



中国认可  
国际互认  
检测  
TESTING  
CNAS L2264

# RF TEST REPORT

<b>Applicant</b>	Alcatel-Lucent Shanghai Bell Co.Ltd.
<b>FCC ID</b>	2ADZRG120WF
<b>Product</b>	GPON ONU
<b>Model</b>	G-120W-F
<b>Brand</b>	NOKIA
<b>Report No.</b>	YXA1704-0038RF01R1
<b>Issue Date</b>	June 29, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2016)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

---

## TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the test report.....	4
1.2. Test facility .....	4
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards .....	7
4. Test Configuration .....	8
5. Test Case Results .....	9
5.1. Average Power Output –Conducted.....	9
5.2. 6dB Bandwidth .....	15
5.3. Band Edge .....	19
5.4. Power Spectral Density .....	22
5.5. Spurious RF Conducted Emissions.....	28
5.6. Radiated Emissions in the Restricted Band .....	38
5.7. Radiates Emission .....	43
5.8. Conducted Emission .....	94
6. Main Test Instruments.....	100
ANNEX A: EUT Appearance and Test Setup .....	101
A.1 EUT Appearance .....	101
A.2 Test Setup .....	103



## Summary of measurement results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Maximum Average conducted output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Radiated Emissions in restricted frequency bands	15.247(d),15.205,15.209	PASS
7	Radiated Emissions	15.247(d),15.205,15.209	PASS
8	Conducted Emissions	15.207	PASS
Date of Testing: June 1, 2017~ June 15, 2017			



## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

### 1.2. Test facility

#### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

#### **FCC (recognition number is 428261)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

#### **VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### Client Information

Applicant	Alcatel-Lucent Shanghai Bell Co.Ltd.
Applicant address	388-389#,Ningqiao Road,Pudong Jinqiao, Shanghai P. R. China
Manufacturer	Alcatel-Lucent Shanghai Bell Co.Ltd.
Manufacturer address	388-389#,Ningqiao Road,Pudong Jinqiao, Shanghai P. R. China

### General information

EUT Description	
Model:	G-120W-F
SN:	/
Kit Code:	3FE47000AAAA
Hardware Version:	PEM 2
Software Version:	3FE46302AFE440
Power Supply:	AC adapter
Antenna Type:	External Antenna
Antenna Connector:	A permanently attached antenna (meet with the standard FCC Part 15.203 requirement)
Antenna Gain:	5.00 dBi
Directional Gain:	5.00 dBi
Test Mode:	802.11b 802.11g, 802.11n(HT20/HT40);
Modulation Type:	802.11b: DSSS; 802.11g/n(HT20/HT40): OFDM
Max. Conducted Power	Wi-Fi 2.4G :18.80dBm
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz 802.11n(HT40): 2422 ~ 2452 MHz
EUT Accessory	
Adapter	Manufacturer: SHENZHEN RUIDE ELECTRONICAL INDUSTRIAL CO., LTD Model: RD1201000-C55-26MG Input power:100-240 VAC 50-60Hz 0.6A Output power:12.0V DC 1.0A
Remark: 1.The information of the EUT is declared by the manufacturer. Please refer to the specifications or user manual for details.	



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### Test standards

- **FCC CFR47 Part 15C (2016) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **KDB 558074 D01 DTS Meas Guidance v04**
- **KDB 662911 D01 Multiple Transmitter Output v02r01**

## 4. Test Configuration

### Test Mode

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Band	Data Rate	
	Antenna 1	MIMO
802.11b	1 Mbps	/
802.11g	6 Mbps	/
802.11n HT20	MCS0	MCS8
802.11n HT40	MCS0	MCS8

The worst case Antenna mode for each of the following tests for Wi-Fi:

Test Cases	Antenna 1	MIMO
Average Power Output –Conducted	O	802.11n HT20/ HT40
6dB Bandwidth	802.11b/g	802.11n HT20/ HT40
Band Edge	802.11b/g	802.11n HT20/ HT40
Power Spectral Density	O	802.11n HT20/ HT40
Spurious RF Conducted Emissions	O	802.11n HT20/ HT40
Radiates Emission in the Restricted Band	802.11b/g	802.11n HT20/ HT40
Radiates Emission	802.11b/g	802.11n HT20/ HT40
Conducted Emission	802.11b/g	802.11n HT20/ HT40



## 5. Test Case Results

### 5.1. Average Power Output –Conducted

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Maximum Average Conducted Output Power Level Method in KDB 558074 D01/KDB662911 D01 for this test.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

#### Test Setup



#### Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	≤ 1W (30dBm)
----------------------	--------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.

**Test Results****SISO Antenna 1**

Network Standards	Carrier frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	Conclusion
802.11b	2412	16.01	30	PASS
	2437	16.60	30	PASS
	2462	17.00	30	PASS
802.11g	2412	16.42	30	PASS
	2437	16.40	30	PASS
	2462	16.77	30	PASS
802.11n HT20	2412	15.21	30	PASS
	2437	15.60	30	PASS
	2462	15.83	30	PASS
802.11n HT40	2422	15.38	30	PASS
	2437	15.67	30	PASS
	2452	15.79	30	PASS


**MIMO**

Network Standards	Carrier frequency (MHz)	Average Output Power (dBm)			Limit (dBm)	Conclusion
		MIMO Ant 1	MIMO Ant 2	MIMO SUM		
802.11n HT20	2412	15.41	15.79	18.61	30	PASS
	2437	15.28	16.24	18.80	30	PASS
	2462	15.50	15.49	18.51	30	PASS
802.11n HT40	2422	13.52	15.53	17.65	30	PASS
	2437	15.66	15.48	18.58	30	PASS
	2452	15.38	15.96	18.69	30	PASS



SISO Antenna 1

802.11b, Carrier frequency (MHz): 2412

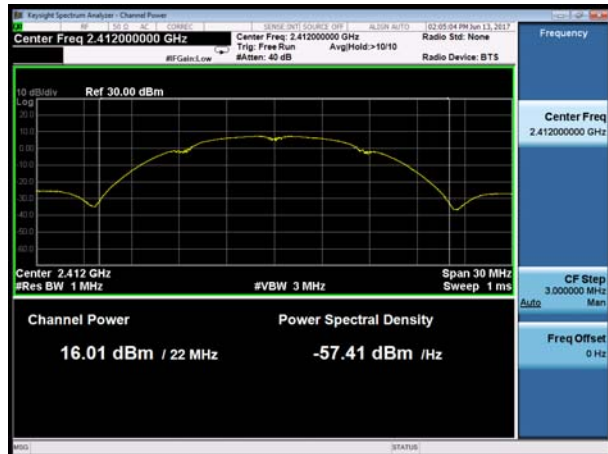

802.11g, Carrier frequency (MHz): 2412




802.11b, Carrier frequency (MHz): 2437



802.11g, Carrier frequency (MHz): 2437



802.11b, Carrier frequency (MHz): 2462

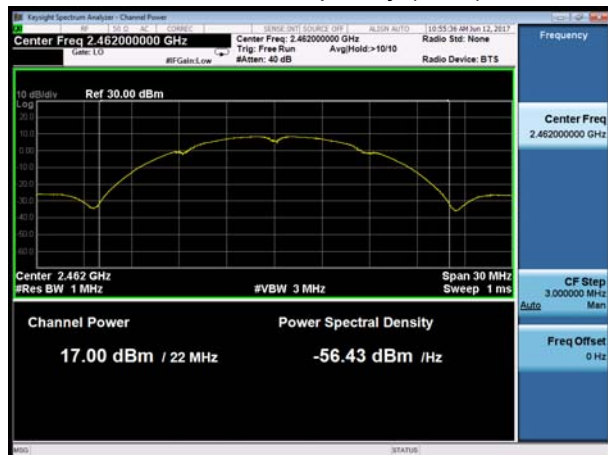


802.11g, Carrier frequency (MHz): 2462





802.11n(HT20), Carrier frequency (MHz): 2412

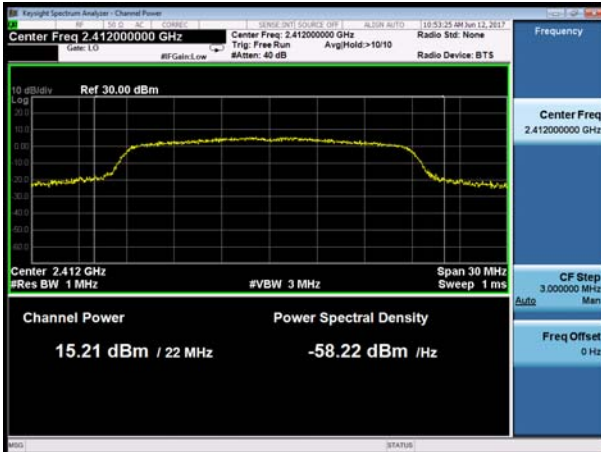

802.11n(HT40), Carrier frequency (MHz): 2422



802.11n(HT20), Carrier frequency (MHz): 2437



802.11n(HT40), Carrier frequency (MHz): 2437



802.11n(HT20), Carrier frequency (MHz): 2462




802.11n(HT40), Carrier frequency (MHz): 2452





MIMO Antenna 1

802.11n(HT20), Carrier frequency (MHz): 2412

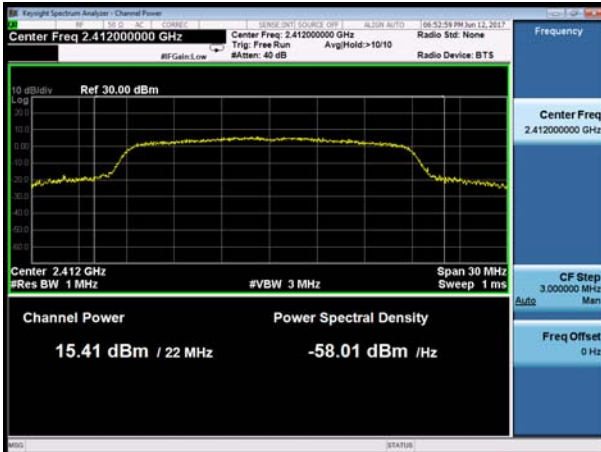


802.11n(HT40), Carrier frequency (MHz): 2422




802.11n(HT20), Carrier frequency (MHz): 2437



802.11n(HT40), Carrier frequency (MHz): 2437

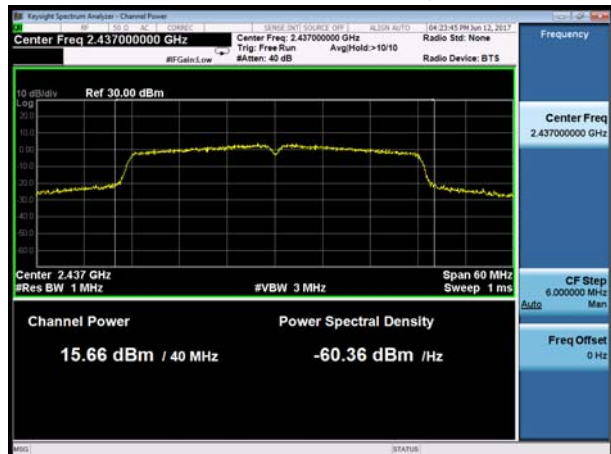

802.11n(HT20), Carrier frequency (MHz):2462

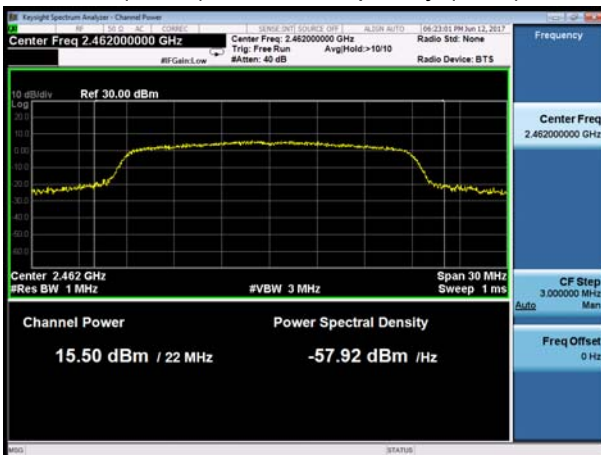


802.11n(HT40), Carrier frequency (MHz):2452






### MIMO Antenna 2


802.11n(HT20), Carrier frequency (MHz): 2412

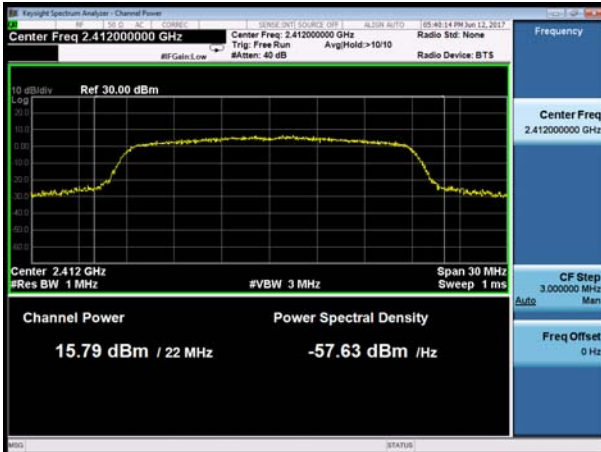


802.11n(HT40), Carrier frequency (MHz): 2422

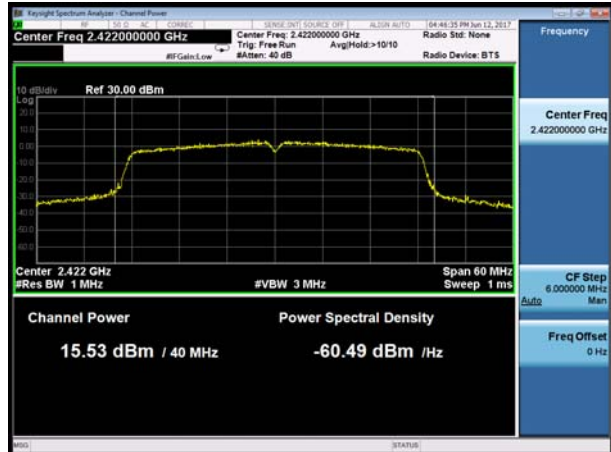

802.11n(HT20), Carrier frequency (MHz): 2437

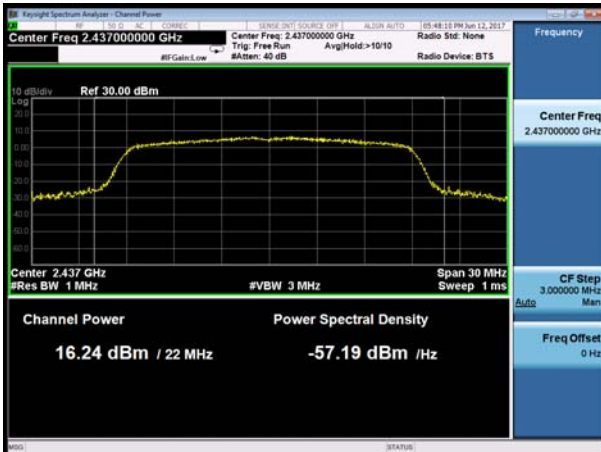


802.11n(HT40), Carrier frequency (MHz): 2437

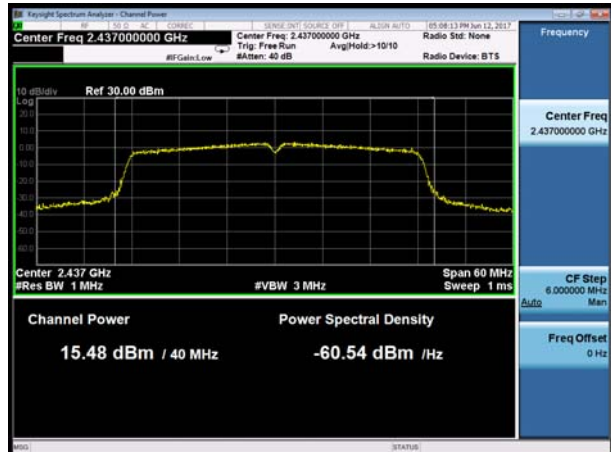

802.11n(HT20), Carrier frequency (MHz):2462



802.11n(HT40), Carrier frequency (MHz):2452

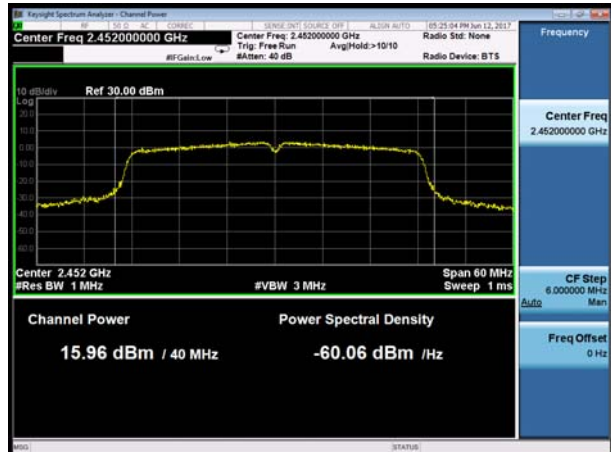

## 5.2. 6dB Bandwidth


### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.

### Test Setup



### Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:****SISO Antenna 1**

Network Standards	Carrier frequency (MHz)	Minimum 6 dB bandwidth (MHz)	99% bandwidth (MHz)	Limit(kHz)	Conclusion
802.11b	2412	9.581	14.279	500	PASS
	2437	10.030	14.168	500	PASS
	2462	9.567	14.114	500	PASS
802.11g	2412	16.330	16.390	500	PASS
	2437	16.320	16.384	500	PASS
	2462	16.340	16.342	500	PASS

**MIMO Antenna 2**

Network Standards	Carrier frequency (MHz)	Minimum 6 dB bandwidth (MHz)	99% bandwidth (MHz)	Limit(kHz)	Conclusion
802.11n HT20	2412	17.290	17.553	500	PASS
	2437	17.200	17.547	500	PASS
	2462	17.570	17.550	500	PASS
802.11n HT40	2422	34.510	35.827	500	PASS
	2437	35.440	35.812	500	PASS
	2452	35.170	35.806	500	PASS





SISO Antenna 1

802.11b, Carrier frequency (MHz): 2412



802.11g, Carrier frequency (MHz): 2412




802.11b, Carrier frequency (MHz): 2437



802.11g, Carrier frequency (MHz): 2437



802.11b, Carrier frequency (MHz): 2462

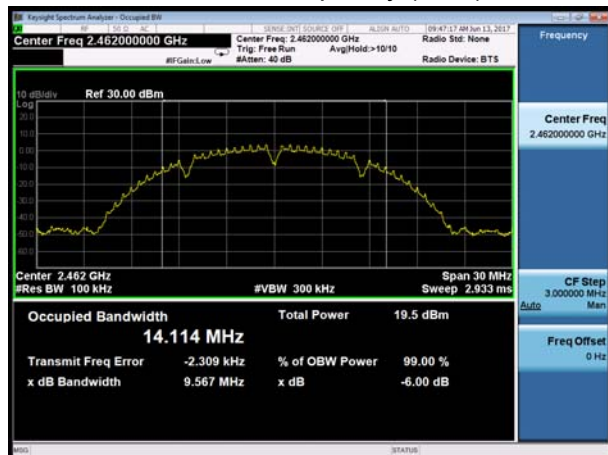

802.11g, Carrier frequency (MHz): 2462





### MIMO Antenna 2

802.11n(HT20), Carrier frequency (MHz): 2412



802.11n(HT40), Carrier frequency (MHz): 2422



802.11n(HT20), Carrier frequency (MHz): 2437



802.11n(HT40), Carrier frequency (MHz): 2437



802.11n(HT20), Carrier frequency (MHz):2462



802.11n(HT40), Carrier frequency (MHz):2452



### 5.3. Band Edge


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

#### Test Setup

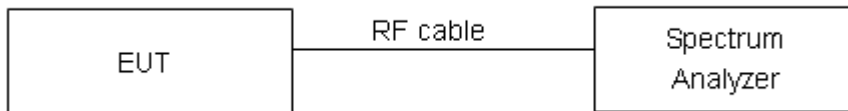

#### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
2GHz-3GHz	1.407 dB




Test Results:

SISO Antenna 1


802.11b, Channel No.: 1

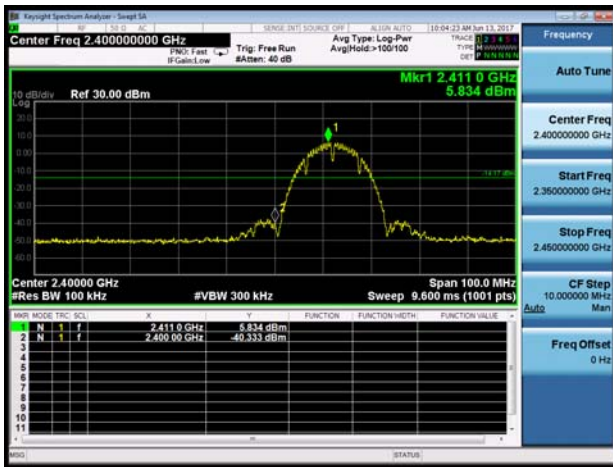


802.11b, Channel No.: 11

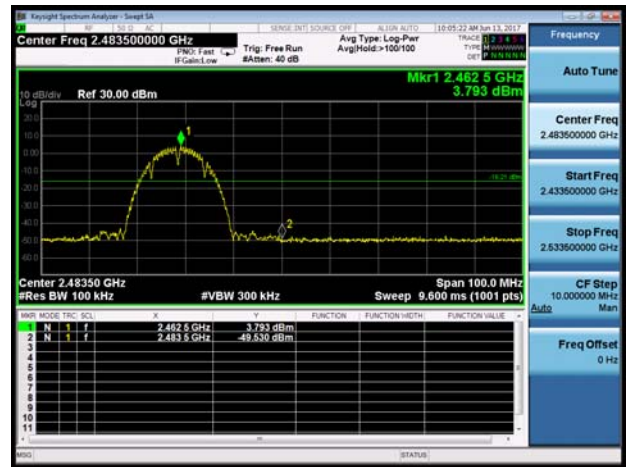

802.11g, Channel No.: 1

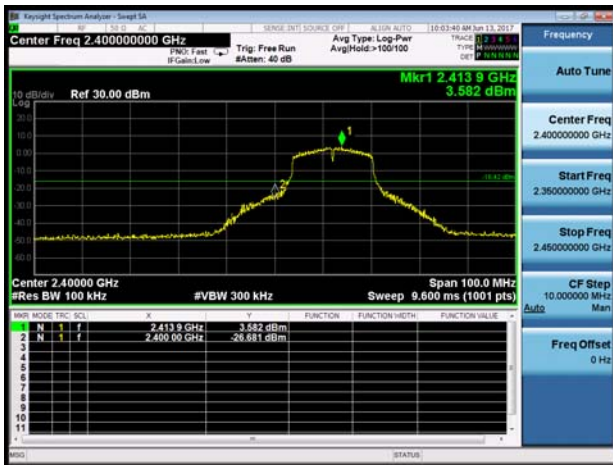


802.11g, Channel No.: 11

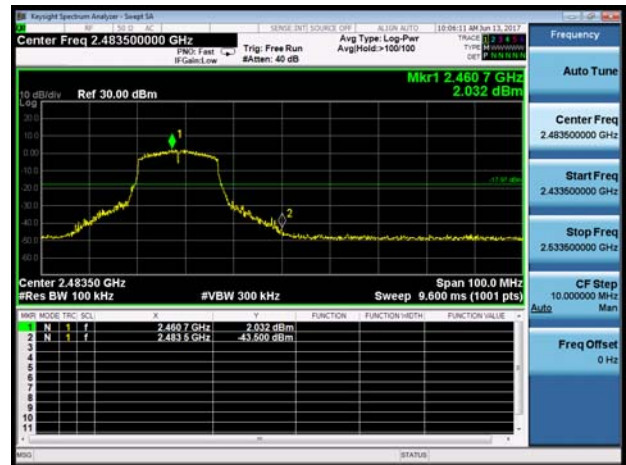



MIMO Antenna 2


802.11n(HT20), Channel No.: 1

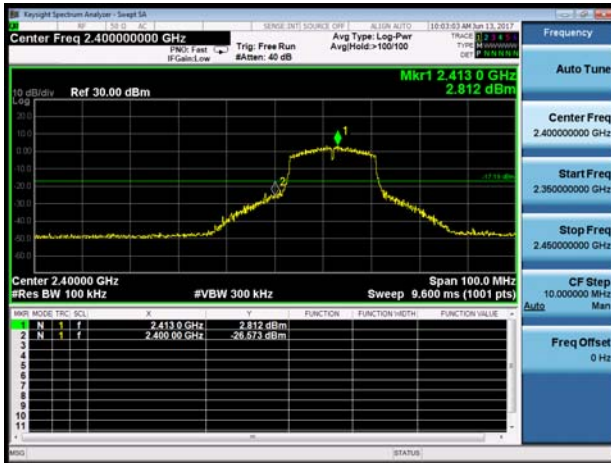

802.11n(HT20), Channel No.: 11



802.11n(HT40), Channel No.: 3

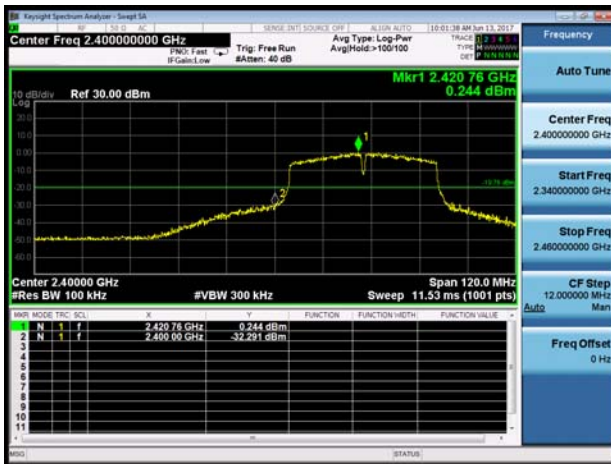

802.11n(HT40), Channel No.: 9



### 5.4. Power Spectral Density

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement


The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

RBW is set to 3 kHz and VBW is set to 10 kHz for Wi-Fi 2.4G on spectrum analyzer.

Set the span to 1.5 times the DTS channel bandwidth. Sweep time = auto couple. Trace mode = max hold. The Average power spectral density is recorded.

The conducted Power is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically.

#### Test setup



#### Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

Limits	≤ 8 dBm / 3kHz
--------	----------------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

**Test Results:**

**SISO Antenna 1**

Network Standards	Channel Number	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-16.206	8	PASS
	6	-15.732	8	PASS
	11	-15.610	8	PASS
802.11g	1	-17.563	8	PASS
	6	-17.253	8	PASS
	11	-17.033	8	PASS
802.11n HT20	1	-18.615	8	PASS
	6	-18.416	8	PASS
	11	-18.274	8	PASS
802.11n HT40	3	-21.636	8	PASS
	6	-21.514	8	PASS
	9	-21.218	8	PASS

**MIMO**

Network Standards	Channel Number	Power Spectral Density (dBm / 3kHz)			Limit (dBm / 3kHz)	Conclusion
		MIMO Ant 1	MIMO Ant 2	MIMO SUM		
802.11n HT20	1	-18.577	-18.202	-15.375	8	PASS
	6	-18.995	-17.671	-15.272	8	PASS
	11	-18.399	-18.288	-15.333	8	PASS
802.11n HT40	3	-24.147	-21.523	-19.629	8	PASS
	6	-22.474	-22.097	-19.271	8	PASS
	9	-21.725	-21.124	-18.404	8	PASS




SISO Antenna 1

802.11b, Channel No.: 1




802.11g, Channel No.: 1

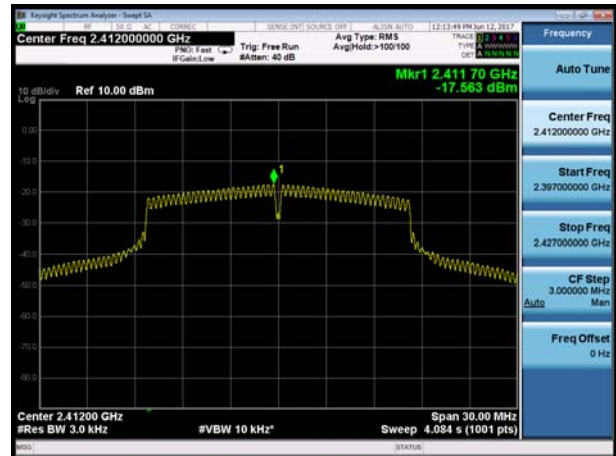

802.11b, Channel No.: 6



802.11g, Channel No.: 6

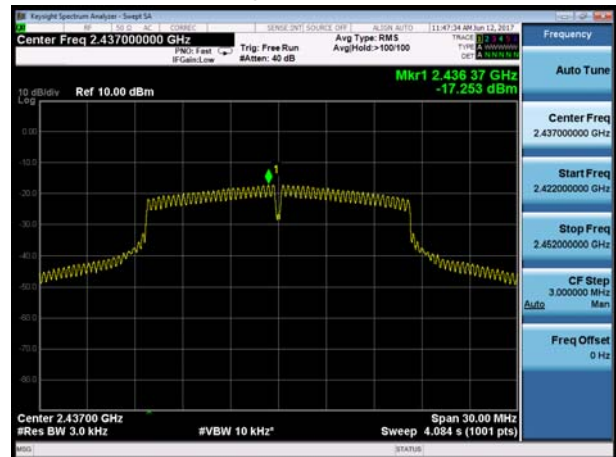

802.11b, Channel No.: 11




802.11g, Channel No.: 11









802.11n(HT20), Channel No. 1

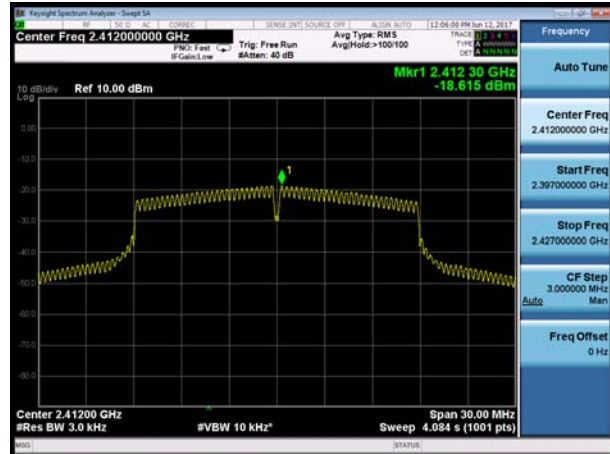


802.11n(HT40), Channel No. 3

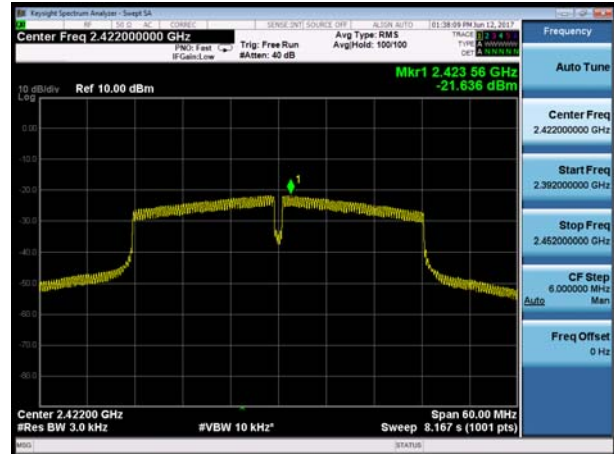


802.11n(HT20), Channel No. 6

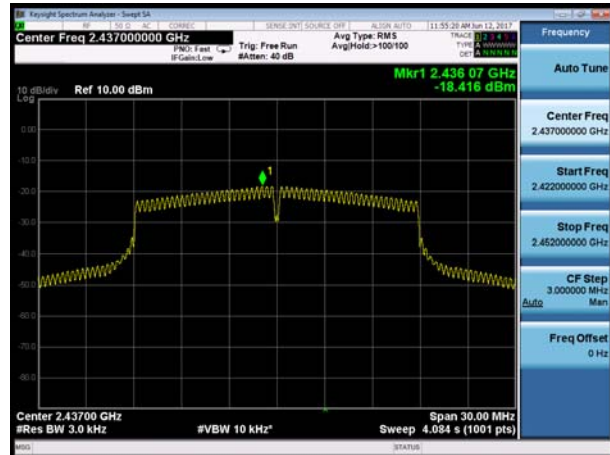


802.11n(HT40), Channel No. 6

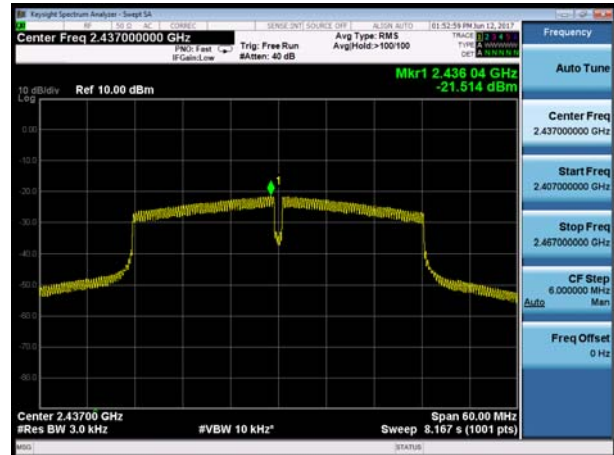

802.11n(HT20), Channel No. 11

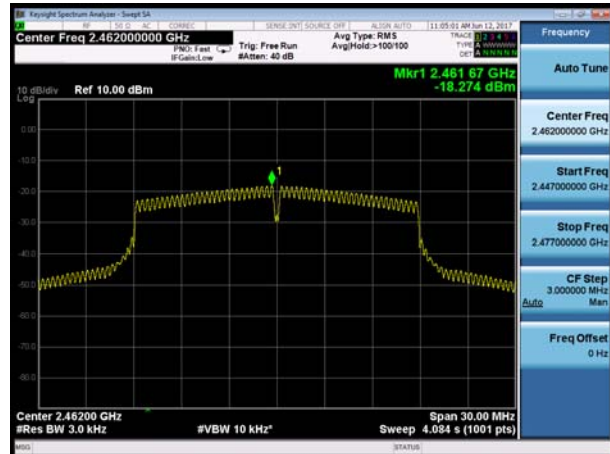

802.11n(HT40), Channel No. 9

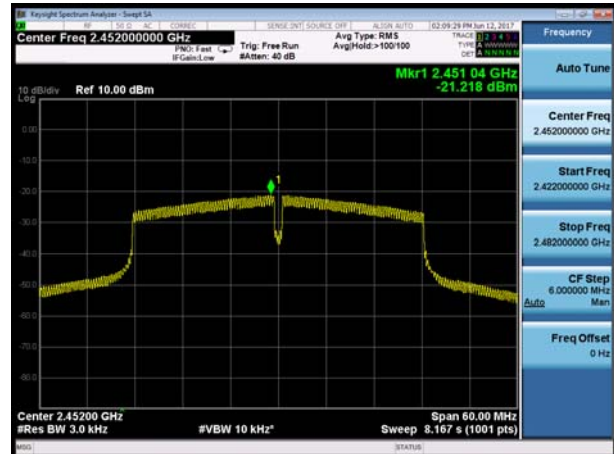




MIMO Antenna 1


802.11n(HT20), Channel No. 1



802.11n(HT40), Channel No. 3

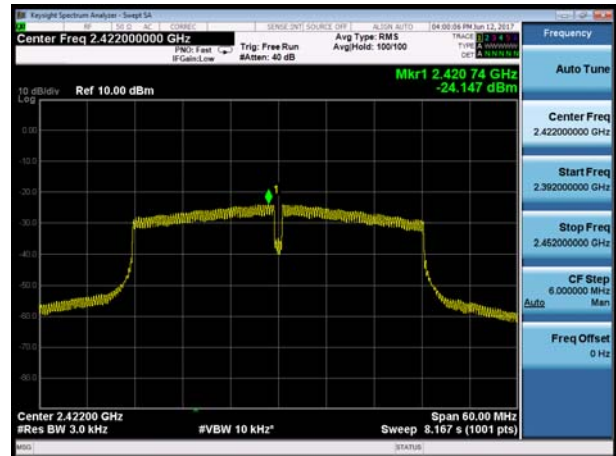

802.11n(HT20), Channel No. 6

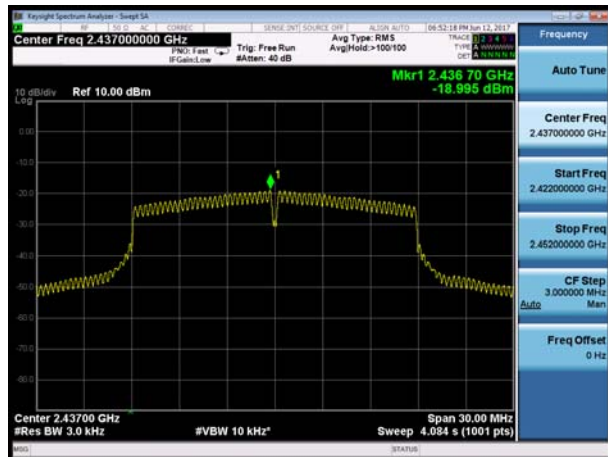


802.11n(HT40), Channel No. 6



802.11n(HT20), Channel No. 11



802.11n(HT40), Channel No. 9

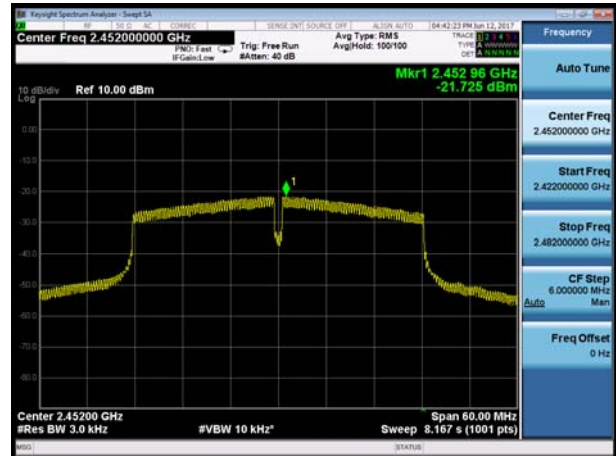



### MIMO Antenna 2

#### 802.11n(HT20), Channel No. 1



#### 802.11n(HT40), Channel No. 3



#### 802.11n(HT20), Channel No. 6



#### 802.11n(HT40), Channel No. 6



#### 802.11n(HT20), Channel No. 11



#### 802.11n(HT40), Channel No. 9



### 5.5. Spurious RF Conducted Emissions

**Ambient condition**

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

**Method of Measurement**

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. RBW and VBW are set to 100 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

**Test setup**



**Limits**

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

**SISO Antenna 1**

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	-8.420	-28.420
	2437	-11.973	-31.973
	2462	4.620	-15.380
802.11g	2412	-8.891	-28.891
	2437	-15.397	-35.397
	2462	-13.144	-33.144
802.11n HT20	2412	-1.850	-21.850
	2437	-13.779	-33.779
	2462	-13.305	-33.305
802.11n HT40	2422	-0.481	-20.481
	2437	-14.587	-34.587
	2452	3.357	-16.643

**MIMO**

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11n HT20	2412	-3.245	-23.245
	2437	-16.007	-36.007
	2462	-5.434	-25.434
802.11n HT40	2422	-14.156	-34.156
	2437	0.222	-19.778
	2452	-3.304	-23.304

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB

**Test Results:**


If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.

The signal beyond the limit is carrier


Test Data File Name	Frequency (MHz)	Peak (dBm)	Limit (dBm)	Margin (dBm)
CSE_ WIFI n(20M) CH01_0.03-18GHz_0604_MIMO	4824.0	-36.01	-23.25	12.76
CSE_ WIFI n(20M) CH06_0.03-18GHz_0604_MIMO	4875.0	-53.65	-36.01	17.64
CSE_ WIFI n(20M) CH11_0.03-18GHz_0604_MIMO	1923.8	-31.32	-25.43	5.88
CSE_ WIFI n(40M) CH06_0.03-18GHz_0604_MIMO	4874.3	-37.26	-19.78	17.48
CSE_ WIFI n(40M) CH09_0.03-18GHz_0604_MIMO	4904.3	-27.78	-23.30	4.48




### SISO Antenna 1

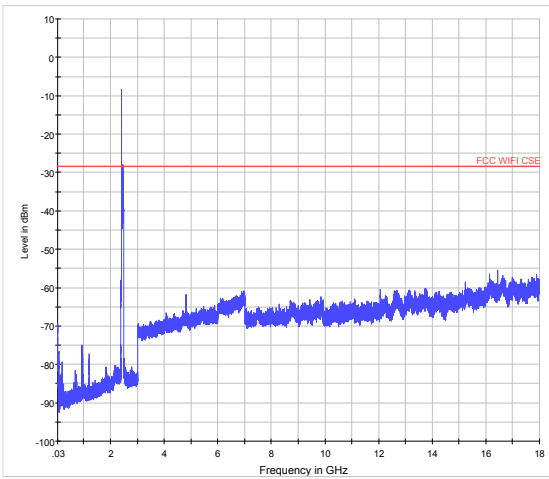


802.11b CH1 30MHz to 18GHz

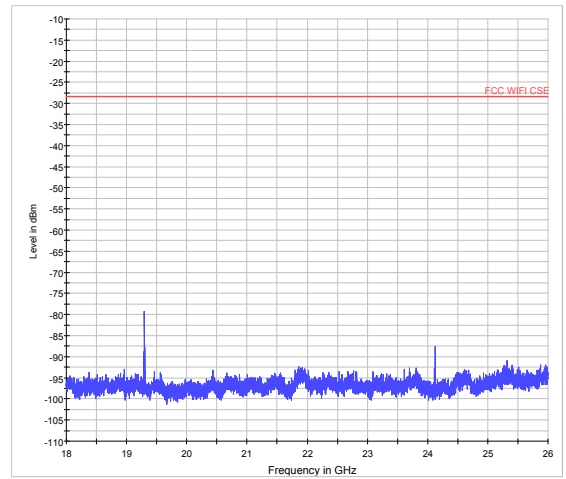


802.11b CH1 18GHz to 26GHz

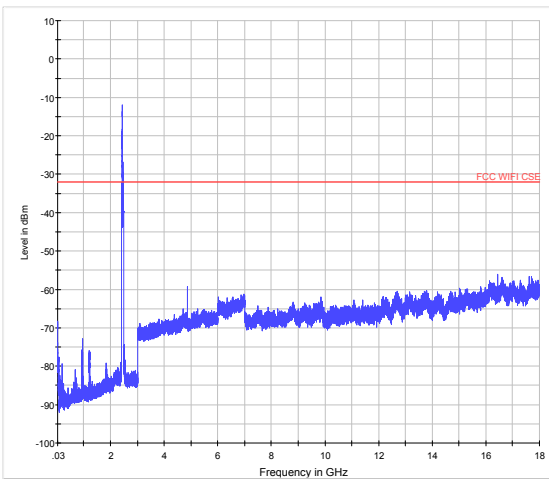


802.11b CH6 30MHz to 18GHz

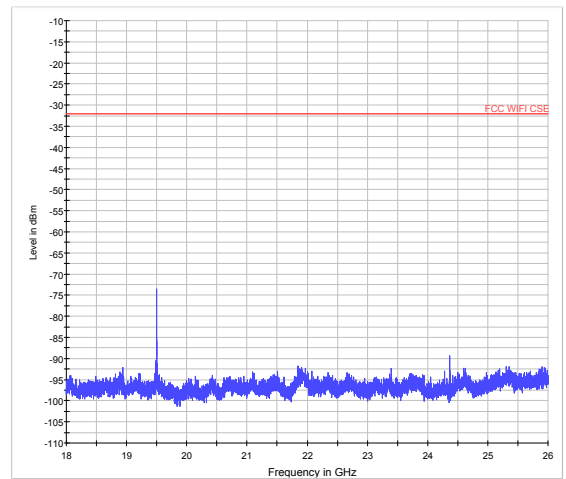

802.11b CH6 18GHz to 26GHz

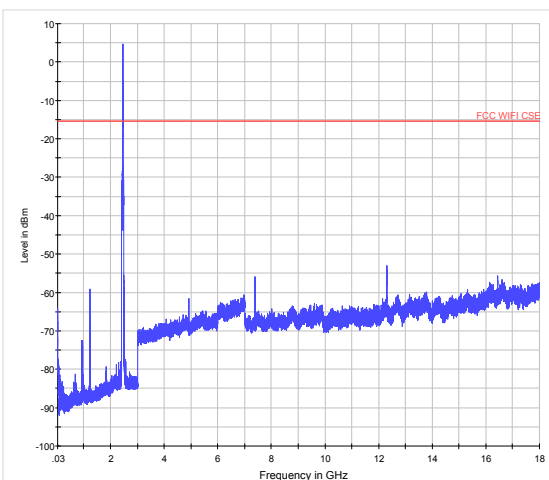


802.11b CH11 30MHz to 18GHz

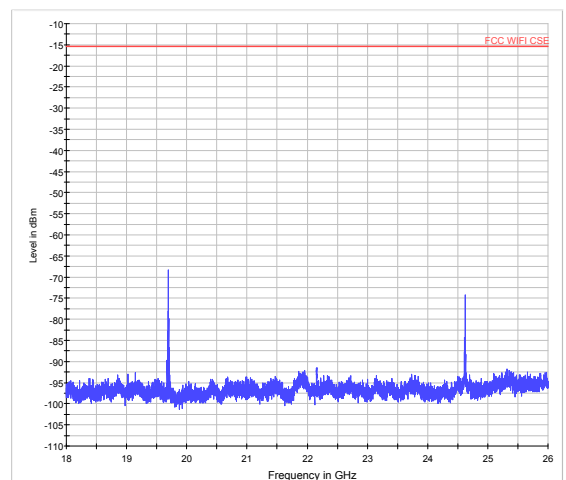


802.11b CH11 18GHz to 26GHz




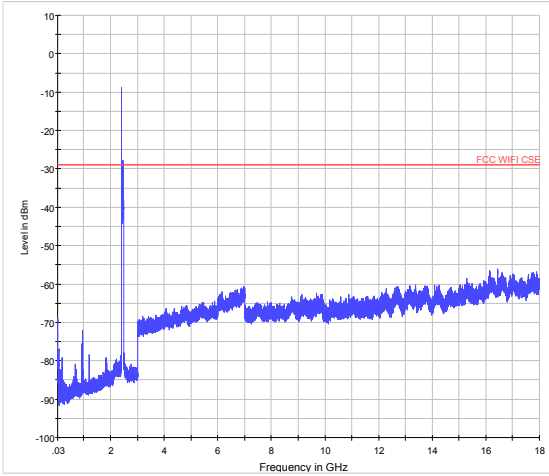


802.11g CH1 30MHz to 18GHz

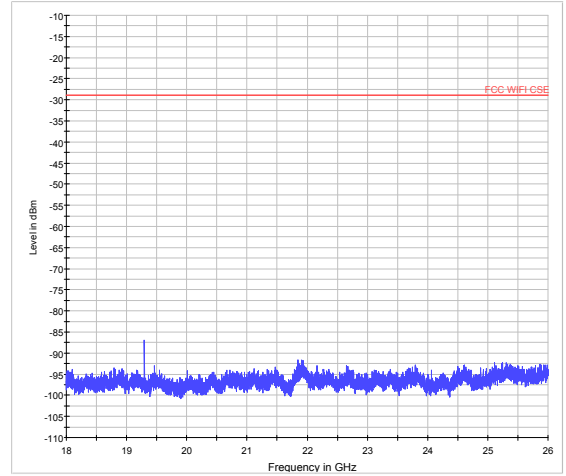


802.11g CH1 18GHz to 26GHz

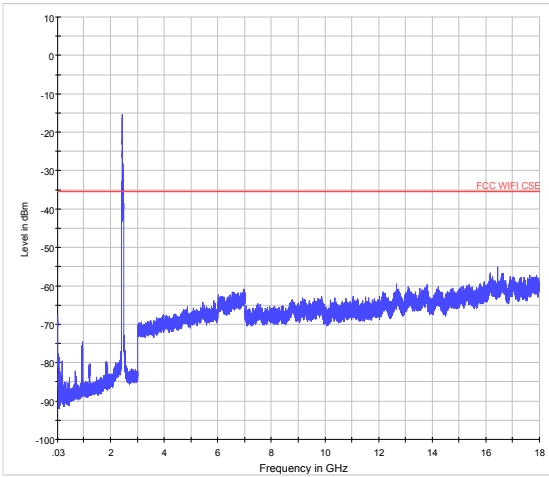


802.11g CH6 30MHz to 18GHz

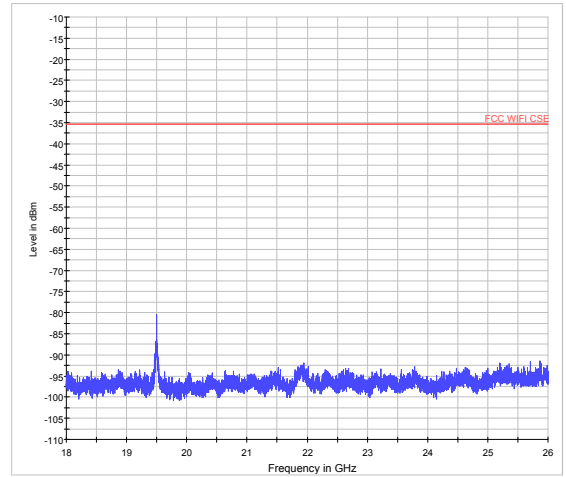


802.11g CH6 18GHz to 26GHz

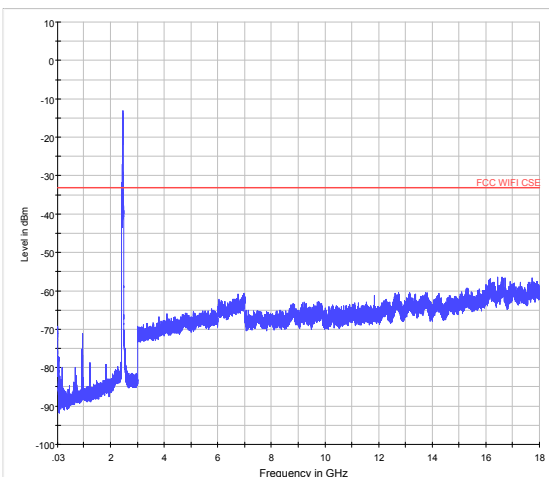


802.11g CH11 30MHz to 18GHz

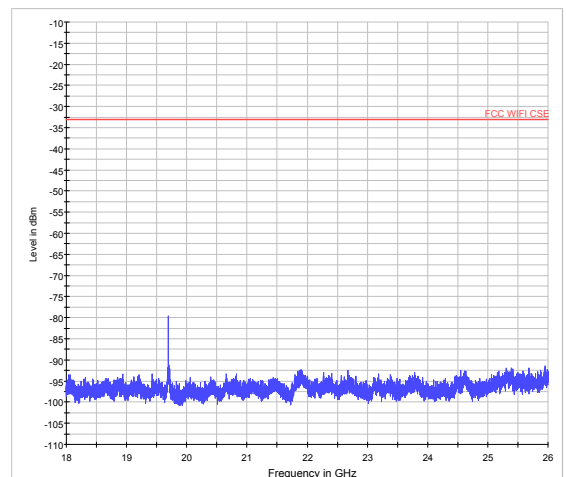


802.11g CH11 18GHz to 26GHz

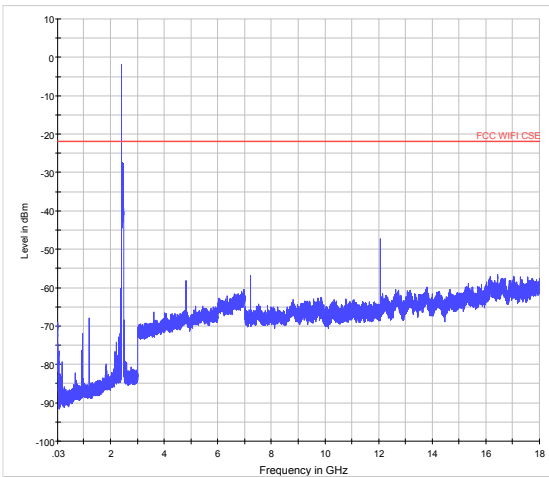


802.11n (HT20) CH1 30MHz to 18GHz

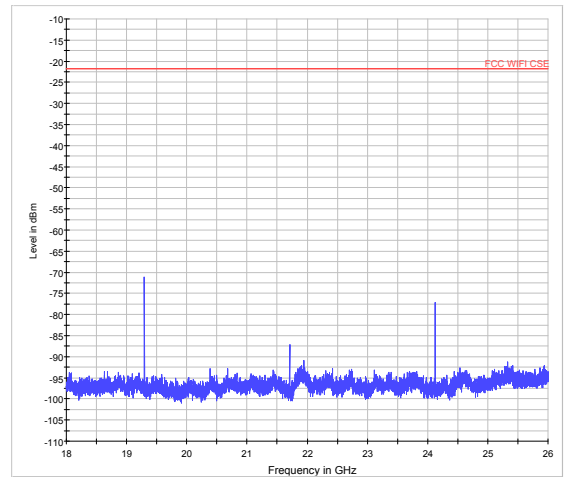


802.11n (HT20) CH1 18GHz to 26GHz

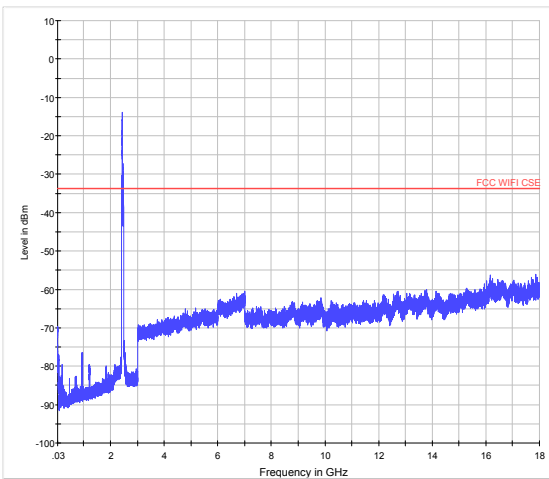


802.11n (HT20) CH6 30MHz to 18GHz

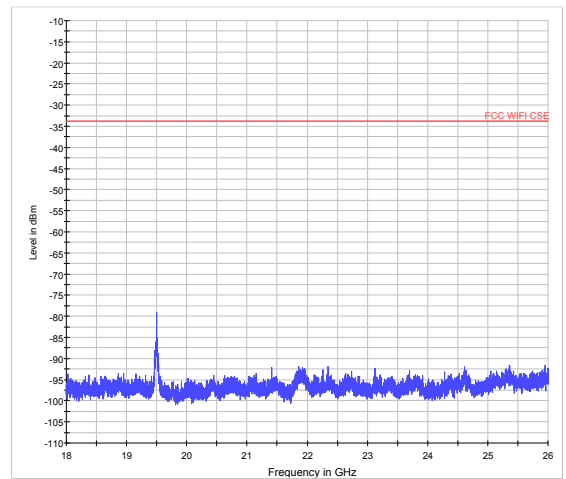


802.11n (HT20) CH6 18GHz to 26GHz

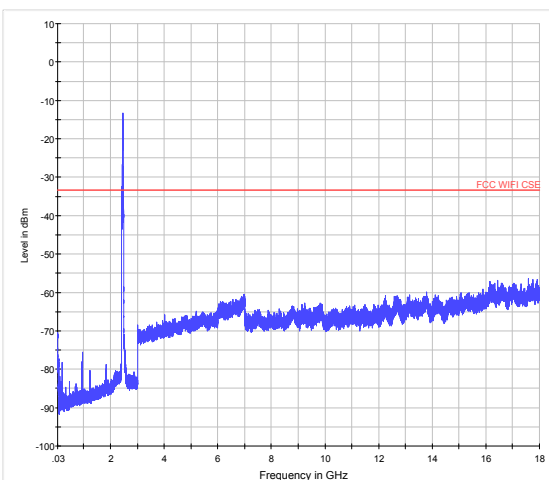


802.11n (HT20) CH11 30MHz to 18GHz

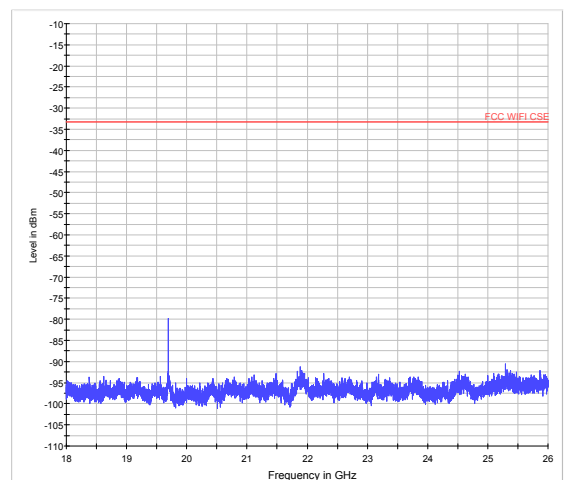


802.11n (HT20) CH11 18GHz to 26GHz

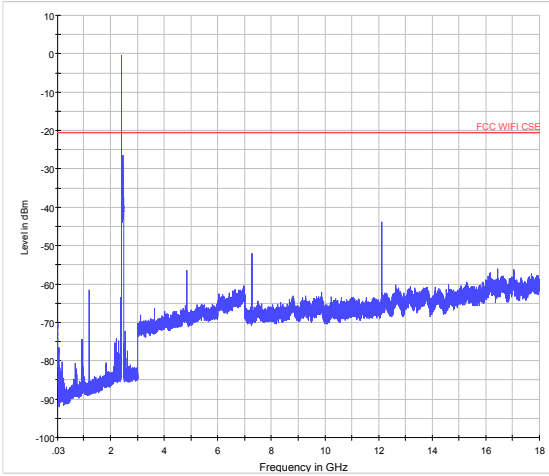


802.11n (HT40) CH3 30MHz to 18GHz

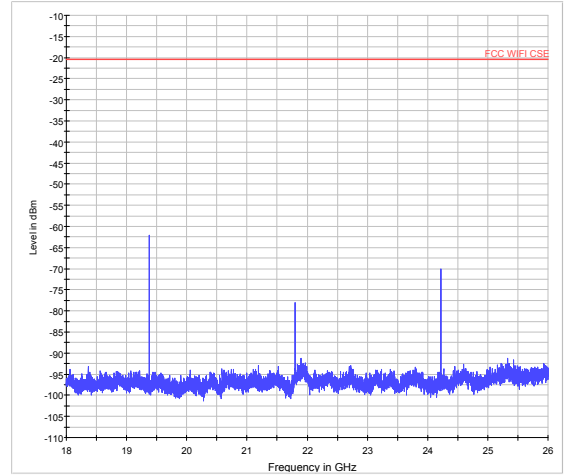


802.11n (HT40) CH3 18GHz to 26GHz

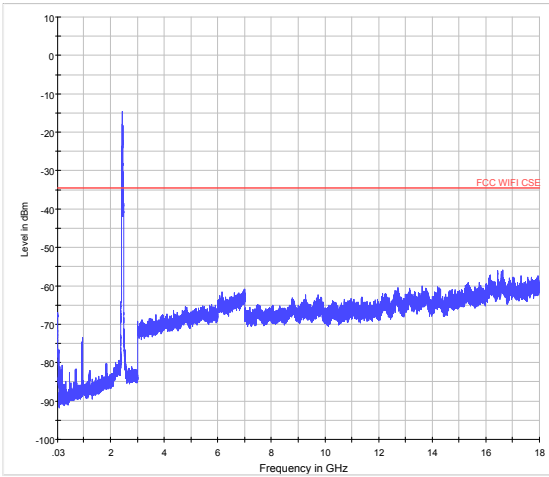


802.11n (HT40) CH6 30MHz to 18GHz

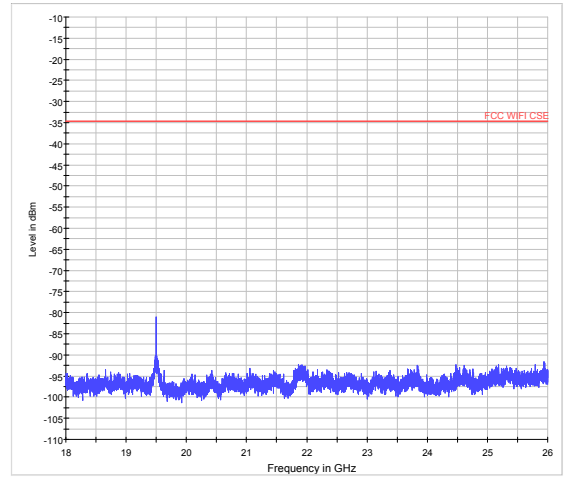

802.11n (HT40) CH6 18GHz to 26GHz

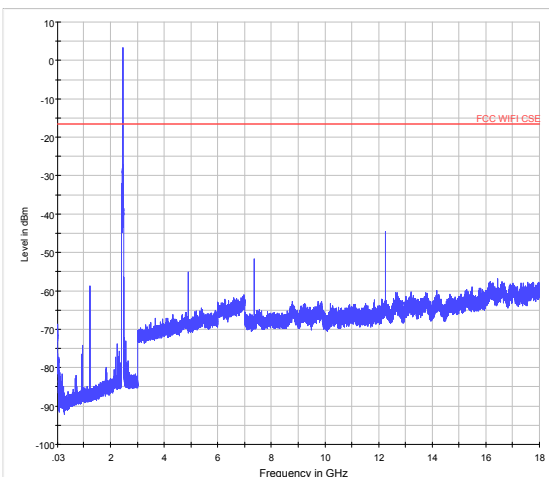


802.11n (HT40) CH9 30MHz to 18GHz

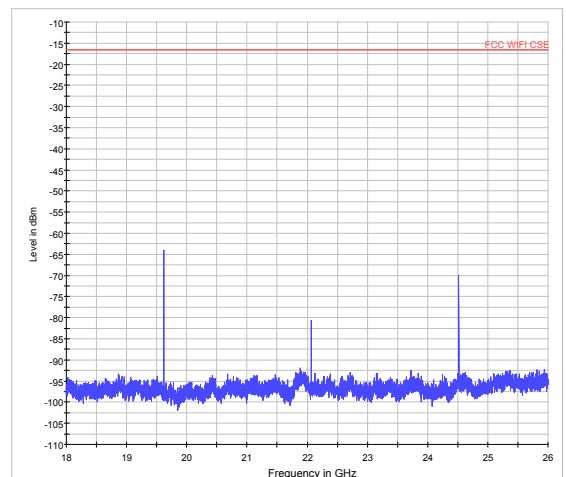


802.11n (HT40) CH9 18GHz to 26GHz




MIMO

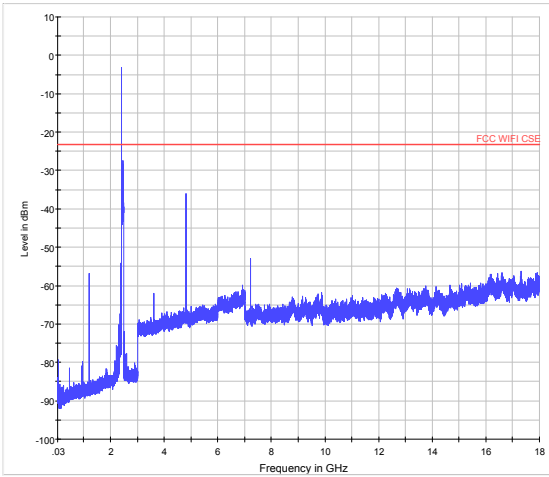


802.11n (HT20) CH1 30MHz to 18GHz

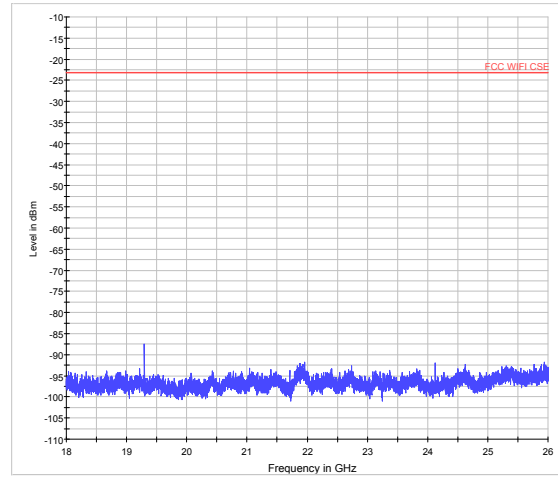


802.11n (HT20) CH1 18GHz to 26GHz

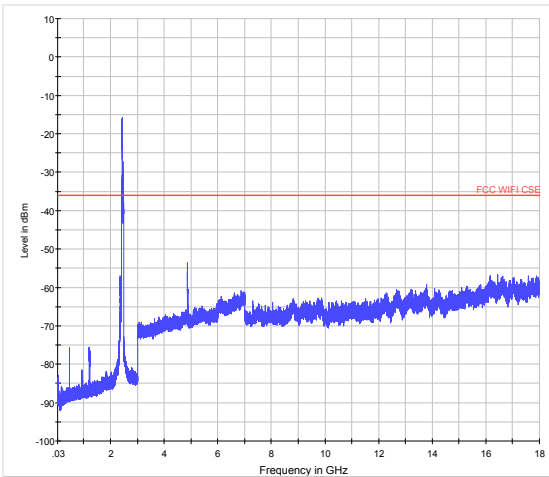


802.11n (HT20) CH6 30MHz to 18GHz

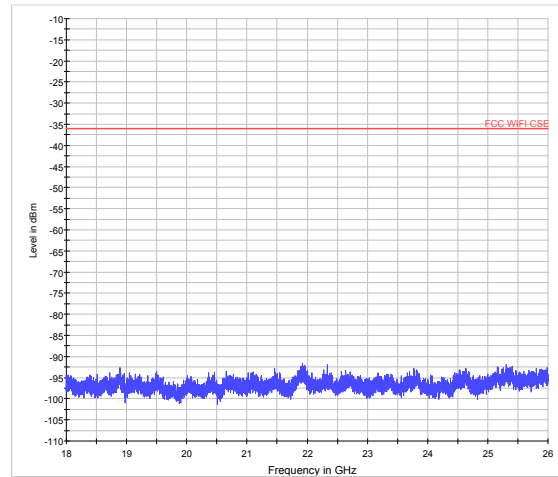


802.11n (HT20) CH6 18GHz to 26GHz

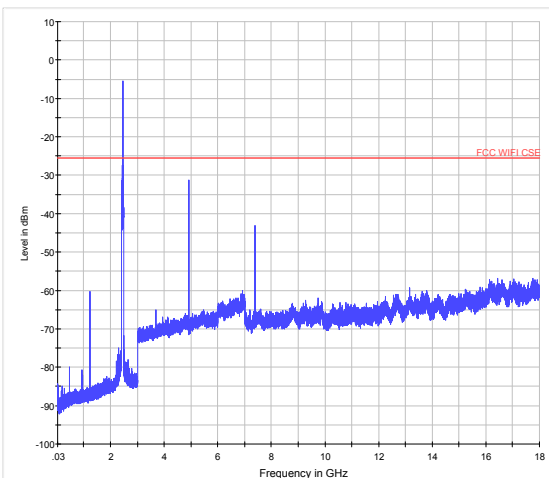


802.11n (HT20) CH11 30MHz to 18GHz

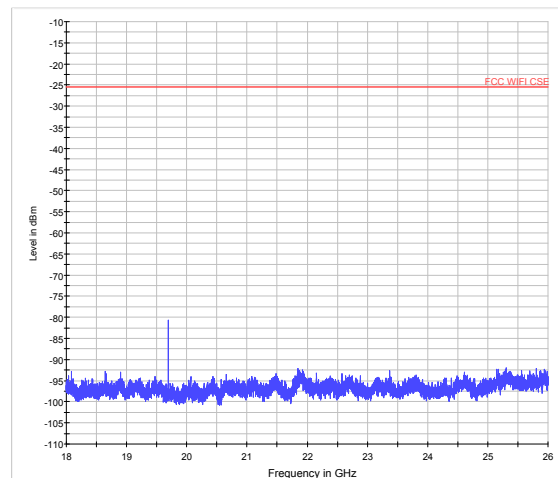


802.11n (HT20) CH11 18GHz to 26GHz

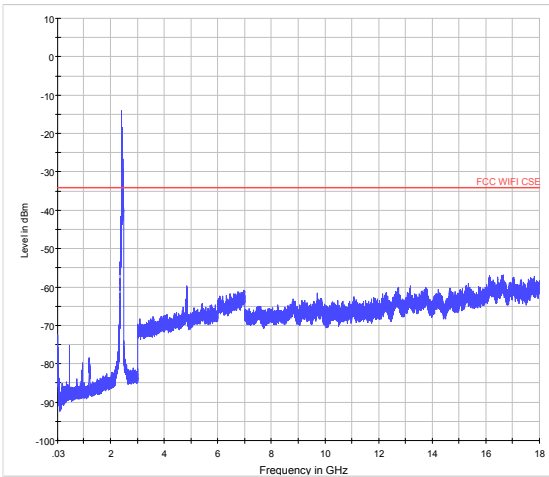


802.11n (HT40) CH3 30MHz to 18GHz

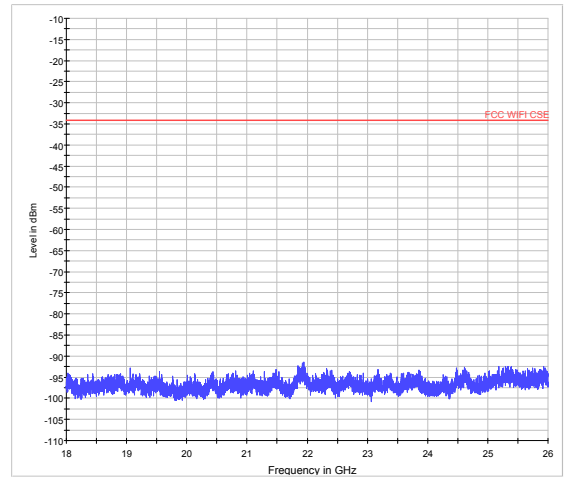


802.11n (HT40) CH3 18GHz to 26GHz

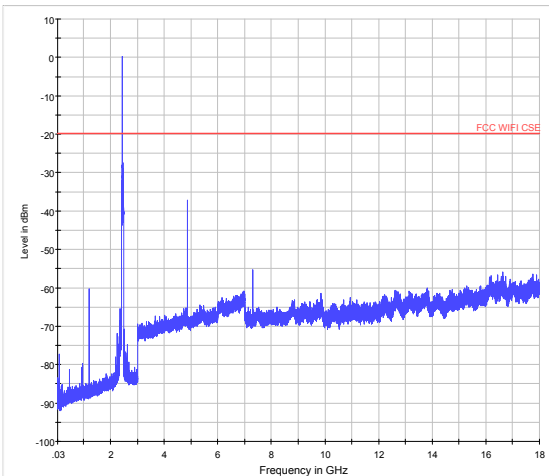


802.11n (HT40) CH6 30MHz to 18GHz

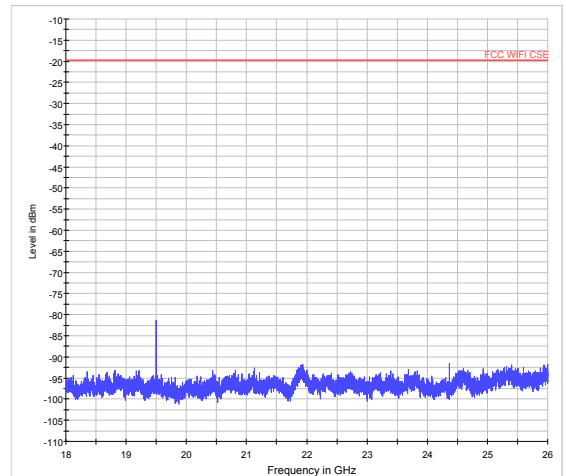

802.11n (HT40) CH6 18GHz to 26GHz

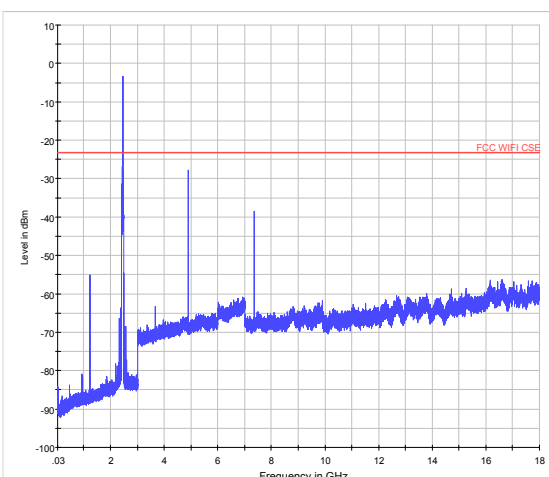

802.11n (HT40) CH9 30MHz to 18GHz

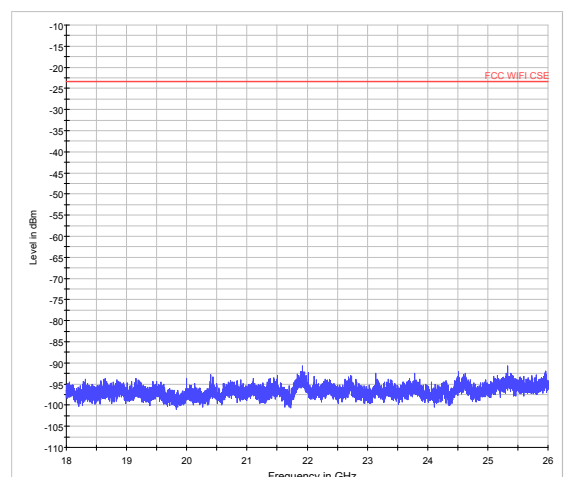

802.11n (HT40) CH9 18GHz to 26GHz

### 5.6. Radiated Emissions in the Restricted Band

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. RBW is set to 100kHz. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

Set the spectrum analyzer in the following:


- (a) PEAK: RBW=1MHz /VBW=3MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz /VBW=3MHz / Sweep=AUTO

This setting method can refer to **KDB 558074**.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Y axis) and the antenna is vertical.

The test is in transmitting mode.

#### Test setup

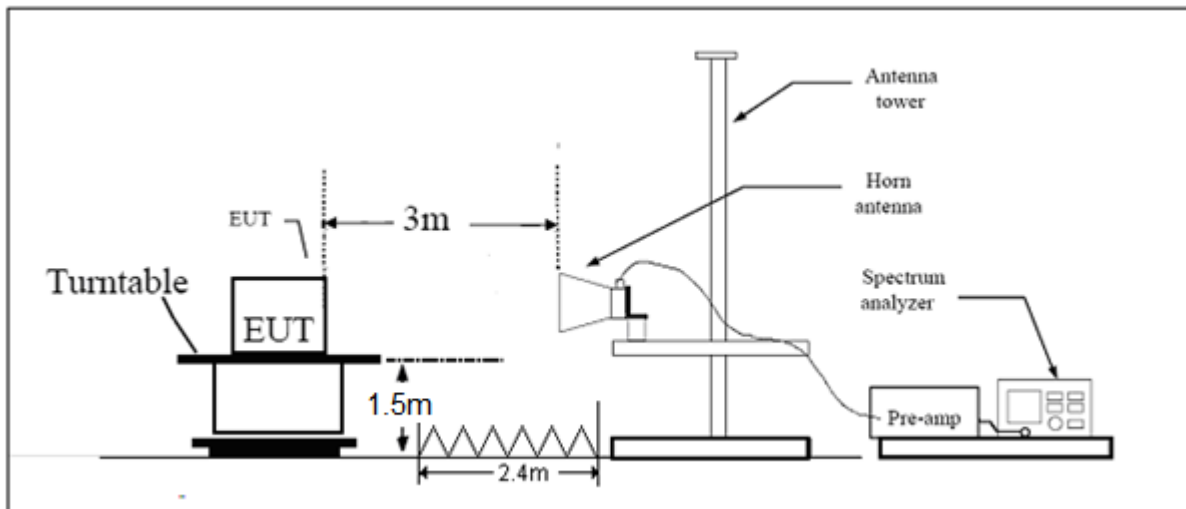

Note: Area side: 2.4mX3.6m

**Limits**

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.




**Test Results:**


**The signal beyond the limit is carrier.**

**SISO Antenna 1**


802.11b-Channel 1: Peak

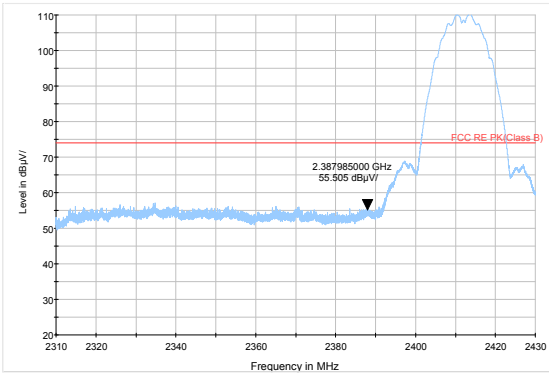


802.11b-Channel 11: Peak

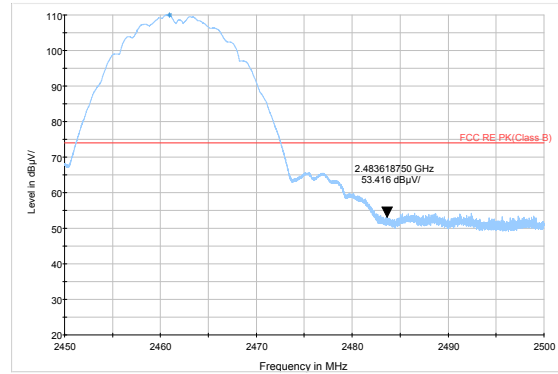


802.11b-Channel 1: Average

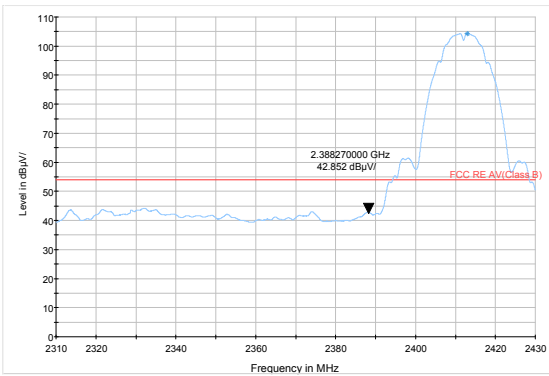


802.11b-Channel 11: Average

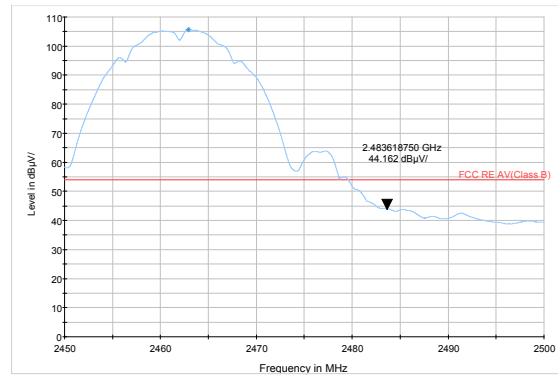

802.11g-Channel 1: Peak

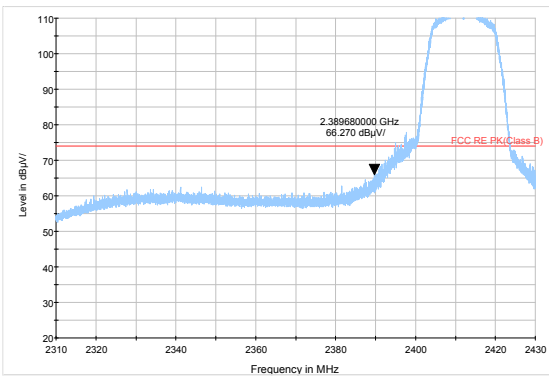


802.11g-Channel 11: Peak

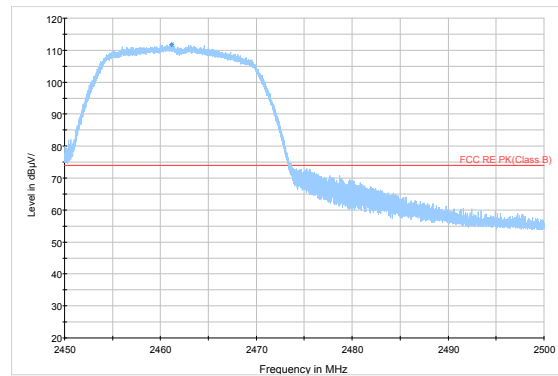






802.11g-Channel 1: Average

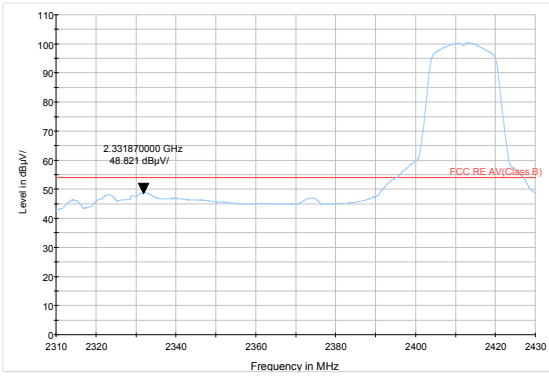


802.11g-Channel 11: Average

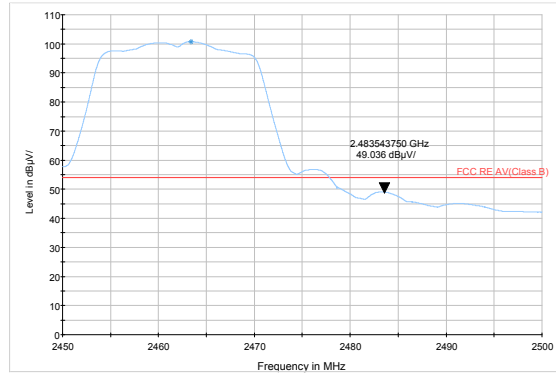


MIMO


802.11n HT20 -Channel 1: Peak

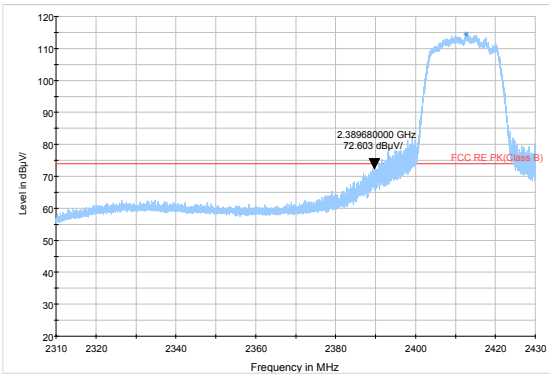


802.11n HT20-Channel 11: Peak

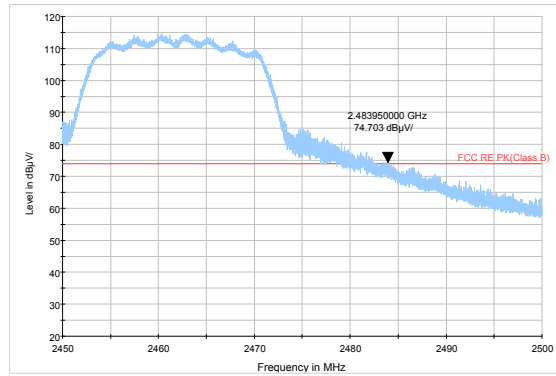

802.11n HT20-Channel 1: Average

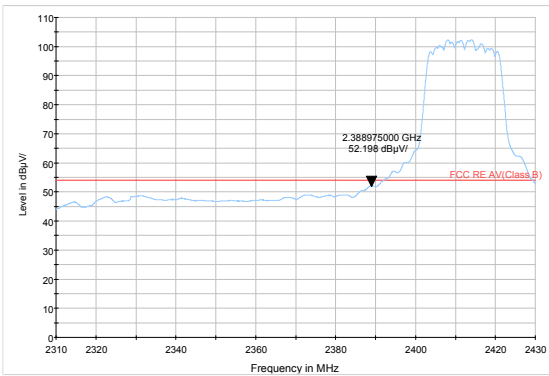


802.11n HT20-Channel 11: Average

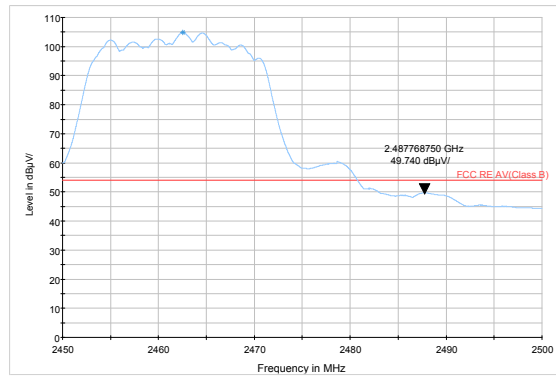





802.11n HT40 -Channel 3: Peak

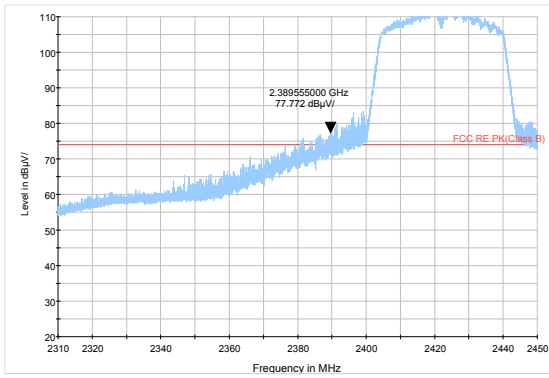


802.11n HT40-Channel 9: Peak

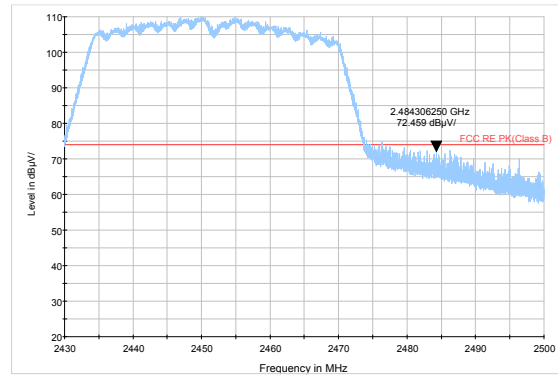

802.11n HT40-Channel 3: Average

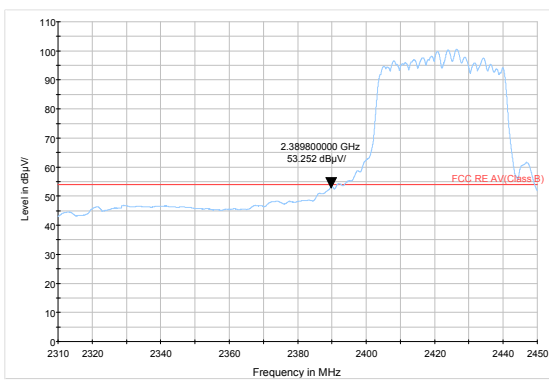

802.11n HT40-Channel 9: Average

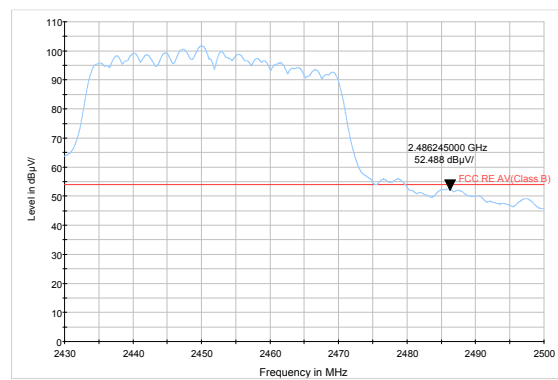

## 5.7. Radiates Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.


The test is in transmitting mode.

**Test setup**


**9KHz ~ 30MHz**

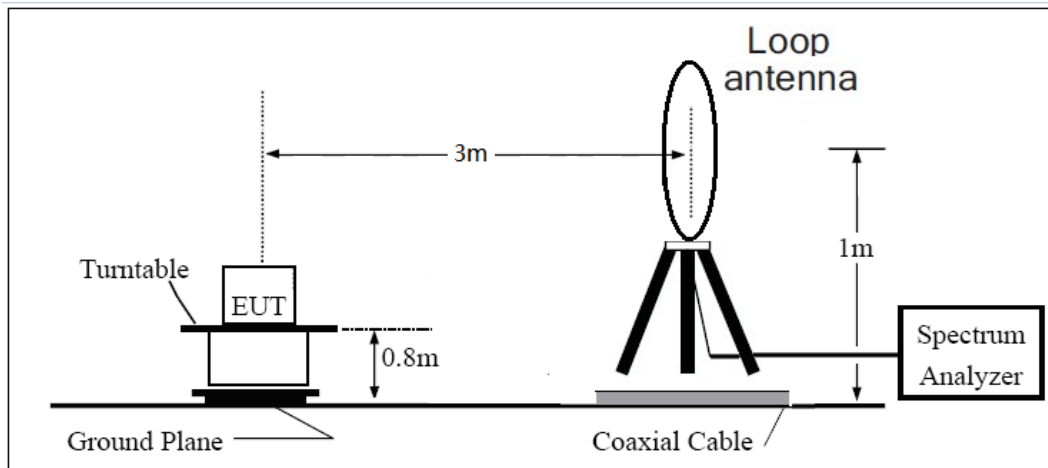

**30MHz ~ 1GHz**

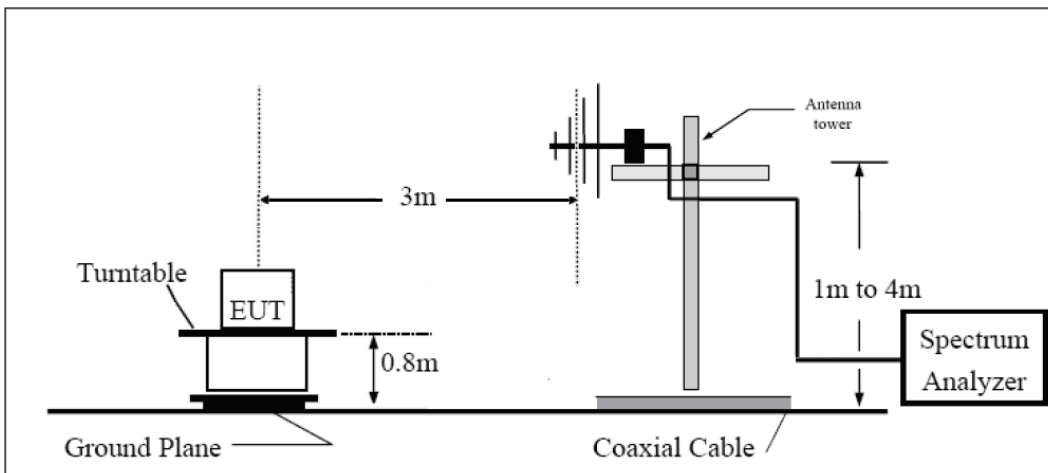

**Above 1GHz**

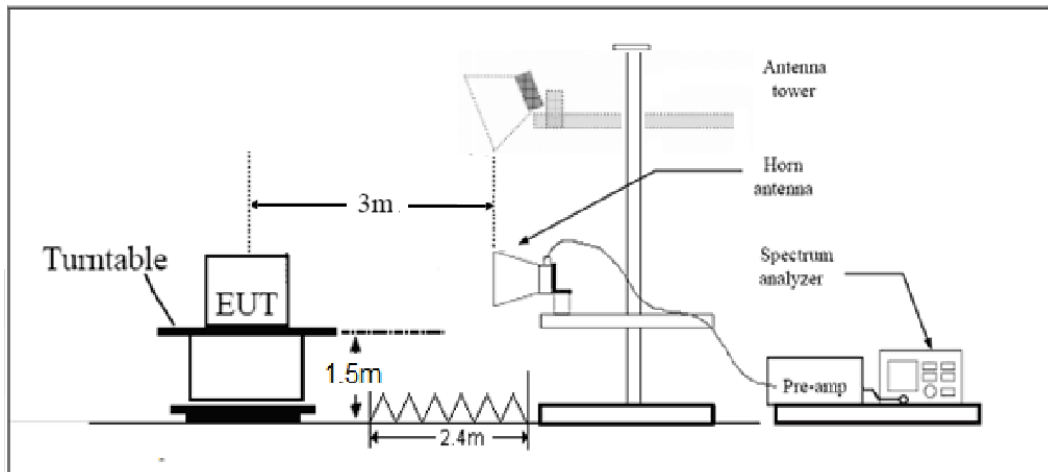

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

## §15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB



**Test result**

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.


The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

**SISO Antenna 1**

**802.11b CH1**

FCC RE 0.03-1GHz QP Class B

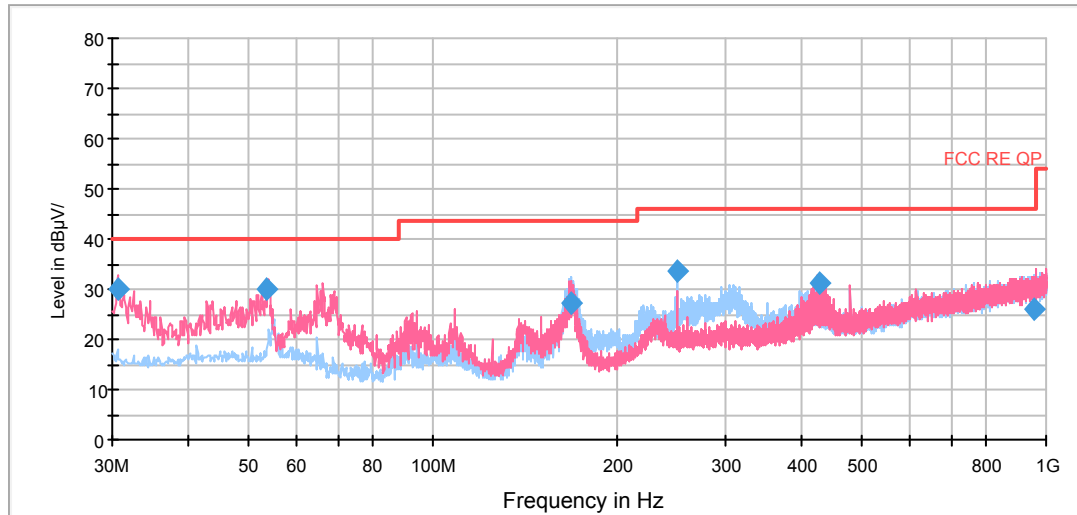

Radiates Emission from 30MHz to 1GHz


Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.606250	30.0	100.0	V	347.0	17.9	12.1	10.0	40.0
53.566250	30.2	100.0	V	63.0	17.4	12.8	9.8	40.0
167.980000	27.1	125.0	H	120.0	16.7	10.4	16.4	43.5
249.988750	33.6	125.0	H	96.0	19.2	14.4	12.4	46.0
428.831250	31.3	125.0	V	59.0	12.3	19.0	14.7	46.0
957.963750	26.0	100.0	H	223.0	-1.3	27.3	20.0	46.0

**Remark: 1. Quasi-Peak = Reading value + Correction factor**

**2. Correction Factor = Antenna factor+ Insertion loss (cable loss+amplifier gain)**

**3. Margin = Limit – Quasi-Peak**

RE 1G-3GHz PK+AV

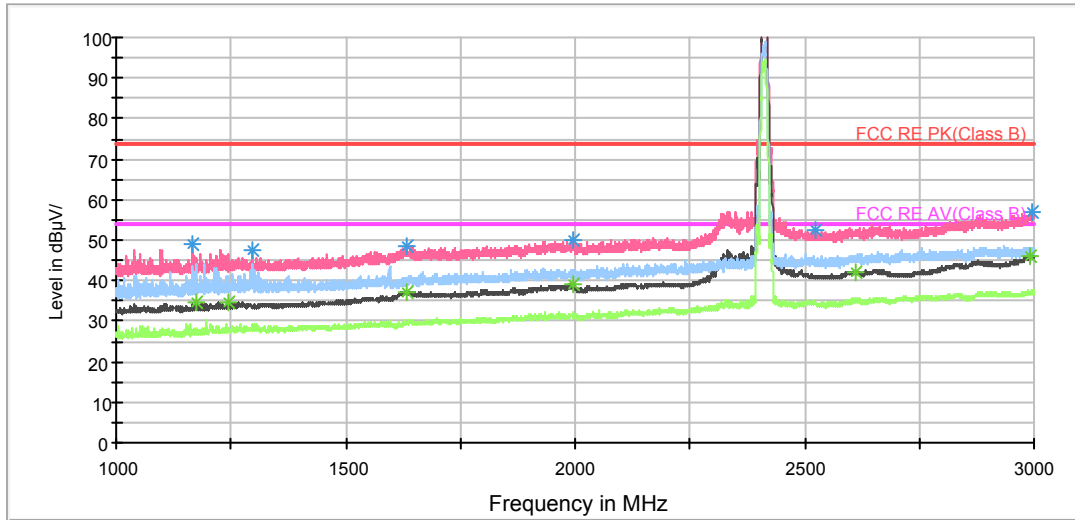

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1167.750000	48.9	100.0	V	0.0	57.1	-8.2	25.1	74
1297.500000	47.5	200.0	V	232.0	55.3	-7.8	26.5	74
1634.750000	48.4	100.0	V	279.0	53.1	-4.7	25.6	74
1994.500000	50.2	100.0	V	256.0	53.4	-3.2	23.8	74
2525.250000	52.4	100.0	V	279.0	52.7	-0.3	21.6	74
2997.000000	57.0	100.0	V	309.0	54.7	2.3	17.0	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1174.250000	34.7	100.0	V	279.0	42.7	-8.0	19.3	54
1244.250000	34.8	100.0	V	301.0	42.8	-8.0	19.2	54
1634.250000	37.3	100.0	V	0.0	42.0	-4.7	16.7	54
1994.000000	39.1	100.0	V	234.0	42.3	-3.2	14.9	54
2612.000000	42.0	100.0	V	0.0	41.9	0.1	12.0	54
2992.250000	46.0	100.0	V	309.0	43.8	2.2	8.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

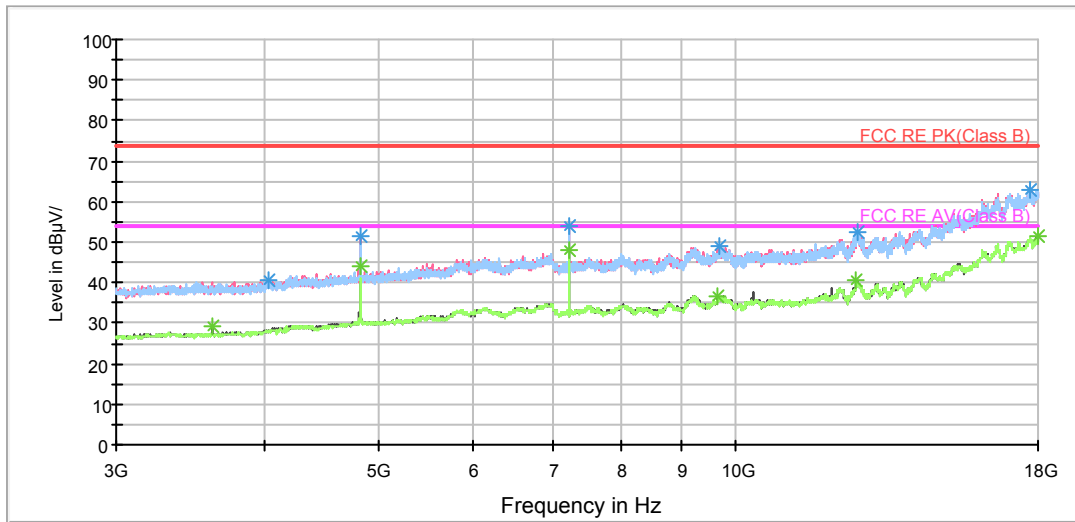

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4040.625000	40.4	105.0	V	99.0	41.4	-1.0	33.6	74
4822.500000	51.6	105.0	V	244.0	50.3	1.3	22.4	74
7235.625000	54.0	205.0	V	106.0	47.2	6.8	20.0	74
9697.500000	49.1	205.0	V	0.0	39.5	9.6	24.9	74
12671.250000	52.6	205.0	V	16.0	38.5	14.1	21.4	74
17745.000000	62.8	105.0	H	108.0	38.7	24.1	11.2	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3618.750000	29.3	105.0	V	47.0	31.3	-2.0	24.7	54
4822.500000	44.2	105.0	V	244.0	42.9	1.3	9.8	54
7233.750000	48.2	205.0	V	106.0	41.4	6.8	5.8	54
9648.750000	36.9	205.0	V	0.0	27.1	9.8	17.1	54
12641.250000	40.6	105.0	H	223.0	26.1	14.5	13.4	54
18000.000000	51.4	205.0	H	320.0	25.9	25.5	2.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



RE 18-26.5GHz PK+AV

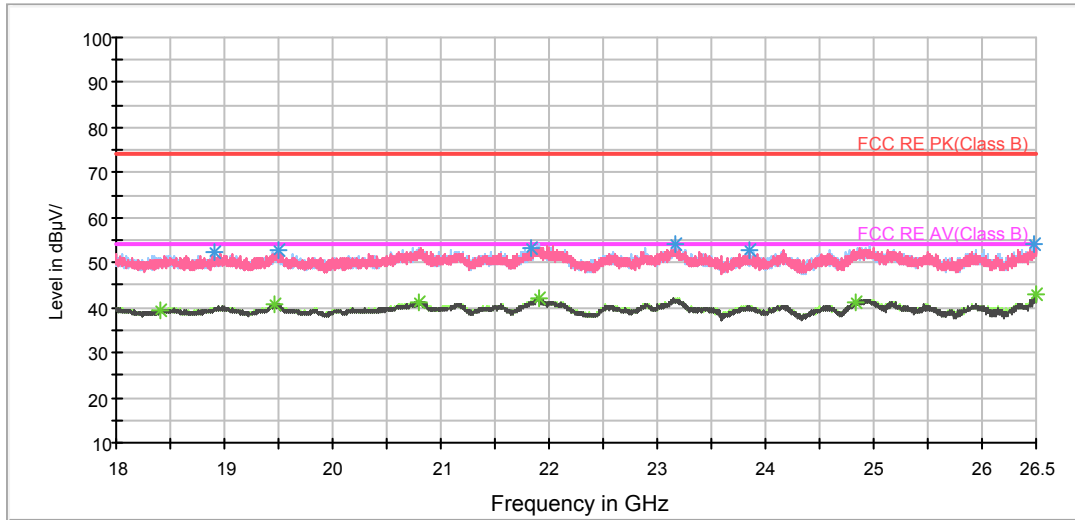

Radiates Emission from 18GHz to 26GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18903.125000	52.3	H	0.0	52.2	0.1	21.7	74
19502.375000	52.8	V	171.0	52.7	0.1	21.2	74
21836.687500	53.3	H	265.0	55.2	-1.9	20.7	74
23158.437500	54.1	H	314.0	54.2	-0.1	19.9	74
23855.437500	52.9	V	34.0	53.7	-0.8	21.1	74
26484.062500	54.2	H	8.0	53.1	1.1	19.8	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18408.000000	39.5	V	180.0	38.9	0.6	14.5	54
19468.375000	41.0	H	335.0	40.9	0.1	13.0	54
20791.187500	41.4	V	7.0	43.3	-1.9	12.6	54
21907.875000	42.1	V	263.0	43.6	-1.5	11.9	54
24832.937500	41.4	H	0.0	41.2	0.2	12.6	54
26495.750000	43.1	H	52.0	42.0	1.1	10.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11b CH6

FCC RE 0.03-1GHz QP Class B

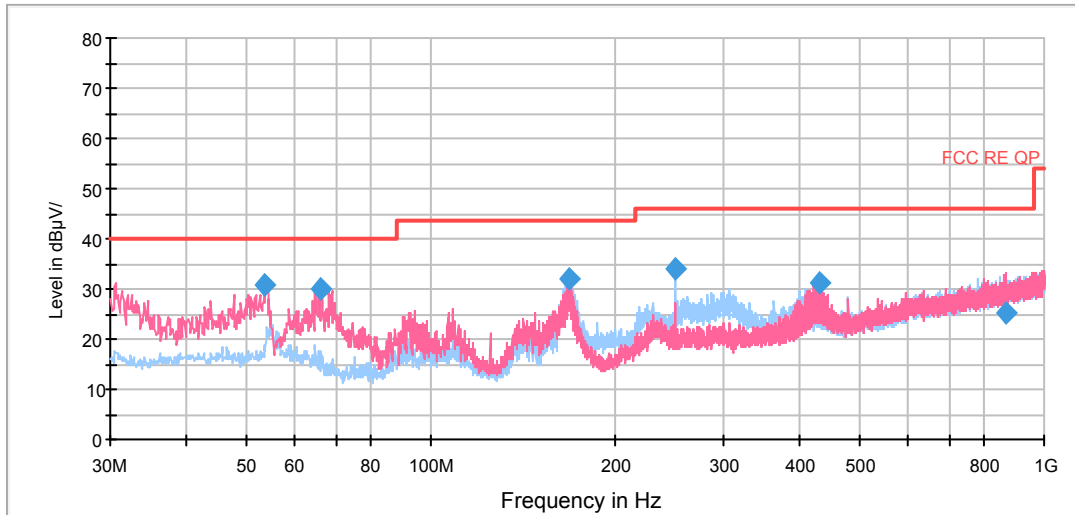


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
53.565000	30.7	100.0	V	56.0	17.9	12.8	9.3	40.0
66.293750	30.1	100.0	V	22.0	19.9	10.2	9.9	40.0
168.346250	32.0	125.0	H	130.0	21.8	10.2	11.5	43.5
249.987500	34.2	125.0	H	98.0	19.8	14.4	11.8	46.0
430.772500	31.0	125.0	V	58.0	12.1	18.9	15.0	46.0
865.973750	25.0	125.0	V	172.0	-1.1	26.1	21.0	46.0

- Remark: 1. Quasi-Peak = Reading value + Correction factor  
 2. Correction Factor = Antenna factor+ Insertion loss (cable loss+amplifier gain)  
 3. Margin = Limit – Quasi-Peak

RE 1G-3GHz PK+AV

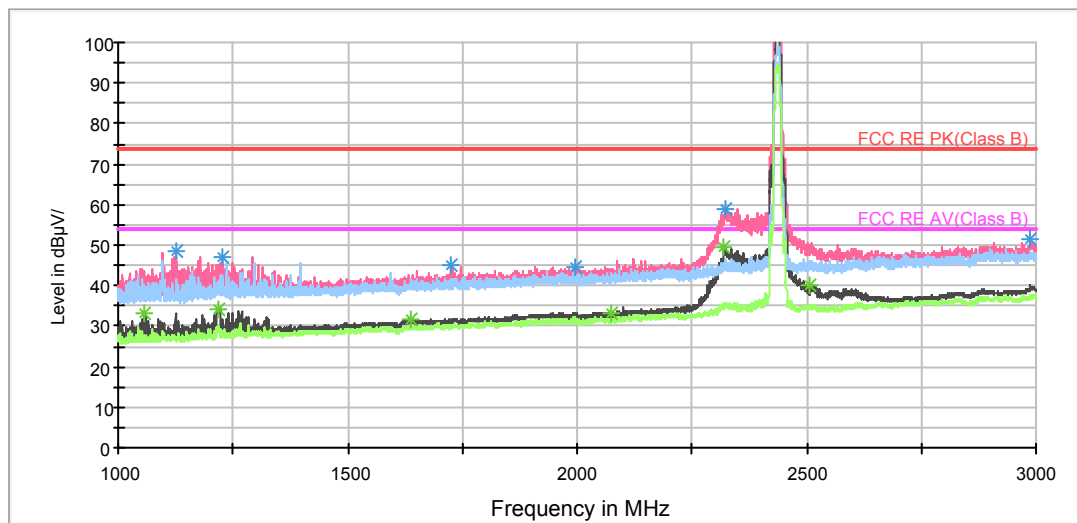

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1124.500000	48.6	100.0	V	313.0	57.1	-8.5	25.4	74
1227.000000	47.0	100.0	V	305.0	54.8	-7.8	27.0	74
1726.500000	45.2	100.0	V	356.0	50.3	-5.1	28.8	74
1993.750000	44.8	200.0	V	184.0	48.1	-3.3	29.2	74
2322.750000	58.9	100.0	V	86.0	60.6	-1.7	15.1	74
2988.250000	51.3	200.0	V	13.0	49.1	2.2	22.7	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1058.500000	33.3	100.0	V	0.0	42.2	-8.9	20.7	54
1219.750000	34.1	200.0	V	0.0	42.0	-7.9	19.9	54
1637.000000	31.7	200.0	V	130.0	36.4	-4.7	22.3	54
2073.000000	33.4	100.0	V	313.0	36.5	-3.1	20.6	54
2320.750000	49.5	100.0	V	101.0	51.2	-1.7	4.5	54
2508.000000	40.2	100.0	V	77.0	40.4	-0.2	13.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

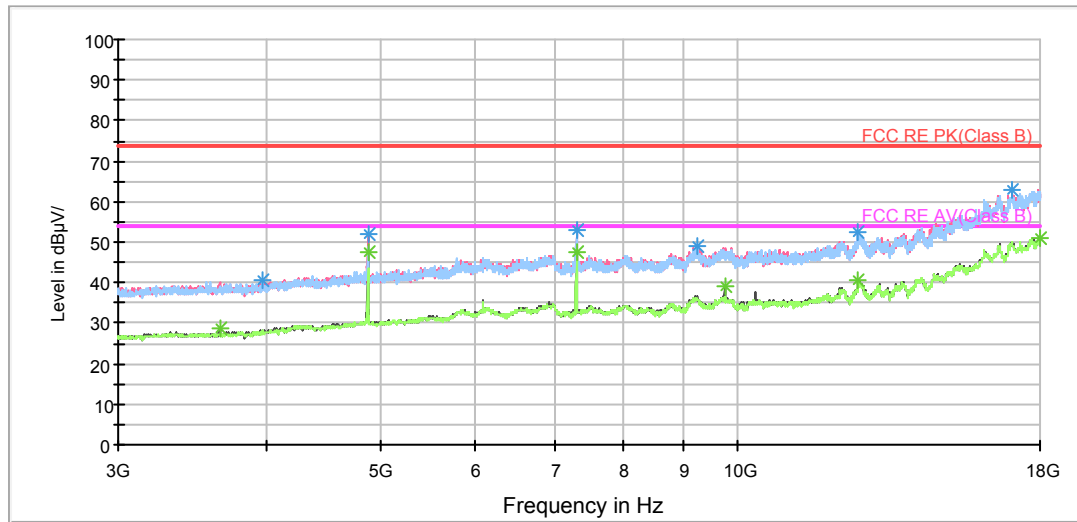

Radiates Emission from 3GHz to 18GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3971.250000	40.4	105.0	H	88.0	41.3	-0.9	33.6	74
4873.125000	51.9	105.0	V	300.0	50.1	1.8	22.1	74
7308.750000	53.0	205.0	V	0.0	46.0	7.0	21.0	74
9260.625000	48.9	205.0	H	251.0	39.5	9.4	25.1	74
12641.250000	52.4	205.0	H	183.0	37.9	14.5	21.6	74
17043.750000	62.9	205.0	V	15.0	38.3	24.6	11.1	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3656.250000	28.8	105.0	V	300.0	30.7	-1.9	25.2	54
4873.125000	47.3	105.0	V	300.0	45.5	1.8	6.7	54
7308.750000	47.4	205.0	V	0.0	40.4	7.0	6.6	54
9748.125000	39.1	105.0	V	277.0	29.3	9.8	14.9	54
12641.250000	40.6	205.0	V	37.0	26.1	14.5	13.4	54
18000.000000	51.1	105.0	V	300.0	25.6	25.5	2.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 18-26.5GHz PK+AV

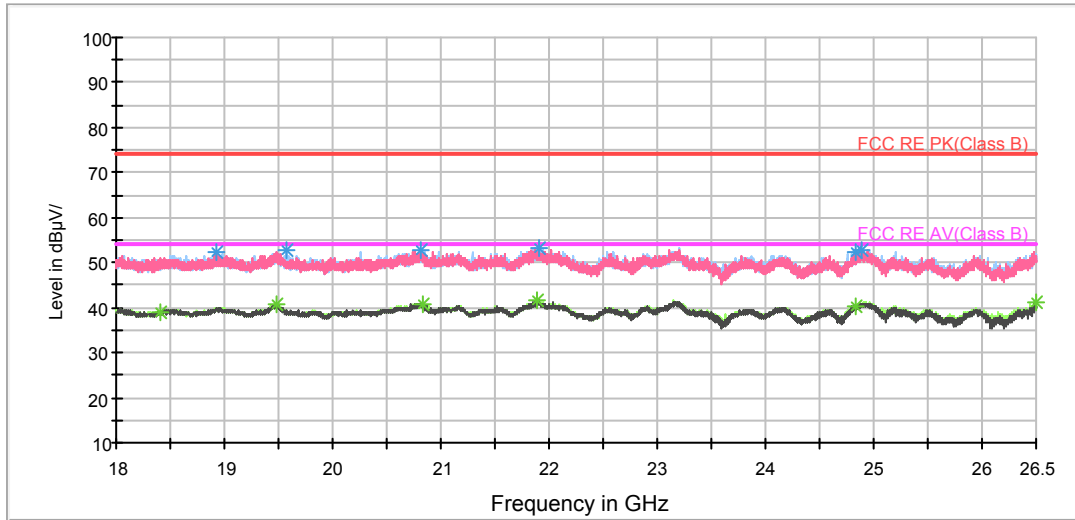

Radiates Emission from 18GHz to 26GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18924.375000	52.2	V	16.0	52.1	0.1	21.8	74
19577.812500	52.6	H	243.0	52.8	-0.2	21.4	74
20816.687500	52.7	H	233.0	54.7	-2.0	21.3	74
21908.937500	53.4	V	16.0	54.9	-1.5	20.6	74
24838.250000	52.5	H	0.0	52.2	0.3	21.5	74
24879.687500	52.6	H	243.0	52.1	0.5	21.4	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18405.875000	39.1	H	168.0	38.5	0.6	14.9	54
19477.937500	40.6	V	70.0	40.5	0.1	13.4	54
20825.187500	40.9	H	297.0	43.0	-2.1	13.1	54
21887.687500	41.7	H	324.0	43.3	-1.6	12.3	54
24835.062500	40.5	H	206.0	40.2	0.3	13.5	54
26493.625000	41.3	H	69.0	40.2	1.1	12.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11b CH11

FCC RE 0.03-1GHz QP Class B

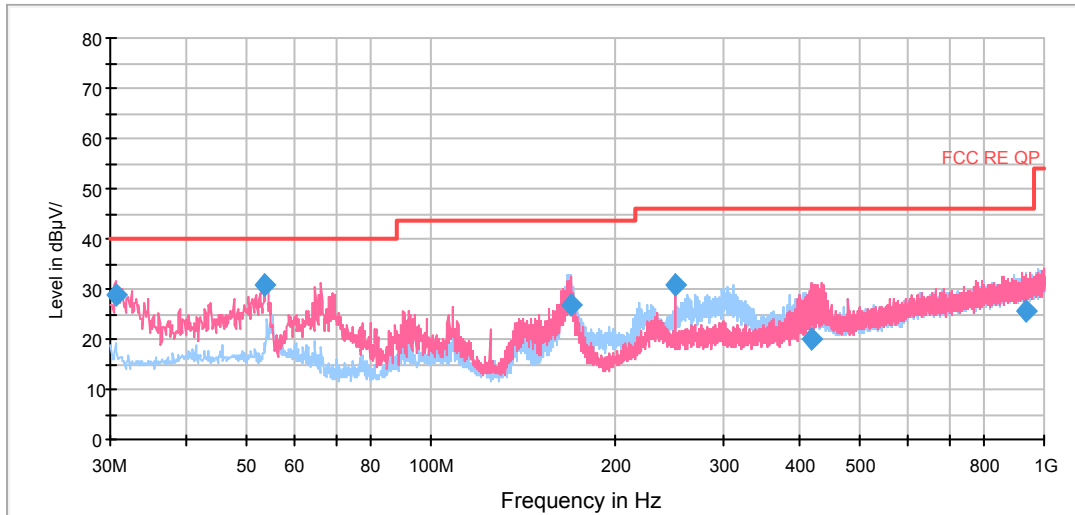


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.606250	28.9	100.0	V	0.0	16.8	12.1	11.1	40.0
53.568750	30.9	100.0	V	38.0	18.1	12.8	9.1	40.0
168.952500	26.9	125.0	H	124.0	16.7	10.2	16.6	43.5
249.988750	30.9	125.0	H	73.0	16.5	14.4	15.1	46.0
416.952500	20.0	125.0	V	67.0	1.2	18.8	26.0	46.0
931.012500	25.7	100.0	H	315.0	-1.3	27.0	20.3	46.0

- Remark: 1. Quasi-Peak = Reading value + Correction factor  
 2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)  
 3. Margin = Limit – Quasi-Peak

RE 1G-3GHz PK+AV

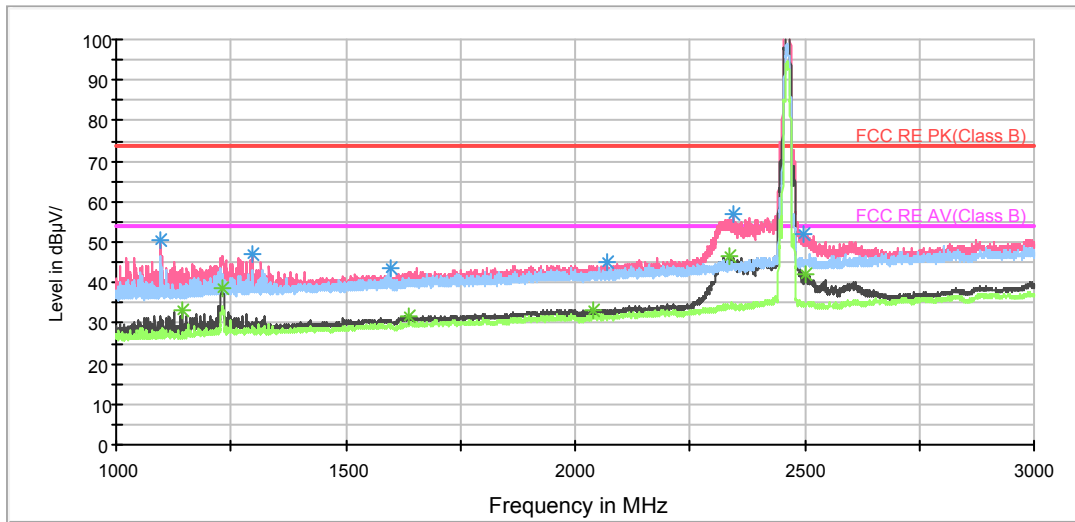

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1095.500000	50.6	100.0	V	251.0	59.5	-8.9	23.4	74
1296.750000	47.2	100.0	V	90.0	55.0	-7.8	26.8	74
1596.500000	43.8	200.0	H	321.0	50.2	-6.4	30.2	74
2071.000000	44.9	100.0	V	0.0	48.0	-3.1	29.1	74
2345.000000	56.7	100.0	V	90.0	58.0	-1.3	17.3	74
2499.250000	51.8	100.0	V	73.0	51.9	-0.1	22.2	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1145.250000	33.3	100.0	V	318.0	41.8	-8.5	20.7	54
1232.000000	38.6	200.0	V	0.0	46.4	-7.8	15.4	54
1636.750000	31.7	200.0	V	135.0	36.4	-4.7	22.3	54
2039.750000	33.3	200.0	V	98.0	36.5	-3.2	20.7	54
2336.250000	46.8	100.0	V	90.0	48.2	-1.4	7.2	54
2502.000000	42.1	100.0	V	73.0	42.3	-0.2	11.9	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

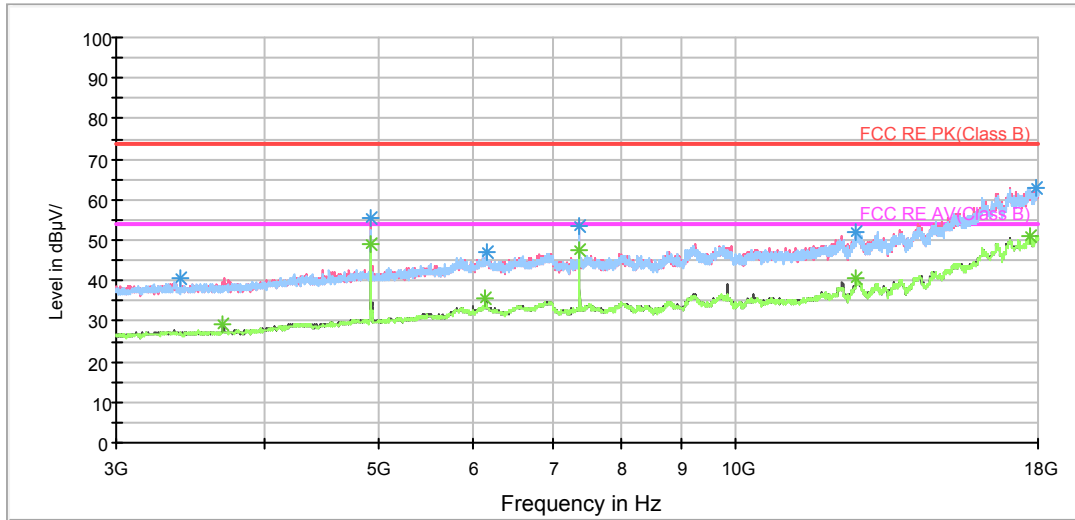

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3395.625000	40.5	205.0	H	183.0	43.1	-2.6	33.5	74
4923.750000	55.4	205.0	V	269.0	53.5	1.9	18.6	74
6155.625000	47.0	105.0	H	63.0	41.4	5.6	27.0	74
7385.625000	53.2	205.0	V	19.0	46.2	7.0	20.8	74
12633.750000	52.0	105.0	H	0.0	38.1	13.9	22.0	74
17917.500000	63.0	205.0	V	63.0	37.3	25.7	11.0	74


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3691.875000	29.4	205.0	V	0.0	31.1	-1.7	24.6	54
4923.750000	49.2	205.0	V	269.0	47.3	1.9	4.8	54
6153.750000	35.8	205.0	V	0.0	30.2	5.6	18.2	54
7383.750000	47.4	205.0	H	345.0	40.4	7.0	6.6	54
12641.250000	40.7	205.0	H	183.0	26.2	14.5	13.3	54
17700.000000	51.2	205.0	V	223.0	26.5	24.7	2.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



RE 18-26.5GHz PK+AV

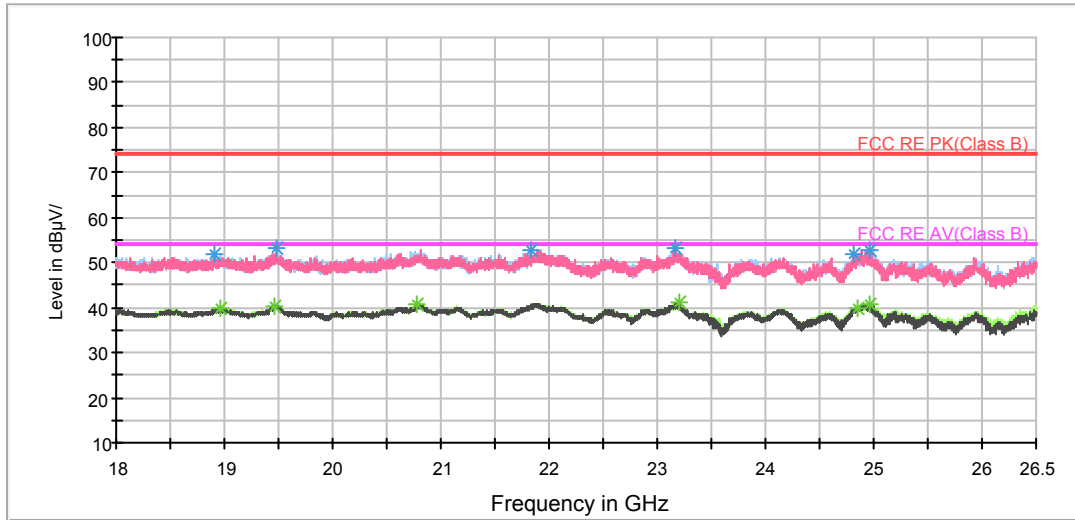

Radiates Emission from 18GHz to 26GHz

Frequency (MHz)	Peak (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18909.500000	51.7	V	0.0	51.6	0.1	22.3	74
19488.562500	53.2	H	269.0	53.1	0.1	20.8	74
21831.375000	52.7	H	0.0	54.6	-1.9	21.3	74
23174.375000	53.2	H	278.0	53.3	-0.1	20.8	74
24819.125000	52.1	V	61.0	51.9	0.2	21.9	74
24954.062500	52.8	H	202.0	51.9	0.9	21.2	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


Frequency (MHz)	Average (dBuV/m)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
18958.375000	39.9	H	212.0	39.9	0.0	14.1	54
19467.312500	40.5	H	305.0	40.4	0.1	13.5	54
20786.937500	40.7	H	0.0	42.6	-1.9	13.3	54
23198.812500	41.0	H	336.0	41.1	-0.1	13.0	54
24844.625000	39.9	V	171.0	39.6	0.3	14.1	54
24955.125000	40.9	H	0.0	40.0	0.9	13.1	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)



802.11g CH1

FCC RE 0.03-1GHz QP Class B

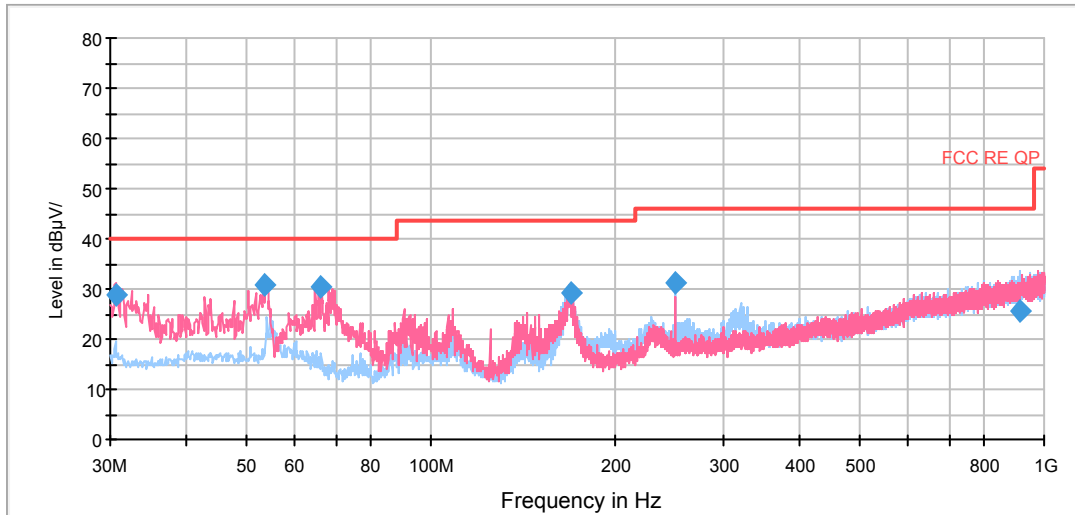


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
30.606250	28.7	100.0	V	139.0	16.6	12.1	11.3	40.0
53.565000	30.8	100.0	V	24.0	18.0	12.8	9.2	40.0
66.293750	30.3	100.0	V	30.0	20.1	10.2	9.7	40.0
169.188750	29.0	100.0	V	172.0	18.6	10.4	14.5	43.5
249.987500	31.0	125.0	H	84.0	16.6	14.4	15.0	46.0
915.411250	25.5	100.0	H	142.0	-1.5	27.0	20.5	46.0

- Remark: 1. Quasi-Peak = Reading value + Correction factor  
 2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)  
 3. Margin = Limit – Quasi-Peak

RE 1G-3GHz PK+AV

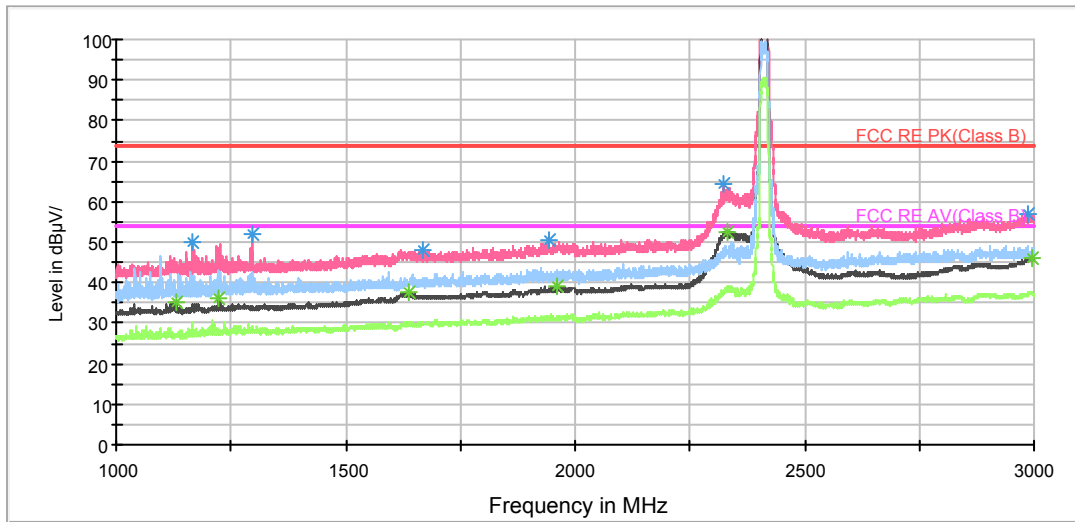

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1166.000000	49.8	100.0	V	319.0	58.0	-8.2	24.2	74
1295.750000	51.8	200.0	V	269.0	59.6	-7.8	22.2	74
1668.000000	48.1	100.0	V	283.0	53.2	-5.1	25.9	74
1943.000000	50.6	100.0	V	0.0	54.0	-3.4	23.4	74
2324.000000	64.2	100.0	V	139.0	65.8	-1.6	9.8	74
2985.000000	56.7	100.0	V	268.0	54.5	2.2	17.3	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1132.500000	35.3	100.0	V	304.0	43.7	-8.4	18.7	54
1221.000000	35.9	100.0	V	319.0	43.8	-7.9	18.1	54
1636.750000	37.4	100.0	V	283.0	42.1	-4.7	16.6	54
1959.250000	39.3	100.0	V	0.0	42.5	-3.2	14.7	54
2332.250000	52.7	100.0	V	139.0	54.1	-1.4	1.3	54
2997.250000	46.2	100.0	V	283.0	43.9	2.3	7.8	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 3-18GHz PK+AV

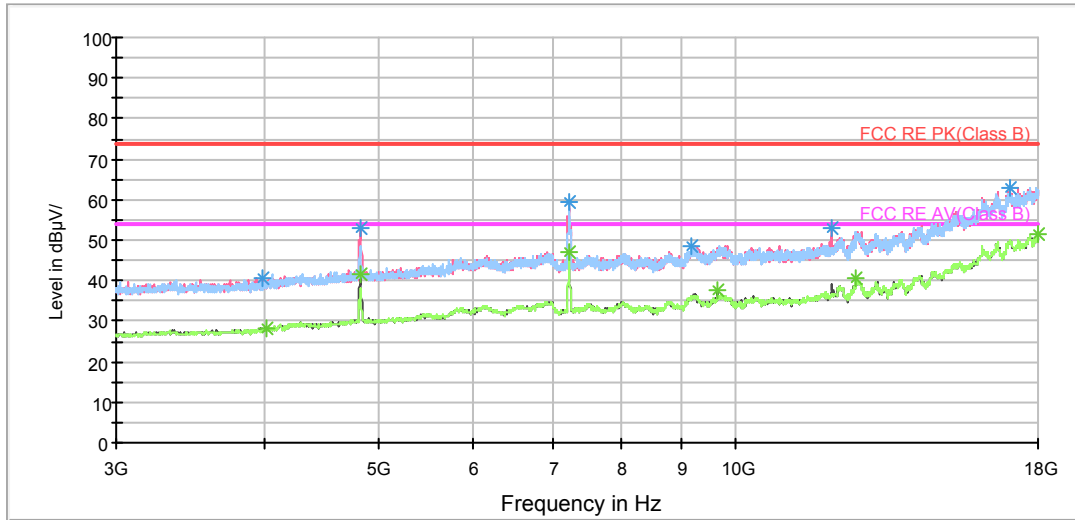

Radiates Emission from 3GHz to 18GHz

Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
3988.125000	40.7	205.0	V	40.0	41.7	-1.0	33.3	74
4824.375000	53.0	205.0	V	269.0	51.6	1.4	21.0	74
7233.750000	59.4	205.0	V	17.0	52.6	6.8	14.6	74
9191.250000	48.4	105.0	H	199.0	38.3	10.1	25.6	74
12069.375000	53.0	205.0	V	0.0	41.2	11.8	21.0	74
17017.500000	63.0	205.0	V	0.0	38.5	24.5	11.0	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
4020.000000	28.3	205.0	V	199.0	29.5	-1.2	25.7	54
4822.500000	41.6	105.0	V	301.0	40.3	1.3	12.4	54
7237.500000	46.9	205.0	H	341.0	40.0	6.9	7.1	54
9648.750000	37.6	105.0	V	91.0	27.8	9.8	16.4	54
12641.250000	40.7	105.0	H	86.0	26.2	14.5	13.3	54
18000.000000	51.3	205.0	V	108.0	25.8	25.5	2.7	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)