



# EMC TEST REPORT

**Applicant**      Nokia Shanghai Bell Co., Ltd.  
**FCC ID**          2ADZRG240WJ  
**Product**        7368 ISAM ONT  
**Model**          G-240W-J  
**Report No.**    Y1906B0084-E3V1  
**Issue Date**    September 27, 2019

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2018)/ ANSI C63.4 (2014)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Wei Liu*

*Guangchang Fan*

*Performed by: Wei Liu/ Manager*

*Approved by: Guangchang Fan/ Director*

**TA Technology (Shanghai) Co., Ltd.**

*No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*



## Table of Contents

|                                                         |                                                  |    |
|---------------------------------------------------------|--------------------------------------------------|----|
| 1                                                       | Test Laboratory.....                             | 4  |
| 1.1                                                     | Notes of the Test Report.....                    | 4  |
| 1.2                                                     | Test facility.....                               | 4  |
| 1.3                                                     | Testing Location.....                            | 5  |
| 2                                                       | General Description of Equipment under Test..... | 6  |
| 2.1                                                     | Client Information.....                          | 6  |
| 2.2                                                     | General information.....                         | 6  |
| 2.3                                                     | Applied Standards.....                           | 8  |
| 2.4                                                     | Test Mode.....                                   | 9  |
| 3                                                       | Test Case Results .....                          | 10 |
| 3.1                                                     | Radiated Emission .....                          | 10 |
| 3.2                                                     | Conducted Emission .....                         | 15 |
| 4                                                       | Main Test Instrument.....                        | 19 |
| ANNEX A: The EUT Appearance and Test Configuration..... |                                                  | 20 |
| A.1 EUT Appearance .....                                |                                                  | 20 |



### Summary of measurement results

| Number                                 | Test Case          | Clause in FCC Rules             | Conclusion |
|----------------------------------------|--------------------|---------------------------------|------------|
| 1                                      | Radiated Emission  | FCC Part15.109, ANSI C63.4-2014 | PASS       |
| 2                                      | Conducted Emission | FCC Part15.107, ANSI C63.4-2014 | PASS       |
| Test Date: May 30, 2019~ June 26, 2019 |                    |                                 |            |

## 1 Test Laboratory

### 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2 Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

#### **VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2 General Description of Equipment under Test

### 2.1 Client Information

|                               |                                                                                                                        |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>Applicant</b>              | Nokia Shanghai Bell Co., Ltd.                                                                                          |
| <b>Applicant address</b>      | No. 388, Ningqiao Rd. Pilot Free Trade Zone, Shanghai, China                                                           |
| <b>Manufacturer 1</b>         | TAICANG T&W ELECTRONICS CO.,LTD                                                                                        |
| <b>Manufacturer address 1</b> | 89# Jiang Nan RD, Lu Du, Taicang, Jiangsu, China                                                                       |
| <b>Manufacturer 2</b>         | SHENZHEN TWOWING TECHNOLOGIES CO., LTD                                                                                 |
| <b>Manufacturer address 2</b> | 1st-12th Floor, Nangang Industrial Building, Tangtou Industrial Park, Shiyao, Baoan, Shenzhen, Guangdong 518108, China |

### 2.2 General information

| EUT Description                                                   |                                                                                           |             |             |
|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------|-------------|
| Device Type:                                                      | Movable Device                                                                            |             |             |
| Model:                                                            | G-240W-J                                                                                  |             |             |
| IMEI:                                                             | /                                                                                         |             |             |
| HW Version:                                                       | PEM2                                                                                      |             |             |
| SW Version:                                                       | 3FE48164AGCA97                                                                            |             |             |
| Antenna Type:                                                     | Internal Antenna                                                                          |             |             |
| Frequency:                                                        | Band                                                                                      | Tx (MHz)    | Rx (MHz)    |
|                                                                   | WIFI 2.4G:                                                                                | 2412 ~ 2462 | 2412 ~ 2462 |
|                                                                   | WIFI 5G(U-NII-1):                                                                         | 5150 ~ 5250 | 5150 ~ 5250 |
|                                                                   | WIFI 5G(U-NII-3):                                                                         | 5725 ~ 5850 | 5725 ~ 5850 |
| Modulation:                                                       | WLAN 802.11b: DSSS<br>WLAN 802.11a/g/n/ac: OFDM                                           |             |             |
| EUT Accessory                                                     |                                                                                           |             |             |
| Adapter 1                                                         | Manufacturer: Shenzhen SOY Technology Co., Ltd<br>Model: SUN-1200300                      |             |             |
| Adapter 2                                                         | Manufacturer: SHENZHEN RUIDE ELECTRONICAL INDUSTRIAL CO.,LTD<br>Model: RD1203000-C55-20MG |             |             |
| Note: The information of the EUT is declared by the manufacturer. |                                                                                           |             |             |



|          | Kit Code   | EMA        | Part Description                                                                                                | Power Adaptor                     |
|----------|------------|------------|-----------------------------------------------------------------------------------------------------------------|-----------------------------------|
| G-240W-J | 3FE48008AA | 3FE48009AA | 2 POTS, 4 GE, Dual band<br>WIFI<br>AC3000 802.11ac<br>4x4/802.11n 3x3<br>US Plug in, 2Pin, Wall<br>Mounted, 12V | SUN-1200300<br>RD1203000-C55-20MG |

**Auxiliary equipment details**

| No. | Name    | Brand name     | Model  | NSB code | Valid Until         |
|-----|---------|----------------|--------|----------|---------------------|
| 1   | Spirent | TestCenter     | DE48E0 | -        | No Cal.<br>Required |
| 2   | OLT     | Alcatel-Lucent | N.A    | -        | No Cal.<br>Required |
| 3   | PC      | HP             | N.A    | -        | No Cal.<br>Required |
| 4   | Phone   | N.A            | N.A    | -        | No Cal.<br>Required |

**Information of Ports**

| No. | Port name | Number | Shielded or unshielded | Cable type (optic, twisted pair, etc.) | Max. Cable length |
|-----|-----------|--------|------------------------|----------------------------------------|-------------------|
| 1   | Power     | 1      | unshielded             | -                                      | -                 |
| 2   | GE        | 4      | unshielded             | -                                      | -                 |
| 3   | POTS      | 2      | unshielded             | -                                      | -                 |
| 4   | USB       | 2      | shielded               | -                                      | -                 |



## 2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

### Test standards


**FCC Code CFR47 Part15B (2018)**

**ANSI C63.4 (2014)**

## 2.4 Test Mode

Description: The G-240W-J is a GPON ONT which has 2 POTs, 4 GE ports, 2 USB ports, 2.4G wi-fi and 5G wi-fi.

The basic functional test in normal room conditions consists of the traffic test and POTs connection test. G-240W-J runs 4 traffics on each line with DE48E0, the each upstream of 3 GE is 250Mbps, and downstream is 750Mbps. The POTs keep connecting though OFLT program.

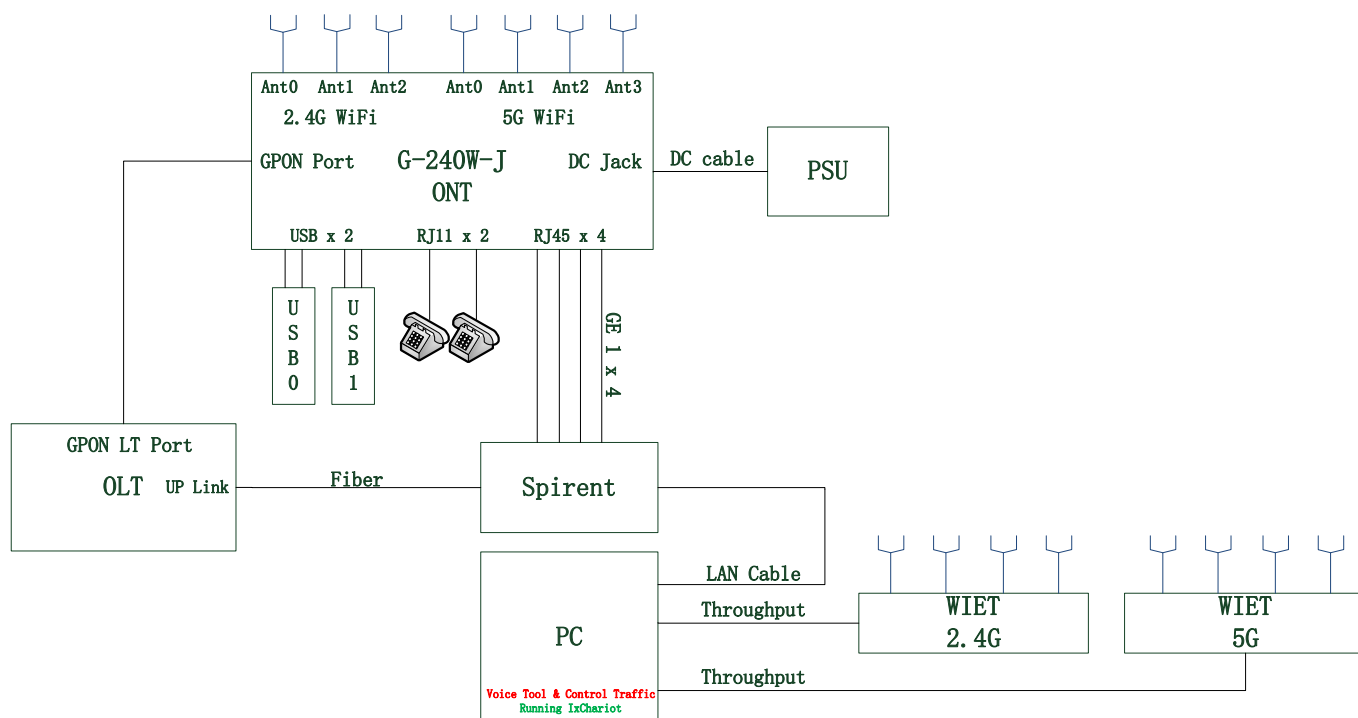

### 3 Test Case Results

#### 3.1 Radiated Emission

##### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 24°C~26°C   | 45%~50%           | 102.5kPa |

##### Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO


(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


During the test, The basic functional test in normal room conditions consists of the traffic test and POTs connection test. G-240W-J runs 4 traffics on each line with DE48E0, the each upstream of 3 GE is 250Mbps, and downstream is 750Mbps. The POTs keep connecting though OFLT program.

## Test Setup

### Below 1GHz

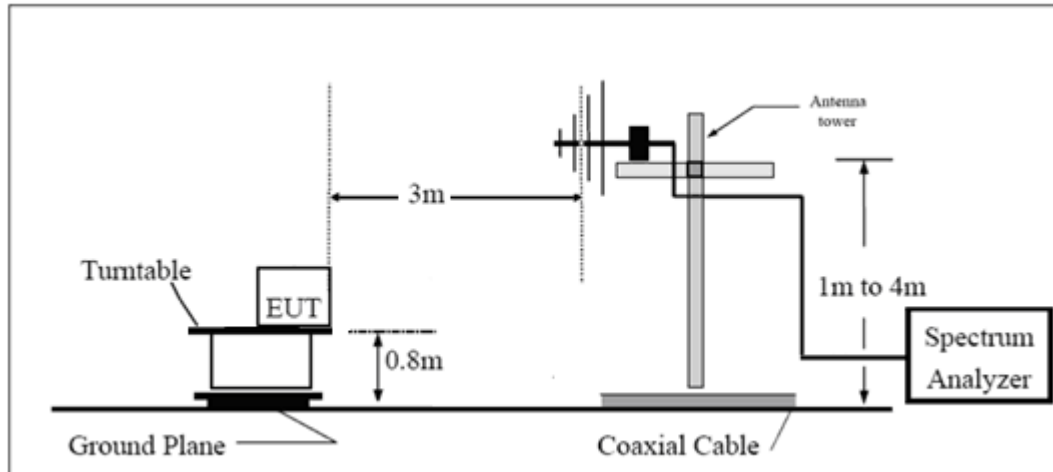

### Above 1GHz

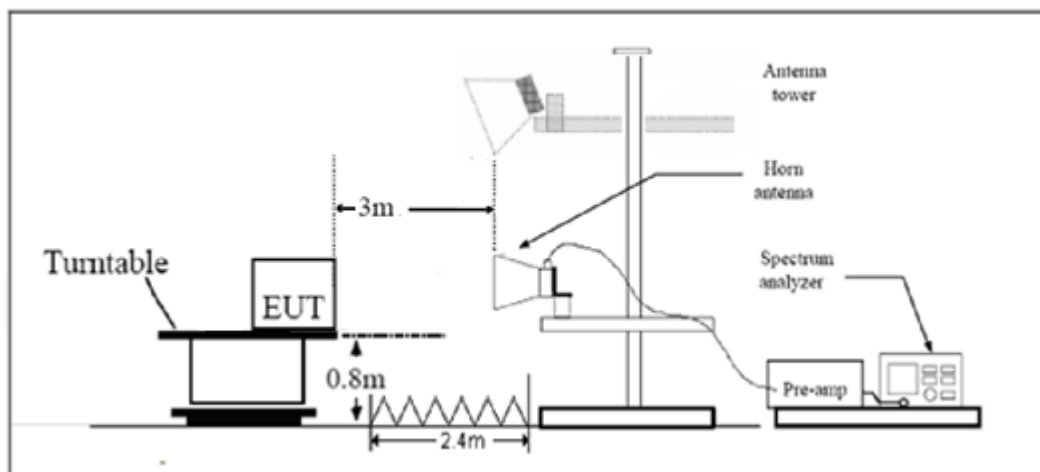

Note: Area side:2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

## Limits

| Frequency (MHz)                                                                 | Field Strength (dB $\mu$ V/m) | Detector        |
|---------------------------------------------------------------------------------|-------------------------------|-----------------|
| 30 -88                                                                          | 40.0                          | Quasi-peak      |
| 88-216                                                                          | 43.5                          | Quasi-peak      |
| 216 – 960                                                                       | 46.0                          | Quasi-peak      |
| 960-1000                                                                        | 54.0                          | Quasi-peak      |
| 1000-5 <sup>th</sup> harmonic of the highest frequency or 40GHz, which is lower | 54<br>74                      | Average<br>Peak |

## Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


| Frequency      | Uncertainty |
|----------------|-------------|
| 30MHz~200MHz   | 4.02 dB     |
| 200MHz~1000MHz | 3.28 dB     |
| 1GHz~18GHz     | 3.70 dB     |
| 18GHz~26.5GHz  | 5.78 dB     |
| 26.5GHz~40GHz  | 5.82 dB     |

## Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier, the Emissions in the frequency band 18GHz- 40GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.  
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

FCC RE 0.03-1GHz QP Class B

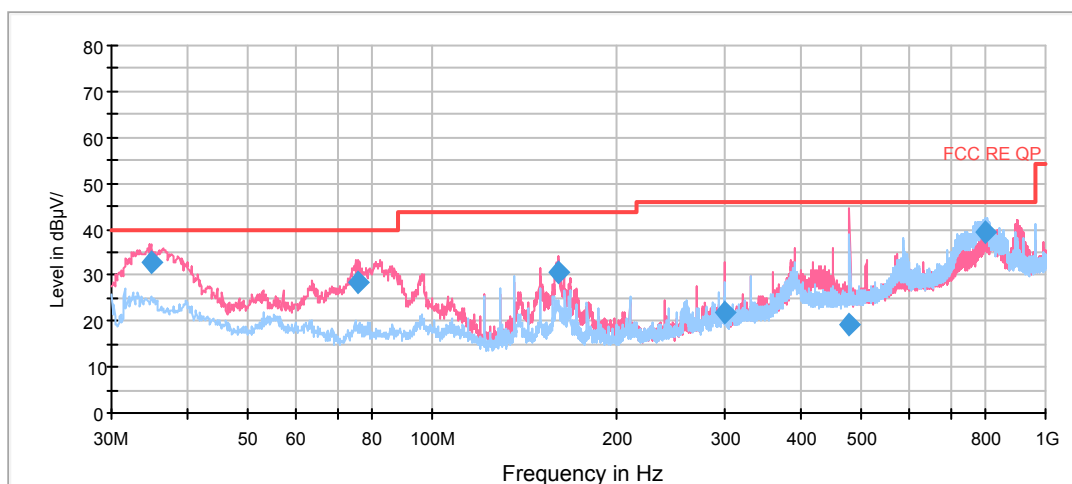


Radiated Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 34.927500       | 32.9                | 100.0       | V            | 258.0         | 16.3                | 7.1         | 40.0           |
| 75.953750       | 28.6                | 125.0       | V            | 22.0          | 10.2                | 11.4        | 40.0           |
| 160.305000      | 30.4                | 100.0       | V            | 0.0           | 10.1                | 13.1        | 43.5           |
| 300.023750      | 22.0                | 175.0       | V            | 6.0           | 15.3                | 24.0        | 46.0           |
| 479.920000      | 19.2                | 125.0       | V            | 22.0          | 20.8                | 26.8        | 46.0           |
| 797.631250      | 39.2                | 100.0       | H            | 31.0          | 24.9                | 6.8         | 46.0           |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

## FCC RE 1G-18GHz PK+AV Class B

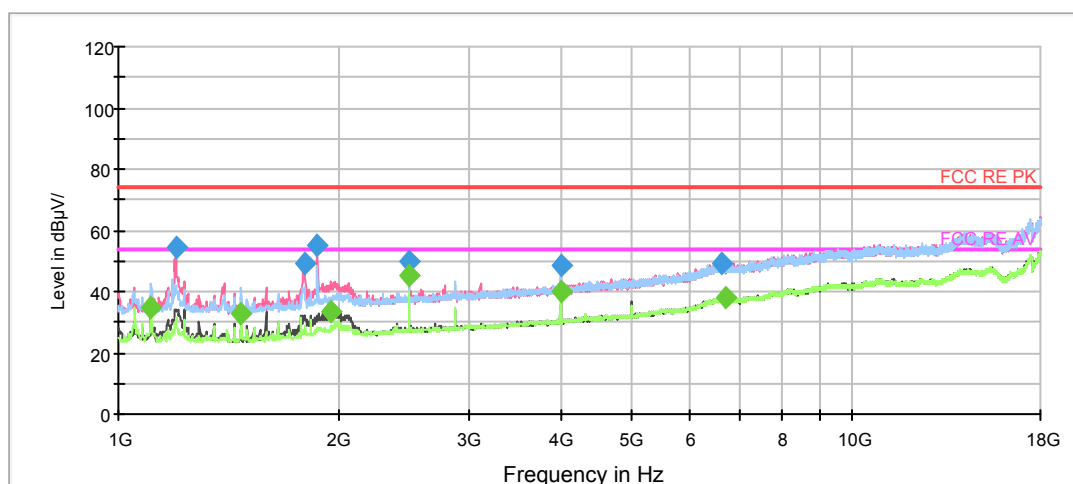

## Radiated Emission from 1GHz to 18GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1197.625000     | 54.6          | 100.0       | V            | 230.0         | -11.2               | 19.4        | 74.0           |
| 1788.375000     | 49.2          | 100.0       | V            | 186.0         | -9.4                | 24.8        | 74.0           |
| 1864.875000     | 55.1          | 100.0       | V            | 186.0         | -9.2                | 18.9        | 74.0           |
| 2487.500000     | 50.0          | 100.0       | V            | 186.0         | -6.4                | 24.0        | 74.0           |
| 3998.375000     | 48.6          | 100.0       | H            | 138.0         | -2.7                | 25.4        | 74.0           |
| 6631.250000     | 48.9          | 200.0       | H            | 327.0         | 5.0                 | 25.1        | 74.0           |

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 1108.375000     | 34.6             | 100.0       | H            | 184.0         | -11.4               | 19.4        | 54.0           |
| 1469.625000     | 32.8             | 100.0       | H            | 194.0         | -10.5               | 21.2        | 54.0           |
| 1945.625000     | 33.5             | 100.0       | V            | 198.0         | -9.0                | 20.5        | 54.0           |
| 2487.500000     | 45.1             | 100.0       | V            | 186.0         | -6.4                | 8.9         | 54.0           |
| 3998.375000     | 39.7             | 100.0       | H            | 138.0         | -2.7                | 14.3        | 54.0           |
| 6699.250000     | 37.7             | 100.0       | V            | 326.0         | 5.0                 | 16.3        | 54.0           |

## 3.2 Conducted Emission

### Ambient condition


|             |                   |          |
|-------------|-------------------|----------|
| Temperature | Relative humidity | Pressure |
| 24°C ~26°C  | 50%~55%           | 102.5kPa |

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, The basic functional test in normal room conditions consists of the traffic test and POTs connection test. G-240W-J runs 4 traffics on each line with DE48E0, the each upstream of 3 GE is 250Mbps, and downstream is 750Mbps. The POTs keep connecting though OFLT program.

### Test Setup

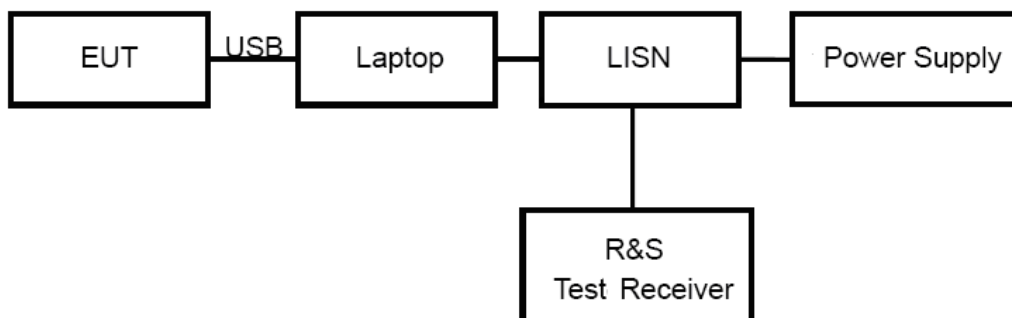

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

### Limits

| Frequency<br>(MHz)                                | Conducted Limits(dBμV) |            |
|---------------------------------------------------|------------------------|------------|
|                                                   | Quasi-peak             | Average    |
| 0.15 - 0.5                                        | 66 to 56 *             | 56 to 46 * |
| 0.5 - 5                                           | 56                     | 46         |
| 5 - 30                                            | 60                     | 50         |
| *: Decreases with the logarithm of the frequency. |                        |            |


### Measurement Uncertainty



The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .  $U = 2.57$  dB.

## Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

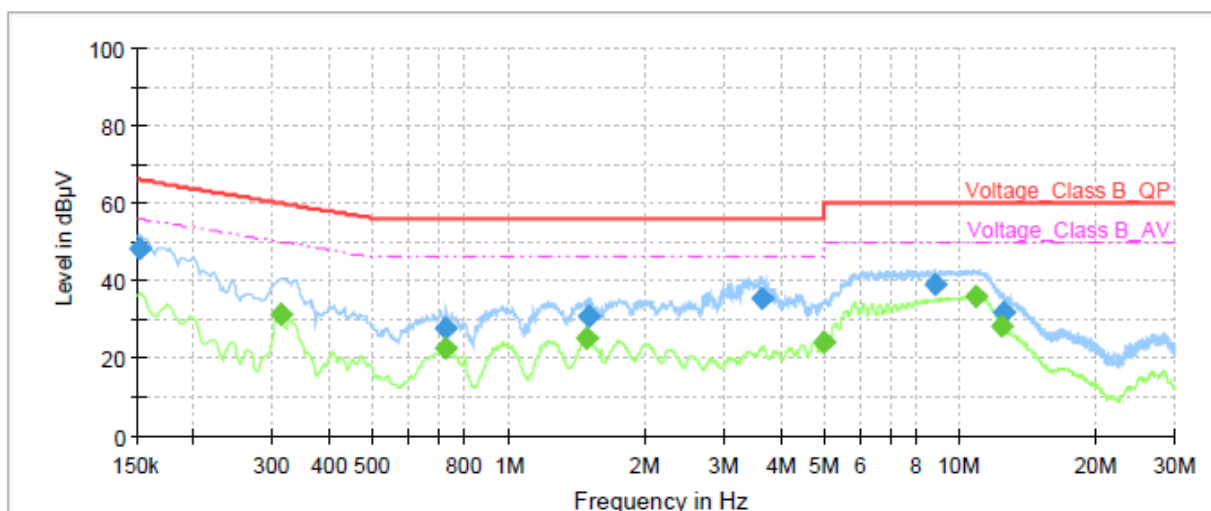


| Frequency (MHz) | QuasiPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.15            | 48.39            | ---            | 65.88        | 17.49       | 1000.0          | 9.000           | L1   | ON     | 19.05      |
| 0.31            | ---              | 31.24          | 49.92        | 18.68       | 1000.0          | 9.000           | L1   | ON     | 19.18      |
| 0.72            | 27.74            | ---            | 56.00        | 28.26       | 1000.0          | 9.000           | L1   | ON     | 19.25      |
| 0.73            | ---              | 22.32          | 46.00        | 23.68       | 1000.0          | 9.000           | L1   | ON     | 19.24      |
| 1.49            | ---              | 25.13          | 46.00        | 20.87       | 1000.0          | 9.000           | L1   | ON     | 19.18      |
| 1.50            | 30.91            | ---            | 56.00        | 25.09       | 1000.0          | 9.000           | L1   | ON     | 19.18      |
| 3.63            | 35.27            | ---            | 56.00        | 20.73       | 1000.0          | 9.000           | L1   | ON     | 19.08      |
| 5.00            | ---              | 23.99          | 46.00        | 22.01       | 1000.0          | 9.000           | L1   | ON     | 19.08      |
| 8.83            | 38.94            | ---            | 60.00        | 21.06       | 1000.0          | 9.000           | L1   | ON     | 19.27      |
| 10.85           | ---              | 35.77          | 50.00        | 14.23       | 1000.0          | 9.000           | L1   | ON     | 19.36      |
| 12.41           | ---              | 28.44          | 50.00        | 21.56       | 1000.0          | 9.000           | L1   | ON     | 19.43      |
| 12.48           | 31.99            | ---            | 60.00        | 28.01       | 1000.0          | 9.000           | L1   | ON     | 19.44      |

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 KHz to 30 MHz

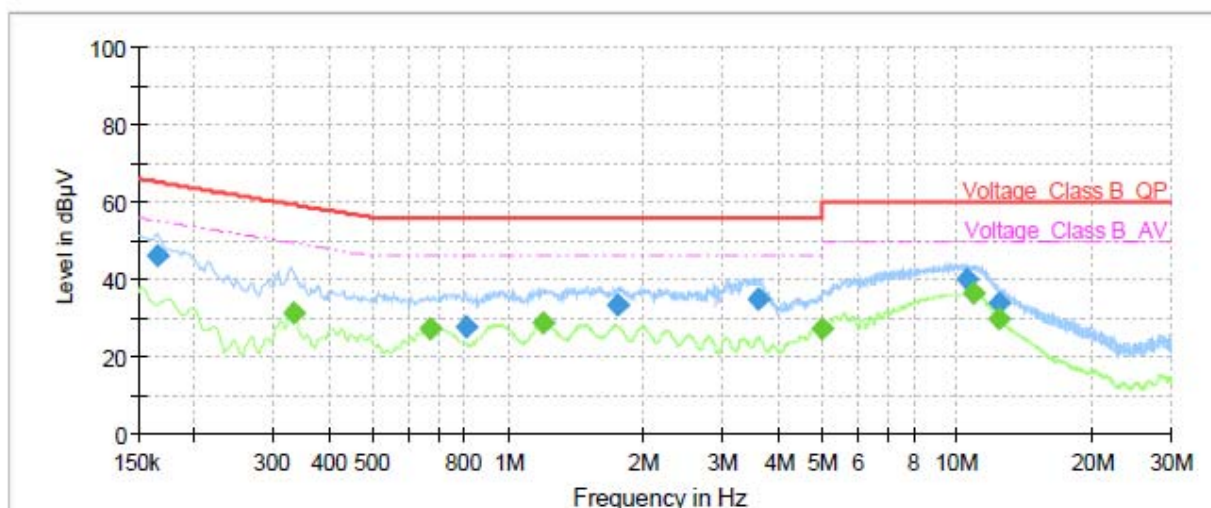

| Frequency (MHz) | QuasiPeak (dBμV) | Average (dBμV) | Limit (dBμV) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------|----------------|--------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.17            | 45.93            | ---            | 65.17        | 19.24       | 1000.0          | 9.000           | N    | ON     | 19.15      |
| 0.33            | ---              | 31.54          | 49.34        | 17.80       | 1000.0          | 9.000           | N    | ON     | 19.19      |
| 0.67            | ---              | 27.43          | 46.00        | 18.57       | 1000.0          | 9.000           | N    | ON     | 19.28      |
| 0.80            | 27.55            | ---            | 56.00        | 28.45       | 1000.0          | 9.000           | N    | ON     | 19.24      |
| 1.20            | ---              | 28.72          | 46.00        | 17.28       | 1000.0          | 9.000           | N    | ON     | 19.23      |
| 1.75            | 33.53            | ---            | 56.00        | 22.47       | 1000.0          | 9.000           | N    | ON     | 19.16      |
| 3.62            | 34.98            | ---            | 56.00        | 21.02       | 1000.0          | 9.000           | N    | ON     | 19.08      |
| 4.99            | ---              | 27.36          | 46.00        | 18.64       | 1000.0          | 9.000           | N    | ON     | 19.08      |
| 10.54           | 40.14            | ---            | 60.00        | 19.86       | 1000.0          | 9.000           | N    | ON     | 19.38      |
| 10.83           | ---              | 36.38          | 50.00        | 13.62       | 1000.0          | 9.000           | N    | ON     | 19.36      |
| 12.42           | ---              | 29.52          | 50.00        | 20.48       | 1000.0          | 9.000           | N    | ON     | 19.41      |
| 12.42           | 33.97            | ---            | 60.00        | 26.03       | 1000.0          | 9.000           | N    | ON     | 19.41      |

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 KHz to 30 MHz

## 4 Main Test Instrument

| Name                    | Manufacturer | Type              | Serial Number | Calibration Date | Expiration Time |
|-------------------------|--------------|-------------------|---------------|------------------|-----------------|
| Spectrum Analyzer       | R&S          | FSV40             | 15195-01-00   | 2019-05-19       | 2020-05-18      |
| EMI Test Receiver       | R&S          | ESCI              | 100948        | 2019-05-19       | 2020-05-18      |
| Trilog Antenna          | SCHWARZBECK  | VULB 9163         | 9163-201      | 2017-11-18       | 2019-11-17      |
| Horn Antenna            | R&S          | HF907             | 100126        | 2018-07-07       | 2020-07-06      |
| Standard Gain Horn      | ETS-Lindgren | 3160-09           | 00102643      | 2018-06-20       | 2020-06-19      |
| Standard Gain Horn      | STEATITE     | QSH-SL-26-40-K-15 | 16779         | 2017-07-20       | 2019-07-19      |
| EMI Test Receiver       | R&S          | ESR               | 101667        | 2019-05-19       | 2020-05-18      |
| LISN                    | R&S          | ENV216            | 101171        | 2016-12-16       | 2019-12-15      |
| Bore Sight Antenna mast | ETS          | 2171B             | 00058752      | /                | /               |
| Test software           | EMC32        | R&S               | 9.26.0        | /                | /               |

\*\*\*\*\*END OF REPORT \*\*\*\*\*

## ANNEX A: The EUT Appearance and Test Configuration

### A.1 EUT Appearance



Front Side



Back Side

a: EUT



Adapter 1



Adapter 2

b: Adapter

Picture 1 EUT and Accessory