

**FCC 47 CFR PART 15 SUBPART C****TEST REPORT****For****Product Name: GPON ONU****Brand Name: N/A****Model No.: G-241W-A****Series Model: N/A****FCC ID: 2ADZRG241W-A****Test Report Number:  
C150506R01-RPW****Issued for****Alcatel-Lucent Shanghai Bell Co., Ltd.****6B602, 388 Ningqiao Road Pudong, Shanghai****Issued by****Compliance Certification Services Inc.****Kun shan Laboratory****No.10 Weiye Rd., Innovation park, Eco&Tec,  
Development Zone, Kunshan City, Jiangsu, China****TEL: 86-512-57355888****FAX: 86-512-57370818**

TESTING CERT #2541.01

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.



### Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	June 19, 2015	C150605R01-RPW	ALL	N/A
Update	July 9, 2015	C150605R01-RPW	1,4	Update Applicant and Manufacturer address

## TABLE OF CONTENTS

<b>1.</b>	<b>TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2.</b>	<b>EUT DESCRIPTION.....</b>	<b>5</b>
<b>3.</b>	<b>TEST METHODOLOGY .....</b>	<b>6</b>
3.1.	EUT CONFIGURATION .....	6
3.2.	EUT EXERCISE .....	6
3.3.	GENERAL TEST PROCEDURES.....	6
3.4.	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5.	DESCRIPTION OF TEST MODES.....	8
3.6.	ANTENNA DESCRIPTION .....	9
<b>4.</b>	<b>INSTRUMENT CALIBRATION.....</b>	<b>10</b>
4.1.	MEASURING INSTRUMENT CALIBRATION .....	10
<b>5.</b>	<b>FACILITIES AND ACCREDITATIONS .....</b>	<b>12</b>
5.1.	FACILITIES .....	12
5.2.	EQUIPMENT.....	12
5.3.	LABORATORY ACCREDITATIONS AND LISTING .....	12
5.4.	TABLE OF ACCREDITATIONS AND LISTINGS .....	13
<b>6.</b>	<b>SETUP OF EQUIPMENT UNDER TEST.....</b>	<b>14</b>
6.1.	SETUP CONFIGURATION OF EUT.....	14
6.2.	SUPPORT EQUIPMENT.....	14
<b>7.</b>	<b>FCC PART 15.247 REQUIREMENTS.....</b>	<b>15</b>
7.1.	6DB BANDWIDTH .....	15
7.2.	PEAK POWER .....	26
7.3.	PEAK POWER SPECTRAL DENSITY .....	28
7.4.	SPURIOUS EMISSIONS .....	39
7.5.	RADIATED EMISSIONS .....	73
7.6.	POWERLINE CONDUCTED EMISSIONS .....	91

**1. TEST RESULT CERTIFICATION**

<b>Product Name:</b>	GPON ONU
<b>Trade Name:</b>	N/A
<b>Model Name.:</b>	G-241W-A
<b>Series Model:</b>	N/A
<b>Applicant Discrepancy:</b>	Initial
<b>Device Category:</b>	Mobile Device
<b>Date of Test:</b>	June 6, 2015 ~ June 18, 2015
<b>Applicant:</b>	<b>Alcatel-Lucent Shanghai Bell Co., Ltd.</b> 6B602, 388 Ningqiao Road Pudong, Shanghai
<b>Manufacturer:</b>	<b>Alcatel-Lucent Shanghai Bell Co., Ltd.</b> 6B602, 388 Ningqiao Road Pudong, Shanghai
<b>Application Type:</b>	Certification

**APPLICABLE STANDARDS**


<b>STANDARD</b>	<b>TEST RESULT</b>
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

**We hereby certify that:**

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:****Tested by:**

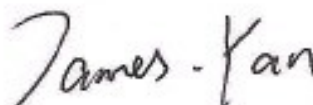

Jeff.Fang  
RF Manager  
Compliance Certification Service Inc.

James.Yan  
Test Engineer  
Compliance Certification Service Inc.

## 2. EUT DESCRIPTION

<b>Product Name:</b>	GPON ONU	
<b>Brand Name:</b>	N/A	
<b>Model Name:</b>	G-241W-A	
<b>Series Model:</b>	N/A	
<b>Model Discrepancy:</b>	N/A	
<b>Power Adapter Power Rating :</b>	Adapter 1: Model No.:AD2412N3L Input: AC 100-240V 1.0A, 50/60Hz Output: DC 12V 2.0A	Adapter 2: Model No.: DUPS-1232G Input: AC 100-240V 1.0A, 50/60Hz Output: DC 10~20V 32W 2.7A(Max) Auxiliary power input: DC 12.5~20V 2.7A(Max)
	Adapter 3: Model No.:DUPS-1232GA Input: AC 100-240V 1.0A, 50/60Hz AUX input:DC 12.5~20V 2.7A(Max) Output: DC 10~20V 32W 2.7A(Max)	Adapter 4: Model No.:CSN27U12V3-G-BC1 Input: AC 100-240V 0.75A, 50/60Hz Output: DC 12V 24W
	Adapter 5: Model No.:DTC36U12V3-G Input: AC 100-240V 1.0A, 50/60Hz Output: DC 12V 36W	
<b>Frequency Range:</b>	2.4G:2412MHz-2462MHz	
<b>Transmit Power:</b>	IEEE 802.11b mode: 20.10 dBm IEEE 802.11g mode: 19.12 dBm IEEE 802.11n HT20 mode: 20.90 dBm IEEE 802.11n HT40 mode: 20.92 dBm	
<b>Modulation Technique:</b>	802.11b mode: DSSS (1,2,5.5 and 11 Mbps) 802.11g mode: DSSS /OFDM (6,9,12,18,24,36,48 and 54 Mbps) 802.11n HT20 mode: OFDM (6.5,13,19.5,26,39,52,58.5 and 65 Mbps) 802.11n HT40 mode: OFDM (13.5,27,40.5,54,81,108,121.5 and 135 Mbps)	
<b>Number of Channels:</b>	IEEE 802.11b/g/n HT20 mode: 11 Channels IEEE 802.11n HT40 mode: 7 Channels	
<b>Antenna Specification:</b>	dipole antenna1 for 2.4GHz Gain 5 dBi dipole antenna2 for 2.4GHz Gain 5 dBi	

**Remark:**

1.The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2.This submittal(s) (test report) is intended for **FCC ID: 2ADZRG241W-A** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 2009 and FCC CFR 47 15.207, 15.209 and 15.247.

#### **3.1. EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2. EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3. GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4 2009.

### 3.4.FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5. DESCRIPTION OF TEST MODES

The EUT transmitting and receiving with one antenna simultaneously working at b/g mode, so 1x1 configuration was used for all testing in this report. The EUT transmitting and receiving with two antennas simultaneously working at n mode, so 2x2 configuration was used for all testing in this report.

The worst-case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all data rates, bandwidths, and modulations.

Note: After the preliminary scan the EUT with Adapter 1 was the worst mode, which mode data was recorded.

The worst-case data rates:

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 1Mbps data rate was chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 54Mbps data rate was chosen for full testing.

Draft 802.11n Standard-20 MHz Channel mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with MCS0 data rate was chosen for full testing.

Draft 802.11n Wide-40 MHz Channel mode:

Channel Low (2422MHz)

Channel Mid (2437MHz)

Channel High (2452MHz) with MCS0 data rate was chosen for full testing.




### 3.6. ANTENNA DESCRIPTION

#### According to FCC 47 CFR 15.203

“an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

Antenna specifications meet the requirements of 15.203

*All two antennas are completely uncorrelated with each other.*

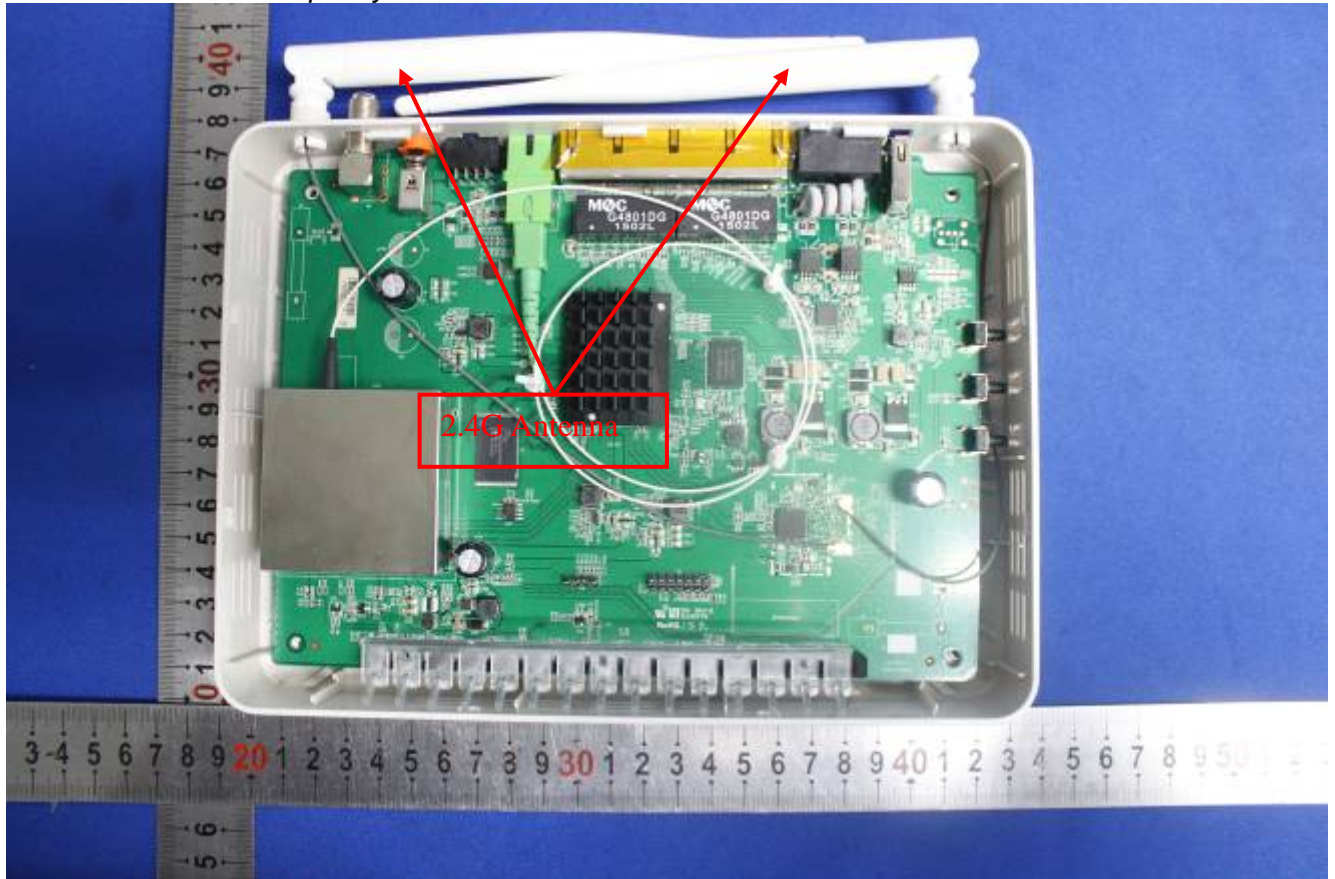

## 4. INSTRUMENT CALIBRATION

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

#### Equipment Used for Emissions Measurement

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9	2016-4-8
Spectrum Analyzer	RS	FSU26	200789	2014-8-12	2015-8-11
Detector negative	Agilent	8473B	MY42240176	2015-5-11	2016-5-10
OSCILLOSCOPE	Agilent	DSO6104A	MY44002585	2015-3-16	2016-3-15
Power meter	Anritsu	ML2495A	1445010	2014-12-01	2015-11-30
Power sensor	Anritsu	MA2411B	1339220	2014-12-06	2015-12-05
EPM-P Series Power Meter	Agilent	E4416A	GB41292714	2015-3-17	2016-3-16
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R	N.C.R
DC POWER SUPPLY	GW instek	GPS-3303C	E903131	N.C.R	N.C.R
Temp. / Humidity Chamber	Kingson	THS-M1	242	2015-1-22	2016-1-21

977 Chamber					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2015-4-9	2016-4-8
EMI Test Receiver	R&S	ESCI	101378	2015-1-22	2016-1-21
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	2015-1-22	2016-1-21
Pre-Amplifier	Miteq	JS41-00101800-32-10P	1675713	2015-1-22	2016-1-21
Bilog Antenna	Sunol	JB1	A062604	2015-3-6	2016-3-5
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2015-3-7	2016-3-6
Turn Table	CT	CT123	4165	N.C.R	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R	N.C.R
Controller	CT	CT100	95637	N.C.R	N.C.R
Test Software	EZ-EMC				

Conducted Emission					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
EMI TEST RECEIVER	R&S	ESCI	100781	2015-3-16	2016-3-15
V (V-LISN)	SCHWARZBECK	NNLK 8129	8129-143	N.C.R	N.C.R
LISN (EUT)	FCC	FCC-LISN-50/250-50-2-02	05012	2015-3-16	2016-3-15
Pulse LIMITER	R&S	ESH3-Z2	100524	2014-9-25	2015-9-24
Test Software	EZ-EMC				

**Remark:** The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2

## **5. FACILITIES AND ACCREDITATIONS**

### **5.1.FACILITIES**

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 2009 and CISPR Publication 22.

### **5.2.EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.



Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### **5.3.LABORATORY ACCREDITATIONS AND LISTING**

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC5743 for 10m chamber 10m, IC5743 for 10m chamber 3m.

**5.4. TABLE OF ACCREDITATIONS AND LISTINGS**

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.4 :2009); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	<b>VCCI</b> R-1600 C-1707 G-216

*\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1.SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2.SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
1.	Notebook	DELL	E5430	CN8YYW1	N/A

**Remark:**

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*


**7. FCC PART 15.247 REQUIREMENTS**

**7.1.6DB BANDWIDTH**

**LIMIT**

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

**Test Configuration**



**TEST PROCEDURE**

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the selected span. The VBW is set to 3 times the RBW. The sweep time is occupied.

**TEST RESULTS**

No non-compliance noted

**Test Data**

**IEEE 802.11b mode**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.038	>500	PASS
Mid	2437	9.038		PASS
High	2462	9.038		PASS

**IEEE 802.11g mode**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.058	>500	PASS
Mid	2437	16.010		PASS
High	2462	16.250		PASS

**IEEE 802.11n HT20 mode / Chain 0**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.163	>500	PASS
Mid	2437	17.067		PASS
High	2462	16.971		PASS

**IEEE 802.11n HT20 mode / Chain 1**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.971	>500	PASS
Mid	2437	16.971		PASS
High	2462	17.452		PASS

**IEEE 802.11n HT40 mode / Chain 0**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.346	>500	PASS
Mid	2437	36.442		PASS
High	2452	36.442		PASS

**IEEE 802.11n HT40 mode / Chain 1**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2422	36.442	>500	PASS
Mid	2437	36.442		PASS
High	2452	36.442		PASS






**6dB Bandwidth (CH High)**



\* RBW 100 kHz      Delta 2 [T1 ]      0.60 dB  
 \* VBW 300 kHz      9.038461538 MHz  
 SWT 15 ms

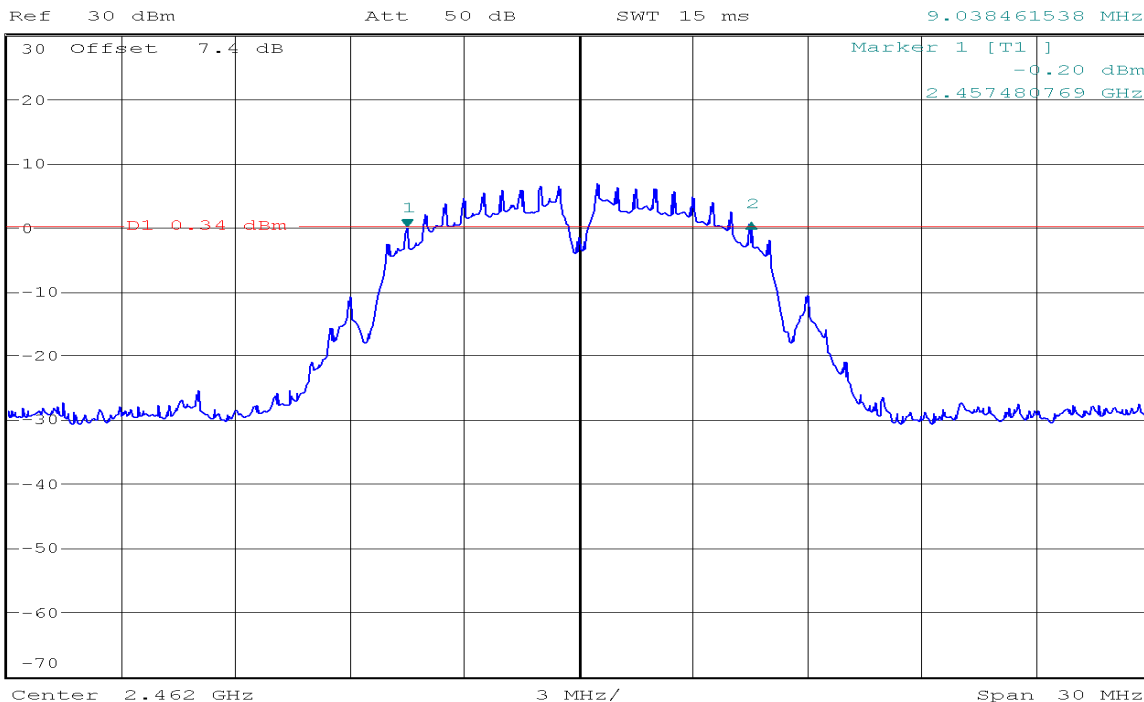


**IEEE 802.11g MODE**

**6dB Bandwidth (CH Low)**




\* RBW 100 kHz      Delta 2 [T1 ]      -0.09 dB  
 \* VBW 300 kHz      16.057692308 MHz  
 SWT 15 ms

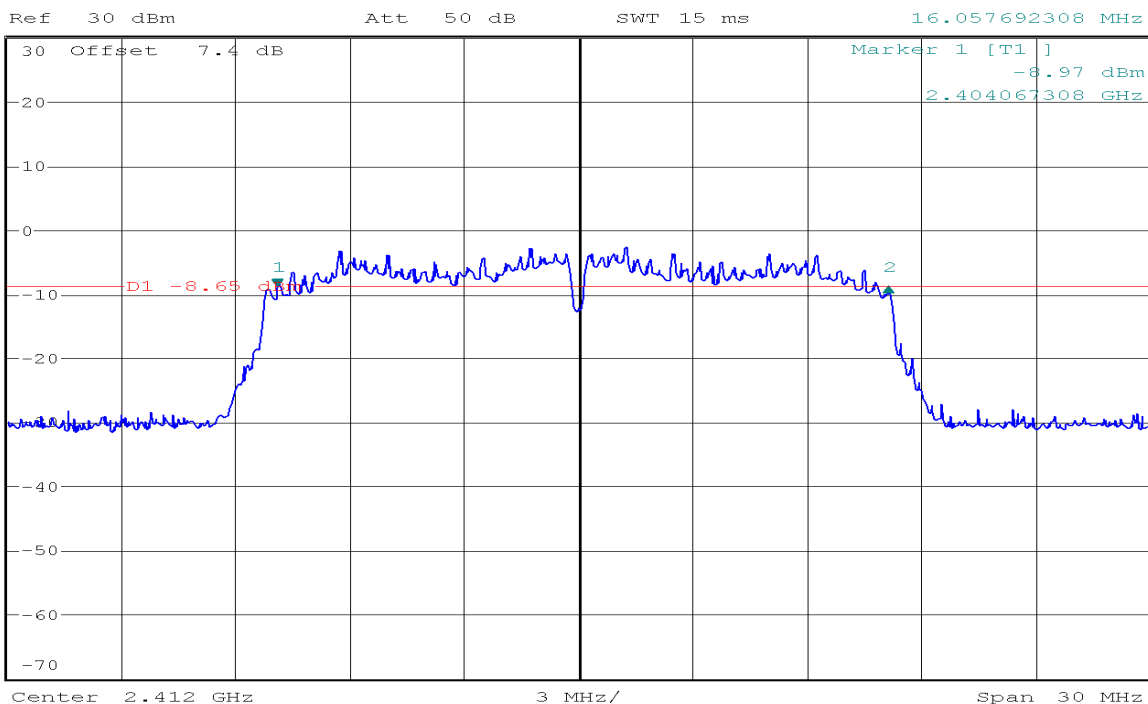

6dB Bandwidth (CH Mid)




\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      -0.14 dB  
 SWT 15 ms      16.009615385 MHz

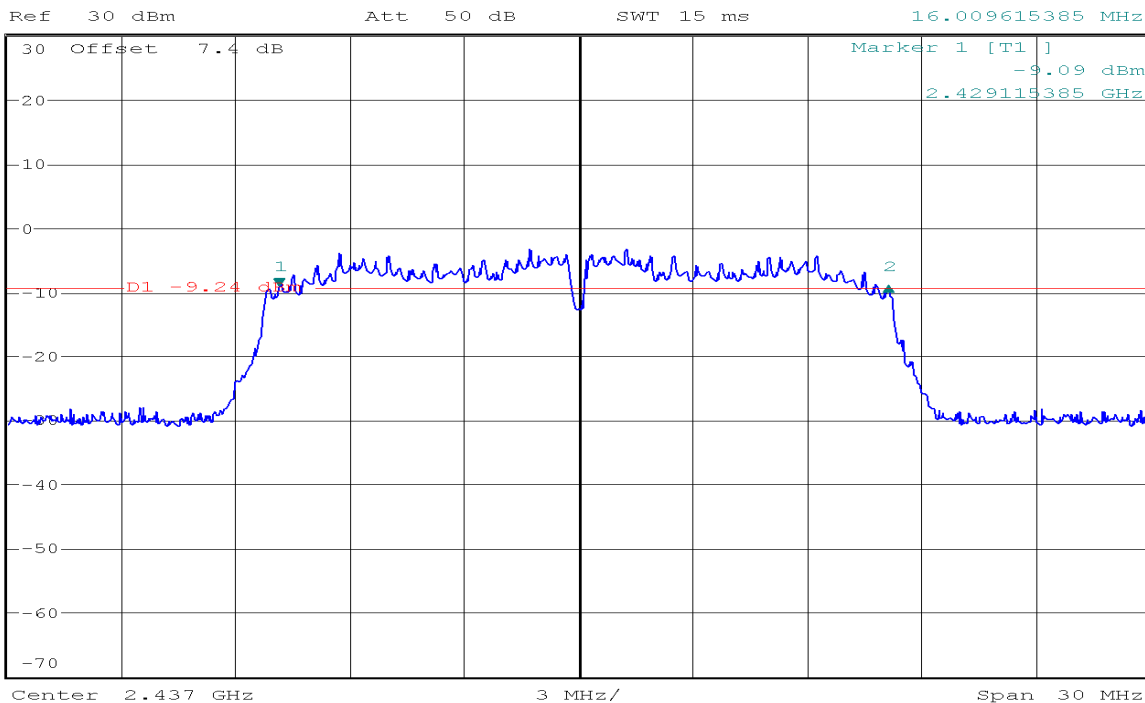

6dB Bandwidth (CH High)



\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      0.51 dB  
 SWT 15 ms      16.250000000 MHz

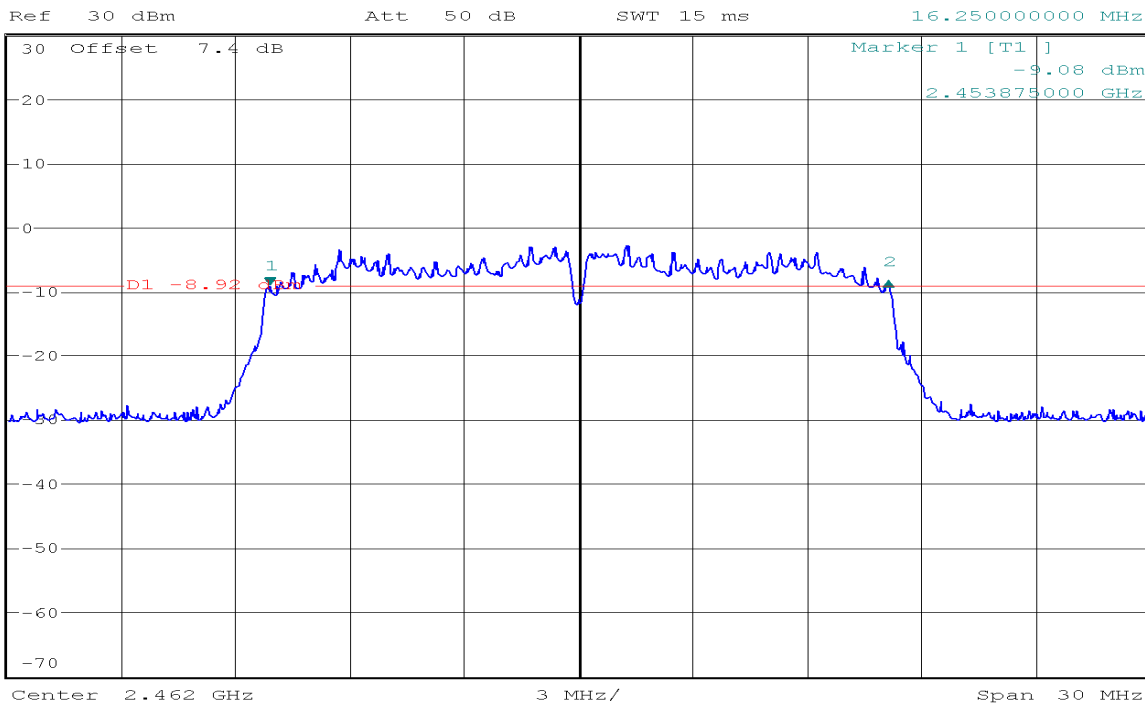


**IEEE 802.11n HT20 mode / Chain 0**

**6dB Bandwidth (CH Low)**




\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      0.66 dB  
 SWT 15 ms      17.163461538 MHz

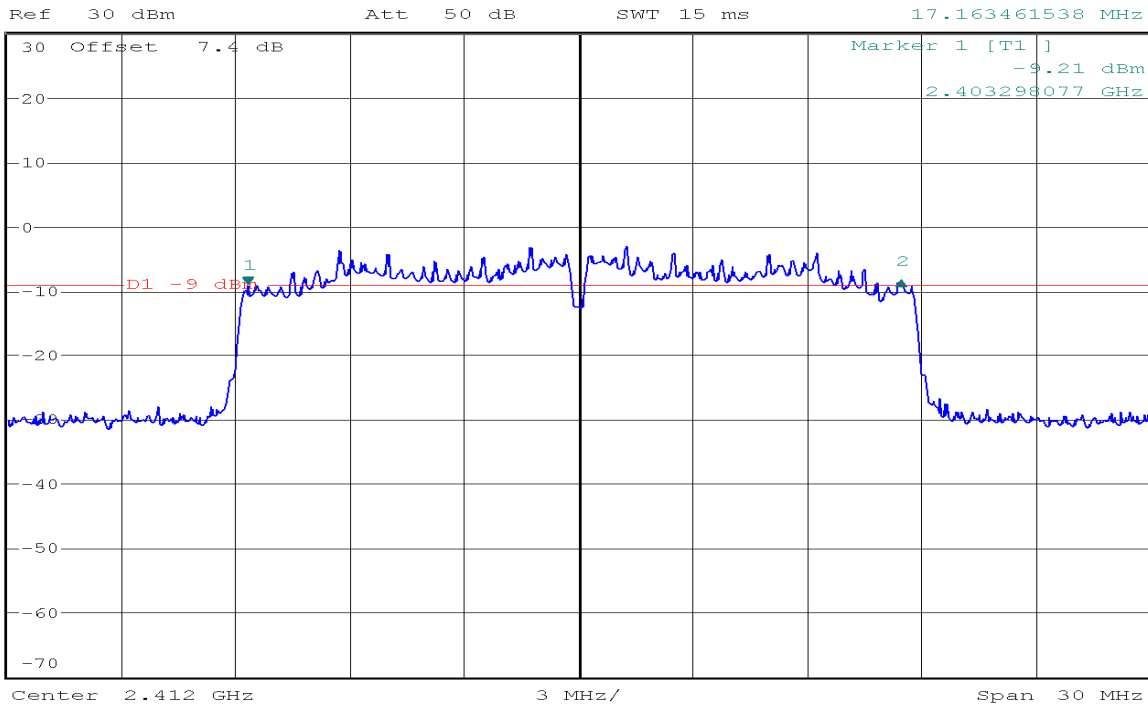

**6dB Bandwidth (CH Mid)**




\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      -1.56 dB  
 SWT 15 ms      17.067307692 MHz

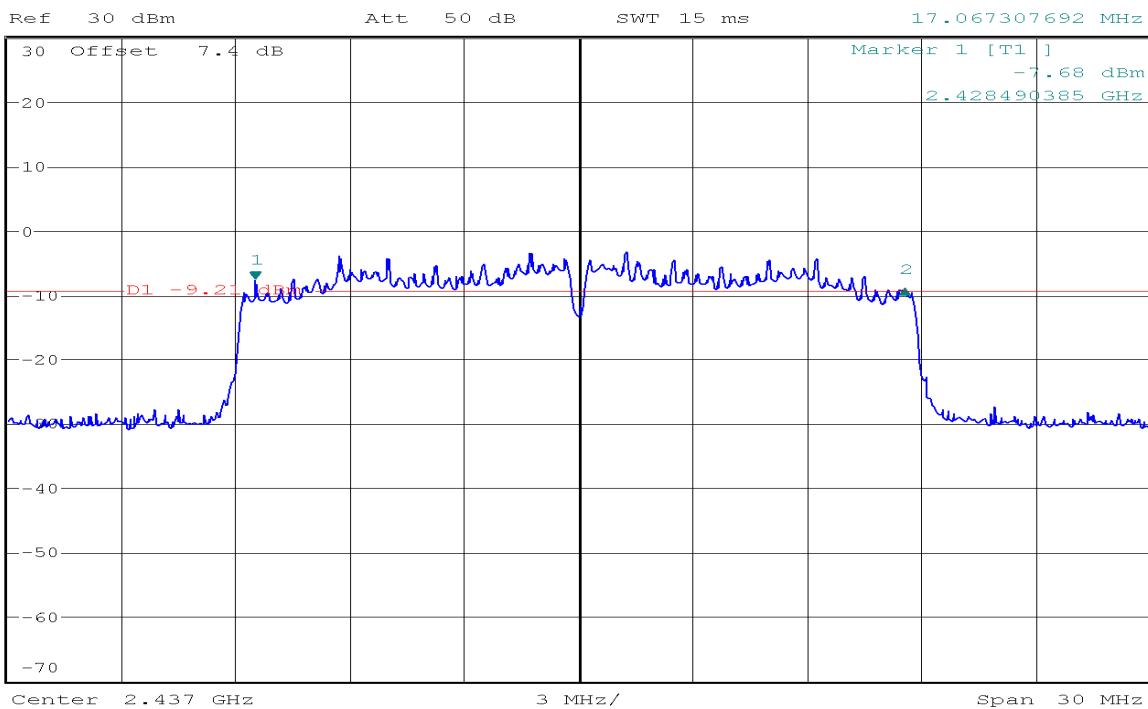

**6dB Bandwidth (CH High)**



\* RBW 100 kHz      Delta 2 [T1]      0.40 dB  
 \* VBW 300 kHz  
 SWT 15 ms      16.971153846 MHz

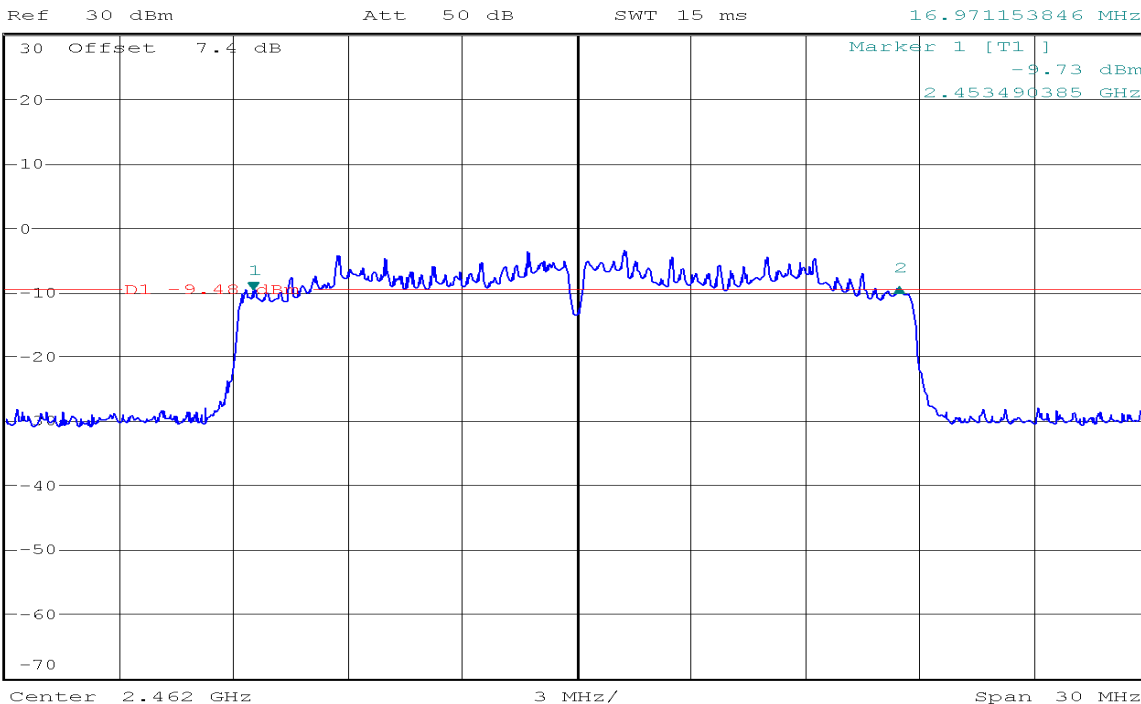


**IEEE 802.11n HT20 mode / Chain 1**

**6dB Bandwidth (CH Low)**



\* RBW 100 kHz      Delta 2 [T1]      -0.16 dB  
 \* VBW 300 kHz  
 SWT 15 ms      16.971153846 MHz

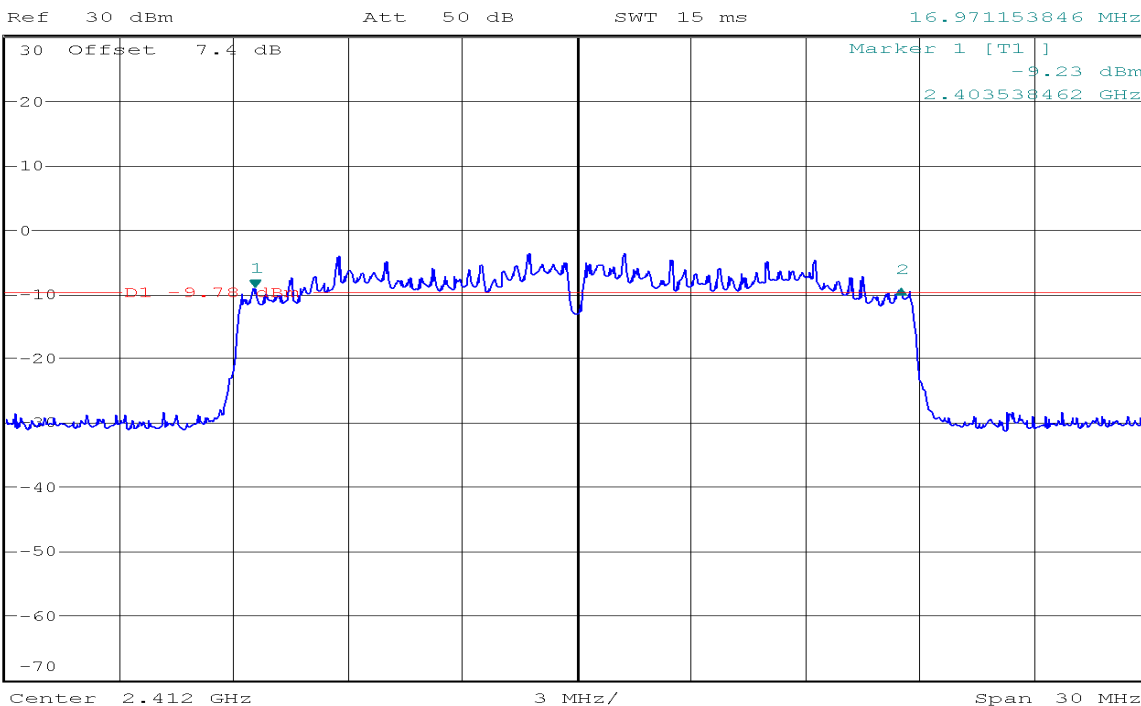


**6dB Bandwidth (CH Mid)**



\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      0.43 dB  
 SWT 15 ms      16.971153846 MHz

Ref 30 dBm      Att 50 dB

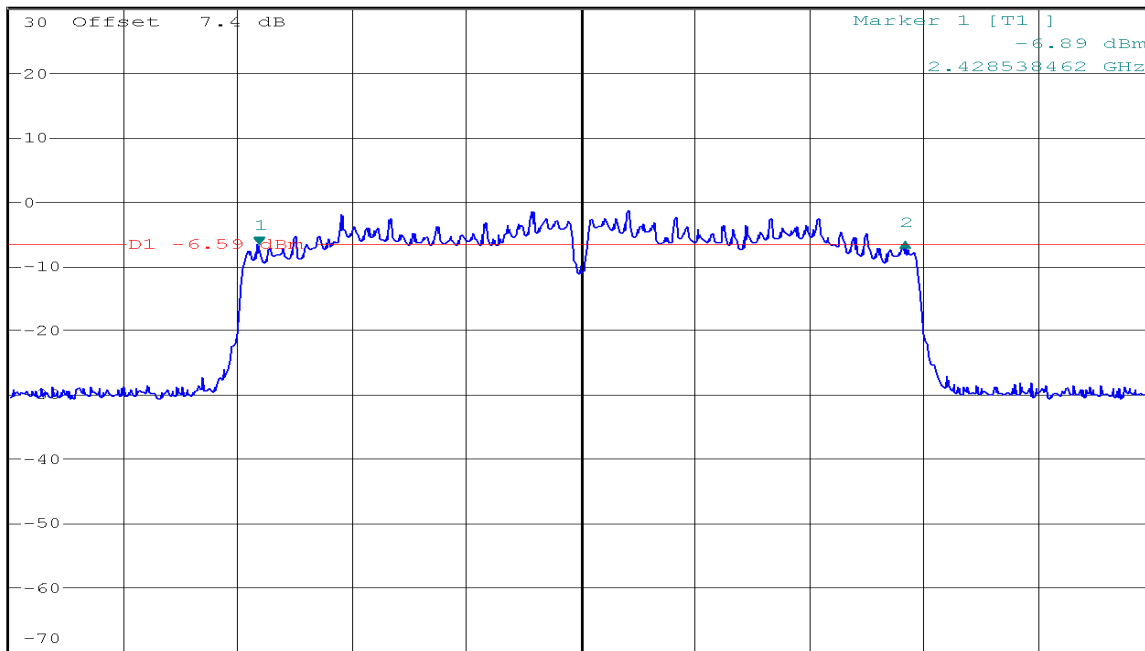


Center 2.437 GHz      3 MHz/      Span 30 MHz

**6dB Bandwidth (CH High)**



\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      0.75 dB  
 SWT 15 ms      17.451923077 MHz

Ref 30 dBm      Att 50 dB

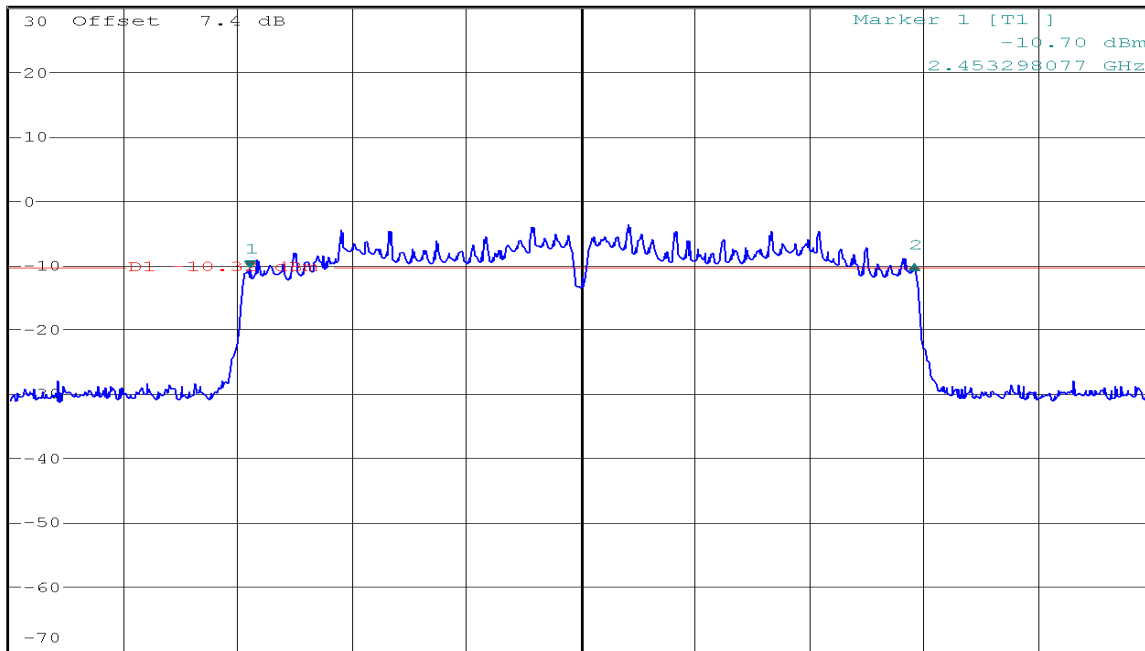


Center 2.462 GHz      3 MHz/      Span 30 MHz

**IEEE 802.11n HT40 mode / Chain 0**

**6dB Bandwidth (CH Low)**




\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      0.03 dB  
 SWT 10 ms      36.346153846 MHz

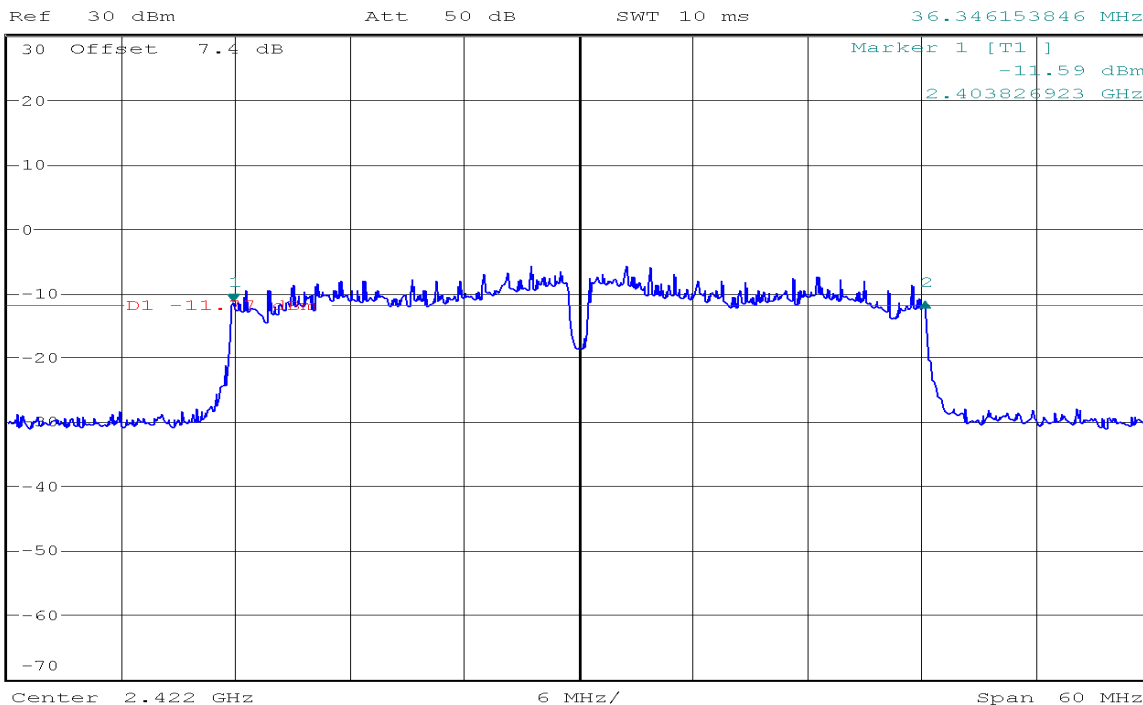

**6dB Bandwidth (CH Mid)**




\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      -0.72 dB  
 SWT 10 ms      36.442307692 MHz

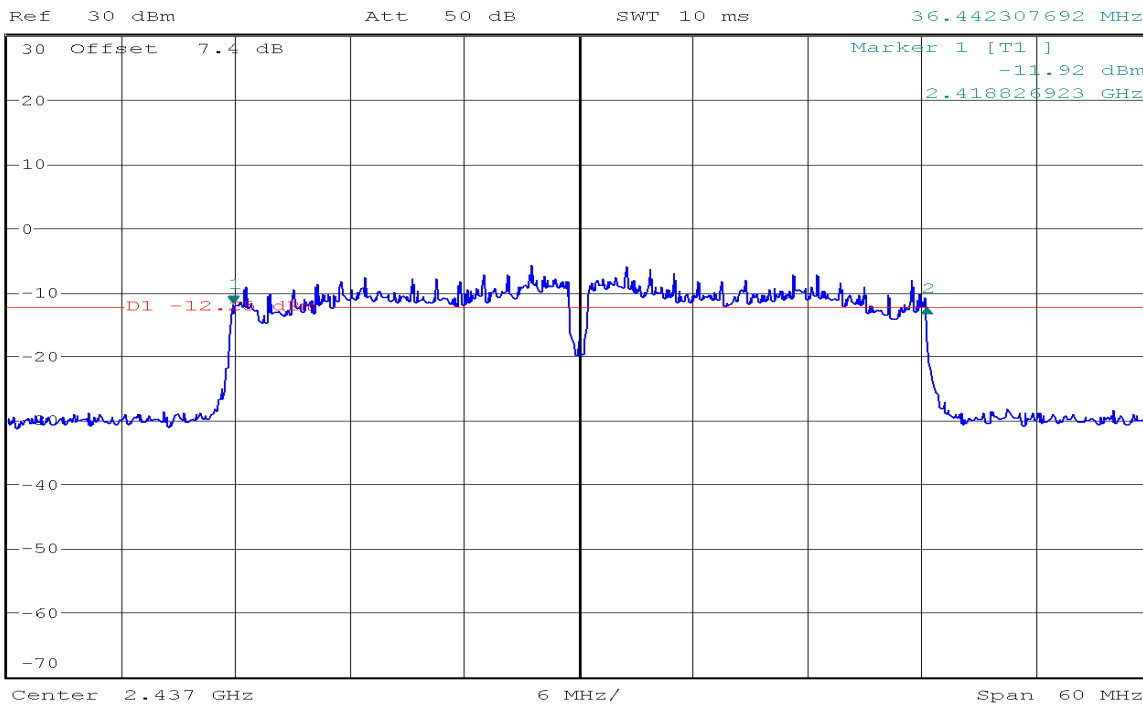

**6dB Bandwidth (CH High)**



\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      -1.60 dB  
 SWT 10 ms      36.442307692 MHz

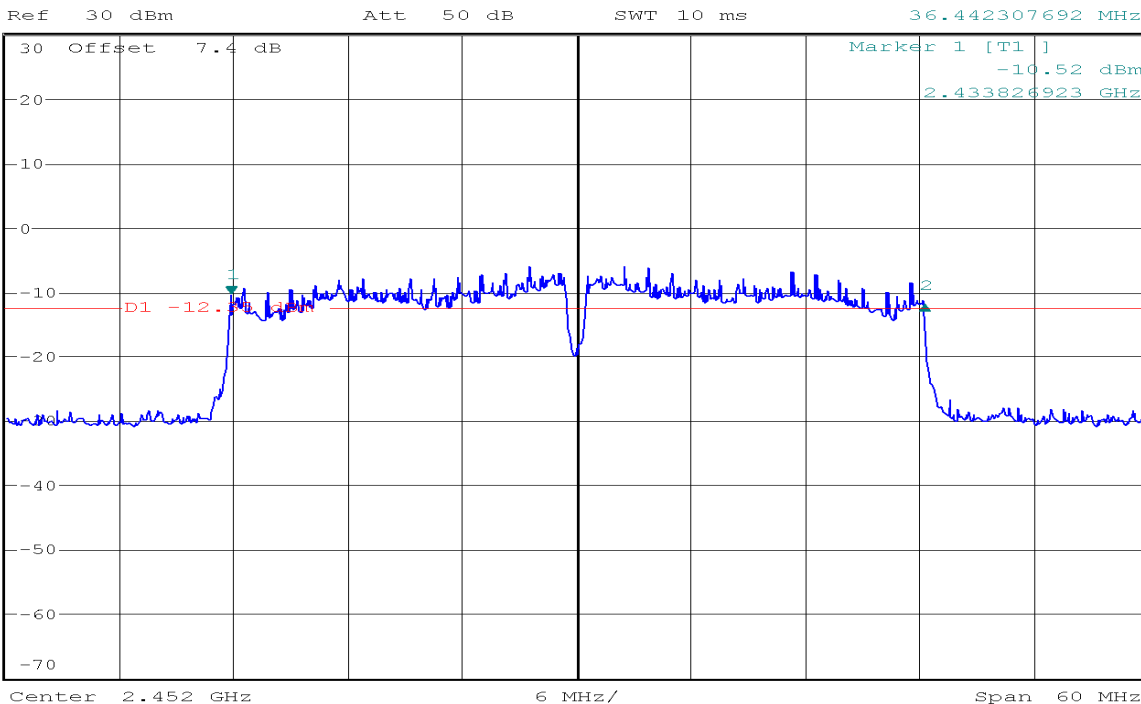


**IEEE 802.11n HT40 mode / Chain 1**

**6dB Bandwidth (CH Low)**



\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      0.20 dB  
 SWT 10 ms      36.442307692 MHz

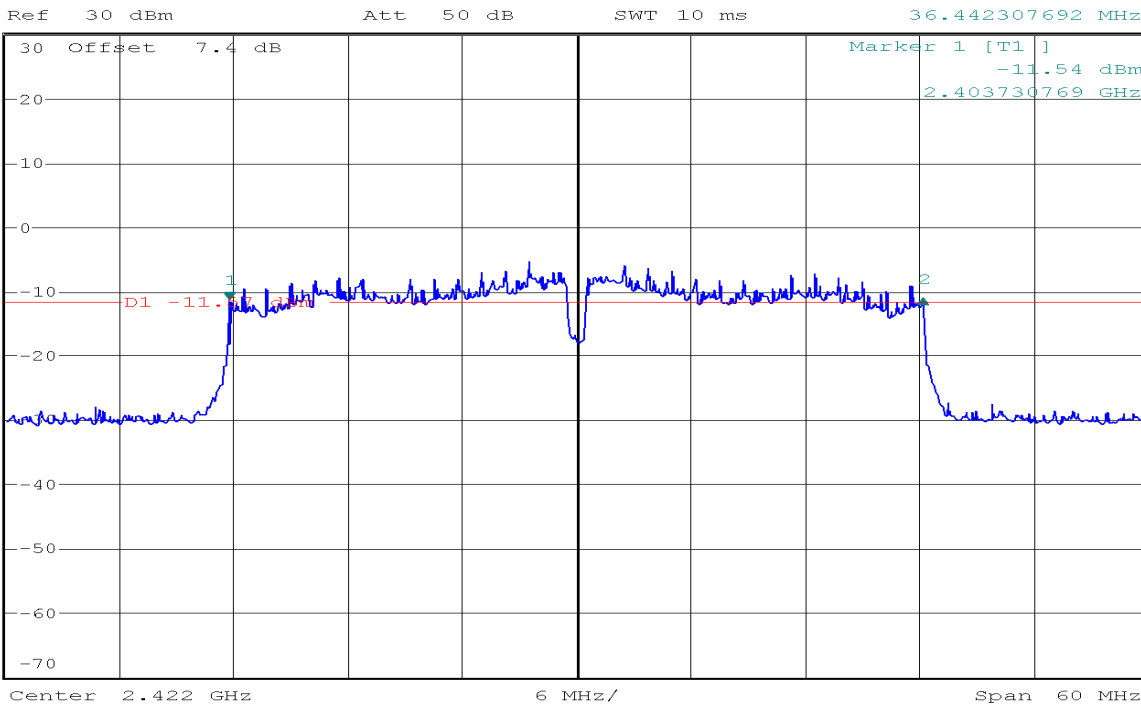




**6dB Bandwidth (CH Mid)**




\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      -1.68 dB  
 SWT 10 ms      36.442307692 MHz

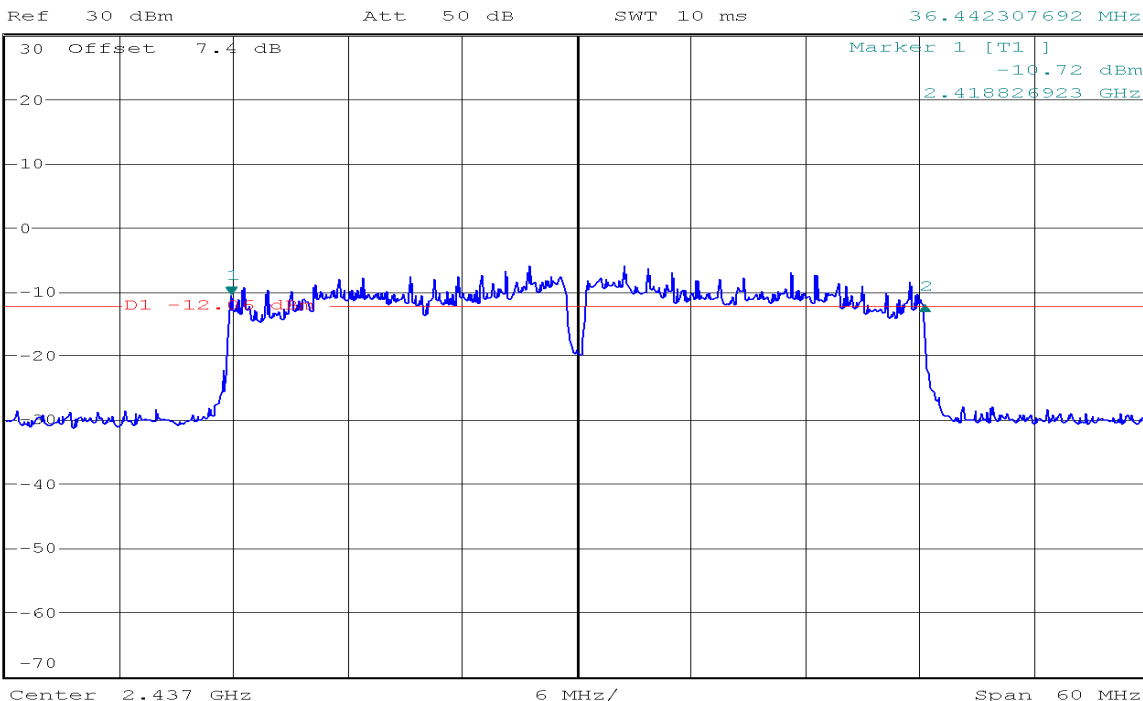

**6dB Bandwidth (CH High)**



\* RBW 100 kHz      Delta 2 [T1 ]  
 \* VBW 300 kHz      -1.06 dB  
 SWT 10 ms      36.442307692 MHz

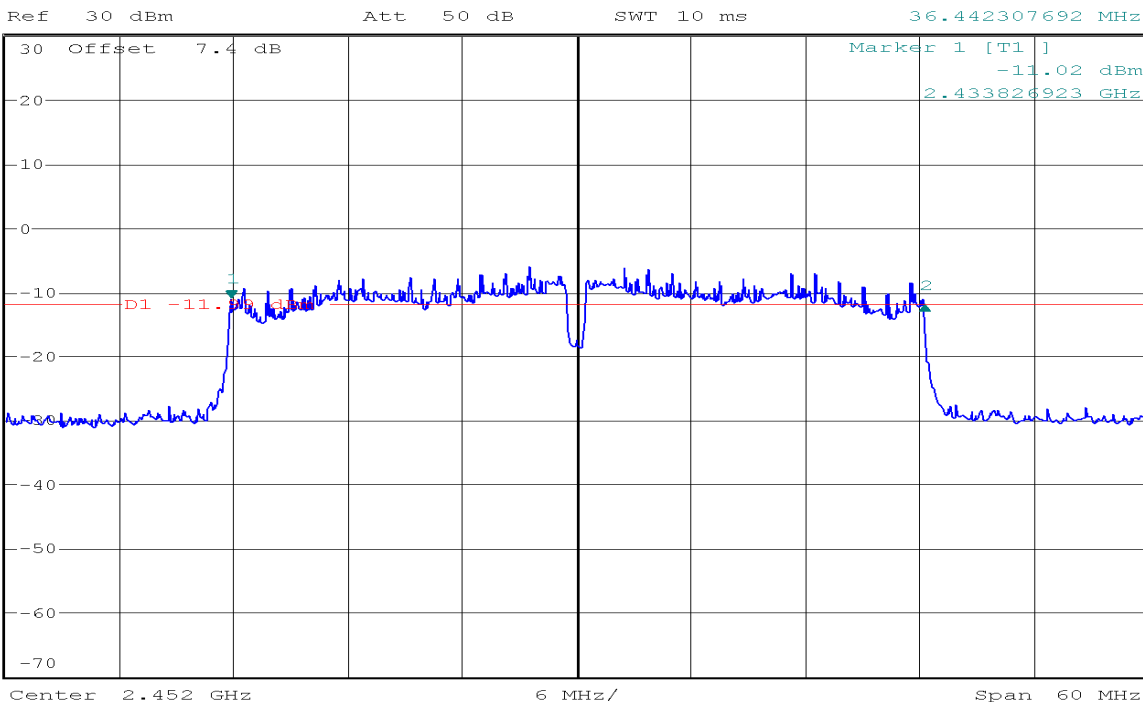

## 7.2. PEAK POWER


### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz: 1 Watt.

2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration



### TEST PROCEDURE

1. The EUT transmitter output is connected to the Power meter.  
The Power meter is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas.
3. Guidance v03r02. 9.1.2 PKPM1 Peak power meter method.

### TEST RESULTS

*No non-compliance noted*

## Test Data

### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	2412	20.10	30.00
Mid	2437	19.85	30.00
High	2462	19.63	30.00

### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Limit (dBm)
Low	2412	19.12	30.00
Mid	2437	18.75	30.00
High	2462	18.88	30.00

### Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	2412	18.08	17.70	20.90	30.00
Mid	2437	17.95	17.62	20.80	30.00
High	2462	17.82	17.53	20.69	30.00

### Test mode: IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	2422	17.94	17.87	20.92	30.00
Mid	2437	17.81	17.72	20.78	30.00
High	2452	17.60	17.65	20.64	30.00

**Remark:** Total Output Power (dBm) = 10\*LOG(10<sup>(Chain 0 Output Power / 10)</sup>+10<sup>(Chain 1 Output Power / 10)</sup>)


### **7.3. PEAK POWER SPECTRAL DENSITY**

#### **LIMIT**

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

#### **Test Configuration**

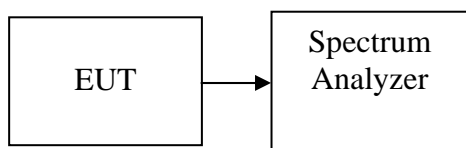

#### **TEST PROCEDURE**

1. Place the EUT on the table and set it in transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto

3. Record the max reading.

4. Repeat the above procedure until the measurements for all frequencies are completed.

#### **TEST RESULTS**

*No non-compliance noted*

## Test Data

### Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Limit (dBm)	Result
Low	2412	-7.87	8.00	PASS
Mid	2437	-7.02	8.00	PASS
High	2462	-7.66	8.00	PASS

### Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Limit (dBm)	Result
Low	2412	-16.15	8.00	PASS
Mid	2437	-16.60	8.00	PASS
High	2462	-16.46	8.00	PASS

### Test mode: IEEE 802.11n HT20 mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
Low	2412	-15.58	-17.49	-13.42	8.00	PASS
Mid	2437	-16.02	-18.08	-13.92	8.00	PASS
High	2462	-15.37	-19.26	-13.88	8.00	PASS

### Test mode: IEEE 802.11n HT40 mode

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
Low	2422	-19.15	-19.48	-16.30	8.00	PASS
Mid	2437	-21.41	-21.87	-18.62	8.00	PASS
High	2452	-21.06	-19.40	-17.14	8.00	PASS

**Remark:** Total PPSD (dBm) =  $10 * \text{LOG}(10^{\text{Chain 0 PPSD} / 10} + 10^{\text{Chain 1 PPSD} / 10})$


**Test Plot**

**IEEE 802.11b mode**

**PPSD (CH Low)**




Ref 10 dBm Att 30 dB \*RBW 3 kHz \*VBW 10 kHz SWT 1.55 s Marker 1 [T1] -7.87 dBm 2.411283043 GHz

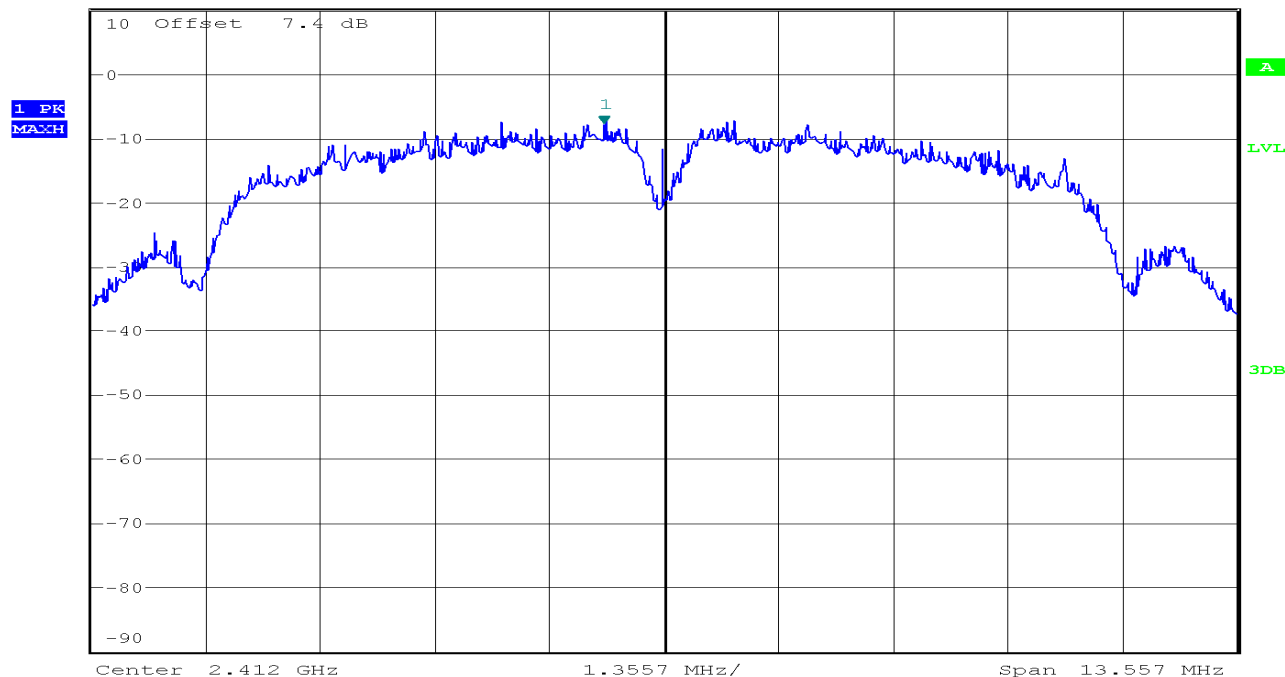

**PPSD(CH Mid)**




Ref 10 dBm Att 30 dB \*RBW 3 kHz \*VBW 10 kHz SWT 1.55 s Marker 1 [T1] -7.02 dBm 2.437673505 GHz

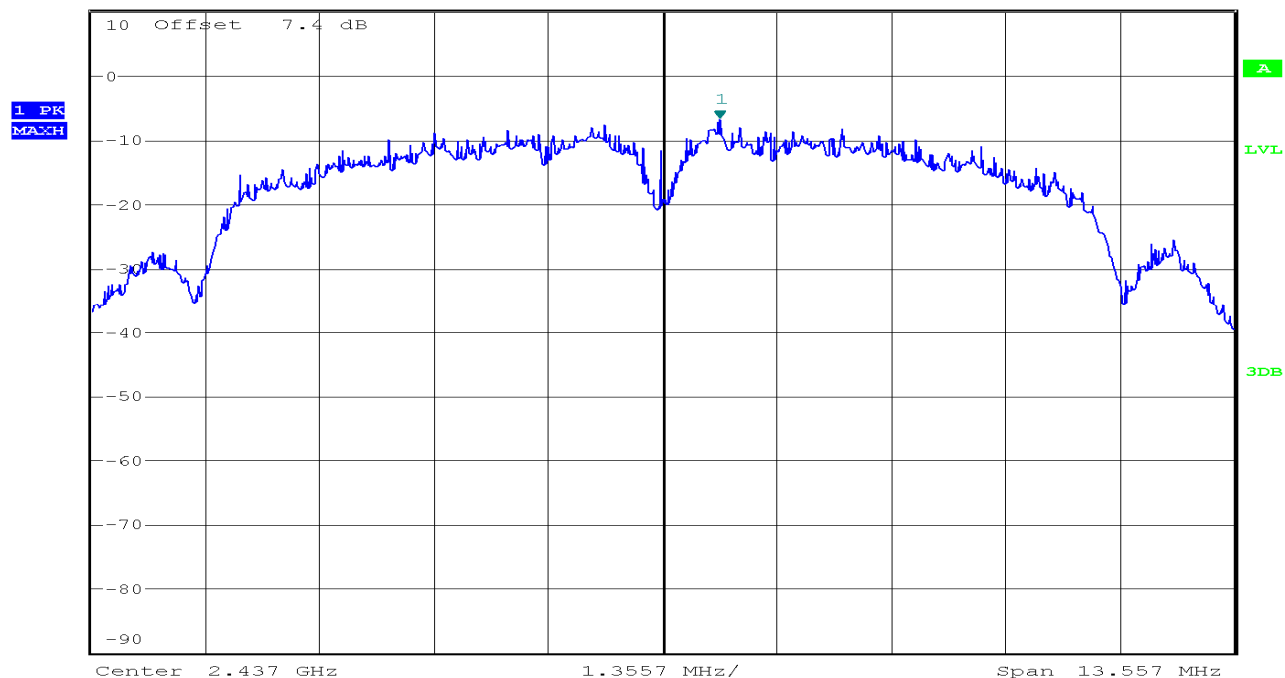

**PPSD (CH High)**



\* RBW 3 kHz  
 \* VBW 10 kHz  
 SWT 1.55 s  
 Marker 1 [T1 ]  
 -7.66 dBm  
 2.462651779 GHz

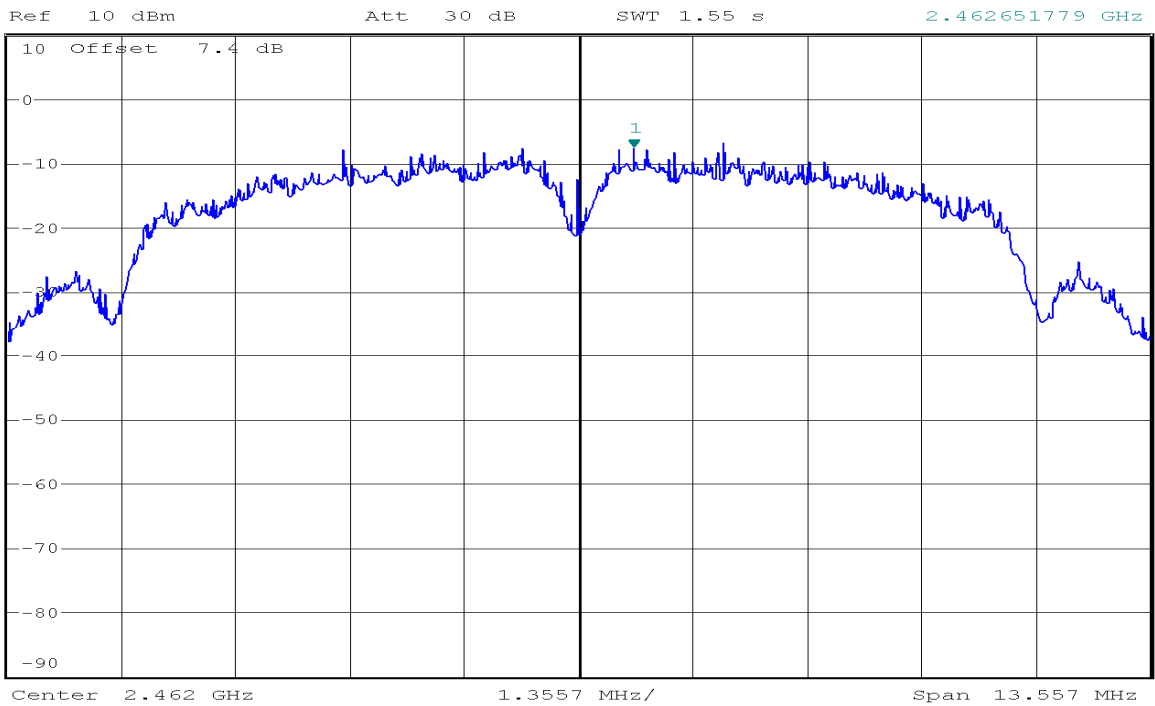


**IEEE 802.11g mode**

**PPSD (CH Low)**



\* RBW 3 kHz  
 \* VBW 10 kHz  
 SWT 2.8 s  
 Marker 1 [T1 ]  
 -16.15 dBm  
 2.412625000 GHz

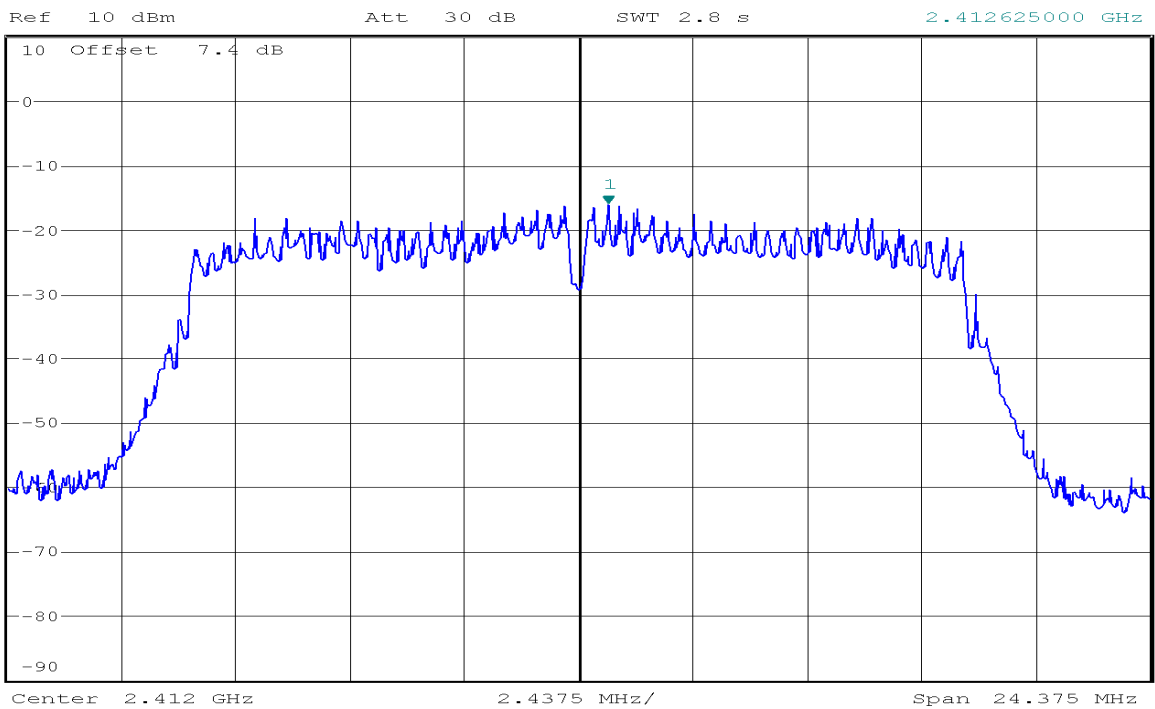


**PPSD (CH Mid)**



\* RBW 3 kHz  
 \* VBW 10 kHz  
 SWT 2.8 s

Marker 1 [T1 ]  
 -16.60 dBm  
 2.436375000 GHz

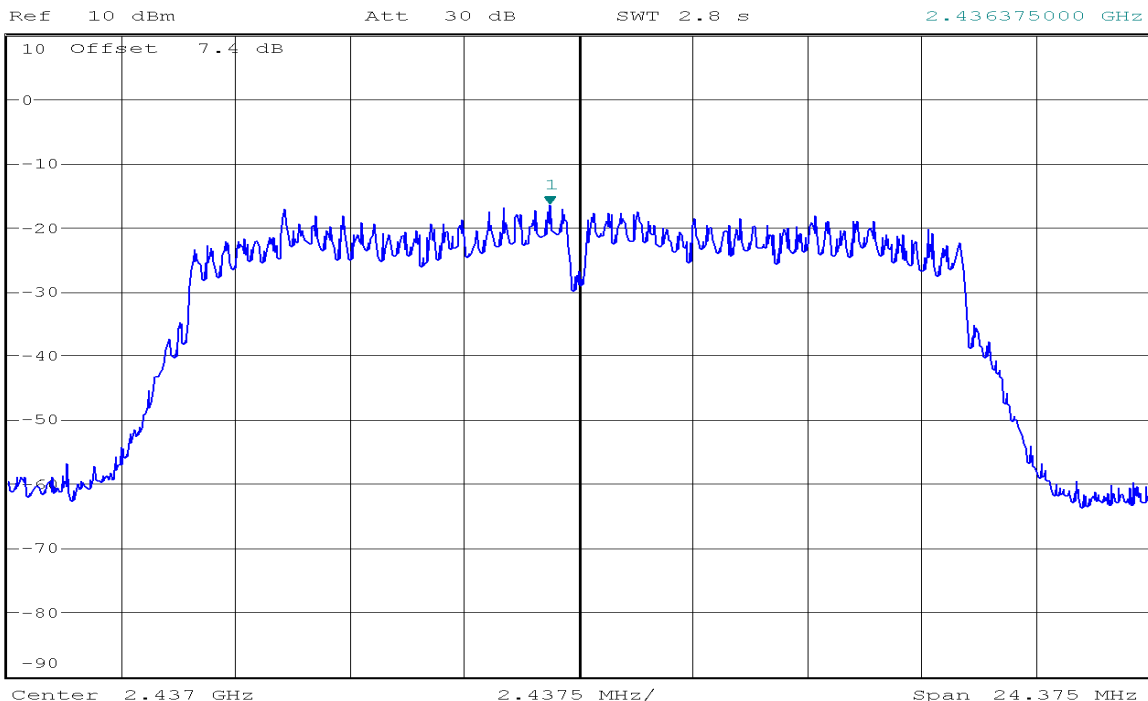


**PPSD (CH High)**



\* RBW 3 kHz  
 \* VBW 10 kHz  
 SWT 2.8 s

Marker 1 [T1 ]  
 -16.46 dBm  
 2.462312500 GHz

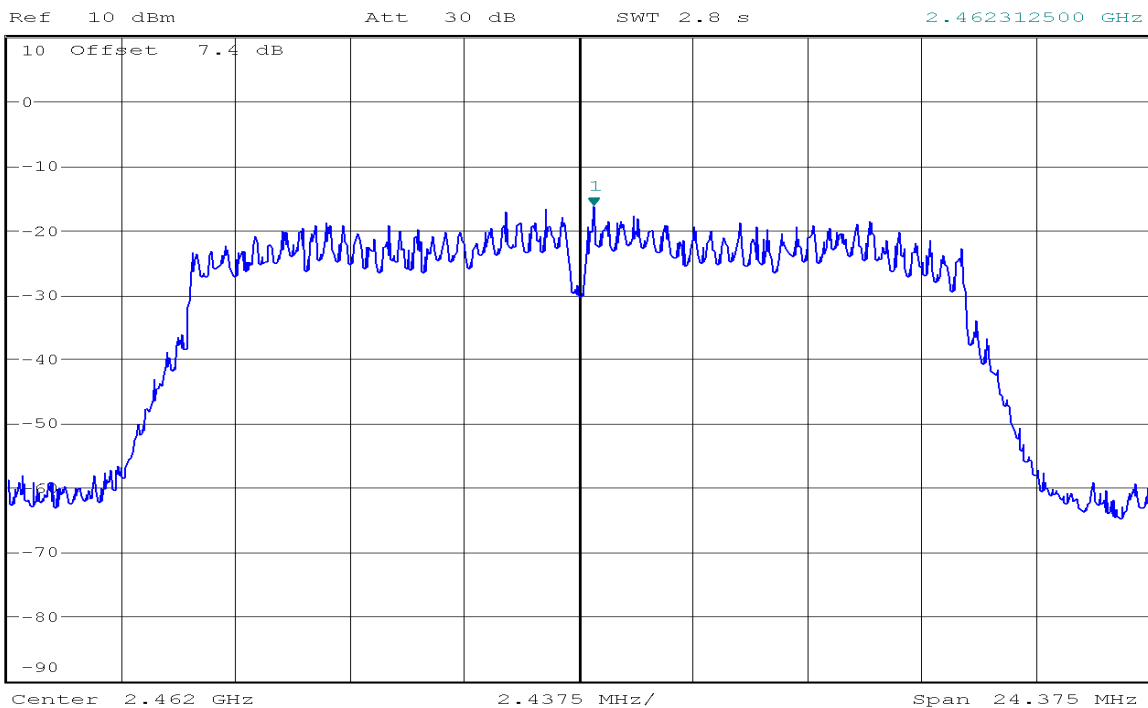




**IEEE 802.11n HT20 mode / Chain 0**

**PPSD (CH Low)**




Ref 10 dBm Att 30 dB \*RBW 3 kHz \*VBW 10 kHz SWT 2.9 s Marker 1 [T1] -15.58 dBm 2.413237740 GHz

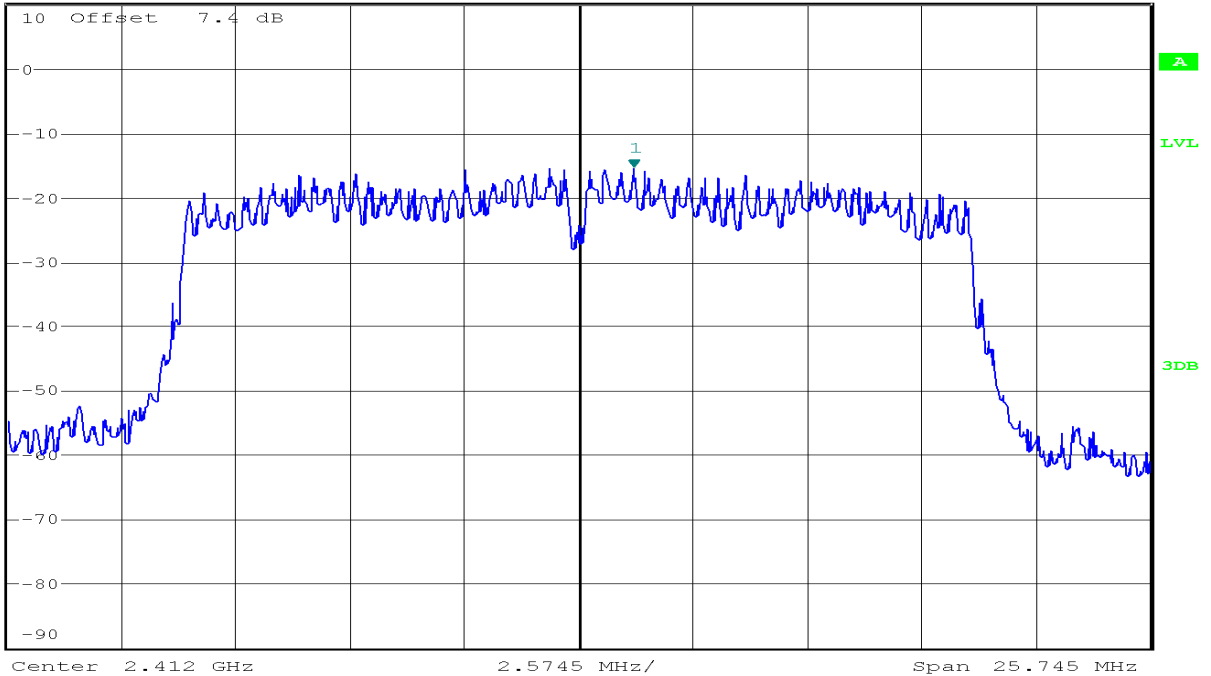

**PPSD (CH Mid)**



Ref 10 dBm Att 30 dB \*RBW 3 kHz \*VBW 10 kHz SWT 2.9 s Marker 1 [T1] -16.02 dBm 2.437536354 GHz

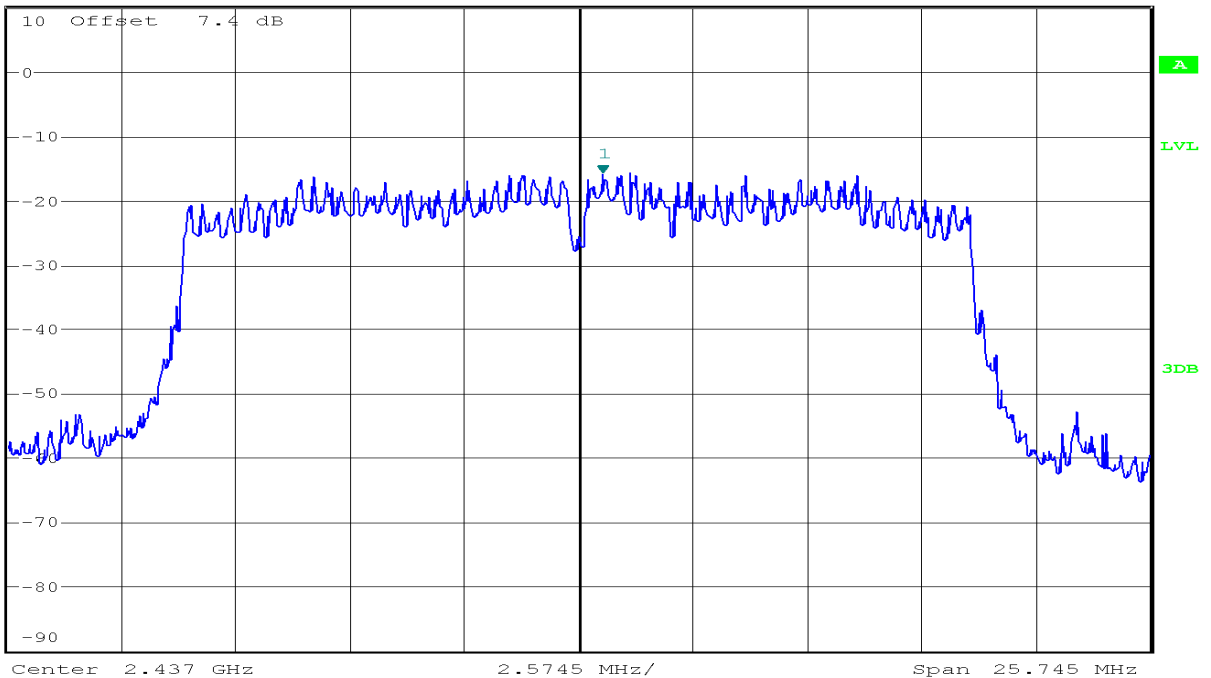


**PPSD (CH High)**



\* RBW 3 kHz  
 \* VBW 10 kHz  
 SWT 2.9 s

Marker 1 [T1 ]  
 -15.37 dBm  
 2.461711194 GHz

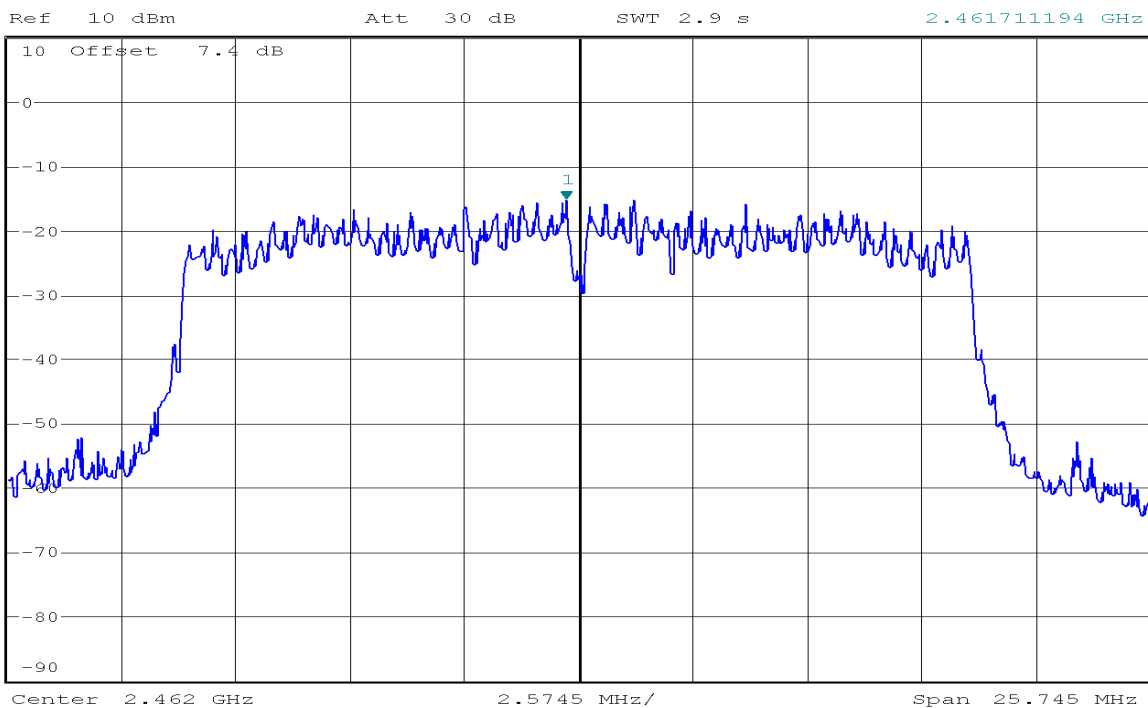


**IEEE 802.11n HT20 mode / Chain 1**

**PPSD (CH Low)**



\* RBW 3 kHz  
 \* VBW 10 kHz  
 SWT 3 s


Marker 1 [T1 ]  
 -17.49 dBm  
 2.411035143 GHz

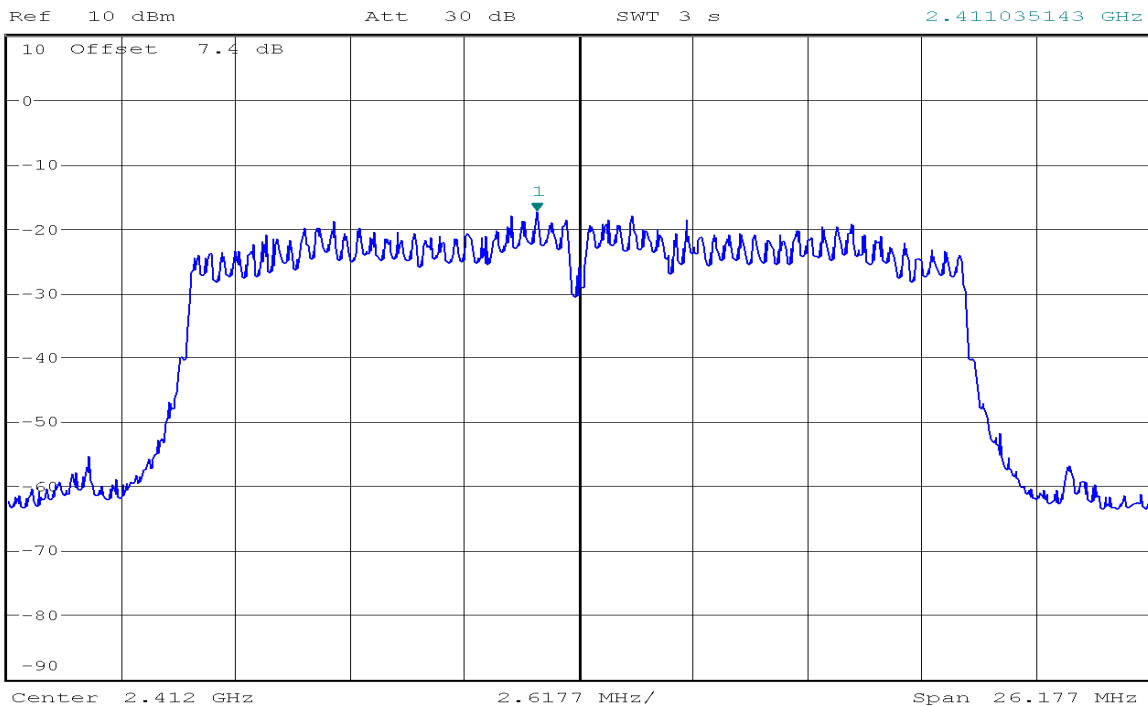

**PPSD (CH Mid)**




\* RBW 3 kHz                      Marker 1 [T1 ]  
 \* VBW 10 kHz                    -18.08 dBm  
 SWT 3 s                            2.435741490 GHz

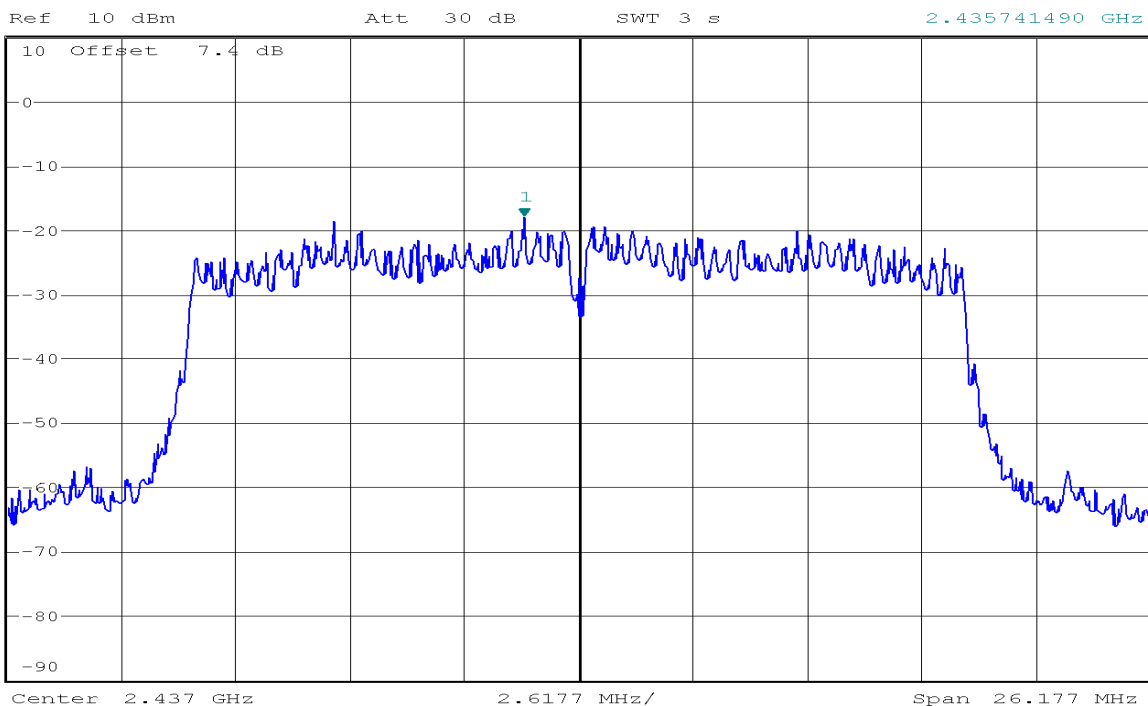

**PPSD (CH High)**



\* RBW 3 kHz                      Marker 1 [T1 ]  
 \* VBW 10 kHz                    -19.26 dBm  
 SWT 3 s                            2.461035143 GHz

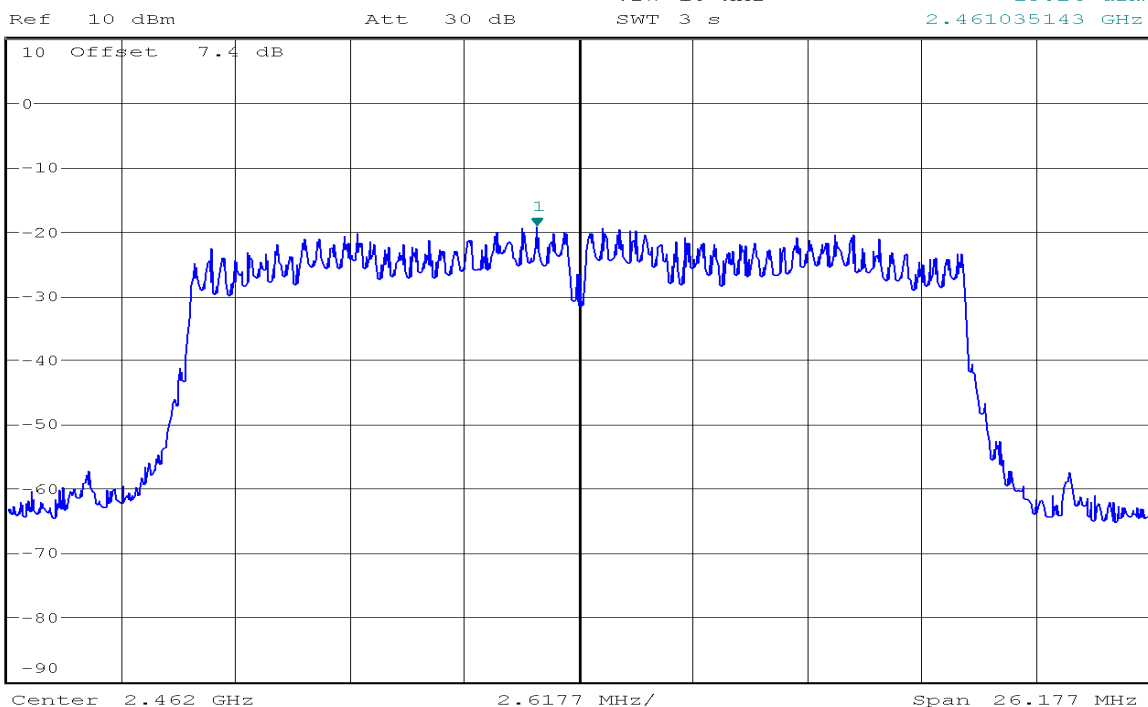


**IEEE 802.11n HT40 mode / Chain 0**

**PPSD (CH Low)**




Ref 10 dBm Att 30 dB \*RBW 3 kHz \*VBW 10 kHz SWT 6.2 s Marker 1 [T1] -19.15 dBm 2.424540428 GHz

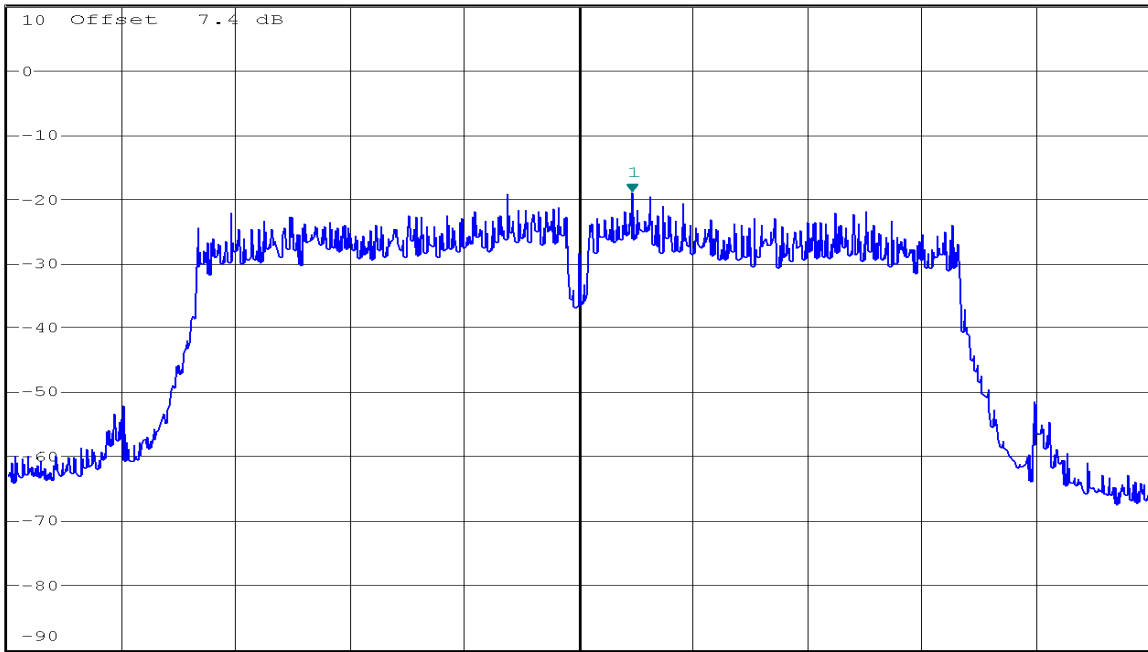

**PPSD (CH Mid)**




Ref 10 dBm Att 30 dB \*RBW 3 kHz \*VBW 10 kHz SWT 6.2 s Marker 1 [T1] -21.41 dBm 2.432006745 GHz

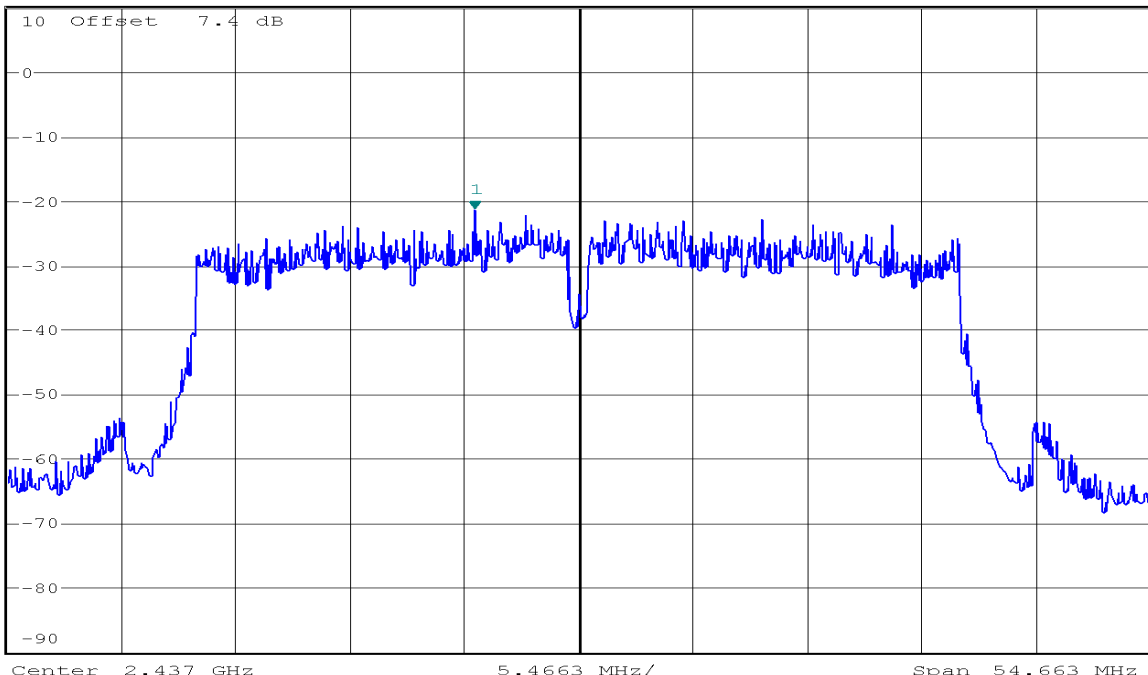

**PPSD (CH High)**



\* RBW 3 kHz                      Marker 1 [T1 ]  
 \* VBW 10 kHz                    -21.06 dBm  
 SWT 6.2 s                        2.448583563 GHz

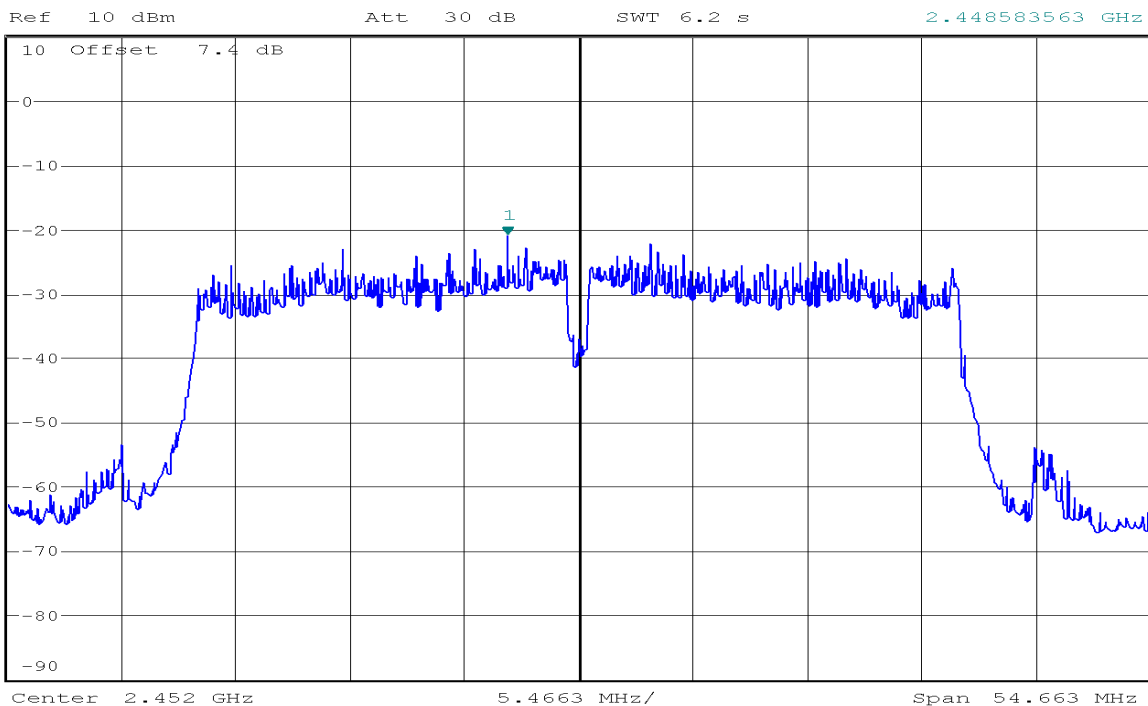


**IEEE 802.11n HT40 mode / Chain 1**

**PPSD (CH Low)**




\* RBW 3 kHz                      Marker 1 [T1 ]  
 \* VBW 10 kHz                    -19.48 dBm  
 SWT 6.2 s                        2.425416438 GHz

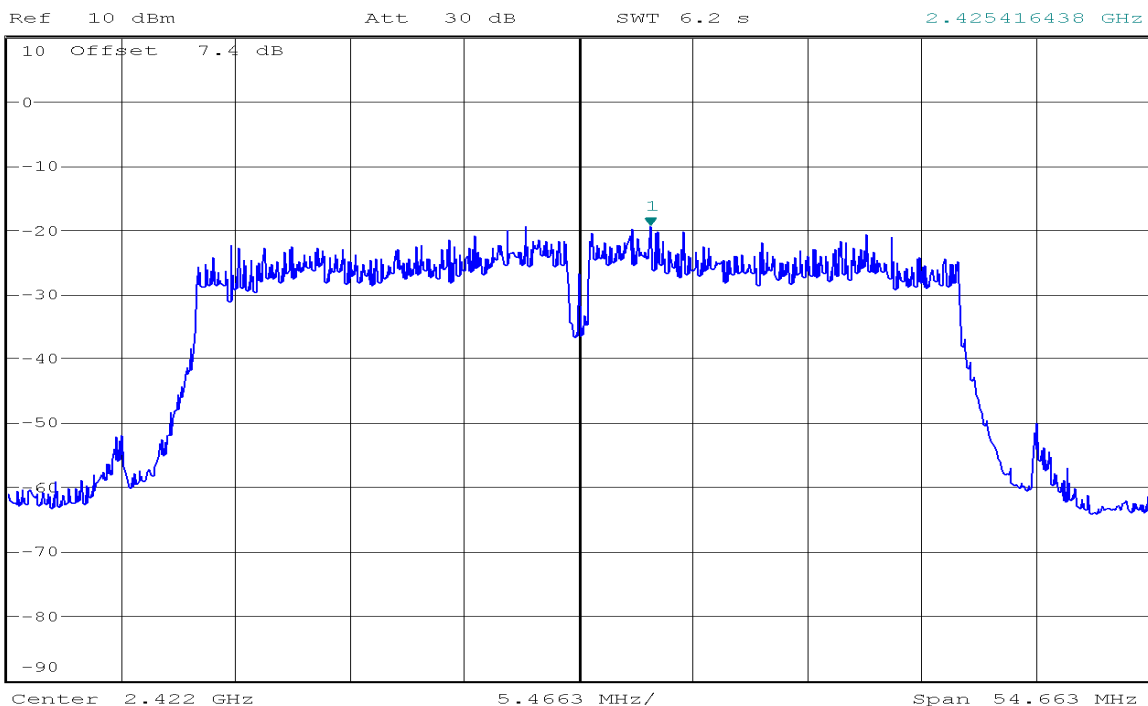

**PPSD (CH Mid)**




\* RBW 3 kHz  
 \* VBW 10 kHz  
 Marker 1 [T1 ]  
 -21.87 dBm  
 2.432006745 GHz

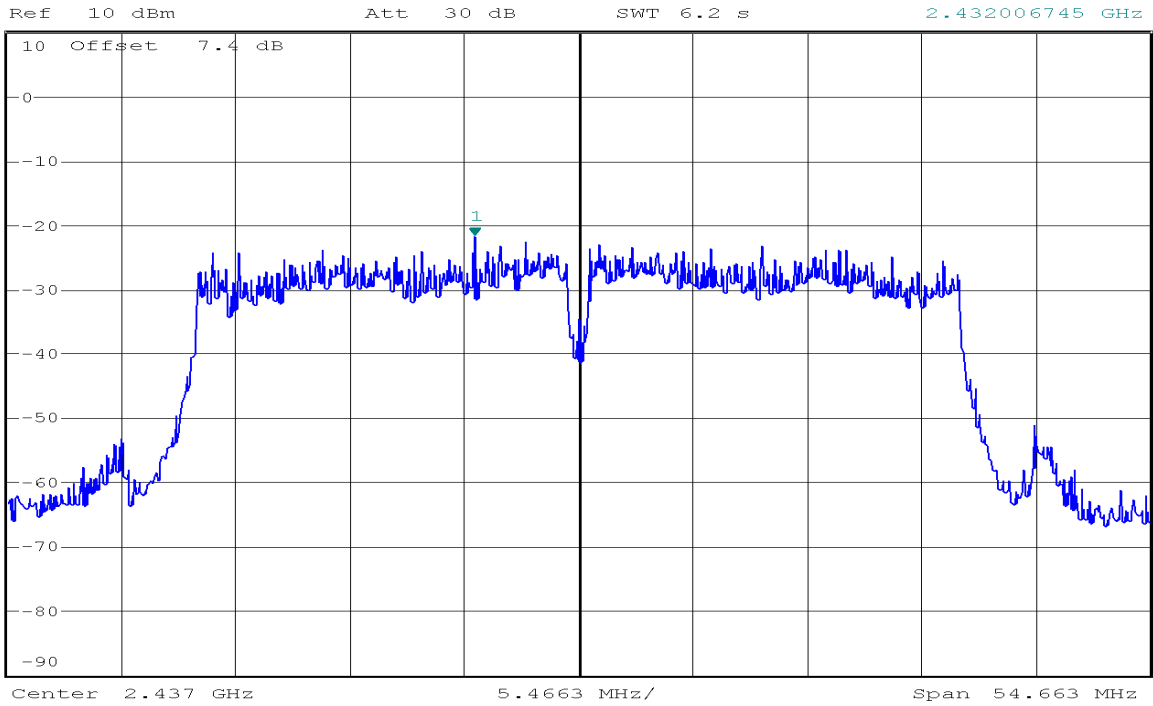

**PPSD (CH High)**



\* RBW 3 kHz  
 \* VBW 10 kHz  
 Marker 1 [T1 ]  
 -19.40 dBm  
 2.448583563 GHz

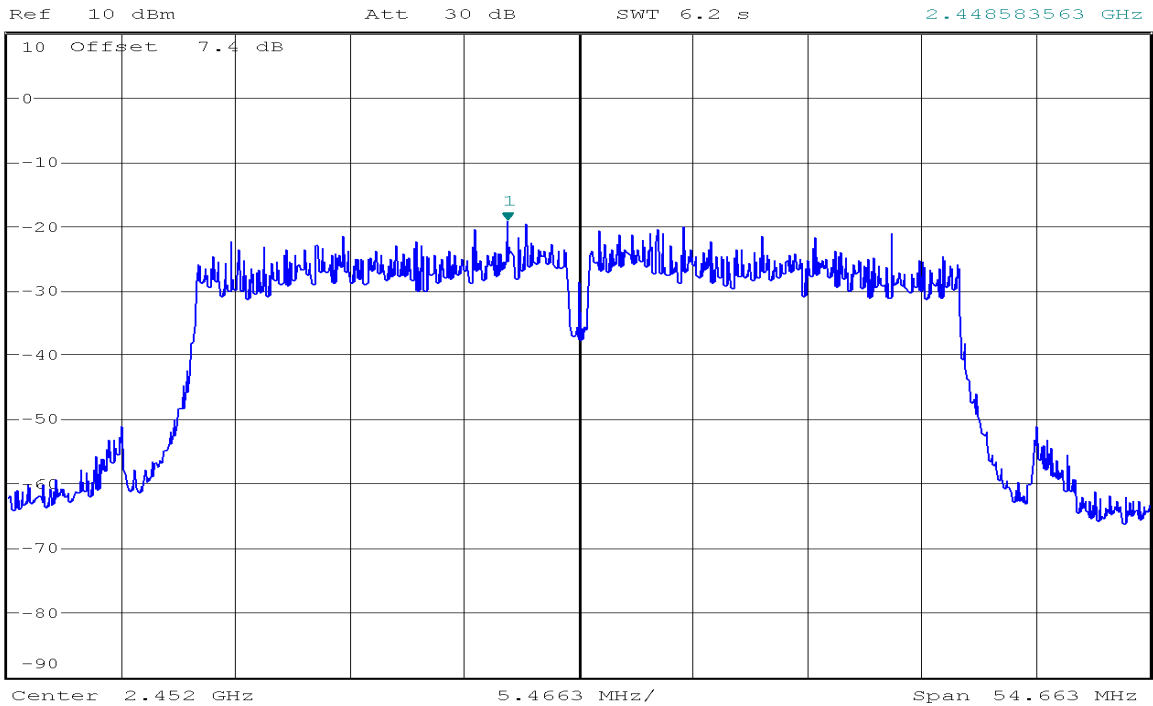


## 7.4.SPURIOUS EMISSIONS

### Conducted Measurement

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted*

**Test Plot**


**OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT**

**IEEE 802.11b mode**


**CH Low**



\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      7.22 dBm  
 SWT 5 ms      2.412477971 GHz

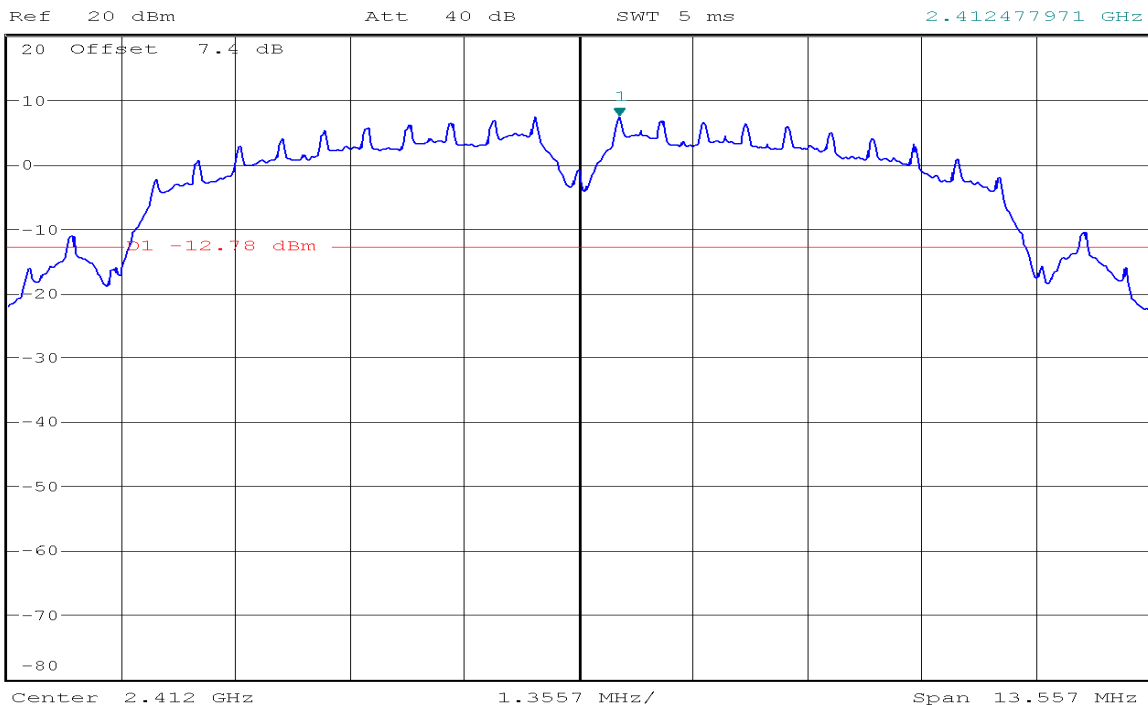


\* RBW 100 kHz      Marker 2 [T1 ]  
 \* VBW 300 kHz      -32.47 dBm  
 SWT 15 ms      2.398052885 GHz

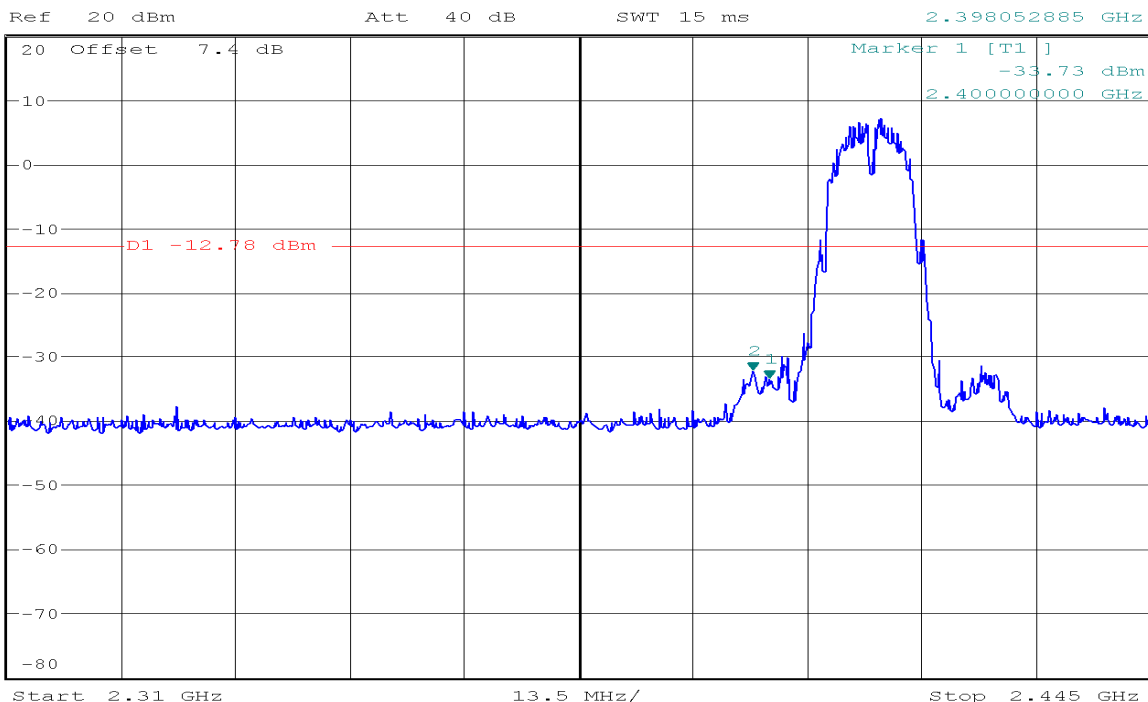






\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -39.61 dBm  
 SWT 300 ms      1.843413462 GHz

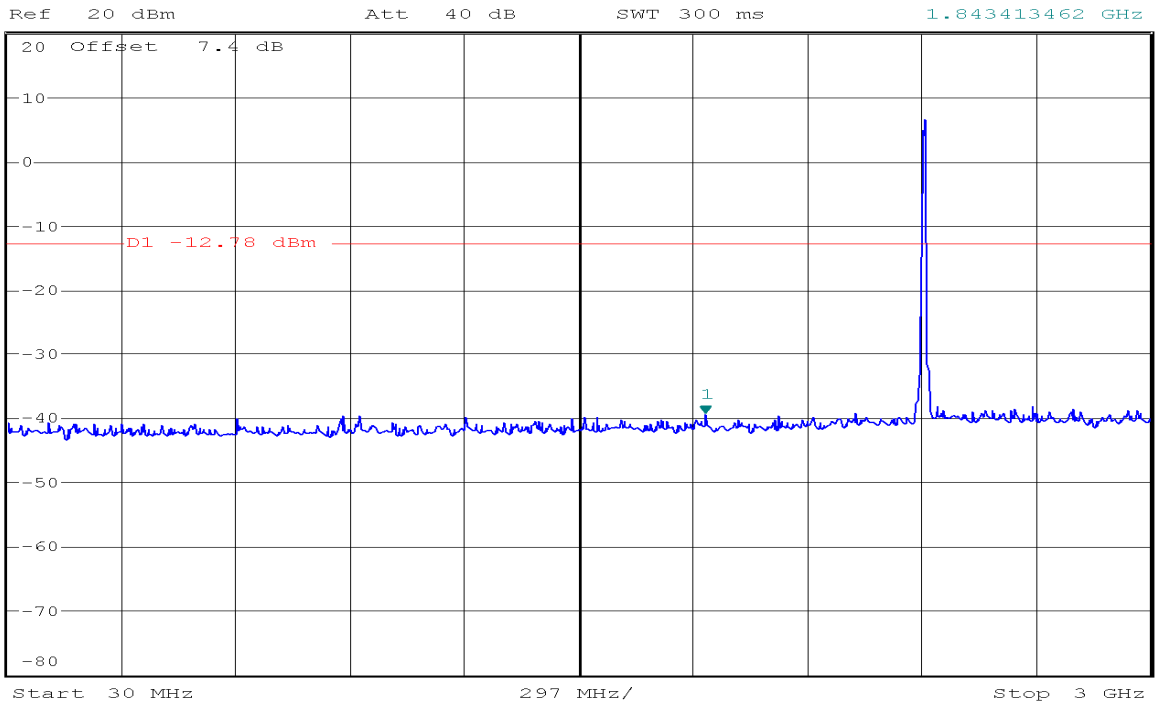


\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -39.38 dBm  
 SWT 2.3 s      13.905448718 GHz

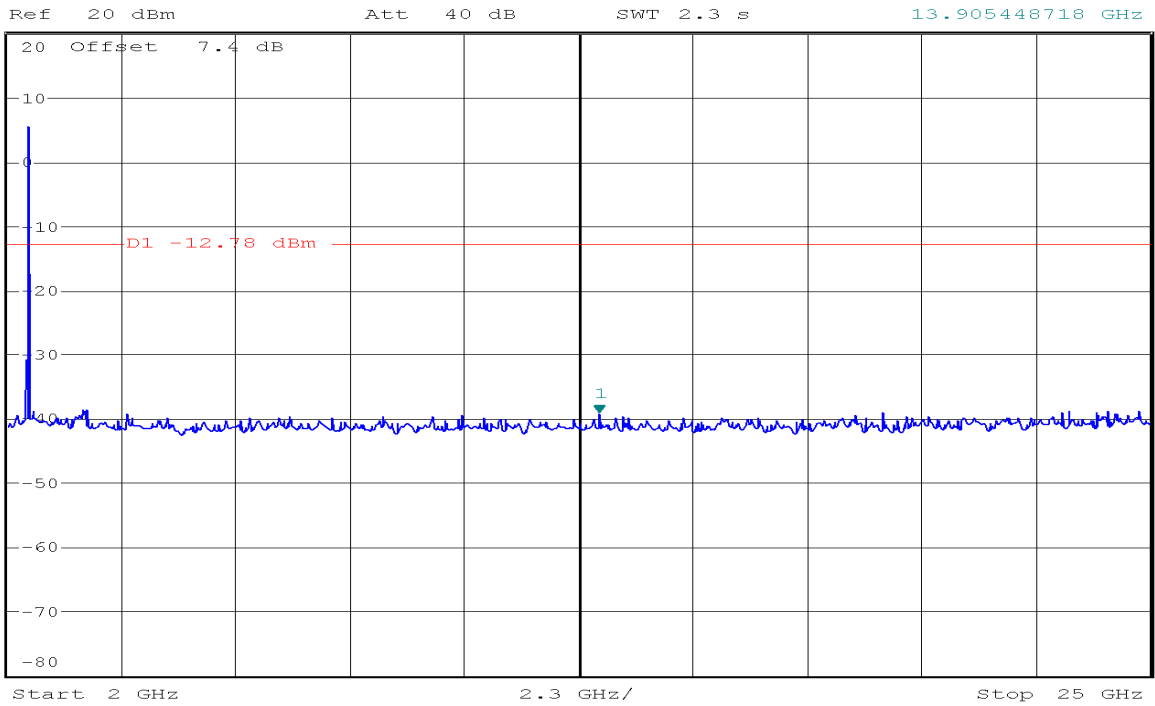


**CH Mid**



Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 1 [T1] 7.11 dBm  
 \* VBW 300 kHz 2.437500434 GHz  
 SWT 5 ms

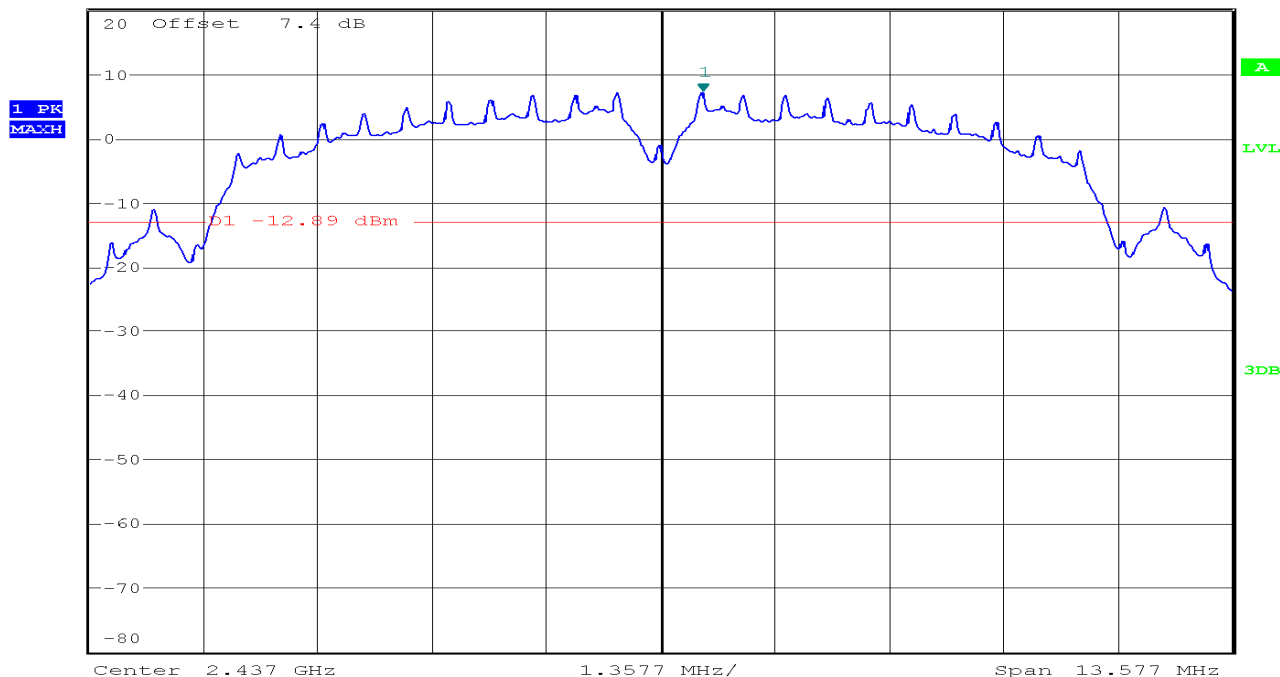


Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 1 [T1] -38.96 dBm  
 \* VBW 300 kHz 2.747740385 GHz  
 SWT 300 ms

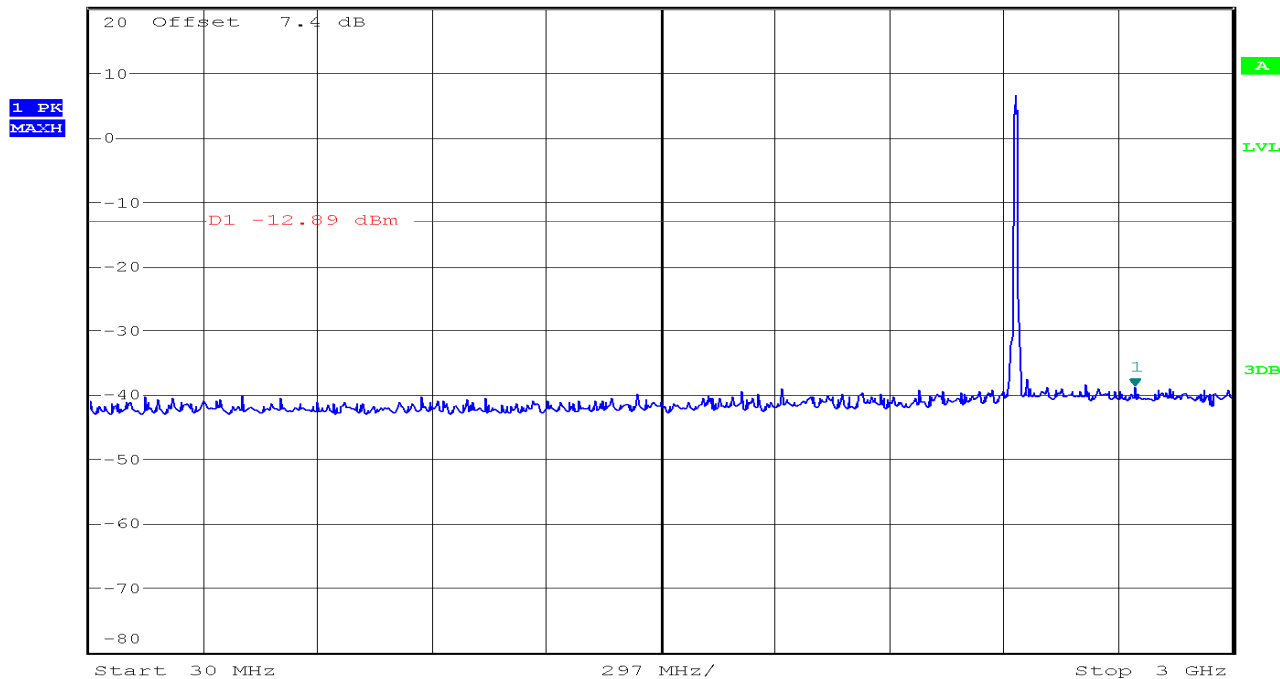




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -39.01 dBm  
 SWT 2.3 s      12.246794872 GHz

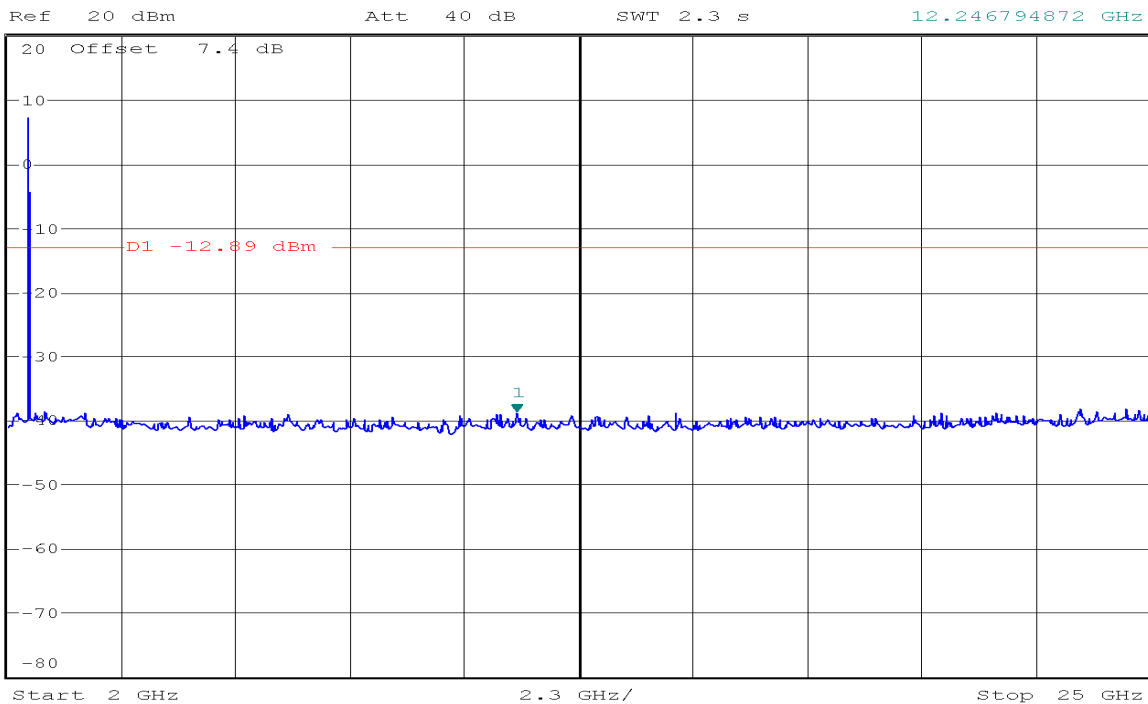

CH High




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      6.88 dBm  
 SWT 5 ms      2.461477808 GHz

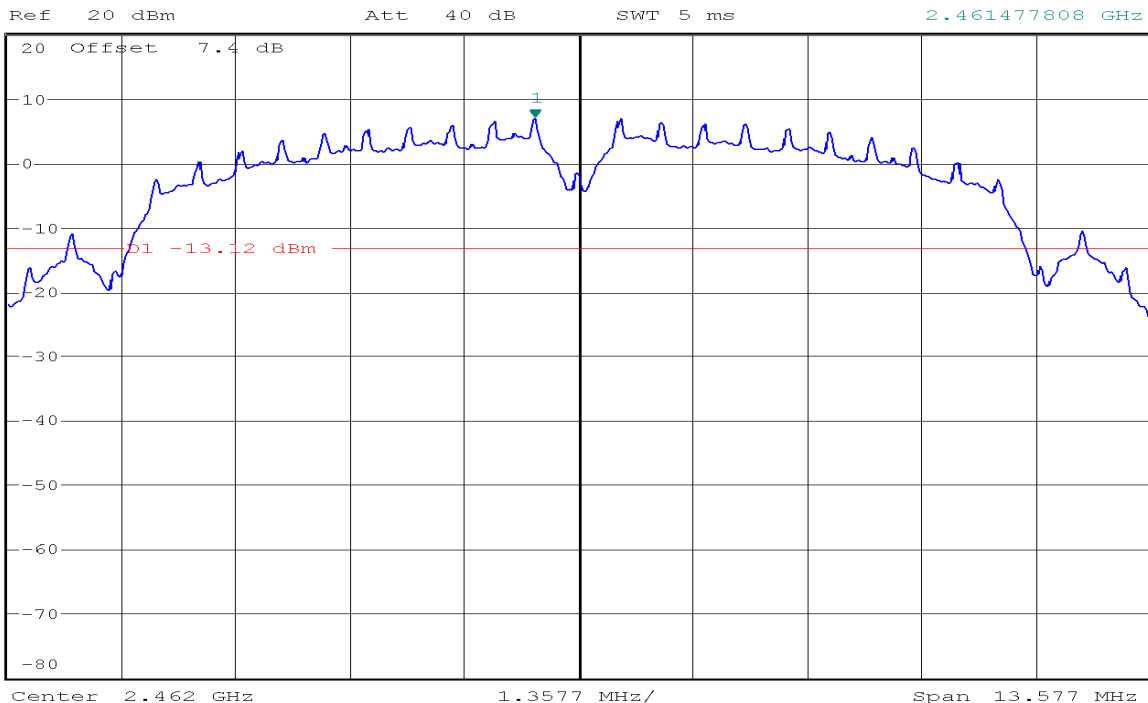




\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -39.83 dBm  
SWT 15 ms      2.483500000 GHz

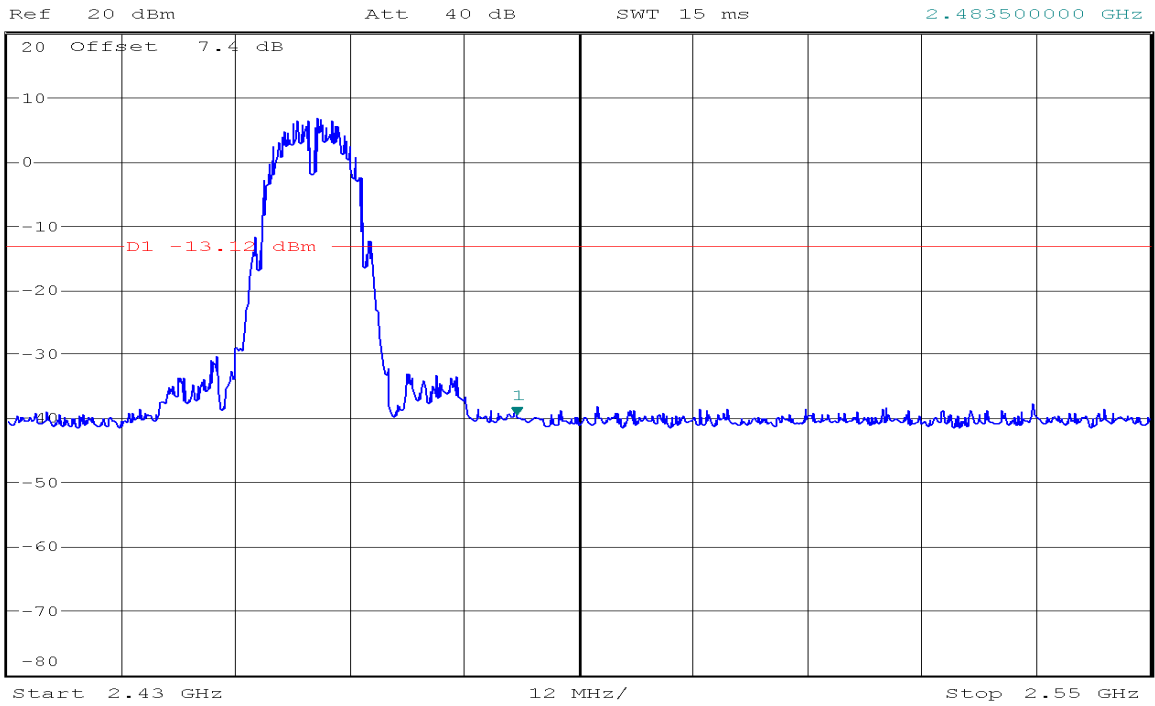


\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -37.75 dBm  
SWT 300 ms      2.604951923 GHz

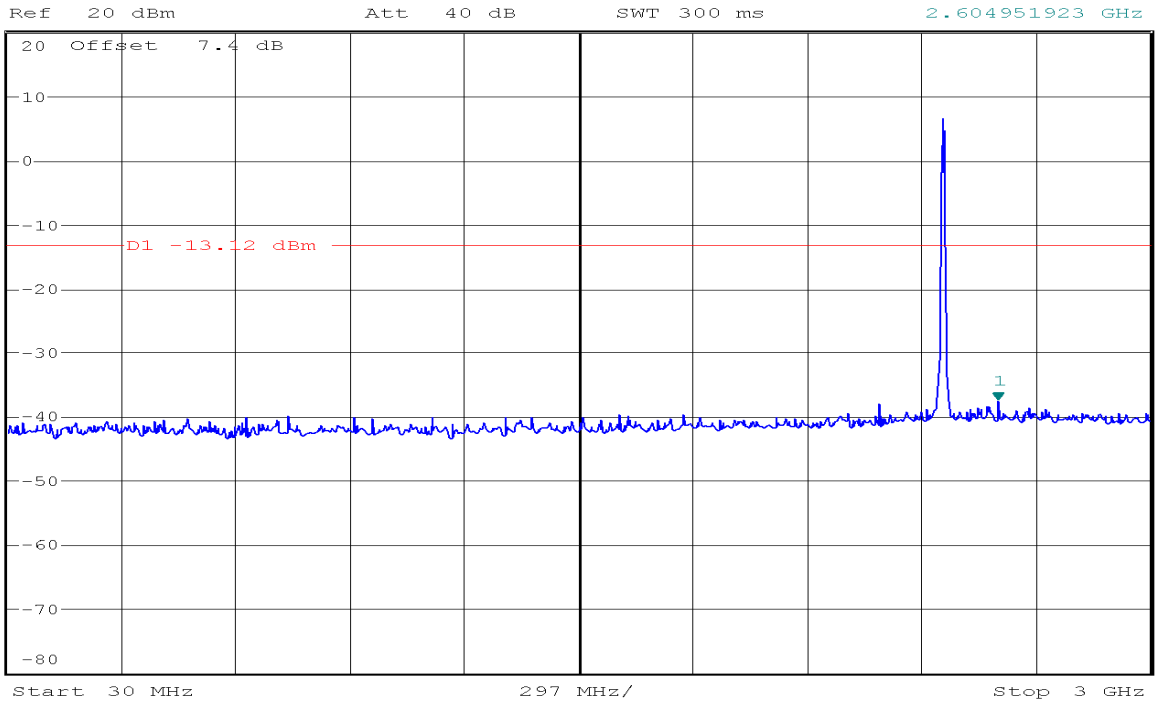



\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -39.74 dBm  
 SWT 2.3 s      6.312500000 GHz

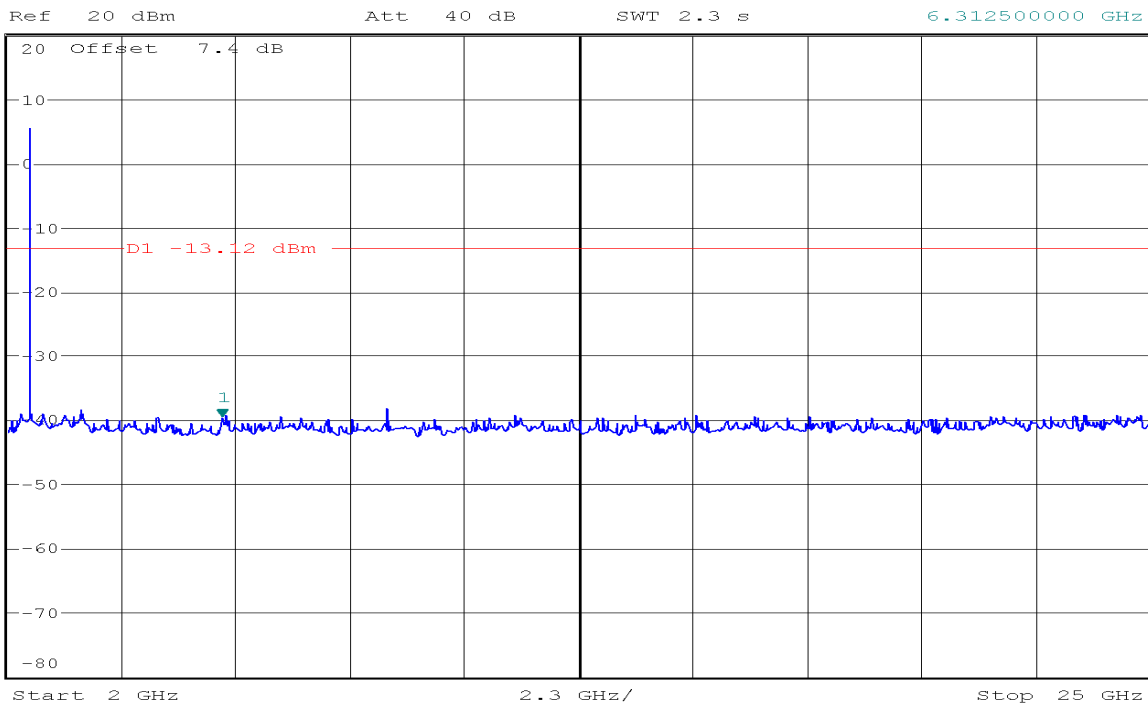


**IEEE 802.11g mode**

**CH Low**




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -2.48 dBm  
 SWT 10 ms      2.413250000 GHz

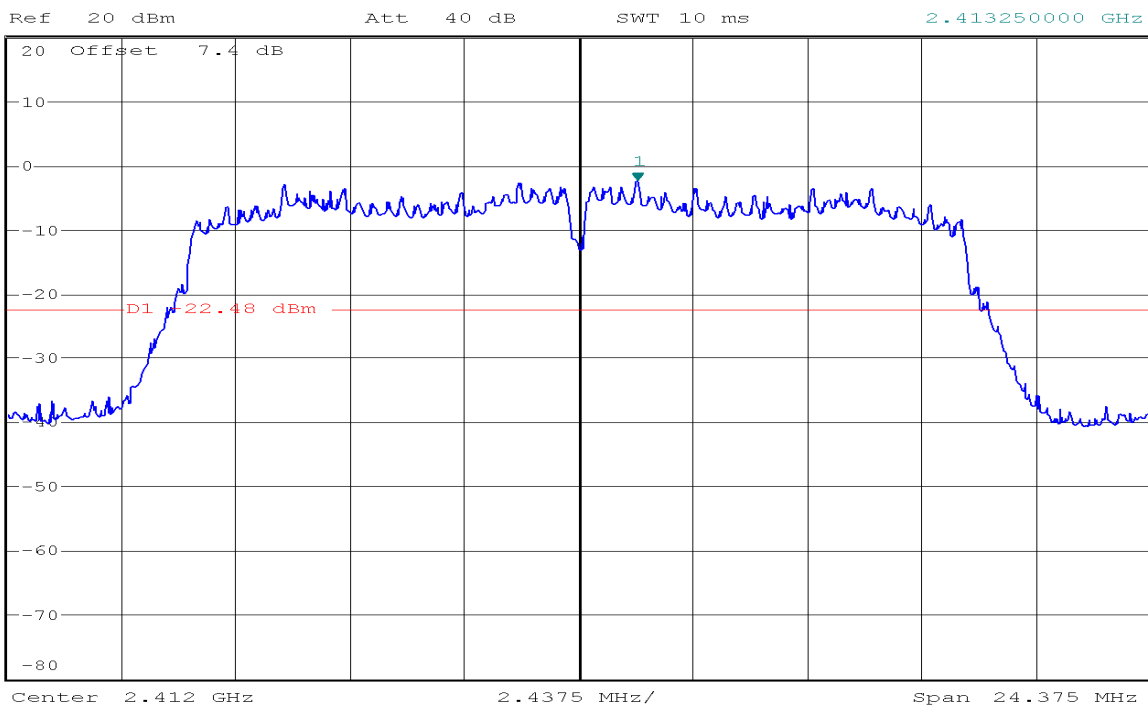




Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 2 [T1 ] -36.81 dBm  
 \* VBW 300 kHz 2.396322115 GHz  
 SWT 15 ms

1 PK  
 MATH

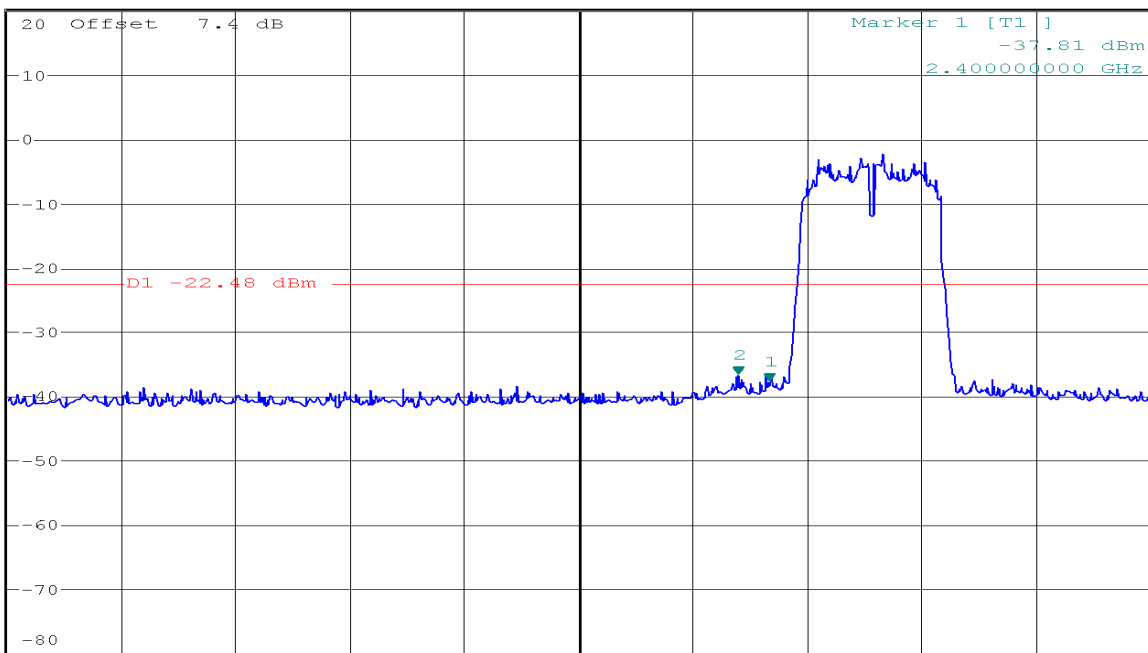


Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 1 [T1 ] -38.94 dBm  
 \* VBW 300 kHz 2.614471154 GHz  
 SWT 300 ms

1 PK  
 MATH

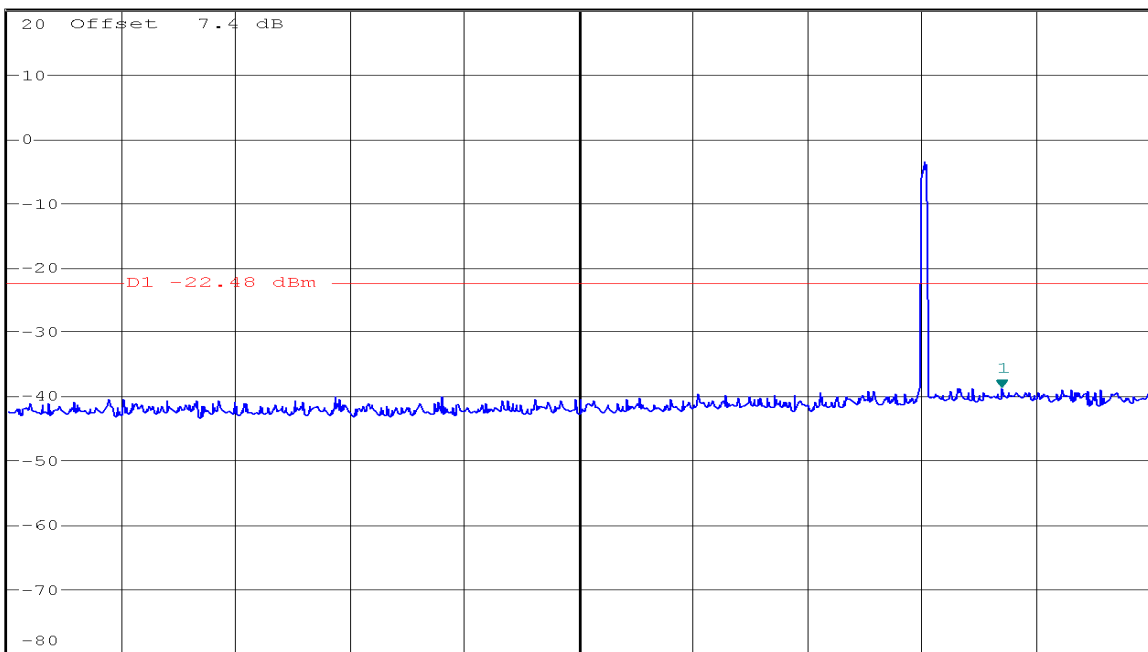




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.60 dBm  
 SWT 2.3 s            24.668269231 GHz

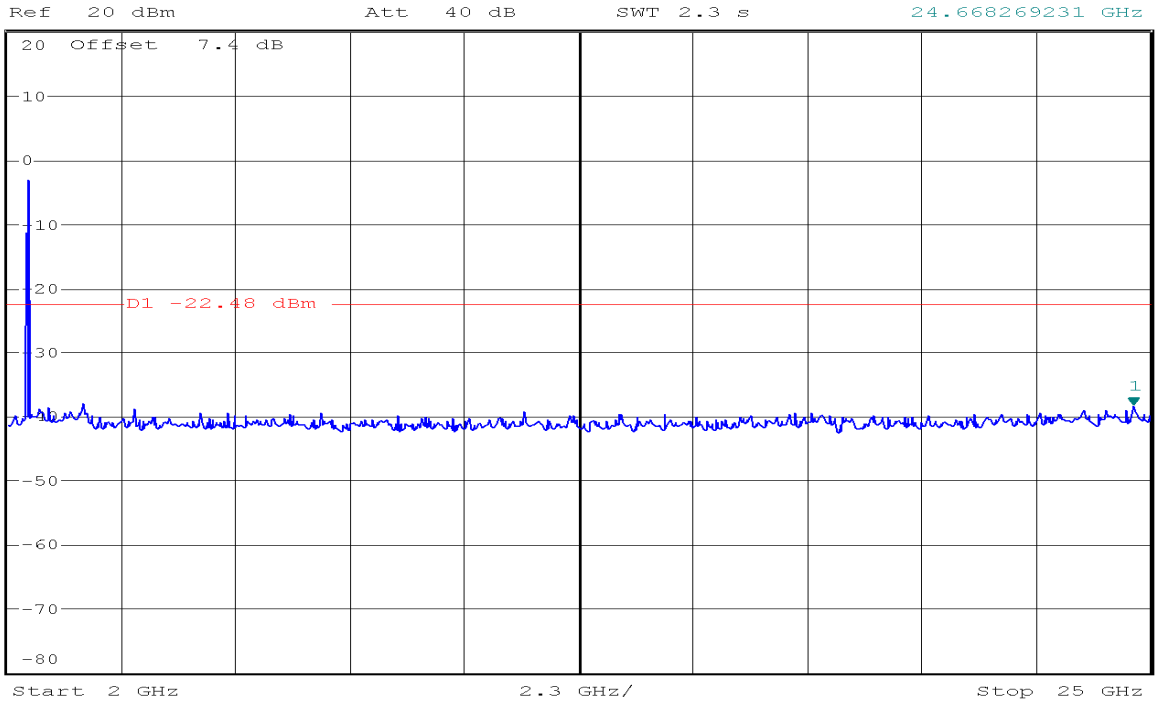

**CH Mid**




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -2.79 dBm  
 SWT 10 ms            2.438250000 GHz

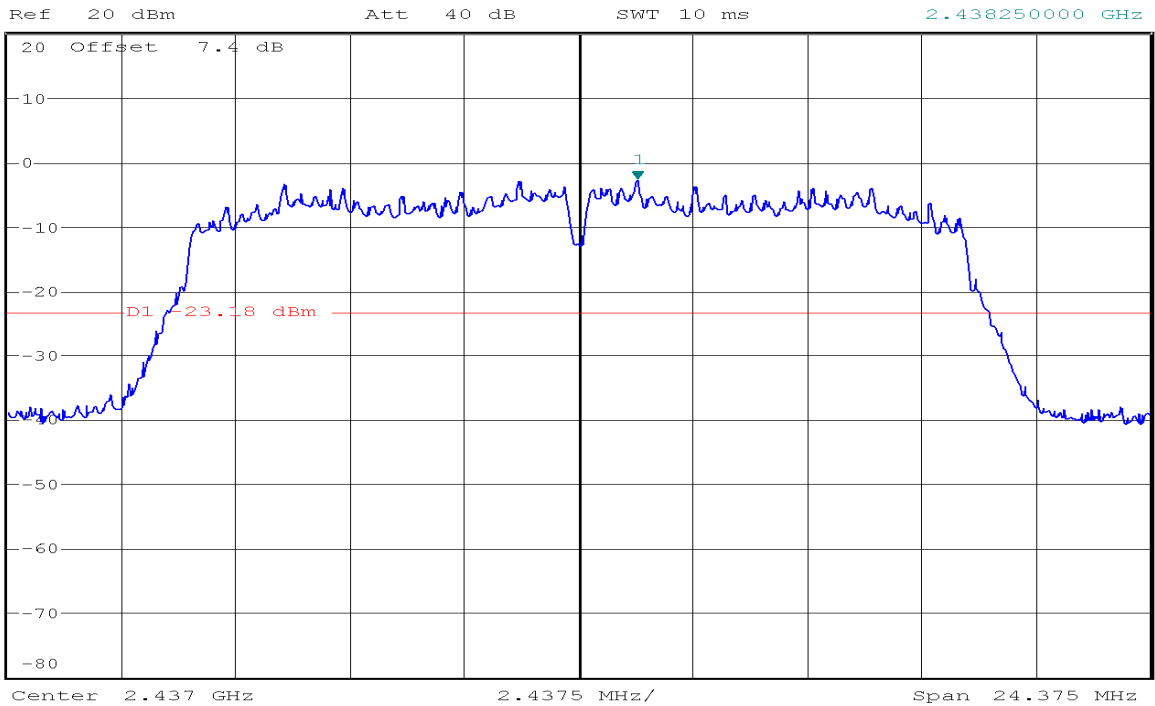




\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -38.87 dBm  
SWT 300 ms      2.814375000 GHz

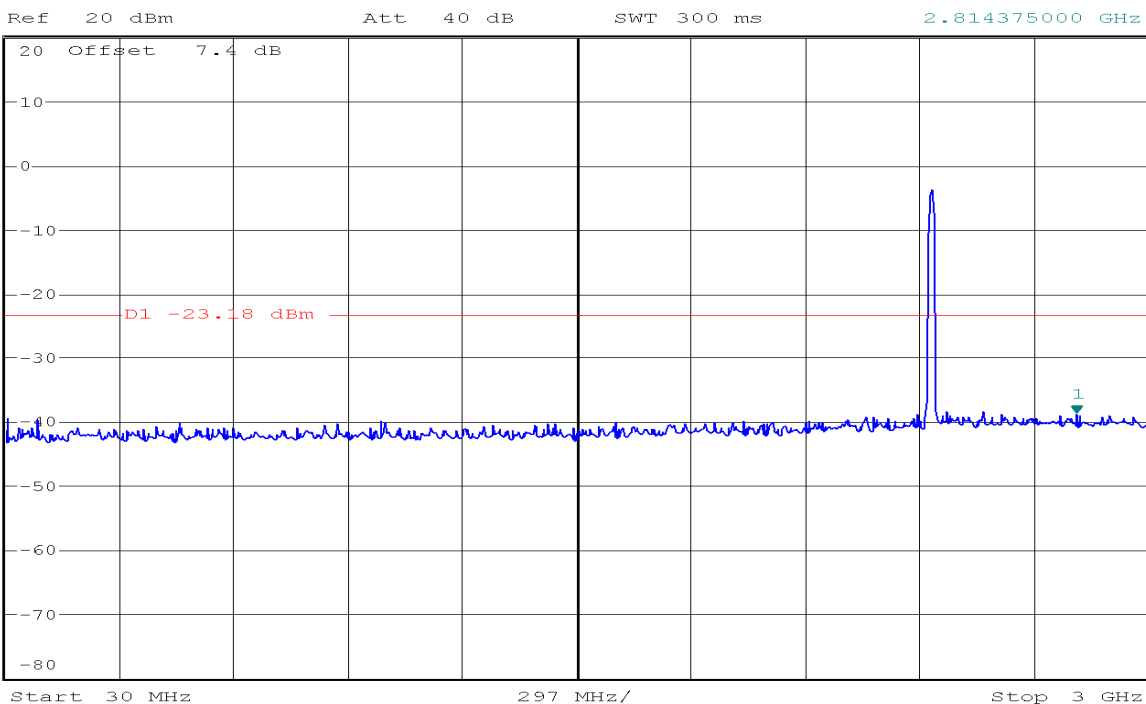

\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -39.52 dBm  
SWT 2.3 s      17.038461538 GHz

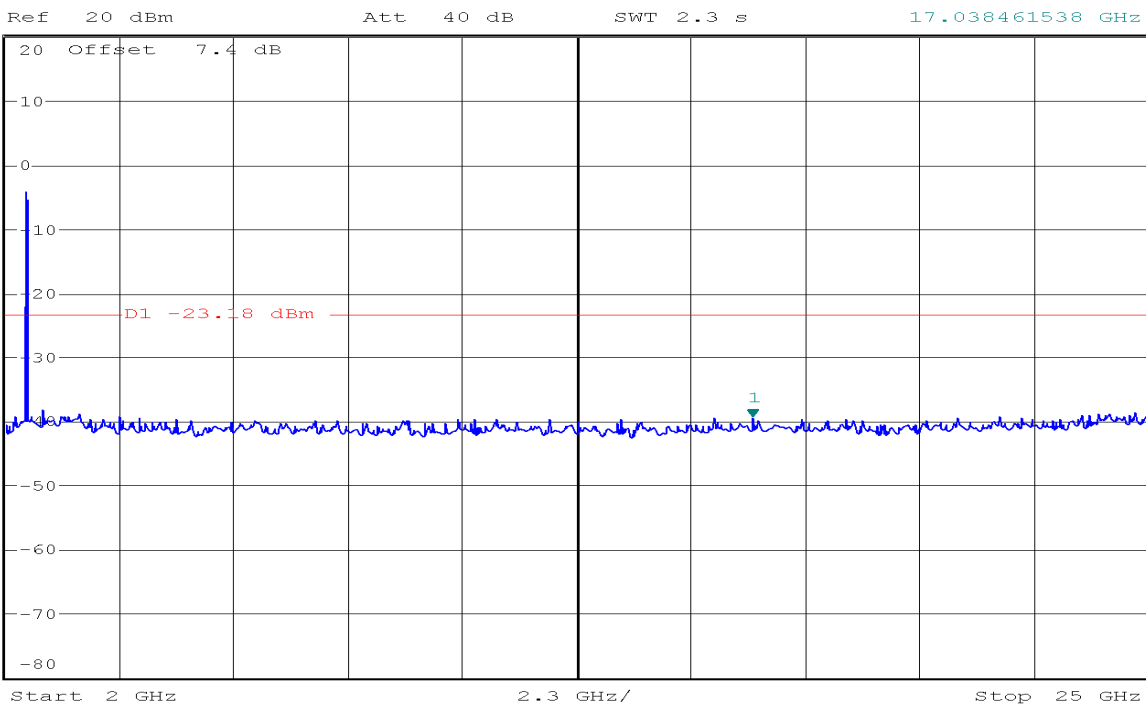





CH High



Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 1 [T1] -3.02 dBm  
 \* VBW 300 kHz 2.463250000 GHz  
 SWT 10 ms

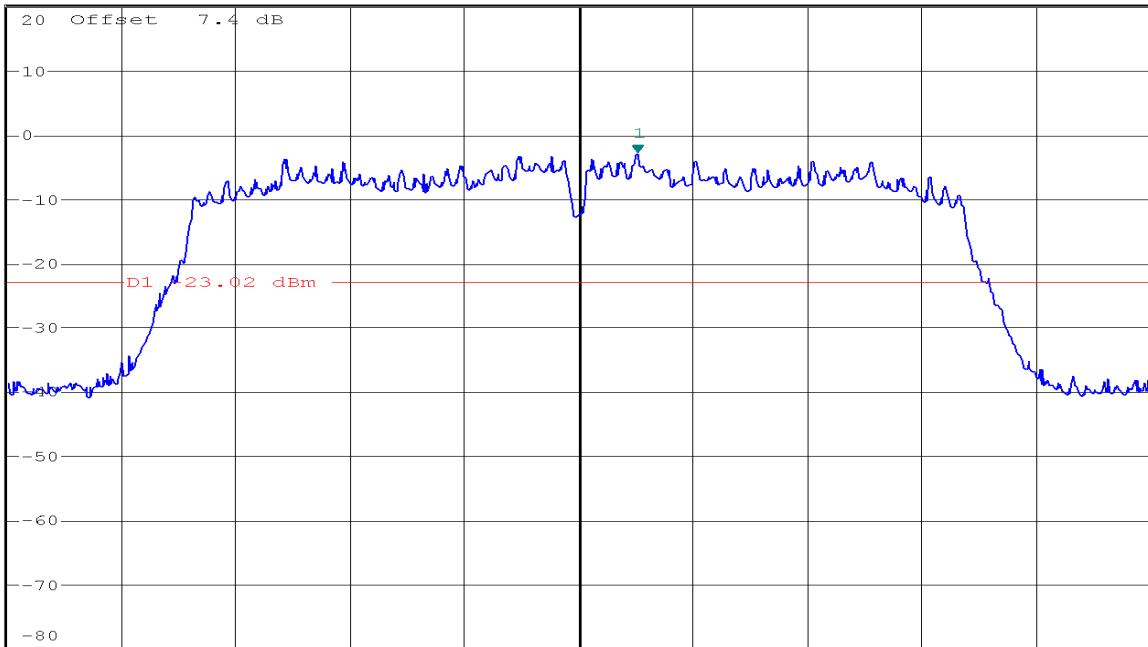


Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 2 [T1] -38.35 dBm  
 \* VBW 300 kHz 2.492884615 GHz  
 SWT 15 ms

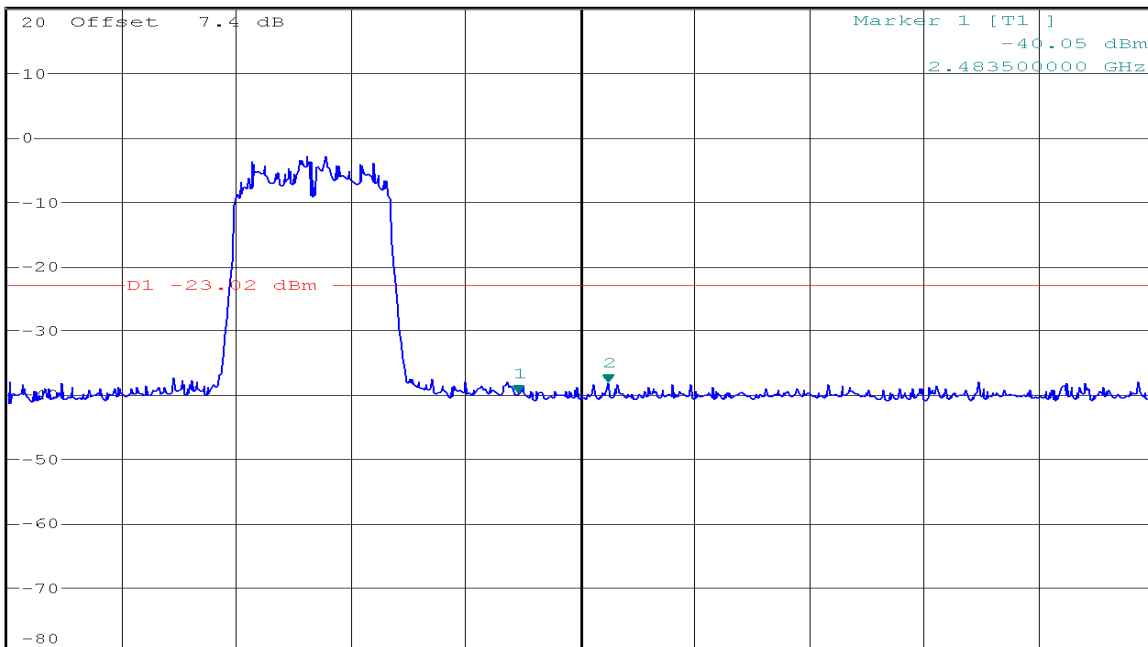




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.70 dBm  
 SWT 300 ms      2.695384615 GHz

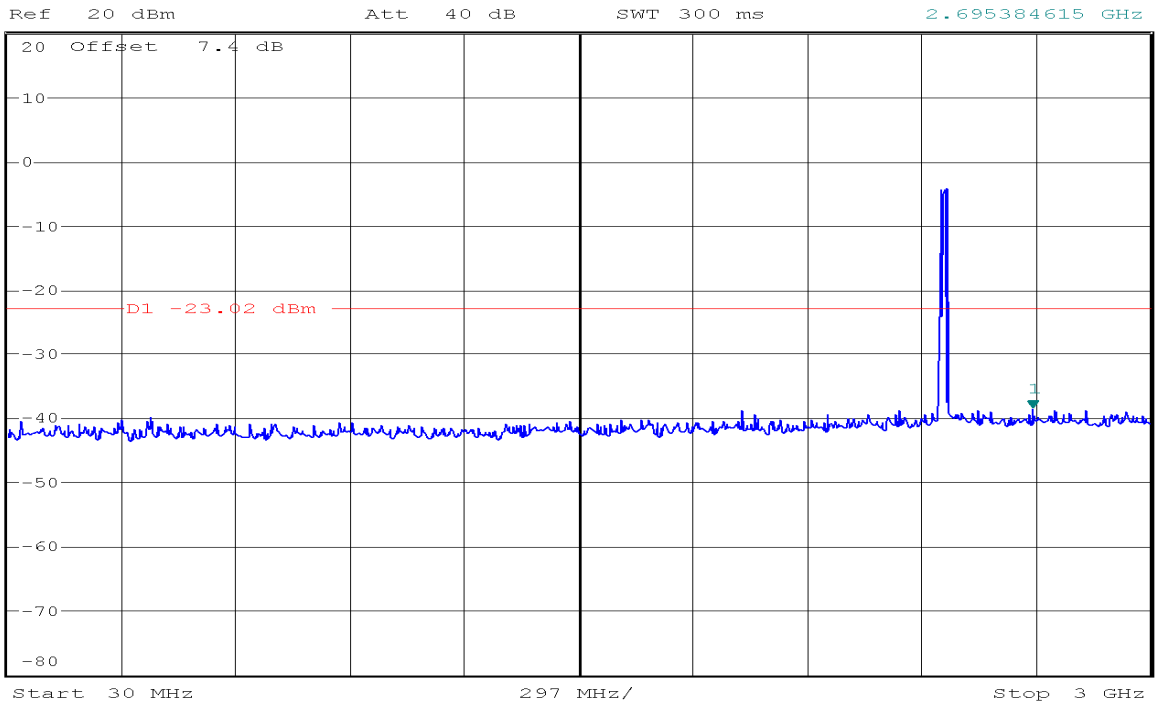

\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.56 dBm  
 SWT 2.3 s      11.693910256 GHz

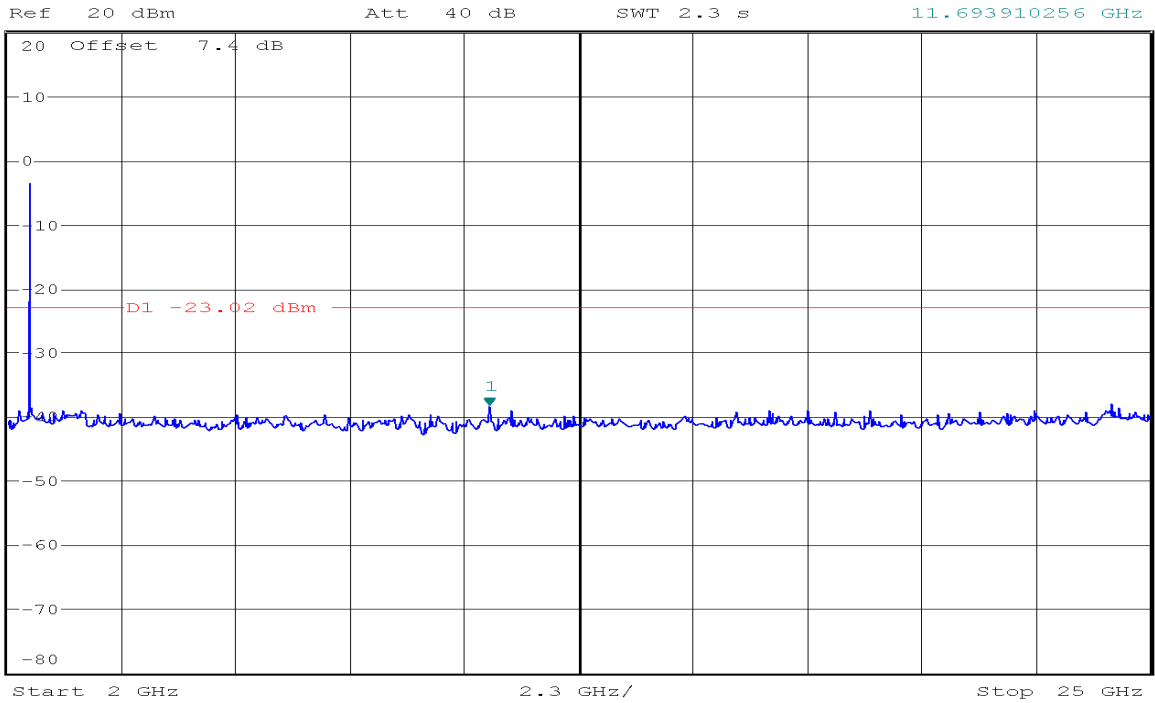


IEEE 802.11n HT20 mode / Chain 0

CH Low




Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 1 [T1] -2.57 dBm  
 \* VBW 300 kHz 2.413237740 GHz  
 SWT 10 ms

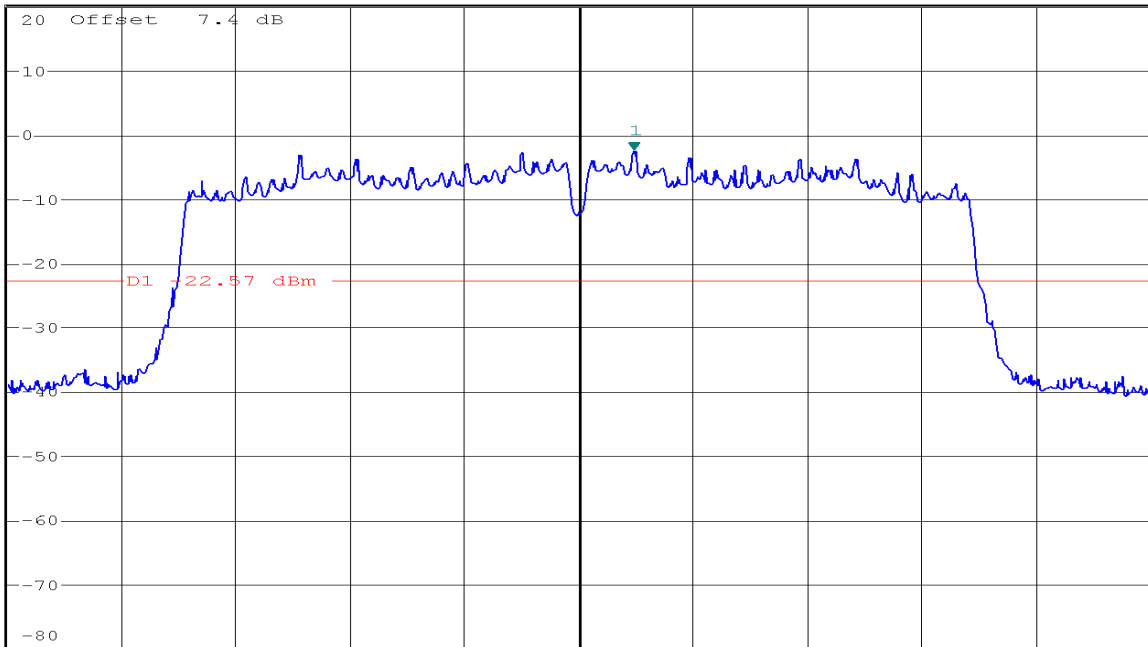

Center 2.412 GHz 2.5745 MHz/ Span 25.745 MHz




Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 2 [T1] -38.37 dBm  
 \* VBW 300 kHz 2.388317308 GHz  
 SWT 15 ms

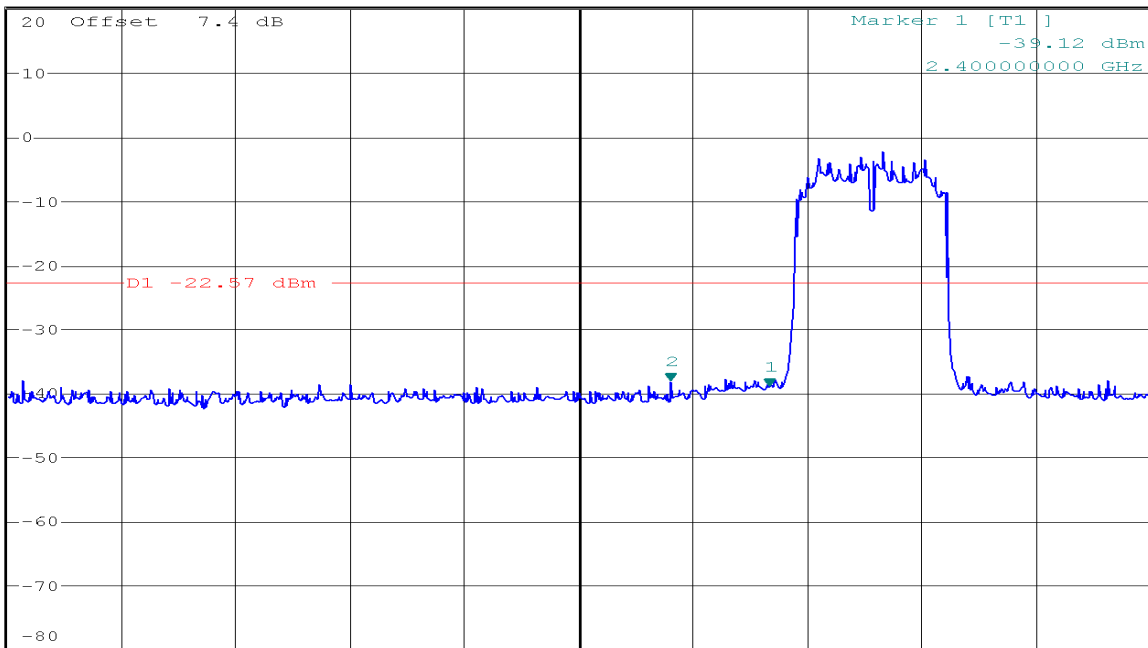


Start 2.31 GHz 13.5 MHz/ Stop 2.445 GHz



\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -38.10 dBm  
SWT 300 ms      2.514519231 GHz

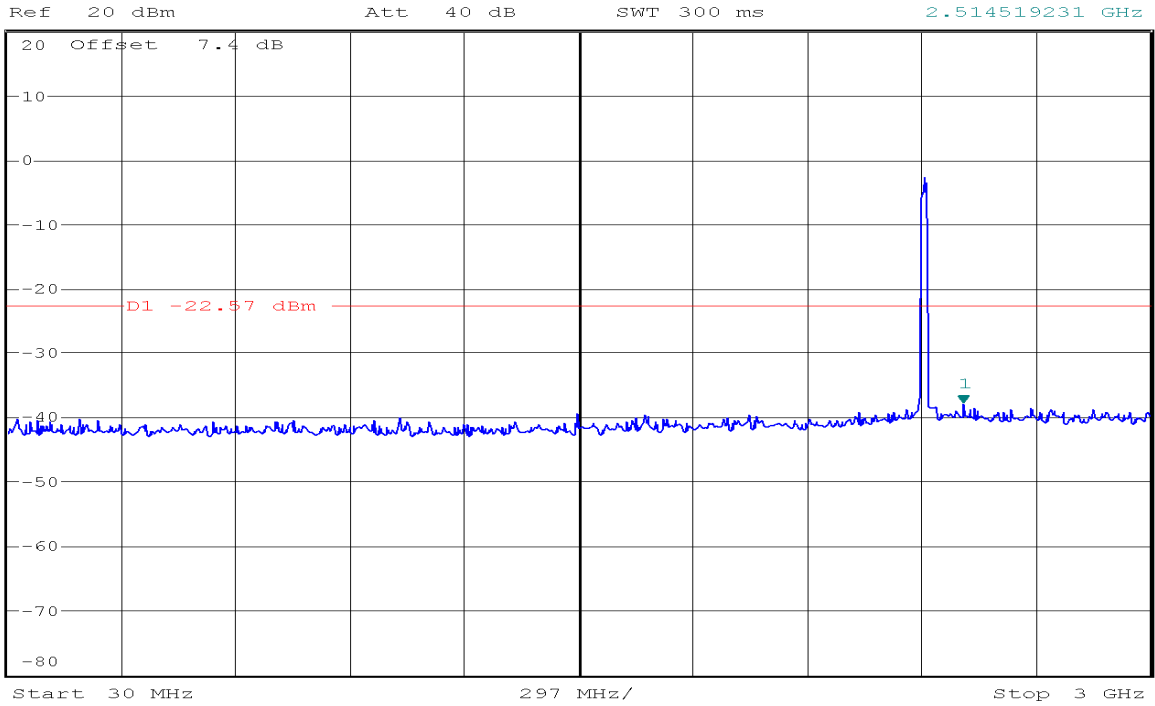


\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -38.91 dBm  
SWT 2.3 s      21.056089744 GHz

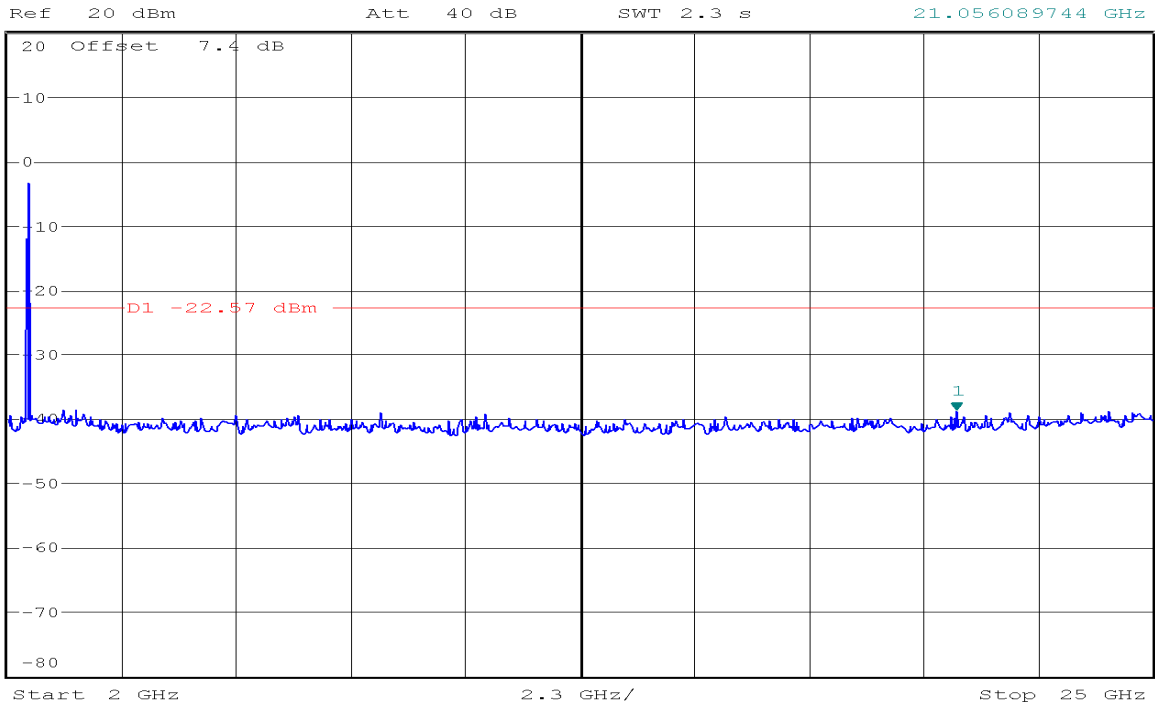


CH Mid



\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -2.87 dBm  
 SWT 10 ms      2.438265585 GHz

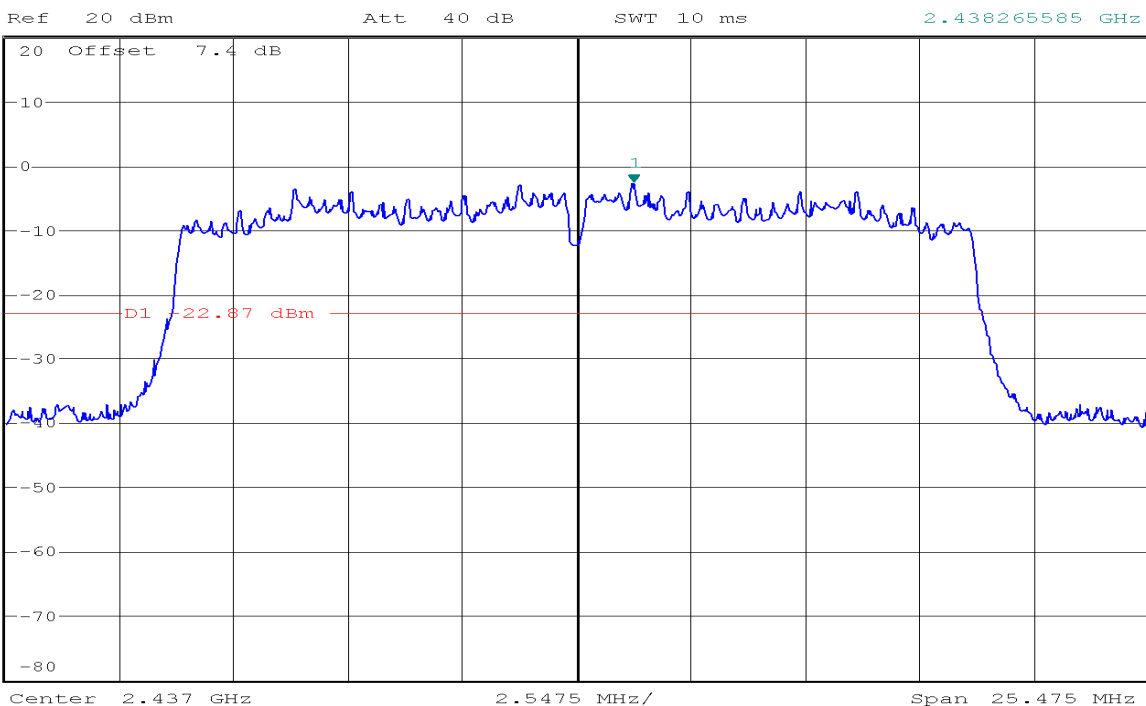


\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.09 dBm  
 SWT 300 ms      2.666826923 GHz

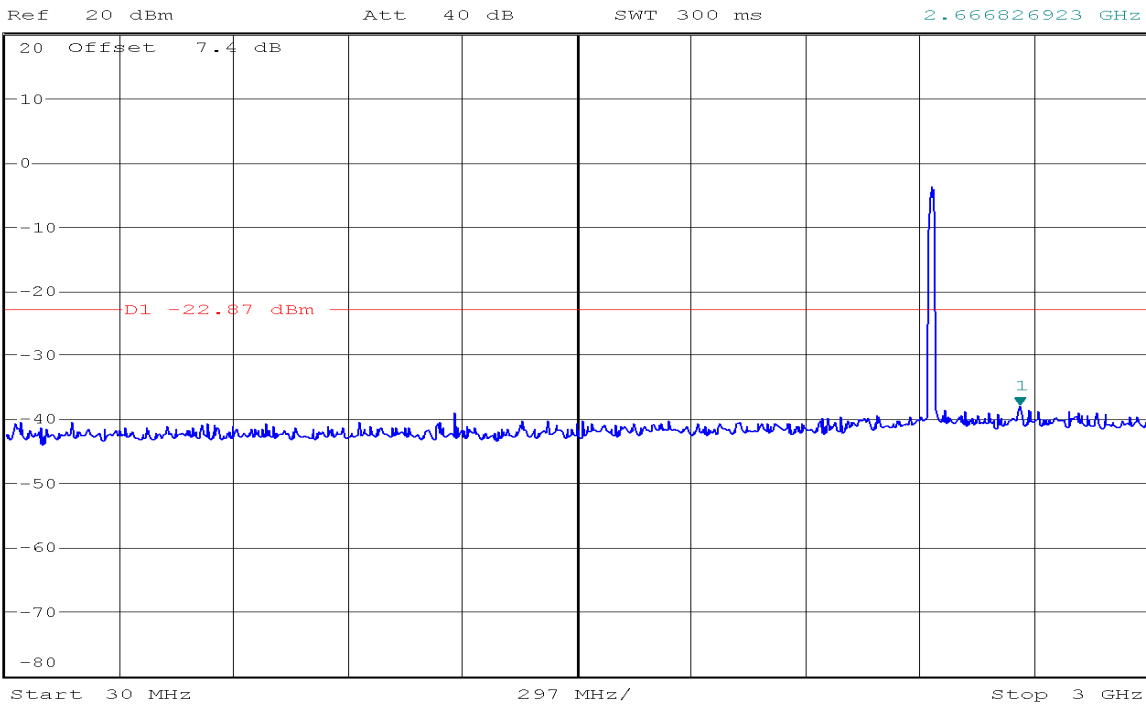




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.97 dBm  
 SWT 2.3 s      18.697115385 GHz

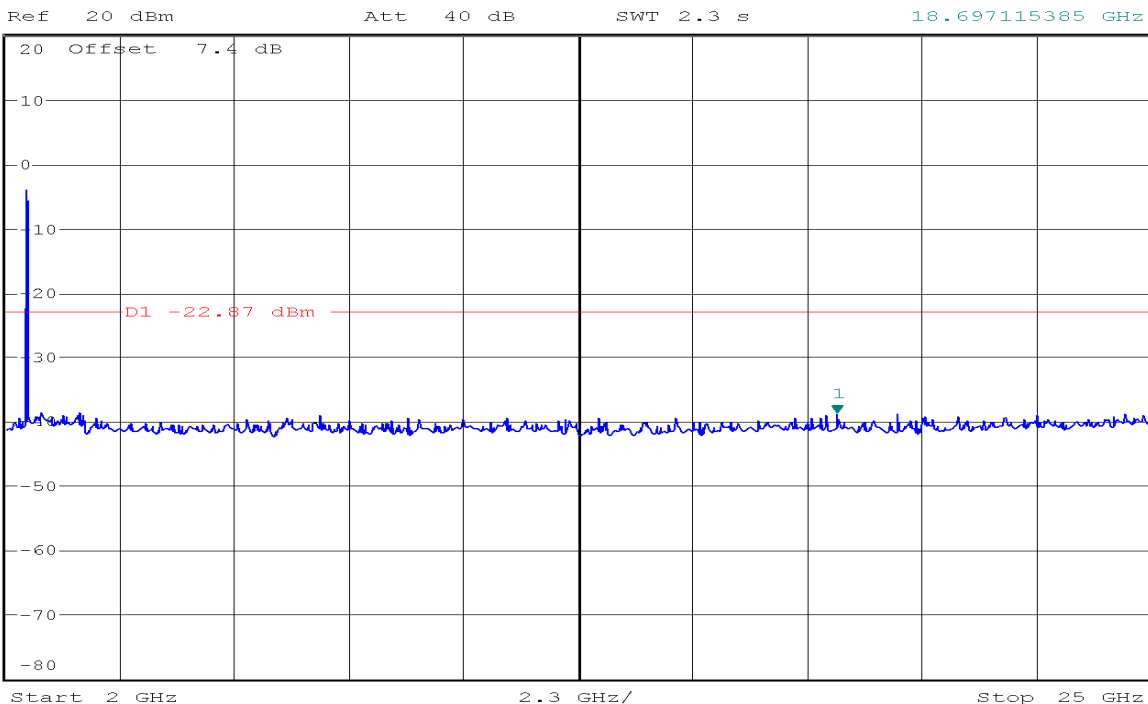

**CH High**




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -3.25 dBm  
 SWT 10 ms      2.463237740 GHz

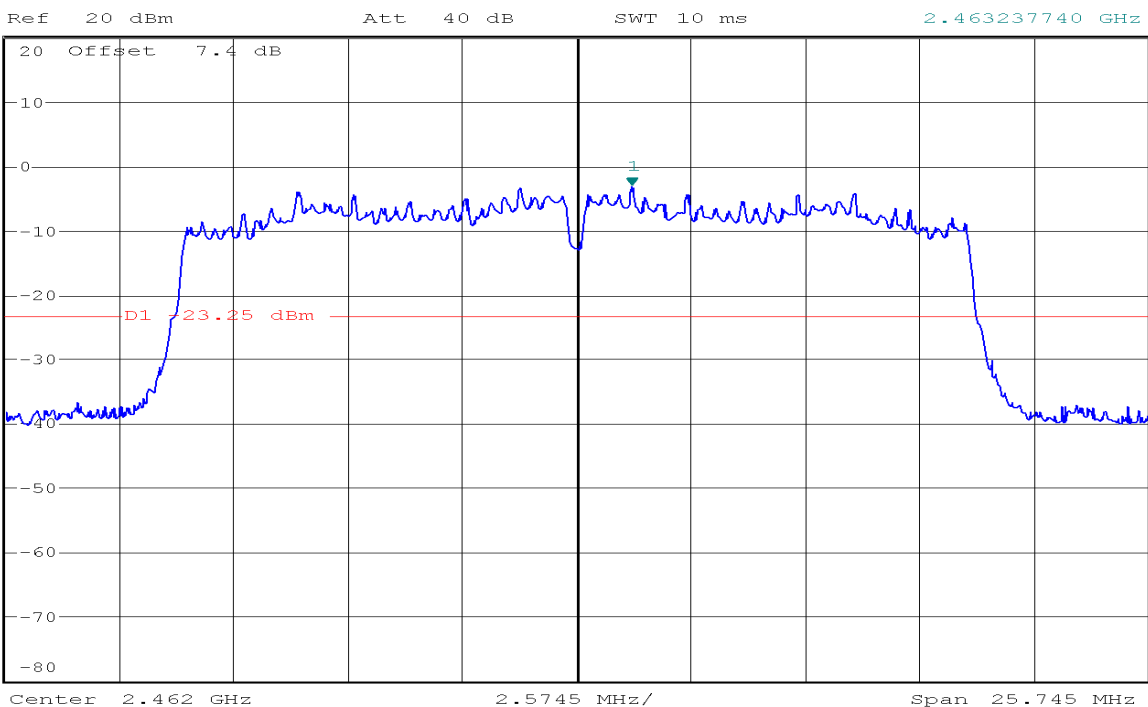




\* RBW 100 kHz      Marker 2 [T1 ]  
 \* VBW 300 kHz      -38.14 dBm  
 SWT 15 ms          2.518076923 GHz

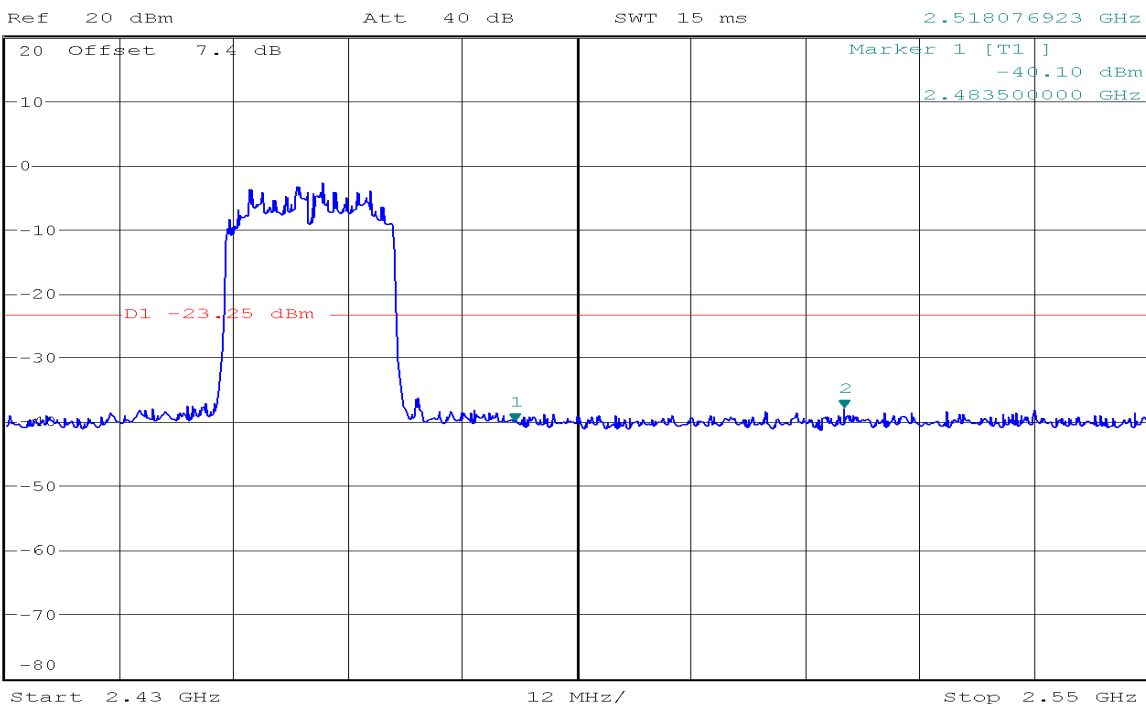


\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -39.00 dBm  
 SWT 300 ms          2.776298077 GHz

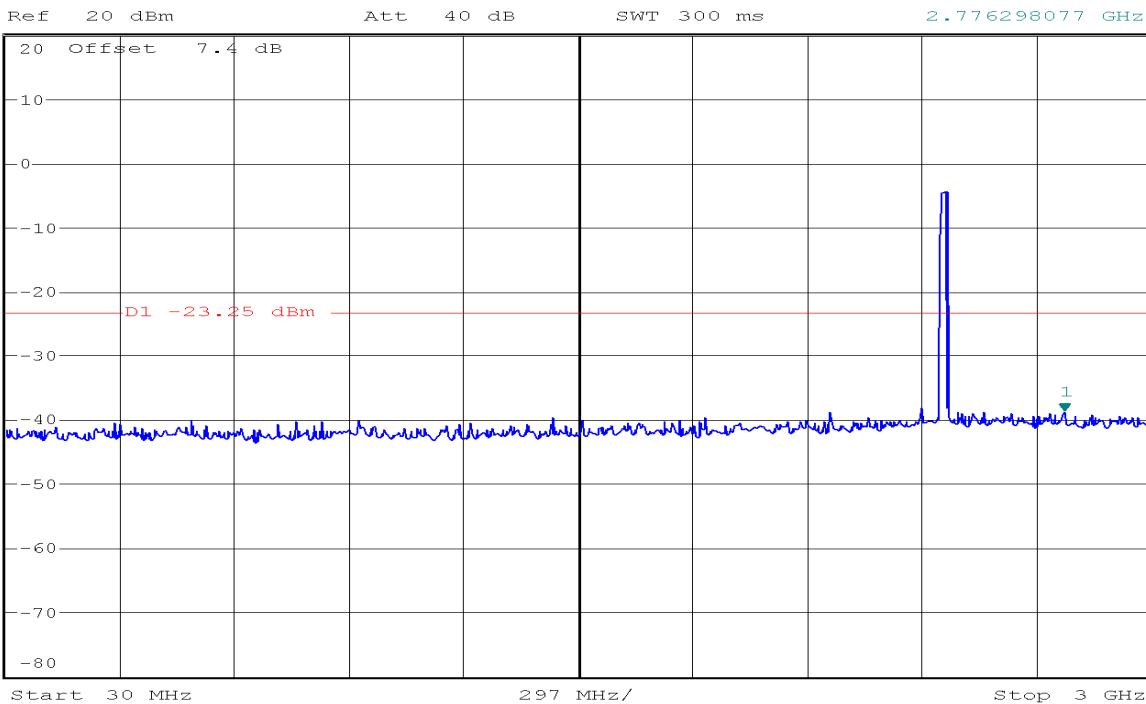



\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.62 dBm  
 SWT 2.3 s      5.243589744 GHz

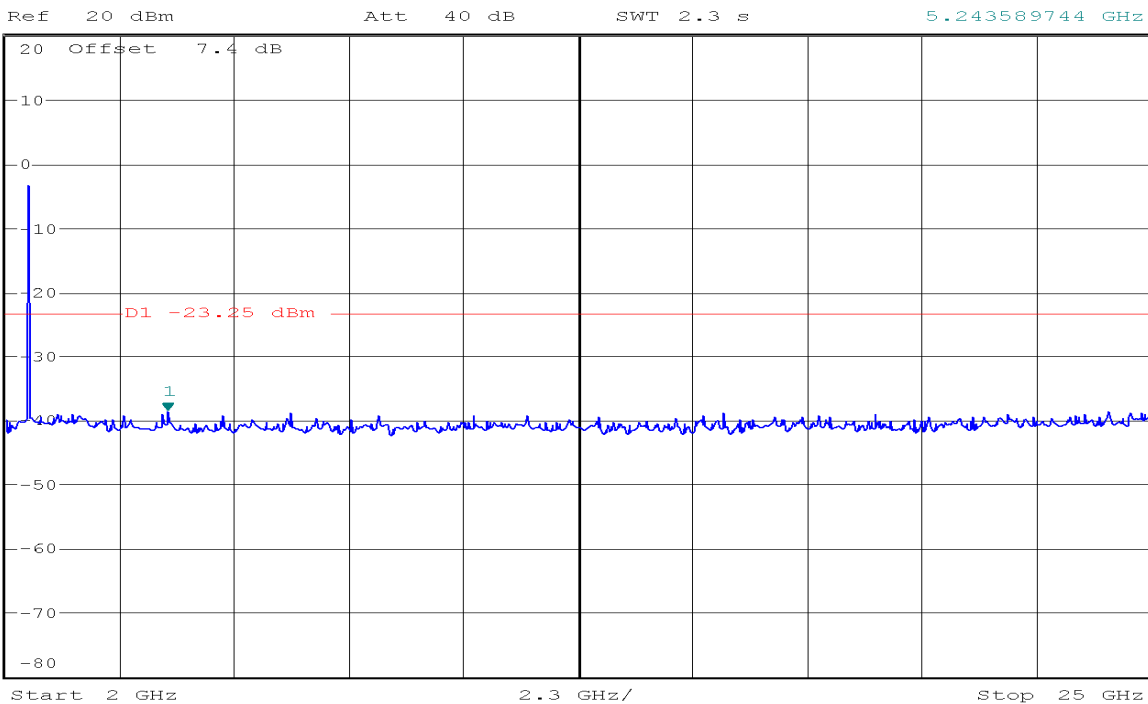


**IEEE 802.11n HT20 mode / Chain 1**

**CH Low**




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -1.54 dBm  
 SWT 10 ms      2.413258510 GHz

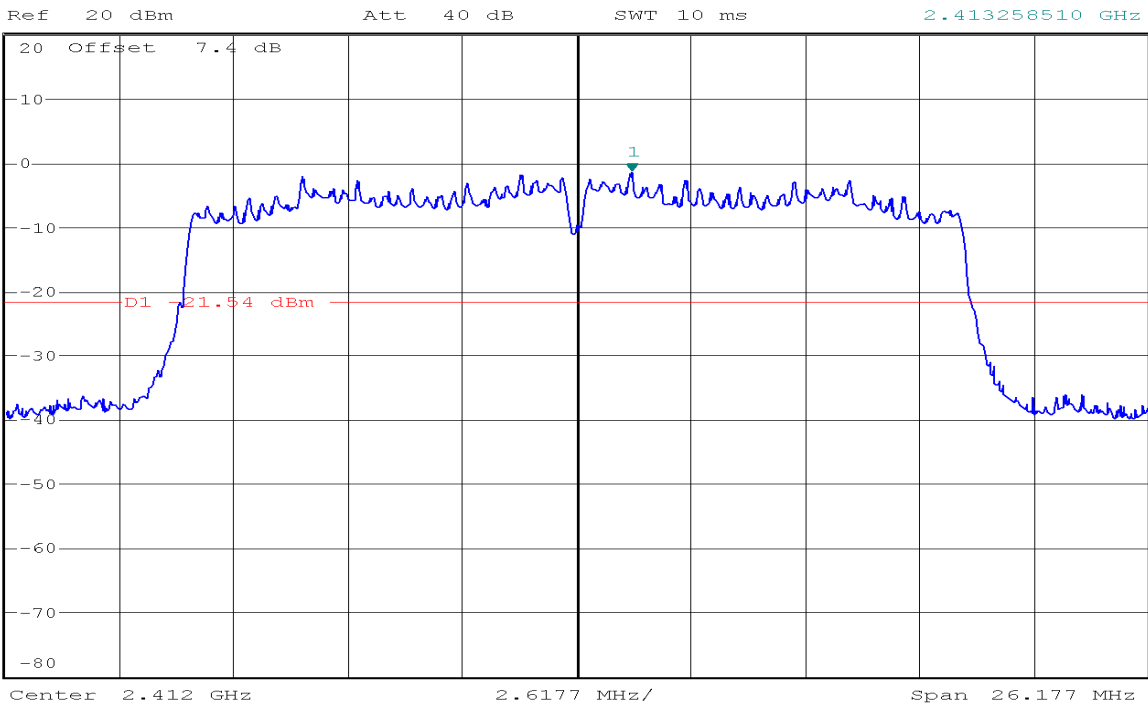






\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.41 dBm  
 SWT 15 ms      2.400000000 GHz

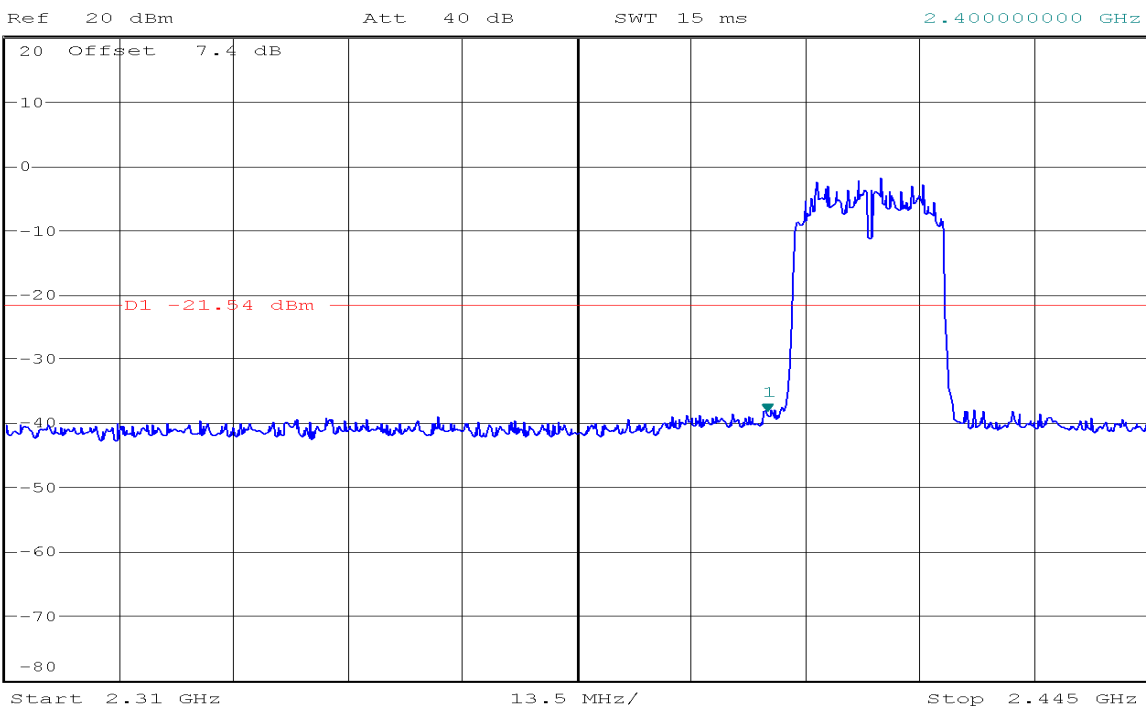


\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.86 dBm  
 SWT 300 ms      2.828653846 GHz

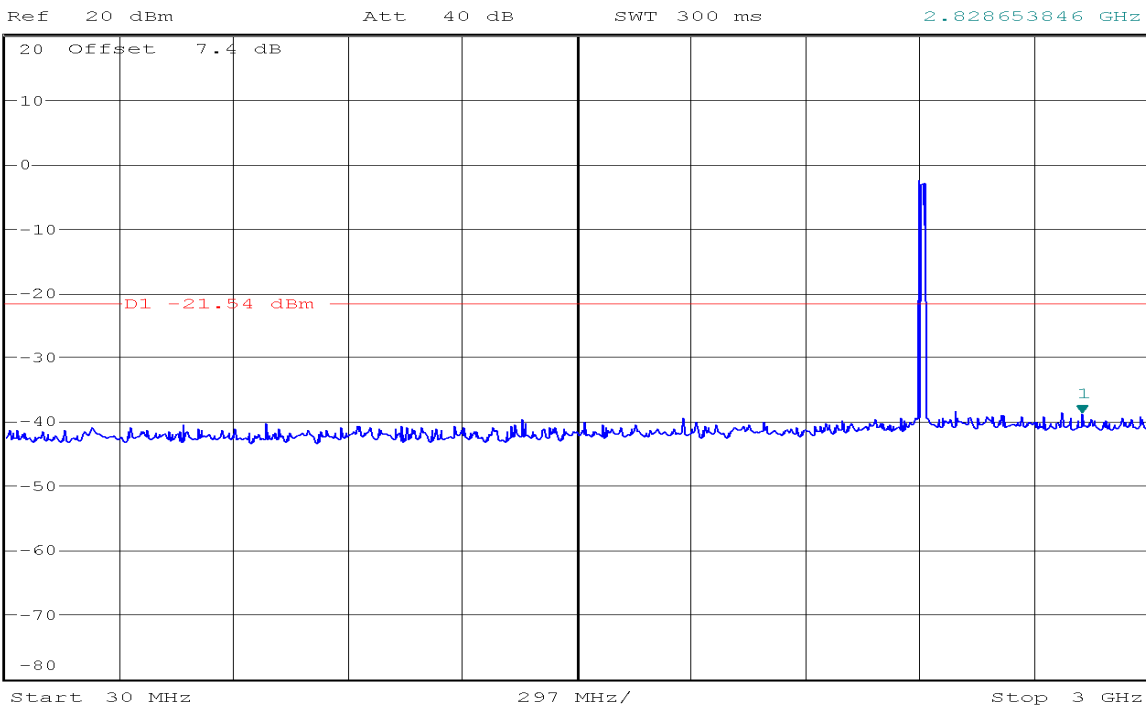




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -39.03 dBm  
 SWT 2.3 s      22.235576923 GHz

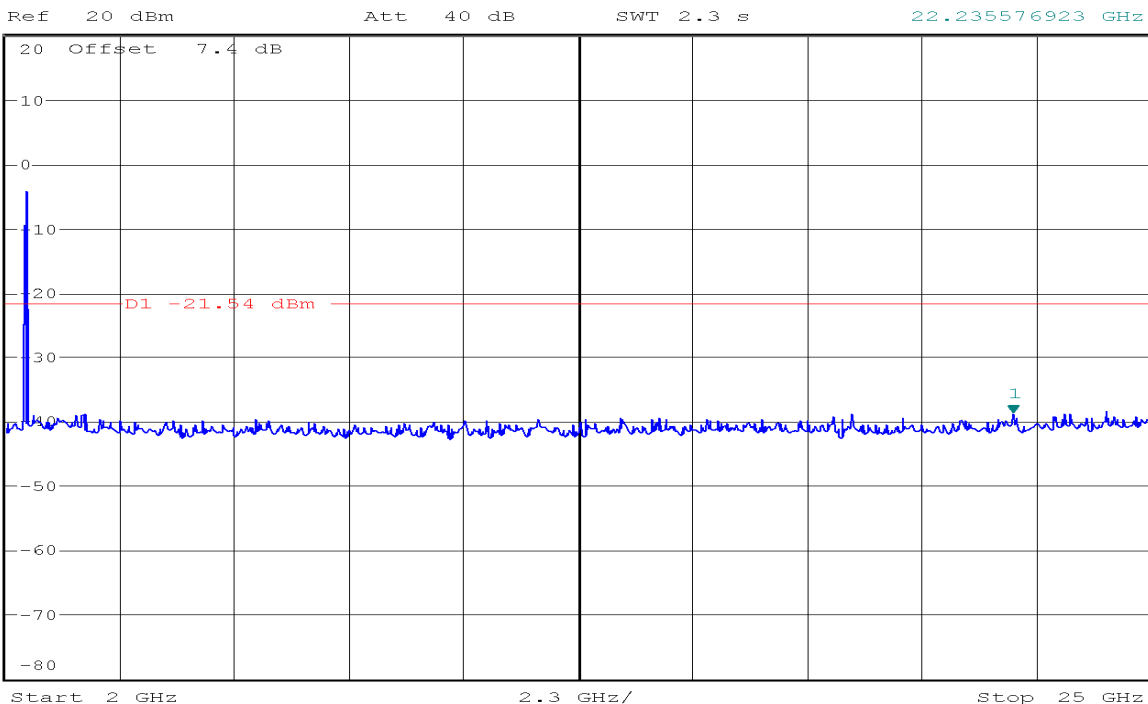

**CH Mid**




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -0.42 dBm  
 SWT 10 ms      2.438258510 GHz

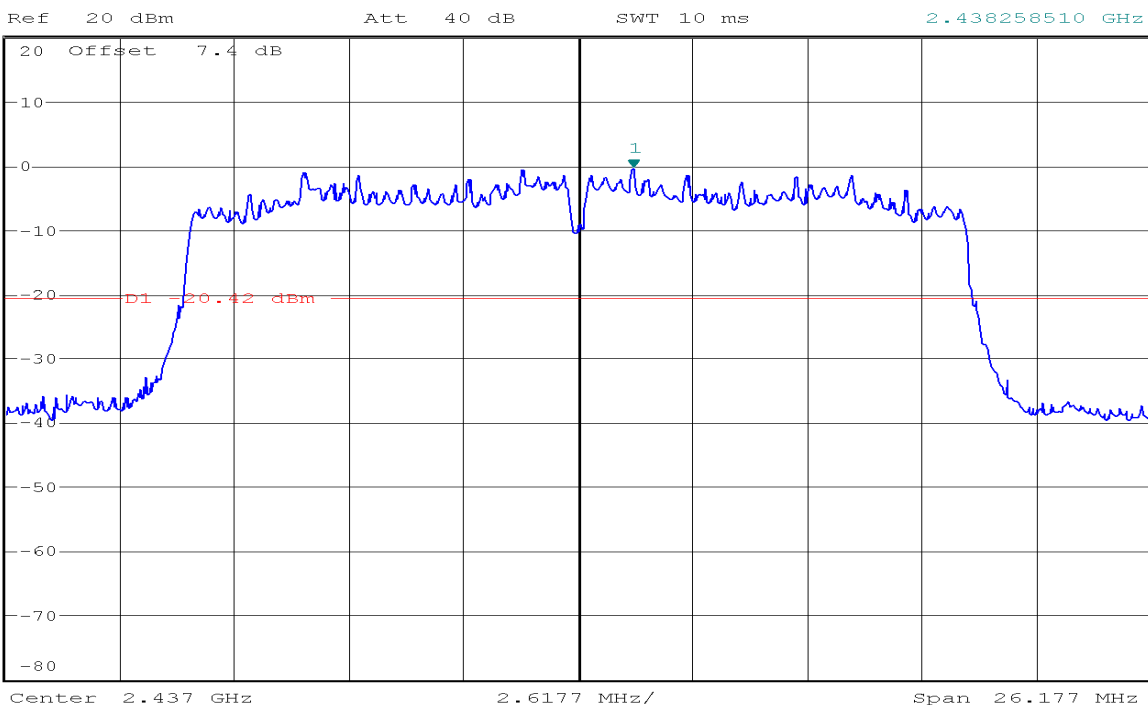




\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -38.69 dBm  
SWT 300 ms      2.823894231 GHz

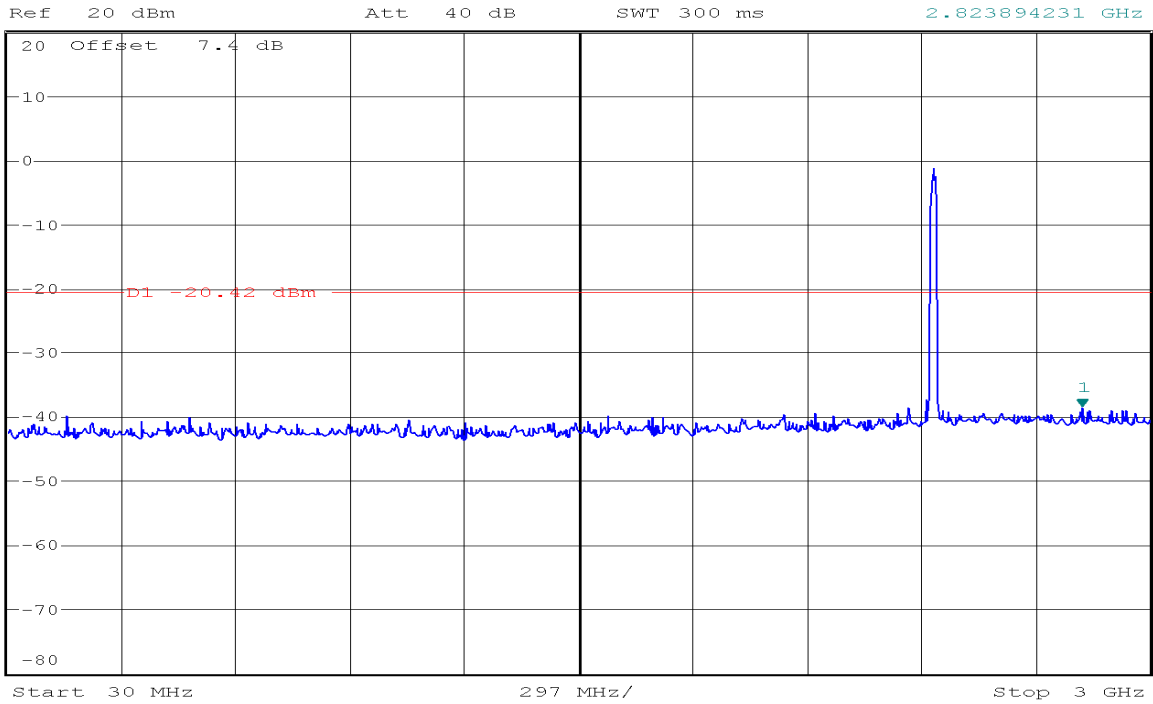


\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -37.64 dBm  
SWT 2.3 s      24.078525641 GHz

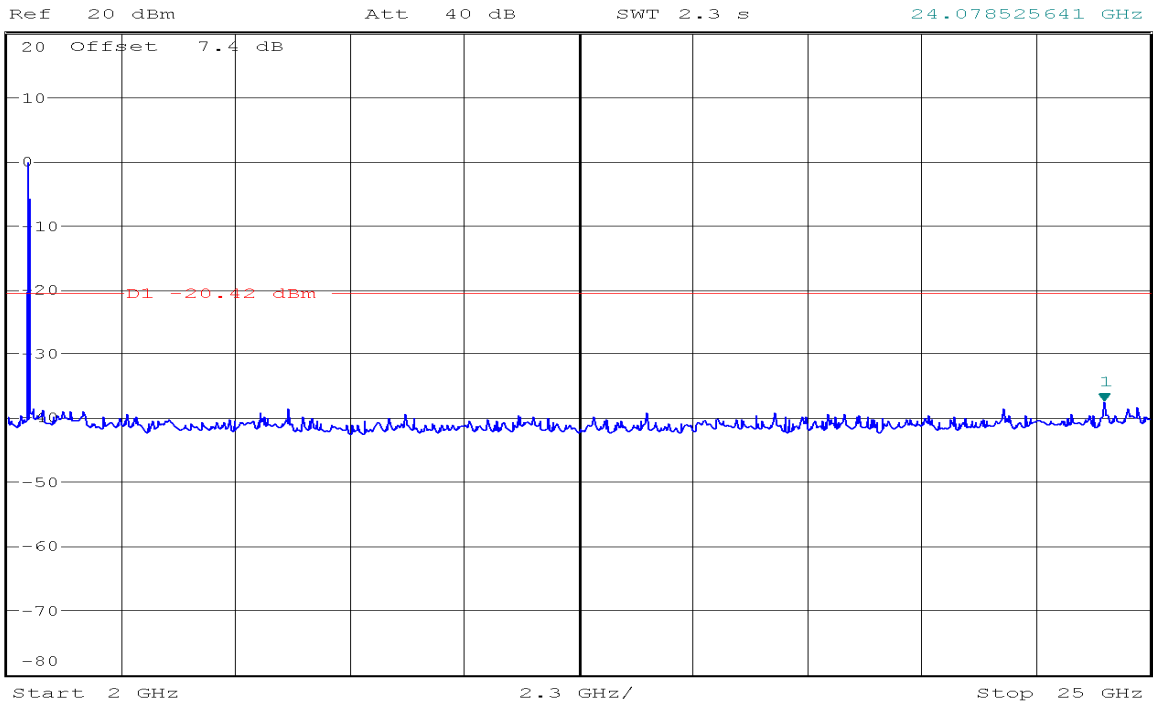


## CH High



Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 1 [T1] -2.03 dBm  
\* VBW 300 kHz 2.463258510 GHz  
SWT 10 ms

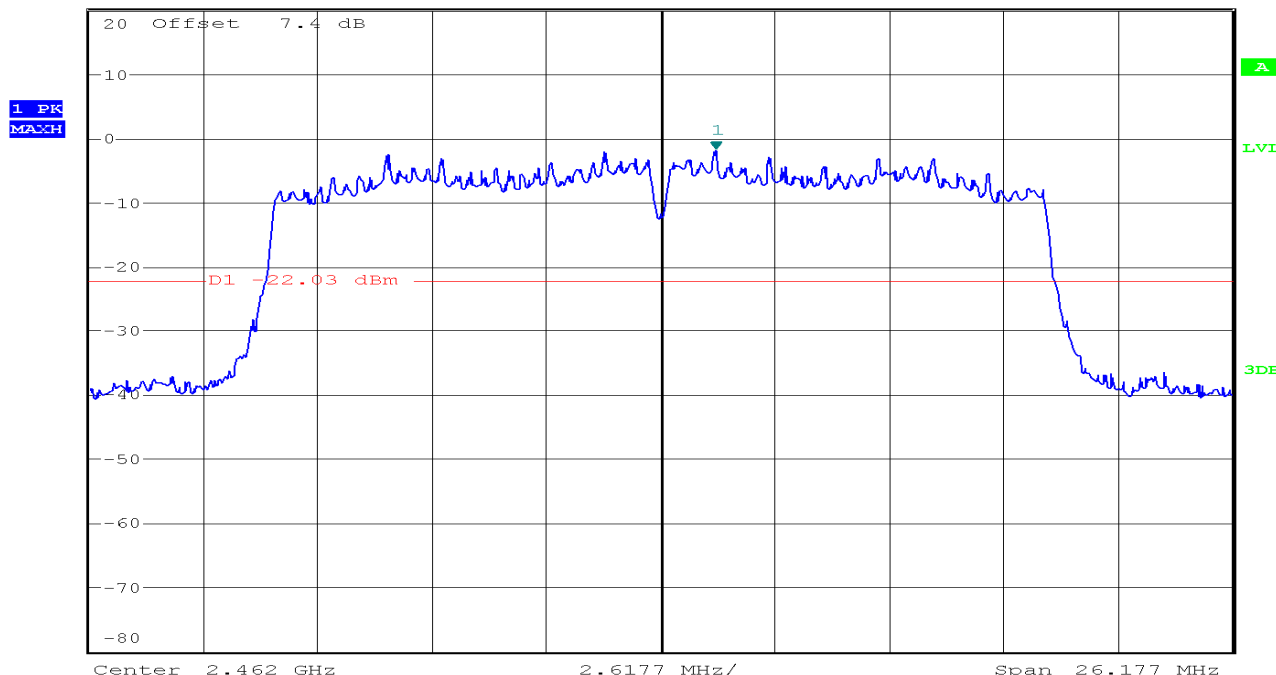


Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 2 [T1] -37.67 dBm  
\* VBW 300 kHz 2.500961538 GHz  
SWT 15 ms

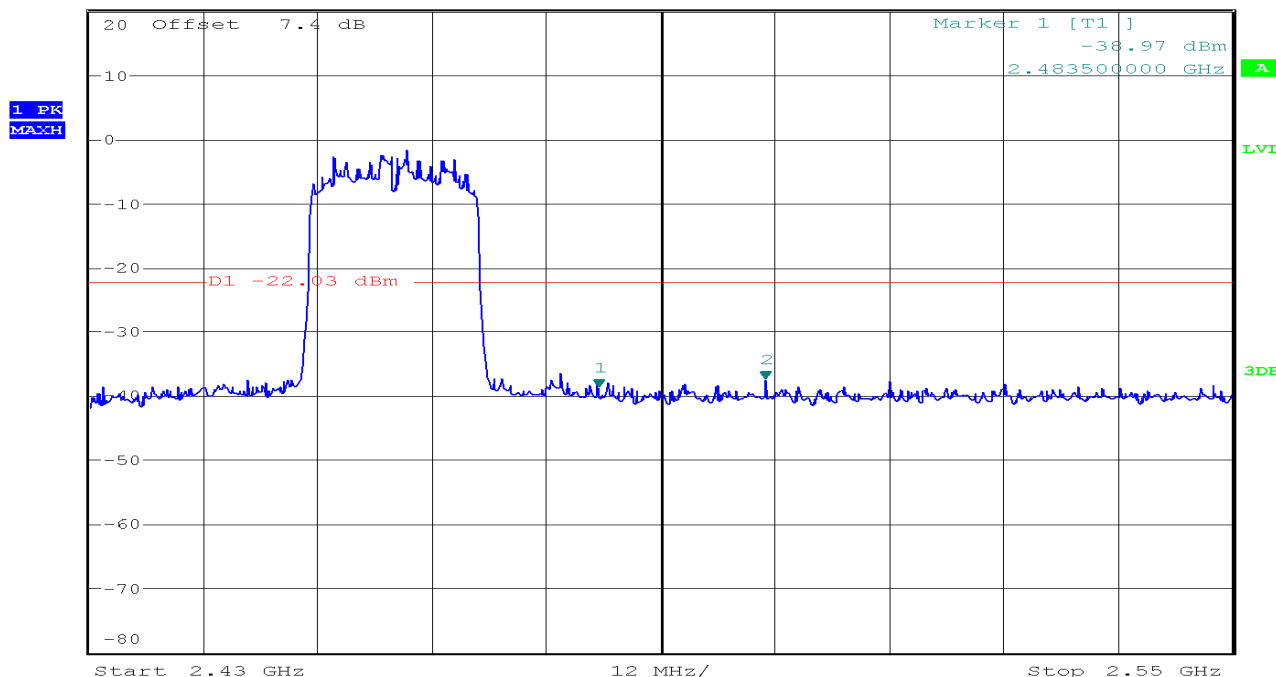




\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -38.91 dBm  
SWT 300 ms      2.952403846 GHz

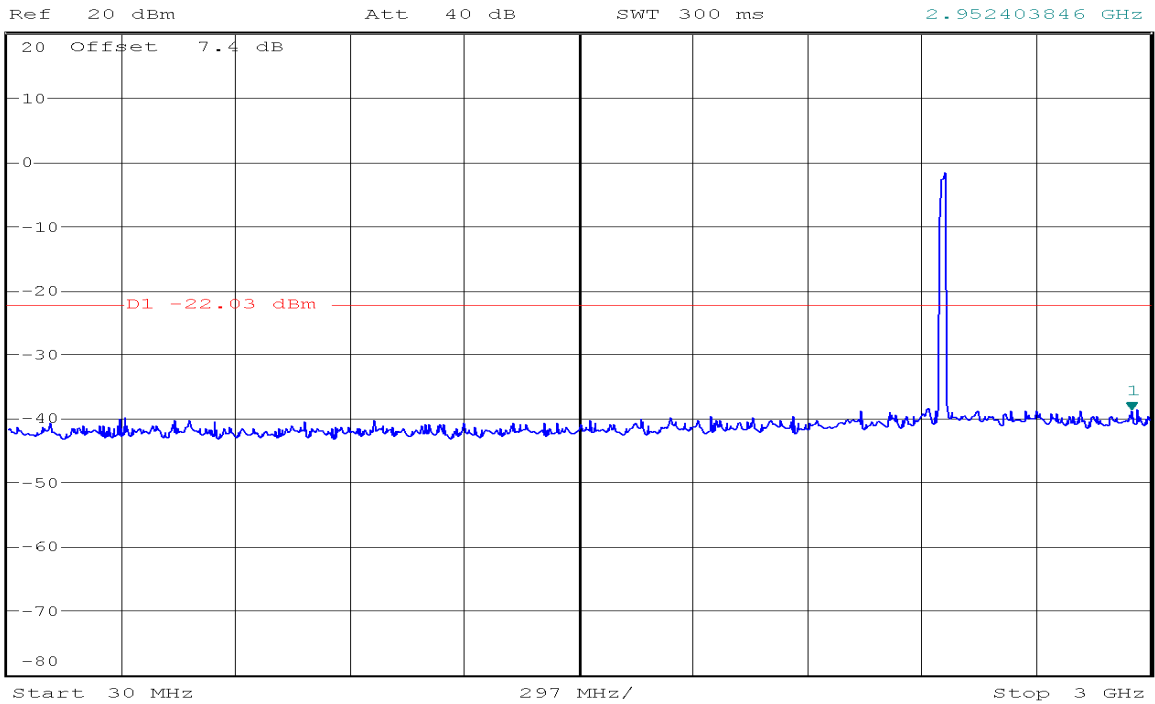

\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -39.12 dBm  
SWT 2.3 s      12.725961538 GHz

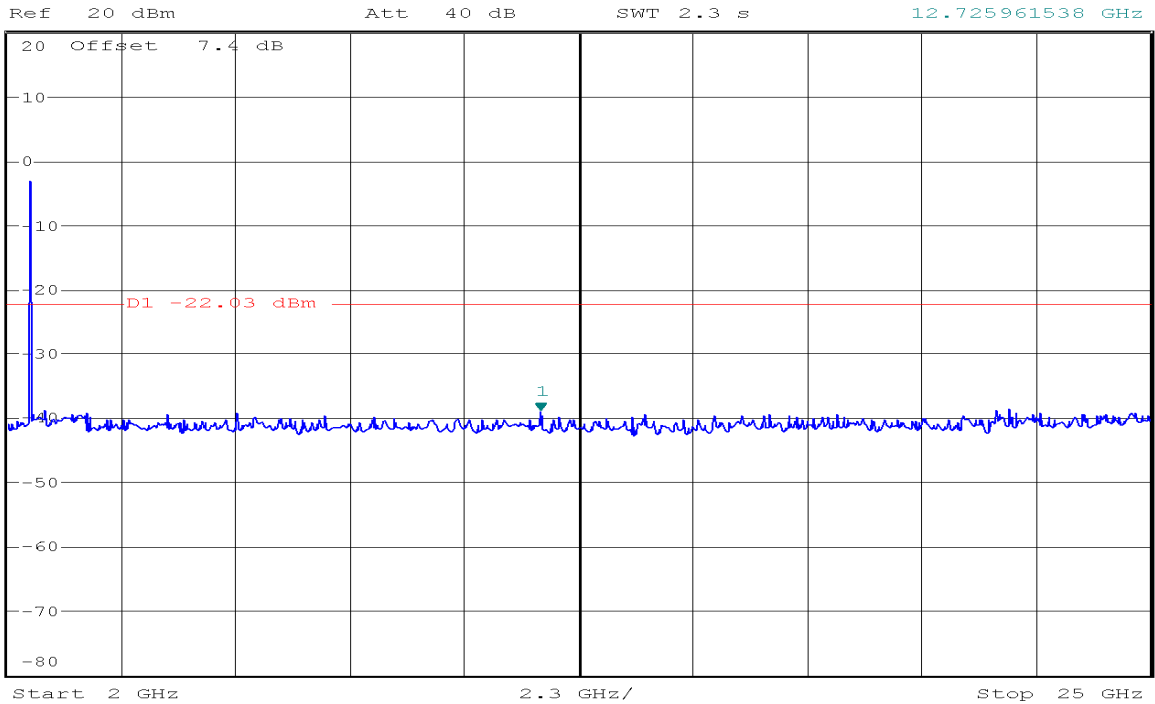


IEEE 802.11n HT40 mode / Chain 0


CH Low



Ref 20 dBm Att 40 dB \*RBW 100 kHz Marker 1 [T1] -5.11 dBm  
 \*VBW 300 kHz 2.419459572 GHz  
 SWT 10 ms

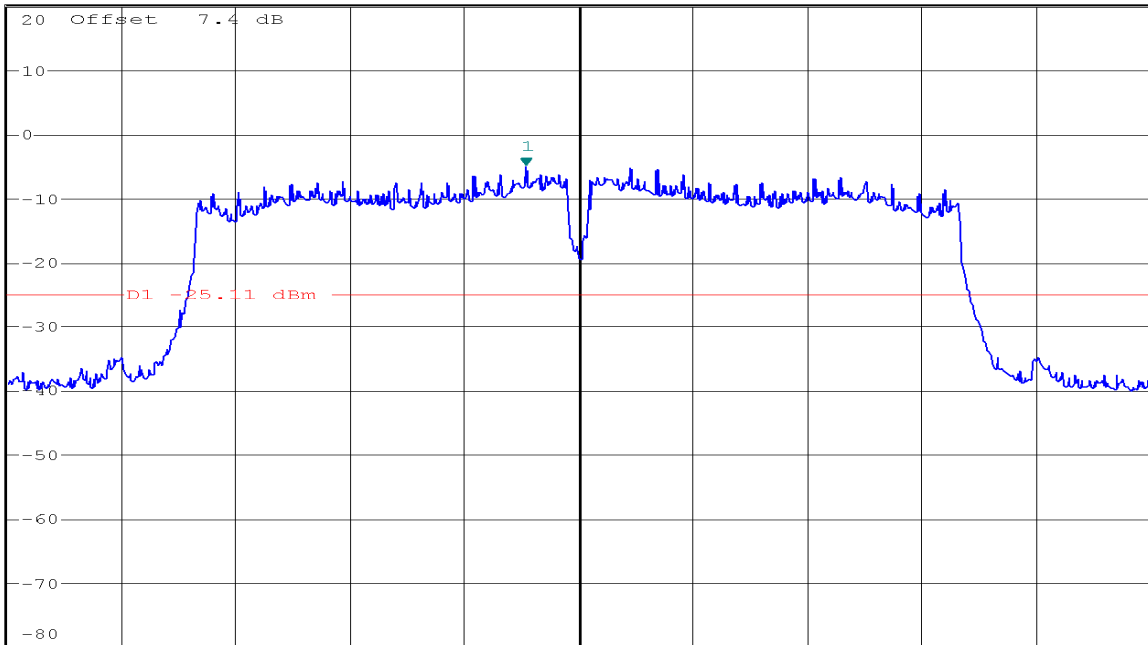


Ref 20 dBm Att 40 dB \*RBW 100 kHz Marker 2 [T1] -35.50 dBm  
 \*VBW 300 kHz 2.398052885 GHz  
 SWT 15 ms

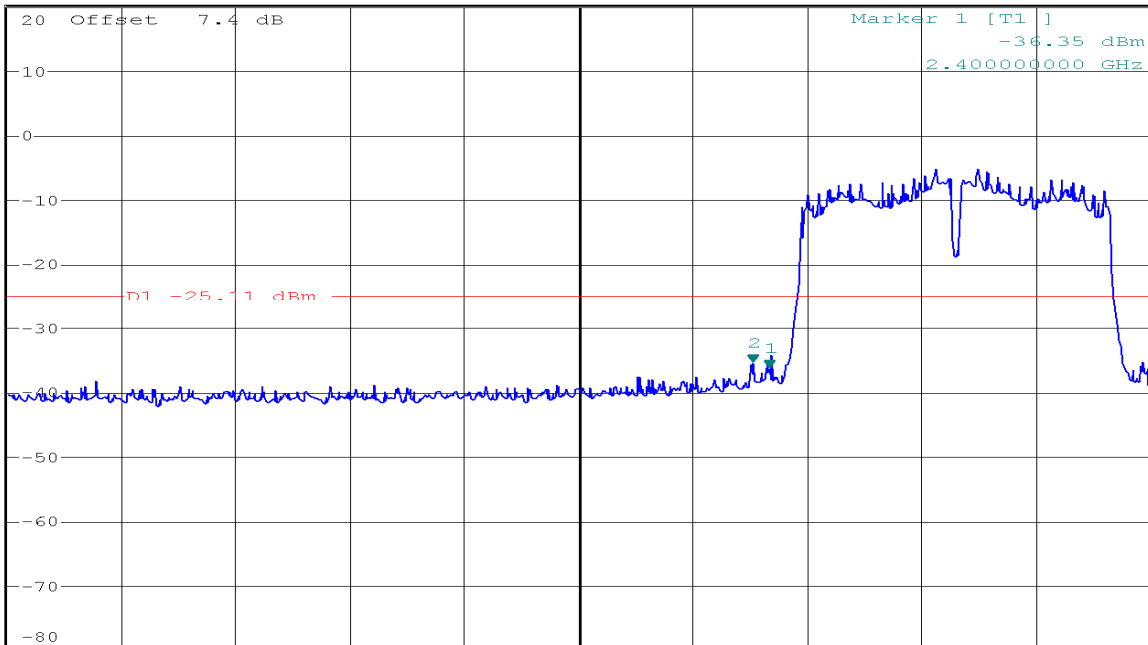




\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -38.97 dBm  
SWT 300 ms      1.415048077 GHz

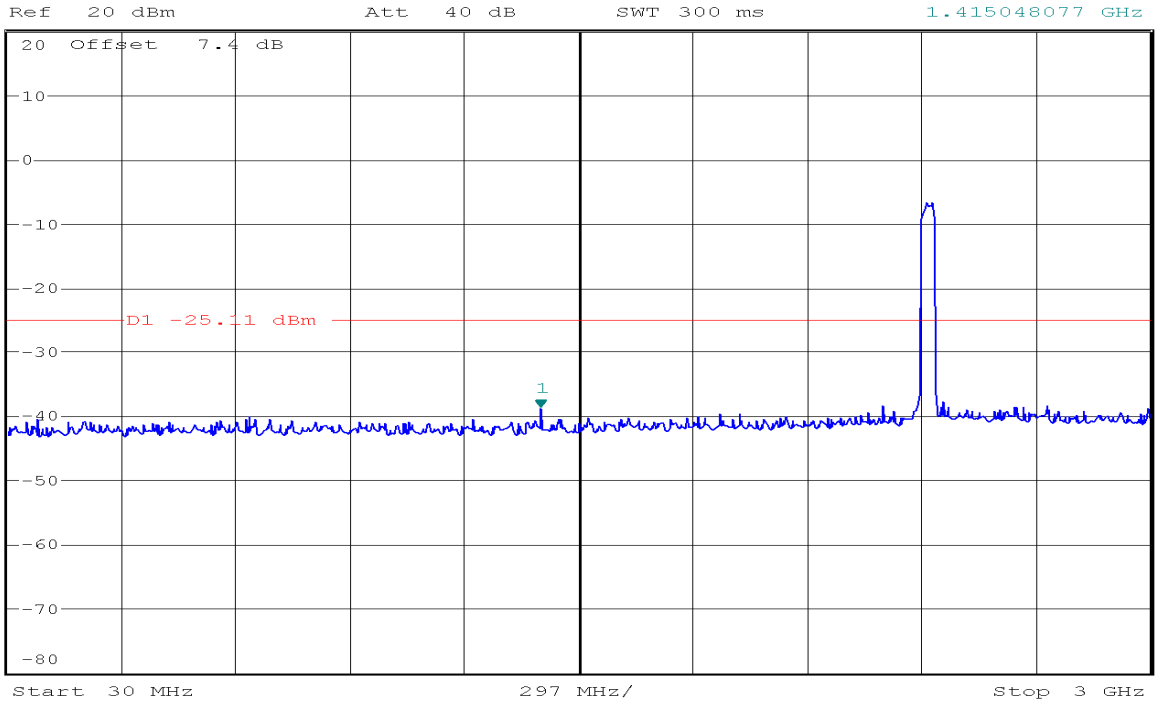


\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 300 kHz      -38.95 dBm  
SWT 2.3 s      5.206730769 GHz

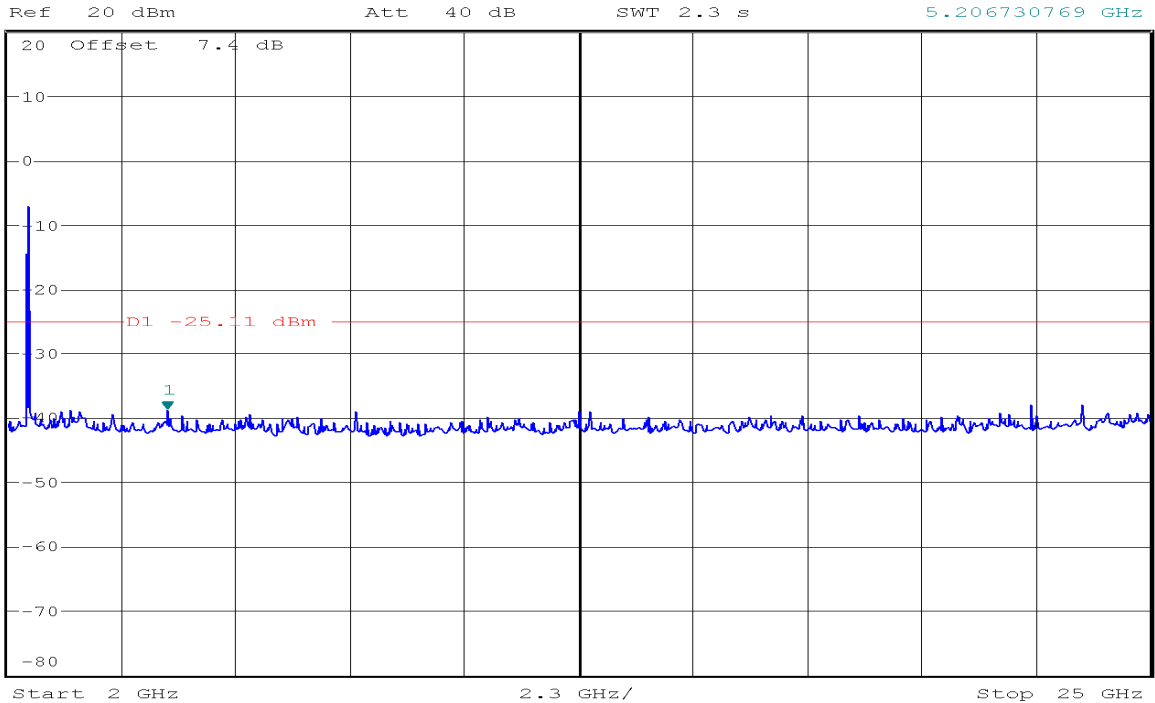


CH Mid



\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -4.21 dBm  
 SWT 10 ms      2.434459572 GHz

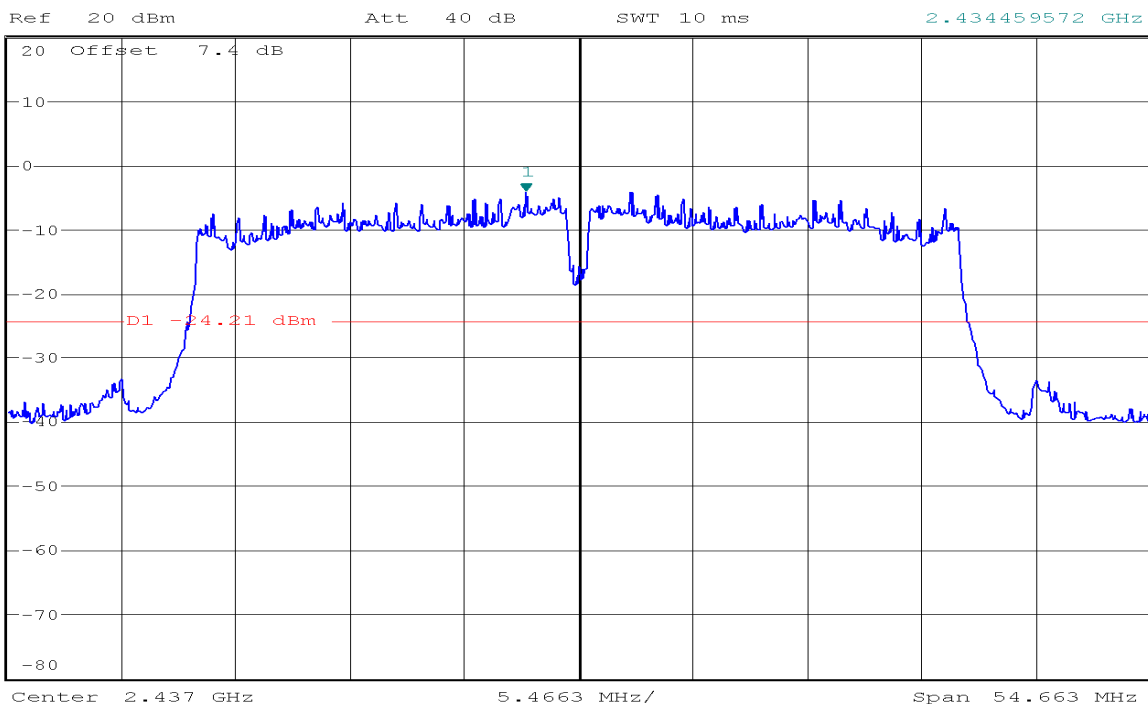


\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.32 dBm  
 SWT 300 ms      2.961923077 GHz

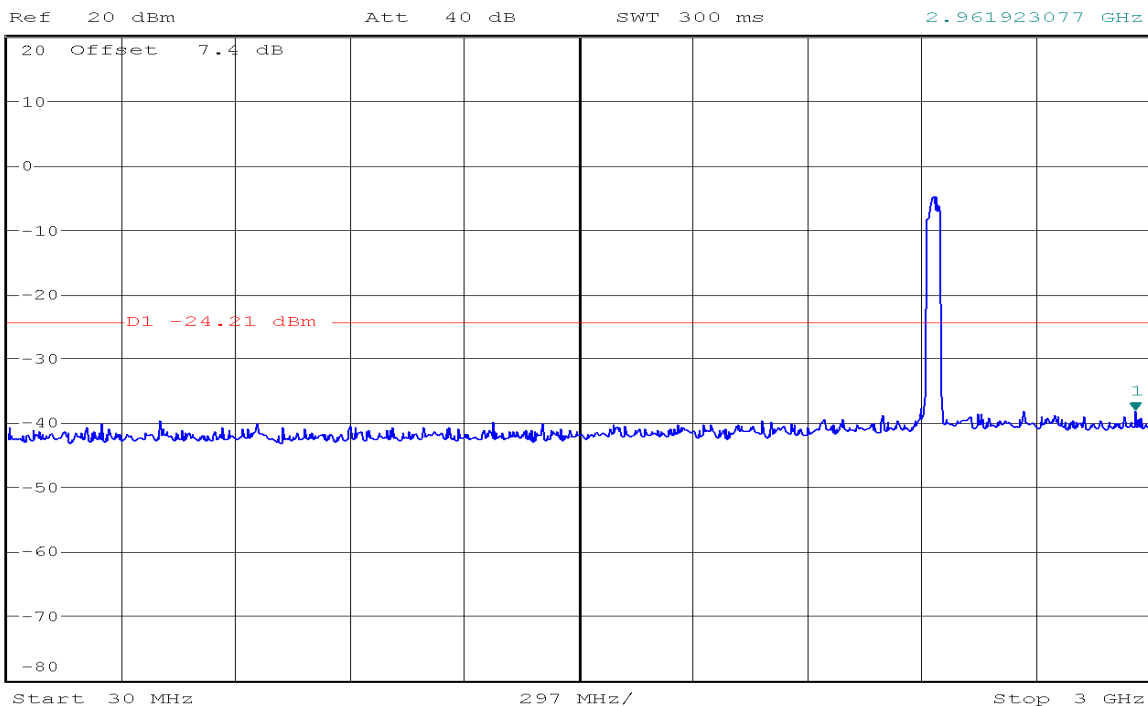






\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.76 dBm  
 SWT 2.3 s      5.538461538 GHz

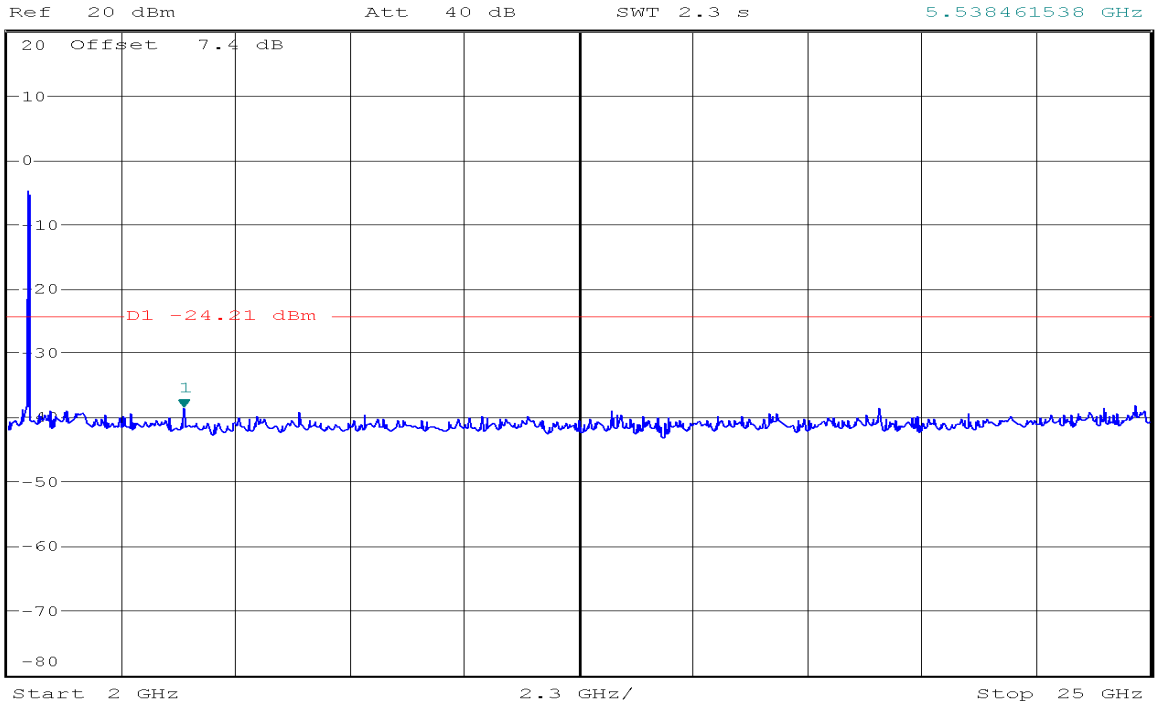

**CH High**



\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -4.35 dBm  
 SWT 10 ms      2.449459572 GHz

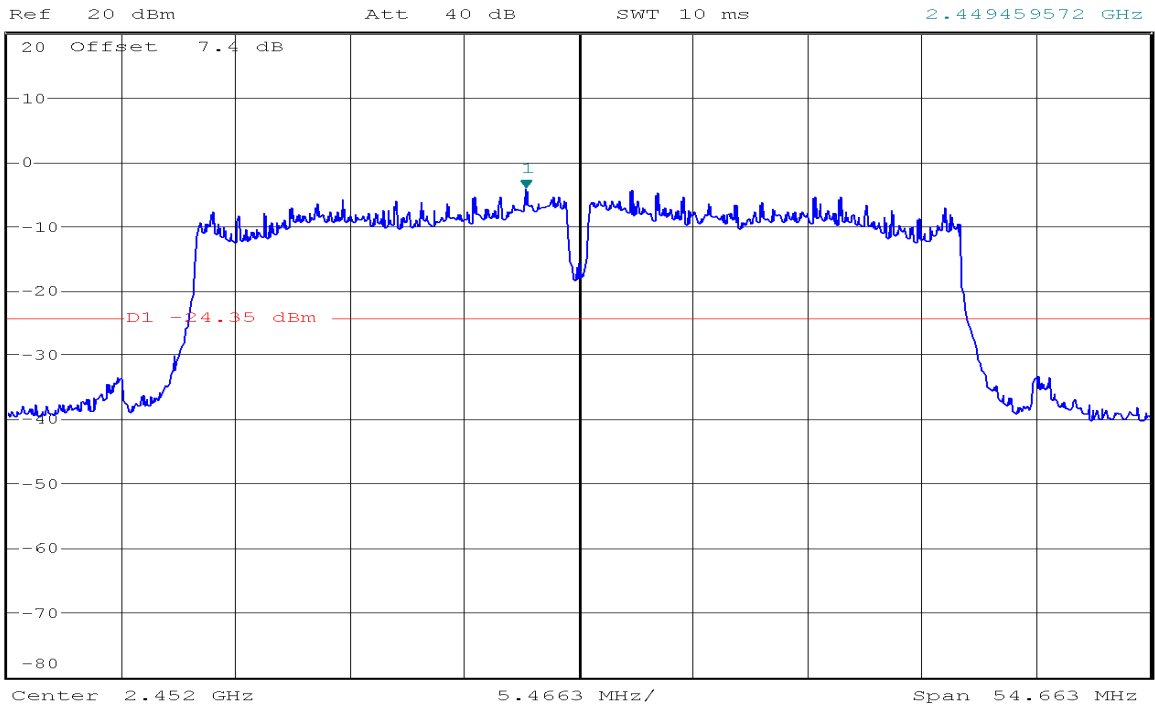




\* RBW 100 kHz      Marker 2 [T1 ]  
 \* VBW 300 kHz      -37.85 dBm  
 SWT 15 ms          2.542115385 GHz

Ref 20 dBm      Att 40 dB


1 PK  
 MATCH

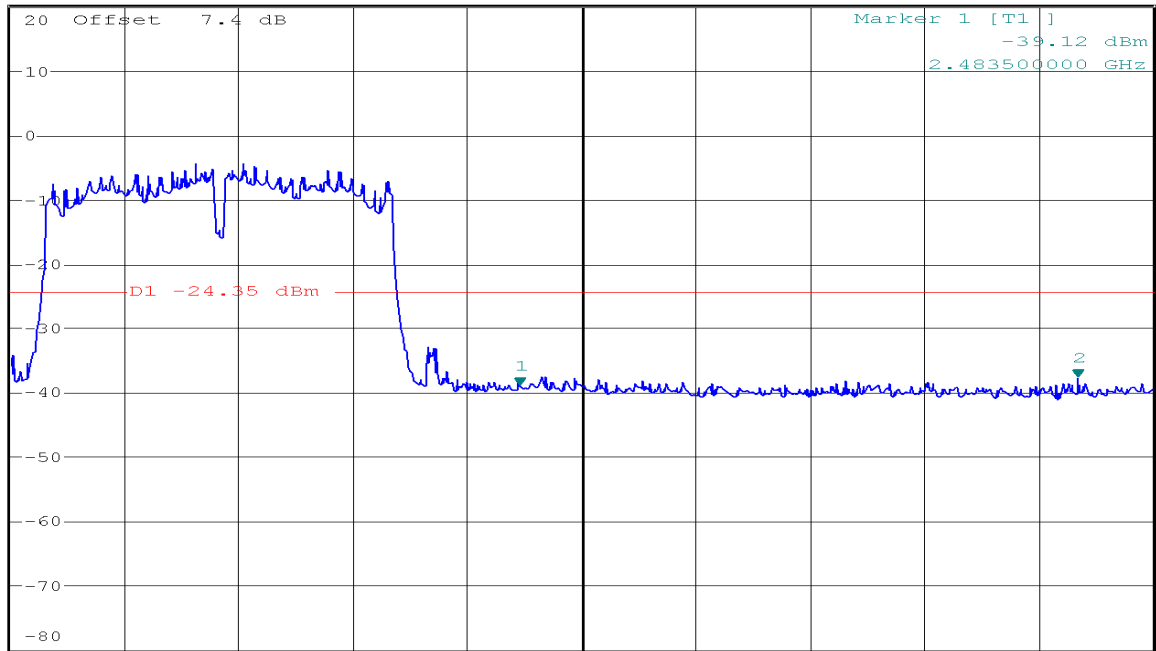

\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.87 dBm  
 SWT 300 ms          2.823894231 GHz


Ref 20 dBm      Att 40 dB

1 PK  
 MATCH

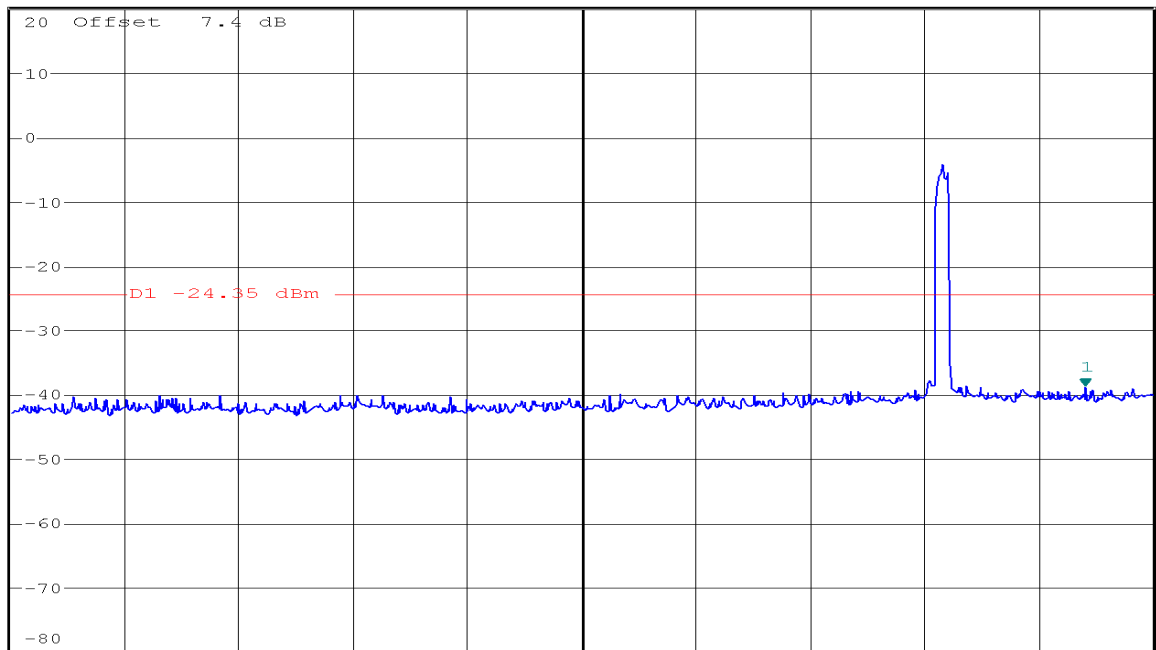



\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -39.23 dBm  
 SWT 2.3 s      5.796474359 GHz

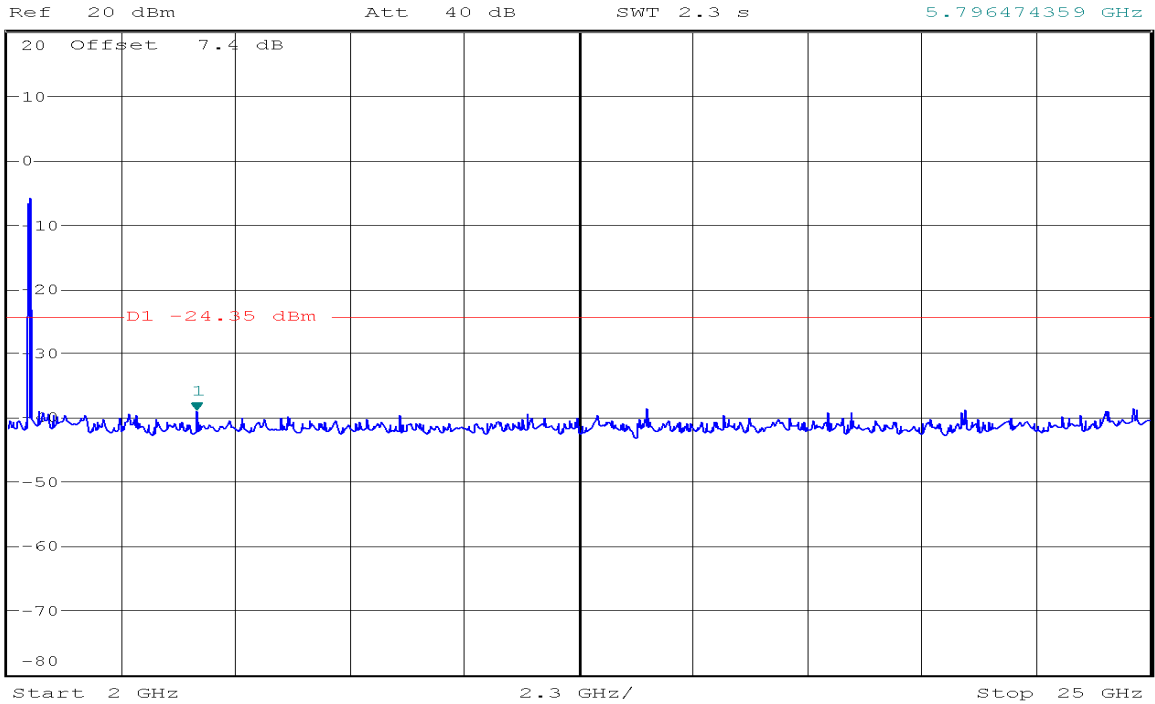


**IEEE 802.11n HT40 mode / Chain 1**

**CH Low**




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -4.35 dBm  
 SWT 10 ms      2.419459572 GHz

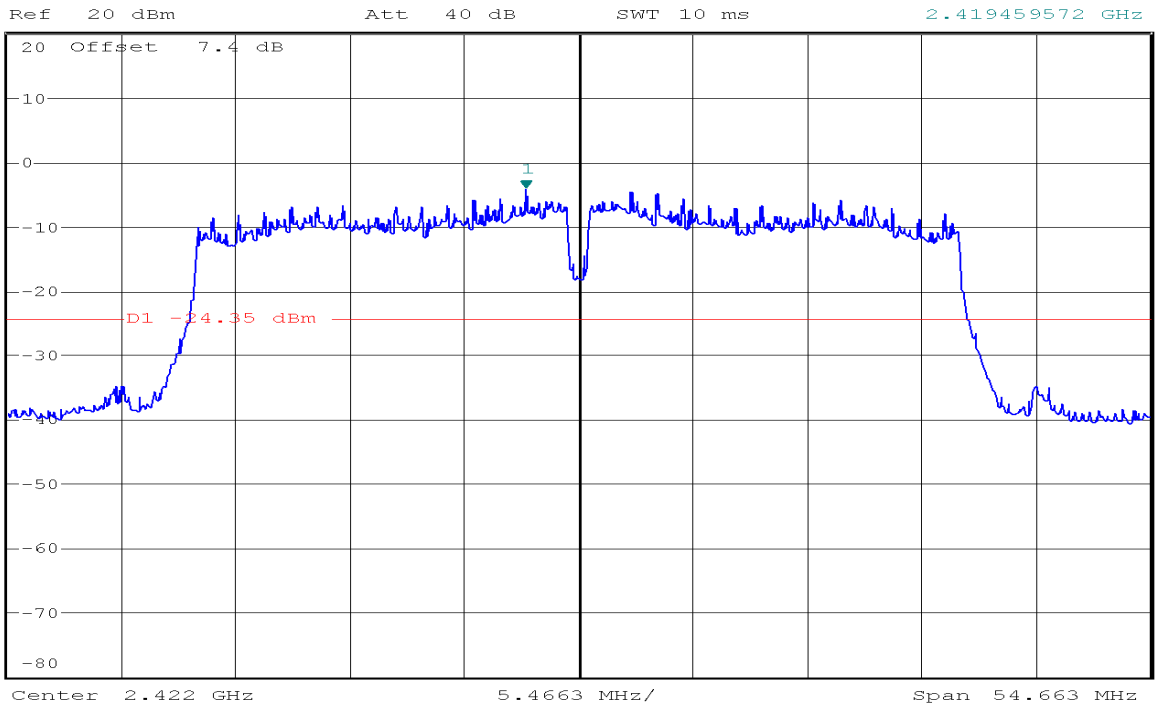




Ref 20 dBm Att 40 dB \*RBW 100 kHz Marker 2 [T1] -38.24 dBm  
 \*VBW 300 kHz 2.335961538 GHz  
 SWT 15 ms

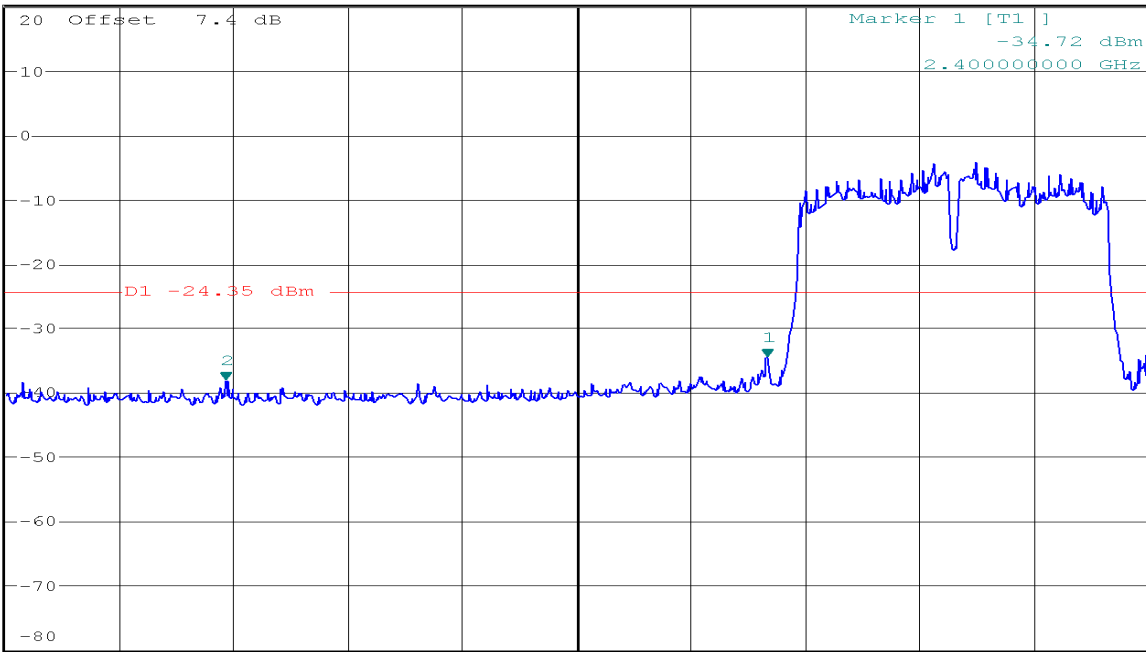


Ref 20 dBm Att 40 dB \*RBW 100 kHz Marker 1 [T1] -38.73 dBm  
 \*VBW 300 kHz 2.257500000 GHz  
 SWT 300 ms

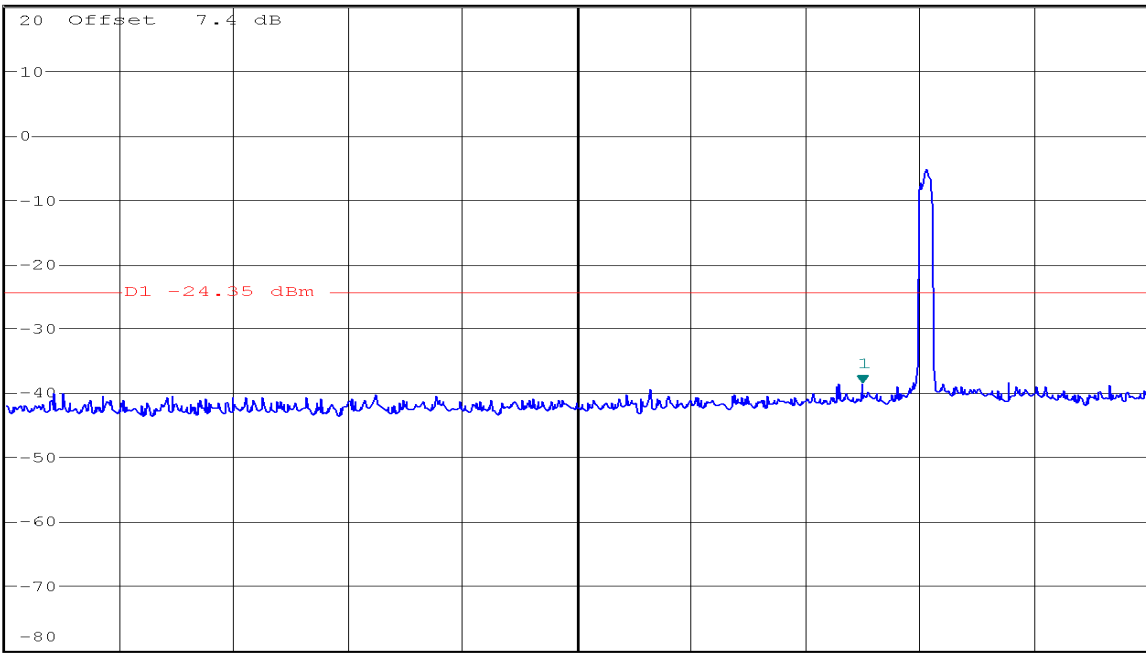




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -37.88 dBm  
 SWT 2.3 s            21.903846154 GHz

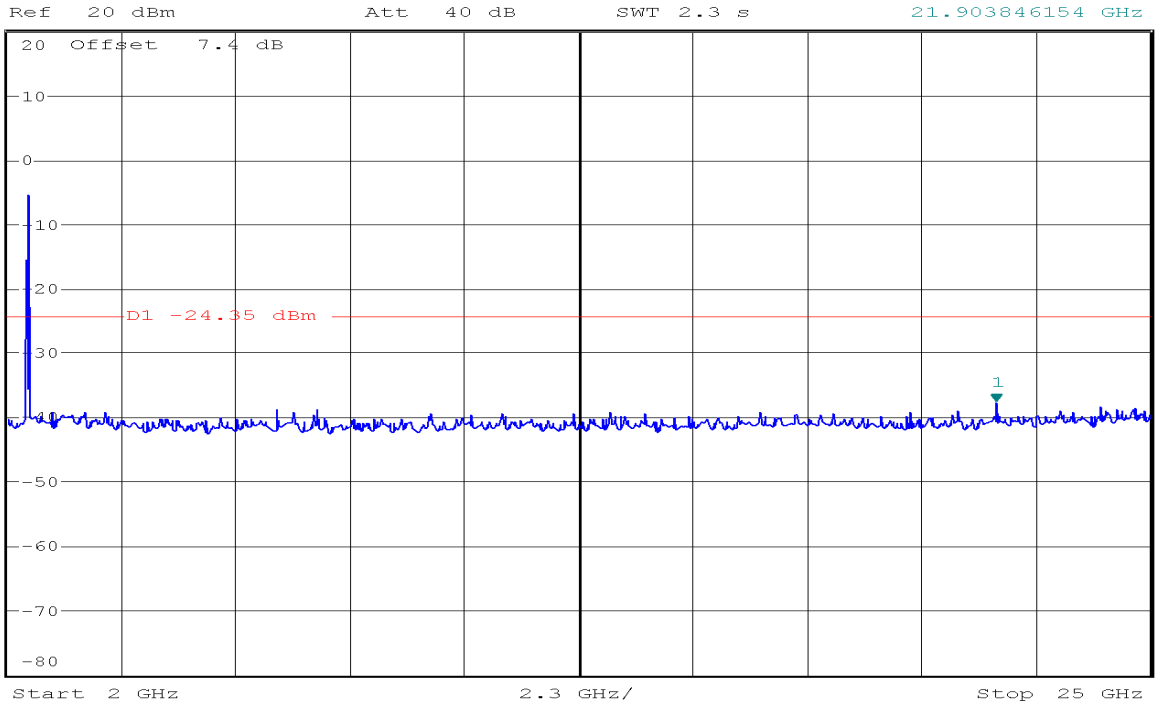

**CH Mid**




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -4.33 dBm  
 SWT 10 ms            2.434459572 GHz

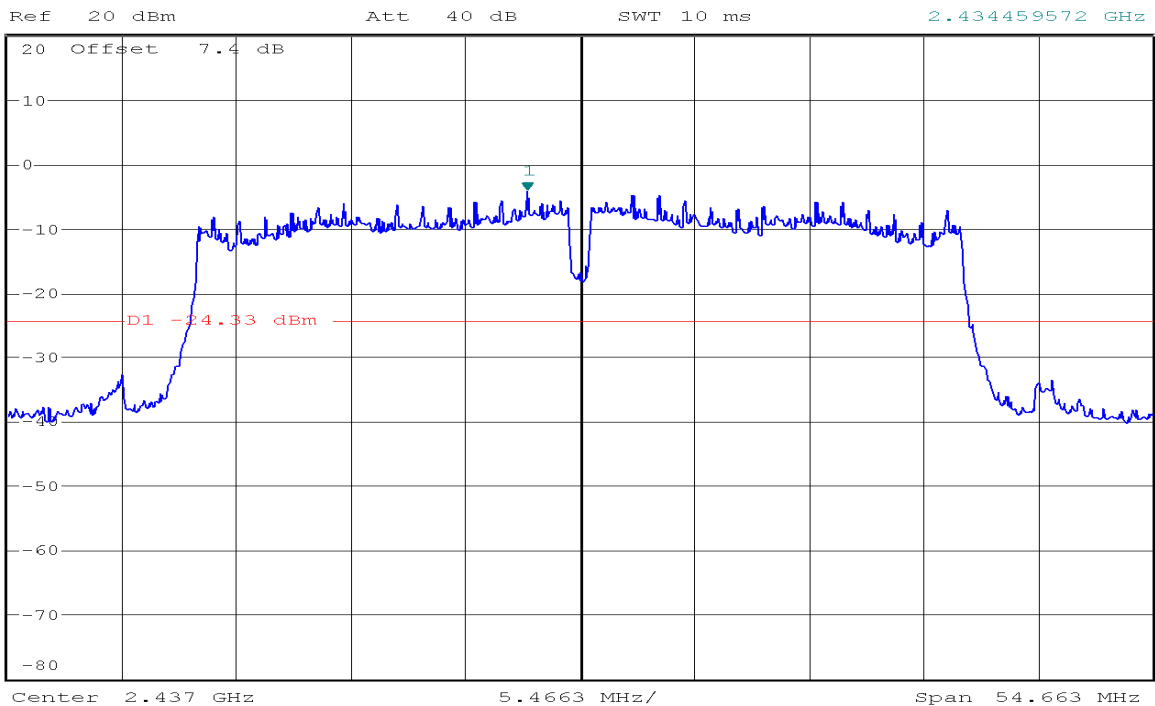




\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -39.32 dBm  
 SWT 300 ms      2.224182692 GHz

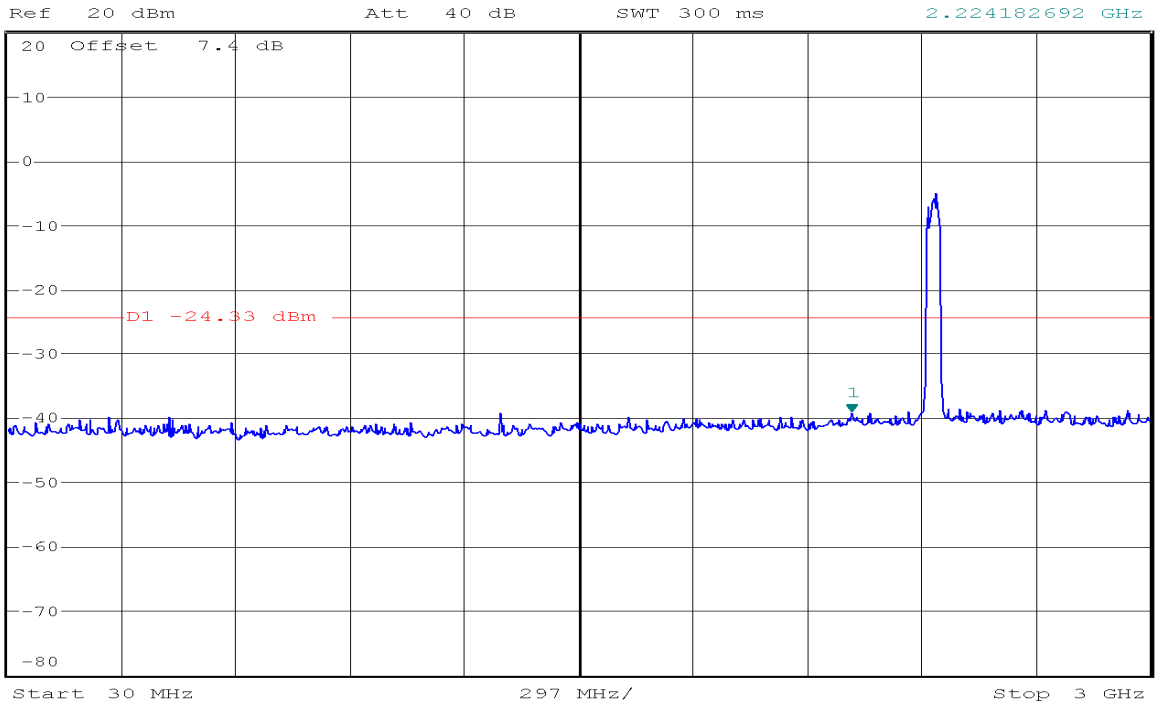


\* RBW 100 kHz      Marker 1 [T1 ]  
 \* VBW 300 kHz      -38.79 dBm  
 SWT 2.3 s      21.719551282 GHz

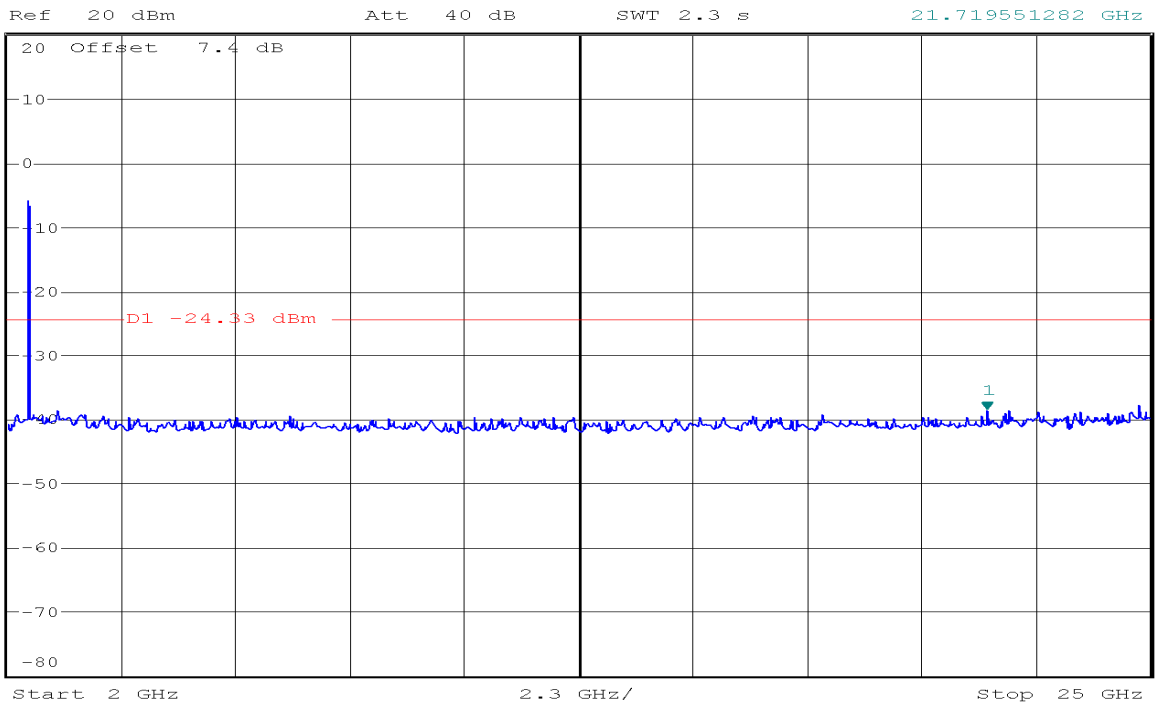


CH High



Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 1 [T1] -4.51 dBm  
 \* VBW 300 kHz 2.449459572 GHz  
 SWT 10 ms

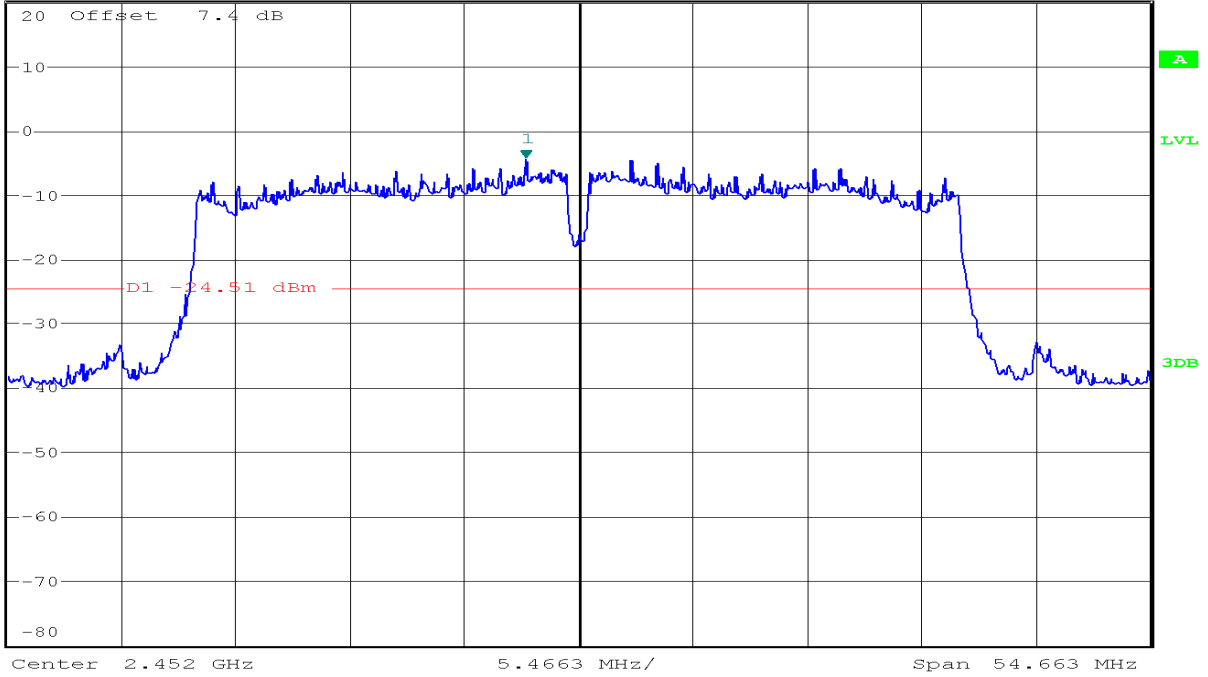


Ref 20 dBm Att 40 dB \* RBW 100 kHz Marker 2 [T1] -38.18 dBm  
 \* VBW 300 kHz 2.497884615 GHz  
 SWT 15 ms

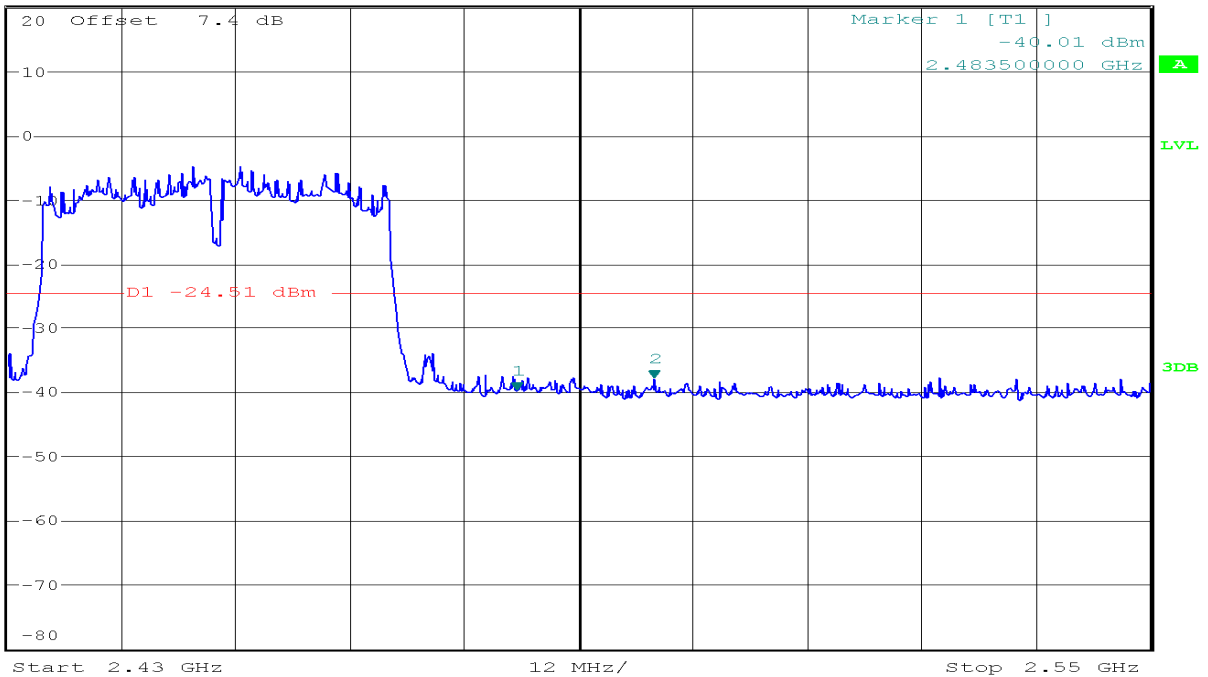




\* RBW 100 kHz  
\* VBW 300 kHz  
SWT 300 ms

Marker 1 [T1 ]  
-38.78 dBm  
2.804855769 GHz

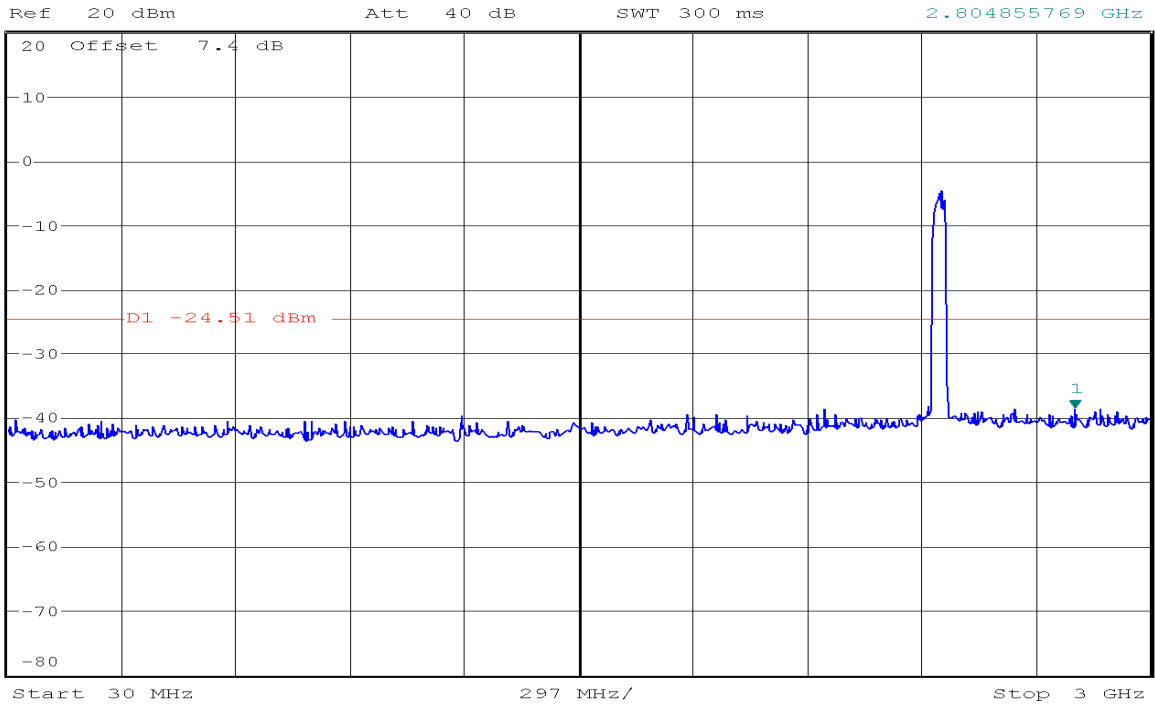

\* RBW 100 kHz  
\* VBW 300 kHz  
SWT 2.3 s

Marker 1 [T1 ]  
-38.68 dBm  
24.004807692 GHz

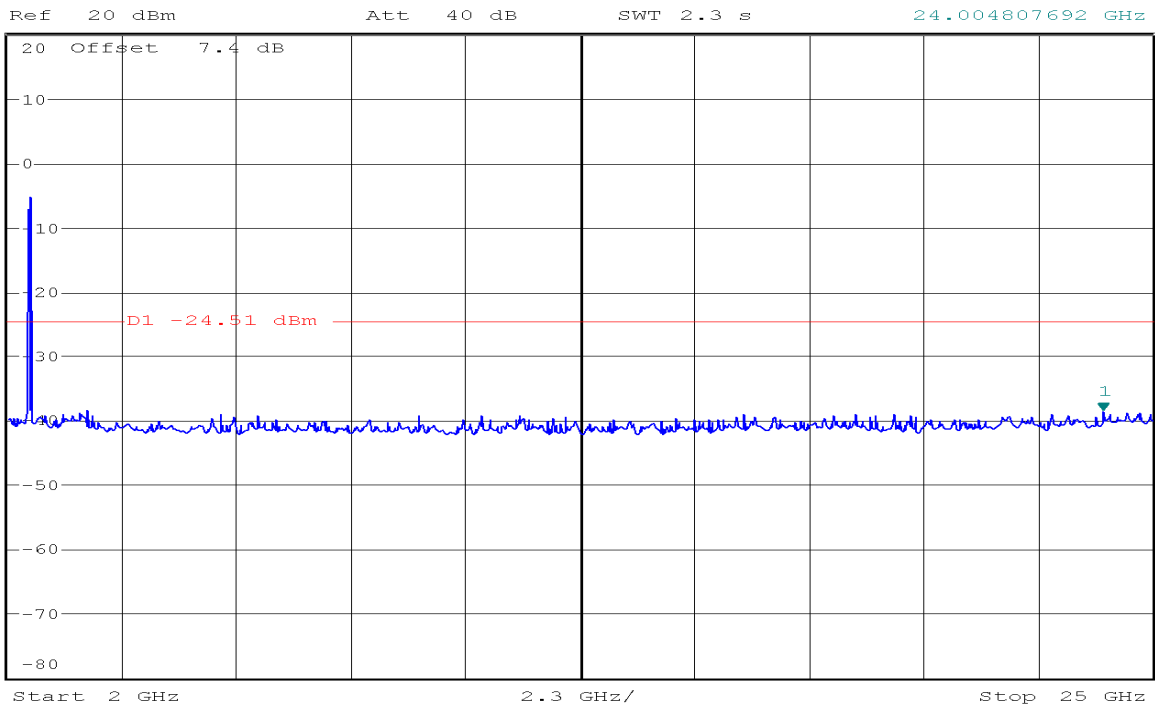



## 7.5.RADIATED EMISSIONS

### LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2009. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:



FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Test Configuration

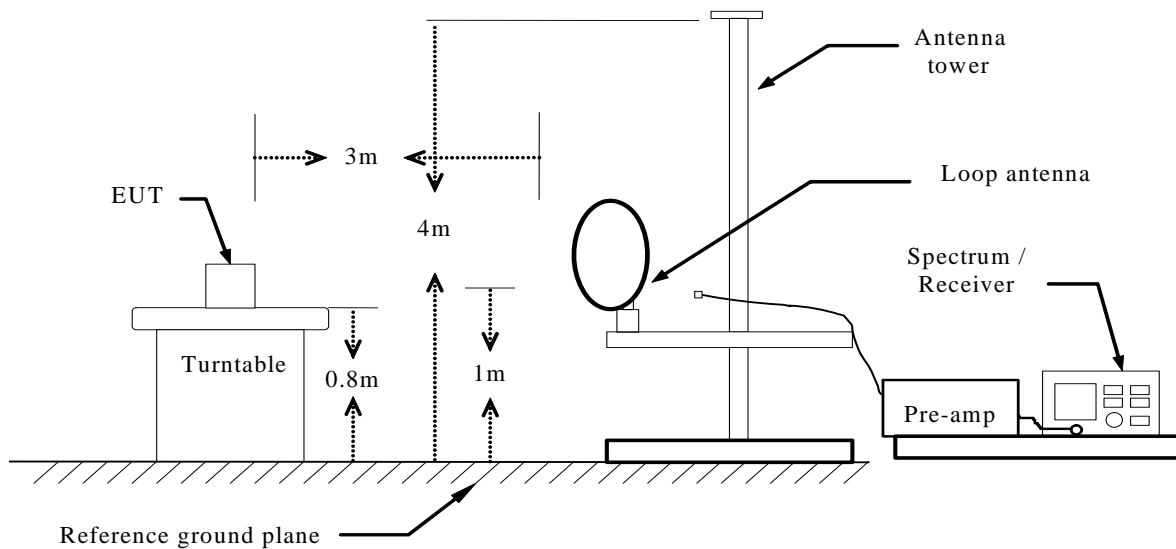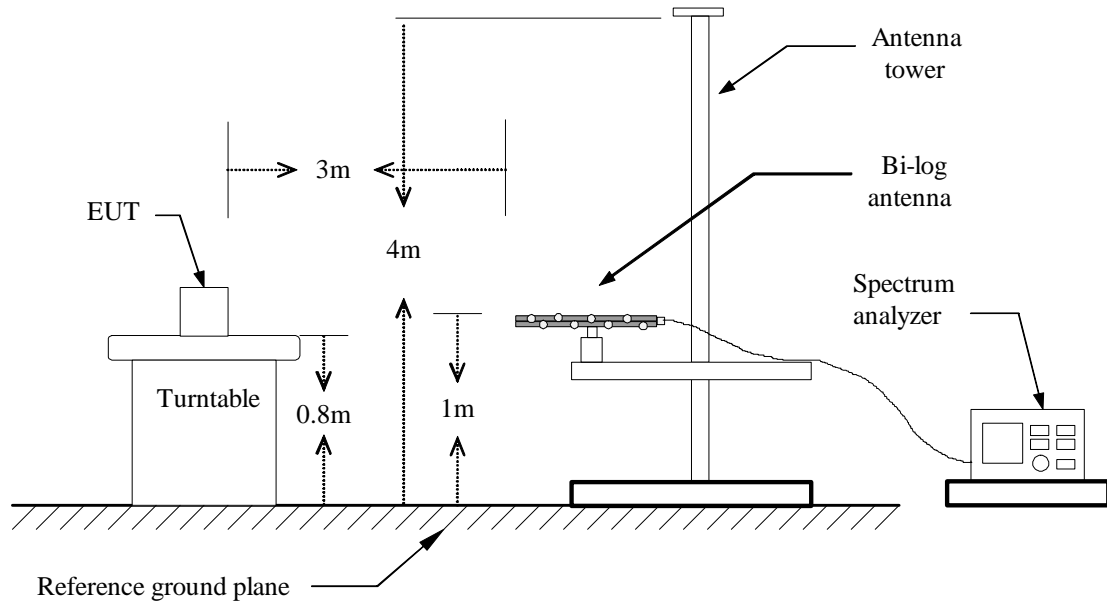**Below 30MHz****Below 1 GHz**

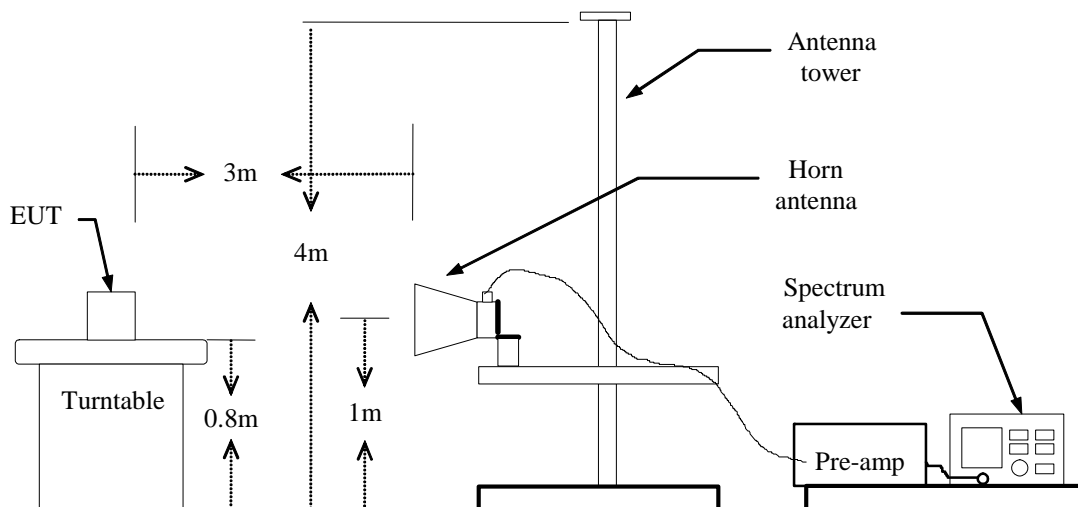**Above 1 GHz****TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


PEAK: RBW=VBW=1MHz / Sweep=AUTO

AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.


**TEST RESULTS**

**RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)**

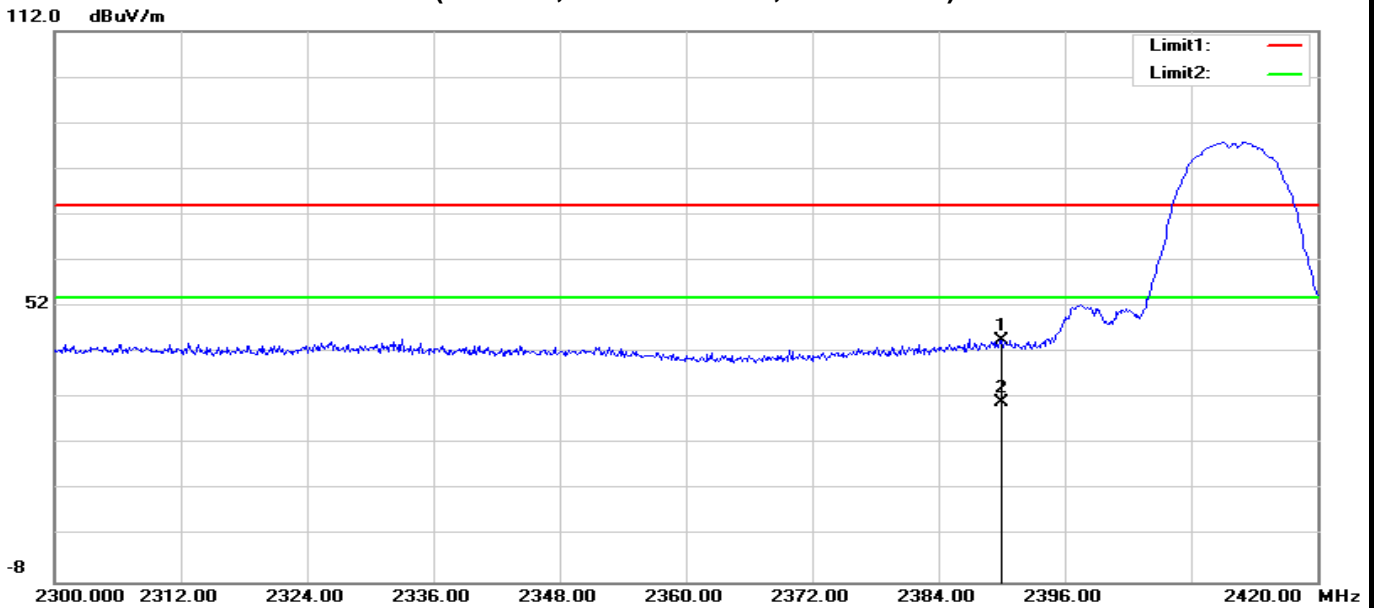

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	45.82	-1.27	44.55	74.00	-29.45	100	216	peak
2	2390.000	32.36	-1.27	31.09	54.00	-22.91	100	216	AVG


**RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)**

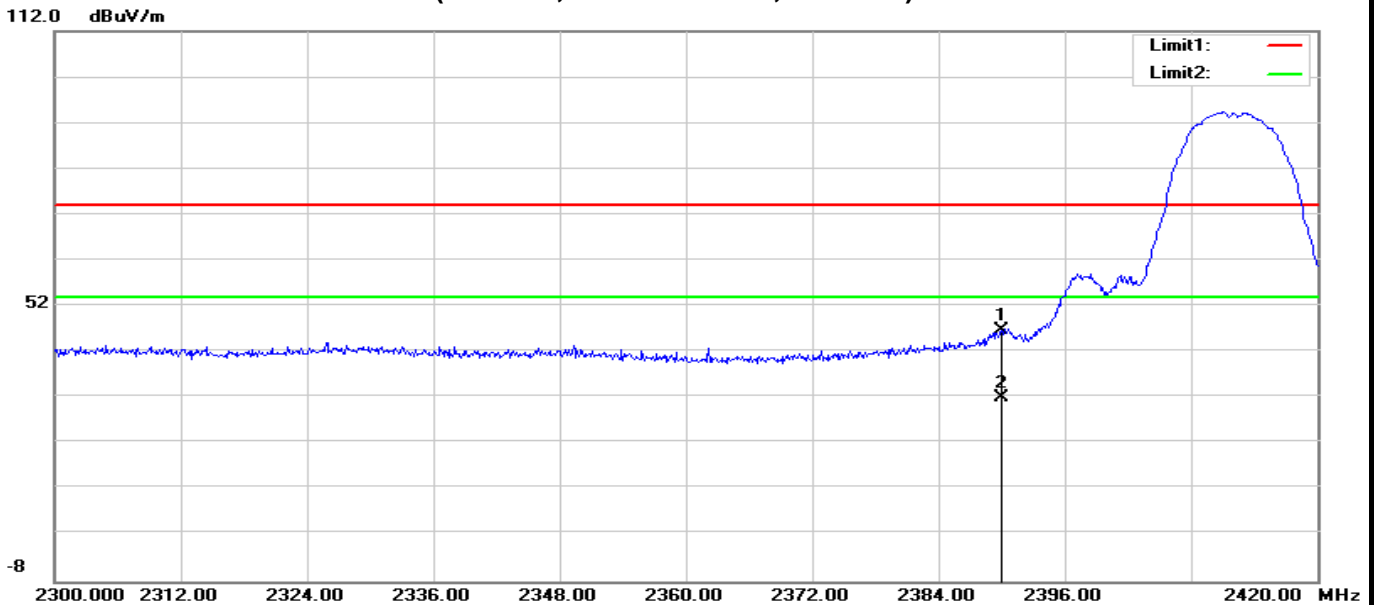

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	48.04	-1.27	46.77	74.00	-27.23	100	217	peak
2	2390.000	33.41	-1.27	32.14	54.00	-21.86	100	217	AVG

**RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)**


112.0 dBuV/m

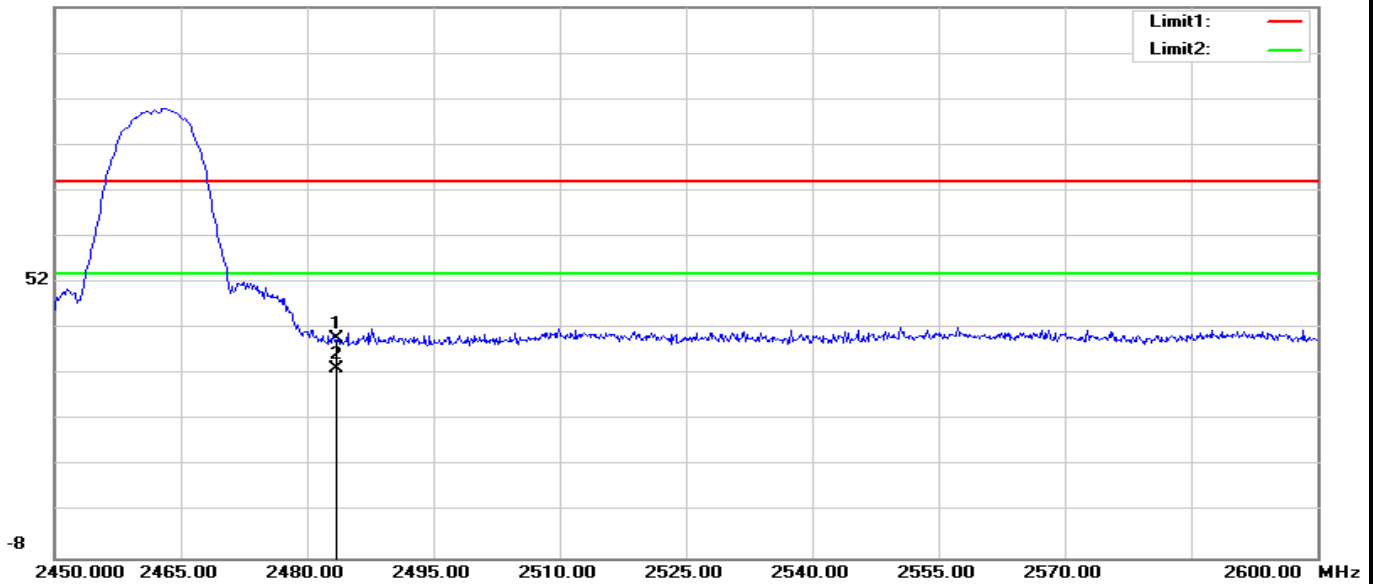

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	40.75	-0.95	39.80	74.00	-34.20	100	220	peak
2	2483.500	34.16	-0.95	33.21	54.00	-20.79	100	220	AVG

**RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)**


112.0 dBuV/m

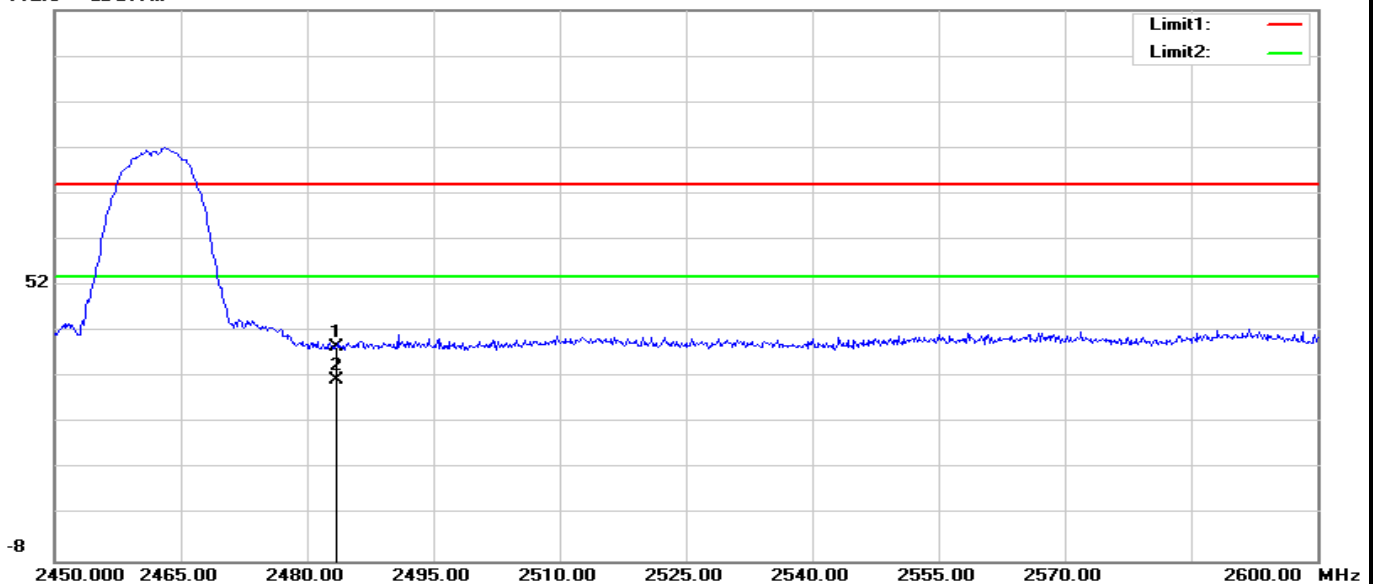

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	39.73	-0.95	38.78	74.00	-35.22	200	0	peak
2	2483.500	32.50	-0.95	31.55	54.00	-22.45	200	0	AVG

**RESTRICTED BANDEDGE (g Mode, Low Channel, Horizontal)**


112.0 dBuV/m

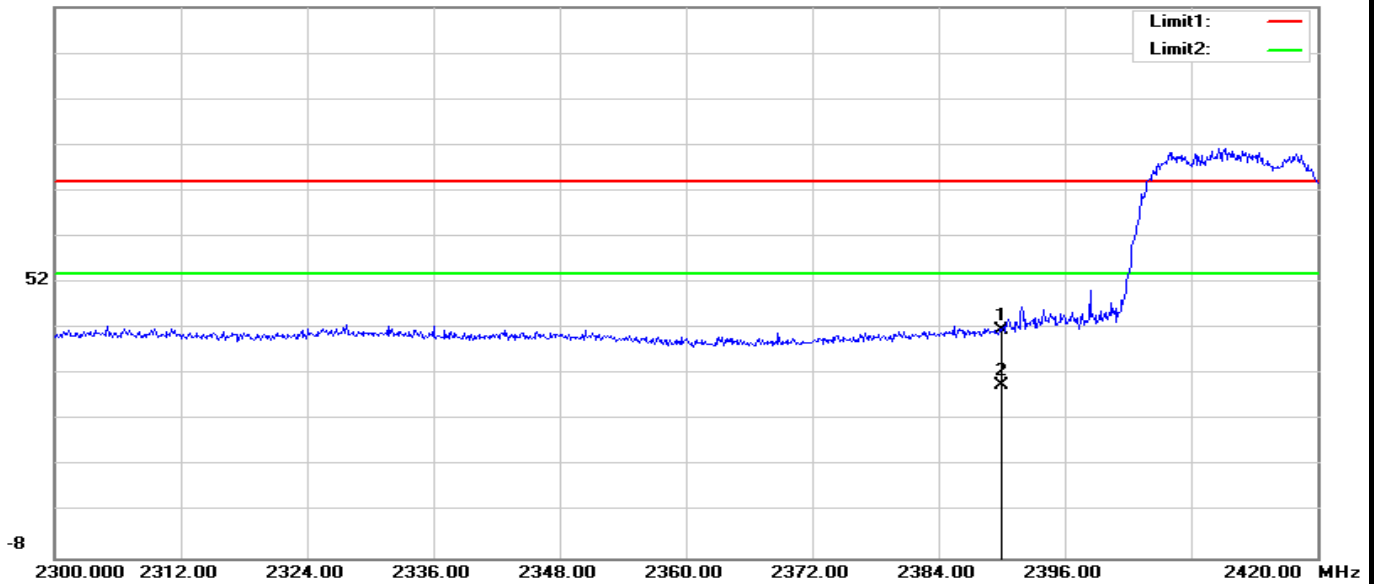

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	42.78	-1.27	41.51	74.00	-32.49	100	77	peak
2	2390.000	30.90	-1.27	29.63	54.00	-24.37	100	77	AVG

**RESTRICTED BANDEDGE (g Mode, Low Channel, Vertical)**


112.0 dBuV/m

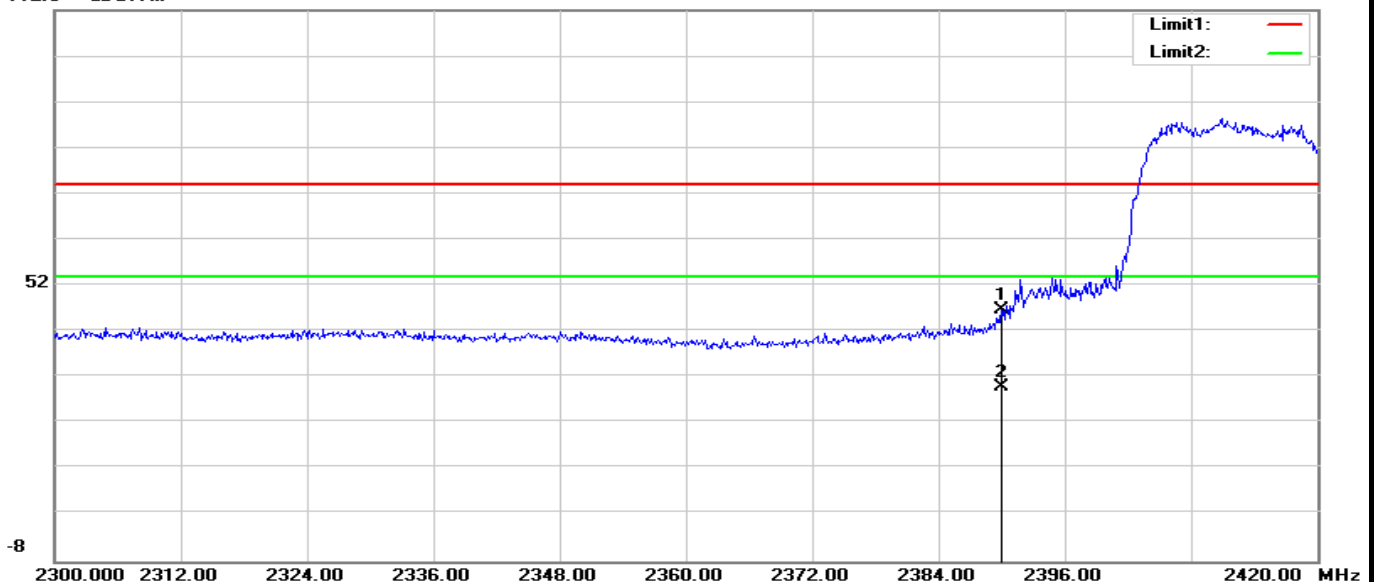

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	48.13	-1.27	46.86	74.00	-27.14	100	359	peak
2	2390.000	31.17	-1.27	29.90	54.00	-24.10	100	359	AVG

**RESTRICTED BANDEDGE (g Mode, High Channel, Horizontal)**


112.0 dBuV/m

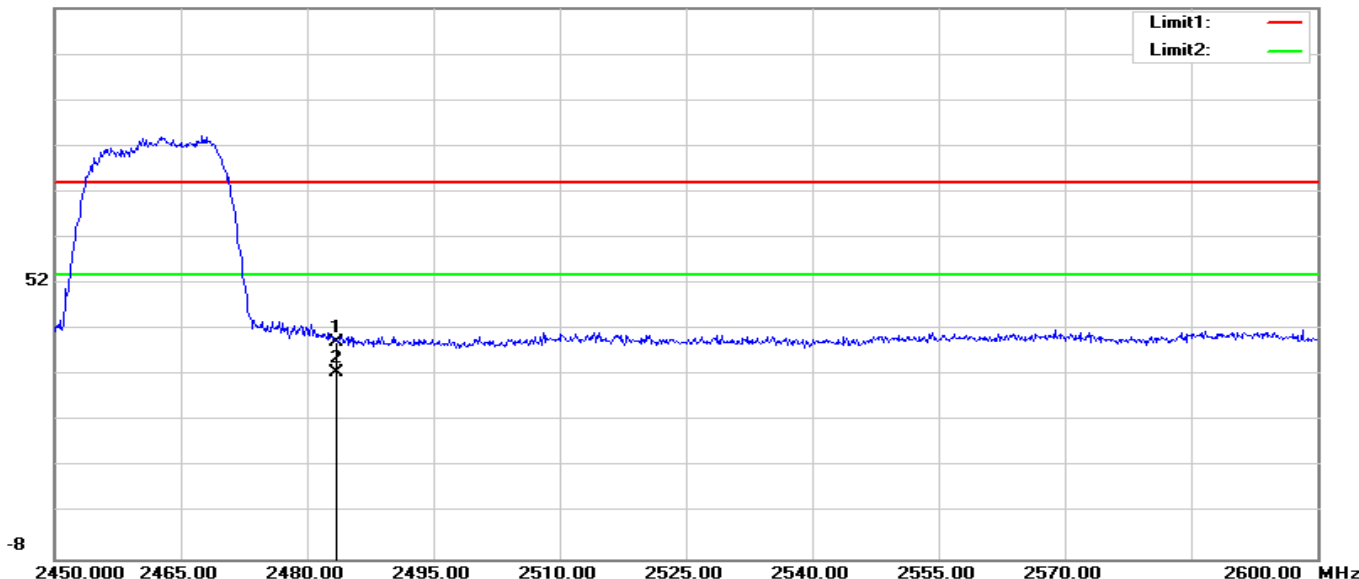

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	40.35	-0.95	39.40	74.00	-34.60	100	0	peak
2	2483.500	33.51	-0.95	32.56	54.00	-21.44	100	0	AVG

**RESTRICTED BANDEDGE (g Mode, High Channel, Vertical)**


112.0 dBuV/m

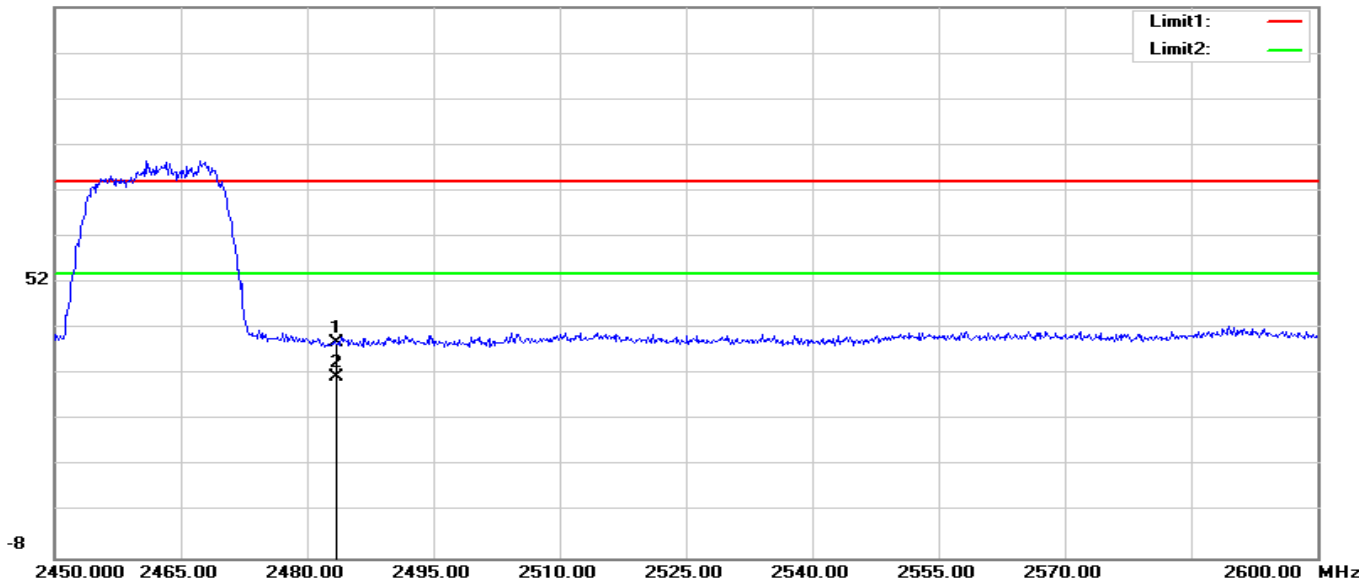

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	39.89	-0.95	38.94	74.00	-35.06	200	321	peak
2	2483.500	32.43	-0.95	31.48	54.00	-22.52	200	321	AVG

**RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, Low Channel, Horizontal)**


112.0 dBuV/m

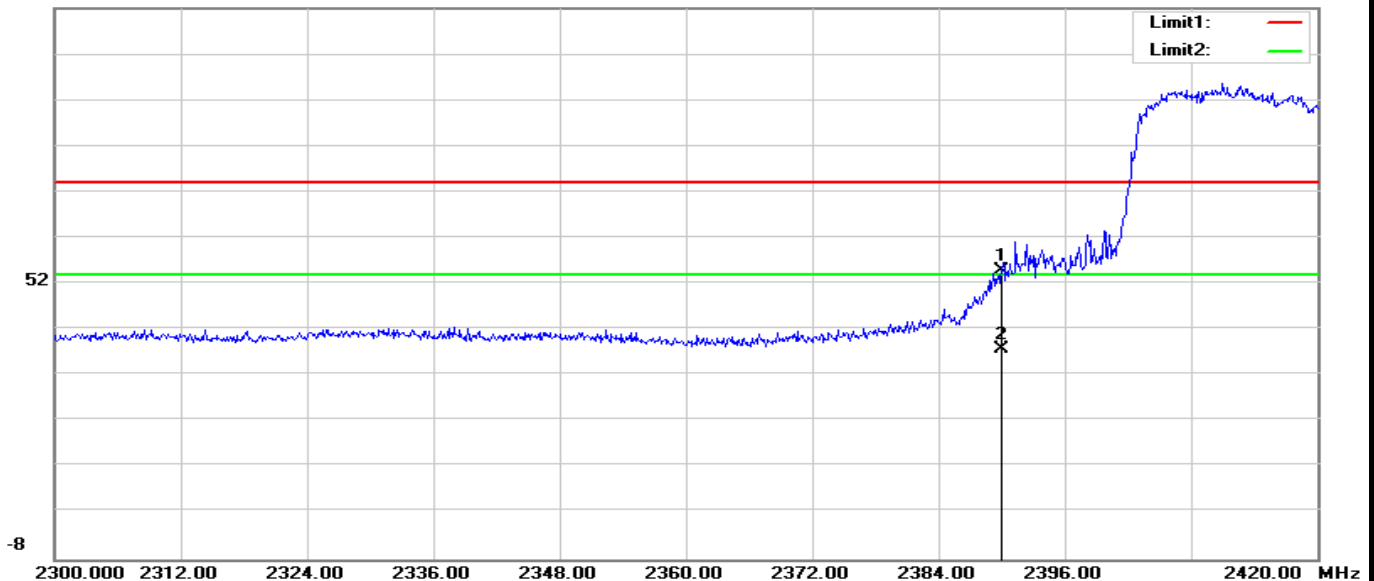

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	56.20	-1.27	54.93	74.00	-19.07	200	360	peak
2	2390.000	39.03	-1.27	37.76	54.00	-16.24	200	360	AVG

**RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, Low Channel, Vertical)**

112.0 dBuV/m

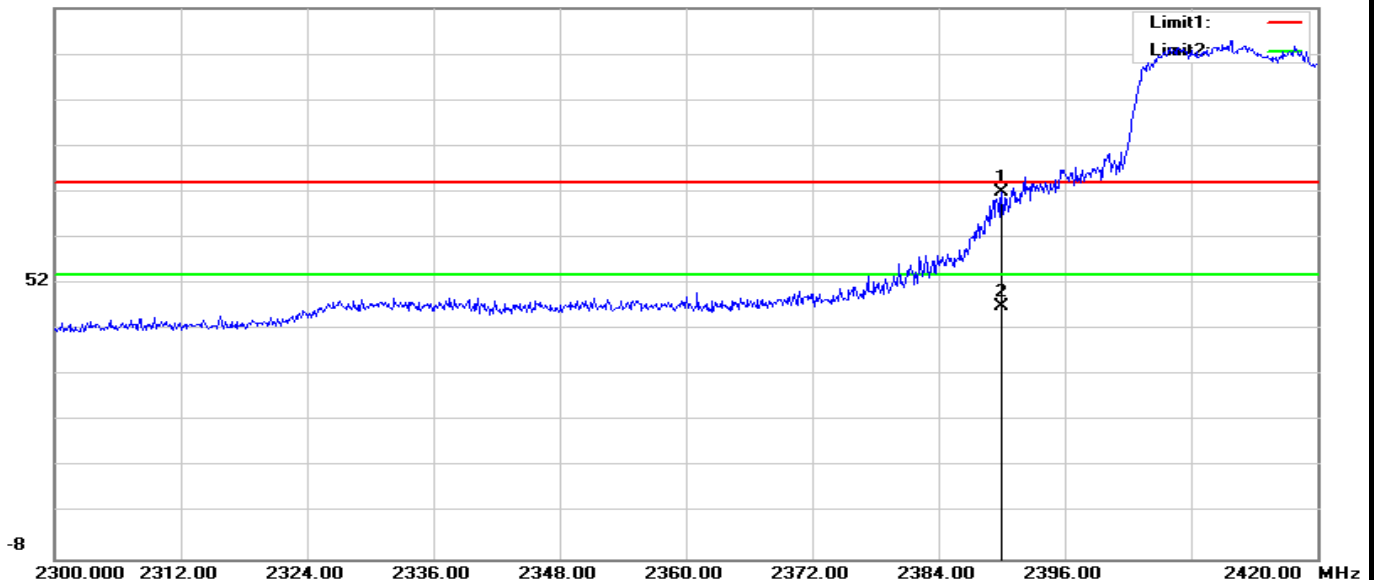


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	73.11	-1.27	71.84	74.00	-2.16	130	0	peak
2	2390.000	48.45	-1.27	47.18	54.00	-6.82	130	0	AVG



**RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, High Channel, Horizontal)**


112.0 dBuV/m

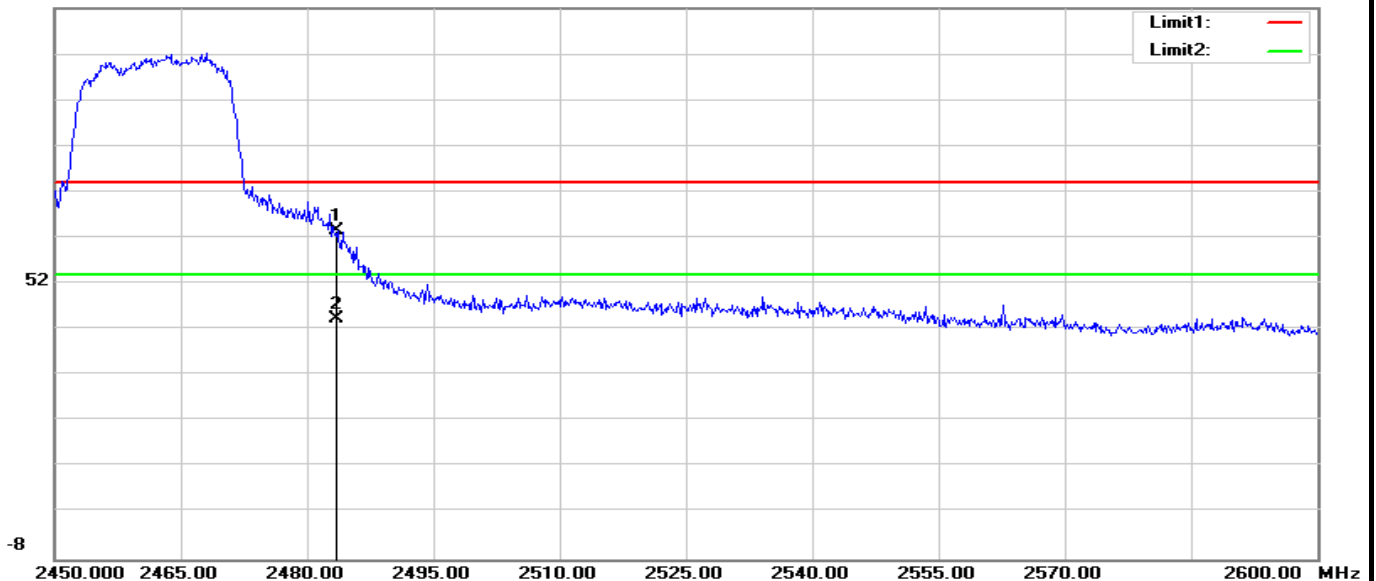

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	64.51	-0.95	63.56	74.00	-10.44	100	0	peak
2	2483.500	45.45	-0.95	44.50	54.00	-9.50	100	0	AVG


**RESTRICTED BANDEDGE (n Standard-20 MHz Channel mode, High Channel, Vertical)**

112.0 dBuV/m

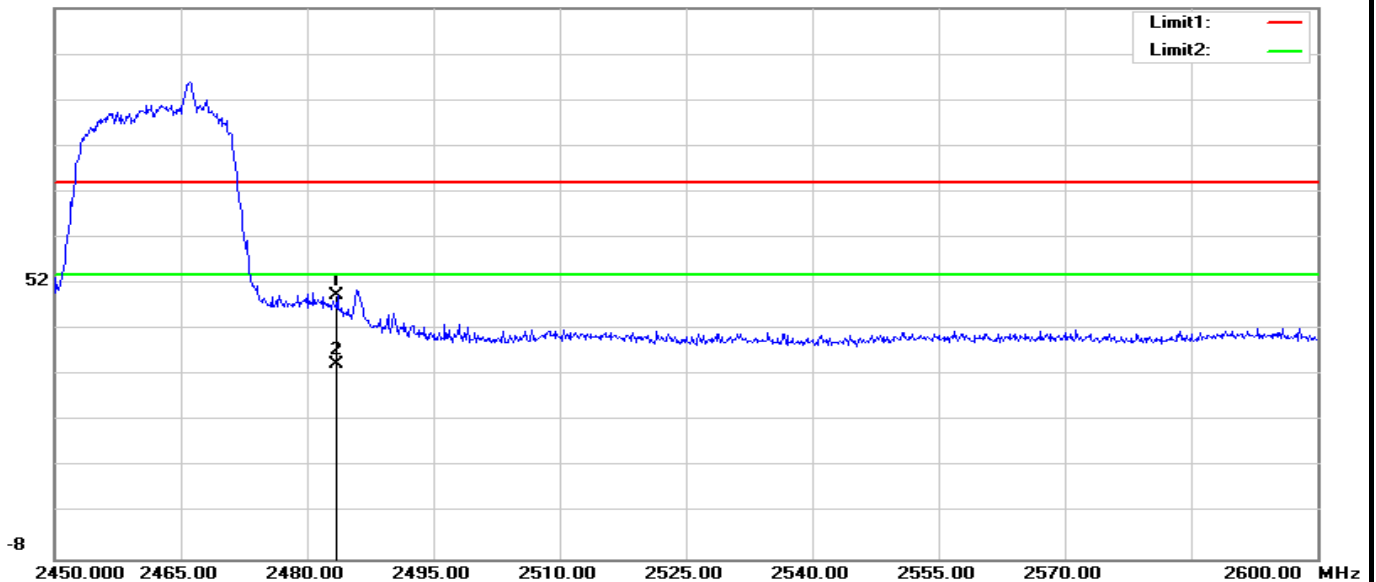


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	50.53	-0.95	49.58	74.00	-24.42	100	359	peak
2	2483.500	35.50	-0.95	34.55	54.00	-19.45	100	359	AVG

**RESTRICTED BANDEDGE (n Wide -40 MHz Channel mode, Low Channel, Horizontal)**

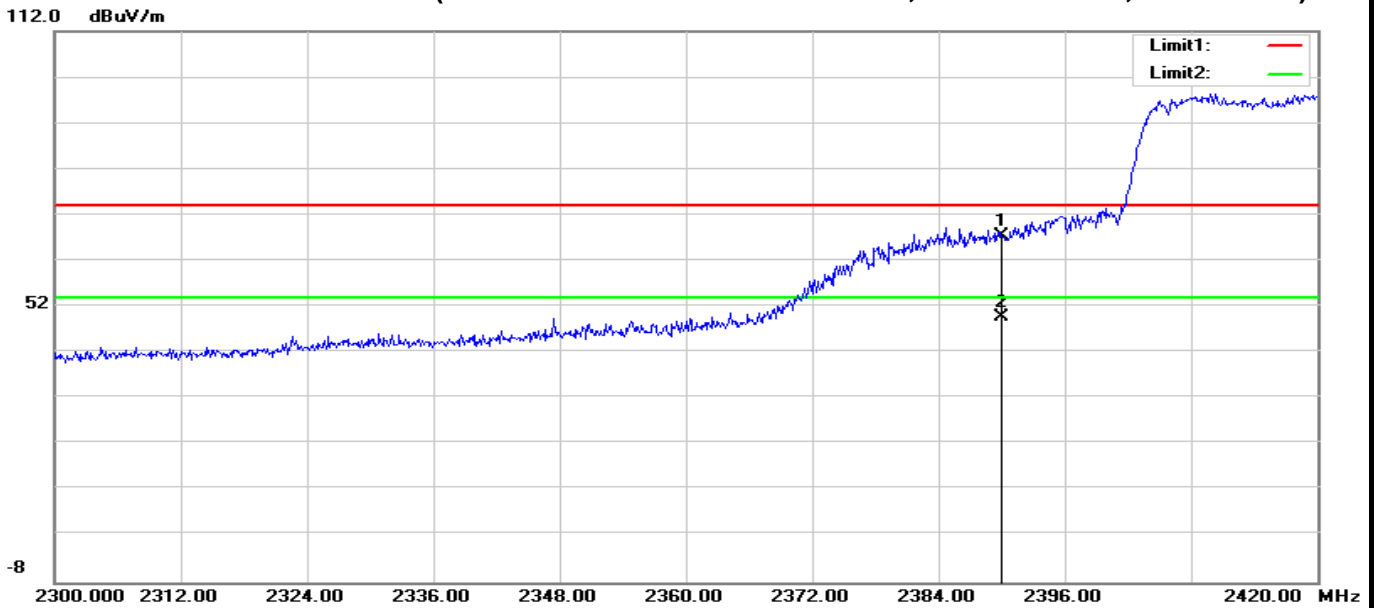


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	68.71	-1.27	67.44	74.00	-6.56	100	160	peak
2	2390.000	50.94	-1.27	49.67	54.00	-4.33	100	160	AVG

**RESTRICTED BANDEDGE (n Wide -40 MHz Channel mode, Low Channel, Vertical)**

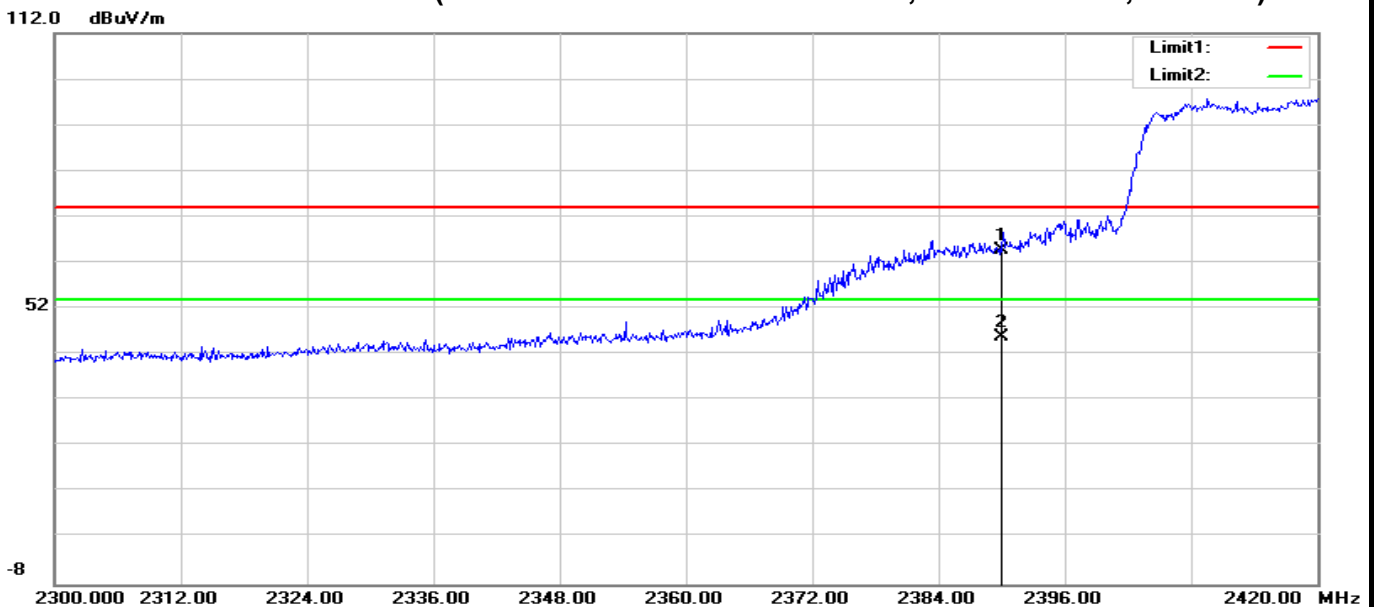


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2390.000	66.00	-1.27	64.73	74.00	-9.27	130	0	peak
2	2390.000	47.04	-1.27	45.77	54.00	-8.23	130	0	AVG

**RESTRICTED BANDEDGE (n Wide -40 MHz Channel mode, High Channel, Horizontal)**

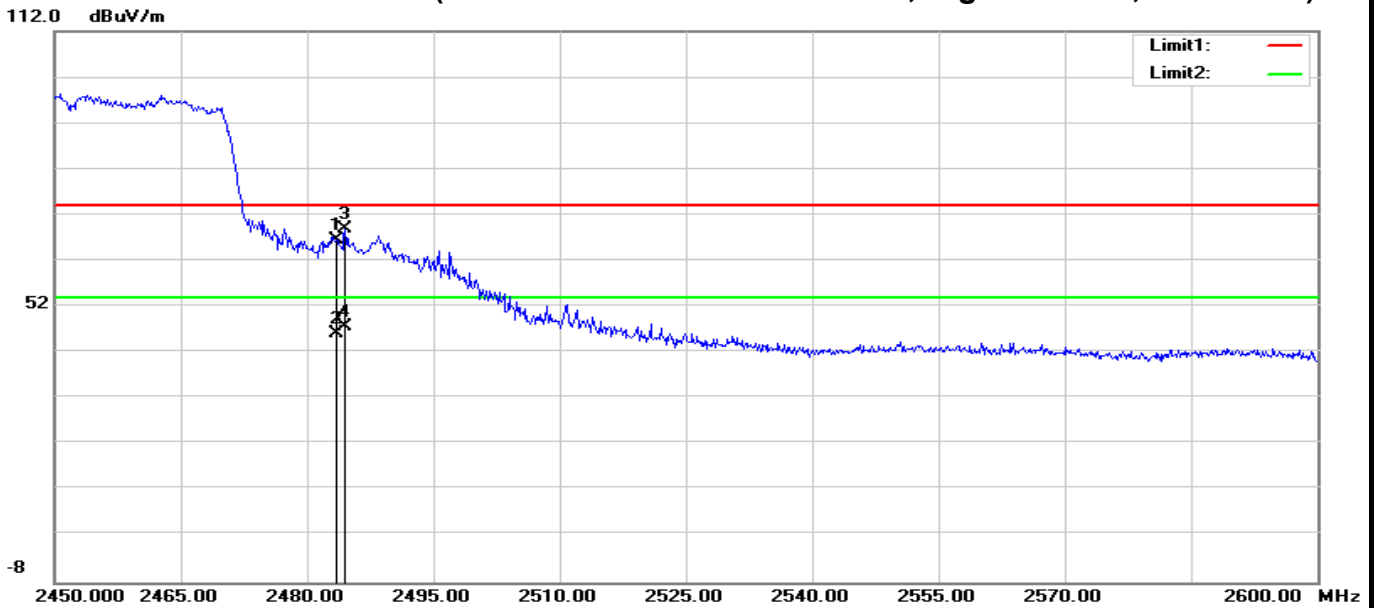

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	67.58	-0.95	66.63	74.00	-7.37	100	217	peak
2	2483.500	47.24	-0.95	46.29	54.00	-7.71	100	217	AVG
3	2484.500	69.79	-0.94	68.85	74.00	-5.15	100	165	peak
4	2484.500	48.53	-0.94	47.59	54.00	-6.41	100	165	AVG

**RESTRICTED BANDEDGE (n Wide -40 MHz Channel mode, High Channel, Vertical)**

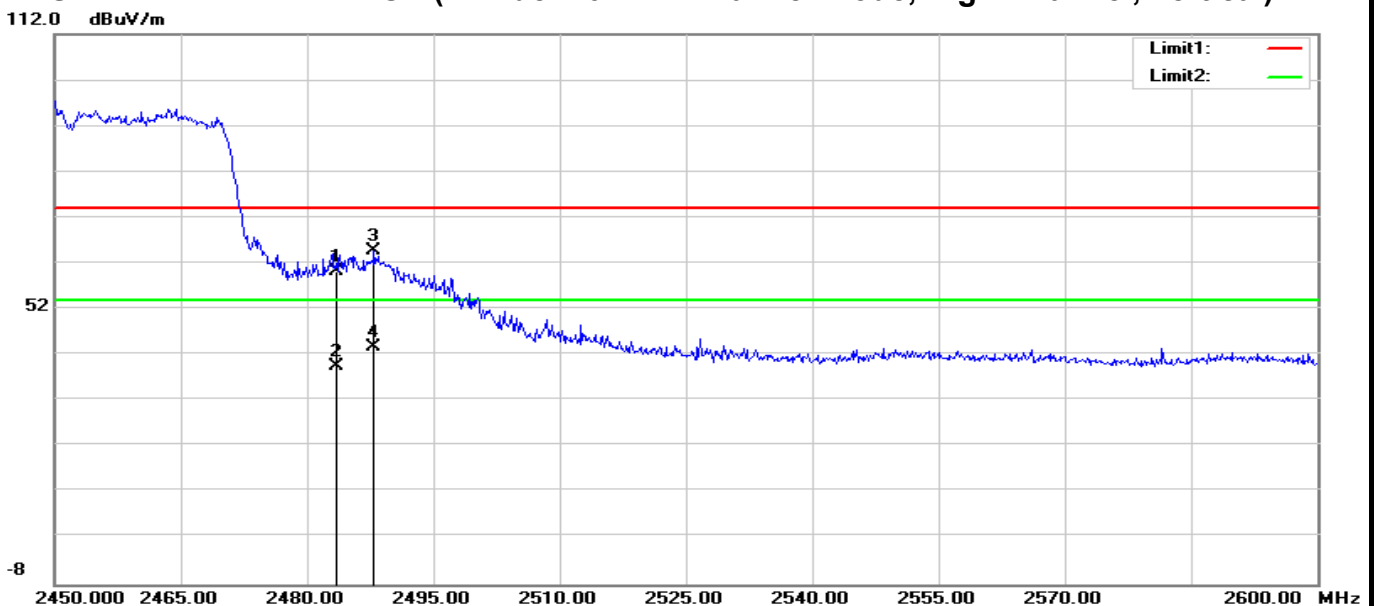

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	61.17	-0.95	60.22	74.00	-13.78	100	92	peak
2	2483.500	40.51	-0.95	39.56	54.00	-14.44	100	92	AVG
3	2487.950	65.63	-0.93	64.70	74.00	-9.30	100	0	peak
4	2487.950	44.82	-0.93	43.89	54.00	-10.11	100	0	AVG

## Below 1GHz

**Operation Mode:** Normal Link

**Test Date:** 2015-6-18

**Temperature:** 24°C

**Tested by:** James.Yan

**Humidity:** 48% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
47.7840	V	19.88	14.52	34.40	40.00	-5.60	Peak
70.7400	V	26.18	10.70	36.88	40.00	-3.12	Peak
93.0500	V	22.39	12.16	34.55	43.50	-8.95	Peak
168.7100	V	19.29	13.05	32.34	43.50	-11.16	Peak
239.5200	V	25.05	12.86	37.91	46.00	-8.09	Peak
400.5400	V	18.14	19.82	37.96	46.00	-8.04	Peak
32.9100	H	14.20	18.89	33.09	40.00	-6.91	Peak
246.3100	H	28.93	12.98	41.91	46.00	-4.09	Peak
386.9600	H	14.79	19.02	33.81	46.00	-12.19	Peak
400.5400	H	20.71	19.82	40.53	46.00	-5.47	Peak
464.5600	H	17.30	19.93	37.23	46.00	-8.77	Peak
771.0800	H	15.14	23.80	38.94	46.00	-7.06	Peak

**Remark:**

1. *Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MH).*
2. *Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.*
3. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
4. *Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).*

## Above 1 GHz

**Operation Mode:** TX / IEEE 802.11b / CH Low

**Test Date:** 2015-6-14

**Temperature:** 24°C

**Tested by:** James.Yan

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4822.000	40.19	7.46	47.65	74.00	-26.35	100	359	peak
2	7237.000	42.34	13.48	55.82	74.00	-18.18	100	175	peak
3	7237.000	25.04	13.48	38.52	54.00	-15.48	100	175	AVG
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4808.000	39.60	7.31	46.91	74.00	-27.09	100	292	peak
2	7398.000	39.45	15.28	54.73	74.00	-19.27	100	64	peak
3	7398.000	23.13	15.28	38.41	54.00	-15.59	100	64	AVG
N/A									

**Operation Mode:** TX / IEEE 802.11b / CH Mid

**Test Date:** 2015-6-14

**Temperature:** 24°C

**Tested by:** James.Yan

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5032.000	39.14	9.06	48.20	74.00	-25.80	100	1	peak
2	7440.000	39.72	15.75	55.47	74.00	-18.53	100	279	peak
3	7440.000	23.77	15.75	39.52	54.00	-14.48	100	279	AVG
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4913.000	39.15	8.40	47.55	74.00	-26.45	100	146	peak
2	7426.000	40.04	15.59	55.63	74.00	-18.37	100	38	peak
3	7426.000	25.47	15.59	41.06	54.00	-12.94	100	38	AVG
N/A									



# Compliance Certification Services Inc.

Date of Issue : June 19, 2015

Report No: C150605R01-RPW

FCC ID: 2ADZRG241W-A

**Operation Mode:** TX / IEEE 802.11b / CH High

**Test Date:** 2015-6-14

**Temperature:** 24°C

**Tested by:** James. Yan

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

## Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4913.000	39.08	8.40	47.48	74.00	-26.52	100	214	peak
2	7440.000	39.00	15.75	54.75	74.00	-19.25	100	262	peak
N/A									

## Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4906.000	38.51	8.33	46.84	74.00	-27.16	100	23	peak
2	7454.000	39.32	15.91	55.23	74.00	-18.77	100	262	peak
N/A									

**Operation Mode:** TX / IEEE 802.11g / CH Low

**Test Date:** 2015-6-14

**Temperature:** 24°C

**Tested by:** James. Yan

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

## Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4815.000	41.22	7.38	48.60	74.00	-25.40	100	233	peak
2	7468.000	38.93	16.06	54.99	74.00	-19.01	100	204	peak
3	7468.000	19.20	16.06	35.26	54.00	-18.74	100	204	AVG
N/A									

## Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4836.000	40.00	7.60	47.60	74.00	-26.40	100	210	peak
2	7454.000	38.74	15.91	54.65	74.00	-19.35	100	166	peak
3	7454.000	21.05	15.91	36.96	54.00	-17.04	100	166	AVG
N/A									



# Compliance Certification Services Inc.

Date of Issue : June 19, 2015

Report No: C150605R01-RPW

FCC ID: 2ADZRG241W-A

Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: 2015-6-14

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

## Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4829.000	39.96	7.53	47.49	74.00	-26.51	100	6	peak
2	7440.000	39.29	15.75	55.04	74.00	-18.96	100	42	peak
3	7440.000	20.03	15.75	35.78	54.00	-18.22	100	42	AVG
N/A									

## Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4815.000	40.58	7.38	47.96	74.00	-26.04	100	358	peak
2	7454.000	38.85	15.91	54.76	74.00	-19.24	100	353	peak
3	7454.000	18.94	15.91	34.85	54.00	-19.15	100	353	AVG
N/A									

Operation Mode: TX / IEEE 802.11g / CH High

Test Date: 2015-6-14

Temperature: 24°C

Tested by: James.Yan

Humidity: 48 % RH

Polarity: Ver. / Hor.

## Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4913.000	39.16	8.40	47.56	74.00	-26.44	100	156	peak
2	7391.000	39.10	15.20	54.30	74.00	-19.70	100	350	peak
3	7391.000	20.09	15.20	35.29	54.00	-18.71	100	350	AVG
N/A									

## Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4906.000	38.51	8.33	46.84	74.00	-27.16	100	47	peak
2	7440.000	39.24	15.75	54.99	74.00	-19.01	100	158	peak
3	7440.000	23.30	15.75	39.05	54.00	-14.95	100	158	AVG
N/A									

**Operation Mode:** TX / IEEE 802.11n HT20 mode(chain0+chain1) / CH Low **Test Date:** 2015-6-14  
**Temperature:** 24°C **Tested by:** James.Yan  
**Humidity:** 48 % RH **Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4815.000	40.47	7.38	47.85	74.00	-26.15	100	297	peak
2	7447.000	39.31	15.83	55.14	74.00	-18.86	100	204	peak
3	7447.000	16.33	15.83	32.16	54.00	-21.84	100	204	AVG
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4808.000	40.66	7.31	47.97	74.00	-26.03	100	94	peak
2	7447.000	38.71	15.83	54.54	74.00	-19.46	100	178	peak
3	7447.000	17.45	15.83	33.28	54.00	-20.72	100	178	AVG
N/A									

**Operation Mode:** TX / IEEE 802.11n HT20 mode(chain0+chain1) / CH Mid **Test Date:** 2015-6-14  
**Temperature:** 24°C **Tested by:** James.Yan  
**Humidity:** 48 % RH **Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4815.000	40.12	7.38	47.50	74.00	-26.50	100	1	peak
2	7363.000	39.90	14.89	54.79	74.00	-19.21	100	357	peak
3	7363.000	20.32	14.89	35.21	54.00	-18.79	100	357	AVG
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4829.000	40.14	7.53	47.67	74.00	-26.33	100	20	peak
2	7440.000	39.28	15.75	55.03	74.00	-18.97	100	138	peak
3	7440.000	22.26	15.75	38.01	54.00	-15.99	100	138	AVG
N/A									





# Compliance Certification Services Inc.

Date of Issue : June 19, 2015

Report No: C150605R01-RPW

FCC ID: 2ADZRG241W-A

**Operation Mode:** TX / IEEE 802.11n HT20 mode(chain0+chain1) / CH High

**Test Date:** 2015-6-14

**Temperature:** 24°C

**Tested by:** James.Yan

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4913.000	40.09	8.40	48.49	74.00	-25.51	100	318	peak
2	7391.000	39.36	15.20	54.56	74.00	-19.44	100	2	peak
3	7391.000	21.06	15.20	36.26	54.00	-17.74	100	2	AVG
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4913.000	39.31	8.40	47.71	74.00	-26.29	100	52	peak
2	7398.000	39.29	15.28	54.57	74.00	-19.43	100	337	peak
3	7398.000	19.50	15.28	34.78	54.00	-19.22	100	337	AVG
N/A									

**Operation Mode:** TX / IEEE 802.11n HT40 mode(chain0+chain1) / CH Low

**Test Date:** 2015-6-14

**Temperature:** 24°C

**Tested by:** James.Yan

**Humidity:** 48 % RH

**Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4808.000	41.10	7.31	48.41	74.00	-25.59	100	191	peak
2	7440.000	38.98	15.75	54.73	74.00	-19.27	100	11	peak
3	7440.000	17.47	15.75	33.22	54.00	-20.78	100	11	AVG
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4836.000	39.88	7.60	47.48	74.00	-26.52	100	167	peak
2	7447.000	39.22	15.83	55.05	74.00	-18.95	100	267	peak
3	7447.000	17.86	15.83	33.69	54.00	-20.31	100	267	AVG
N/A									



# Compliance Certification Services Inc.

Date of Issue : June 19, 2015

Report No: C150605R01-RPW

FCC ID: 2ADZRG241W-A

**Operation Mode:** TX / IEEE 802.11n HT40 mode(chain0+chain1) / CH Mid  
**Temperature:** 24°C  
**Humidity:** 48 % RH

**Test Date:** 2015-6-14  
**Tested by:** James.Yan  
**Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4829.000	39.40	7.53	46.93	74.00	-27.07	100	144	peak
2	7433.000	38.97	15.67	54.64	74.00	-19.36	100	8	peak
3	7433.000	18.51	15.67	34.18	54.00	-19.82	100	8	AVG
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4836.000	40.01	7.60	47.61	74.00	-26.39	100	39	peak
2	7461.000	38.54	15.98	54.52	74.00	-19.48	100	39	peak
3	7461.000	19.76	15.98	35.74	54.00	-18.26	100	39	AVG
N/A									

**Operation Mode:** TX / IEEE 802.11n HT40 mode(chain0+chain1) / CH High  
**Temperature:** 24°C  
**Humidity:** 48 % RH

**Test Date:** 2015-6-14  
**Tested by:** James.Yan  
**Polarity:** Ver. / Hor.

### Horizontal

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4906.000	39.34	8.33	47.67	74.00	-26.33	100	359	peak
2	7426.000	39.73	15.59	55.32	74.00	-18.68	100	0	peak
3	7426.000	18.88	15.59	34.47	54.00	-19.53	100	0	AVG
N/A									

### Vertical

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4906.000	40.91	8.33	49.24	74.00	-24.76	100	86	peak
2	7426.000	38.89	15.59	54.48	74.00	-19.52	100	307	peak
3	7426.000	16.96	15.59	32.55	54.00	-21.45	100	307	AVG
N/A									

## 7.6.POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE


- 1.The EUT was placed on a table, which is 0.8m above ground plane.
- 2.Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3.Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### TEST DATA

Job No.:	C150605R01	Date:	2015-6-12
Model:	G-241W-A	Time:	15:32:29
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	James.Yan
Line:	L1	Test Voltage:	AC 120V/60Hz
Model:		Description:	

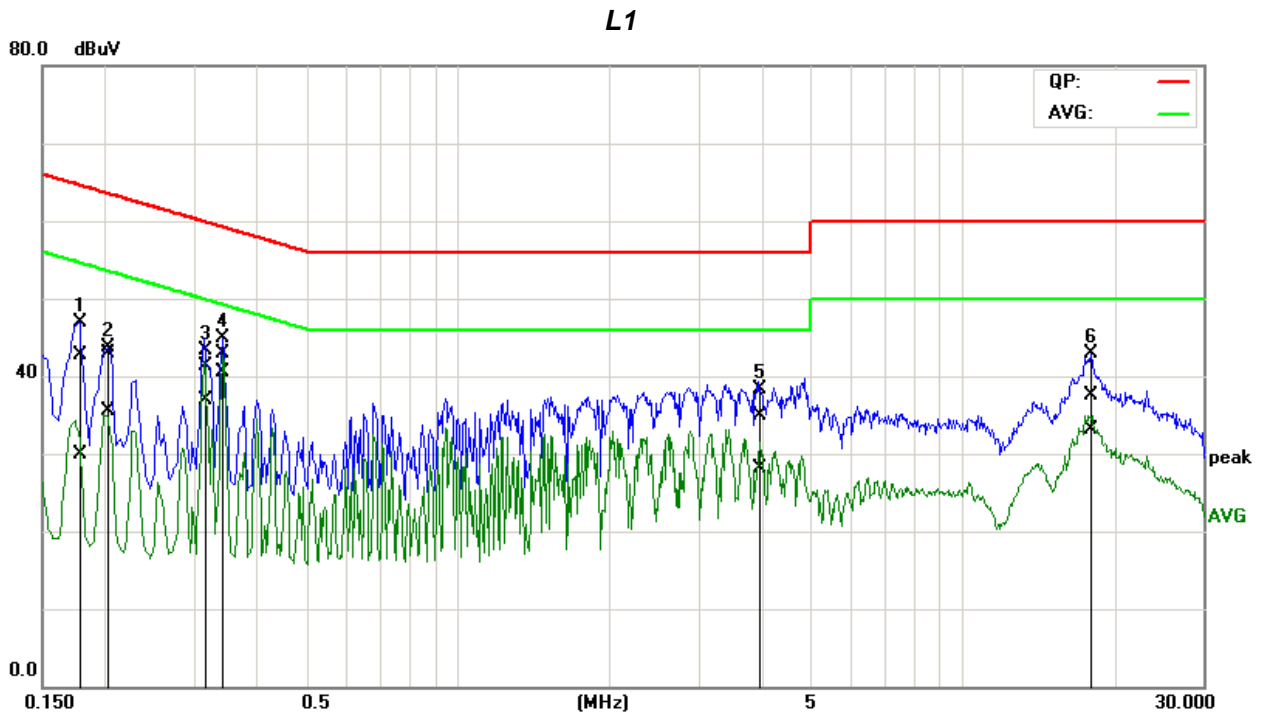


No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1765	23.00	10.17	19.70	42.70	29.87	64.65	54.65	-21.95	-24.78	Pass
2	0.2000	23.35	15.89	19.60	42.95	35.49	63.61	53.61	-20.66	-18.12	Pass
3	0.3175	21.55	17.12	19.69	41.24	36.81	59.77	49.77	-18.53	-12.96	Pass
4	0.3397	23.27	20.72	19.71	42.98	40.43	59.21	49.21	-16.23	-8.78	Pass
5*	3.9660	14.69	7.96	20.17	34.86	28.13	56.00	46.00	-21.14	-17.87	Pass
6	18.0375	16.53	12.06	21.02	37.55	33.08	60.00	50.00	-22.45	-16.92	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.: C150605R01  
 Model: G-241W-A  
 Standard: FCC Class B  
 Test item: Conduction test  
 Line: L2  
 Model:

Date: 2015-6-12  
 Time: 15:36:59  
 Temp.(C)/Hum.(%): 22(C)/48%  
 Test By: James.Yan  
 Test Voltage: AC 120V/60Hz  
 Description:

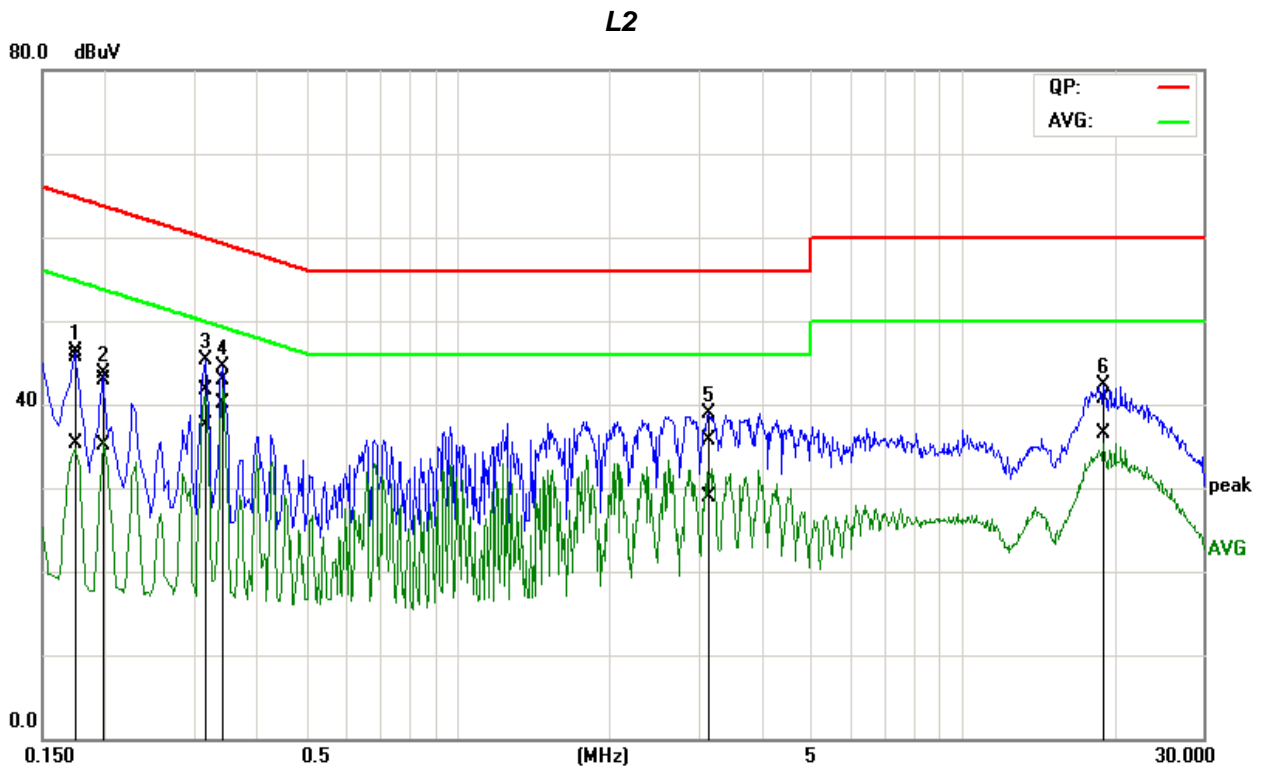

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1723	26.11	15.68	19.69	45.80	35.37	64.85	54.85	-19.05	-19.48	Pass
2	0.1994	23.19	15.47	19.64	42.83	35.11	63.64	53.64	-20.81	-18.53	Pass
3	0.3175	22.06	17.81	19.72	41.78	37.53	59.77	49.77	-17.99	-12.24	Pass
4	0.3398	23.07	20.37	19.74	42.81	40.11	59.21	49.21	-16.40	-9.10	Pass
5*	3.1479	15.56	8.87	20.10	35.66	28.97	56.00	46.00	-20.34	-17.03	Pass
6	19.0681	19.73	15.41	21.01	40.74	36.42	60.00	50.00	-19.26	-13.58	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).