



TEST REPORT

Applicant Name : ARICH INTERNATIONAL INC
 Address : 360 SUMMERVIEW CT SAN RAMON CA 94583-4463, SAN RAMON,
 California, United States 945834463
 Report Number : SZNS2220914-41668E-RF-00B
 FCC ID: 2ADZTDRAGONFLY

Test Standard (s)
 FCC Part 15.247

Sample Description

Product: Dragonfly
 Tested Model: HULK-10
 Trade Name: TUNAI
 Date Received: 2022-09-14
 Date of Test: 2022-09-21 to 2022-09-28
 Report Date: 2022-10-14

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Roger.Ling

 Roger.Ling
 EMC Engineer

Approved By:

Candy Li

 Candy Li
 EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
 Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
DUTY CYCLE.....	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
FCC §1.1310 & §2.1091 –RF EXPOSURE EVALUATION.....	10
APPLICABLE STANDARD	10
TEST RESULT	11
FCC §15.203 - ANTENNA REQUIREMENT.....	12
APPLICABLE STANDARD	12
ANTENNA CONNECTOR CONSTRUCTION	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	13
APPLICABLE STANDARD	13
EUT SETUP.....	13
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	14
TEST PROCEDURE	14
FACTOR & MARGIN CALCULATION	14
TEST DATA	14
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH.....	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA	21
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	22
APPLICABLE STANDARD	22
TEST PROCEDURE	22
TEST DATA	22
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA	23
FCC §15.247(e) - POWER SPECTRAL DENSITY	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24
APPENDIX A: 6dB Emission Bandwidth	25

APPENDIX B: Occupied Channel Bandwidth	38
APPENDIX C: Maximum conducted output power	51
APPENDIX D: Band edge measurements	53
APPENDIX E: Maximum power spectral density	61
APPENDIX F: Duty Cycle.....	75

GENERAL INFORMATION**Product Description for Equipment under Test (EUT)**

Product	Dragonfly
Tested Model	HULK-10
Frequency Range	Wi-Fi: 2412-2462MHz
Maximum Conducted Peak Output Power	Wi-Fi: 16.14dBm(802.11b), 17.71dBm(802.11g), 17.08dBm(802.11n20),19.27dBm(802.11n40)
Modulation Technique	Wi-Fi: DSSS, OFDM
Antenna Specification*	Internal Antenna1: 3.20dBi (provided by the applicant) Internal Antenna2: 2.73dBi (provided by the applicant)
Voltage Range	DC 5V from USB port
Sample serial number	SZNS2220914-41668E-RF-S1 (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices, and KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1°C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 4297.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g, 802.11n-HT20 and 802.11n-HT40 mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.
802.11n-HT40 mode was tested with Channel 3, 6 and 9.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

Software “Xshell7.0.0063”* was used during testing and power level as below:

Mode	Data Rate (Mbps)	Power Level*
802.11 b	1	44
802.11 g	6	44
802.11 n20	MCS0	44
802.11 n40	MCS0	44

The worse-case data rates are determined to be as above for each mode based upon investigations by measuring the output power and PSD across all data rates, bandwidths and modulations.

EUT have two antennas and support MIMO transmit, the SISO/MIMO have same parameter setting, the worst case MIMO was recorded in report.

The two antenna port have same power level setting.

Duty cycle

Test Result: Compliant. Please refer to the Appendix F

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Volkswagen	Car machine	H12	3GB035866A
Apple	Iphone	XS MAX	F2LZ346PKPQ7

External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielding Detachable USB Cable	1.0	Iphone	EUT
USB extension cord	5.0	EUT	Car machine

Block Diagram of Test Setup

For Radiated emission

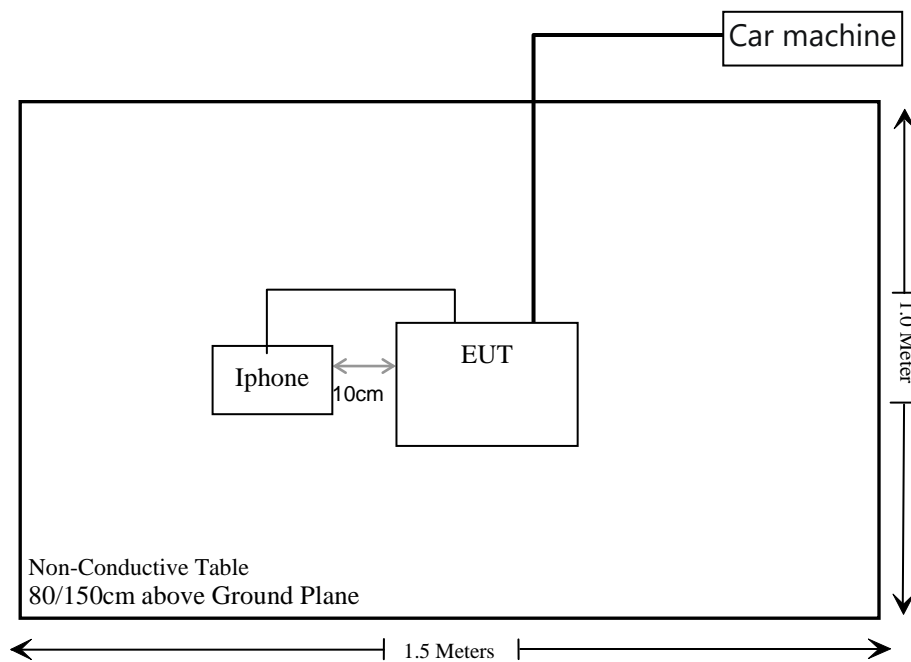

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i) & §1.1307(b)	RF Exposure Evaluation	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Not Applicable*
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth & Occupied Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

Not Applicable*: The EUT is intend for used in vehicle.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2021/12/13	2022/12/12
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2021/12/13	2022/12/12
WEINSCHHEL	10dB Attenuator	5324	AU 3842	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.33	RF-03	Each time	

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 –RF EXPOSURE EVALUATION

Applicable Standard

According to KDB 447498 D04 Interim General RF Exposure Guidance v01, clause 2.1.4 –MPE-Based Exemption:

An alternative to the SAR-based exemption is provided in § 1.1307(b)(3)(i)(C), for a much wider frequency range, from 300 kHz to 100 GHz, applicable for separation distances greater or equal to $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. The MPE-based test exemption condition is in terms of ERP, defined as the product of the maximum antenna gain and the delivered maximum time-averaged power. For this case, a RF source is an RF exempt device if its ERP (watts) is no more than a frequency-dependent value, as detailed tabular form in Appendix B. These limits have been derived based on the basic specifications on Maximum Permissible Exposure (MPE) considered for the FCC rules in § 1.1310(e)(1).

Table to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Test Result**For worst case:**

Mode	Frequency Range (MHz)	Tune-up Output Power		Antenna Gain		ERP		Evaluation Distance (cm)	ERP Limit (mW)
		(dBm)	(mW)	(dBi)	(dBd)	(dBm)	(mW)		
BDR/EDR	2402-2480	4.5	2.82	3.2	1.05	5.55	3.59	20	768
2.4G Wi-Fi	2412-2462	20	100	3.2	1.05	21.05	127.35	20	768

Note 1: The tune-up power was declared by the applicant.

Note 2: 0dBd=2.15dBi.

Note 3: The BT function can't transmit at the same time with the 2.4G Wi-Fi function.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



Antenna Connector Construction

The EUT has two internal Antennas arrangement for 2.4G Wi-Fi, which were permanently attached to the EUT and the antenna 1 gain is 3.2dBi and the antenna 2 gain is 2.73 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliant.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**

FCC §15.247 (d); §15.209; §15.205;

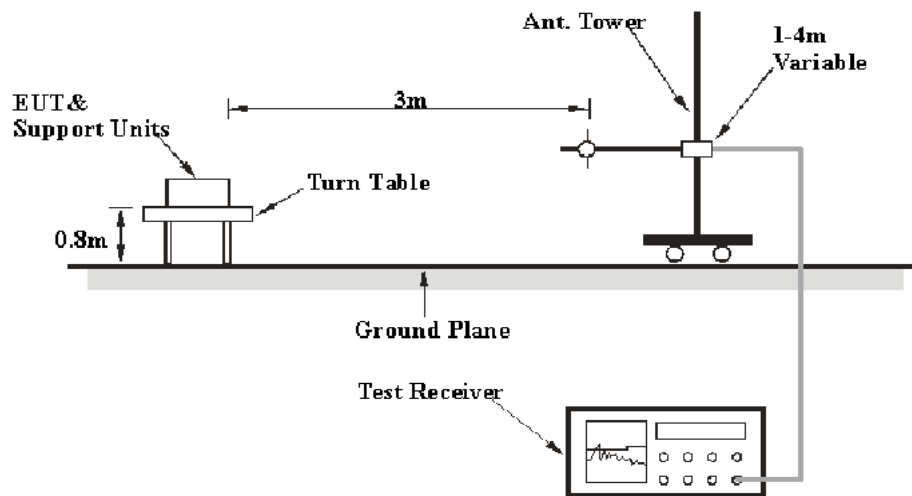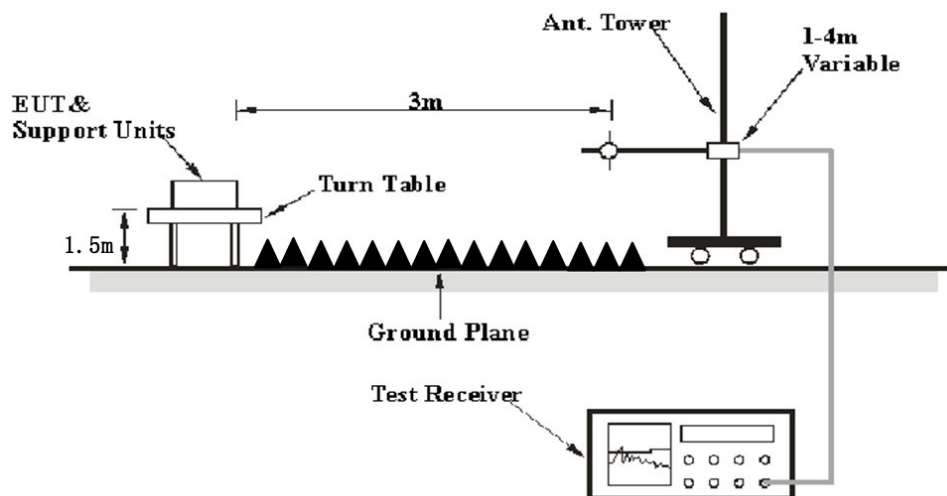EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10Hz*	/	Ave.
	1 MHz	1/T**	/	Ave.

Note: * for duty cycle $\geq 98\%$

**for duty cycle $< 98\%$, and T is maximum transmission duration.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

If the maximized peak measured value complies with the limit, then it is unnecessary to perform an QP/Average measurement

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


Temperature:	24~25°C
Relative Humidity:	60 ~61%
ATM Pressure:	101.0 ~101.2kPa

The testing was performed by Level Li from 2022-09-21 to 2022-09-28

EUT operation mode: Transmitting (Pre-scan EUT in X axis, Y axis, Z axis, the worst case is Y axis)

30MHz-1GHz: (Worst case 802.11 G mode, Low Channel)


Horizontal

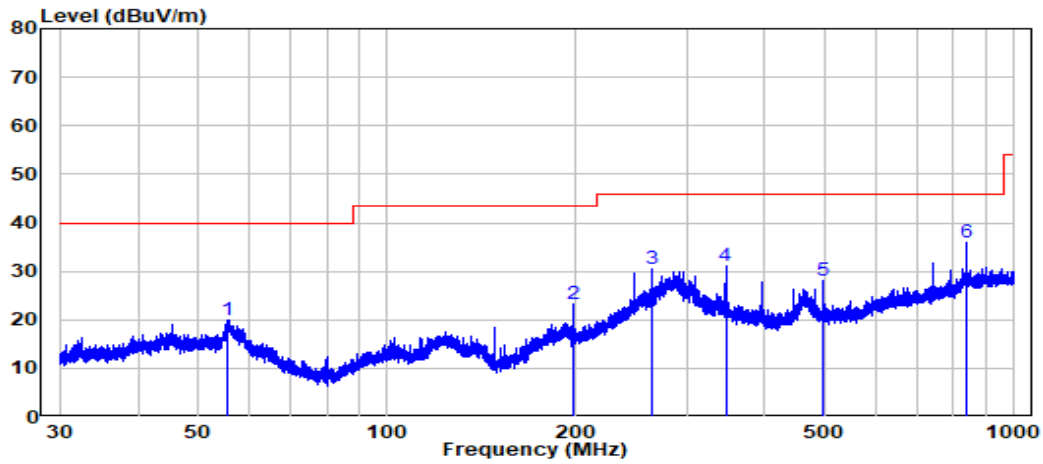

Site : chamber
 Condition: 3m HORIZONTAL
 Job No. : SZNS2220914-41668E-RF
 Test Mode: WIFI Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	55.536	-10.23	30.14	19.91	40.00	-20.09	Peak
2	197.980	-11.54	34.74	23.20	43.50	-20.30	Peak
3	264.050	-10.48	40.98	30.50	46.00	-15.50	Peak
4	346.505	-7.24	38.21	30.97	46.00	-15.03	Peak
5	495.066	-4.46	32.46	28.00	46.00	-18.00	Peak
6	841.761	0.33	35.46	35.79	46.00	-10.21	Peak

Vertical

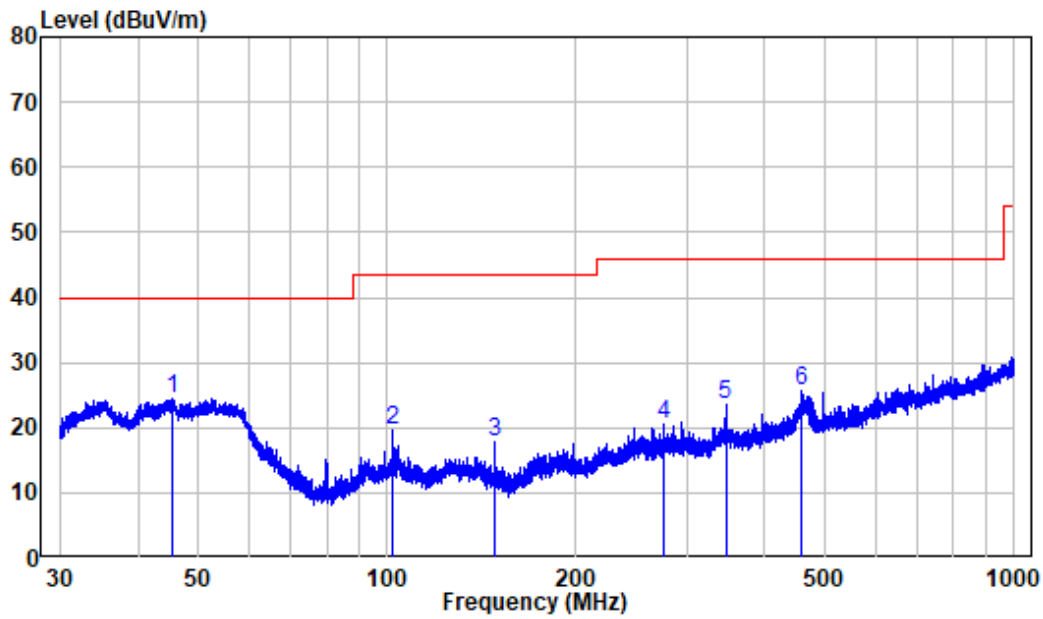

Site : chamber
 Condition: 3m VERTICAL
 Job No. : SZNS2220914-41668E-RF
 Test Mode: WIFI Transmitting

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	45.276	-9.95	34.31	24.36	40.00	-15.64	Peak
2	101.867	-11.58	31.24	19.66	43.50	-23.84	Peak
3	148.506	-15.35	33.11	17.76	43.50	-25.74	Peak
4	276.608	-9.79	30.41	20.62	46.00	-25.38	Peak
5	346.505	-7.24	30.85	23.61	46.00	-22.39	Peak
6	458.109	-5.45	31.26	25.81	46.00	-20.19	Peak

1-25 GHz: The worst case

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
802.11B, Low Channel									
2310	54.36	PK	91	1.8	H	-7.23	47.13	74	-26.87
2310	55.48	PK	78	1.8	V	-7.23	48.25	74	-25.75
2390	55.36	PK	27	2.0	H	-7.21	48.15	74	-25.85
2390	55.71	PK	327	1.2	V	-7.21	48.50	74	-25.50
4824	44.22	PK	324	2.1	H	-3.53	40.69	74	-33.31
4824	44.61	PK	134	1.7	V	-3.53	41.08	74	-32.92
802.11B, Middle Channel									
4874	44.62	PK	203	2.1	H	-3.42	41.20	74	-32.80
4874	44.55	PK	159	1.9	V	-3.42	41.13	74	-32.87
11B, High Channel									
2483.5	55.03	PK	34	1.6	H	-7.2	47.83	74	-26.17
2483.5	55.24	PK	229	1.0	V	-7.2	48.04	74	-25.96
2500	54.61	PK	212	1.8	H	-7.18	47.43	74	-26.57
2500	55.01	PK	342	2.1	V	-7.18	47.83	74	-26.17
4924	44.02	PK	35	2.1	H	-3.16	40.86	74	-33.14
4924	44.17	PK	242	1.2	V	-3.16	41.01	74	-32.99
802.11G, Low Channel									
2310	55.45	PK	289	1.6	H	-7.23	48.22	74	-25.78
2310	54.57	PK	85	1.9	V	-7.23	47.34	74	-26.66
2390	54.92	PK	152	1.9	H	-7.21	47.71	74	-26.29
2390	56	PK	189	2.0	V	-7.21	48.79	74	-25.21
4824	43.75	PK	87	1.4	H	-3.53	40.22	74	-33.78
4824	45.87	PK	124	2.0	V	-3.53	42.34	74	-31.66
802.11G, Middle Channel									
4874	43.76	PK	2	1.3	H	-3.42	40.34	74	-33.66
4874	44.31	PK	133	2.0	V	-3.42	40.89	74	-33.11
802.11G, High Channel									
2483.5	54.71	PK	60	1.2	H	-7.2	47.51	74	-26.49
2483.5	54.84	PK	169	2.1	V	-7.2	47.64	74	-26.36
2500	55.17	PK	52	1.2	H	-7.18	47.99	74	-26.01
2500	54.97	PK	52	1.2	V	-7.18	47.79	74	-26.21
4924	45.77	PK	87	2.1	H	-3.16	42.61	74	-31.39
4924	44.85	PK	197	1.1	V	-3.16	41.69	74	-32.31
802.11N20, Low Channel									
2310	55.19	PK	356	1.8	H	-7.23	47.96	74	-26.04
2310	54.49	PK	57	1.6	V	-7.23	47.26	74	-26.74
2390	54.62	PK	183	1.1	H	-7.21	47.41	74	-26.59
2390	59.17	PK	311	1.7	V	-7.21	51.96	74	-22.04
4824	44.46	PK	283	1.0	H	-3.53	40.93	74	-33.07
4824	45.93	PK	143	1.4	V	-3.53	42.40	74	-31.60

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/Ave		Height (m)	Polar (H/V)				
802.11N20, Middle Channel									
4874	44.84	PK	145	1.8	H	-3.42	41.42	74	-32.58
4874	44.87	PK	293	1.8	V	-3.42	41.45	74	-32.55
802.11N20, High Channel									
2483.5	55.27	PK	62	1.1	H	-7.2	48.07	74	-25.93
2483.5	55.19	PK	354	1.6	V	-7.2	47.99	74	-26.01
2500	54.7	PK	101	1.7	H	-7.18	47.52	74	-26.48
2500	54.45	PK	101	1.7	V	-7.18	47.27	74	-26.73
4924	44.35	PK	28	1.8	H	-3.16	41.19	74	-32.81
4924	44.24	PK	201	1.9	V	-3.16	41.08	74	-32.92
802.11N40, Low Channel									
2310	53.73	PK	59	1.9	H	-7.23	46.50	74	-27.50
2310	54.65	PK	269	1.7	V	-7.23	47.42	74	-26.58
2390	54.87	PK	269	1.7	H	-7.21	47.66	74	-26.34
2390	55.71	PK	325	1.4	V	-7.21	48.50	74	-25.50
4844	44.63	PK	23	1.9	H	-3.54	41.09	74	-32.91
4844	45.91	PK	211	2.0	V	-3.54	42.37	74	-31.63
802.11N40, Middle Channel									
4874	44.89	PK	285	1.5	H	-3.42	41.47	74	-32.53
4874	45.31	PK	307	1.3	V	-3.42	41.89	74	-32.11
802.11N40, High Channel									
2483.5	51.82	PK	64	2.1	H	-3.26	48.56	74	-25.44
2483.5	50.68	PK	19	1.7	V	-3.26	47.42	74	-26.58
2500	51.41	PK	193	2.1	H	-3.26	48.15	74	-25.85
2500	52.15	PK	180	1.3	V	-3.26	48.89	74	-25.11
4904	44.88	PK	286	2.2	H	-3.26	41.62	74	-32.38
4904	44.39	PK	24	2.0	V	-3.26	41.13	74	-32.87

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading


Margin = Absolute Level (Corrected Amplitude) – Limit

The other spurious emission which is in the noise floor level was not recorded.


For above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.

1-18 GHz: (Worst case)

Pre-scan plots
802.11 g High Channel
Horizontal

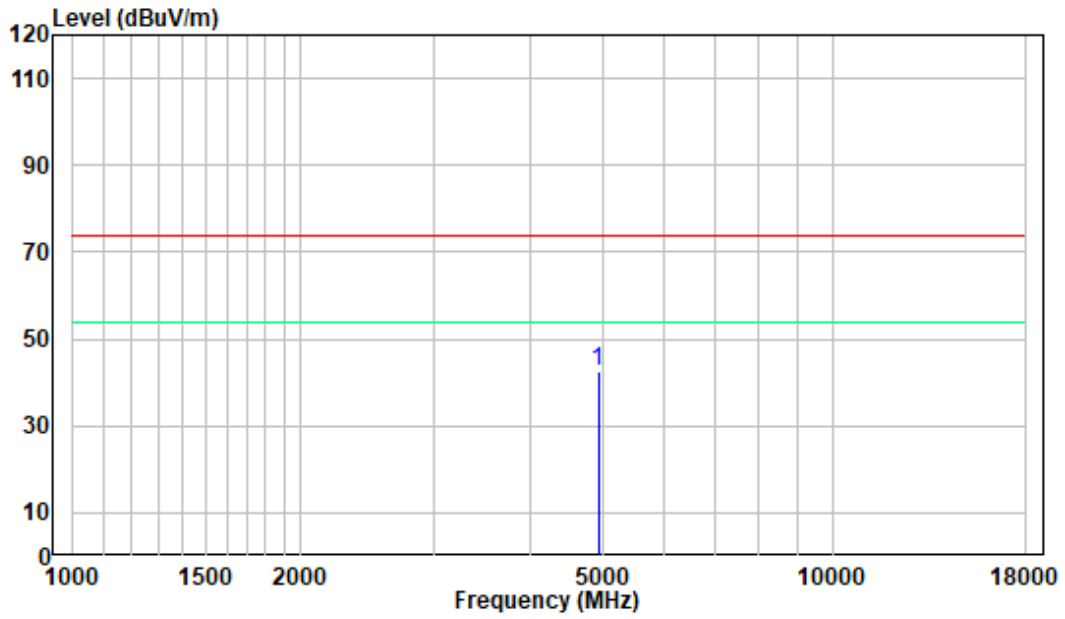


Vertical

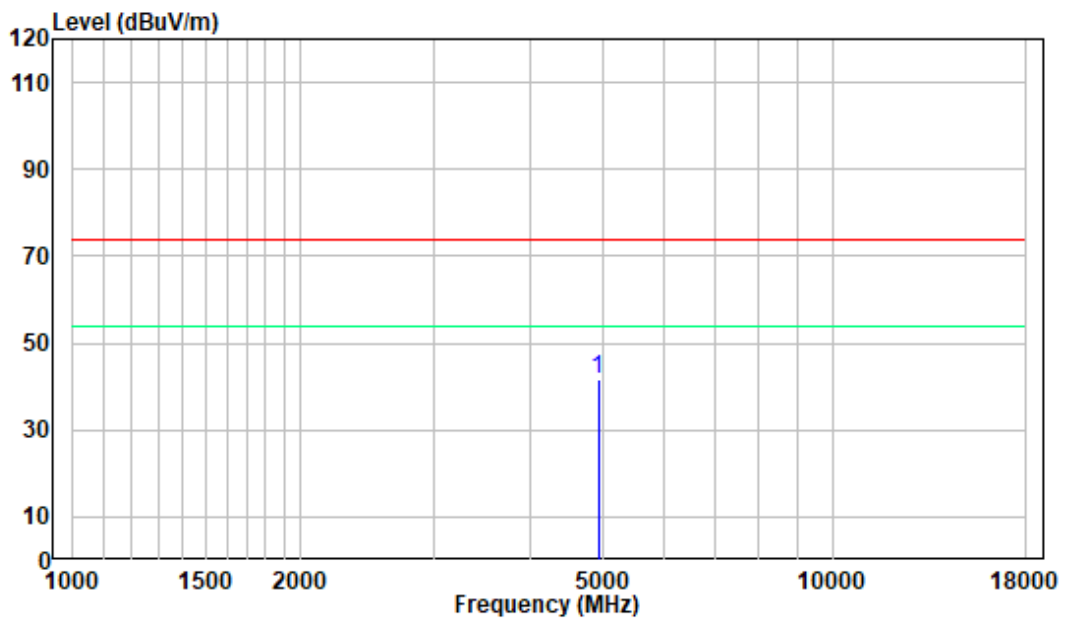


18 -25GHz: (Worst case)

**Pre-scan plots
802.11 g High Channel
Horizontal**

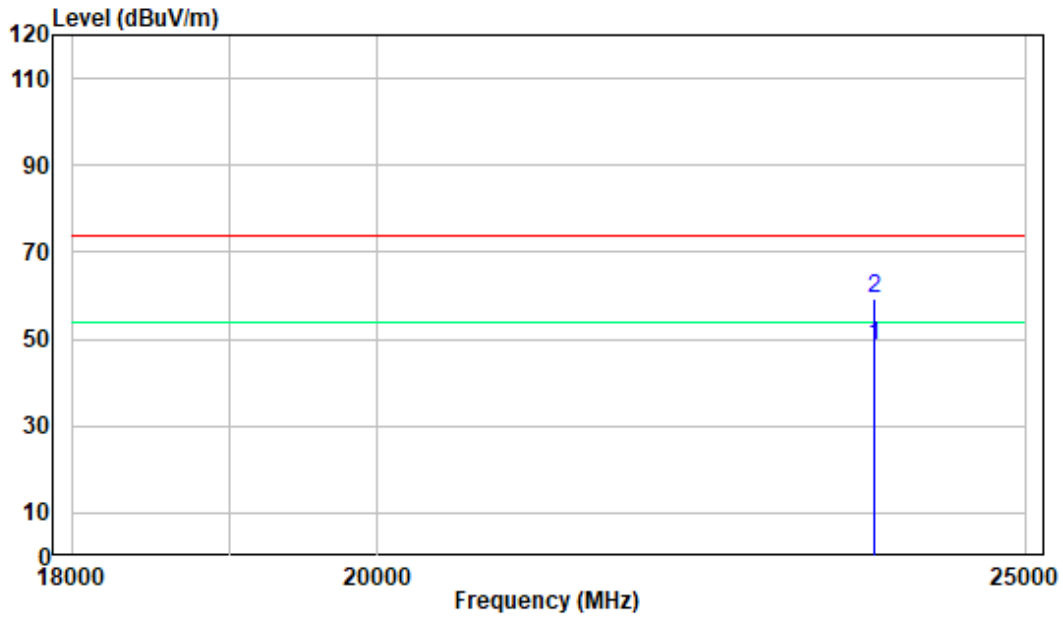

Vertical

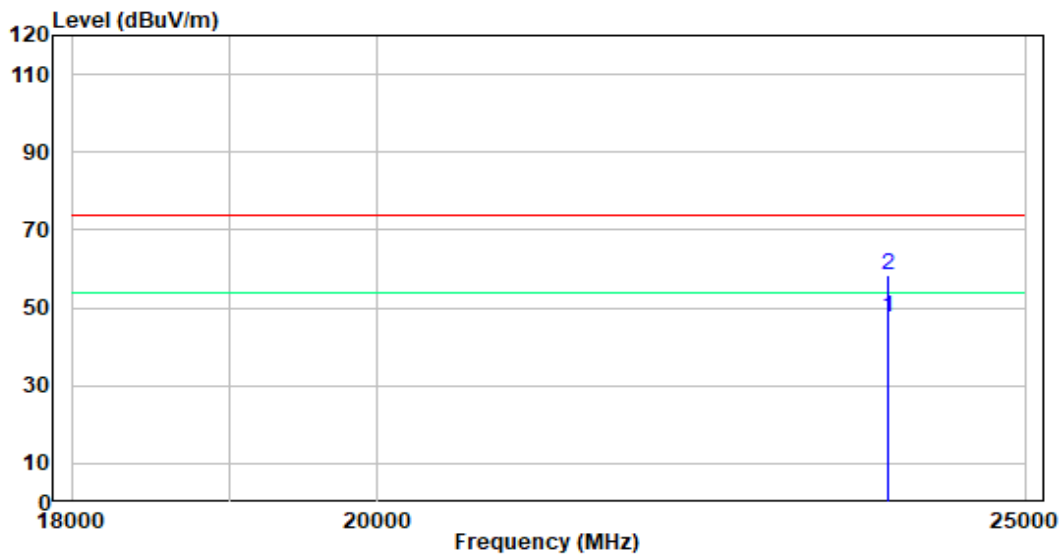


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-09-28.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix A and Appendix B.


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-09-28.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix C.

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

**Test Data****Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-09-28.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix D.


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

Temperature:	23 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Glenn Jiang on 2022-09-28.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix E.

APPENDIX A: 6dB Emission Bandwidth**Test Result**

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
11B MIMO	Ant1	2412	9.640	0.5	PASS
	Ant2	2412	9.200	0.5	PASS
	Ant1	2437	9.640	0.5	PASS
	Ant2	2437	9.200	0.5	PASS
	Ant1	2462	9.640	0.5	PASS
	Ant2	2462	9.200	0.5	PASS
11G MIMO	Ant1	2412	16.560	0.5	PASS
	Ant2	2412	16.560	0.5	PASS
	Ant1	2437	16.560	0.5	PASS
	Ant2	2437	16.560	0.5	PASS
	Ant1	2462	16.560	0.5	PASS
	Ant2	2462	16.560	0.5	PASS
11N20 MIMO	Ant1	2412	17.680	0.5	PASS
	Ant2	2412	17.680	0.5	PASS
	Ant1	2437	17.680	0.5	PASS
	Ant2	2437	17.680	0.5	PASS
	Ant1	2462	17.680	0.5	PASS
	Ant2	2462	17.680	0.5	PASS
11N40MIMO	Ant1	2422	36.640	0.5	PASS
	Ant2	2422	36.640	0.5	PASS
	Ant1	2437	36.640	0.5	PASS
	Ant2	2437	36.640	0.5	PASS
	Ant1	2452	36.640	0.5	PASS
	Ant2	2452	36.160	0.5	PASS


Test Graphs

11B MIMO_Ant1_2412

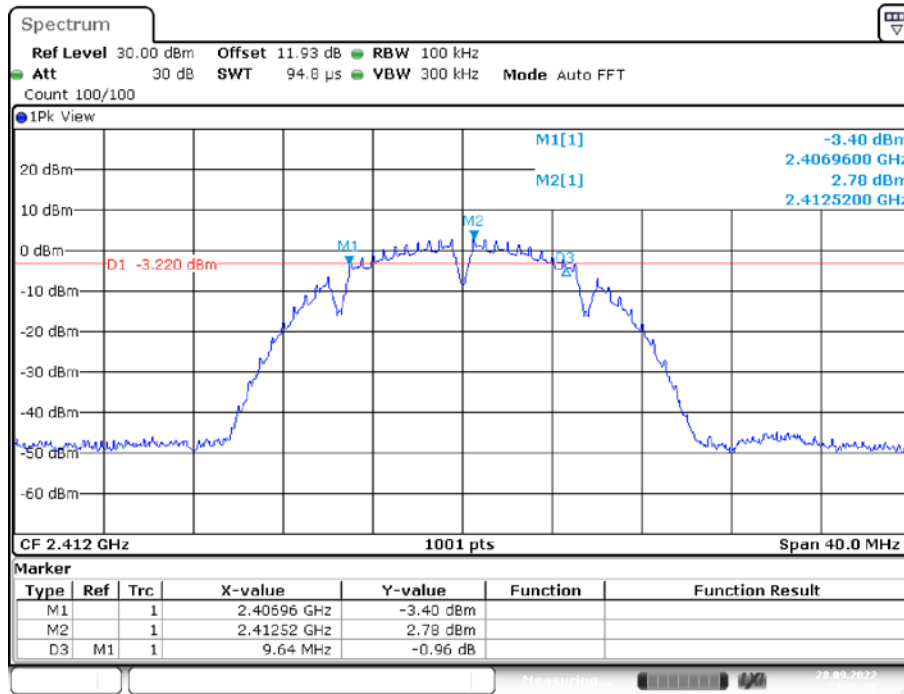


Date: 28.SEP.2022 14:56:10

11B MIMO_Ant2_2412

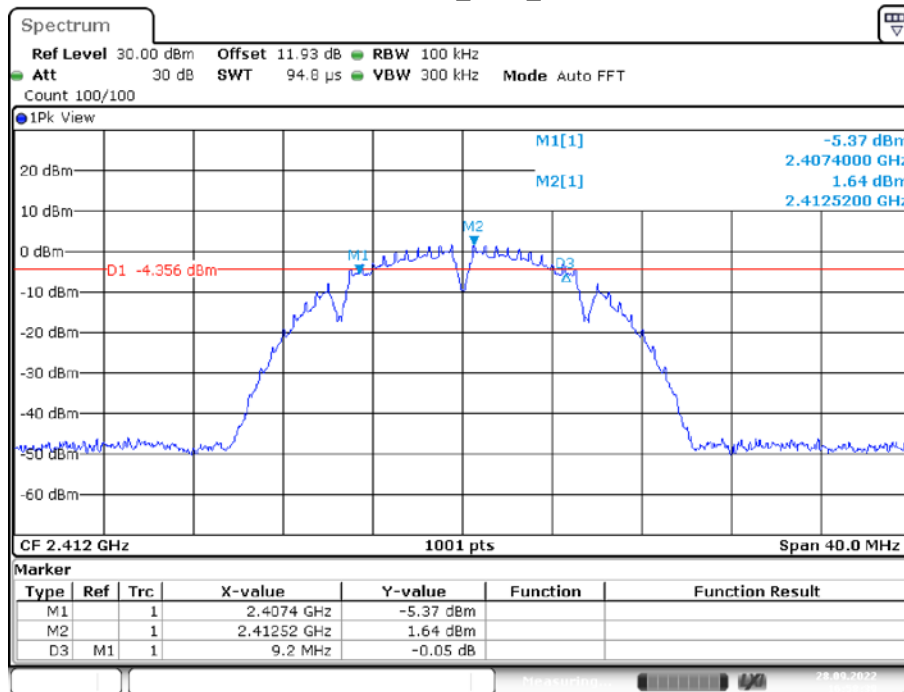


Date: 28.SEP.2022 16:58:39

11B MIMO_Ant1_2437

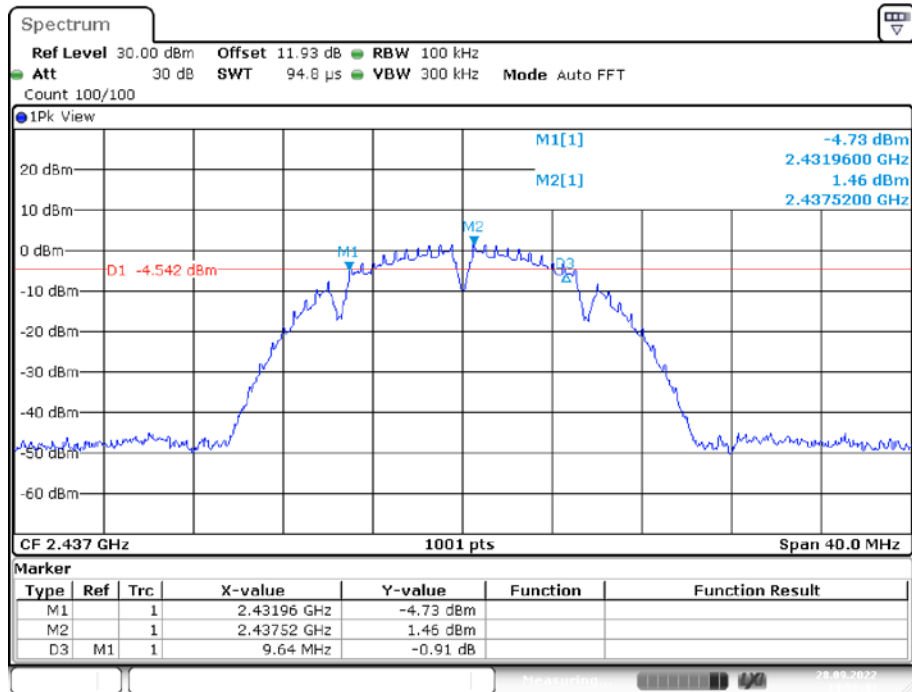


Date: 28.SEP.2022 14:58:44

11B MIMO_Ant2_2437

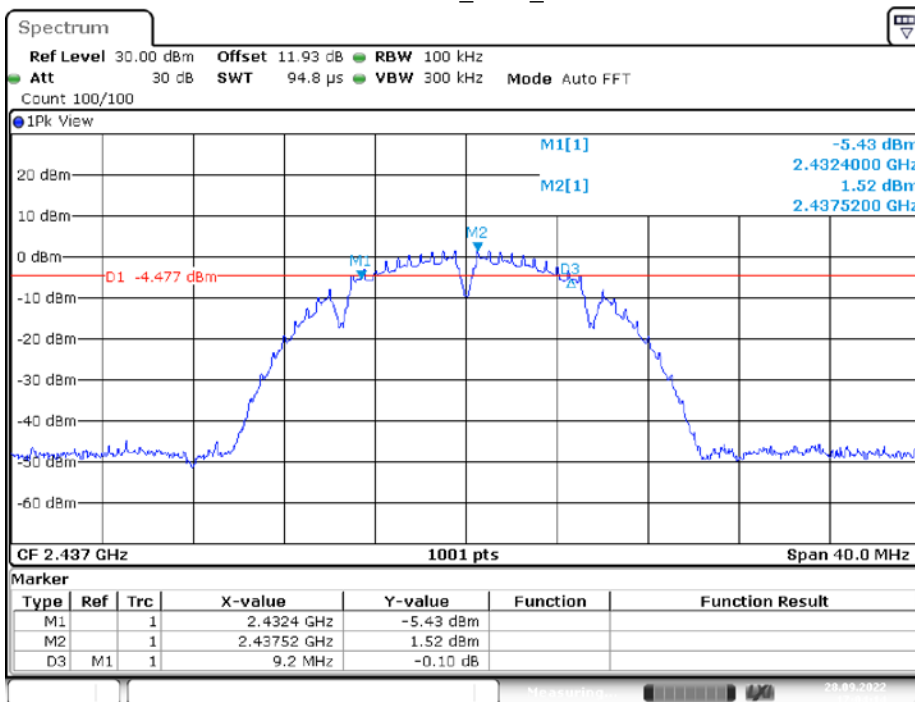


Date: 28.SEP.2022 17:04:14


11B MIMO_Ant1_2462

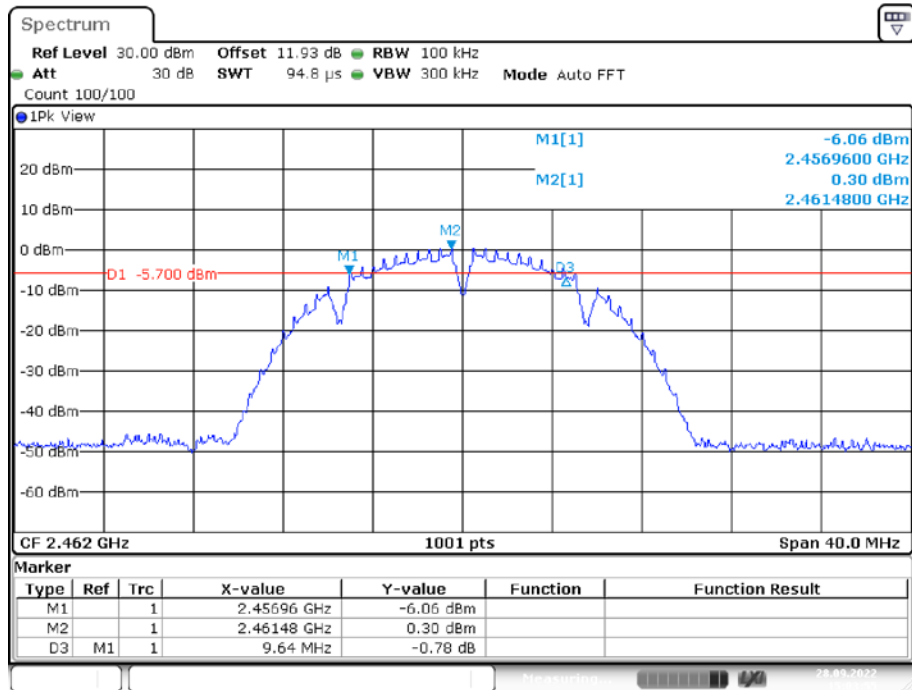


11B MIMO_Ant2_2462

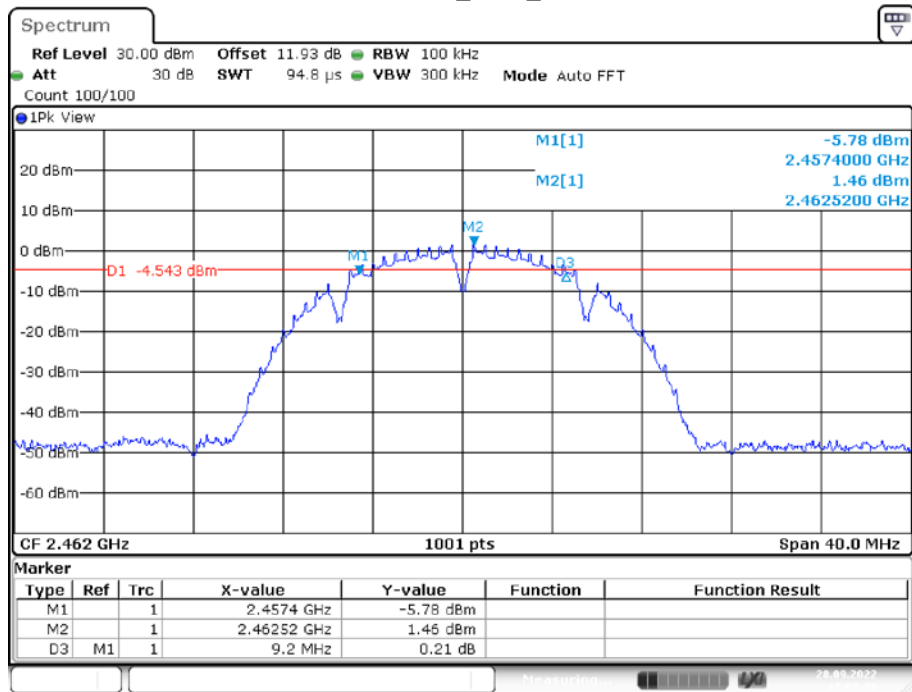


11G MIMO_Ant1_2412

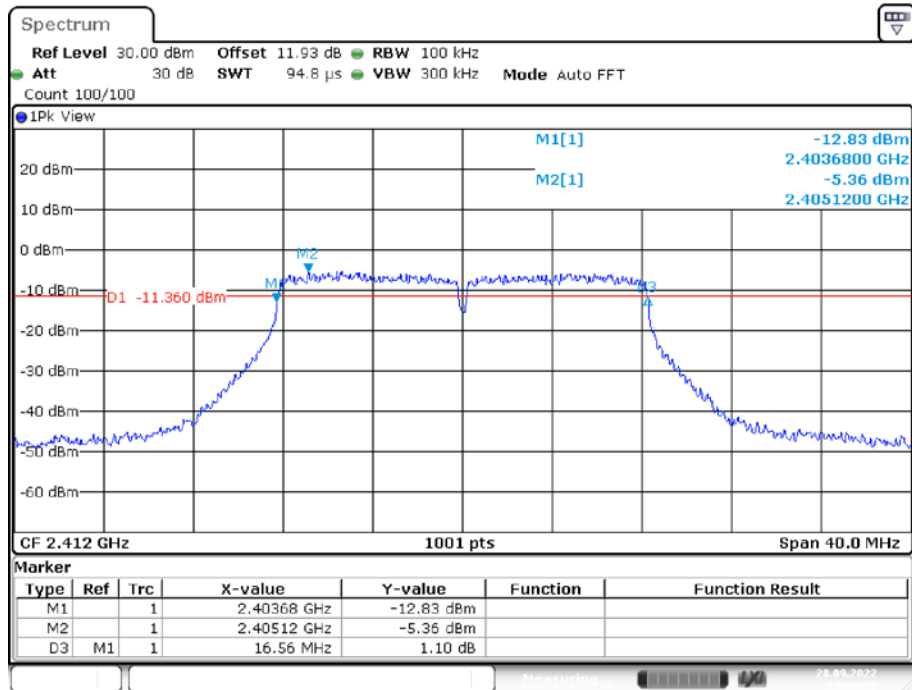


11G MIMO_Ant2_2412

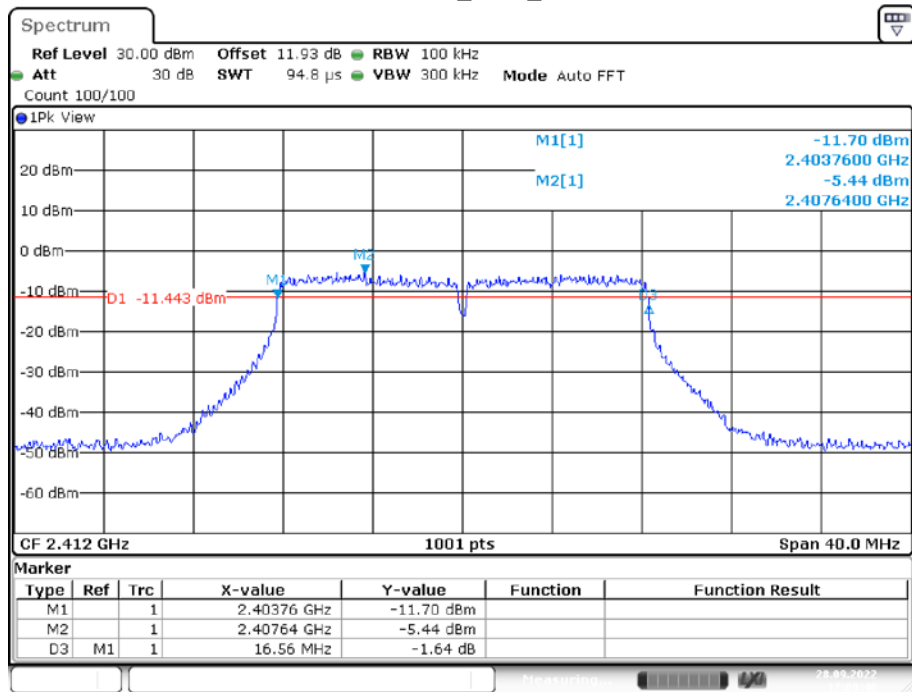


11G MIMO_Ant1_2437

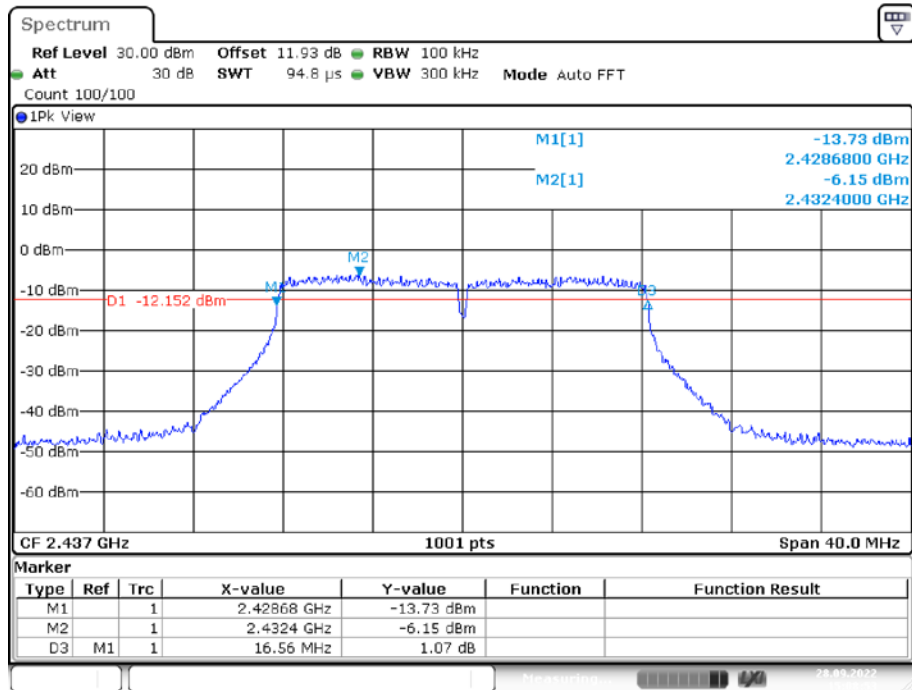


11G MIMO_Ant2_2437

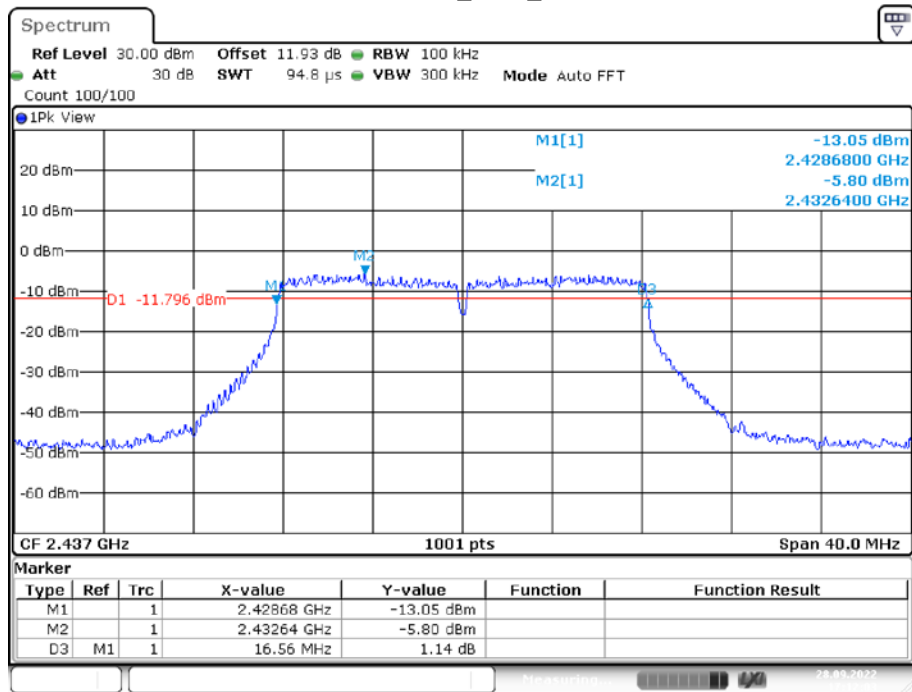


11G MIMO_Ant1_2462

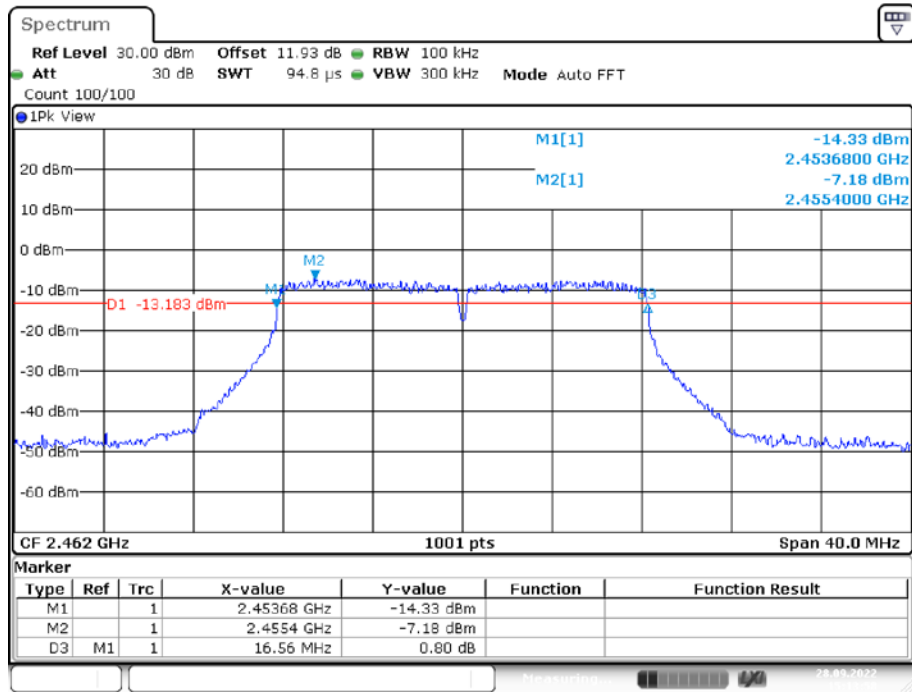


11G MIMO_Ant2_2462

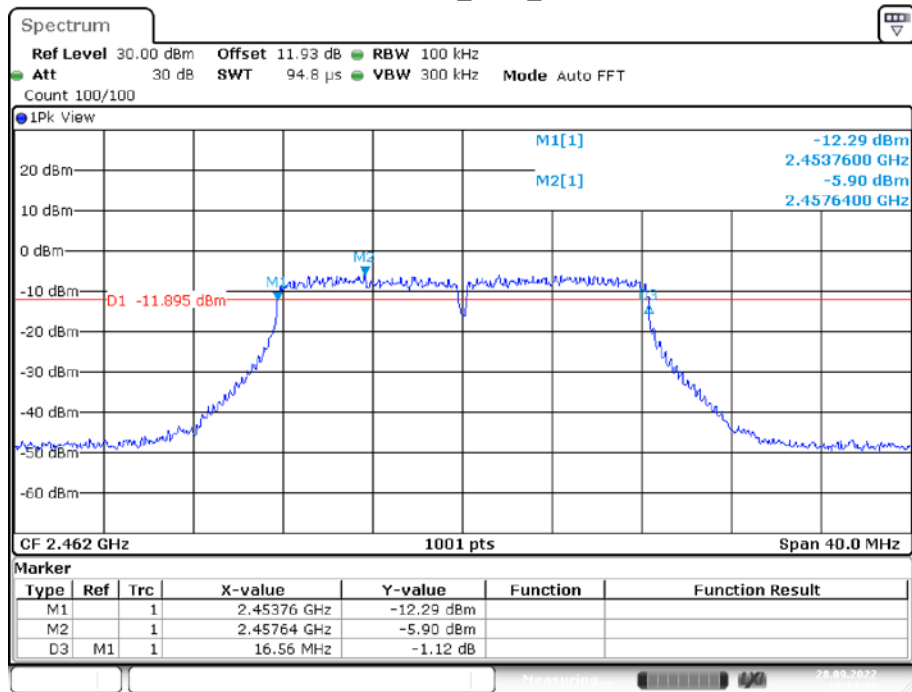


11N20 MIMO_Ant1_2412

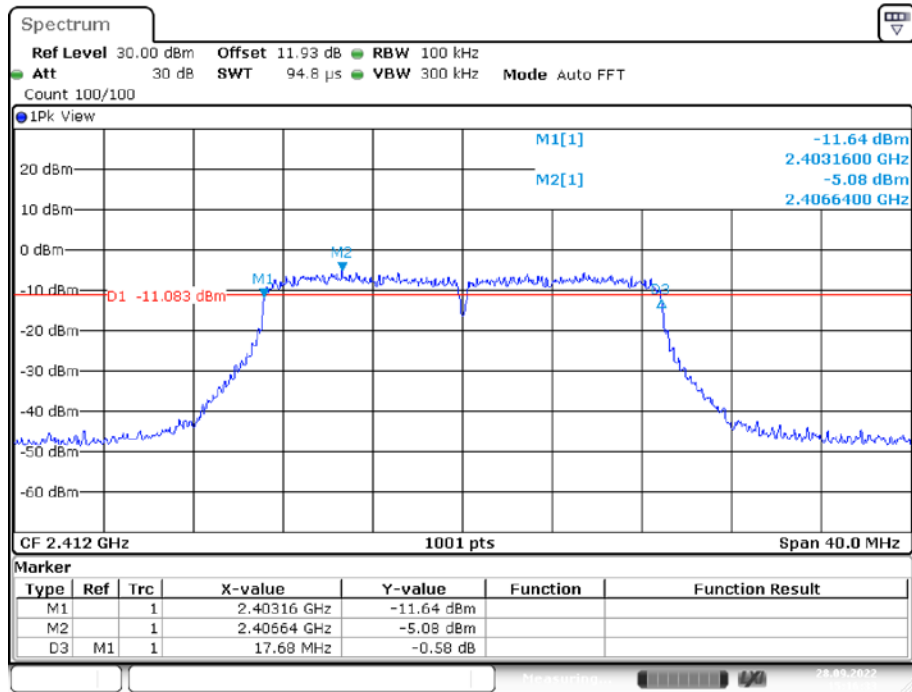


11N20 MIMO_Ant2_2412

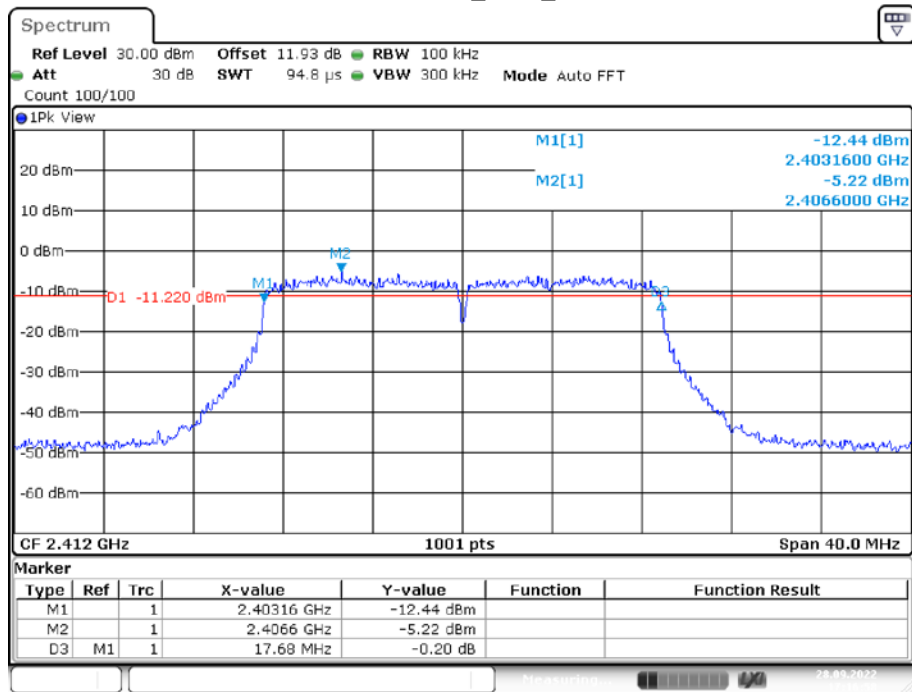


11N20 MIMO_Ant1_2437

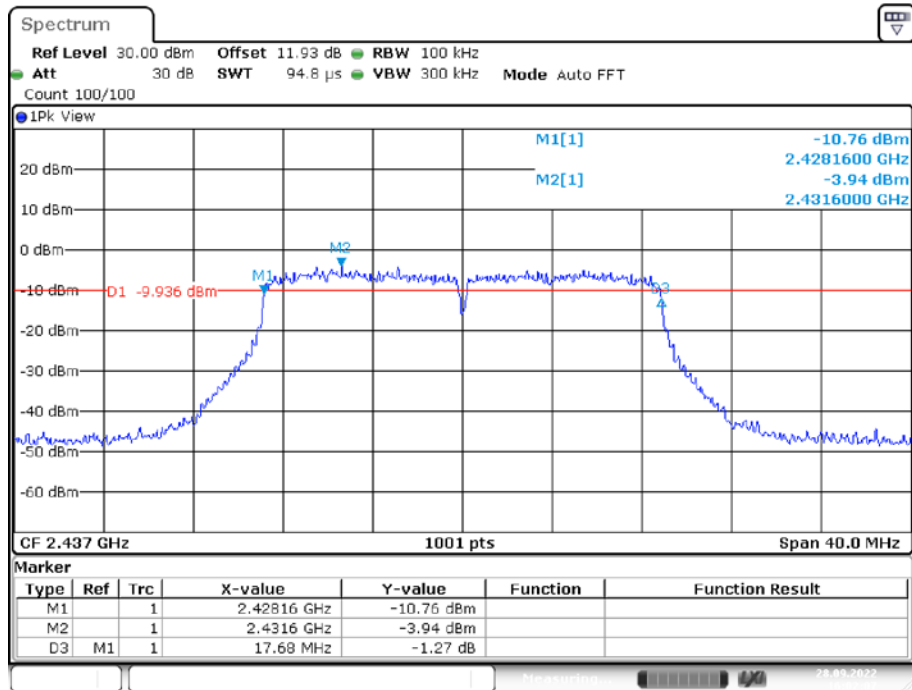


11N20 MIMO_Ant2_2437

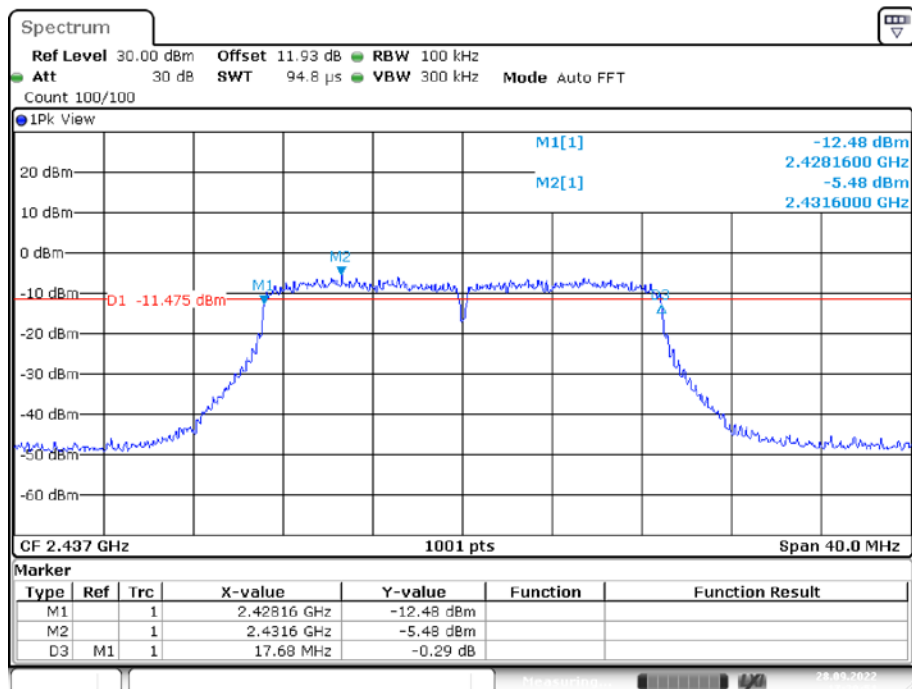


11N20 MIMO_Ant1_2462

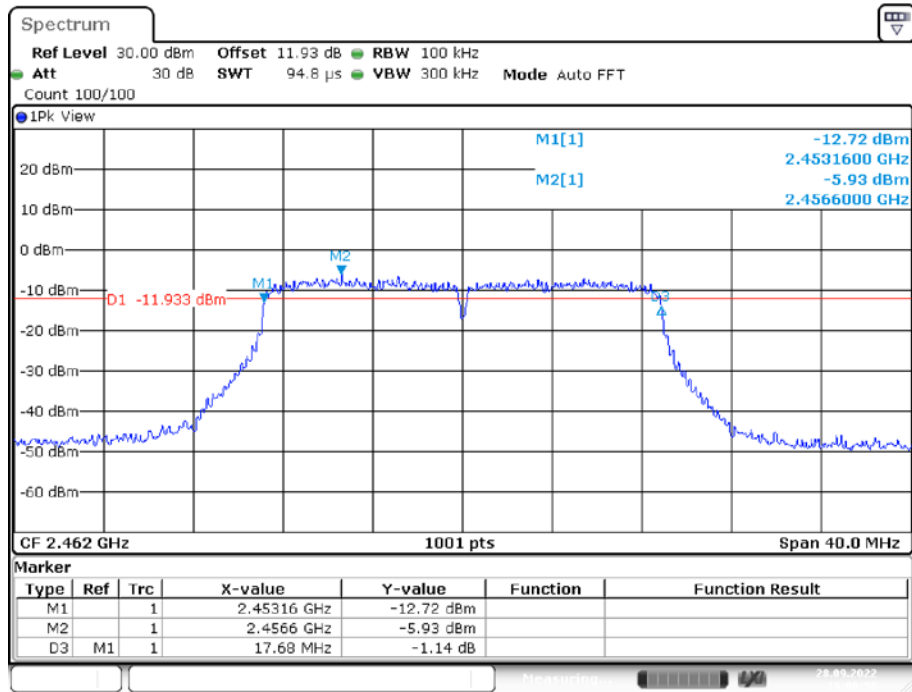


11N20 MIMO_Ant2_2462

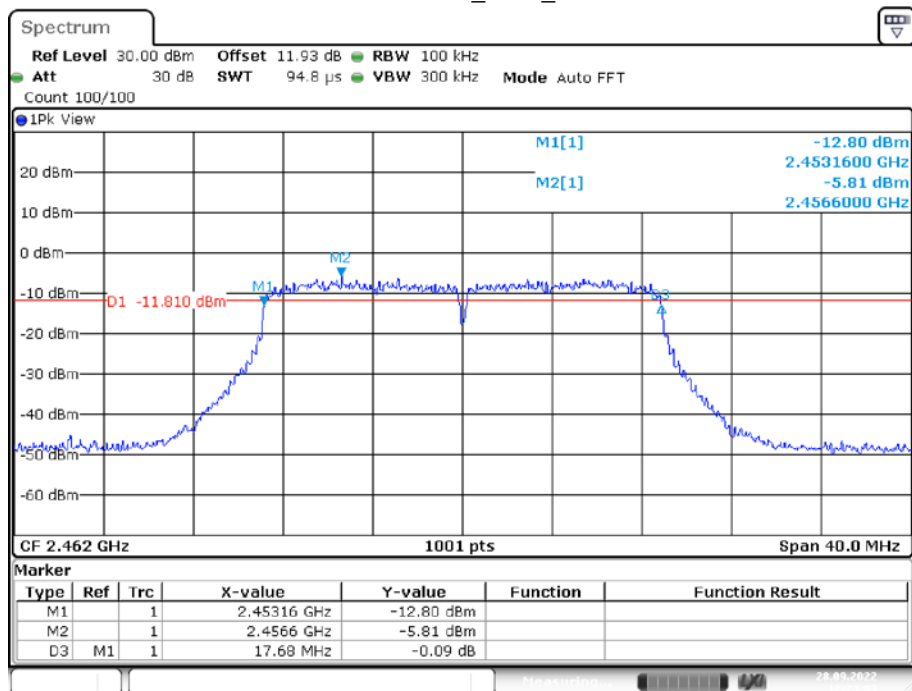


11N40 MIMO_Ant1_2422

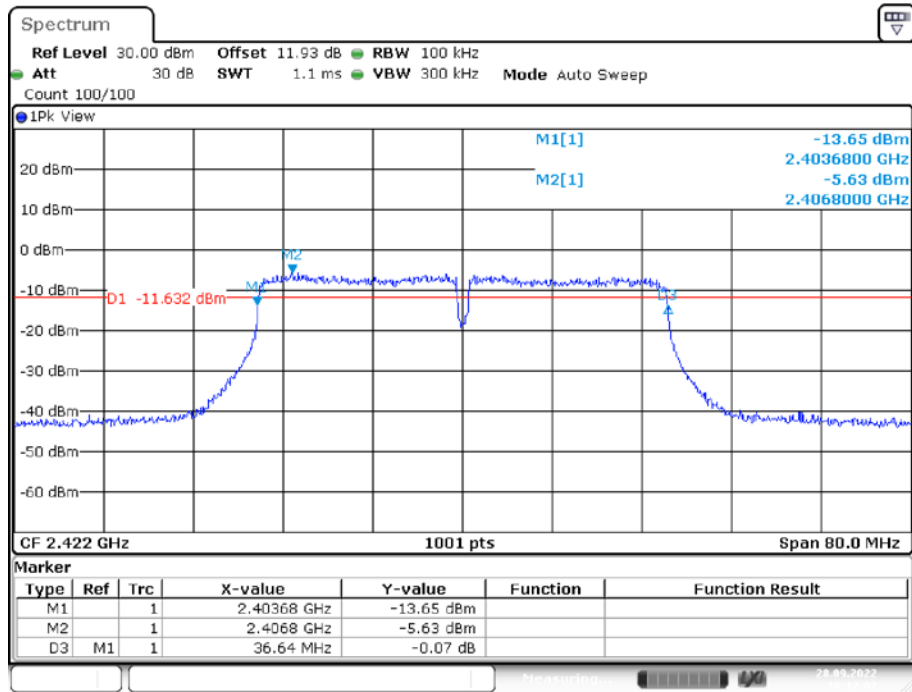


11N40 MIMO_Ant2_2422

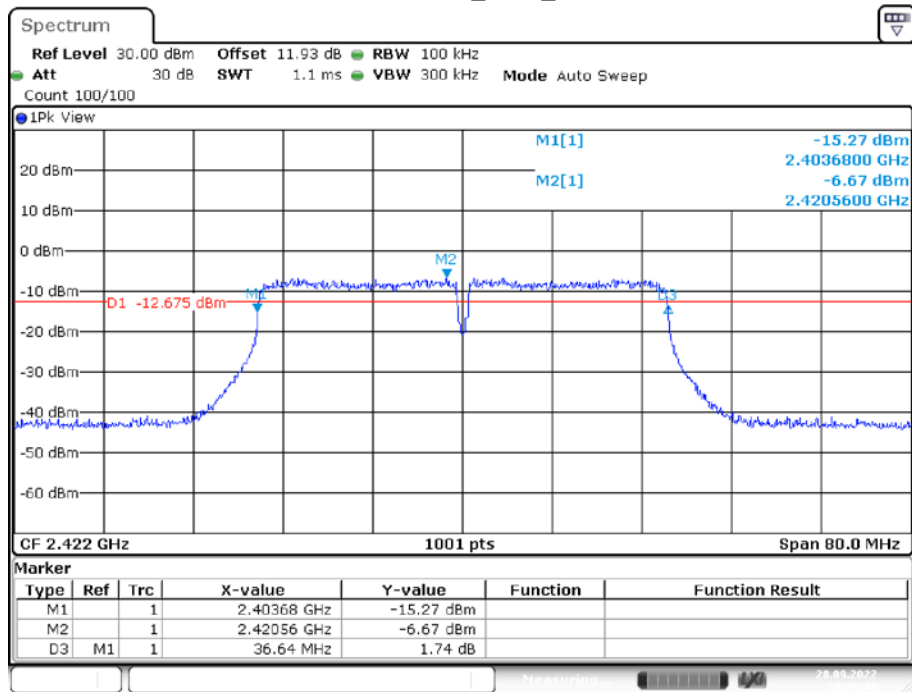


11N40 MIMO_Ant1_2437

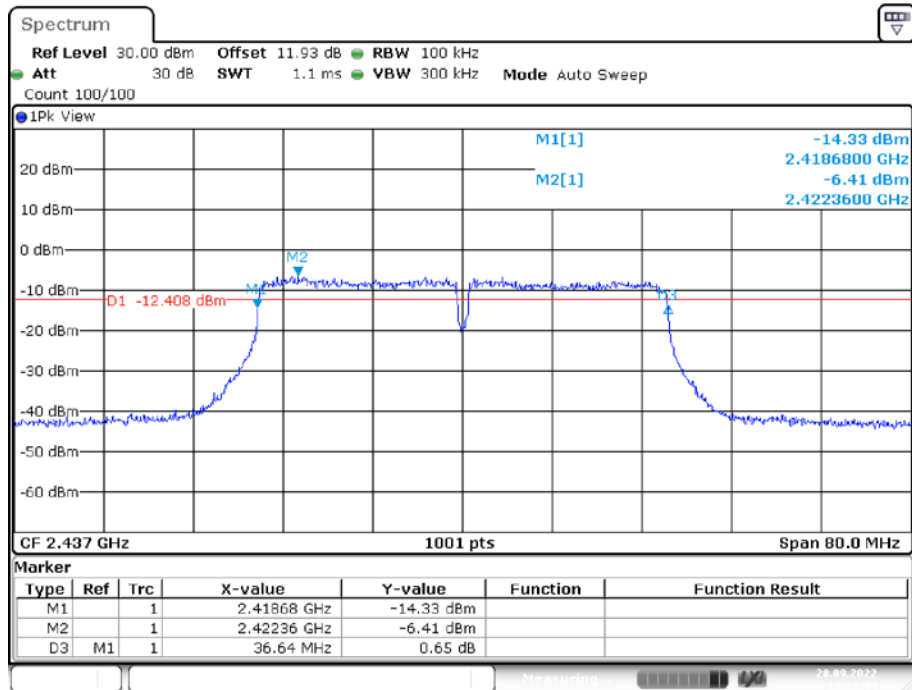


11N40 MIMO_Ant2_2437

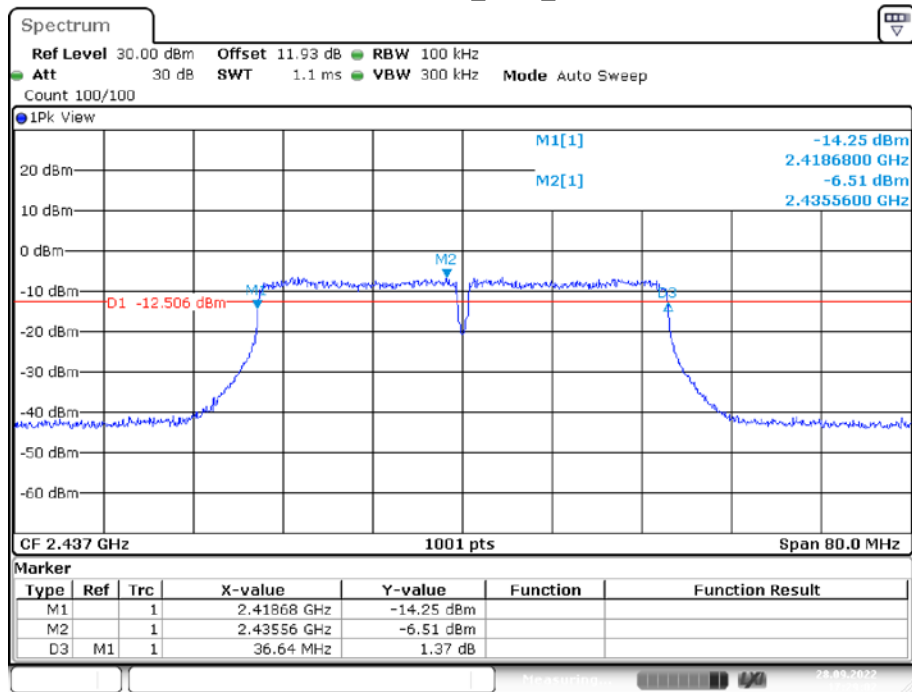

11N40 MIMO_Ant1_2452

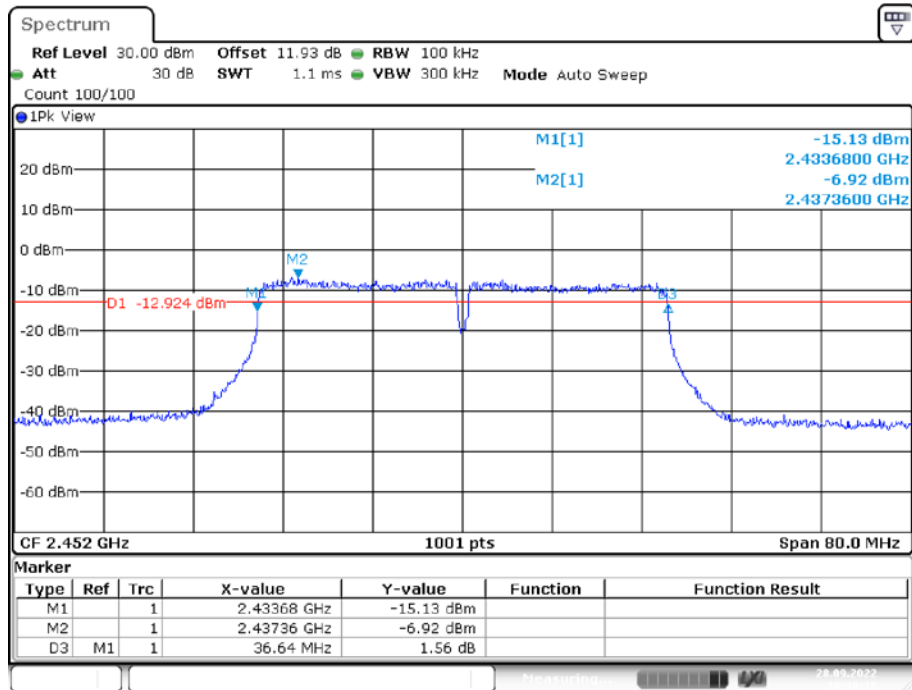

11N40 MIMO_Ant2_2452

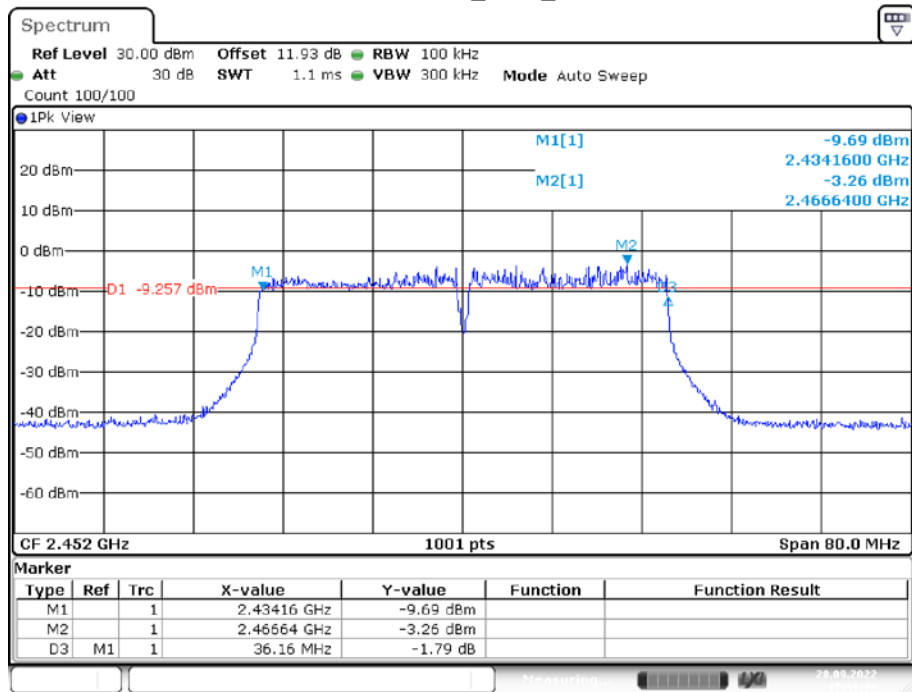


APPENDIX B: Occupied Channel Bandwidth**Test Result:**

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11B MIMO	Ant1	2412	13.906	---	PASS
	Ant2	2412	13.626	---	PASS
	Ant1	2437	13.746	---	PASS
	Ant2	2437	13.666	---	PASS
	Ant1	2462	13.746	---	PASS
	Ant2	2462	13.666	---	PASS
11G MIMO	Ant1	2412	17.183	---	PASS
	Ant2	2412	16.983	---	PASS
	Ant1	2437	17.063	---	PASS
	Ant2	2437	17.103	---	PASS
	Ant1	2462	17.223	---	PASS
	Ant2	2462	17.063	---	PASS
11N20 MIMO	Ant1	2412	18.062	---	PASS
	Ant2	2412	18.022	---	PASS
	Ant1	2437	18.022	---	PASS
	Ant2	2437	18.062	---	PASS
	Ant1	2462	18.062	---	PASS
	Ant2	2462	18.062	---	PASS
11N40 MIMO	Ant1	2422	37.163	---	PASS
	Ant2	2422	37.163	---	PASS
	Ant1	2437	37.163	---	PASS
	Ant2	2437	37.243	---	PASS
	Ant1	2452	37.243	---	PASS
	Ant2	2452	37.163	---	PASS


Test Graphs:

11B MIMO_Ant1_2412

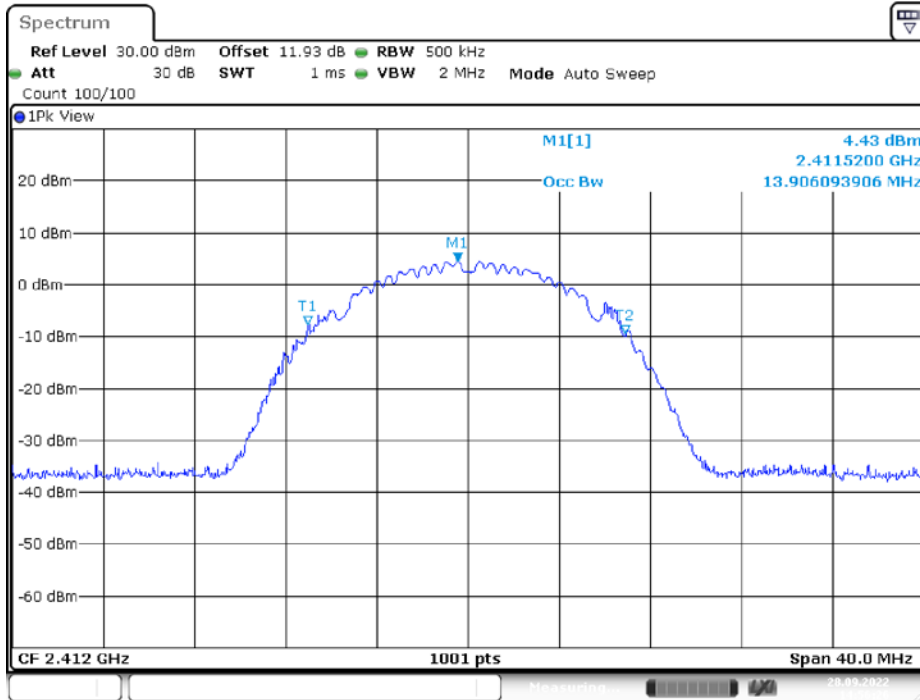


Date: 28.SEP.2022 14:56:26

11B MIMO_Ant2_2412

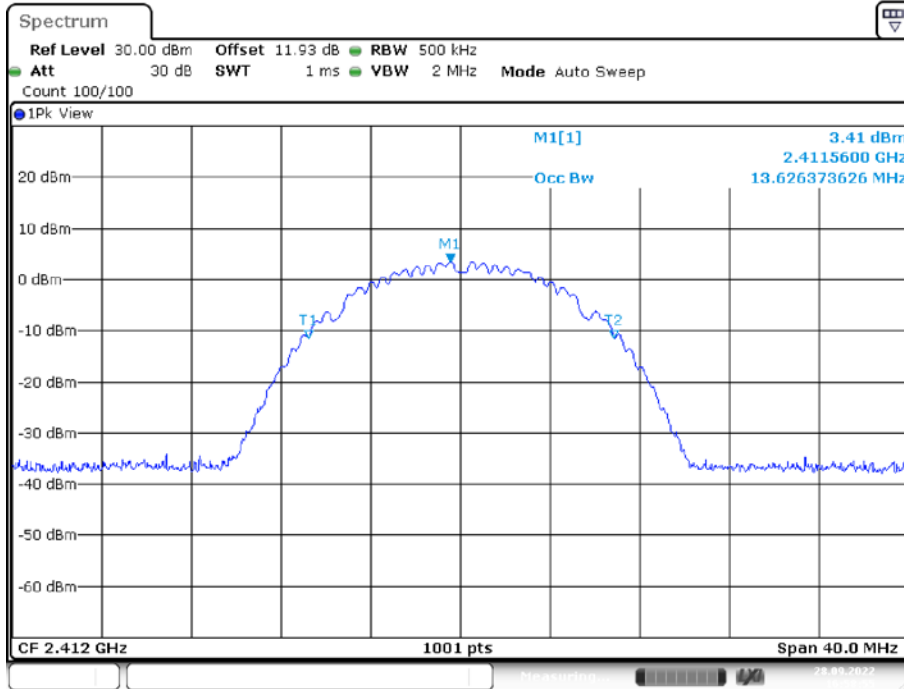


Date: 28.SEP.2022 16:58:56


11B MIMO_Ant1_2437

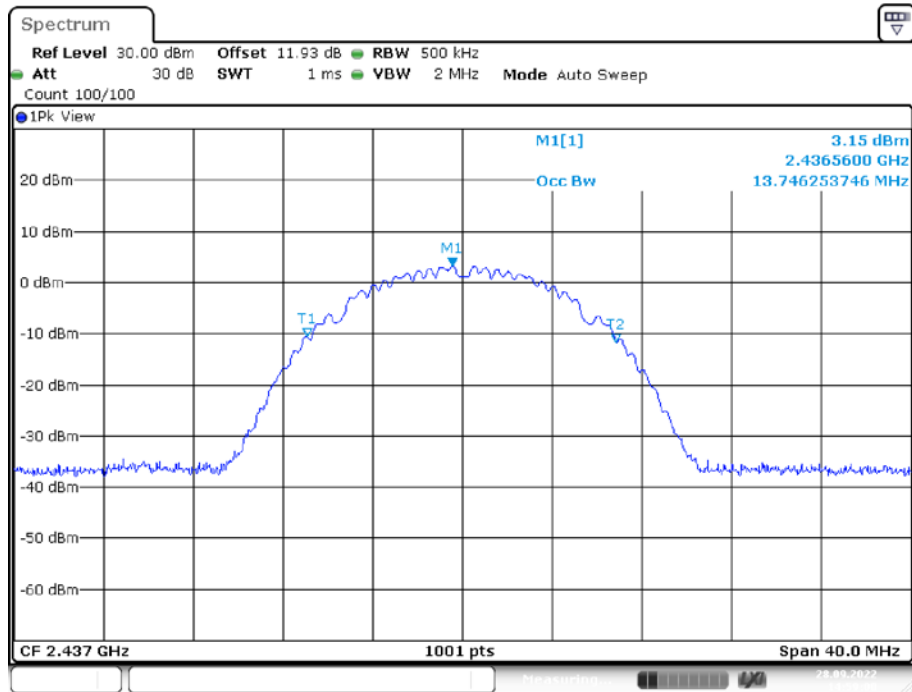


11B MIMO_Ant2_2437

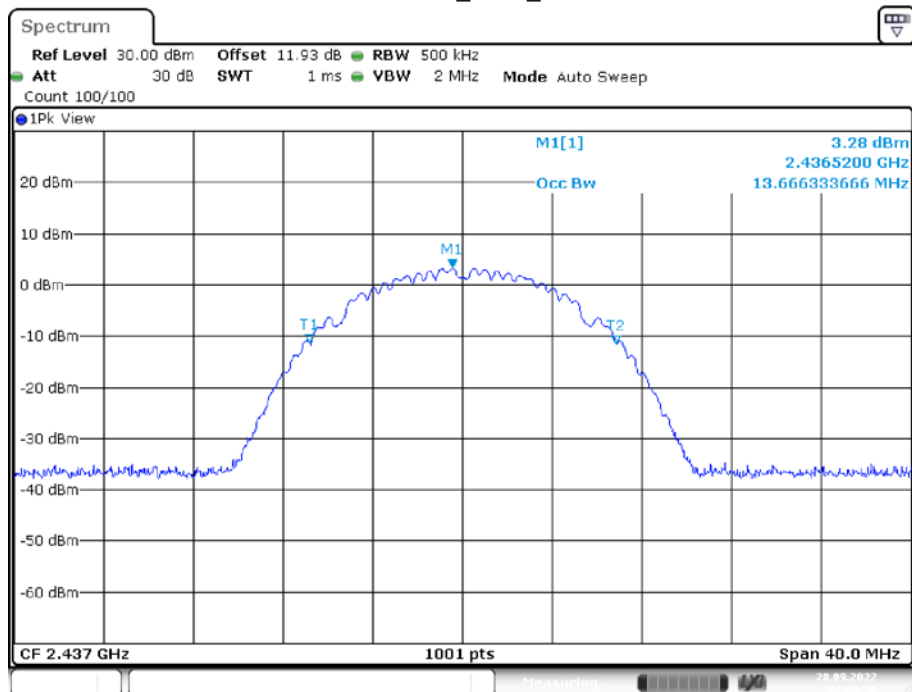


11B MIMO_Ant1_2462

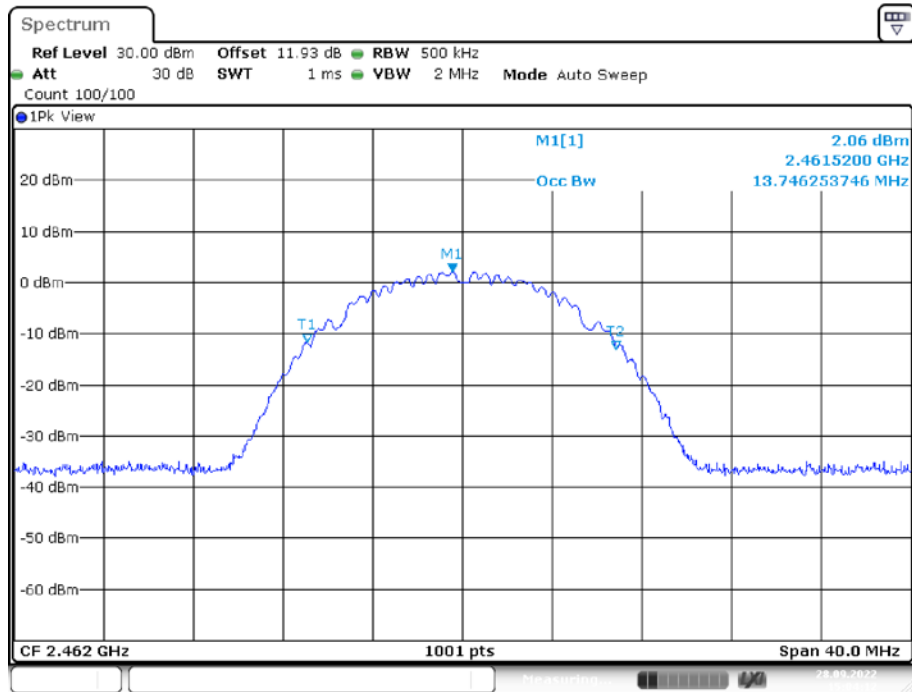


11B MIMO_Ant2_2462

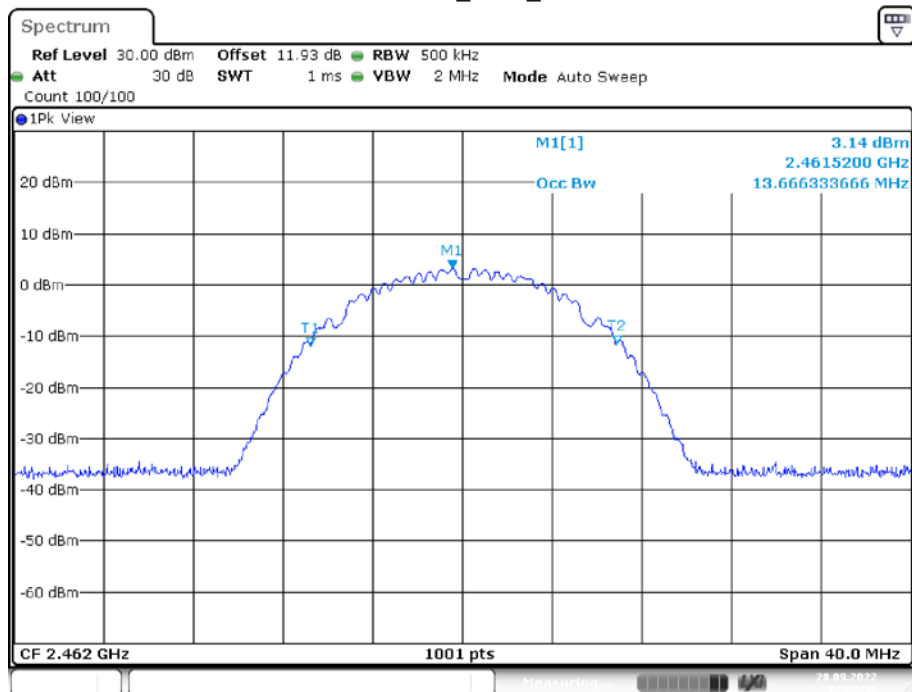


11G MIMO_Ant1_2412

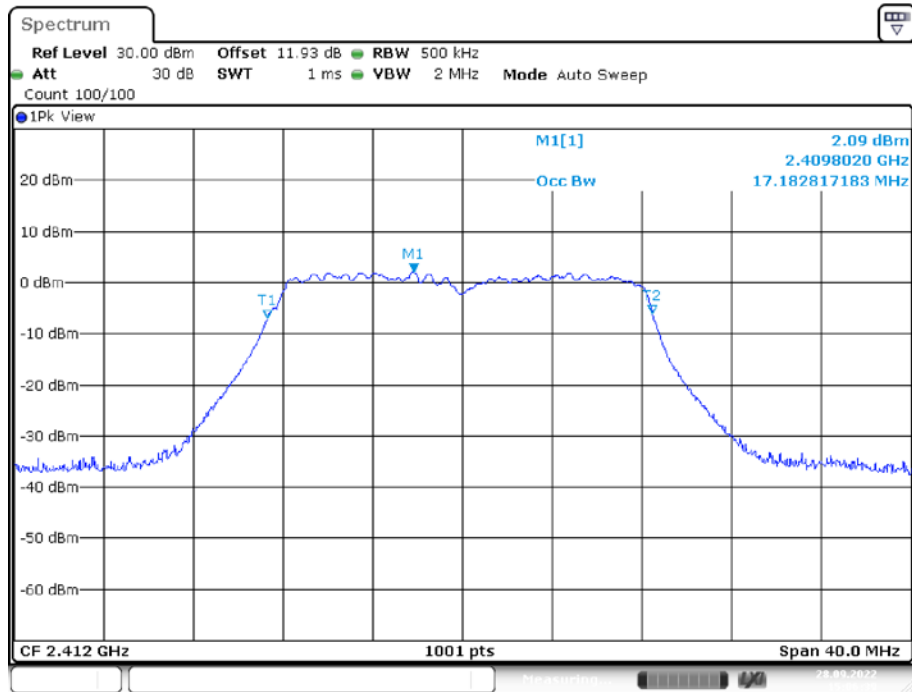


11G MIMO_Ant2_2412

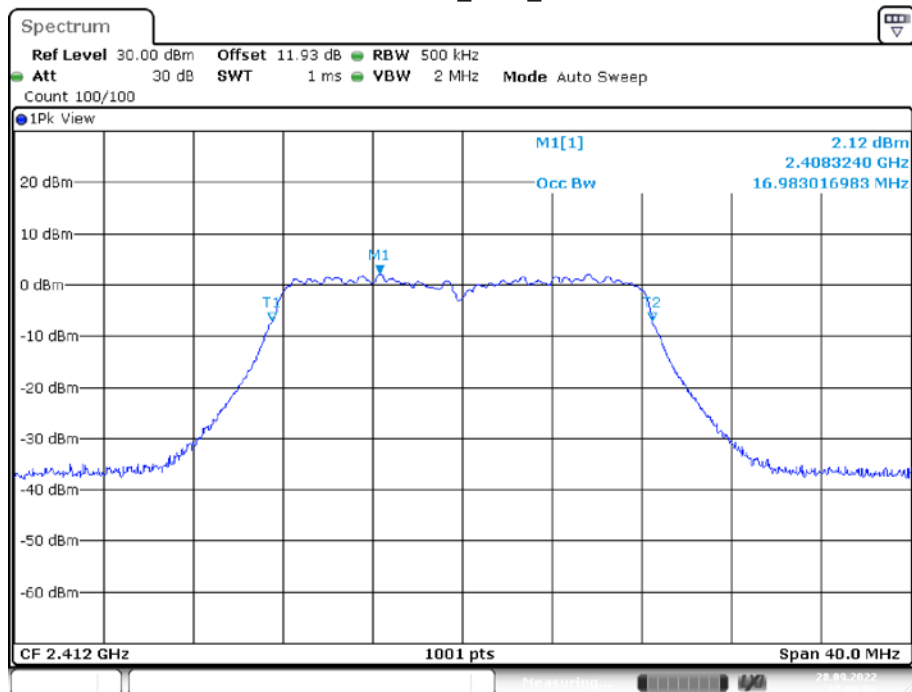


11G MIMO_Ant1_2437

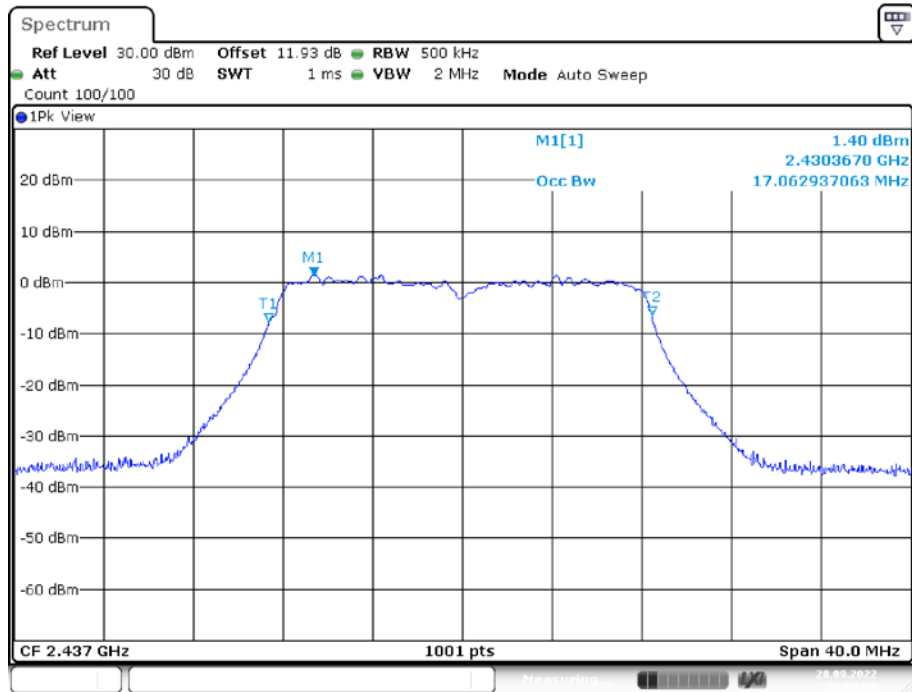

11G MIMO_Ant2_2437

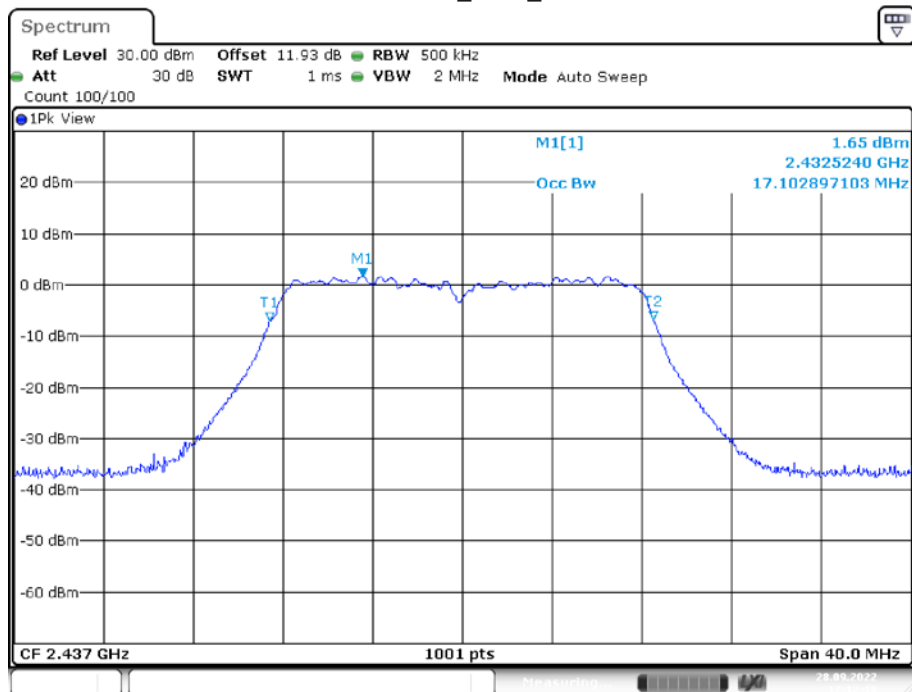

11G MIMO_Ant1_2462

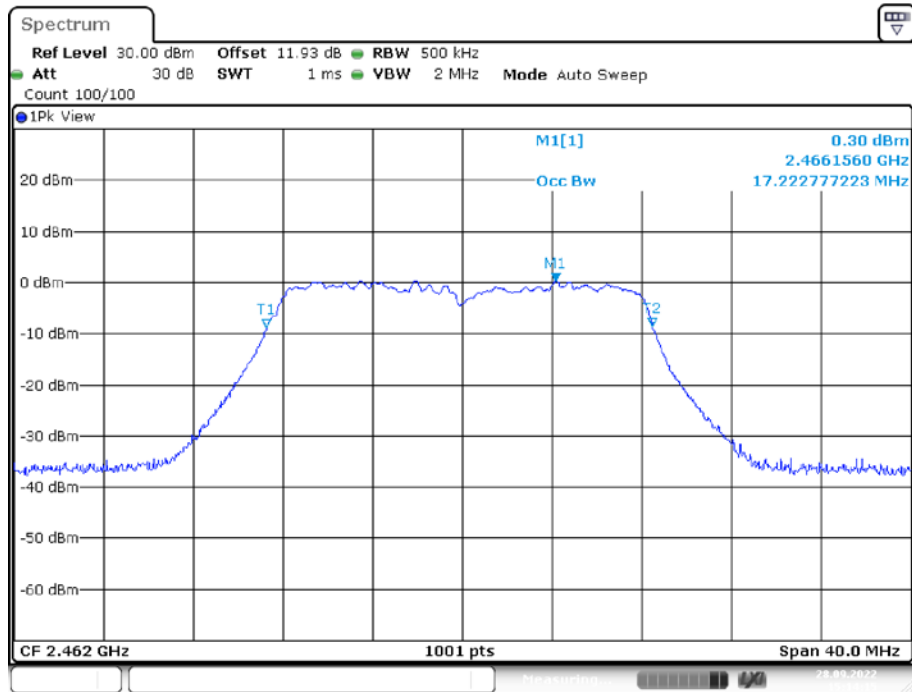

11G MIMO_Ant2_2462

