

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Chunghsin Technology Group CO., LTD

32inch HD DLED TV

Model Number: WD32HBB101

Additional Model: WD32HBR105

FCC ID: 2AE2W-WD32HBB101

Prepared for:	Chunghsin Technology Group CO., LTD
	NO. 618-2 GONGREN WEST ROAD, JIAOJIANG AREA,
T	AIZHOU, ZHEJIANG, China
Prepared By:	EST Technology Co., Ltd.
	San Tun Management Zone, Houjie District, Dongguan, China
	Tel: 86-769-83081888-808


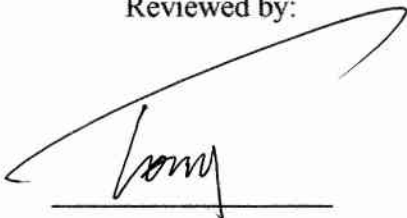

Report Number:	ESTE-R1709075
Date of Test:	July 02,~09, 2017
Date of Report:	July 10, 2017

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION	3
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT)	5
2. SUMMARY OF TEST	6
2.1. Summary of test result	6
2.2. Test Facilities	7
2.3. Measurement uncertainty	8
2.4. Assistant equipment used for test	8
2.5. Block Diagram	8
2.6. Test mode	9
2.7. Channel List	9
2.8. Test Equipment	10
3 POWER LINE CONDUCTED EMISSION TEST	11
3.1. Limit	11
3.2. Test Procedure	11
3.3. Test Result	11
3.4. Test data	12
4 RADIATED EMISSION TEST	14
4.1. Limit	14
4.2. Block Diagram of Test setup	15
4.3. Test Procedure	16
4.4. Test Result	16
4.5. Test Data	17
5 BAND EDGE COMPLIANCE TEST	45
5.1. Limit	45
5.2. Block Diagram of Test setup	45
5.3. Test Procedure	45
5.4. Test Result	45
5.5. Test Data	46
6 6dB & 20dB Bandwidth Test	62
6.1. Limit	62
6.2. Test Procedure for 6dB	62
6.3. Test Procedure for 20dB	62
6.4. Test Result	64
6.5. 6dB Test Data	65
6.6. 20dB Test Data	73
7 OUTPUT POWER TEST	81
7.1. Limit	81
7.2. Test Procedure	81
7.3. Test Result	82
7.4. Test Data	83
8 POWER SPECTRAL DENSITY TEST	91
8.1. Limit	91

8.2	Test Procedure.....	91
8.3	Test Result.....	92
8.4	Test Data	93
9	ANTENNA REQUIREMENTS	101
9.1	Limit	101
9.2	Result	101
10	TEST SETUP PHOTO	102
11	PHOTOS OF EUT	104

EST Technology Co., Ltd.

Applicant:	Chunghsin Technology Group CO., LTD		
Address:	NO. 618-2 GONGREN WEST ROAD, JIAOJIANG AREA, TAIZHOU, ZHEJIANG, China		
Manufacturer	Chunghsin Technology Group CO., LTD		
Address:	NO. 618-2 GONGREN WEST ROAD, JIAOJIANG AREA, TAIZHOU, ZHEJIANG, China		
E.U.T:	32inch HD DLED TV		
Model Number:	WD32HBB101 (Each model has two appearances)		
Additional Model:	WD32HBR105 (It's just that the sales area is different, other is exactly the same.)		
Power Supply:	AC 120V, 50/60Hz		
Test Voltage:	AC 120V/60Hz		
Trade Name:		Serial No.:	-----
Date of Receipt:	July 02, 2017	Date of Test:	July 02,~09, 2017
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2016 ANSI C63.10:2013		
Test Result:	<p>The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements.</p> <p style="text-align: center;">This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p>		
	Prepared by:	Reviewed by:	Date: July 10, 2017
	 _____ Amy / Assistant	 _____ Tony / Engineer	Approved by:  _____ Iceman Hu / Manager
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	32inch HD DLED TV
Model Number	:	WD32HBB101
FCC ID	:	2AE2W-WD32HBB101
Modulation	:	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Operation Frequency	:	IEEE 802.11b/g: 2412 ~ 2462 MHz IEEE 802.11n HT20 : 2412 ~ 2462 MHz IEEE 802.11n HT40: 2422 ~ 2452 MHz
Number of channel	:	IEEE 802.11b 2412 ~ 2462 MHz: 11 Channels IEEE 802.11g 2412 ~ 2462 MHz: 11 Channels IEEE 802.11n HT20 2412 ~ 2462 MHz: 11 Channels IEEE 802.11n HT20 2422 ~ 2452 MHz: 7 Channels
Antenna	:	Internal antenna, 2 dBi Gain
Sample Type	:	Prototype production

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10:2013	PASS
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10:2013 KDB 558074	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Conducted spurious emissions	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note: KDB 558074 D01 DTS Meas Guidance v04		

2.2. Test Facilities

EMC Lab	:	<p>Certificated by CNAS, CHINA Registration No.: L5288 Date of registration: November 13, 2014</p> <p>Certificated by FCC, USA Registration No.: 989591 Date of registration: November 15, 2016</p> <p>Certificated by Industry Canada Registration No.: 9405A-1 Date of registration: December 30, 2015</p> <p>Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2014</p> <p>Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: February 07, 2015</p> <p>Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011</p> <p>Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011</p> <p>Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011</p> <p>Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011</p>
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China

2.3. Measurement uncertainty

Test Item	Uncertainty
Uncertainty for Conduction emission test	±3.48dB
Uncertainty for spurious emissions test (30MHz-1GHz)	±4.56 dB(Polarize: H)
	±4.78 dB(Polarize: V)
Uncertainty for spurious emissions test (1GHz to 18GHz)	±4.46dB
Uncertainty for radio frequency	7×10^{-8}
Uncertainty for conducted RF Power	0.20dB
Uncertainty for Power density test	0.26dB


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2.4. Assistant equipment used for test

2.4.1. N/A

2.5. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 or 1.5 meter high above ground. EUT was be set into Wi-Fi test mode by software before test.



(EUT: 32inch HD DLED TV)

2.6. Test mode

A special test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode and data rate.

Test mode	Lower channel	Center channel	Upper channel
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20 Transmitting	2412MHz	2437MHz	2462MHz
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20 Receiving	2412MHz	2437MHz	2462MHz
IEEE 802.11n HT40 Transmitting	2422MHz	2437MHz	2452MHz
IEEE 802.11n HT40 Receiving	2422MHz	2437MHz	2452MHz

2.7. Channel List

IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20					
Channel	Frequency (MHz)	Channel (MHz)	Frequency (MHz)	Channel (MHz)	Frequency (MHz)
1	2412	6	2437	1	2462
2	2417		2442		
3	2422		2447		
4	2427		2452		
5	2432	10	2457		
IEEE 802.11n HT40					
Channel	Frequency (MHz)	Channel (MHz)	Frequency (MHz)	Channel (MHz)	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427		2442		
5	2432		2447		

2.8. Test Equipment

2.8.1. For conducted emission test

Equipment Manufacturer		Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	June 17,17	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	101260	June 17,17	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	June 17,17	1 Year

2.8.2. For radiated emission test(9 kHz-30MHz)

Equipment Manufacturer		Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESCI	100435	June 17,17	1 Year
Loop Antenna	ETS-LINDGREN	6502 00071730		June 08,17	1 Year
RF Cable	MIYAZAKI	5D-2W 966	Chamber No.1	June 17,17	1 Year

2.8.3. For radiated emissions test (30-1000MHz)

Equipment Manufacturer		Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	June 17,17	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	June 17,17	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	June 08,17	1 Year
Signal Amplifier	Agilent	310N	187037	June 17,17	1 Year
RF Cable	MIYAZAKI	5D-2W 966	Chamber No.1	June 17,17	1 Year

2.8.4. For radiated emission test(above 1GHz)

Equipment Manufacturer		Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120D1002	June 08,17	1 Year
Board-Band Horn Antenna	SCHWARZBECK	BBHA 9170	9170-497	June 08,17	1 Year
Signal Amplifier	SCHWARZBECK	BBV9718	9718-212	June 17,17	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	June 17,17	1 Year
Spectrum Analyzer	Rohde &Schwarz	FSV	103173	June 17,17	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	June 17,17	1 Year

3 POWER LINE CONDUCTED EMISSION TEST

3.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

3.2. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

3.3. Test Result


PASS.

3.4. Test data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 21 File: \\Emc-ce-2\Test Data\2017\RF\ZHONG XIN KE JIEM6 (24) Date: 2017-07-03

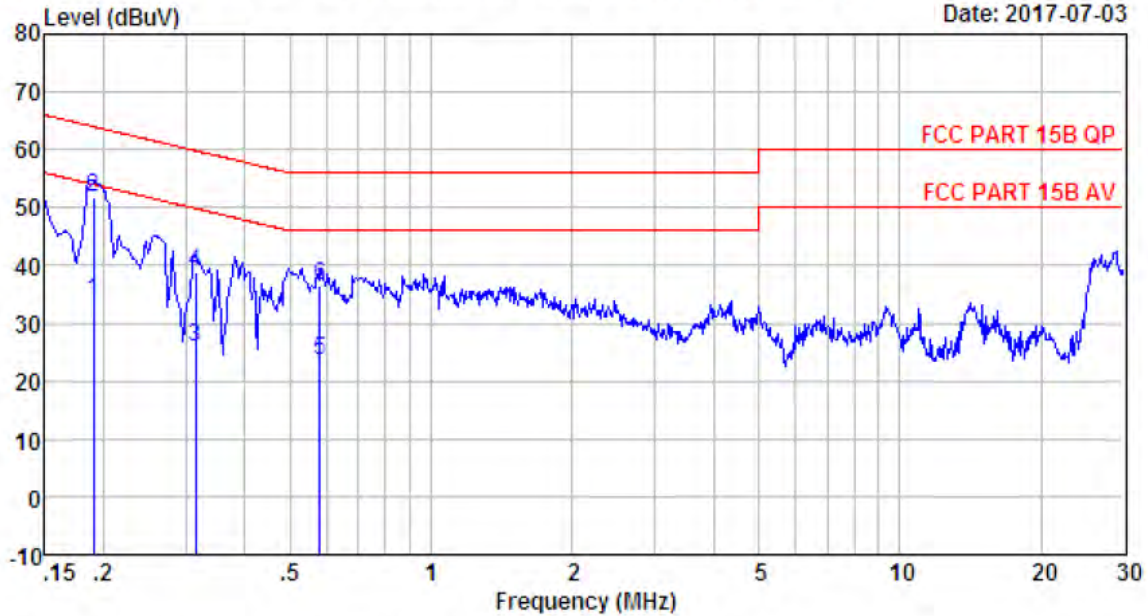

Site no. : 2# Contuction Shield Room Data no. : 21
 Dis. / Ant. : Temp:24.9'C Humi:53.6% Press:101.50kPa: LINE
 Limit : FCC PART 15B QP
 Env. / Ins. : Temp:24.9'C Humi:53.6% Press:101.50kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.19	9.61	9.80	14.30	33.71	54.02	20.31	Average
2	0.19	9.61	9.80	32.30	51.71	64.02	12.31	QP
3	0.31	9.61	9.83	6.32	25.76	49.84	24.08	Average
4	0.31	9.61	9.83	19.32	38.76	59.84	21.08	QP
5	0.58	9.60	9.82	4.21	23.63	46.00	22.37	Average
6	0.58	9.60	9.82	17.21	36.63	56.00	19.37	QP


Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

EST Technology

Data: 23

File: \\Emc-ce-2\Test Data\2017\RF\Z\ZHONG XIN KE JI.EM6 (24)

Date: 2017-07-03

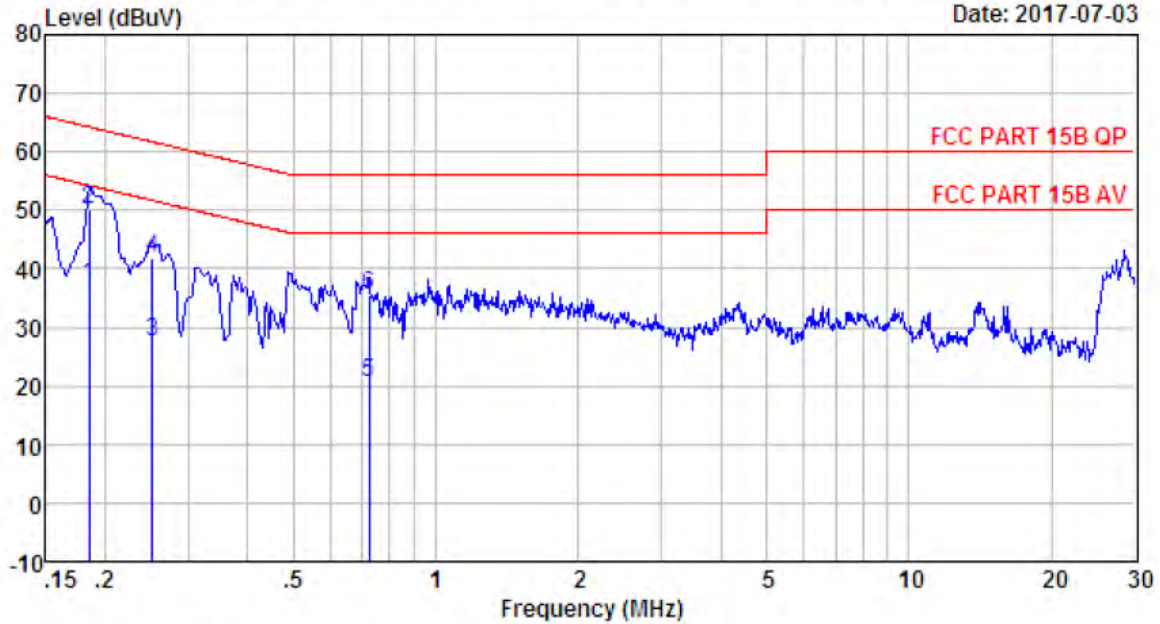

Site no. : 2# Conduction Shield Room Data no. : 23
 Dis. / Ant. : Temp:24.9°C Humi:53.6% Press:101.50kPa: NEUTRAL
 Limit : FCC PART 15B QP
 Env. / Ins. : Temp:24.9°C Humi:53.6% Press:101.50kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.19	9.56	9.80	17.78	37.14	54.24	17.10	Average
2	0.19	9.56	9.80	30.78	50.14	64.24	14.10	QP
3	0.25	9.60	9.82	8.24	27.66	51.69	24.03	Average
4	0.25	9.60	9.82	22.24	41.66	61.69	20.03	QP
5	0.72	9.63	9.81	1.00	20.44	46.00	25.56	Average
6	0.72	9.63	9.81	16.00	35.44	56.00	20.56	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4 RADIATED EMISSION TEST

4.1 Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit


Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490 2400/F(kHz)		300
0.490-1.705 24000/F(kHz)		30
1.705-30 30		30
30-88 100		3
88-216 150		3
216-960 200		3
Above 960	500	3

Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.

(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.2. Block Diagram of Test setup

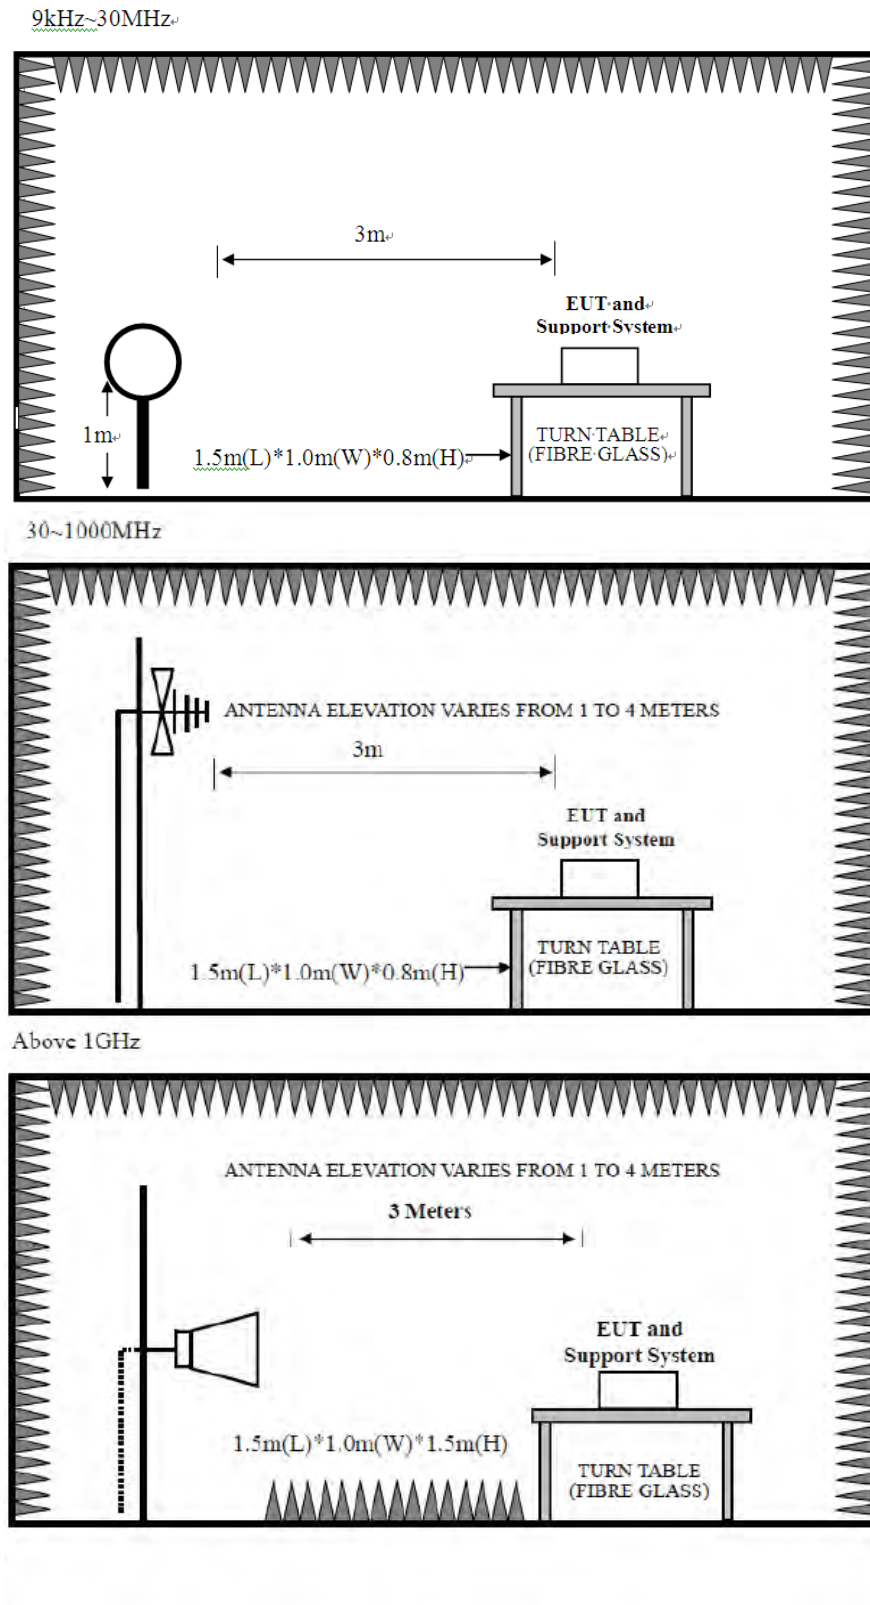

4.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground for 9kHz~1000MHz test, and which is 1.5 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The test frequency analyzer system was set to Peak Detect (300Hz RBW in 9kHz to 150kHz and 10kHz RBW in 150kHz to 30MHz) Function and Specified Bandwidth with Maximum Hold Mode.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

4.4. Test Result

PASS.

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2412MHz、 2422MHz、 2437 MHz、 2452MHz and 2462 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

4.5. Test Data

9 kHz – 30 MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

30-1000 MHz

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

EST Technology

Data: 7 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-EMC.EM6 (8) Date: 2017-07-02

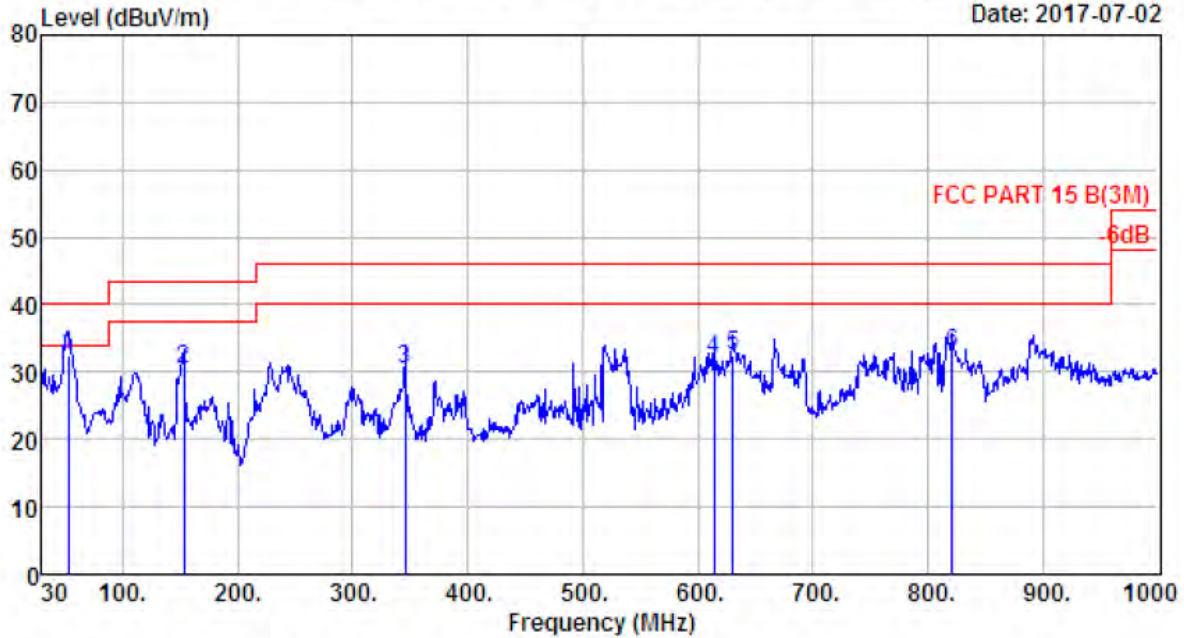


Site no : 1# 966 Chamber Data no. : 7
 Env. / Ins. : Temp:27.4';Humi:53%;Press:101.52kPa LINE Phase : VERTICAL
 Limit : FCC PART 15 B(3M)
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	53.280	6.11	0.91	25.34	32.36	40.00	7.64	QP
2	153.190	10.75	1.63	17.90	30.28	43.50	13.22	QP
3	345.250	14.32	2.54	13.67	30.53	46.00	15.47	QP
4	613.940	19.94	3.39	8.67	32.00	46.00	14.00	QP
5	630.430	20.17	3.48	8.78	32.43	46.00	13.57	QP
6	821.520	22.37	3.81	6.45	32.63	46.00	13.37	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Data: 8 File: \\Emc-966-1\test data\2017\RFIZ\zhong xin ke ji-EMC.EM6 (8) Date: 2017-07-02

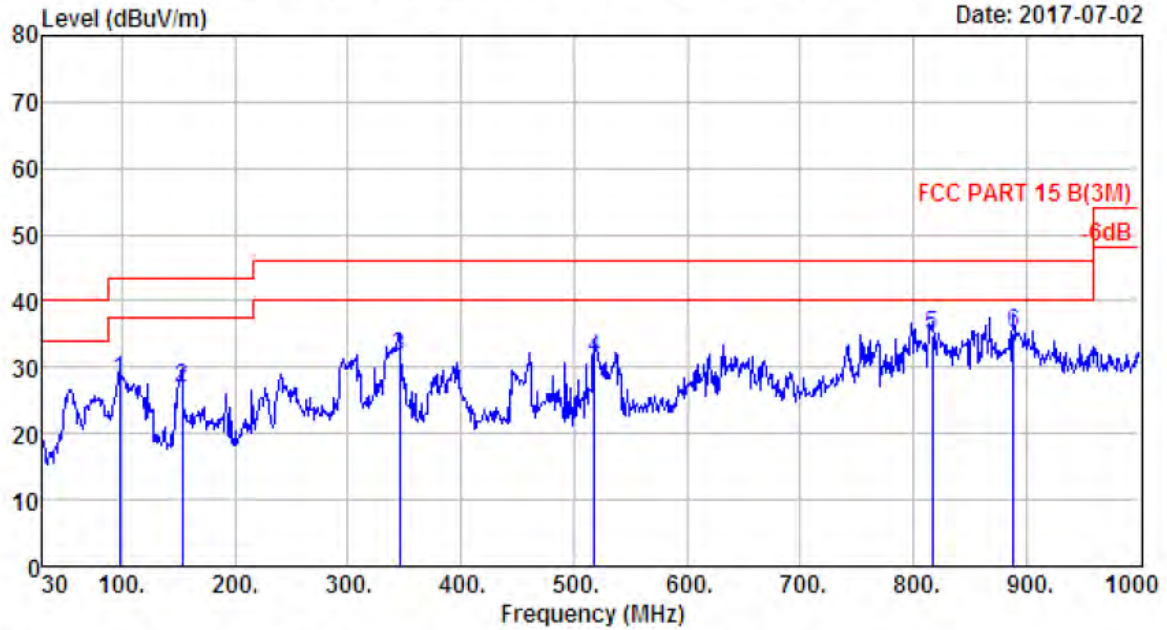

Site no : 1# 966 Chamber Data no. : 8
 Env. / Ins. : Temp:27.4';Humi:53%;Press:101.52kPa LINE Phase : HORIZONTAL
 Limit : FCC PART 15 B(3M)
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	97.900	9.13	1.33	17.58	28.04	43.50	15.46	QP
2	153.190	10.75	1.63	14.39	26.77	43.50	16.73	QP
3	345.250	14.32	2.54	14.84	31.70	46.00	14.30	QP
4	517.910	17.96	3.15	10.08	31.19	46.00	14.81	QP
5	816.670	22.35	3.83	8.80	34.98	46.00	11.02	QP
6	888.450	22.81	3.94	8.43	35.18	46.00	10.82	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

1000-18000 MHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 309 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

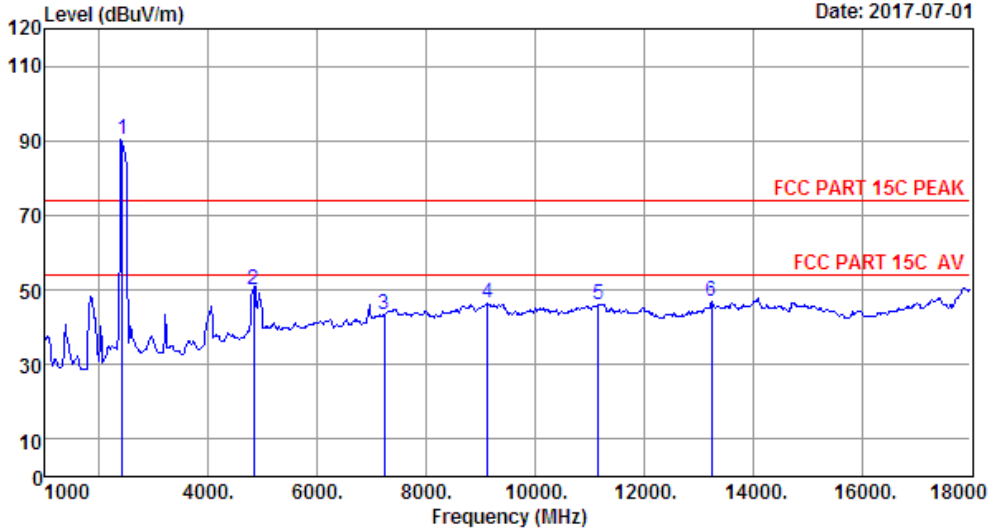

Site no. : 1# 966 Chamber Data no. : 309
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11b CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	90.75	90.35	74.00	-16.35	Peak
2	4824.00	31.28	11.84	35.66	42.57	50.03	74.00	23.97	Peak
3	7236.00	36.53	11.55	33.99	29.39	43.48	74.00	30.52	Peak
4	9126.00	37.62	11.52	34.09	31.42	46.47	74.00	27.53	Peak
5	11166.00	39.41	11.17	33.31	28.86	46.13	74.00	27.87	Peak
6	13240.00	39.46	11.46	32.88	28.83	46.87	74.00	27.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 310 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

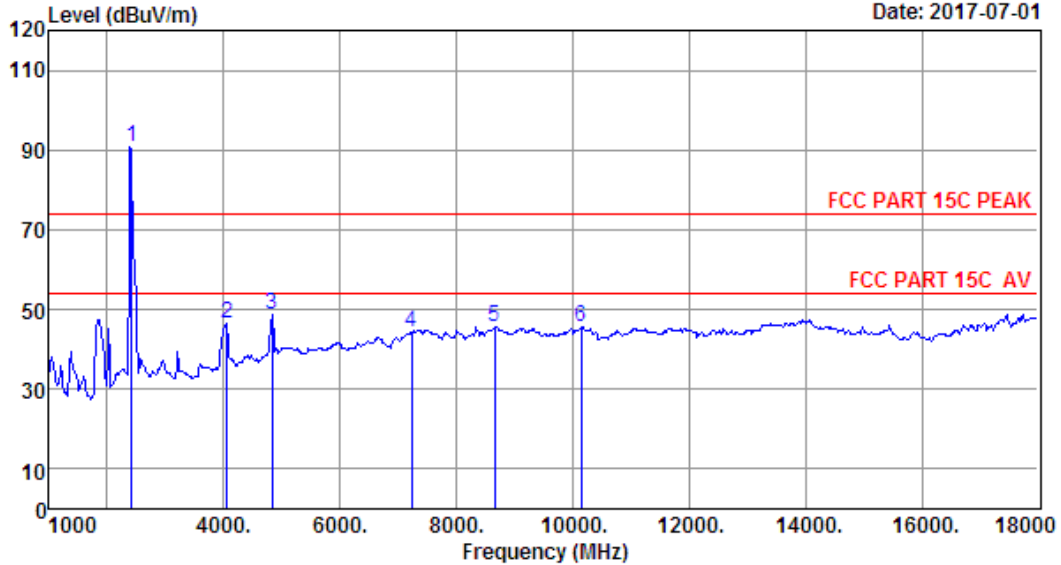

Site no. : 1# 966 Chamber Data no. : 310
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11b CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	91.02	90.62	74.00	-16.62	Peak
2	4060.00	29.77	10.83	36.18	42.04	46.46	74.00	27.54	Peak
3	4824.00	31.28	11.84	35.66	41.13	48.59	74.00	25.41	Peak
4	7236.00	36.53	11.55	33.99	30.34	44.43	74.00	29.57	Peak
5	8650.00	37.27	11.45	33.68	30.66	45.70	74.00	28.30	Peak
6	10146.00	38.36	11.51	34.58	30.32	45.61	74.00	28.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 311 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

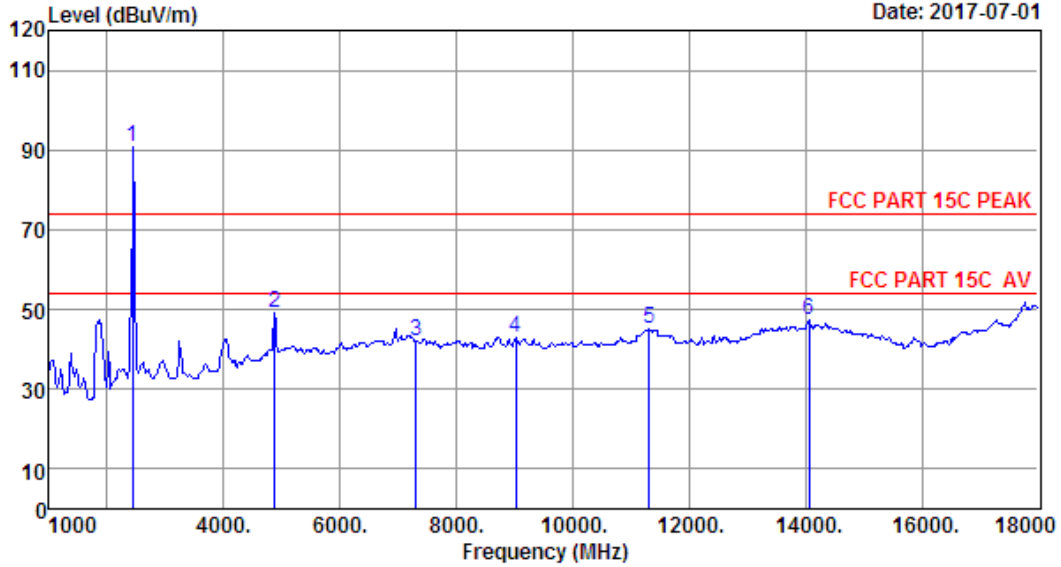

Site no. : site Data no. : 311
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11b CH6 2437TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.85	91.55	90.97	74.00	-16.97	Peak
2	4874.00	31.37	12.07	35.76	41.39	49.07	74.00	24.93	Peak
3	7311.00	36.55	11.57	34.12	27.87	41.87	74.00	32.13	Peak
4	9024.00	37.43	11.47	34.30	28.40	43.00	74.00	31.00	Peak
5	11319.00	39.31	11.06	33.39	28.23	45.21	74.00	28.79	Peak
6	14056.00	41.51	10.90	33.06	28.00	47.35	74.00	26.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 312 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

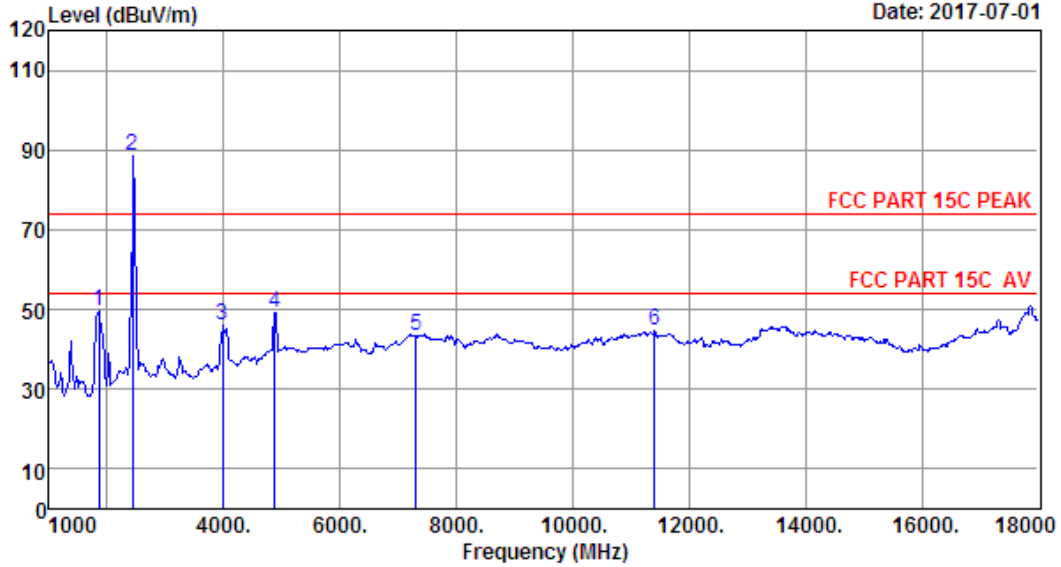

Site no. : 1# 966 Chamber Data no. : 312
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11b CH6 2437TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1850.00	25.15	5.63	35.27	54.20	49.71	74.00	24.29	Peak
2	2437.00	27.60	6.67	34.85	89.35	88.77	74.00	-14.77	Peak
3	3975.00	29.60	10.81	36.42	42.00	45.99	74.00	28.01	Peak
4	4874.00	31.37	12.07	35.76	41.55	49.23	74.00	24.77	Peak
5	7311.00	36.55	11.57	34.12	29.20	43.20	74.00	30.80	Peak
6	11404.00	39.25	10.99	33.57	27.92	44.59	74.00	29.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 313 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

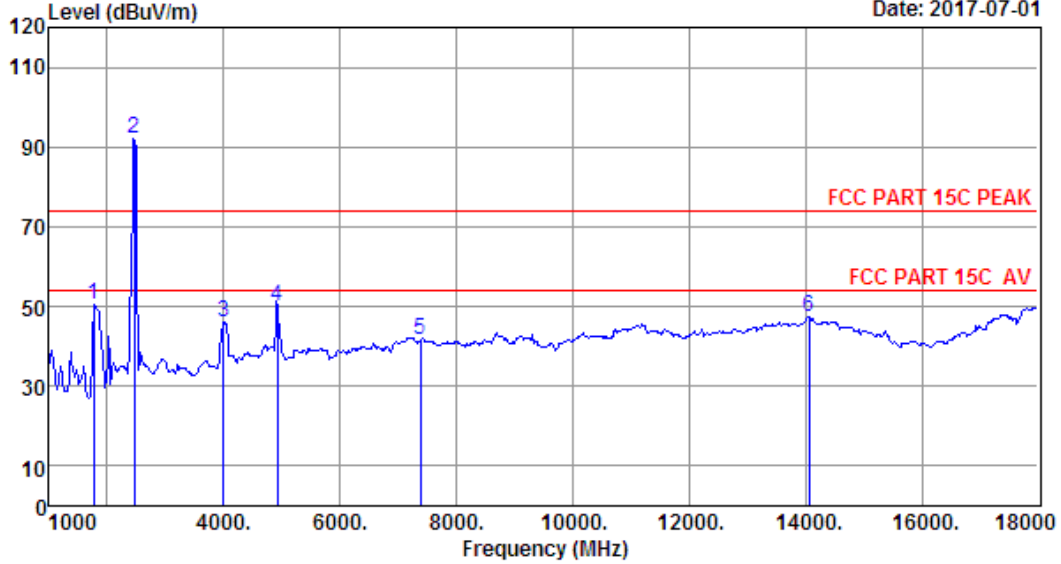

Site no. : 1# 966 Chamber Data no. : 313
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11b CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1765.00	24.87	5.32	35.25	55.72	50.66	74.00	23.34	Peak
2	2462.00	27.58	6.69	34.98	92.59	91.88	74.00	-17.88	Peak
3	3992.00	29.65	10.89	36.38	41.76	45.92	74.00	28.08	Peak
4	4924.00	31.45	12.29	35.91	42.27	50.10	74.00	23.90	Peak
5	7386.00	36.57	11.59	34.23	27.82	41.75	74.00	32.25	Peak
6	14056.00	41.51	10.90	33.06	28.19	47.54	74.00	26.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 314 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

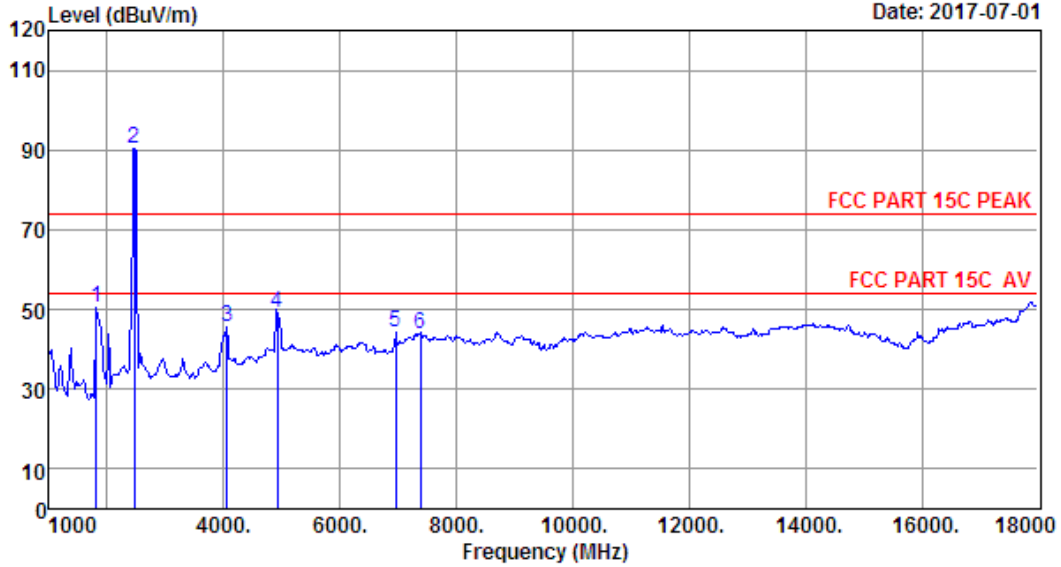

Site no. : 1# 966 Chamber Data no. : 314
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11b CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1816.00	25.02	5.50	35.28	55.11	50.35	74.00	23.65	Peak
2	2462.00	27.58	6.69	34.98	91.10	90.39	74.00	-16.39	Peak
3	4060.00	29.77	10.83	36.18	41.23	45.65	74.00	28.35	Peak
4	4924.00	31.45	12.29	35.91	41.32	49.15	74.00	24.85	Peak
5	6950.00	35.29	11.56	34.34	31.90	44.41	74.00	29.59	Peak
6	7386.00	36.57	11.59	34.23	29.96	43.89	74.00	30.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 315 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

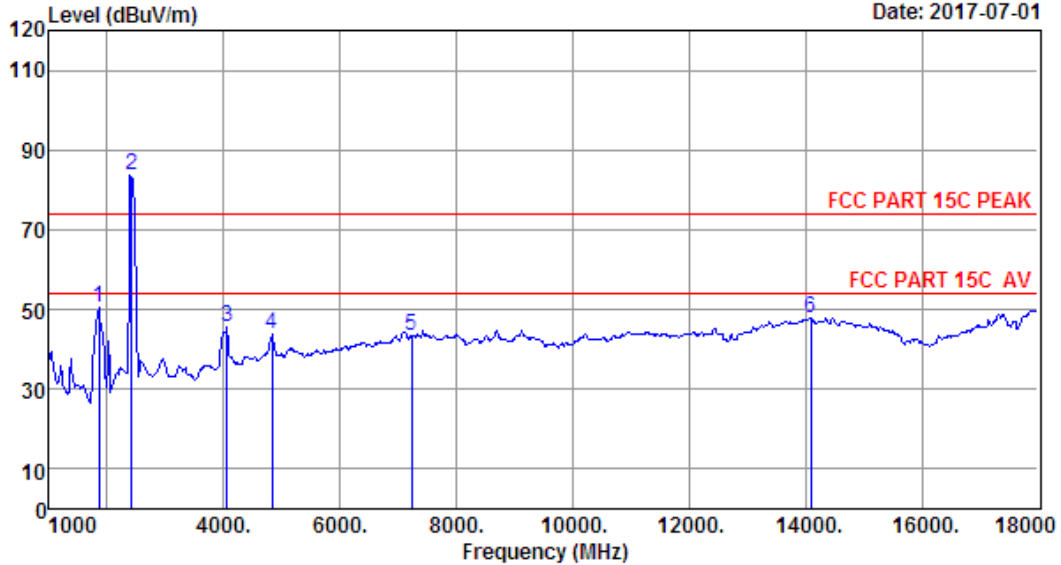

Site no. : 1# 966 Chamber Data no. : 315
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11g CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1850.00	25.15	5.63	35.27	55.14	50.65	74.00	23.35	Peak
2	2412.00	27.60	6.64	34.64	84.10	83.70	74.00	-9.70	Peak
3	4060.00	29.77	10.83	36.18	41.06	45.48	74.00	28.52	Peak
4	4824.00	31.28	11.84	35.66	36.48	43.94	74.00	30.06	Peak
5	7236.00	36.53	11.55	33.99	29.23	43.32	74.00	30.68	Peak
6	14090.00	41.54	10.91	33.13	28.46	47.78	74.00	26.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 316 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

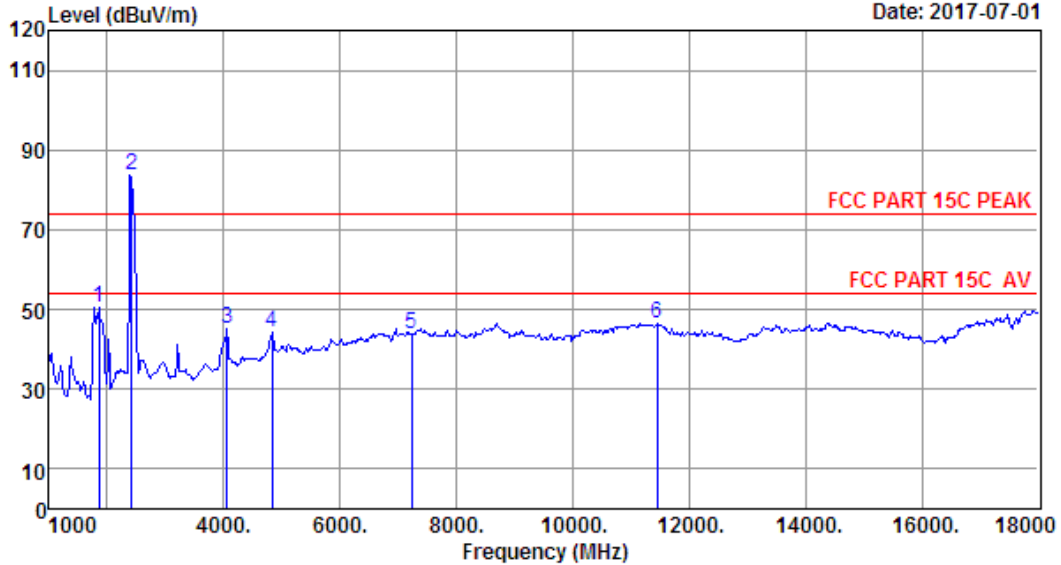

Site no. : 1# 966 Chamber Data no. : 316
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11g CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1850.00	25.15	5.63	35.27	55.11	50.62	74.00	23.38	Peak
2	2412.00	27.60	6.64	34.64	83.93	83.53	74.00	-9.53	Peak
3	4060.00	29.77	10.83	36.18	40.59	45.01	74.00	28.99	Peak
4	4824.00	31.28	11.84	35.66	36.65	44.11	74.00	29.89	Peak
5	7236.00	36.53	11.55	33.99	29.62	43.71	74.00	30.29	Peak
6	11455.00	39.23	10.96	33.53	29.86	46.52	74.00	27.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 317 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

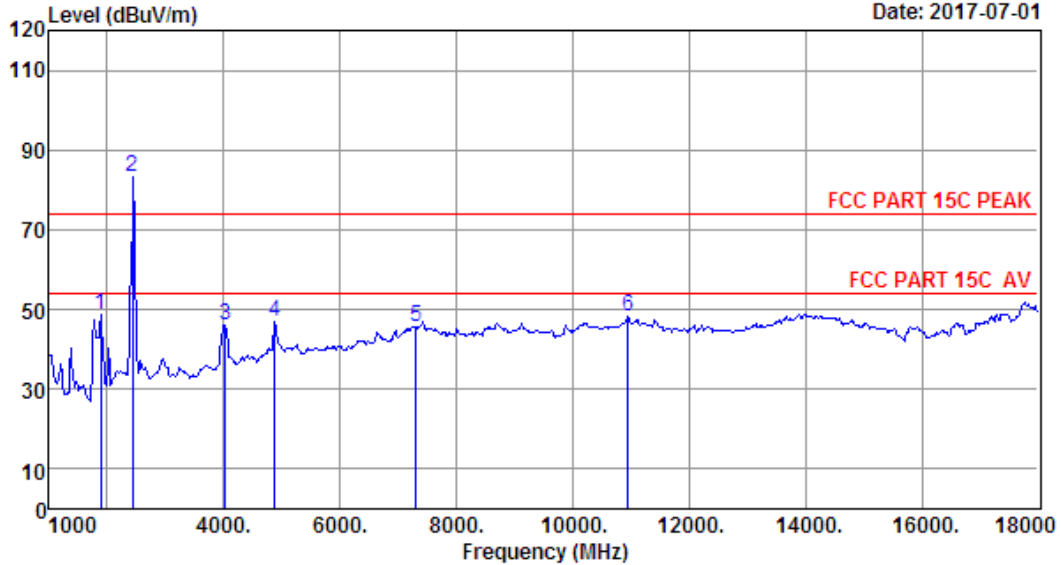

Site no. : 1# 966 Chamber Data no. : 317
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11g CH6 2437TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1884.00	25.28	5.75	35.23	52.72	48.52	74.00	25.48	Peak
2	2437.00	27.60	6.67	34.85	84.01	83.43	74.00	-9.43	Peak
3	4026.00	29.71	10.86	36.28	41.88	46.17	74.00	27.83	Peak
4	4874.00	31.37	12.07	35.76	39.24	46.92	74.00	27.08	Peak
5	7311.00	36.55	11.57	34.12	31.46	45.46	74.00	28.54	Peak
6	10945.00	39.46	11.29	34.13	31.59	48.21	74.00	25.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 318 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

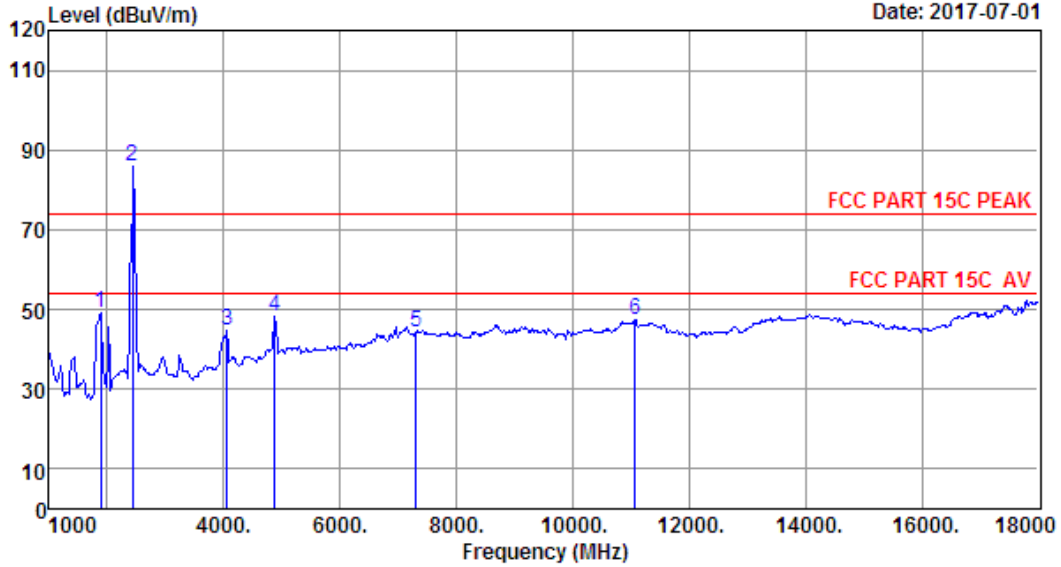

Site no. : 1# 966 Chamber Data no. : 318
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11g CH6 2437TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1884.00	25.28	5.75	35.23	53.28	49.08	74.00	24.92	Peak
2	2437.00	27.60	6.67	34.85	86.31	85.73	74.00	-11.73	Peak
3	4060.00	29.77	10.83	36.18	40.31	44.73	74.00	29.27	Peak
4	4874.00	31.37	12.07	35.76	40.43	48.11	74.00	25.89	Peak
5	7311.00	36.55	11.57	34.12	30.40	44.40	74.00	29.60	Peak
6	11064.00	39.48	11.24	33.83	30.68	47.57	74.00	26.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 319 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

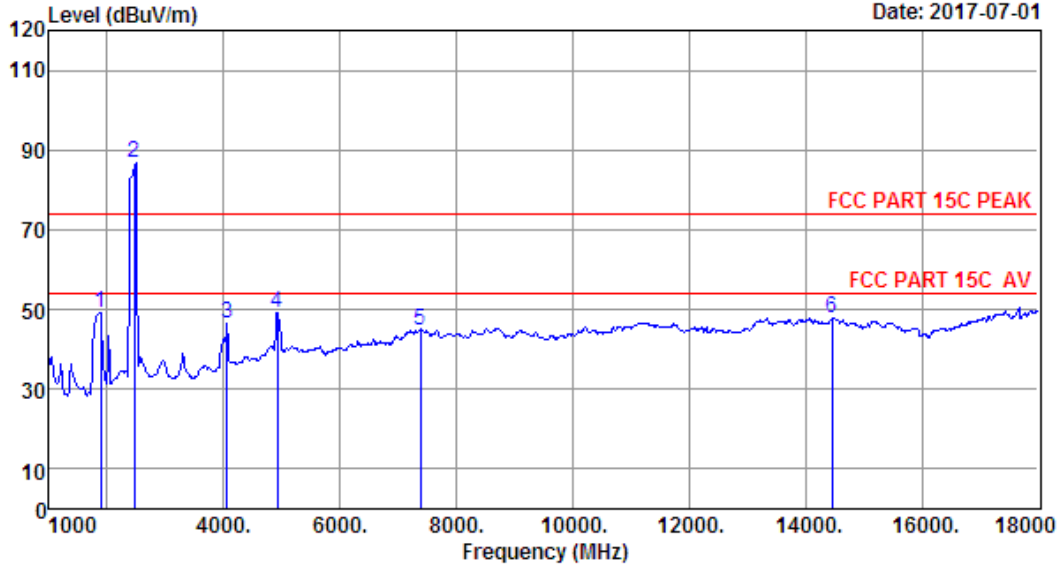

Site no. : 1# 966 Chamber Data no. : 319
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11g CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1884.00	25.28	5.75	35.23	53.38	49.18	74.00	24.82	Peak
2	2462.00	27.58	6.69	34.98	87.69	86.98	74.00	-12.98	Peak
3	4060.00	29.77	10.83	36.18	41.98	46.40	74.00	27.60	Peak
4	4924.00	31.45	12.29	35.91	41.35	49.18	74.00	24.82	Peak
5	7386.00	36.57	11.59	34.23	30.92	44.85	74.00	29.15	Peak
6	14464.00	41.85	10.93	33.45	28.65	47.98	74.00	26.02	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 320 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

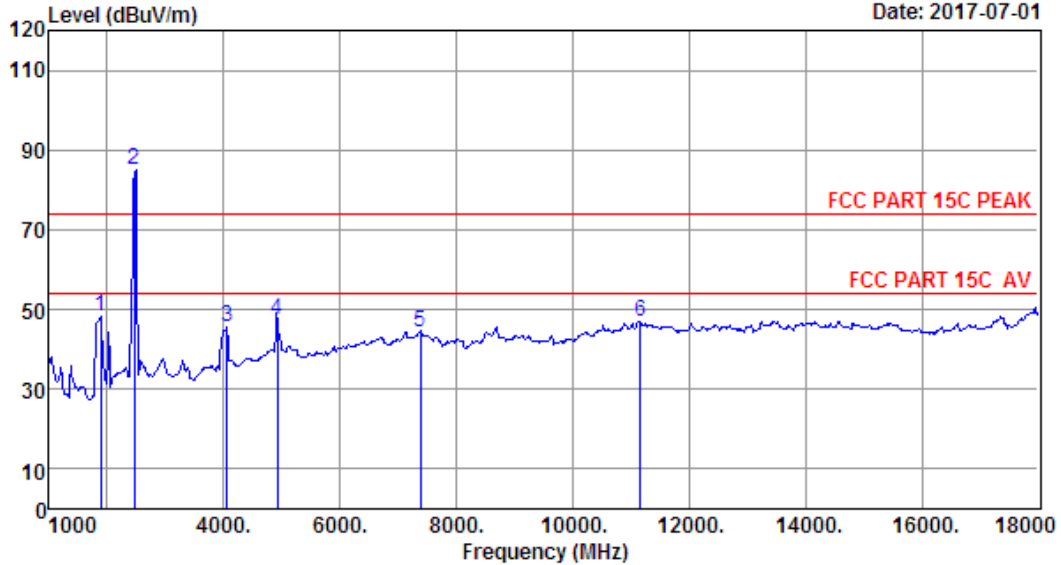

Site no. : 1# 966 Chamber Data no. : 320
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11g CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1884.00	25.28	5.75	35.23	52.31	48.11	74.00	25.89	Peak
2	2462.00	27.58	6.69	34.98	85.76	85.05	74.00	-11.05	Peak
3	4060.00	29.77	10.83	36.18	41.35	45.77	74.00	28.23	Peak
4	4924.00	31.45	12.29	35.91	39.42	47.25	74.00	26.75	Peak
5	7386.00	36.57	11.59	34.23	30.19	44.12	74.00	29.88	Peak
6	11166.00	39.41	11.17	33.31	29.85	47.12	74.00	26.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 321 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

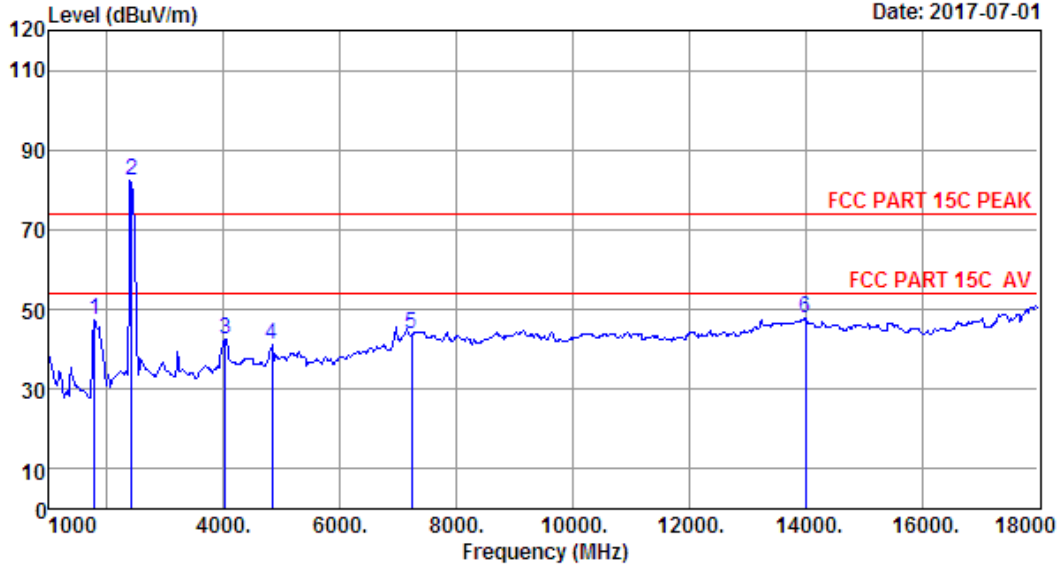

Site no. : 1# 966 Chamber Data no. : 321
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT20 CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1782.00	24.91	5.38	35.27	52.57	47.59	74.00	26.41	Peak
2	2412.00	27.60	6.64	34.64	82.74	82.34	74.00	-8.34	Peak
3	4026.00	29.71	10.86	36.28	38.03	42.32	74.00	31.68	Peak
4	4824.00	31.28	11.84	35.66	33.61	41.07	74.00	32.93	Peak
5	7236.00	36.53	11.55	33.99	29.69	43.78	74.00	30.22	Peak
6	14005.00	41.46	10.90	33.01	28.40	47.75	74.00	26.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 322 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

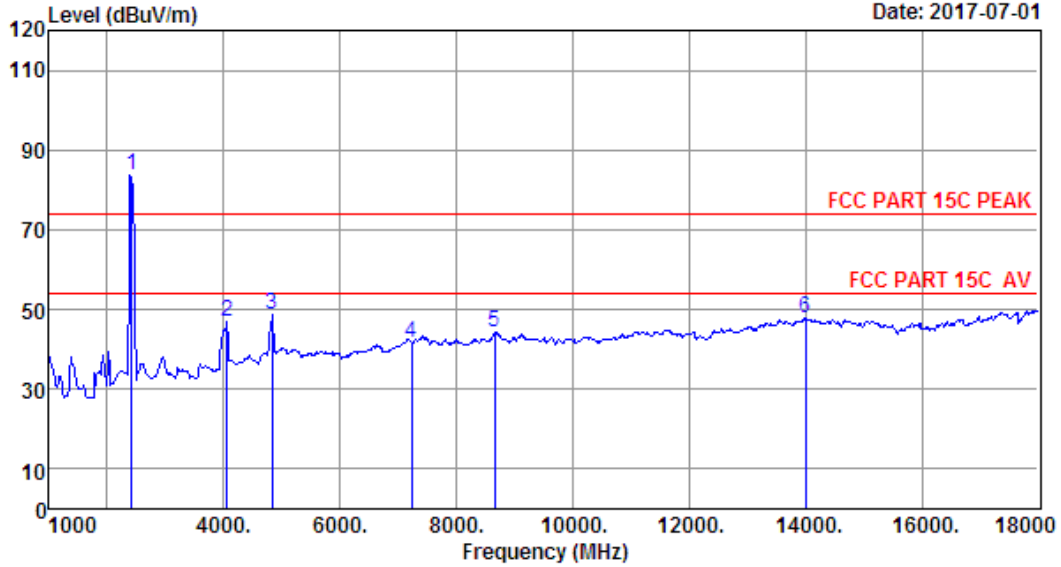

Site no. : 1# 966 Chamber Data no. : 322
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT20 CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.64	84.04	83.64	74.00	-9.64	Peak
2	4060.00	29.77	10.83	36.18	42.40	46.82	74.00	27.18	Peak
3	4824.00	31.28	11.84	35.66	41.33	48.79	74.00	25.21	Peak
4	7236.00	36.53	11.55	33.99	27.70	41.79	74.00	32.21	Peak
5	8650.00	37.27	11.45	33.68	29.10	44.14	74.00	29.86	Peak
6	14005.00	41.46	10.90	33.01	28.34	47.69	74.00	26.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 323 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

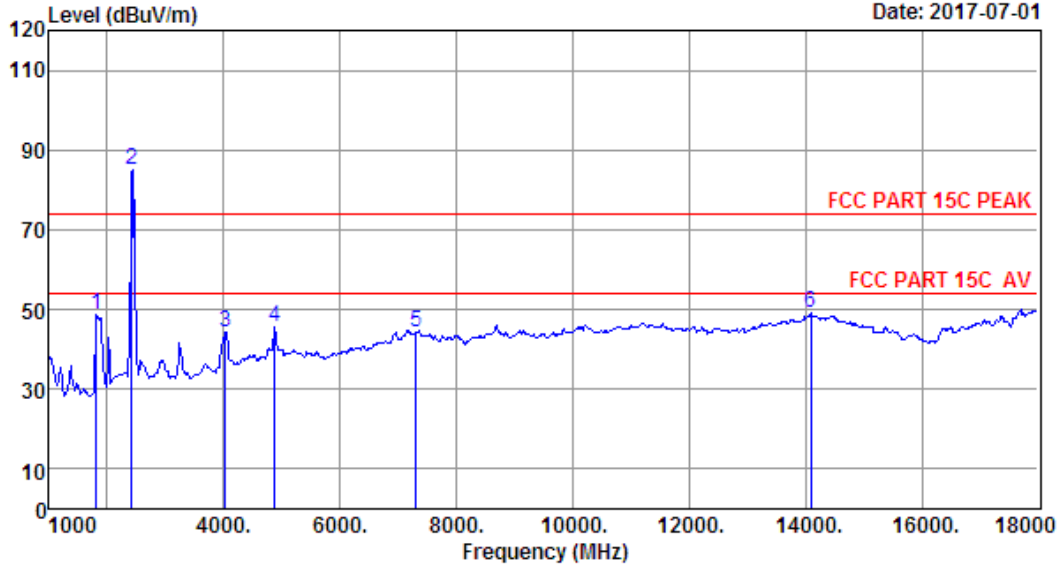

Site no. : 1# 966 Chamber Data no. : 323
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT20 CH6 2437TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1816.00	25.02	5.50	35.28	53.59	48.83	74.00	25.17	Peak
2	2412.00	27.60	6.64	34.64	85.46	85.06	74.00	-11.06	Peak
3	4026.00	29.71	10.86	36.28	39.85	44.14	74.00	29.86	Peak
4	4874.00	31.37	12.07	35.76	38.13	45.81	74.00	28.19	Peak
5	7311.00	36.55	11.57	34.12	30.33	44.33	74.00	29.67	Peak
6	14090.00	41.54	10.91	33.13	29.82	49.14	74.00	24.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 324 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

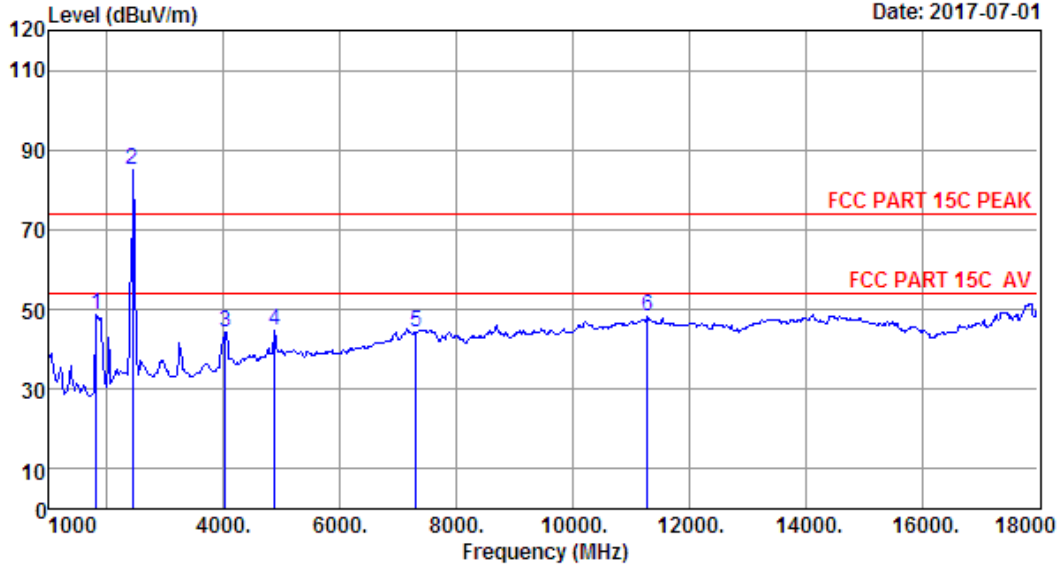

Site no. : 1# 966 Chamber Data no. : 324
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT20 CH6 2437TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1816.00	25.02	5.50	35.28	53.59	48.83	74.00	25.17	Peak
2	2437.00	27.60	6.67	34.85	85.64	85.06	74.00	-11.06	Peak
3	4026.00	29.71	10.86	36.28	39.85	44.14	74.00	29.86	Peak
4	4874.00	31.37	12.07	35.76	37.13	44.81	74.00	29.19	Peak
5	7311.00	36.55	11.57	34.12	30.39	44.39	74.00	29.61	Peak
6	11285.00	39.33	11.08	33.32	31.00	48.09	74.00	25.91	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 325 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

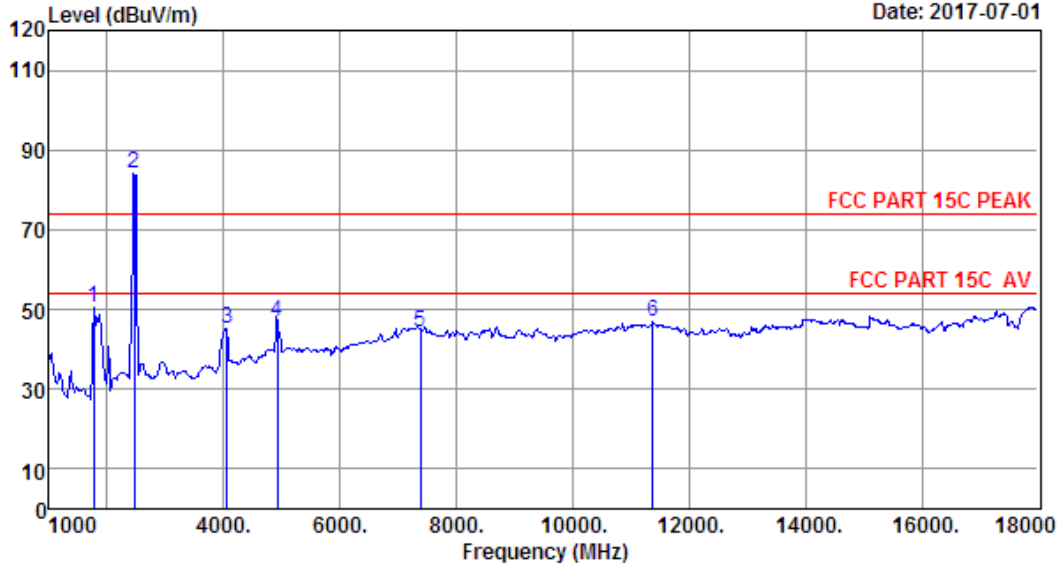

Site no. : 1# 966 Chamber Data no. : 325
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT20 CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1765.00	24.87	5.32	35.25	55.47	50.41	74.00	23.59	Peak
2	2462.00	27.58	6.69	34.98	84.69	83.98	74.00	-9.98	Peak
3	4060.00	29.77	10.83	36.18	40.90	45.32	74.00	28.68	Peak
4	4924.00	31.45	12.29	35.91	39.17	47.00	74.00	27.00	Peak
5	7386.00	36.57	11.59	34.23	30.47	44.40	74.00	29.60	Peak
6	11370.00	39.28	11.02	33.51	29.98	46.77	74.00	27.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 326 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

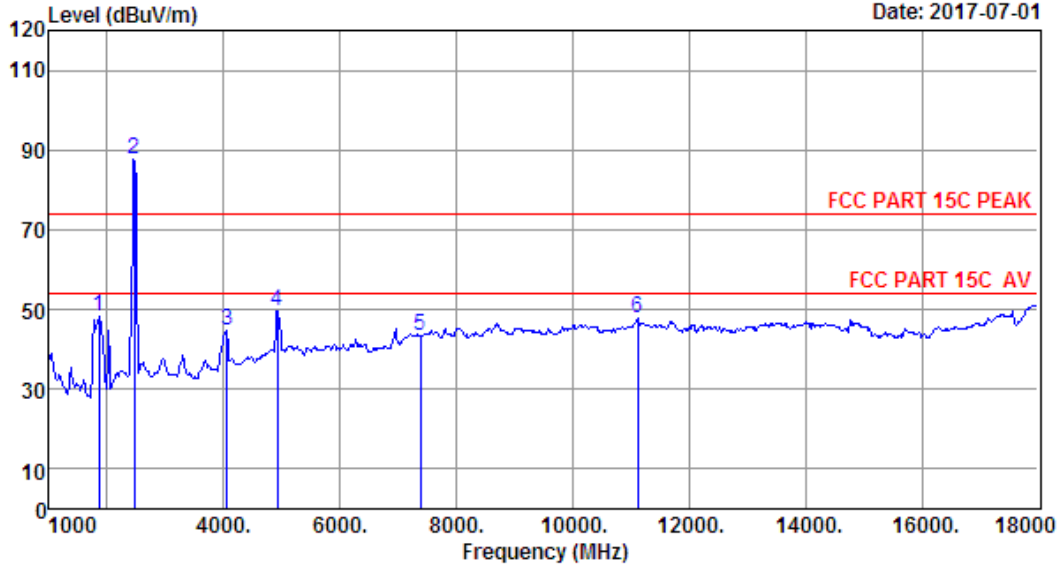

Site no. : 1# 966 Chamber Data no. : 326
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT20 CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1850.00	25.15	5.63	35.27	52.79	48.30	74.00	25.70	Peak
2	2462.00	27.58	6.69	34.98	88.20	87.49	74.00	-13.49	Peak
3	4060.00	29.77	10.83	36.18	40.50	44.92	74.00	29.08	Peak
4	4924.00	31.45	12.29	35.91	41.75	49.58	74.00	24.42	Peak
5	7386.00	36.57	11.59	34.23	29.26	43.19	74.00	30.81	Peak
6	11115.00	39.44	11.20	33.55	30.66	47.75	74.00	26.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 327 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

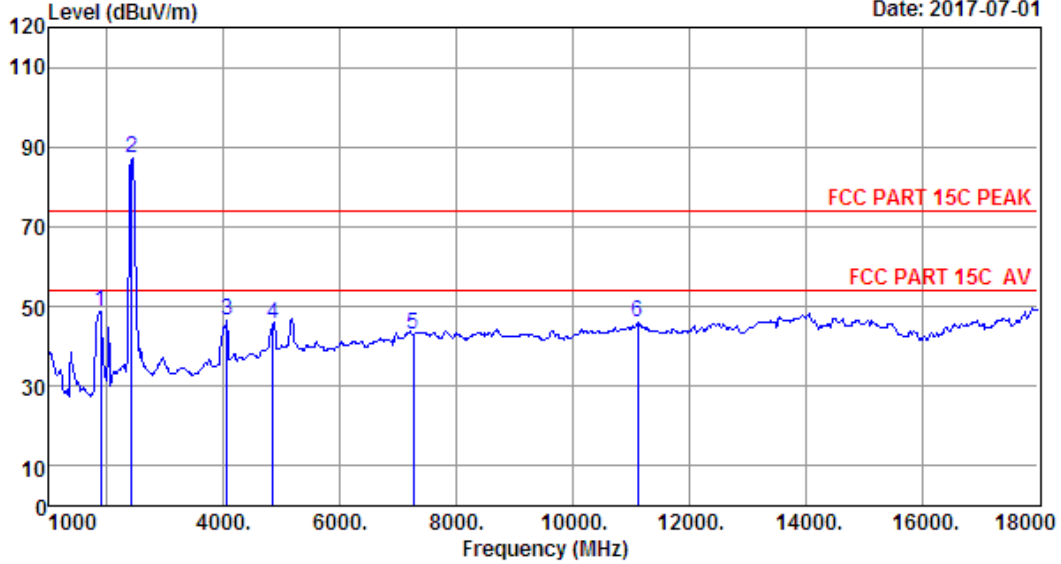

Site no. : 1# 966 Chamber Data no. : 327
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT40 CH1 2422TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1884.00	25.28	5.75	35.23	53.12	48.92	74.00	25.08	Peak
2	2422.00	27.60	6.66	34.74	87.91	87.43	74.00	-13.43	Peak
3	4060.00	29.77	10.83	36.18	41.99	46.41	74.00	27.59	Peak
4	4844.00	31.31	11.92	35.68	38.01	45.56	74.00	28.44	Peak
5	7266.00	36.54	11.56	34.05	29.01	43.06	74.00	30.94	Peak
6	11115.00	39.44	11.20	33.55	28.92	46.01	74.00	27.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 328 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

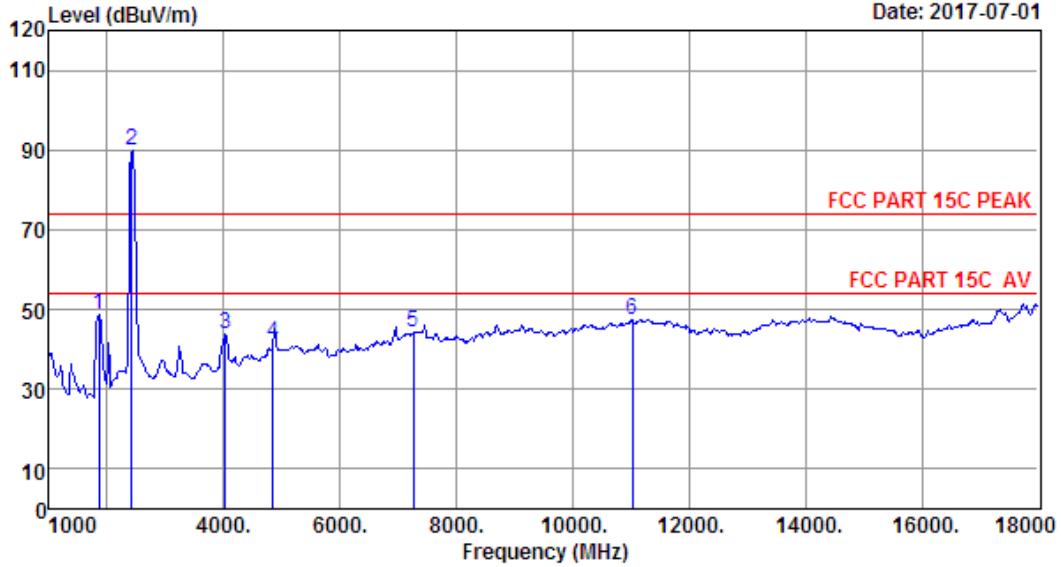

Site no. : 1# 966 Chamber Data no. : 328
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT40 CH1 2422TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1850.00	25.15	5.63	35.27	53.39	48.90	74.00	25.10	Peak
2	2422.00	27.60	6.66	34.74	90.51	90.03	74.00	-16.03	Peak
3	4026.00	29.71	10.86	36.28	39.49	43.78	74.00	30.22	Peak
4	4844.00	31.31	11.92	35.68	34.11	41.66	74.00	32.34	Peak
5	7266.00	36.54	11.56	34.05	30.16	44.21	74.00	29.79	Peak
6	11030.00	39.50	11.27	33.98	30.65	47.44	74.00	26.56	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 329 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

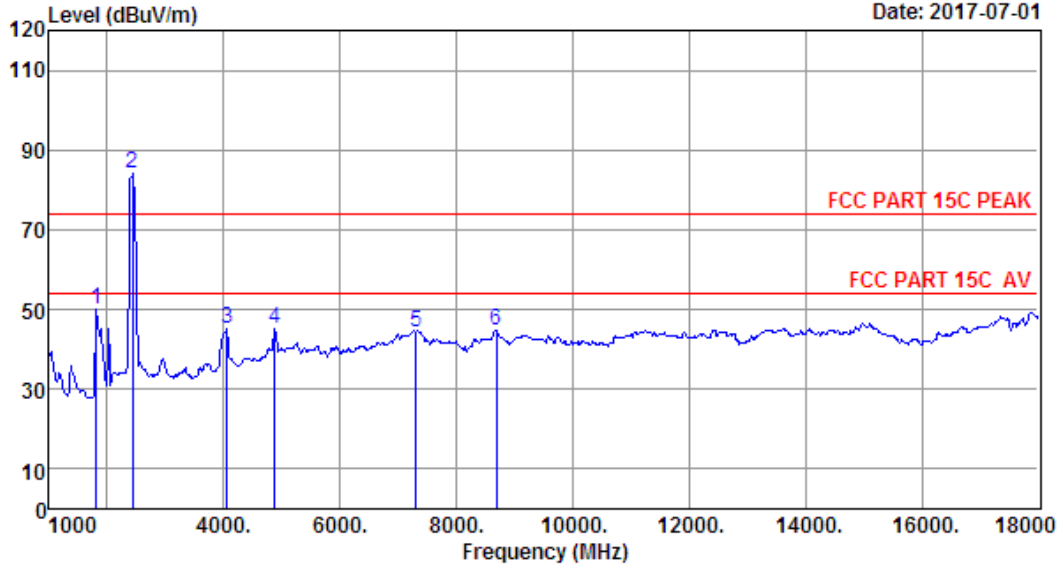

Site no. : 1# 966 Chamber Data no. : 329
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT40 CH4 2437TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1816.00	25.02	5.50	35.28	54.67	49.91	74.00	24.09	Peak
2	2437.00	27.60	6.67	34.85	84.88	84.30	74.00	-10.30	Peak
3	4060.00	29.77	10.83	36.18	40.71	45.13	74.00	28.87	Peak
4	4874.00	31.37	12.07	35.76	37.40	45.08	74.00	28.92	Peak
5	7311.00	36.55	11.57	34.12	30.42	44.42	74.00	29.58	Peak
6	8684.00	37.32	11.45	33.66	29.61	44.72	74.00	29.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 330 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

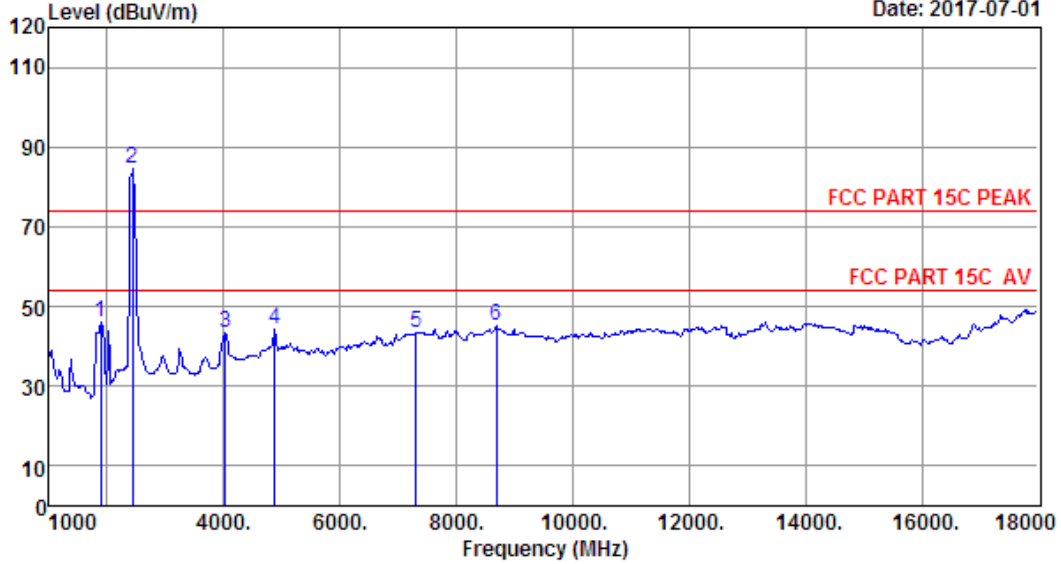

Site no. : 1# 966 Chamber Data no. : 330
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT40 CH4 2437TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1884.00	25.28	5.75	35.23	50.37	46.17	74.00	27.83	Peak
2	2437.00	27.60	6.67	34.85	85.11	84.53	74.00	-10.53	Peak
3	4026.00	29.71	10.86	36.28	39.28	43.57	74.00	30.43	Peak
4	4874.00	31.37	12.07	35.76	36.38	44.06	74.00	29.94	Peak
5	7311.00	36.55	11.57	34.12	29.21	43.21	74.00	30.79	Peak
6	8684.00	37.32	11.45	33.66	30.08	45.19	74.00	28.81	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 331 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

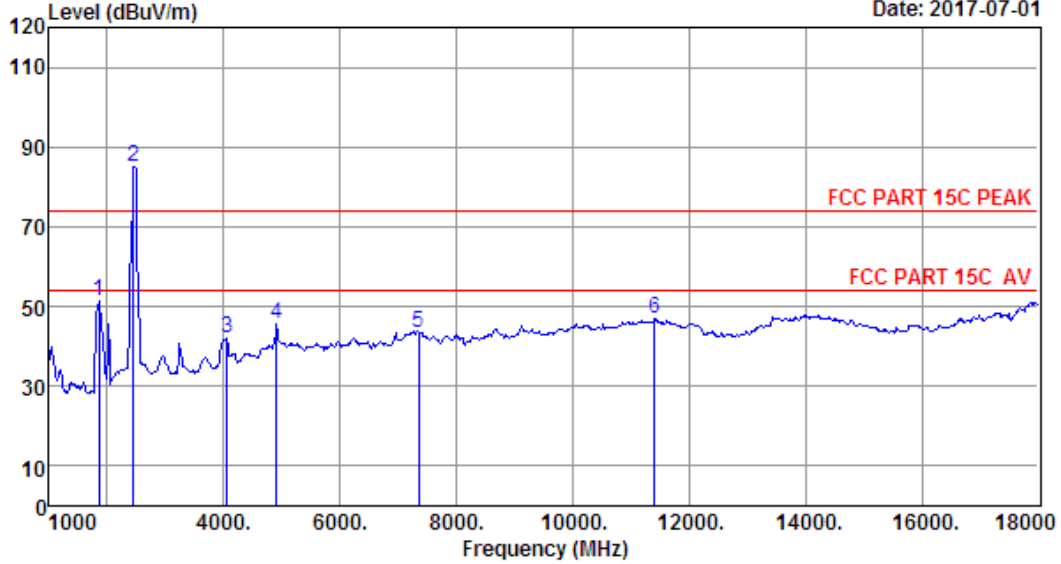

Site no. : 1# 966 Chamber Data no. : 331
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT40 CH7 2452TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1850.00	25.15	5.63	35.27	55.84	51.35	74.00	22.65	Peak
2	2452.00	27.59	6.67	34.85	85.80	85.21	74.00	-11.21	Peak
3	4060.00	29.77	10.83	36.18	37.63	42.05	74.00	31.95	Peak
4	4904.00	31.42	12.22	35.87	37.77	45.54	74.00	28.46	Peak
5	7356.00	36.56	11.58	34.19	29.65	43.60	74.00	30.40	Peak
6	11404.00	39.25	10.99	33.57	30.28	46.95	74.00	27.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 332 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

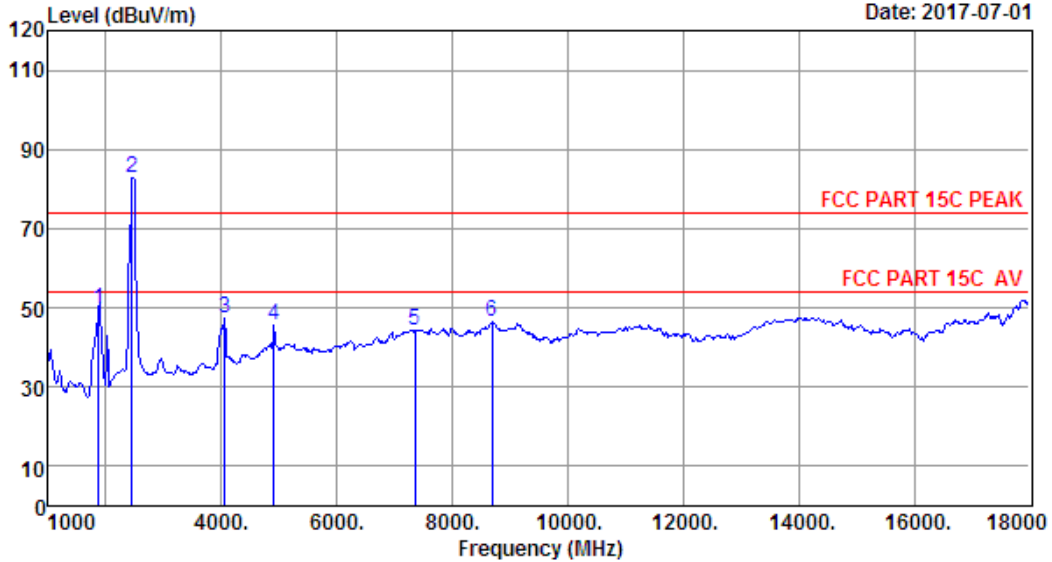

Site no. : 1# 966 Chamber Data no. : 332
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT40 CH7 2452TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1867.00	25.21	5.69	35.25	53.85	49.50	74.00	24.50	Peak
2	2452.00	27.59	6.67	34.85	83.50	82.91	74.00	-8.91	Peak
3	4060.00	29.77	10.83	36.18	43.02	47.44	74.00	26.56	Peak
4	4904.00	31.42	12.22	35.87	37.72	45.49	74.00	28.51	Peak
5	7356.00	36.56	11.58	34.19	30.21	44.16	74.00	29.84	Peak
6	8684.00	37.32	11.45	33.66	31.39	46.50	74.00	27.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

18000MHz – 25000MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

5 BAND EDGE COMPLIANCE TEST

5.1 Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits

5.2 Block Diagram of Test setup

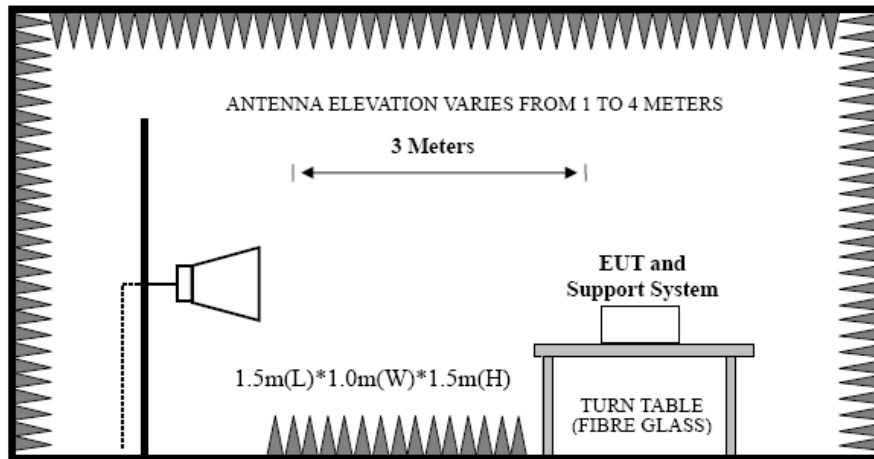

5.3 Test Procedure

EUT was placed on a turn table, which is 1.5 m high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto.

AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto.

5.4 Test Result

Pass (The testing data was attached in the next pages.)


Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2412 MHz 、 2422MHz、 2452MHz and 2462 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.

5.5 Test Data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

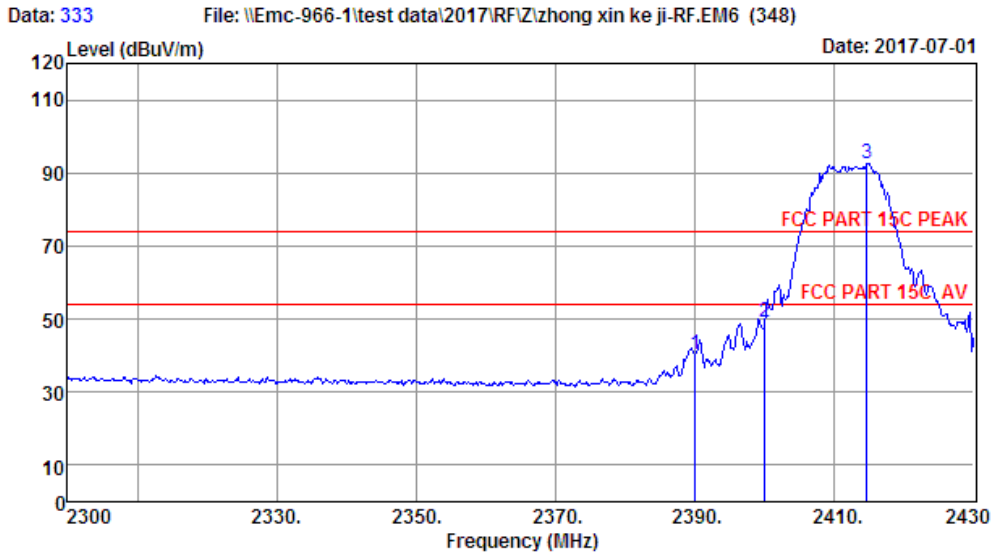

Site no. : 1# 966 Chamber Data no. : 333
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6°;Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11b CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	6.62	34.62	40.57	40.21	74.00	33.79	Peak
2	2400.00	27.61	6.62	34.64	49.68	49.27	74.00	24.73	Peak
3	2414.66	27.60	6.64	34.64	92.92	92.52	74.00	-18.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 334 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

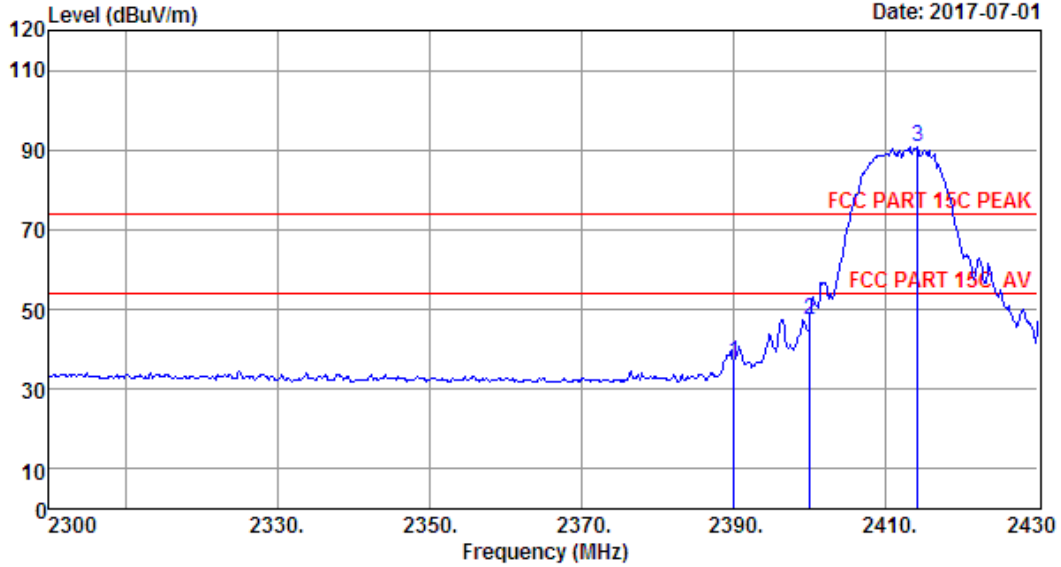

Site no. : 1# 966 Chamber Data no. : 334
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11b CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	6.62	34.62	37.33	36.97	74.00	37.03	Peak
2	2400.00	27.61	6.62	34.64	47.70	47.29	74.00	26.71	Peak
3	2414.14	27.60	6.64	34.64	91.33	90.93	74.00	-16.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 335 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

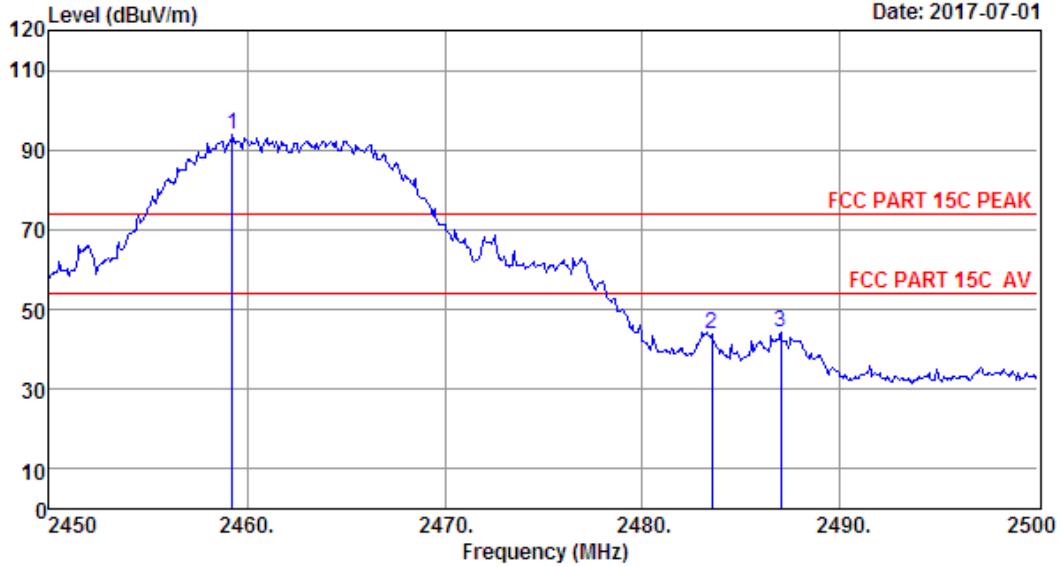

Site no. : 1# 966 Chamber Data no. : 335
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11b CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2459.25	27.59	6.69	34.98	94.43	93.73	74.00	-19.73	Peak
2	2483.50	27.58	6.71	35.11	44.84	44.02	74.00	29.98	Peak
3	2487.00	27.58	6.71	35.11	45.00	44.18	74.00	29.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 336 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

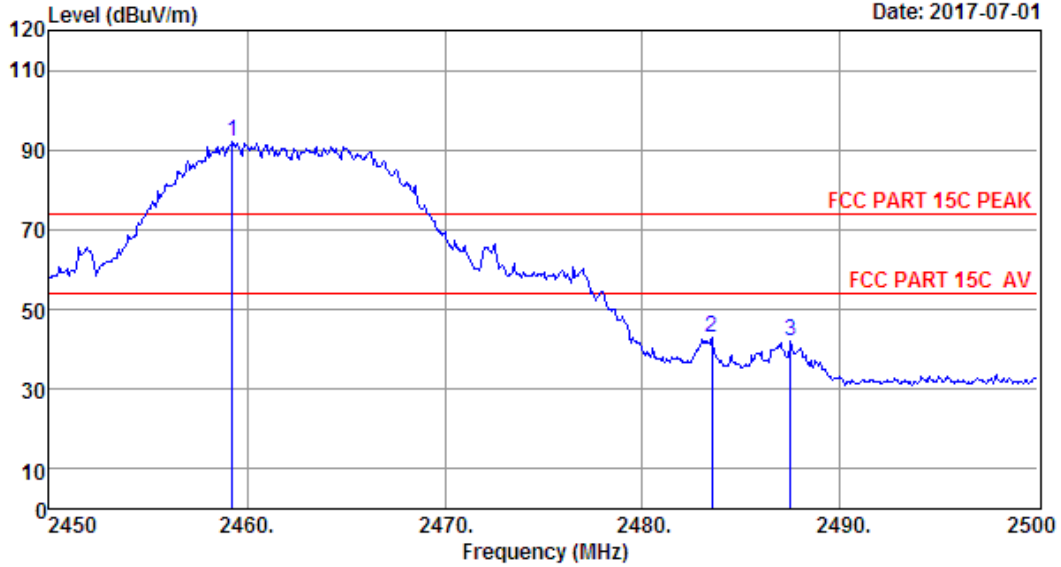

Site no. : 1# 966 Chamber Data no. : 336
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11b CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2459.25	27.59	6.69	34.98	93.00	92.30	74.00	-18.30	Peak
2	2483.50	27.58	6.71	35.11	43.75	42.93	74.00	31.07	Peak
3	2487.50	27.58	6.73	35.11	43.02	42.22	74.00	31.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 337 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

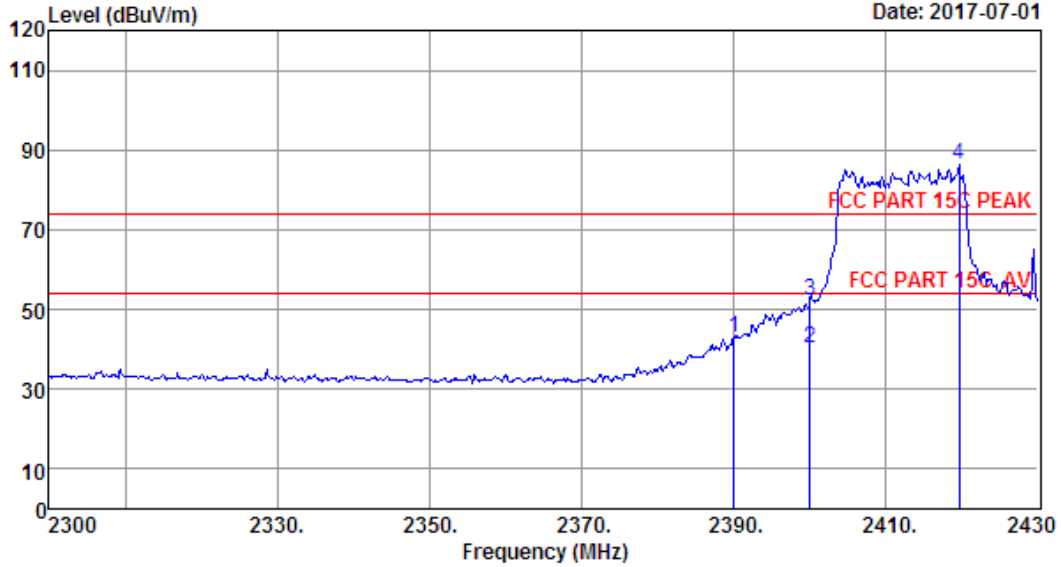

Site no. : 1# 966 Chamber Data no. : 337
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11g CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	6.62	34.62	43.26	42.90	74.00	31.10	Peak
2	2400.00	27.61	6.62	34.64	40.59	40.18	54.00	13.82	Average
3	2400.00	27.61	6.62	34.64	52.59	52.18	74.00	21.82	Peak
4	2419.60	27.60	6.66	34.74	86.82	86.34	74.00	-12.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 338 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

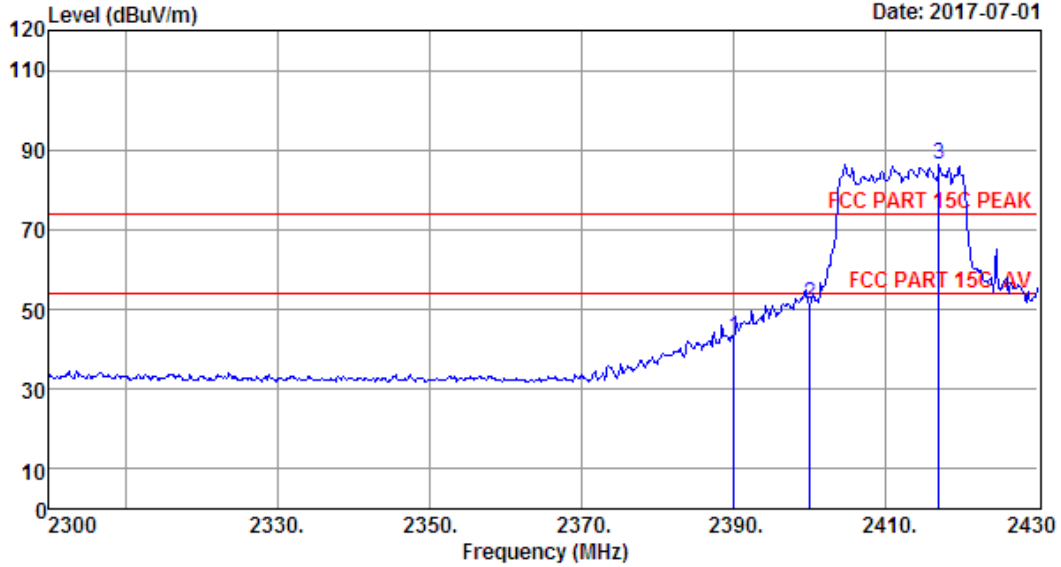

Site no. : 1# 966 Chamber Data no. : 338
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11g CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	6.62	34.62	43.33	42.97	74.00	31.03	Peak
2	2400.00	27.61	6.62	34.64	51.71	51.30	74.00	22.70	Peak
3	2417.00	27.60	6.64	34.64	86.66	86.26	74.00	-12.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 339 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

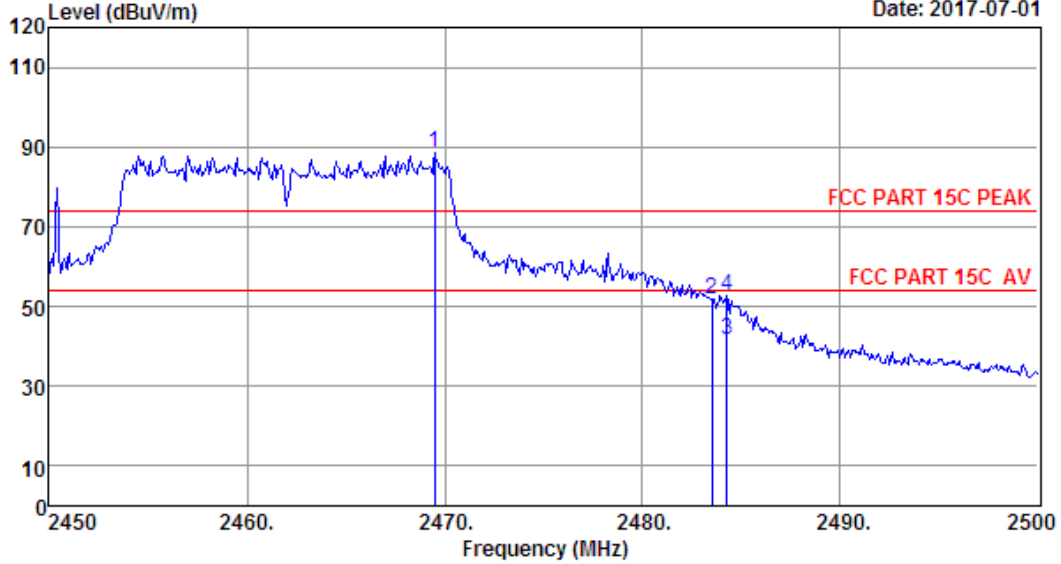

Site no. : 1# 966 Chamber Data no. : 339
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11g CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2469.50	27.58	6.69	34.98	89.23	88.52	74.00	-14.52	Peak
2	2483.50	27.58	6.71	35.11	52.63	51.81	74.00	22.19	Peak
3	2484.25	27.58	6.71	35.11	42.55	41.73	74.00	32.27	Average
4	2484.25	27.58	6.71	35.11	53.55	52.73	74.00	21.27	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 340 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

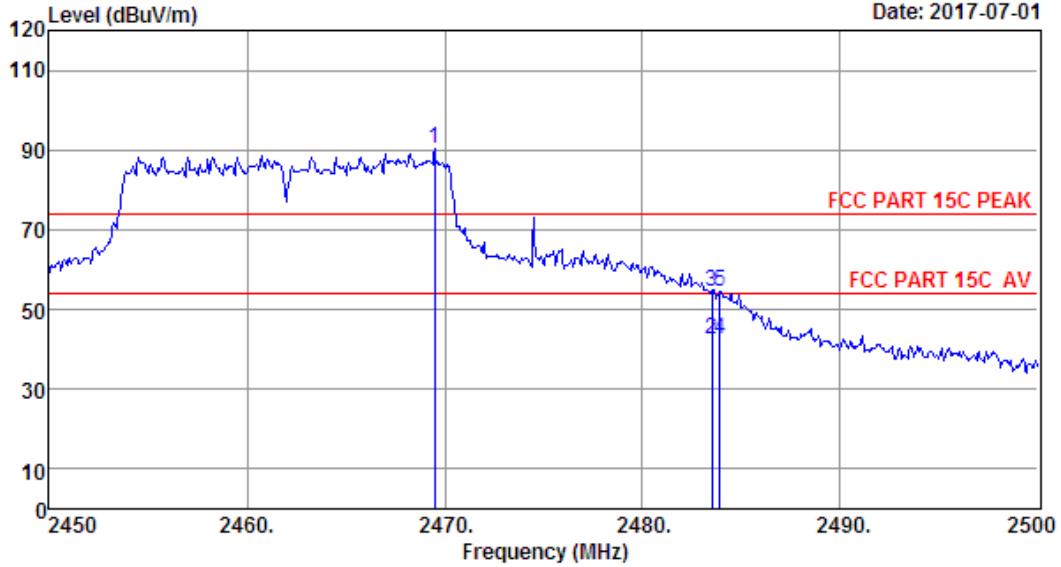

Site no. : 1# 966 Chamber Data no. : 340
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11g CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2469.50	27.58	6.69	34.98	91.22	90.51	74.00	-16.51	Peak
2	2483.50	27.58	6.71	35.11	43.12	42.30	54.00	11.70	Average
3	2483.50	27.58	6.71	35.11	55.33	54.51	74.00	19.49	Peak
4	2483.90	27.58	6.71	35.11	43.32	42.50	54.00	11.50	Average
5	2483.90	27.58	6.71	35.11	55.46	54.64	74.00	19.36	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 341 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

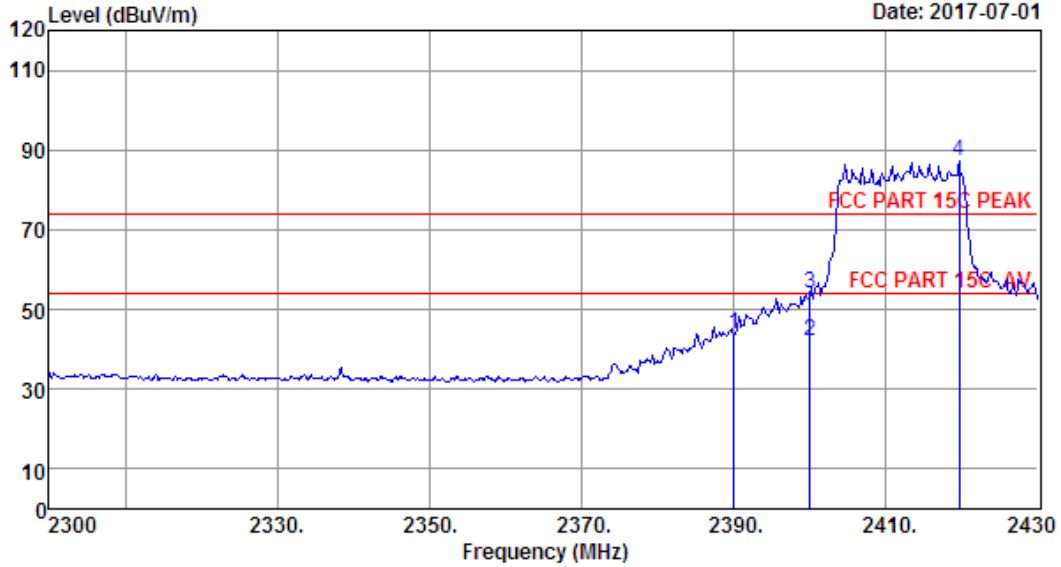

Site no. : 1# 966 Chamber Data no. : 341
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT20 CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	6.62	34.62	44.00	43.64	74.00	30.36	Peak
2	2400.00	27.61	6.62	34.64	42.51	42.10	54.00	11.90	Average
3	2400.00	27.61	6.62	34.64	54.31	53.90	74.00	20.10	Peak
4	2419.60	27.60	6.66	34.74	87.58	87.10	74.00	-13.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 342 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

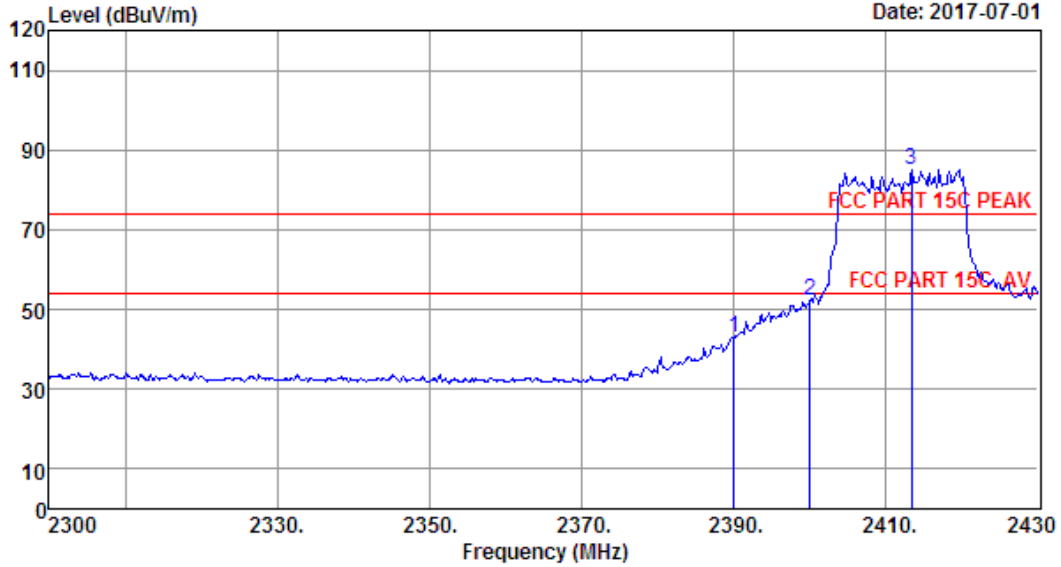

Site no. : 1# 966 Chamber Data no. : 342
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT20 CH1 2412TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	27.64	6.62	34.62	43.27	42.91	74.00	31.09	Peak
2	2400.00	27.61	6.62	34.64	52.69	52.28	74.00	21.72	Peak
3	2413.36	27.60	6.64	34.64	85.62	85.22	74.00	-11.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 343 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

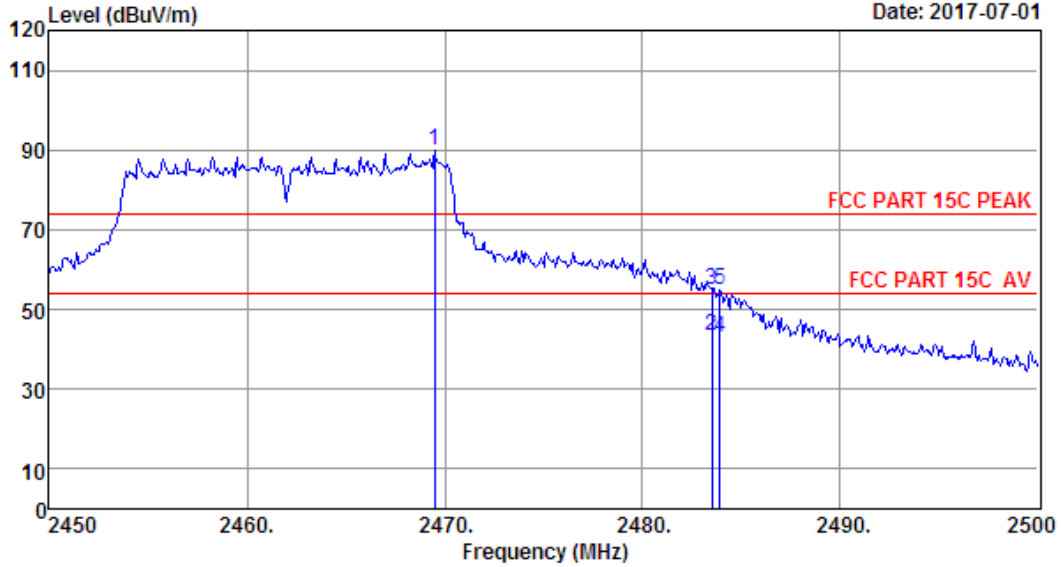

Site no. : 1# 966 Chamber Data no. : 343
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT20 CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2469.50	27.58	6.69	34.98	90.81	90.10	74.00	-16.10	Peak
2	2483.50	27.58	6.71	35.11	44.32	43.50	54.00	10.50	Average
3	2483.50	27.58	6.71	35.11	55.84	55.02	74.00	18.98	Peak
4	2483.90	27.58	6.71	35.11	43.84	43.02	54.00	10.98	Average
5	2483.90	27.58	6.71	35.11	55.51	54.69	74.00	19.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 344 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

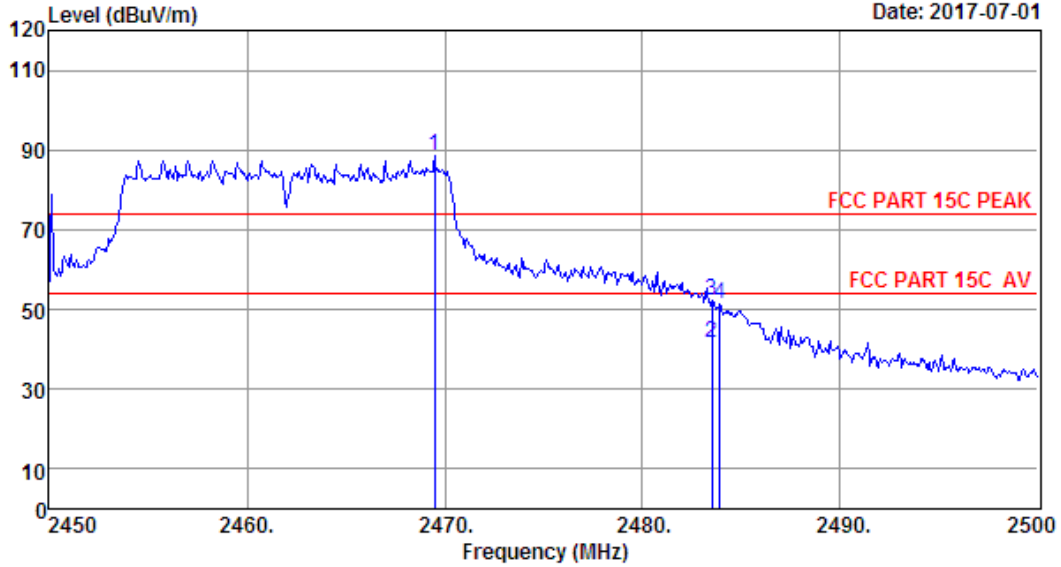

Site no. : 1# 966 Chamber Data no. : 344
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT20 CH11 2462TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2469.50	27.58	6.69	34.98	89.08	88.37	74.00	-14.37	Peak
2	2483.50	27.58	6.71	35.11	42.42	41.60	54.00	12.40	Average
3	2483.50	27.58	6.71	35.11	53.12	52.30	74.00	21.70	Peak
4	2483.90	27.58	6.71	35.11	52.23	51.41	74.00	22.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 345 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

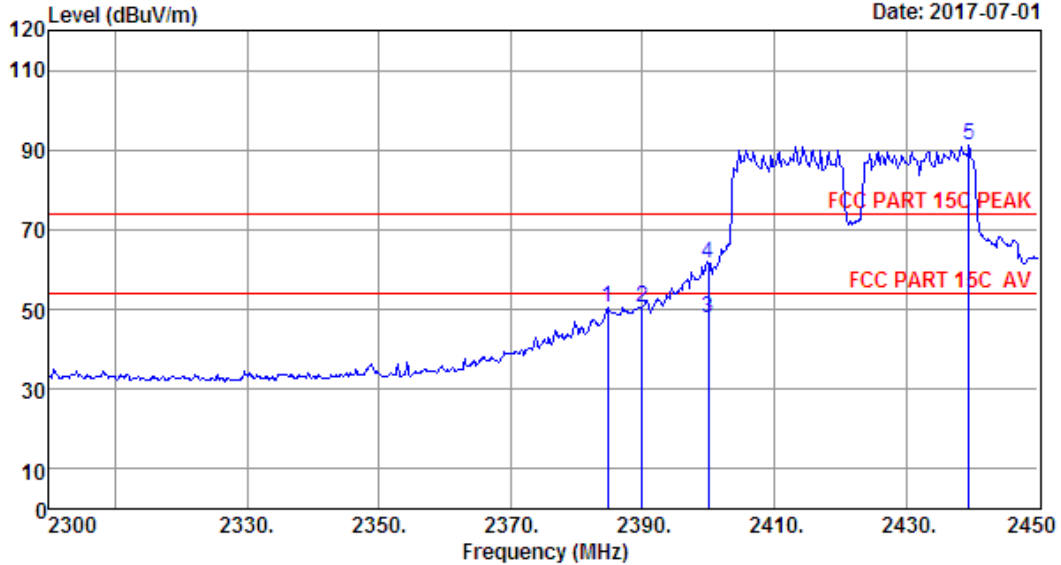

Site no. : 1# 966 Chamber Data no. : 345
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT40 CH1 2422TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2384.75	27.64	6.60	34.62	50.92	50.54	74.00	23.46	Peak
2	2390.00	27.64	6.62	34.62	50.66	50.30	74.00	23.70	Peak
3	2400.00	27.61	6.62	34.64	48.21	47.80	54.00	6.20	Average
4	2400.00	27.61	6.62	34.64	62.07	61.66	74.00	12.34	Peak
5	2439.50	27.60	6.67	34.85	91.82	91.24	74.00	-17.24	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 346 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

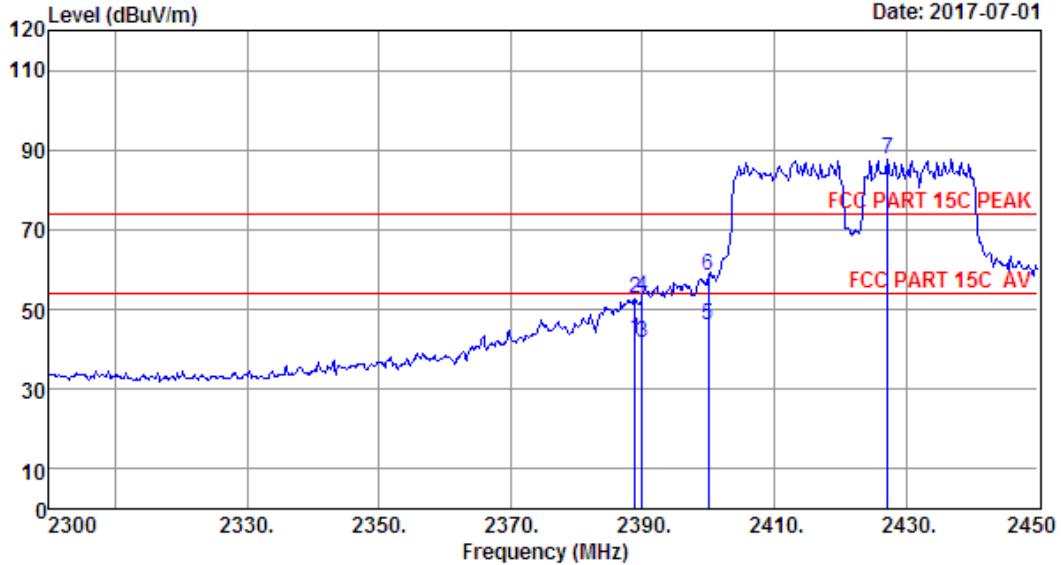

Site no. : 1# 966 Chamber Data no. : 346
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT40 CH1 2422TX


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.80	27.64	6.62	34.62	42.66	42.30	54.00	11.70	Average
2	2388.80	27.64	6.62	34.62	53.20	52.84	74.00	21.16	Peak
3	2390.00	27.64	6.62	34.62	41.96	41.60	54.00	12.40	Average
4	2390.00	27.64	6.62	34.62	53.55	53.19	74.00	20.81	Peak
5	2400.00	27.61	6.62	34.64	46.41	46.00	54.00	8.00	Average
6	2400.00	27.61	6.62	34.64	58.68	58.27	74.00	15.73	Peak
7	2427.20	27.60	6.66	34.74	87.97	87.49	74.00	-13.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 347 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

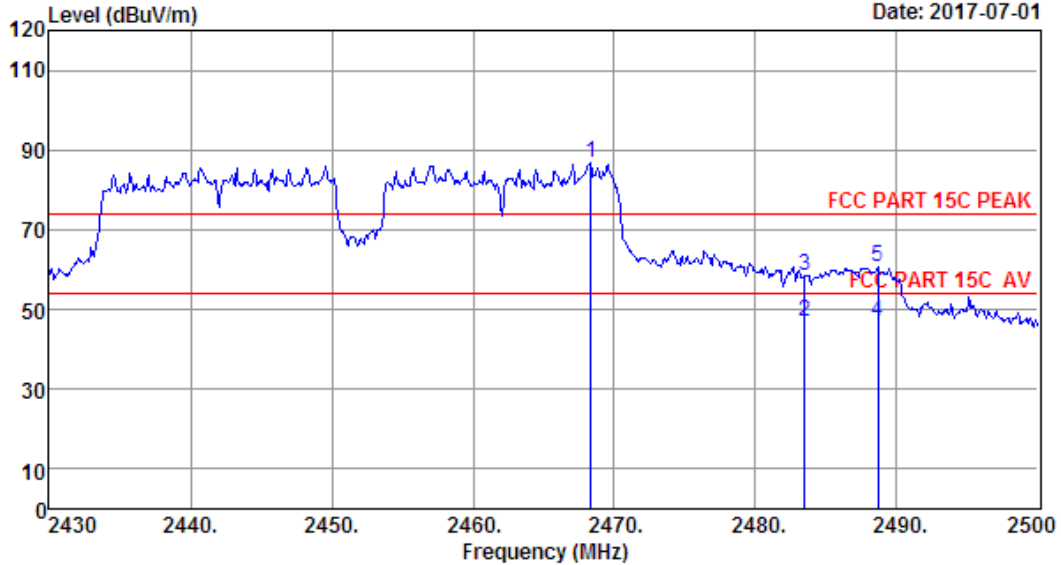


Site no. : 1# 966 Chamber Data no. : 347
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6';Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT40 CH7 2452TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2468.36	27.58	6.69	34.98	87.53	86.82	74.00	-12.82	Peak
2	2483.50	27.58	6.71	35.11	47.72	46.90	54.00	7.10	Average
3	2483.50	27.58	6.71	35.11	59.12	58.30	74.00	15.70	Peak
4	2488.66	27.58	6.73	35.11	47.80	47.00	54.00	7.00	Average
5	2488.66	27.58	6.73	35.11	61.37	60.57	74.00	13.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

EST Technology

Data: 348 File: \\Emc-966-1\test data\2017\RF\Z\zhong xin ke ji-RF.EM6 (348) Date: 2017-07-01

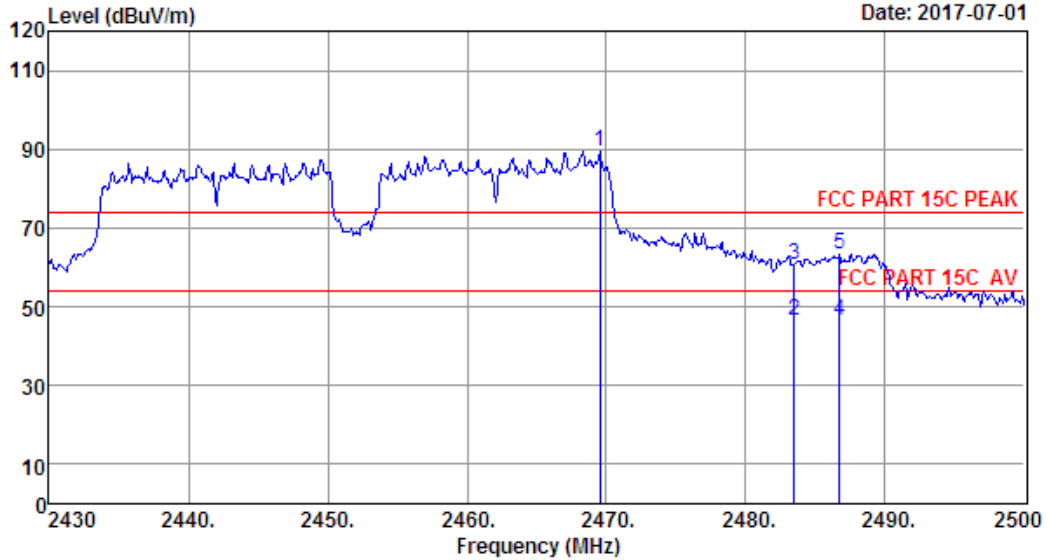

Site no. : 1# 966 Chamber Data no. : 348
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:23.6%;Humi:56%;Press:101.52kPa
 Engineer : Seven
 EUT : 32inch HD DLED TV
 Power : AC 120V/60Hz
 M/N : WD32HBB101
 Test Mode : IEEE 802.11n HT40 CH7 2452TX

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2469.55	27.58	6.69	34.98	90.05	89.34	74.00	-15.34	Peak
2	2483.50	27.58	6.71	35.11	47.32	46.50	54.00	7.50	Average
3	2483.50	27.58	6.71	35.11	61.66	60.84	74.00	13.16	Peak
4	2486.70	27.58	6.71	35.11	47.52	46.70	54.00	7.30	Average
5	2486.70	27.58	6.71	35.11	63.99	63.17	74.00	10.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

6 6dB & 20dB Bandwidth Test

6.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

6.2 Test Procedure for 6dB

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
 - (1). Set resolution bandwidth (RBW) = 100 kHz.
 - (2). Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - (3). Detector = Peak.
 - (4). Trace mode = max hold.
 - (5). Sweep = auto couple.
 - (6). Allow the trace to stabilize.
 - (7). Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Test Procedure for 20dB

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in C63.10
 - (1). The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
 - (2). The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
 - (3). Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
 - (4). Steps a) through c) might require iteration to adjust within the specified tolerances.
 - (5). The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
 - (6). Set detection mode to peak and trace mode to max hold.
 - (7). Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
 - (8). Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
 - (9). If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
 - (10). Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “_xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value,

then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “_xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.


(11). The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.4 Test Result


EUT: 32inch HD DLED TV					
M/N: WD32HBB101					
Test date: 2017-07-05		Test site: RF Site		Tested by: Seven	
Test Mode	CH	6dB bandwidth (MHz)	20dB bandwidth (MHz)	Limit	
				6dB BW (KHz)	20dB BW
IEEE 802.11 b	CH1 9.932		14.077	>500	/
	CH6 9.916		14.405	>500	/
	CH11 10.066		14.696	>500	/
IEEE 802.11 g	CH1 16.490		18.769	>500	/
	CH6 16.514		18.399	>500	/
	CH11 16.505		18.598	>500	/
IEEE 802.11 n HT 20	CH1 16.462		18.998	>500	/
	CH6 16.465		19.040	>500	/
	CH11 16.472		19.009	>500	/
IEEE 802.11 n HT 40	CH3 36.376		40.438	>500	/
	CH6 36.404		40.158	>500	/
	CH9 36.294		40.374	>500	/
Conclusion : PASS					

6.5 6dB Test Data


Test Mode: IEEE 802.11b 2412MHz

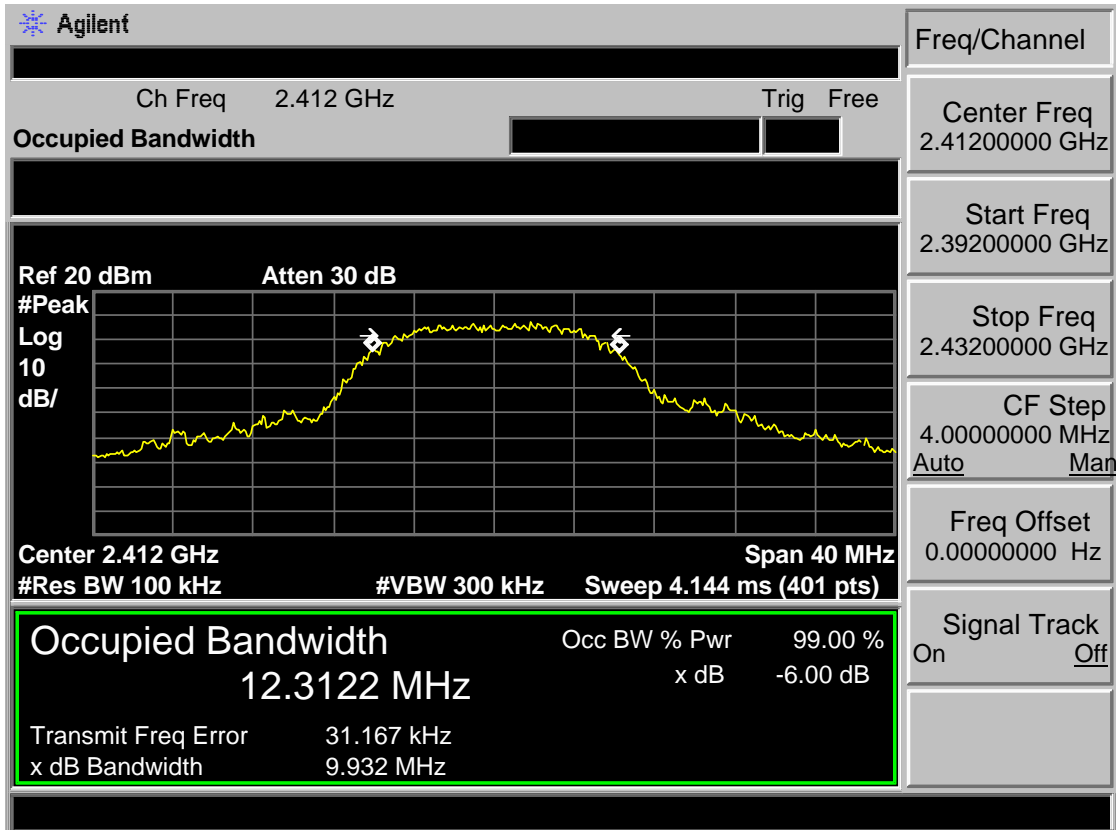


Test Mode: IEEE 802.11b 2437MHz

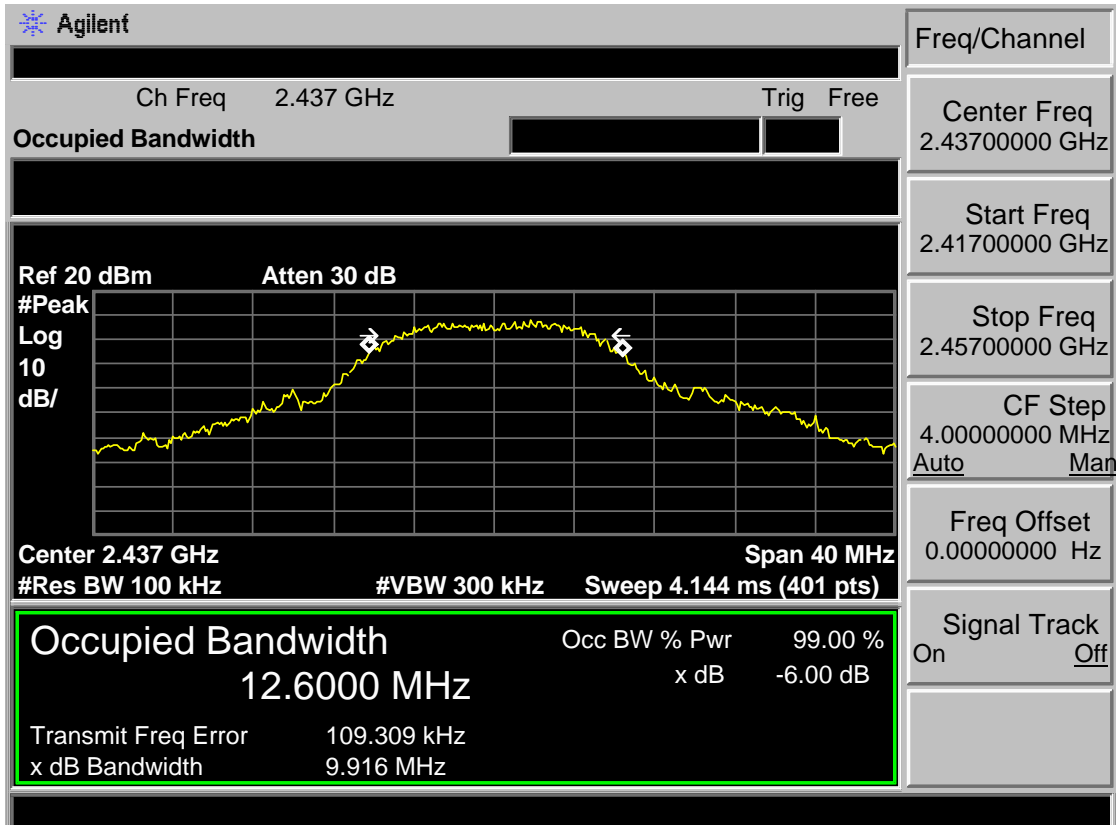


Test Mode: IEEE 802.11b 2462MHz

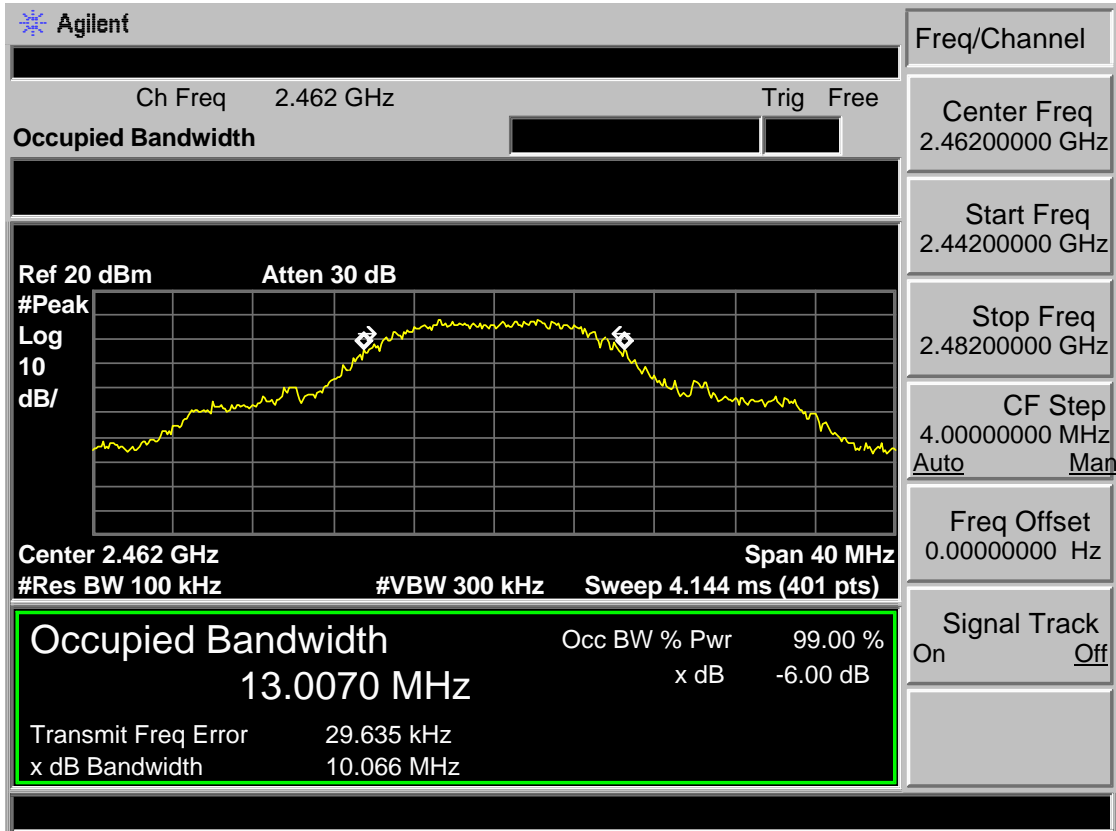

Test Mode: IEEE 802.11g 2412MHz

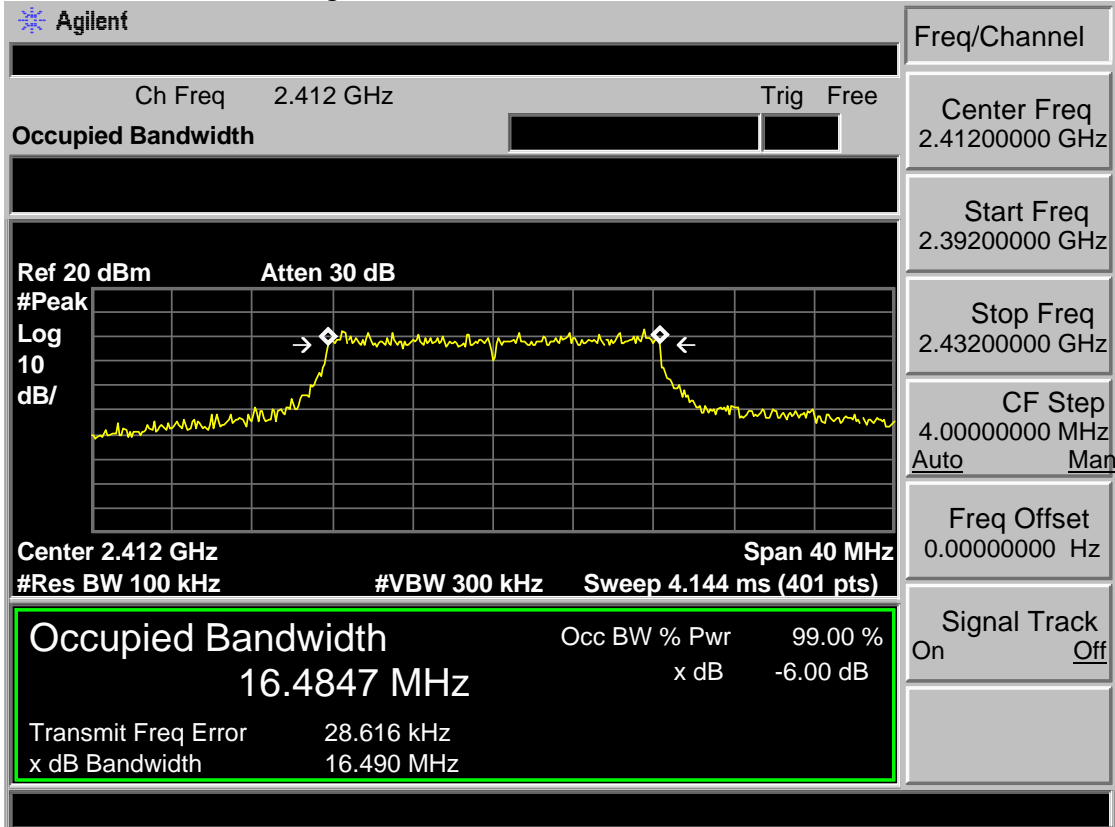

Test Mode: IEEE 802.11g 2437MHz

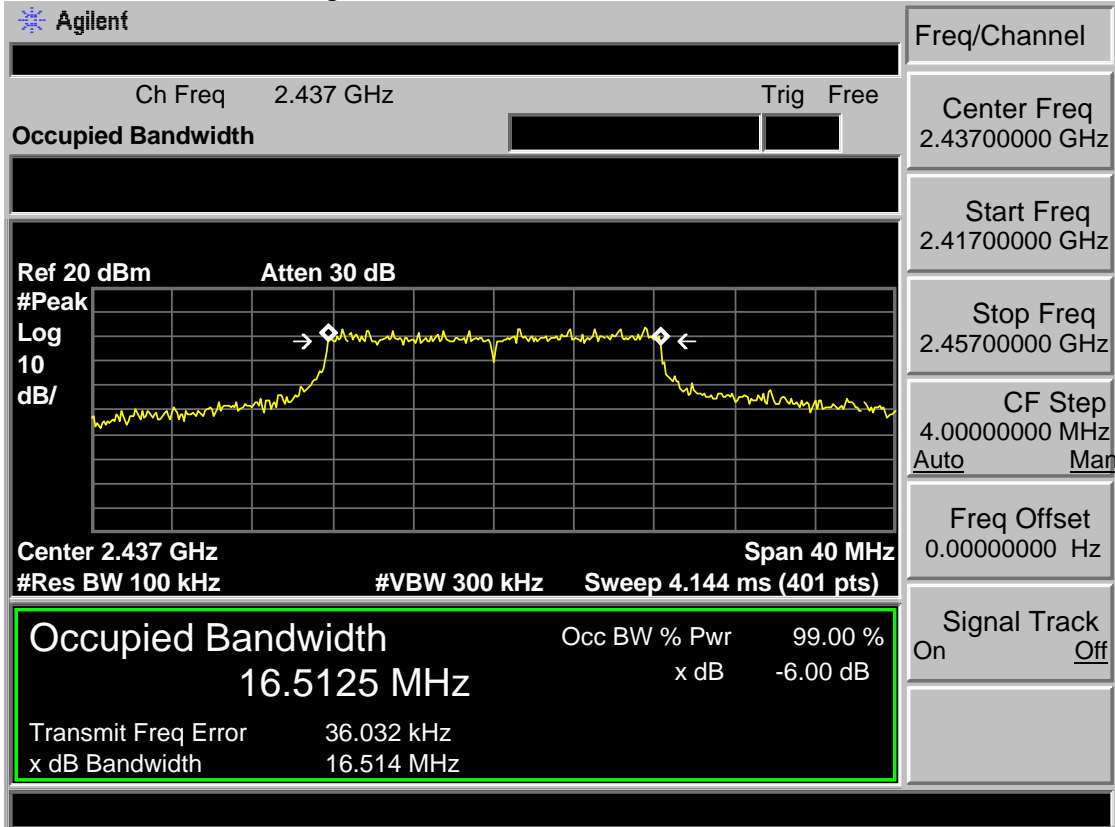

Test Mode: IEEE 802.11g 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

Center 2.462 GHz Span 40 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 4.144 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.5304 MHz	x dB	-6.00 dB
Transmit Freq Error	33.368 kHz	
x dB Bandwidth	16.505 MHz	

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz


Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Test Mode: IEEE 802.11n HT20 2412MHz

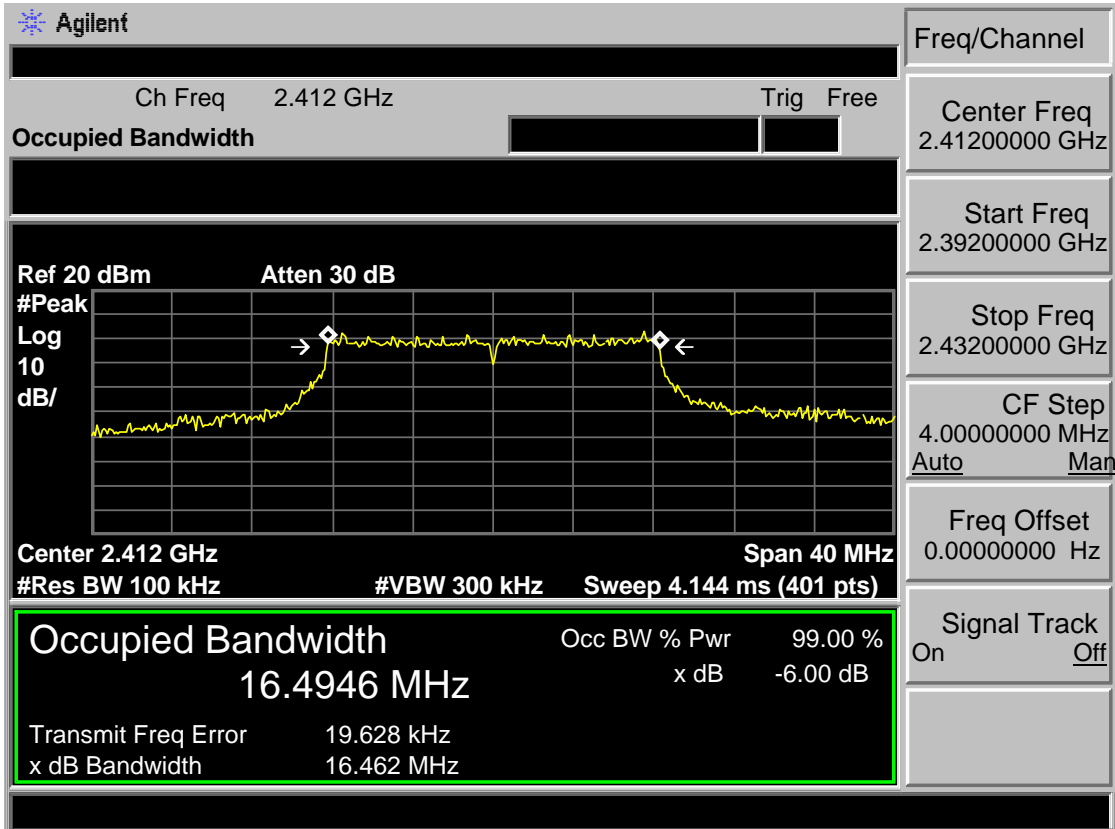

Test Mode: IEEE 802.11n HT20 2437MHz

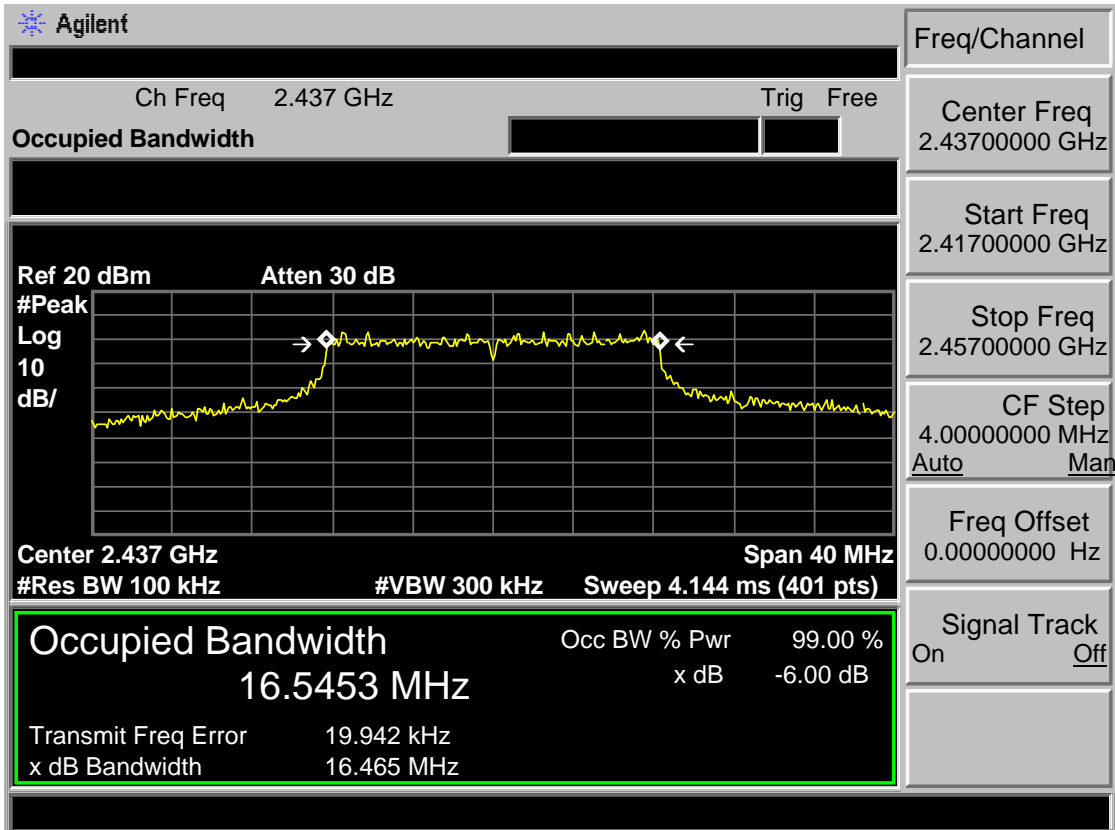

Test Mode: IEEE 802.11n HT20 2462MHz

Agilent

Freq/Channel	
Center Freq	2.46200000 GHz
Start Freq	2.44200000 GHz
Stop Freq	2.48200000 GHz
CF Step	4.00000000 MHz
Auto <u>Man</u>	
Freq Offset	0.00000000 Hz
Signal Track	On <u>Off</u>


Ch Freq	2.462 GHz	Trig	Free
Occupied Bandwidth			

Ref 20 dBm	Atten 30 dB	
#Peak		
Log		
10		
dB/		


Center 2.462 GHz	Span 40 MHz
#Res BW 100 kHz	#VBW 300 kHz Sweep 4.144 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
16.5631 MHz	x dB	-6.00 dB
Transmit Freq Error	40.597 kHz	
x dB Bandwidth	16.472 MHz	

Test Mode: IEEE 802.11n HT40 2422MHz

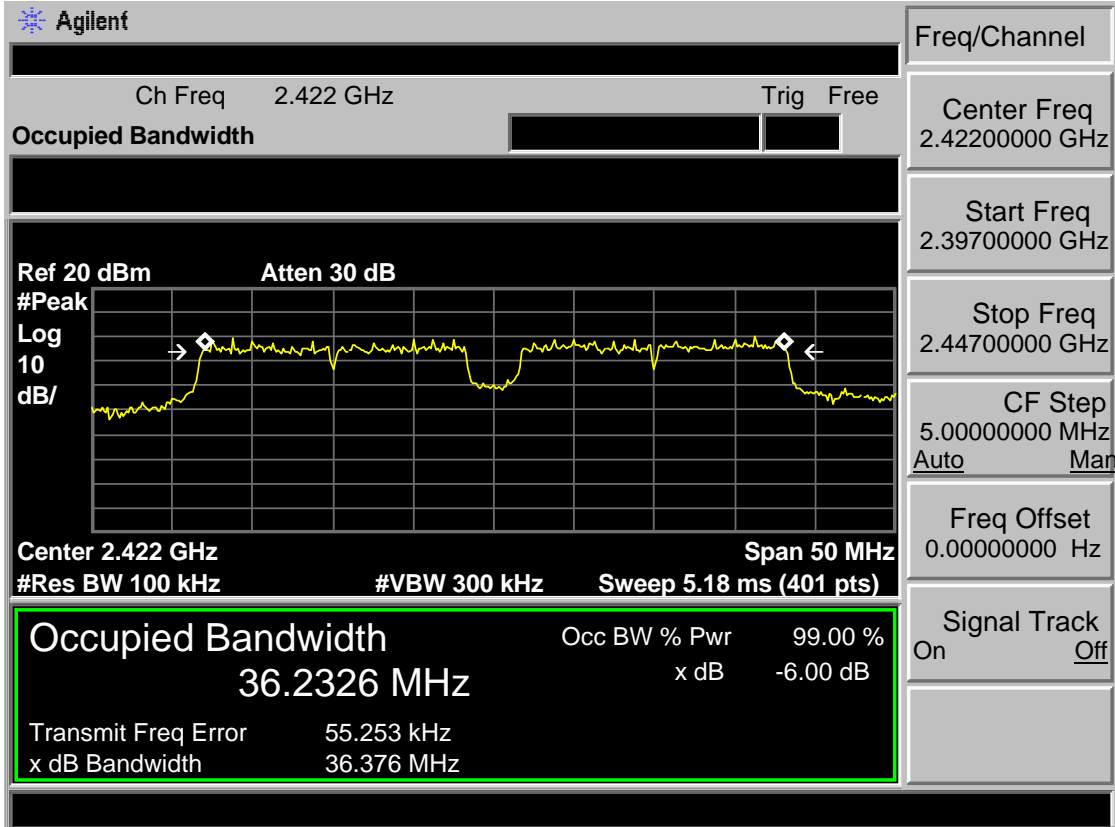

Test Mode: IEEE 802.11n HT40 2437MHz

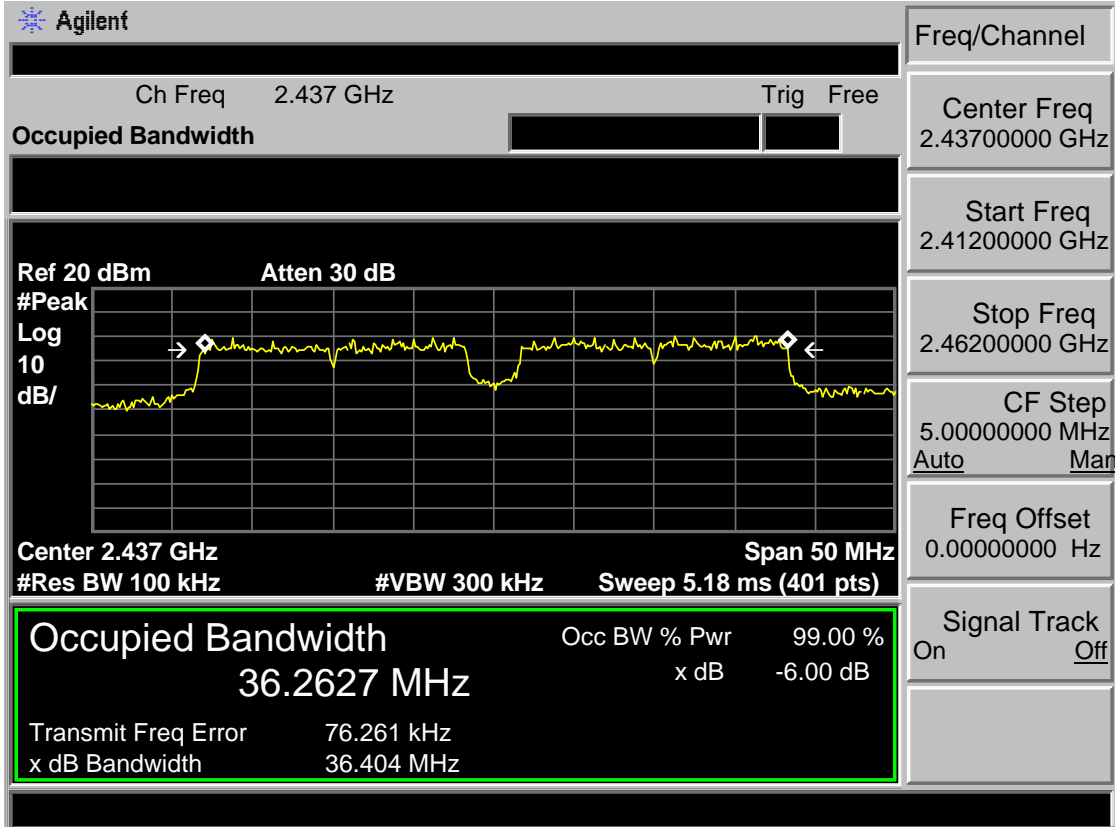

Test Mode: IEEE 802.11n HT40 2452MHz

Agilent

Ch Freq 2.452 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

Center 2.452 GHz Span 50 MHz
#Res BW 100 kHz #VBW 300 kHz Sweep 5.18 ms (401 pts)

Occupied Bandwidth	Occ BW % Pwr	99.00 %
36.3233 MHz	x dB	-6.00 dB
Transmit Freq Error	68.179 kHz	
x dB Bandwidth	36.294 MHz	

Freq/Channel

Center Freq
2.45200000 GHz

Start Freq
2.42700000 GHz

Stop Freq
2.47700000 GHz


CF Step
5.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz


Signal Track
On Off

6.6 20dB Test Data


Test Mode: IEEE 802.11b 2412MHz

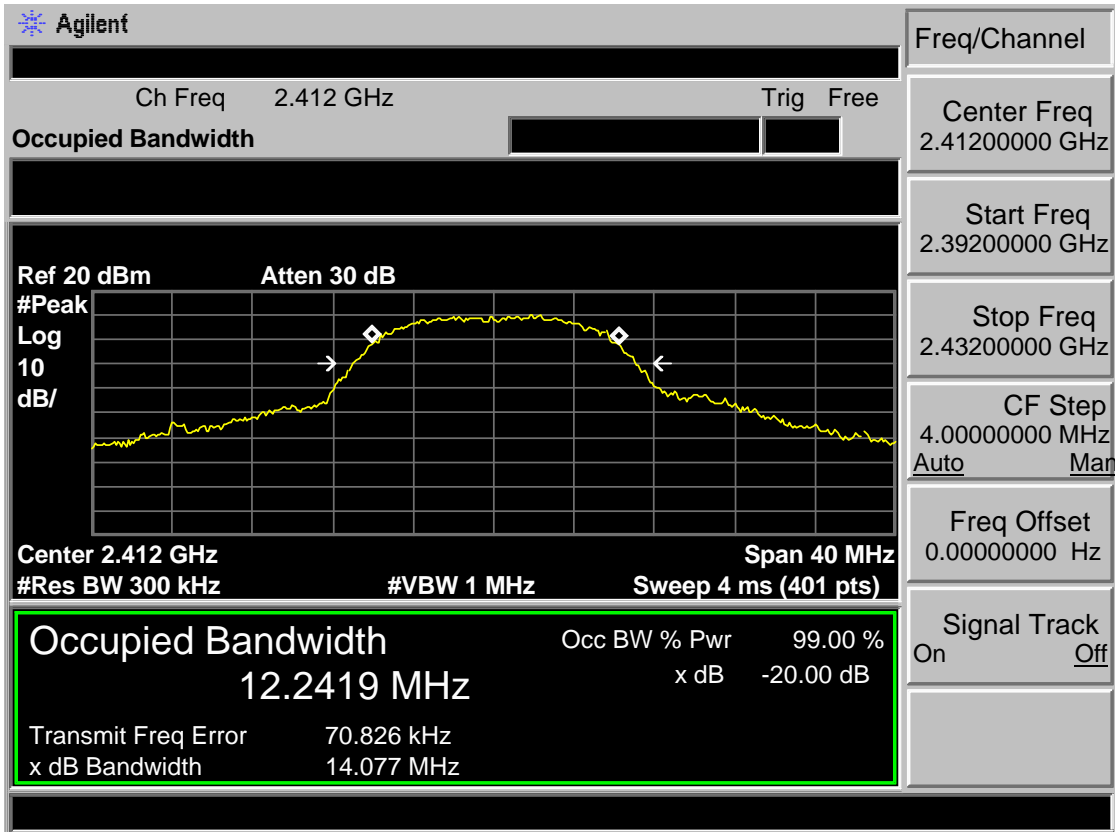

Test Mode: IEEE 802.11b 2437MHz

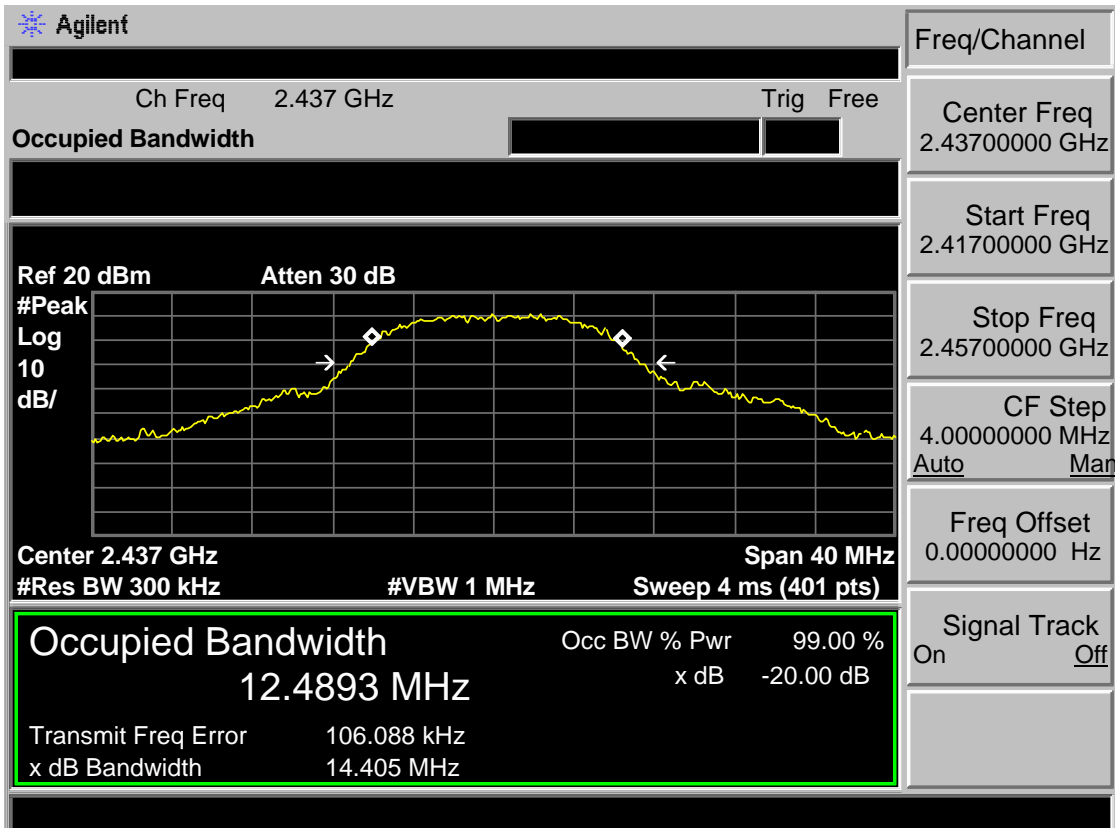

Test Mode: IEEE 802.11b 2462MHz

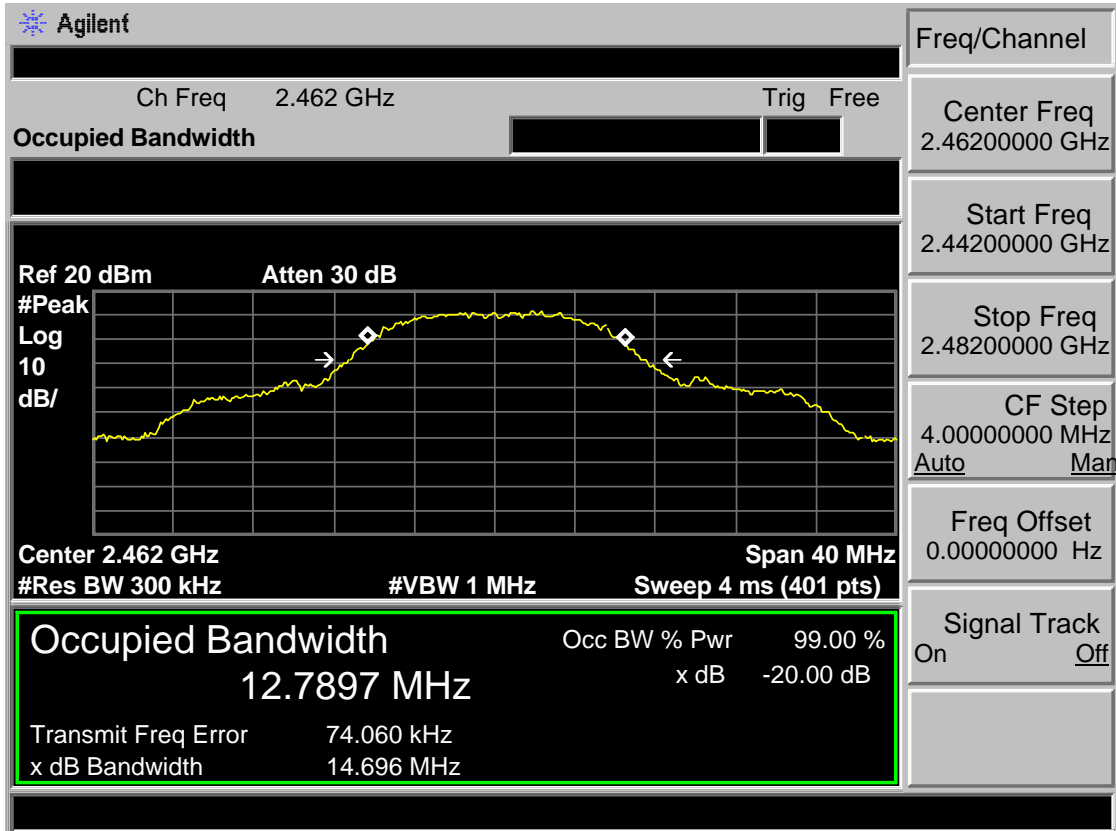

Test Mode: IEEE 802.11g 2412MHz

Agilent

Ch Freq 2.412 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

Center 2.412 GHz Span 40 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth Occ BW % Pwr 99.00 %

16.7803 MHz x dB -20.00 dB

Transmit Freq Error 37.375 kHz

x dB Bandwidth 18.769 MHz

Freq/Channel

Center Freq 2.41200000 GHz

Start Freq 2.39200000 GHz

Stop Freq 2.43200000 GHz

CF Step 4.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2437MHz

Agilent

Ch Freq 2.437 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

Center 2.437 GHz Span 40 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth Occ BW % Pwr 99.00 %

16.9098 MHz x dB -20.00 dB

Transmit Freq Error 48.667 kHz

x dB Bandwidth 18.399 MHz

Freq/Channel

Center Freq 2.43700000 GHz

Start Freq 2.41700000 GHz

Stop Freq 2.45700000 GHz

CF Step 4.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz

Signal Track On Off

Test Mode: IEEE 802.11g 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

#Peak
Log
10
dB/

Center 2.462 GHz Span 40 MHz
#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
17.0082 MHz		x dB	-20.00 dB
Transmit Freq Error	29.239 kHz		
x dB Bandwidth	18.598 MHz		

Freq/Channel

Center Freq
2.46200000 GHz

Start Freq
2.44200000 GHz


Stop Freq
2.48200000 GHz

CF Step
4.00000000 MHz
Auto Man


Freq Offset
0.00000000 Hz

Signal Track
On Off

Test Mode: IEEE 802.11n HT20 2412MHz

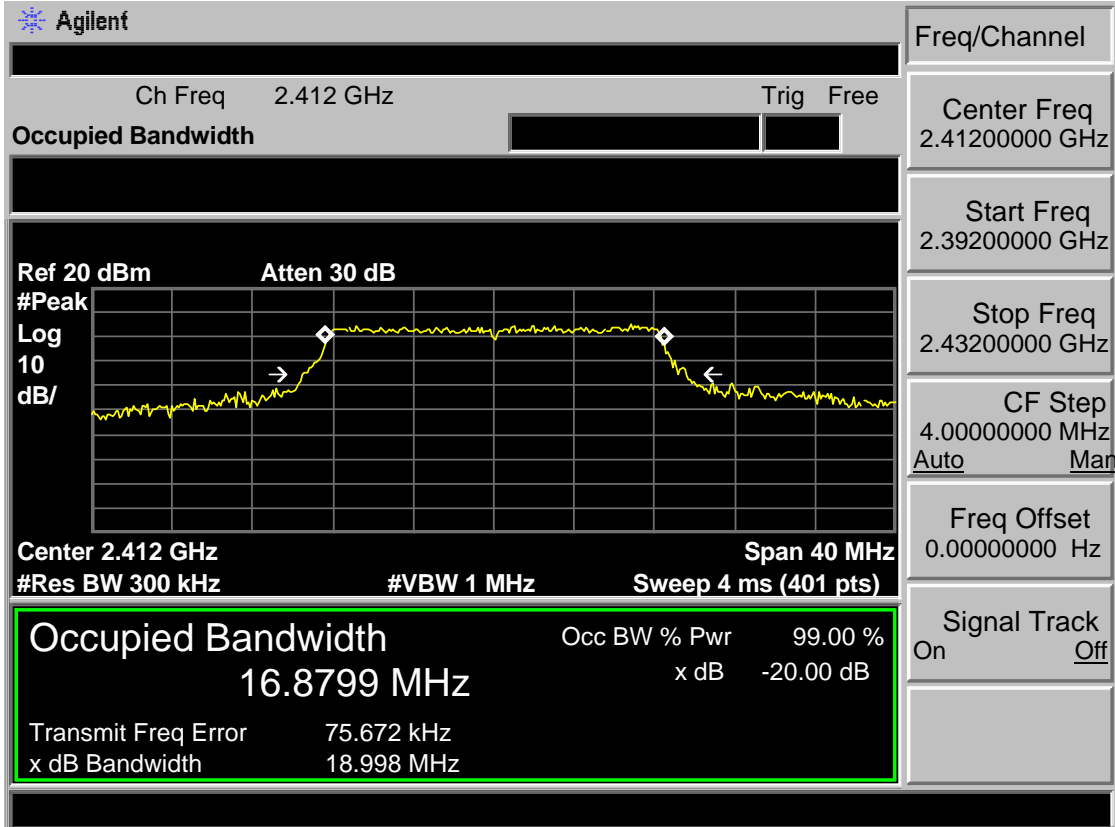

Test Mode: IEEE 802.11n HT20 2437MHz

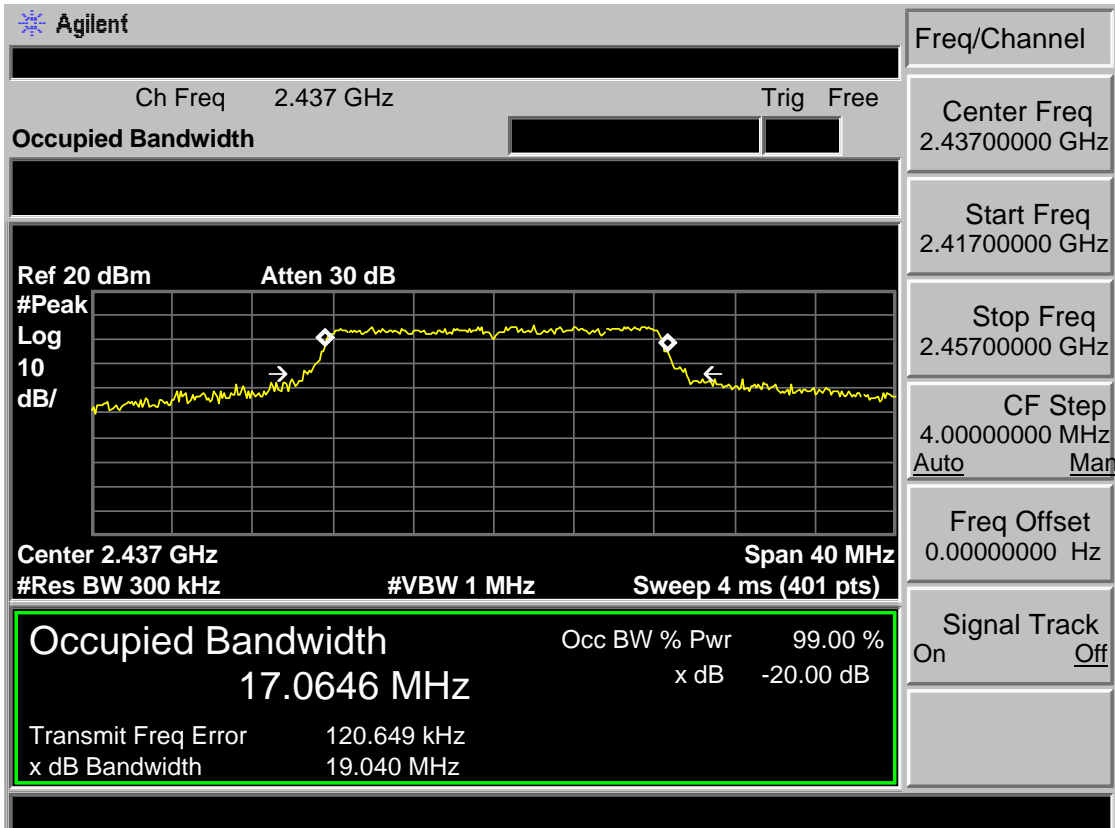

Test Mode: IEEE 802.11n HT20 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

#Peak
Log
10
dB/

Center 2.462 GHz Span 40 MHz
#Res BW 300 kHz #VBW 1 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth 17.2158 MHz

Transmit Freq Error 120.002 kHz
x dB Bandwidth 19.009 MHz

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44200000 GHz

Stop Freq 2.48200000 GHz

CF Step 4.00000000 MHz
Auto Man

Freq Offset 0.00000000 Hz


Signal Track On Off

Occupied Bandwidth 17.2158 MHz


Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error 120.002 kHz
x dB Bandwidth 19.009 MHz

Test Mode: IEEE 802.11n HT40 2422MHz

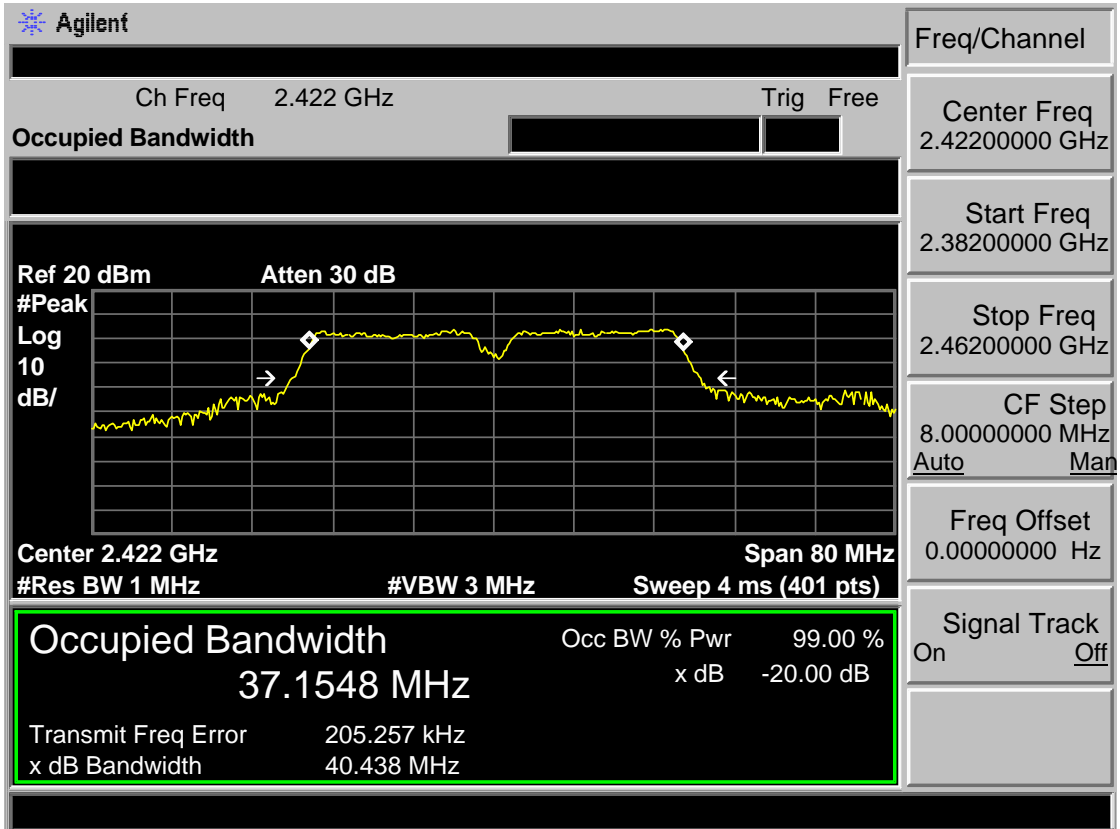

Test Mode: IEEE 802.11n HT40 2437MHz

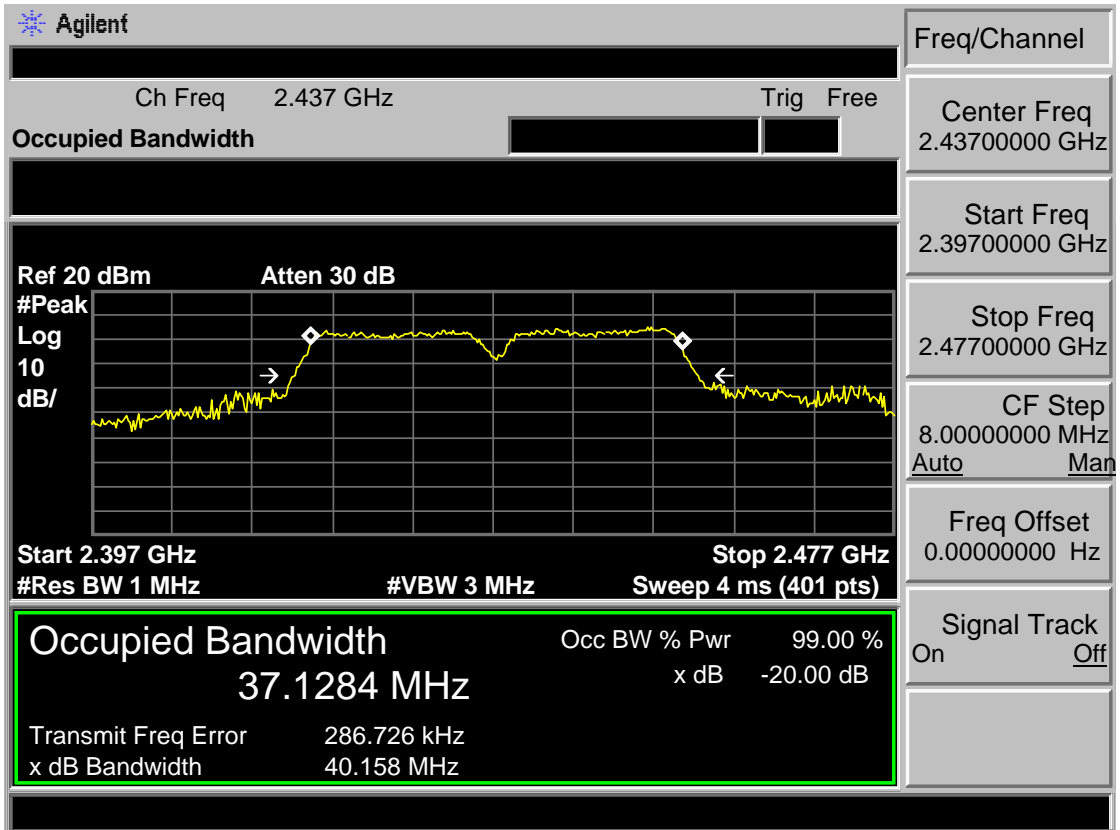

Test Mode: IEEE 802.11n HT40 2452MHz

Agilent

Ch Freq 2.452 GHz Trig Free

Occupied Bandwidth

Ref 20 dBm Atten 30 dB

#Peak
Log
10
dB/

Center 2.452 GHz Span 80 MHz
#Res BW 1 MHz #VBW 3 MHz Sweep 4 ms (401 pts)

Occupied Bandwidth		Occ BW % Pwr	99.00 %
37.3021 MHz		x dB	-20.00 dB
Transmit Freq Error	285.446 kHz		
x dB Bandwidth	40.374 MHz		

Freq/Channel

Center Freq
2.45200000 GHz

Start Freq
2.41200000 GHz

Stop Freq
2.49200000 GHz

CF Step
8.00000000 MHz
Auto Man

Freq Offset
0.00000000 Hz

Signal Track
On Off

7 OUTPUT POWER TEST

7.1 Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak output Power shall not exceed 1W(30dBm)

7.2 Test Procedure

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
 - (1)Set span to at least 1.5 times the OBW.
 - (2)Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
 - (3)Set VBW $\geq 3 \times$ RBW.
 - (4)Number of points in sweep $\geq 2 \times$ span / RBW . (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
 - (4)Sweep time = auto.
 - (5)Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
 - (6)If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
 - (7)Trace average at least 100 traces in power averaging (i.e., RMS) mode.
 - (8)Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

7.3 Test Result


EUT: 32inch HD DLED TV			
M/N: WD32HBB101			
Test date: 2017-07-05		Test site: RF Site	Tested by: Seven
Pass			
Test Mode	CH	Conducted Power (dBm)	Lim it (dBm)
IEEE 802.11 b	CH1 14.94		30
	CH6 15.74		30
	CH11 16.61		30
IEEE 802.11 g	CH1 9.81		30
	CH6 1	1.04	30
	CH11 1	1.61	30
IEEE 802.11 n HT 20	CH1 9.36		30
	CH6 10.46		30
	CH11 1	1.50	30
IEEE 802.11 n HT 40	CH3 4.86		30
	CH6 5.53		30
	CH9 6.71		30
Conclusion : PASS			

7.4 Test Data


Test Mode: IEEE 802.11b 2412MHz

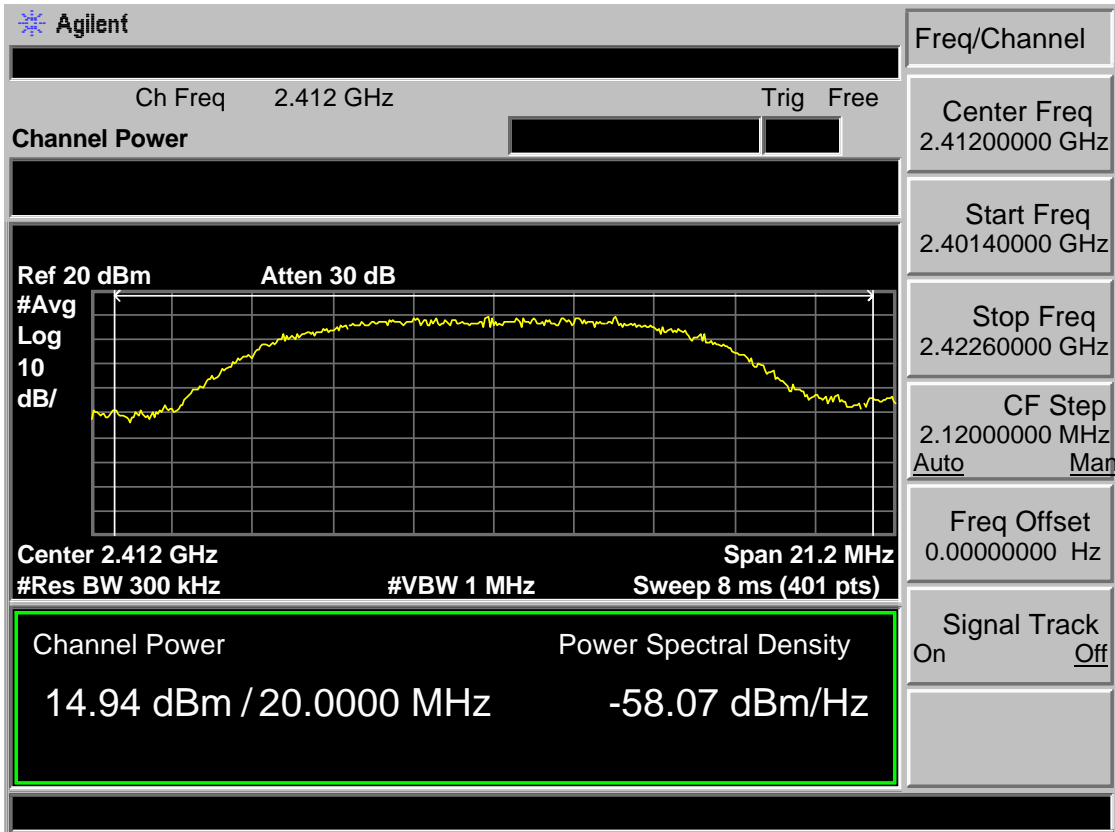

Test Mode: IEEE 802.11b 2437MHz

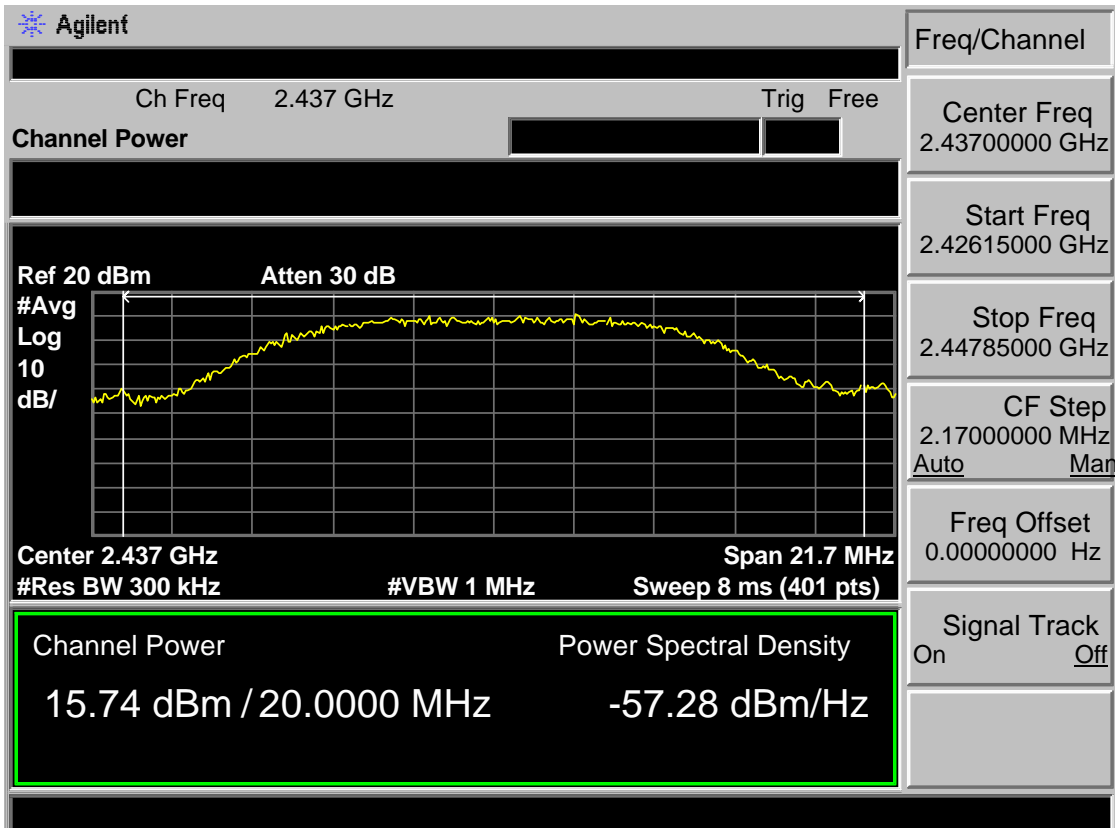

Test Mode: IEEE 802.11b 2462MHz

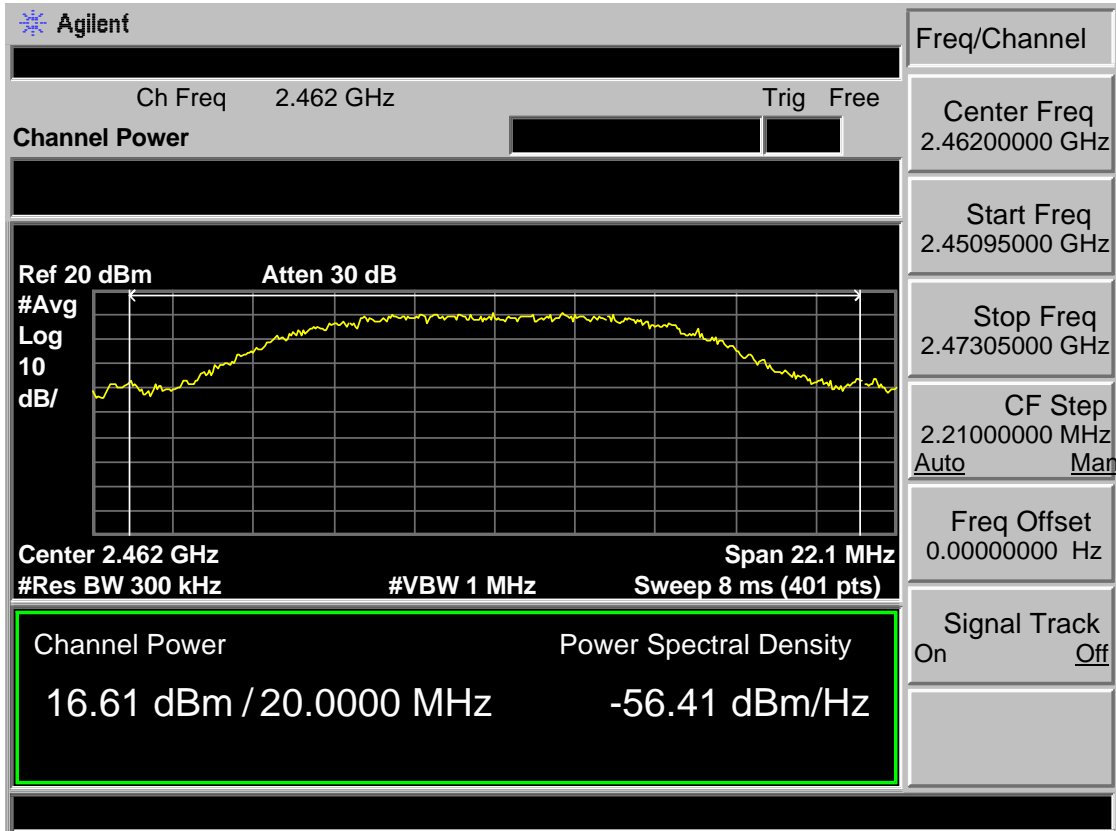

Test Mode: IEEE 802.11g 2412MHz

		Freq/Channel	
Ch Freq 2.412 GHz Trig Free		Center Freq 2.41200000 GHz	
Channel Power		Start Freq 2.39785000 GHz	
		Stop Freq 2.42615000 GHz	
Center 2.412 GHz Span 28.3 MHz		CF Step 2.83000000 MHz Auto Man	
#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)		Freq Offset 0.00000000 Hz	
Channel Power Power Spectral Density		Signal Track On Off	
9.81 dBm / 20.0000 MHz -63.20 dBm/Hz			

Test Mode: IEEE 802.11g 2437MHz

		Freq/Channel	
Ch Freq 2.437 GHz Trig Free		Center Freq 2.43700000 GHz	
Channel Power		Start Freq 2.42315000 GHz	
		Stop Freq 2.45085000 GHz	
Center 2.437 GHz Span 27.7 MHz		CF Step 2.77000000 MHz Auto Man	
#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)		Freq Offset 0.00000000 Hz	
Channel Power Power Spectral Density		Signal Track On Off	
11.04 dBm / 20.0000 MHz -61.97 dBm/Hz			

Test Mode: IEEE 802.11g 2462MHz

Agilent

Ch Freq 2.462 GHz Trig Free

Channel Power

Ref 20 dBm Atten 30 dB

Center 2.462 GHz Span 28 MHz

#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)

Channel Power	Power Spectral Density
11.61 dBm / 20.0000 MHz	-61.15 dBm/Hz

Freq/Channel

Center Freq 2.46200000 GHz

Start Freq 2.44800000 GHz


Stop Freq 2.47600000 GHz

CF Step 2.80000000 MHz
Auto Man


Freq Offset 0.00000000 Hz

Signal Track On Off


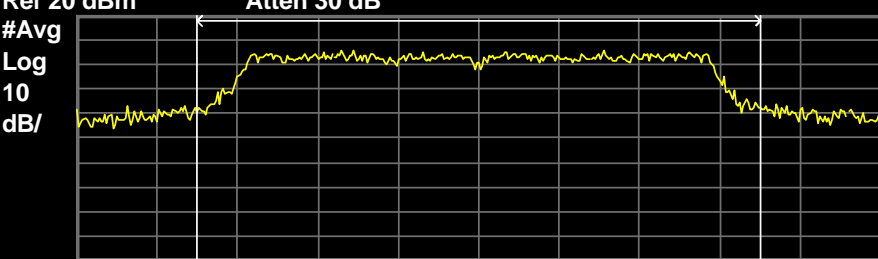
Test Mode: IEEE 802.11n HT20 2412MHz

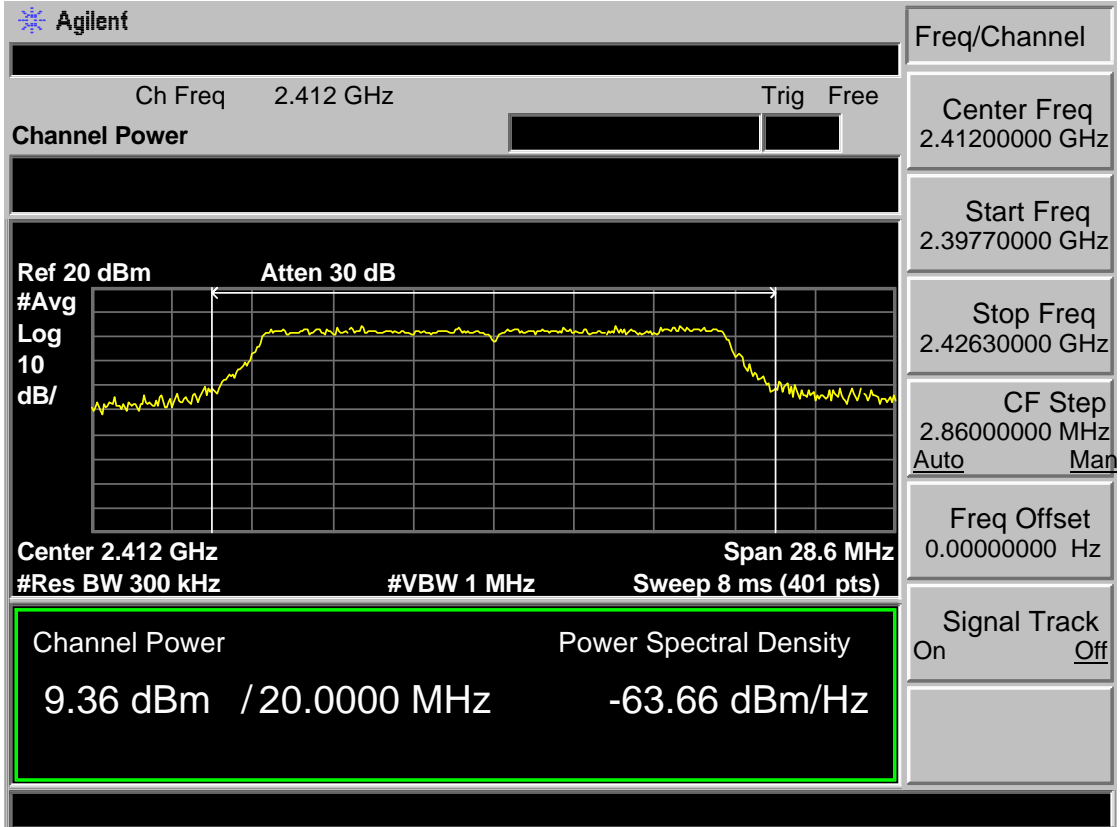


Test Mode: IEEE 802.11n HT20 2437MHz

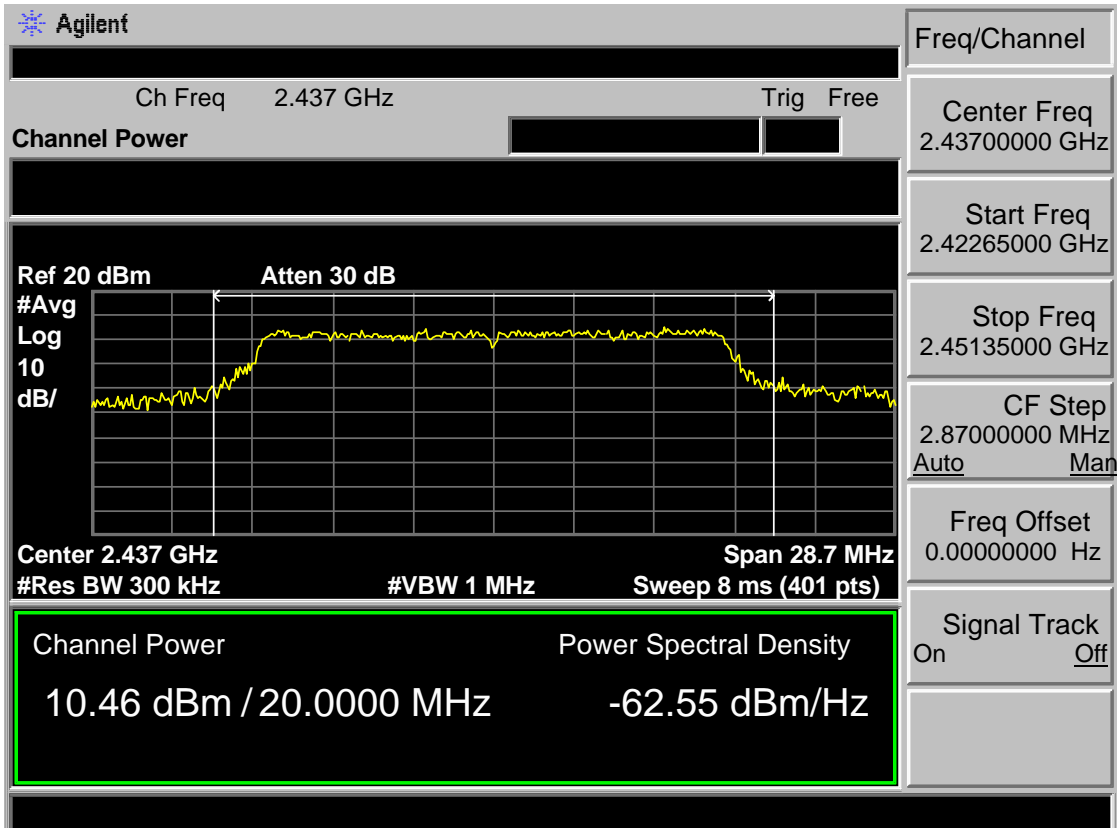


Test Mode: IEEE 802.11n HT20 2462MHz

		Freq/Channel
Ch Freq 2.462 GHz Trig Free		Center Freq 2.46200000 GHz
Channel Power		Start Freq 2.44770000 GHz
Ref 20 dBm Atten 30 dB		Stop Freq 2.47630000 GHz
		CF Step 2.86000000 MHz Auto Man
Center 2.462 GHz Span 28.6 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)		Freq Offset 0.00000000 Hz
Channel Power Power Spectral Density 11.50 dBm / 20.0000 MHz -61.51 dBm/Hz		Signal Track On Off


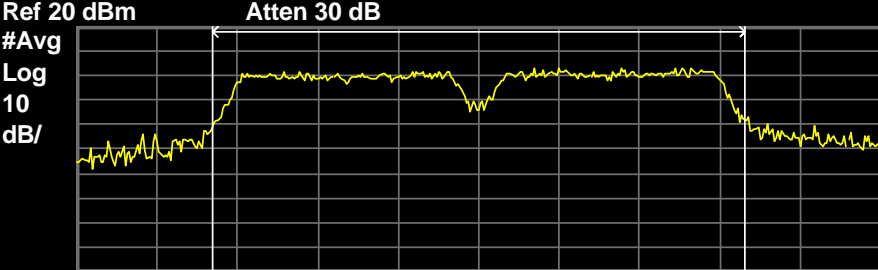
Test Mode: IEEE 802.11n HT40 2422MHz

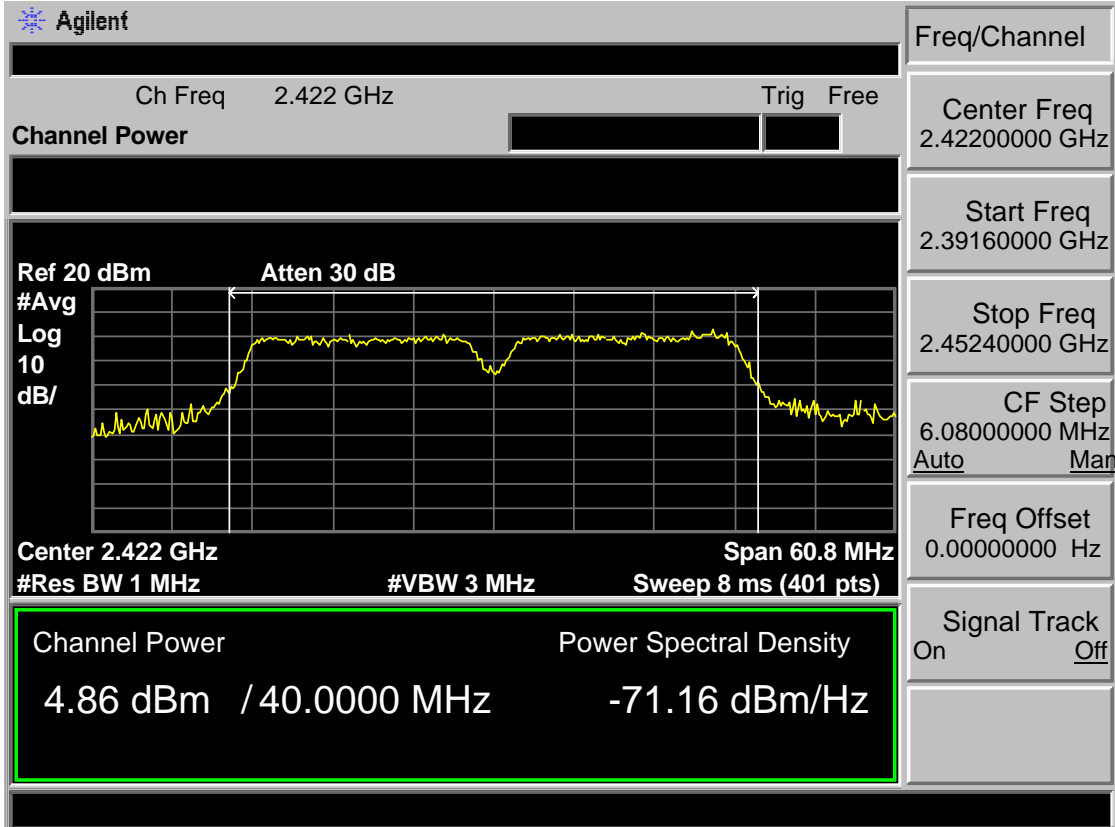

Test Mode: IEEE 802.11n HT40 2437MHz

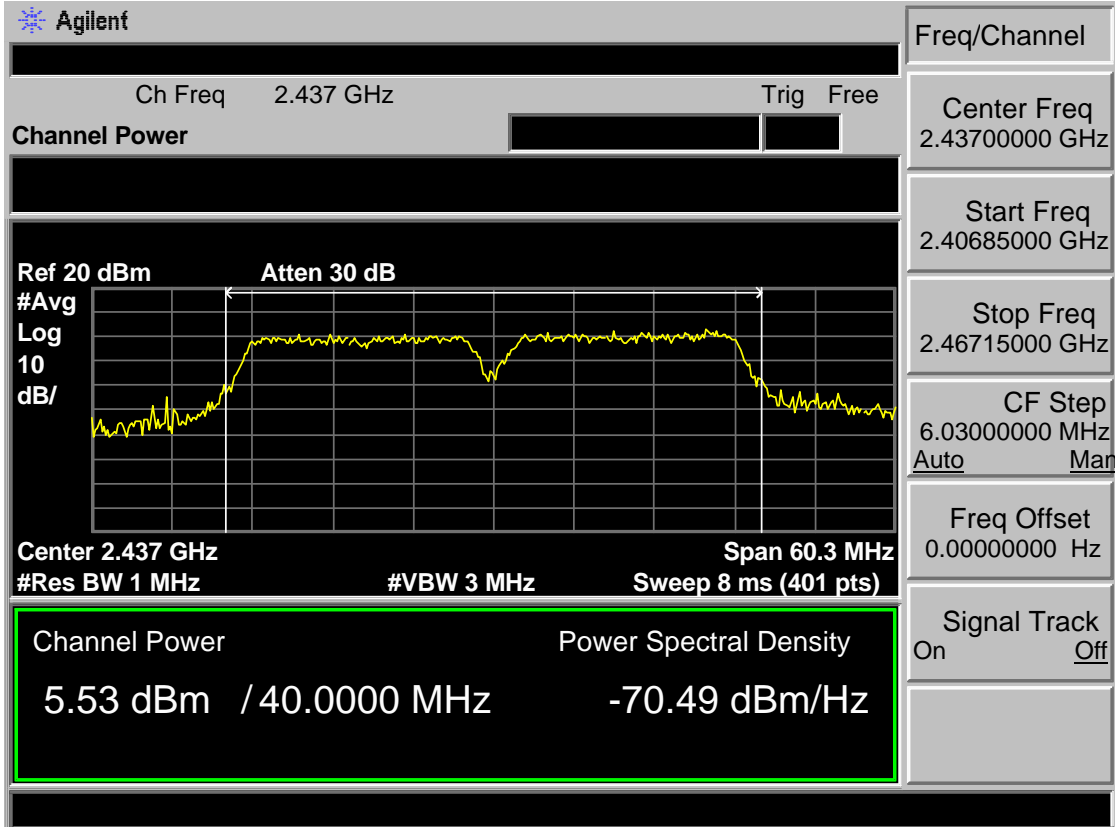

Test Mode: IEEE 802.11n HT40 2452MHz

		Freq/Channel
Ch Freq 2.452 GHz Trig Free		Center Freq 2.45200000 GHz
Channel Power		Start Freq 2.42165000 GHz
Ref 20 dBm Atten 30 dB		Stop Freq 2.48235000 GHz
		CF Step 6.07000000 MHz Auto Man
Center 2.452 GHz Span 60.7 MHz		Freq Offset 0.00000000 Hz
#Res BW 1 MHz #VBW 3 MHz Sweep 8 ms (401 pts)		Signal Track On Off
Channel Power Power Spectral Density		
6.71 dBm / 40.0000 MHz -69.31 dBm/Hz		

8 POWER SPECTRAL DENSITY TEST

8.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

8.2 Test Procedure

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer . Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.


- 2, Follow the test procedure as described in KDB 558074
 - (1). Set analyzer center frequency to DTS channel center frequency.
 - (2). Set the span to 1.5 times the DTS bandwidth.
 - (3). Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - (4). Set the VBW $\geq 3 \text{ RBW}$.
 - (5). Detector = peak.
 - (6). Sweep time = auto couple.
 - (7). Trace mode = max hold.
 - (8). Allow trace to fully stabilize.
 - (9). Use the peak marker function to determine the maximum amplitude level.
 - (10). If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

8.3 Test Result


EUT: 32inch HD DLED TV			
M/N: WD32HBB101			
Test date: 2017-07-05		Test site: RF Site	Tested by: Seven
Pass			
Test Mode	CH	Power density (dBm/3kHz)	Lim it (dBm /3kHz)
IEEE 802.11 b	CH1 -8.026		8
	CH6 -6.848		8
	CH11 -5.890		8
IEEE 802.11 g	CH1 -13.240		8
	CH6 -13.560		8
	CH11 -12.330		8
IEEE 802.11 n HT 20	CH1 -14.120		8
	CH6 -12.540		8
	CH11 -1	1.760	8
IEEE 802.11 n HT 40	CH3 -20.960		8
	CH6 -20.030		8
	CH9 -19.980		8
Conclusion : PASS			

8.4 Test Data


Test Mode: IEEE 802.11b 2412MHz

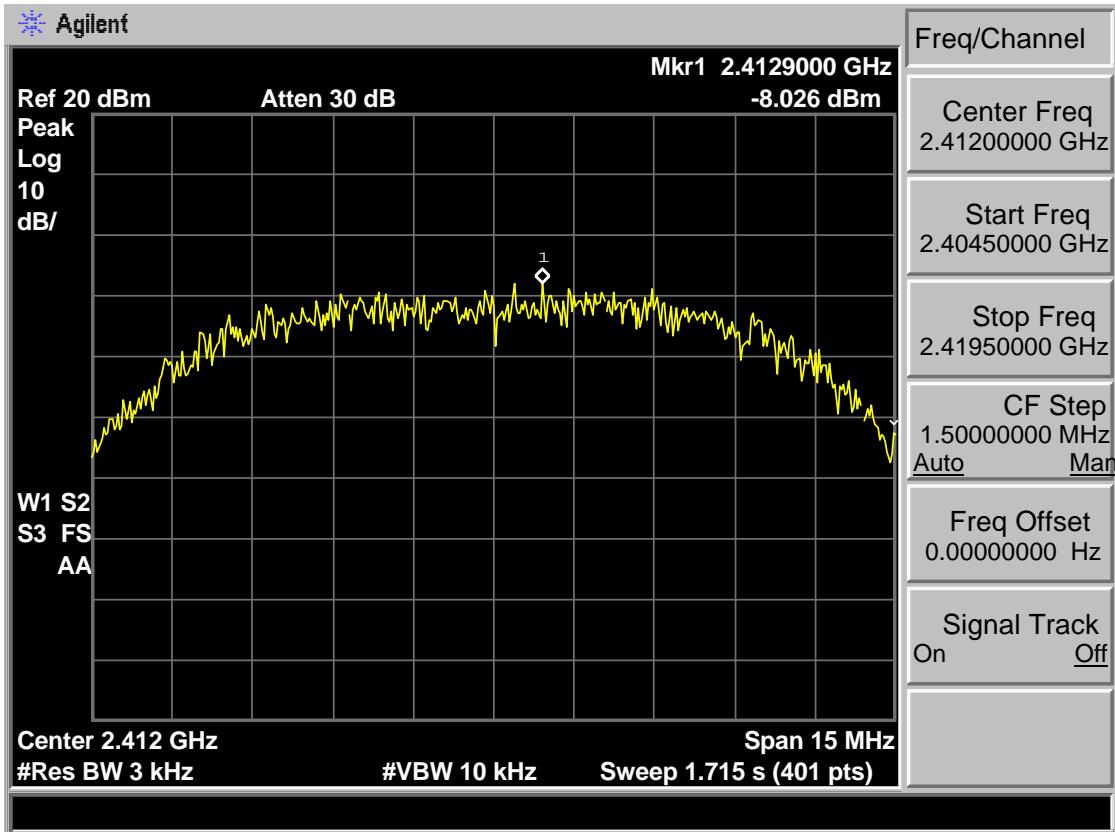


Test Mode: IEEE 802.11b 2437MHz

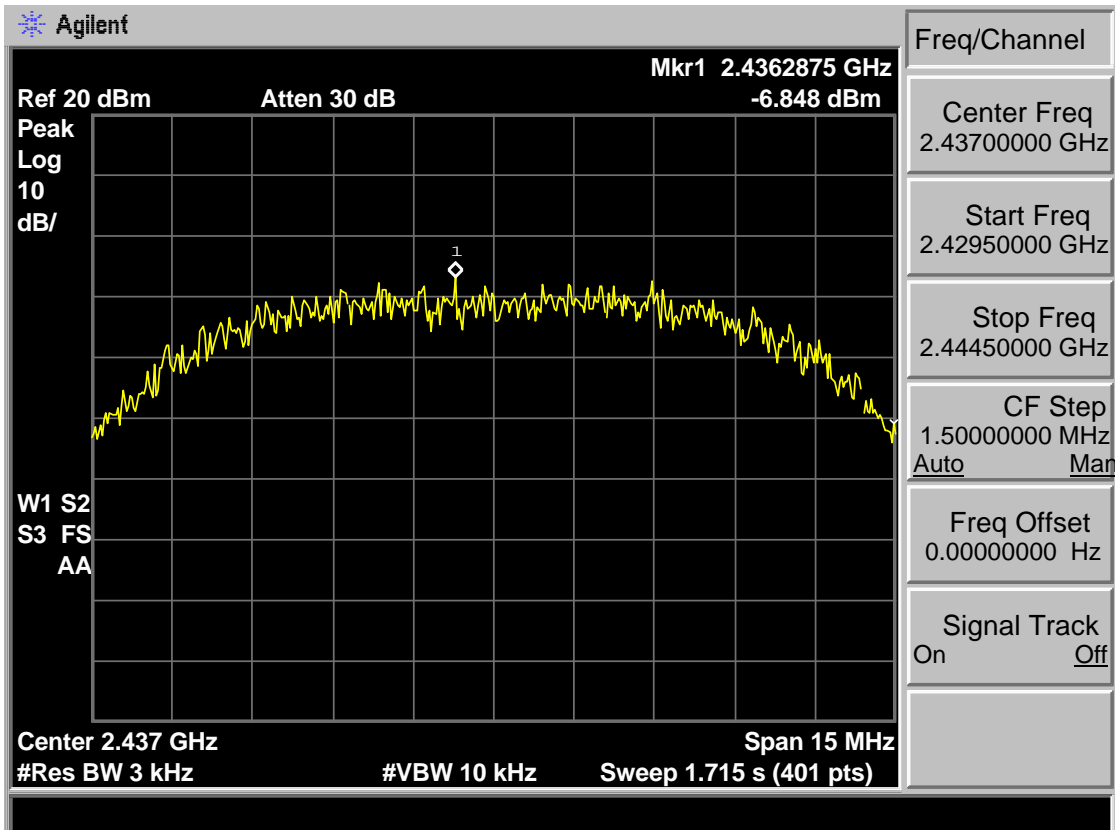


Test Mode: IEEE 802.11b 2462MHz

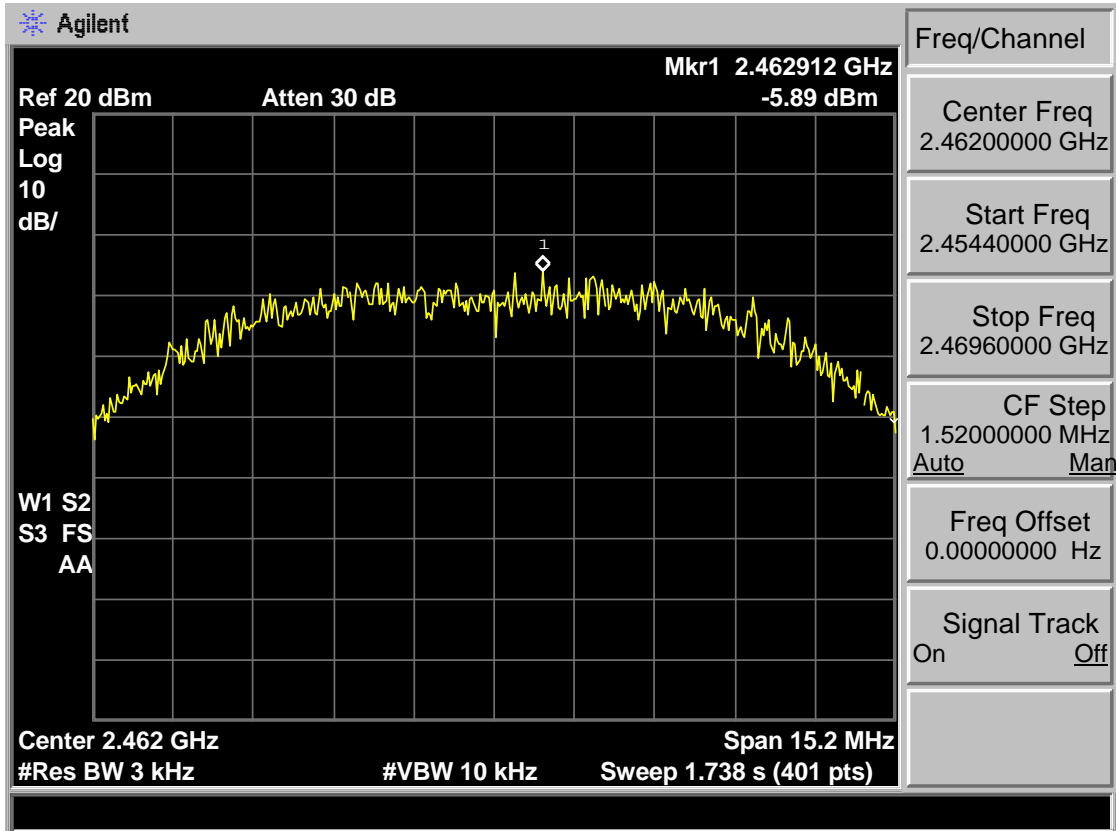


Test Mode: IEEE 802.11g 2412MHz

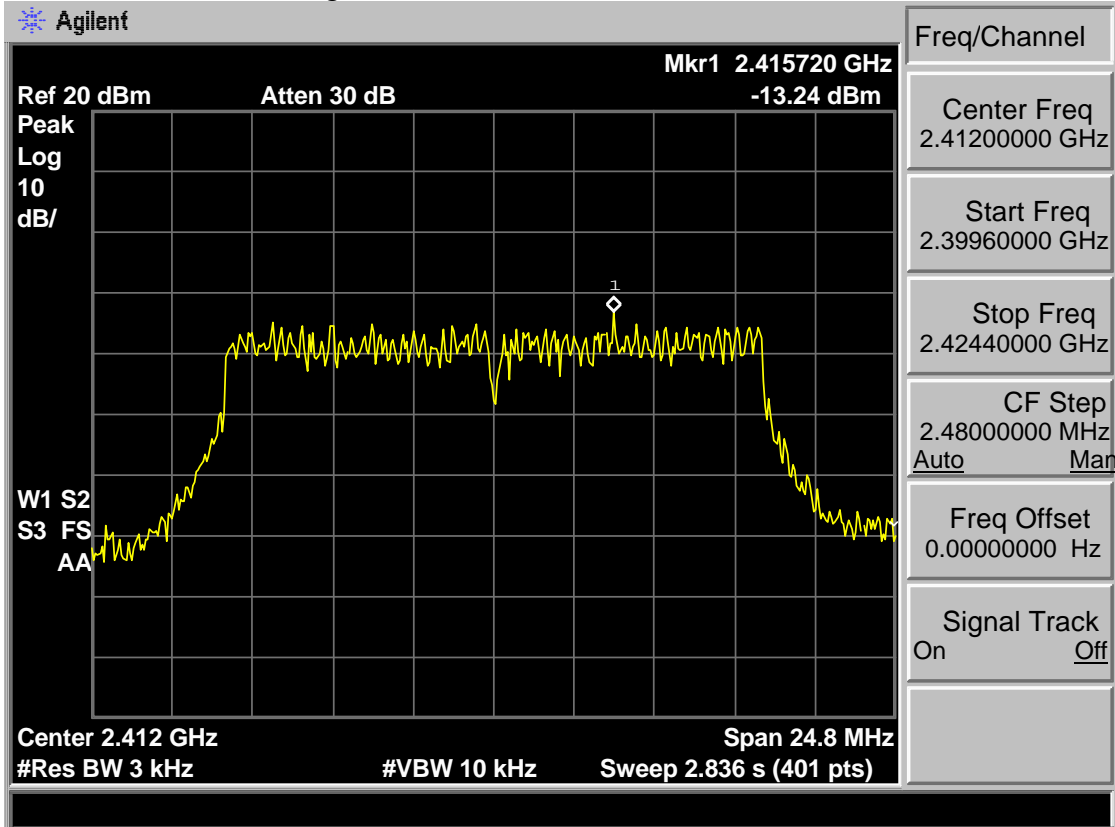


Test Mode: IEEE 802.11g 2437MHz

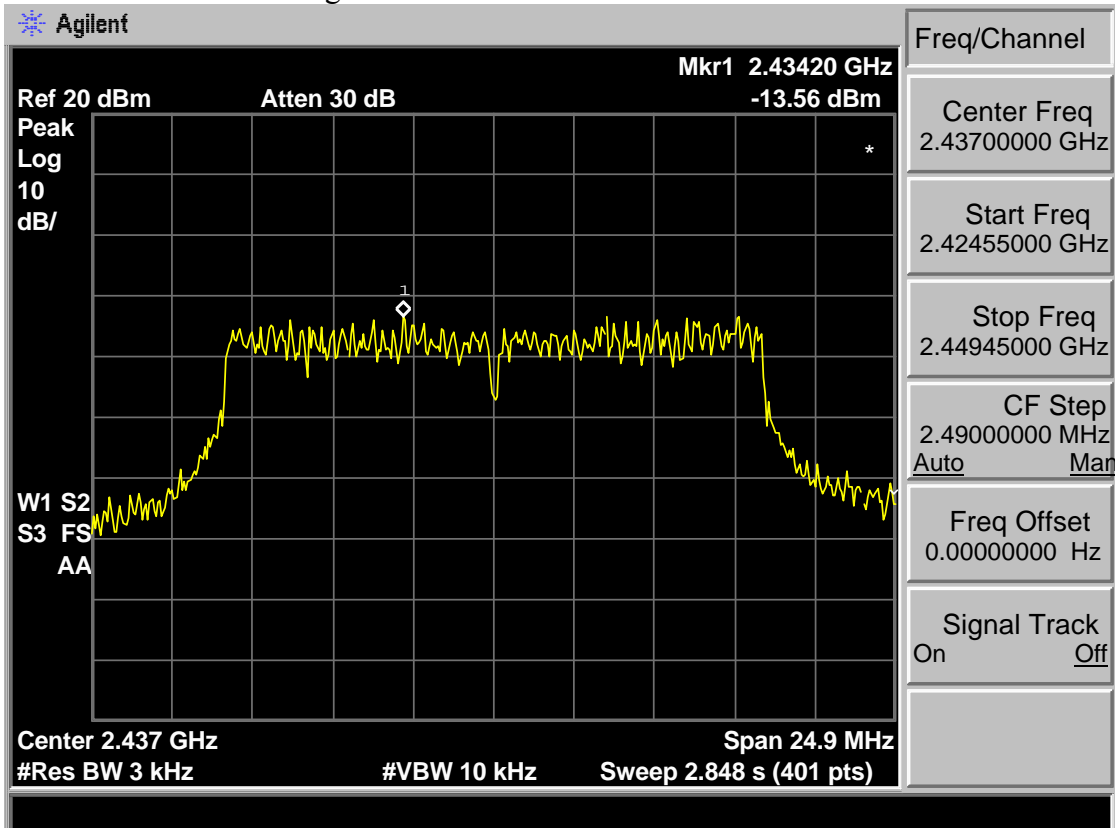


Test Mode: IEEE 802.11g 2462MHz

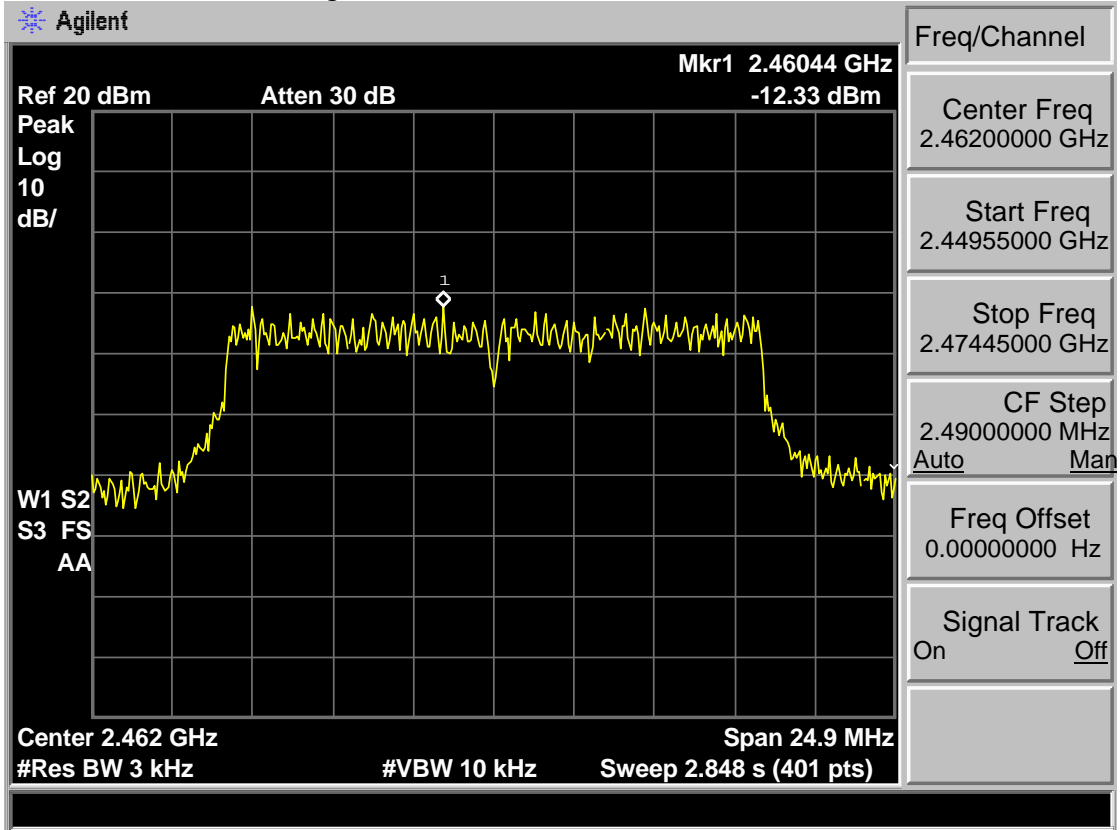


Test Mode: IEEE 802.11n HT20 2412MHz

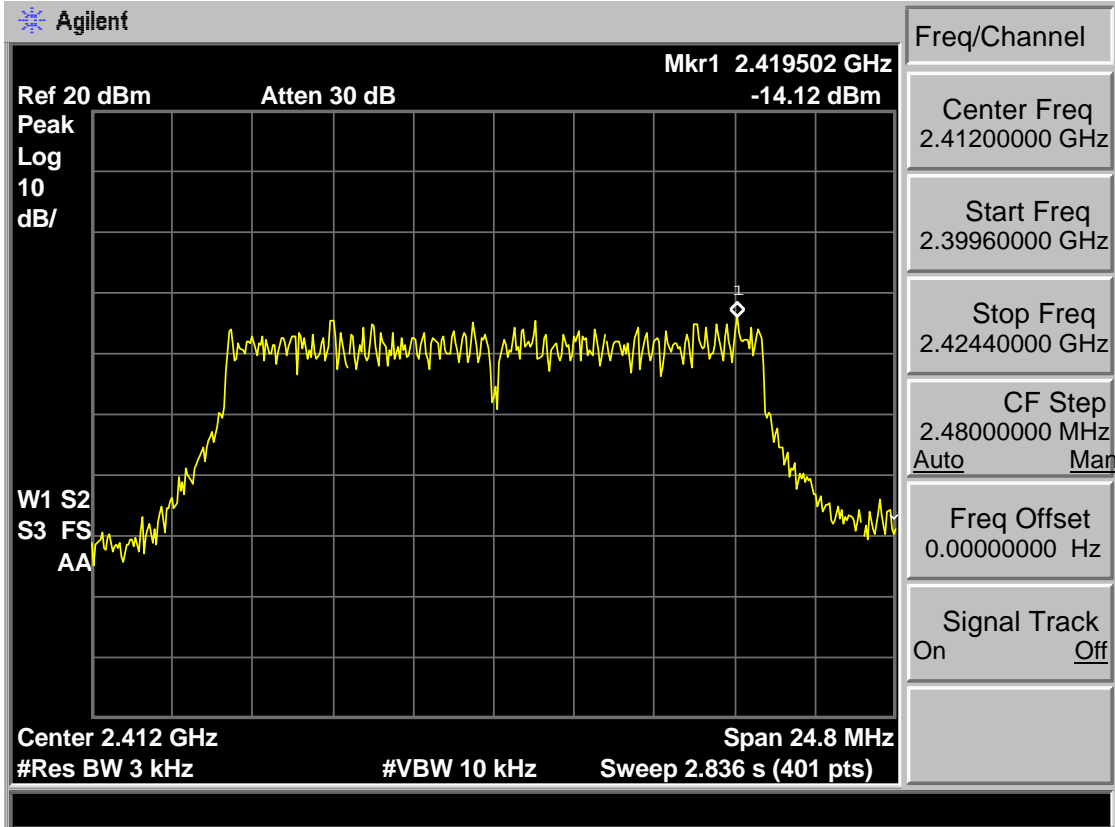


Test Mode: IEEE 802.11n HT20 2437MHz

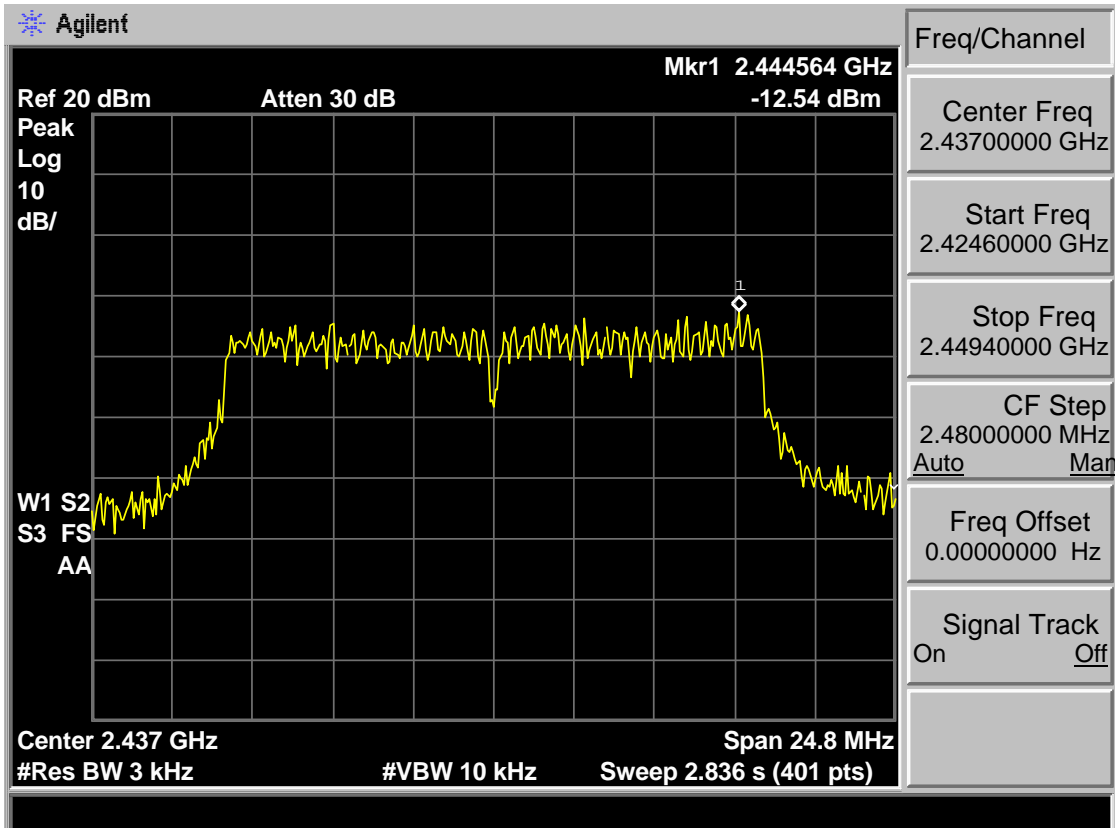


Test Mode: IEEE 802.11n HT20 2462MHz

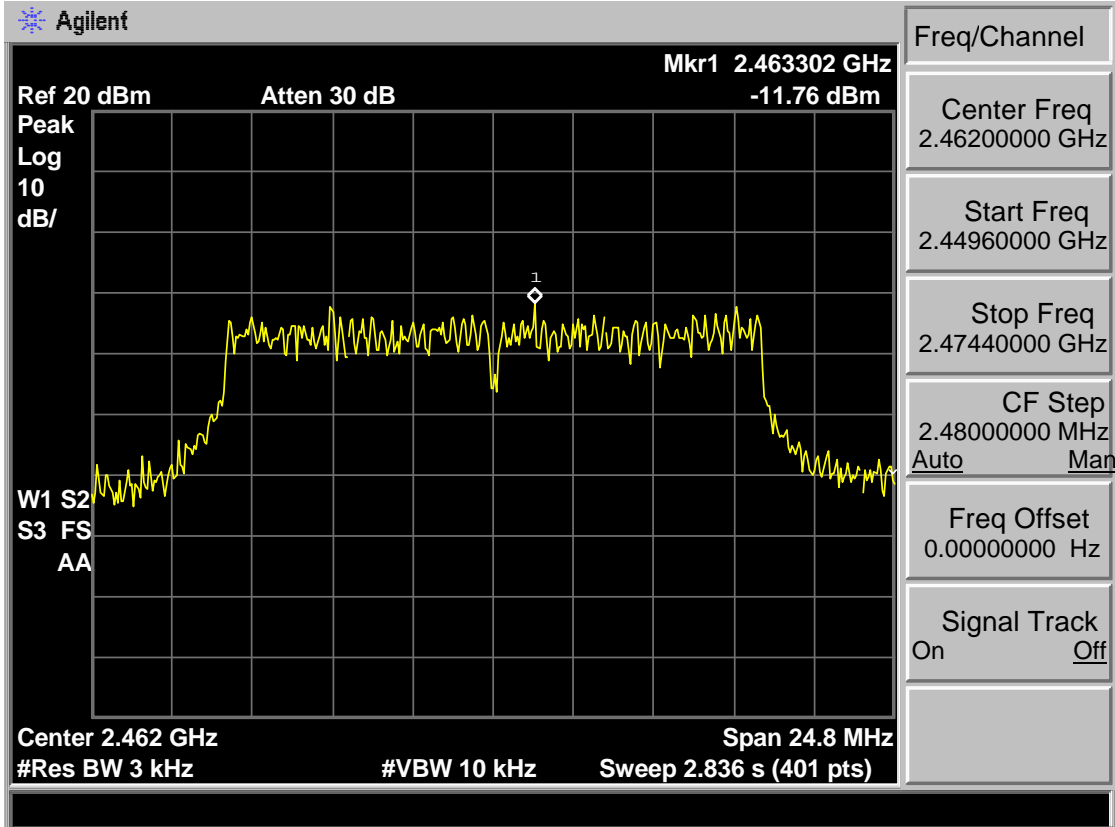


Test Mode: IEEE 802.11n HT40 2422MHz

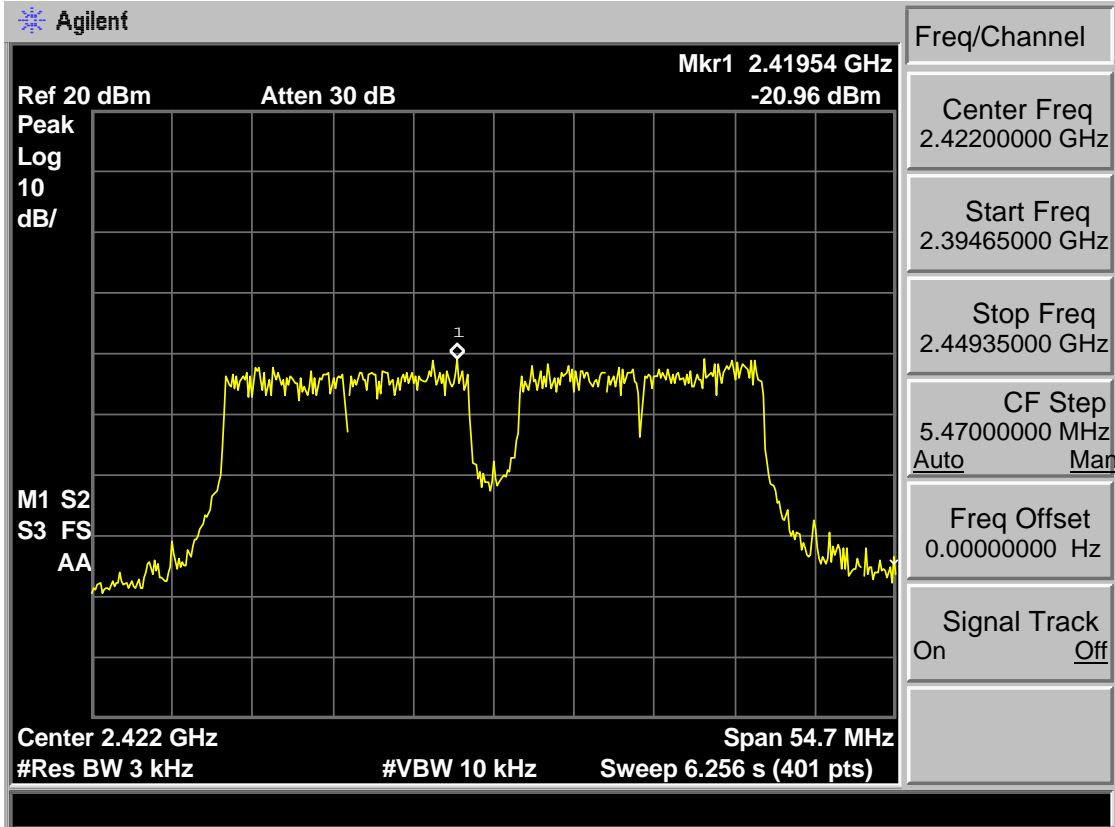

Test Mode: IEEE 802.11n HT40 2437MHz

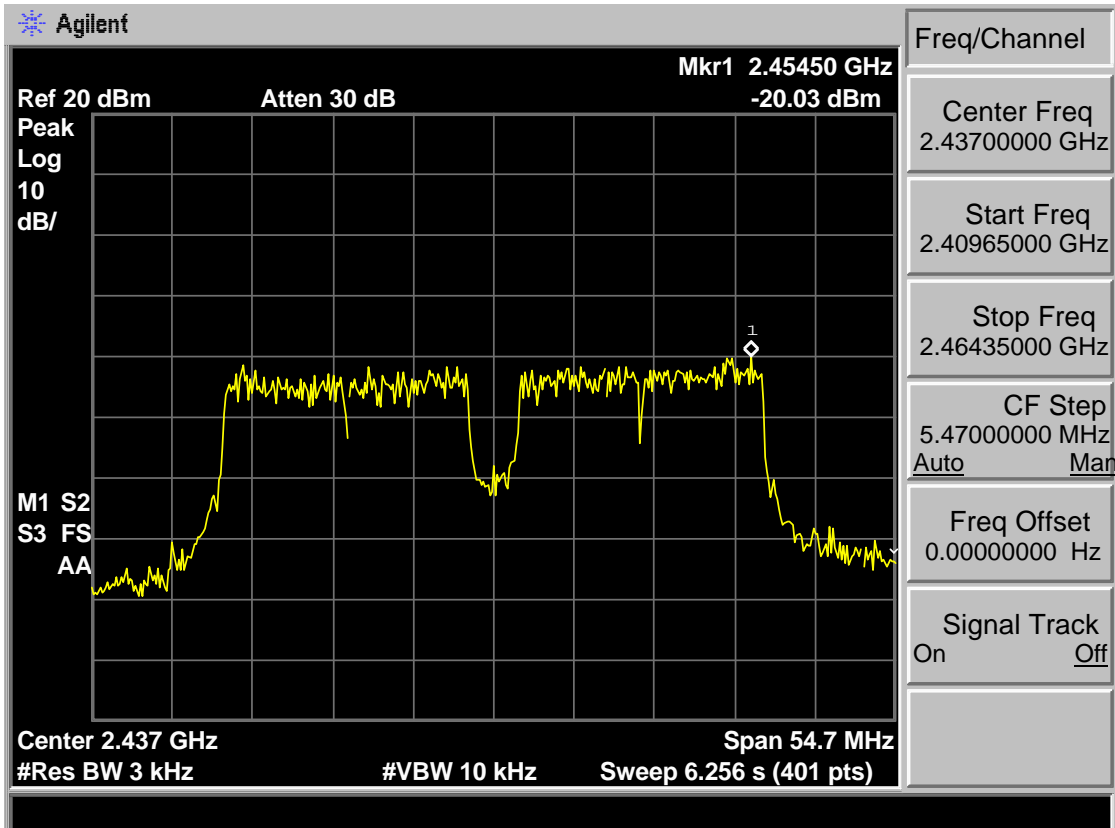

Test Mode: IEEE 802.11n HT40 2452MHz

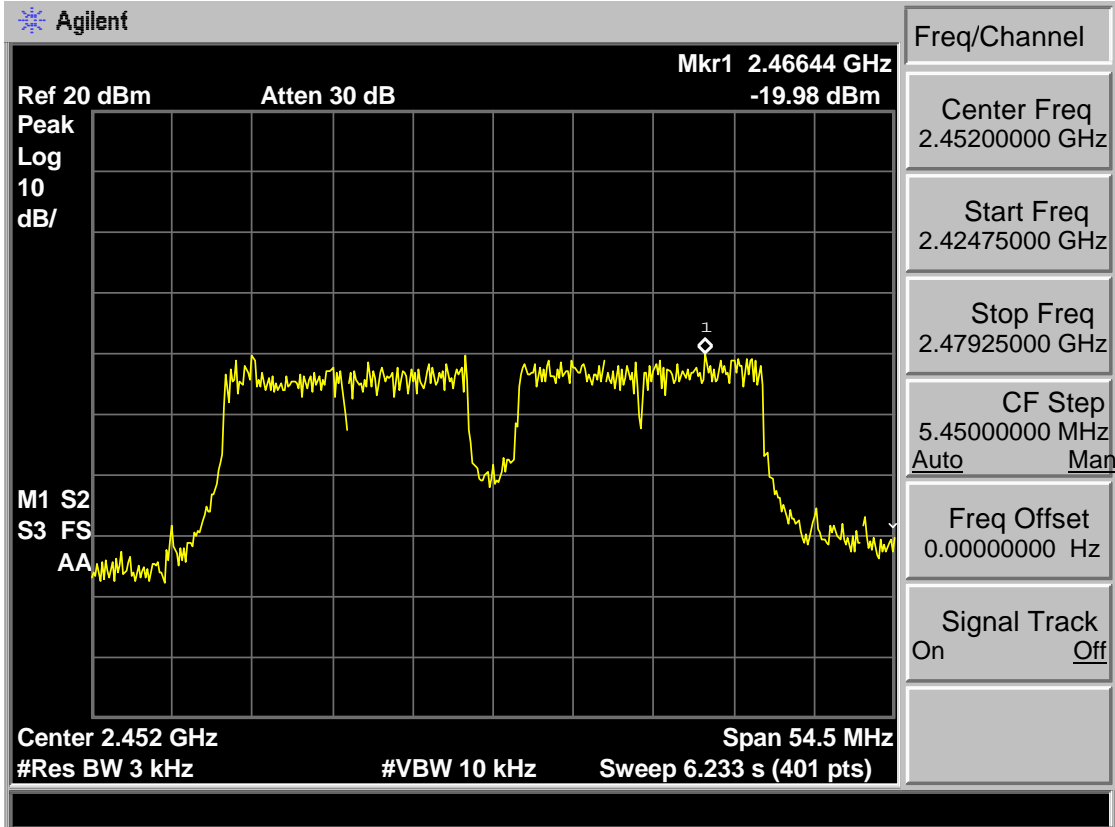

9 ANTENNA REQUIREMENTS

9.1 Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 Result

The antennas used for this product are Internal antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 2 dBi.

10 TEST SETUP PHOTO

Conducted Test



Radiated Test (30-1000 MHz)



Radiated Test (Above 1000 MHz)



11 PHOTOS OF EUT


External Photos
M/N: WD32HBB101



External Photos
M/N: WD32HBB101





External Photos
M/N: WD32HBB101

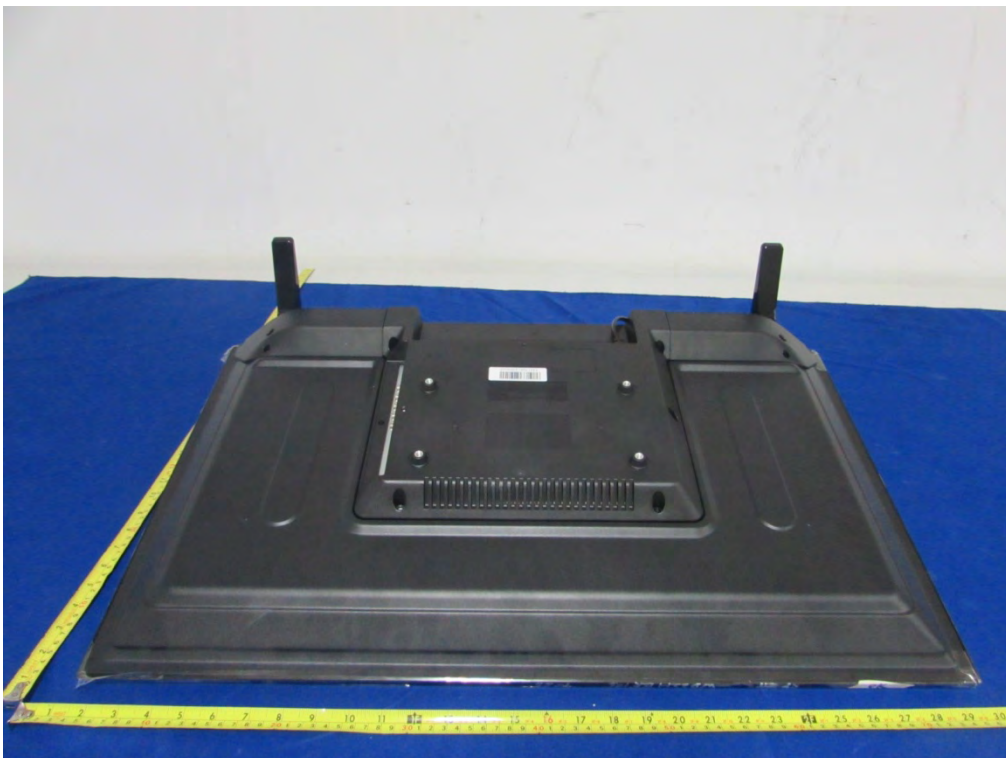

External Photos
M/N: WD32HBB101





Internal Photos
M/N: WD32HBB101

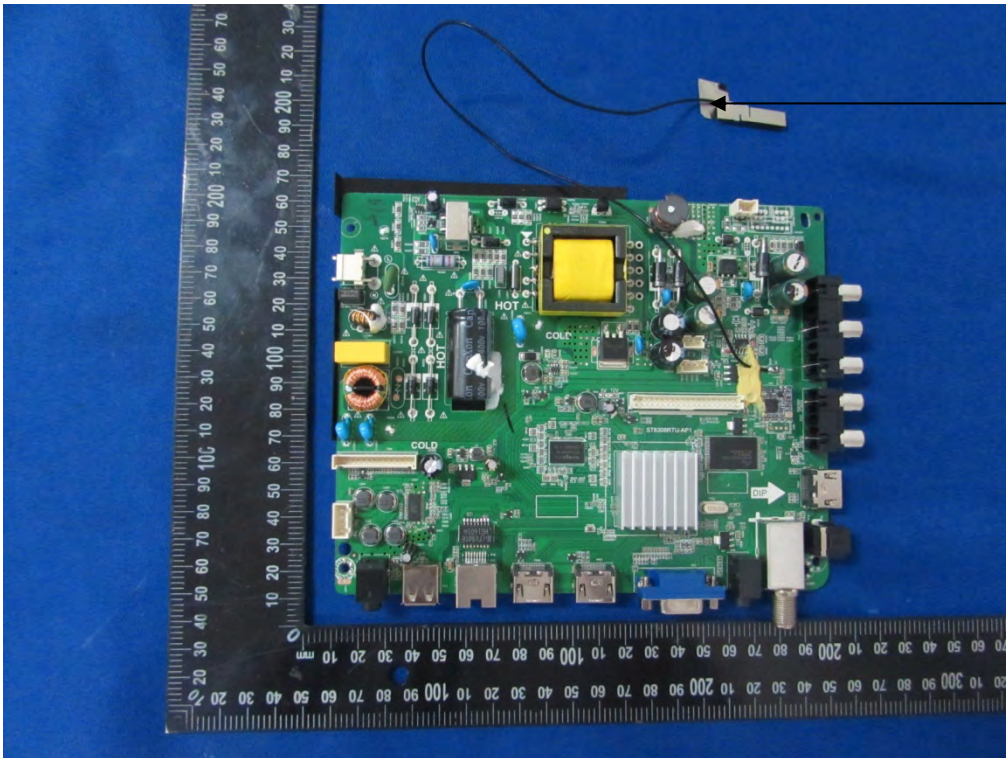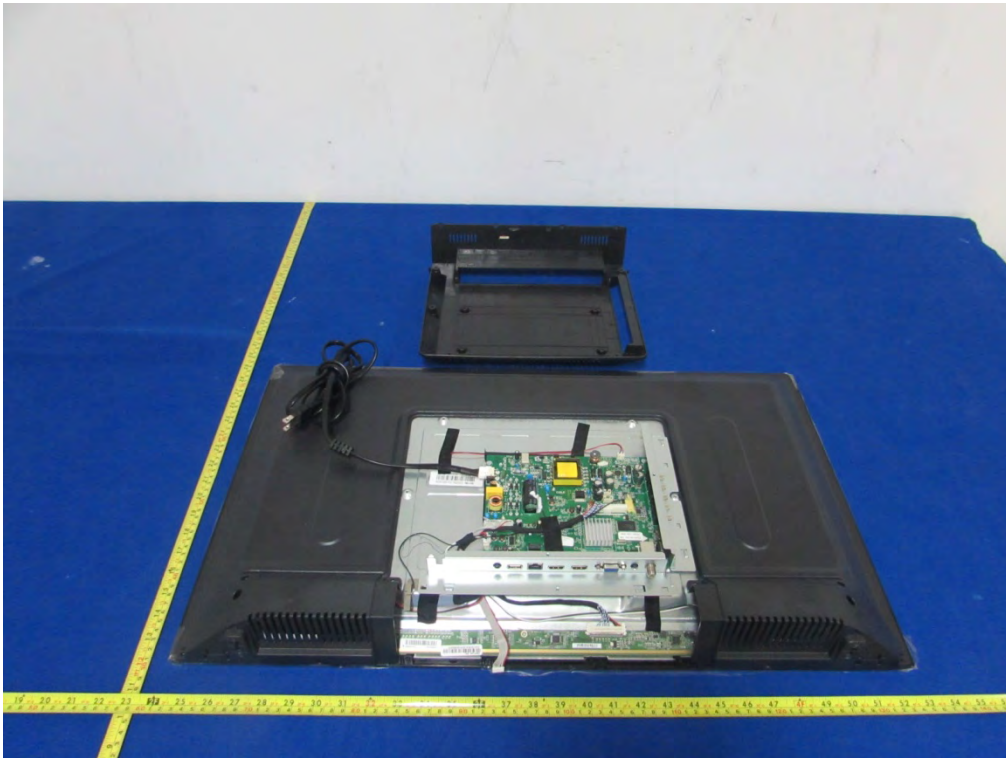


Wi-Fi
Antenna

Internal Photos
M/N: WD32HBB101

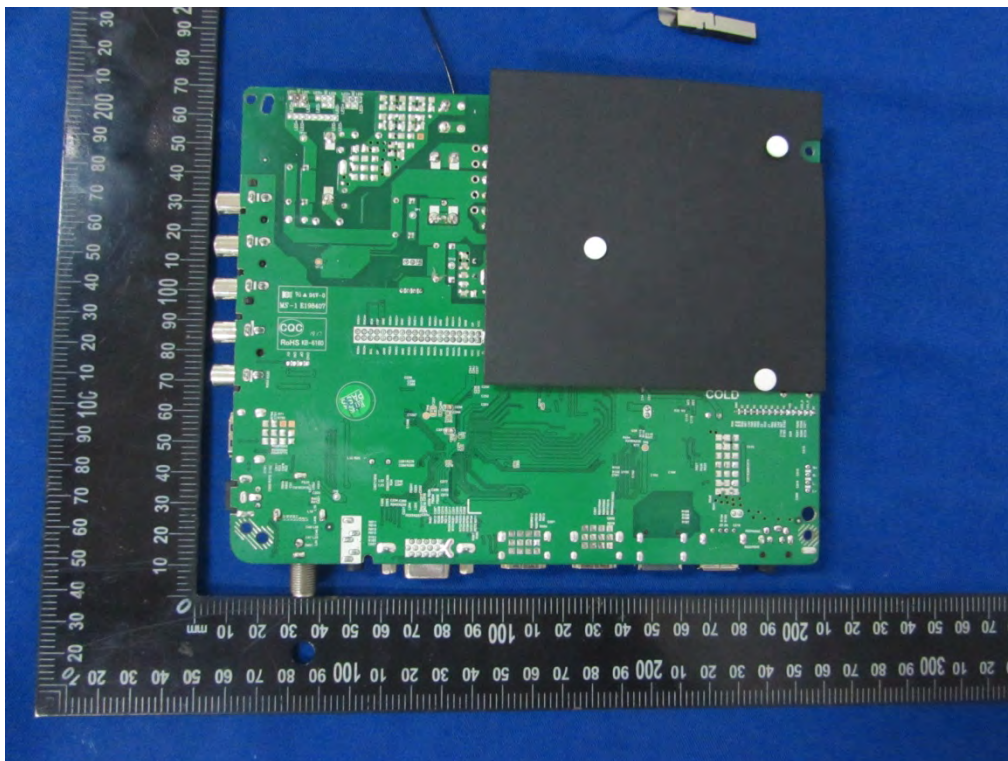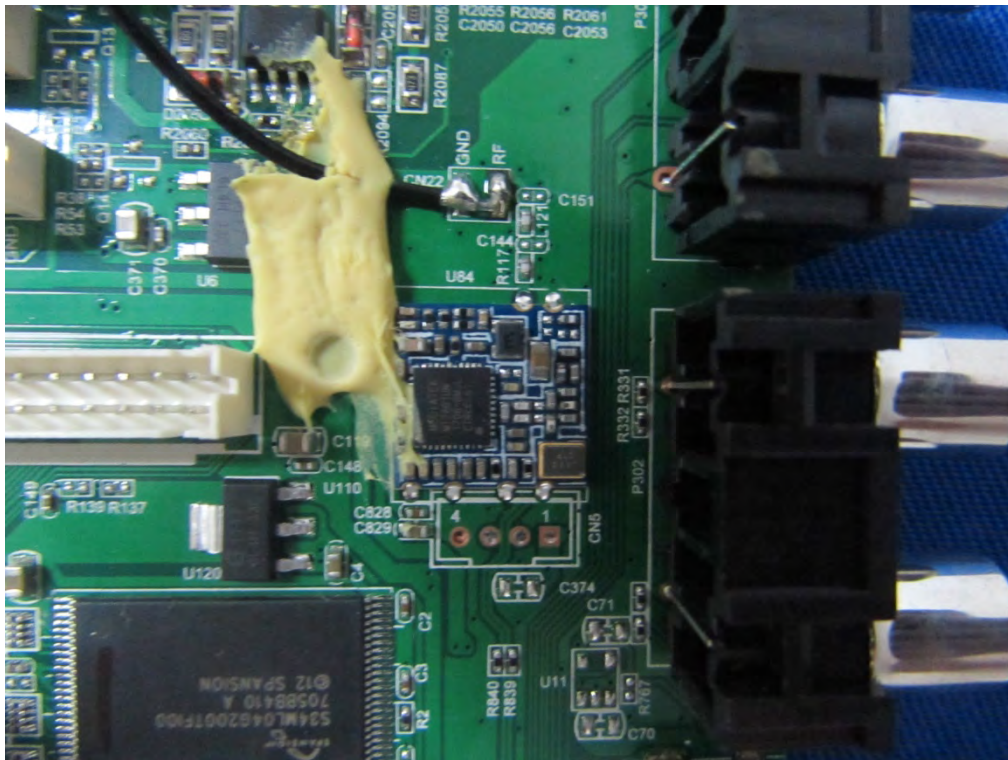

Internal Photos
M/N: WD32HBB101

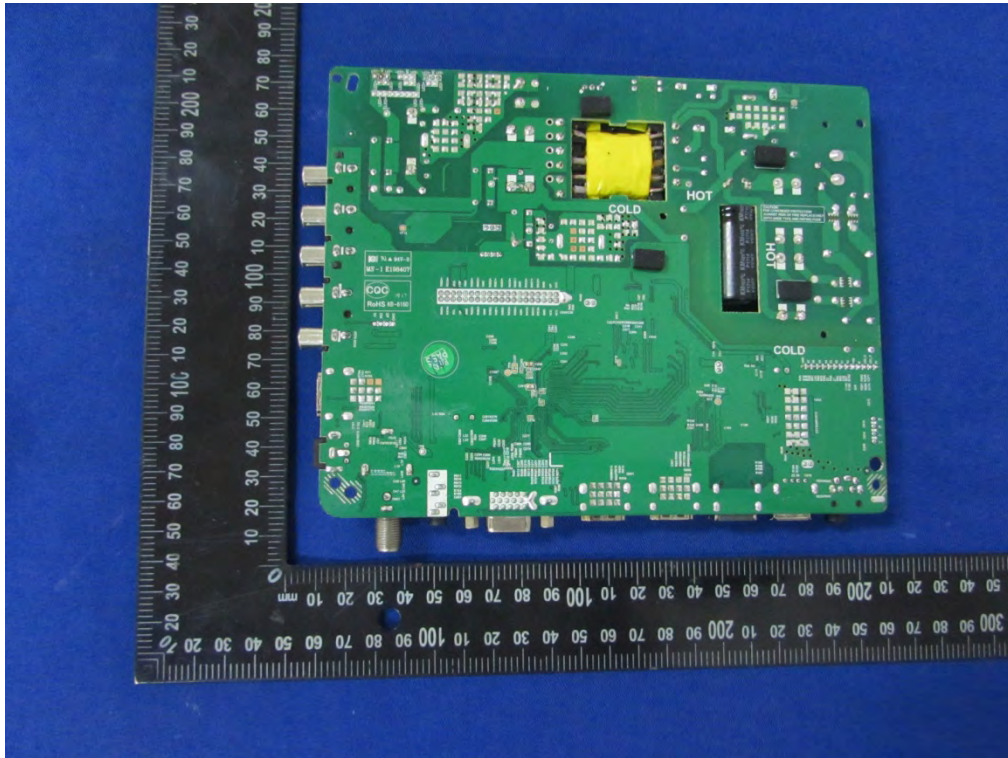

External Photos

M/N: WD32HBB101 (different appearance)



External Photos

M/N: WD32HBB101 (different appearance)



External Photos

M/N: WD32HBB101 (different appearance)

