

# TEST REPORT

**Reference No.** ..... : WTN17S0989813-1E  
**FCC ID**..... : 2AE2WT0702R  
**Applicant** ..... : Chunghsin Technology Group CO.,LTD  
**Address** ..... : NO.618-2 GONGREN WEST ROAD, JIAOJIANG AREA, TAIZHOU,  
ZHEJIANG, China  
**Manufacturer** ..... : The same as above  
**Address** ..... : The same as above  
**Product** ..... : 7" tablet  
**Model(s)**..... : T0702R, HT0703W08  
**Standards** ..... : FCC CFR47 Part 15 Section 15.247: 2016  
**Date of Receipt sample** .... : 2017-09-11  
**Date of Test** ..... : 2017-09-12 to 2017-10-31  
**Date of Issue** ..... : 2017-11-02  
**Test Result** ..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Tested by:

*Jack Wen*

Jack Wen / Test Engineer

Approved by:



*Philo Zhong*

Philo Zhong / Manager

## 2 Contents

	<b>Page</b>
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 CONTENTS</b> .....	<b>2</b>
<b>3 REVISION HISTORY</b> .....	<b>4</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1 GENERAL DESCRIPTION OF E.U.T .....	5
4.2 DETAILS OF E.U.T. ....	5
4.3 CHANNEL LIST .....	5
4.4 TEST MODE .....	6
<b>5 EQUIPMENT USED DURING TEST</b> .....	<b>7</b>
5.1 EQUIPMENTS LIST .....	7
5.2 MEASUREMENT UNCERTAINTY .....	9
5.3 SUBCONTRACTED.....	10
5.4 TEST EQUIPMENT CALIBRATION .....	10
<b>6 TEST SUMMARY</b> .....	<b>11</b>
<b>7 CONDUCTED EMISSION</b> .....	<b>12</b>
7.1 E.U.T. OPERATION .....	12
7.2 EUT SETUP.....	12
7.3 MEASUREMENT DESCRIPTION .....	12
7.4 CONDUCTED EMISSION TEST RESULT .....	13
<b>8 RADIATED EMISSIONS</b> .....	<b>15</b>
8.1 EUT OPERATION.....	15
8.2 TEST SETUP .....	16
8.3 SPECTRUM ANALYZER SETUP .....	17
8.4 TEST PROCEDURE .....	18
8.5 SUMMARY OF TEST RESULTS .....	19
<b>9 CONDUCTED SPURIOUS EMISSIONS</b> .....	<b>22</b>
9.1 TEST PROCEDURE .....	22
9.2 TEST RESULT .....	23
<b>10 BAND EDGE MEASUREMENT</b> .....	<b>32</b>
10.1 TEST PROCEDURE.....	32
10.2 TEST RESULT: .....	33
<b>11 BANDWIDTH MEASUREMENT</b> .....	<b>39</b>
11.1 TEST PROCEDURE:.....	39
11.2 TEST RESULT: .....	39
<b>12 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>44</b>
12.1 TEST PROCEDURE:.....	44
12.2 TEST RESULT: .....	44
<b>13 HOPPING CHANNEL SEPARATION</b> .....	<b>50</b>
13.1 TEST PROCEDURE:.....	50
13.2 TEST RESULT: .....	50
<b>14 NUMBER OF HOPPING FREQUENCY</b> .....	<b>56</b>
14.1 TEST PROCEDURE:.....	56

14.2	TEST RESULT: .....	56
<b>15</b>	<b>DWELL TIME .....</b>	<b>58</b>
15.1	TEST PROCEDURE:.....	58
15.2	TEST RESULT: .....	58
<b>16</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>64</b>
<b>17</b>	<b>SAR EVALUATION .....</b>	<b>65</b>
<b>18</b>	<b>PHOTOGRAPHS -TEST SETUP PHOTOS .....</b>	<b>66</b>
18.1	PHOTOGRAPH-CONDUCTED EMISSIONS TEST SETUP .....	66
18.2	PHOTOGRAPH-RADIATED EMISSIONS.....	66
<b>19</b>	<b>PHOTOGRAPHS – CONSTRUCTIONAL DETAILS .....</b>	<b>70</b>

**3 Revision History**


<b>Test report No.</b>	<b>Date of Receipt sample</b>	<b>Date of Test</b>	<b>Date of Issue</b>	<b>Purpose</b>	<b>Comment</b>	<b>Approved</b>
WTN17S0989813-1E	2017-09-11	2017-09-12 to 2017-10-31	2017-11-02	original	-	Valid

## 4 General Information

### 4.1 General Description of E.U.T

<b>Product</b>	:7" tablet
<b>Model(s)</b>	T0702R, HT0703W08
<b>Model Difference:</b>	:Only the model names and colors are different.
<b>Operation Frequency</b>	: 2402-2480MHz, 79(EDR) Channels in total
<b>Bluetooth Version</b>	: 2.1 (EDR)
<b>The Lowest Oscillator</b>	: 32.768kHz
<b>Antenna Gain</b>	: 2.5dBi
<b>Type of Modulation</b>	: GFSK, Pi/4DQPSK, 8DPSK
<b>Antenna installation</b>	: Integrated Antenna

### 4.2 Details of E.U.T.

<b>Ratings</b>	DC 3.7V, 2500mAh, power by battery (Adapter: Input:100-240V~50/60 Hz, 0.2A Output:5.0V  1.5A)
<b>Adapter</b>	Model: BSY01J3050150U U1

### 4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

#### 4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Table 1 Tests Carried Out Under FCC part 15.247

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

Table 2 Tests Carried Out Under FCC part 15.207 and 15.209

Test Item	Test Mode
Radiated Emissions	Transmitting
Conducted Emissions	Transmitting

## 5 Equipment Used during Test

### 5.1 Equipments List

<b>Conducted Emissions Test Site 1#</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2017-09-12	2018-09-11
2.	LISN	R&S	ENV216	101215	2017-09-12	2018-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2017-09-12	2018-09-11
<b>Conducted Emissions Test Site 2#</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017-09-12	2018-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017-09-12	2018-09-11
3.	Limitter	York	MTS-IMP-136	261115-001-0024	2017-09-12	2018-09-11
4.	Cable	LARGE	RF300	-	2017-09-12	2018-09-11
<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 1#</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2017-09-14	2018-09-13
2	Amplifier	Agilent	8447D	2944A10178	2017-10-17	2018-10-16
3	Active Loop Antenna	Beijing Dazhi	ZN30900A	0703	2017-04-09	2018-04-08
4	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2017-09-12	2018-09-11
5	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-04-09	2018-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2017-09-14	2018-09-13
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2017-04-13	2018-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2017-04-13	2018-04-12
<b>3m Semi-anechoic Chamber for Radiation Emissions Test site 2#</b>						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2017-04-13	2018-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2017-04-09	2018-04-08
3	Amplifier	ANRITSU	MH648A	M43381	2017-04-13	2018-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2017-04-13	2018-04-12
<b>RF Conducted Testing</b>						

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2017-09-14	2018-09-13
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2017-09-12	2018-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11
<b>RF Conducted Spurious Emissions Testing (Shenzhen Balun Technology Co.,Ltd.)</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSV-40	101544	2017-02-17	2018-02-16
<b>10m Semi-anechoic Chamber for Radiation Emissions (Above18GHz) (Shenzhen Balun Technology Co.,Ltd.)</b>						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	R&S	FSV-40	101544	2017-02-17	2018-02-16
2.	Antenna-Horn (18-40 GHz)	A-INFO	LB-180400KF	J211060273	2017-01-07	2018-01-06
3.	Amplifier	COM-MV	ZLNA-18-40G-021	1608001	2017-02-17	2018-02-16
4.	Cable	Top	18-40GHz	-	2017-02-17	2018-02-16



## 5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (30M~1000MHz)
	$\pm 5.47$ dB (1000M~25000MHz)
Conducted Spurious Emissions test	$\pm 3.64$ dB (AC mains 150KHz~30MHz)
Radiated Spurious Emissions (Shenzhen Balun Technology Co.,Ltd.)	$\pm 7.5$ dB
Conducted Spurious Emissions (Shenzhen Balun Technology Co.,Ltd.)	$\pm 2.2$ dB

### 5.3 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes       No

If Yes, list the related test items and lab information:

Test Lab: Shenzhen Balun Technology Co.,Ltd.

FCC Designation No.: CN1196, Test Firm Registration No.: 935607.

Lab address: Block B, 1st FL, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, ShenZhen, GuangDong Province, P. R. China

Test items: Radiated Spurious Emission(18GHz to 25GHz),

Conducted Spurious Emission(18GHz to 25GHz).

### 5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., L TD. address is No.163, Pingyun Rd. West of Huangpu Ave,Tianhe District, Guangzhou, Guangdong, China.

## 6 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	C
Spurious Radiated Emissions	15.205(a) 15.209 15.247(d)	C
Band edge	15.247(d) 15.205(a)	C
Bandwidth	15.247(a)(1)	C
Maximum Peak Output Power	15.247(b)(1)	C
Frequency Separation	15.247(a)(1)	C
Number of Hopping Frequency	15.247(a)(1)(iii)	C
Dwell time	15.247(a)(1)(iii)	C
SAR	1.1307(b)(1)	C
Antenna Requirement	15.203	C
Note: C=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		

## 7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207  
 Test Method: ANSI C63.10:2013;ANSI C63.4:2014  
 Test Result: PASS  
 Frequency Range: 150kHz to 30MHz  
 Class/Severity: Class B

Limit:

Frequency (MHz)	Conducted Limit (dB $\mu$ V)	
	Qsi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50

\*Decreases with the logarithm of the frequency.

### 7.1 E.U.T. Operation

Operating Environment :


Temperature: 22.8 °C  
 Humidity: 52.6 % RH  
 Atmospheric Pressure: 101.2kPa

EUT Operation :

Refer to Section 4.4.

### 7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

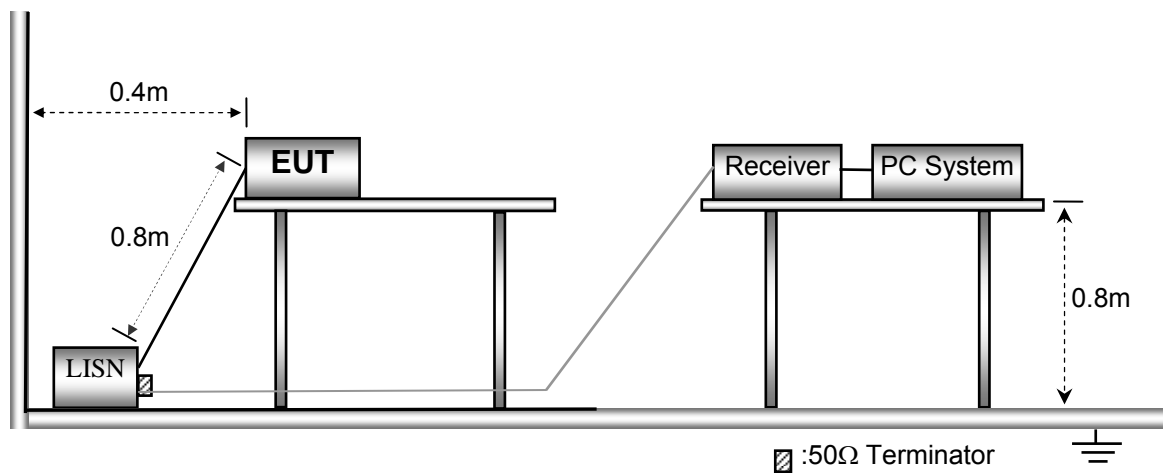


### 7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 7.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

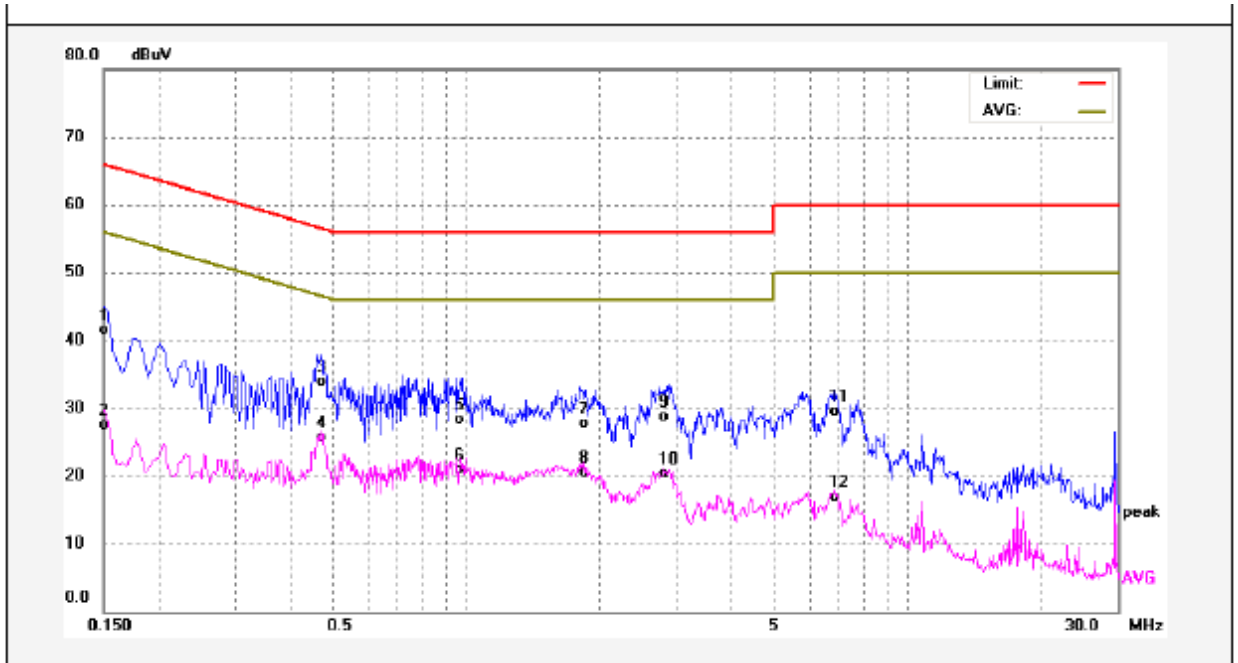

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	31.47	10.06	41.53	65.99	-24.46	QP	
2	0.1500	17.35	10.06	27.41	55.99	-28.58	AVG	
3	0.4700	23.87	10.06	33.93	56.51	-22.58	QP	
4	0.4700	15.71	10.06	25.77	46.51	-20.74	AVG	
5	0.9660	18.21	10.08	28.29	56.00	-27.71	QP	
6	0.9660	10.73	10.08	20.81	46.00	-25.19	AVG	
7	1.8500	17.46	10.18	27.64	56.00	-28.36	QP	
8	1.8500	10.24	10.18	20.42	46.00	-25.58	AVG	
9	2.8100	18.46	10.24	28.70	56.00	-27.30	QP	
10	2.8100	9.99	10.24	20.23	46.00	-25.77	AVG	
11	6.8620	19.16	10.28	29.44	60.00	-30.56	QP	
12	6.8620	6.59	10.28	16.87	50.00	-33.13	AVG	

Neutral line:

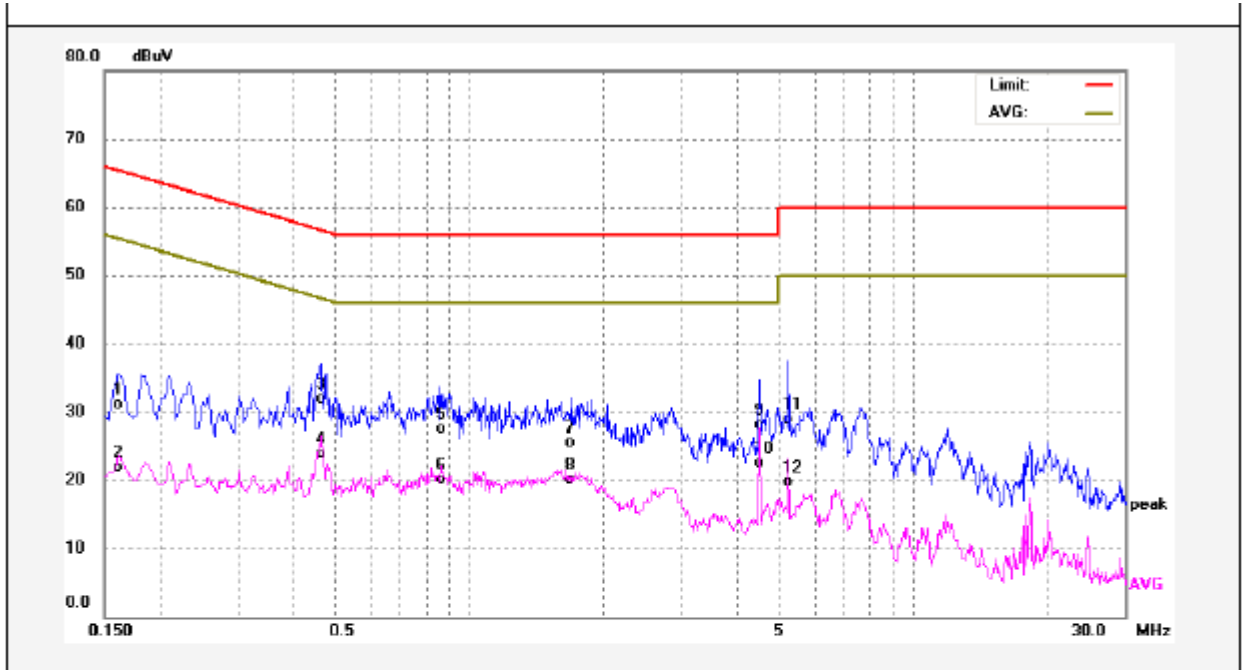

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.1620	21.20	9.94	31.14	65.36	-34.22	QP	
2	0.1620	11.96	9.94	21.90	55.36	-33.46	AVG	
3	0.4620	21.77	10.06	31.83	56.66	-24.83	QP	
4	0.4620	13.88	10.06	23.94	46.66	-22.72	AVG	
5	0.8540	17.48	10.07	27.55	56.00	-28.45	QP	
6	0.8540	10.10	10.07	20.17	46.00	-25.83	AVG	
7	1.6940	15.41	10.17	25.58	56.00	-30.42	QP	
8	1.6940	9.85	10.17	20.02	46.00	-25.98	AVG	
9	4.5140	17.88	10.26	28.14	56.00	-27.86	QP	
10	4.5140	12.26	10.26	22.52	46.00	-23.48	AVG	
11	5.2260	18.75	10.25	29.00	60.00	-31.00	QP	
12	5.2260	9.46	10.25	19.71	50.00	-30.29	AVG	

## 8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013;ANSI C63.4:2014

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

Refer to Section 4.4.


## 8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.

The test setup for emission measurement below 30MHz.

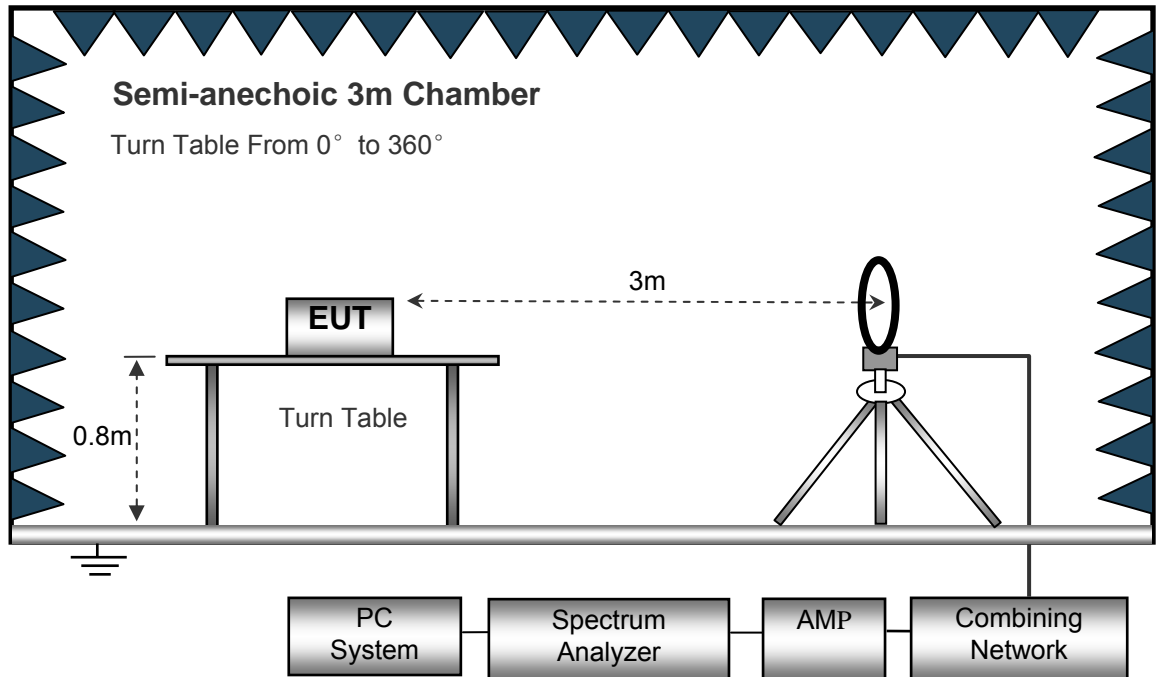


The test setup for emission measurement from 30 MHz to 1 GHz.

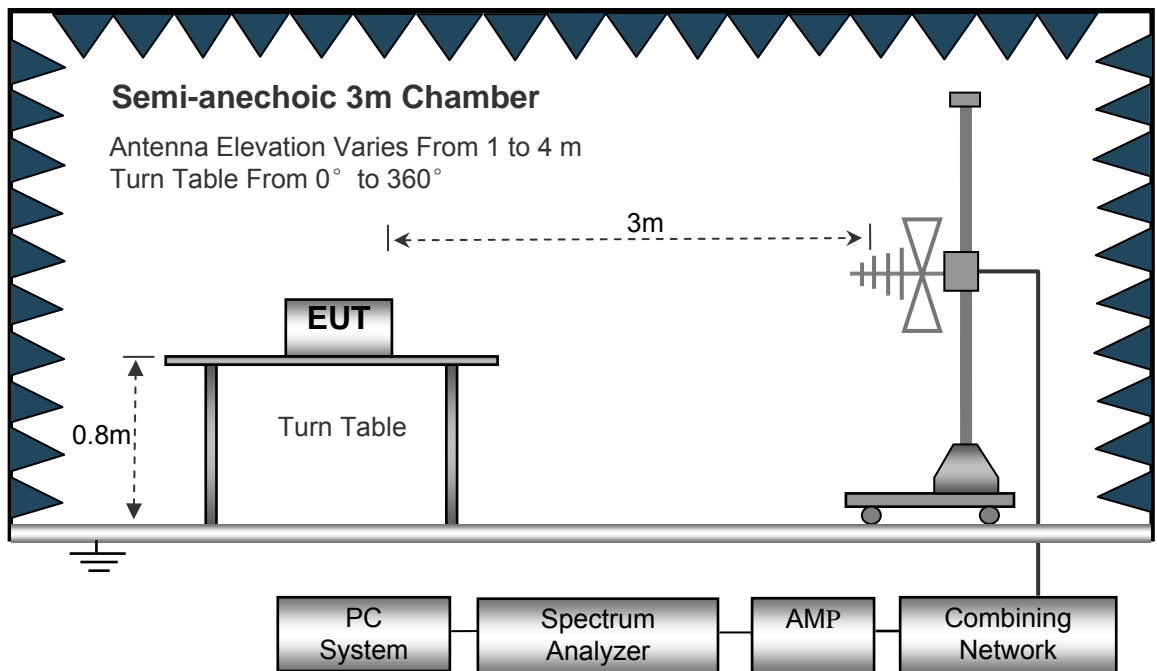



The test setup for emission measurement above 1 GHz.

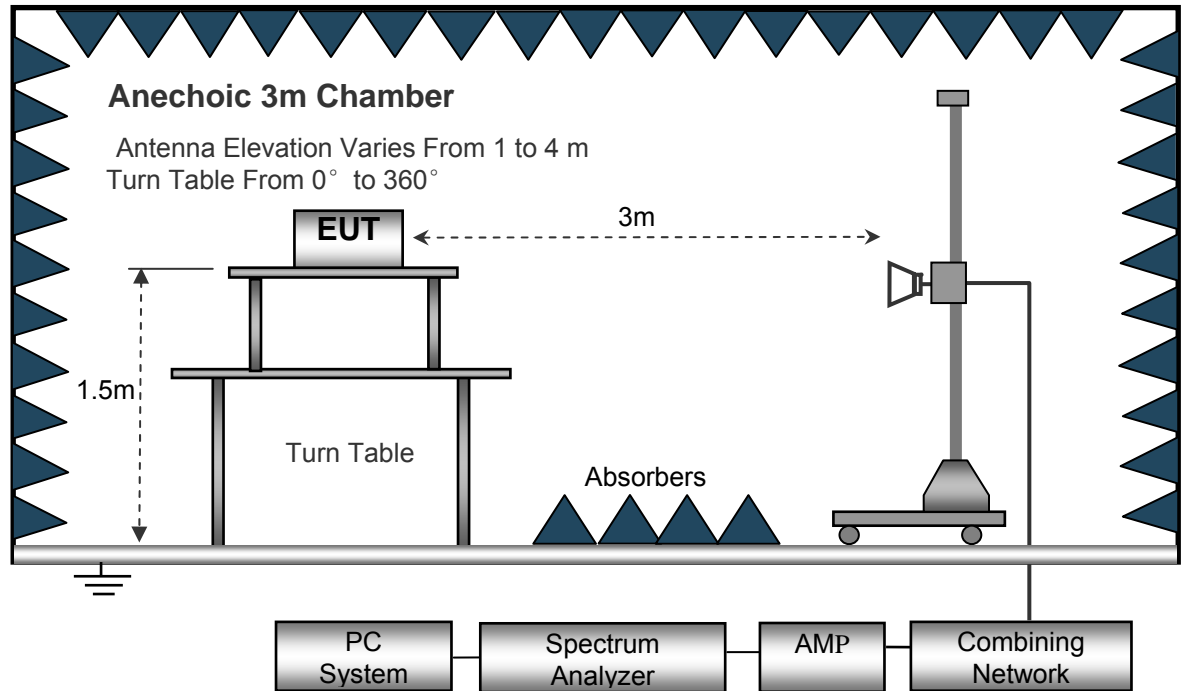

### 8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

## 8.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane; For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

## 8.5 Summary of Test Results

### Test Frequency: 32.768kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

### Test Frequency: 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Low Channel 2402MHz									
268.30	35.26	QP	326	1.4	H	-13.35	21.91	46.00	-24.09
268.30	40.19	QP	15	1.4	V	-13.35	26.84	46.00	-19.16
4804.00	45.29	PK	267	1.6	V	-1.06	44.23	74.00	-29.77
4804.00	42.15	Ave	267	1.6	V	-1.06	41.09	54.00	-12.91
7206.00	40.16	PK	233	1.3	H	1.33	41.49	74.00	-32.51
7206.00	35.46	Ave	233	1.3	H	1.33	36.79	54.00	-17.21
2316.85	46.44	PK	21	1.4	V	-13.19	33.25	74.00	-40.75
2316.85	38.95	Ave	21	1.4	V	-13.19	25.76	54.00	-28.24
2384.91	44.02	PK	25	2.0	H	-13.14	30.88	74.00	-43.12
2384.91	36.89	Ave	25	2.0	H	-13.14	23.75	54.00	-30.25
2491.36	42.31	PK	305	1.6	V	-13.08	29.23	74.00	-44.77
2491.36	37.45	Ave	305	1.6	V	-13.08	24.37	54.00	-29.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Middle Channel 2441MHz									
268.30	35.20	QP	243	1.2	H	-13.35	21.85	46.00	-24.15
268.30	40.18	QP	335	1.2	V	-13.35	26.83	46.00	-19.17
4882.00	44.11	PK	61	1.4	V	-0.62	43.49	74.00	-30.51
4882.00	42.80	Ave	61	1.4	V	-0.62	42.18	54.00	-11.82
7323.00	40.29	PK	302	1.3	H	2.21	42.50	74.00	-31.50
7323.00	35.74	Ave	302	1.3	H	2.21	37.95	54.00	-16.05
2324.01	46.33	PK	191	1.3	V	-13.19	33.14	74.00	-40.86
2324.01	39.19	Ave	191	1.3	V	-13.19	26.00	54.00	-28.00
2369.90	42.80	PK	258	1.5	H	-13.14	29.66	74.00	-44.34
2369.90	36.08	Ave	258	1.5	H	-13.14	22.94	54.00	-31.06
2484.94	42.71	PK	107	1.1	V	-13.08	29.63	74.00	-44.37
2484.94	38.75	Ave	107	1.1	V	-13.08	25.67	54.00	-28.33

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK High Channel 2480MHz									
268.30	35.43	QP	135	1.1	H	-13.35	22.08	46.00	-23.92
268.30	39.57	QP	343	1.4	V	-13.35	26.22	46.00	-19.78
4960.00	44.76	PK	119	1.2	V	-0.24	44.52	74.00	-29.48
4960.00	42.97	Ave	119	1.2	V	-0.24	42.73	54.00	-11.27
7440.00	41.29	PK	255	1.6	H	2.84	44.13	74.00	-29.87
7440.00	35.36	Ave	255	1.6	H	2.84	38.20	54.00	-15.80
2316.26	46.59	PK	33	1.4	V	-13.19	33.40	74.00	-40.60
2316.26	38.68	Ave	33	1.4	V	-13.19	25.49	54.00	-28.51
2380.54	44.10	PK	105	1.4	H	-13.14	30.96	74.00	-43.04
2380.54	38.34	Ave	105	1.4	H	-13.14	25.20	54.00	-28.80
2497.97	42.45	PK	20	1.6	V	-13.08	29.37	74.00	-44.63
2497.97	38.04	Ave	20	1.6	V	-13.08	24.96	54.00	-29.04

**Test Frequency: 18GHz~25GHz**

The measurements were more than 20 dB below the limit and not reported.

## 9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247  
Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016  
Test Result: PASS  
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;

2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 1MHz, VBW = 3MHz, Sweep = auto


Detector function = peak, Trace = max hold

### 9.2 Test Result


#### GFSK Low Channel

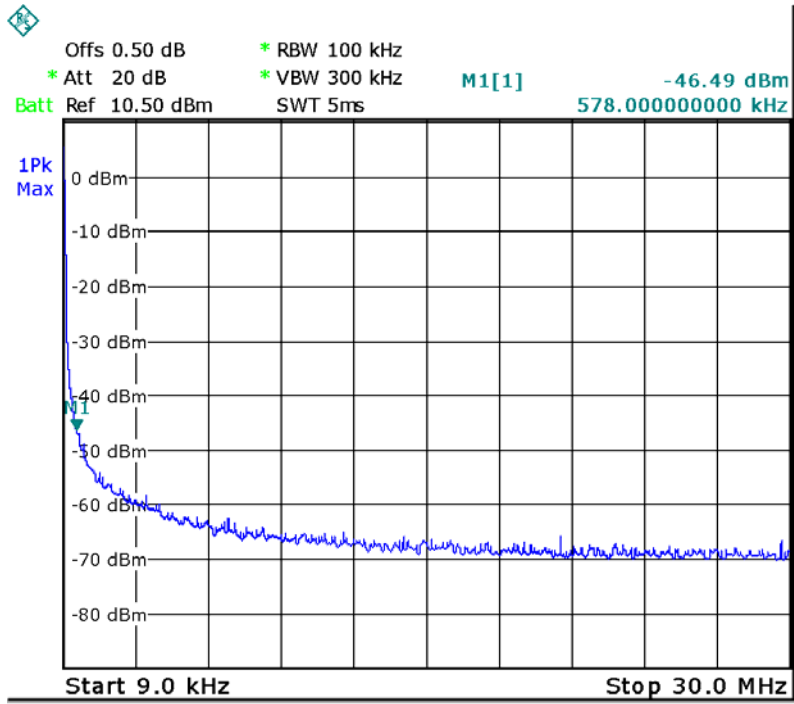

#### Middle Channel

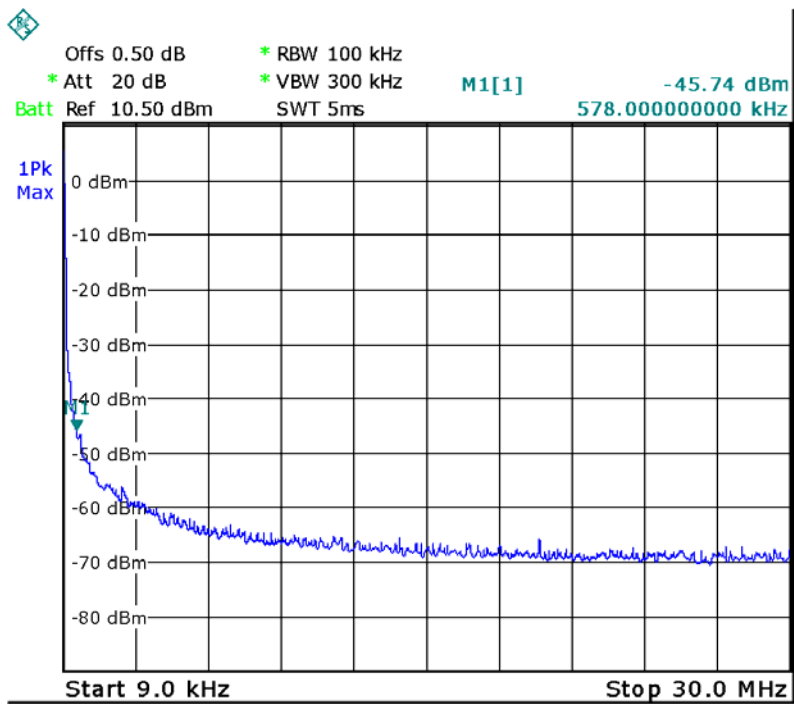


### High Channel

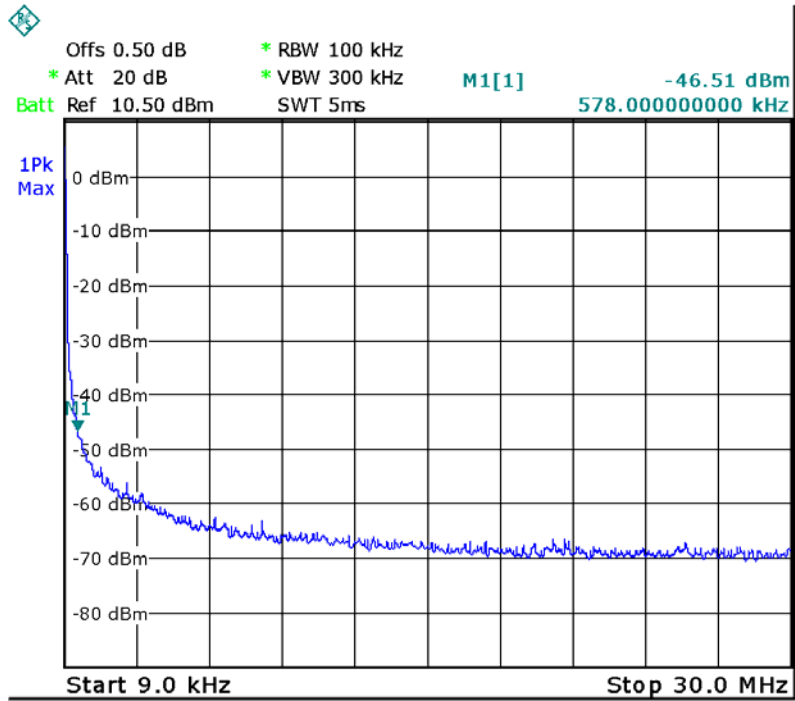

### GFSK

### Low Channel

Fundamental

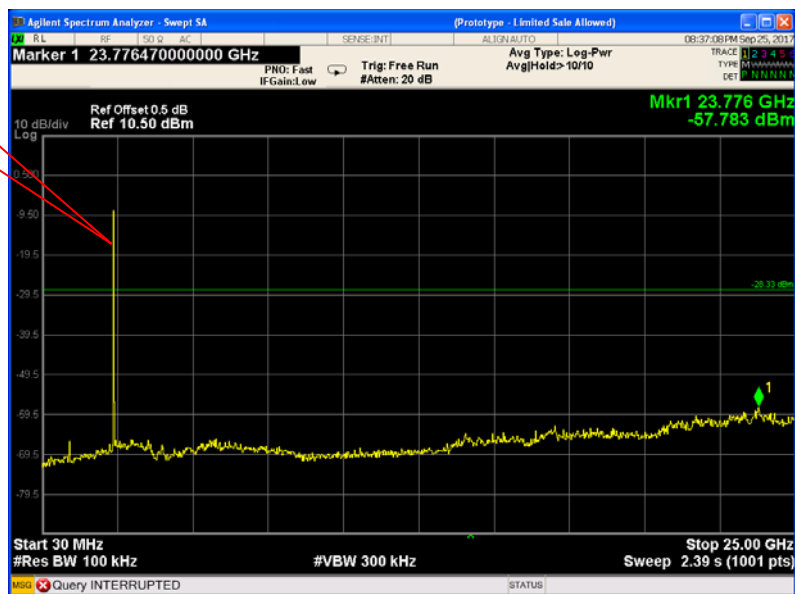




### Middle Channel

Fundamental




### High Channel


Fundamental

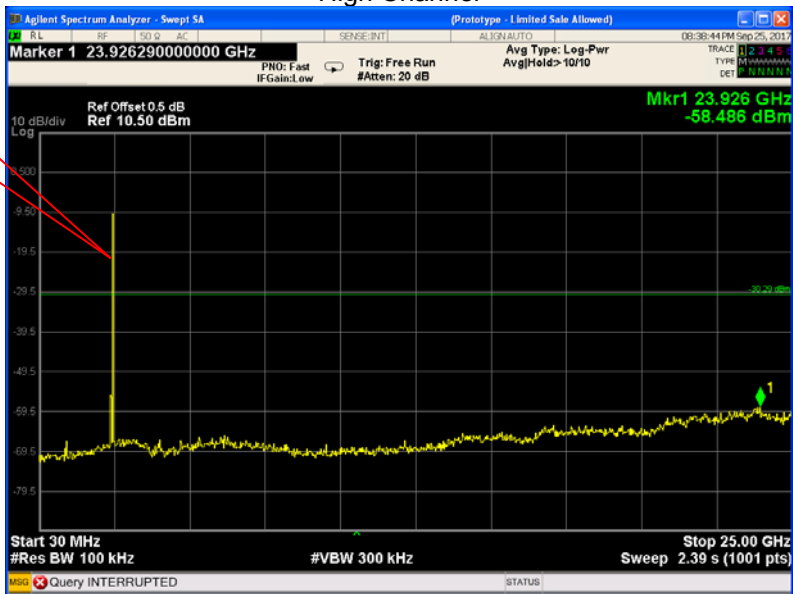


Pi/4DQPSK  
Low Channel

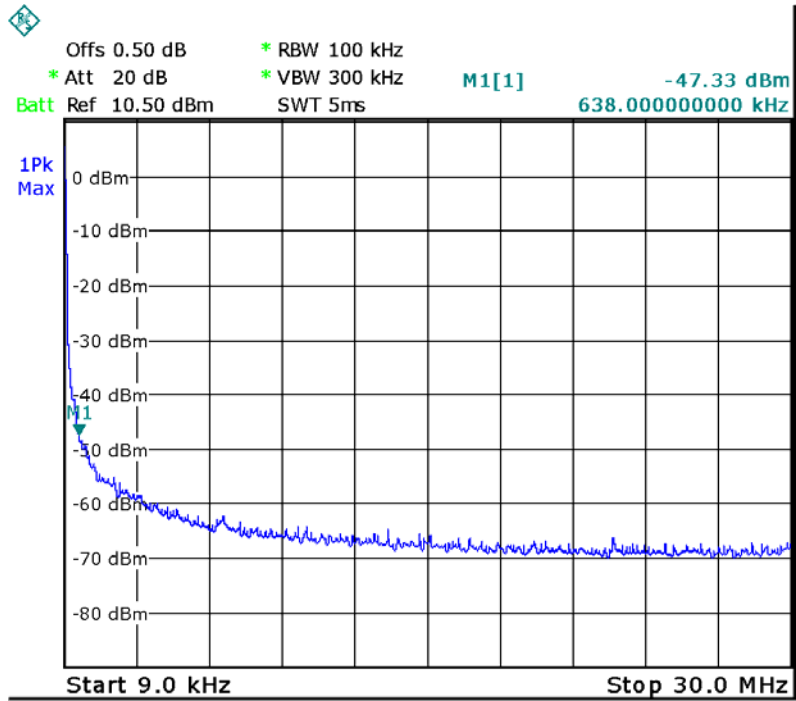

Middle Channel

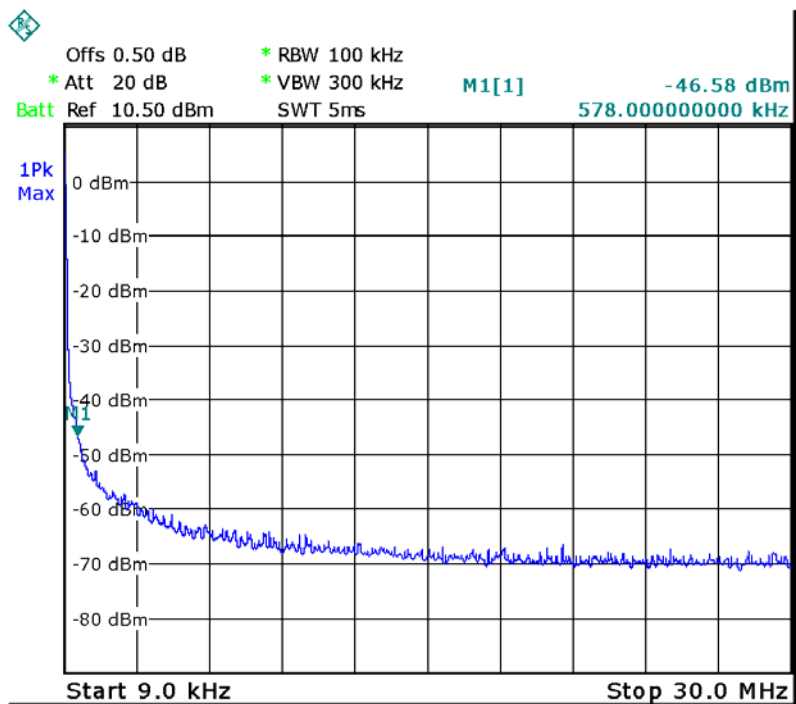


### High Channel

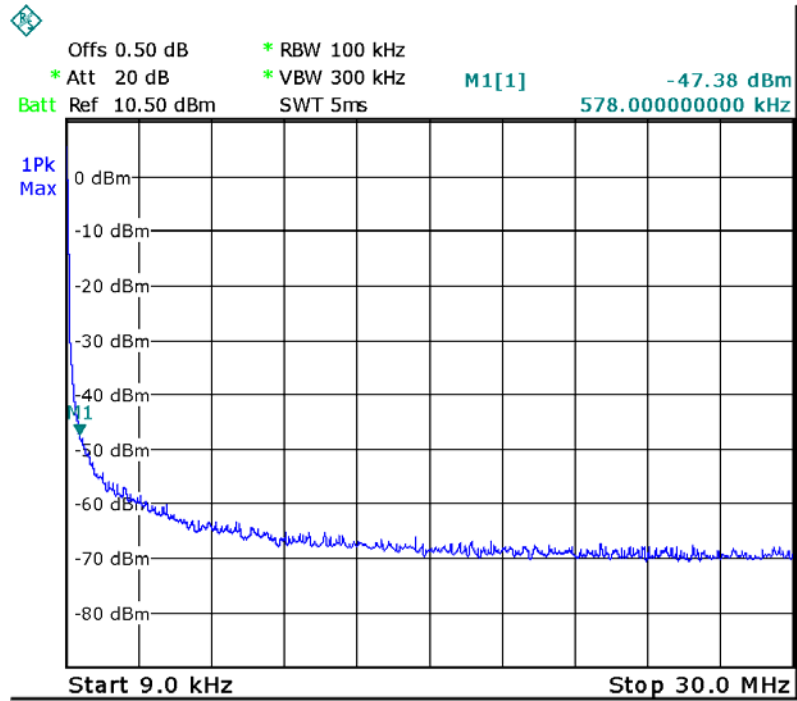

### Pi/4DQPSK


### Low Channel

Fundamental

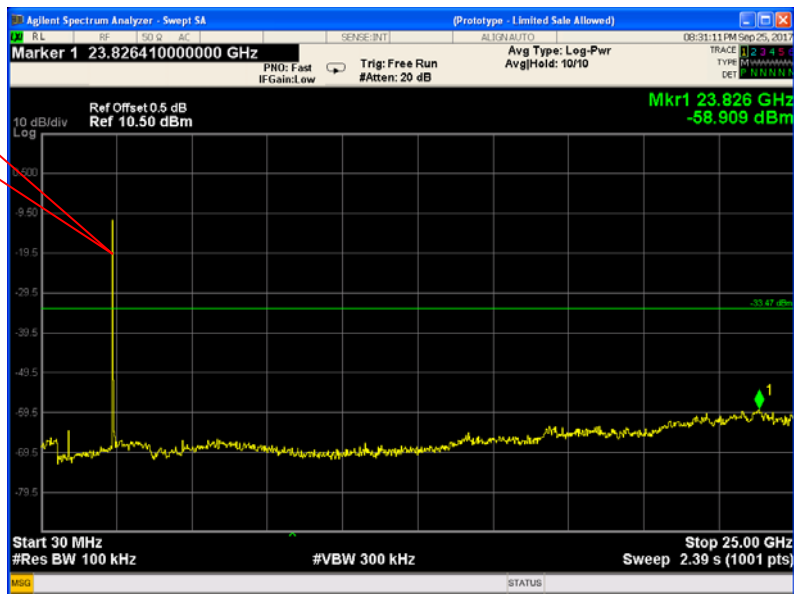


Middle Channel

Fundamental

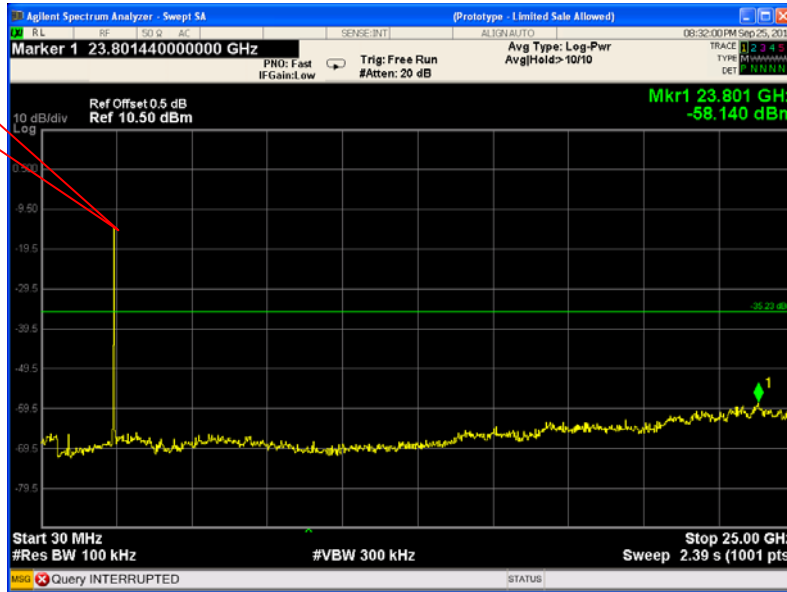


High Channel


Fundamental

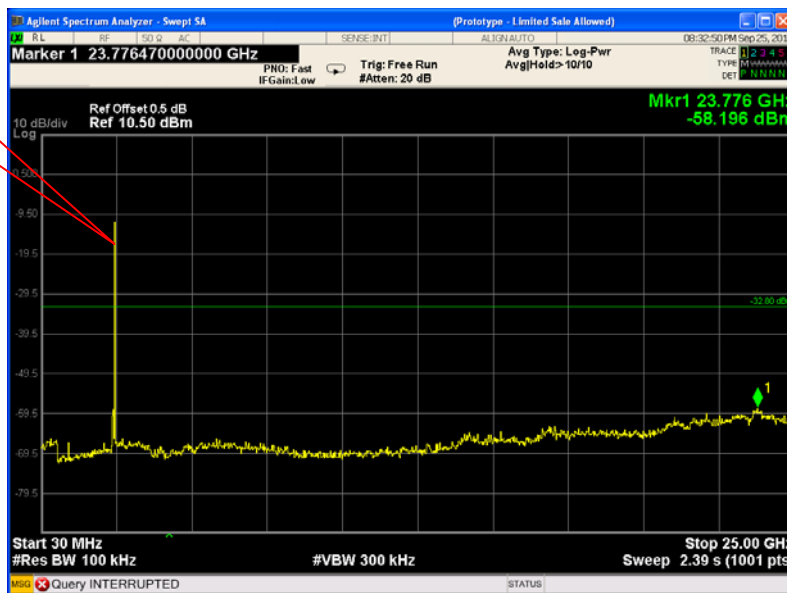


8DPSK  
Low Channel

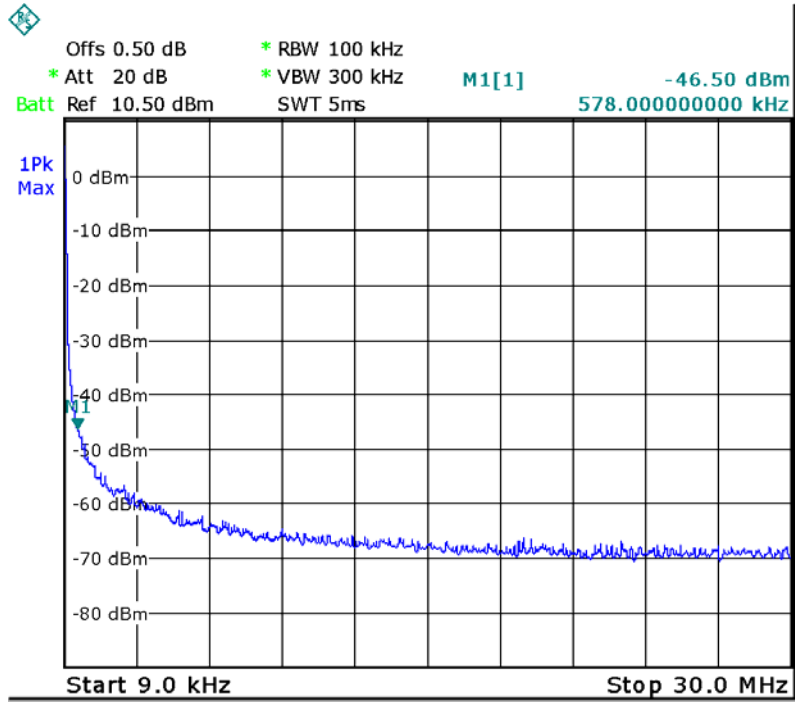

Middle Channel

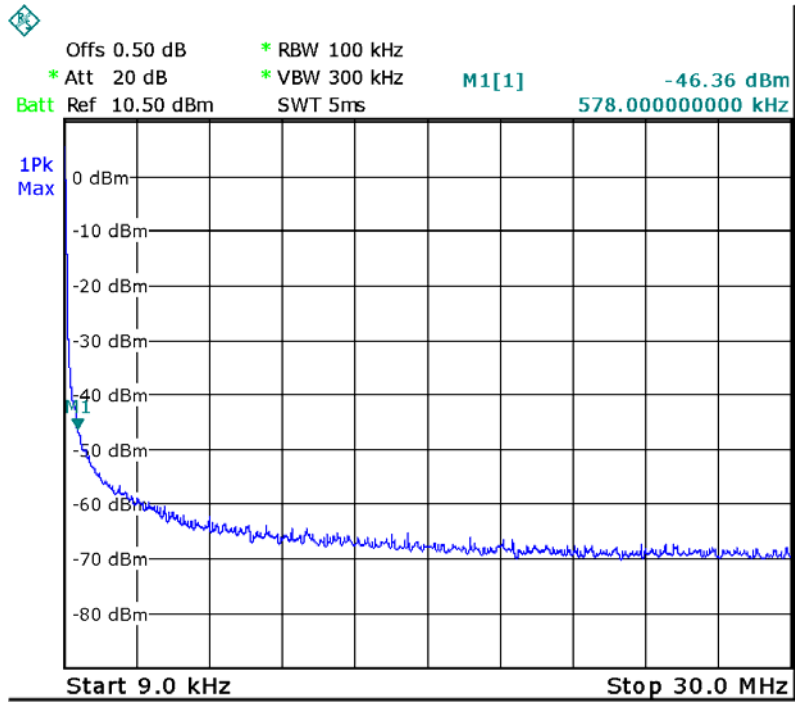


### High Channel

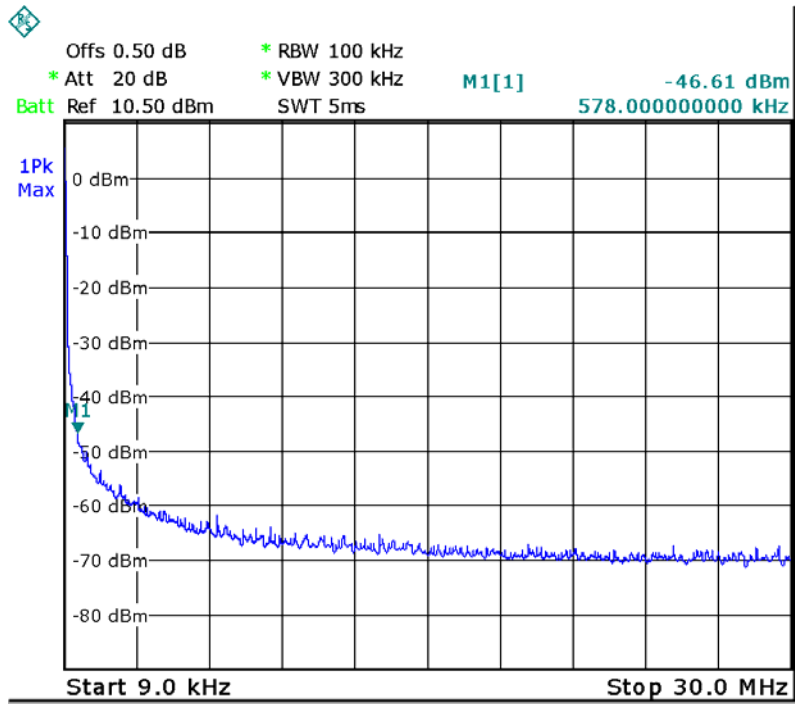

### 8DPSK


### Low Channel

Fundamental

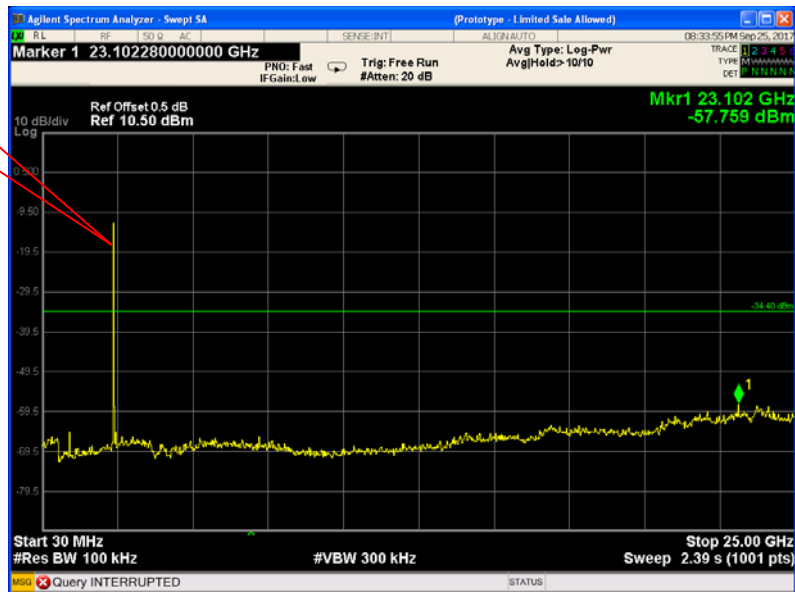


Middle Channel

Fundamental

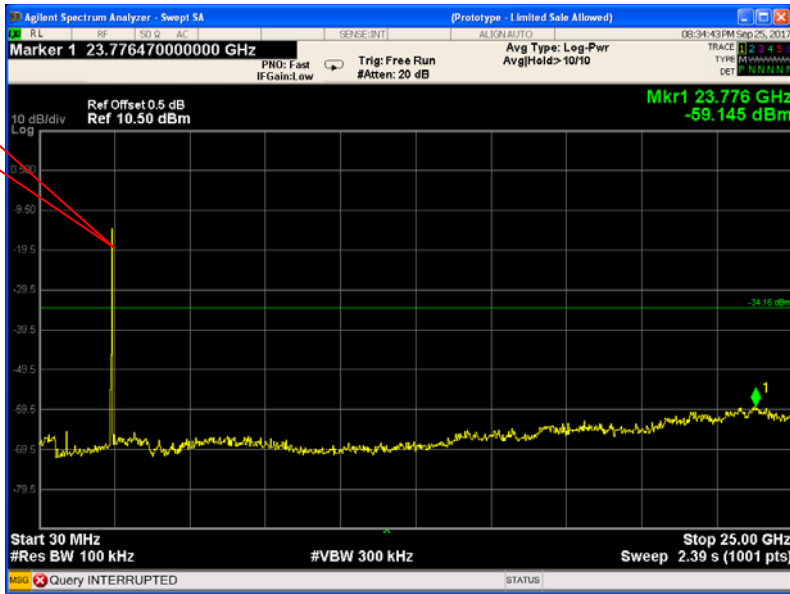

High Channel

Fundamental

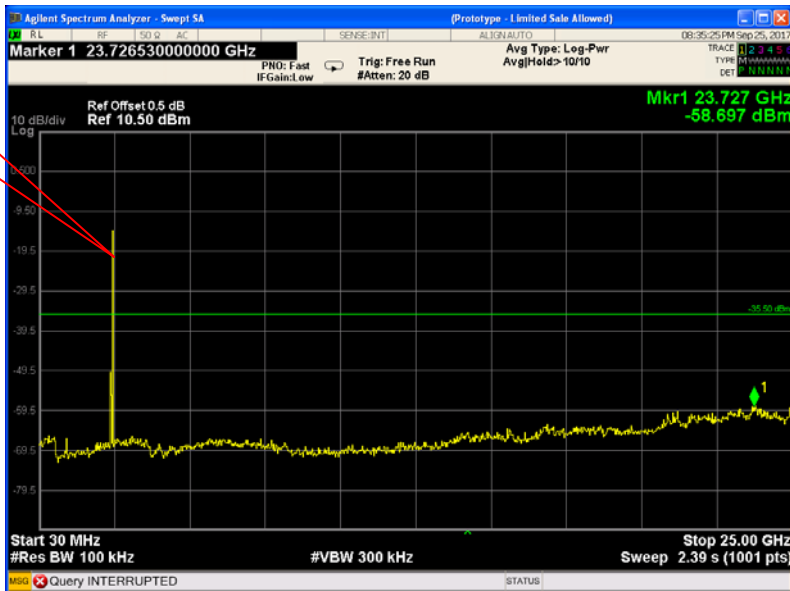

## 10 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

### 10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold




10.2 Test Result:

Test plots


GFSK Transmitting Band edge-left side

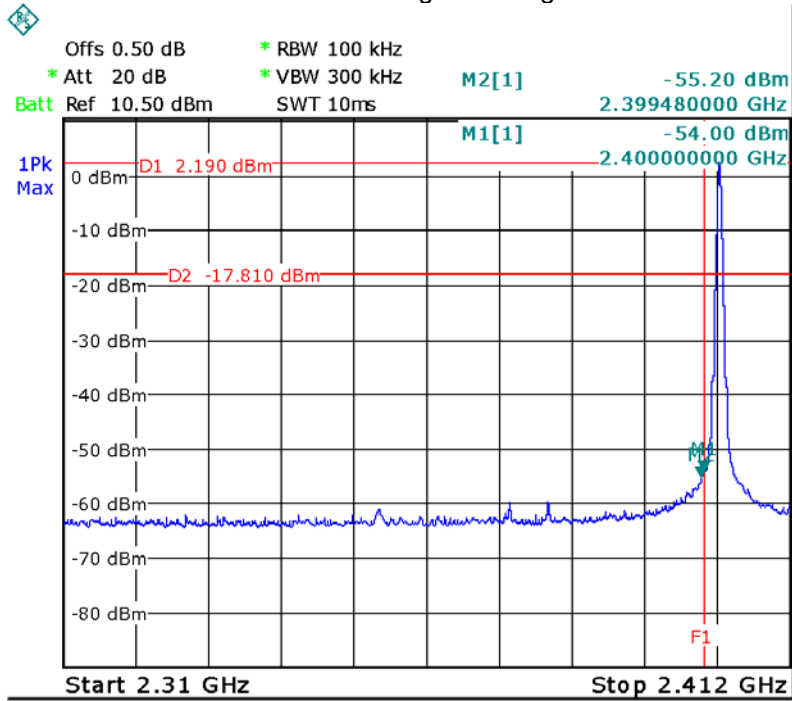


GFSK Hopping Band edge-left side

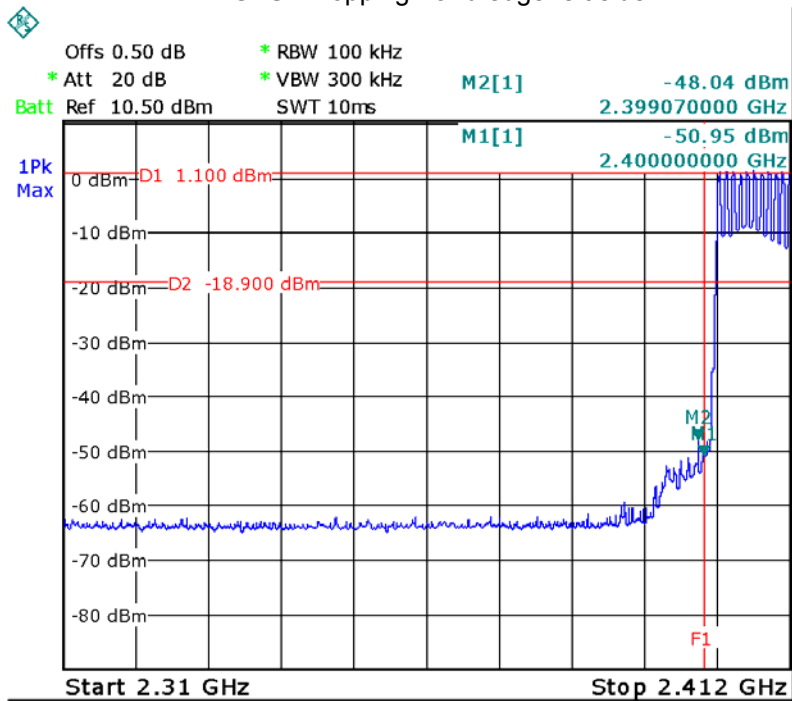


GFSK Transmitting Band edge-right side

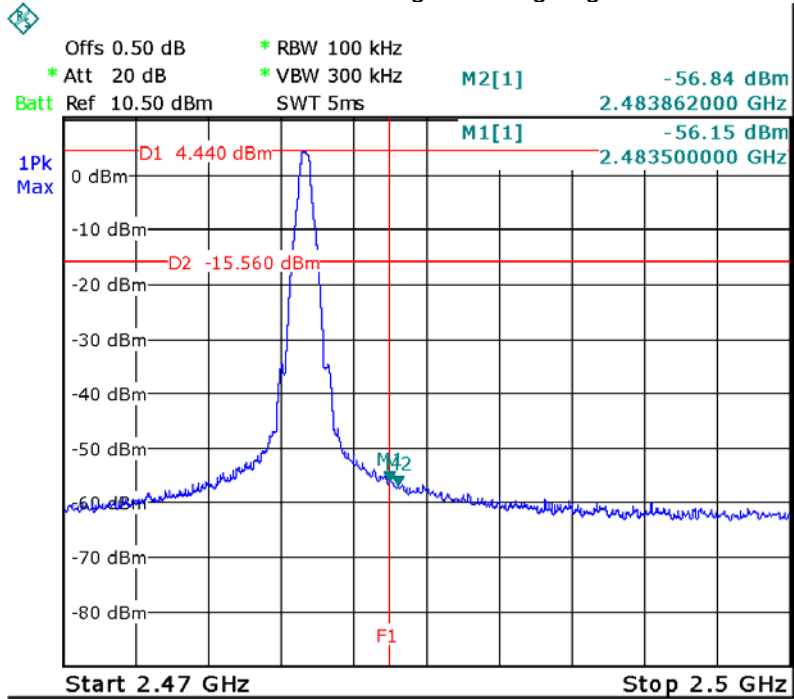


GFSK Hopping Band edge-right side

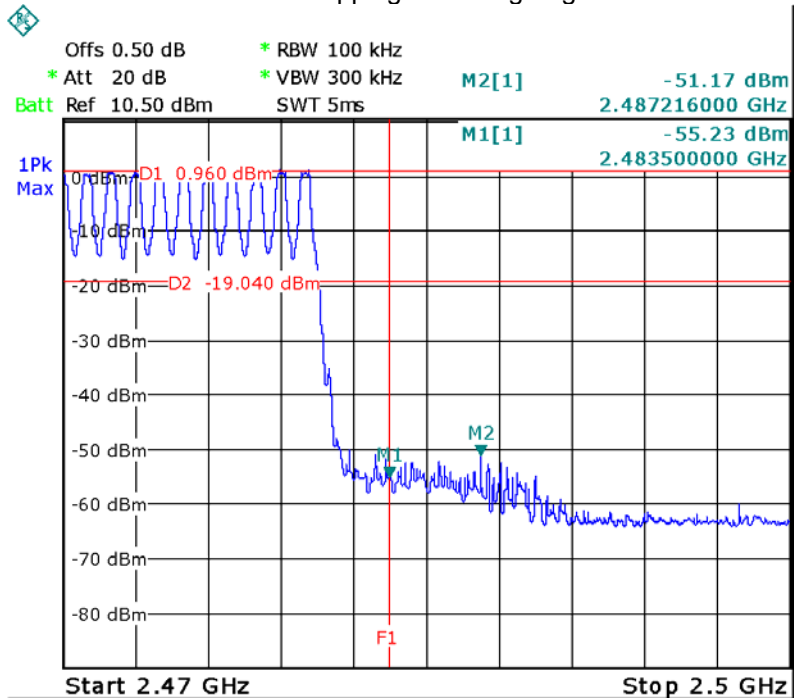


Pi/4 DQPSK Transmitting Band edge-left side

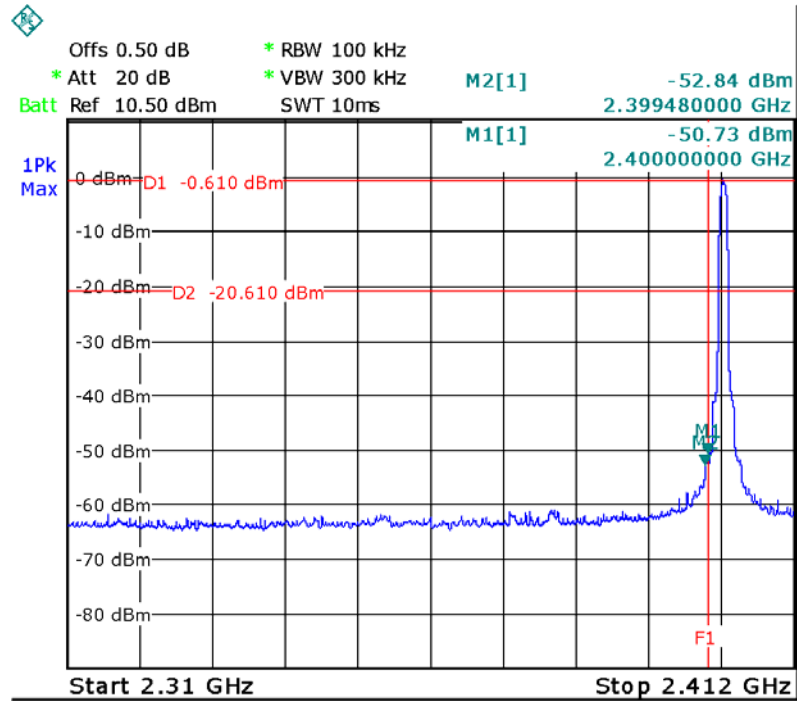


Pi/4 DQPSK Hopping Band edge-left side

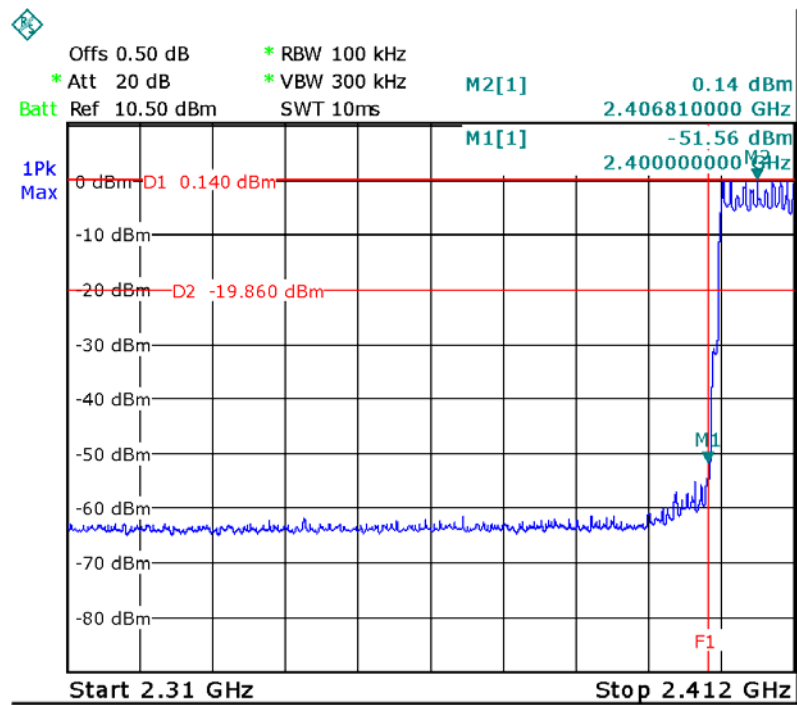


Pi/4 DQPSK Transmitting Band edge-right side

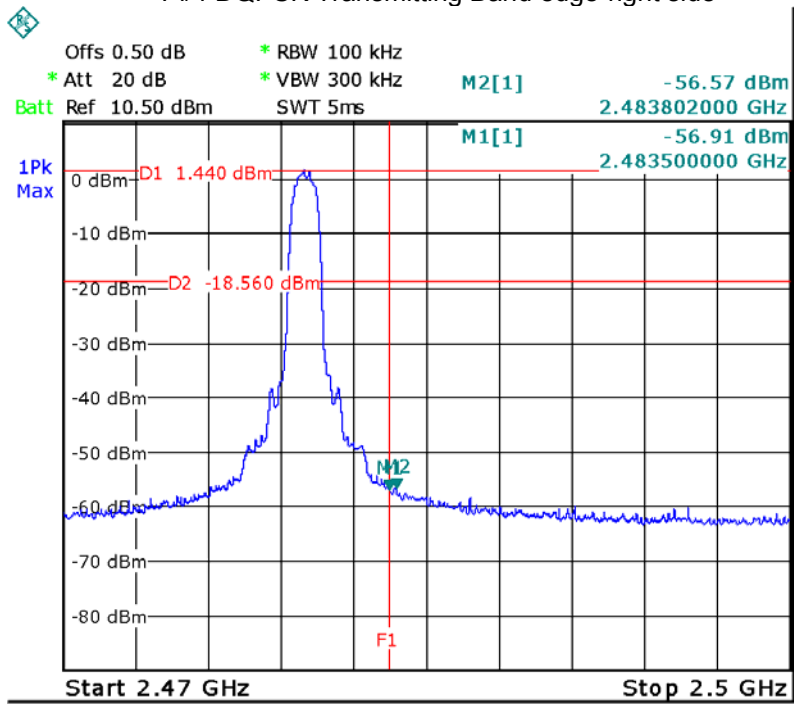


Pi/4 DQPSK Hopping Band edge-right side

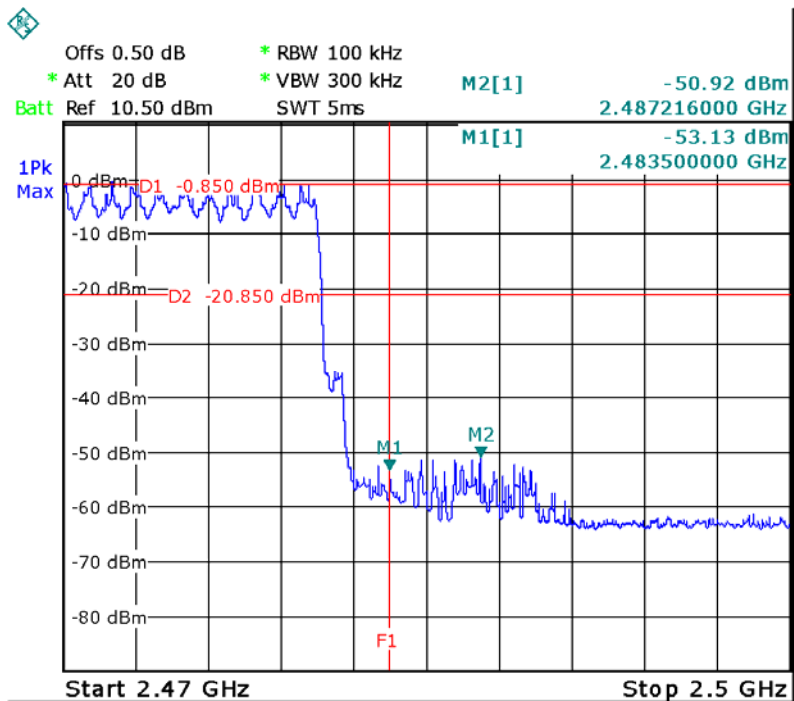


8DPSK Transmitting Band edge-left side

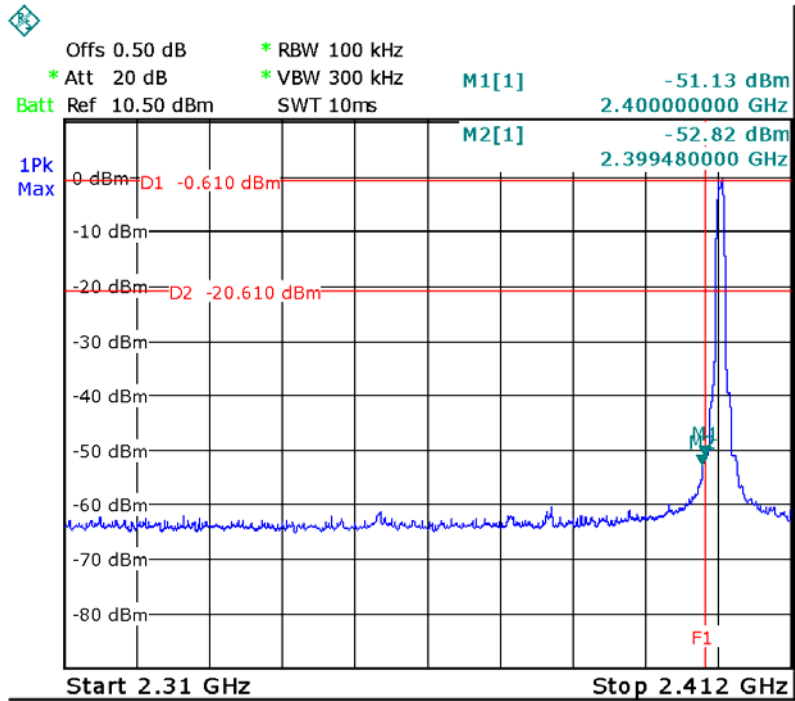


8DPSK Hopping Band edge-left side

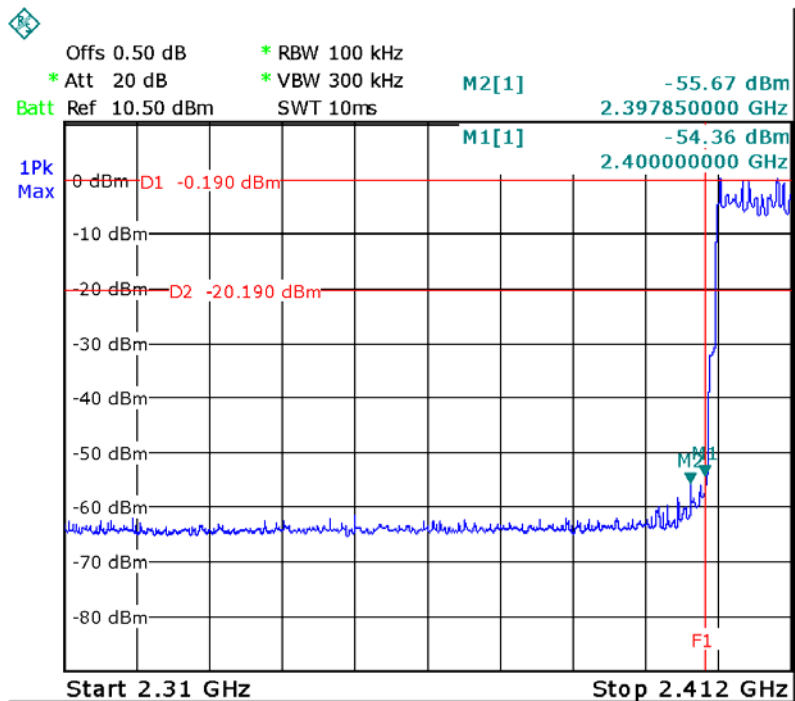

8DPSK Transmitting Band edge-right side

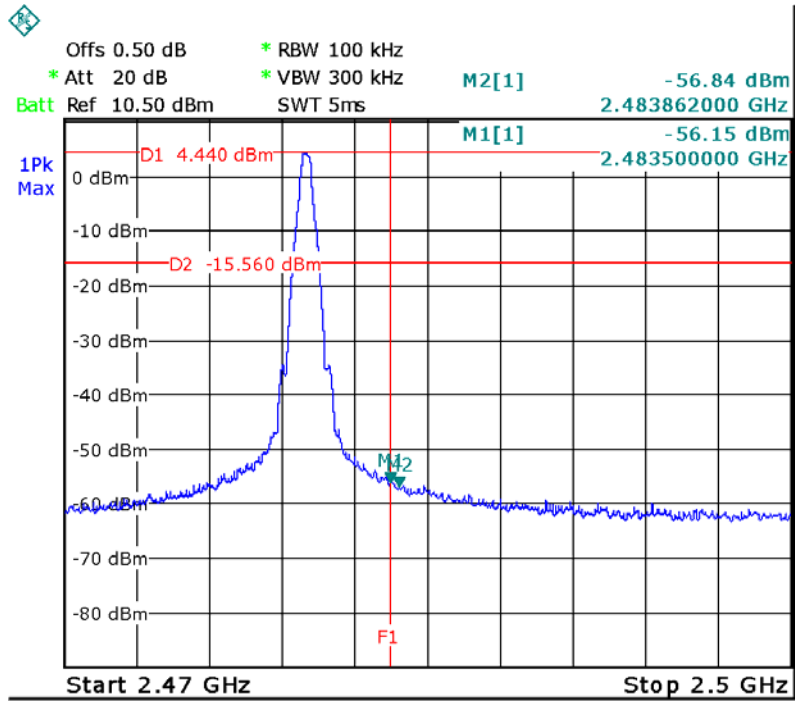

8DPSK Hopping Band edge-right side

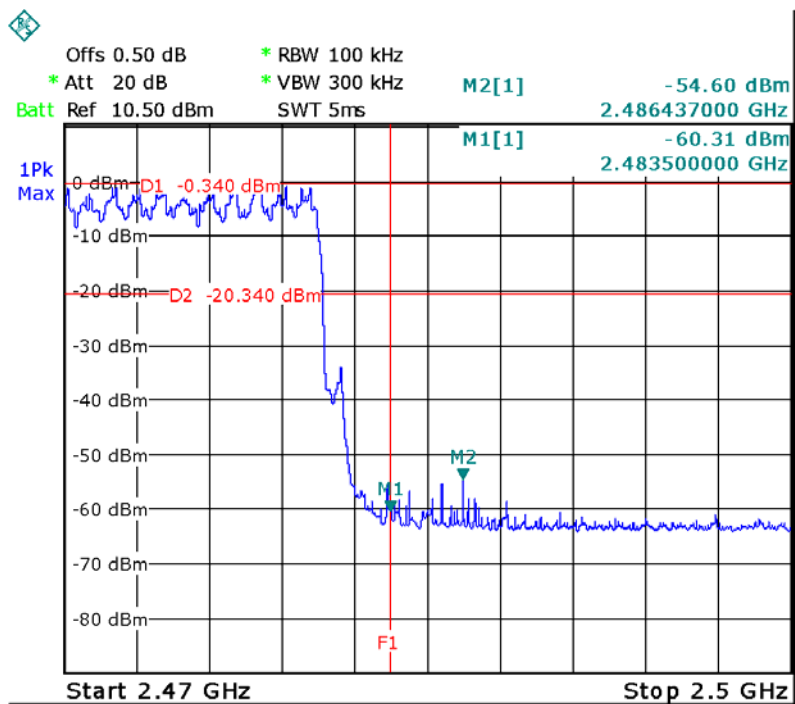

## 11 Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247  
 Test Method: C63.10: 2013  
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.

### 11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

### 11.2 Test Result:


Modulation	Test Channel	20 dB Bandwidth	99% Bandwidth
GFSK	Low	1.036MHz	0.898MHz
GFSK	Middle	1.036MHz	0.904MHz
GFSK	High	1.036MHz	0.904MHz
Pi/4 DQPSK	Low	1.305MHz	1.192MHz
Pi/4 DQPSK	Middle	1.305MHz	1.180MHz
Pi/4 DQPSK	High	1.305MHz	1.174MHz
8DPSK	Low	1.293MHz	1.210MHz
8DPSK	Middle	1.299MHz	1.204MHz
8DPSK	High	1.293MHz	1.192MHz

Test result plot as follows:


Modulation: GFSK Low Channel

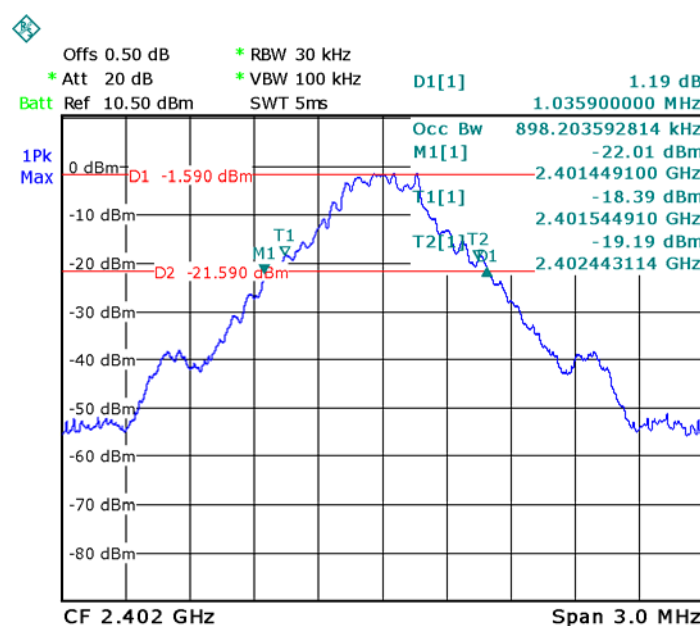

### Middle Channel

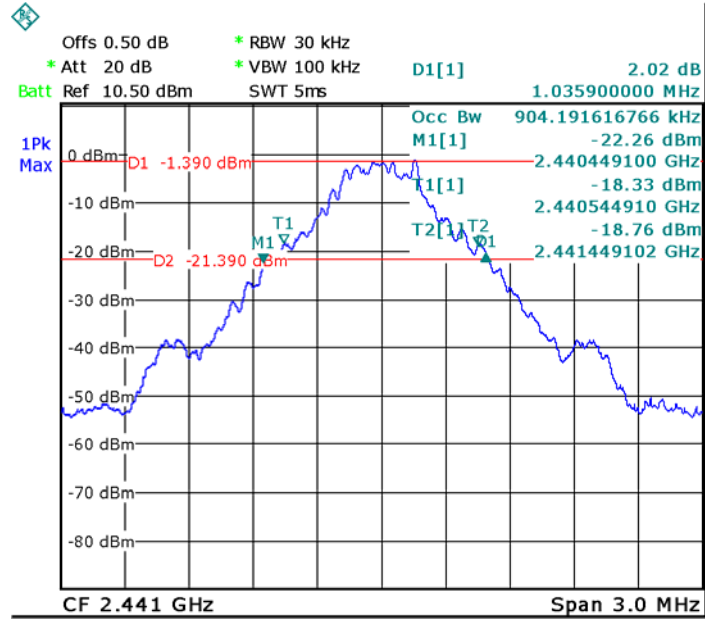


### High Channel

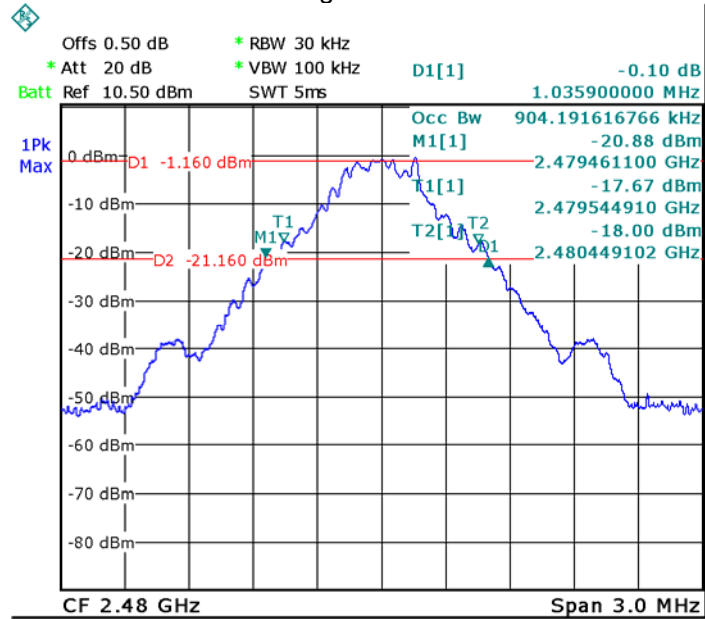




Modulation: Pi/4 DQPSK


Low Channel

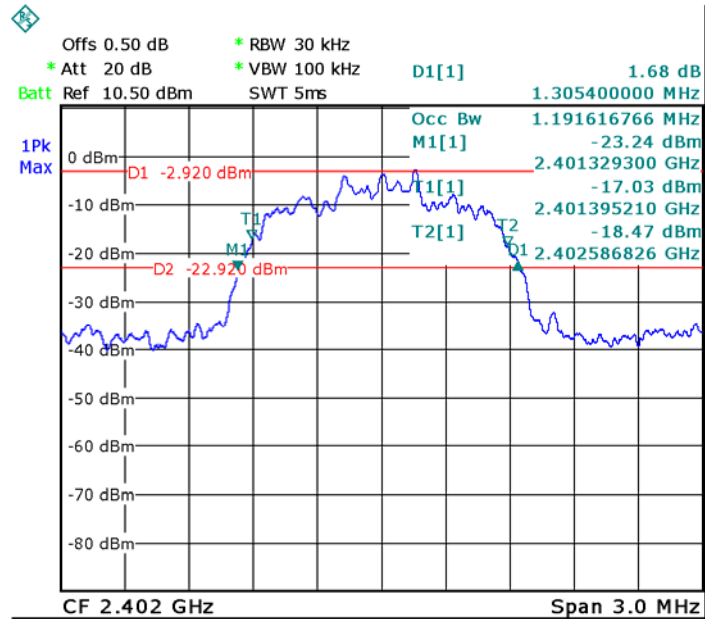

Middle Channel

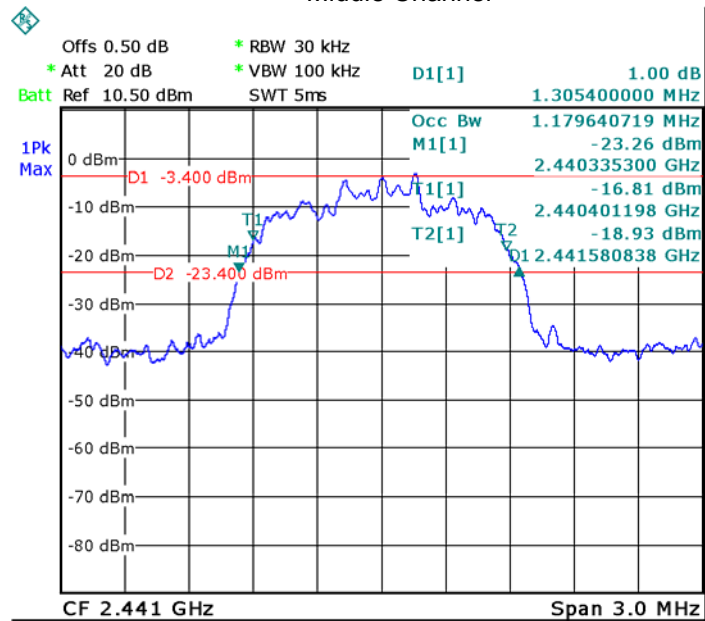




### High Channel

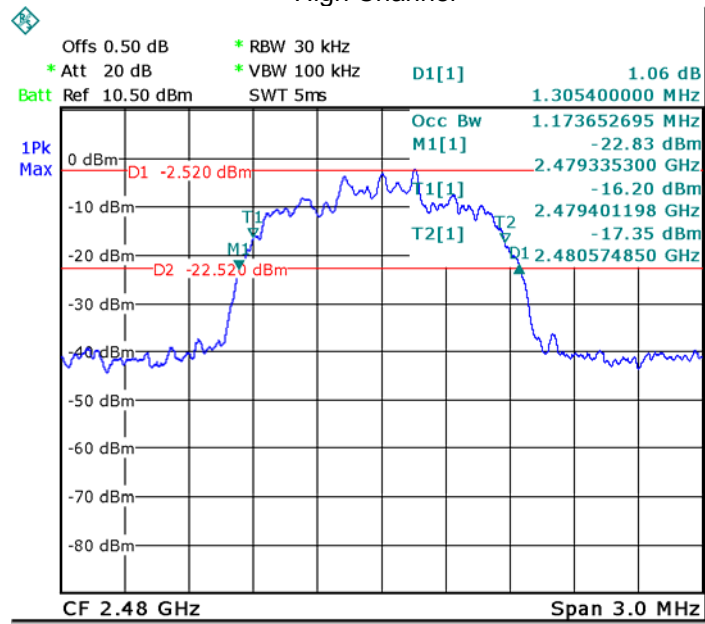

### Modulation: 8DPSK

### Low Channel

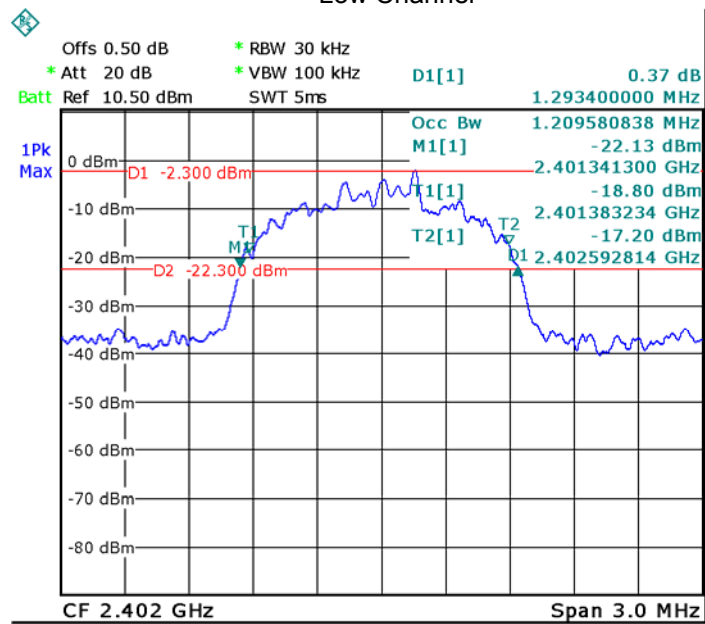

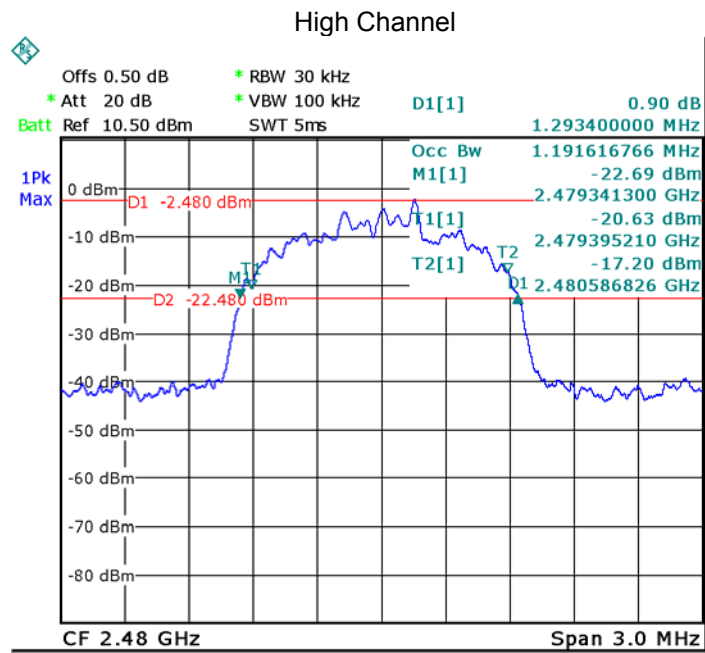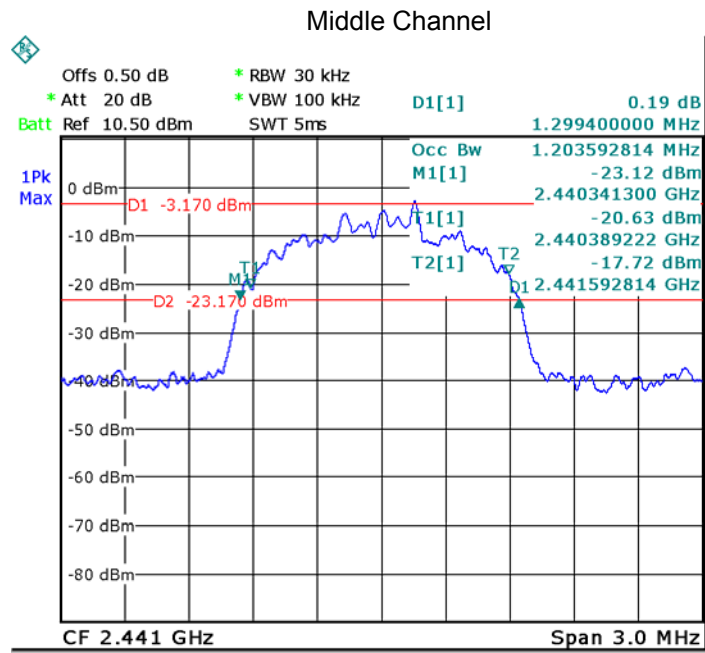

## 12 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

### 12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


### 12.2 Test Result:

Test Mode	Data Rate	Peak Power(dBm)			Limit (dBm)
		Low Channel	Middle Channel	High Channel	
GFSK	1Mbps	2.47	3.77	4.82	20.97
4* $\pi$ 4DQPSK	2Mbps	3.94	4.89	6.49	20.97
8DPSK	3Mbps	4.19	5.15	<b>6.51</b>	20.97


Test result plot as follows:


Modulation: GFSK

Low Channel

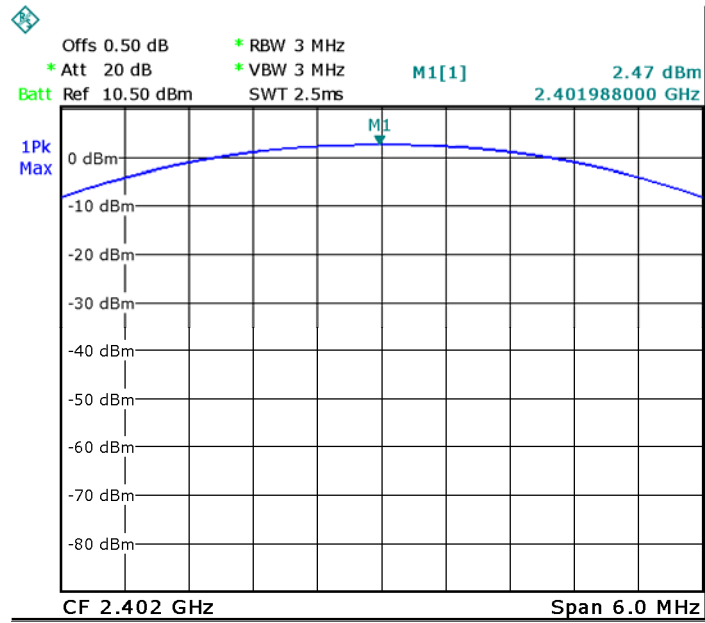


Middle Channel

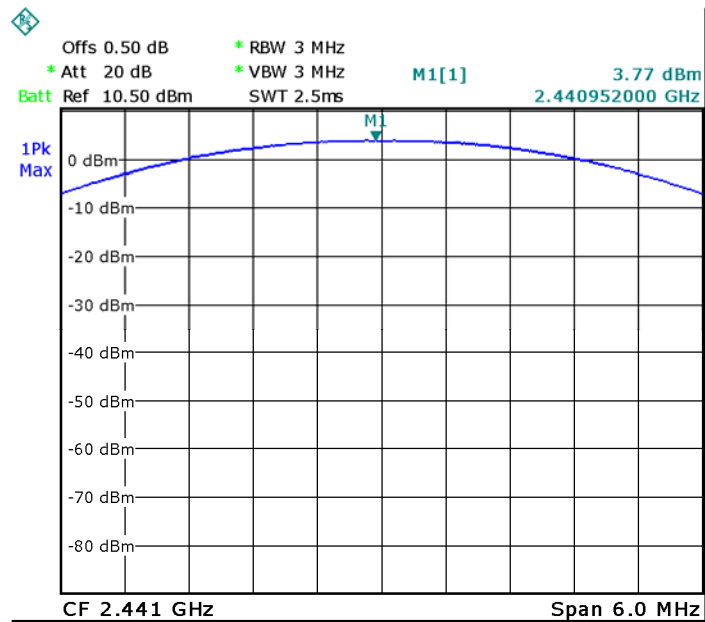

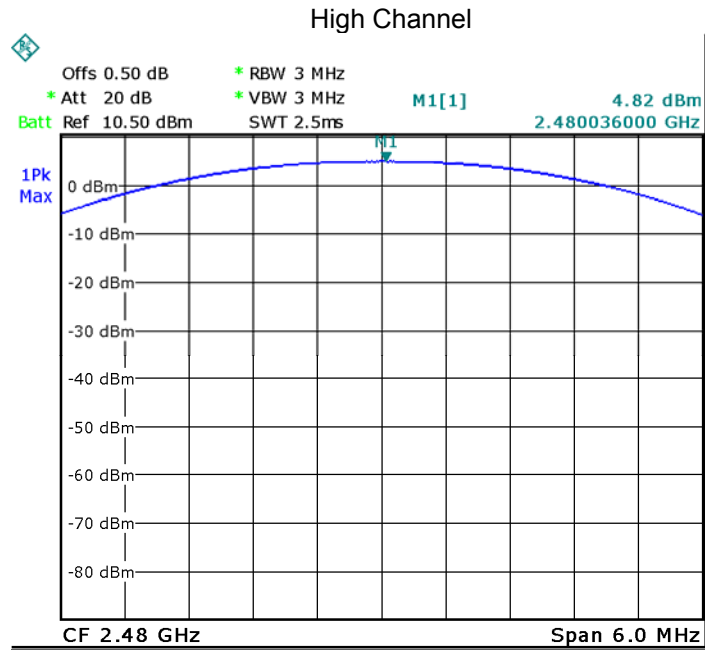


### Modulation: Pi/4 DQPSK Low Channel


### Low Channel

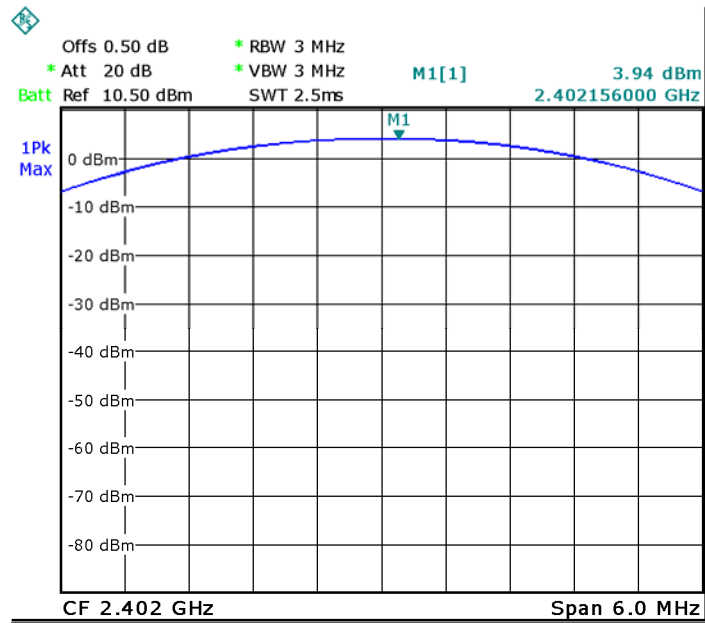


### Middle Channel

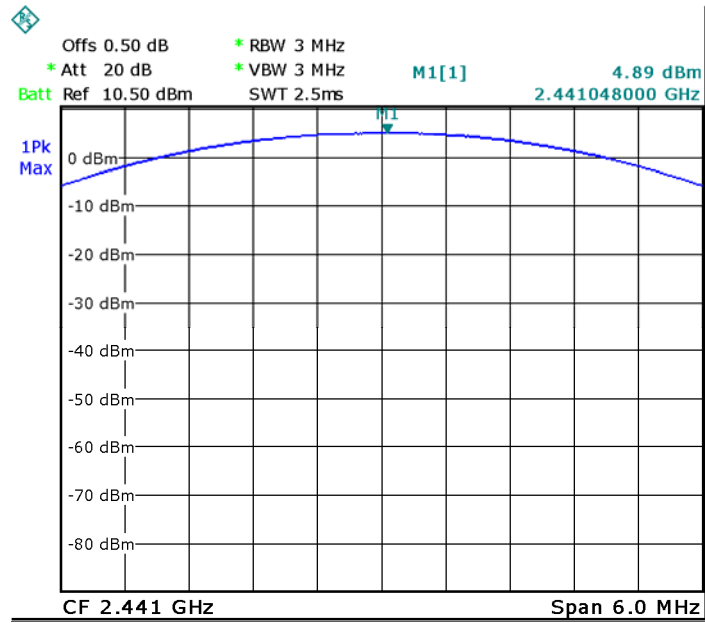


### High Channel

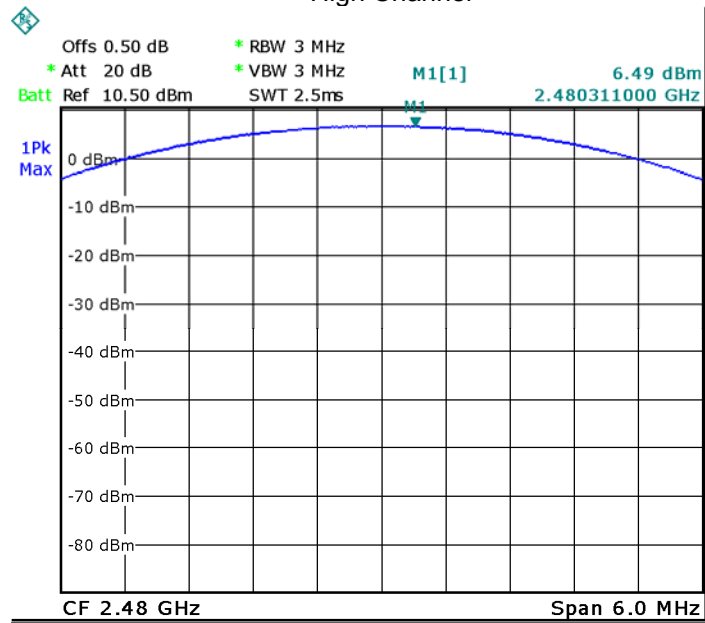


Modulation: 8DPSK Low Channel  
Low Channel

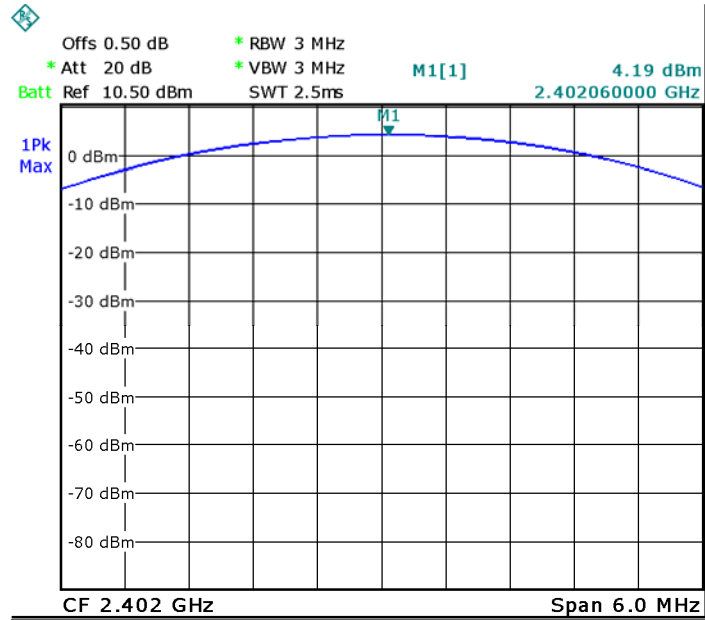

Middle Channel

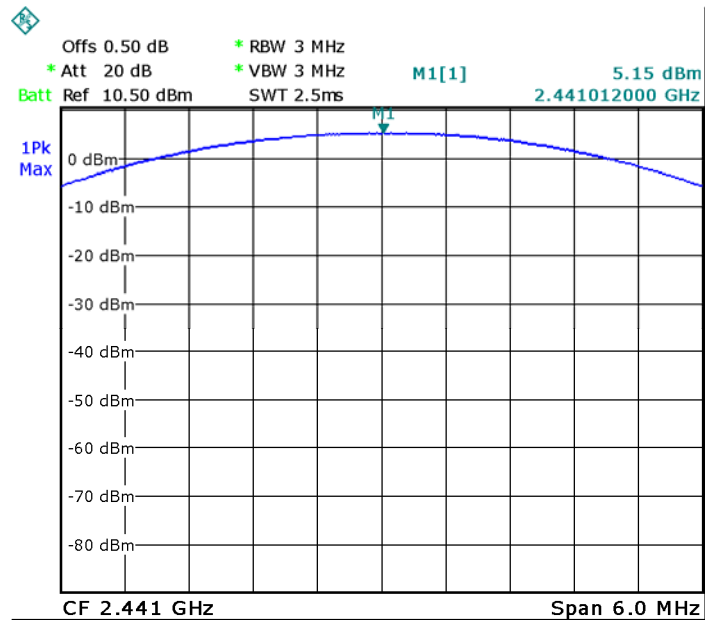



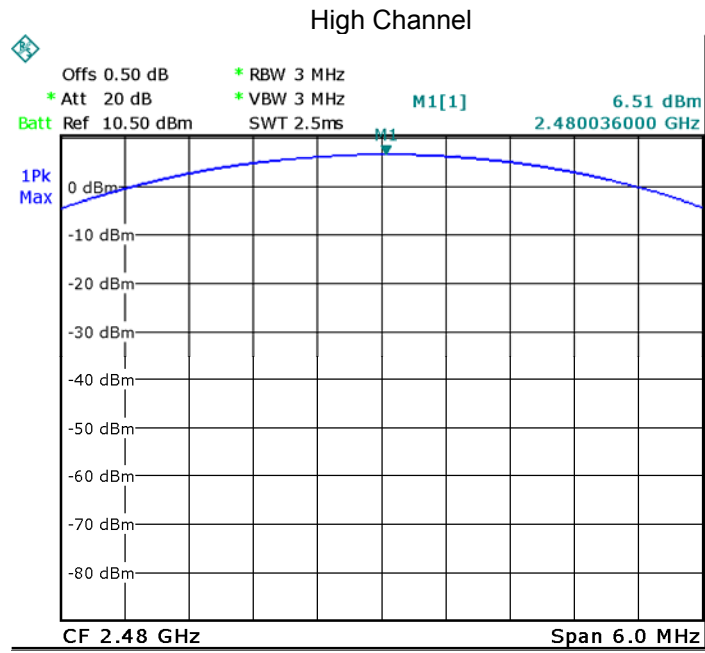

## 13 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

### 13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.


### 13.2 Test Result:

Test result plot as follows:


Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1 MHz	PASS
GFSK	Middle	1 MHz	PASS
GFSK	High	1 MHz	PASS
Pi/4 DQPSK	Low	1 MHz	PASS
Pi/4 DQPSK	Middle	1 MHz	PASS
Pi/4 DQPSK	High	1 MHz	PASS
8DPSK	Low	1 MHz	PASS
8DPSK	Middle	1 MHz	PASS
8DPSK	High	1 MHz	PASS

Test plots


GFSK Low Channel

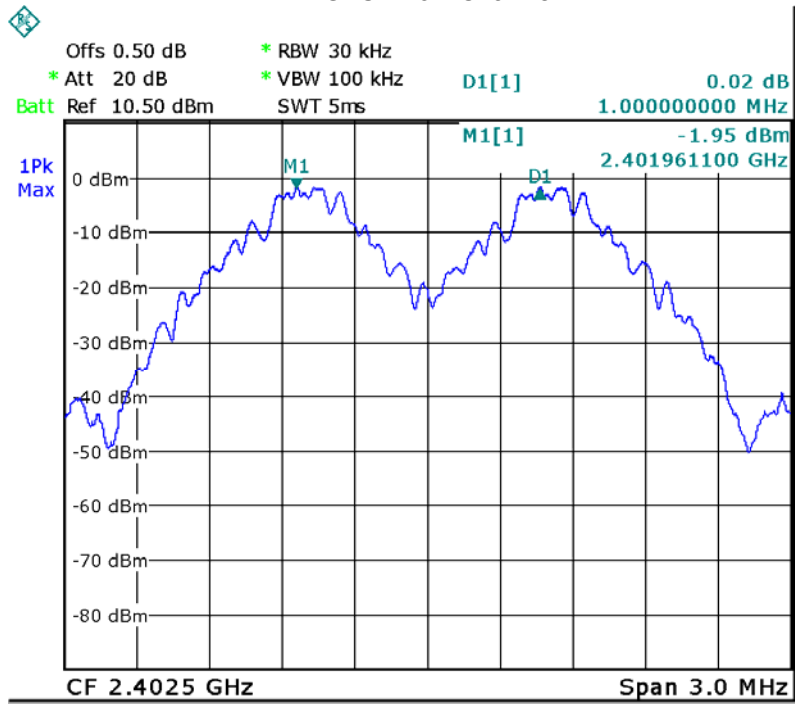


GFSK Middle Channel

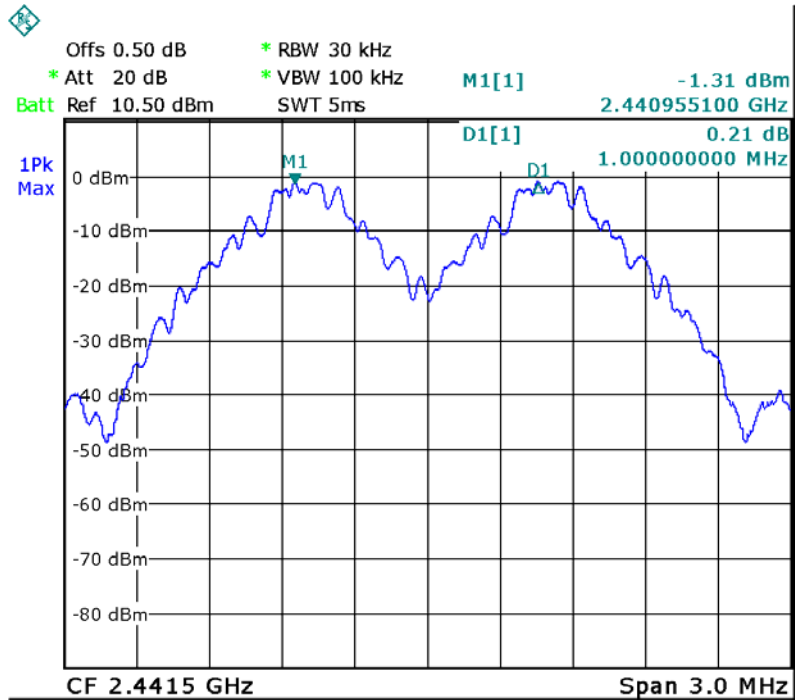


### GFSK High Channel

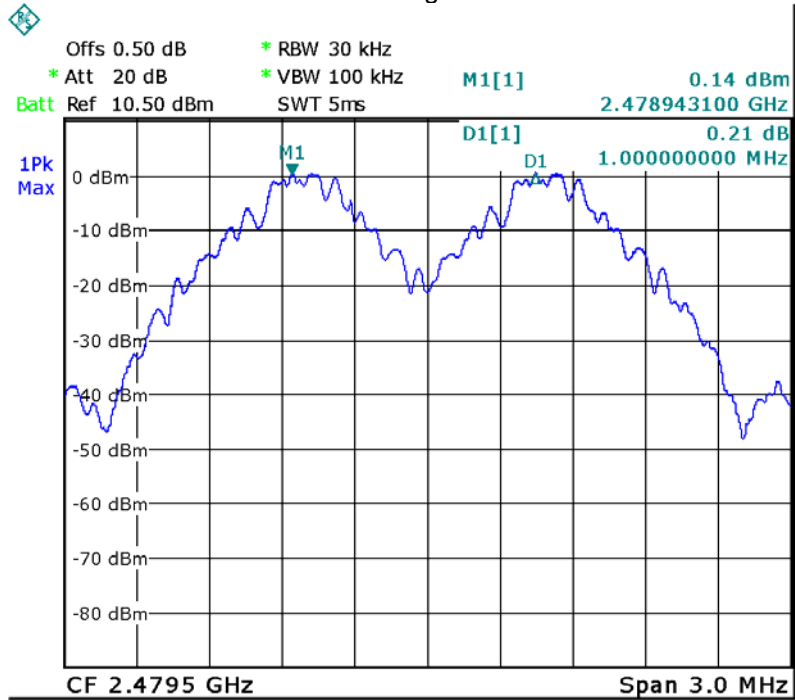


### Pi/4 DQPSK Low Channel

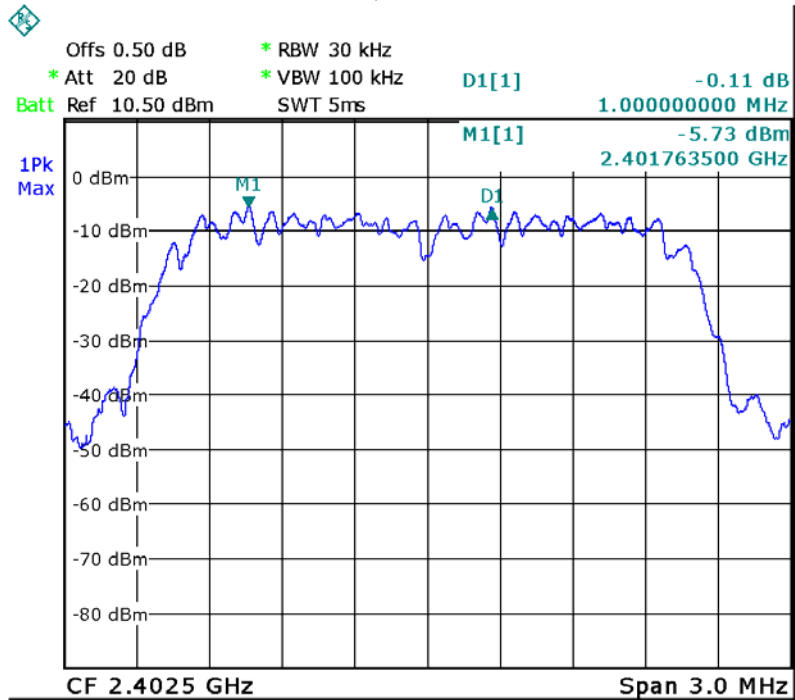


Pi/4 DQPSK Middle Channel

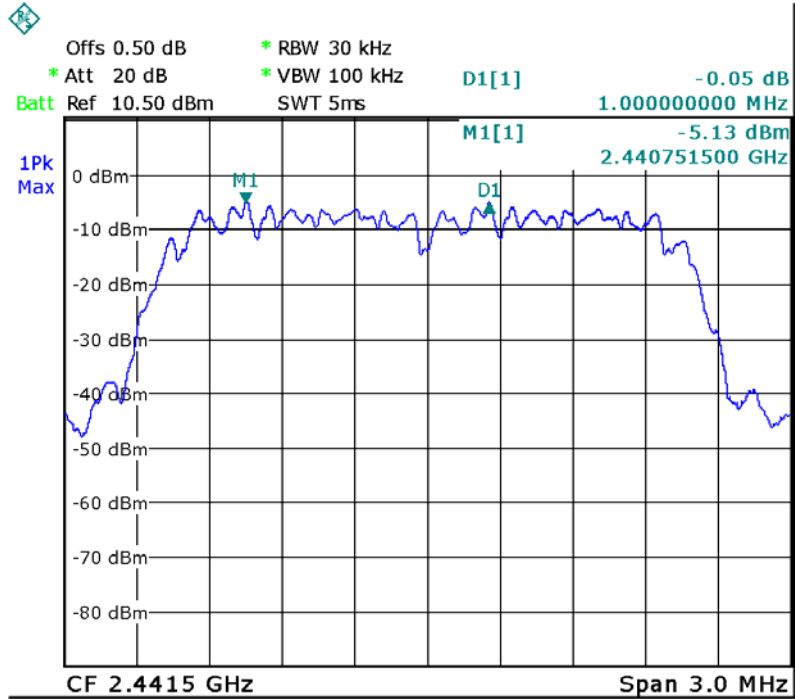


Pi/4 DQPSK High Channel

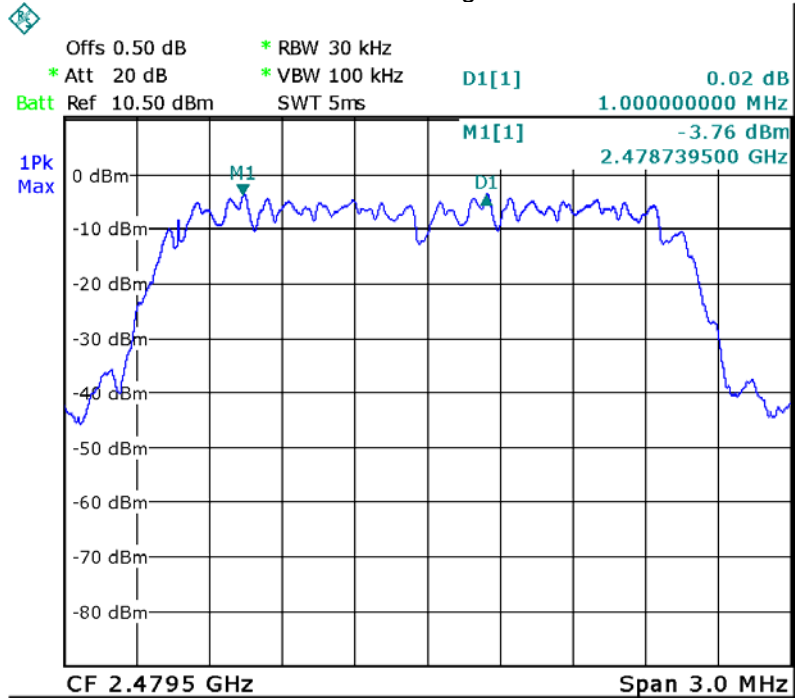


### 8DPSK Low Channel

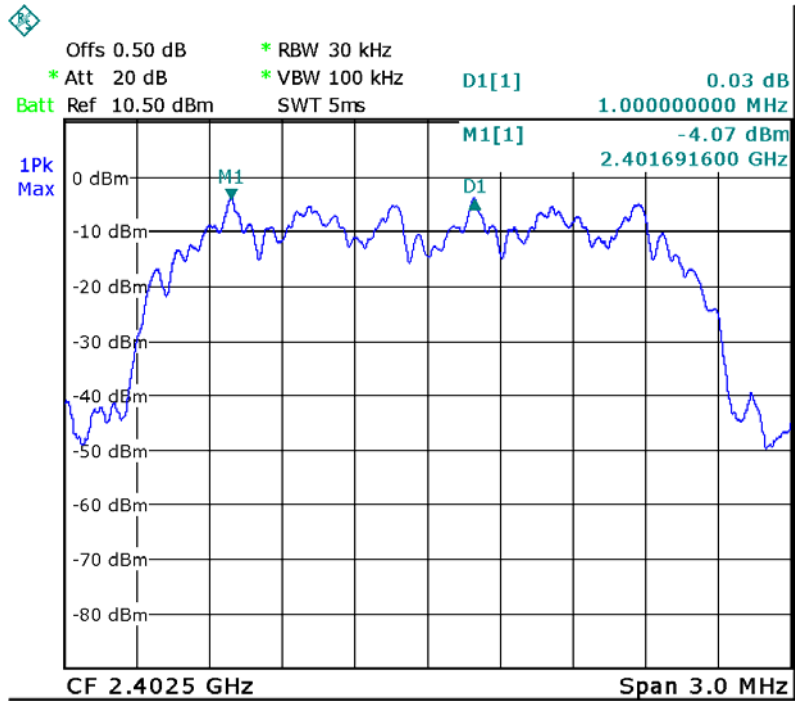

### 8DPSK Middle Channel

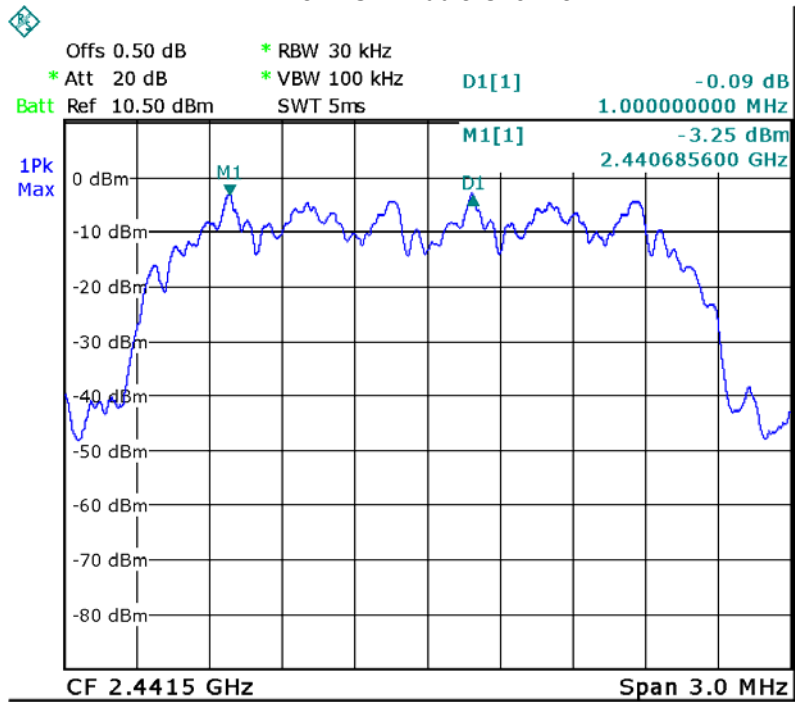

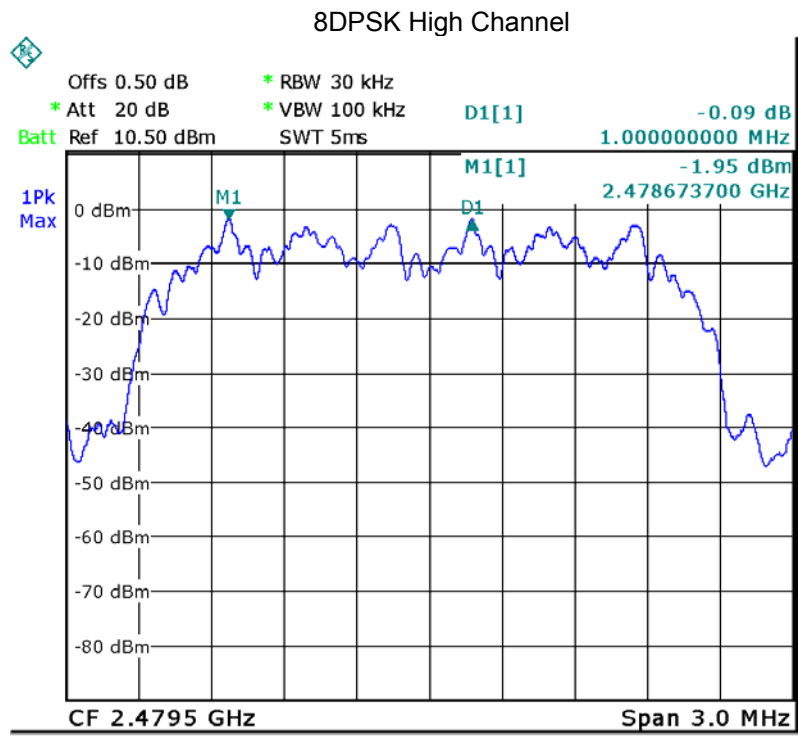

## 14 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

### 14.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;


### 14.2 Test Result:

**Total Channels are 79 Channels.**

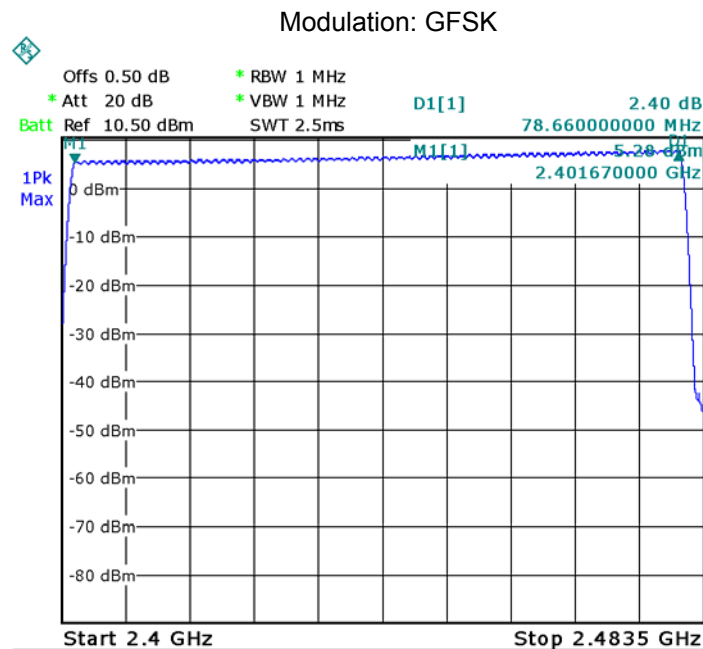




Modulation: GFSK Pi/4 DQPSK

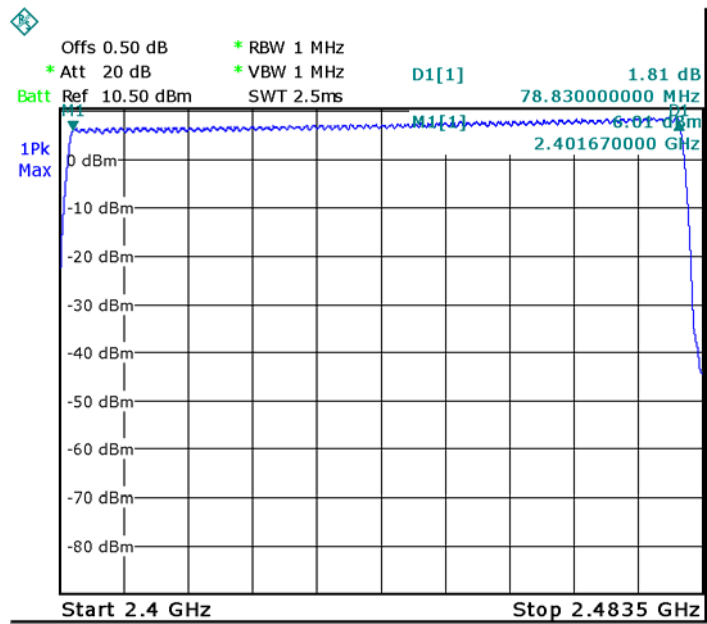

Modulation: 8DPSK

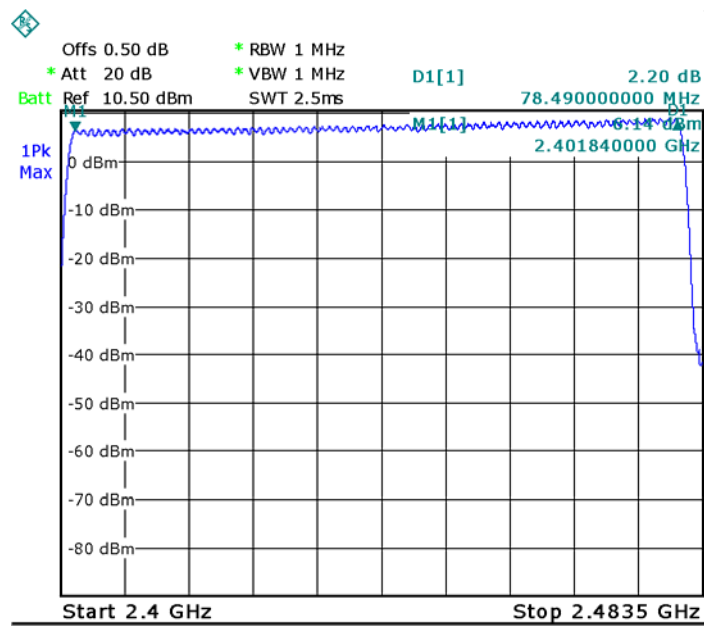

## 15 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	C63.10:2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

### 15.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 15.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period:  $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH1	$1600/79/2*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.872	0.306	0.4
		middle	2.872	0.306	0.4
		High	2.872	0.306	0.4
Pi/4DQPSK	DH5	Low	2.872	0.306	0.4
		middle	2.872	0.306	0.4
		High	2.872	0.306	0.4
8DPSK	DH5	Low	2.864	0.305	0.4
		middle	2.864	0.305	0.4
		High	2.864	0.305	0.4


Modulation: GFSK

Data Packet:


DH5.Low channel

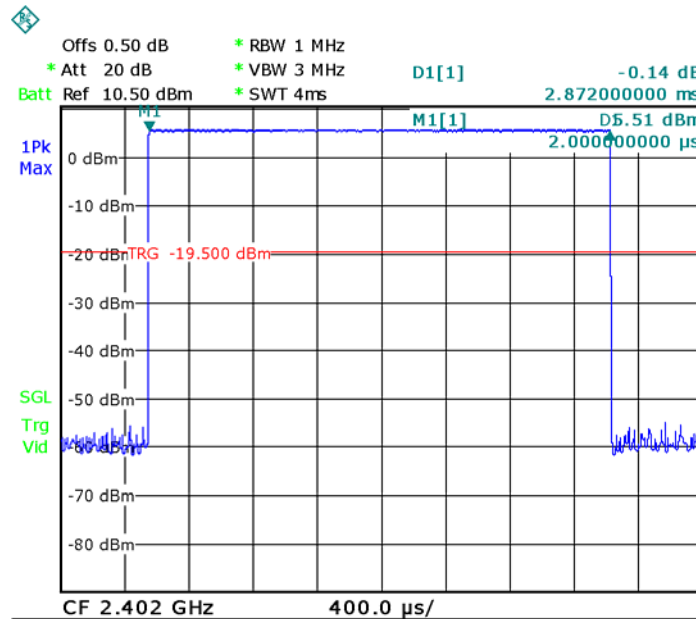

Data Packet:  
DH5.Middle channel

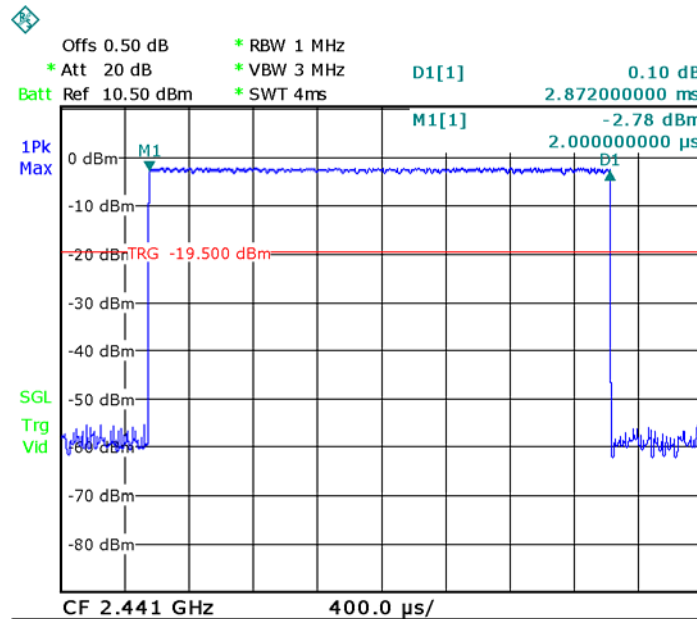


Data Packet:  
DH5,High channel

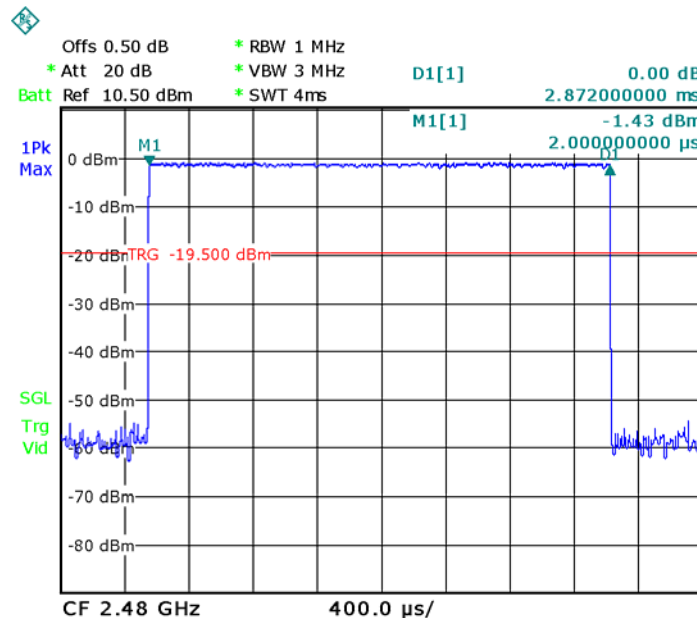

Modulation: Pi/4DQPSK


Data Packet:

2DH5 Low channel

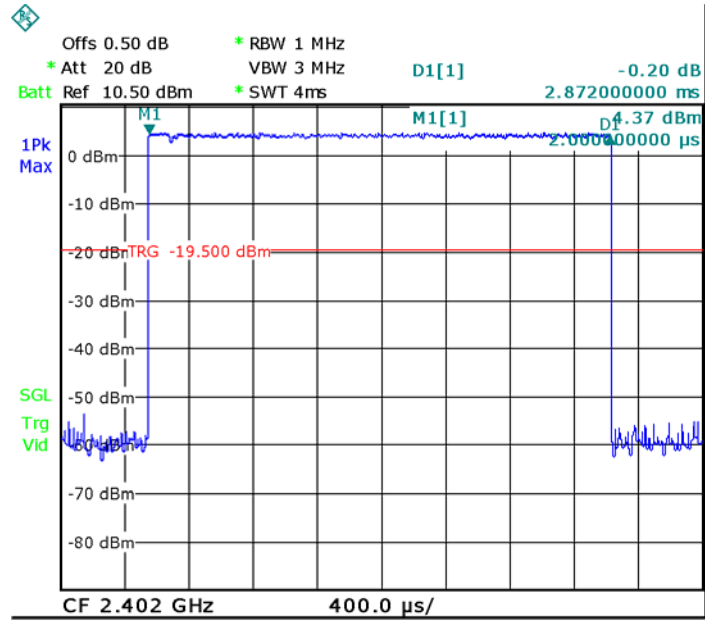


Data Packet:

2DH5.Middle channel

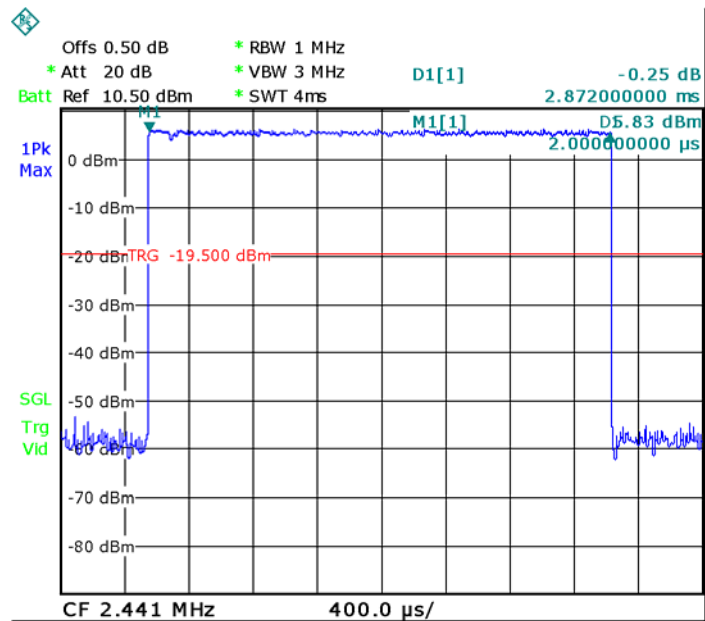


Data Packet:  
2DH5,High channel

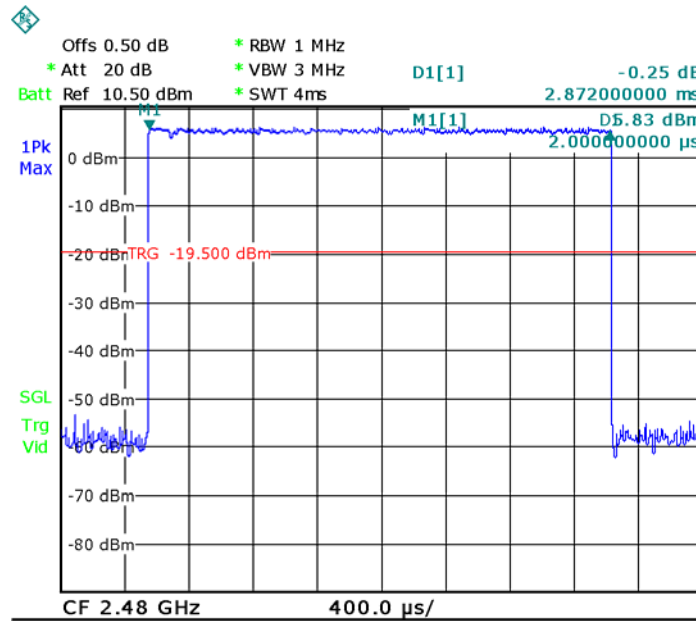


Modulation: 8DPSK


Data Packet:  
3DH5.Low channel

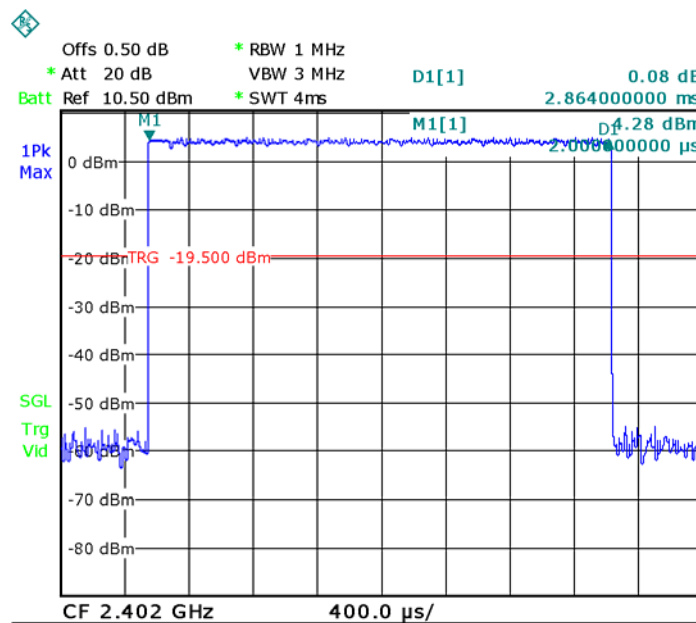

Data Packet:  
3DH5.Middle channel

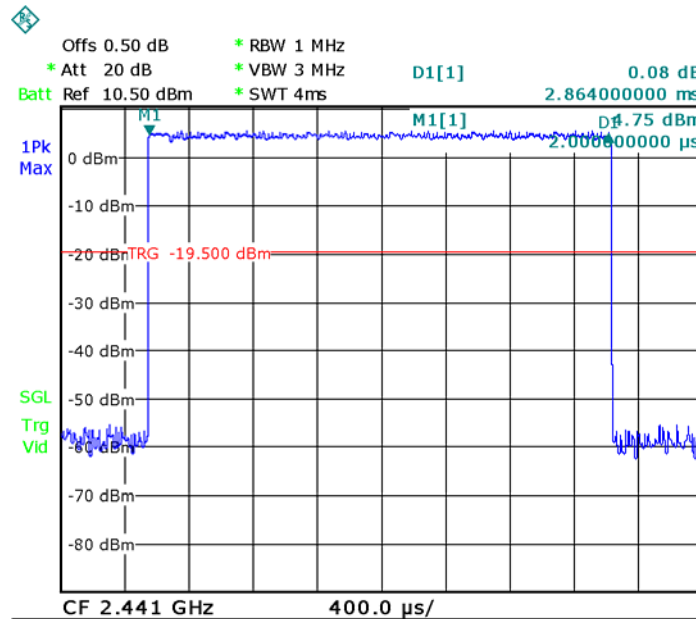

Data Packet:  
3DH5.High channel

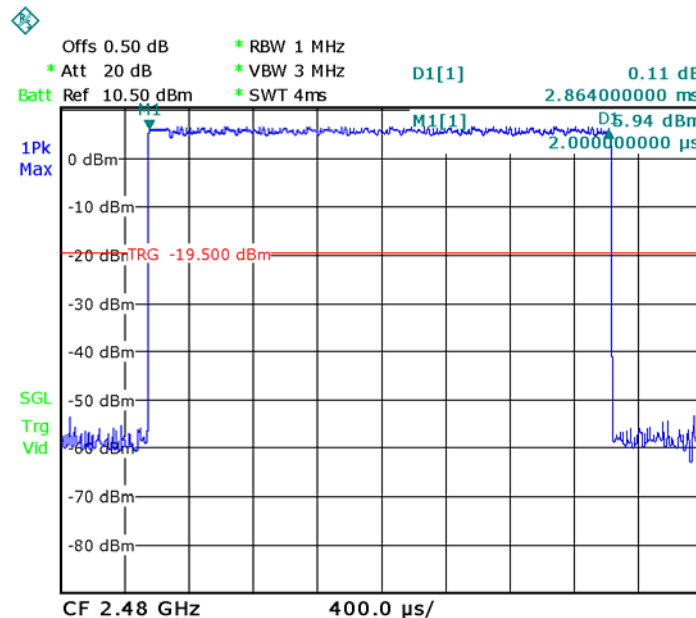


## 16 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has a Integrated Antenna, meets the requirements of FCC 15.203.

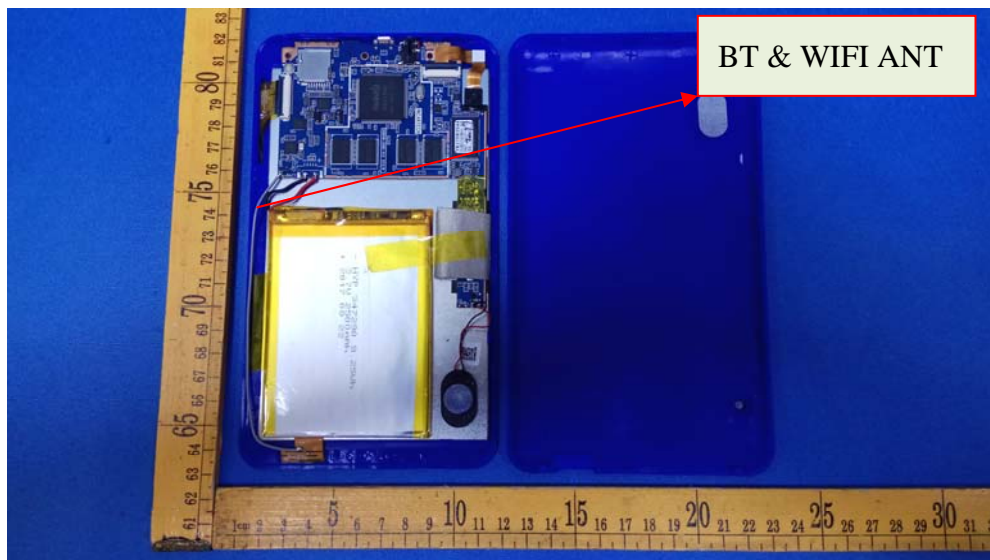



## **17 SAR Evaluation**

Please refer to SAR report.

## 18 Photographs -Test Setup Photos

### 18.1 Photograph-Conducted Emissions Test Setup



### 18.2 Photograph-Radiated Emissions

Test Frequency Below 30MHz




Test Frequency 30MHz to 1000MHz



Test Frequency Above 1GHz



For 18GHz to 25GHz

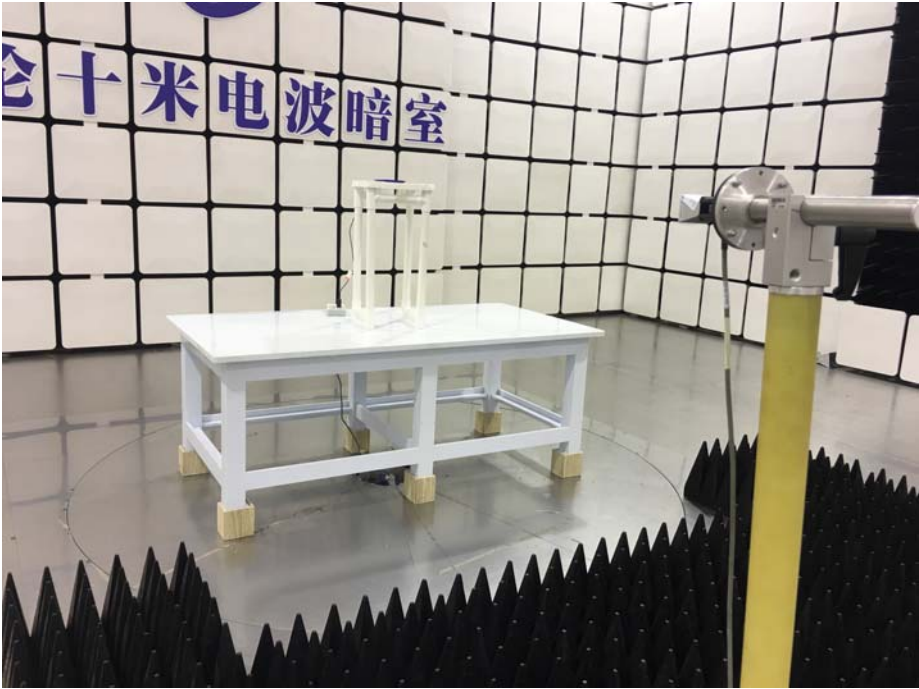

## **19 Photographs – Constructional Details**

Refer to Annex WTN17S0989813E-Photo.

=====**End of Report**=====