

Radio Frequency TEST REPORT

Report No.: 180300366TWN-001
Model No.: #7447,#7447-CN, #7447-US, #7447-USK,
#7447-K,#7447-LG, 620381, 1617861,
7447-W85-B
Issued Date: Mar. 31, 2018

Applicant: GENIUS TOY TAIWAN CO.,LTD
7F-2,No.406,TAIWAN BLVD. SEC. 2, TAICHUNG TAIWAN

Test Method/ Standard: 47 CFR FCC Part 15.249 & ANSI C63.10 2013

Test Site: 960839

Test By: Intertek Testing Services Taiwan Ltd.
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan

It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).



The test report was prepared by:

Candy Liu

Candy Liu/ Assistant

These measurements were taken by:

Durant Wei

Durant Wei/ Engineer

The test report was reviewed by:

Rico Deng

Name Rico Deng

Title Supervisor

Revision History

Report No.	Issue Date	Revision Summary
180300366TWN-001	Mar. 31, 2018	Original report

Table of Contents

Summary of Tests	4
1. General information.....	5
1.1 Identification of the EUT.....	5
1.2 Description of EUT	5
1.3 Antenna description	5
1.4 Peripherals equipment	6
2. Test specifications.....	7
2.1 Test standard	7
2.2 Operation mode	7
3. 20dB Bandwidth test.....	8
3.1 Operating environment	8
3.2 Test setup & procedure	8
3.3 Measured data of modulated bandwidth test results	8
4. Radiated emission test FCC 15.249 (C).....	11
4.1 Operating environment	11
4.2 Test setup & procedure	11
4.3 Emission limit	13
4.3.1 Fundamental and harmonics emission limits	13
4.3.2 General radiated emission limits	14
4.4 Radiated spurious emission test data	14
4.4.1 Measurement results: frequency range from 9 kHz to 30 MHz.....	14
4.4.2 Measurement results: frequencies equal to or less than 1 GHz.....	15
4.4.3 Measurement results: frequency above 1GHz	16
4.4.4 Measurement results: Fundamental and harmonics emission	16
5. Radiated emission on the band edge FCC 15.249(d)	17
5.1 Operating environment	17
5.2 Radiated emission on the band edge test data	17
6. Conducted emission test FCC 15.207	20
Appendix A: Test equipment list	21
Appendix B: Measurement Uncertainty.....	22

Summary of Tests

Test	Reference	Results
20dB Bandwidth	15.215(c)	Pass
Radiated Emission test	15.249(c), 15.209	Pass
Emission on the Band Edge	15.249(d)	Pass
Conducted Emission of AC Power	15.207	N/A
Antenna Requirement	15.203	Pass

1. General information

1.1 Identification of the EUT

Product: Remote-Control Machines: Farm Vehicle-RC Receiver
Model No.: #7447-US
Frequency Range: 2438MHz, 2465MHz, 2475MHz
Channel Number: 3 Channels
Type of Modulation: RF
Rated Power: DC 4.5 V from battery
Power Cord: N/A
Sample Received: Feb. 09, 2018
Sample condition: Workable
Test Date(s): Feb. 12, 2018 ~ Mar. 08, 2018

Note 1: The test report only allows to be revised within three years from its original issued date unless further standard or the requirement was noticed.

Note 2: When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Note 3: Except where explicitly agreed in writing, all work and services performed by Intertek is subject to our standard Terms and Conditions which can be obtained at our website: <http://www.intertek-twn.com/terms/>. Intertek's responsibility and liability are limited to the terms and conditions of the agreement.

This report is made solely on the basis of your instructions and / or information and materials supplied by you and provide no warranty on the tested sample(s) be truly representative of the sample source. The report is not intended to be a recommendation for any particular course of action, you are responsible for acting as you see fit on the basis of the report results. Intertek is under no obligation to refer to or report upon any facts or circumstances which are outside the specific instructions received and accepts no responsibility to any parties whatsoever, following the issue of the report, for any matters arising outside the agreed scope of the works. This report does not discharge or release you from your legal obligations and duties to any other person. You are the only one authorized to permit copying or distribution of this report (and then only in its entirety). Any such third parties to whom this report may be circulated rely on the content of the report solely at their own risk.

1.2 Description of EUT

The EUT is a Remote-Control Machines: Farm Vehicle-RC Receiver, and was defined as information technology equipment.

#7447, #7447-CN, #7447-USK, #7447-K, #7447-LG, 620381, 1617861, 7447-W85-B are identical in cosmetics, electrical, mechanical and physical design, including software/firmware with previous Model no. #7447-US except the item numbers which depend on different countries for the buyers and packaging.

For more detail features, please refer to user's Manual.

1.3 Antenna description

The EUT uses a permanently connected antenna.

Antenna Gain: 0 dBi
Antenna Type: Monopole Antenna
Connector Type: Fixed

1.4 Peripherals equipment

Peripherals	Brand	Model No.	Serial No.	Description of Data Cable
Battery 1.5V × 3	Panasonic	AA	N/A	N/A

2. Test specifications

2.1 Test standard

The EUT was performed according to the procedures in FCC Part 15 Subpart C Paragraph 15.249 for non-spread spectrum devices.

The test of radiated measurements according to FCC Part15 Section 15.33(a) had been conducted and the field strength of this frequency band were all meet limit requirement, thus we evaluate the EUT pass the specified test.

2.2 Operation mode

The EUT is supplied with DC 9 V from battery.

TX-MODE: Press EUT button to change different channel.

3. 20dB Bandwidth test

3.1 Operating environment

Temperature: 25 °C
Relative Humidity: 50 %
Atmospheric Pressure: 1008 hPa

3.2 Test setup & procedure

Step 1: The 20dB bandwidth was measured using a 50 ohm spectrum analyzer

Step 2: The span range for the SA display shall be between two times and five times the OBW.

Step 3: The nominal IF filter bandwidth (3 dB RBW) should be approximately 1 % to 5 % of the OBW, unless otherwise specified, depending on the applicable requirement.


Step 4: The test was performed at 3 channels (lowest, middle and highest channel). The maximum 20dB modulation bandwidth is in the following Table.

3.3 Measured data of modulated bandwidth test results

Mode	Frequency (MHz)	20dB Occupied Bandwidth (MHz)
RF	2438	0.0614
	2465	0.0612
	2475	0.0608

Please see the plot below.

Chain0 : 20dB Bandwidth @ Channel Low

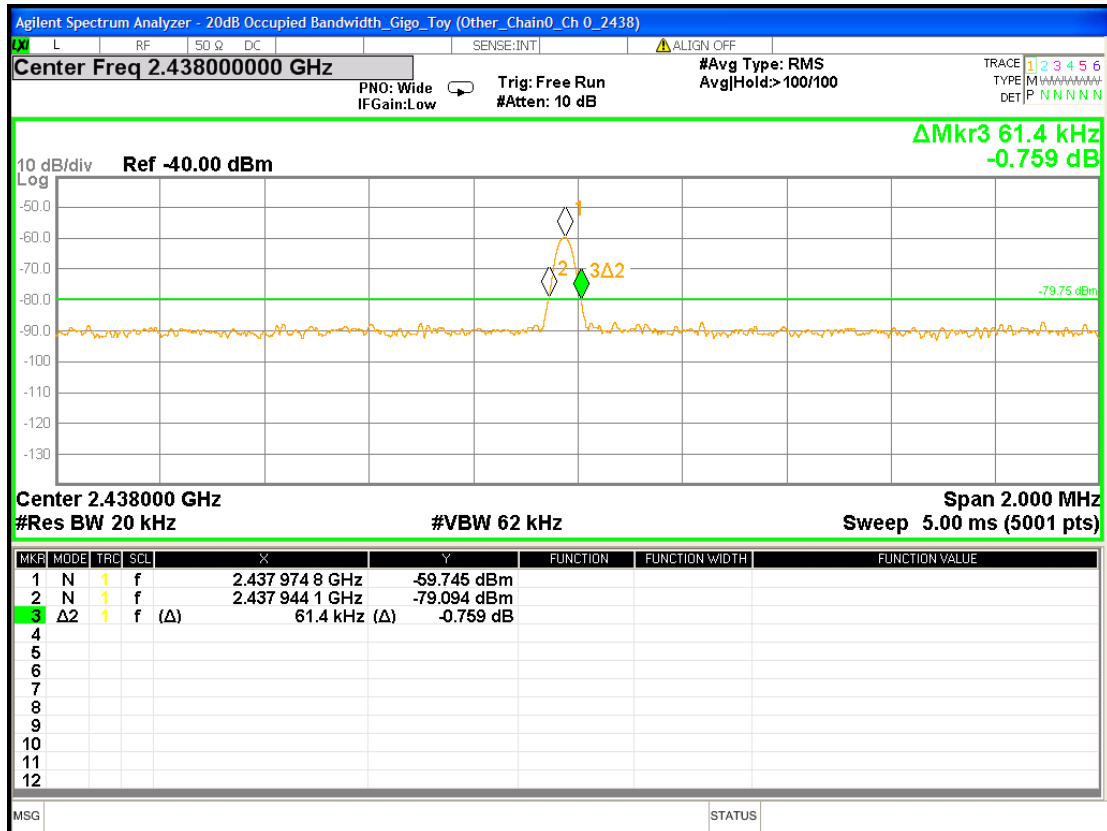

Chain0 : 20dB Bandwidth @ Channel Mid






4. Radiated emission test FCC 15.249 (C)

4.1 Operating environment


Temperature:	25	°C
Relative Humidity:	50	%
Atmospheric Pressure:	1008	hPa

4.2 Test setup & procedure


Radiated emission from 9kHz to 30MHz uses Loop Antenna:

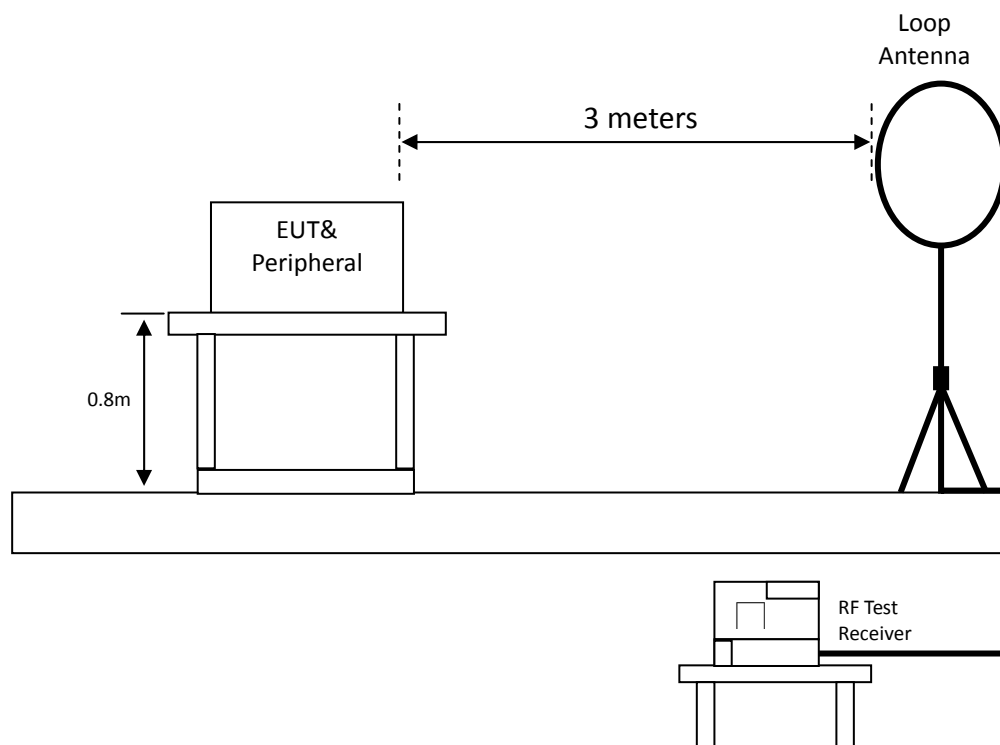

Radiated emission below 1GHz using Bilog Antenna

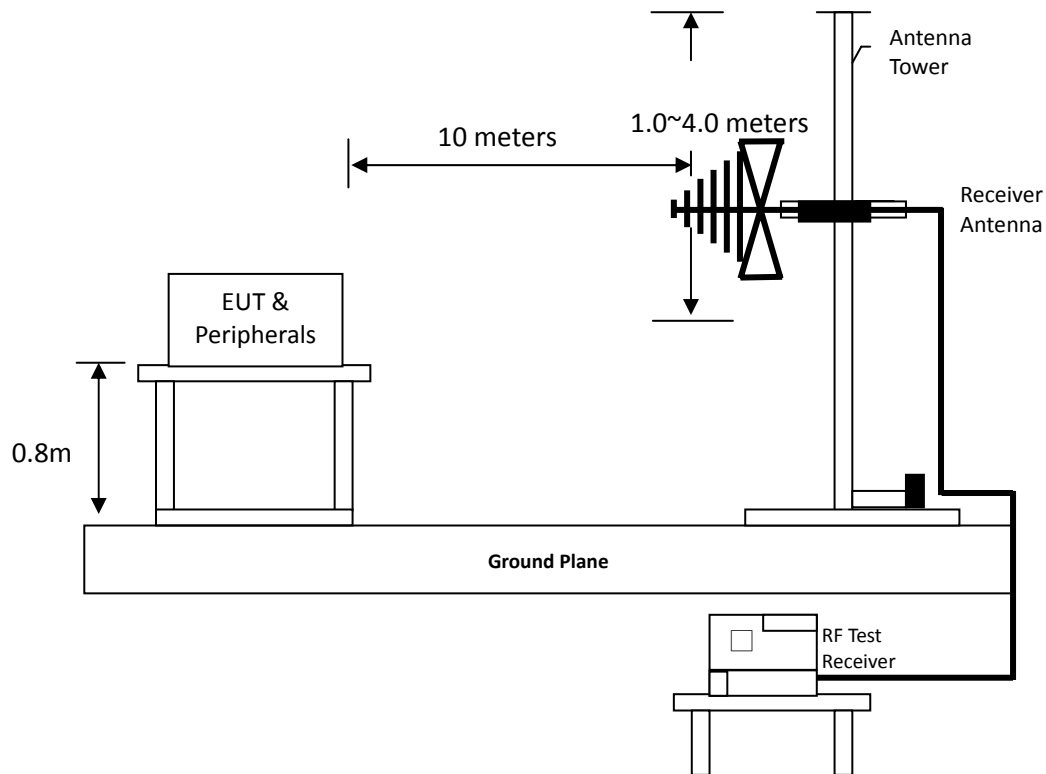

Radiated emission above 1GHz using Horn Antenna

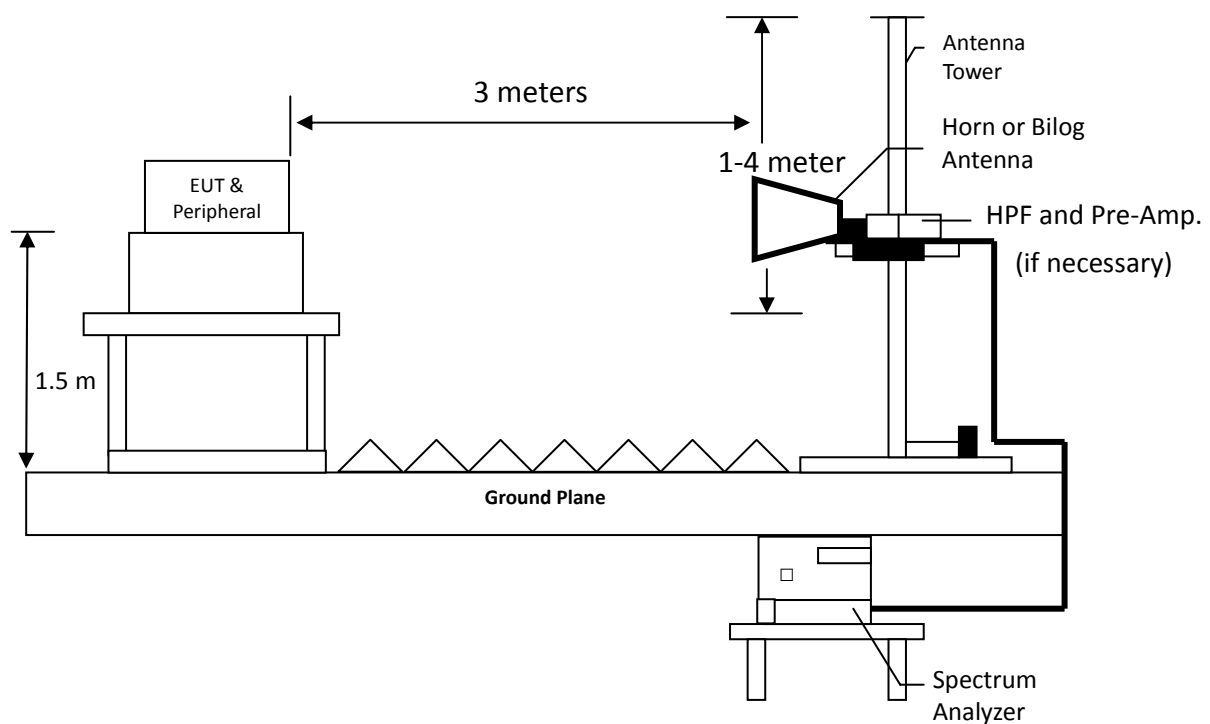

Radiated emissions were investigated cover the frequency range from 30MHz to 1000MHz using a receiver RBW of 120kHz record QP reading, and the frequency over 1GHz using a spectrum analyzer RBW of 1MHz and 10Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/ 3 MHz VBW) recorded also on the report.

The EUT for testing is arranged on a turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter.

The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

The EUT configuration please refers to the "Spurious set-up photo.pdf".

4.3 Emission limit

4.3.1 Fundamental and harmonics emission limits

Frequency (MHz)	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m@3m)	(dBuV/m@3m)	(uV/m@3m)	(dBuV/m@3m)
2400-2483.5	50	94	500	54

4.3.2 General radiated emission limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

Frequency MHz	15.209 Limits (dB μ V/m@3m)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

4.4 Radiated spurious emission test data

4.4.1 Measurement results: frequency range from 9 kHz to 30 MHz

Frequency (MHz)	Detector	Corr. Factor (dB/m)	Reading (dB μ V)	Calculated level (dB μ V/m)	Limit @ 3m (dB μ V/m)	Margin (dB)
0.02	PK	20.29	41.11	61.40	121.58	-60.18
0.03	PK	20.34	25.24	45.57	118.06	-72.49
0.05	PK	19.85	21.37	41.22	113.62	-72.40
0.06	PK	19.58	24.91	44.49	112.04	-67.55
0.10	QP	19.19	25.42	44.61	107.60	-62.99
0.13	PK	19.11	21.36	40.47	105.33	-64.86
0.15	PK	19.09	28.52	47.60	104.08	-56.48
0.45	PK	18.95	24.15	43.09	94.54	-51.45
0.69	QP	18.99	19.74	38.73	70.83	-32.10
1.16	QP	19.07	14.83	33.90	66.32	-32.42
1.70	QP	18.94	15.06	34.00	63.00	-29.00
2.12	QP	18.84	15.57	34.41	69.54	-35.13

4.4.2 Measurement results: frequencies equal to or less than 1 GHz

The test was performed on EUT under RF mode. The worst case occurred at RF mode at High channel

EUT: #7447-US

Worst case: 2475MHz

Antenna Polarized (V/H)	Freq. (MHz)	Receiver Detector	Corr. Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
V	144.46	QP	20.42	0.72	21.14	43.50	-22.36
V	173.56	QP	20.03	0.82	20.85	43.50	-22.65
V	416.06	QP	24.82	0.70	25.52	46.00	-20.48
V	493.66	QP	26.80	0.57	27.37	46.00	-18.63
V	606.18	QP	29.22	1.94	31.17	46.00	-14.83
V	728.40	QP	31.17	3.39	34.56	46.00	-11.44
H	95.96	QP	14.91	7.37	22.28	43.50	-21.22
H	127.00	QP	18.78	6.57	25.36	43.50	-18.14
H	167.74	QP	20.59	6.84	27.43	43.50	-16.07
H	173.56	QP	20.03	8.60	28.63	43.50	-14.87
H	187.14	QP	18.33	10.33	28.66	43.50	-14.84
H	192.96	QP	18.00	11.01	29.01	43.50	-14.49

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

4.4.3 Measurement results: frequency above 1GHz

EUT : #7447-US

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Corr. Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3m (dBμV/m)	Margin (dB)
Channel Low 2438MHz	4876	PK	V	6.02	34.04	40.06	74.00	-33.94
	4876	PK	H	6.02	33.63	39.65	74.00	-34.35
Channel Mid 2465MHz	4930	PK	V	6.23	32.91	39.14	74.00	-34.86
	4930	PK	H	6.23	34.25	40.48	74.00	-33.52
Channel High 2475MHz	4950	PK	V	6.30	33.33	39.63	74.00	-34.37
	4950	PK	H	6.30	32.88	39.19	74.00	-34.81

Remark:

1. Correction Factor = Antenna Factor + Cable Loss– Preamp. Gain
2. The frequency measured ranges from 1GHz to 25GHz.The data value listed above which is higher than the noise floor, the others please refer to noise floor level.

4.4.4 Measurement results: Fundamental and harmonics emission

EUT : #7447-US

Mode	Frequency (MHz)	Spectrum Analyzer	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Reading (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
Channel Low 2438MHz	2438	PK	V	35.07	13.63	48.70	114	-65.30
	2438	PK	H	35.07	12.46	47.53	114	-66.47
Channel Mid 2465MHz	2465	PK	V	35.08	14.88	49.96	114	-64.04
	2465	PK	H	35.08	13.24	48.32	114	-65.68
Channel High 2475MHz	2475	PK	V	35.09	16.16	51.25	114	-62.75
	2475	PK	H	35.09	13.19	48.28	114	-65.72

Remark:

1. Correction Factor = Antenna Factor + Cable Loss– Preamp. Gain
2. The frequency measured ranges from 1GHz to 25GHz.The data value listed above which is higher than the noise floor, the others please refer to noise floor level.

5. Radiated emission on the band edge FCC 15.249(d)

5.1 Operating environment

Temperature: 25 °C
Relative Humidity: 50 %
Atmospheric Pressure: 1008 hPa


5.2 Radiated emission on the band edge test data

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental (2438~2475MHz) or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
RF	2382.27	PK	V	35.37	10.14	45.51	74	-28.49	2310~2390
	2339.45	AV	V	35.44	-3.07	32.37	54	-21.63	
	2487.82	PK	V	35.22	11.57	46.79	74	-27.21	2483.5~2500
	2484.39	AV	V	35.22	-2.79	32.43	54	-21.57	


Remark: Correction Factor = Antenna Factor + Cable Loss

Chain0 : Bandedge @ mode Ch Low Peak

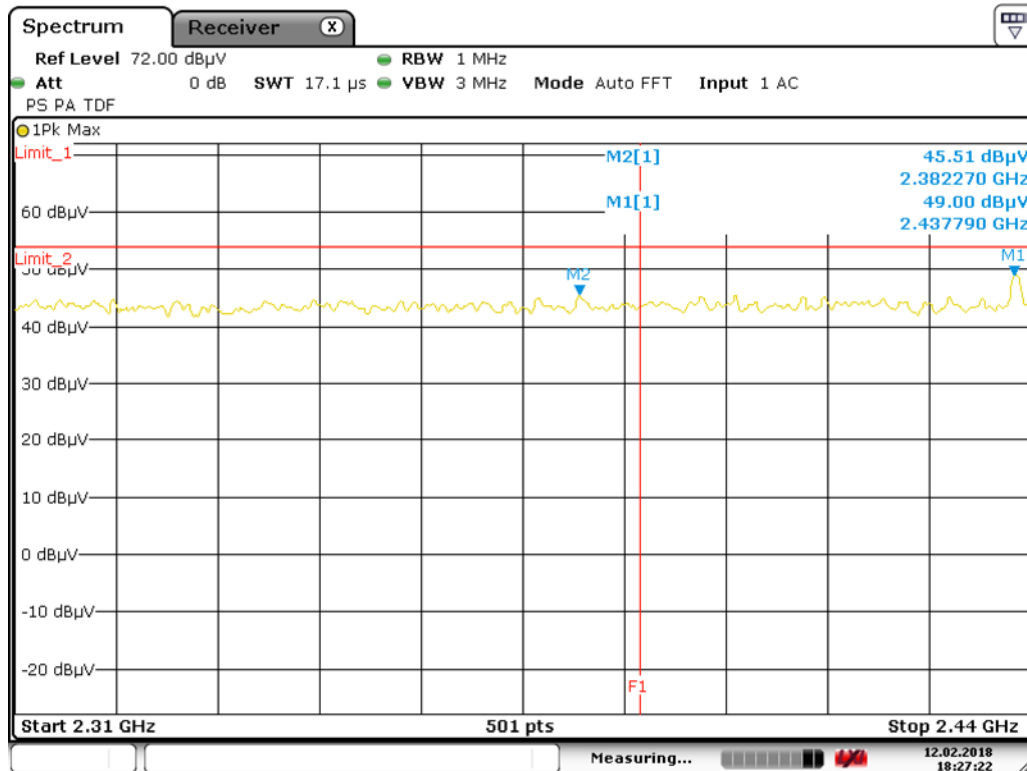


Date: 12.FEB.2018 18:27:21

Chain0 : Bandedge @ mode Ch Low Average

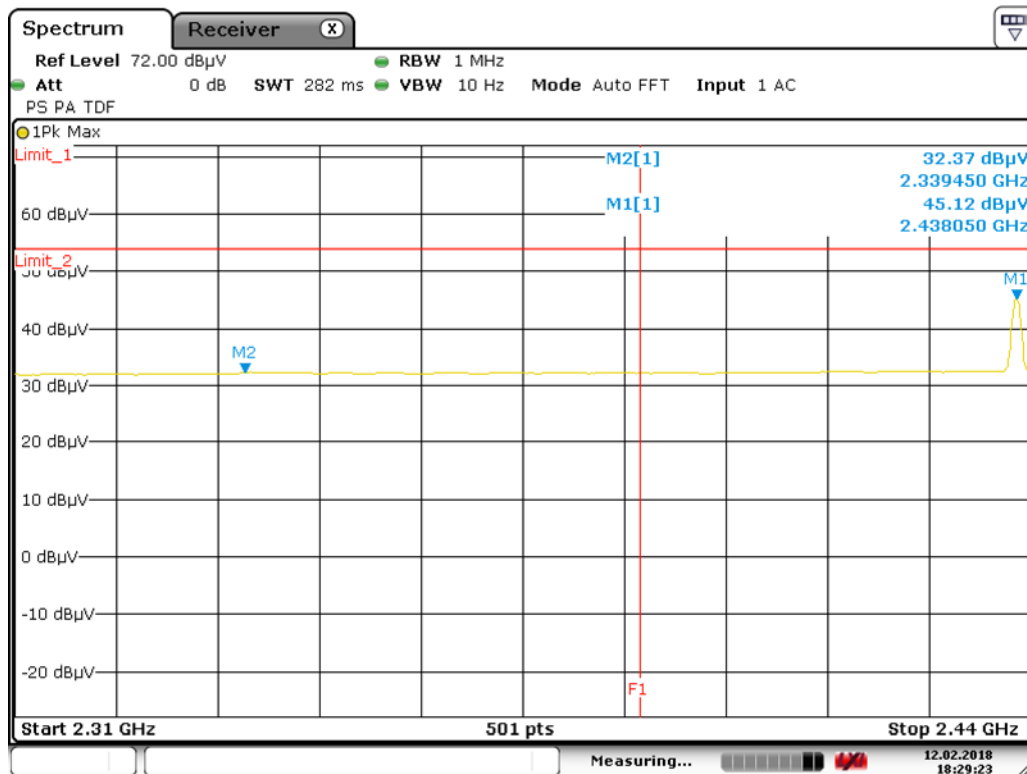


Date: 12.FEB.2018 18:29:23

Chain0 : Bandedge @ mode Ch High Peak

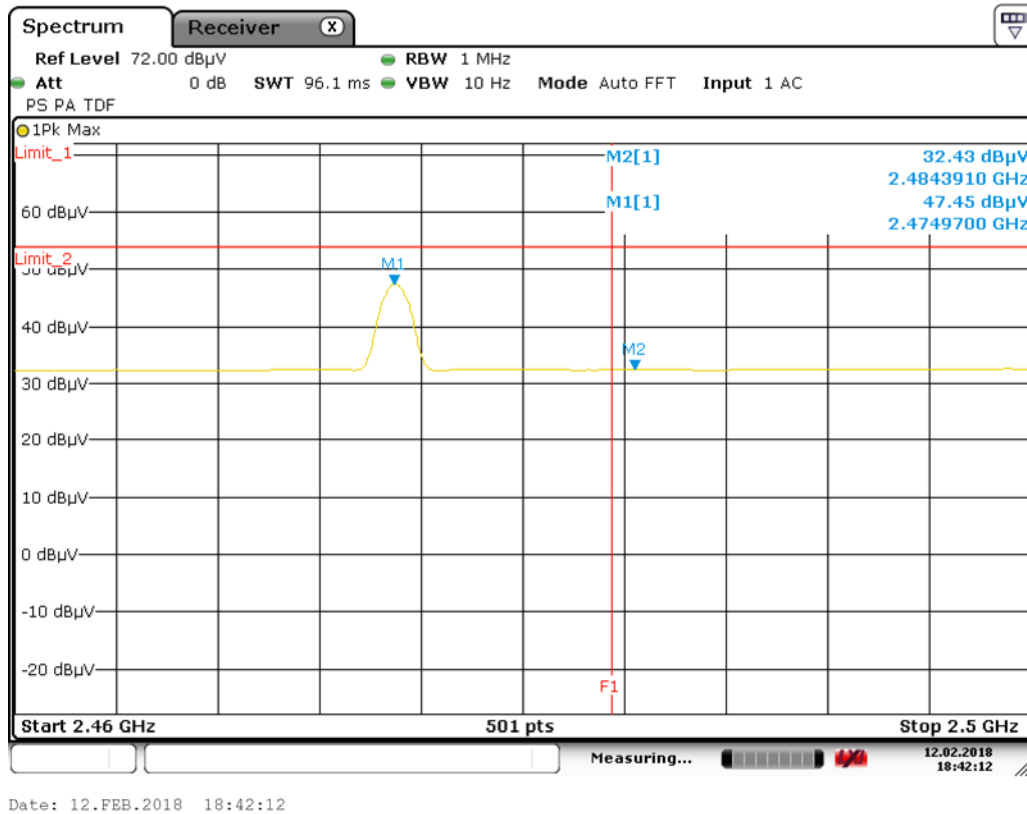

Chain0 : Bandedge @ mode Ch High Average

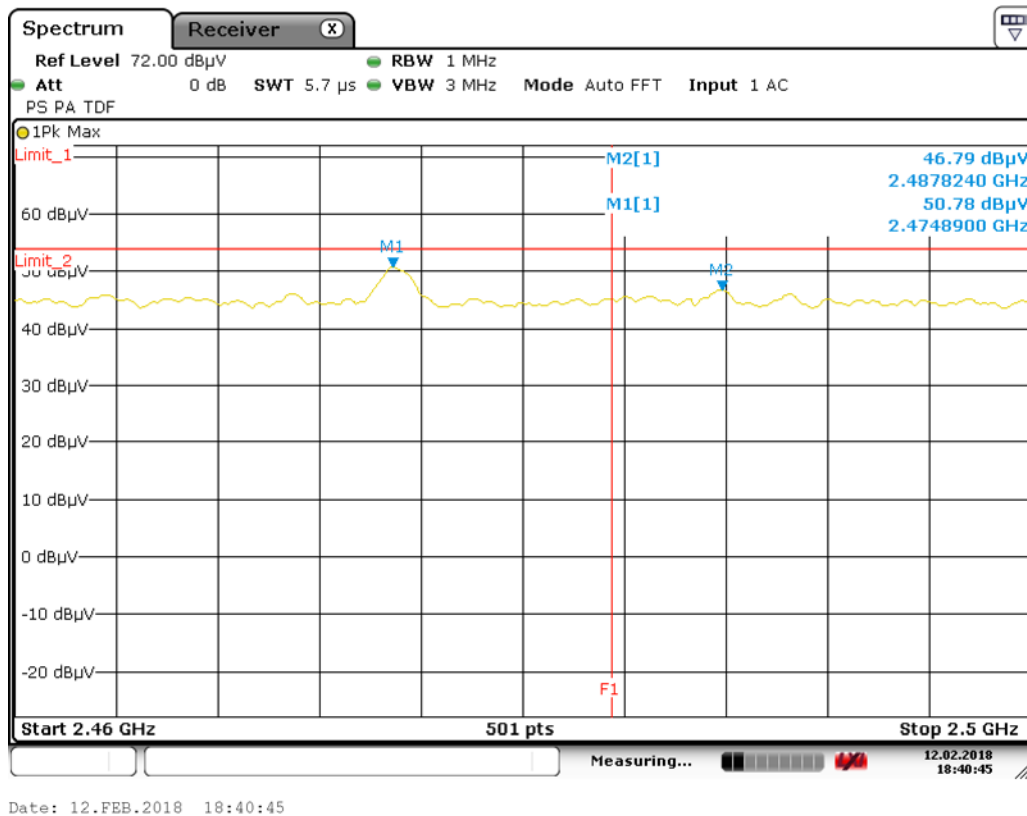

6. Conducted emission test FCC 15.207

Since the EUT is connected to DC source, therefore, the test can be waived.

Appendix A: Test equipment list

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
ESCI EMI Test Receiver	Rohde & Schwarz	ESCI	100018	2017/11/21	2018/11/20
Spectrum Analyzer	Rohde & Schwarz	FSP30	100245	2018/02/23	2019/02/22
Horn Antenna (1-18G)	SHWARZBECK	BBHA 9120 D	9120D-456	2018/01/23	2019/01/22
Horn Antenna (14-42G)	SHWARZBECK	BBHA 9170	BBHA9170159	2017/09/04	2020/09/02
Broadband Antenna	SHWARZBECK	VULB 9168	9168-172	2017/04/05	2018/04/04
Pre-Amplifier	EMC Co.	EMC12635SE	980205	2017/11/28	2018/11/27
Pre-Amplifier	MITEQ	JS4-26004000--27-8A	828825	2017/08/23	2018/08/22
Power Meter	Anritsu	ML2495A	0844001	2017/10/18	2018/10/17
Power Sensor	Anritsu	MA2411B	0738452	2017/05/23	2018/05/22
Signal Analyzer	Agilent	N9030A	MY51380492	2017/08/29	2018/08/28
966-2(A) Cable 9kHz~26.5GHz	SUHNER	SMA / EX 100	N/A	2017/08/15	2018/08/14
966-2(B) Cable 9kHz~26.5GHz	SUHNER	SUCOFLEX 104P	CB0005	2017/08/15	2018/08/14
RF Cable 9kHz~26.5GHz	SUHNER	SUCOFLEX 102	CB0006	2017/05/04	2018/05/03
966-2_3m Semi-Anechoic Chamber	966_2	CEM-966_2	N/A	2017/03/29	2018/03/28
High Pass Filter	Wainwright	WHKX3.0/18G-12SS	N/A	2017/06/02	2018/06/01
Active Loop Antenna	SCHWARZBECK MESS-ELEKTRONIC	FMZB1519	1519-067	2017/03/30	2018/03/29

Note: No Calibration Required (NCR).

Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.14 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	5.22 dB
Vertically polarized Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	3.64 dB
Horizontally polarized Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	3.64 dB
Vertically polarized Radiated disturbances from 18GHz~40GHz in a semi-anechoic chamber at a distance of 3m	2.68 dB
Horizontally polarized Radiated disturbances from 18GHz~40GHz in a semi-anechoic chamber at a distance of 3m	2.68 dB
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	3.54 dB
Emission on the Band Edge Test	3.64 dB
20dB Bandwidth	1.22 dB
AC Power Line Conducted Emission	2.48 dB