



Test Report No.: RF2309WDG0001



# TEST REPORT



Applicant	Guangzhou Bresser Optical Instruments Co., Ltd.
Address	No.12 Kangda RD., Dong Cheng Zone, Yunpu Industrial District, Huangpu, Guangzhou, China. (510760)

Manufacturer or Supplier	Guangzhou Jinghua Precision Optics Co., LTD.
Address	No.12 Kangda RD., Dong Cheng Zone, Yunpu Industrial District, Huangpu, Guangzhou, China. (510760)
Product	35mm Thermal Monocular
Additional Product	54mm Thermal Monocular, 25mm Thermal Monocular; see item 3.1
Brand Name	ALPEN
Model	ATM35
Additional Model & Model Difference	ATM54, ATM25; see item 3.1
Date of tests	Dec. 26, 2023 ~ Mar. 11, 2024

The tests have been carried out according to the requirements of the following standard:

**FCC Part 15, Subpart C, Section 15.247**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Lucas Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	  Date: Mar. 22, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD</b> .....	<b>4</b>
<b>1 SUMMARY OF TEST RESULTS</b> .....	<b>5</b>
<b>2 MEASUREMENT UNCERTAINTY</b> .....	<b>5</b>
<b>3 GENERAL INFORMATION</b> .....	<b>6</b>
3.1 GENERAL DESCRIPTION OF EUT.....	6
3.2 DESCRIPTION OF TEST MODES.....	8
3.2.1 CONFIGURATION OF SYSTEM UNDER TEST .....	8
3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
3.4 DESCRIPTION OF SUPPORT UNITS.....	10
<b>4 TEST TYPES AND RESULTS</b> .....	<b>13</b>
4.1. CONDUCTED EMISSION MEASUREMENT .....	13
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	13
4.1.2 TEST INSTRUMENTS.....	13
4.1.3 TEST PROCEDURES .....	14
4.1.4 DEVIATION FROM TEST STANDARD .....	14
4.1.5 TEST SETUP.....	15
4.1.6 EUT OPERATING CONDITIONS.....	15
4.1.7 TEST RESULTS .....	16
4.2. RADIATED EMISSION MEASUREMENT .....	18
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT .....	18
4.2.2 TEST INSTRUMENTS.....	19
4.2.3 TEST PROCEDURES .....	20
4.2.4 DEVIATION FROM TEST STANDARD .....	21
4.2.5 TEST SETUP.....	21
4.2.6 EUT OPERATING CONDITIONS.....	22
4.2.7 TEST RESULTS .....	23
4.3 6DB BANDWIDTH MEASUREMENT.....	34
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT .....	34
4.3.2 TEST INSTRUMENTS.....	34
4.3.3 TEST PROCEDURE.....	34
4.3.4 DEVIATION FROM TEST STANDARD .....	35
4.3.5 TEST SETUP.....	35
4.3.6 EUT OPERATING CONDITIONS.....	35
4.3.7 TEST RESULTS .....	36



**Test Report No.: RF2309WDG0001**

4.4	CONDUCTED OUTPUT POWER .....	40
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	40
4.4.2	TEST SETUP .....	40
4.4.3	TEST INSTRUMENTS.....	40
4.4.4	TEST PROCEDURES .....	41
4.4.5	DEVIATION FROM TEST STANDARD .....	41
4.4.6	EUT OPERATING CONDITIONS .....	41
4.4.7	TEST RESULTS .....	42
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	44
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	44
4.5.2	TEST SETUP .....	44
4.5.3	TEST INSTRUMENTS.....	44
4.5.4	TEST PROCEDURE.....	44
4.5.5	DEVIATION FROM TEST STANDARD .....	44
4.5.6	EUT OPERATING CONDITION .....	45
4.5.7	TEST RESULTS .....	45
4.6	OUT OF BAND EMISSION MEASUREMENT .....	47
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT.....	47
4.6.2	TEST SETUP .....	47
4.6.3	TEST INSTRUMENTS.....	47
4.6.4	TEST PROCEDURE.....	47
4.6.5	DEVIATION FROM TEST STANDARD .....	48
4.6.6	EUT OPERATING CONDITION .....	48
4.6.7	TEST RESULTS .....	49
<b>5</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>54</b>
<b>6</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>55</b>



Test Report No.: RF2309WDG0001

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2309WDG0001	Original release	Mar. 22, 2024

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex not a standard connector.

## 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	3.36dB
Radiated emissions	9KHz ~ 30MHz	2.80dB
	30MHz ~ 1GMHz	4.65dB
	1GHz ~ 18GHz	5.01dB
	18GHz ~ 40GHz	4.10dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	35mm Thermal Monocular
<b>ADDITIONAL PRODUCT</b>	54mm Thermal Monocular, 25mm Thermal Monocular
<b>BRAND</b>	ALPEN
<b>MODEL NO.</b>	ATM35
<b>ADDITIONAL NO.</b>	ATM54, ATM25
<b>FCC ID</b>	2AE3N-BR90D
<b>NOMINAL VOLTAGE</b>	DC 3.6V from Battery or DC 5V from Adapter (USB-A to Type-C); Battery Charger: DC 5V from Adapter (USB-A to Micro USB)
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>OPERATING FREQUENCY</b>	2412-2462MHz for 11b/g/n(HT20)
<b>PEAK OUTPUT POWER</b>	31.046 mW (Maximum)
<b>ANTENNA TYPE</b>	FPC Antenna, with 3.28dBi gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	USB-A to Type-C: Shielded, Detachable, 80cm, with two cores; USB-A to Micro USB: Unshielded, Detachable, 80cm

**NOTES:**

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.
2. Please refer to the EUT photo document (Reference No.: 2309WDG0001-1) for detailed product photo.
3. Additional models ATM54, ATM25 are identical with the test model ATM35 except product name, model number and external dimension for trading purpose.
4. The product name corresponding to the model, as below:

PRODUCT	MODEL NO.
35mm Thermal Monocular	ATM35
54mm Thermal Monocular	ATM54
25mm Thermal Monocular	ATM25

5. The EUT provides completed transmitters and receivers:

MODULATION MODE	FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (HT20)	1TX/1RX



Test Report No.: RF2309WDG0001

6. The EUT was powered by the following adapter:

<b>ADAPTER</b>	
<b>BRAND:</b>	OPPO
<b>MODEL:</b>	AK733CY
<b>INPUT:</b>	AC 100-240V, 50/60Hz 0.3A
<b>OUTPUT:</b>	DC 5V, 2A

### 3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

#### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

#### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, power supply voltage range and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				Description
	RE<1G	RE≥1G	PLC	APCM	
<b>A</b>	√	√	√	-	DC 5V from adapter input AC 120V 60Hz
<b>B</b>	-	-	-	√	DC 3.6V from Battery

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

#### POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
A	WIFI (2.4G) Link





**RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1	DSSS	DBPSK	1.0

For the test results, only the worst case was shown in test report.

**RADIATED EMISSION TEST (ABOVE 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
A	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
B	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	25deg. C, 53%RH	DC 5V from adapter input AC 120V 60Hz	Stalker
RE≥1G	25deg. C, 53%RH		Stalker
PLC	25deg. C, 58%RH		Summer
APCM	25deg. C, 60%RH	DC 3.6V from Battery	Vincent



### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.247**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	Remark
1	iPhone X	Apple	MQA52CH/A	N/A	Provide by Lab.

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

Remark: The iPhone is the remote unit, so the test photos don't show it


### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

#### For Conducted Emission Test

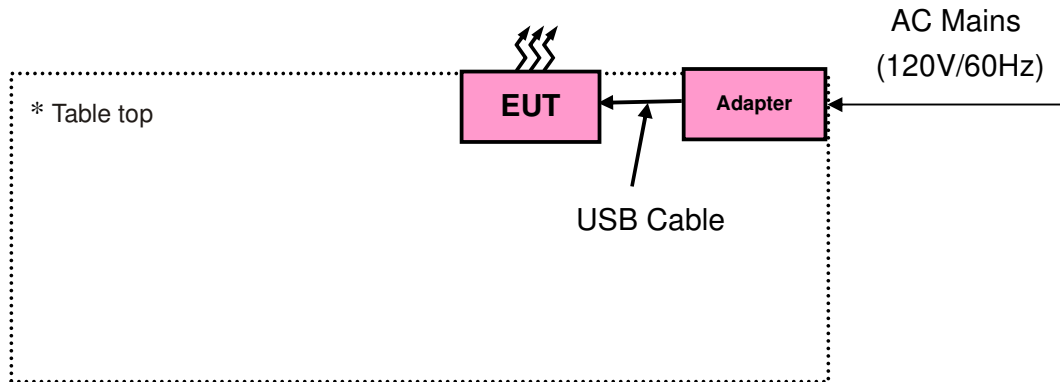

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### For Radiated Emission Test

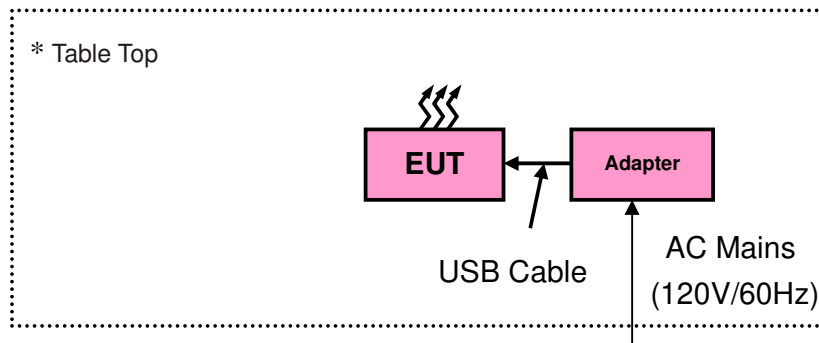


**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).



### 3.6 DUTY CYCLE OF TESET SIGNAL

Test Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty factor (dB)	1/T Min. VBW (KHz)	VBW Setting
802.11b	12.410	12.505	99.2	0.03	-	10Hz
802.11g	2.064	2.126	97.1	0.13	0.48	500Hz
802.11n (HT20)	0.228	0.345	66.1	1.80	4.39	5KHz

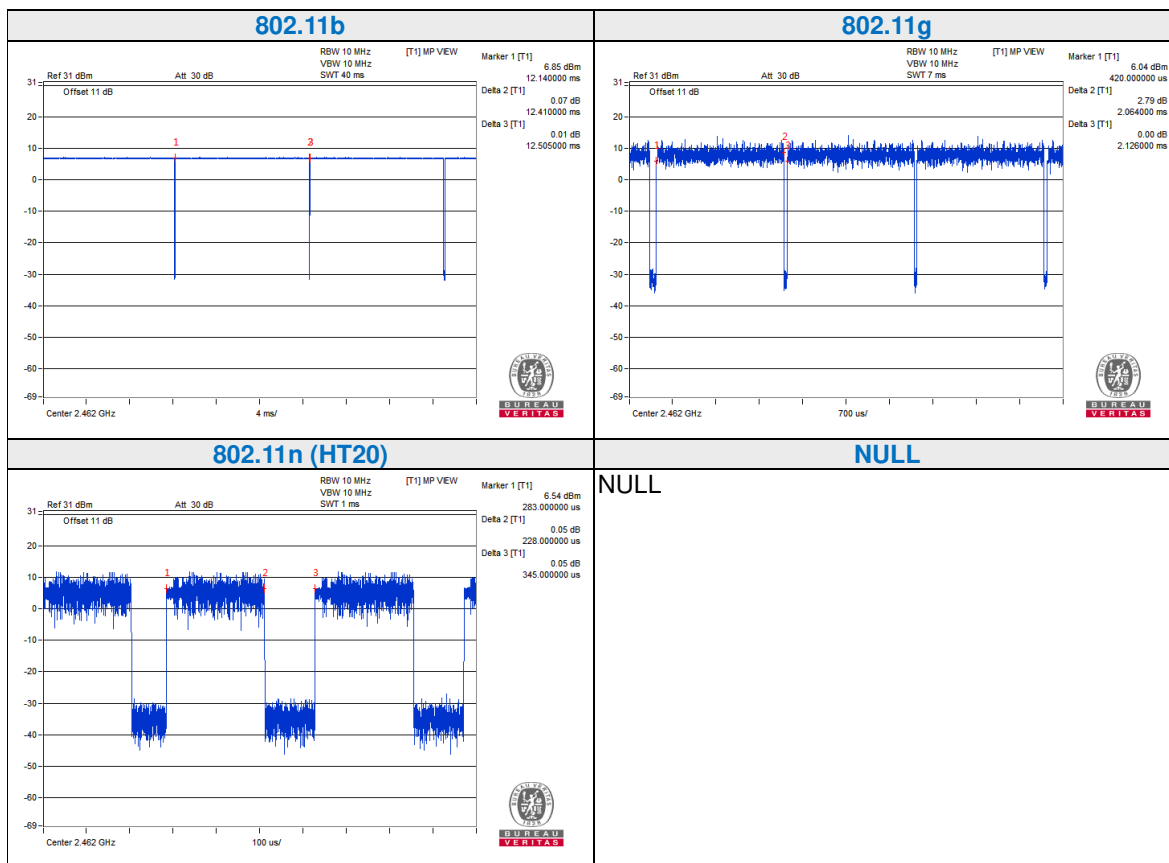

## 4 TEST TYPES AND RESULTS

### 4.1. CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTES:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Jan. 02, 25
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Jan. 11, 25
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Jan. 02, 25
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jul. 16, 24
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A

- NOTES:**
1. The test was performed in shielded room 553.
  2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation.
  3. Test Lab: No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China.



#### 4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.1.5 TEST SETUP

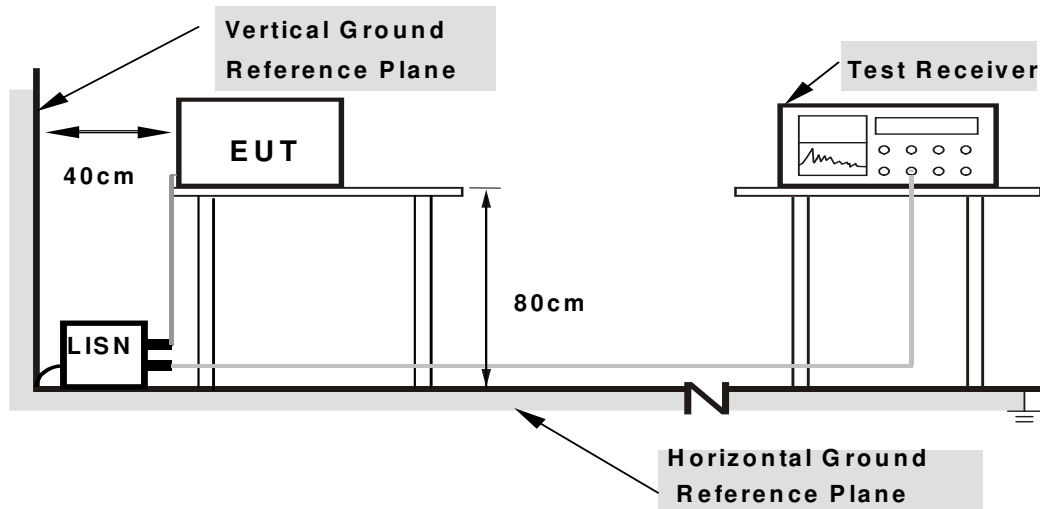

- Note: 1.Support units were connected to second LISN.**  
**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.


### 4.1.7 TEST RESULTS

**CONDUCTED WORST-CASE DATA: WIFI Link**

<b>PHASE</b>	Line	<b>6dB BANDWIDTH</b>	9kHz
--------------	------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15509	9.64	39.80	14.35	49.44	23.99	65.72	55.72	-16.28	-31.73
2	0.17925	9.69	36.67	12.11	46.36	21.80	64.52	54.52	-18.16	-32.72
3	0.22200	9.74	32.00	10.09	41.74	19.83	62.74	52.74	-21.00	-32.91
4	0.27144	9.76	28.00	11.56	37.76	21.32	61.07	51.07	-23.31	-29.75
5	0.35475	9.76	22.82	16.04	32.58	25.80	58.85	48.85	-26.27	-23.05
6	0.40229	9.78	25.94	22.89	35.72	32.67	57.81	47.81	-22.09	-15.14

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

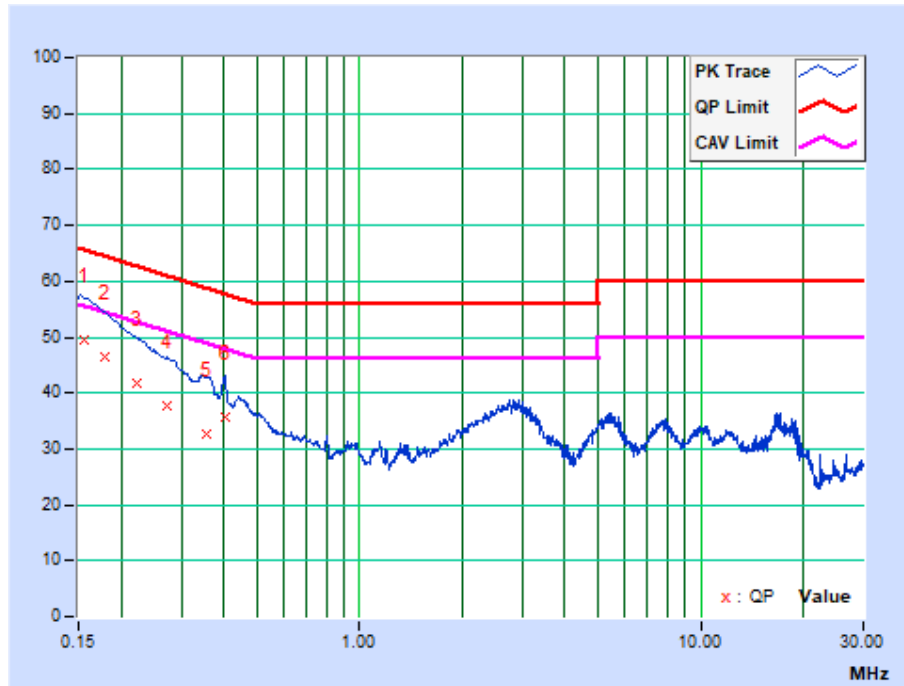




<b>PHASE</b>	Neutral	<b>6dB BANDWIDTH</b>	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16800	9.42	32.29	16.39	41.71	25.81	65.06	55.06	-23.35	-29.25
2	0.22200	9.39	27.03	12.44	36.42	21.83	62.74	52.74	-26.32	-30.91
3	0.34791	9.39	20.25	12.95	29.64	22.34	59.01	49.01	-29.37	-26.67
4	0.46516	9.42	24.27	16.60	33.69	26.02	56.60	46.60	-22.91	-20.58
5	0.65392	9.43	20.89	14.67	30.32	24.10	56.00	46.00	-25.68	-21.90
6	1.09139	9.47	21.71	11.91	31.18	21.38	56.00	46.00	-24.82	-24.62

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

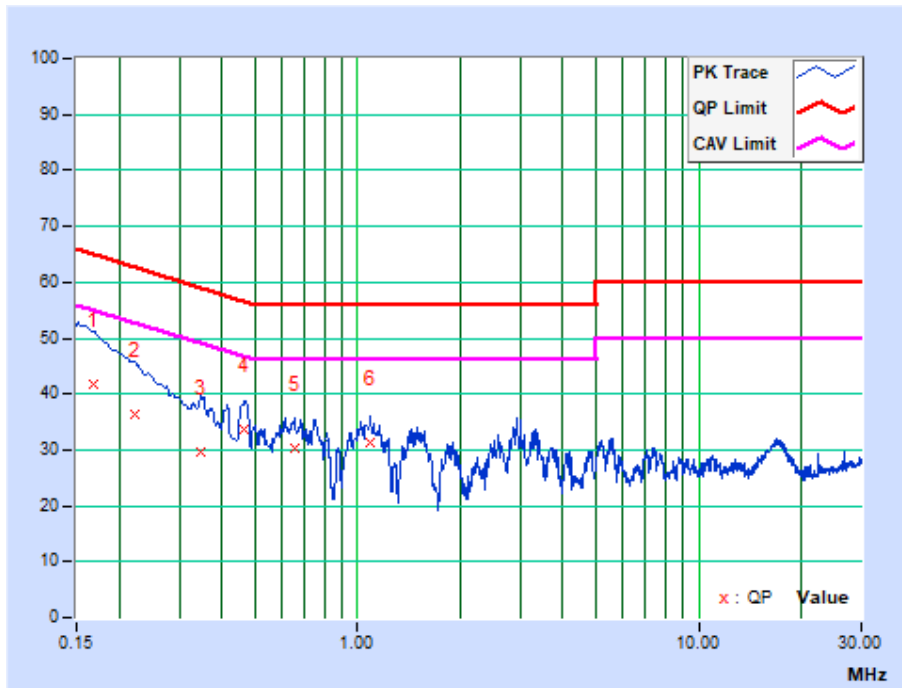



## 4.2. RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### NOTES:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Jan. 02, 25
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Apr. 05, 24
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May. 09, 24
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Mar. 06, 24
Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-554	Jan. 08, 25
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Apr. 01, 24
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Apr. 01, 24
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	May. 20, 24
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Apr. 24, 24
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Jan. 02, 25
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A

NOTES:

1. The test was performed in 966 Chamber.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation.
3. Test Lab: No. 96, Guantai Road (Houjie Section), Houjie Town, Dongguan City, Guangdong Province. 523942. People's Republic of China.
4. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
5. The FCC Site Registration No. is 749762.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1.3m above the ground.
- g. During the test, each emission was maximized by having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### NOTES:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated, and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.




#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

#### 4.2.5 TEST SETUP

##### Below 30MHz test setup

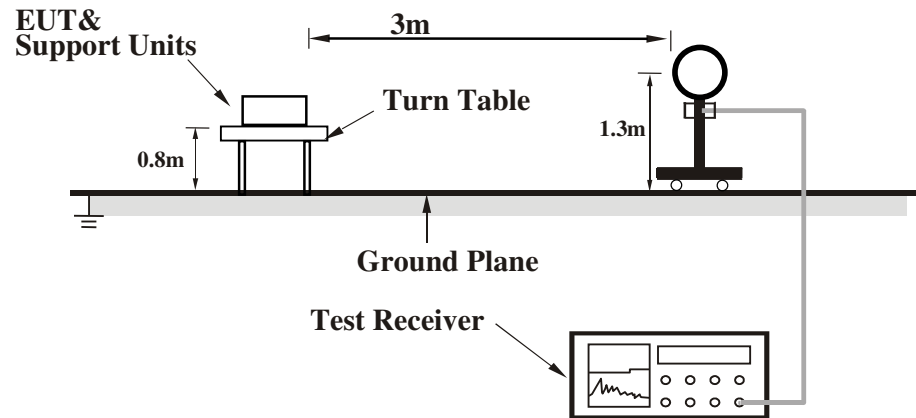


##### Below 1GHz test setup

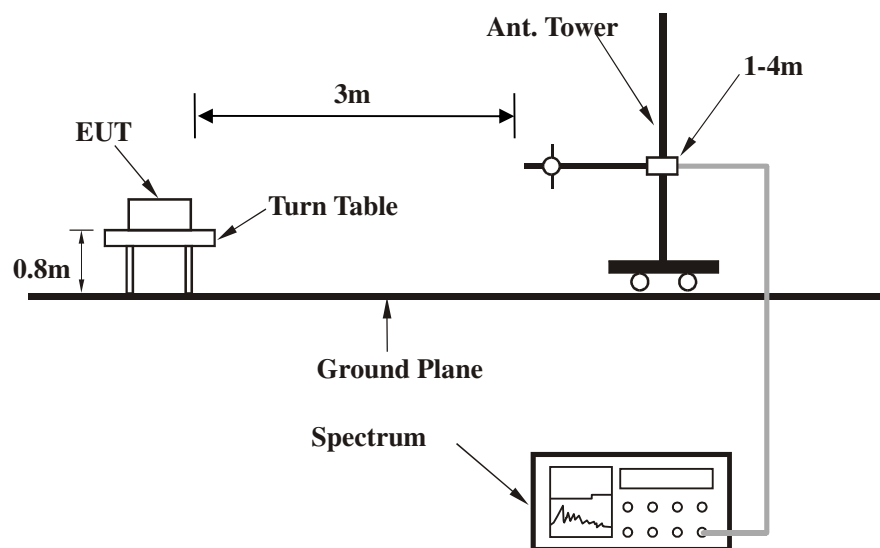

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

## Above 1GHz test setup

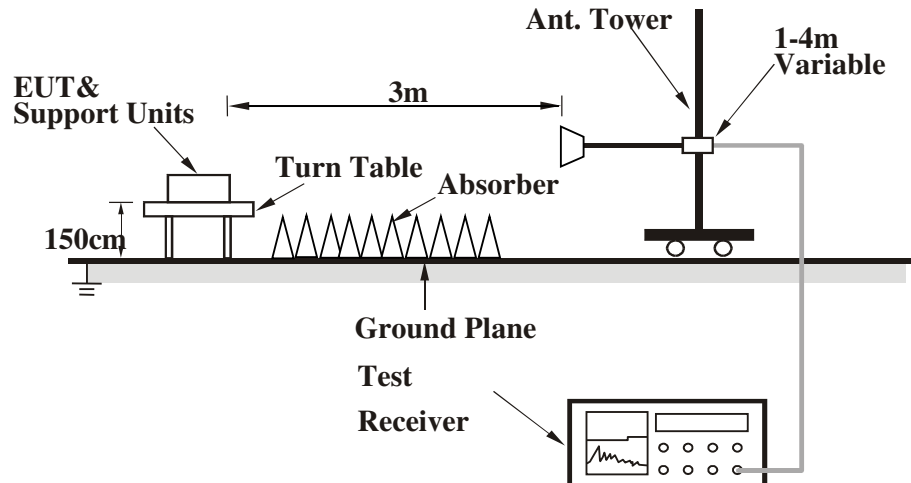

**Note:** For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 4.2.6 EUT OPERATING CONDITIONS

- Placed the EUT on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.

### 4.2.7 TEST RESULTS

**BELOW 1GHz WORST-CASE DATA:**


**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	149.70	22.14 QP	43.50	-21.36	2.00 H	219	39.04	-16.90
2	350.22	29.58 QP	46.00	-16.42	1.97 H	237	44.29	-14.71
3	459.04	34.16 QP	46.00	-11.84	1.87 H	252	45.50	-11.34
4	594.28	38.18 QP	46.00	-7.82	1.75 H	267	46.94	-8.76
<b>5</b>	<b>701.54</b>	<b>39.13 QP</b>	<b>46.00</b>	<b>-6.87</b>	<b>1.64 H</b>	<b>282</b>	<b>45.97</b>	<b>-6.84</b>
6	810.35	36.40 QP	46.00	-9.60	2.00 H	197	41.41	-5.01

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

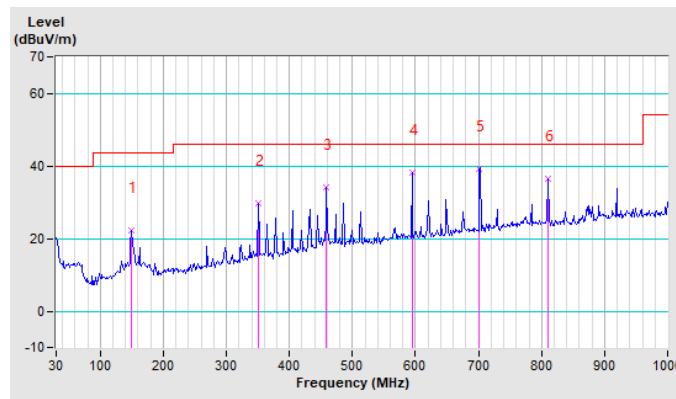




Test Report No.: RF2309WDG0001

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.11	20.02 QP	40.00	-19.98	1.00 V	272	39.24	-19.22
2	459.04	33.23 QP	46.00	-12.77	1.00 V	226	44.57	-11.34
3	485.46	32.21 QP	46.00	-13.79	1.00 V	240	43.10	-10.89
4	513.45	30.99 QP	46.00	-15.01	1.00 V	254	41.44	-10.45
5	594.28	35.63 QP	46.00	-10.37	1.00 V	211	44.39	-8.76
6	701.54	34.82 QP	46.00	-11.18	1.00 V	196	41.66	-6.84

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

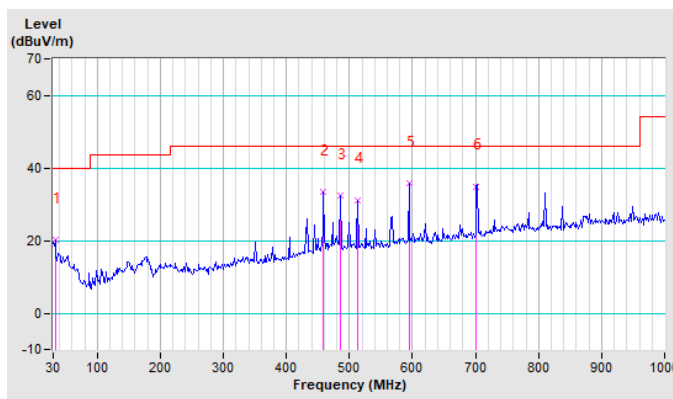





ABOVE 1GHz DATA

802.11b

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1458.00	47.03 PK	74.00	-26.97	1.00 H	48	46.78	0.25
2	1458.00	41.76 AV	54.00	-12.24	1.00 H	48	41.51	0.25
3	2390.00	47.18 PK	74.00	-26.82	1.00 H	304	44.19	2.99
4	2390.00	35.42 AV	54.00	-18.58	1.00 H	304	32.43	2.99
5	*2412.00	99.39 PK			2.99 H	304	96.35	3.04
6	*2412.00	90.87 AV			2.99 H	304	87.83	3.04
7	4824.00	48.49 PK	74.00	-25.51	1.00 H	32	40.62	7.87
8	4824.00	36.65 AV	54.00	-17.35	1.00 H	32	28.78	7.87
9	#7236.00	50.60 PK	74.00	-23.40	1.00 H	35	40.16	10.44
10	#7236.00	38.97 AV	54.00	-15.03	1.00 H	35	28.53	10.44

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.04 PK	74.00	-27.96	1.52 V	19	43.05	2.99
2	2390.00	34.80 AV	54.00	-19.20	1.52 V	19	31.81	2.99
3	*2412.00	97.47 PK			1.51 V	192	94.43	3.04
4	*2412.00	88.71 AV			1.51 V	192	85.67	3.04
5	4824.00	51.23 PK	74.00	-22.77	1.00 V	21	43.36	7.87
6	4824.00	38.97 AV	54.00	-15.03	1.00 V	21	31.10	7.87
7	#7236.00	50.88 PK	74.00	-23.12	1.35 V	54	40.44	10.44
8	#7236.00	40.35 AV	54.00	-13.65	1.35 V	54	29.91	10.44

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



Test Report No.: RF2309WDG0001

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	100.30 PK			1.00 H	32	97.21	3.09
2	*2437.00	90.30 AV			1.00 H	32	87.21	3.09
3	4874.00	51.20 PK	74.00	-22.80	1.03 H	55	43.21	7.99
4	4874.00	38.90 AV	54.00	-15.10	1.03 H	55	30.91	7.99
5	7311.00	51.30 PK	74.00	-22.70	1.06 H	6	40.61	10.69
6	7311.00	40.38 AV	54.00	-13.62	1.06 H	6	29.69	10.69

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	97.30 PK			1.35 V	44	94.21	3.09
2	*2437.00	89.35 AV			1.35 V	44	86.26	3.09
3	4874.00	49.25 PK	74.00	-24.75	2.01 V	165	41.26	7.99
4	4874.00	37.50 AV	54.00	-16.50	2.01 V	165	29.51	7.99
5	7311.00	51.30 PK	74.00	-22.70	1.02 V	55	40.61	10.69
6	7311.00	40.28 AV	54.00	-13.72	1.02 V	55	29.59	10.69

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.



Test Report No.: RF2309WDG0001

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1458.00	49.26 PK	74.00	-24.74	1.00 H	32	49.01	0.25
2	1458.00	41.76 AV	54.00	-12.24	1.00 H	32	41.51	0.25
3	*2462.00	99.21 PK			1.00 H	123	96.07	3.14
4	*2462.00	90.27 AV			1.00 H	123	87.13	3.14
5	2483.50	45.72 PK	74.00	-28.28	1.00 H	123	42.55	3.17
6	2483.50	34.77 AV	54.00	-19.23	1.00 H	123	31.60	3.17
7	4924.00	51.30 PK	74.00	-22.70	1.03 H	55	43.18	8.12
8	4924.00	40.20 AV	54.00	-13.80	1.03 H	55	32.08	8.12
9	7386.00	52.10 PK	74.00	-21.90	1.05 H	44	41.15	10.95
10	7386.00	39.58 AV	54.00	-14.42	1.05 H	44	28.63	10.95

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	95.72 PK			2.95 V	57	92.55	3.17
2	*2462.00	85.36 AV			2.95 V	57	82.19	3.17
3	2483.50	45.74 PK	74.00	-28.26	2.95 V	57	42.57	3.17
4	2483.50	34.20 AV	54.00	-19.80	2.95 V	57	31.03	3.17
5	4960.00	51.32 PK	74.00	-22.68	1.65 V	5	43.11	8.21
6	4960.00	39.20 AV	54.00	-14.80	1.65 V	5	30.99	8.21
7	7440.00	51.35 PK	74.00	-22.65	1.05 V	55	40.22	11.13
8	7440.00	40.32 AV	54.00	-13.68	1.05 V	55	29.19	11.13

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. "\*" : Fundamental frequency.



802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.35 PK	74.00	-27.65	1.00 H	5	43.36	2.99
2	2390.00	34.90 AV	54.00	-19.10	1.00 H	5	31.91	2.99
3	*2412.00	99.40 PK			3.00 H	295	96.36	3.04
4	*2412.00	90.35 AV			3.00 H	295	87.31	3.04
5	4824.00	49.50 PK	74.00	-24.50	1.04 H	44	41.63	7.87
6	4824.00	38.80 AV	54.00	-15.20	1.04 H	44	30.93	7.87
7	#7236.00	50.80 PK	74.00	-23.20	1.01 H	301	40.36	10.44
8	#7236.00	41.20 AV	54.00	-12.80	1.01 H	301	30.76	10.44

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.07 PK	74.00	-28.93	1.75 V	315	42.08	2.99
2	2390.00	34.06 AV	54.00	-19.94	1.75 V	315	31.07	2.99
3	*2412.00	94.22 PK			1.75 V	315	91.18	3.04
4	*2412.00	80.44 AV			1.75 V	315	77.40	3.04
5	4824.00	50.07 PK	74.00	-23.93	1.40 V	11	42.20	7.87
6	4824.00	39.80 AV	54.00	-14.20	1.40 V	11	31.93	7.87
7	#7236.00	51.35 PK	74.00	-22.65	1.03 V	5	40.91	10.44
8	#7236.00	40.10 AV	54.00	-13.90	1.03 V	5	29.66	10.44

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



Test Report No.: RF2309WDG0001

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.74 PK			1.00 H	32	96.65	3.09
2	*2437.00	89.26 AV			1.00 H	32	86.17	3.09
3	4874.00	51.25 PK	74.00	-22.75	4.00 H	5	43.26	7.99
4	4874.00	40.30 AV	54.00	-13.70	4.00 H	5	32.31	7.99
5	7311.00	51.35 PK	74.00	-22.65	1.04 H	44	40.66	10.69
6	7311.00	40.21 AV	54.00	-13.79	1.04 H	44	29.52	10.69
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	94.68 PK			1.04 V	4	91.59	3.09
2	*2437.00	82.10 AV			1.04 V	4	79.01	3.09
3	4874.00	48.90 PK	74.00	-25.10	1.00 V	21	40.91	7.99
4	4874.00	38.00 AV	54.00	-16.00	1.00 V	21	30.01	7.99
5	7311.00	51.20 PK	74.00	-22.80	1.00 V	21	40.51	10.69
6	7311.00	40.80 AV	54.00	-13.20	1.00 V	21	30.11	10.69

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.



Test Report No.: RF2309WDG0001

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	98.79 PK			1.00 H	21	95.65	3.14
2	*2462.00	89.32 AV			1.00 H	21	86.18	3.14
3	2483.50	51.20 PK	74.00	-22.80	1.04 H	4	48.03	3.17
4	2483.50	40.30 AV	54.00	-13.70	1.04 H	4	37.13	3.17
5	4924.00	51.30 PK	74.00	-22.70	1.02 H	11	43.18	8.12
6	4924.00	40.20 AV	54.00	-13.80	1.02 H	11	32.08	8.12
7	7386.00	50.78 PK	74.00	-23.22	1.45 H	21	39.83	10.95
8	7386.00	39.87 AV	54.00	-14.13	1.45 H	21	28.92	10.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	95.01 PK			1.44 V	4	91.87	3.14
2	*2462.00	81.35 AV			1.44 V	4	78.21	3.14
3	2483.50	45.68 PK	74.00	-28.32	1.04 V	44	42.51	3.17
4	2483.50	34.65 AV	54.00	-19.35	1.04 V	44	31.48	3.17
5	4924.00	51.00 PK	74.00	-23.00	1.04 V	44	42.88	8.12
6	4924.00	39.65 AV	54.00	-14.35	1.04 V	44	31.53	8.12
7	7386.00	51.30 PK	74.00	-22.70	1.04 V	301	40.35	10.95
8	7386.00	40.30 AV	54.00	-13.70	1.04 V	301	29.35	10.95

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



802.11n HT20

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.00 PK	74.00	-28.00	1.00 H	21	43.01	2.99
2	2390.00	34.50 AV	54.00	-19.50	1.00 H	21	31.51	2.99
3	*2412.00	98.01 PK			1.00 H	21	94.97	3.04
4	*2412.00	88.70 AV			1.00 H	21	85.66	3.04
5	4824.00	49.65 PK	74.00	-24.35	1.00 H	221	41.78	7.87
6	4824.00	38.20 AV	54.00	-15.80	1.00 H	221	30.33	7.87
7	#7236.00	51.35 PK	74.00	-22.65	1.05 H	44	40.91	10.44
8	#7236.00	41.20 AV	54.00	-12.80	1.05 H	44	30.76	10.44

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.30 PK	74.00	-27.70	2.47 V	105	43.31	2.99
2	2390.00	34.10 AV	54.00	-19.90	2.47 V	105	31.11	2.99
3	*2412.00	94.65 PK			2.47 V	105	91.61	3.04
4	*2412.00	79.50 AV			2.47 V	105	76.46	3.04
5	4824.00	51.32 PK	74.00	-22.68	1.04 V	41	43.45	7.87
6	4824.00	38.79 AV	54.00	-15.21	1.04 V	41	30.92	7.87
7	#7236.00	50.70 PK	74.00	-23.30	1.04 V	81	40.26	10.44
8	#7236.00	40.78 AV	54.00	-13.22	1.04 V	81	30.34	10.44

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



Test Report No.: RF2309WDG0001

<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.51 PK			1.00 H	32	95.42	3.09
2	*2437.00	89.20 AV			1.00 H	32	86.11	3.09
3	4874.00	50.30 PK	74.00	-23.70	1.03 H	2	42.31	7.99
4	4874.00	38.70 AV	54.00	-15.30	1.03 H	2	30.71	7.99
5	7311.00	51.20 PK	74.00	-22.80	1.05 H	5	40.51	10.69
6	7311.00	40.58 AV	54.00	-13.42	1.05 H	5	29.89	10.69
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	94.31 PK			1.00 V	65	91.22	3.09
2	*2437.00	78.20 AV			1.00 V	65	75.11	3.09
3	4874.00	48.97 PK	74.00	-25.03	1.40 V	11	40.98	7.99
4	4874.00	38.20 AV	54.00	-15.80	1.40 V	11	30.21	7.99
5	7311.00	51.38 PK	74.00	-22.62	1.00 V	32	40.69	10.69
6	7311.00	41.00 AV	54.00	-13.00	1.00 V	32	30.31	10.69

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " \* " : Fundamental frequency.





Test Report No.: RF2309WDG0001

<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.32 PK			1.35 H	54	96.18	3.14
2	*2462.00	88.78 AV			1.35 H	54	85.64	3.14
3	2483.50	47.20 PK	74.00	-26.80	1.00 H	21	44.03	3.17
4	2483.50	34.18 AV	54.00	-19.82	1.00 H	21	31.01	3.17
5	4924.00	50.20 PK	74.00	-23.80	1.40 H	4	42.08	8.12
6	4924.00	38.90 AV	54.00	-15.10	1.40 H	4	30.78	8.12
7	7386.00	51.35 PK	74.00	-22.65	1.00 H	32	40.40	10.95
8	7386.00	41.30 AV	54.00	-12.70	1.00 H	32	30.35	10.95
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	95.32 PK			1.00 V	21	92.18	3.14
2	*2462.00	82.31 AV			1.00 V	21	79.17	3.14
3	2483.50	46.30 PK	74.00	-27.70	1.00 V	55	43.13	3.17
4	2483.50	34.68 AV	54.00	-19.32	1.00 V	55	31.51	3.17
5	4924.00	51.20 PK	74.00	-22.80	1.00 V	54	43.08	8.12
6	4924.00	40.30 AV	54.00	-13.70	1.00 V	54	32.18	8.12
7	7386.00	51.87 PK	74.00	-22.13	3.01 V	344	40.92	10.95
8	7386.00	41.20 AV	54.00	-12.80	3.01 V	344	30.25	10.95

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. "\*" : Fundamental frequency.

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	May. 11, 24
Power Meter	Anritsu	ML2495A	1139001	Jul. 11, 24
Power Sensor	Anritsu	MA2411B	1531155	Jul. 11, 24
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct. 15, 24
Oscilloscope	Agilent	DSO9254A	MY51260160	Jul. 11, 24
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Jan. 01, 25
Signal Generator	Agilent	N5183A	MY50140980	Jul. 23, 24
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jul. 11, 24
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

- NOTES:** 1. The test was performed in RF Oven room.  
 2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation.

#### 4.3.3 TEST PROCEDURE


1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.3.5 TEST SETUP



#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 TEST RESULTS

##### 802.11b


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.04	0.5	PASS
6	2437	9.59	0.5	PASS
11	2462	10.04	0.5	PASS

##### 802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.42	0.5	PASS
6	2437	16.38	0.5	PASS
11	2462	16.39	0.5	PASS


##### 802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.67	0.5	PASS
6	2437	17.68	0.5	PASS
11	2462	17.77	0.5	PASS

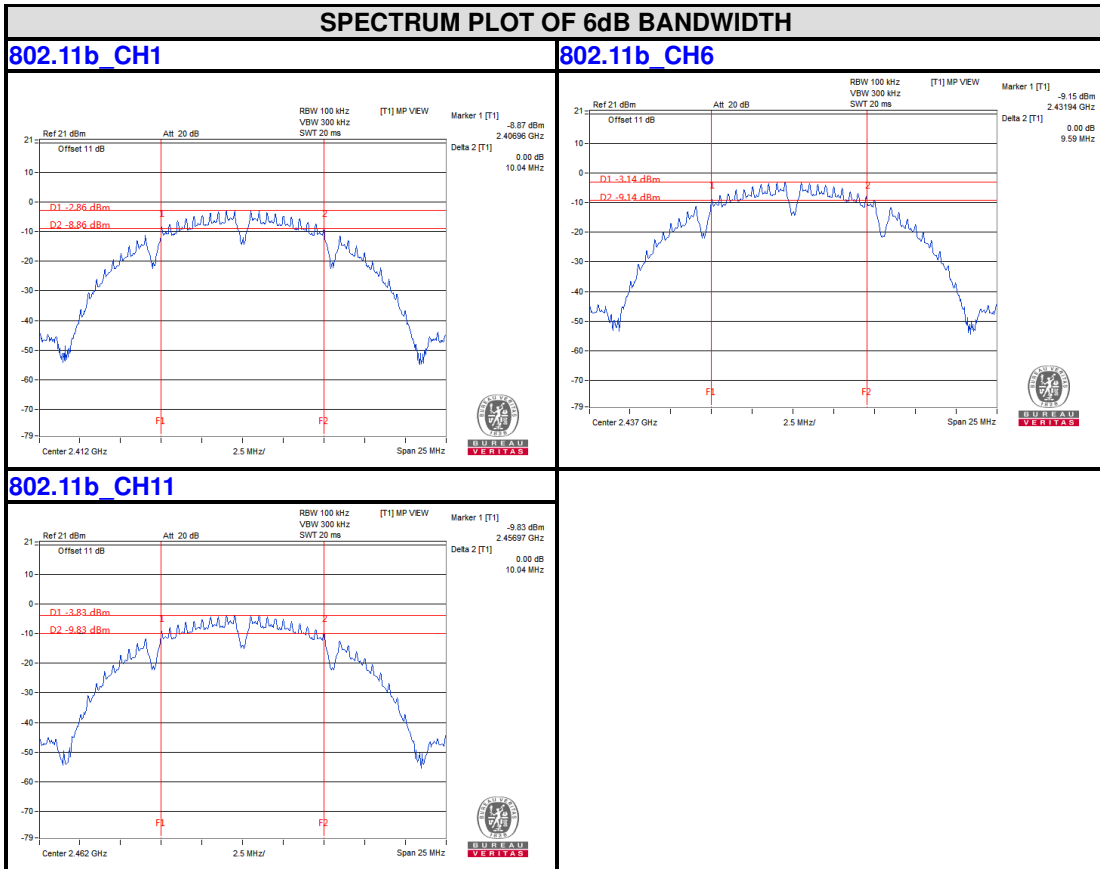



Test Report No.: RF2309WDG0001

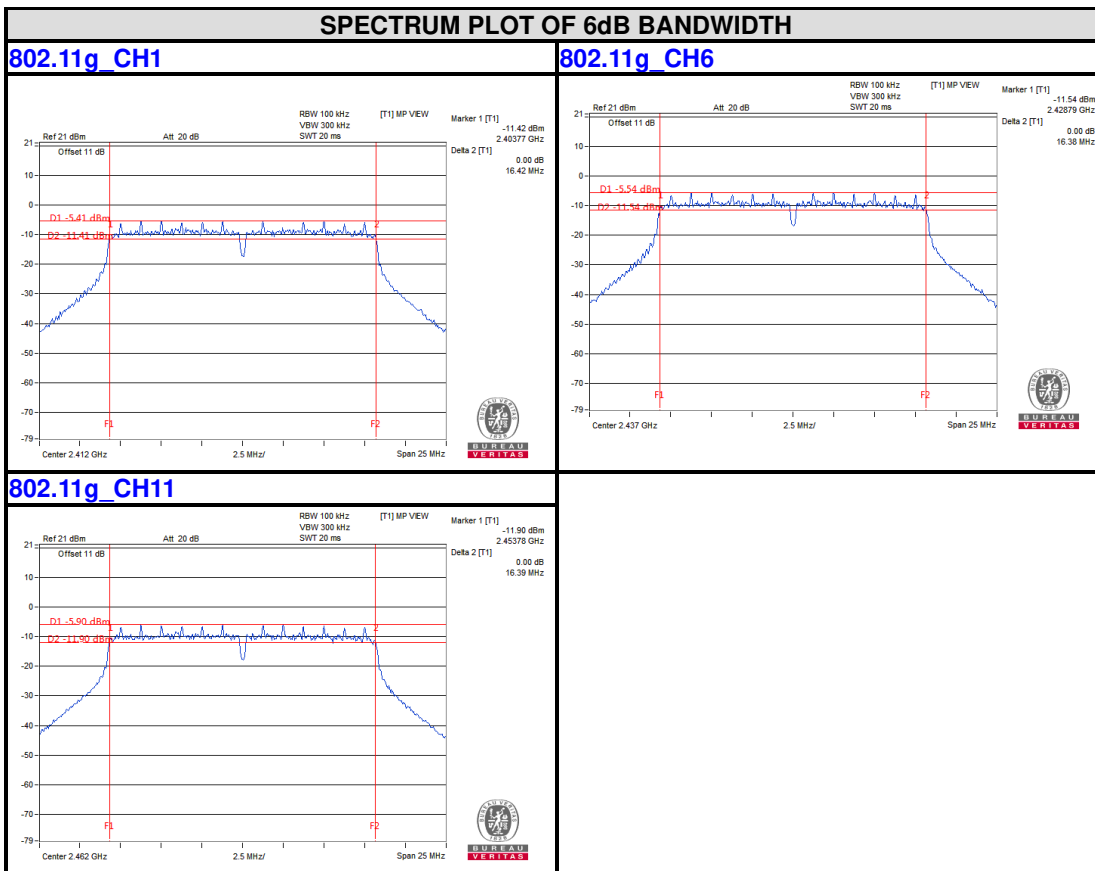


Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.

Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)



Test Report No.: RF2309WDG0001

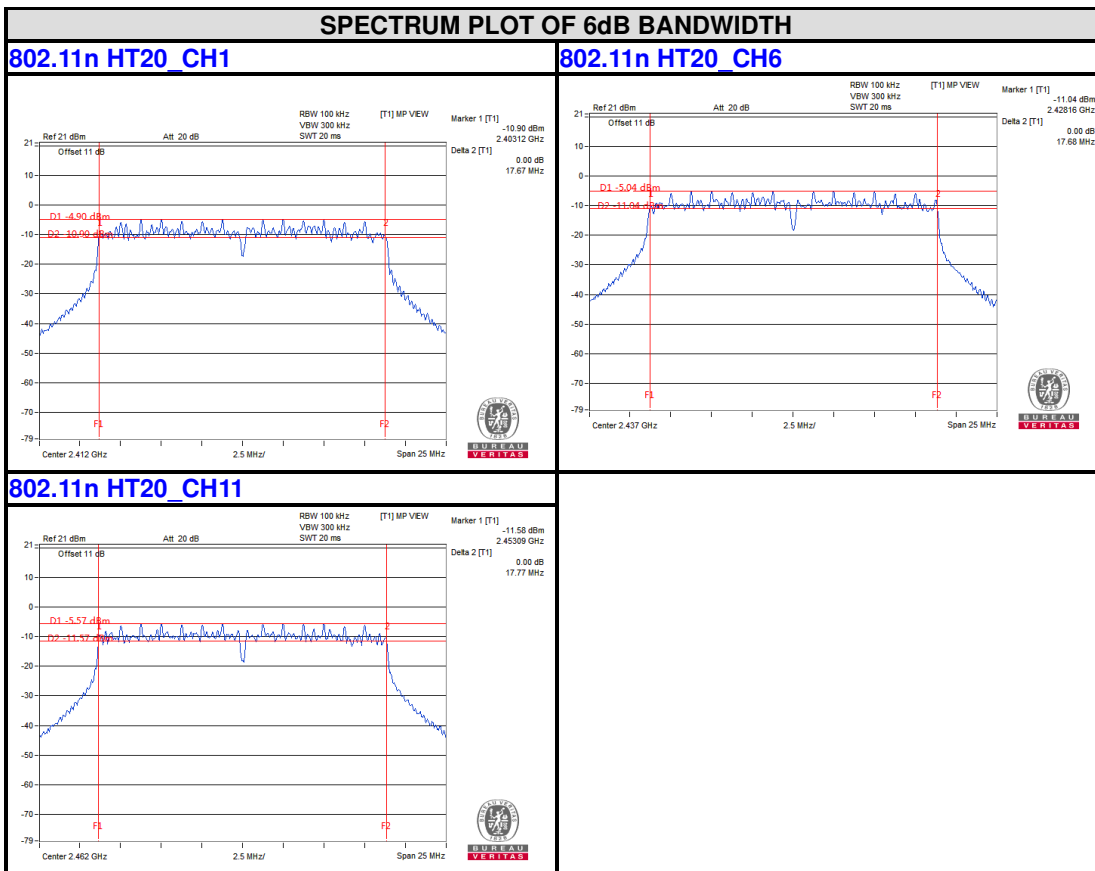

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 96, Guantai Road (Houjie Section), Houjie  
Town, Dongguan City, Guangdong Province.  
523942. People's Republic of China.


Tel: +86 769 8998 2098  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@bureauveritas.com](mailto:customerservice.dg@bureauveritas.com)

## 4.4 CONDUCTED OUTPUT POWER

### 4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

### 4.4.2 TEST SETUP

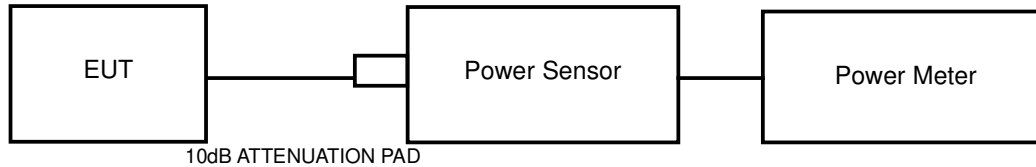

### 4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
Power Sensor	Keysight	U2021XA	MY57320002	May. 11, 24
Power Meter	Anritsu	ML2495A	1139001	Jul. 11, 24
Power Sensor	Anritsu	MA2411B	1531155	Jul. 11, 24
Digital Multimeter	FLUKE	15B	A1220010DG	N/A
Humid & Temp Programmable Tester	Haida	HD-225T	110807201	Oct. 15, 24
Oscilloscope	Agilent	DSO9254A	MY51260160	Jul. 11, 24
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Jan. 01, 25
Signal Generator	Agilent	N5183A	MY50140980	Jul. 23, 24
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Jul. 11, 24
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	N/A
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A
DC Source	Keysight	E3642A	MY56146098	N/A
Test software	ADT	ADT_RF Test Software V6.6.5.3	N/A	N/A

#### NOTES:

1. The test was performed in RF Oven room.
2. Equipment are calibrated by calibration laboratory accredited to ISO/IEC 17025 by a mutually recognized Accreditation.





Test Report No.: RF2309WDG0001

#### 4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

#### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.4.7 TEST RESULTS

##### MAXIMUM PEAK OUTPUT POWER

###### 802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	13.72	23.55	1	PASS
6	2437	12.65	18.408	1	PASS
11	2462	12.03	15.959	1	PASS

###### 802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	14.82	30.339	1	PASS
6	2437	14.42	27.669	1	PASS
11	2462	13.69	23.388	1	PASS

###### 802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	14.92	31.046	1	PASS
6	2437	14.38	27.416	1	PASS
11	2462	13.82	24.099	1	PASS

**AVERAGE OUTPUT POWER (FOR REFERENCE)**

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

**802.11b**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	6.98	4.989
6	2437	6.53	4.498
11	2462	6.23	4.198

**802.11g**

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	7.10	5.129
6	2437	6.64	4.613
11	2462	6.03	4.009

**802.11n HT20**


CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	7.12	5.152
6	2437	6.72	4.699
11	2462	6.18	4.15

## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

### 4.5.2 TEST SETUP



### 4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to 1.5 times the DTS bandwidth.
- c) Set RBW to: 3KHz
- d) Set VBW  $\geq 3 \times$  RBW.
- e) Detector = peak
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

#### 4.5.7 TEST RESULTS

##### 802.11b


Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-17.18	8.00	PASS
6	2437	-17.08	8.00	PASS
11	2462	-17.58	8.00	PASS

##### 802.11g

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-17.64	8.00	PASS
6	2437	-19.63	8.00	PASS
11	2462	-19.86	8.00	PASS

##### 802.11n HT20

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-19.63	8.00	PASS
6	2437	-20.06	8.00	PASS
11	2462	-20.93	8.00	PASS

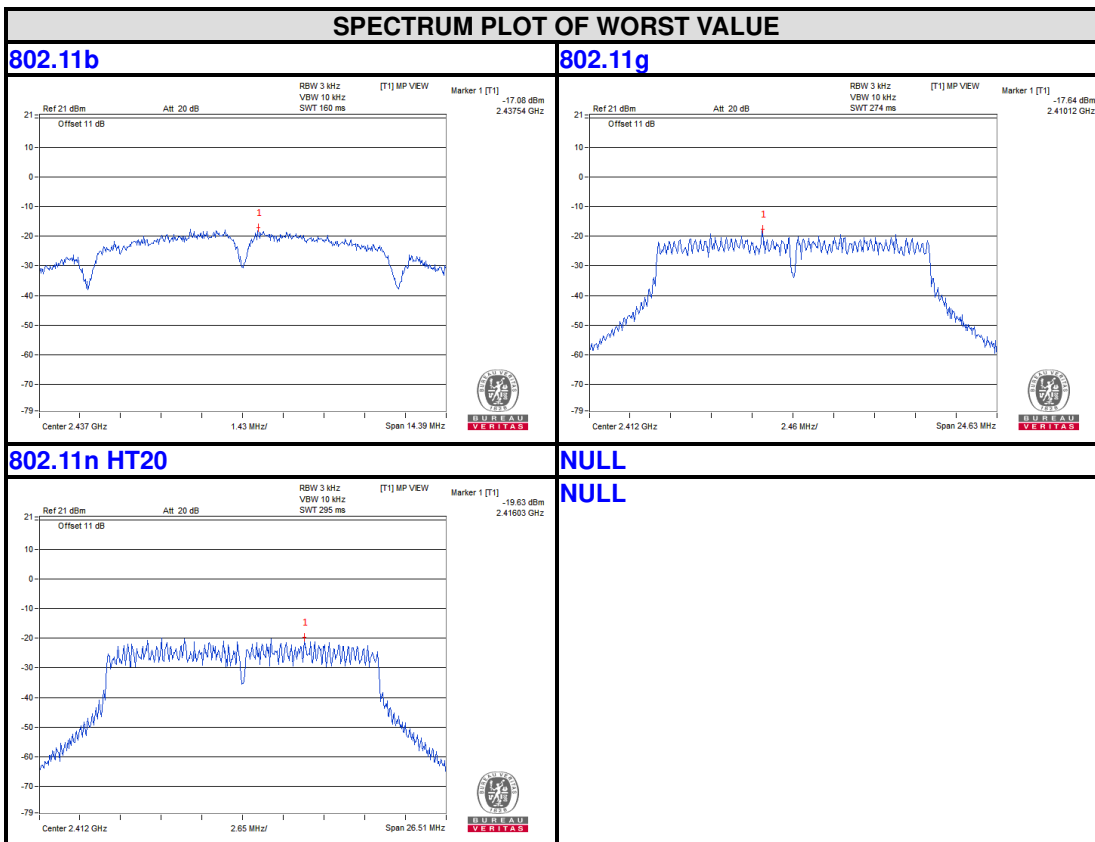

## 4.6 OUT OF BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST SETUP



### 4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.6.4 TEST PROCEDURE

#### Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



Test Report No.: RF2309WDG0001

### Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

#### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.


#### 4.6.6 EUT OPERATING CONDITION

Same as item 4.3.6




### 4.6.7 TEST RESULTS

#### 802.11b

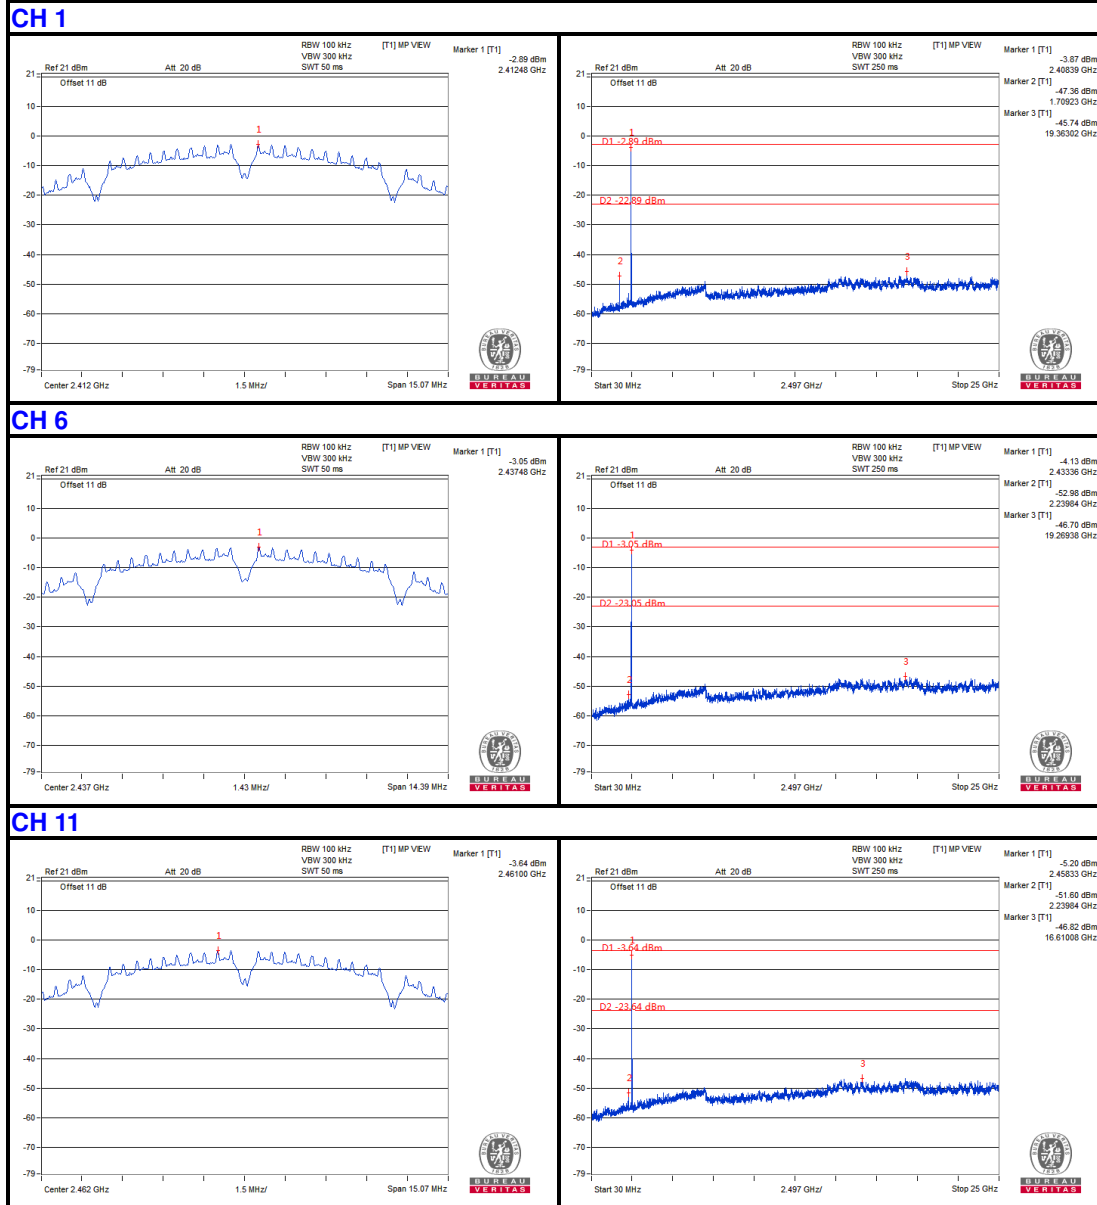


802.11g

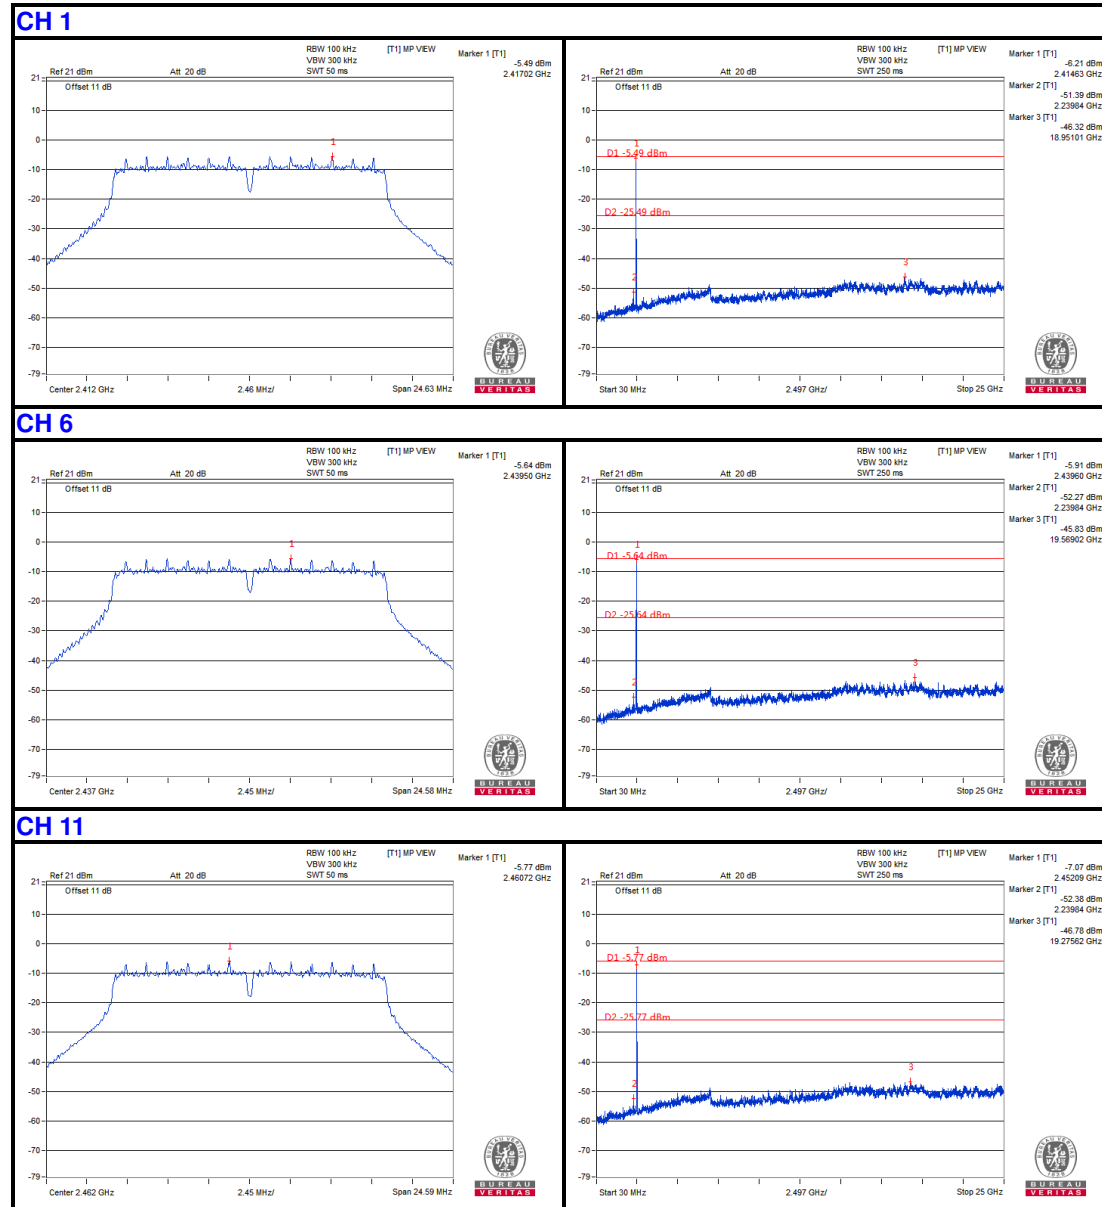





802.11n HT20

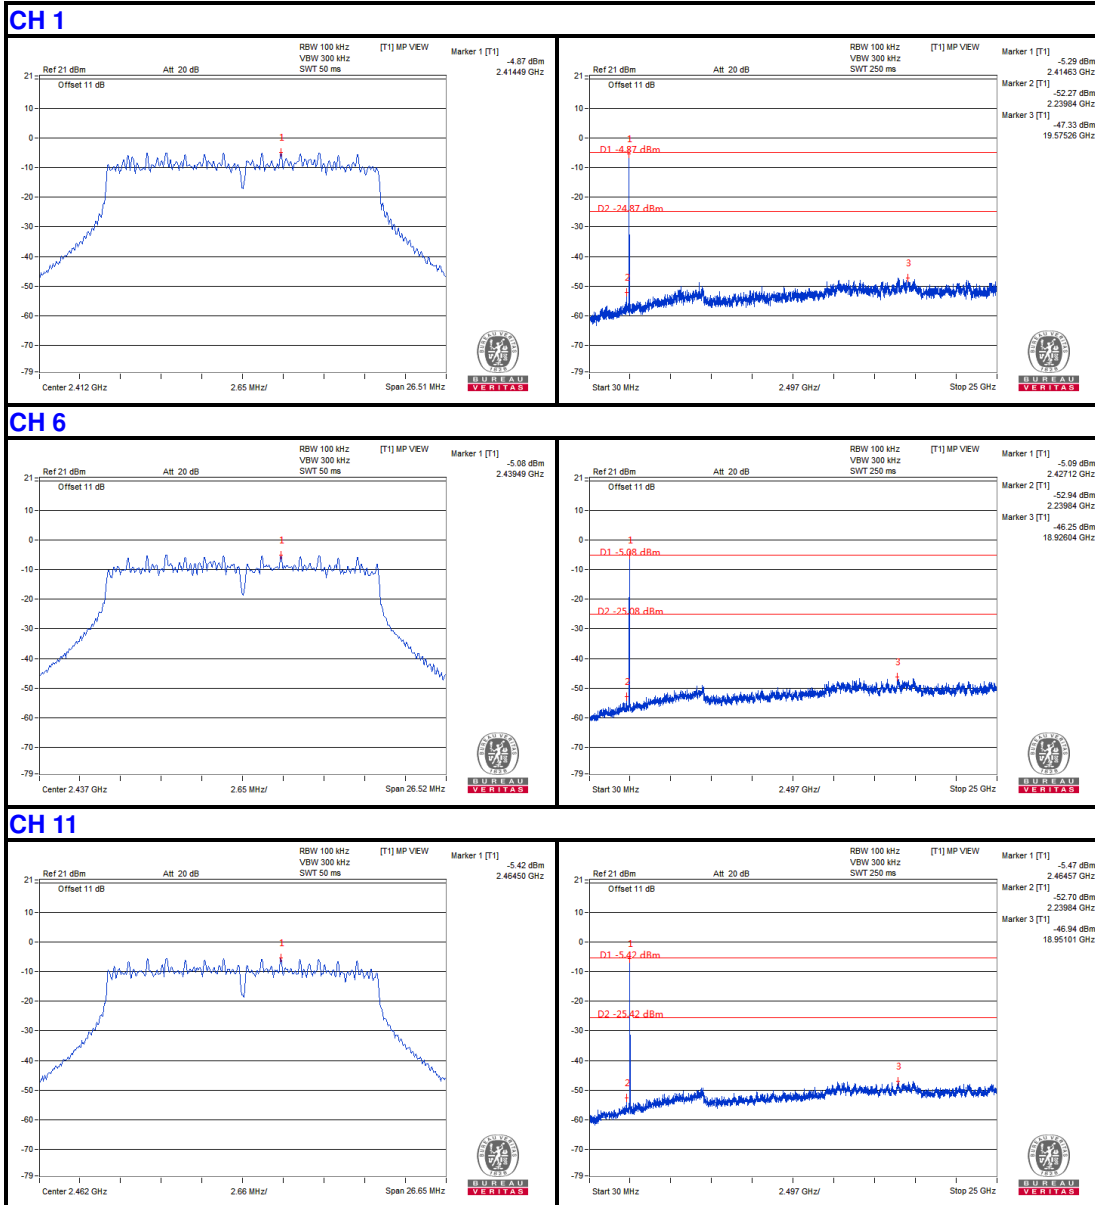

802.11b

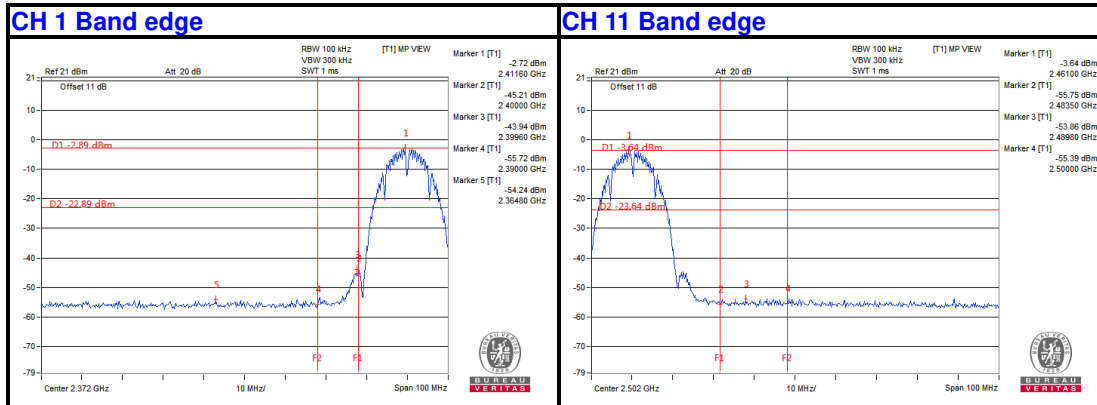


802.11g

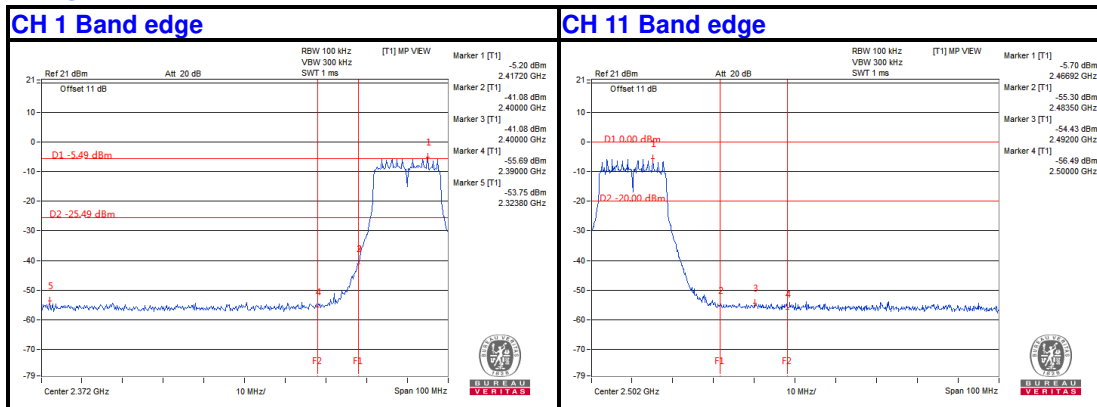



802.11n HT20

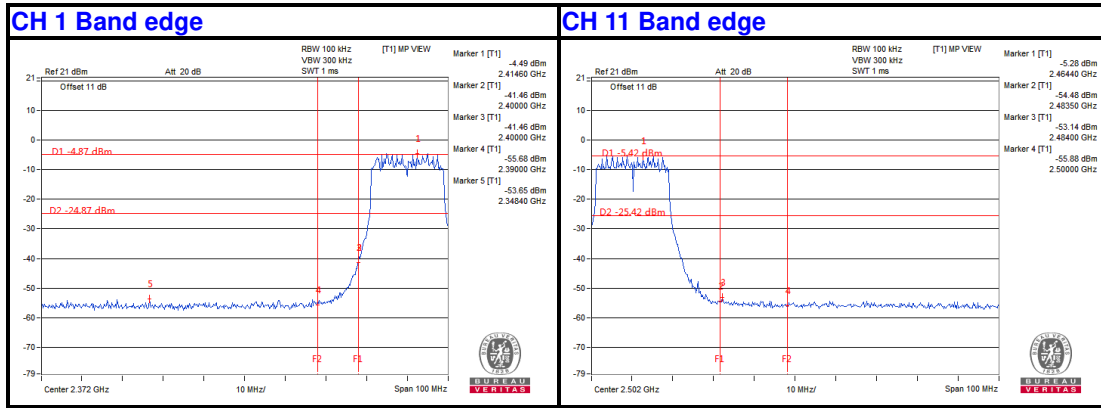



Test Report No.: RF2309WDG0001

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF2309WDG0001

## 6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications are made to the EUT by the lab during the test.

---END---