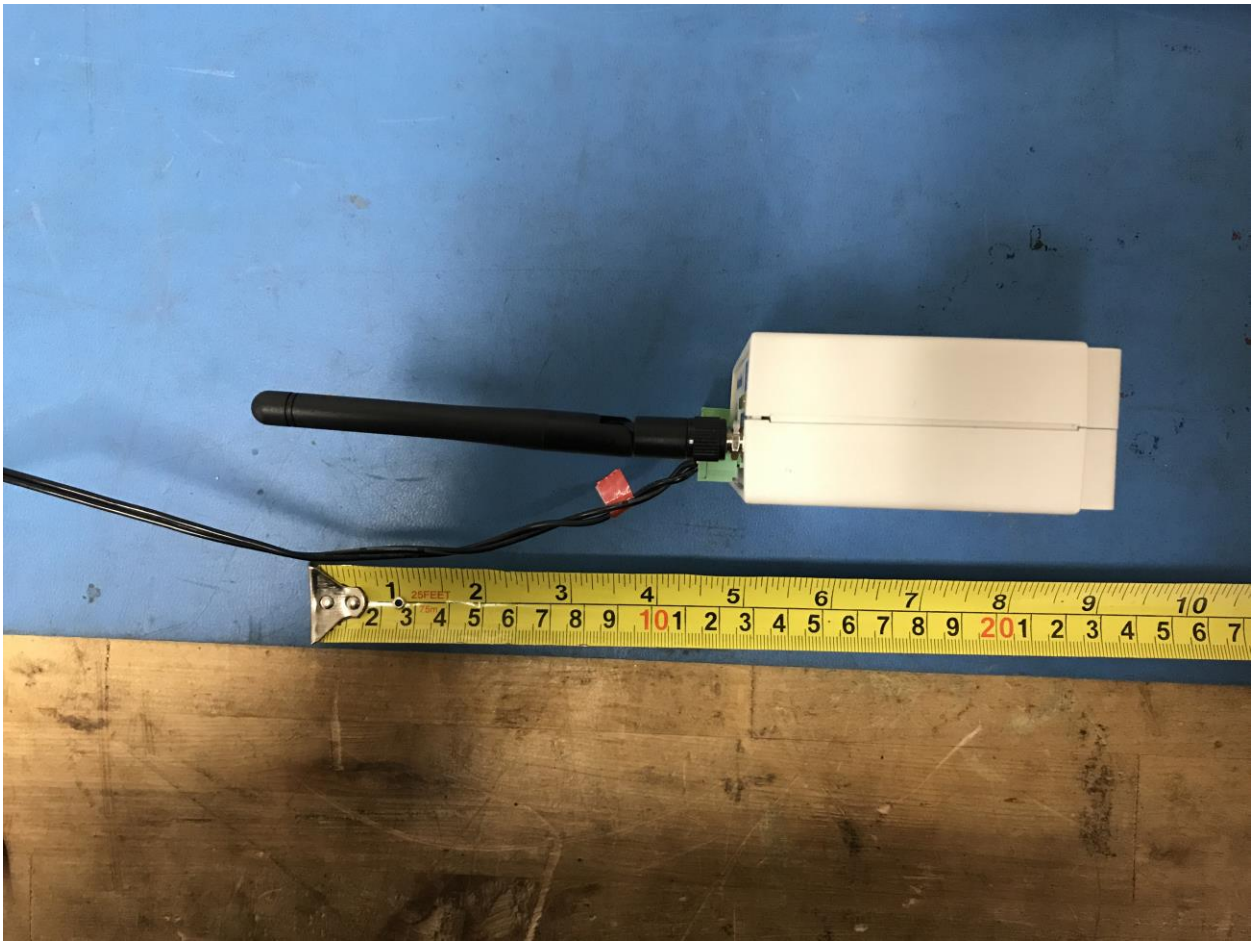
25FEET

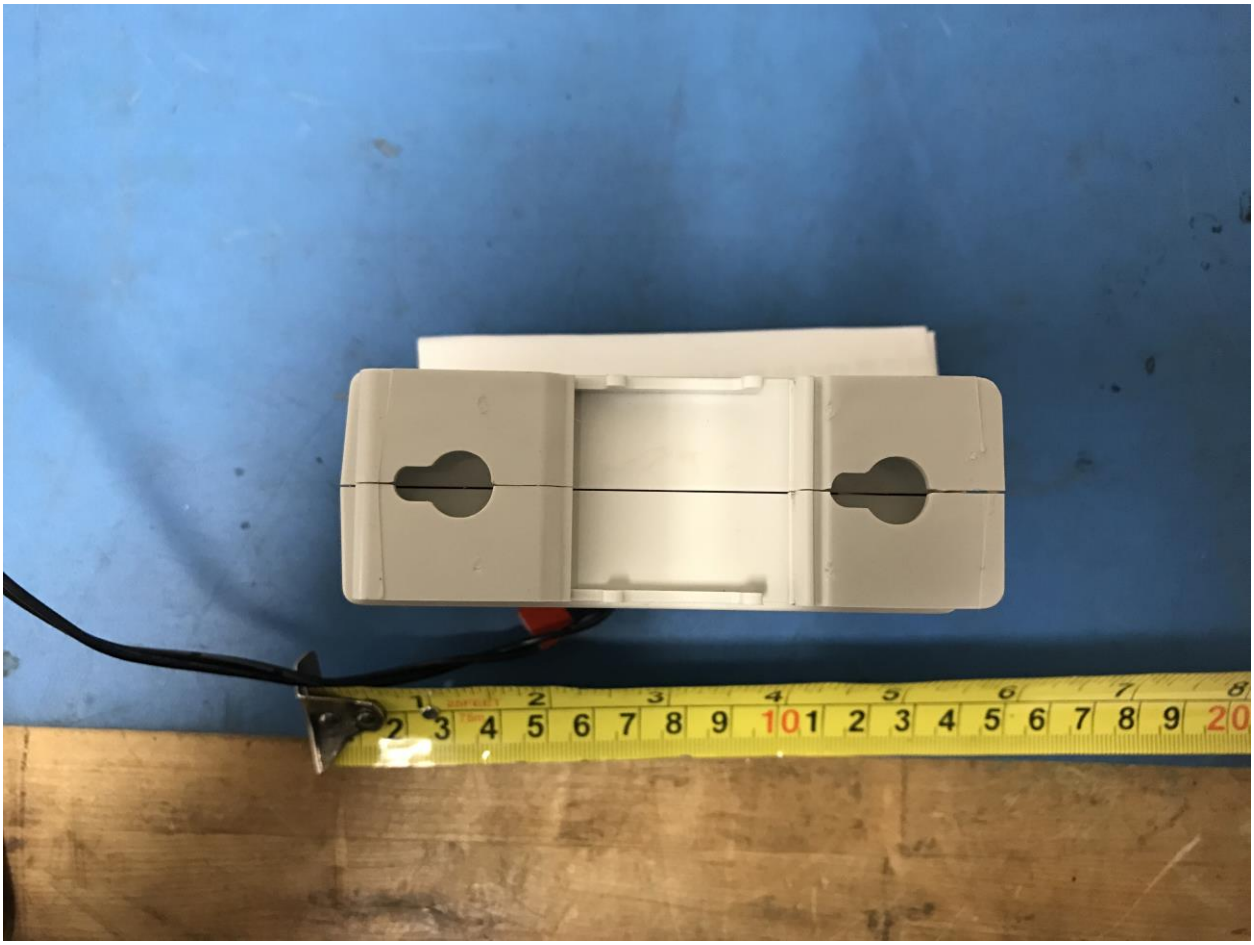

25FEET

25FEET

Xytronix Research & Design, Inc.
Nibley, UT, USA
Model: XW-210-I
SN: 00-0C-C8-00-00-00
Supply Voltage (Vin): 9-28V⎓ (DC)
Supply Current @9VDC: 188mA
@24VDC: 75mA
Opto-Isolated Input: 4-26V⎓
5V Output: 5V⎓ 50mA max
Relay Contact Ratings:
Max Voltage: 277V~(AC)
general purpose
NO 110V, NC 30V⎓(DC)
resistive load
Max Current: 12 Amps
See Users Manual for power supply requirements and other important information.
CONTROL by WEB
www.ControlByWeb.com
E488316
FCC: 2AE4Z-XWD002
IC: 21441-XWD002
Made in U.S.A.

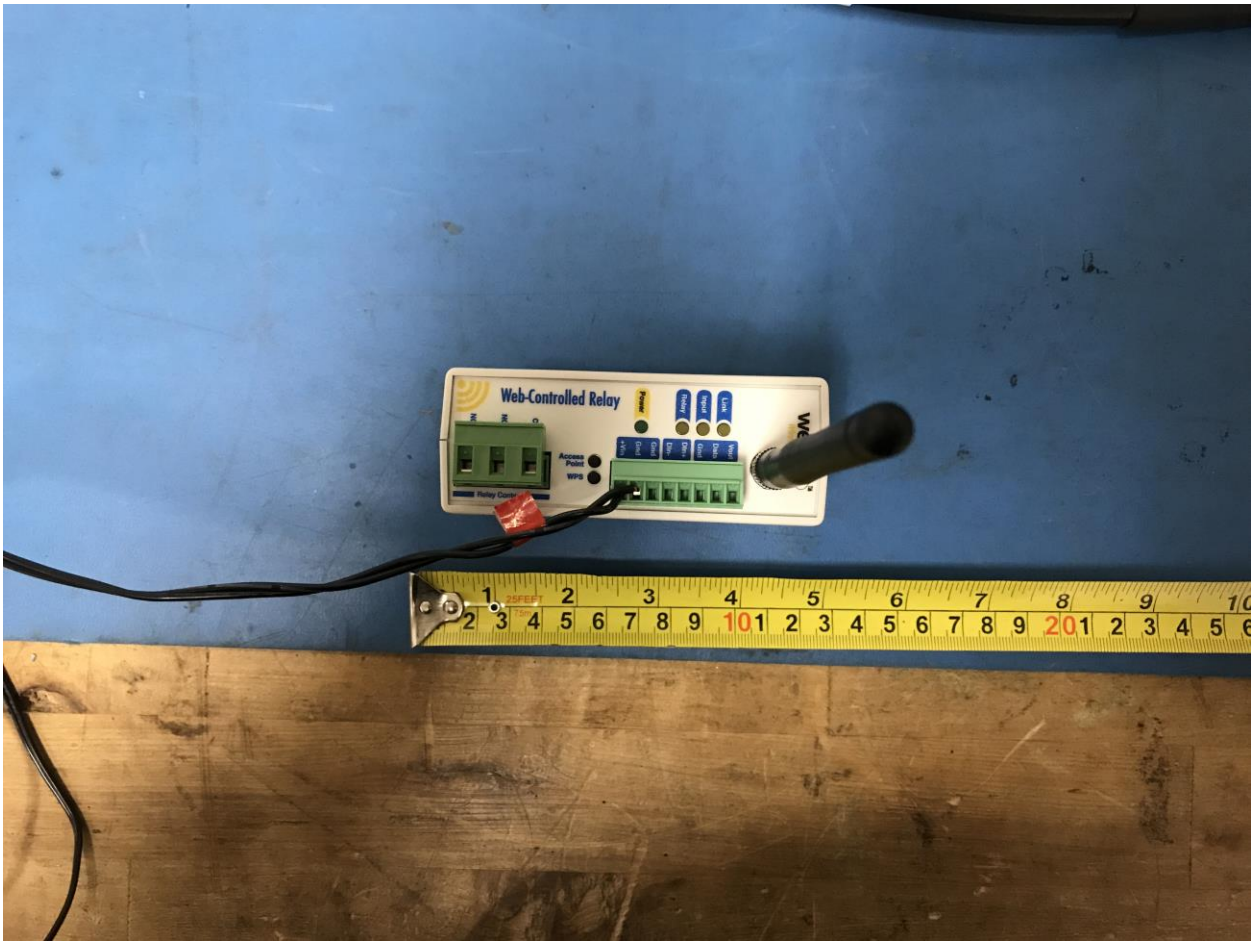
Web-Controlled Relay
Power
Relay
Input
Link
Access Point
WPS
Relay Contr
15FEET