

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND RSS 247 REQUIREMENT


	OF
Applicant:	Euro-CB (Phils.) Inc. SFB No 2, MEZ 1, Lapu Lapu City, 6015 Cebu, Philippines
Product Name:	Interphone Shape
Brand Name:	Interphone
Model No.:	INTERPHONE BTF7
Model Difference:	N/A
FCC ID:	2AE5MBTF7
IC:	20468-BTF7
Report Number:	ER/2018/10023
FCC Rule Part:	§15.247, Cat: DSS
IC Rule Part:	RSS-247 issue 2 Feb 2017
Issue Date:	Jan. 26, 2018
Date of Test:	Jan. 05, 2018 ~ Jan. 26, 2018
Date of EUT Received: We hereby certify that:	Jan. 05, 2018

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits. The test results of this report relate only to the tested sample identified in this report.

Prepared By: Yuri Tsai / Clerl

Approved By:

ager



Testing Laborators 0513



Revision History

Report Number	Revision	Description	Issue Date
ER/2018/10023	Rev.00	Initial creation of document	Jan. 26, 2018

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of libability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the printed event of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unavity and definders may be prosecuted to the fulle event of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY1	1
6	CONDUCTED EMISSION TEST 12	2
7	PEAK OUTPUT POWER MEASUREMENT 10	6
8	20dB & 99% BANDWIDTH MEASUREMENT19	9
9	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT 23	3
10	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	9
11	FREQUENCY SEPARATION	8
12	NUMBER OF HOPPING FREQUENCY	D
13	TIME OF OCCUPANCY (DWELL TIME)	2
14	ANTENNA REQUIREMENT	0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advitud and offenders may be prosecuted to the fulle extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



GENERAL INFORMATION 1

1.1 Product description

General:

Product Name:	Interphor	ne Shape		
Brand Name:	Interphor	Interphone		
Model No.:	INTERPI	HONE BTF7		
Model Difference:	N/A			
Product SW/HW version:	R144/ C			
Radio SW/HW version:	26h + EDR / N/A			
Test SW Version:	N/A			
RF power setting in TEST SW:	N/A			
Micro USB Cable	Model No.: N/A, Supplier: N/A			
	3.7Vdc Rechargeable Li-ion Battery			
Power Supply:	Battery:	Model No.: 602055P, Supplier: Shenzhen BAK Technology Co Ltd		

Bluetooth_BR+EDR:

Bluetooth Version:	Bluetooth V3.0
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	5.15dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	<= 0.4s
Antenna Designation:	Internal Antenna, Gain: 2.37dBi



1.2 Test Methodology of Applied Standards

Canada RSS-247 issue 2 Feb. 2017

RSS-Gen issue 4 Nov. 2014

FCC Part 15, Subpart C §15.247

FCC Public Notice DA 00-705 Measurement Guidelines

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803 (TAF code 0513)

FCC Registration Numbers are: 509634 / TW0001

Canada Registration Number: 4620A-5

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SYSTEM TEST CONFIGURATION 2

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 **Conducted Emissions**

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz,. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 **Radiated Emissions**

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plan. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated

emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note: The spectrum analyzer offset is derived from RF cable loss 1dB+ splitter 0dB. Total offset = 1 + 0 = 1 dB.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Since State were readed on the state of th tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Report No.: ER/2018/10023 Page 7 of 70



2.5 Configuration of Tested System Fig. 2-1 Radiated Emission Configuration



Fig.2-3 Conducted Emission (Antenna Port) Configuration



Fig. 2-2 Conducted Emission (AC Power Line) Configuration



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	Bluetooth Test Software	N/A	N/A	N/A	N/A	N/A
2.	Notebook	DELL	D505	34056609472	Shielded	Unshielded
3.	Bluetooth Test Set	Anritsu	MT8852B	6k00006107	Shielded	Unshielded



SUMMARY OF TEST RESULTS 3

FCC Rules	IC Rules	s Description Of Test			
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant		
§15.247(b)(1)	RSS-247 §5.4 (2)	Peak Output Power	Compliant		
§15.247(a)(1)	RSS-247 §5.1 (1) RSS-Gen §6.6	20dB & 99% Bandwidth	Compliant		
§15.247(d)	RSS-247 §5.5	Conducted Band Edge and Spurious Emission	Compliant		
§15.247(d)	RSS-247 §5.5	Radiated Band Edge and Spurious Emission	Compliant		
§15.247(a)(1)	RSS-247 §5.1 (2)	Frequency Separation	Compliant		
§15.247(a)(1)(iii)	RSS-247 §5.1 (4)	Number of hopping frequency	Compliant		
§15.247(a)(1)(iii)	RSS-247 §5.1 (4)	Time of Occupancy	Compliant		
§15.203 §15.247(b)	RSS- Gen §8.3	Antenna Requirement	Compliant		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of libability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the printed event of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unavity and definders may be prosecuted to the fulle event of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



DESCRIPTION OF TEST MODES 4

4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

CH	FREQUENCY	СН	FREQUENCY	CH	FREQUENCY	СН	FREQUENCY
0	2402 MHz	20	2422 MHz	40	2442 MHz	70	2462 MHz
1	2403 MHz	21	2423 MHz	41	2443 MHz	71	2463 MHz
2	2404 MHz	22	2424 MHz	42	2444 MHz	72	2464 MHz
3	2405 MHz	23	2425 MHz	43	2445 MHz	73	2465 MHz
4	2406 MHz	24	2426 MHz	44	2446 MHz	74	2466 MHz
5	2407 MHz	25	2427 MHz	45	2447 MHz	75	2467 MHz
6	2408 MHz	26	2428 MHz	46	2448 MHz	76	2468 MHz
7	2409 MHz	27	2429 MHz	47	2449 MHz	77	2469 MHz
8	2410 MHz	28	2430 MHz	48	2450 MHz	78	2470 MHz
9	2411 MHz	29	2431 MHz	49	2451 MHz	79	2471 MHz
10	2412 MHz	30	2432 MHz	50	2452 MHz	70	2472 MHz
11	2413 MHz	31	2433 MHz	51	2453 MHz	71	2473 MHz
12	2414 MHz	32	2434 MHz	52	2454 MHz	72	2474 MHz
13	2415 MHz	33	2435 MHz	53	2455 MHz	73	2475 MHz
14	2416 MHz	34	2436 MHz	54	2456 MHz	74	2476 MHz
15	2417 MHz	35	2437 MHz	55	2457 MHz	75	2477 MHz
16	2418 MHz	36	2438 MHz	56	2458 MHz	76	2478 MHz
17	2419 MHz	37	2439 MHz	57	2459 MHz	77	2479 MHz
18	2420 MHz	38	2440 MHz	58	2460 MHz	78	2480 MHz
19	2421 MHz	39	2441 MHz	59	2461 MHz		



4.2 The Worst Test Modes and Channel Details

- The EUT has been tested under operating condition.
- Test program used to control the EUT for staying in continuous transmitting and receiving 2 mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst 3 case.

RADIATED EMISSION TEST:


	RADIATED EMISSION TEST (BELOW 1 GHz)					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE		
Bluetooth	0 to 78	0,39,78	8-DQPK	DH5		
	RAI	DIATED EMISSIC	ON TEST (ABOVE 1 (GHz)		
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE		
Bluetooth	0 to 78	0,39,78	8-DQPK	DH5		

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and High, the worst case E1 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

	CONDUCTED TEST				
		Peak Output Pov	ver, 20dB Band Wid	th	
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE	
	0 to 78	0,39,78	GFSK	DH5	
Bluetooth	0 to 78	0,39,78	π/4-DQPSK	DH5	
	0 to 78	0,39,78	8-DQPK	DH5	
		Bai	nd Edge		
Bluetooth	0 to 78	0,78	GFSK / 8-DQPK	DH5	
		Frequen	cy Separation		
Bluetooth 0 to 78 0,1,2 GFSK DH5		DH5			
		Number of h	opping frequency		
Bluetooth	0 to 78	0 to 78	GFSK	DH5	
	Time of Occupancy (Dwell time)				
Bluetooth	0 to 78	0,39,78	GFSK	DH1/DH3/DH5	
Bluetooth	0 to 78	39	π/4-DQPSK	DH1/DH3/DH5	
Bluetooth	0 to 78	39	8-DPSK	DH1/DH3/DH5	





MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
20dB Bandwidth	+/- 51.33 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Frequency Separation	+/- 51.33 Hz
Number of hopping frequency	+/- 51.33 Hz
Time of Occupancy	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 180MHz: +/- 3.37dB
Measurement uncertainty	180MHz -417MHz: +/- 3.19dB
(Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	9kHz – 30MHz: +/- 2.87 dB
	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
-	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the

95% confidence level using a coverage factor of k=2.



CONDUCTED EMISSION TEST 6

6.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Lin dB(nits uV)
MHz	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used

	Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
EMI Test Receiver	R&S	ESCI7	100760	05/11/2017	05/10/2018				
LISN	SCHWARZBECK	NSLK 8127	8127-649	05/22/2017	05/21/2018				
LISN	MESS TEC	FCC-LISN-50/250-25-2-01	4034	03/19/2017	03/18/2018				
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2017	11/25/2018				


6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.4 Test SET-UP (Block Diagram of Configuration)

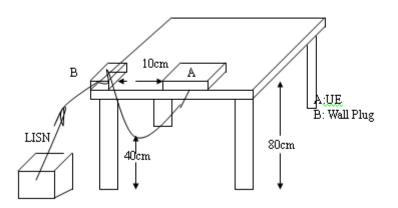

6.5 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.


6.6 Measurement Result

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



AC POWER LINE CONDUCTED EMISSION TEST DATA

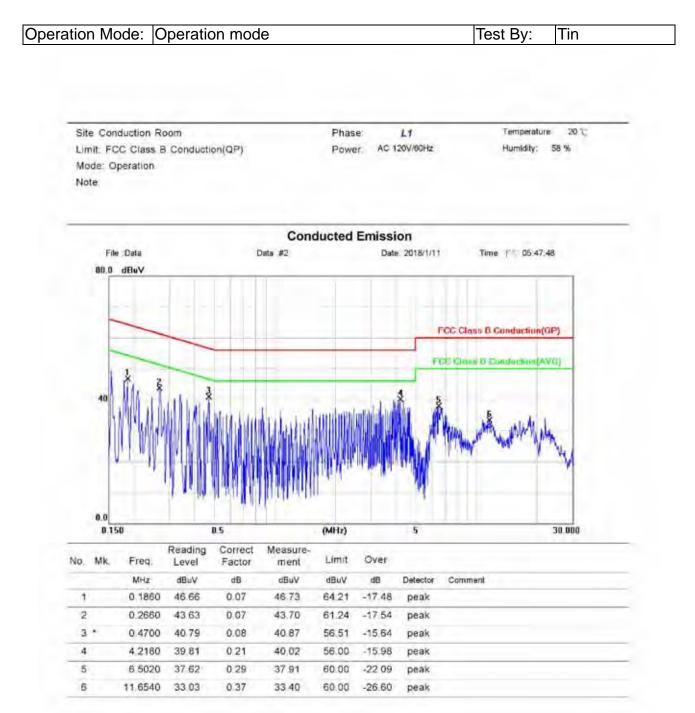

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

Report No.: ER/2018/10023 Page 15 of 70



4

5

6

1.2020

3.0020

4 1460

40.94

39 21

0.16

021

41 10

39 42

56.00


56.00

-14.90

-16.58

peak

peak

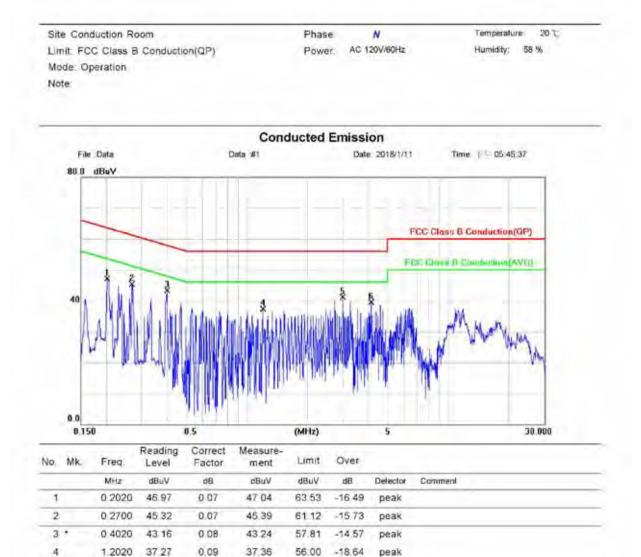

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-parament is underful and effection prove to the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



PEAK OUTPUT POWER MEASUREMENT 7


7.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 -2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts and the e.i.r.p. shall not exceed 0.5 W if the hopset uses less than 75 hopping channels.

7.2 Measurement Equipment Used

	Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Power Meter	Anritsu	ML2495A	1005007	12/29/2017	12/28/2018				
Power Sensor	Anritsu	MA2411B	917032	12/29/2017	12/28/2018				
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019				
Coaxial Cable	HUBER+SUHNER	SUCOFLEX 102	23670/2	01/02/2018	01/01/2019				
Splitter	Agilent	11636B	N/A	01/02/2018	01/01/2019				
DC Power Supply	Agilent	E3640A	MY52410006	11/28/2017	11/27/2018				

7.3 Test Set-up:



7.4 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- 5. Repeat above procedures until all default test channel is completed.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



7.5 Measurement Result

1M BR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	4.88	3.076	1000
39	2441	4.55	2.851	1000
78	2480	4.18	2.618	1000

1M BR mode (Average):

it V)	СН	Freq. (MHz)	Max. Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
0	0	2402	3.76	2.377	1000
0	39	2441	3.42	2.198	1000
0	78	2480	3.03	2.009	1000

2M EDR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	5.14	3.266	125
39	2441	4.65	2.917	125
78	2480	4.17	2.612	125

2M EDR mode (Average):

iit V)	СН	Freq. (MHz)	Max. Avg.Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
5	0	2402	2.19	1.656	125
5	39	2441	1.60	1.445	125
5	78	2480	1.00	1.259	125

3M EDR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
0	2402	5.15	3.273	125
39	2441	4.79	3.013	125
78	2480	4.30	2.692	125

3M EDR mode (Average):

				Max. Avg.Output				
nit V)			_	include	Output	Limit		
	СН	H Freq. (MHz)	tune up	Power				
v)			(IVI⊟Z)	tolerance	(mW)	(mW)		
				Power (dBm)				
5		0	2402	2.16	1.644	125		
5		39	2441	1.31	1.352	125		
5		78	2480	1.04	1.271	125		

*Note: Max. Output include tune up tolerance Power measured by using average detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of libability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the printed event of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unavity and definders may be prosecuted to the fulle event of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



1M BR mode EIRP

Channel	Frequency (MHz)	Max. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	3.76	2.37	4.102	4000
39	2441	3.42	2.37	3.793	4000
78	2480	3.03	2.37	3.467	4000

2M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	2.19	2.37	2.858	4000
39	2441	1.60	2.37	2.495	4000
78	2480	1.00	2.37	2.173	4000

3M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
0	2402	2.16	2.37	2.838	4000
39	2441	1.31	2.37	2.333	4000
78	2480	1.04	2.37	2.193	4000

* Note: EIRP = Average Power + Gain

NOTE: cable loss as 1dB that offsets in the spectrum

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of libability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the printed event of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unavity and definders may be prosecuted to the fulle event of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



8 20dB & 99% BANDWIDTH MEASUREMENT


8.1 Standard Applicable

For frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.

8.2 Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
EXA Spectrum Analyzer	Agilent	N9030A	MY53120760	02/25/2017	02/24/2018			
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019			
Coaxial Cable	HU- BER+SUHNER	SUCOFLEX 102	23670/2	01/02/2018	01/01/2019			
Splitter	Agilent	11636B	N/A	01/02/2018	01/01/2019			
DC Power Supply	Agilent	E3640A	MY52410006	11/28/2017	11/27/2018			

8.3 Test Set-up



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 5. Mark the peak frequency and -20dB (upper and lower) frequency
- 6. Turn on the 99% bandwidth function, max reading.
- 7. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemndification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8.5 Measurement Result

GFSK	π/4-DQPSK			K 8-DPSK				
СН	20 dB BW	2/3 BW	СН	20 dB BW	2/3 BW	СН	20 dB BW	2/3 BW
	(MHz)	(MHz)		(MHz)	(MHz)		(MHz)	(MHz)
Low	0.9233	0.62	Low	1.204	0.80	Low	1.245	0.83
Mid	0.9254	0.62	Mid	1.204	0.80	Mid	1.242	0.83
High	0.9254	0.62	High	1.205	0.80	High	1.244	0.83

GF	S	Κ
----	---	---

π/4-DQPSK

СН	99% Bandwidth (MHz)	СН	99% Bandwidth (MHz)	СН	99% Bandwidth (MHz)
Low	0.84745	Low	1.1703	Low	1.1617
Mid	0.84497	Mid	1.1684	Mid	1.1663
High	0.8419	High	1.1654	High	1.1655

8-DPSK



BW CH-Low (GFSK mode)



CH-Mid (GFSK mode)



CH-High (GFSK mode)



CH-Low (π /4-DQPSK mode)



CH-Mid (π/4-DQPSK mode)



CH-High (π /4-DQPSK mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

t (886-2) 2299-3279

Unless otherwise stated the results shown in this test report fere only to the sample(s) tested and stort is sample(s) are related to 90 days only. 防非方 式说明,此報告結果僅對測試之樣品負責,同時此提品僅保留的人影。本報告未變年公司書面許可,不可約份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

f (886-2) 2298-0488

www.tw.sgs.com



CH-Low (8-DPSK mode)



CH-Mid (8-DPSK mode)



CH-High (8-DPSK mode)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the feature states and results shown in this test report refer only to the sample(s) tested and state states and references and performed by the company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prevented to the fully. may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



9 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT


9.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9 limit.

9.2 Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
EXA Spectrum Analyzer	Agilent	N9030A	MY53120760	03/21/2017	03/20/2018			
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019			
Coaxial Cable	HU- BER+SUHNE R	SUCOFLEX 102	23670/2	01/02/2018	01/01/2019			
Splitter	Agilent	11636B	N/A	01/02/2018	01/01/2019			
DC Power Supply	Agilent	E3640A	MY52410006	11/28/2017	11/27/2018			

9.3 Test SET-UP



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.4 Measurement Procedure

Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- Mark Peak, 2.3999GHz and 2.4836GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

Conducted Spurious Emission:

- 1. To connect Antenna Port of EUT to Spectrum.
- The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	


9.5 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Since State the resolution of the state of tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.






Hopping mode BR Band Edge CH-Low



BR Band Edge CH-High

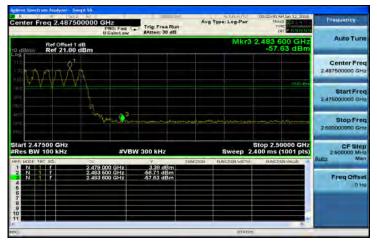

EDR Band Edge CH-Low




EDR Band Edge CH-High



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the features into the state report feiter only to the sample(s) tested and such sample(s) tested and sample(s) teste and tested and sample(s) tes prosecuted to the fullest extent of the law.

|No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.






Non-Hopping BR Band Edge CH-Low

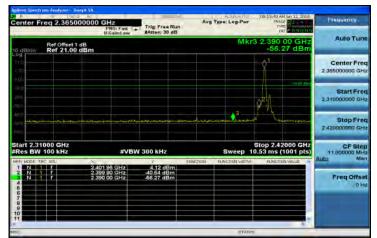


BR Band Edge CH-High

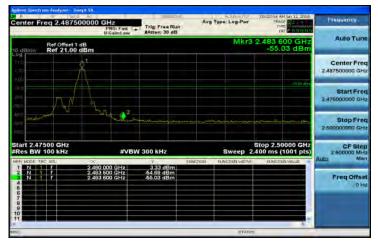

EDR Band Edge CH-Low



EDR Band Edge CH-High

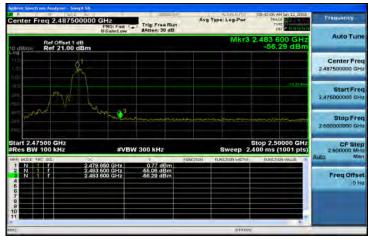

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the features into the state report feiter only to the sample(s) tested and such sample(s) tested and sample(s) teste and tested and sample(s) tes prosecuted to the fullest extent of the law.

|No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.


台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com




Conducted Spurious Emission Measurement Result Ch Low 30MHz - 3GHz (BR Mode)

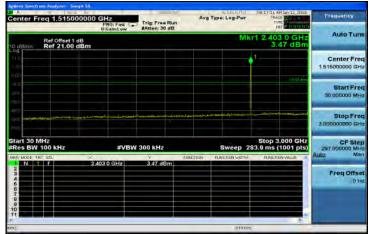


Ch Low 3GHz – 26.5GHz (BR Mode)

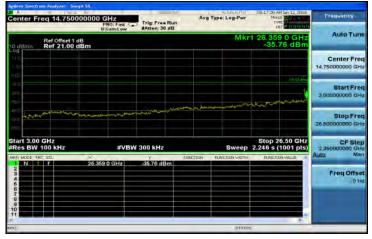


Ch Mid 30MHz - 3GHz (BR Mode)

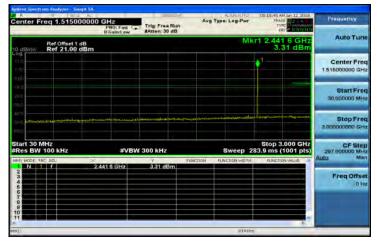


Ch Mid 3GHz - 26.5GHz (BR Mode)

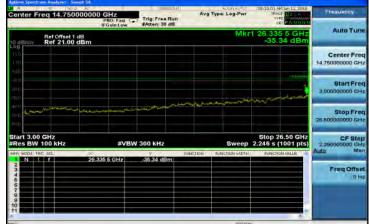

Ch High 30MHz - 3GHz (BR Mode)

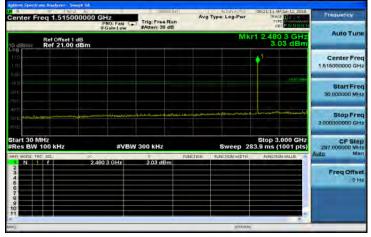

Ch High 3GHz - 26.5GHz (BR Mode)

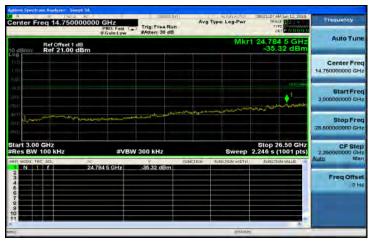

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。


(ホチカオ 気切)・U 板 ちち 木 ぼ 月 水 風 く 旅 の 貢 貝)・P 可 TU 旅 の ほ 家 田 シン ~ 本 取る 木 空 本 ひ 音 回 ゴ リ・ハ う ザ 力 技 え This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.


台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com




Ch Low 30MHz – 3GHz (EDR Mode)

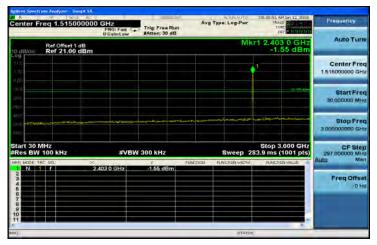


Ch Low 3GHz – 26.5GHz (EDR Mode)

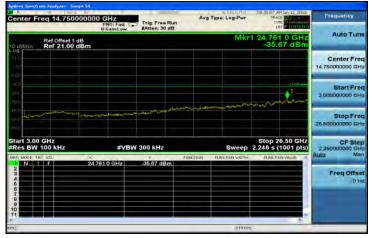


Ch Mid 30MHz – 3GHz (EDR Mode)

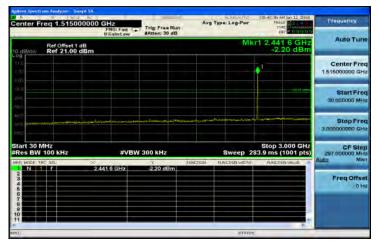


Ch Mid 3GHz - 26.5GHz (EDR Mode)

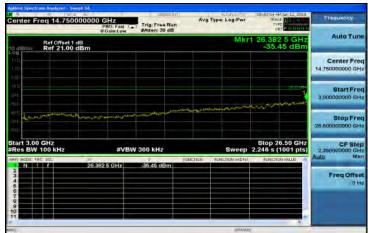

Ch High 30MHz - 3GHz (EDR Mode)

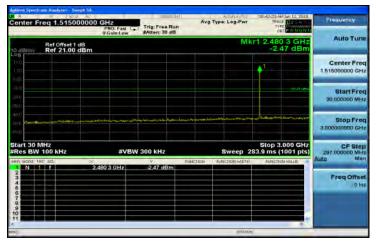

Ch High 3GHz - 26.5GHz (EDR Mode)

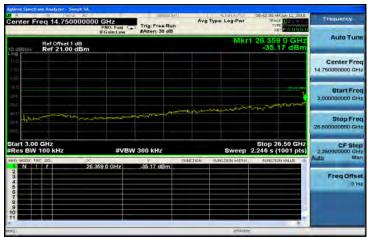

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Chiefs Softerwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are related to 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488

www.tw.sgs.com



10 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, must also comply with the §15.209 & RSS-Gen §8.10 Table 6 limit.

And according to §15.33(a) (1) & RSS-Gen §8.9 Table 4 & 5, for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level ($dB\mu V/m$) = 20 log Emission level ($dB\mu V/m$)

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Measurement Equipment Used 10.2

966 Chamber								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EMI Test Receiver	R&S	ESCI7	100760	05/11/2017	05/10/2018			
Spectrum Analyzer	Agilent	E4446A	MY51100003	04/25/2017	04/24/2018			
Loop Antenna	ETS-Lindgren	6502	148045	09/20/2017	09/19/2018			
Bilog Antenna	SCHWAZBECK	VULB9168	378	12/29/2017	12/30/2018			
Bilog Antenna	SCHWAZBECK	VULB9168	300	12/20/2017	12/19/2018			
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/04/2017	08/03/2018			
Pre-Amplifier	Agilent	8447D	2944A07676	01/02/2018	01/01/2019			
Pre-Amplifier	EMC Instruments Corp.	EMC0126530	980038	01/02/2018	01/01/2019			
Turn Table	HD	DT420	N/A	N.C.R	N.C.R			
Antenna Tower	ChamPro	AM-BS-4500-B	060776-ABS	N.C.R	N.C.R			
Controller	ChamPro	EM1000	60776	N.C.R	N.C.R			
Low Loss Cable	Huber Suhner	966_RX	9	01/02/2018	01/01/2019			
3m Site NSA	SGS	966 chamber	N/A	01/02/2018	01/01/2019			
Low Loss Cable	Huber Suhner	966 TX	1	01/02/2018	01/01/2019			
Horn Antenna	Schwarzbeck	BBHA9170	184	12/12/2017	12/11/2018			
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/02/2018	01/01/2019			


NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of libability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the printed event of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unavity and definders may be prosecuted to the fulle event of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




10.3 Test SET-UP


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

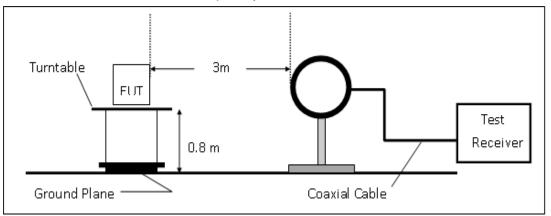

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

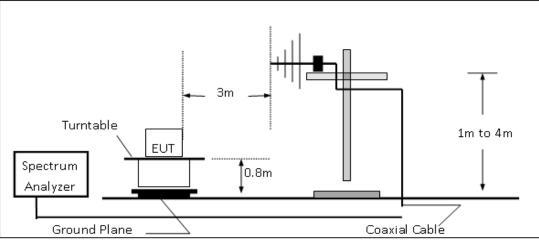

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

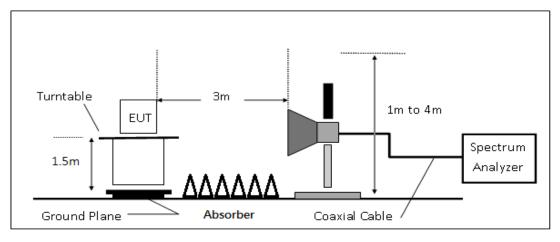

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.4 Measurement Procedure

Radiated Emission

- 1. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 0.8m for frequency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Use the follow spectrum analyzer setting:
 - (1) Span = wide enough to fully capture the emission being measured
 - (2) RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz, VBW \ge RBW, Sweep = auto, Detector function = peak, Trace = max hold
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c) Duty Cycle = On time/100 milliseconds

On time = N1*L1=N2*L2+...+N(n-1)*LN(n-1)+N(n)*L(n)

Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.

Average Emission Level = Peak Emission Level + 20*log (duty Cycle)

- 6. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 7. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 8. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 9. Repeat above procedures until all frequency of the interest measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

Since State the resolution of the state of tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

Note :

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

10.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

10.7 Measurement Result

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Since State were readed on the state of th tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



10.7.1 **Radiated Band Edge Measurement Result:**

Operation Band	:BR(1M)	Test Date	:2018-01-09
Fundamental Frequency	:2402 MHz	Temp./Humi.	:23 deg_C / 62 RH
Operation Mode	:Bandedge CH LOW	Engineer	:Kane
EUT Pol.	:E1 Plane	Measurement Antenna Pol.	:VERTICAL

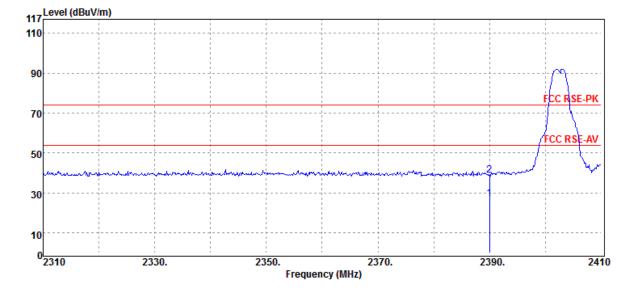

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	28.87	-1.74	27.13	54.00	-26.87
2390.00	Е	Peak	40.50	-1.74	38.76	74.00	-35.24


Report No.: ER/2018/10023 Page 35 of 70



Operation Band :BR(1M) Fundamental Frequency :2402 MHz **Operation Mode** :Bandedge CH LOW EUT Pol. :E1 Plane

Test Date Temp./Humi. Engineer :Kane Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :HORIZONTAL

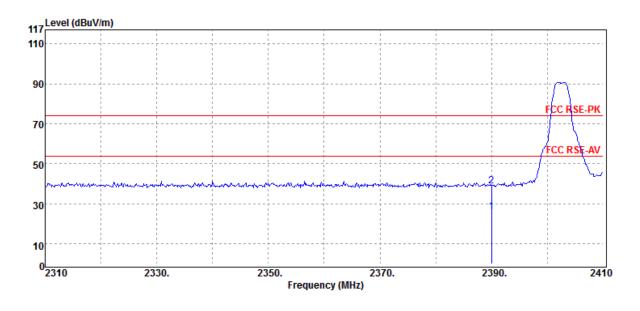


Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	27.79	-1.74	26.05	54.00	-27.95
2390.00	Е	Peak	40.56	-1.74	38.82	74.00	-35.18

Report No.: ER/2018/10023 Page 36 of 70



Operation Band :BR(1M) Fundamental Frequency :2480 MHz **Operation Mode** :Bandedge CH HIGH EUT Pol. :E1 Plane

Test Date :2018-01-09 Temp./Humi. :23 deg_C / 62 RH Engineer :Kane :VERTICAL Measurement Antenna Pol.

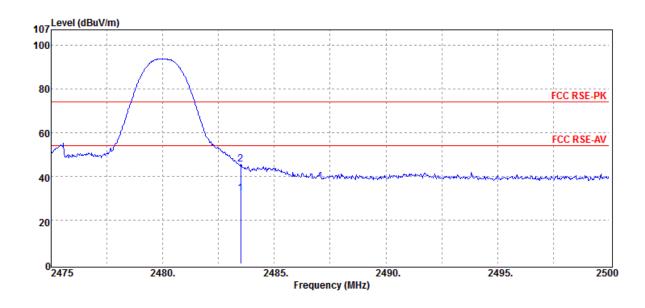

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.50	E	Average	33.82	-1.62	32.20	54.00	-21.80
2483.50	Е	Peak	47.12	-1.62	45.50	74.00	-28.50


Report No.: ER/2018/10023 Page 37 of 70



Operation Band :BR(1M) Fundamental Frequency :2480 MHz **Operation Mode** :Bandedge CH HIGH EUT Pol. :E1 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :Kane :HORIZONTAL

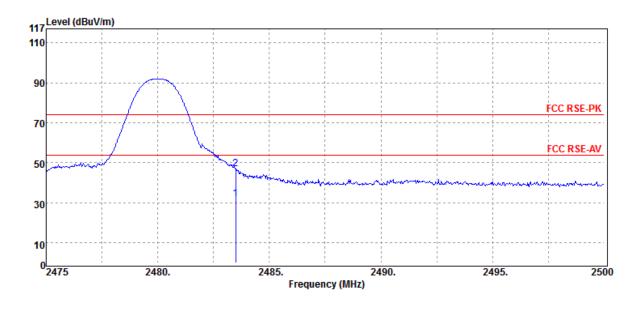


	Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2483.50	E	Average	33.62	-1.62	32.00	54.00	-22.00
	2483.50	E	Peak	48.70	-1.62	47.08	74.00	-26.92

Report No.: ER/2018/10023 Page 38 of 70



Operation Band :EDR(3M) Fundamental Frequency :2402 MHz **Operation Mode** :Bandedge CH LOW EUT Pol. :E1 Plane

Test Date :2018-01-09 Temp./Humi. :23 deg_C / 62 RH Engineer :Kane :VERTICAL Measurement Antenna Pol.

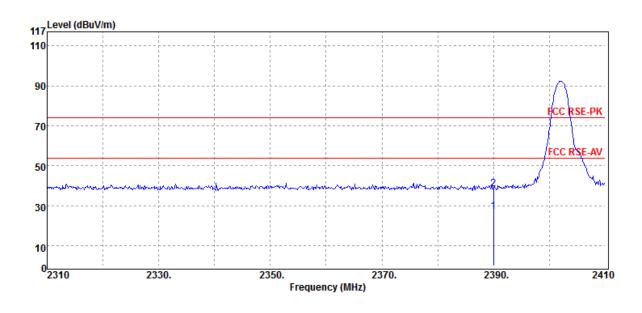

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
2390.00	E	Average	28.94	-1.74	27.20	54.00	-26.80	
2390.00	E	Peak	40.15	-1.74	38.41	74.00	-35.59	


Report No.: ER/2018/10023 Page 39 of 70



Operation Band :EDR(3M) Fundamental Frequency :2402 MHz **Operation Mode** :Bandedge CH LOW EUT Pol. :E1 Plane

Test Date Temp./Humi. Engineer :Kane Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :HORIZONTAL

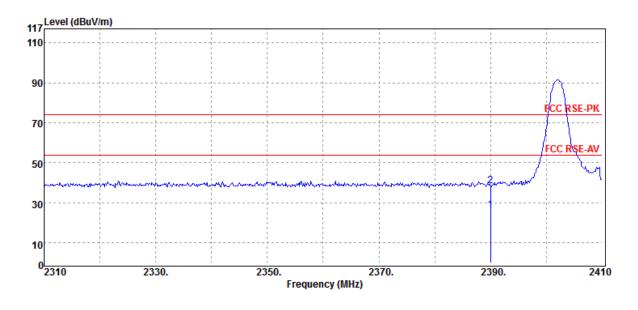


Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Е	Average	27.98	-1.74	26.24	54.00	-27.76
2390.00	Е	Peak	40.24	-1.74	38.50	74.00	-35.50

Report No.: ER/2018/10023 Page 40 of 70



Operation Band :EDR(3M) Fundamental Frequency :2480 MHz **Operation Mode** :Bandedge CH HIGH EUT Pol. :E1 Plane

Test Date :2018-01-09 Temp./Humi. :23 deg_C / 62 RH Engineer :Kane :VERTICAL Measurement Antenna Pol.

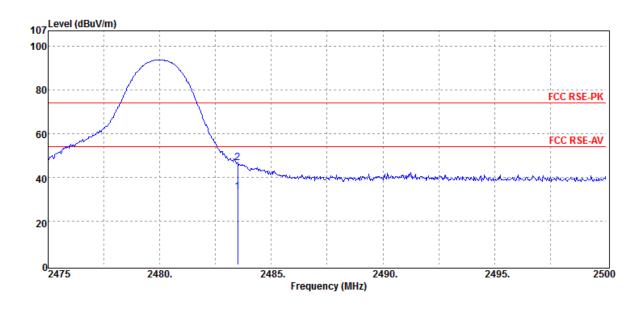

	Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2483.50	E	Average	34.96	-1.62	33.34	54.00	-20.66
	2483.50	E	Peak	48.17	-1.62	46.55	74.00	-27.45


Report No.: ER/2018/10023 Page 41 of 70



Operation Band :EDR(3M) Fundamental Frequency :2480 MHz **Operation Mode** :Bandedge CH HIGH EUT Pol. :E1 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :Kane :HORIZONTAL

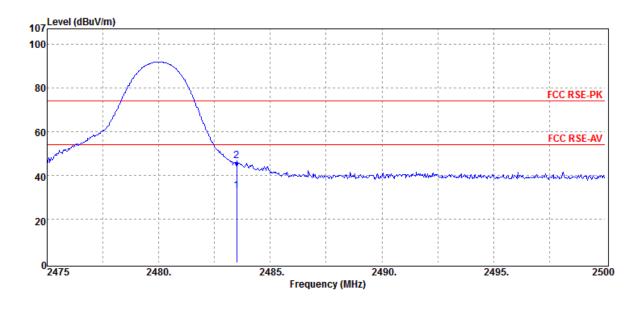

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2483.5	0 E	Average	34.42	-1.62	32.80	54.00	-21.20
2483.5	0 E	Peak	48.11	-1.62	46.49	74.00	-27.51

Report No.: ER/2018/10023 Page 42 of 70




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BR Hopping :2402 MHz :Bandedge CH LOW :E1 Plane

Test Date Temp./Humi. Engineer :Kane Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :VERTICAL

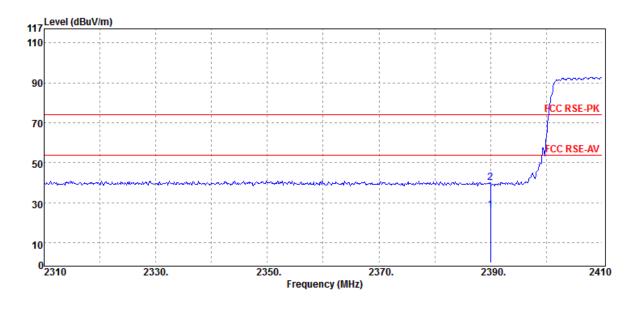

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	27.93	-1.74	26.19	54.00	-27.81
2390.00	E	Peak	41.73	-1.74	39.99	74.00	-34.01

Report No.: ER/2018/10023 Page 43 of 70




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BR Hopping :2402 MHz :Bandedge CH LOW :E1 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :Kane :HORIZONTAL

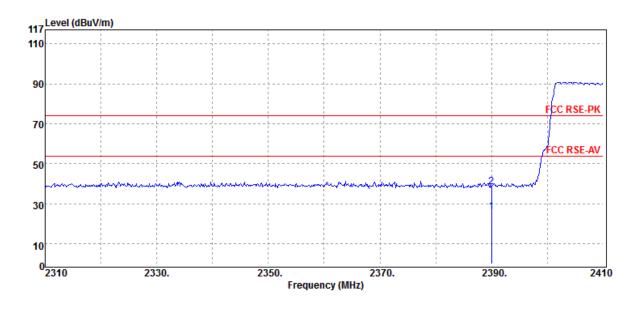

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	_
2390.00	E	Average	27.82	-1.74	26.08	54.00	-27.92	
2390.00	Е	Peak	40.02	-1.74	38.28	74.00	-35.72	

Report No.: ER/2018/10023 Page 44 of 70




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BR Hopping :2480 MHz :Bandedge CH HIGH :E1 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :Kane :VERTICAL

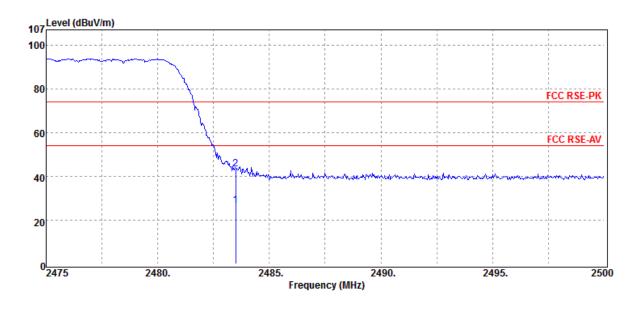

	Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2483.50	E	Average	28.42	-1.62	26.80	54.00	-27.20
	2483.50	E	Peak	44.83	-1.62	43.21	74.00	-30.79

Report No.: ER/2018/10023 Page 45 of 70




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:BR Hopping :2480 MHz :Bandedge CH HIGH :E1 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :Kane :HORIZONTAL

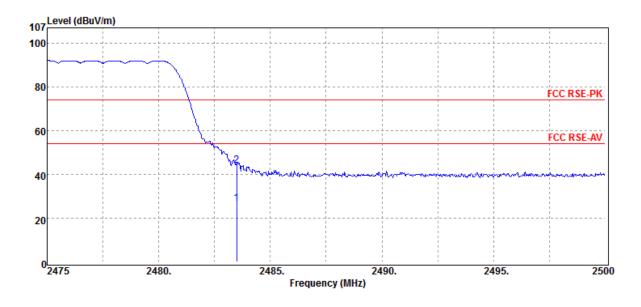

	Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2483.50	E	Average	28.19	-1.62	26.57	54.00	-27.43
	2483.50	E	Peak	45.74	-1.62	44.12	74.00	-29.88

Report No.: ER/2018/10023 Page 46 of 70




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:EDR Hopping :2402 MHz :Bandedge CH LOW :E1 Plane

Test Date Temp./Humi. Engineer :Kane Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :VERTICAL

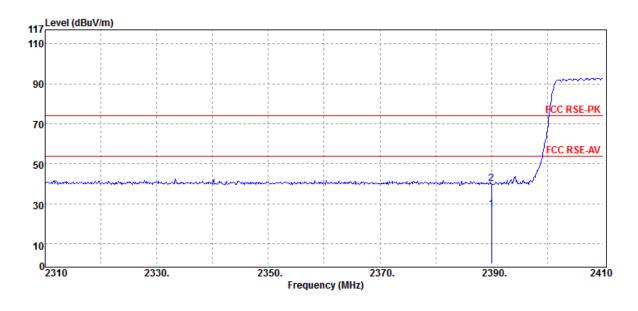

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	28.75	-1.74	27.01	54.00	-26.99
2390.00	E	Peak	42.01	-1.74	40.27	74.00	-33.73

Report No.: ER/2018/10023 Page 47 of 70




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:EDR Hopping :2402 MHz :Bandedge CH LOW :E1 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :Kane :HORIZONTAL

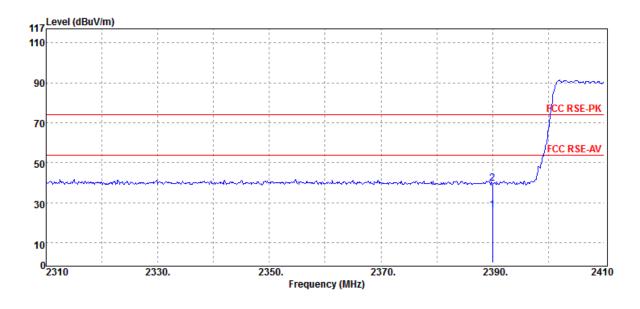

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	E	Average	27.87	-1.74	26.13	54.00	-27.87
2390.00	Е	Peak	41.48	-1.74	39.74	74.00	-34.26

Report No.: ER/2018/10023 Page 48 of 70




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:EDR Hopping :2480 MHz :Bandedge CH HIGH :E1 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :Kane :VERTICAL

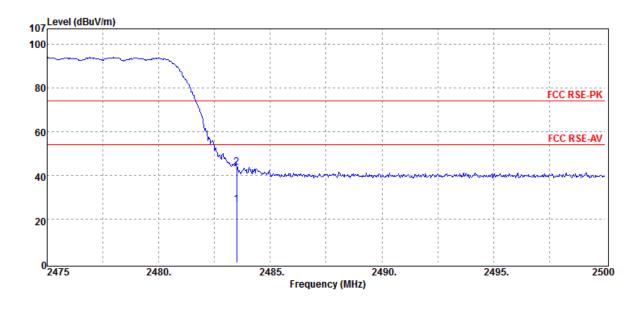

	Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
			Mode	Reading Level		FS	@3m	
_	MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
	2483.50	E	Average	28.30	-1.62	26.68	54.00	-27.32
	2483.50	E	Peak	45.30	-1.62	43.68	74.00	-30.32

Report No.: ER/2018/10023 Page 49 of 70




Operation Band Fundamental Frequency **Operation Mode** EUT Pol.

:EDR Hopping :2480 MHz :Bandedge CH HIGH :E1 Plane

Test Date Temp./Humi. Engineer Measurement Antenna Pol.

:2018-01-09 :23 deg_C / 62 RH :Kane :HORIZONTAL

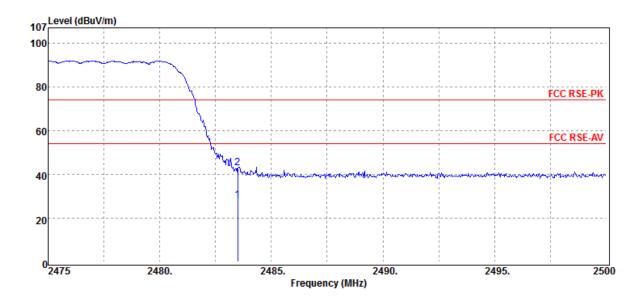

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
 MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
 2483.50	E	Average	29.83	-1.62	28.21	54.00	-25.79
2483.50	E	Peak	44.52	-1.62	42.90	74.00	-31.10




Radiated Spurious Emission Measurement Result : (Worst Case) 10.7.2 For Frequency form 30MHz to 1000MHz

Operation Band	:EDR(
Fundamental Frequency	:2441
Operation Mode	:Tx Cł
EUT Pol.	:E1 Pl


(3M) MHz H MID :E1 Plane

Test Date :2018-01-11 Temp./Humi. :23 deg C / 62 RH Engineer :Kane :VERTICAL Measurement Antenna Pol.

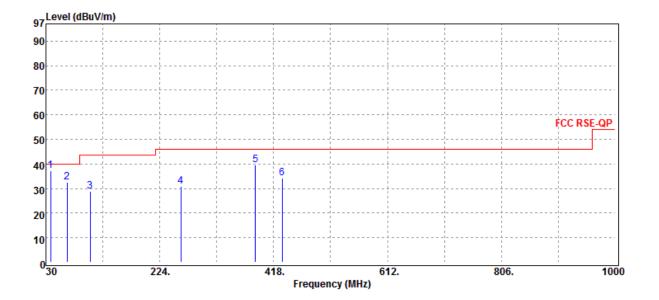

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
37.76	S	Peak	45.93	-8.75	37.18	40.00	-2.82
65.89	S	Peak	42.08	-9.38	32.70	40.00	-7.30
105.66	S	Peak	40.51	-11.80	28.71	43.50	-14.79
259.89	S	Peak	38.25	-7.29	30.96	46.00	-15.04
386.96	S	Peak	43.82	-4.29	39.53	46.00	-6.47
432.55	S	Peak	37.56	-3.43	34.13	46.00	-11.87



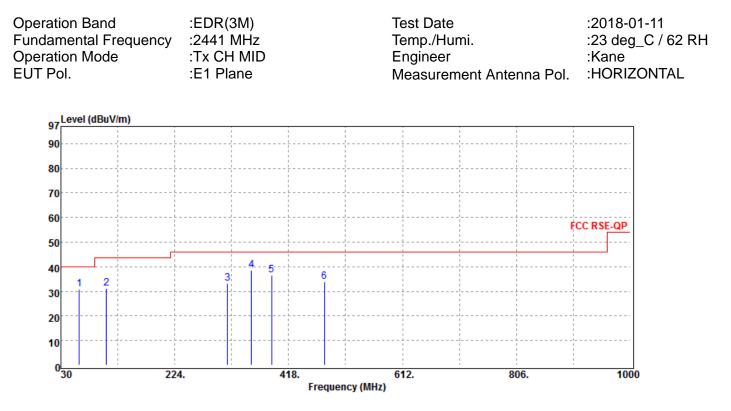


Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
61.04	S	Peak	39.08	-8.25	30.83	40.00	-9.17
107.60	S	Peak	42.59	-11.52	31.07	43.50	-12.43
314.21	S	Peak	38.81	-5.49	33.32	46.00	-12.68
354.95	S	Peak	43.41	-4.75	38.66	46.00	-7.34
388.90	S	Peak	40.80	-4.29	36.51	46.00	-9.49
479.11	S	Peak	36.42	-2.39	34.03	46.00	-11.97



10.7.3 **Radiated Spurious Emission Measurement Result :**

For Frequency above 1 GHz

Operation Band	:EDR(3M)	Test Date	:2018-01-11
Fundamental Frequency	:2402 MHz	Temp./Humi.	:23 deg_C / 62 RH
Operation Mode	:Tx CH LOW	Engineer	:Kane
EUT Pol.	:E1 Plane	Measurement Antenna Pol.	:VERTICAL

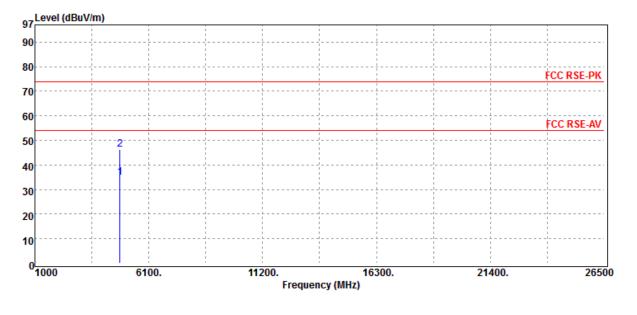

Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	Н	Average	29.82	4.92	34.74	54.00	-19.26
4804.00	Н	Peak	41.30	4.92	46.22	74.00	-27.78



Operation Band Fundamental Frequency Operation Mode EUT Pol.		:EDR(3M) :2402 MHz :Tx CH LOW :E1 Plane		Test Date Temp./Hu Engineer Measure	umi.	:Kane)1-11 J_C / 62 RH CONTAL
97	BuV/m)						
90				·			
80				·		FCC RSE-PK	
70							
60	0	 		 		FCC RSE-AV	
50							
40							
30							
20						 	
10				·		 	
0 <mark></mark>	610 E	0.	11200.	16300.	21400.	2650	0
			Frequency (MI	Hz)			
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00	н	Average	32.78	4.92	37.70	54.00	-16.30
4804.00	Н	Peak	47.49	4.92	52.41	74.00	-21.59

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advitud and offenders may be prosecuted to the fulle extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Operation Band Fundamental Frequency Operation Mode EUT Pol.		:EDR(3M) :2441 MHz :Tx CH MID :E1 Plane	MHz H MID		e umi. ment Antenna I	:Kane	_C / 62 RH
97 Level (d	BuV/m)						1
90							
80						FCC RSE-PK	
70		 		 			
60						FCC RSE-AV	
50	2						
40							
30		·····		1 1 1 1		··	
20						 	
10						·	
0 <mark></mark>	610	: 0.	11200.	16300.	21400.	2650	0
			Frequency (M	Hz)			
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	н	Average	30.16	5.18	35.34	54.00	-18.66
4882.00	Н	Peak	39.43	5.18	44.61	74.00	-29.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of libability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the printed event of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unavity and definders may be prosecuted to the fulle event of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Operation Band Fundamental Frequency Operation Mode EUT Pol.		:EDR(3M) :2441 MHz :Tx CH MID :E1 Plane)	Test Date Temp./Hu Engineer Measure	umi.	:Kane	01-11 J_C / 62 RH CONTAL
97	BuV/m)						
90							
80						FCC RSE-PK	
70		 					
60						FCC RSE-AV	
50	2						
40				 			
30							
20							
10							
0 <mark></mark>	610 E) 0.	11200.	16300.	21400.	2650	0
			Frequency (MH	z)			
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4882.00	Н	Average	34.09	5.18	39.27	54.00	-14.73
4882.00	H	Peak	42.70	5.18	47.88	74.00	-26.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of libability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the printed event of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unavity and definders may be prosecuted to the fulle event of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Н

4960.00

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:EDR(3M) :2480 MHz :Tx CH HIGH :E1 Plane		Test Date Temp./Hu Engineer Measure	umi.	:Kane	_C / 62 RH		
oz Level (d	97_Level (dBuV/m)								
90									
80									
70						FCC RSE-PK			
60	J					FCC RSE-AV			
50	2								
40									
30	· · · · · · · · · · · · · · · · · · ·			·		 			
20	· · · · · · · · · · · · · · · · · · ·			·		 			
10									
0 <mark></mark>	610	0.	11200.	16300.	21400.	2650	0		
			Frequency (MH				-		
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB		
4960.00	Н	Average	29.10	5.29	34.39	54.00	-19.61		

Peak

38.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advitud and offenders may be prosecuted to the fulle extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

5.29

74.00

-30.47

43.53



Н

4960.00

-30.02

74.00

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:EDR(3M) :2480 MHz :Tx CH HIGH :E1 Plane		Test Date Temp./Hu Engineer Measure	umi.	:Kane	01-11 J_C / 62 RH CONTAL
97 Level (d	BuV/m)						l
90				·			
80						FCC RSE-PK	
70							
60						FCC RSE-AV	
50	2			·			
40							
30				· · · · · · · · · · · · · · · · · · ·			
20				· · · · · · · · · · · · · · · · · · ·			
10				·		· · · · · · · · · · · · · · · · · · ·	
0 <mark></mark> 1000	610	0.	11200. Frequency (MH	16300. z)	21400.	2650	0
Freq.	Note	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Safe Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4960.00	Н	Average	32.64	5.29	37.93	54.00	-16.07

Peak

38.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of libability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the printed event of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unavity and definders may be prosecuted to the fulle event of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

5.29

43.98



11 FREQUENCY SEPARATION


11.1 Standard Applicable

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2 Measurement Equipment Used

Conducted Emission Test Site										
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.					
EXA Spectrum Analyzer	Agilent	N9030A	MY53120760	03/21/2017	03/20/2018					
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019					
Coaxial Cable	HU- BER+SUHNER	SUCOFLEX 102	23670/2	01/02/2018	01/01/2019					
Splitter	Agilent	11636B	N/A	01/02/2018	01/01/2019					
DC Power Supply	Agilent	E3640A	MY52410006	11/28/2017	11/27/2018					

11.3 Test Set-up



11.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 6. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

11.5 Measurement Result

Channel separation (MHz)	Limit	Result
1	>=25 kHz or 2/3 times 20dB bandwidth	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Frequency Separation Test Data



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-parament is underful and effection prove to the produced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



12 NUMBER OF HOPPING FREQUENCY


12.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

12.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
EXA Spectrum Analyzer	Agilent	N9030A	MY53120760	03/21/2017	03/20/2018		
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019		
Coaxial Cable	HU- BER+SUHNE R	SUCOFLEX 102	23670/2	01/02/2018	01/01/2019		
Splitter	Agilent	11636B	N/A	01/02/2018	01/01/2019		
DC Power Supply	Agilent	E3640A	MY52410006	11/28/2017	11/27/2018		

12.3 Test Set-up



12.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

12.5 Measurement Result

Tabular Data of Total Channel Number

	Channel Number	Limit
2.4 GHz – 2.441GHz	40	
2.441 GHz – 2.4835GHz	39	>15
2.4GHz ~2.4835GHz	(40+39) = 79	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Channel Number

Frequency Center Freq 2.420500000 GHz Avg Type: Log-Pwr Trig: Free Run #Atten: 30 dB PNO: Fast CP IFGain:Low Auto Tune Mkr1 2.402 000 GHz 3.85 dBm Ref Offset 1 dB Ref 21.00 dBm Center Freq 2.420500000 GHz Start Fred 2 40000000 GH Stop Freq 2.441000000 GH CF Step 4 100000 MHz Mar Auto Freq Offset OH Start 2.40000 GHz Stop 2.44100 GHz #VBW 1.5 MHz Sweep #Res BW 430 kHz 1.000 ms (1001 pts)

2.402GHz – 2.441GHz

2.441GHz - 2.4835GHz



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

除非方方 就明,此報告結果僅對測試之樣品資資,同時此樣品僅條留則人。本報告未經本公司著血許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



13 TIME OF OCCUPANCY (DWELL TIME)


13.1 **Standard Applicable**

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

13.2 **Measurement Equipment Used**

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
EXA Spectrum Analyz- er	Agilent	N9030A	MY53120760	03/21/2017	03/20/2018		
DC Block	Mini-Circuits	BLK-18-S+	1	01/02/2018	01/01/2019		
Coaxial Cable	HU- BER+SUHNER	SUCOFLEX 102	23670/2	01/02/2018	01/01/2019		
Splitter	Agilent	11636B	N/A	01/02/2018	01/01/2019		
DC Power Supply	Agilent	E3640A	MY52410006	11/28/2017	11/27/2018		

13.3 Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



13.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows FCC Public Notice DA 00-705 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = 2~8ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

In AFH mode, hopping rate is 800 hop/s with 6 slots in 20 hopping channels with channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 * 20) (S), Hop Over Occupancy Time comes to $(800 / 6 / 20)^{*}(0.4 * 20) = 53.33$

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



13.5 Tabular Result of the Measurement

GFSK (1Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	DH1	127.36	400ms
0	DH3	262.72	400ms
	DH5	305.39	400ms
39	DH1	127.36	400ms
	DH3	261.92	400ms
	DH5	305.39	400ms
	DH1	126.72	400ms
78	DH3	261.92	400ms
	DH5	306.77	400ms

$\pi/4$ DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	2DH1	130.88	400ms
39	2DH3	263.36	400ms
	2DH5	306.77	400ms

8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	3DH1	129.92	400ms
39	3DH3	263.36	400ms
	3DH5	306.77	400ms

A period time = 0.4 (s) * 79 = 31.6 (s)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of libability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the printed event of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unavity and definders may be prosecuted to the fulle event of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



GFSK (1Mbps):

CH Low	DH1 time slot =	0.398 *	(1600/2/79) *	31.6 =	127.36 (ms)			
	DH3 time slot =	1.642 *	(1600/4/79) *	31.6 =	262.72 (ms)			
	DH5 time slot $=$	2.863 *	(1600/6/79) *	31.6 =	305.39 (ms)			
CH Mid	DH1 time slot =	0.398 *	(1600/2/79) *	31.6 =	127.36 (ms)			
	DH3 time slot =	1.637 *	(1600/4/79) *	31.6 =	261.92 (ms)			
	DH5 time slot =	2.863 *	(1600/6/79) *	31.6 =	305.39 (ms)			
CH High	DH1 time slot =	0.396 *	(1600/2/79) *	31.6 =	126.72 (ms)			
	DH3 time slot =	1.637 *	(1600/4/79) *	31.6 =	261.92 (ms)			
	DH5 time slot =	2.876 *	(1600/6/79) *	31.6 =	306.77 (ms)			
π/4 -DQPS	K (2Mbps):							
CH Mid	2DH1 time slot=	0.409 *	(1600/2/79) *	31.6 =	130.88 (ms)			
	2DH3 time slot=	1.646 *	(1600/4/79) *	31.6 =	263.36 (ms)			
	2DH5 time slot=	2.876 *	(1600/6/79) *	31.6 =	306.77 (ms)			
8-DPSK (31	8-DPSK (3Mbps):							

CH Mid	3DH1 time slot=	0.406 *	(1600/2/79) *	31.6 =	129.92 (ms)
	3DH3 time slot=	1.646 *	(1600/4/79) *	31.6 =	263.36 (ms)
	3DH5 time slot=	2.876 *	(1600/6/79) *	31.6 =	306.77 (ms)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advitud and offenders may be prosecuted to the fulle extent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



GFSK (1Mbps) for AFH Mode					
Hopping Channel Number	PACKET TYPE	Measurement Result (ms)	Limit (ms)		
20	DH5	153.39	400ms		
	π/4 DQPSK (2Mb	ps) for AFH Mode			
Hopping Channel Number	PACKET TYPE	Measurement Result (ms)	Limit (ms)		
20	2DH5	153.39	400ms		
	8-DPSK (3Mbps	s) for AFH Mode			
Hopping Channel Number	PACKET TYPE	Measurement Result (ms)	Limit (ms)		
20	3DH5	153.39	400ms		

GFSK (1Mbps):

DH5 time sI =	2.876	(ms)	*	(800/6/20)* 8 =	153.39	(ms)
π/4 -DQPSK (2Mbps						
2DH5 time :=	2.876	(ms)	*	(800/6/20)* 8 =	153.39	(ms)
8-DPSK (3Mbps):						
3DH5 time :=	2.876	(ms)	*	(800/6/20)* 8 =	153.39	(ms)

13.6 **Measurement Result**


Note: Refer to next page for plots.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of libability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised at the printed event of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unavity and definders may be prosecuted to the fulle event of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law




CH-Low DH1

CH-Mid DH1

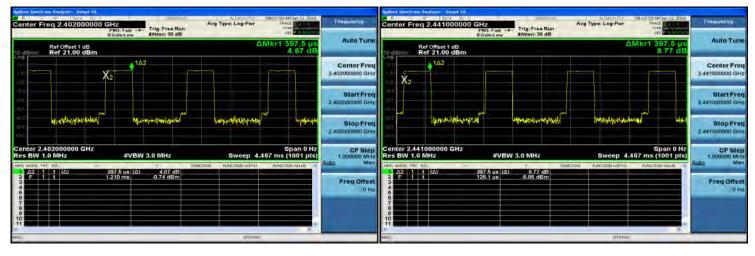


CH-Low DH3

CH-Mid DH3

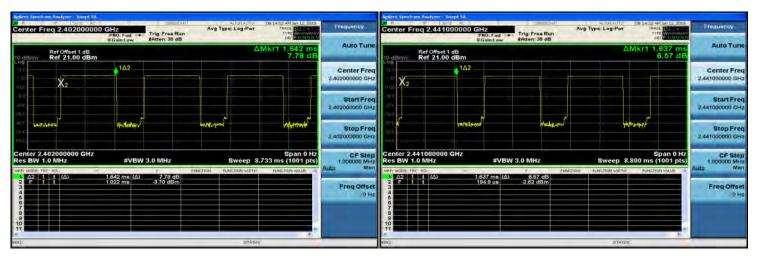

CH-Low DH5

CH-Mid DH5

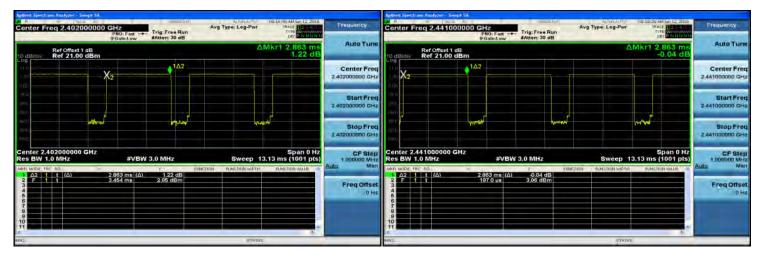

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the features into the state report feiter only to the sample(s) tested and such sample(s) tested and sample(s) teste and tested and sample(s) tes prosecuted to the fullest extent of the law.


|No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

t (886-2) 2299-3279 台灣檢驗科技股份有限公司 f (886-2) 2298-0488 www.tw.sqs.com




CH-High DH1

CH-Mid 2DH1

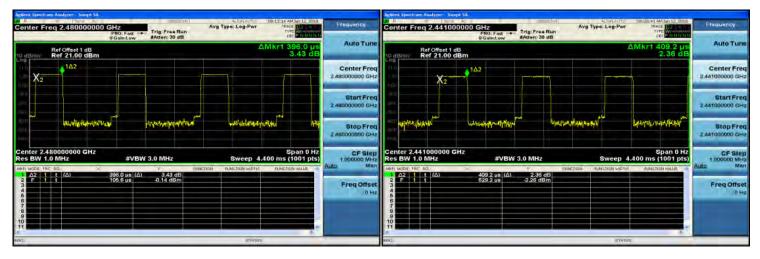


CH-High DH3

CH-Mid 2DH3

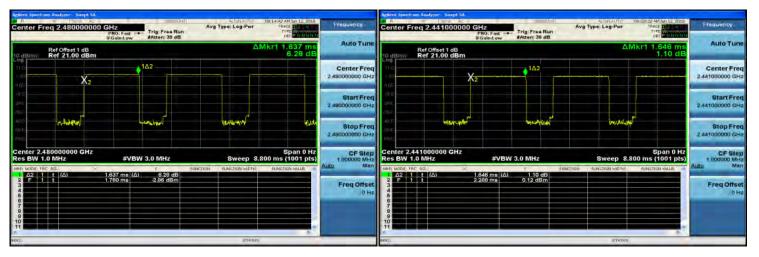

CH-High DH5

CH-Mid 2DH5

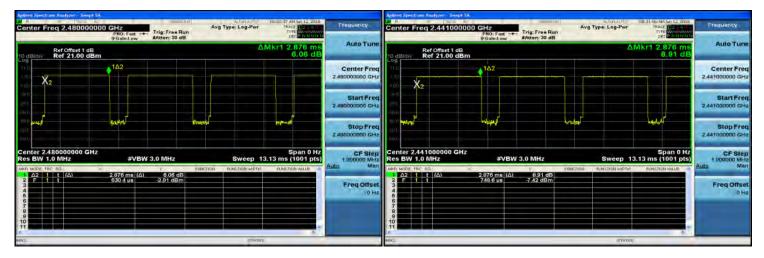

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the features into the state report feiter only to the sample(s) tested and such sample(s) tested and sample(s) teste and tested and sample(s) tes prosecuted to the fullest extent of the law.

|No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.


台灣檢驗科技股份有限公司 t (886-2) 2299-3279 f (886-2) 2298-0488 www.tw.sgs.com



CH-Mid 3DH1

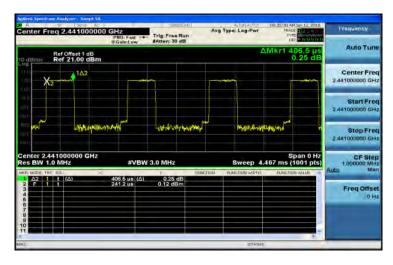


CH-Mid 3DH3

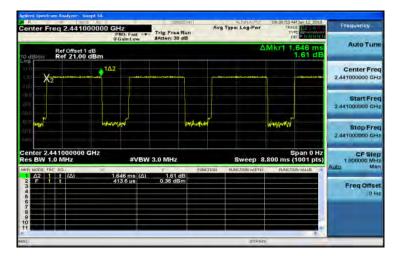

CH-Mid 3DH5

台

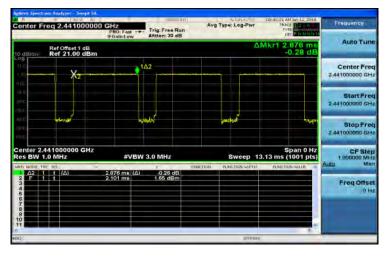

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The e-document compared at the time of its intervention on the transaction documents. This document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document is unlawful and offenders may be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號

台灣檢驗科技股份有限公司	• ·	f (886-2) 2298-0488	www.tw.sgs.com	
	I		Member of SGS Group	



14 ANTENNA REQUIREMENT

14.1 **Standard Applicable**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

14.2 Antenna Connected Construction

An embedded-in antenna design is used.

The antenna is designed as permanently attached and has no consideration of replacement. Please see EUT photo and antenna spec. for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號