

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO **FCC PART 15 SUBPART C REQUIREMENT**

	OF
Product Name:	MRS1
Brand Name:	Multiroom System
Model No.:	MRS1
Model Difference:	N/A
FCC ID:	2AE5MMRS1
Report No.:	E2/2015/60039
Issue Date:	Aug. 27, 2015
FCC Rule Part:	§15.249
Prepared for:	EuroCB (Phils.) Inc. SFB2 MEPZ1, 6015 Lapu-Lapu City, Philippines
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333



Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



VERIFICATION OF COMPLIANCE

Applicant:	EuroCB (Phils.) Inc. SFB2 MEPZ1, 6015 Lapu-Lapu City, Philippines
Product Name:	MRS1
Brand Name:	Multiroom System
Model No.:	MRS1
Model Difference:	N/A
FCC ID:	2AE5MMRS1
File Number:	E2/2015/60039
Date of test:	Jun. 17, 2015 ~ Aug. 27, 2015
Date of EUT Received:	Jun. 17, 2015

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	J-Q 2 2	Huang	Date	Aug. 27, 2015
	Jazz Huang /	Asst. Supervisor		
Prepared By:	Allen	Tsai	Date	Aug. 27, 2015
Approved By:	Tim	i / Engineer Ch ang Asst. Manager	Date	Aug. 27, 2015

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Revision History

Report Number	Revision	Description	Issue Date
E2/2015/60039	Rev.00 Initial creation of document		Aug. 27, 2015

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



Table of Contents

1	GEN	ERAL INFORMATION	.6
	1.1	Product Description	. 6
	1.2	Test Methodology of Applied Standards	. 7
	1.3	Test Facility	. 7
	1.4	Special Accessories	. 7
	1.5	Equipment Modifications	. 7
2	SYST	EM TEST CONFIGURATION	.8
	2.1	EUT Configuration	. 8
	2.2	EUT Exercise	. 8
	2.3	Test Procedure	. 8
	2.4	Measurement Results Explanation Example	. 8
	2.5	Limitation	. 9
	2.6	Configuration of Tested System	11
3	SUM	MARY OF TEST RESULTS	12
4	DES	CRIPTION OF TEST MODES	12
	4.1	Operated in 2400 ~ 2483.5MHz Band	12
	4.2	The Worst Test Modes and Channel Details	13
5	MEA	SUREMENT UNCERTAINTY	14
6	CON	DUCTED EMISSION TEST	15
	6.1	Standard Applicable:	15
	6.2	Measurement Equipment Used:	15
	6.3		
		EUT Setup:	15
	6.4	EUT Setup: Test SET-UP (Block Diagram of Configuration)	
	6.4 6.5		16
	-	Test SET-UP (Block Diagram of Configuration)	16 16
7	6.5 6.6	Test SET-UP (Block Diagram of Configuration) Measurement Procedure:	16 16 16
7	6.5 6.6	Test SET-UP (Block Diagram of Configuration) Measurement Procedure: Measurement Result:	16 16 16 19
7	6.5 6.6 Radi a	Test SET-UP (Block Diagram of Configuration) Measurement Procedure: Measurement Result: ated Emission Test	16 16 16 19 19
7	6.5 6.6 Radi a 7.1.	Test SET-UP (Block Diagram of Configuration) Measurement Procedure: Measurement Result: ated Emission Test	16 16 16 19 19
7	6.5 6.6 Radia 7.1. 7.2.	Test SET-UP (Block Diagram of Configuration) Measurement Procedure: Measurement Result: Ated Emission Test Measurement Procedure Test SET-UP (Block Diagram of Configuration)	16 16 16 19 19 19 21
7	6.5 6.6 Radi a 7.1. 7.2. 7.3.	Test SET-UP (Block Diagram of Configuration) Measurement Procedure: Measurement Result: ated Emission Test Measurement Procedure Test SET-UP (Block Diagram of Configuration) Measurement Equipment Used:	 16 16 19 19 21 22
7	6.5 6.6 Radia 7.1. 7.2. 7.3. 7.4. 7.5.	Test SET-UP (Block Diagram of Configuration) Measurement Procedure: Measurement Result: Ated Emission Test Measurement Procedure Test SET-UP (Block Diagram of Configuration) Measurement Equipment Used: Field Strength Calculation	 16 16 16 19 19 21 22 23
-	6.5 6.6 Radia 7.1. 7.2. 7.3. 7.4. 7.5.	Test SET-UP (Block Diagram of Configuration) Measurement Procedure: Measurement Result: Ated Emission Test Measurement Procedure. Test SET-UP (Block Diagram of Configuration) Measurement Equipment Used: Field Strength Calculation	 16 16 16 19 19 21 22 23 40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M the 5. Big M



8.3	Measurement Equipment Used:	40
8.4	Measurement Results:	40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



GENERAL INFORMATION 1

1.1 Product Description

General:

Product Name:	MRS1		
Brand Name:	Multiroom System		
Model No.:	MRS1		
Model Difference:	N/A		
Transmit Power	90.57 dBuV/m		
Operation Frequency:	2406 ~ 2474MHz		
Channel number:	18 channels		
Channel space:	4MHz		
Modulation Type:	8 DPSK		
Hardware Version:	V1		
Software Version:	R1		
	20 Vdc from adapter		
Power Supply:	Adapter: Model No.: 3A-401WP20, Supplier: ENG		
Antenna Designation:	Whip Antenna, Peak Gain: 2.5dBi Printed Patch Antenna, Peak Gain: -10dBi		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.249

ANSI C63.10:2013

Note:

- All test items have been performed and record as per the above standards. 1.
- The composite system is compliance with FCC Subpart B is authorized under 2. the certification procedure.
- 3. The EUT was placed 1.5m height for frequency above 1GHz in accordance with ANSI C63.10:2013.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan. (TAF code 0513)

FCC Registration Numbers are: 628985 (Hwaya)

Canada Registration Number: 4620A-5.

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 **Equipment Modifications**

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SYSTEM TEST CONFIGURATION 2

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Measurement Results Explanation Example 2.4

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Following shows an offset computation example with cable loss 1.2 dB.

でいたいでは、 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.5 Limitation

(1) Conducted Emission

According to section 15.207(a) Conducted Emission Limits is as following.

Frequency	Conducted Limit (dBuV)		
(MHz)	Quasi-Peak	Average	
0.15 – 0.5	66 - 56	56 - 46	
0.5 – 5	56	46	
5 - 30	60	50	

(2) Radiated Emission 15.249(a)

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following.

Frequency (MHz)	Field strength of Fundamental	Field strength of Harmonics	Distance (m)
902 – 928	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
2400 – 2483.5	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
5725 – 5875	50 mV/m	500 uV/m	3
	(94dBuV/m)	(54dBuV/m)	
24.0 – 24.25 GHz	250 mV/m	2500 uV/m	3
	(107.95dBuV/m)	(67.95dBuV/m)	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



(3) Radiated Emission15.249 (d)

Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209 as below, whichever is the lesser attenuation.

Frequency	Field strength	Distance (m)	Field strength at
(MHz)	μV/m		3m dBμV/m
1.705-30	30	30	69.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

(4) Radiated Emission 15.249(e)

For frequencies above 1000MHz, the above field strength limits are based on average limits. The peak filed strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

- Re-1. Emission level in dBuV/m=20 log (uV/m)
- mark: 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 - 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of ξ 15.205
 - 4. Emission spurious frequency which appearing within the Restricted Bands specified in provision of *E*15.205, then the general radiated emission limits in ξ 15.209 apply.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でいたいでは、 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



Configuration of Tested System 2.6

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration



Fig. 2-2 AC Power Line Conducted Emission



Table 2-1 Equipment Used in Tested System

lte m	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	2.4GHz wireless Test Software	PurePath Wireless Commander	N/A	N/A	N/A	N/A
2.	Notebook	Lenovo	L412	LR-027LM	Shielded	Unshielded

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained to so days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



SUMMARY OF TEST RESULTS 3

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emis- sion	Compliant
§15.249(a)(d)(e)	Radiated Emission	Compliant
§15.215(c)	20dB bandwidth Measurement	Compliant

DESCRIPTION OF TEST MODES 4

Operated in 2400 ~ 2483.5MHz Band 4.1

18 channels are provided.

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2406MHz	7	2430MHz	13	2454MHz
2	2410MHz	8	2434MHz	14	2458MHz
3	2414MHz	9	2438MHz	15	2462MHz
4	2418MHz	10	2442MHz	16	2466MHz
5	2422MHz	11	2446MHz	17	2470MHz
6	2426MHz	12	2450MHz	18	2474MHz

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Pre-scanned was done on Whip antenna and Printed patch antenna, and Whip antenna results higher emission. Therefore, the completed set of measurement was Whip antenna to presented on this test repot.

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)										
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT					
2.4G	1 to 18	1,10,18	8-DPSK	3	MAIN					
	RADIATED EMISSION TEST (ABOVE 1 GHz)									
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT					
2.4G	1 to 18	1,10,18	8-DPSK	3	MAIN					

Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth LE 4.1 Transmitter for channel Low, Mid and High, the worst case E1 position was reported.

ANTENNA PORT CONDUCTED MEASUREMENT:

CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
2.4G	1 to 18	1,10,18	8-DPSK	3	MAIN		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 0.84 dB
6dB Bandwidth	+/- 51.33 Hz
100 kHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB
Peak Power Density	+/- 1.3 dB
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	30MHz - 180MHz: +/- 3.37dB
Maggurament ungerteintu	180MHz -417MHz: +/- 3.19dB
Measurement uncertainty (Polarization : Vertical)	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6 CONDUCTED EMISSION TEST

6.1 Standard Applicable:

According to §15.207, frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)						
MHz	Quasi-peak	Average					
0.15 to 0.50	66 to 56	56 to 46					
0.50 to 5	56	46					
5 to 30	60	50					
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50							

6.2 Measurement Equipment Used:

Conducted Emission Test Site									
EQUIPMENT	MFR MODEL		SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
EMI Test Receiver	R&S	ESCI 7	100950	12/12/2014	12/11/2015				
Coaxial Cables	N/A	N30N30-1042-150cm	N/A	01/06/2015	01/07/2016				
LISN	Schwarzbeck	NSLK 8127	8127-648	06/09/2015	06/08/2016				
LISN	Rolf-Heine	NNB-2/16Z	99012	03/04/2015	03/03/2016				
Test Software	Farad	EZ-EMC	Ver. SGS-03A2	N.C.R.	N.C.R.				

6.3 EUT Setup:

MHz.


- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of

tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134, WuKungRoad, NewTaipeilndustrialPark, WukuDistrict, NewTaipeiCity, Taiwan24803/新北市五股區新北產業園區五工路 134 號



6.4 Test SET-UP (Block Diagram of Configuration)

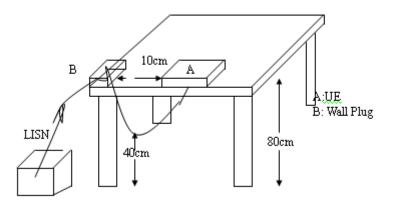

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result:

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.


Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode:	Operation mode		Test Date:	Aug. 14, 2014	
Temperature:	24 Humidity: 63 %			Test By:	Vito
Model No.:	3A-401WP20			Probe	L1

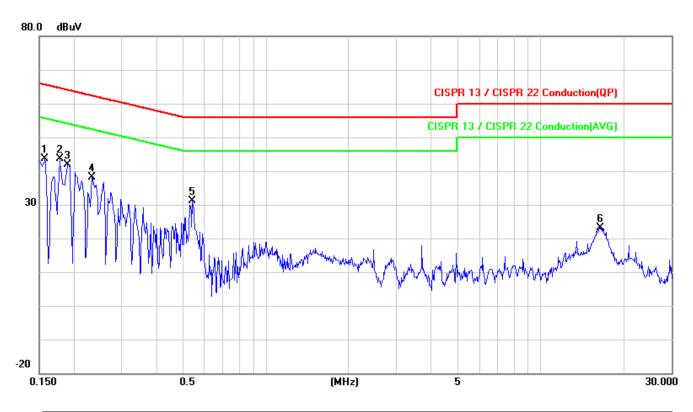

No.	Mk.	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		(MHz)	dBuV	(dB)	(dBuV)	(dBuV)	(dB)		
1		0.1580	43.60	0.08	43.68	65.57	-21.89	peak	
2	*	0.1780	43.46	0.08	43.54	64.58	-21.04	peak	
3		0.1900	41.92	0.07	41.99	64.04	-22.05	peak	
4		0.2340	38.17	0.08	38.25	62.31	-24.06	peak	
5		0.5420	30.91	0.24	31.15	56.00	-24.85	peak	
6		16.4100	22.56	0.60	23.16	60.00	-36.84	peak	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Contention is stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



0.150

30.000

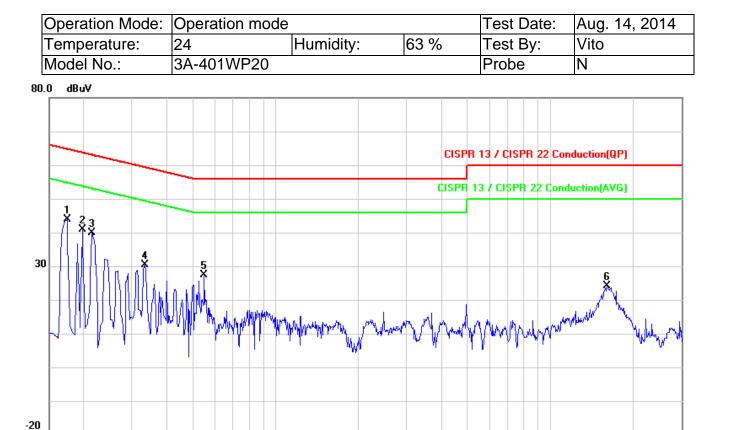

No.	Mk.	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Comment
		(MHz)	dBuV	(dB)	(dBuV)	(dBuV)	(dB)		
1	*	0.1740	43.84	0.14	43.98	64.77	-20.79	peak	
2		0.1980	40.83	0.13	40.96	63.69	-22.73	peak	
3		0.2140	39.84	0.14	39.98	63.05	-23.07	peak	
4		0.3340	30.17	0.19	30.36	59.35	-28.99	peak	
5		0.5500	27.12	0.29	27.41	56.00	-28.59	peak	
6		16.0780	23.52	0.64	24.16	60.00	-35.84	peak	

(MHz)

5

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

0.5




Radiated Emission Test 7

7.1. Measurement Procedure

- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4. Repeat above procedures until all frequency measured were complete.

7.2. Test SET-UP (Block Diagram of Configuration)

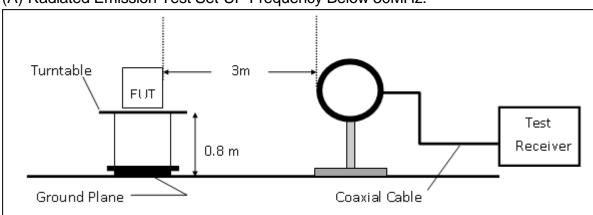


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

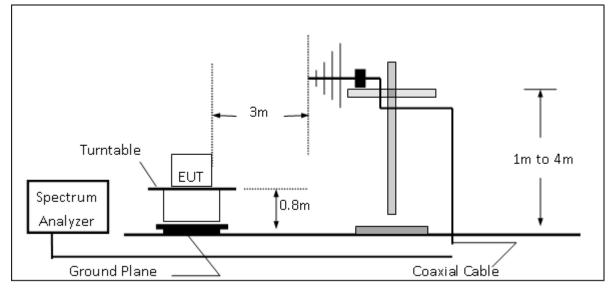

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

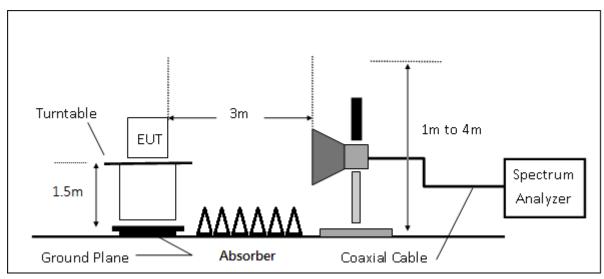

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Contention is stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relative for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



7.3. Measurement Equipment Used:

SGS SAC Chamber No.C (FCC)									
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.				
TYPE		NUMBER	NUMBER	CAL.					
EMI Test Receiver	R&S	ESU 40	100363	04/09/2015	04/08/2016				
Loop Antenna	ETS-Lindgren	6502	00143303	12/09/2014	12/08/2015				
Broadband Antenna	TESEQ	CBL 6112D	35240	12/05/2014	12/04/2015				
Horn Antenna	ETS-Lindgren	3117	00143272	12/08/2014	12/07/2015				
Horn Antenna	ETS-Lindgren	3160-09	00117911	11/13/2014	11/12/2015				
Horn Antenna	ETS-Lindgren	3160-10	00117783	11/13/2014	11/12/2015				
Pre Amplifier	EMC Instruments	EMC330	980096	12/19/2014	12/18/2015				
Pre Amplifier	EMC Instruments	EMC0011830	980199	12/19/2014	12/18/2015				
Pre Amplifier	R&S	SCU-18	10204	12/19/2014	12/18/2015				
Pre Amplifier	R&S	SCU-26	100780	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	RG 214/U	966Rx 9K-30M	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	RG 214/U SUCOFLEX 104	966Rx 30M-3G	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Rx 1G-18G	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	mini 141-12 SUCOFLEX 104	966Rx 18G-40G	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	SUCOFLEX 104	966Tx 30M-18G	12/19/2014	12/18/2015				
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	966Tx 18G-40G	12/19/2014	12/18/2015				
Attenuator	WOKEN	218FS-10	RF27	12/19/2014	12/18/2015				
Site NSA	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016				
Site VSWR	SGS	966 Chamber C	SAC-C	03/04/2015	03/03/2016				
DC Power Supply	HOLA	DP-3003	D7070035	05/04/2015	05/03/2016				
Controller	MF	MF-7802	N/A	N.C.R.	N.C.R.				
Antenna Master	MF	N/A	N/A	N.C.R.	N.C.R.				
Turn Table	MF	N/A	N/A	N.C.R.	N.C.R.				
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測试之樣品負責,同時此樣品僅保留卽天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號



7.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でいたいでは、 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



7.5. Measurement Result

2406.98

Average

Radiated Spurious Emission Measurement Result (MAIN)

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:2.4GTest Date:2406 MHzTemp./Humi.:MAIN LOWEngineer:H PlanMeasurement A		:2015-07-16 :24.6deg_C/47 :Vito Antenna Pol. :VERTICAL		_C/47RH		
	Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Safe
		Mode		Reading Leve	el	FS	@3m	Margin
	MHz	PK/QP/A\	/ F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
	2407.01	Peak	F	88.40	6.66	95.06	114.00	-18.94
	2407.01	Average	F	80.08	6.66	86.74	94.00	-7.26
Fun Ope	eration Band adamental F eration Mod T Pol.	requency	:2.4G :2406 MHz :MAIN LOW :H Plan	T	est Date emp./Humi. ngineer leasurement	Antenna Pol.	:2015-07 :24.6deg :Vito :HORIZC	_C/47RH
	Freq.	Detector Mode	Note	Spectrum Reading Leve	Factor	Actual FS	Limit @3m	Safe Margin
	MHz	PK/QP/A\	/ F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
	2406.98	Peak	F	86.09	6.66	92.75	114.00	-21.25

78.40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

F

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

6.66

85.06

94.00

-8.94



Operation Band Fundamental Frequency Operation Mode EUT Pol.		:2.4G :2442 MHz :MAIN MID :H Plan	I42 MHzTemp./Humi.AIN MIDEngineer		:2015-07-16 :24.6deg_C/47RH :Vito :VERTICAL			
	Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Safe
		Mode		Reading Level		FS	@3m	Margin
_	MHz	PK/QP/AV	/ F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
	2440.93	Peak	F	88.63	6.83	95.46	114.00	-18.54
	2440.93	Average	F	80.45	6.83	87.28	94.00	-6.72
Operation Band:2.4GFundamental Frequency:2442 MHzOperation Mode:MAIN MIDEUT Pol.:H Plan		:2442 MHz :MAIN MID	Test Date Temp./Humi. Engineer Measurement Antenna Pol.		:2015-07 :24.6deg :Vito :HORIZC	_C/47RH		
	Freq. MHz	Detector Mode PK/QP/AV	Note / F/H/E/S	Spectrum Reading Level dBµV/m	Factor dB	Actual FS dBuV//m	Limit @3m dBu\//m	Safe Margin dB
-			F/FI/E/3	υσμν/Π	uD	dBµV/m	dBµV/m	UD

2440.97	Peak	F	85.60	6.83	92.43	114.00	-21.57
2440.97	Average	F	77.84	6.83	84.67	94.00	-9.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M the 5. Big M



Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 25 of 42

Limit	Safe
@3m	Margin
dBµV/m	dB
114.00	-20.27
94.00	-8.74
	@3m dBµV/m 114.00

Operation Band	:2.4G	Test Date	:2015-07-16
Fundamental Frequency	:2474 MHz	Temp./Humi.	:24.6deg_C/47RH
Operation Mode	:MAIN HIGH	Engineer	:Vito
EUT Pol.	:H Plan	Measurement Antenna Pol.	:HORIZONTAL

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Safe
	Mode		Reading Level		FS	@3m	Margin
MHz	PK/QP/AV	F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
2472.9	0 Peak	F	81.87	6.93	88.80	114.00	-25.20
2472.9	0 Average	F	72.86	6.93	79.79	94.00	-14.21

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Radiated Spurious Emission Measurement Result

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:2.4G :2406 MHz :BANDEDGE LOW :H Plan		Test Date Temp./Humi. Engineer Measurement Antenna Pol.		:2014-07-16 :24.6deg_C/47RH :Vito :VERTICAL	
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Le	vel	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
2390.00	Peak	Е	44.39	6.62	51.01	74.00	-22.99
2390.00	Average	Е	33.03	6.62	39.65	54.00	-14.35

Operation Band	:2.4G	Test Date	:2014-07-16
Fundamental Frequency	:2406 MHz	Temp./Humi.	:24.6deg_C/47RH
Operation Mode	:BANDEDGE LOW	Engineer	:Vito
EUT Pol.	:H Plan	Measurement Antenna Pol.	:HORIZONTAL

	Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
		Mode		Reading Level		FS	@3m	
	MHz	PK/QP/AV	F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
2	390.00	Peak	Е	44.59	6.62	51.20	74.00	-22.80
2	390.00	Average	Е	33.11	6.62	39.73	54.00	-14.27

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 27 of 42

Operation Band	:2.4G	Test Date	:2014-07-16
Fundamental Frequency	:2474 MHz	Temp./Humi.	:24.6deg_C/47RH
Operation Mode	:BANDEDGE HIGH	Engineer	:Vito
EUT Pol.	:H Plan	Measurement Antenna Pol.	:VERTICAL

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
2483.50	Peak	Е	45.08	6.96	52.05	74.00	-21.95
2483.50	Average	Е	33.34	6.96	40.30	54.00	-13.70

Operation Band	:2.4G	Test Date	:2014-07-16
Fundamental Frequency	:2474 MHz	Temp./Humi.	:24.6deg_C/47RH
Operation Mode	:BANDEDGE HIGH	Engineer	:Vito
EUT Pol.	:H Plan	Measurement Antenna Pol.	:HORIZONTAL

	Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
		Mode		Reading Level		FS	@3m	
_	MHz	PK/QP/AV	F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
	2483.50	Peak	Е	45.31	6.96	52.27	74.00	-21.73
	2483.50	Average	Е	33.09	6.96	40.05	54.00	-13.95

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Radiated Spurious Emission Measurement Result

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:2406 MHz :TX LOW		est Date emp./Humi. ngineer leasurement	Antenna Pol	:24.6deg :Vito	:2014-07-16 :24.6deg_C/47RH :Vito :VERTICAL	
97 - 87 - 77 - 67 -								
58 [(ɯ//mɡp]] tevei		,		5			FCC RSE QP	
38 × 1 29 19	×				6 X			
9		272.5	requ	515 ency [MHz]	757.5	, , , ,	1000	
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin	
·	Mode		Reading Leve		FS	@3m	5	
MHz	PK/QP/AV	F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB	
32.81	Peak	S	51.92	-14.64	37.27	40.00	-2.73	
47.46	QP	S	59.50	-23.95	35.55	40.00	-4.45	
161.92	Peak	S	61.18	-23.26	37.92	43.50	-5.58	
307.42	Peak	S	58.38	-18.94	39.44	46.00	-6.56	
552.83	Peak	S	54.00	-13.21	40.79	46.00	-5.21	
746.83	QP	S	29.89	-9.95	19.94	46.00	-26.06	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 29 of 42

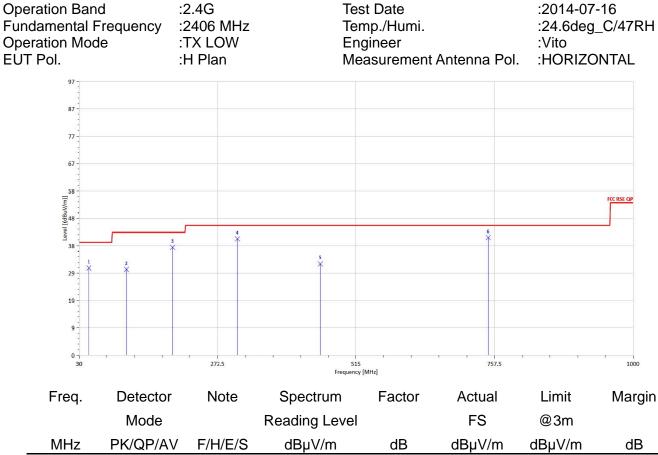


_	IVIHZ	PN/QP/AV	F/H/E/S	αθμν/m	aв	αθμν/m	ασμν/m	aв	_
									_
	47.46	Peak	S	54.82	-23.95	30.88	40.00	-9.12	
	113.42	Peak	S	52.46	-22.04	30.42	43.50	-13.08	
	193.93	Peak	S	62.00	-23.82	38.18	43.50	-5.32	
	307.42	Peak	S	60.13	-18.94	41.19	46.00	-4.81	
	452.92	Peak	S	47.21	-14.83	32.38	46.00	-13.62	
	746.83	Peak	S	51.60	-9.95	41.64	46.00	-4.36	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 30 of 42

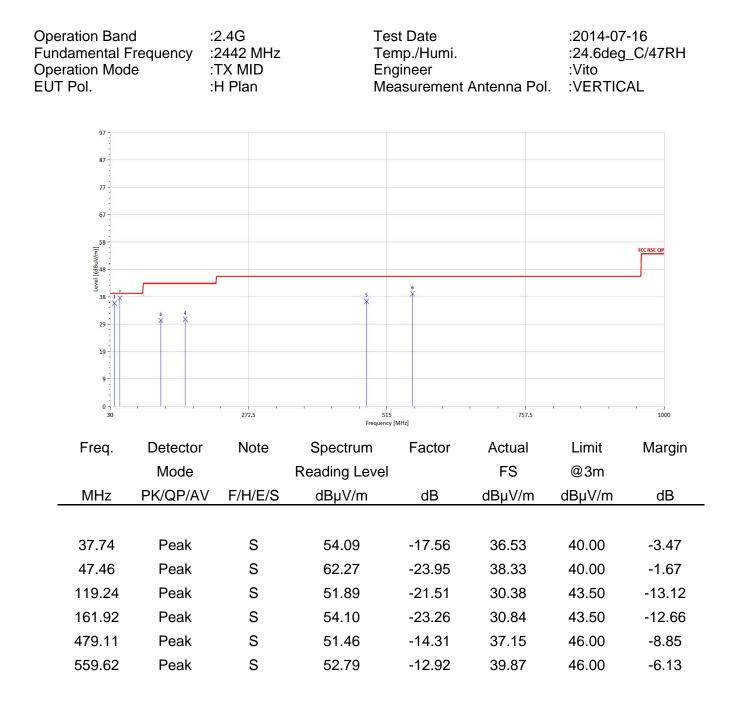

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 31 of 42

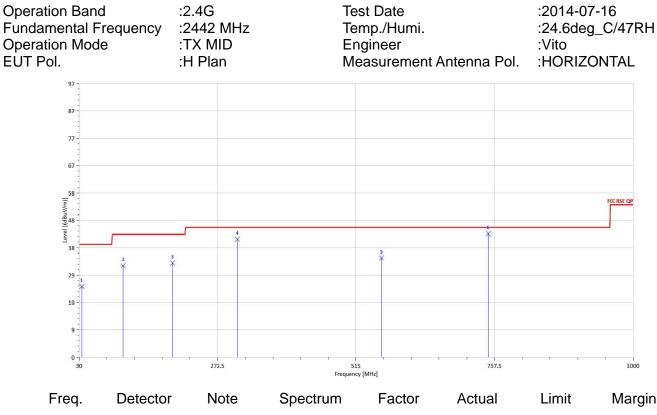


	TTEY.	Delector	NOLE	Spectrum	T actor	Actual	LIIIII	Maryin	
		Mode		Reading Level		FS	@3m		
_	MHz	PK/QP/AV	F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB	_
	34.85	Peak	S	40.82	-15.75	25.07	40.00	-14.93	
	107.60	Peak	S	55.10	-22.68	32.42	43.50	-11.08	
	193.93	Peak	S	57.20	-23.82	33.38	43.50	-10.12	
	307.42	Peak	S	60.71	-18.94	41.78	46.00	-4.22	
	559.62	Peak	S	48.07	-12.92	35.15	46.00	-10.85	
	746.83	Peak	S	53.73	-9.95	43.78	46.00	-2.22	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 32 of 42

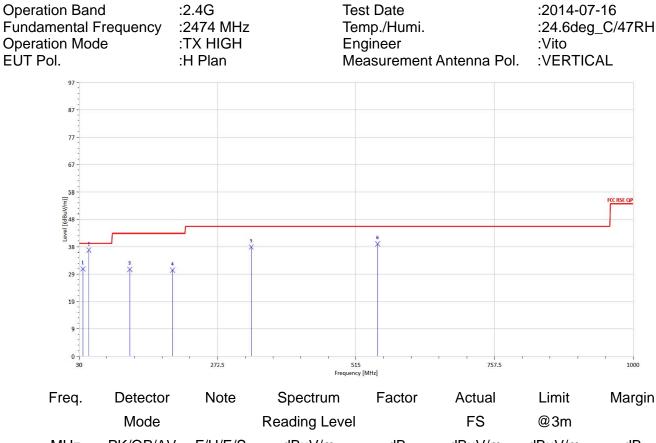

MHz	PK/QP/AV	F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
36.79	QP	S	47.89	-16.96	30.93	40.00	-9.07
47.46	QP	S	61.55	-23.95	37.60	40.00	-2.40
119.24	Peak	S	52.25	-21.51	30.74	43.50	-12.76
193.93	Peak	S	54.31	-23.82	30.49	43.50	-13.01
331.67	Peak	S	56.88	-18.20	38.68	46.00	-7.32
552.83	Peak	S	53.01	-13.21	39.80	46.00	-6.20

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 33 of 42

Operation Band :2.4G Test Date :2014-07-16 **Fundamental Frequency** Temp./Humi. :2474 MHz :24.6deg_C/47RH Operation Mode :TX HIGH Engineer :Vito EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL 97 87 77 -67 58 FCC RSE QP 19 48 38 29 19 9 0 1000 272.5 515 757.5 Frequency [MHz]

	Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
		Mode		Reading Level		FS	@3m	
_	MHz	PK/QP/AV	F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
	30.97	Peak	S	33.91	-13.64	20.27	40.00	-19.73
	113.42	Peak	S	53.80	-22.04	31.76	43.50	-11.74
	193.93	Peak	S	56.70	-23.82	32.88	43.50	-10.62
	307.42	Peak	S	60.36	-18.94	41.42	46.00	-4.58
	559.62	Peak	S	48.03	-12.92	35.11	46.00	-10.89
	738.10	Peak	S	47.34	-10.30	37.04	46.00	-8.96

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 34 of 42

Operation Band Fundamental F Operation Mod EUT Pol.	requency e	:2406 MHz :TX LOW		Test Date Temp./Humi. Engineer Measuremer	nt Antenna Pol	:24.6deg :Vito	:2014-07-16 :24.6deg_C/47RH :Vito :VERTICAL	
117								
105 -								
93 -								
81								
70 -							FCC RSE PK	
[[m//m]								
(س//۳۹۵) 88							FCC RSE AV	
46	×							
35	×							
23								
11								
0			- I I I			1 1 1		
1000		7375	Fre	13750 quency [MHz]	20125		26500	
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin	
	Mode		Reading Lev	/el	FS	@3m		
MHz	PK/QP/AV	F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB	
4812.00	Peak	Н	33.23	10.99	44.21	74.00	-29.79	
4812.00	Average	Н	22.24	10.99	33.23	54.00	-20.77	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 35 of 42

Operatio Fundam Operatio EUT Pol	ental F n Mod	requency	:2.4G :2406 MHz :TX LOW :H Plan		Temp. Engin	Test Date Temp./Humi. Engineer Measurement Antenna Pol.			-16 _C/47RH)NTAL
	117								
	105								
	93 -								
	81								
	70 -								FCC RSE PK
	Level [(dBuV/m]]								FCC RSE AV
	46	1 *							
	35	*							
	23								
	11								
	0 - 1000		7375		13750 Frequency [MHz]	1 1	20125		26500
F	req.	Detector	Note	e Spectru	ım l	Factor	Actual	Limit	Margin
		Mode		Reading L	evel		FS	@3m	
N	1Hz	PK/QP/AV	′ F/H/E	/S dBµV/i	n	dB	dBµV/m	dBµV/m	dB
48	12.00	Peak	Н	33.25	i	10.99	44.24	74.00	-29.76
48	12.00	Average	Н	22.14		10.99	33.13	54.00	-20.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M the 5. Big M



Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 36 of 42

Operation Band Fundamental F Operation Mod EUT Pol.	requency e	:2.4G :2442 MHz :TX MID :H Plan	T E	est Date emp./Humi. ngineer /leasuremen	t Antenna Po	:Vito	_C/47RH
117							
105							
93							
81							
70							FCC RSE PK
Level [(dBuV/m)]							
							FCC RSE AV
46 -	*						
35 -	*						
23 -							
11							
0		7375		13750 Jency [MHz]	20125		26500
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Leve	el	FS	@3m	
MHz	PK/QP/AV	/ F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
4884.00	Peak	Н	31.79	10.92	42.71	74.00	-31.29
4884.00	Average	Н	22.01	10.92	32.93	54.00	-21.07

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Operation Band Fundamental Frequency Operation Mode EUT Pol.		:2.4G :2442 MHz :TX MID :H Plan		est Date emp./Humi. ngineer easurement	Antenna Pol.	:24.6deg :Vito	:2014-07-16 :24.6deg_C/47RH :Vito :HORIZONTAL	
117 -								
105 -								
93 -								
81 -								
							FCC RSE PK	
70 - [[]								
[(m//mg/) 85							FCC RSE AV	
<u>م</u> 46 -	1							
35 -	¥							
23 -								
11								
0 -	ю	7375		750 ncy [MHz]	20125	1 1 1	26500	
Freq.	Detector	. Note	Spectrum	Factor	Actual	Limit	Margin	
	Mode		Reading Leve	l	FS	@3m		
MHz	PK/QP/A	V F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB	
4884.0	0 Peak	н	32.18	10.92	43.10	74.00	-30.90	
4884.0	0 Average	н	22.12	10.92	33.04	54.00	-20.96	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 38 of 42

Operation Band Fundamental Frequency Operation Mode EUT Pol.			:2.4G :2474 MHz :TX HIGH :H Plan		Test Date Temp./Humi. Engineer Measurement Antenna Pol.			ol.	:2014-07-16 :24.6deg_C/47RH :Vito :VERTICAL		
	117										
	105										
	93 -										
	81										
	70 -										FCC RSE PK
	Level [(dBu//m]]										
	level [(d										FCC RSE AV
	46 -										
	35 -	*									
	23 -										
	11										
	0										
1000		737	75	F	137 requenc	50 ;y [MHz]	20125			26500	
Fr	eq.	Detector	No	ote	Spectrum	ı	Factor	Actual		Limit	Margin
		Mode			Reading Le	vel		FS		@3m	
M	Hz	PK/QP/A\	/ F/H/	E/S	dBµV/m		dB	dBµV/m	d	BµV/m	dB
494	8.00	Peak	F	ł	31.93		10.96	42.89		74.00	-31.11
494	8.00	Average	F	ł	21.98		10.96	32.94		54.00	-21.06

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部分複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction form exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCGS Taiwan Ltd.</u> No.134. WuKungRoad NewTaipeiflustrialPark WukuDistrict NewTaipeifCity.Taiwan24803/新 the 5. Big M the 5. Big M



Report No.: E2/2015/60039 Issue Date: Aug. 27, 2015 Page: 39 of 42

Operation Band :2.4G Test Date :2014-07-16 **Fundamental Frequency** Temp./Humi. :2474 MHz :24.6deg_C/47RH **Operation Mode** :TX HIGH Engineer :Vito EUT Pol. :H Plan Measurement Antenna Pol. :HORIZONTAL 117 105 93 81 70 [(qBu 58 FCC RSE AV PVP 46 35 23 11 0 -1000 7375 20125 26500 13750 Frequency [MHz]

	Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
		Mode		Reading Level		FS	@3m	
_	MHz	PK/QP/AV	F/H/E/S	dBµV/m	dB	dBµV/m	dBµV/m	dB
	4948.00	Peak	Н	32.19	10.96	43.14	74.00	-30.86
	4948.00	Average	Н	21.98	10.96	32.94	54.00	-21.06

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



8 20 dB Bandwidth Measurement

8.1 Measurement Procedure

- The EUT was placed on a turn table which is 0.8m above ground plane. 1.
- 2. Set ETU normal operating mode.
- 3. Set SPA Center Frequency = fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 5MHz.
- 4. Set SPA Max hold. Mark peak, -20dB.

8.2 Test SET-UP (Block Diagram of Configuration)

Refer to section 7.2 for the plot.

8.3 Measurement Equipment Used:

SGS Conducted Room(ALL)								
Name of Equip- ment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due			
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/15/2014	10/14/2015			
Power Meter	Anritsu	ML2496A	1326001	06/23/2015	06/22/2016			
Power Sensor	Anritsu	MA2411B	1315048	06/23/2015	06/22/2016			
Power Sensor	Anritsu	MA2411B	1315049	06/23/2015	06/22/2016			
Coaxial Cable 30cm	WOKEN	00100A1F1A195C	RF01	12/19/2014	12/18/2015			
DC Block	PASTERNACK	PE8210	RF29	12/19/2014	12/18/2015			
Splitter	RF-LAMBAD	RFLT2W1G18G	RF35	12/19/2014	12/18/2015			
Attenuator	WOKEN	218FS-10	RF23	12/19/2014	12/18/2015			
DC Power Supply	Agilent	E3640A	MY53140006	05/04/2015	05/03/2016			

8.4 Measurement Results:

2.442GHz = 4341 kHz

2.474GHz = 4332 kHz

Refer to attached data chart.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

でいたいでは、 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留知天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



20dB Bandwidth Test Plot (2.406GHz)



20dB Bandwidth Test Plot (2.442GHz)



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



20dB Bandwidth Test Plot (2.474GHz)



~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.