



**BUREAU  
VERITAS**

**TEST REPORT No.: (5215)120-0387**

## TEST REPORT

To:	<b>SUNNY DAYS ENTERTAINMENT, LLC</b>	To:	-
Attn:	Melvin Wells	Attn:	-
Address:	PO Box 80644 Simpsonville, SC 29680	Address:	-
Fax:	--	Fax:	-
E-mail:	--	E-mail:	-
Folder No.:	--		
Factory Name:	<b>SHANTOU CHENGHAI XIANXIN PLASTIC TOYS FACTORY</b>		
Location:	--		
Product:	Commando Series – Walkie Talkies MODEL: 10513		
	Sample No:	(5215)120-0387	
	Test Date(s):	May 05, 2015 to June 16, 2015	
	Test Requested:	FCC Part 15 – 2012	
	Test Method:	ANSI C63.4 – 2009	
	FCC ID:	2AE6B10513JESM	
<b>The results given in this report are related to the tested specimen of the described electrical apparatus.</b>			
<b>CONCLUSION: The submitted sample was found to <u>COMPLY</u> with requirement of FCC Part 15 Subpart C.</b>			
Authorized Signature:			
			
Reviewed by: Keith Yeung		Approved by: Steven Tsang	
Date: July 02, 2015		Date: July 02, 2015	

**BUREAU VERITAS HONG KONG LIMITED –  
Kowloon Bay Office  
1/F Pacific Trade Centre,  
2 Kai Hing Road, Kowloon Bay,  
Kowloon, HONG KONG**  
Tel: +852 2331 0888  
Fax: +852 2331 0889  
www.cps.bureauveritas.com

This report is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. Our report is limited to the test samples identified herein. The results set forth in this report are not necessarily indicative or representative of the statistical quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof. You shall have thirty days from receipt of this report to request additional testing of the samples or to notify us of any errors or omissions relating to our report, provided, however, such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



**TEST REPORT No.: (5215)120-0387**

## Test Result Summary

<b>EMISSION TEST</b>			
<b>Test requirement: FCC Part 15 – 2012</b>			
Test Condition	Test Method	Test Result	
		Pass	Failed
Radiated Emission Test, 9kHz to 1GHz	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Frequency range of Fundamental Emission	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>
26dB Bandwidth of Fundamental Emission	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Duty Cycle Correction During 100mesc	ANSI C63.4	<input checked="" type="checkbox"/>	<input type="checkbox"/>

### Report Revision & Sample Re-submit History:

Sample first submission date: May 04, 2015

Sample second submission date: June 15, 2015



**TEST REPORT No.: (5215)120-0387**

## Test Laboratory & Test Instruments List

Radiated and Conducted emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009. An Open Area Test Site and Full Anechoic Chamber (FCC Listed Site, Registration No. 642151) are set up for investigation and located at:

### BUREAU VERITAS HONG KONG LIMITED, EMC CENTRE

No. 2106-2107, 21/F., Westin Centre,  
26 Hung To Road,  
Kwun Tong, Kowloon,  
Hong Kong

## Test Instrument List

### Radiated Emission

EQUIPMENT	MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATION DUE
EMI TEST RECEIVER	R&S	ESCI	100379	03-FEB-2016
SIGNAL ANALYZER 40GHZ	R&S	FSV 40	100977	13-MAY-2016
LOOP ANTENNA	ETS-LINDGREN	6502	00102266	27-SEP-2015
BILOG ANTENNA	SCHAFFNER	CBL6112D	25229	02-FEB-2016
OPEN AREA TEST SITE	BVCPS	N/A	N/A	18-JUN-2016
ANECHOIC CHAMBER	ALBATROSS	M-CDC	80374004499B	03-FEB-2016
COAXIAL CABLE	SUHNER	RG214	N/A	22-DEC-2015

### Remarks: -

N/A: Not Applicable or Not Available

## Measurement Uncertainty

Measurement	Frequency	Uncertainty
Radiated emissions	9kHz to 30MHz	4.2dB
	30MHz to 1GHz	5.0dB
	1GHz to 18GHz	4.9dB
	18GHz to 40GHz	4.8dB

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

TEST REPORT No.: (5215)120-0387

## Equipment Under Test [EUT]

### Description of Sample:

Model Name: Commando Walkie Talkies  
Model Number: 10513  
Additional Model Name: --  
Additional Model Number: --  
Additional Model information: --  
Rating: Transmitter / Receiver: 9Vd.c. ("6F22" size battery x 1)

### Description of EUT Operation:

The Equipment Under Test (EUT) is a SUNNY DAYS ENTERTAINMENT, LLC of Radio Control toy. The transmitter is 1 switch and 1 button and operating at 49.86MHz. The EUT continues to transmit while sticks are being pushed or pulled, Modulation by IC, and type is amplitude modulation.

The transmitter has different control:

1. Left button – push to talk
2. Switch – control ON / OFF

### Antenna Requirement (Section 15.203)

The EUT is use of a permanently antenna. The antenna consists of 11.6cm long metal spring covered with rubber. The antenna is not replaceable or user serviceable. The requirement of S15.203 are met. There are no deviations or exceptions to the specifications.

#### Photo of Antenna



**TEST REPORT No.: (5215)120-0387**

**Test Results**

**Radiated Emissions (Fundamental)**

Test Requirement: FCC Part 15 Section 15.235  
 Test Method: ANSI C63.4  
 Test Date(s): 2015-06-16  
 Temperature: 25.0 °C  
 Humidity: 54.0 %  
 Atmospheric Pressure: 100.6 kPa  
 Mode of Operation: Transmission mode  
 Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

**Test Method:**


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

**Test Setup: Open Area Test Site**

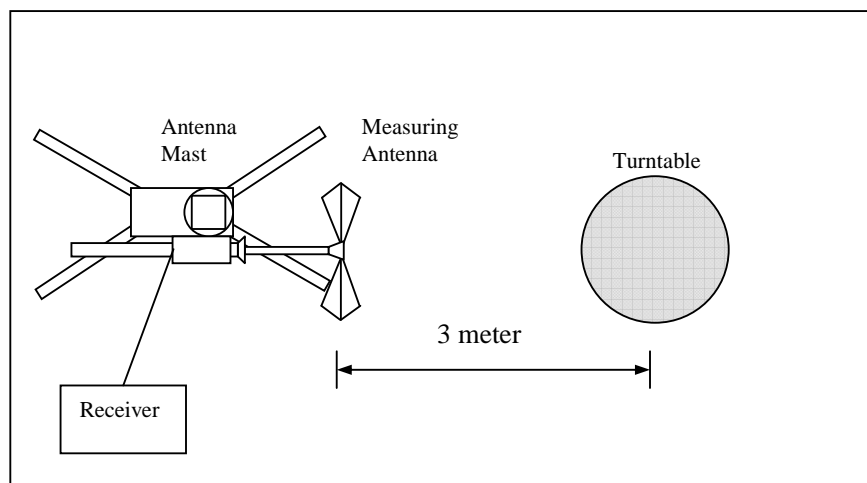



**TEST REPORT No.: (5215)120-0387**

**Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:**

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [ $\mu\text{V/m}$ ]	Field Strength of Fundamental Emission [Average] [ $\mu\text{V/m}$ ]
49.82 – 49.90	100,000 (100 dB $\mu\text{V/m}$ )	10,000 (80 dB $\mu\text{V/m}$ )

**Measurement Data**

**Test Result of (Transmission mode): PASS**

**Detection mode: Peak**

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu\text{V/m}$ )	Limit at 3m (dB $\mu\text{V/m}$ )	Margin (dB)
49.86	H	9.2	47.3	100.0	-52.7
49.86	V	9.2	66.8	100.0	-33.2

**Detection mode: Average**

Frequency (MHz)	Polarity (H/V) and degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu\text{V/m}$ )	Limit at 3m (dB $\mu\text{V/m}$ )	Margin (dB)
49.86	H	9.2	46.9	80.0	-33.1
49.86	V	9.2	66.4	80.0	-13.6

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 100KHz  
VBW = 300KHz



**TEST REPORT No.: (5215)120-0387**

**Radiated Emissions (9kHz – 1GHz)**

Test Requirement: FCC Part 15 Section 15.209  
 Test Method: ANSI C63.4  
 Test Date(s): 2015-06-16  
 Temperature: 25.0 °C  
 Humidity: 54.0 %  
 Atmospheric Pressure: 100.6 kPa  
 Mode of Operation: Transmission mode  
 Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

**Limits for Radiated Emissions [FCC 47 CFR 15.209]:**

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu$ V/m]	Measurement Distance m
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above960	500	3

**Measurement Data**

**Test Result of (Transmission mode): PASS**

**Detection mode: Quasi-Peak**

Frequency	Polarity (H/V)	Field Strength	Limit	Margin (dB)
Emissions detected are more than 20 dB below the limit line(s) in 9kHz to 30MHz				



**TEST REPORT No.: (5215)120-0387**

**Measurement Data**

**Test Result of (Transmission mode): PASS**

**Detection mode: Quasi-Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
99.72	H	12.3	27.7	43.5	-15.8
149.58	H	11.9	29.5	43.5	-14.0
199.44	H	10.8	28.3	43.5	-15.2
249.30	H	14.2	27.9	46.0	-18.1
299.16	H	15.0	35.1	46.0	-10.9
349.02	H	16.5	33.5	46.0	-12.5
398.88	H	17.3	35.2	46.0	-10.8
448.74	H	18.0	29.8	46.0	-16.2
498.60	H	19.8	34.2	46.0	-11.8
548.46	H	21.0	37.6	46.0	-8.4
598.32	H	20.8	28.0	46.0	-15.8
648.18	H	20.6	31.0	46.0	-15.0
698.04	H	21.1	36.1	46.0	-9.9
749.90	H	22.4	40.2	46.0	-5.8
797.76	H	22.2	37.5	46.0	-8.5

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz  
VBW = 120KHz





**TEST REPORT No.: (5215)120-0387**

**Measurement Data**

**Test Result of (Transmission mode): PASS**

**Detection mode: Quasi-Peak**

Frequency (MHz)	Polarity (H/V)	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
99.72	V	11.1	25.6	43.5	-17.9
149.58	V	12.3	28.4	43.5	-15.1
199.44	V	12.2	25.6	43.5	-17.9
249.30	V	13.7	24.8	46.0	-21.2
299.16	V	14.6	27.6	46.0	-18.4
349.02	V	15.3	29.7	46.0	-16.3
398.88	V	17.3	35.5	46.0	-10.5
448.74	V	17.9	29.3	46.0	-16.7
498.60	V	18.7	36.2	46.0	-9.8
548.46	V	20.4	39.5	46.0	-6.5
698.04	V	21.1	37.8	46.0	-8.2
749.90	V	22.4	40.4	46.0	-5.6
797.76	V	22.2	39.6	46.0	-6.4

Note: Field Strength includes Antenna Factor and Cable Loss.

Receiver setting: RBW = 120KHz  
VBW = 120KHz

**TEST REPORT No.: (5215)120-0387**

**Test Results**

**Radiated Emissions (30MHz – 1GHz)**

Test Requirement: FCC Part 15 Section 15.109  
 Test Method: ANSI C63.4  
 Test Date(s): 2015-06-16  
 Temperature: 25.0 °C  
 Humidity: 54.0 %  
 Atmospheric Pressure: 100.6 kPa  
 Mode of Operation: Receiver mode  
 Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

**Test Method:**


Radiated emissions measurements are investigated and taken pursuant to the procedures of ANSI C63.4 – 2009.

The equipment under test (EUT) was placed on a non-conductive turntable with dimensions of 1.5m x 1m and 0.8m high above the ground. 3m from the EUT, a broadband antenna mounting on the mast received the signal strength. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level. The antenna was then moving along the mast from 1m up to 4m until no more higher value was found. Both horizontal and vertical polarization of the antenna were placed and investigated.

For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

Location: The Roof, Westin Centre, 26 Hung To Road, Kwun Tong, Kowloon, Hong Kong

**Test Setup: Open Area Test Site**

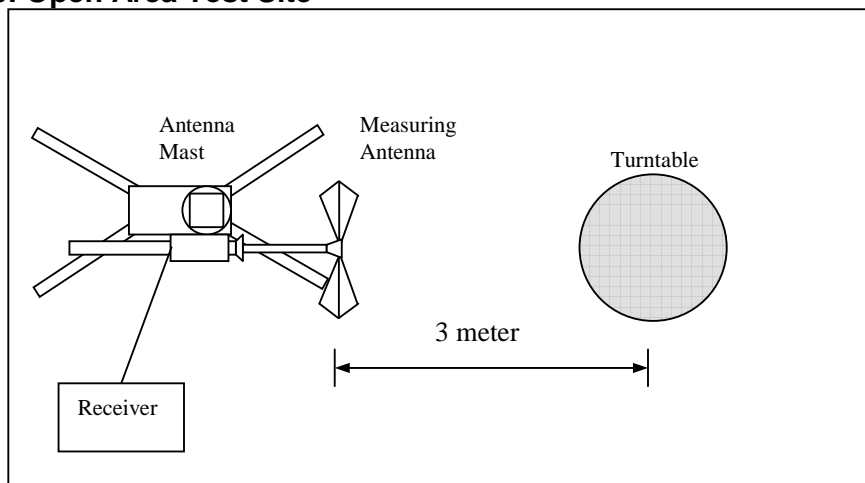



**BUREAU  
VERITAS**

## TEST REPORT No.: (5215)120-0387

### Limits for Radiated Emission: FCC Part 15.109

Frequency Range [MHz]	Limits [dB $\mu$ V/m @ 3m]
30-88	40.0
88-216	43.5
216-960	46.0
Above 960	54.0

### Measurement Data

**Test Result of (Receiver mode): PASS**

**Detection mode: Quasi-Peak**

Frequency (MHz)	Polarity (H/V)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
46.40	H	34.2	40.0	-5.8
92.80	H	20.6	43.5	-22.9
139.20	H	23.4	43.5	-20.1
185.60	H	21.5	43.5	-22.0
232.00	H	22.8	46.0	-23.2
278.40	H	24.6	46.0	-21.4

Frequency (MHz)	Polarity (H/V)	Field Strength at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
46.40	V	36.3	40.0	-3.7
92.80	V	21.0	43.5	-22.5
139.20	V	23.5	43.5	-20.0
185.60	V	21.7	43.5	-21.8
232.00	V	22.9	46.0	-23.1
278.40	V	24.5	46.0	-21.5

Note: Field Strength includes Antenna Factor and Cable Loss.

The measurement instrumentation uncertainty would be taking into consideration on each of the test result

During the test shall be used to radiate an unmodulated CW signal to a superregenerative receiver at its operating frequency in order to "cohere" or to resolve the individual components of the characteristic broadband emissions from such a receiver. The level of the signal may need to be increased for this to occur.



## TEST REPORT No.: (5215)120-0387

### 26dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.235  
 Test Method: ANSI C63.4  
 Test Date(s): 2015-05-05  
 Temperature: 23.0 °C  
 Humidity: 75.0 %  
 Atmospheric Pressure: 100.2 kPa  
 Mode of Operation: Transmission mode  
 Tested Voltage: 9Vd.c. ("6F22" size battery x 1)

### Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

### Limits for 26dB Bandwidth of Fundamental Emission:

Frequency [MHz]	26dB Bandwidth [KHz]	Limits [MHz]
49.86	9.4	within 49.82-49.90




BUREAU VERITAS

# TEST REPORT No.: (5215)120-0387

## Measurement Data

### Test Result of 26dB Bandwidth of Fundamental Emission: PASS

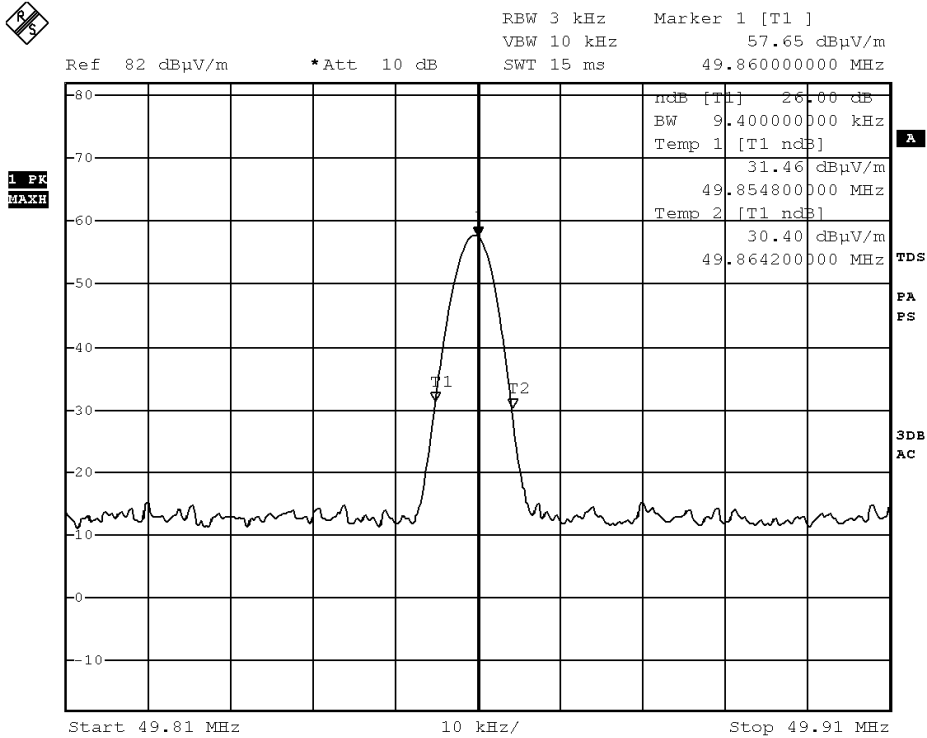

**TEST REPORT No.: (5215)120-0387**

**Photographs of EUT**

**Front View of the product**



**Rear View of the product**



**Top View of the product**



**Bottom View of the product**



**Side View of the product**



**Side View of the product**



**Battery compartment**



**Battery Cover**





**BUREAU  
VERITAS**

**TEST REPORT No.: (5215)120-0387**

**Photographs of EUT**


**Internal View of the product**




**Internal View of the product**



**Inner Circuit Top View**

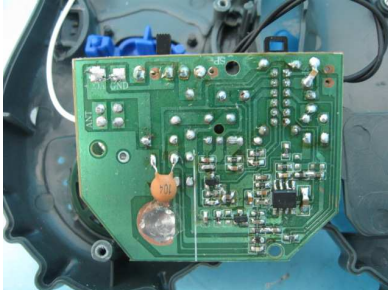

**Inner Circuit Bottom View**

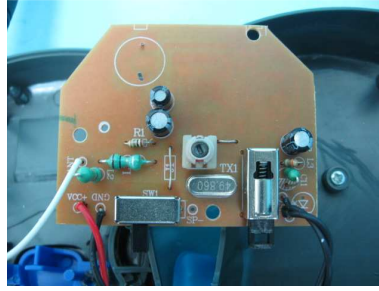

**Antenna**





**BUREAU  
VERITAS**

**TEST REPORT No.: (5215)120-0387**

### **Measurement of Radiated Emission Test Set Up**



**\*\*\*\*\* End of Report \*\*\*\*\***