


5. 20 dB bandwidth measurement

5.1. Test setup

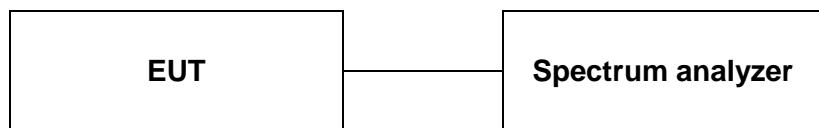

5.2. Limit

Not applicable

5.3. Test procedure

1. The 20 dB band width was measured with a spectrum analyzer connected to RF antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20 dBband width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using $\text{RBW} \geq 10 \text{ kHz}$, $\text{VBW} \geq 10 \text{ kHz}$, $\text{Span} = 3 \text{ MHz}$.

5.4. Test results


Ambient temperature: 24°C

Relative humidity: 51 % R.H.


Operation mode	Frequency(MHz)	20 dB bandwidth (MHz)
BDR	2 402	0.755
	2 441	0.755
	2 480	0.747
EDR	2 402	1.268
	2 441	1.268
	2 480	1.268

Operation mode: BDR


A. Low channel(2 402 MHz)– 20 dB bandwidth

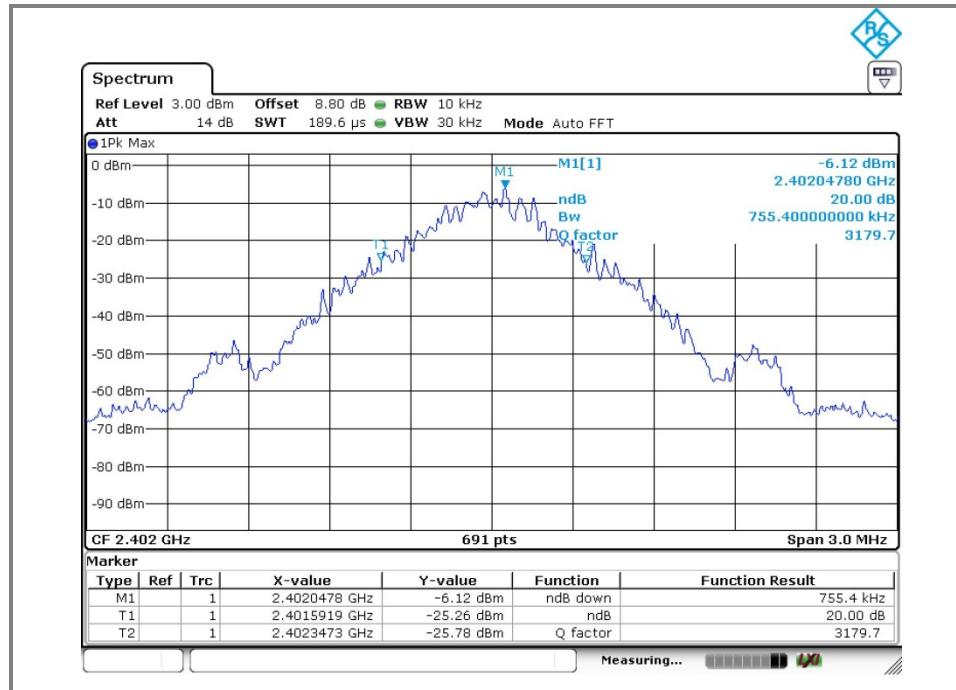

B. Middle channel(2 441 MHz)– 20 dB bandwidth

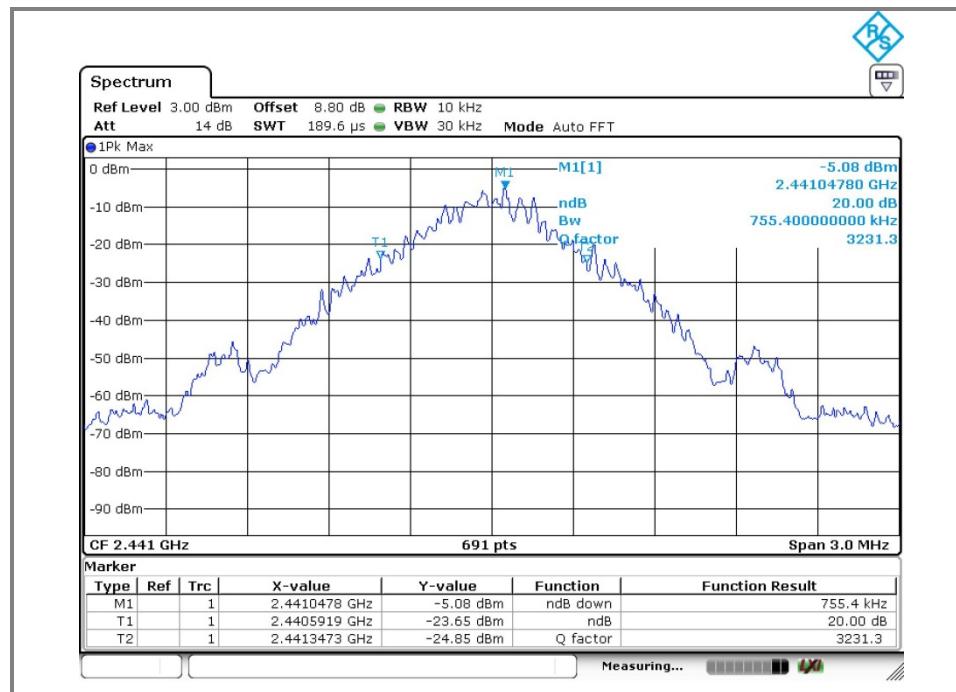


C. High channel(2 480 MHz)– 20 dB bandwidth

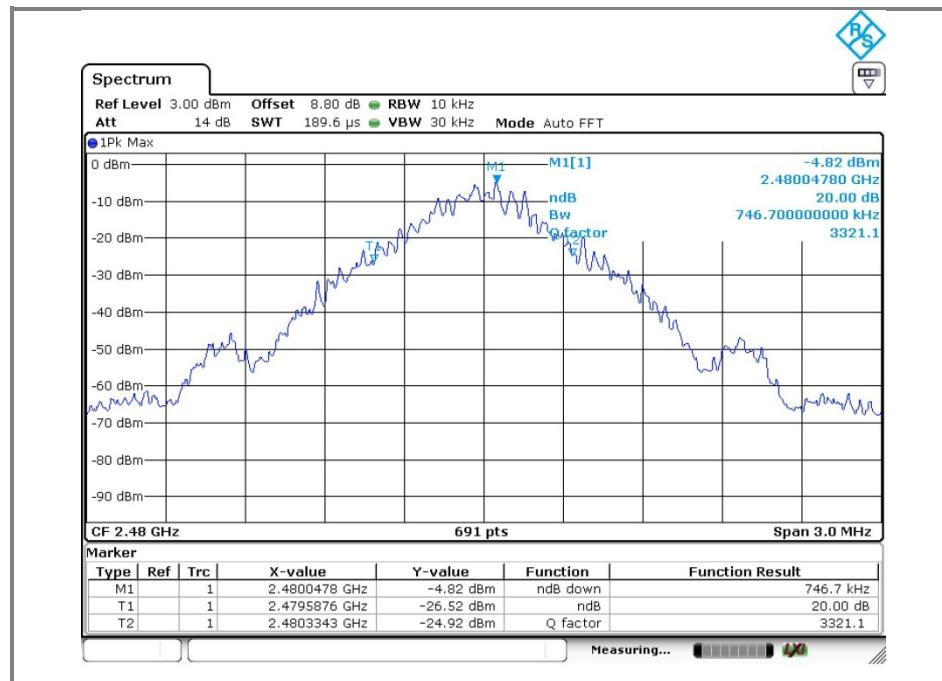


Operation mode: EDR


A. Low channel(2 402 MHz)– 20 dB bandwidth

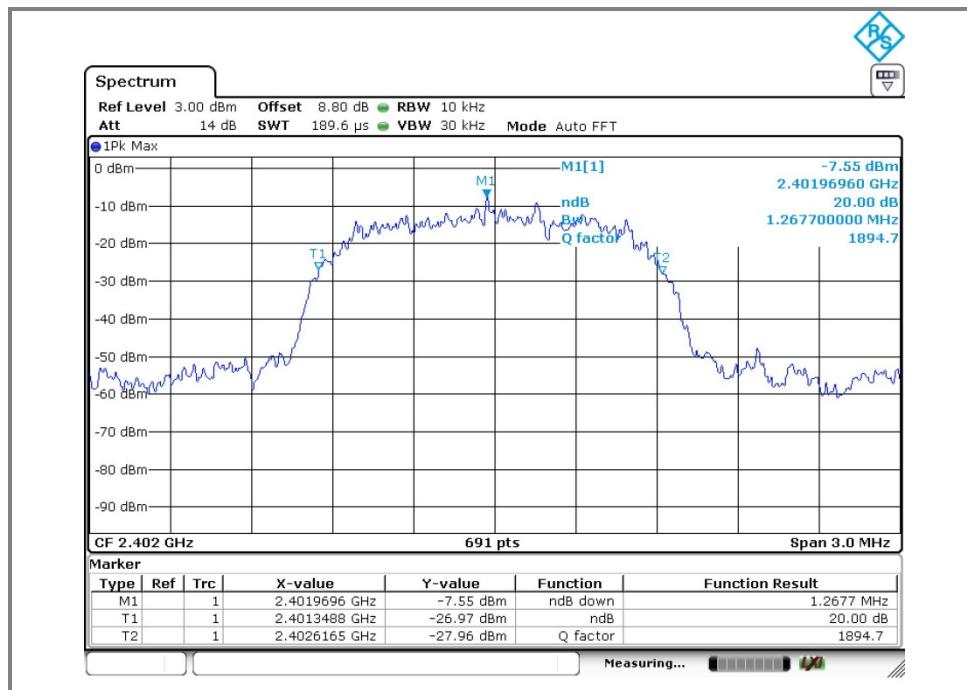

B. Middle channel(2 441 MHz)– 20 dB bandwidth

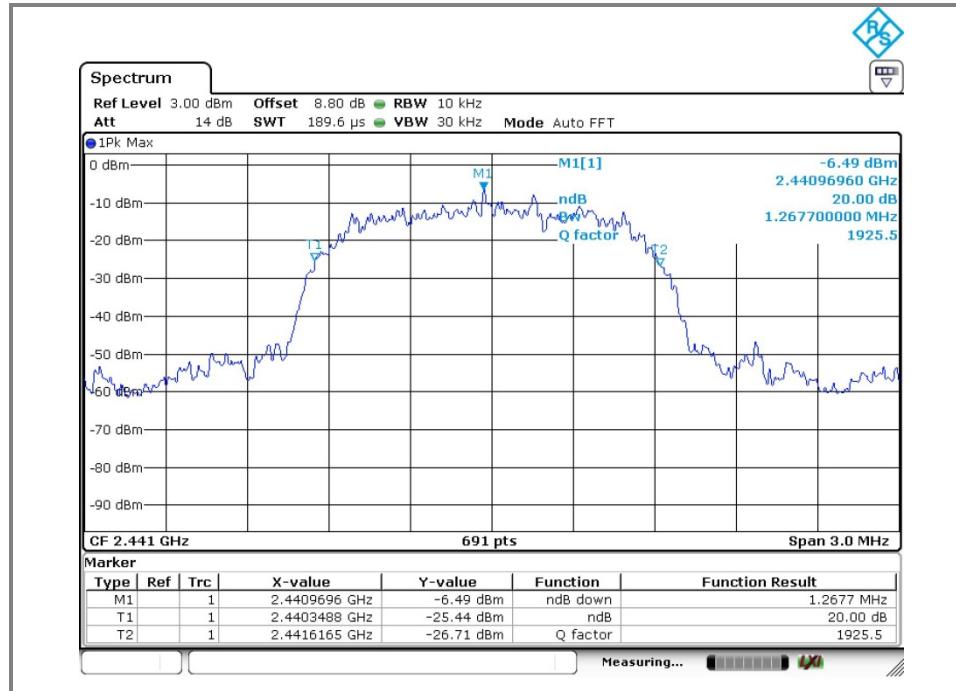


C. High channel(2 480 MHz)– 20 dB bandwidth

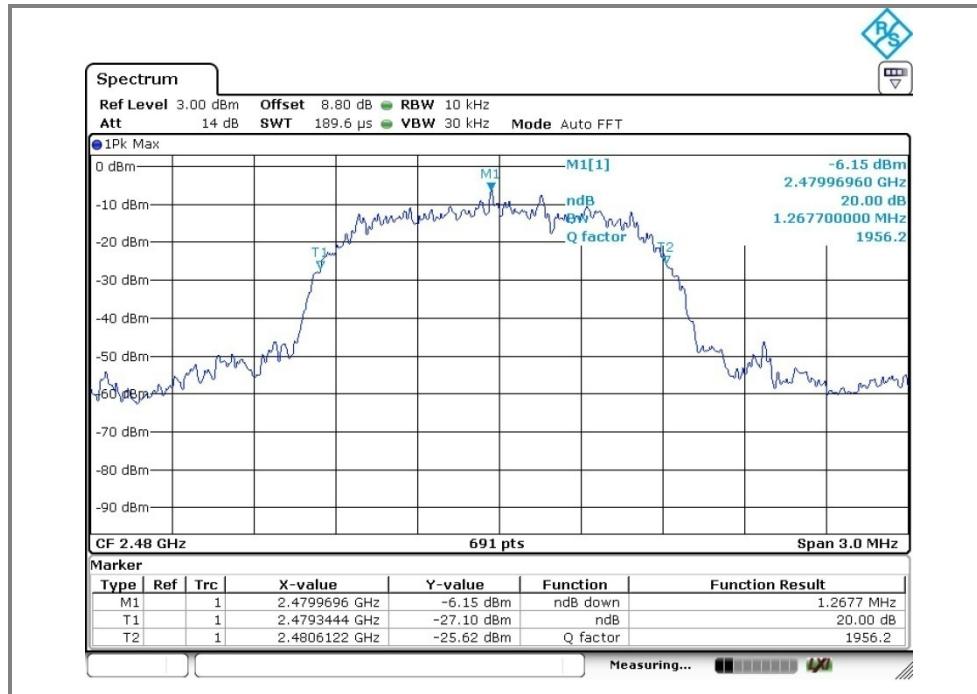

6. Maximum peak output power measurement

6.1. Test setup.

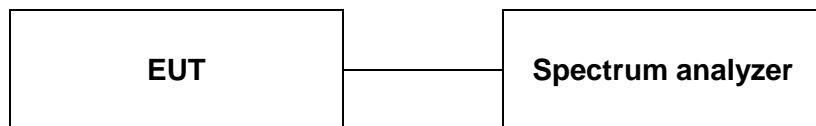

6.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW
2. §15.247(b)(1), For frequency hopping systems operating in the 2400–2483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5805 MHz band: 1Watt.

6.3. Test procedure

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 20 dB BW, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold

6.4. Test results


Ambient temperature: 25°C

Relative humidity: 51 % R.H.


Operation mode	Frequency(MHz)	Peak output power(dBm)	Limit(dBm)
BDR	2 402	-0.73	30
	2 441	0.55	30
	2 480	0.95	30
EDR	2 402	1.87	30
	2 441	3.40	30
	2 480	3.57	30

Operation mode: BDR


A. Low channel(2 402 MHz)

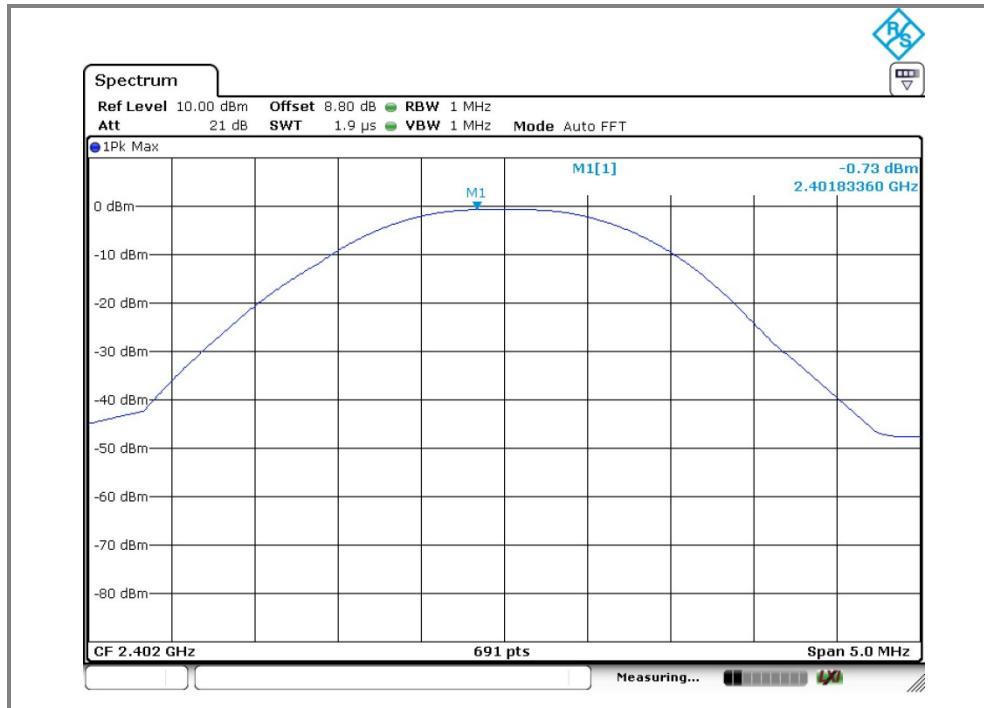

B. Middle channel(2 441 MHz)

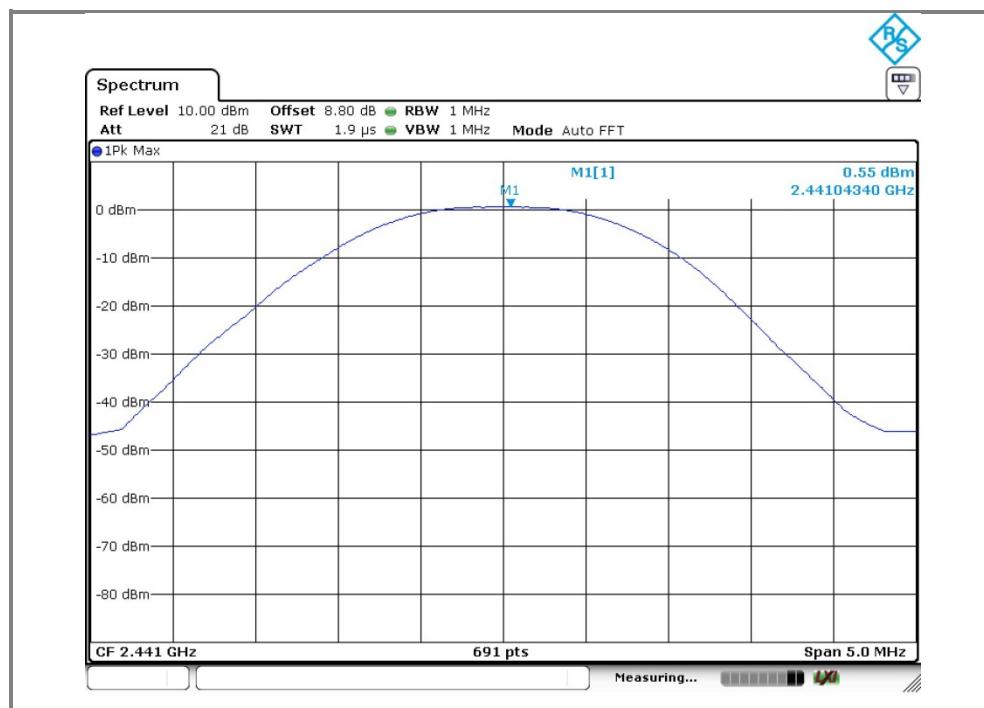


C. High channel(2 480 MHz)

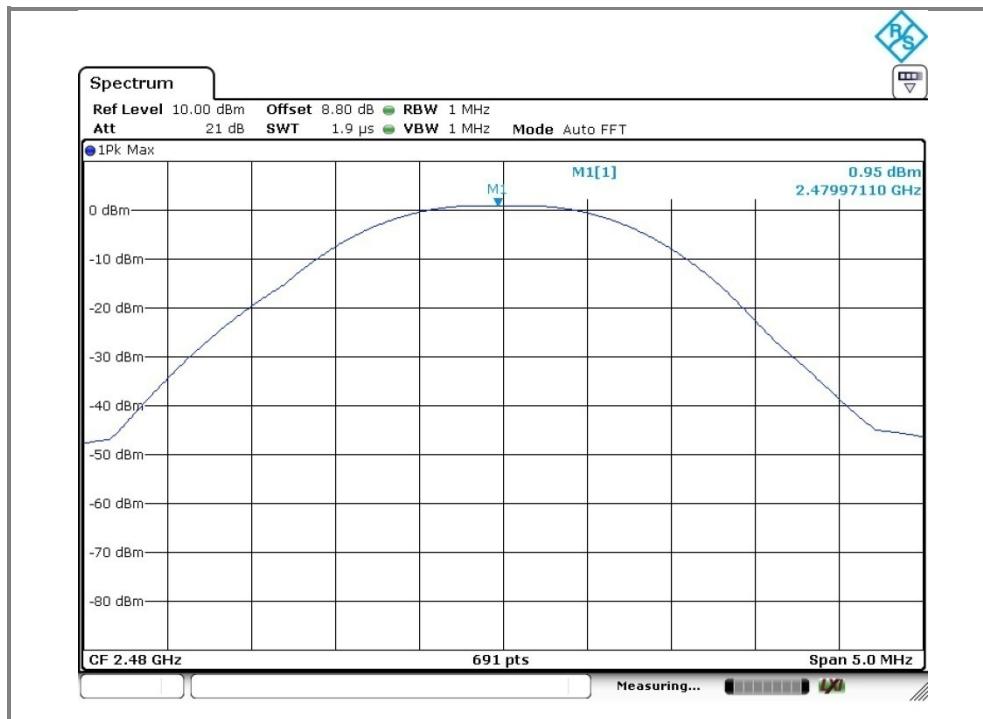


Operation mode: EDR


A. Low channel(2 402 MHz)

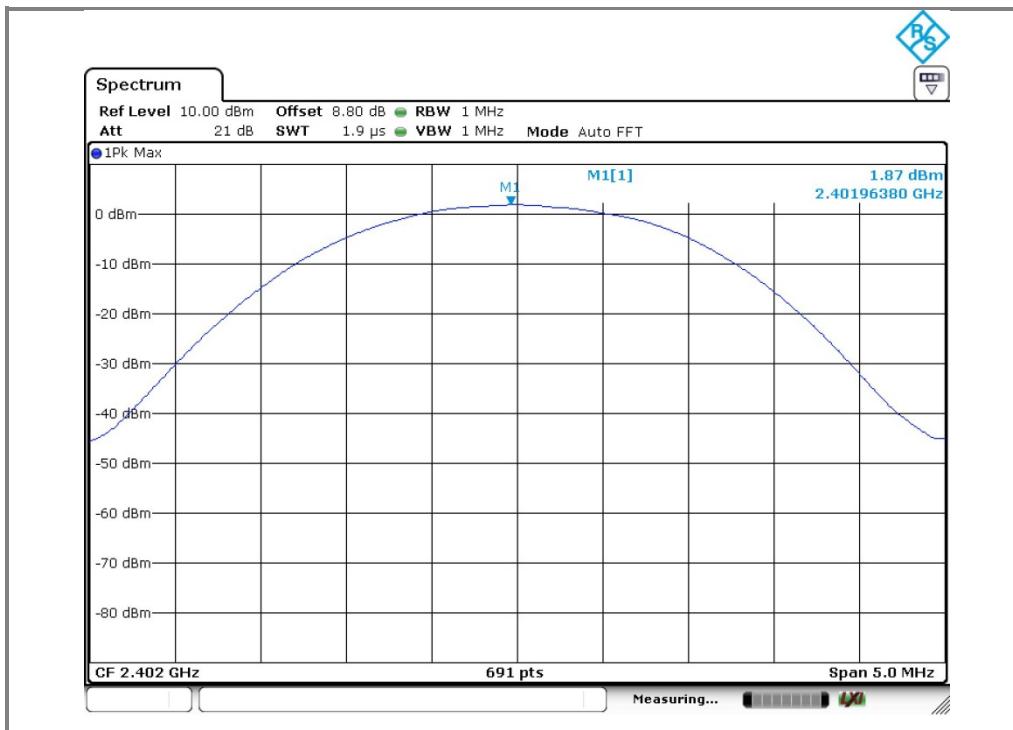

B. Middle channel(2.441 MHz)

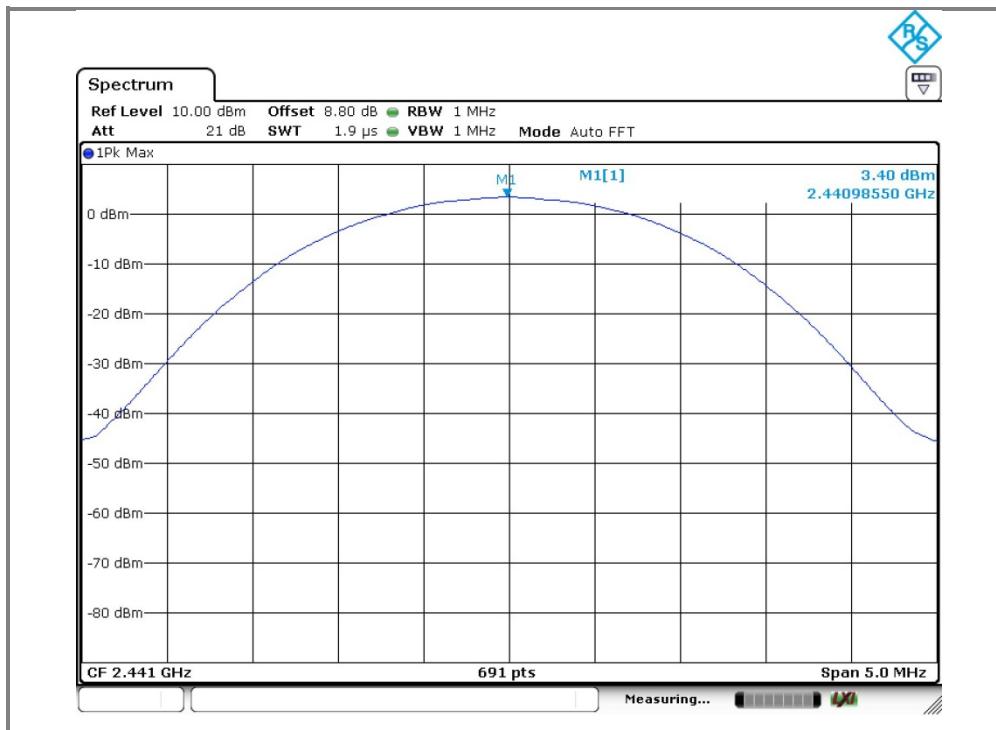


C. High channel(2.480 MHz)

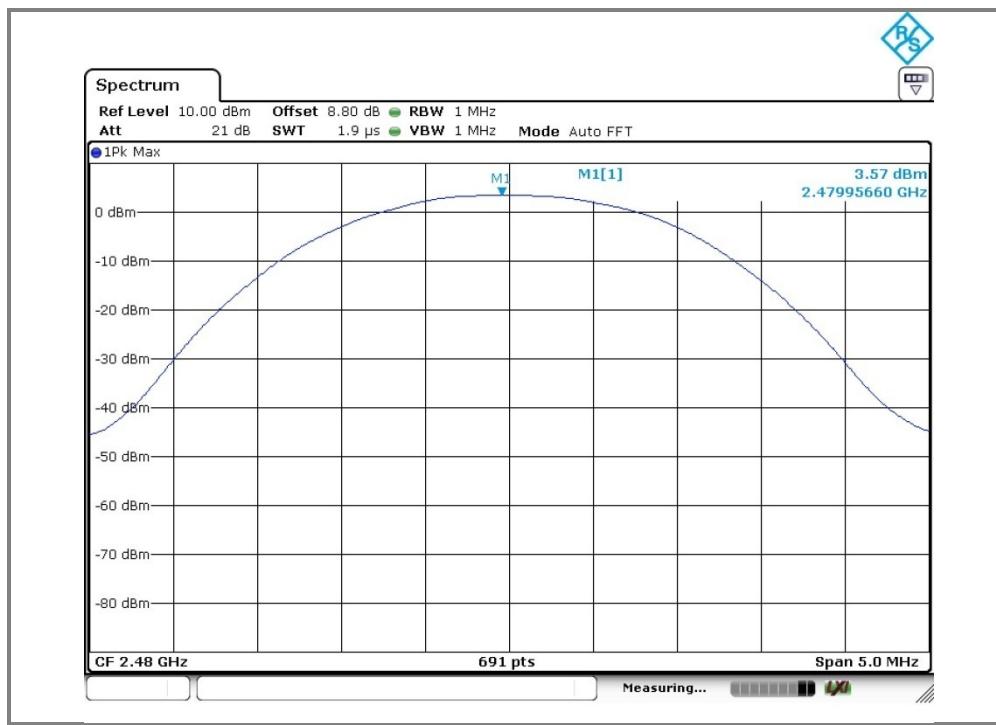

7. Hopping channel separation

7.1. Test setup

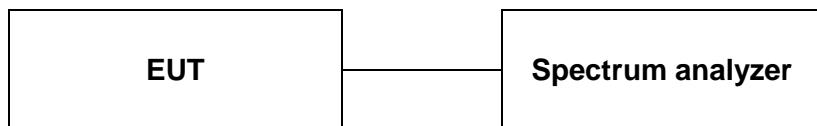

7.2. Limit

§15.247(a)(1) Frequency hopping system operating in 2 400 – 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the max hold function record the separation of adjacent channels.
4. Measure the frequency difference of these two adjacent channels by spectrum analyzer mark function. And then plot the result on spectrum analyzer screen.
5. Repeat above procedures until all frequencies measured were complete.
6. Set center frequency of spectrum analyzer = middle of hopping channel.
7. Set the spectrum analyzer as RBW = 10 kHz, VBW = 10 kHz, Span = 3 MHz and Sweep = auto.

7.4. Test results

Ambient temperature: 24°C


Relative humidity: 52% R.H.

Operation mode	Frequency (MHz)	Adjacent hopping Channel separation (kHz)	Two-third of 20 dB bandwidth (kHz)	Minimum bandwidth (kHz)
BDR	2 441	998.6	503.33	25
EDR	2 441	998.6	845.33	25


※ Remark:

20 dB bandwidth measurement, the measured channel separation should be greater than two-third of 20 dB bandwidth or Minimum bandwidth.

Operation mode :BDR

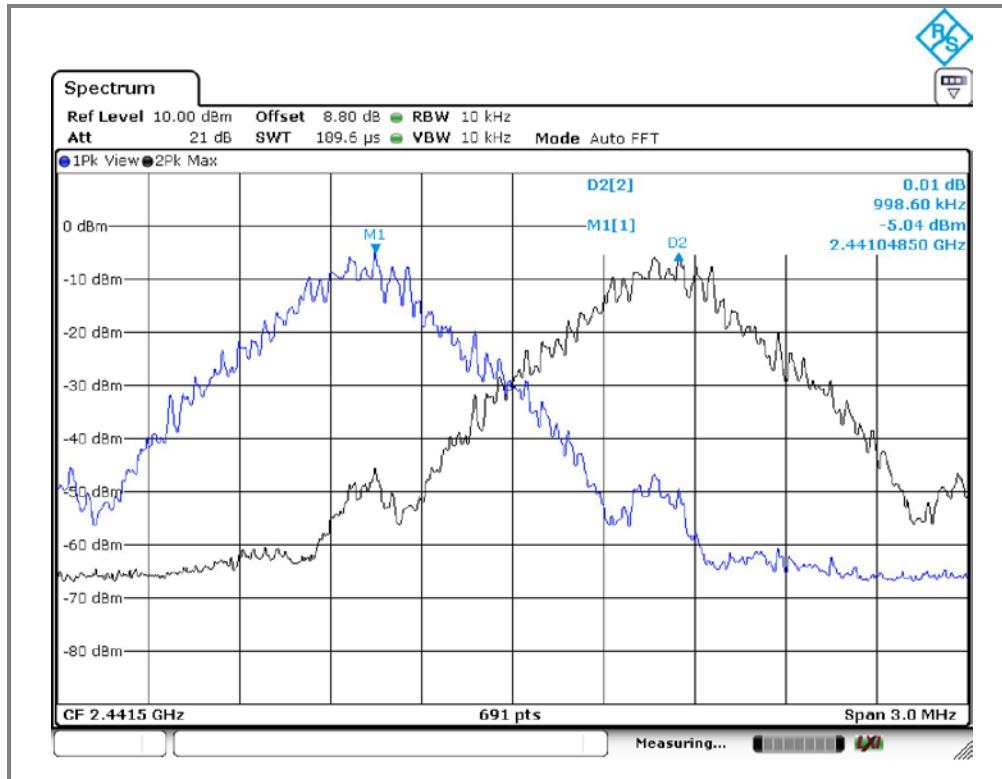


Operation mode: EDR

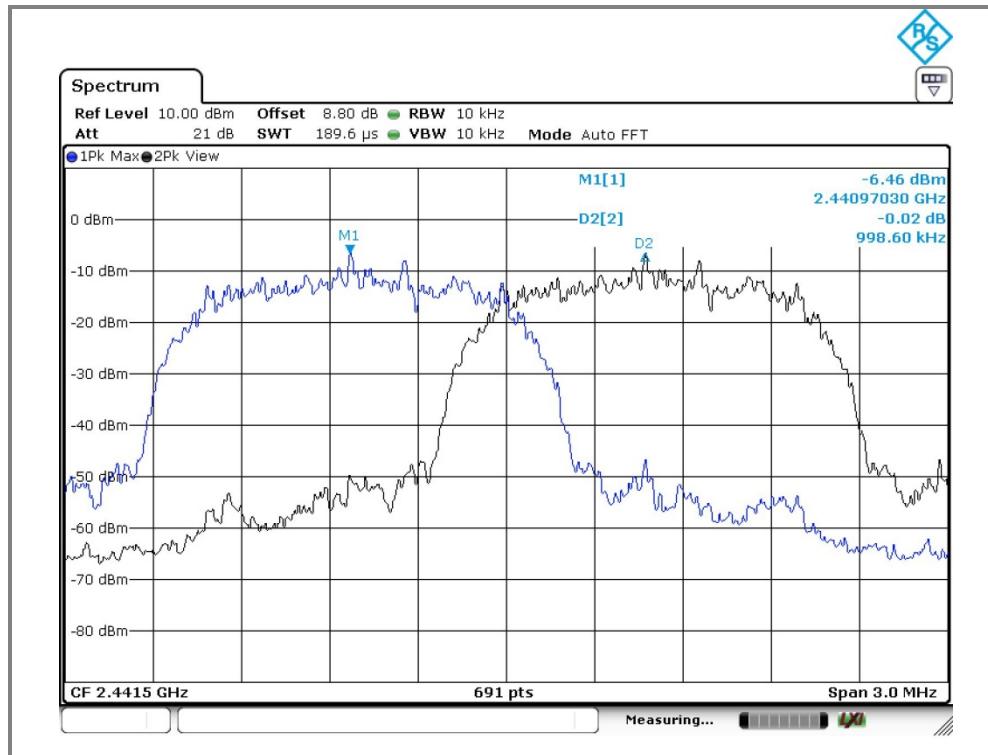

8. Number of hopping frequency

8.1. Test setup

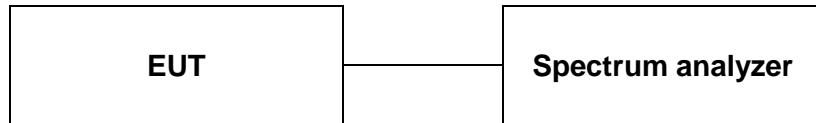

8.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2400-2483.5MHz bands shall use at least 15 hopping frequencies.

8.3. Test procedure



1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum analyzer
3. Set spectrum analyzer Start = 2400 MHz, Stop = 2441.5 MHz, Sweep=auto and Start = 2441.5 MHz, Stop = 2483.5 MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=100 kHz.
5. Max hold, view and count how many channel in the band.

9.4. Test results

Ambient temperature: 25°C


Relative humidity: 52 % R.H.

Number of Hopping Frequency	Limit
79	≥ 15

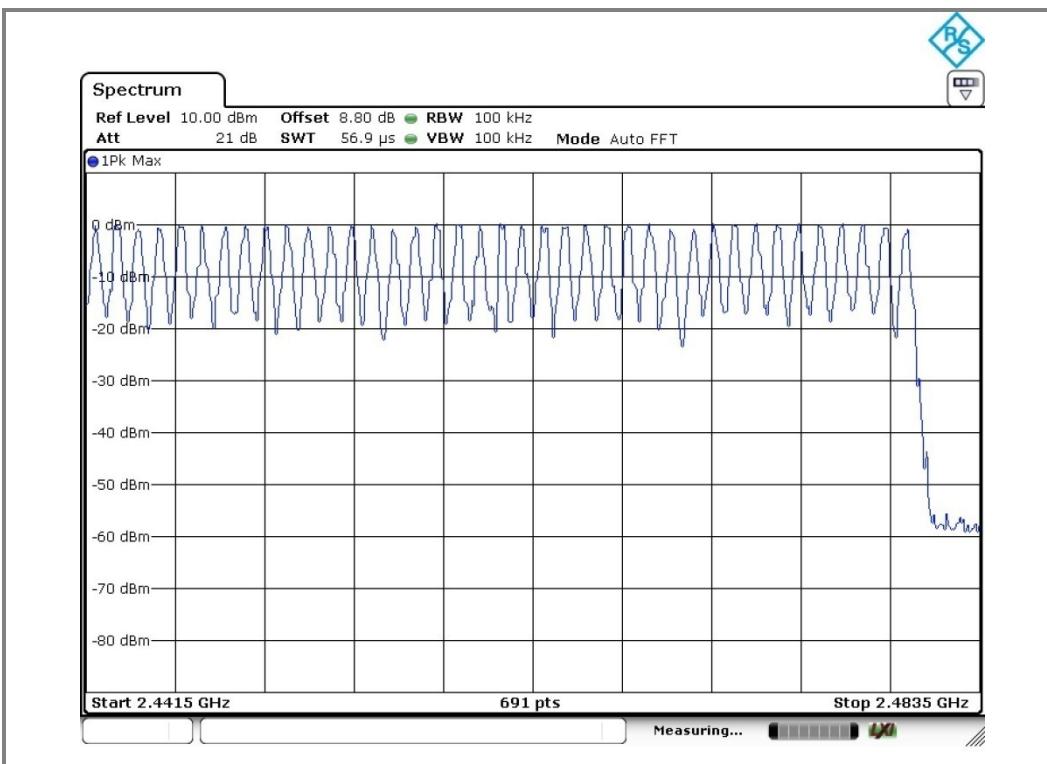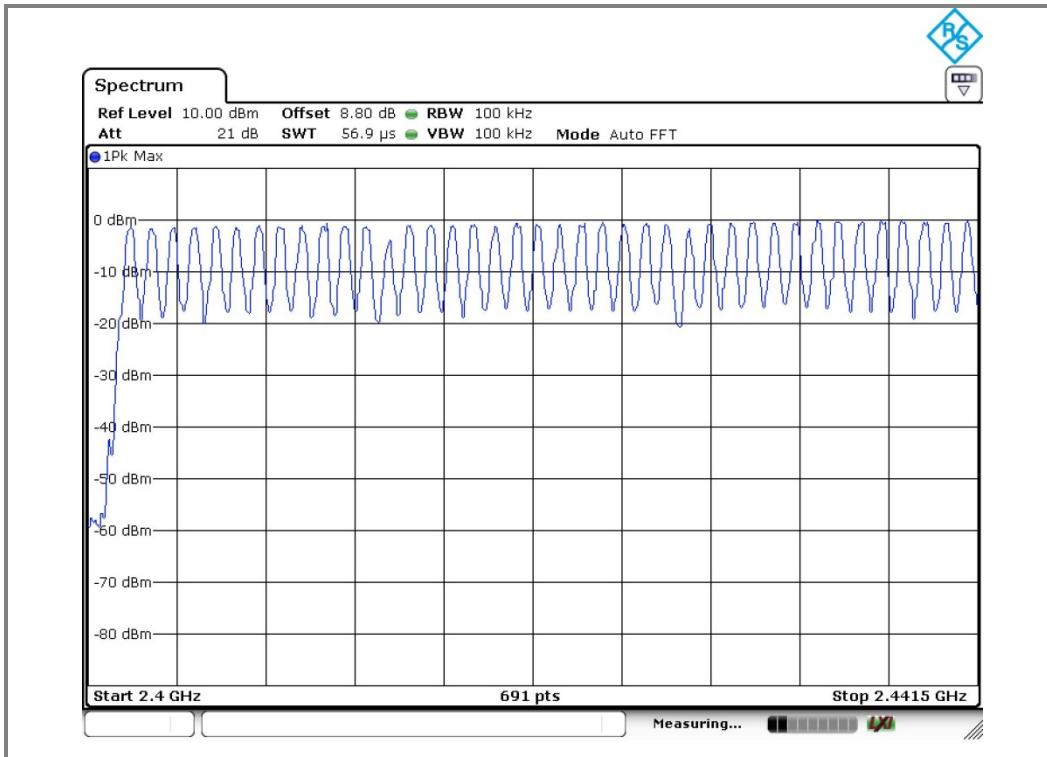Operation mode: Hopping mode

9. Time of occupancy(Dwell time)

9.1. Test setup

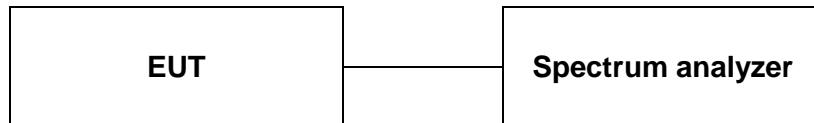

9.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2 400 – 2 483.5 MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time = 0.4(s) * 79 = 31.6(s)

9.3. Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The hopping rate is 1 600 per second.

9.4. Test results

Ambient temperature: 26°C

Relative humidity: 50 % R.H.



0.4 seconds within a 30 second period per any frequency

Mode	Number of transmission in a 31.6s (79Hopping*0.4)	Length of Transmission Time (msec)	Result (msec)	Limit (msec)
DH1	32(Times / 3.16sec) *10 = 320	0.439	140.48	400
DH3	16(Times / 3.16sec) *10= 160	1.639	262.24	400
DH5	13(Times / 3.16sec) *10= 130	2.893	376.09	400
2-DH5	13(Times / 3.16sec) *10= 130	2.891	375.83	400
3-DH5	13(Times / 3.16sec) *10= 130	2.891	375.83	400



※ Remark:

dwell time = {(number of hopping per second / number of slot) x duration time per channel} x 0.4 ms



A. DH1

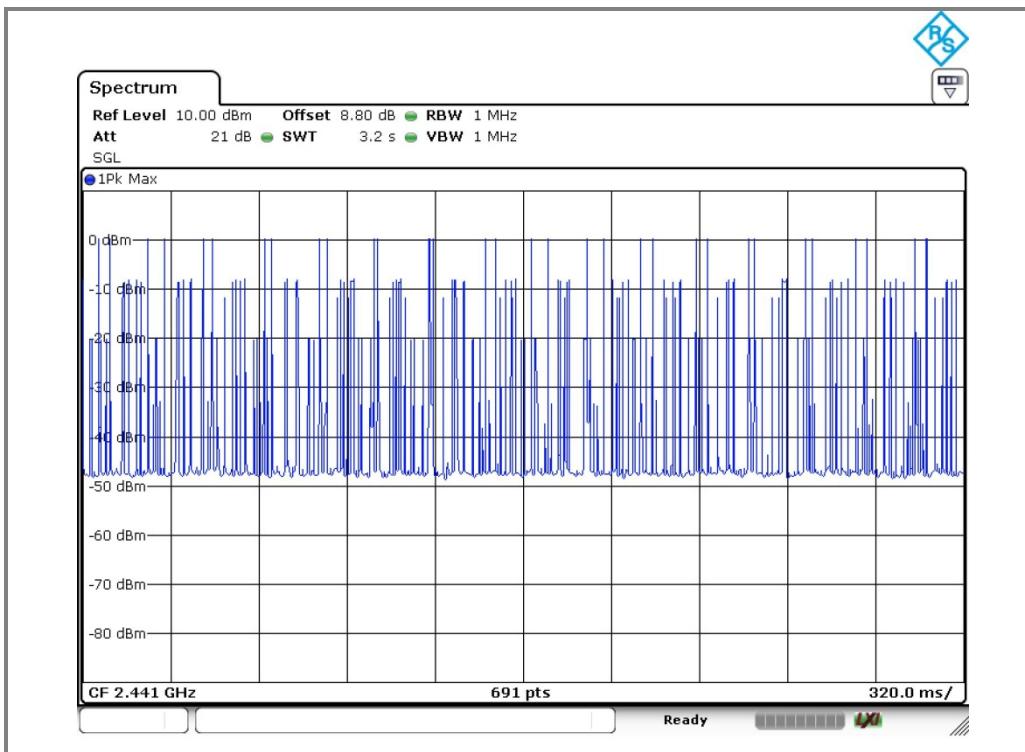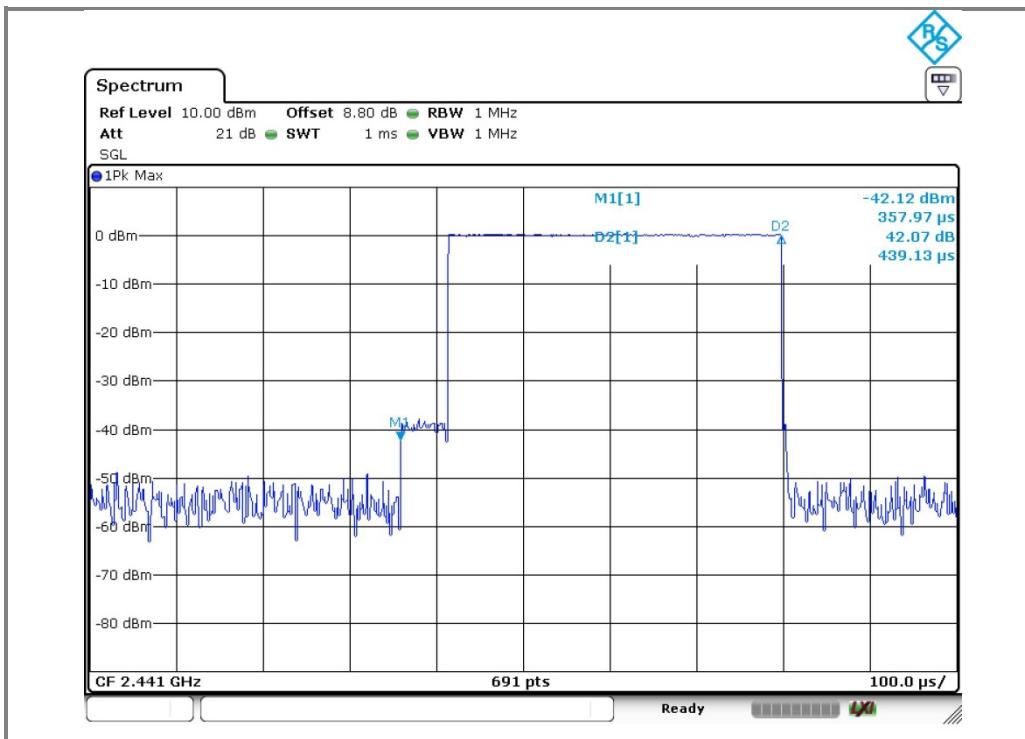



B. DH3

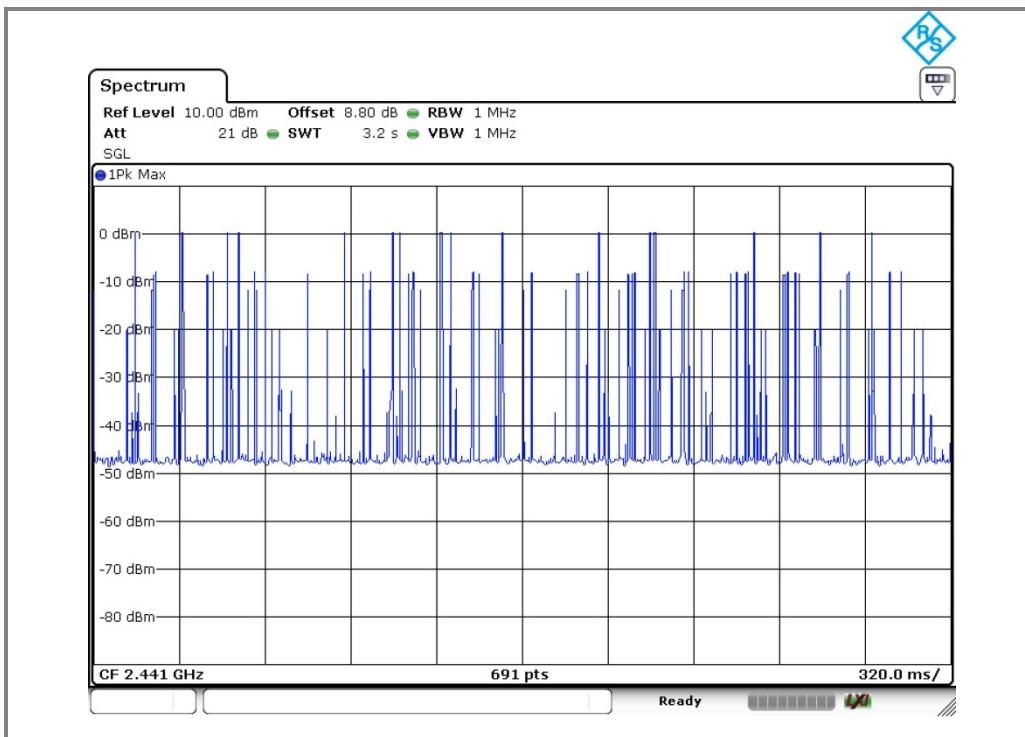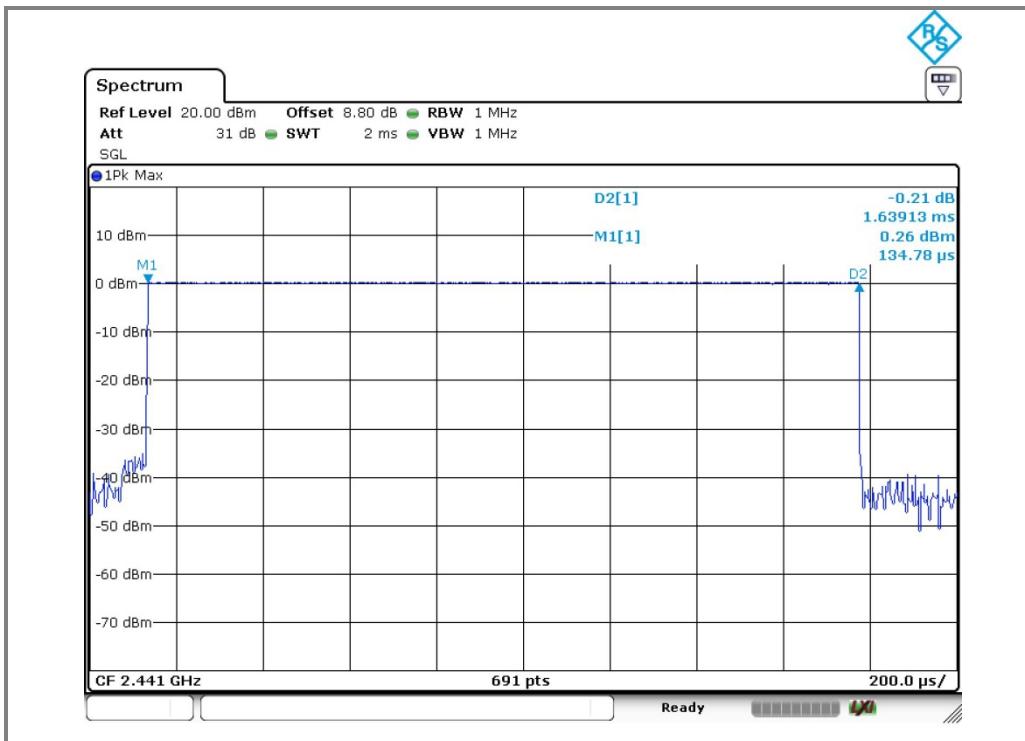



C. DH5

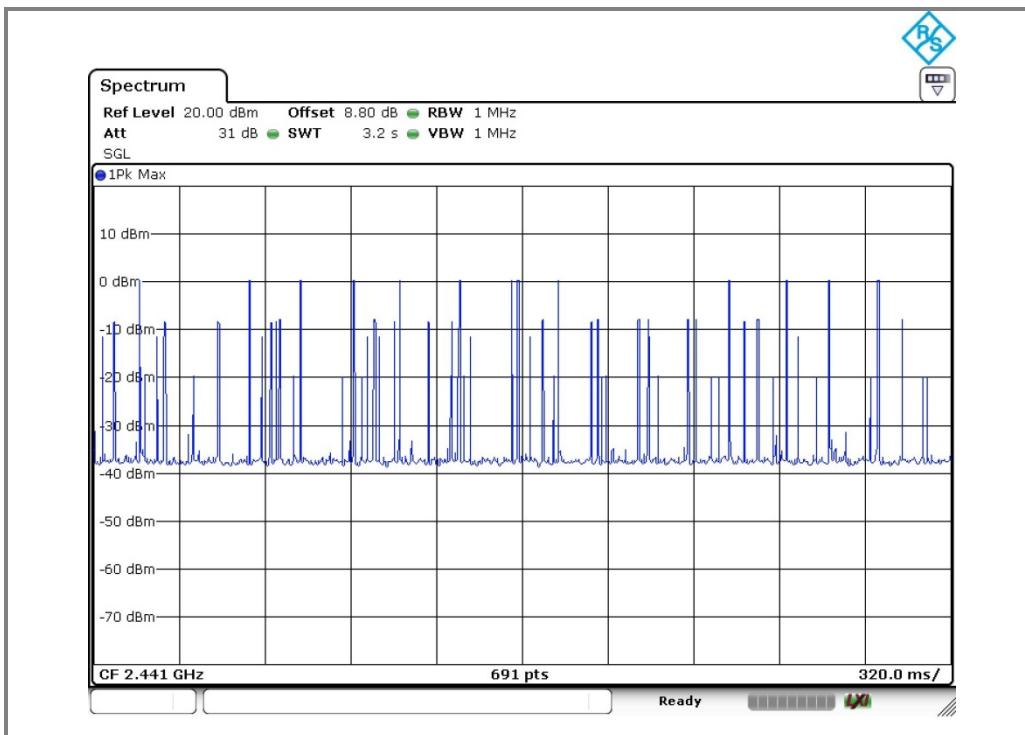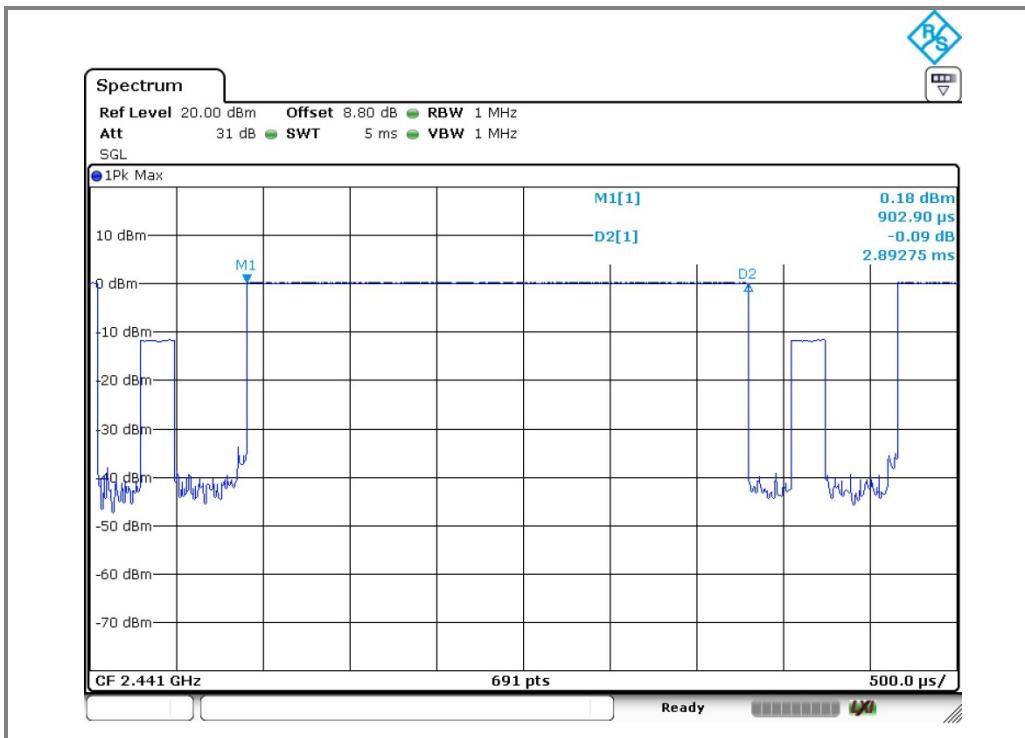

D.2-DH5

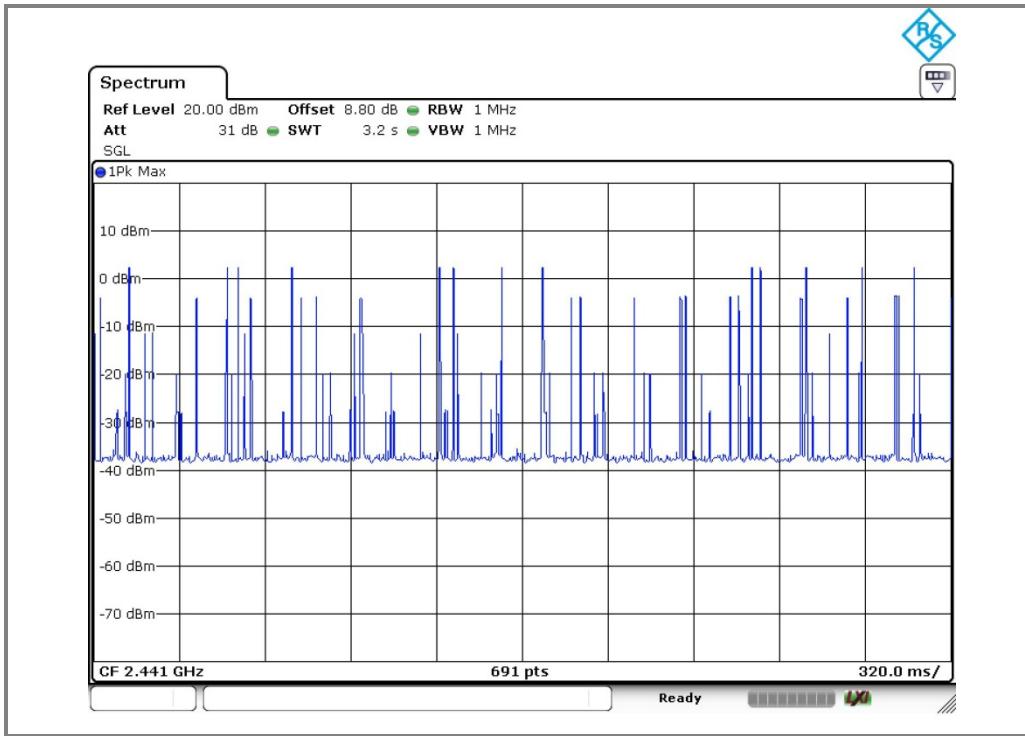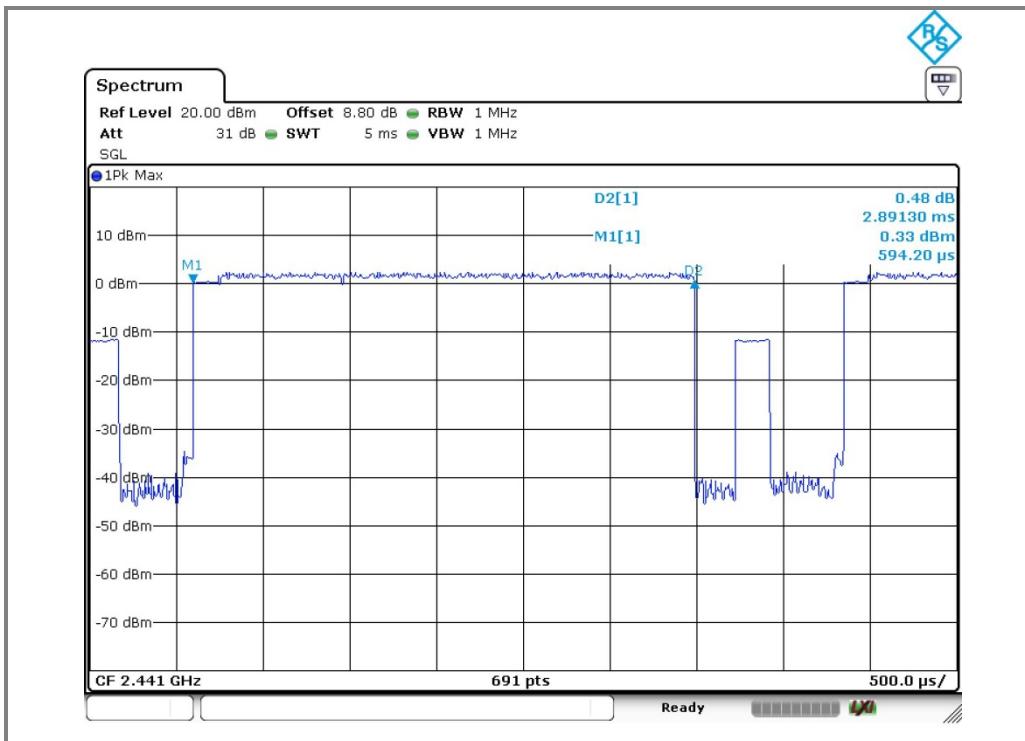

E. 3-DH5

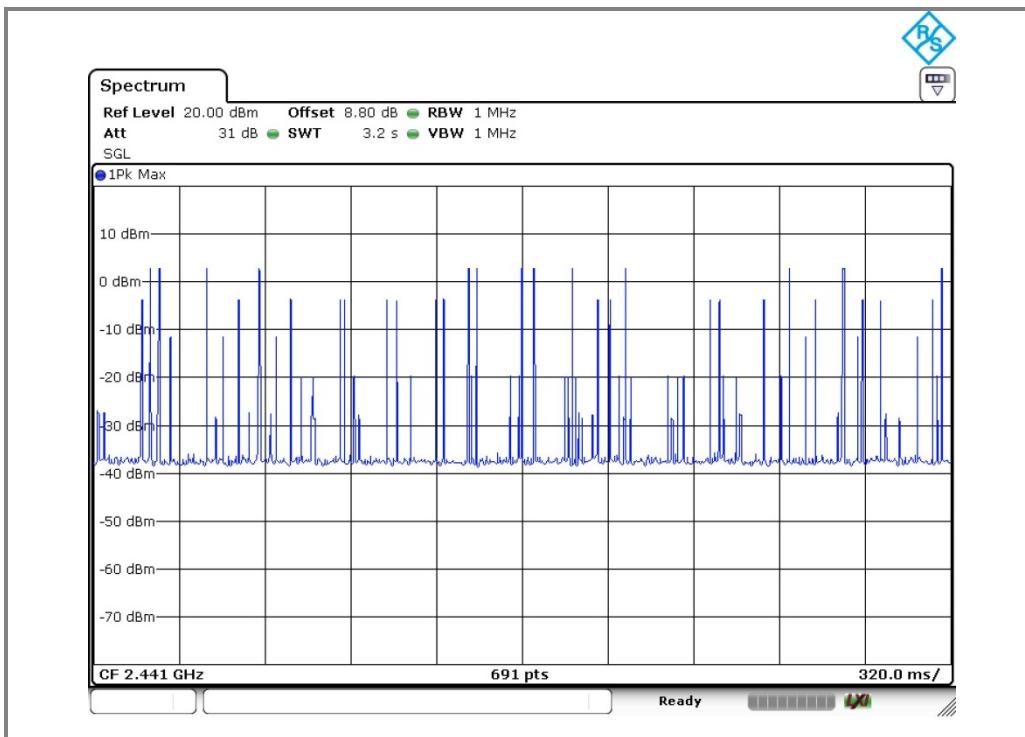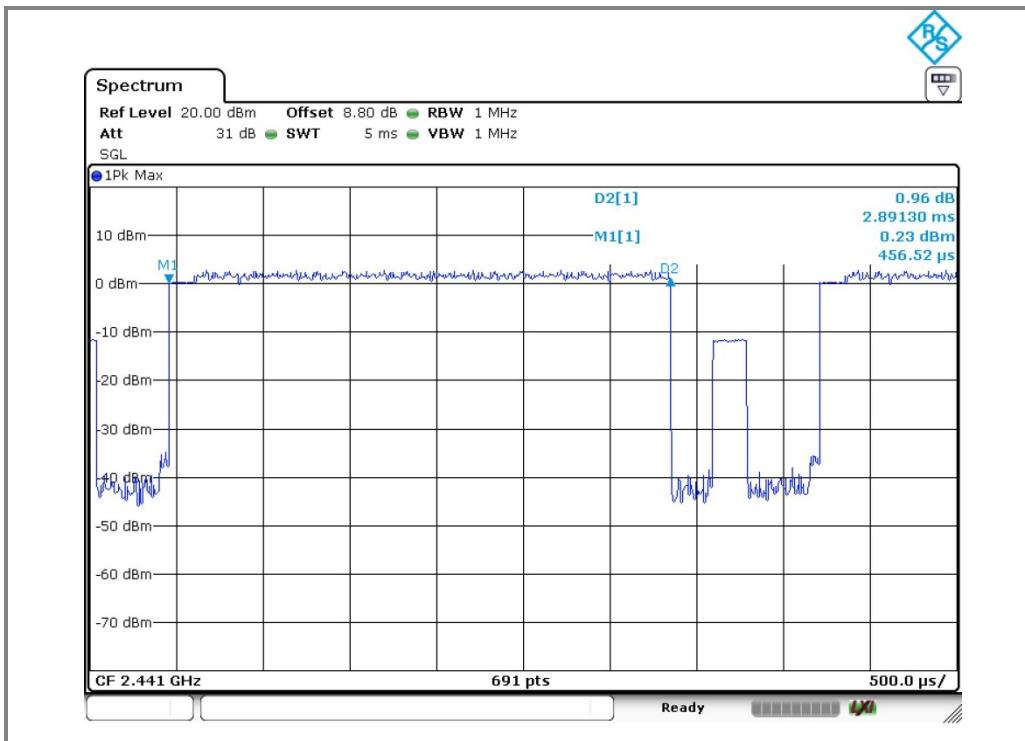

10. Antenna requirement

10.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6dB_i are used.

10.2. Antenna Connected Construction

Antenna used in this product is PCB antenna

Antenna gain is 0.5 dB_i.

11. RF exposure evaluation

11.1 Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to KDB 447498 (2)(a)(i)

Limits for maximum permissible exposure (MPE)

Frequency range (MHz)	Electric field strength(V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Average time
(A) Limits for Occupational / Control exposures				
300 – 1 500	--	--	F/300	6
1 500 – 100 000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300 – 1 500	--	--	F/1 500	6
<u>1 500 – 100 000</u>	--	--	<u>1</u>	<u>30</u>

RF exposure evaluation is required if the separation distance between the user and the device's radiating element is greater than 20 cm, except when the device operates as follows:

below 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 2.5 W;

at or above 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 5 W.

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

11.2. Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

P_d = Power density in mW/cm^2

P_{out} =output power to antenna in mW

G = Numeric gain of the antenna relative to isotropic antenna

$\pi=3.1416$

R = distance between observation point and center of the radiator in cm

P_d the limit of MPE, 1 mW/cm^2 . If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

11.3. Test result of RF exposure evaluation

Test Item : RF Exposure evaluation data

Test Mode : Normal operation

11.4. Output power into antenna & RF exposure evaluation distance

Antenna gain: 0.5 dB

Operation mode : BDR mode

Frequency (MHz)	Output Peak power to antenna (dBm)	Antenna gain (dBi)	Antenna Gain (dBi) Numeric	Power density at 20 cm (mW/cm²)	e.i.r.p. (mW)	e.i.r.p. Limits (W)	Power density Limits (mW/cm²)
2 402	-0.73	0.5	1.12	0.000 189	0.95	5	1
2 441	0.55			0.000 253	1.27		
2 480	0.95			0.000 278	1.40		

Operation mode : EDR mode

Frequency (MHz)	Output Peak power to antenna (dBm)	Antenna gain (dBi)	Antenna Gain (dBi) Numeric	Power density at 20 cm (mW/cm²)	e.i.r.p. (mW)	e.i.r.p. Limits (W)	Power density Limits (mW/cm²)
2 402	1.87	0.5	1.12	0.000 344	1.73	5	1
2 441	3.40			0.000 489	2.45		
2 480	3.57			0.000 508	2.55		

※ Remark

The power density P_d (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm².