

# FCC Part 15 Subpart B&C §15.247

## Test Report

|                             |                                    |
|-----------------------------|------------------------------------|
| <b>Equipment Under Test</b> | <b>Car Infotainment</b>            |
| <b>Model Name</b>           | <b>DGU-7T45-A161SA</b>             |
| <b>Applicant</b>            | <b>DIGEN</b>                       |
| <b>FCC ID</b>               | <b>2AE77DGU7T45A161SA</b>          |
| <b>Manufacturer</b>         | <b>DIGEN</b>                       |
| <b>Date of Test(s)</b>      | <b>2015. 07. 13 ~ 2015. 07. 28</b> |
| <b>Date of Issue</b>        | <b>2015. 07. 29</b>                |

In the configuration tested, the EUT complied with the standards specified above.

| <b>Issue to</b>   | <b>Issue by</b>  |
|---|--|
| <p><b>DIGEN</b><br/>89, Seongseo4chacheomdan-ro,<br/>Dalseo-gu, Daegu, 704-801,<br/>Korea</p> <p>Tel.: +82-70-4850-3322<br/>Fax: +82-2-532-8811</p> | <p><b>MOVON Corporation</b><br/>498-2, Geumeo-ro, Pogok-eup,<br/>Cheoin-gu, Yongin-si, Gyeonggi-do,<br/>Korea, 449-812</p> <p>Tel.: +82-31-338-8837<br/>Fax: +82-31-338-8847</p> |



### Revision history

| Revision | Date of issue | Description | Revised by |
|----------|---------------|-------------|------------|
| --       | July 29, 2015 | Initial     | --         |

## Table of contents

|   |    |
|---|----|
| 1. ATTESTATION OF TEST RESULTS .....  | 4  |
| 2. EUT DESCRIPTION.....   | 6  |
| 3. FREQUENCY HOPPING SYSTEM REQUIREMENTS.....                                     | 7  |
| 4. TRANSMITTER RADIATED SPURIOUS EMISSIONS AND CONDUCTED SPURIOUS EMISSIONS ..... | 10 |
| 5. 20 dB BANDWIDTH MEASUREMENT .....  | 34 |
| 6. MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....                                     | 39 |
| 7. HOPPING CHANNEL SEPARATION.....  | 44 |
| 8. NUMBER OF HOPPING FREQUENCY.....   | 46 |
| 9. TIME OF OCCUPANCY (DWELL TIME).....  | 48 |
| 10. ANTENNA REQUIREMENT .....   | 54 |
| 11. RF EXPOSURE EVALUATION .....  | 55 |

## 1. Attestation of test results

### 1.1. Details of applicant and manufacturer

Applicant : DIGEN  
Address : 89, Seongseo4chacheomdan-ro, Dalseo-gu, Daegu,  
704-801, Korea  
Contact Person : Jong-Sun, Park  
Telephone : +82-70-4850-3322  
Fax : +82-2-532-8811



## 1.2. Summary of test results

The EUT has been tested according to the following specifications;

| Section in FCC part 15              | Description   | Result |
|-------------------------------------|---|--------|
| §15.205(a)<br>§15.209<br>§15.247(d) | Transmitter radiated spurious emissions,<br>Conducted spurious emission | C      |
| §15.109(a)                          | Receiver radiated spurious emission                                     | C      |
| §15.247(a)(1)                       | 20 dB bandwidth   | C      |
| §15.247(b)(1)                       | Maximum peak output power   | C      |
| §15.247(a)(1)                       | Frequency separation  | C      |
| §15.247(a)(1)(iii)                  | Number of hopping frequency   | C      |
| §15.247(a)(1)(iii)                  | Time of occupancy(Dwell time)   | C      |
| §15.247(i)<br>§1.1307(b)(1)         | RF exposure evaluation  | C      |

*The sample was tested according to the following specification:*

**FCC Parts 15.247; ANSI C-63.4-2009**

**FCC Public Notice DA 00-705**

**TEST SITE REGISTRATION NUMBER:**

FCC(670686), FCC(287786)

### ※ Abbreviation

C Complied

N/A Not applicable

F Fail

### Approval Signatories

| Test and Report Completed by :                    | Report Approval by :                                |
|---|---|
|   |   |
| Jungmoo Her<br>Test Engineer<br>MOVON CORPORATION | Issac Jin<br>Technical Manager<br>MOVON CORPORATION |

**2. EUT Description**

|                                      |                          |
|--------------------------------------|--------------------------|
| <b>Kind of product</b>               | Car Infotainment         |
| <b>Model Name</b>                    | DGU-7T45-A161SA          |
| <b>FCC ID</b>                        | 2AE77DGU7T45A161SA       |
| <b>Serial Number</b>                 | N/A                      |
| <b>Power supply</b>                  | DC 13.5V                 |
| <b>Frequency range</b>               | 2 402 MHz ~ 2 480 MHz    |
| <b>Modulation technique</b>          | GFSK, Pi/4DQPSK, 8DPSK   |
| <b>Number of channels</b>            | 79                       |
| <b>Antenna gain</b>                  | -0.09 dB i (Max.)        |
| <b>TEST SITE REGISTRATION NUMBER</b> | FCC(670686), FCC(287786) |

**2.1. Declarations by the manufacturer**

None

**2.2. Details of modification**

None

### 3. Frequency Hopping System Requirements

#### 3.1. Standard Applicable


According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### 3.2. EUT Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9 Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits Longest sequence of zeros: 8 (non-inverted signal)

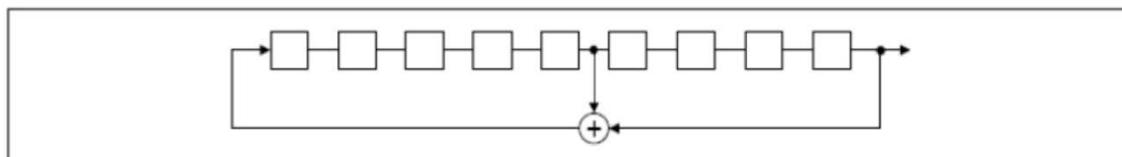

*Linear Feedback Shift Register for Generation of the PRBS sequence*

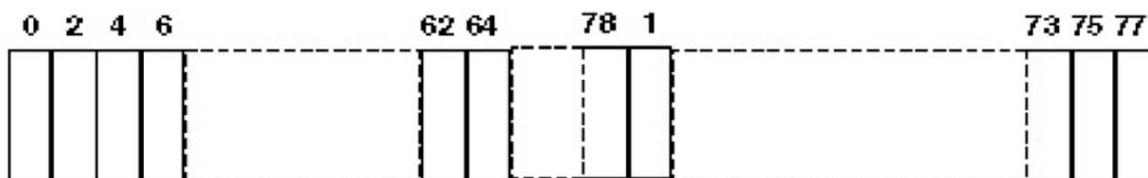

Each frequency used equally on the average by each transmitter. The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

### 3.3. Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule. This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

\*Example for a Bluetooth device using channel numbers would be :  
Ch 44, 35, 78, 03, 15, 21, 76, 40, 56, 13, 02, 19, 67, 39, 78, 20, 21, 64, 75 etc.

**Measurement equipment**

| Equipment          | Manufacturer                   | Model       | Serial number   | Calibration Interval | Calibration due. |
|--------------------|--------------------------------|-------------|-----------------|----------------------|------------------|
| Signal Generator   | R&S                            | SMBV100     | 257379          | 1 year               | 2015-09-29       |
| Spectrum Analyzer  | R&S                            | FSV-40      | 100832          | 1 year               | 2016-03-06       |
| DC Power Supply    | AMREL                          | PPS 1203    | 125426          | 1 year               | 2015-09-29       |
| Bilog Antenna      | SCHWARZBECK                    | VULB 9160   | 9160-3122       | 2 year               | 2016-04-02       |
| Biconical Antenna  | SCHWARZBECK                    | VHA9103     | 2502            | 2 year               | 2015-08-19       |
| EMI Receiver       | R&S                            | ESVN30      | 832854/010      | 1 year               | 2016-01-12       |
| Loop Antenna       | R&S                            | HEH2-Z2     | 881056/6        | 2 year               | 2017-01-06       |
| EMC Analyzer       | H.P                            | E7403A      | US39150108      | 1 year               | 2016-01-12       |
| Antenna Master     | AUDIX                          | N/A         | N/A             | N/A                  | N/A              |
| Tunable Controller | AUDIX                          | ACT         | N/A             | N/A                  | N/A              |
| Horn Antenna       | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA 9120 D | BBHA 9120 D 517 | 2 year               | 2016-10-16       |
| Test Receiver      | R&S                            | ESPI        | 100012          | 1 year               | 2016-01-12       |
| RF Amplifier       | COM-POWER                      | PAM-118A    | 551019          | 1 year               | 2016-07-21       |

**\* Remark;  
Support equipment**


| Description       | Manufacturer | Model         | Serial number |
|-------------------|--------------|---------------|---------------|
| Notebook computer | DELL         | Latitude D510 | -             |

## 4. Transmitter radiated spurious emissions and conducted spurious emissions


### 4.1. Test setup

#### 4.1.1. Transmitter radiated spurious emissions


The diagram below shows the test setup that is utilized to make the measurements for emission from 9kHz to 30MHz Emissions.

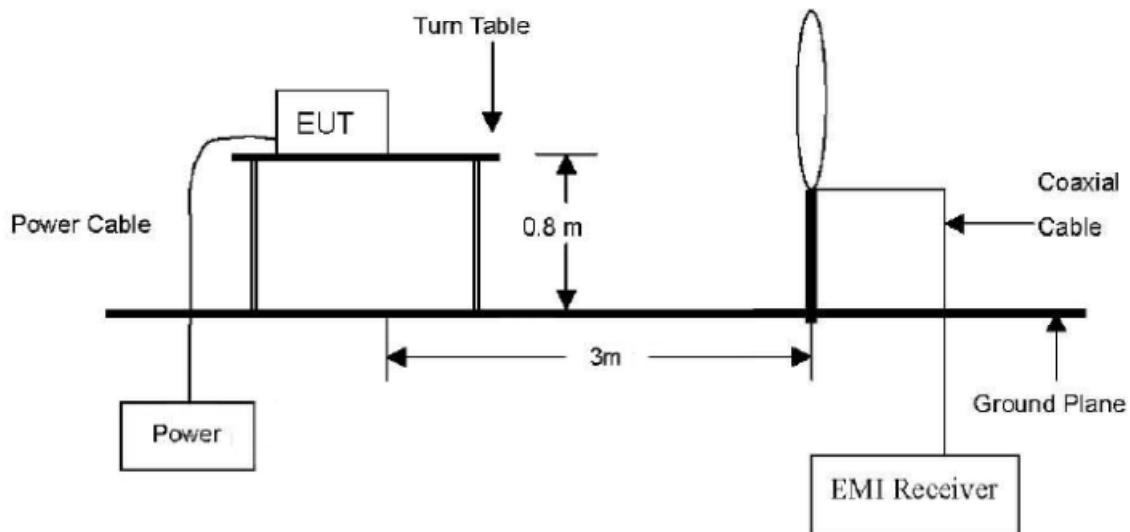

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

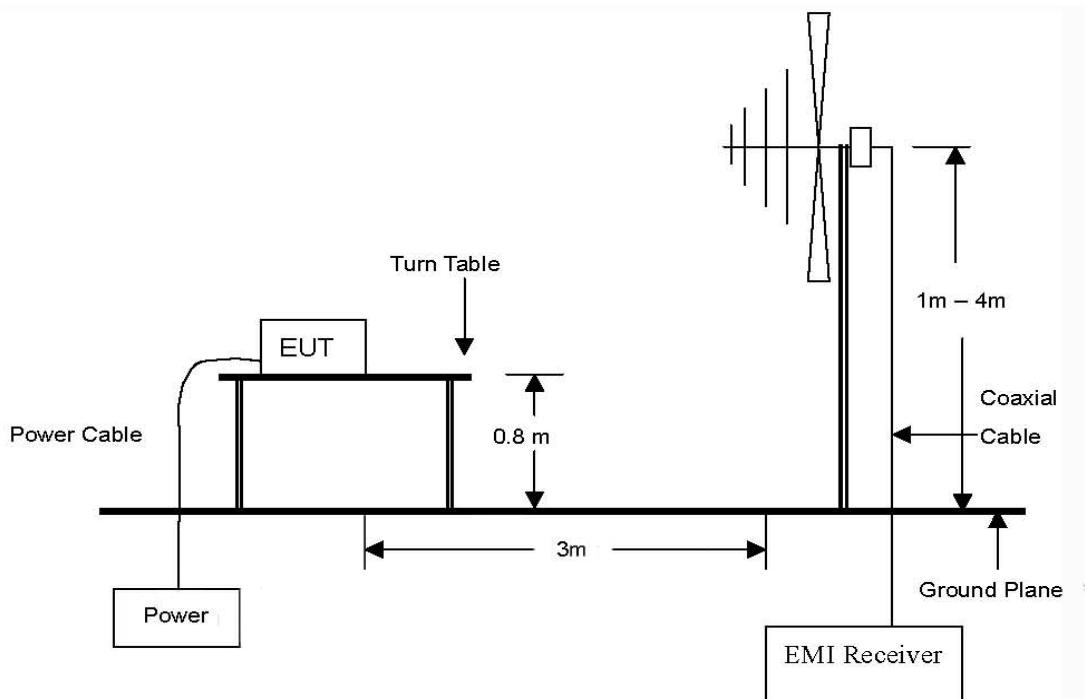

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 26.5 GHz emissions.

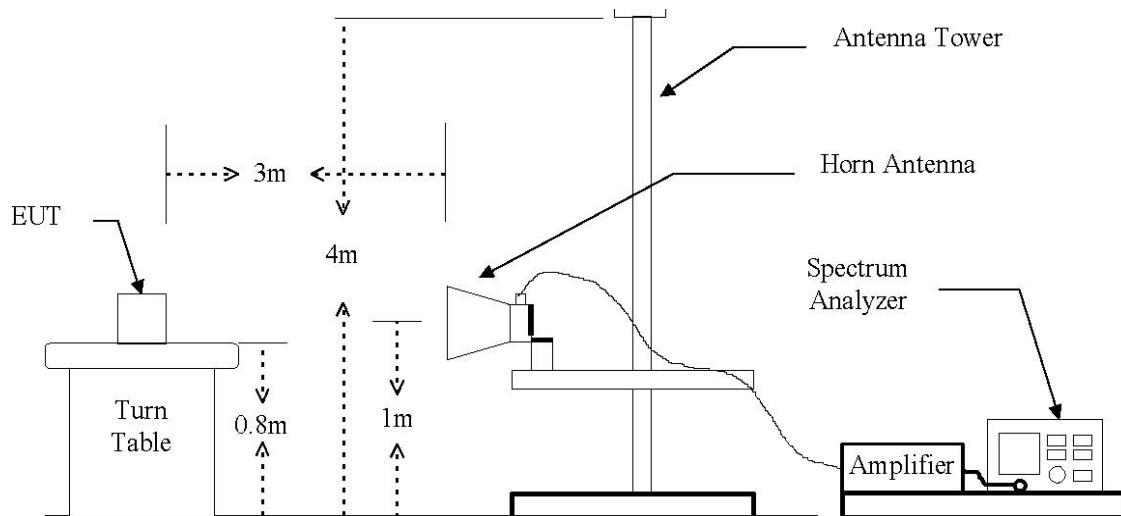

#### 4.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement , provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section §15.205(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to § 15.109(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values :

| Frequency (MHz) | Distance (Meters) | Radiated at 3M (dB $\mu$ V/m) | Radiated ( $\mu$ V/m) |
|-----------------|-------------------|-------------------------------|-----------------------|
| 0.009–0.490     | 300               | See the remark                | 2400/F(kHz)           |
| 0.490–1.705     | 30                |                               | 24000/F(kHz)          |
| 1.705–30.0      | 30                |                               | 30                    |
| 30 - 88         | 3                 | 40.0                          | 100                   |
| 88 – 216        | 3                 | 43.5                          | 150                   |
| 216 – 960       | 3                 | 46.0                          | 200                   |
| Above 960       | 3                 | 54.0                          | 500                   |

\*Remark

1. Emission level in dB uV/m = 20 log (uV/m)
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Distance extrapolation factor = 40log(Specific distance/ test distance) (dB)  
Limit line=Specific limits(dB uV) + distance extrapolation factor.

## 4.3. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2009  
In case of the air temperature of the test site is out of the range is 10 to 40°C before the testing  
proceeds the warm-up time of EUT maintain adequately

### 4.3.1. Test procedures for radiated spurious emissions

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

**\* Remark;**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for Peak detection (PK) at frequency below 30 MHz
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

### 4.3.2. Test procedures for conducted spurious emissions

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 100 kHz.

#### 4.4. Test result

Ambient temperature: 23°C

Relative humidity: 45 % R.H.

##### 4.4.1. Spurious radiated emission

The frequency spectrum from 9 kHz to 30 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

###### Operation mode

###### A. Low channel (2 402 MHz)

| Radiated emissions   |                         |                  | Ant. | Correction factors    |              | Total                    | Limit                   |                |
|--|-------------------------|------------------|------|-----------------------|--------------|--------------------------|-------------------------|----------------|
| Frequency<br>(MHz)   | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant. factor<br>(dB/m) | C.L.<br>(dB) | Actual<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                         |                  |      |                       |              |                          |                         |                |

###### B. Middle channel (2 441 MHz)

| Radiated emissions   |                         |                  | Ant. | Correction factors    |              | Total                    | Limit                   |                |
|--|-------------------------|------------------|------|-----------------------|--------------|--------------------------|-------------------------|----------------|
| Frequency<br>(MHz)   | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant. factor<br>(dB/m) | C.L.<br>(dB) | Actual<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                         |                  |      |                       |              |                          |                         |                |

###### C. High channel (2 480 MHz)

| Radiated emissions   |                         |                  | Ant. | Correction factors    |              | Total                    | Limit                   |                |
|--|-------------------------|------------------|------|-----------------------|--------------|--------------------------|-------------------------|----------------|
| Frequency<br>(MHz)   | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant. factor<br>(dB/m) | C.L.<br>(dB) | Actual<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
| No other emissions were detected at a level greater than 20dB below limit. |                         |                  |      |                       |              |                          |                         |                |

###### ※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

#### 4.4.2. Spurious radiated emission

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

##### Operation mode: Basic mode

###### A. Low channel (2 402 MHz)

| Radiated emissions |                      |               | Ant. | Correction factors |          | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|----------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ N) | Detector mode | Pol. | Ant. factor (dB/m) | C.L (dB) | Actual (dB $\mu$ N/m) | Limit (dB $\mu$ N/m) | Margin (dB) |
| 54.17              | 19.14                | Q.P           | V    | 13.04              | 0.76     | 32.94                 | 40.00                | 7.06        |
| 63.97              | 25.4                 | Q.P           | V    | 11.92              | 0.83     | 38.15                 | 40.00                | 1.85        |
| 325.01             | 21.33                | Q.P           | H    | 14.70              | 1.93     | 37.96                 | 46.02                | 8.06        |
| 415.99             | 20.55                | Q.P           | H    | 15.55              | 2.09     | 38.19                 | 46.02                | 7.83        |
| 539.49             | 18.19                | Q.P           | H    | 17.83              | 2.36     | 38.38                 | 46.02                | 7.64        |
| 864.13             | 14.79                | Q.P           | H    | 21.58              | 3.05     | 39.42                 | 46.02                | 6.60        |
| Above 900.00       | Not detected         | -             | -    | -                  | -        | -                     | -                    | -           |

##### ※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**B. Middle channel (2 441 MHz)**

| Radiated emissions |                      |               | Ant. | Correction factors |          | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|----------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ N) | Detector mode | Pol. | Ant. factor (dB/m) | C.L (dB) | Actual (dB $\mu$ N/m) | Limit (dB $\mu$ N/m) | Margin (dB) |
| 54.15              | 19.12                | Q.P           | V    | 13.04              | 0.76     | 32.92                 | 40.00                | 7.08        |
| 63.97              | 25.39                | Q.P           | V    | 11.92              | 0.83     | 38.14                 | 40.00                | 1.86        |
| 325.05             | 21.31                | Q.P           | H    | 14.70              | 1.93     | 37.94                 | 46.02                | 8.08        |
| 415.98             | 20.50                | Q.P           | H    | 15.55              | 2.09     | 38.14                 | 46.02                | 7.88        |
| 439.47             | 20.09                | Q.P           | H    | 16.10              | 2.15     | 38.34                 | 46.02                | 7.68        |
| 864.11             | 14.79                | Q.P           | H    | 21.58              | 3.05     | 39.42                 | 46.02                | 6.60        |
| Above 900.00       | Not detected         | -             | -    | -                  | -        | -                     | -                    | -           |

**C. High channel (2 480 MHz)**

| Radiated emissions |                      |               | Ant. | Correction factors |          | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|----------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ N) | Detector mode | Pol. | Ant. factor (dB/m) | C.L (dB) | Actual (dB $\mu$ N/m) | Limit (dB $\mu$ N/m) | Margin (dB) |
| 54.17              | 19.19                | Q.P           | V    | 13.04              | 0.76     | 32.99                 | 40.00                | 7.01        |
| 63.95              | 25.47                | Q.P           | V    | 11.92              | 0.83     | 38.22                 | 40.00                | 1.78        |
| 352                | 21.32                | Q.P           | H    | 14.70              | 1.93     | 37.95                 | 46.02                | 8.07        |
| 415.94             | 20.50                | Q.P           | H    | 15.55              | 2.09     | 38.14                 | 46.02                | 7.88        |
| 539.47             | 18.14                | Q.P           | H    | 17.83              | 2.36     | 38.33                 | 46.02                | 7.69        |
| 864.15             | 14.76                | Q.P           | H    | 21.58              | 3.05     | 39.39                 | 46.02                | 6.63        |
| Above 900.00       | Not detected         | -             | -    | -                  | -        | -                     | -                    | -           |

**※ Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**Operation mode: EDR**
**A. Low channel (2 402 MHz)**

| Radiated emissions |                      |               | Ant. | Correction factors |          | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|----------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ N) | Detector mode | Pol. | Ant. factor (dB/m) | C.L (dB) | Actual (dB $\mu$ N/m) | Limit (dB $\mu$ N/m) | Margin (dB) |
| 54.14              | 19.16                | Q.P           | V    | 13.04              | 0.76     | 32.96                 | 40.00                | 7.04        |
| 63.94              | 25.34                | Q.P           | V    | 11.92              | 0.83     | 38.09                 | 40.00                | 1.91        |
| 352.02             | 21.32                | Q.P           | H    | 14.70              | 1.93     | 37.95                 | 46.02                | 8.07        |
| 415.95             | 20.50                | Q.P           | H    | 15.55              | 2.09     | 38.14                 | 46.02                | 7.88        |
| 539.44             | 18.14                | Q.P           | H    | 17.83              | 2.36     | 38.33                 | 46.02                | 7.69        |
| 864.20             | 14.76                | Q.P           | H    | 21.58              | 3.05     | 39.39                 | 46.02                | 6.63        |
| Above 900.00       | Not detected         | -             | -    | -                  | -        | -                     | -                    | -           |

**B. Middle channel (2 441 MHz)**

| Radiated emissions |                      |               | Ant. | Correction factors |          | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|----------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ N) | Detector mode | Pol. | Ant. factor (dB/m) | C.L (dB) | Actual (dB $\mu$ N/m) | Limit (dB $\mu$ N/m) | Margin (dB) |
| 54.17              | 19.04                | Q.P           | V    | 13.04              | 0.76     | 32.84                 | 40.00                | 7.16        |
| 63.95              | 25.35                | Q.P           | V    | 11.92              | 0.83     | 38.10                 | 40.00                | 1.90        |
| 352.04             | 21.26                | Q.P           | H    | 14.70              | 1.93     | 37.89                 | 46.02                | 8.13        |
| 415.95             | 20.50                | Q.P           | H    | 15.55              | 2.09     | 38.14                 | 46.02                | 7.88        |
| 539.44             | 18.13                | Q.P           | H    | 17.83              | 2.36     | 38.32                 | 46.02                | 7.70        |
| 864.21             | 14.71                | Q.P           | H    | 21.58              | 3.05     | 39.34                 | 46.02                | 6.68        |
| Above 900.00       | Not detected         | -             | -    | -                  | -        | -                     | -                    | -           |

**※ Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**C. High channel (2 480 MHz)**

| Radiated emissions |                      |               | Ant. | Correction factors |          | Total                 | Limit                |             |
|--------------------|----------------------|---------------|------|--------------------|----------|-----------------------|----------------------|-------------|
| Frequency (MHz)    | Reading (dB $\mu$ N) | Detector mode | Pol. | Ant. factor (dB/m) | C.L (dB) | Actual (dB $\mu$ N/m) | Limit (dB $\mu$ N/m) | Margin (dB) |
| 54.17              | 19.10                | Q.P           | V    | 13.04              | 0.76     | 32.90                 | 40.00                | 7.10        |
| 63.99              | 25.37                | Q.P           | V    | 11.91              | 0.83     | 38.11                 | 40.00                | 1.89        |
| 351.98             | 21.29                | Q.P           | H    | 14.70              | 1.93     | 37.92                 | 46.02                | 8.10        |
| 416.04             | 20.49                | Q.P           | H    | 15.55              | 2.09     | 38.13                 | 46.02                | 7.89        |
| 539.45             | 18.13                | Q.P           | H    | 17.83              | 2.36     | 38.32                 | 46.02                | 7.70        |
| 864.14             | 14.77                | Q.P           | H    | 21.58              | 3.05     | 39.40                 | 46.02                | 6.62        |
| Above 900.00       | Not detected         | -             | -    | -                  | -        | -                     | -                    | -           |

**\* Remark**

1. Actual = Reading + Ant. factor + CL(Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

#### 4.4.3. Spurious radiated emission

The frequency spectrum above 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

##### Operation mode: Basic mode

###### A. Low channel (2 402 MHz)

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant.<br>factor<br>(dB/m) | C.L.<br>(dB) | AMP<br>Gain<br>(dB) | Actual<br>(dB $\mu$ N/m) | Limit<br>(dB $\mu$ N/m) | Margin<br>(dB) |
|--------------------|-------------------------|------------------|------|--------------------------|--------------|---------------------|--------------------------|-------------------------|----------------|
| 1 062.81           | 51.71                   | Peak             | H    | 25.13                    | 2.87         | 40.09               | 39.62                    | 74.00                   | 34.38          |
| 1 838.96           | 65.05                   | Peak             | H    | 25.71                    | 3.99         | 40.47               | 54.28                    | 74.00                   | 19.72          |
| 1 838.96           | 48.38                   | Average          | H    | 25.71                    | 3.99         | 40.47               | 37.61                    | 54.00                   | 16.39          |
| 1 865.51           | 65.74                   | Peak             | V    | 25.72                    | 4.01         | 40.48               | 54.99                    | 74.00                   | 19.01          |
| 1 865.51           | 48.78                   | Average          | V    | 25.72                    | 4.01         | 40.48               | 38.03                    | 54.00                   | 15.97          |
| 2 168.51           | 59.22                   | Peak             | V    | 26.36                    | 4.27         | 40.72               | 49.13                    | 74.00                   | 24.87          |
| Above<br>3 000.00  | Not<br>detected         | -                | -    | -                        | -            | -                   | -                        | -                       | -              |

##### \* Remark

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor - Amp + C.L (Cable loss)
5. 15.31 Measurement standards.

**THE AMPLITUDE OF SPURIOUS EMISSIONS FROM INTENTIONAL RADIATORS AND EMISSIONS FROM UNINTENTIONAL RADIATORS WHICH ARE ATTENUATED MORE THAN 20 DB BELOW THE PERMISSIBLE VALUE NEED NOT BE REPORTED UNLESS SPECIFICALLY REQUIRED ELSEWHERE IN THIS PART.**

**B. Middle channel (2 441 MHz)**

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant.<br>factor<br>(dB/m) | C.L.<br>(dB) | AMP<br>Gain<br>(dB) | Actual<br>(dB $\mu$ N/m) | Limit<br>(dB $\mu$ N/m) | Margin<br>(dB) |
|--------------------|-------------------------|------------------|------|--------------------------|--------------|---------------------|--------------------------|-------------------------|----------------|
| 1 062.81           | 52.14                   | Peak             | H    | 25.13                    | 2.87         | 40.09               | 40.05                    | 74.00                   | 33.95          |
| 1 832.38           | 65.12                   | Peak             | H    | 25.71                    | 3.98         | 40.47               | 54.34                    | 74.00                   | 19.66          |
| 1 832.38           | 48.44                   | Average          | H    | 25.71                    | 3.98         | 40.47               | 37.66                    | 54.00                   | 16.34          |
| 1 832.38           | 67.81                   | Peak             | V    | 25.71                    | 3.98         | 40.47               | 57.03                    | 74.00                   | 16.97          |
| 1 832.38           | 48.99                   | Average          | V    | 25.71                    | 3.98         | 40.47               | 38.21                    | 54.00                   | 15.79          |
| 2 160.75           | 63.08                   | Peak             | V    | 26.34                    | 4.26         | 40.71               | 52.97                    | 74.00                   | 21.03          |
| Above<br>3 000.00  | Not<br>detected         | -                | -    | -                        | -            | -                   | -                        | -                       | -              |

**\* Remark**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor - Amp + C.L (Cable loss)
5. 15.31 Measurement standards.

**THE AMPLITUDE OF SPURIOUS EMISSIONS FROM INTENTIONAL RADIATORS AND EMISSIONS FROM UNINTENTIONAL RADIATORS WHICH ARE ATTENUATED MORE THAN 20 DB BELOW THE PERMISSIBLE VALUE NEED NOT BE REPORTED UNLESS SPECIFICALLY REQUIRED ELSEWHERE IN THIS PART.**

**C. High channel (2 480 MHz)**

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant.<br>factor<br>(dB/m) | C.L.<br>(dB) | AMP<br>Gain<br>(dB) | Actual<br>(dB $\mu$ N/m) | Limit<br>(dB $\mu$ N/m) | Margin<br>(dB) |
|--------------------|-------------------------|------------------|------|--------------------------|--------------|---------------------|--------------------------|-------------------------|----------------|
| 1 064.72           | 52.05                   | Peak             | H    | 25.13                    | 2.88         | 40.09               | 39.97                    | 74.00                   | 34.03          |
| 1 822.56           | 65.65                   | Peak             | H    | 25.70                    | 3.97         | 40.47               | 54.85                    | 74.00                   | 19.15          |
| 1 822.56           | 48.41                   | Average          | H    | 25.70                    | 3.97         | 40.47               | 37.61                    | 54.00                   | 16.39          |
| 1 822.56           | 66.31                   | Peak             | V    | 25.70                    | 3.97         | 40.47               | 55.51                    | 74.00                   | 18.49          |
| 1 822.56           | 49.01                   | Average          | V    | 25.70                    | 3.97         | 40.47               | 38.21                    | 54.00                   | 15.79          |
| 2 160.75           | 59.53                   | Peak             | V    | 26.34                    | 4.26         | 40.71               | 49.42                    | 74.00                   | 24.58          |
| Above<br>3 000.00  | Not<br>detected         | -                | -    | -                        | -            | -                   | -                        | -                       | -              |

**\* Remark**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor - Amp + C.L (Cable loss)
5. 15.31 Measurement standards.

**THE AMPLITUDE OF SPURIOUS EMISSIONS FROM INTENTIONAL RADIATORS AND EMISSIONS FROM UNINTENTIONAL RADIATORS WHICH ARE ATTENUATED MORE THAN 20 DB BELOW THE PERMISSIBLE VALUE NEED NOT BE REPORTED UNLESS SPECIFICALLY REQUIRED ELSEWHERE IN THIS PART.**

**Operation mode: EDR**
**A. Low channel (2 402 MHz)**

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant.<br>factor<br>(dB/m) | C.L<br>(dB) | AMP<br>Gain<br>(dB) | Actual<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|-------------------------|------------------|------|--------------------------|-------------|---------------------|--------------------------|-------------------------|----------------|
| 1 060.91           | 52.13                   | Peak             | H    | 25.12                    | 2.87        | 40.09               | 40.03                    | 74.00                   | 33.97          |
| 1 832.38           | 65.65                   | Peak             | H    | 25.71                    | 3.98        | 40.47               | 54.87                    | 74.00                   | 19.13          |
| 1 832.38           | 48.4                    | Average          | H    | 25.71                    | 3.98        | 40.47               | 37.62                    | 54.00                   | 16.38          |
| 1 832.38           | 66.93                   | Peak             | V    | 25.71                    | 3.98        | 40.47               | 56.15                    | 74.00                   | 17.85          |
| 1 832.38           | 49.02                   | Average          | V    | 25.71                    | 3.98        | 40.47               | 38.24                    | 54.00                   | 15.76          |
| 2 168.51           | 58.29                   | Peak             | H    | 26.36                    | 4.27        | 40.72               | 48.20                    | 74.00                   | 25.80          |
| Above<br>3 000.00  | Not<br>detected         | -                | -    | -                        | -           | -                   | -                        | -                       | -              |

**※ Remark**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor - Amp + C.L (Cable loss)
5. 15.31 Measurement standards.

**THE AMPLITUDE OF SPURIOUS EMISSIONS FROM INTENTIONAL RADIATORS AND EMISSIONS FROM UNINTENTIONAL RADIATORS WHICH ARE ATTENUATED MORE THAN 20 DB BELOW THE PERMISSIBLE VALUE NEED NOT BE REPORTED UNLESS SPECIFICALLY REQUIRED ELSEWHERE IN THIS PART.**

**B. Middle channel (2 441 MHz)**

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant.<br>factor<br>(dB/m) | C.L.<br>(dB) | AMP<br>Gain<br>(dB) | Actual<br>(dB $\mu$ N/m) | Limit<br>(dB $\mu$ N/m) | Margin<br>(dB) |
|--------------------|-------------------------|------------------|------|--------------------------|--------------|---------------------|--------------------------|-------------------------|----------------|
| 1 059.01           | 51.94                   | Peak             | H    | 25.12                    | 2.87         | 40.09               | 39.84                    | 74.00                   | 34.16          |
| 1 822.56           | 67.26                   | Peak             | H    | 25.70                    | 3.97         | 40.47               | 56.46                    | 74.00                   | 17.54          |
| 1 822.56           | 48.45                   | Average          | H    | 25.70                    | 3.97         | 40.47               | 37.65                    | 54.00                   | 16.35          |
| 1 812.79           | 66.44                   | Peak             | V    | 25.70                    | 3.96         | 40.46               | 55.64                    | 74.00                   | 18.36          |
| 1 812.79           | 48.92                   | Average          | V    | 25.70                    | 3.96         | 40.46               | 38.12                    | 54.00                   | 15.88          |
| 2 168.51           | 59.79                   | Peak             | H    | 26.36                    | 4.27         | 40.72               | 49.70                    | 74.00                   | 24.30          |
| Above<br>3 000.00  | Not<br>detected         | -                | -    | -                        | -            | -                   | -                        | -                       | -              |

**\* Remark**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor - Amp + C.L (Cable loss)
5. 15.31 Measurement standards.

**THE AMPLITUDE OF SPURIOUS EMISSIONS FROM INTENTIONAL RADIATORS AND EMISSIONS FROM UNINTENTIONAL RADIATORS WHICH ARE ATTENUATED MORE THAN 20 DB BELOW THE PERMISSIBLE VALUE NEED NOT BE REPORTED UNLESS SPECIFICALLY REQUIRED ELSEWHERE IN THIS PART.**

**C. High channel (2 480 MHz)**

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant.<br>factor<br>(dB/m) | C.L.<br>(dB) | AMP<br>Gain<br>(dB) | Actual<br>(dB $\mu$ N/m) | Limit<br>(dB $\mu$ N/m) | Margin<br>(dB) |
|--------------------|-------------------------|------------------|------|--------------------------|--------------|---------------------|--------------------------|-------------------------|----------------|
| 1 062.81           | 54.43                   | Peak             | V    | 25.13                    | 2.87         | 40.09               | 42.34                    | 74.00                   | 31.66          |
| 1 809.54           | 66.47                   | Peak             | H    | 25.70                    | 3.96         | 40.46               | 55.67                    | 74.00                   | 18.33          |
| 1 809.54           | 48.5                    | Average          | H    | 25.70                    | 3.96         | 40.46               | 37.70                    | 54.00                   | 16.30          |
| 1 822.56           | 66.14                   | Peak             | V    | 25.70                    | 3.97         | 40.47               | 55.34                    | 74.00                   | 18.66          |
| 1 822.56           | 49.04                   | Average          | V    | 25.70                    | 3.97         | 40.47               | 38.24                    | 54.00                   | 15.76          |
| 2 168.51           | 61.17                   | Peak             | V    | 26.36                    | 4.27         | 40.72               | 51.08                    | 74.00                   | 22.92          |
| Above<br>3 000.00  | Not<br>detected         | -                | -    | -                        | -            | -                   | -                        | -                       | -              |

**\* Remark**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental Frequency.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor - Amp + C.L (Cable loss)
5. 15.31 Measurement standards.

**THE AMPLITUDE OF SPURIOUS EMISSIONS FROM INTENTIONAL RADIATORS AND EMISSIONS FROM UNINTENTIONAL RADIATORS WHICH ARE ATTENUATED MORE THAN 20 DB BELOW THE PERMISSIBLE VALUE NEED NOT BE REPORTED UNLESS SPECIFICALLY REQUIRED ELSEWHERE IN THIS PART.**

#### 4.4.4. Band Edge

##### Operation mode: Basic mode

###### A. 2 310 - 2 390 MHz measurement

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant.<br>factor<br>(dB/m) | C.L<br>(dB) | AMP<br>Gain<br>(dB) | Actual<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|-------------------------|------------------|------|--------------------------|-------------|---------------------|--------------------------|-------------------------|----------------|
| 2 389.90           | 47.16                   | Peak             | H    | 26.74                    | 4.61        | 41.02               | 37.49                    | 74.00                   | 36.51          |
| 2 386.76           | 51.79                   | Peak             | V    | 26.74                    | 4.61        | 41.03               | 42.11                    | 74.00                   | 31.89          |
| 2 389.80           | 35.13                   | Average          | H    | 26.74                    | 4.61        | 41.02               | 25.46                    | 54.00                   | 28.54          |
| 2 376.03           | 35.93                   | Average          | V    | 26.72                    | 4.60        | 41.02               | 26.23                    | 54.00                   | 27.77          |

###### B. 2 483.5 – 2 500 MHz measurement

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant.<br>factor<br>(dB/m) | C.L<br>(dB) | AMP<br>Gain<br>(dB) | Actual<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|-------------------------|------------------|------|--------------------------|-------------|---------------------|--------------------------|-------------------------|----------------|
| 2 483.50           | 55.90                   | Peak             | H    | 26.86                    | 4.66        | 41.20               | 46.22                    | 74.00                   | 27.78          |
| 2 483.50           | 55.13                   | Peak             | V    | 26.86                    | 4.66        | 41.20               | 45.45                    | 74.00                   | 28.55          |
| 2 483.50           | 50.87                   | Average          | H    | 26.86                    | 4.66        | 41.20               | 41.19                    | 54.00                   | 12.81          |
| 2 483.50           | 50.02                   | Average          | V    | 26.86                    | 4.66        | 41.20               | 40.34                    | 54.00                   | 13.66          |

##### Operation mode: EDR

###### A. 2 310 - 2 390 MHz measurement

| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant.<br>factor<br>(dB/m) | C.L<br>(dB) | AMP<br>Gain<br>(dB) | Actual<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|-------------------------|------------------|------|--------------------------|-------------|---------------------|--------------------------|-------------------------|----------------|
| 2 389.99           | 46.53                   | Peak             | H    | 26.74                    | 4.61        | 41.04               | 36.84                    | 74.00                   | 37.16          |
| 2 389.99           | 44.90                   | Peak             | V    | 26.74                    | 4.61        | 41.04               | 35.21                    | 74.00                   | 38.79          |
| 2 389.99           | 35.25                   | Average          | H    | 26.74                    | 4.61        | 41.04               | 25.56                    | 54.00                   | 28.44          |
| 2 389.99           | 35.84                   | Average          | V    | 26.74                    | 4.61        | 41.04               | 26.15                    | 54.00                   | 27.85          |

###### B. 2 483.5 – 2 500 MHz measurement


| Frequency<br>(MHz) | Reading<br>(dB $\mu$ V) | Detector<br>mode | Pol. | Ant.<br>factor<br>(dB/m) | C.L<br>(dB) | AMP<br>Gain<br>(dB) | Actual<br>(dB $\mu$ V/m) | Limit<br>(dB $\mu$ V/m) | Margin<br>(dB) |
|--------------------|-------------------------|------------------|------|--------------------------|-------------|---------------------|--------------------------|-------------------------|----------------|
| 2 483.50           | 54.10                   | Peak             | H    | 26.86                    | 4.66        | 41.20               | 44.42                    | 74.00                   | 29.58          |
| 2 483.50           | 54.22                   | Peak             | V    | 26.86                    | 4.66        | 41.20               | 44.54                    | 74.00                   | 29.46          |
| 2 483.50           | 47.20                   | Average          | H    | 26.86                    | 4.66        | 41.20               | 37.52                    | 54.00                   | 16.48          |
| 2 483.50           | 46.56                   | Average          | V    | 26.86                    | 4.66        | 41.20               | 36.88                    | 54.00                   | 17.12          |

#### 4.4.5. Spurious RF conducted emissions: Plot of spurious RF conducted emission


##### Operation mode: Basic mode

###### A. Low channel (2.402 MHz)


###### Unwanted Emission data

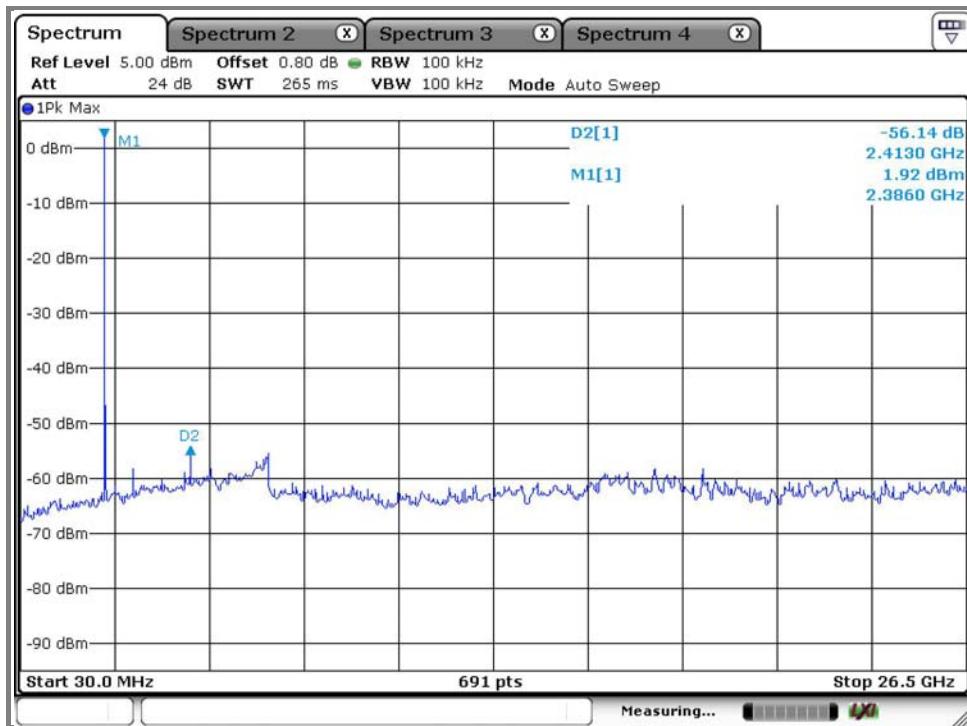

###### Band-edge data (With Hopping Disabled)

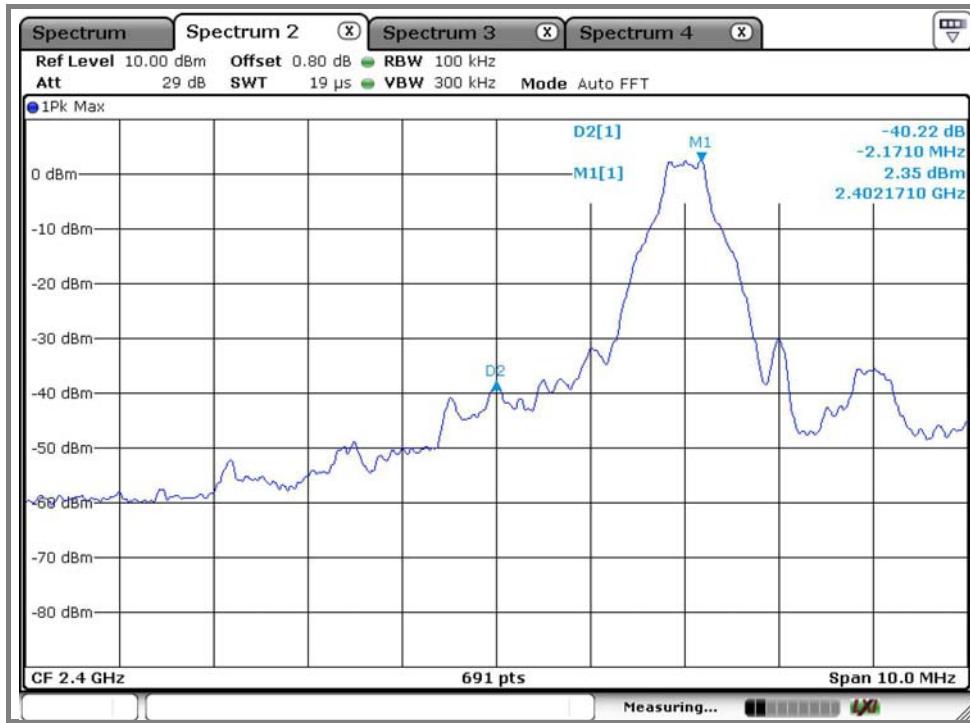


**Band-edge data (With Hopping Enabled)**

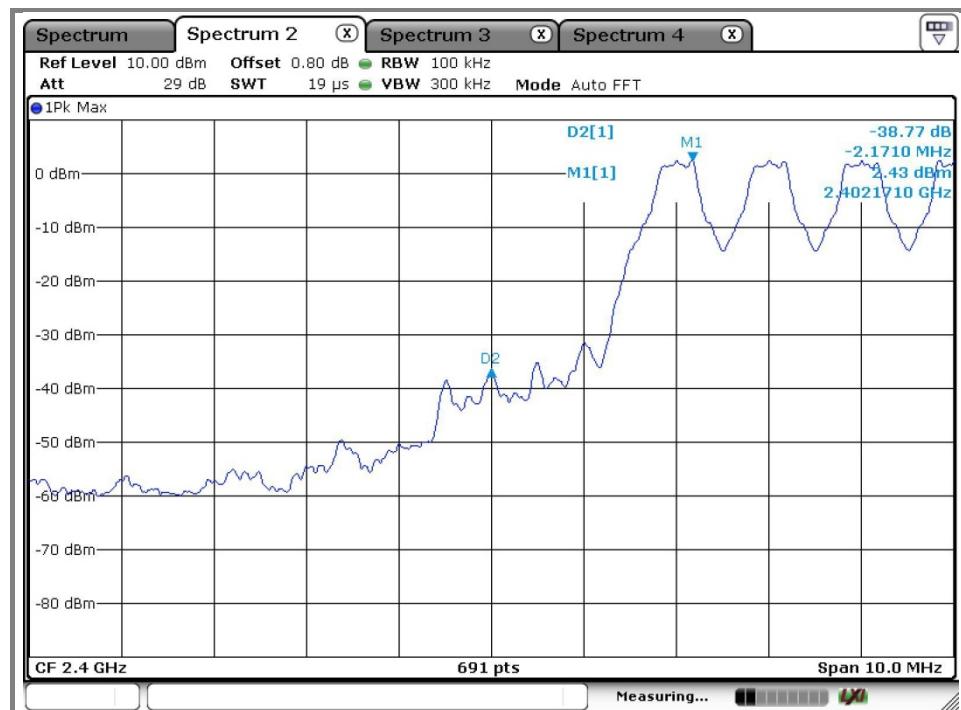


**B. Middle channel (2.441 GHz)**

**Unwanted Emission data**

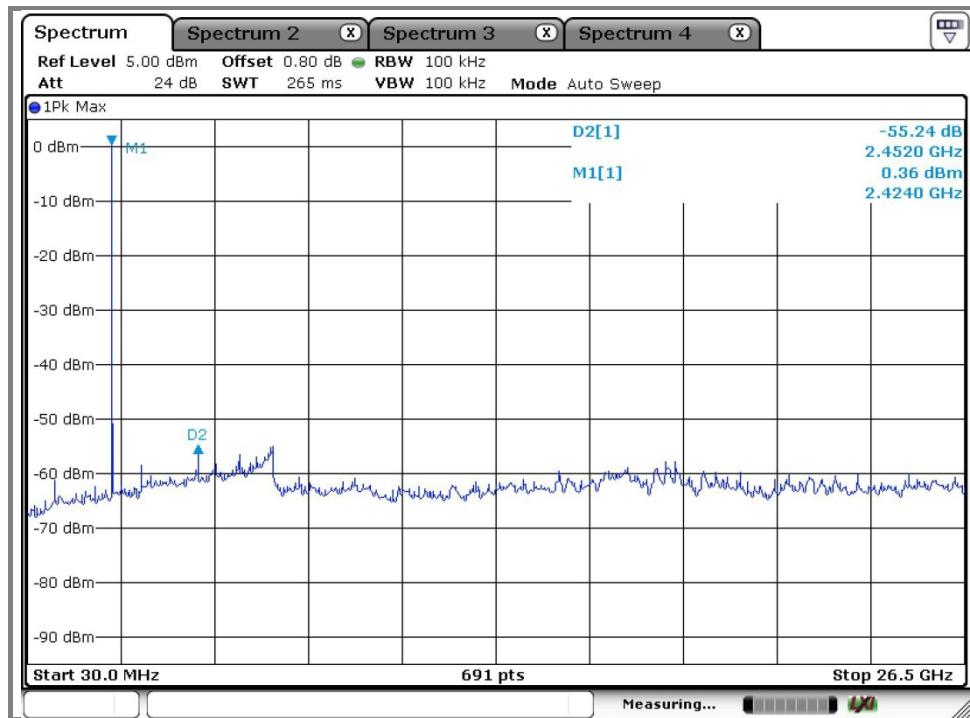


### C. High channel (2 480 MHz)


#### Unwanted Emission data

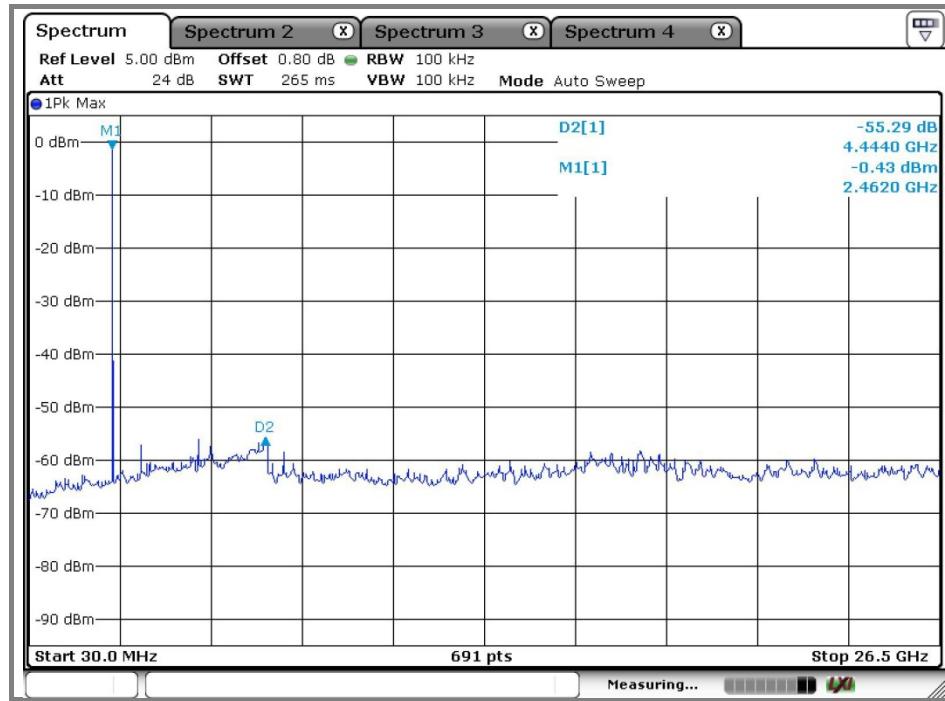

#### Band-edge data (With Hopping Disabled)

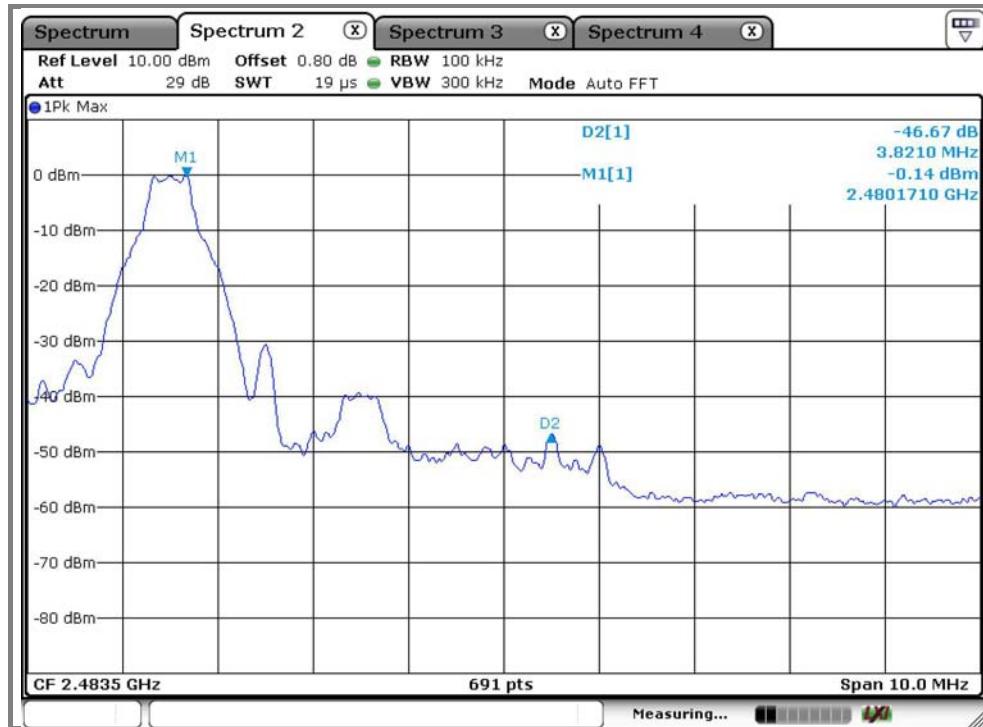


## Unwanted Emission data (With Hopping Enabled)

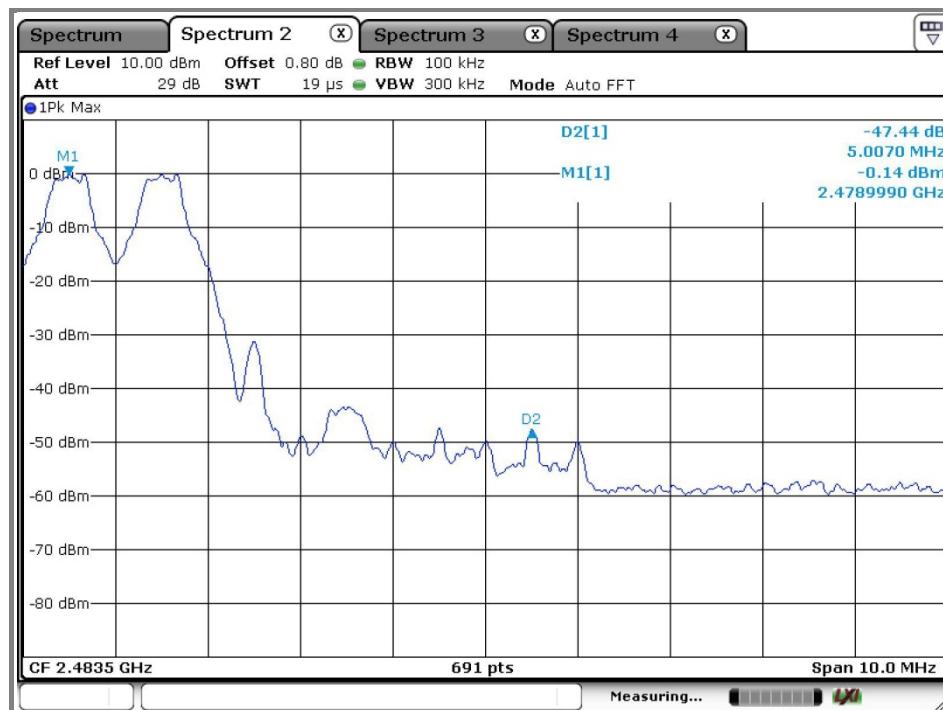


**Operation mode: EDR mode**

**A. Low channel (2.402 MHz)**

**Unwanted Emission data**

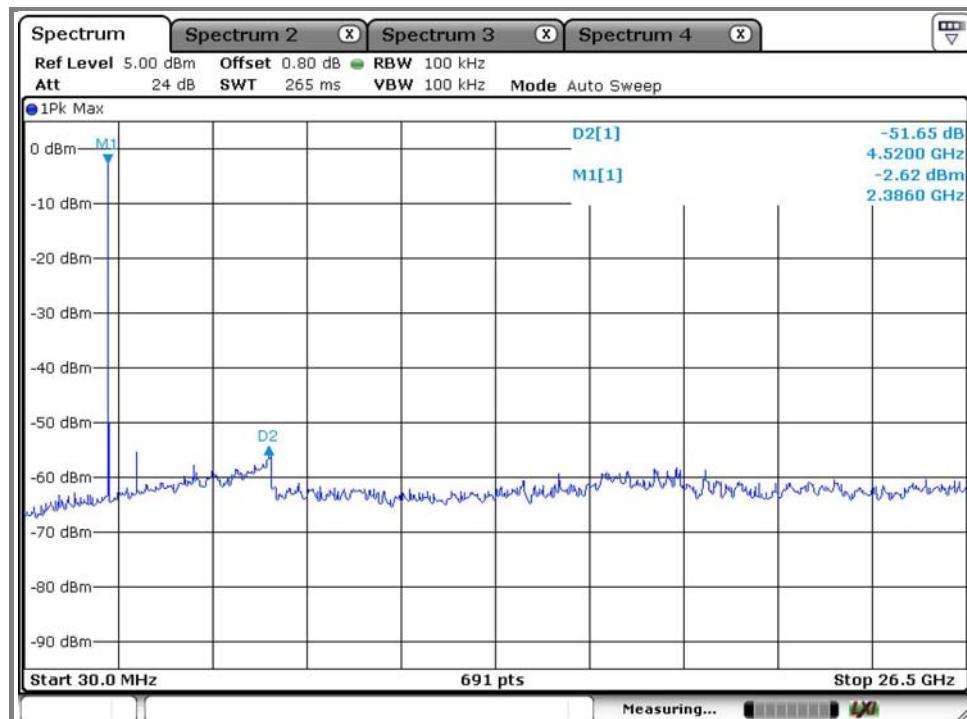

**Band-edge data (With Hopping Disabled)**

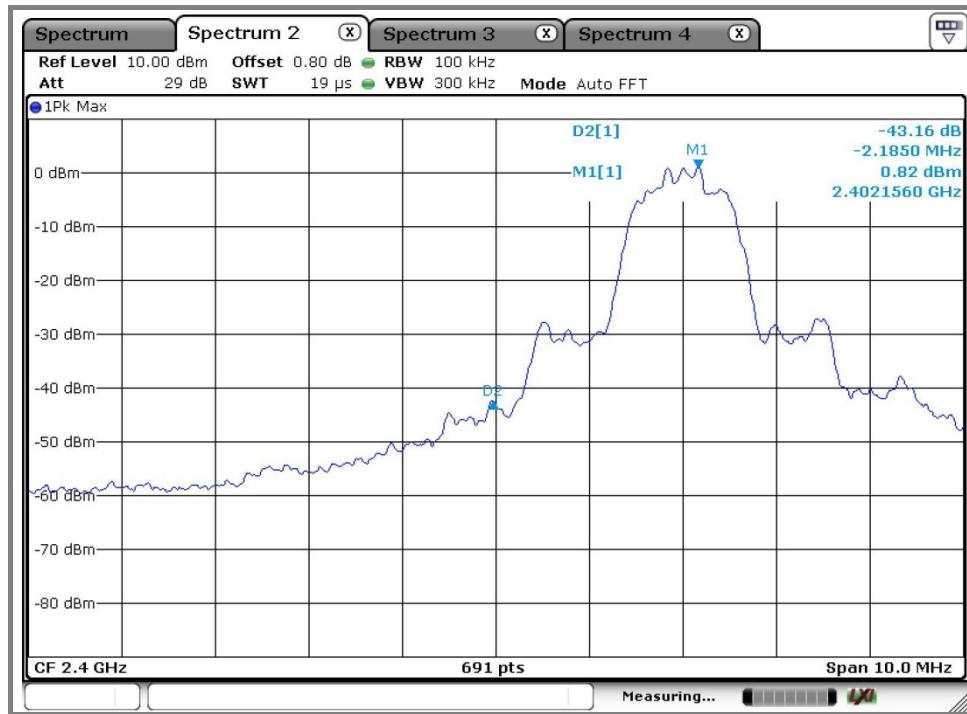


Band-edge data (With Hopping Enabled)




**B. Middle channel (2.441 GHz)**

Unwanted Emission data

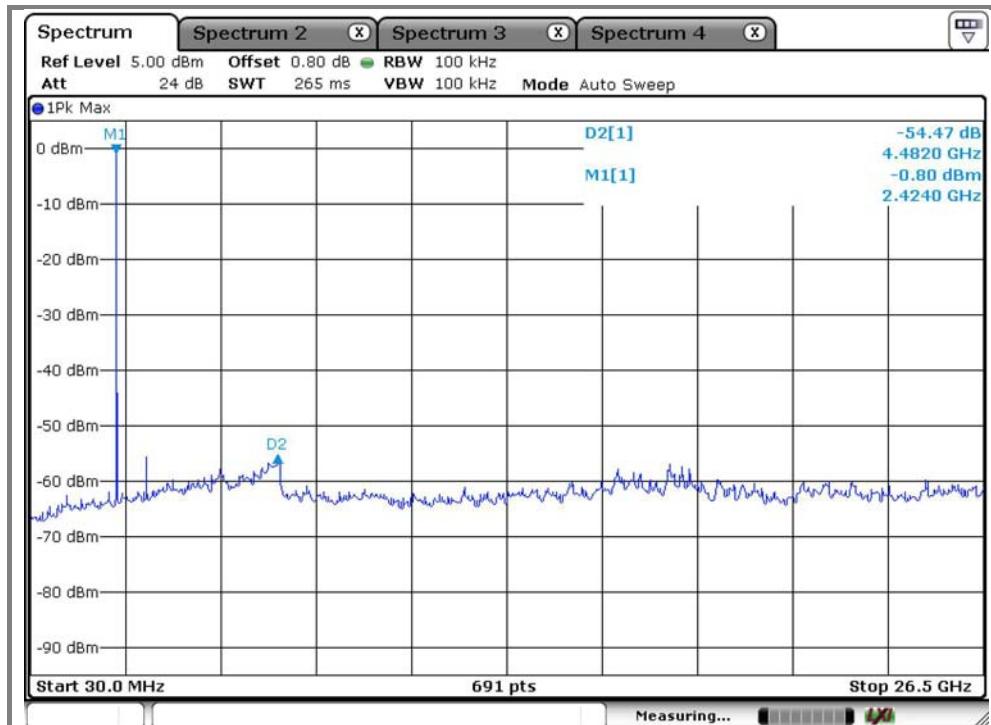


### C. High channel (2.480 MHz)


#### Unwanted Emission data

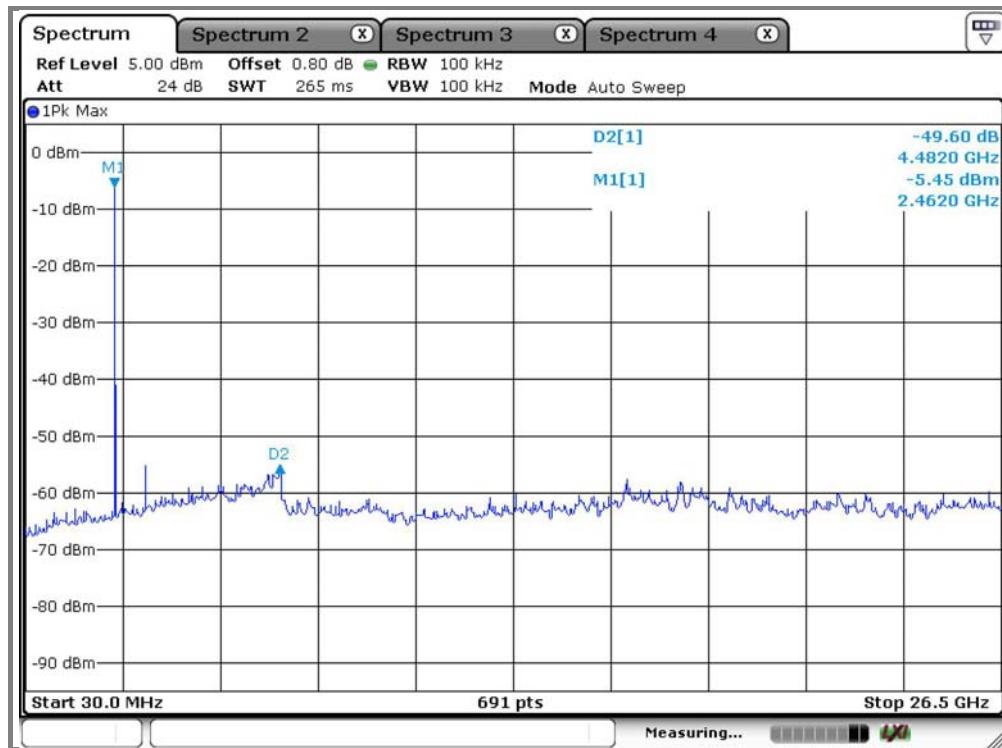

#### Band-edge data (With Hopping Disabled)

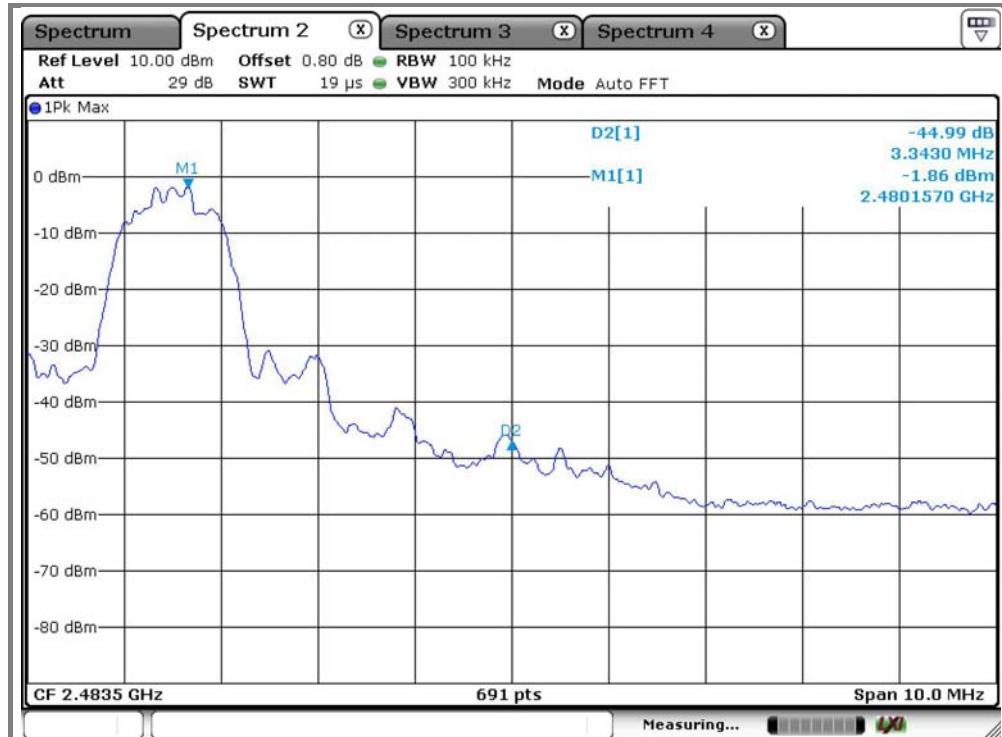


## Unwanted Emission data (With Hopping Enabled)

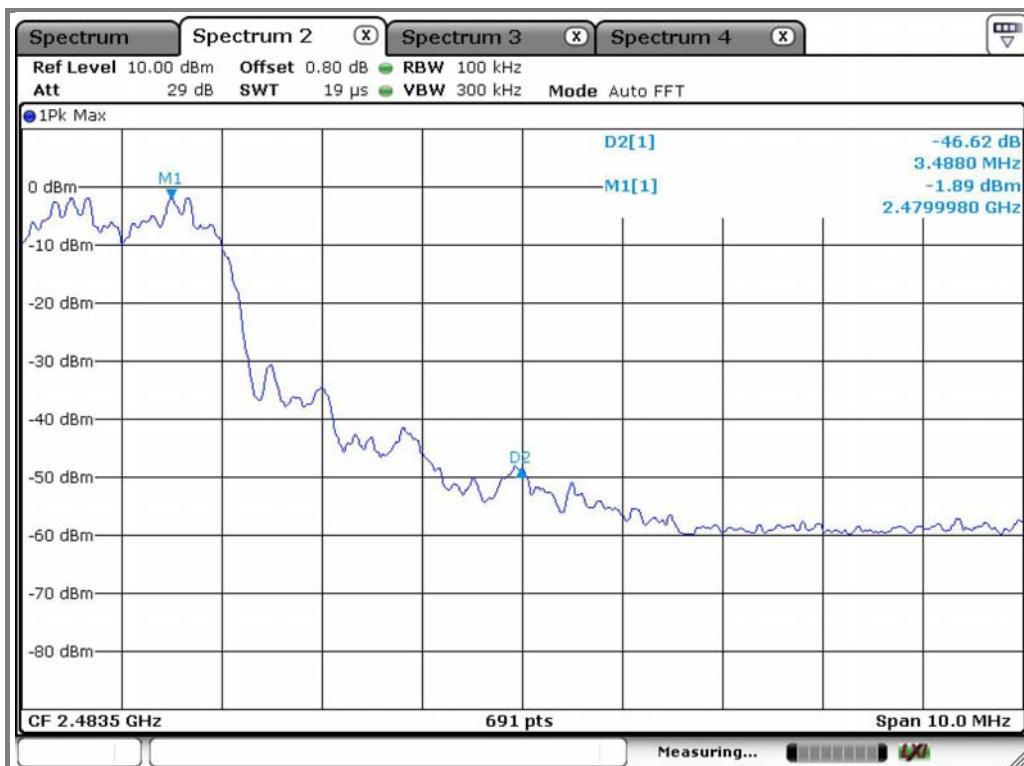

## 5. 20 dB bandwidth measurement

### 5.1. Test setup

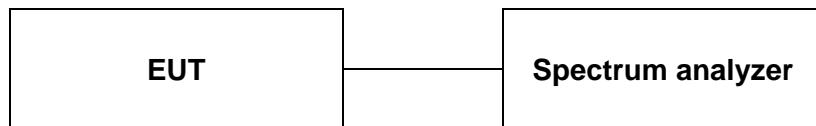

### 5.2. Limit

Not applicable

### 5.3. Test procedure

1. The 20 dB band width was measured with a spectrum analyzer connected to RF antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 20 dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using  $\text{RBW} \geq 10 \text{ kHz}$ ,  $\text{VBW} \geq 10 \text{ kHz}$ ,  $\text{Span} = 3 \text{ MHz}$ .

### 5.4. Test results


Ambient temperature: 22 °C

Relative humidity: 45 % R.H.


| Operation mode | Frequency (MHz) | 20 dB bandwidth (MHz) |
|----------------|-----------------|-----------------------|
| BASIC          | 2 402           | 0.769                 |
|                | 2 441           | 0.764                 |
|                | 2 480           | 0.799                 |
| EDR            | 2 402           | 1.211                 |
|                | 2 441           | 1.268                 |
|                | 2 480           | 1.220                 |


**Operation mode: Basic mode**

**A. Low channel (2 402 MHz) – 20 dB bandwidth**

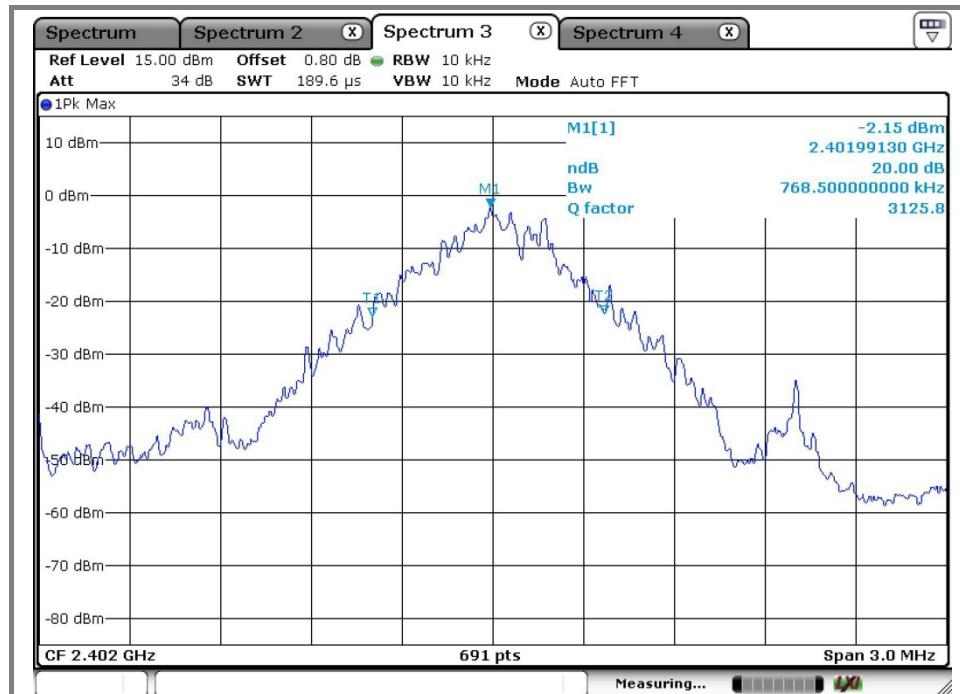


**B. Middle channel (2 441 MHz) – 20 dB bandwidth**

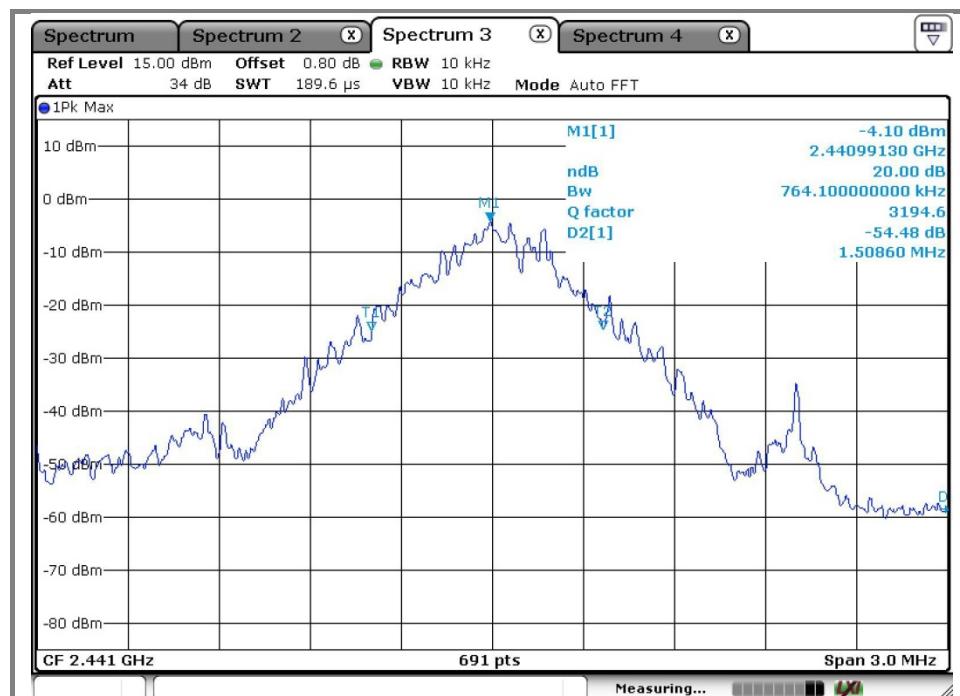

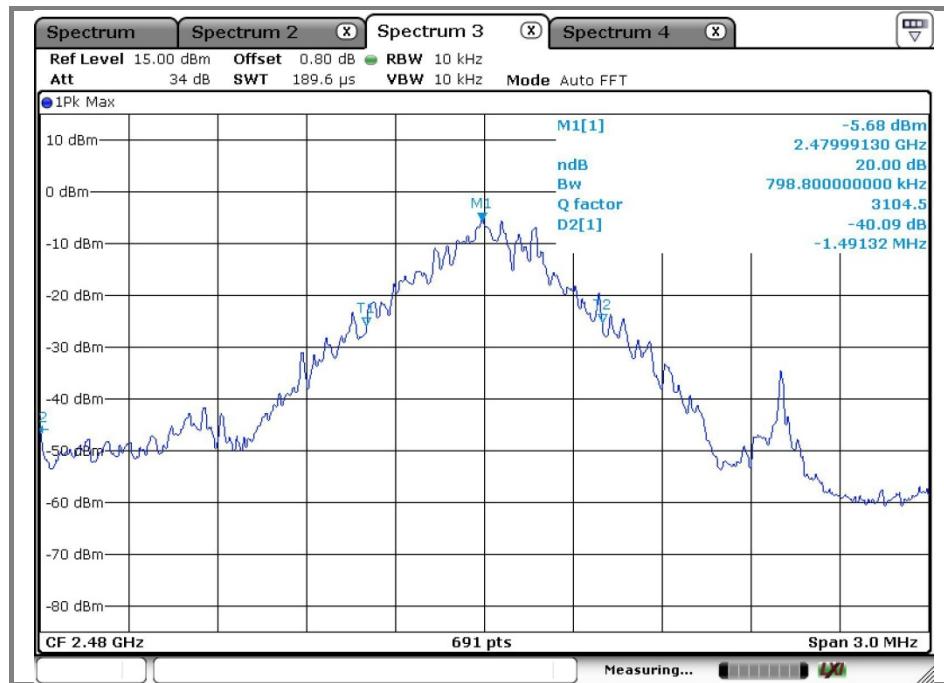
**C. High channel (2 480 MHz) – 20 dB bandwidth**


Operation mode: EDR

**A. Low channel (2 402 MHz)– 20 dB bandwidth**

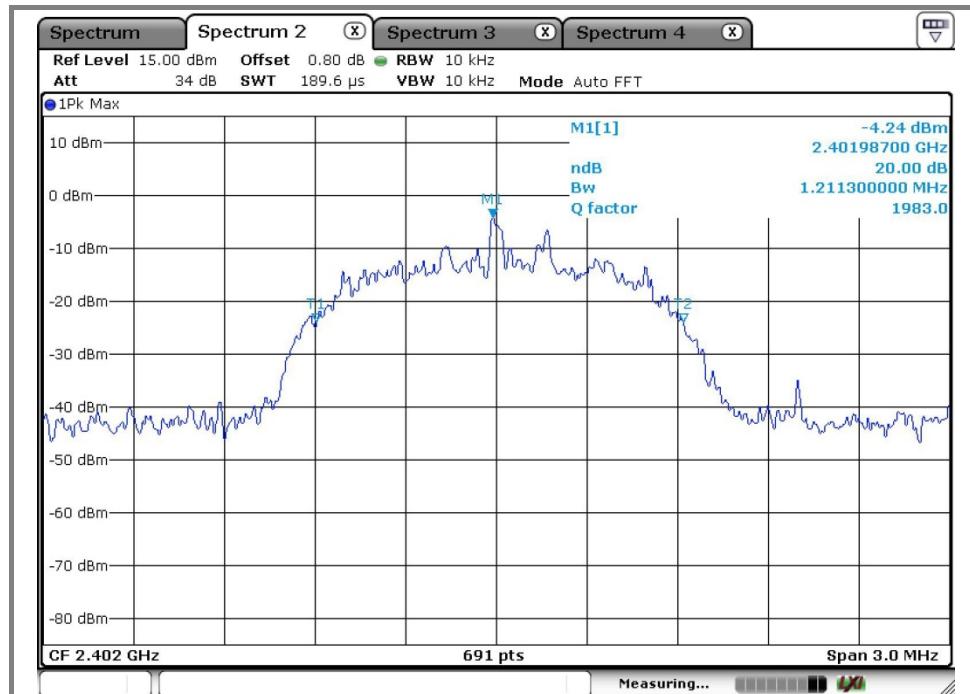


**B. Middle channel (2 441 MHz)– 20 dB bandwidth**

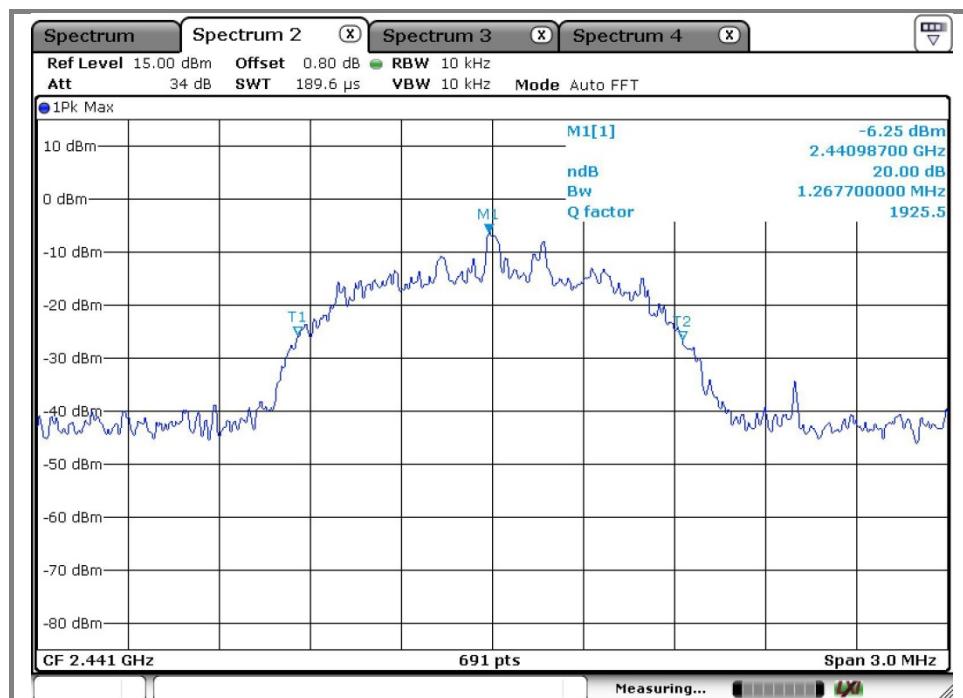

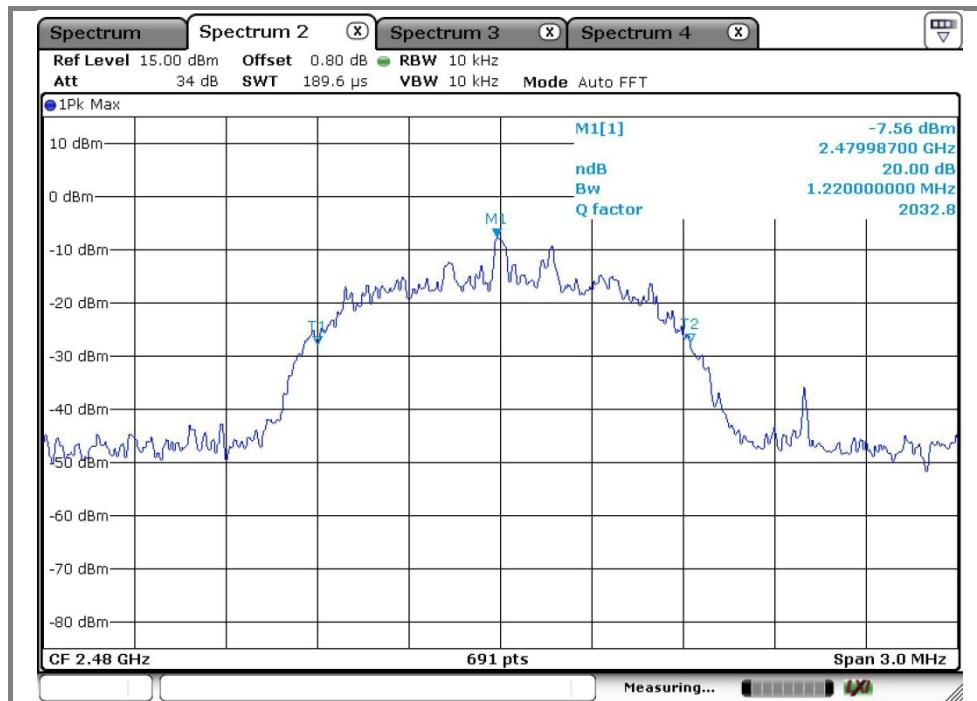**C. High channel (2 480 MHz)– 20 dB bandwidth**

## 6. Maximum peak output power measurement

### 6.1. Test setup.



### 6.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW
2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 MHz band: 1 Watt.

### 6.3. Test procedure

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using; Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
RBW  $\geq$  20 dB BW, VBW  $\geq$  RBW, Sweep = auto, Detector function = peak, Trace = max hold

### 6.4. Test results


Ambient temperature: 22 °C

Relative humidity: 45 % R.H.


| Operation mode | Frequency(MHz) | Peak output power(dBm) | Limit(dBm) |
|----------------|----------------|------------------------|------------|
| BASIC          | 2 402          | 2.46                   | 30         |
|                | 2 441          | 1.12                   | 30         |
|                | 2 480          | 0.02                   | 30         |
| EDR            | 2 402          | 1.16                   | 30         |
|                | 2 441          | -0.10                  | 30         |
|                | 2 480          | -1.50                  | 30         |


**Operation mode: Basic mode**

**A. Low channel (2 402 MHz)**

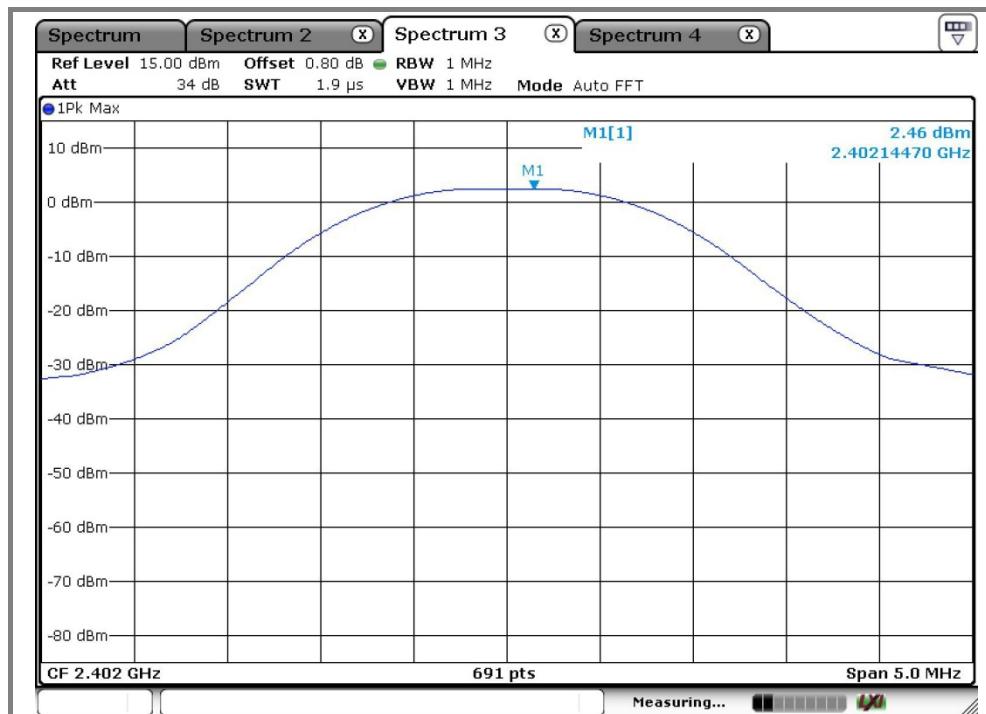


**B. Middle channel (2 441 MHz)**

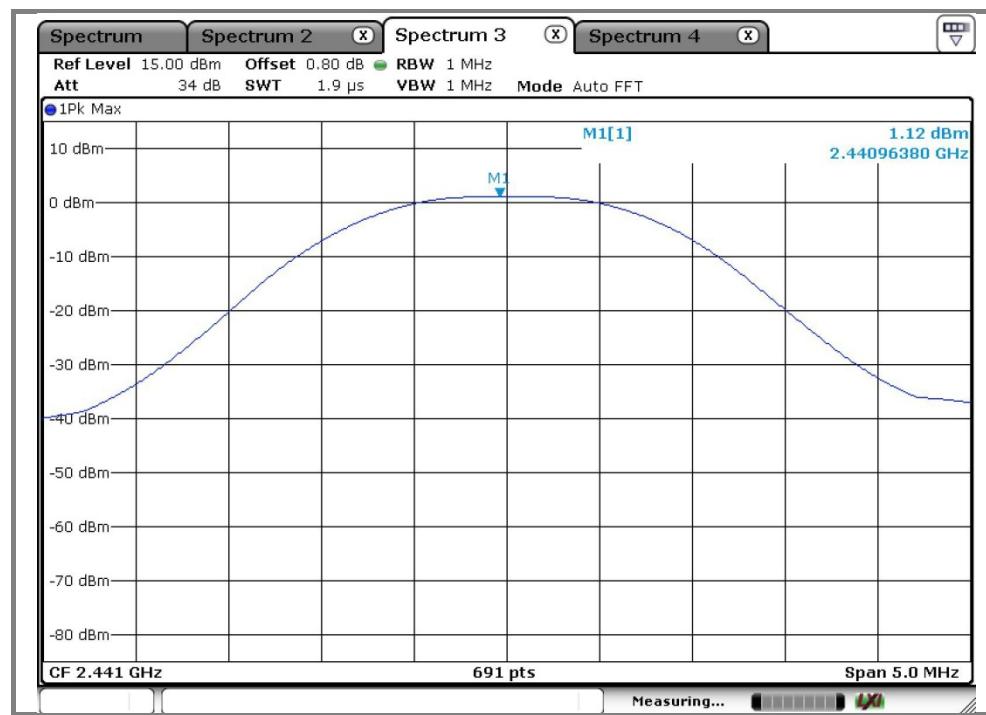

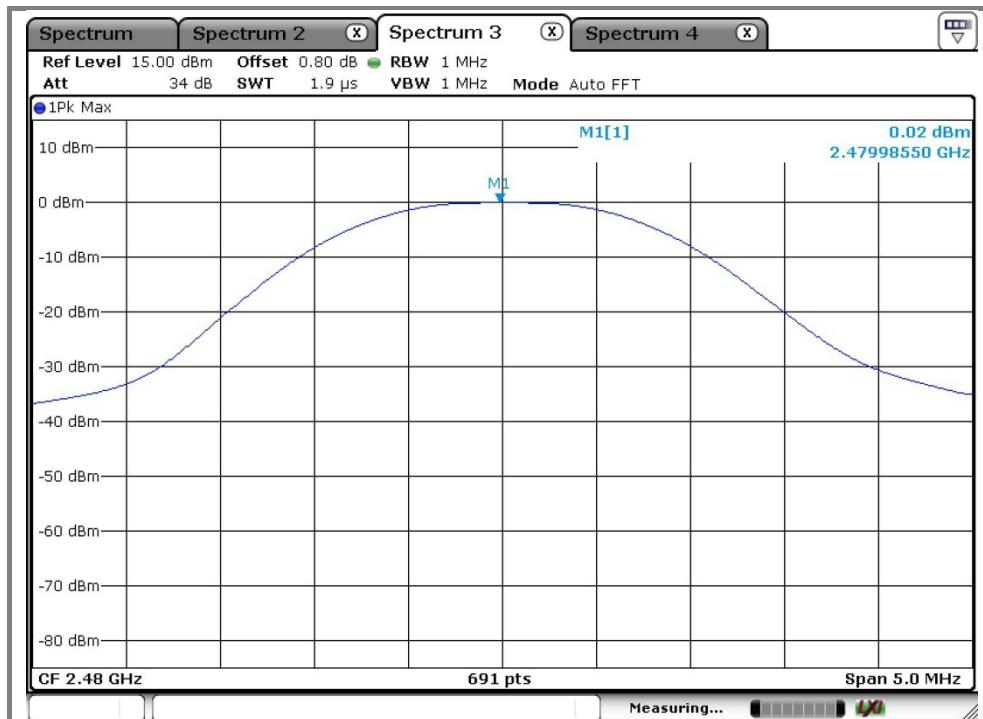
**C. High channel (2 480 MHz)**


Operation mode: EDR

**A. Low channel (2.402 MHz)**

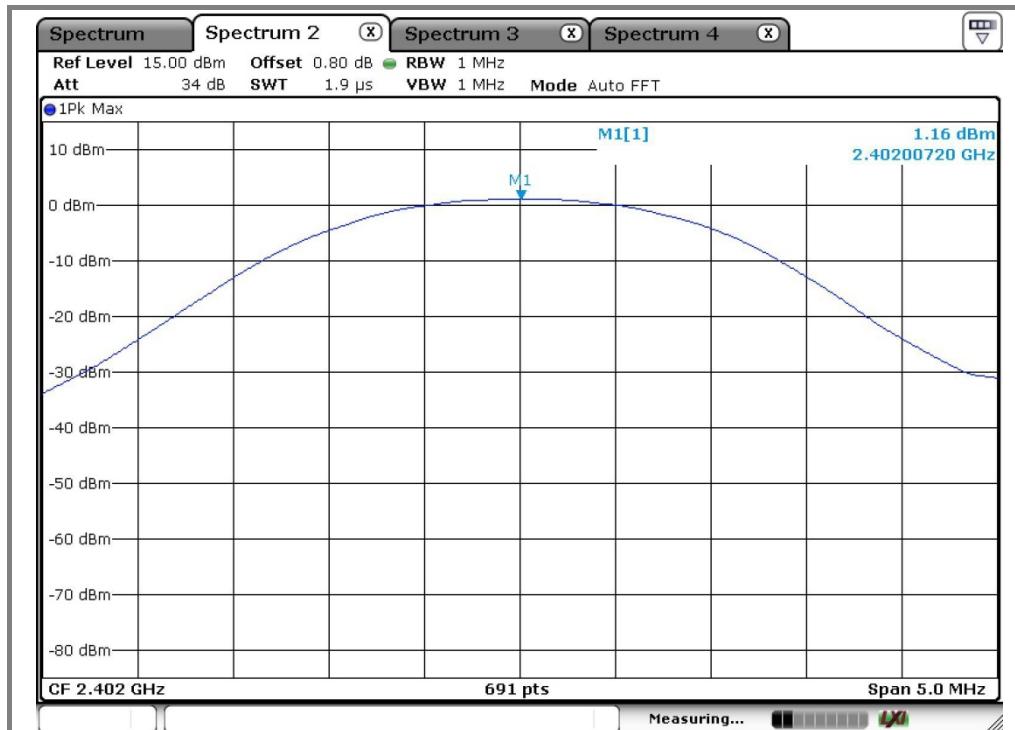


**B. Middle channel (2.441 MHz)**

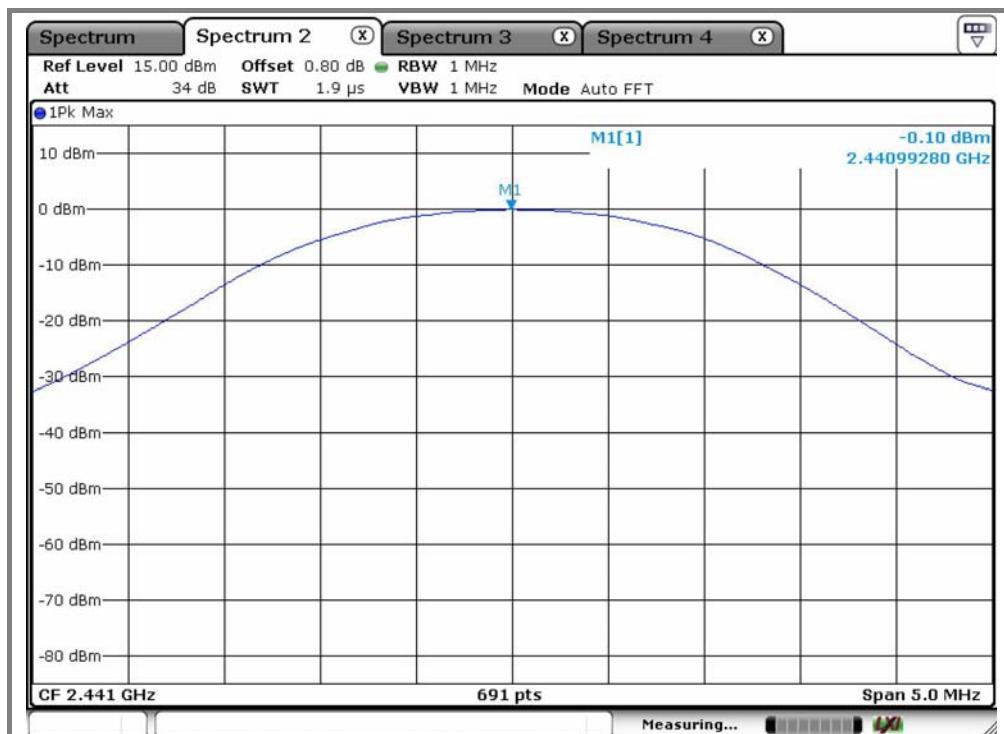

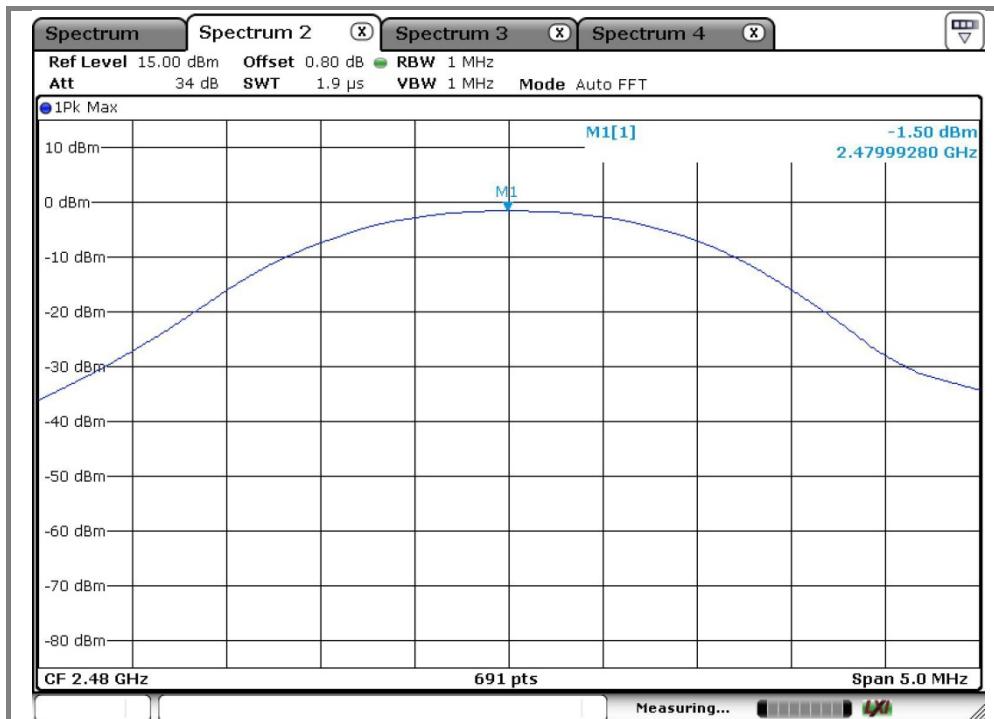**C. High channel (2 480 MHz)**

## 7. Hopping channel separation

### 7.1. Test setup



### 7.2. Limit

§15.247(a)(1) Frequency hopping system operating in 2 400 – 2 483.5 MHz. Band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### 7.3. Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the max hold function record the separation of adjacent channels.
4. Measure the frequency difference of these two adjacent channels by spectrum analyzer mark function. And then plot the result on spectrum analyzer screen.
5. Repeat above procedures until all frequencies measured were complete.
6. Set center frequency of spectrum analyzer = middle of hopping channel.
7. Set the spectrum analyzer as RBW = 10 kHz, VBW = 10 kHz, Span = 3 MHz and Sweep = auto.

### 7.4. Test results

Ambient temperature: 22 °C


Relative humidity: 45 % R.H.

| Operation mode | Frequency (MHz) | Adjacent hopping Channel separation (kHz) | Two-third of 20 dB bandwidth (kHz) | Minimum bandwidth (kHz) |
|----------------|-----------------|---|------------------------------------|-------------------------|
| BASIC          | 2 441           | 933.40                                    | 509.40                             | 25                      |
| EDR            | 2 441           | 1 002.9                                   | 845.33                             | 25                      |


#### \* Remark:

20 dB bandwidth measurement, the measured channel separation should be greater than two-third of 20 dB bandwidth or Minimum bandwidth.

Operation mode : Basic mode

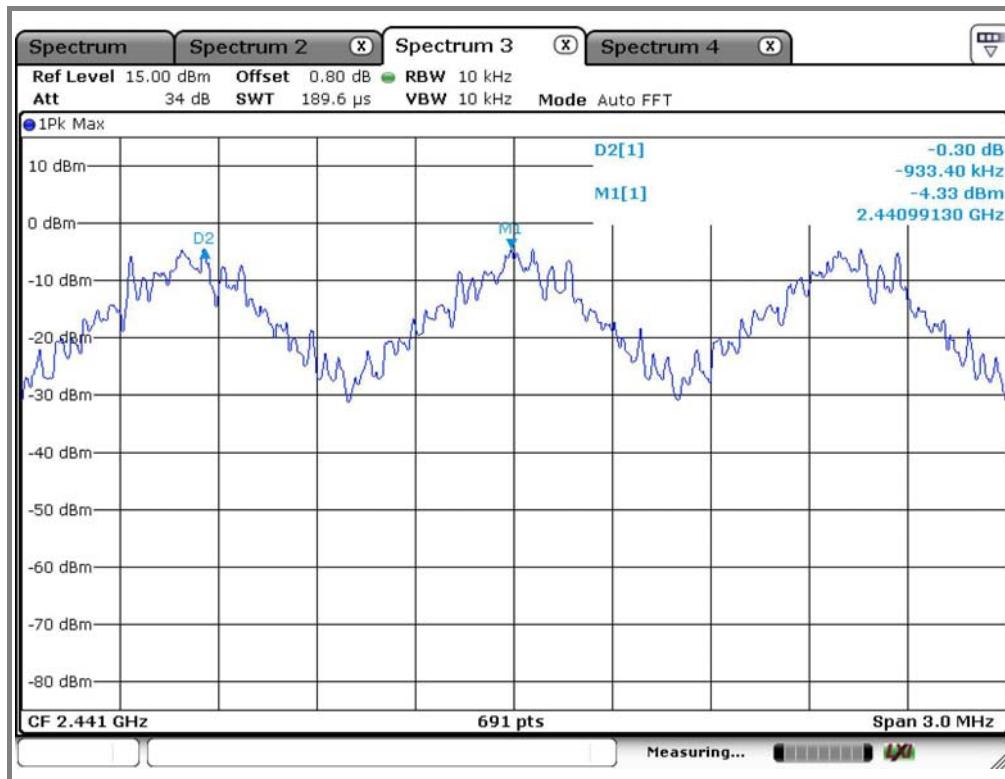


Operation mode: EDR

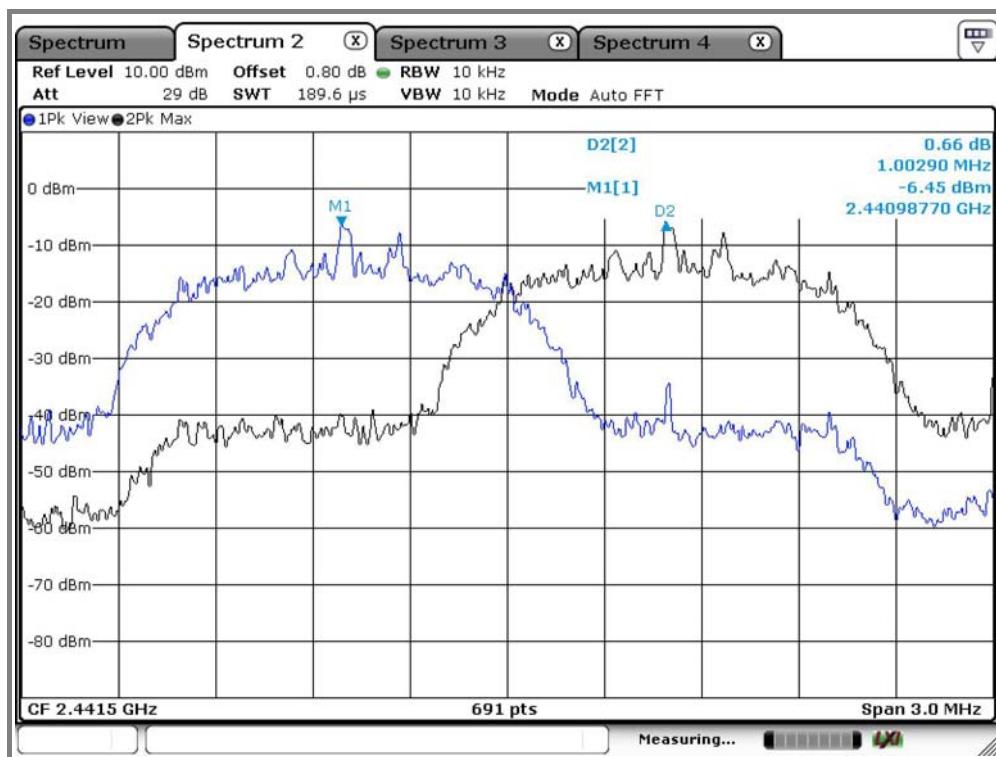

## 8. Number of hopping frequency

### 8.1. Test setup



### 8.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2 400 - 2 483.5 MHz bands shall use at least 15 hopping frequencies.

### 8.3. Test procedure



1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna the port to the Spectrum analyzer
3. Set spectrum analyzer Start = 2 400 MHz, Stop = 2 441.5 MHz, Sweep = auto and Start = 2 441.5 MHz, Stop = 2 483.5 MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW = 100 kHz.
5. Max hold, view and count how many channel in the band.

### 9.4. Test results

Ambient temperature: 22 °C


Relative humidity: 45 % R.H.

| Number of Hopping Frequency | Limit |
|-----------------------------|-------|
| 79                          | ≥ 15  |

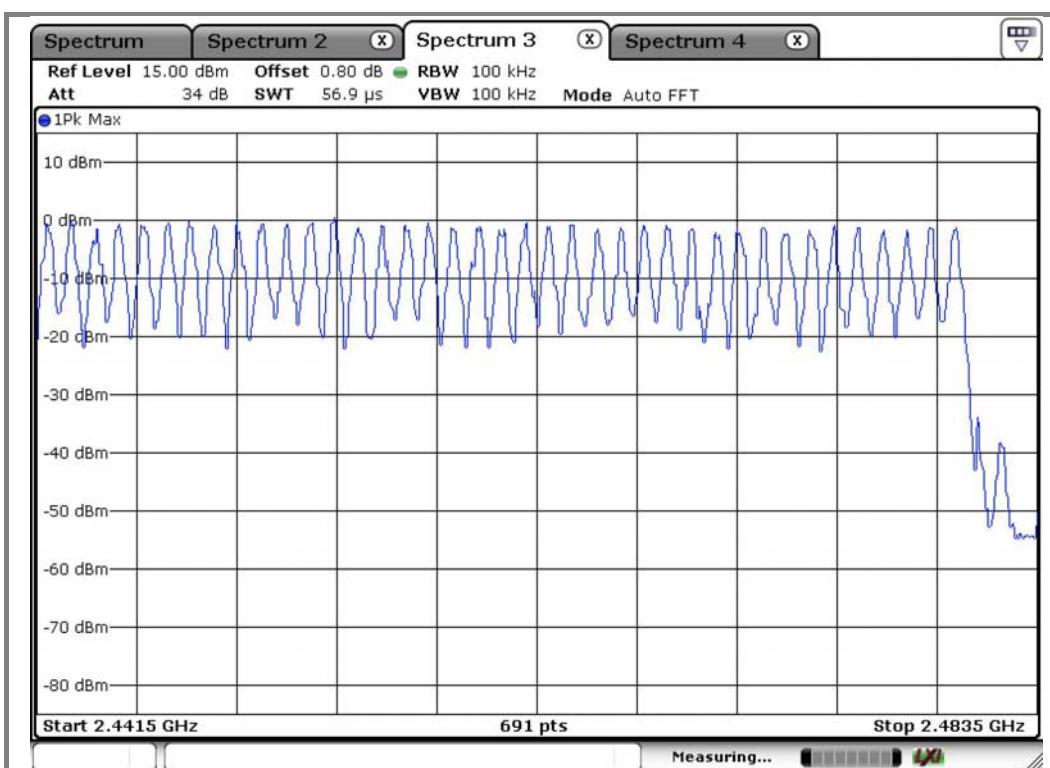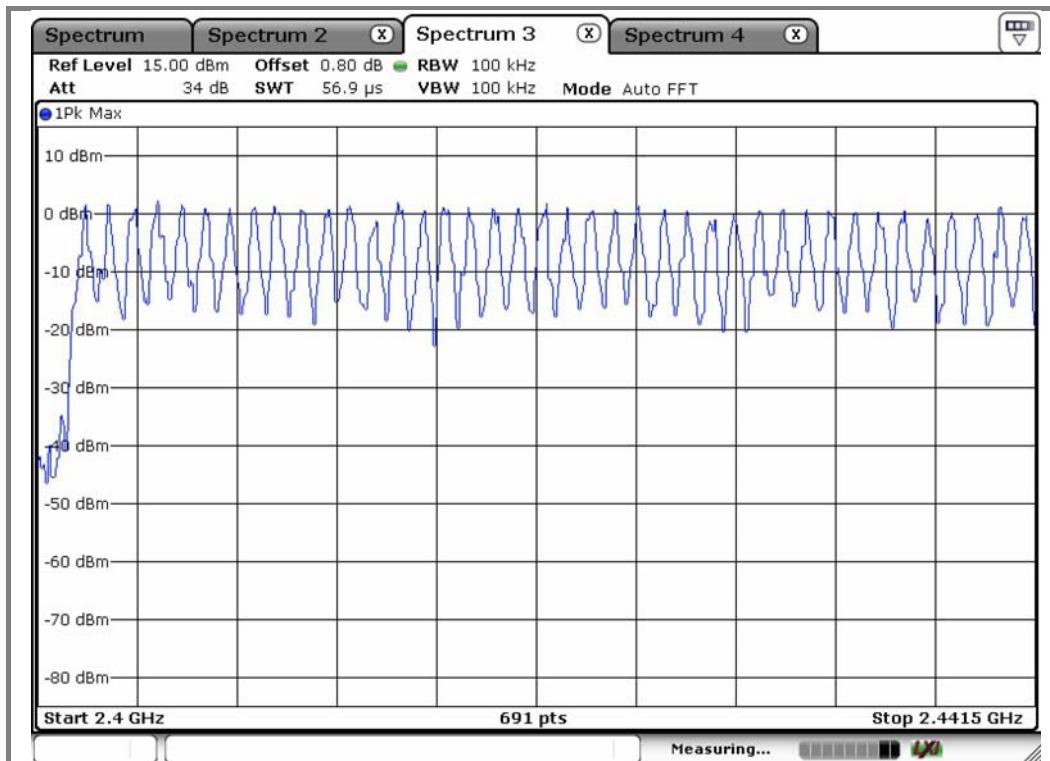**Operation mode: Basic mode**

## 9. Time of occupancy (Dwell time)

### 9.1. Test setup



### 9.2. Limit

§15.247(a)(1)(iii) For frequency hopping system operating in the 2 400 – 2 483.5 MHz band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time = 0.4(s) \* 79 = 31.6(s)

### 9.3. Test procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The hopping rate is 1 600 per second.

### 9.4. Test results

Ambient temperature: 22 °C

Relative humidity: 45 % R.H.



0.4 seconds within a 30 second period per any frequency

| Mode  | Number of transmission in a 31.6s ( 79Hopping*0.4) | Length of Transmission Time (msec) | Result (msec) | Limit (msec) |
|-------|--|------------------------------------|---------------|--------------|
| DH1   | 32(Times / 3.16sec) *10 = 320                      | 0.400                              | 128.00        | 400          |
| DH3   | 16(Times / 3.16sec) *10= 160                       | 1.654                              | 264.64        | 400          |
| DH5   | 11(Times / 3.16sec) *10= 110                       | 2.907                              | 319.77        | 400          |
| 2-DH5 | 11(Times / 3.16sec) *10= 110                       | 2.893                              | 318.23        | 400          |
| 3-DH5 | 11(Times / 3.16sec) *10= 110                       | 2.914                              | 320.54        | 400          |



#### \* Remark:

dwell time = {(number of hopping per second / number of slot ) x duration time per channel} x 0.4 ms



A. DH1

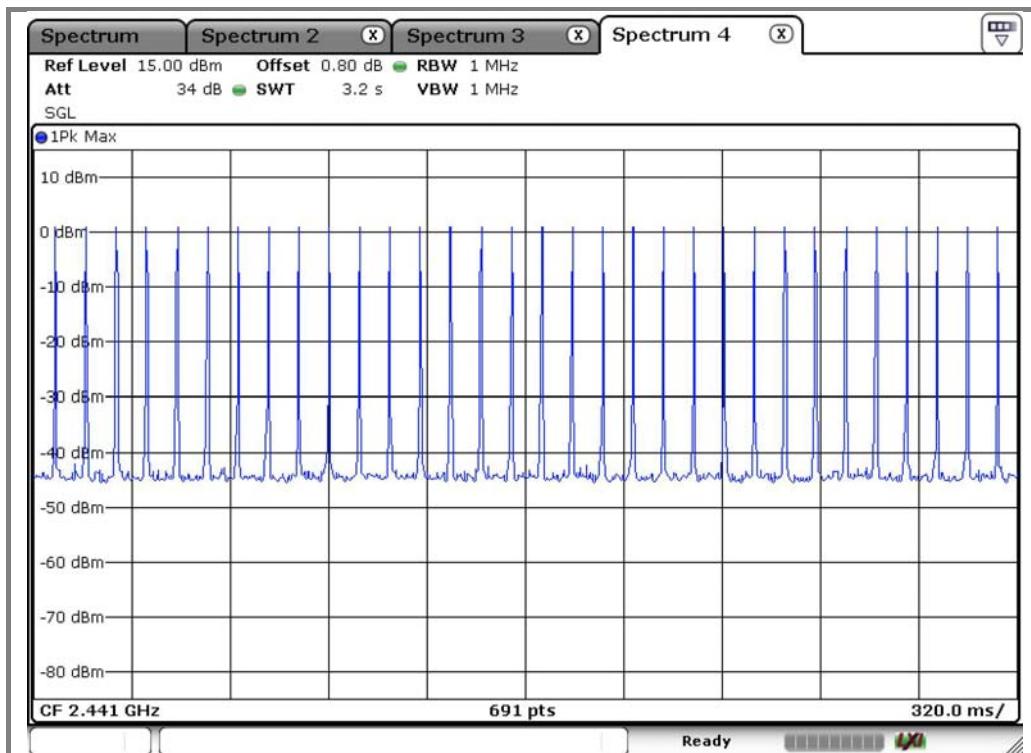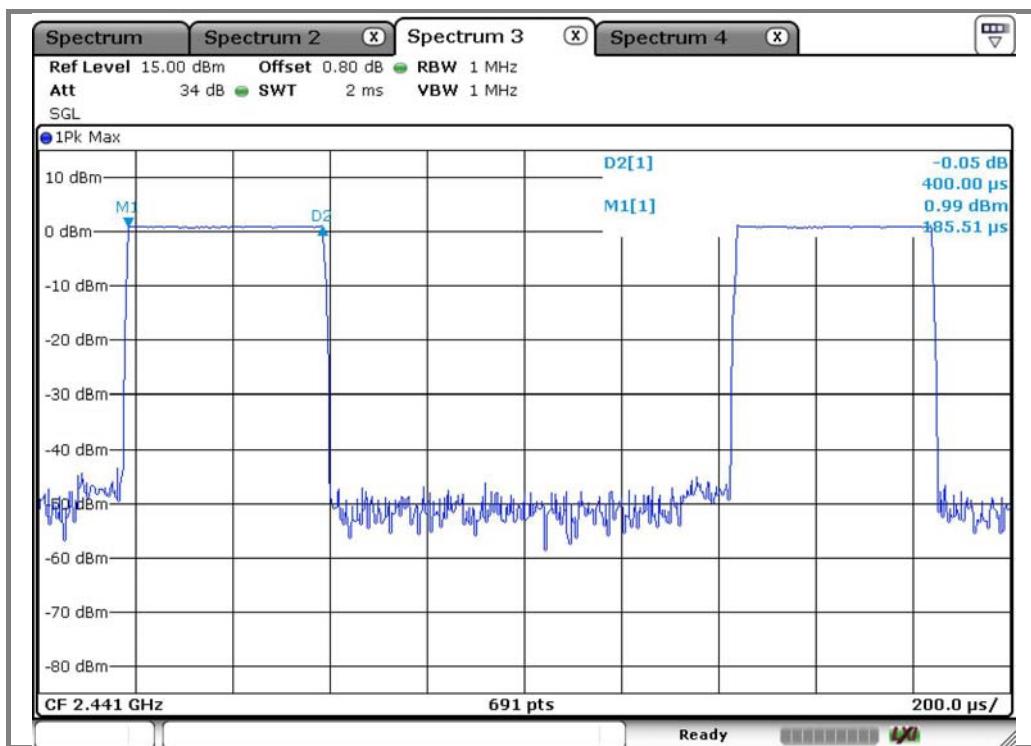



B. DH3

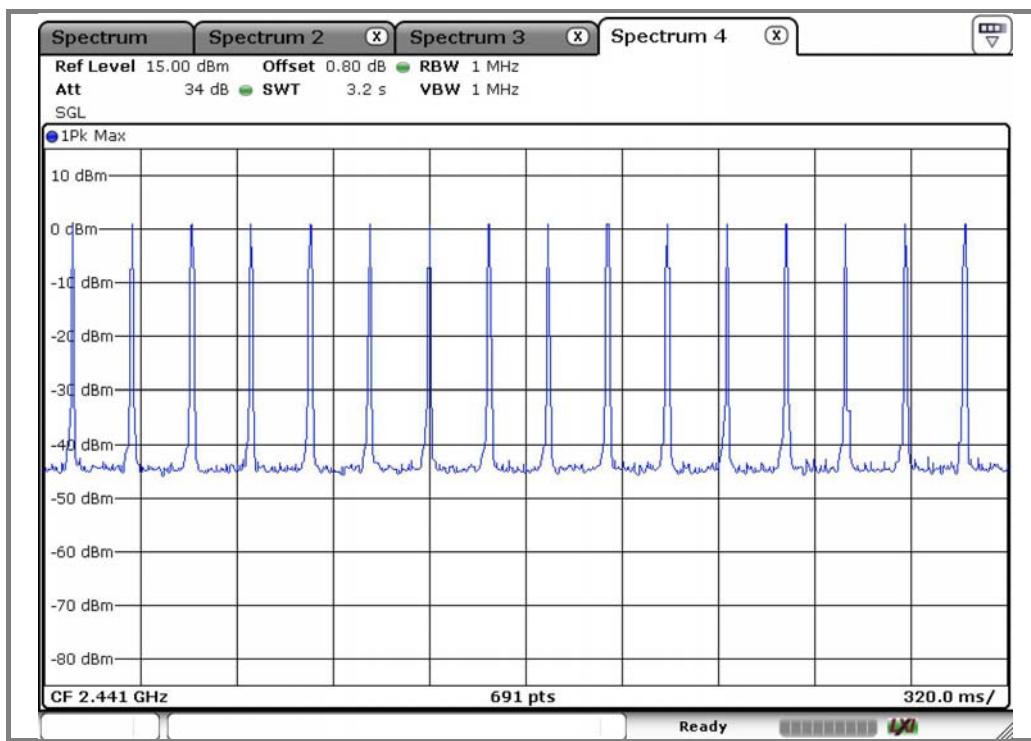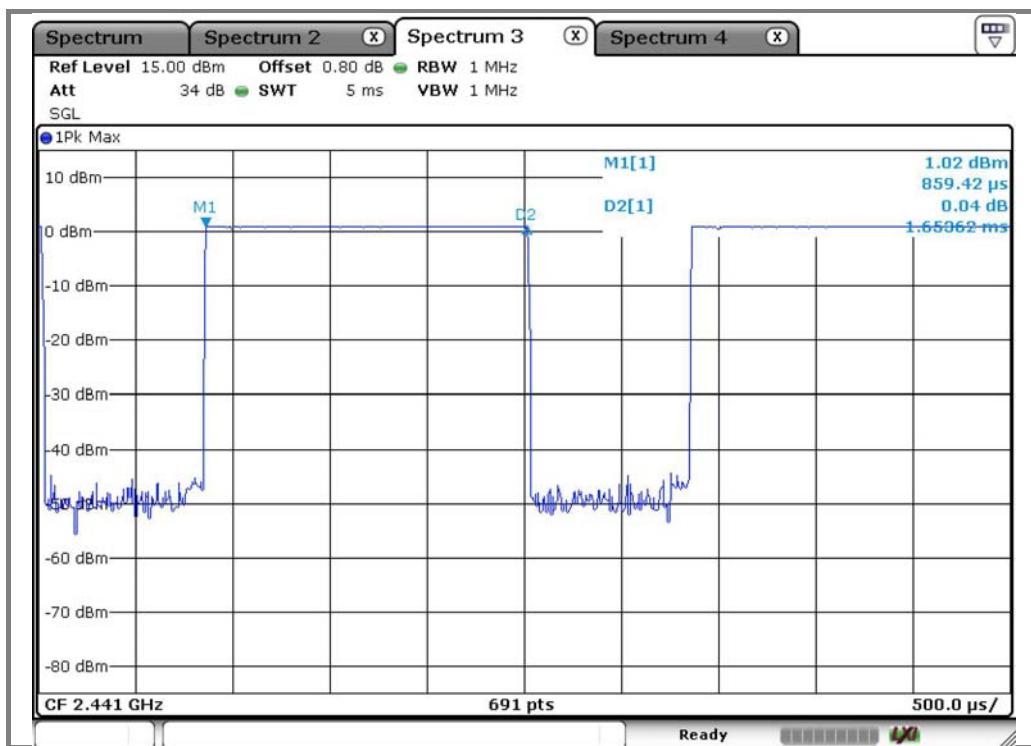



C. DH5

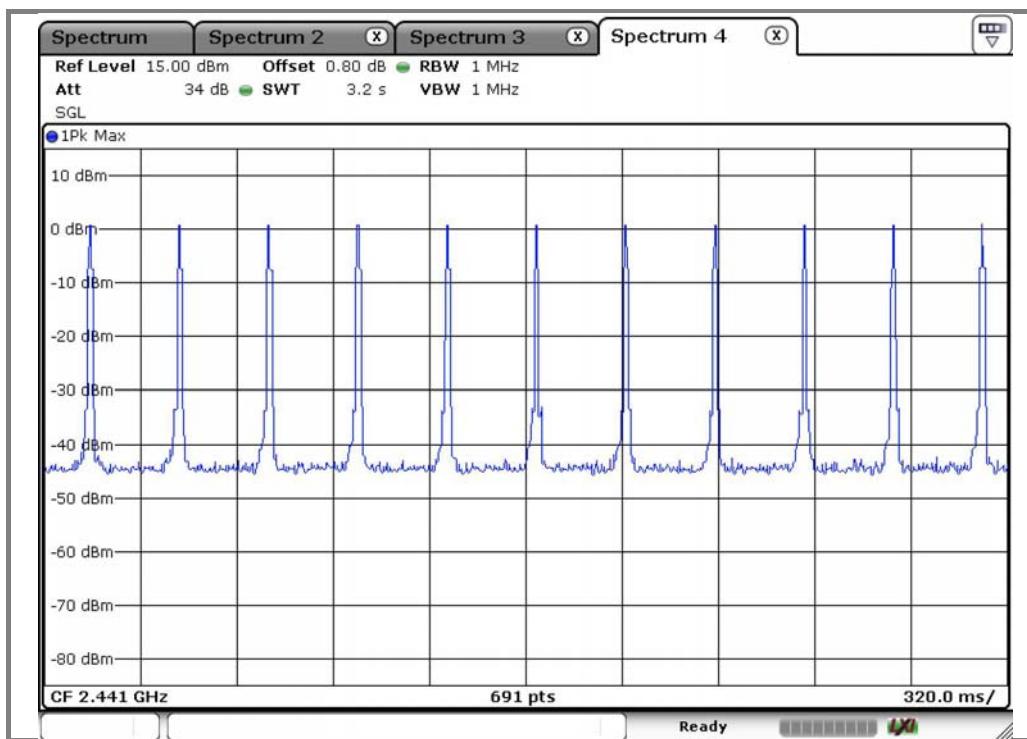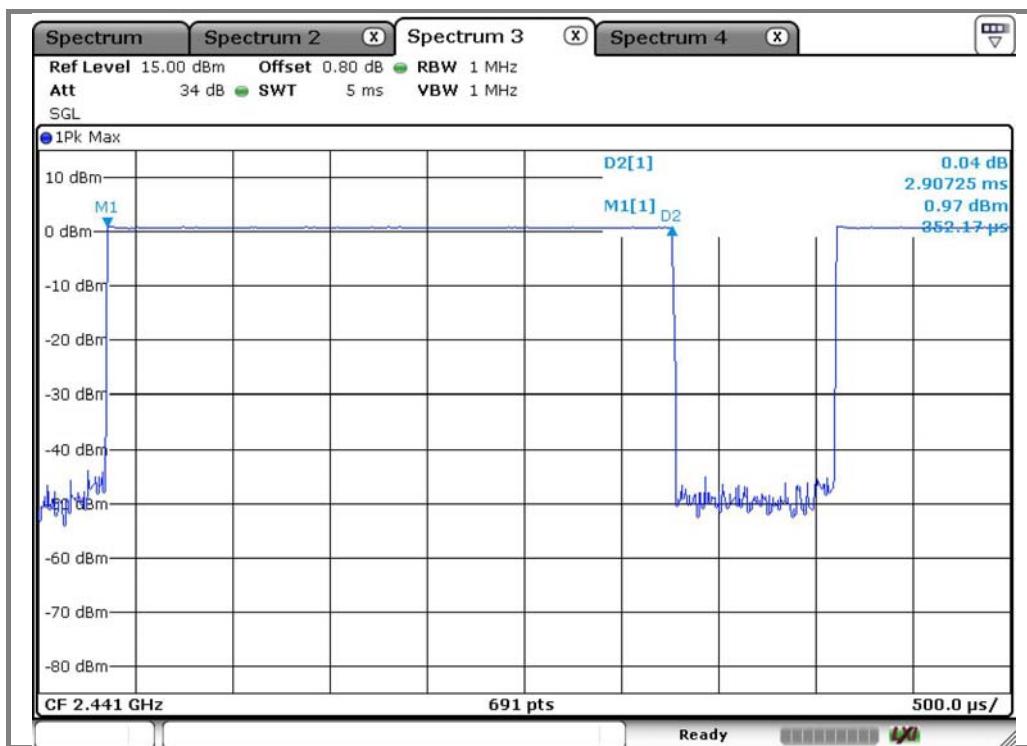

D.2-DH5

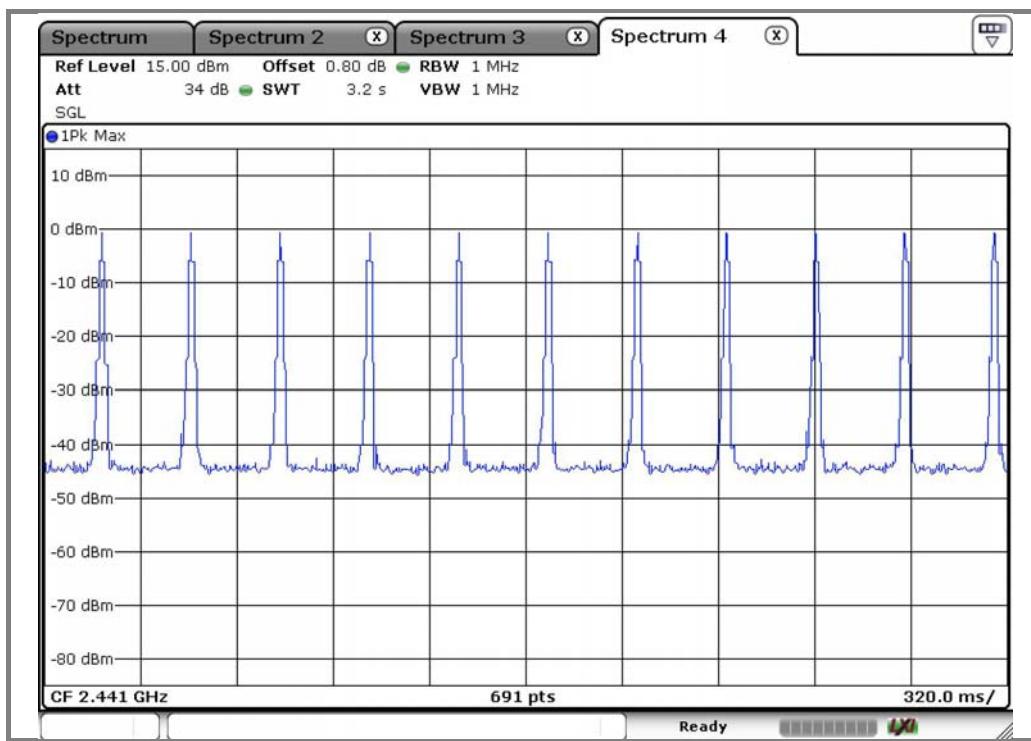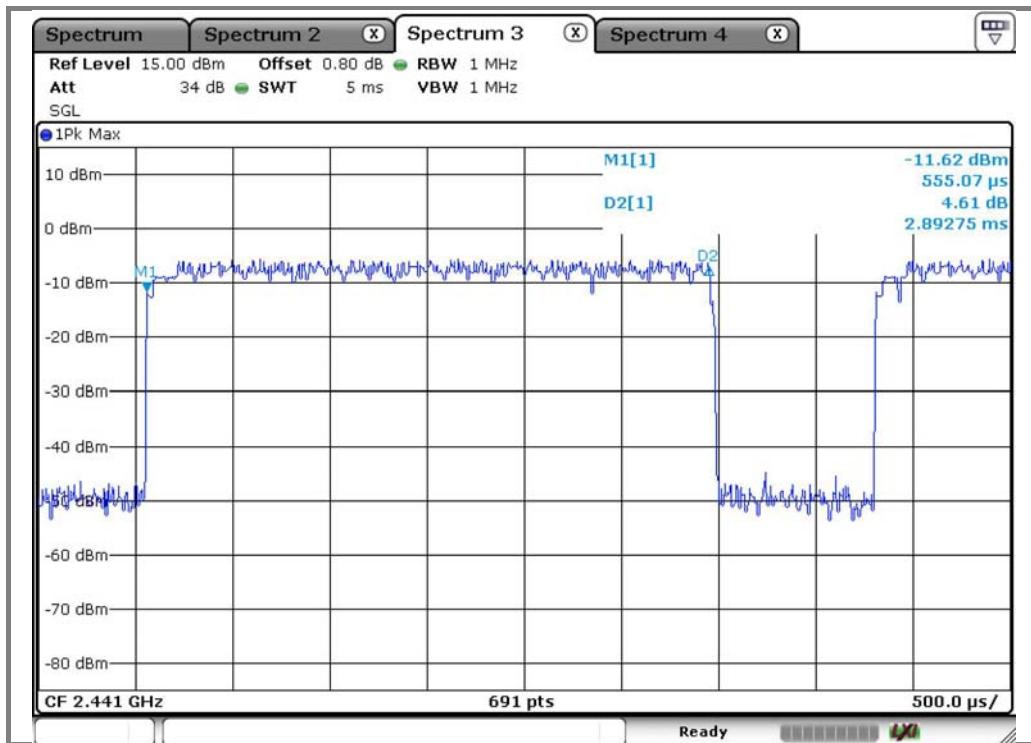

**E. 3-DH5**

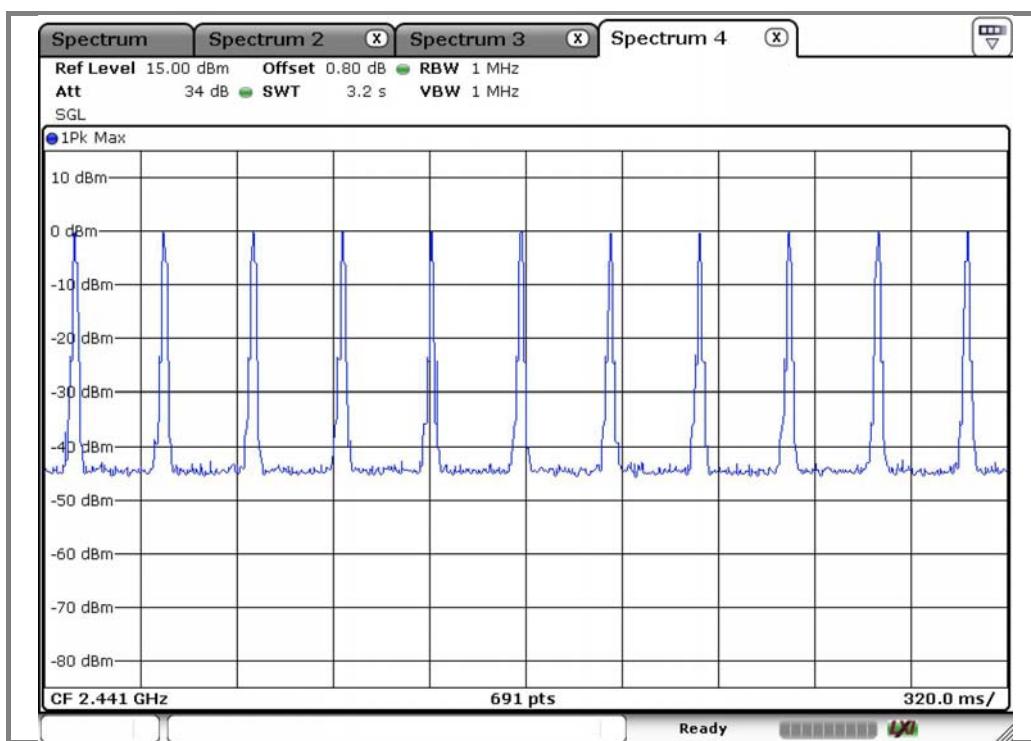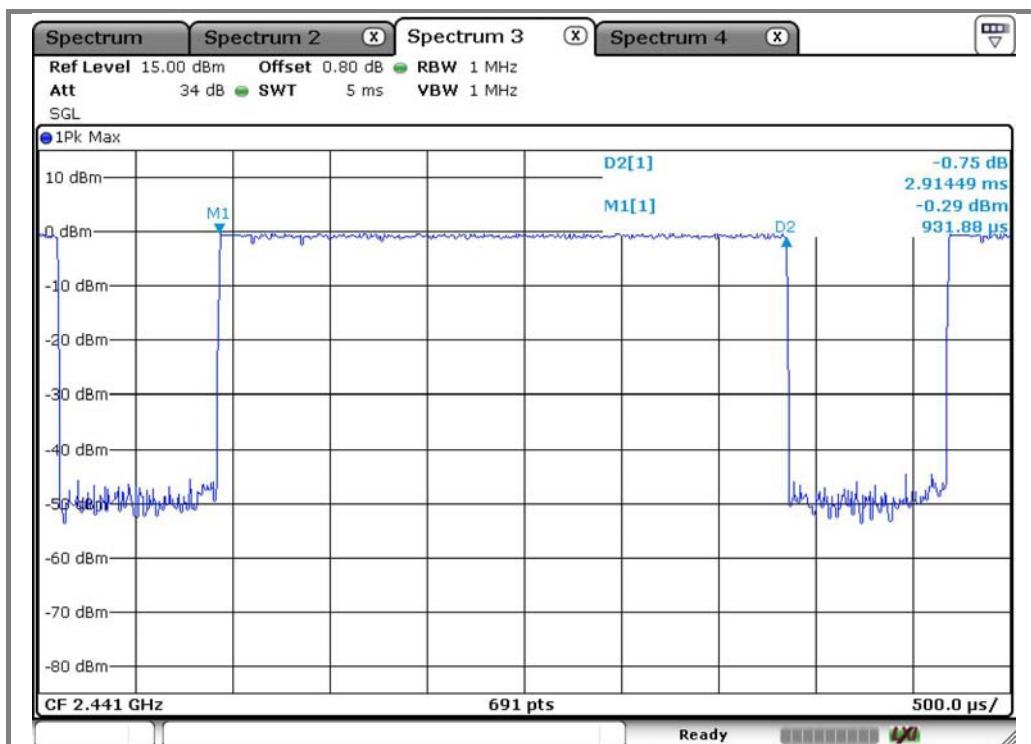

## 10. Antenna requirement

### 10.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dB<sub>i</sub> are used.

### 10.2. Antenna Connected Construction

Antenna used in this product is Integral type antenna (Chip antenna),  
Antenna gain is -0.09 dB<sub>i</sub>.

## 11. RF exposure evaluation

### 11.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to KDB 447498 (2)(a)(i)

#### Limits for maximum permissible exposure (MPE)

| Frequency range (MHz)                                   | Electric field strength(V/m) | Magnetic field strength (A/m) | Power density (mW/cm <sup>2</sup> ) | Average time |
|---|------------------------------|-------------------------------|-------------------------------------|--------------|
| (A) Limits for Occupational / Control exposures         |                              |                               |                                     |              |
| 300 – 1 500   | --                           | --                            | F/300                               | 6            |
| 1 500 – 100 000   | --                           | --                            | 5                                   | 6            |
| (B) Limits for General Population / Uncontrol Exposures |                              |                               |                                     |              |
| 300 – 1 500   | --                           | --                            | F/1 500                             | 6            |
| <u>1 500 – 100 000</u>                                  | --                           | --                            | <u>1</u>                            | <u>30</u>    |

RF exposure evaluation is required if the separation distance between the user and the device's radiating element is greater than 20 cm, except when the device operates as follows:

below 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 2.5 W;

at or above 1.5 GHz and the maximum e.i.r.p. of the device is equal to or less than 5 W.

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

### 11.2. Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

$P_d$ = Power density in  $\text{mW/cm}^2$

$P_{out}$ =output power to antenna in  $\text{mW}$

$G$ = Numeric gain of the antenna relative to isotropic antenna

$\pi=3.1416$

$R$ = distance between observation point and center of the radiator in cm

$P_d$  the limit of MPE,  $1 \text{ mW/cm}^2$ . If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

### 11.3. Test result of RF exposure evaluation

Test Item : RF Exposure evaluation data

Test Mode : Normal operation

### 11.4. Output power into antenna & RF exposure evaluation distance

Antenna gain: **-0.09 dB<sub>i</sub>**

#### Basic mode

| Frequency (MHz) | Output Peak power to antenna (dBm) | Antenna gain (dB <sub>i</sub> ) | Antenna Gain (dB <sub>i</sub> ) Numeric | Power density at 20 cm (mW/cm <sup>2</sup> ) | e.i.r.p. (mW) | e.i.r.p. Limits (W) | Power density Limits (mW/cm <sup>2</sup> ) |
|-----------------|------------------------------------|---------------------------------|---|--|---------------|---------------------|--|
| 2 402           | 2.46                               | -0.09                           | 0.98                                    | 0.000 34                                     | 1.73          | 5                   | 1  |
| 2 441           | 1.12                               | -0.09                           | 0.98                                    | 0.000 25                                     | 1.27          |                     |  |
| 2 480           | 0.02                               | -0.09                           | 0.98                                    | 0.000 20                                     | 0.98          |                     |  |

#### EDR mode

| Frequency (MHz) | Output Peak power to antenna (dBm) | Antenna gain (dB <sub>i</sub> ) | Antenna Gain (dB <sub>i</sub> ) Numeric | Power density at 20 cm (mW/cm <sup>2</sup> ) | e.i.r.p. (mW) | e.i.r.p. Limits (W) | Power density Limits (mW/cm <sup>2</sup> ) |
|-----------------|------------------------------------|---------------------------------|---|--|---------------|---------------------|--|
| 2 402           | 1.16                               | -0.09                           | 0.98                                    | 0.000 26                                     | 1.28          | 5                   | 1  |
| 2 441           | -0.10                              | -0.09                           | 0.98                                    | 0.000 19                                     | 0.96          |                     |  |
| 2 480           | -1.50                              | -0.09                           | 0.98                                    | 0.000 14                                     | 0.69          |                     |  |

#### ※ Remark

The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm<sup>2</sup>.