

## FCC Test Report

**Report No.:** RF150904C32-3 R1

**FCC ID:** 2AE79-2015DAP

**Test Model:** DP-X1/XDP-100R

**Received Date:** Sep. 04, 2015

**Test Date:** Sep. 08, 2015 ~ Sep. 15, 2015

**Issued Date:** Oct. 27, 2015

**Applicant:** Onkyo & Pioneer Innovations Corporation

**Address:** Onkyo Yaesu Bldg, 2-3-12, Yaesu, Chuo-Ku, Tokyo 104-0028, Japan

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan  
( R.O.C )

**Test Location (1):** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate of Conformity .....</b>	<b>5</b>
<b>2 Summary of Test Results.....</b>	<b>6</b>
2.1 Measurement Uncertainty.....	6
2.2 Modification Record .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes.....	8
3.2.1 Test Mode Applicability and Tested Channel Detail.....	9
3.3 Duty Cycle of Test Signal .....	11
3.4 Description of Support Units .....	12
3.4.1 Configuration of System under Test .....	12
3.5 General Description of Applied Standards.....	12
<b>4 Test Types and Results .....</b>	<b>13</b>
4.1 Radiated Emission and Bandedge Measurement .....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	13
4.1.2 Test Instruments .....	14
4.1.3 Test Procedures.....	15
4.1.4 Deviation from Test Standard .....	15
4.1.5 Test Set Up .....	16
4.1.6 EUT Operating Conditions.....	16
4.1.7 Test Results .....	17
4.2 Conducted Emission Measurement.....	29
4.2.1 Limits of Conducted Emission Measurement .....	29
4.2.2 Test Instruments .....	29
4.2.3 Test Procedures.....	30
4.2.4 Deviation from Test Standard .....	30
4.2.5 Test Setup.....	30
4.2.6 EUT Operating Conditions.....	30
4.2.7 Test Results .....	31
4.3 6dB Bandwidth Measurement.....	35
4.3.1 Limits of 6dB Bandwidth Measurement.....	35
4.3.2 Test Setup.....	35
4.3.3 Test Instruments .....	35
4.3.4 Test Procedure .....	35
4.3.5 Deviation from Test Standard .....	35
4.3.6 EUT Operating Conditions.....	35
4.3.7 Test Result .....	36
4.4 Conducted Output Power Measurement .....	38
4.4.1 Limits of Conducted Output Power Measurement.....	38
4.4.2 Test Setup.....	38
4.4.3 Test Instruments .....	38
4.4.4 Test Procedures.....	38
4.4.5 Deviation from Test Standard .....	38
4.4.6 EUT Operating Conditions.....	38
4.4.7 Test Results .....	39
4.5 Power Spectral Density Measurement .....	40
4.5.1 Limits of Power Spectral Density Measurement.....	40
4.5.2 Test Setup.....	40
4.5.3 Test Instruments .....	40
4.5.4 Test Procedure .....	40
4.5.5 Deviation from Test Standard .....	40
4.5.6 EUT Operating Condition .....	40



A D T

4.5.7 Test Results .....	41
4.6 Conducted Out of Band Emission Measurement .....	43
4.6.1 Limits of Conducted Out of Band Emission Measurement.....	43
4.6.2 Test Setup.....	43
4.6.3 Test Instruments .....	43
4.6.4 Test Procedure .....	43
4.6.5 Deviation from Test Standard .....	43
4.6.6 EUT Operating Condition .....	43
4.6.7 Test Results .....	44
<b>5 Pictures of Test Arrangements.....</b>	<b>50</b>
<b>Appendix – Information on the Testing Laboratories .....</b>	<b>51</b>



A D T

### Release Control Record

Issue No.	Description	Date Issued
RF150904C32-3	Original Release	Oct. 05, 2015
RF150904C32-3 R1	Remove chip information	Oct. 27, 2015



A D T

## 1 Certificate of Conformity

**Product:** Digital Audio Player

**Brand:** ONKYO/PIONEER

**Test Model:** DP-X1/XDP-100R

**Sample Status:** Identical Prototype

**Applicant:** Onkyo & Pioneer Innovations Corporation

**Test Date:** Sep. 08, 2015 ~ Sep. 15, 2015

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**Prepared by :**  , **Date:** Oct. 27, 2015

Ivonne Wu / Supervisor

**Approved by :**  , **Date:** Oct. 27, 2015

Anderson Chiu / Assistant Manager

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.36 dB at 0.18568 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -4.76 dB at 2484 MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

The listed uncertainties are the worst case uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.44 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

Product	Digital Audio Player
Brand	ONKYO/PIONEER
Test Model	DP-X1/XDP-100R
Status of EUT	Identical Prototype
Power Supply Rating	5.0Vdc (Host equipment) 3.8Vdc (Li-ion battery)
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to MCS7
Operating Frequency	2412 ~ 2462MHz
Number of Channel	11
Output Power	113.24mW
Antenna Type	PIFA antenna with 0.7 dBi gain (ONKYO) PIFA antenna with -2.5 dBi gain (PIONEER)
Antenna Connector	N/A
Accessory Device	Refer to Note as below
Data Cable Supplied	Refer to Note as below

Note:

1. All models are listed as below.

Brand	Model	Description
ONKYO	DP-X1	All models are electrically identical, different model names and brand names are for marketing purpose.
PIONEER	XDP-100R	

❖ EUT with brand PIONEER was chosen as the main test, and only the worst case of main test result was verified for EUT with brand ONKYO.

2. The EUT contains following accessory devices.

Product	Brand	Model	Description
Battery	TCL	PR-335367G	3.8Vdc, 1630mAh
USB Cable	N/A	N/A	0.9m shielded cable w/o core

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	EUT with brand PIONEER
B	√	√	√	-	EUT with brand ONKYO

Where      RE≥1G: Radiated Emission above 1GHz      RE<1G: Radiated Emission below 1GHz  
               PLC: Power Line Conducted Emission      APCM: Antenna Port Conducted Measurement

**NOTE:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.  
**NOTE:** “-”means no effect.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0
B	802.11n (20MHz)	1 to 11	11	OFDM	BPSK	MCS0

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B	802.11n (20MHz)	1 to 11	11	OFDM	BPSK	MCS0

#### Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A, B	802.11n (20MHz)	1 to 11	11	OFDM	BPSK	MCS0

### **Bandedge Measurement:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
	802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	MCS0

### **Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
	802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	MCS0

### **Test Condition:**


Applicable To	Environmental Conditions	Input Power	Tested by
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz (System)	Gavin Wu
RE<1G	25deg. C, 65%RH	120Vac, 60Hz (System)	Gavin Wu
PLC	25deg. C, 65%RH	120Vac, 60Hz (System)	Toby Tian
APCM	25deg. C, 65%RH	3.8Vdc	Wayne Lin

### 3.3 Duty Cycle of Test Signal

**802.11b:** Duty cycle of test signal is 100 %

**802.11g:** Duty cycle =  $1.363/1.571 = 0.868$ , Duty factor =  $10 * \log(1/0.868) = 0.61$

**802.11n (20MHz):** Duty cycle =  $1.275/1.483 = 0.860$ , Duty factor =  $10 * \log(1/0.860) = 0.66$

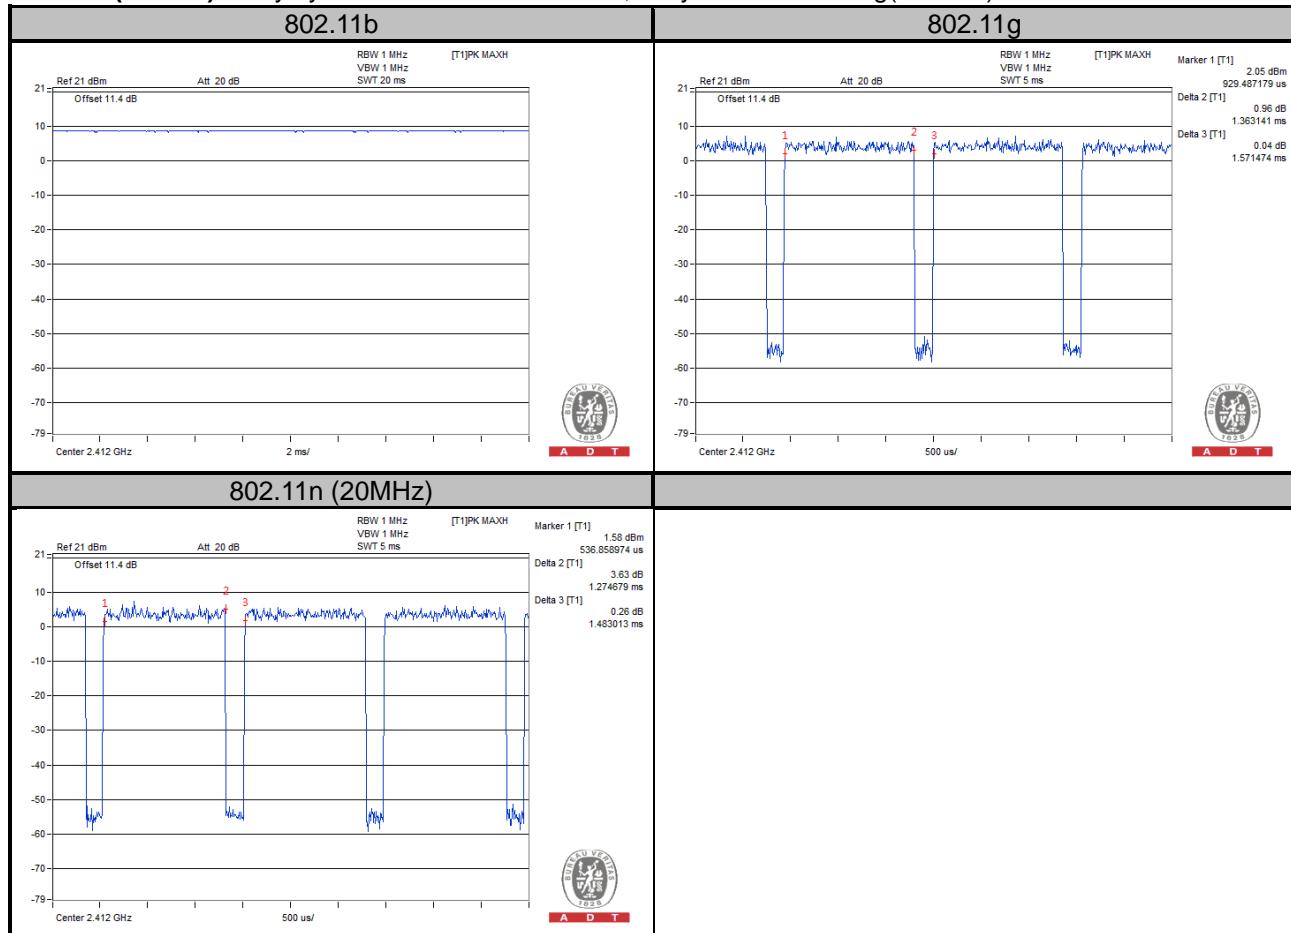

### 3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook	DELL	Inspiron 14R	9LRKKW1	N/A
2.	Earphone	N/A	FK-130102	N/A	N/A

No.	Signal Cable Description Of The Above Support Units
1.	0.9m shielded USB cable w/o core
2.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).

#### 3.4.1 Configuration of System under Test

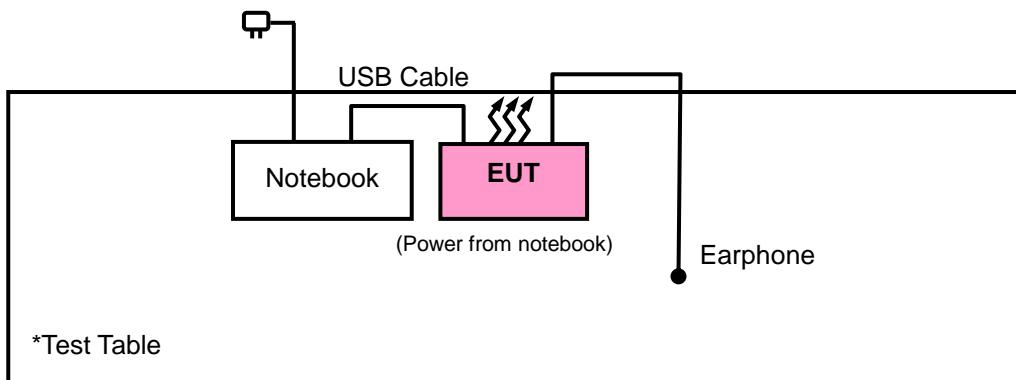

### 3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**558074 D01 DTS Meas Guidance v03r03**

**ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).  
The test report has been issued separately.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>u</sub>V/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Jan. 21, 2015	Jan. 21, 2016
Spectrum Analyzer Agilent	N9010A	MY52220314	Sep. 03, 2015	Sep. 02, 2016
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 10, 2014	Dec. 09, 2015
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Feb. 04, 2015	Feb. 04, 2016
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Feb. 09, 2015	Feb. 09, 2016
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Feb. 04, 2015	Feb. 04, 2016
Loop Antenna	EM-6879	269	Jul. 31, 2015	Jul. 30, 2016
Preamplifier EMCI	EMC 012645	980115	Dec. 12, 2014	Dec. 11, 2015
Preamplifier EMCI	EMC 184045	980116	Jan. 09, 2015	Jan. 08, 2016
Preamplifier EMCI	EMC 330H	980112	Dec. 27, 2014	Dec. 26, 2015
Power Meter Anritsu	ML2495A	1012010	Aug. 21, 2015	Aug. 20, 2016
Power Sensor Anritsu	MA2411B	1315050	Aug. 21, 2015	Aug. 20, 2016
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4 2950114	Oct. 18, 2014	Oct. 17, 2015
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Oct. 18, 2014	Oct. 17, 2015
RF Coaxial Cable Worken	8D-FB	Cable-Ch10-01	Nov. 07, 2014	Nov. 06, 2015
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 10.
  3. The horn antenna and preamplifier (model: EMC 184045) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The FCC Site Registration No. is 690701.
  5. The IC Site Registration No. is IC7450F-10.

#### 4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ( $10 \log(1/\text{duty cycle})$ ).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Set Up

##### <Frequency Range below 1GHz>

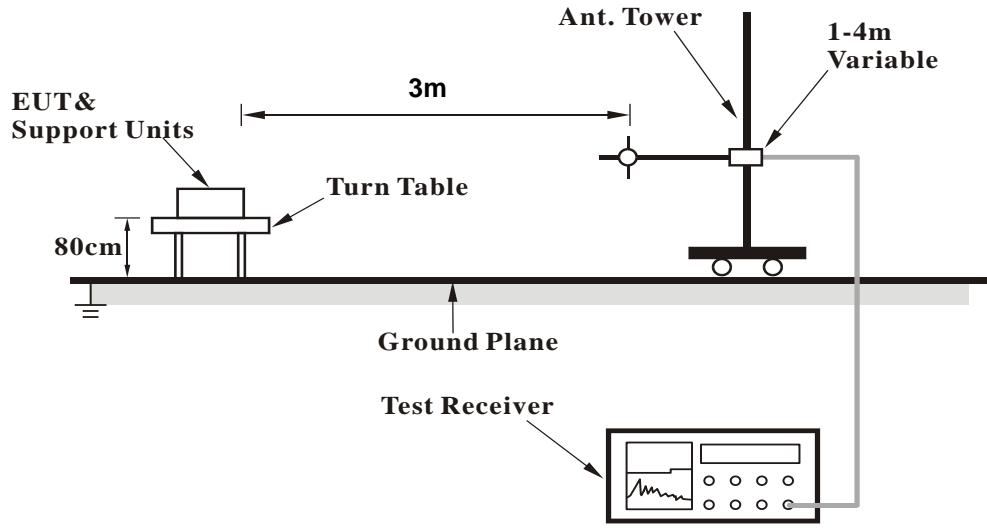

##### <Frequency Range above 1GHz>

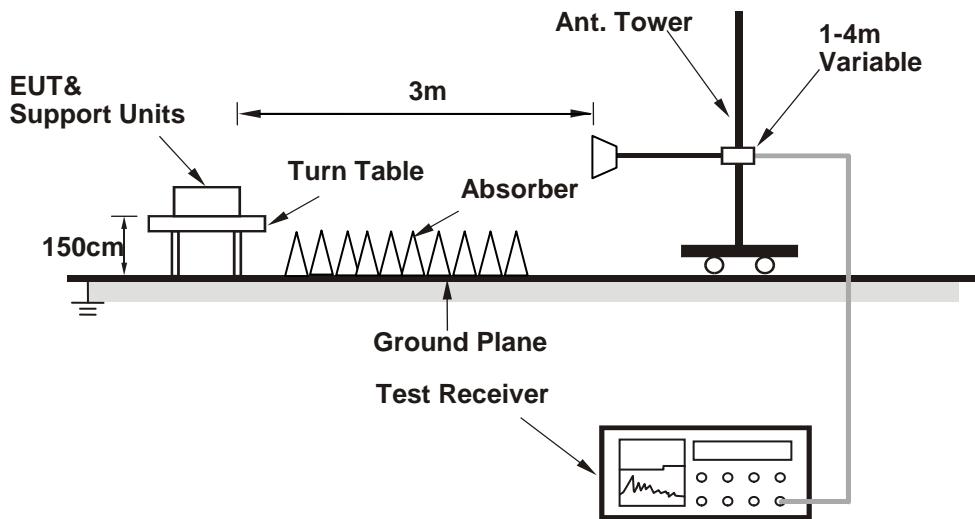

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

#### 4.1.7 Test Results

**Above 1GHz Data :**

**MODE A**

**802.11b**

EUT TEST CONDITION			MEASUREMENT DETAIL						
CHANNEL		Channel 1			FREQUENCY RANGE			1GHz ~ 25GHz	
INPUT POWER		120Vac, 60 Hz			DETECTOR FUNCTION			Peak (PK) Average (AV)	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH			TESTED BY			Gavin Wu	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2328	33.84	40.55	54	-20.16	26.72	4.04	37.47	108	232	Average
2328	56.43	63.14	74	-17.57	26.72	4.04	37.47	108	232	Peak
2412	97.48	103.95			26.96	4.09	37.52	108	232	Average
2412	101.46	107.93			26.96	4.09	37.52	108	232	Peak
2492	34.38	40.27	54	-19.62	27.2	4.16	37.25	108	232	Average
2492	56.27	62.16	74	-17.73	27.2	4.16	37.25	108	232	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2374	34.24	40.81	54	-19.76	26.86	4.07	37.5	185	256	Average
2374	57.28	63.85	74	-16.72	26.86	4.07	37.5	185	256	Peak
2412	93.87	100.34			26.96	4.09	37.52	185	256	Average
2412	97.71	104.18			26.96	4.09	37.52	185	256	Peak
2484	34.76	40.78	54	-19.24	27.15	4.15	37.32	185	256	Average
2484	57.74	63.76	74	-16.26	27.15	4.15	37.32	185	256	Peak

#### REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value

2. 2412MHz: Fundamental frequency.

EUT TEST CONDITION			MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER		120Vac, 60 Hz		DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY	Gavin Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2338	34.21	40.87	54	-19.79	26.77	4.04	37.47	108	236	Average
2338	56.16	62.82	74	-17.84	26.77	4.04	37.47	108	236	Peak
2437	97.48	103.76			27.06	4.12	37.46	108	236	Average
2437	101.26	107.54			27.06	4.12	37.46	108	236	Peak
2492	34.78	40.67	54	-19.22	27.2	4.16	37.25	108	236	Average
2492	56.15	62.04	74	-17.85	27.2	4.16	37.25	108	236	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2378	34.48	41.05	54	-19.52	26.86	4.07	37.5	185	257	Average
2378	56.79	63.36	74	-17.21	26.86	4.07	37.5	185	257	Peak
2437	93.01	99.29			27.06	4.12	37.46	185	257	Average
2437	97.79	104.07			27.06	4.12	37.46	185	257	Peak
2500	34.69	40.58	54	-19.31	27.2	4.16	37.25	185	257	Average
2500	56.99	62.88	74	-17.01	27.2	4.16	37.25	185	257	Peak

**REMARKS:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2437MHz: Fundamental frequency.

EUT TEST CONDITION			MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER		120Vac, 60 Hz		DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY	Gavin Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2384	36.01	42.57	54	-17.99	26.86	4.08	37.5	134	238	Average
2384	55.61	62.17	74	-18.39	26.86	4.08	37.5	134	238	Peak
2462	97.25	103.41			27.1	4.13	37.39	134	238	Average
2462	101.71	107.87			27.1	4.13	37.39	134	238	Peak
2500	35.75	41.64	54	-18.25	27.2	4.16	37.25	134	238	Average
2500	56.17	62.06	74	-17.83	27.2	4.16	37.25	134	238	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2384	34.11	40.67	54	-19.89	26.86	4.08	37.5	222	260	Average
2384	57.28	63.84	74	-16.72	26.86	4.08	37.5	222	260	Peak
2462	93.57	99.73			27.1	4.13	37.39	222	260	Average
2462	97.53	103.69			27.1	4.13	37.39	222	260	Peak
2496	35.23	41.12	54	-18.77	27.2	4.16	37.25	222	260	Average
2496	57.33	63.22	74	-16.67	27.2	4.16	37.25	222	260	Peak

**REMARKS:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2462MHz: Fundamental frequency.

## 802.11g

EUT TEST CONDITION			MEASUREMENT DETAIL					
CHANNEL	Channel 1		FREQUENCY RANGE			1GHz ~ 25GHz		
INPUT POWER	120Vac, 60 Hz		DETECTOR FUNCTION			Peak (PK) Average (AV)		
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH		TESTED BY			Gavin Wu		

## ANTENNA POLARITY &amp; TEST DISTANCE: HORIZONTAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	42.26	48.79	54	-11.74	26.91	4.08	37.52	109	232	Average
2390	60.03	66.56	74	-13.97	26.91	4.08	37.52	109	232	Peak
2412	91.71	98.18			26.96	4.09	37.52	109	232	Average
2412	101.2	107.67			26.96	4.09	37.52	109	232	Peak
2488	34.43	40.39	54	-19.57	27.2	4.16	37.32	109	232	Average
2488	57	62.96	74	-17	27.2	4.16	37.32	109	232	Peak

## ANTENNA POLARITY &amp; TEST DISTANCE: VERTICAL AT 3 M

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2326	39.44	46.16	54	-14.56	26.72	4.03	37.47	150	1	Average
2326	57.07	63.79	74	-16.93	26.72	4.03	37.47	150	1	Peak
2412	87.51	93.98			26.96	4.09	37.52	150	1	Average
2412	97.06	103.53			26.96	4.09	37.52	150	1	Peak
2484	36.54	42.56	54	-17.46	27.15	4.15	37.32	150	1	Average
2484	57.64	63.66	74	-16.36	27.15	4.15	37.32	150	1	Peak

## REMARKS:

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2412MHz: Fundamental frequency.

EUT TEST CONDITION			MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER		120Vac, 60 Hz		DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY	Gavin Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2374	34.83	41.4	54	-19.17	26.86	4.07	37.5	107	240	Average
2374	56.98	63.55	74	-17.02	26.86	4.07	37.5	107	240	Peak
2437	91.37	97.65			27.06	4.12	37.46	107	240	Average
2437	101.1	107.38			27.06	4.12	37.46	107	240	Peak
2494	34.98	40.87	54	-19.02	27.2	4.16	37.25	107	240	Average
2494	56.38	62.27	74	-17.62	27.2	4.16	37.25	107	240	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2382	33.68	40.24	54	-20.32	26.86	4.08	37.5	246	261	Average
2382	57.71	64.27	74	-16.29	26.86	4.08	37.5	246	261	Peak
2437	86.93	93.21			27.06	4.12	37.46	246	261	Average
2437	97.48	103.76			27.06	4.12	37.46	246	261	Peak
2500	34.7	40.59	54	-19.3	27.2	4.16	37.25	246	261	Average
2500	57.97	63.86	74	-16.03	27.2	4.16	37.25	246	261	Peak

**REMARKS:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2437MHz: Fundamental frequency.

EUT TEST CONDITION			MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER		120Vac, 60 Hz		DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY	Gavin Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2374	33.74	40.31	54	-20.26	26.86	4.07	37.5	103	241	Average
2374	56.87	63.44	74	-17.13	26.86	4.07	37.5	103	241	Peak
2462	90.71	96.87			27.1	4.13	37.39	103	241	Average
2462	100.74	106.9			27.1	4.13	37.39	103	241	Peak
2484	46.6	52.62	54	-7.4	27.15	4.15	37.32	103	241	Average
2484	67.59	73.61	74	-6.41	27.15	4.15	37.32	103	241	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2330	33.52	40.23	54	-20.48	26.72	4.04	37.47	200	260	Average
2330	56.79	63.5	74	-17.21	26.72	4.04	37.47	200	260	Peak
2462	87.83	93.99			27.1	4.13	37.39	200	260	Average
2462	97.55	103.71			27.1	4.13	37.39	200	260	Peak
2484	44.45	50.47	54	-9.55	27.15	4.15	37.32	200	260	Average
2484	63.71	69.73	74	-10.29	27.15	4.15	37.32	200	260	Peak

**REMARKS:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2462MHz: Fundamental frequency.

**802.11n (20MHz)**

EUT TEST CONDITION			MEASUREMENT DETAIL						
CHANNEL	Channel 1		FREQUENCY RANGE			1GHz ~ 25GHz			
INPUT POWER	120Vac, 60 Hz			DETECTOR FUNCTION			Peak (PK) Average (AV)		
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH			TESTED BY			Gavin Wu		

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2388	45.58	52.09	54	-8.42	26.91	4.08	37.5	109	235	Average
2388	63.64	70.15	74	-10.36	26.91	4.08	37.5	109	235	Peak
2412	91.05	97.52			26.96	4.09	37.52	109	235	Average
2412	101.39	107.86			26.96	4.09	37.52	109	235	Peak
2494	34.5	40.39	54	-19.5	27.2	4.16	37.25	109	235	Average
2494	56.79	62.68	74	-17.21	27.2	4.16	37.25	109	235	Peak

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	39.98	46.51	54	-14.02	26.91	4.08	37.52	188	355	Average
2390	57.7	64.23	74	-16.3	26.91	4.08	37.52	188	355	Peak
2412	87.46	93.93			26.96	4.09	37.52	188	355	Average
2412	97.93	104.4			26.96	4.09	37.52	188	355	Peak
2490	37.22	43.18	54	-16.78	27.2	4.16	37.32	188	355	Average
2490	57.03	62.99	74	-16.97	27.2	4.16	37.32	188	355	Peak

**REMARKS:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2412MHz: Fundamental frequency.

EUT TEST CONDITION			MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER		120Vac, 60 Hz		DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY	Gavin Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2368	34.31	40.93	54	-19.69	26.81	4.07	37.5	108	236	Average
2368	57.2	63.82	74	-16.8	26.81	4.07	37.5	108	236	Peak
2437	91.37	97.65			27.06	4.12	37.46	108	236	Average
2437	101.83	108.11			27.06	4.12	37.46	108	236	Peak
2490	35.54	41.5	54	-18.46	27.2	4.16	37.32	108	236	Average
2490	57.67	63.63	74	-16.33	27.2	4.16	37.32	108	236	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2344	33.59	40.27	54	-20.41	26.77	4.04	37.49	224	260	Average
2344	56.36	63.04	74	-17.64	26.77	4.04	37.49	224	260	Peak
2437	87.19	93.47			27.06	4.12	37.46	224	260	Average
2437	97.82	104.1			27.06	4.12	37.46	224	260	Peak
2500	35.15	41.04	54	-18.85	27.2	4.16	37.25	224	260	Average
2500	56.61	62.5	74	-17.39	27.2	4.16	37.25	224	260	Peak

**REMARKS:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2437MHz: Fundamental frequency.

EUT TEST CONDITION			MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE	1GHz ~ 25GHz
INPUT POWER		120Vac, 60 Hz		DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH		TESTED BY	Gavin Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2368	33.91	40.53	54	-20.09	26.81	4.07	37.5	106	240	Average
2368	56.67	63.29	74	-17.33	26.81	4.07	37.5	106	240	Peak
2462	91.71	97.87			27.1	4.13	37.39	106	240	Average
2462	101.37	107.53			27.1	4.13	37.39	106	240	Peak
2484	49.24	55.26	54	-4.76	27.15	4.15	37.32	106	240	Average
2484	67.38	73.4	74	-6.62	27.15	4.15	37.32	106	240	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2364	33.72	40.33	54	-20.28	26.81	4.07	37.49	222	259	Average
2364	56.69	63.3	74	-17.31	26.81	4.07	37.49	222	259	Peak
2462	87.32	93.48			27.1	4.13	37.39	222	259	Average
2462	97.11	103.27			27.1	4.13	37.39	222	259	Peak
2484	47.28	53.3	54	-6.72	27.15	4.15	37.32	222	259	Average
2484	67.68	73.7	74	-6.32	27.15	4.15	37.32	222	259	Peak

**REMARKS:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
2. 2462MHz: Fundamental frequency.

**MODE B****802.11n (20MHz)**

EUT TEST CONDITION			MEASUREMENT DETAIL						
CHANNEL		Channel 11			FREQUENCY RANGE		1GHz ~ 25GHz		
INPUT POWER		120Vac, 60 Hz			DETECTOR FUNCTION		Peak (PK) Average (AV)		
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH			TESTED BY		Gavin Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2368	34.08	40.7	54	-19.92	26.81	4.07	37.5	107	350	Average
2368	56.98	63.6	74	-17.02	26.81	4.07	37.5	107	350	Peak
2462	91.98	98.14			27.1	4.13	37.39	107	350	Average
2462	101.6	107.76			27.1	4.13	37.39	107	350	Peak
2484	44.64	50.66	54	-9.36	27.15	4.15	37.32	107	350	Average
2484	65.66	71.68	74	-8.34	27.15	4.15	37.32	107	350	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2370	36.07	42.64	54	-17.93	26.86	4.07	37.5	224	273	Average
2370	56.62	63.19	74	-17.38	26.86	4.07	37.5	224	273	Peak
2462	88.28	94.44			27.1	4.13	37.39	224	273	Average
2462	98.5	104.66			27.1	4.13	37.39	224	273	Peak
2484	40.69	46.71	54	-13.31	27.15	4.15	37.32	224	273	Average
2484	62.39	68.41	74	-11.61	27.15	4.15	37.32	224	273	Peak

**REMARKS:**

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level – Limit value
- 2462MHz: Fundamental frequency.

### 9kHz ~ 30MHz DATA:

The amplitude of spurious emissions attenuated more than 20dB below the permissible value is not required to be report.

### 30MHz ~ 1GHz WORST-CASE DATA:

#### MODE A

#### 802.11n (20MHz)

EUT TEST CONDITION		MEASUREMENT DETAIL					
CHANNEL	Channel 11	FREQUENCY RANGE			30MHz ~ 1GHz		
INPUT POWER	120Vac, 60 Hz	DETECTOR FUNCTION			Peak (PK) Quasi-peak (QP)		
ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH	TESTED BY			Gavin Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
189.08	25.26	45.58	43.5	-18.24	10.12	1.25	31.69	135	264	Peak
305.48	32.48	49.65	46	-13.52	13.08	1.65	31.9	131	53	Peak
399.57	29.26	44.15	46	-16.74	15.33	1.91	32.13	118	233	Peak
588.72	30.91	41.47	46	-15.09	19.34	2.24	32.14	135	139	Peak
696.39	30.18	38.77	46	-15.82	20.77	2.45	31.81	112	115	Peak
800.18	31.46	38.05	46	-14.54	22.23	2.61	31.43	130	39	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
153.19	23.24	41.1	43.5	-20.26	12.72	1.11	31.69	132	103	Peak
216.24	22.91	43.16	46	-23.09	10.05	1.36	31.66	119	289	Peak
454.86	27.81	41.38	46	-18.19	16.43	1.99	31.99	130	47	Peak
599.39	32.04	42.43	46	-13.96	19.59	2.26	32.24	126	298	Peak
664.38	30.06	39.17	46	-15.94	20.39	2.39	31.89	108	193	Peak
796.3	32.53	39.16	46	-13.47	22.18	2.61	31.42	129	192	Peak

#### REMARKS:

- Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value



A D T

**MODE B****802.11n (20MHz)**

EUT TEST CONDITION			MEASUREMENT DETAIL						
CHANNEL		Channel 11			FREQUENCY RANGE		30MHz ~ 1GHz		
INPUT POWER		120Vac, 60 Hz			DETECTOR FUNCTION		Peak (PK) Quasi-peak (QP)		
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH			TESTED BY		Gavin Wu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
422.85	32.22	46.53	46	-13.78	15.79	1.94	32.04	138	116	Peak
477.17	35.41	48.35	46	-10.59	16.87	2.05	31.86	133	122	Peak
492.69	36.07	48.54	46	-9.93	17.18	2.08	31.73	109	24	Peak
551.86	31.62	42.91	46	-14.38	18.5	2.18	31.97	122	4	Peak
600.36	32.95	43.33	46	-13.05	19.61	2.26	32.25	134	5	Peak
696.39	31.01	39.6	46	-14.99	20.77	2.45	31.81	139	247	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB/m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
152.22	22.69	40.52	43.5	-20.81	12.71	1.12	31.66	116	223	Peak
216.24	25.59	45.84	46	-20.41	10.05	1.36	31.66	108	294	Peak
344.28	26.94	43.01	46	-19.06	14.01	1.75	31.83	108	47	Peak
496.57	30.63	42.97	46	-15.37	17.25	2.08	31.67	116	313	Peak
513.06	31.69	43.53	46	-14.31	17.62	2.12	31.58	123	286	Peak
612	33.03	43.1	46	-12.97	19.75	2.28	32.1	113	355	Peak

**REMARKS:**

2. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor

Margin value = Emission level – Limit value

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 11, 2014	Nov. 10, 2015
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Dec. 26, 2014	Dec. 25, 2015
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 26, 2015	Feb. 25, 2016
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Jul. 24, 2015	Jul. 23, 2016
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1.  
 3. The VCCI Site Registration No. is C-2040.

#### 4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm / 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

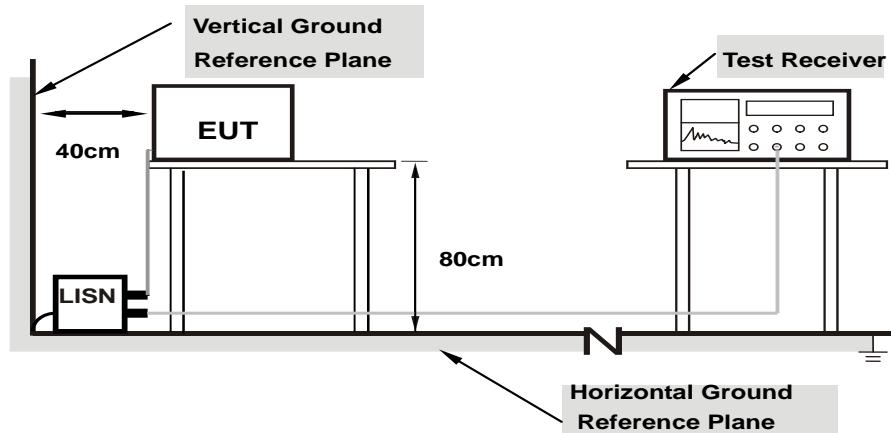

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

Same as 4.1.6.

#### 4.2.7 Test Results


##### MODE A

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Toby Tian	Test Date	2015/9/18

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.84	32.22	20.04	42.06	29.88	66.00	56.00	-23.94	-26.12
2	0.18568	9.90	44.96	25.10	54.86	35.00	64.23	54.23	-9.36	-19.22
3	0.25400	9.92	33.66	19.53	43.58	29.45	61.63	51.63	-18.04	-22.17
4	0.33400	9.91	28.21	13.13	38.12	23.04	59.35	49.35	-21.23	-26.31
5	1.76154	10.08	15.88	5.72	25.96	15.80	56.00	46.00	-30.04	-30.20
6	3.71800	10.18	13.18	5.19	23.36	15.37	56.00	46.00	-32.64	-30.63

##### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

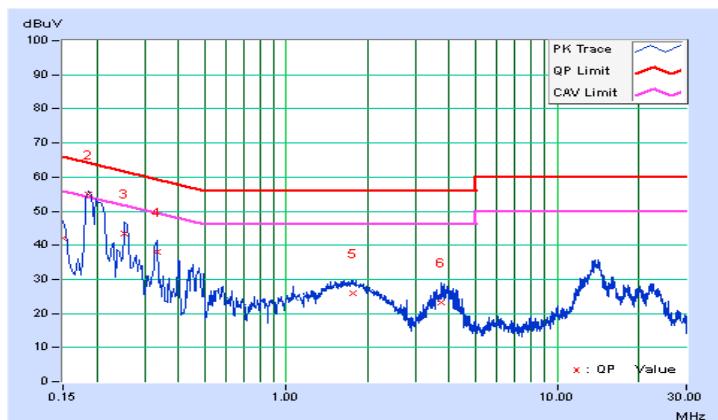


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Toby Tian	Test Date	2015/9/18

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15770	9.91	24.22	14.41	34.13	24.32	65.58	55.58	-31.45	-31.26
2	0.17801	9.97	43.60	30.98	53.57	40.95	64.58	54.58	-11.01	-13.63
3	0.24600	10.02	33.43	22.14	43.45	32.16	61.89	51.89	-18.44	-19.73
4	0.29677	10.01	26.27	16.49	36.28	26.50	60.33	50.33	-24.05	-23.83
5	0.43400	9.99	17.58	5.56	27.57	15.55	57.18	47.18	-29.60	-31.62
6	3.73800	10.30	9.54	2.45	19.84	12.75	56.00	46.00	-36.16	-33.25

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

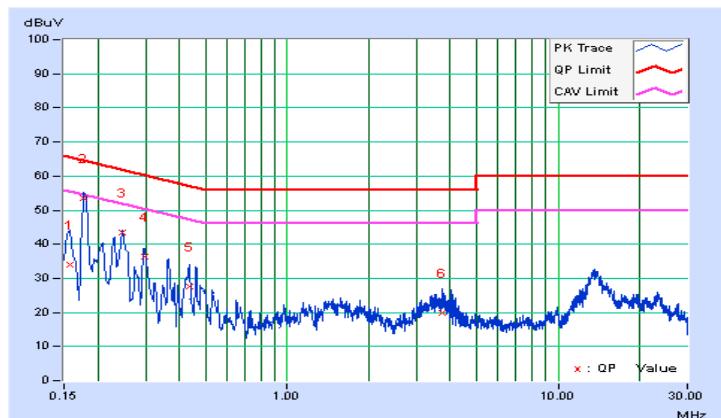


## MODE B

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Toby Tian	Test Date	2015/9/18

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.84	31.47	19.78	41.31	29.62	66.00	56.00	-24.69	-26.38
2	0.18200	9.90	44.73	25.66	54.63	35.56	64.39	54.39	-9.77	-18.84
3	0.20600	9.93	40.36	21.66	50.29	31.59	63.37	53.37	-13.08	-21.78
4	0.25742	9.92	32.94	16.94	42.86	26.86	61.51	51.51	-18.65	-24.65
5	1.52600	10.07	15.36	5.64	25.43	15.71	56.00	46.00	-30.57	-30.29
6	3.85400	10.18	10.86	3.16	21.04	13.34	56.00	46.00	-34.96	-32.66

## Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

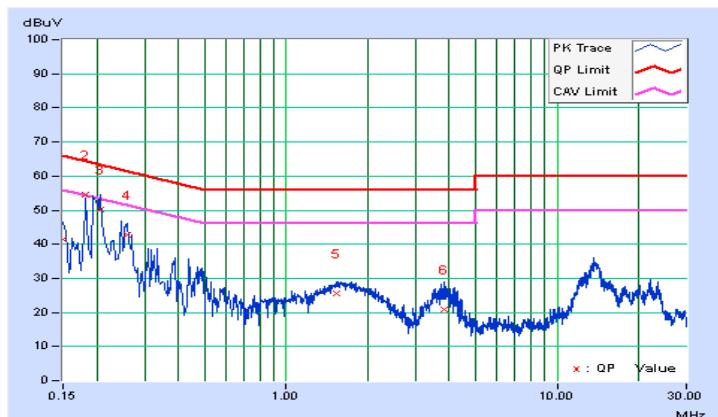


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 65%RH
Tested by	Toby Tian	Test Date	2015/9/25

#### Phase Of Power : Neutral (N)

No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.89	32.55	19.95	42.44	29.84	66.00	56.00	-23.56	-26.16
2	0.18519	9.99	42.78	24.65	52.77	34.64	64.25	54.25	-11.48	-19.61
3	0.20084	10.03	42.34	27.88	52.37	37.91	63.58	53.58	-11.21	-15.67
4	0.25557	10.02	34.20	19.49	44.22	29.51	61.57	51.57	-17.36	-22.07
5	0.32614	10.00	27.47	11.54	37.47	21.54	59.55	49.55	-22.07	-28.00
6	0.37287	10.00	25.98	9.89	35.98	19.89	58.44	48.44	-22.46	-28.55

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

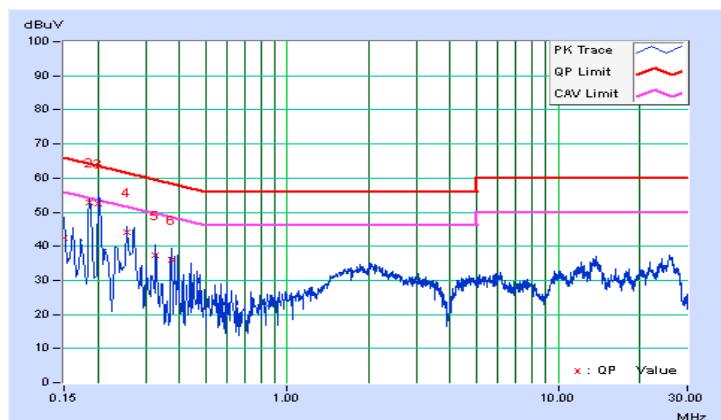


### 4.3 6dB Bandwidth Measurement

#### 4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup

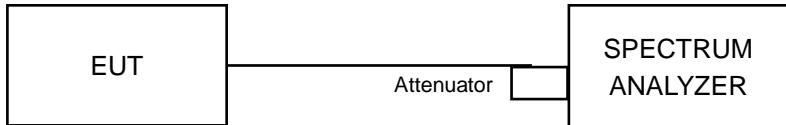

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.3.7 Test Result

##### 802.11b

Channel	Frequency (MHz)	6db Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	8.58	0.5	Pass
6	2437	8.58	0.5	Pass
11	2462	9.20	0.5	Pass

##### 802.11g

Channel	Frequency (MHz)	6db Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	16.38	0.5	Pass
6	2437	16.40	0.5	Pass
11	2462	16.39	0.5	Pass

##### 802.11n (20MHz)




Channel	Frequency (MHz)	6db Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
1	2412	17.60	0.5	Pass
6	2437	17.63	0.5	Pass
11	2462	17.63	0.5	Pass

### Spectrum Plot of Worst Value

802.11b

802.11g

802.11n (20MHz)

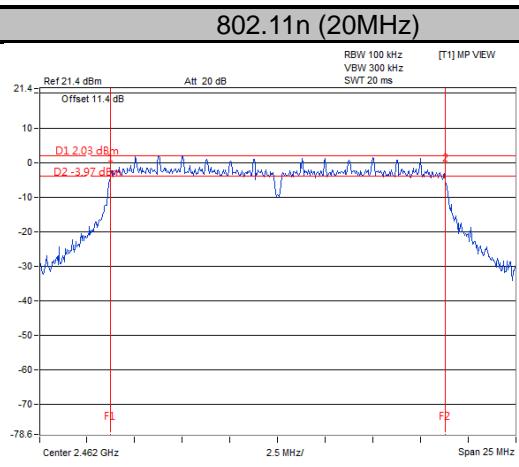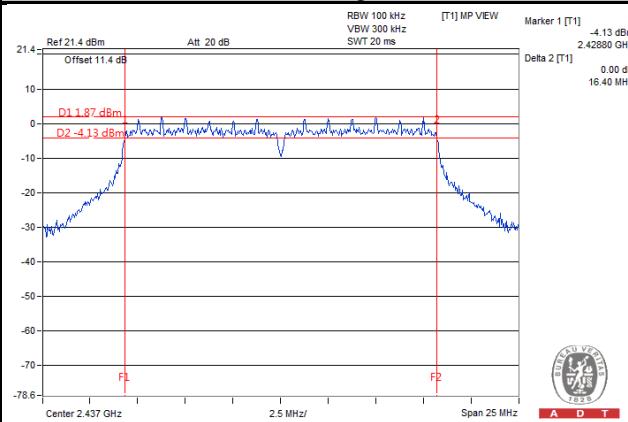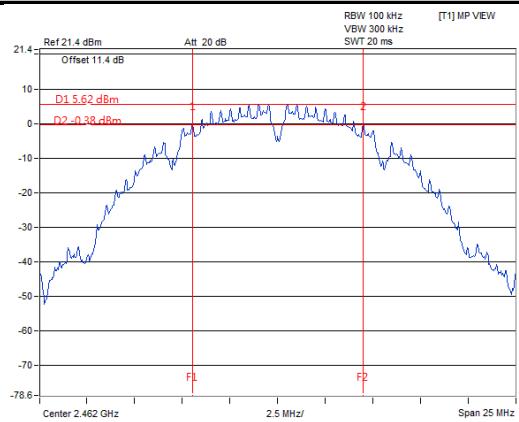


## 4.4 Conducted Output Power Measurement

### 4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

### 4.4.2 Test Setup

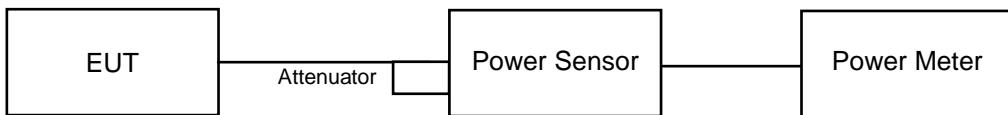

### 4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

### 4.4.5 Deviation from Test Standard

No deviation.

### 4.4.6 EUT Operating Conditions

Same as 4.3.6.

#### 4.4.7 Test Results

##### 802.11b

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	35.56	15.51	30	Pass
6	2437	36.56	15.63	30	Pass
11	2462	34.36	15.36	30	Pass

##### 802.11g

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	101.86	20.08	30	Pass
6	2437	107.65	20.32	30	Pass
11	2462	102.80	20.12	30	Pass

##### 802.11n (20MHz)


Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
1	2412	102.80	20.12	30	Pass
6	2437	113.24	20.54	30	Pass
11	2462	107.65	20.32	30	Pass

## 4.5 Power Spectral Density Measurement

### 4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 Test Setup

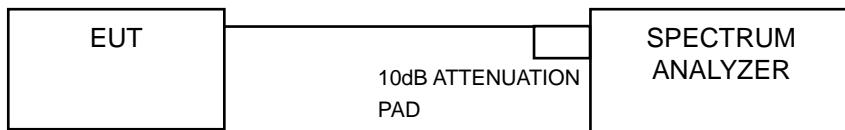

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Condition

Same as Item 4.3.6

#### 4.5.7 Test Results

##### 802.11b


Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Pass / Fail
1	2412	-11.76	8	Pass
6	2437	-11.95	8	Pass
11	2462	-11.66	8	Pass

##### 802.11g

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Pass / Fail
1	2412	-14.21	8	Pass
6	2437	-14.46	8	Pass
11	2462	-14.62	8	Pass

##### 802.11n (20MHz)

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Pass / Fail
1	2412	-14.46	8	Pass
6	2437	-14.97	8	Pass
11	2462	-14.91	8	Pass

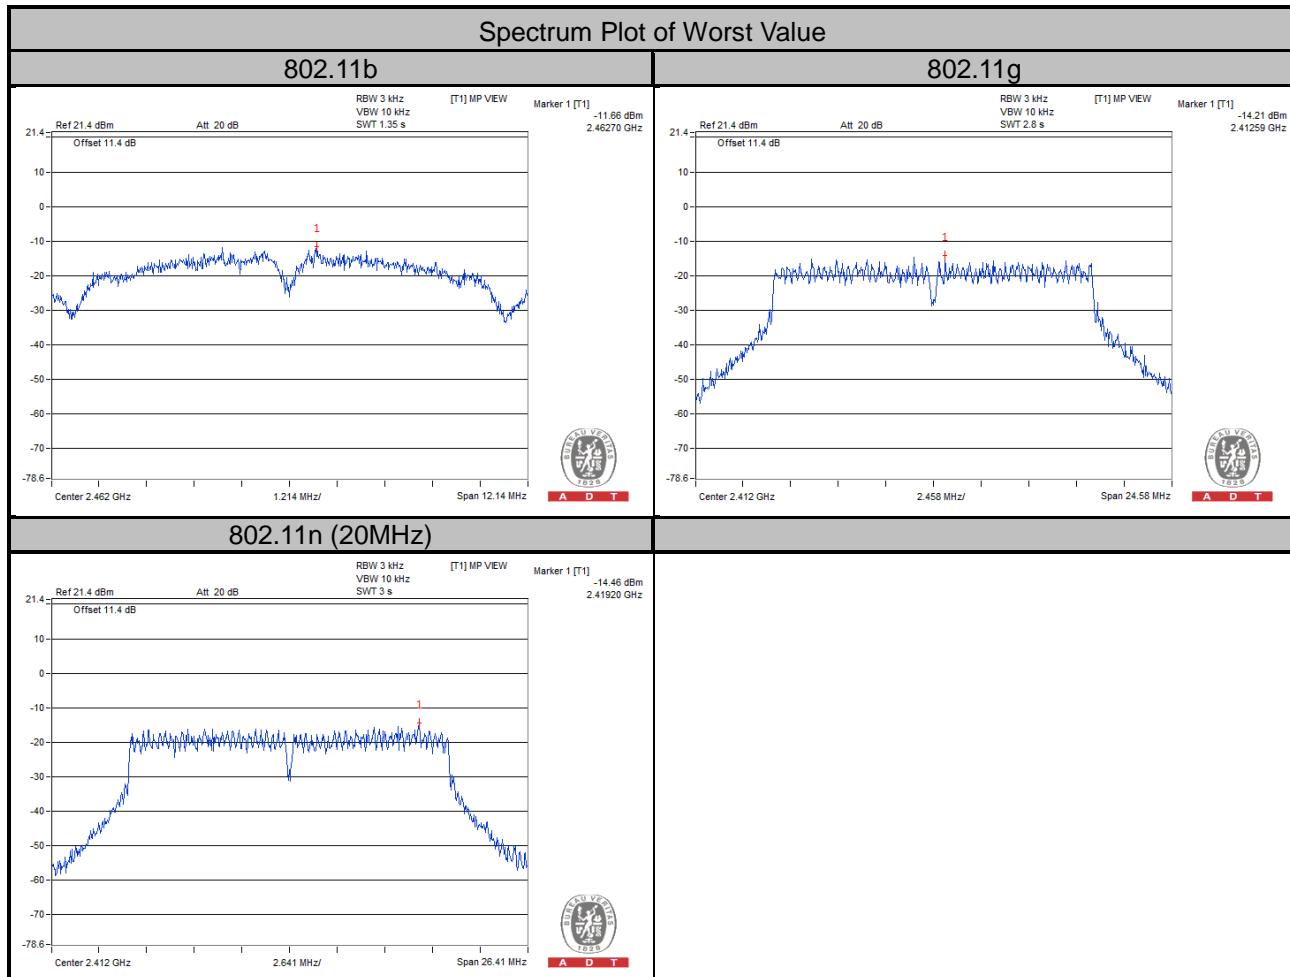

#### 4.6 Conducted Out of Band Emission Measurement

##### 4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

##### 4.6.2 Test Setup



##### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

##### 4.6.4 Test Procedure

###### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

###### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

##### 4.6.5 Deviation from Test Standard

No deviation.


##### 4.6.6 EUT Operating Condition


Same as Item 4.3.6

#### 4.6.7 Test Results

The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.


##### 802.11b

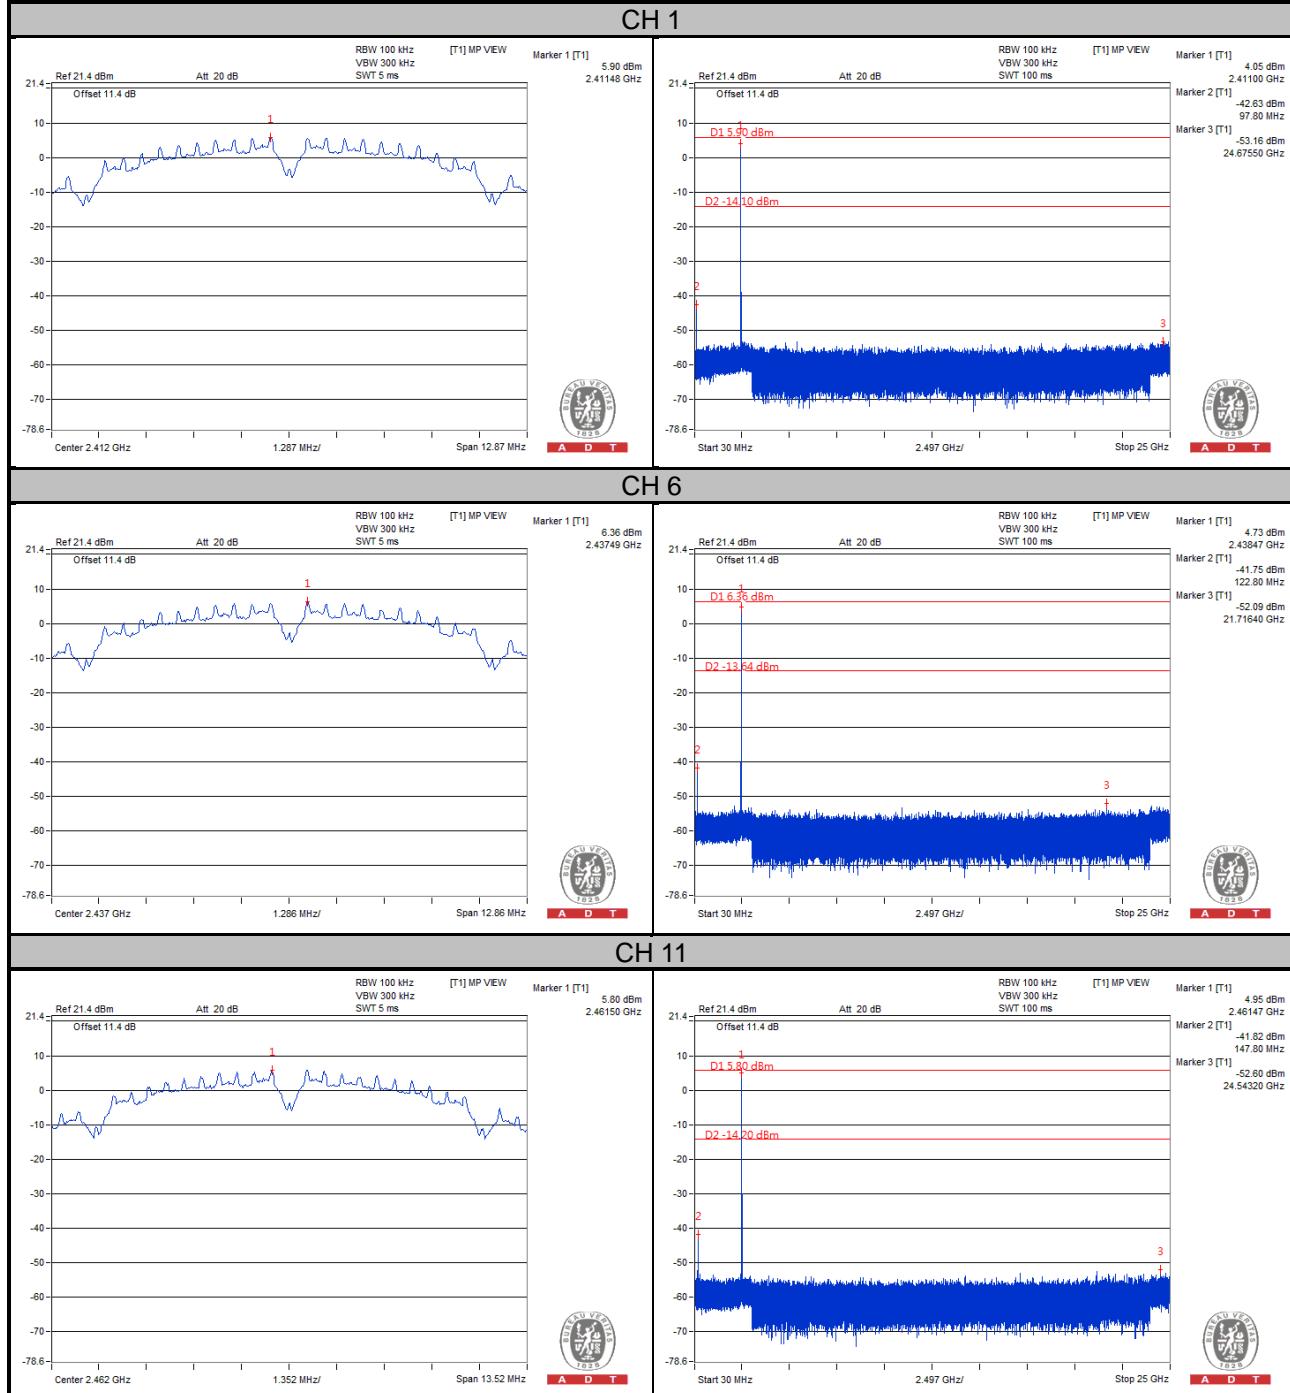

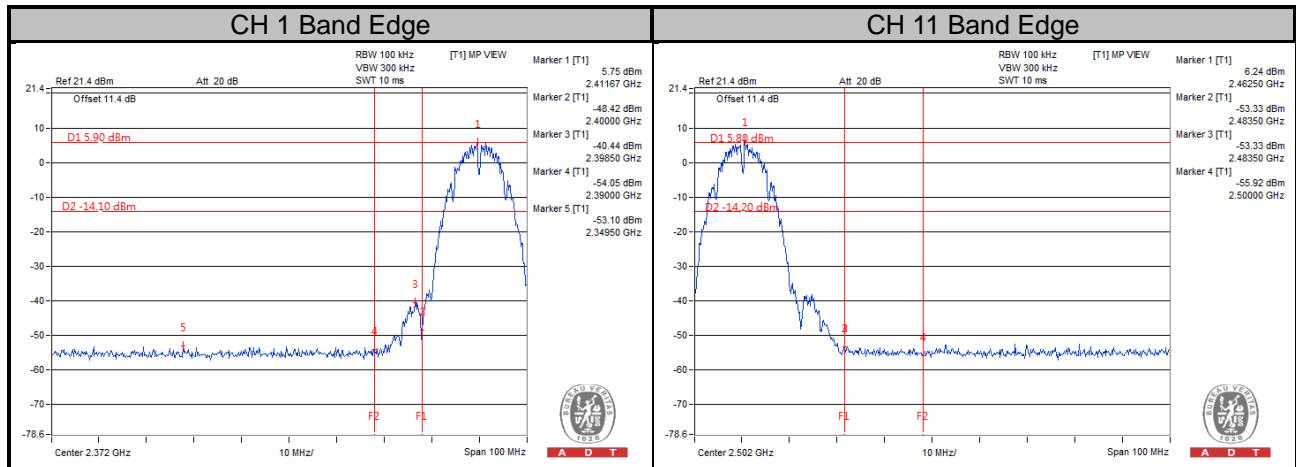


## 802.11g


CH 1

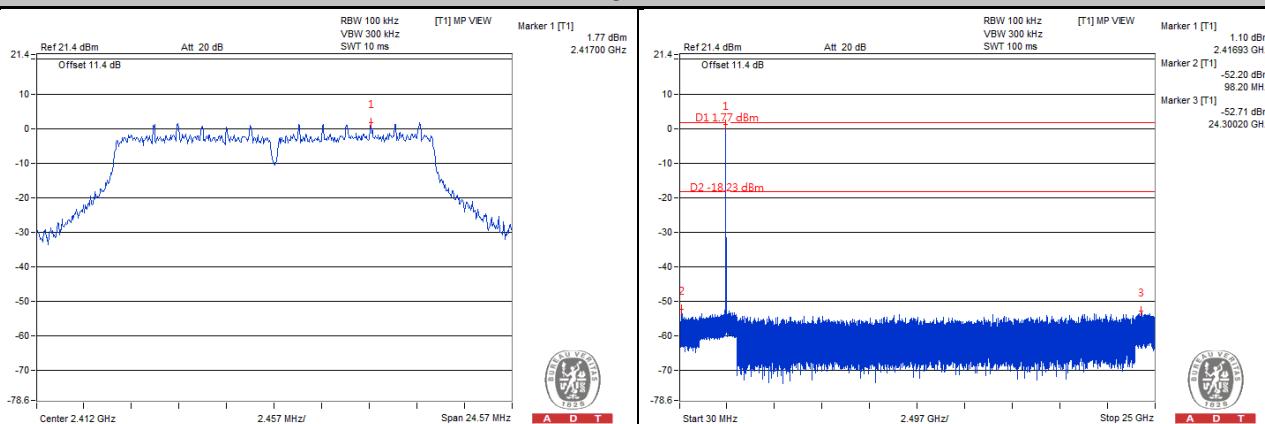


CH 6

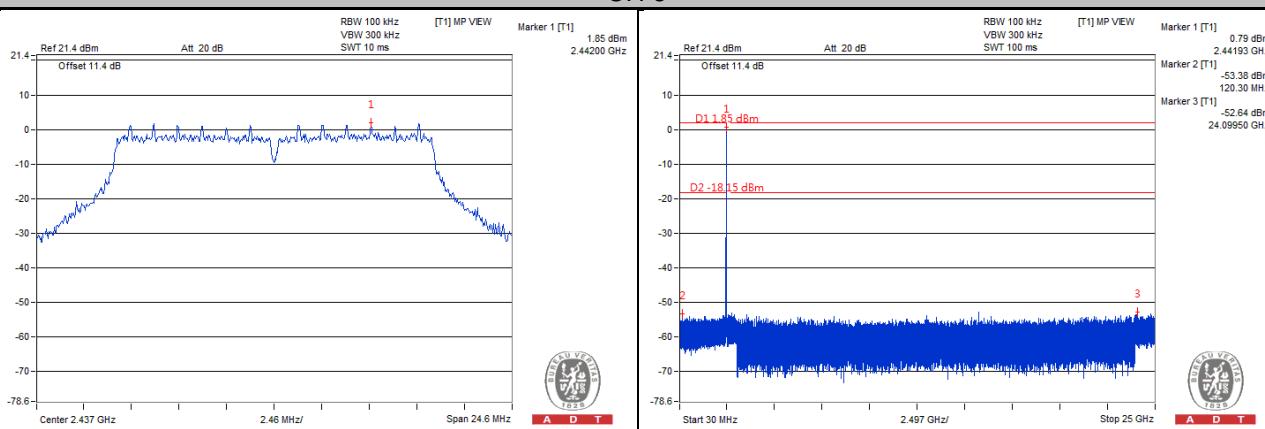


CH 11

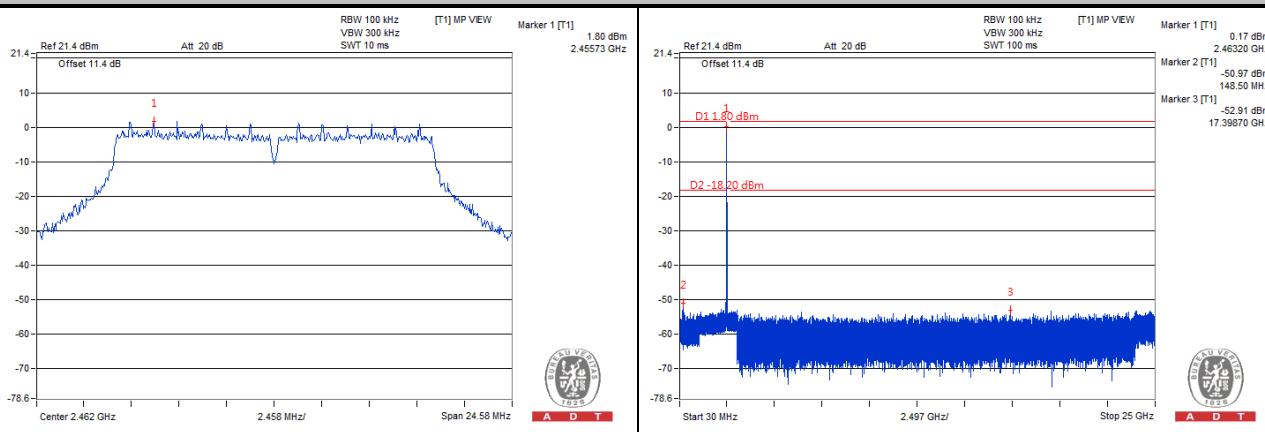

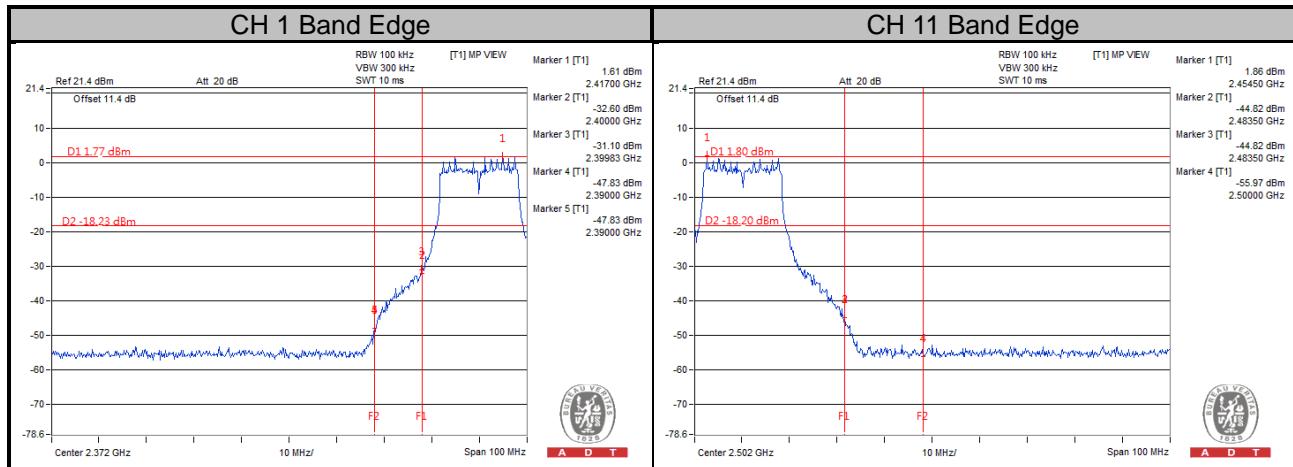


## 802.11n (20MHz)


**CH 1**

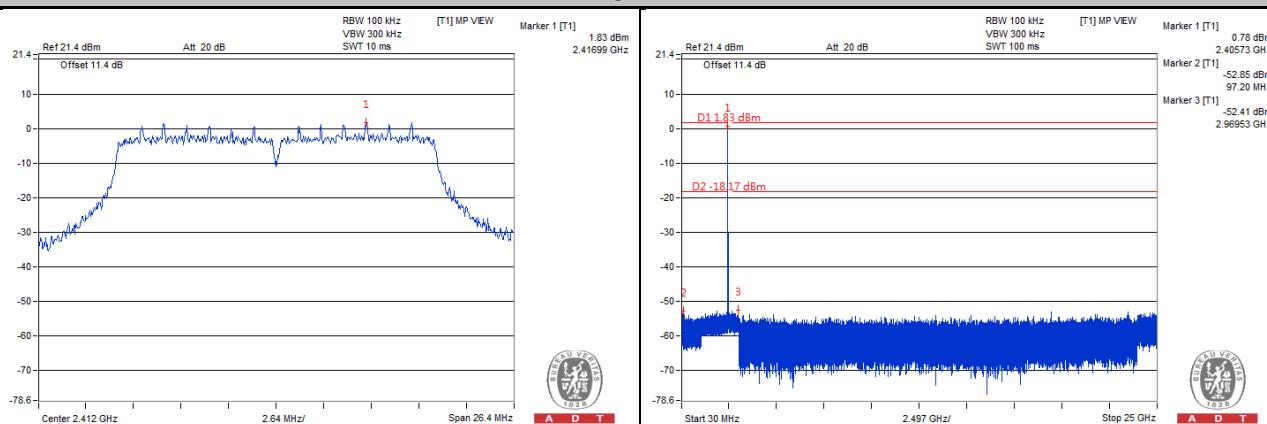


**CH 6**

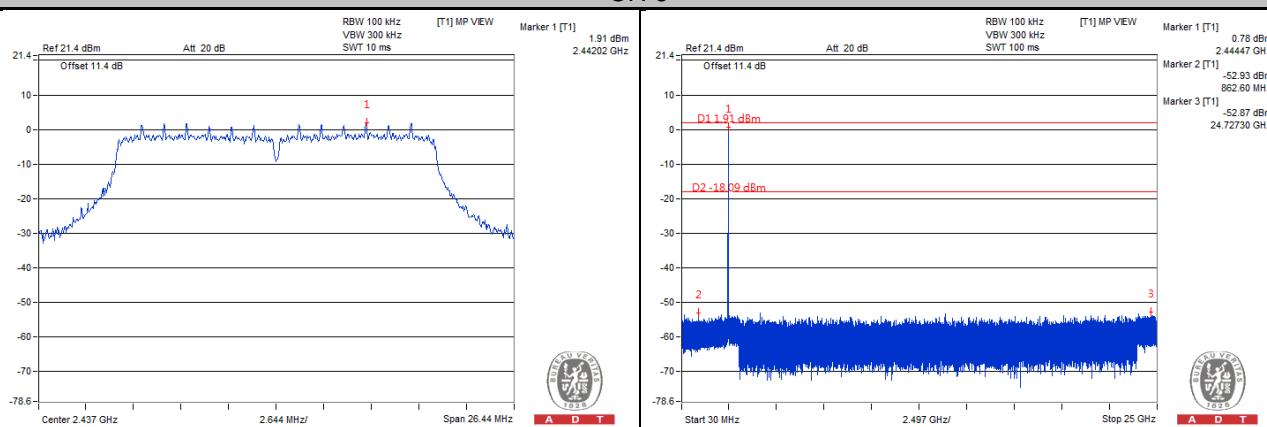

**CH 11**

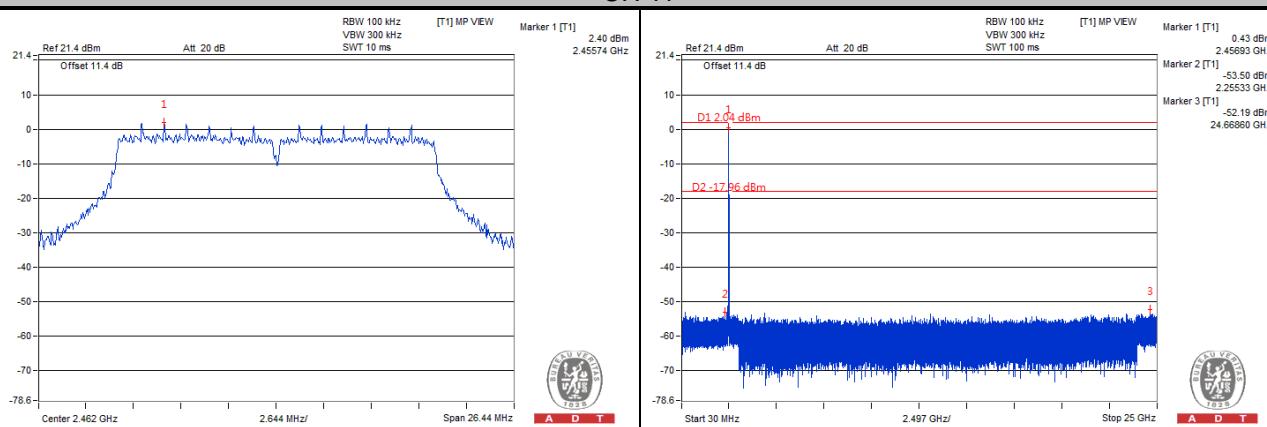

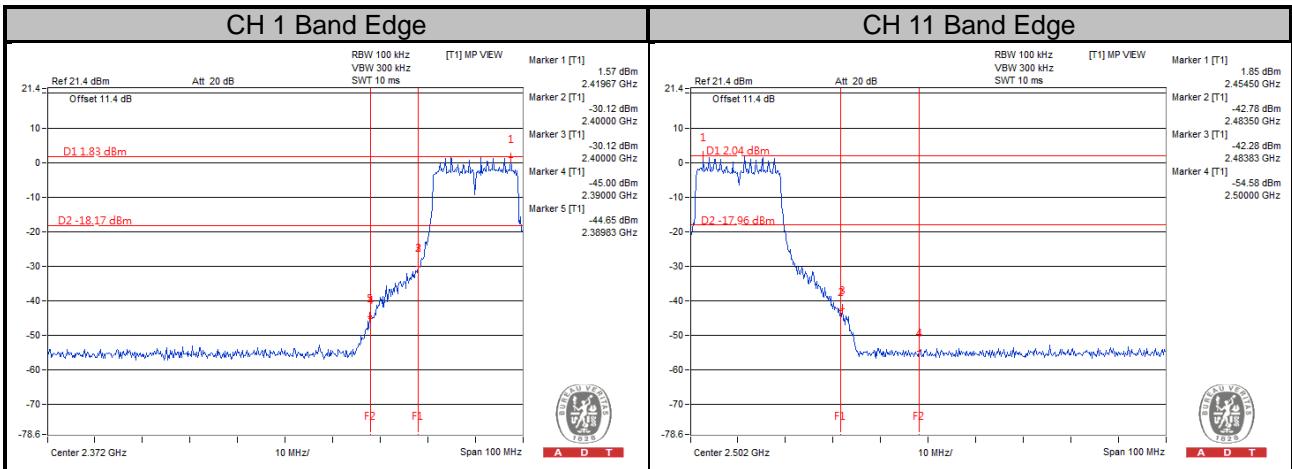



A D T

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab**

Tel: 886-2-26052180  
Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-5935343  
Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232  
Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---