



**RF TEST REPORT**  
**No. 170101094SHA-001**

Applicant : Yanzi Networks AB  
Isafjordsgatan 32C, 16440 Kista Sweden  
Manufacturer : Shanghai Pinyuan Info. Co., Ltd.  
1007 No.9, No.970 Dalian Road, Shanghai 200082, China  
Product Name : Motion+  
Type/Model : MDW3-0231  
**TEST RESULT : PASS**

**SUMMARY**

The equipment complies with the requirements according to the following standard(s):

**47CFR Part 15 (2016):** Radio Frequency Devices

**ANSI C63.10 (2013):** American National Standard for Testing Unlicensed Wireless Devices

Date of issue: March 9, 2017

Prepared by:

Wade Zhang (*Project Engineer*)

Reviewed by:

Daniel Zhao (*Reviewer*)



**FCC ID: 2AE7LMDW3-0231**

## **Description of Test Facility**

Name: Intertek Testing Services Limited Shanghai  
Address: Building 86, No. 1198 Qinzhou Rd., North, Shanghai 200233, P.R. China

FCC Registration Number: 236597  
IC Assigned Code: 2042B-1

Name of contact: Jonny Jing  
Tel: +86 21 61278271  
Fax: +86 21 54262353

## Content

<b>SUMMARY</b> .....	<b>1</b>
<b>DESCRIPTION OF TEST FACILITY</b> .....	<b>2</b>
<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
1.1 Applicant Information.....	4
1.2 Identification of the EUT .....	4
1.3 Mode of operation during the test / Test peripherals used.....	5
<b>2. TEST SPECIFICATION</b> .....	<b>6</b>
2.1 Instrument list .....	6
2.2 Test Standard .....	6
2.3 Test Summary .....	7
<b>3. RADIATED EMISSION &amp; BAND EDGE</b> .....	<b>8</b>
3.1 Test limit .....	8
3.2 Test Configuration .....	8
3.3 Test procedure and test setup .....	9
3.4 Test protocol .....	10
<b>4. ASSIGNED BANDWIDTH (20DB BANDWIDTH)</b> .....	<b>13</b>
4.1 Limit.....	13
4.2 Test Configuration .....	13
4.3 Test procedure and test setup .....	13
4.4 Test protocol .....	14
<b>5. POWER LINE CONDUCTED EMISSION</b> .....	<b>16</b>
5.1 Limit.....	16
5.2 Test configuration .....	16
5.3 Test procedure and test set up .....	17
5.4 Test protocol .....	17

## 1. General Information

### 1.1 Applicant Information

Applicant : Yanzi Networks AB  
Isafjordsgatan 32C, 16440 Kista Sweden

Name of contact : Stefan Sandhagen  
Tel : +46 8 559 21 440  
Fax : /

Manufacturer : Shanghai Pinyuan Info. Co., Ltd.  
1007 No.9, No.970 Dalian Road, Shanghai 200082, China

### 1.2 Identification of the EUT

Product description : Motion+

Type/model : MDW3-0231

Operation Frequency : 2400-2483.5MHz  
Band

EUT Modes of : IEEE802.15.4  
Modulation

Type of Modulation : O-QPSK

Channel Description : 16 channels (11-26)

Antenna Type : 0.5dBi Chip antenna

Port identification : /

Rating : 3V DC

Category of EUT : Class B

EUT type :  Table top  Floor standing

Sample received date : 2017.1.23

Sample Identification : /  
No

Date of test : 2017.1.23 ~ 2017.2.22

### **1.3 Mode of operation during the test / Test peripherals used**

Within this test report, EUT was tested with modulation and tested under its rating voltage and frequency.

Three axes (X, Y, Z) were observed while the test receiver worked as “max hold” continuously and the highest reading among the whole test procedure was recorded. Compare with the test results that Z axis is the worst case.

Test Peripherals: NA

## 2. Test Specification

### 2.1 Instrument list

Selected	Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
<input checked="" type="checkbox"/>	PXA Analyzer	N9030A	Agilent	EC5338	2016/3/4	2017/3/3
<input checked="" type="checkbox"/>	Vector SG	N5182B	Agilent	EC5175	2016/3/4	2017/3/3
<input checked="" type="checkbox"/>	Power sensor	U2021XA	Agilent	EC5338-1	2016/3/4	2017/3/3
<input checked="" type="checkbox"/>	MXG Analog SG	N5181A	Agilent	EC5338-2	2016/3/4	2017/3/3
<input checked="" type="checkbox"/>	Power meter	N1911A/N1921A	Agilent	EC4318	2016/5/18	2017/5/17
<input checked="" type="checkbox"/>	EMI chamber	3m	Albatross	EC 3048	2016/9/10	2017/9/9
<input checked="" type="checkbox"/>	Test Receiver	ESIB 26	R&S	EC 3045	2016/10/19	2017/10/18
<input checked="" type="checkbox"/>	Test Receiver	ESCI 7	R&S	EC4501	2016/2/24	2017/2/23
<input checked="" type="checkbox"/>	Bilog Antenna	CBL 6112D	TESEQ	EC 4206	2016/6/2	2017/6/1
<input checked="" type="checkbox"/>	Horn antenna	HF 906	R&S	EC 3049	2016/9/24	2017/9/23
<input checked="" type="checkbox"/>	Horn antenna	HAP18-26W	TOYO	EC 4792-3	2014/6/12	2017/6/11
<input checked="" type="checkbox"/>	Pre-amplifier	Pre-amp 18	R&S	EC 5262	2016/6/30	2017/6/29
<input checked="" type="checkbox"/>	Pre-amplifier	Tpa0118-40	R&S	EC 4792-2	2016/4/11	2017/4/10

### 2.2 Test Standard

47CFR Part 15 (2016)  
ANSI C63.10 (2013)

### 2.3 Test Summary

**This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.**

TEST ITEM	FCC REFERANCE	RESULT
Radiated emission	15.249 & 15.209	Pass
Assigned bandwidth (20dB bandwidth)	15.215(c)	Pass
Power line conducted emission	15.207	NA

*Note: This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.*

### 3. Radiated emission & Band Edge

**Test result: PASS**


#### 3.1 Test limit

Fundamental Frequency (MHz)	Fundamental limit (dBuV/m)	Harmonic limit (dBuV/m)
<input type="checkbox"/> 902 - 928	94	54
<input checked="" type="checkbox"/> 2400 - 2483.5	94	54
<input type="checkbox"/> 5725 - 5875	94	54
<input type="checkbox"/> 24000 - 24250	108	68

The radiated emissions which fall outside allocated band, must also comply with the radiated emission limits specified in § 15.209(a) and Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (dBuV/m)	Measurement Distance (m)
30 - 88	40.0	3
88 - 216	43.5	3
216 - 960	46.0	3
Above 960	54.0	3

#### 3.2 Test Configuration

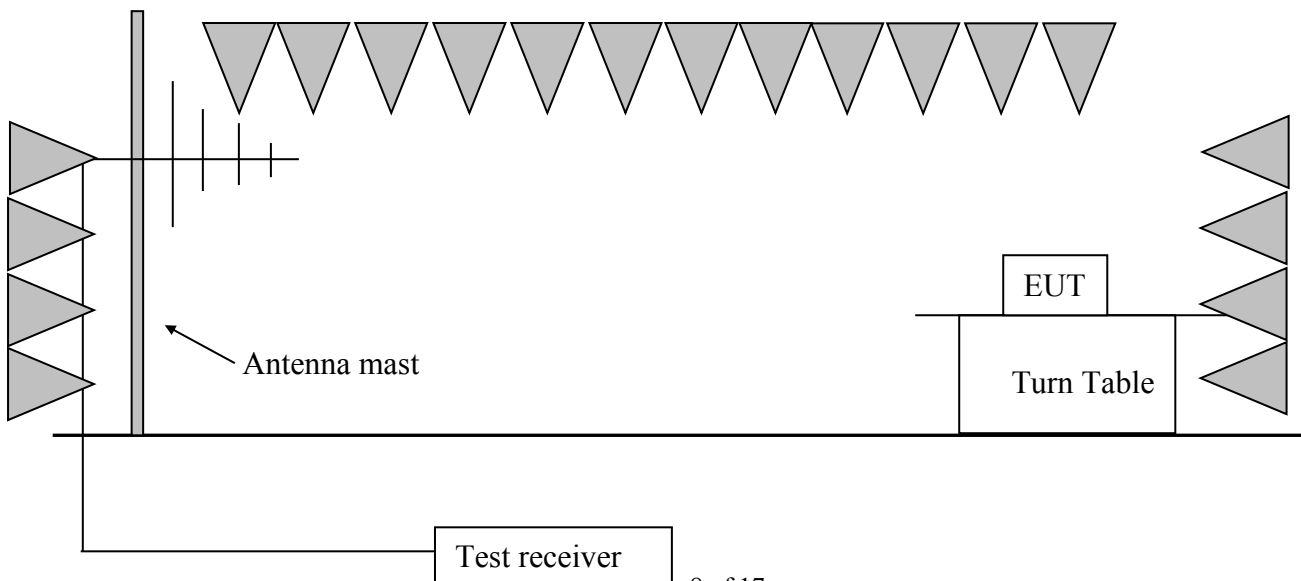



### 3.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre-amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a non-conducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:


RBW = 300 Hz, VBW = 1 kHz (9 kHz~150 kHz);  
RBW = 10 kHz, VBW = 30 kHz (150 kHz~30MHz);  
RBW = 100 kHz, VBW = 300 kHz (30MHz~1GHz for PK)  
RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

### 3.4 Test protocol


Temperature : 25 °C  
Relative Humidity : 55 %

The worst waveform from 30MHz to 1000MHz is listed as below:

Horizontal

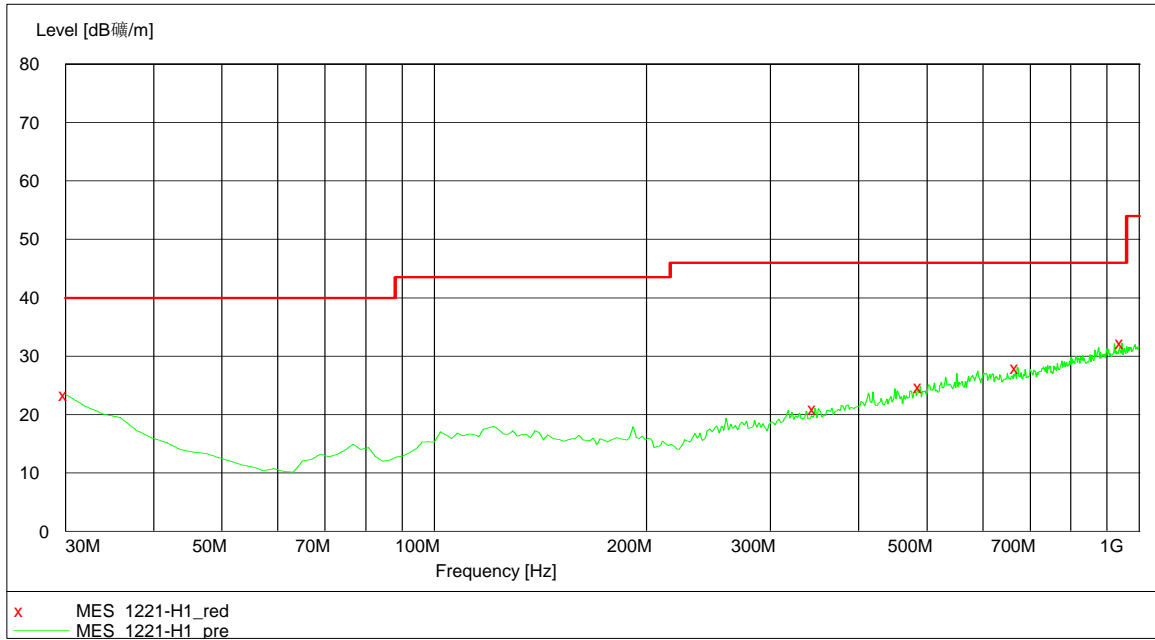

Vertical

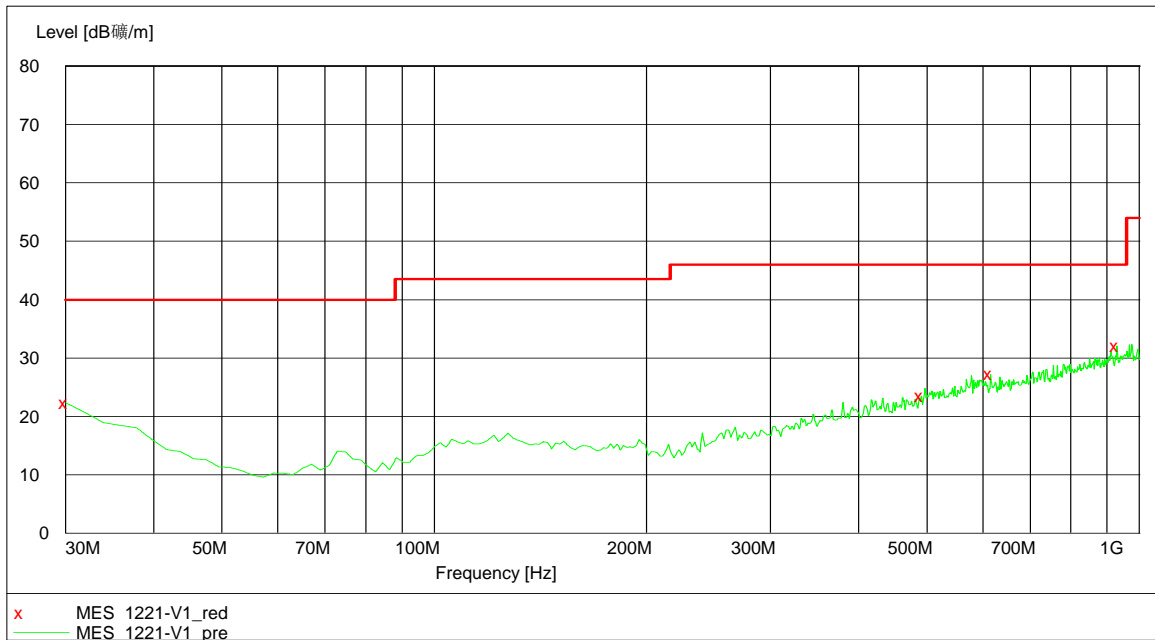

**Test result below 1GHz:**

Polarization	Frequency (MHz)	Measured level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
H	30.00	23.4	40.0	16.6	PK
	346.85	21.0	46.0	25.0	PK
	488.76	24.8	46.0	21.2	PK
	671.48	28.1	46.0	17.9	PK
	945.57	32.3	46.0	13.7	PK
V	30.00	22.3	40.0	17.7	PK
	490.70	23.5	46.0	22.5	PK
	615.11	27.3	46.0	18.7	PK
	930.02	32.1	46.0	13.9	PK

Note: The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

**Test result above 1GHz:**

CH	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2405.00	30.70	91.60	94.00	2.40	PK
	V	2405.00	30.70	84.70	94.00	9.30	PK
	H	2389.00	30.30	36.30	54.00	17.70	PK
	H	2400.00	30.30	59.53	74.00	14.47	PK
	H	2400.00	30.30	51.31	54.00	2.69	AV
	H	4810.00	-1.50	43.50	54.00	10.50	PK
	V	4810.00	-1.50	37.80	54.00	16.20	PK
M	H	2440.00	30.70	90.80	94.00	3.20	PK
	V	2440.00	30.70	85.20	94.00	8.80	PK
	H	4880.00	-1.10	41.55	54.00	12.45	PK
	V	4880.00	-1.10	38.31	54.00	15.69	PK
H	H	2480.00	30.70	91.20	94.00	2.80	PK
	V	2480.00	30.70	84.50	94.00	9.50	PK
	H	2483.50	30.80	42.20	54.00	11.80	PK
	V	2483.50	30.80	36.20	54.00	17.80	PK
	H	4960.00	-0.80	41.50	54.00	12.50	PK
	V	4960.00	-0.80	38.10	54.00	15.90	PK

## Remark:

1. For fundamental emission test, no pre-amplifier is employed;
2. Correct Factor = Antenna Factor + Cable Loss (-Amplifier, is employed);
3. Corrected Reading = Original Receiver Reading + Correct Factor;
4. Margin = limit – Corrected Reading;
5. If the PK reading is lower than AV limit, the AV test can be elided;
6. The shaded data is the fundamental emission;
7. Both emissions on “horizontal” and “vertical” axes were assessed and the worse test data was listed in this report;

## Example:

Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV,  
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m,  
Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m,  
Assuming limit = 54dBuV/m, Corrected Reading = 10.20dBuV/m,  
Then Margin = 54 -10.20 = 43.80dBuV/m.


#### 4. Assigned bandwidth (20dB bandwidth)

Test result: PASS

##### 4.1 Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emission is contained within the allocated frequency band as clause 3.1 shows.

##### 4.2 Test Configuration

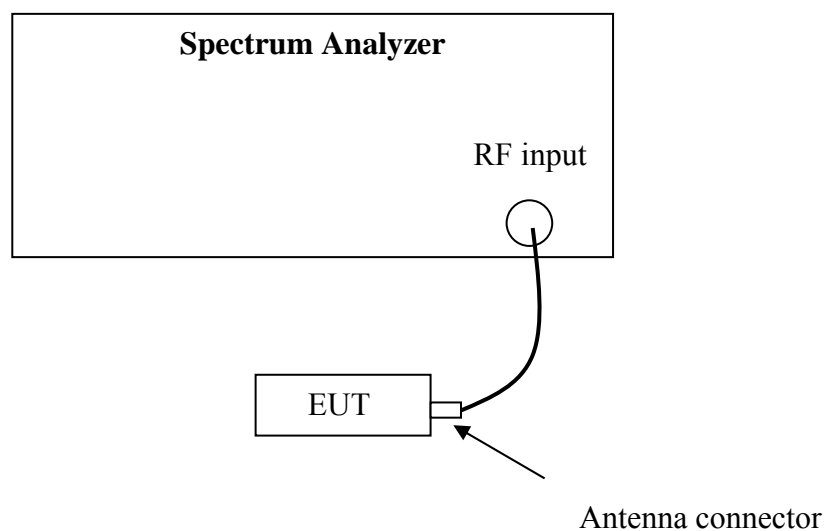

##### 4.3 Test procedure and test setup


The 20dB Bandwidth per FCC § 15.215(c) is measured using the Spectrum Analyzer. Set Span = 2 to 3 times the 20 dB bandwidth,  $RBW \geq 1\%$  of the 20 dB bandwidth,  $VBW \geq RBW$ , Sweep = auto, Detector = peak, Trace = max hold. The test was performed at 2 channels (lowest and highest channel).

4.4 Test protocol


Temperature : 25°C  
 Relative Humidity : 55 %

Mode	20dB Bandwidth		Permitted Bandwidth (MHz)	Result
	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)		
1	2403.805	2481.170	2400-2483.5	Pass

Channel L

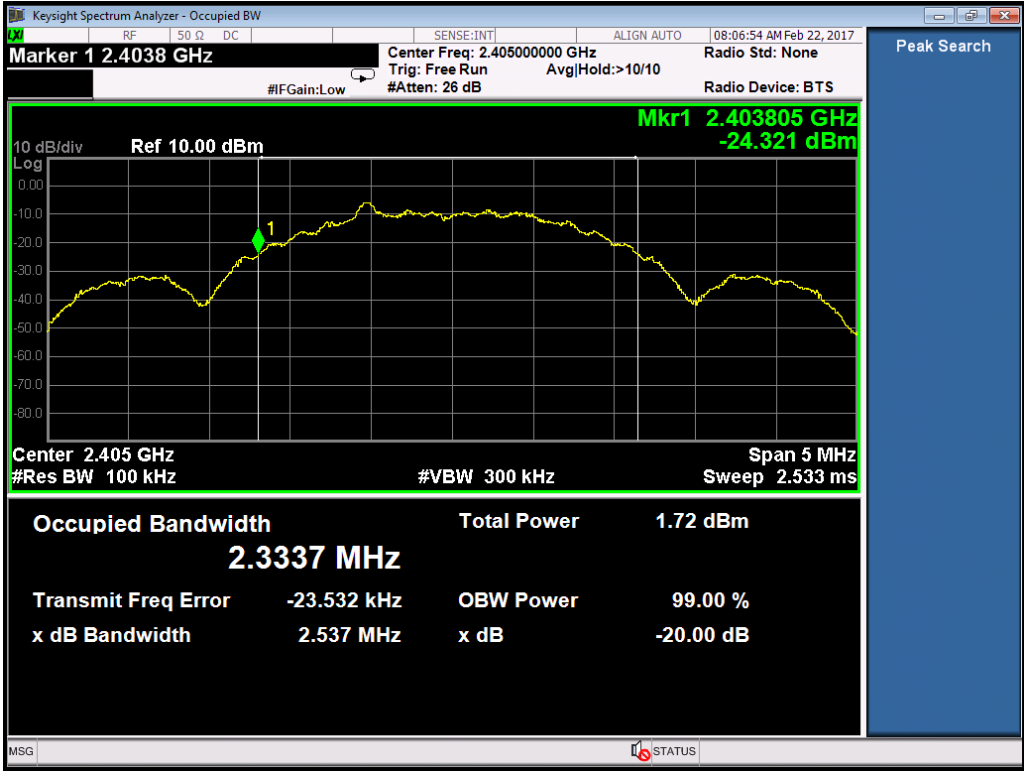

Channel H

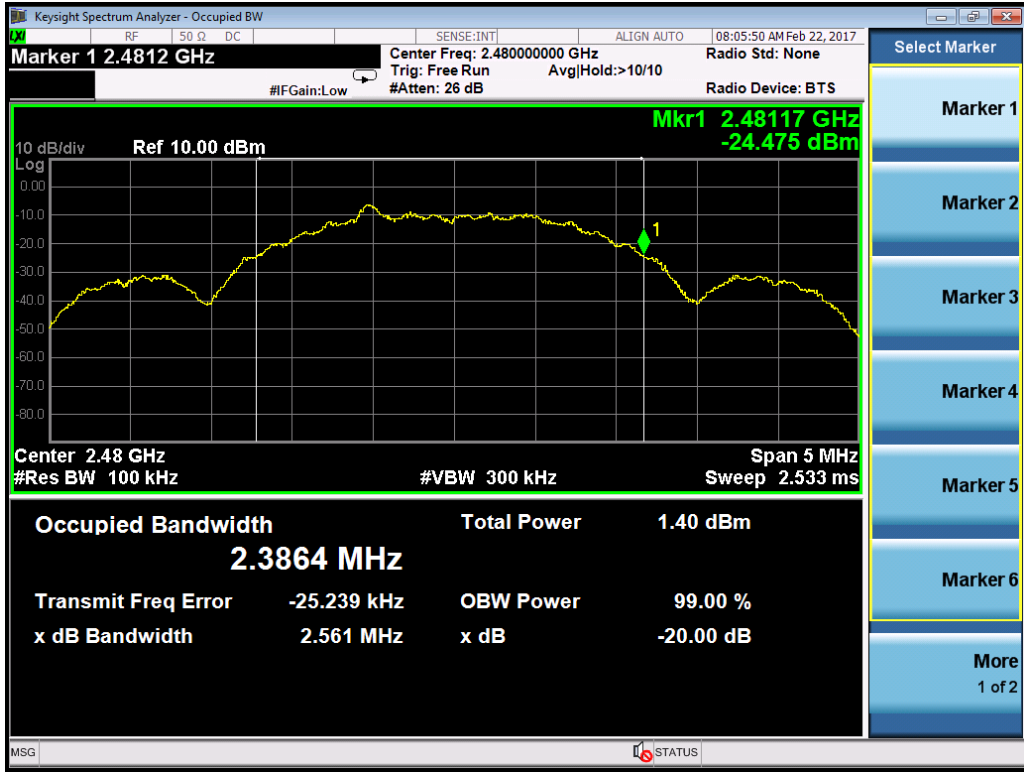

### 5. Power line conducted emission


Test result: NA

#### 5.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

#### 5.2 Test configuration

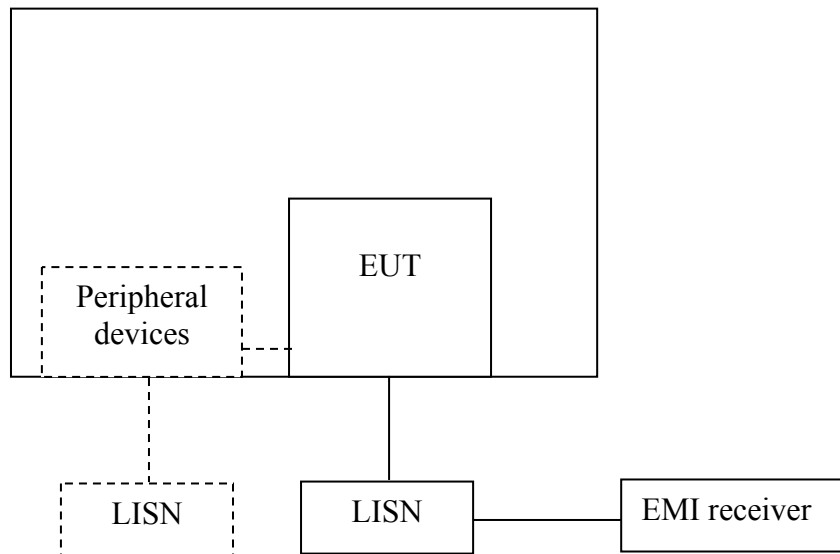

For table top equipment, wooden support is 0.8m height table

For floor standing equipment, wooden support is 0.1m height rack.



### 5.3 Test procedure and test set up

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50Ω/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50Ω/50uH coupling impedance with 50Ω termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.

### 5.4 Test protocol

Temperature : °C  
 Relative Humidity : %

#### Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-