

FCC Part 15C

Measurement and Test Report

For

Santok Limited

Santok House, Unit L, Braintree Industrial Estate, Braintree Road, South Ruislip, Middlesex, HA4 0EJ United Kingdom

FCC ID: 2AE7RSANTOKQ65

FCC Rule(s):	<u>FCC Part 15C</u>
Product Description:	<u>Mobile Phone</u>
Tested Model:	<u>Q65</u>
Report No.:	<u>STR15068223I-4</u>
Tested Date:	<u>2015-06-26 to 2015-07-08</u>
Issued Date:	<u>2015-07-08</u>
Tested By:	<u>Lebron Wang / Engineer</u>
Reviewed By:	<u>Lahm Peng / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	<p>Shenzhen SEM.Test Technology Co., Ltd. 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)</p>
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY	5
1.5 EUT SETUP AND TEST MODE.....	6
2. SUMMARY OF TEST RESULTS	7
3. RF EXPOSURE	8
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
4. ANTENNA REQUIREMENT	9
4.1 STANDARD APPLICABLE.....	9
4.2 EVALUATION INFORMATION	9
5. POWER SPECTRAL DENSITY	10
5.1 STANDARD APPLICABLE.....	10
5.2 TEST EQUIPMENT LIST AND DETAILS	10
5.3 TEST PROCEDURE.....	10
5.4 ENVIRONMENTAL CONDITIONS	10
5.5 SUMMARY OF TEST RESULTS/PLOTS	11
6. 6DB BANDWIDTH	18
6.1 STANDARD APPLICABLE.....	18
6.2 TEST EQUIPMENT LIST AND DETAILS	18
6.3 TEST PROCEDURE.....	18
6.4 ENVIRONMENTAL CONDITIONS	18
6.5 SUMMARY OF TEST RESULTS/PLOTS	19
7. RF OUTPUT POWER	26
7.1 STANDARD APPLICABLE.....	26
7.2 TEST EQUIPMENT LIST AND DETAILS	26
7.3 TEST PROCEDURE.....	26
7.4 ENVIRONMENTAL CONDITIONS	26
7.5 SUMMARY OF TEST RESULTS/PLOTS	27
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	34
8.1 MEASUREMENT UNCERTAINTY	34
8.2 STANDARD APPLICABLE.....	34
8.3 TEST EQUIPMENT LIST AND DETAILS	34
8.4 TEST PROCEDURE.....	35
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	35
8.6 ENVIRONMENTAL CONDITIONS	36
8.7 SUMMARY OF TEST RESULTS/PLOTS	36
9. OUT OF BAND EMISSIONS.....	65
9.1 STANDARD APPLICABLE.....	65
9.2 TEST EQUIPMENT LIST AND DETAILS	65
9.3 TEST PROCEDURE.....	65
9.4 ENVIRONMENTAL CONDITIONS	66
9.5 SUMMARY OF TEST RESULTS/PLOTS	66
10. CONDUCTED EMISSIONS	81
10.1 MEASUREMENT UNCERTAINTY	81
10.2 TEST EQUIPMENT LIST AND DETAILS	81
10.3 TEST PROCEDURE.....	81
10.4 BASIC TEST SETUP BLOCK DIAGRAM.....	81
10.5 ENVIRONMENTAL CONDITIONS	82
10.6 TEST RECEIVER SETUP	82
10.7 SUMMARY OF TEST RESULTS/PLOTS	82
10.8 CONDUCTED EMISSIONS TEST DATA.....	82

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Santok Limited
Address of applicant: Santok House, Unit L, Braintree Industrial Estate, Braintree Road, South Ruislip, Middlesex, HA4 0EJ United Kingdom
Manufacturer: GIPO HOLDINGS LIMITED
Address of manufacturer: East 1201, Phase II, Hi-tech Plaza, Futian District, Shenzhen

General Description of EUT	
Product Name:	Mobile Phone
Brand Name:	Tecmobile
Model No.:	Q65
Adding Model:	Raspberry, Lychee, Storm 2, Sync 5S, Sync 5i, Sync 5.5
Hardware Version:	DR100-MB-V0.2
Software Version:	Q65_DS819_V0.0.2_150625
IMEI:	355386000145387/355386000145395
Rated Voltage:	DC 3.7V Li-ion Battery
Battery:	1500mAh
Power Adaptor:	Q65 Input: AC 100-240V Output: DC 5V/1000mA
Device Category:	Portable Device
<i>The EUT is GSM850/900/DCS1800/PCS1900, WCDMA Band II, V, Mobile Phone. The Mobile Phone is intended for speech and Multimedia Message Service (MMS) transmission. It is equipped with GPRS/EGPRS class 12 for GSM850 and GSM1900 and Bluetooth, Wi-Fi, GPS and camera functions. For more information see the following datasheet</i>	
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The appearance of others models listed in the report is different from main-test model Q65, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n
Frequency Range:	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
RF Output Power:	15.53dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Quantity of Channels:	11/7
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	1.9dBi

1.2 Test Standards

The following report is prepared on behalf of the Santok Limited in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 V03r02 for digital transmission systems shall be performed also.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

CNAS Registration No.: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. Some measurement facilities used to collect the measurement data are located at Building 28/29, Shigudong, Xili Industrial Area, Xili Street, Nanshan District, Shenzhen, Guangdong, China

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	
TM1	802.11b	2412MHz, 2437MHz, 2462MHz	
TM2	802.11g	2412MHz, 2437MHz, 2462MHz	
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz	
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz	

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
Earphone Cable	1.2	Unshielded	Without Core
USB Cable	1.0	Shielded	Without Core

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E10	LR-63C8R

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the SAR Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2015-05-28	2016-05-27
Attenuator	ATTEN	ATS100-4-20	/	2015-05-28	2016-05-27

5.3 Test Procedure

According to the KDB 558074 D01 V03r02, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

5.4 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-8.166	8
	2437	-8.409	8
	2462	-8.806	8
802.11g	2412	-11.15	8
	2437	-11.99	8
	2462	-12.63	8
802.11n HT20	2412	-14.42	8
	2437	-14.42	8
	2462	-15.24	8
802.11n HT40	2422	-16.12	8
	2437	-16.56	8
	2452	-16.60	8

Please refer to the following test plots:


802.11b-Low Channel

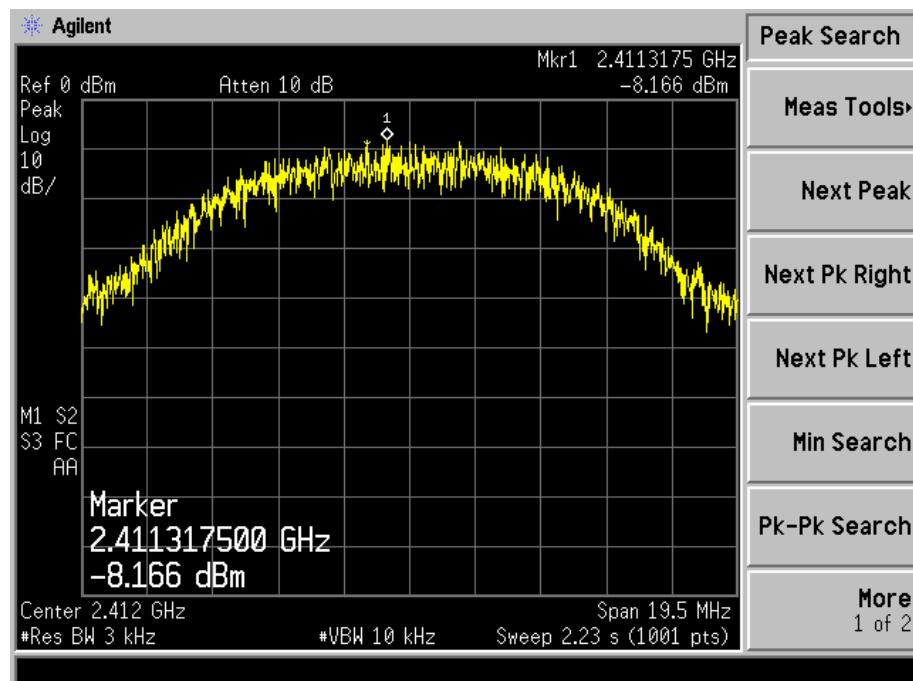


802.11b-Middle Channel

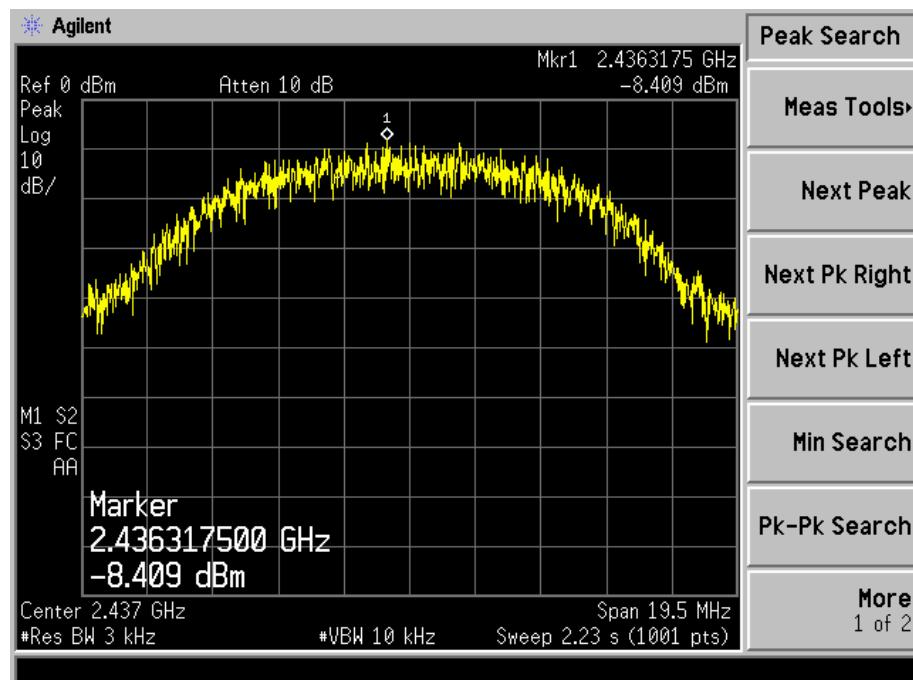


802.11b-High Channel

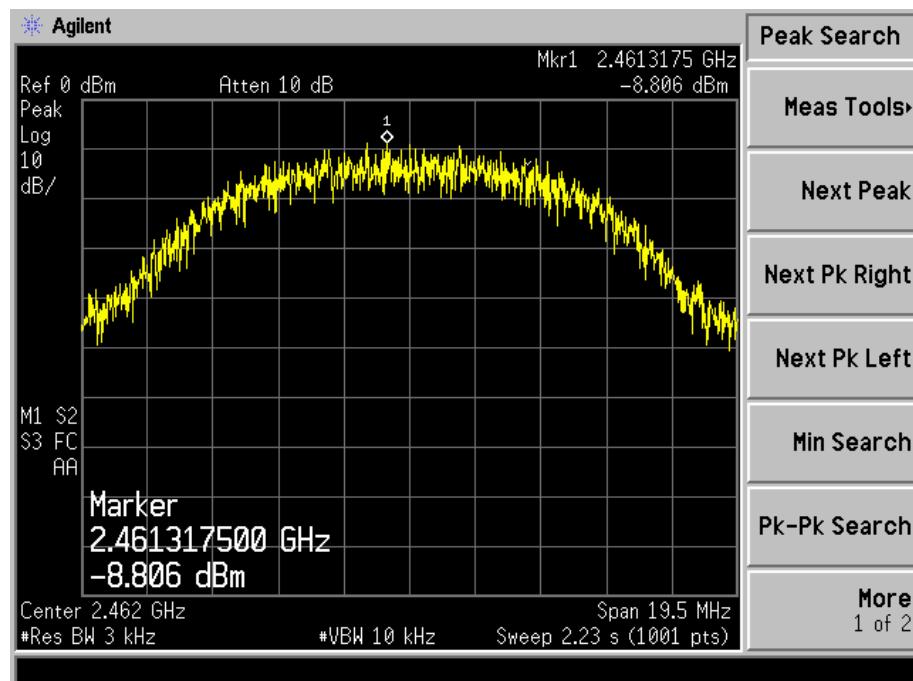


802.11g-Low Channel

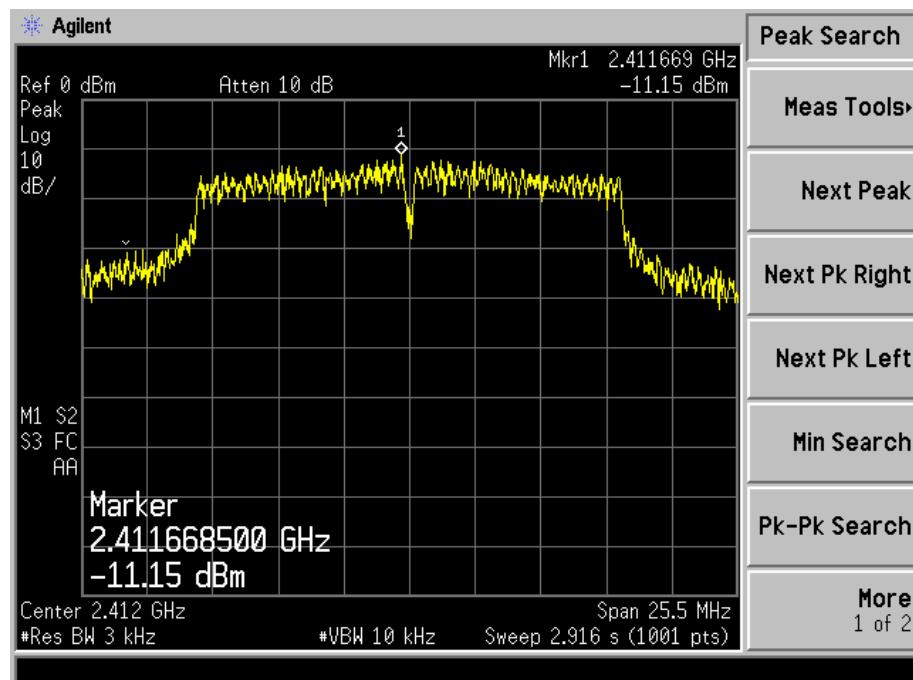


802.11g-Middle Channel

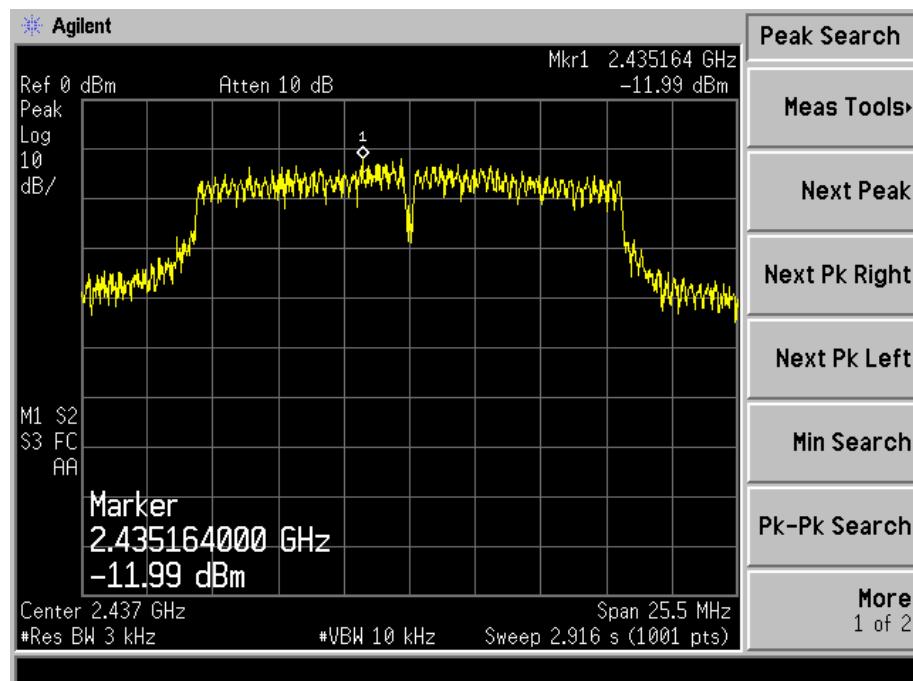


802.11g-High Channel

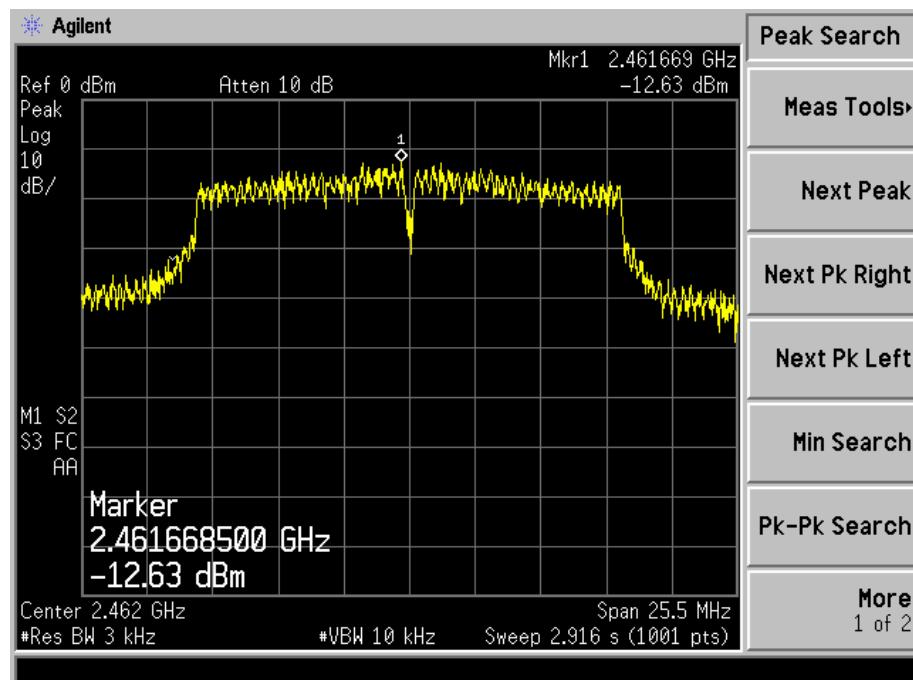


802.11n-HT20-Low Channel

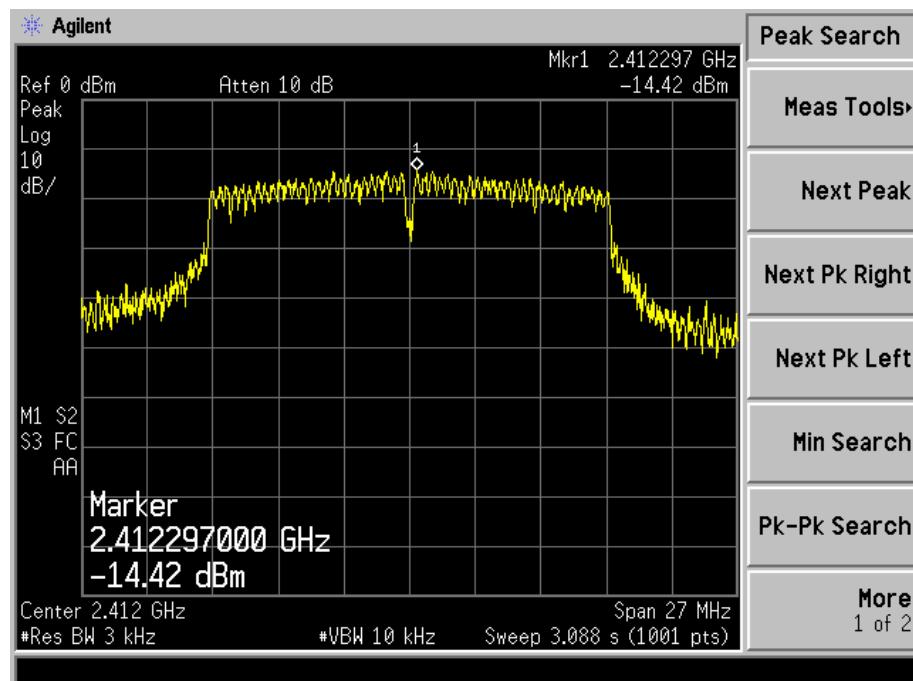


802.11n-HT20-Middle Channel

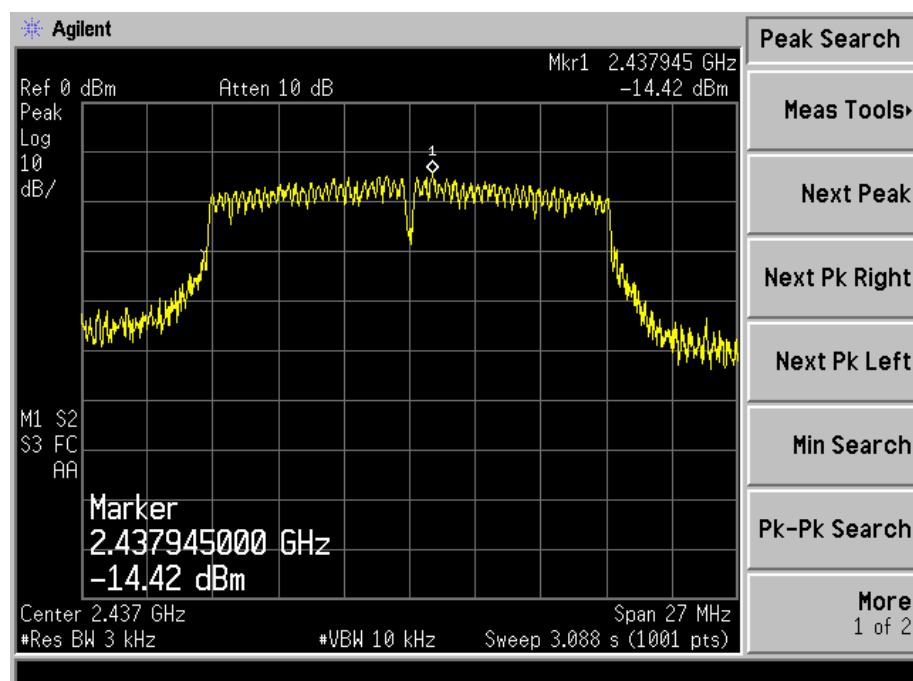


802.11n-HT20-High Channel

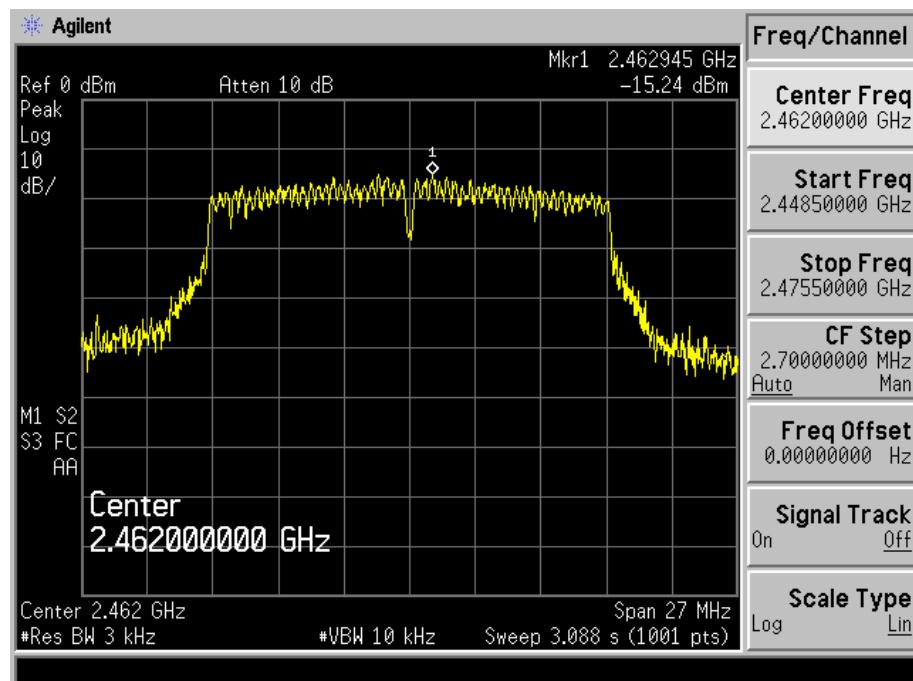


802.11n-HT40-Low Channel

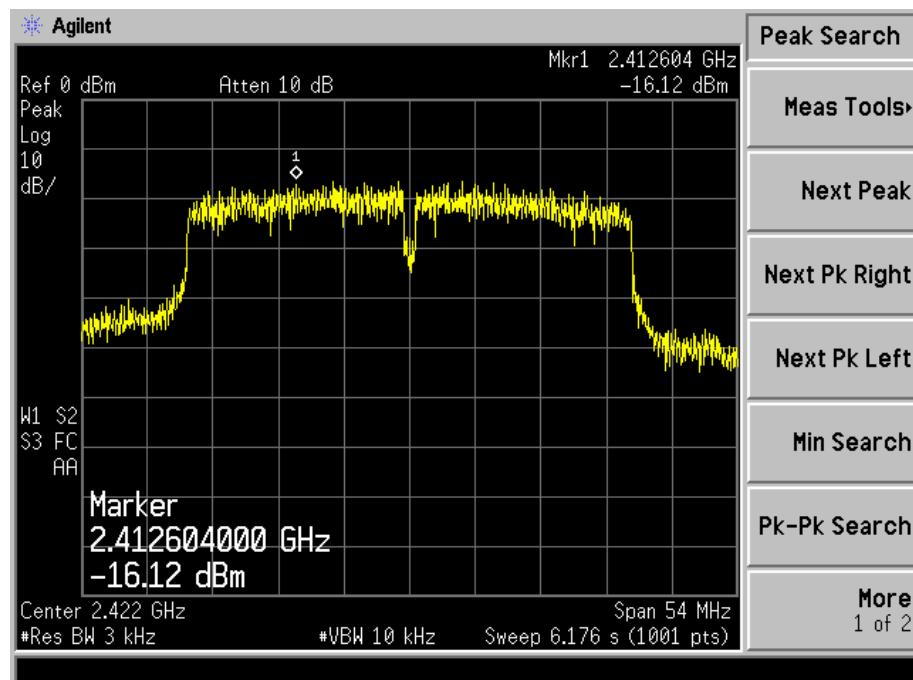

802.11n-HT40-Middle Channel

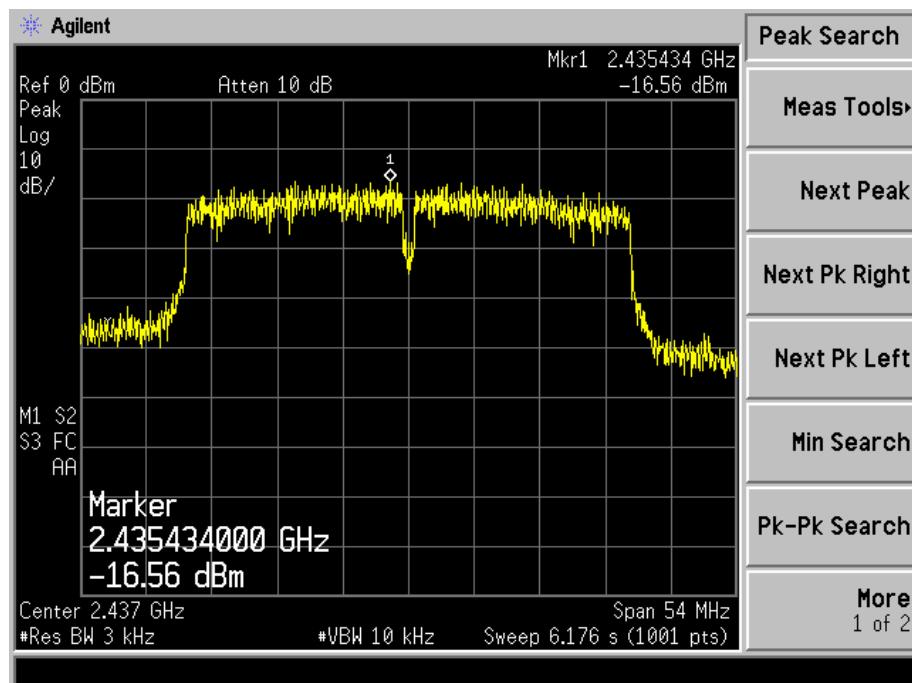

802.11n-HT40-High Channel

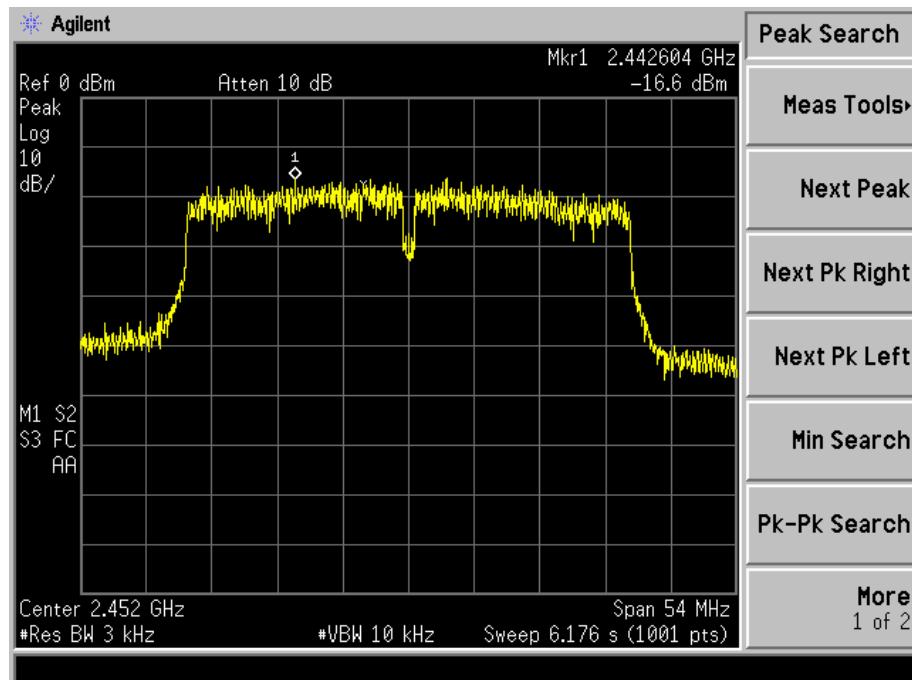

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2015-05-28	2016-05-27
Attenuator	ATTEN	ATS100-4-20	/	2015-05-28	2016-05-27

6.3 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
802.11b	2412	9519	12984.7	500
	2437	9528	12719.8	500
	2462	9514	12604.7	500
802.11g	2412	16464	16413.2	500
	2437	16471	16408.6	500
	2462	16485	16407.7	500
802.11n-HT20	2412	17629	17556.0	500
	2437	17595	17539.3	500
	2462	17579	17537.0	500
802.11n-HT20	2422	36053	35841.6	500
	2437	36113	35862.6	500
	2452	36105	35892.5	500

Please refer to the following test plots:


802.11b-Low Channel

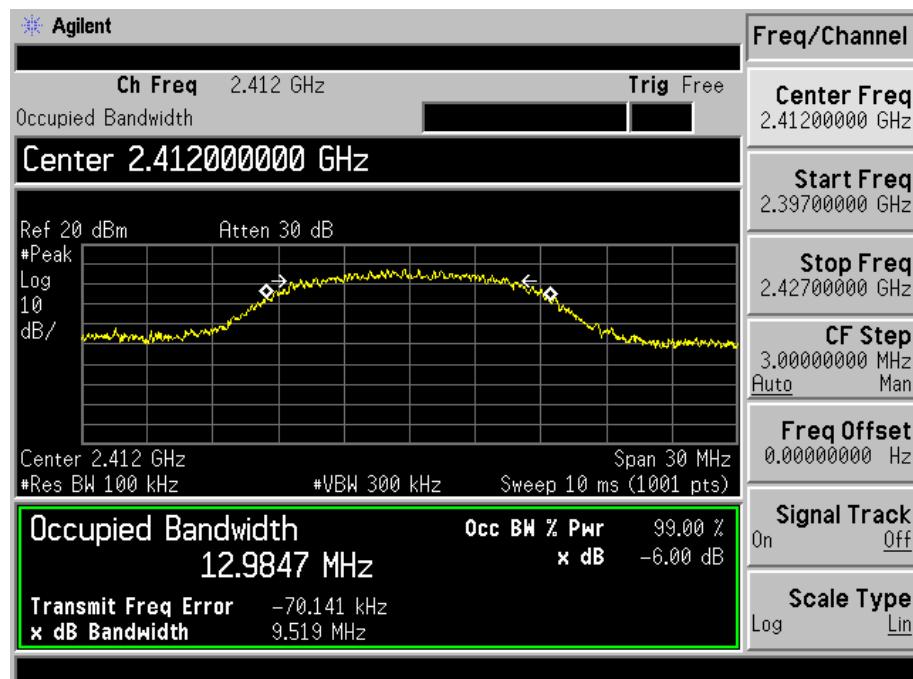


802.11b-Middle Channel

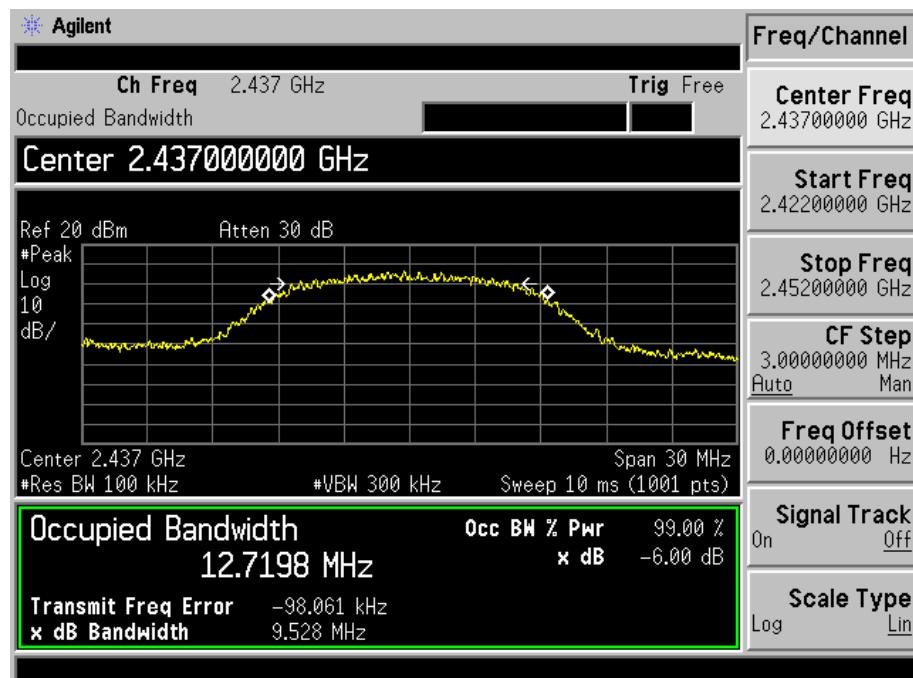


802.11b-High Channel

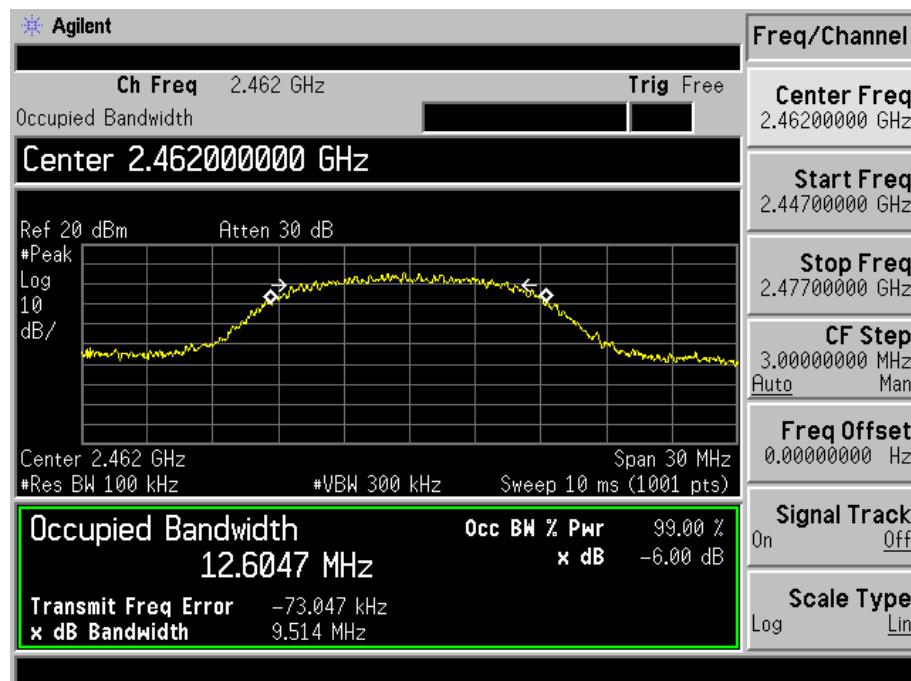


802.11g-Low Channel

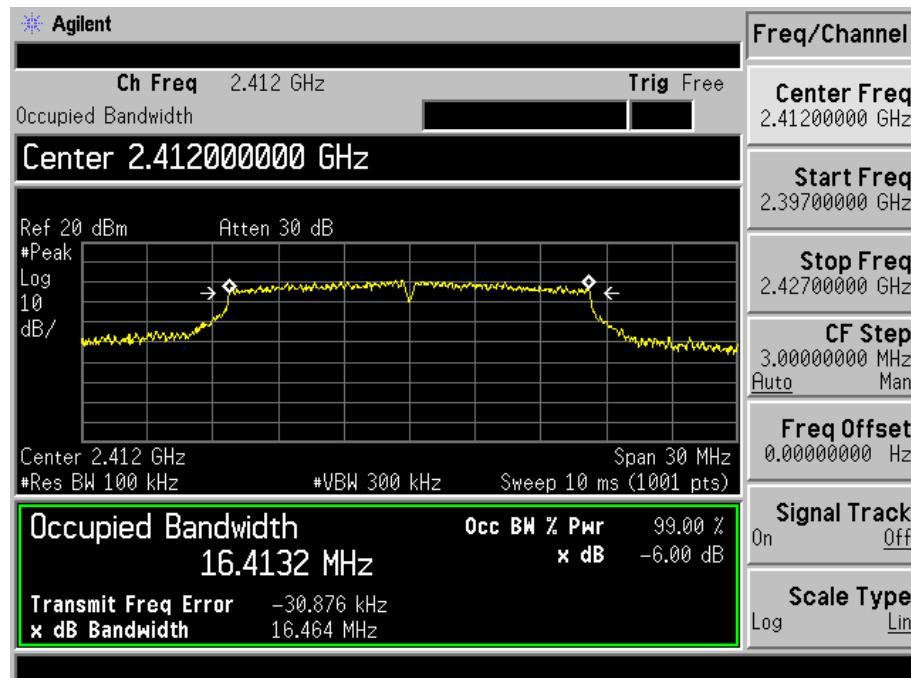


802.11g-Middle Channel

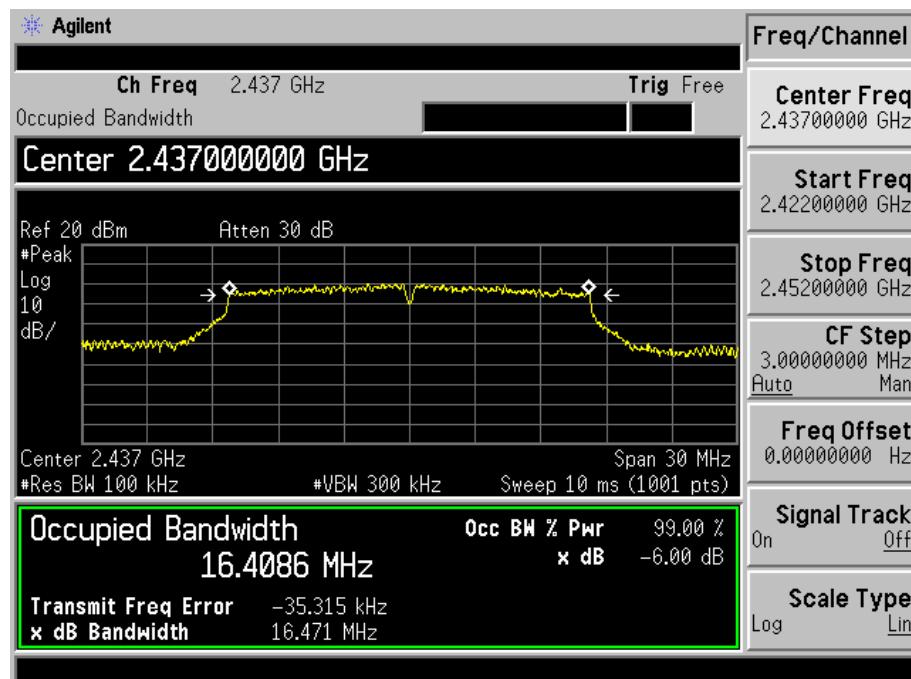


802.11g-High Channel

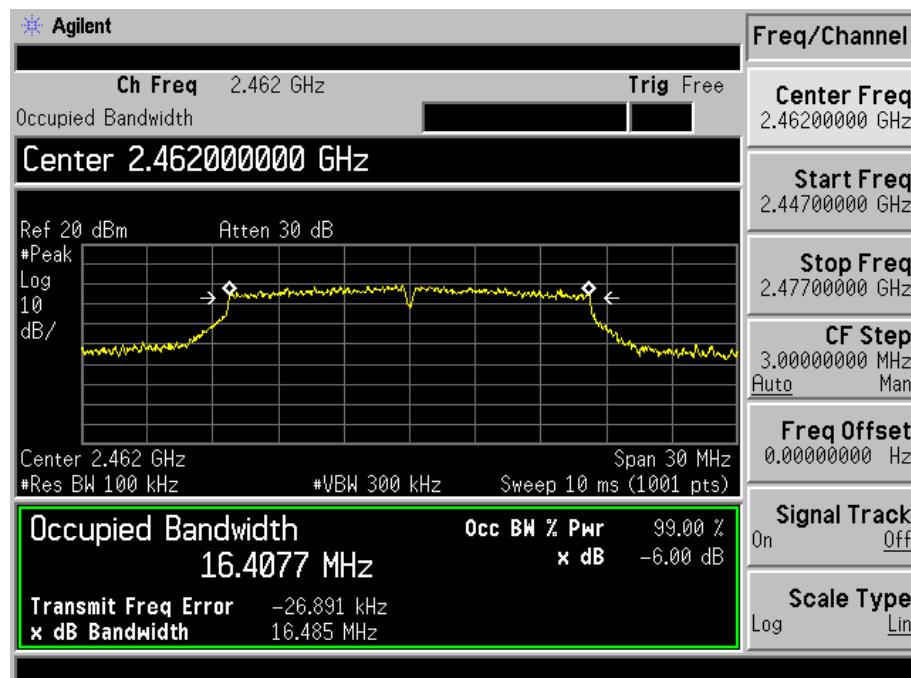


802.11n-HT20-Low Channel

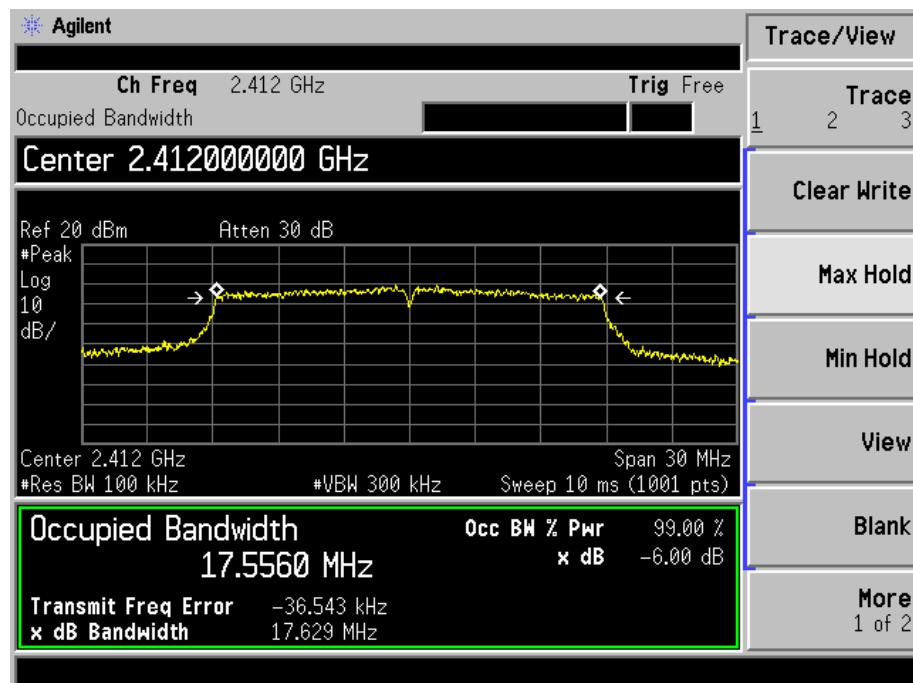


802.11n-HT20-Middle Channel

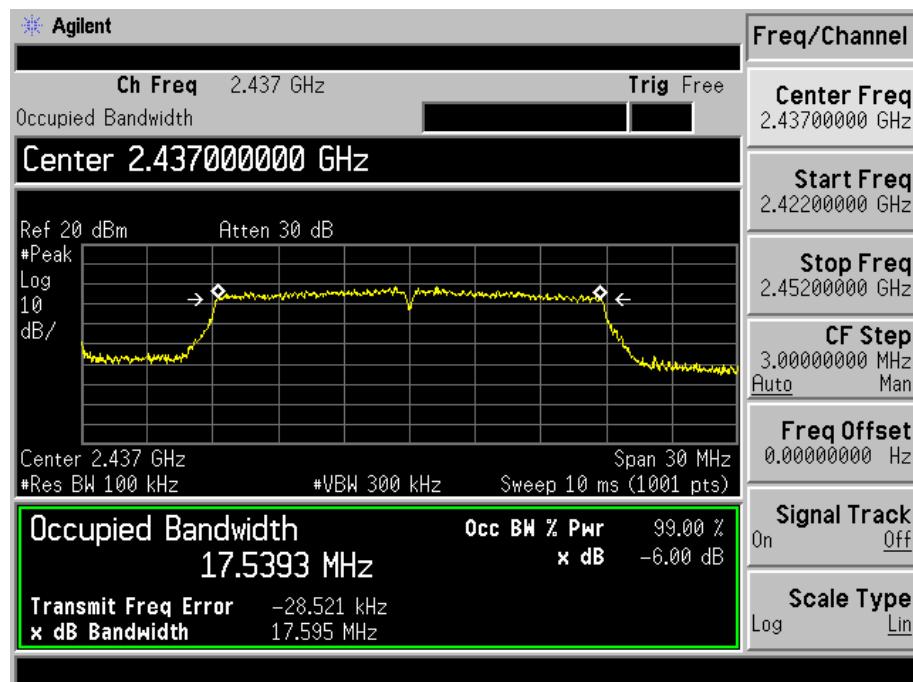


802.11n-HT20-High Channel

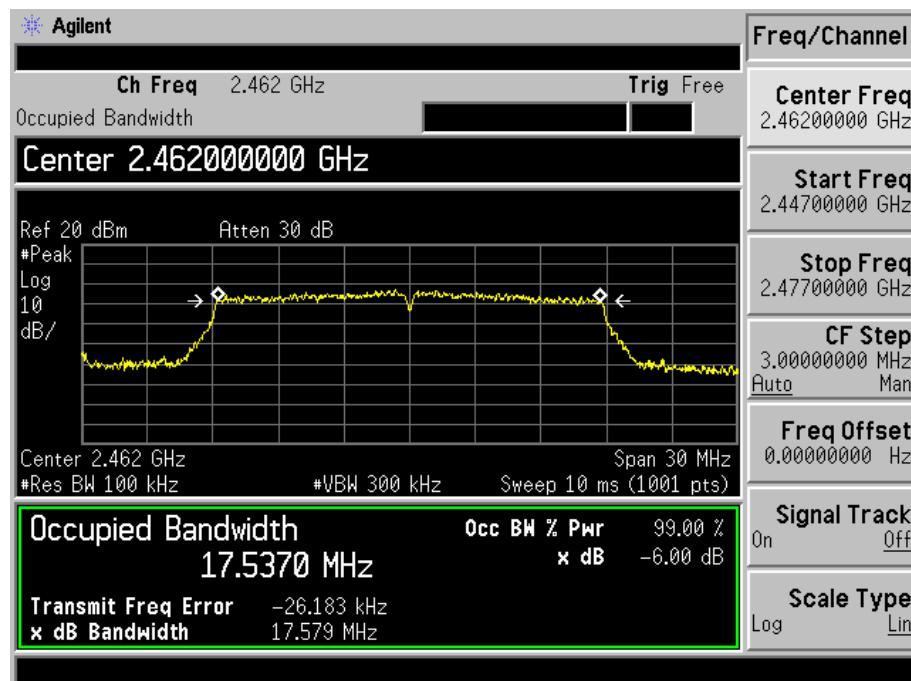


802.11n-HT40-Low Channel

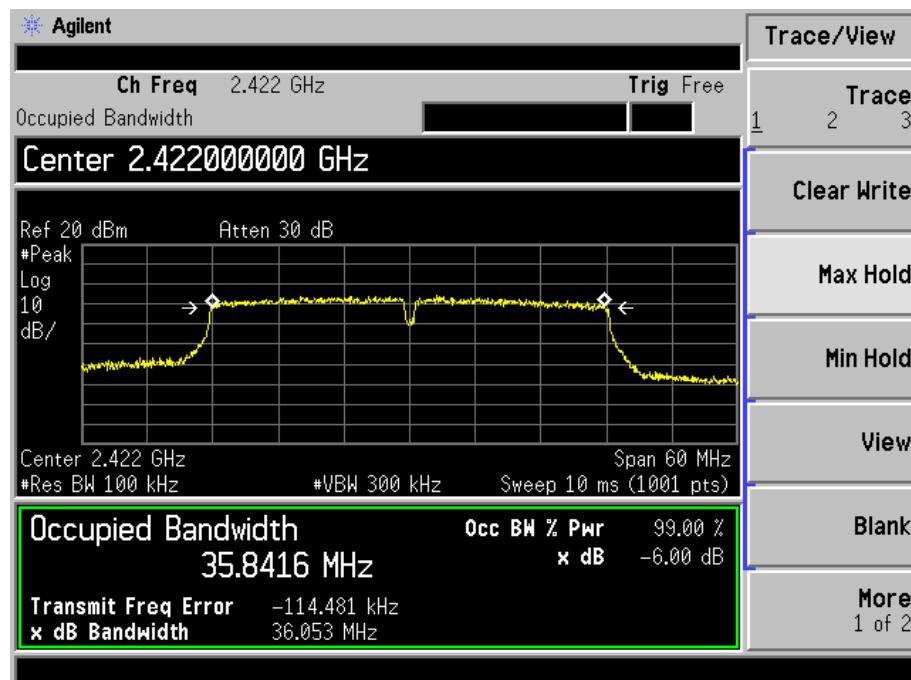

802.11n-HT40-Middle Channel

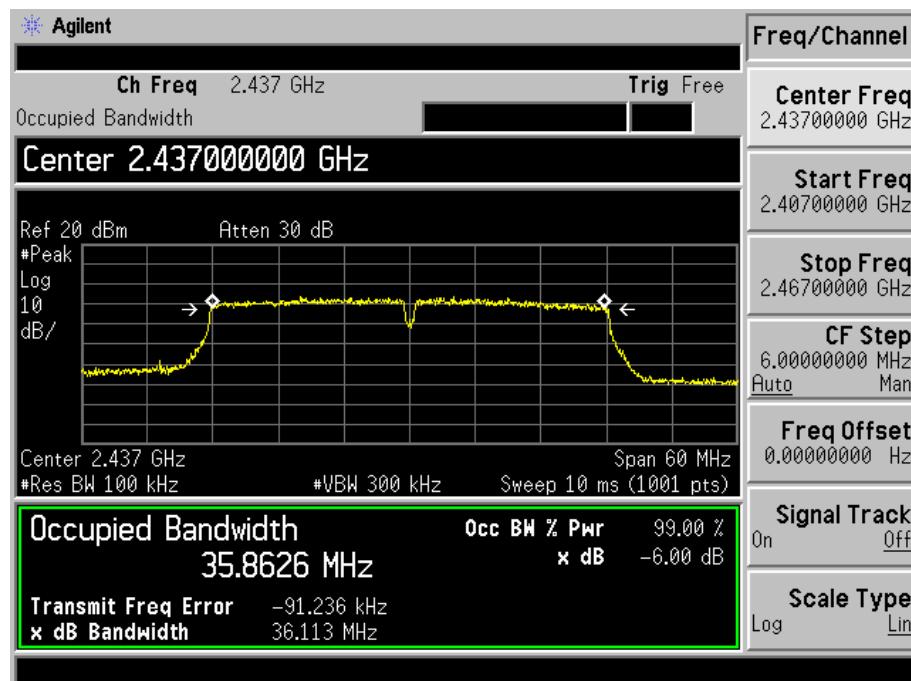

802.11n-HT40-High Channel

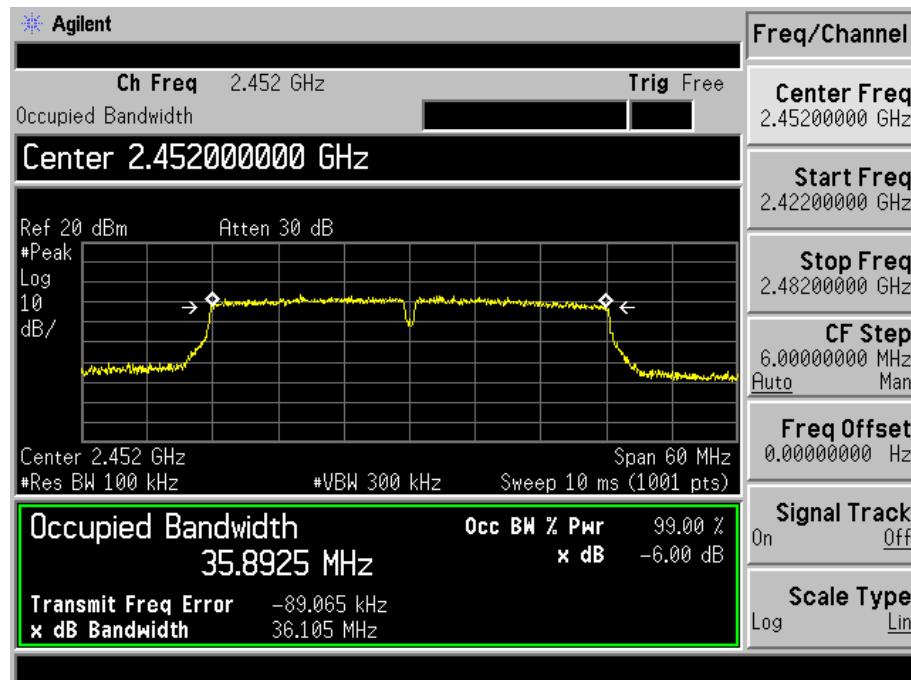

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2015-05-28	2016-05-27
Attenuator	ATTEN	ATS100-4-20	/	2015-05-28	2016-05-27

7.3 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 D01 V03r02, 9.2.2.2 (channel integration method) When this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98 \%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.4 Environmental Conditions


Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar

7.5 Summary of Test Results/Plots


Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	15.53	35.73	1000
	2437	15.19	33.04	1000
	2462	14.48	28.05	1000
802.11g_54Mbps	2412	13.95	24.83	1000
	2437	13.62	23.01	1000
	2462	12.49	17.74	1000
802.11n HT20_MCS7	2412	12.18	16.52	1000
	2437	11.59	14.42	1000
	2462	10.66	11.64	1000
802.11n HT40_MCS7	2422	11.50	14.13	1000
	2437	10.95	12.45	1000
	2452	10.69	11.72	1000

Please refer to the following test plots:


802.11b-11Mbps-Low Channel

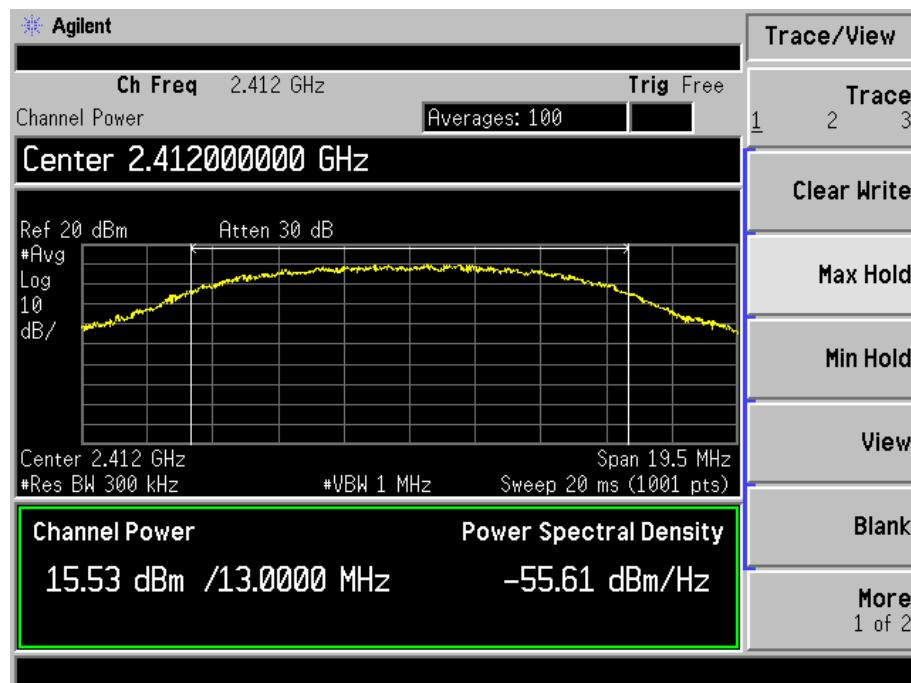


802.11b -11Mbps-Middle Channel

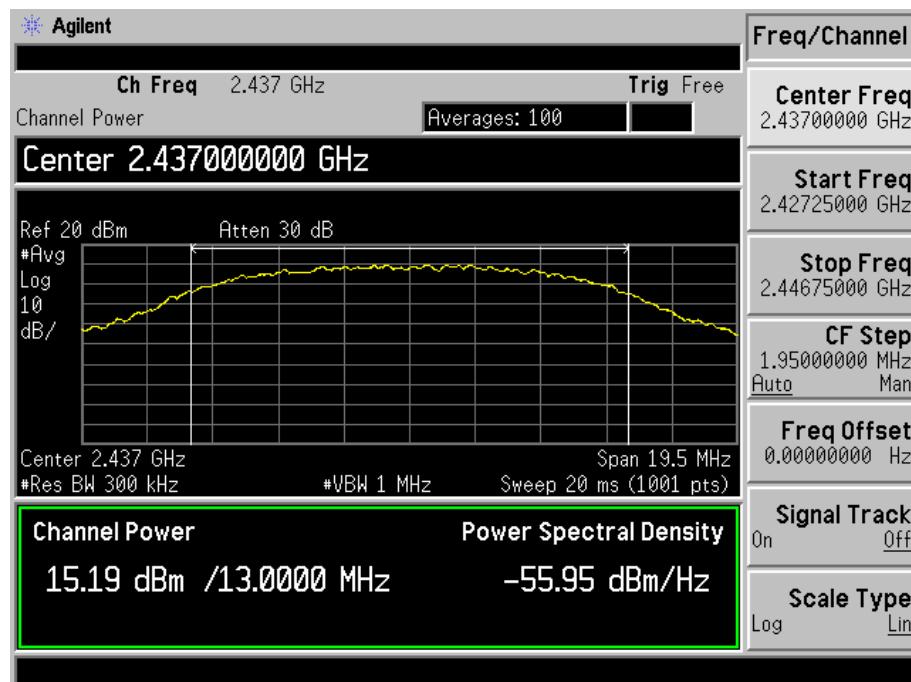


802.11b -11Mbps-High Channel

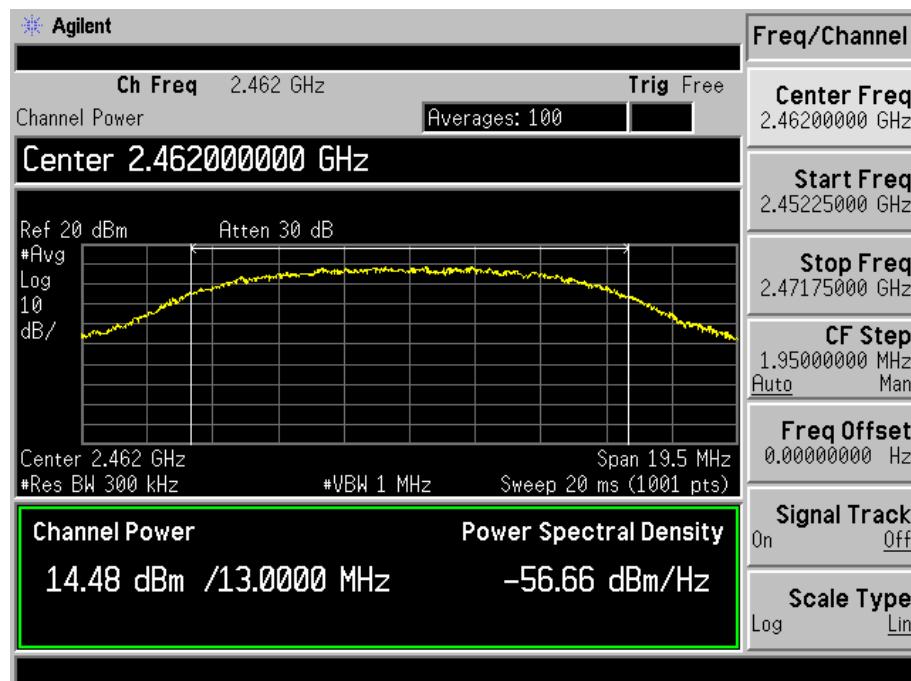


802.11g-54Mbps-Low Channel

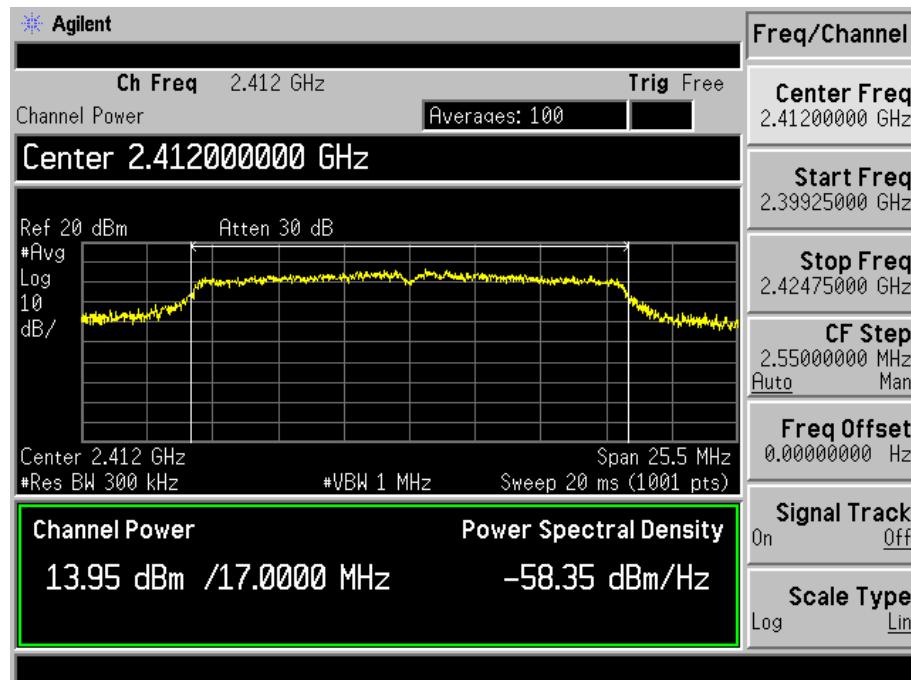


802.11g-54Mbps-Middle Channel

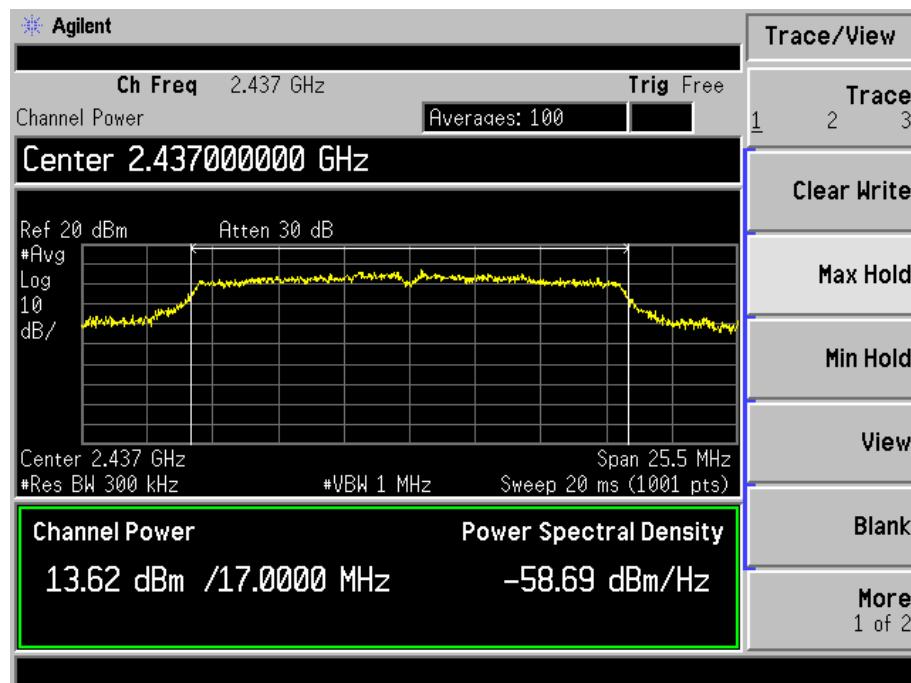


802.11g-54Mbps-High Channel

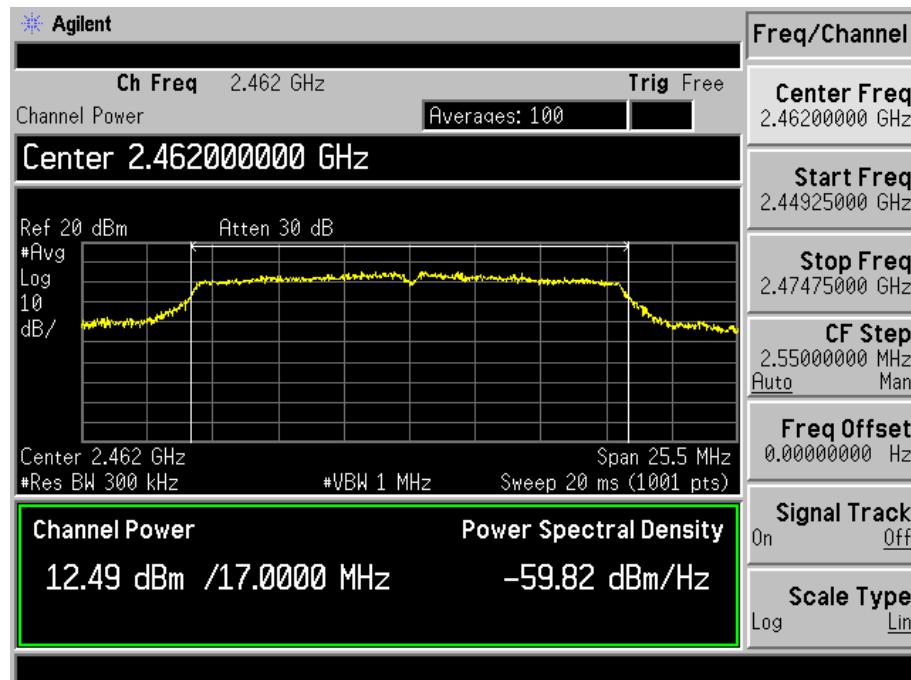


802.11n-HT20-MCS7-Low Channel

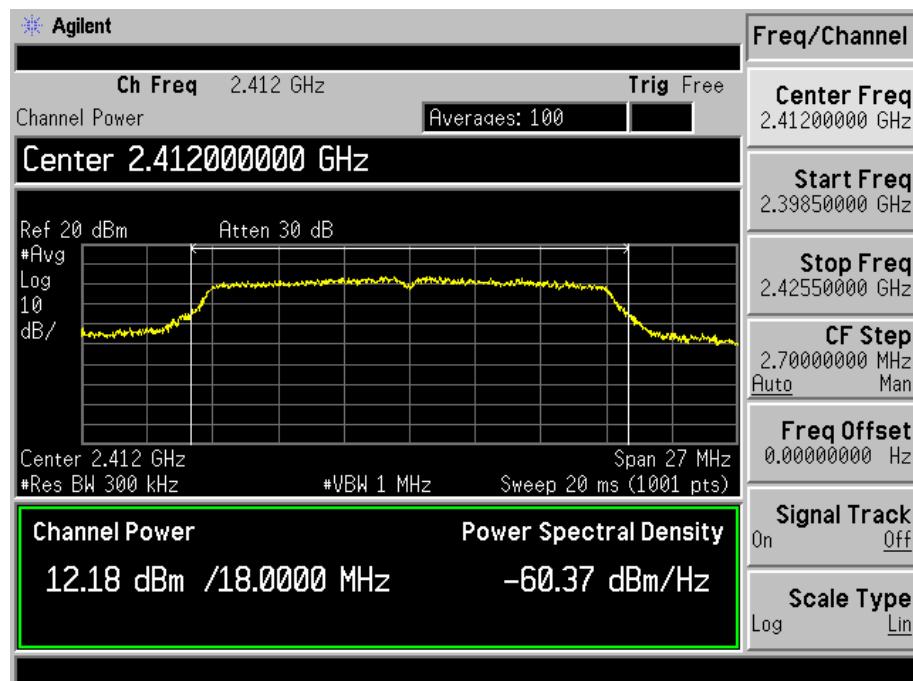


802.11n-HT20-MCS7-Middle Channel

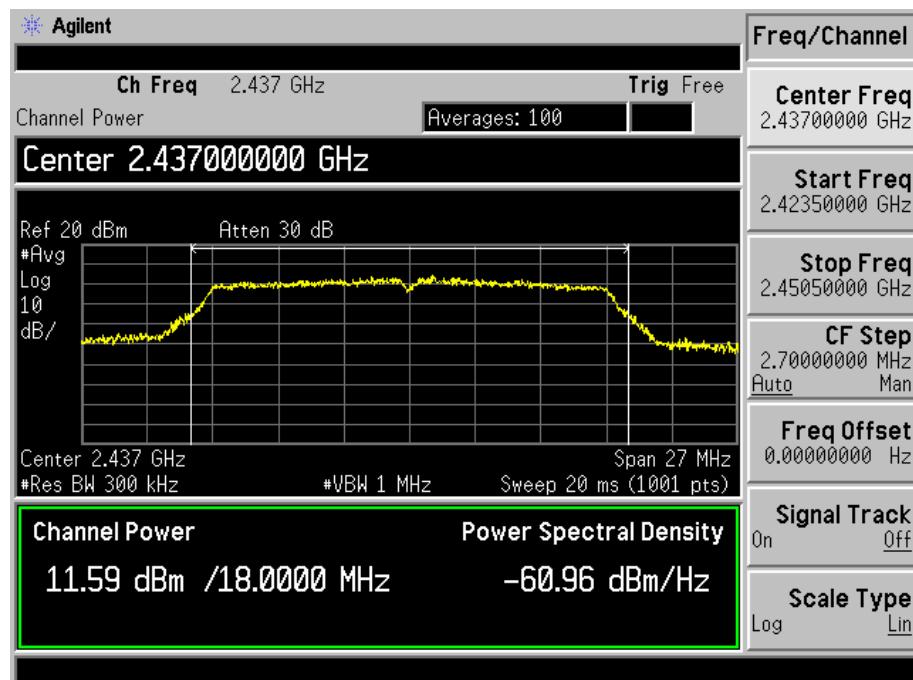


802.11n-HT20-MCS7-High Channel

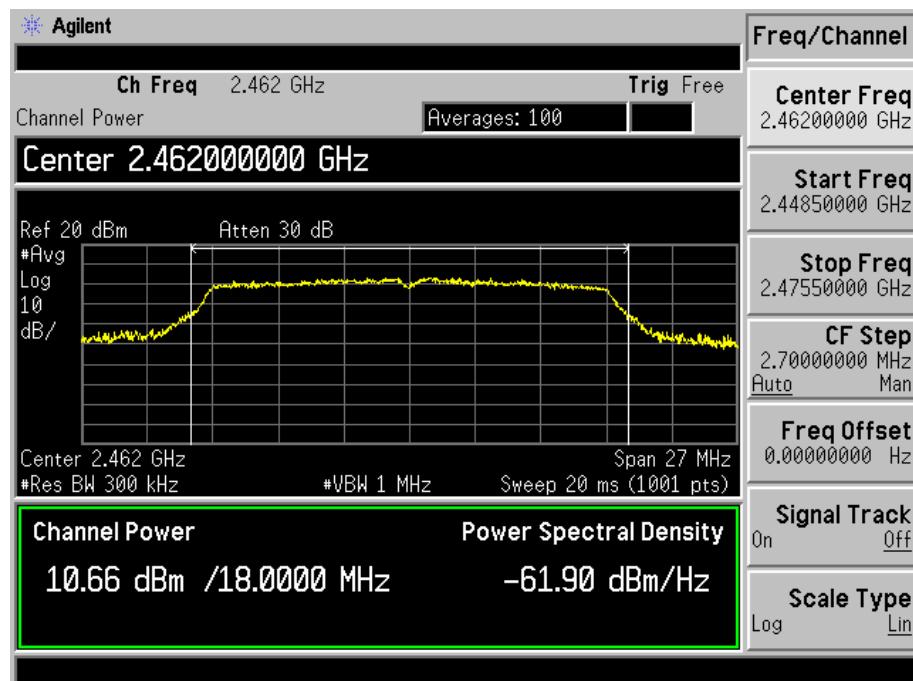


802.11n-HT40-MCS7-Low Channel

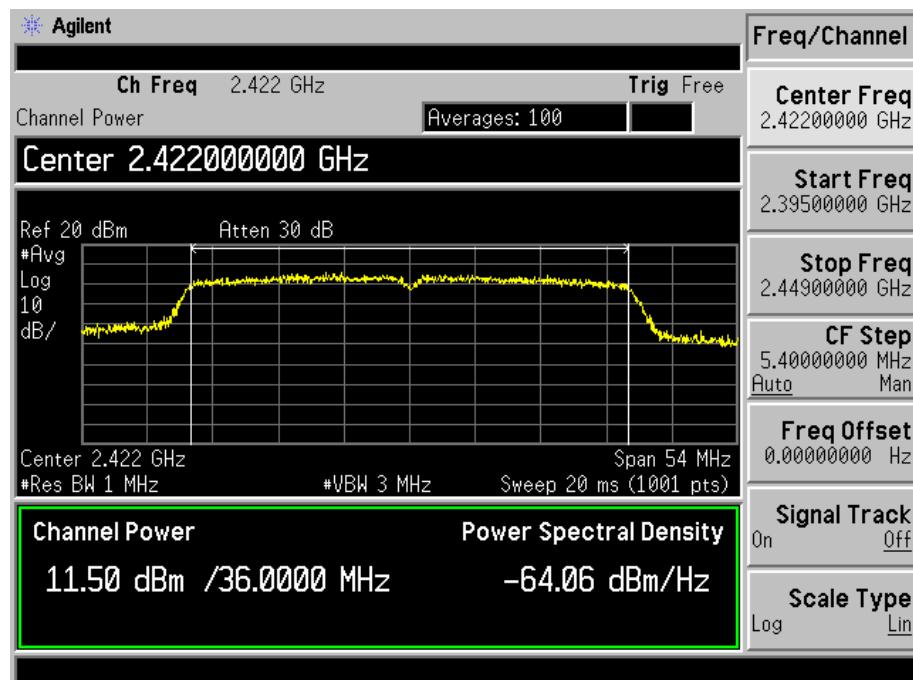

802.11n-HT40-MCS7-Middle Channel

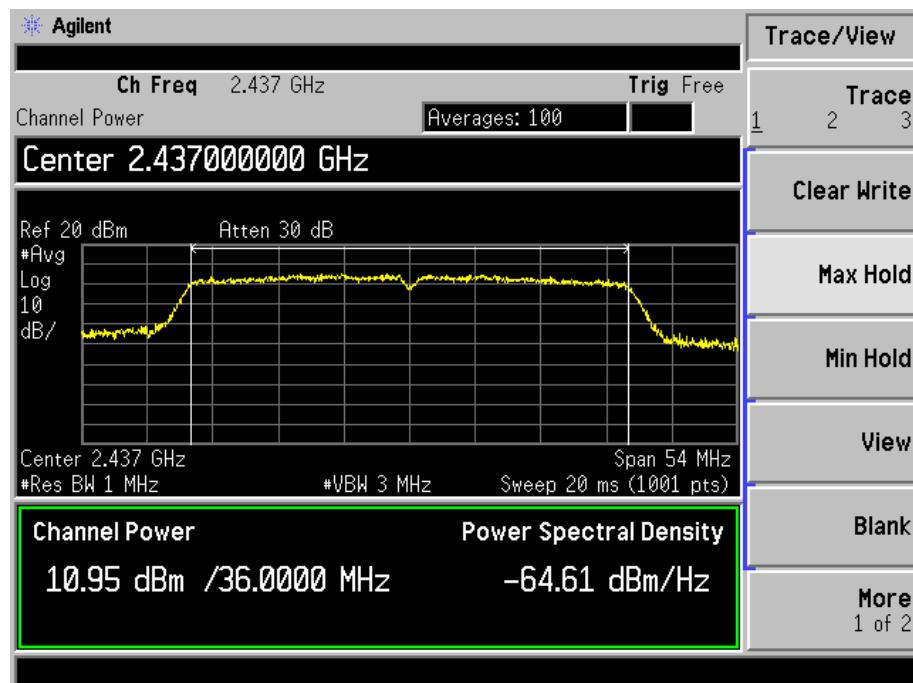

802.11n-HT40-MCS7-High Channel

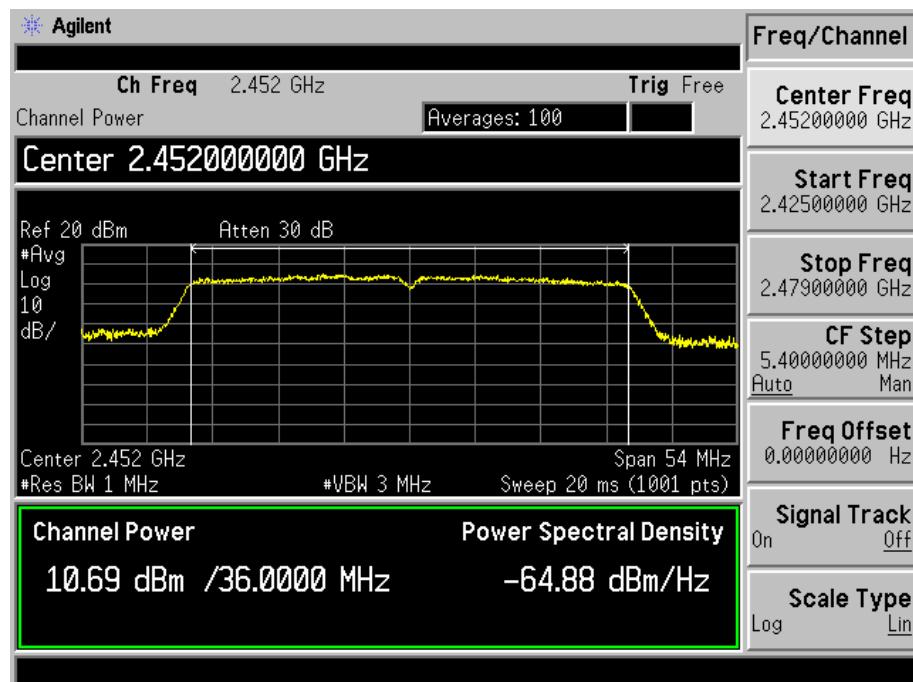

8. Field Strength of Spurious Emissions

8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.3 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2015-05-28	2016-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2015-05-28	2016-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2015-05-28	2016-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2015-05-28	2016-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2015-05-24	2016-05-23
Horn Antenna	ETS	3117	00086197	2015-05-24	2016-05-23
Horn Antenna	ETS	3116B	00088203	2015-05-24	2016-05-23
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2015-05-24	2016-05-23

8.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

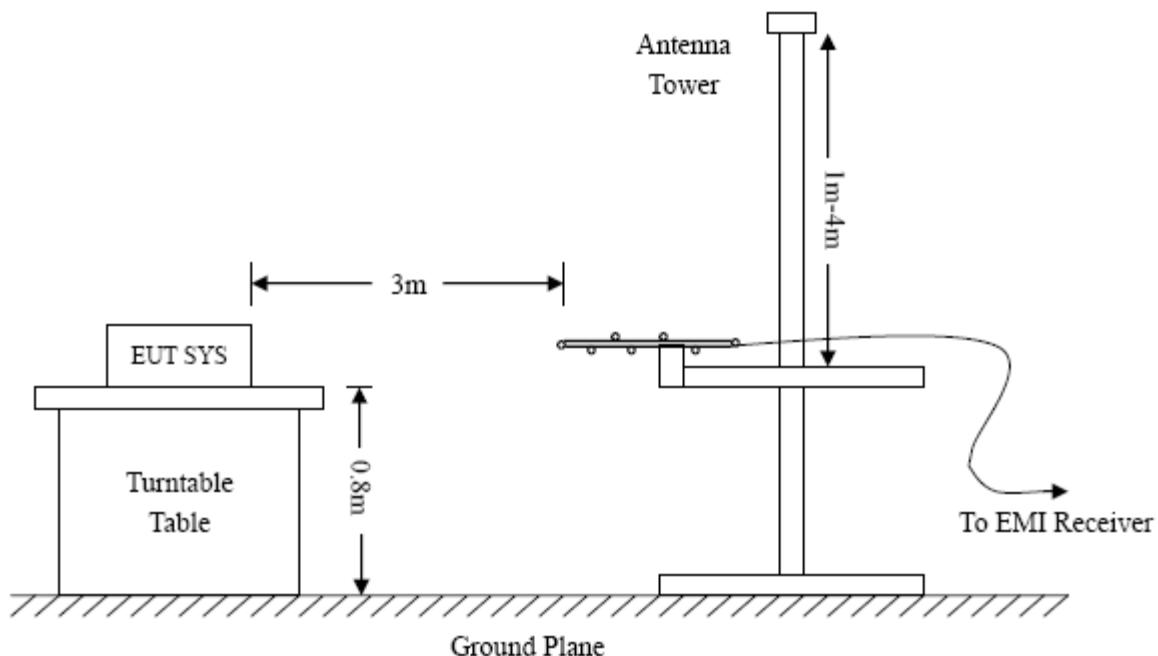

Frequency :9kHz-30MHz
RBW=10KHz,
VBW =30KHz
Sweep time= Auto
Trace = max hold
Detector function = peak

Frequency :30MHz-1GHz
RBW=120KHz,
VBW=300KHz
Sweep time= Auto
Trace = max hold
Detector function = peak, QP

Frequency :Above 1GHz
RBW=1MHz,
VBW=3MHz(Peak), 10Hz(AV)
Sweep time= Auto
Trace = max hold
Detector function = peak, AV

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

8.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

*Note: this EUT was tested in 3 orthogonal positions, the **antenna horizontally** is worst case position and the data was reported.*

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: Mobile Phone

Tested Model: Q65

Operating Condition: 802.11b Transmitting Low Channel-2412MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

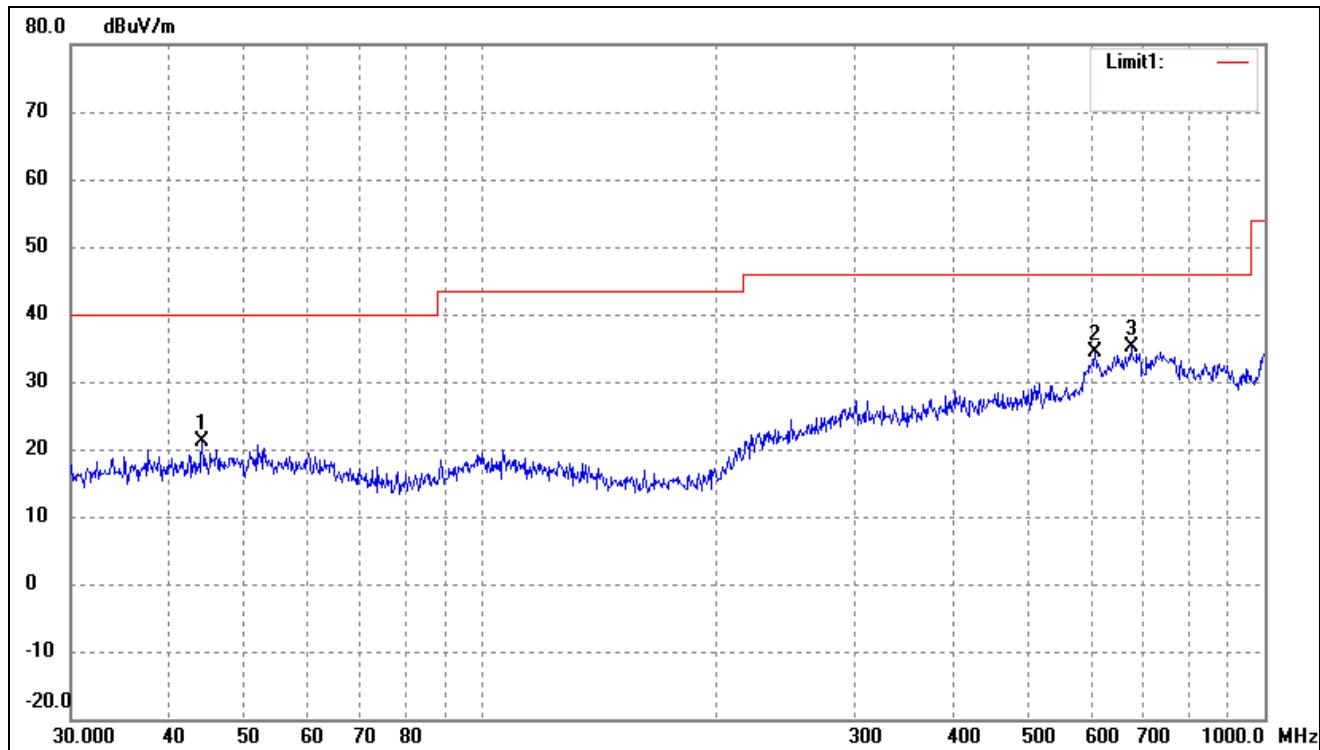

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	44.1202	15.99	5.26	21.25	40.00	-18.75	105	100	QP
2	607.7867	15.57	18.77	34.34	46.00	-11.66	160	100	QP
3	675.2080	16.07	18.99	35.06	46.00	-10.94	180	100	QP

Test Specification: Vertical

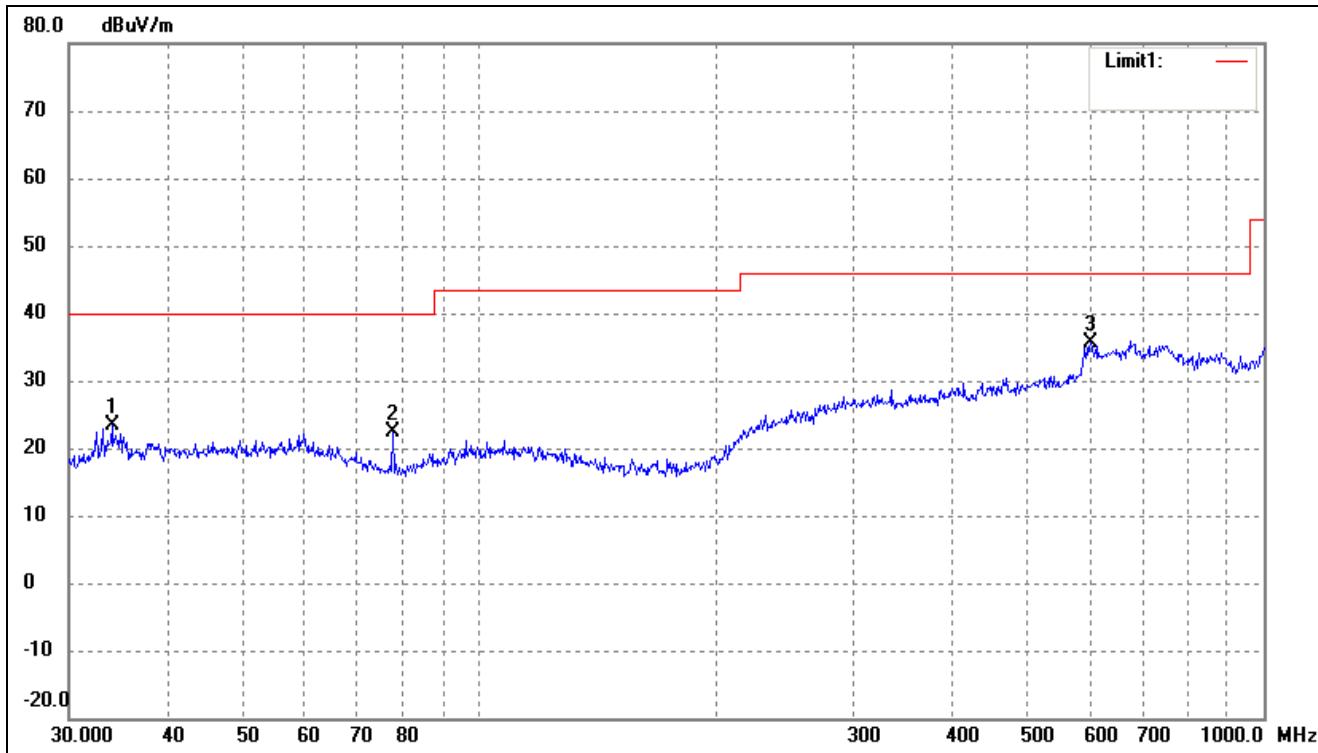


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	34.0365	19.05	4.25	23.30	40.00	-16.70	140	100	QP
2	77.5928	19.99	2.29	22.28	40.00	-17.72	250	100	QP
3	601.4265	16.32	19.22	35.54	46.00	-10.46	120	100	QP

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

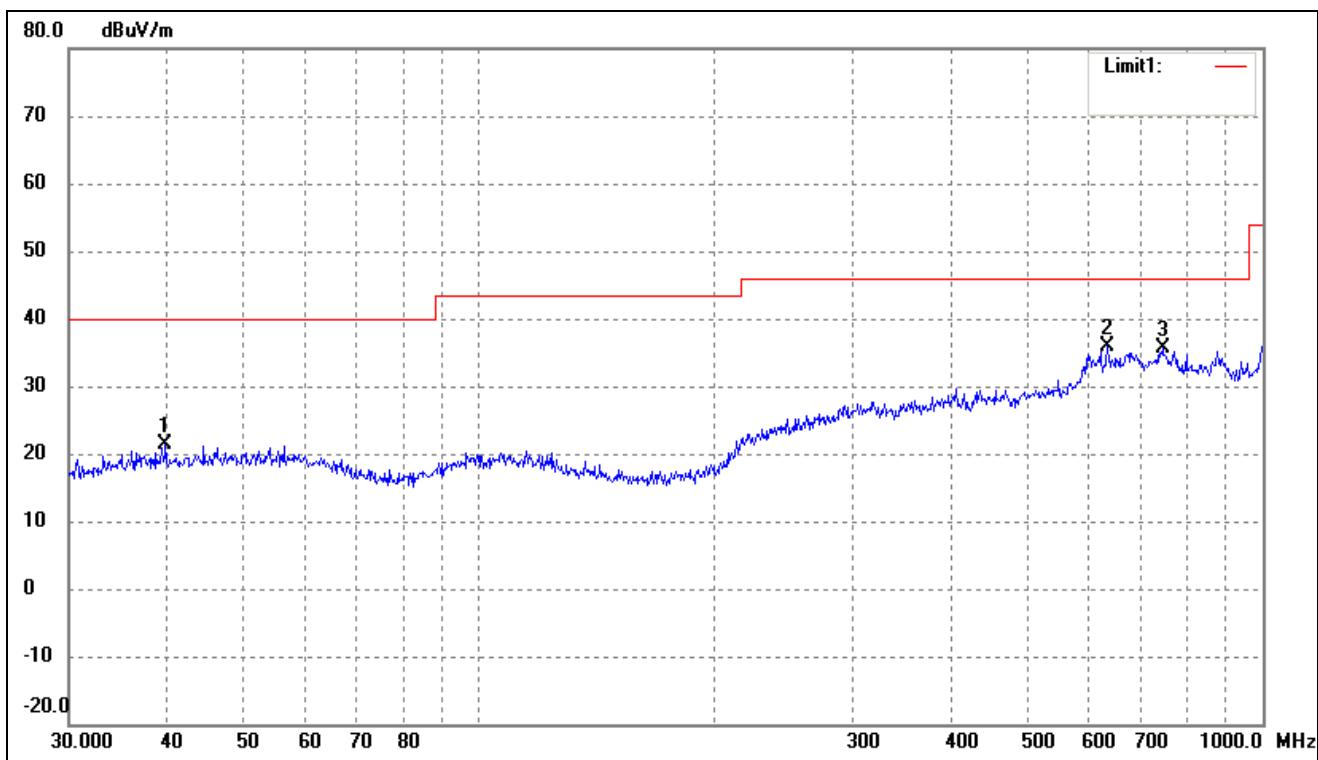

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	39.8542	16.17	5.23	21.40	40.00	-18.60	145	100	QP
2	633.9073	17.56	18.41	35.97	46.00	-10.03	120	100	QP
3	744.8661	16.35	19.33	35.68	46.00	-10.32	108	100	QP

Test Specification: Vertical

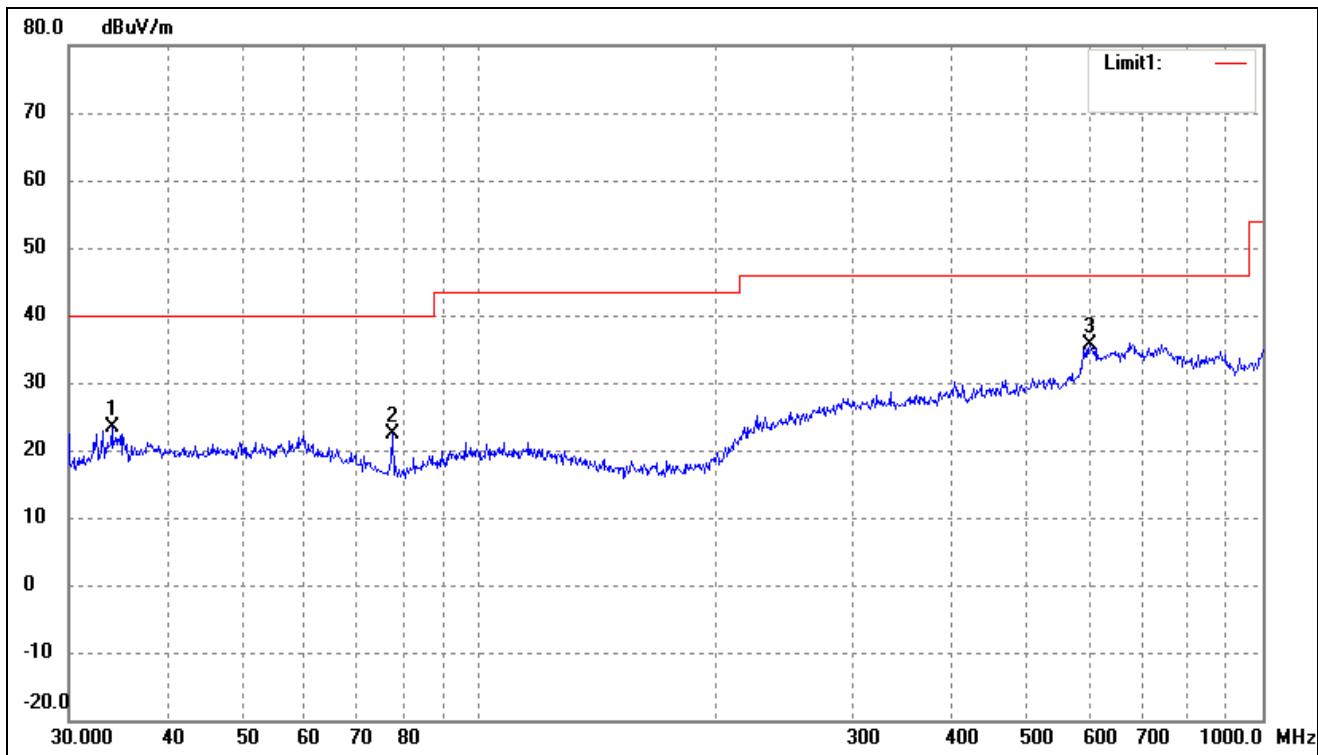


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	34.0365	19.05	4.25	23.30	40.00	-16.70	120	100	QP
2	77.5928	19.99	2.29	22.28	40.00	-17.72	113	100	QP
3	601.4265	16.32	19.22	35.54	46.00	-10.46	157	100	QP

Operating Condition: 802.11b Transmitting High Channel-2462MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

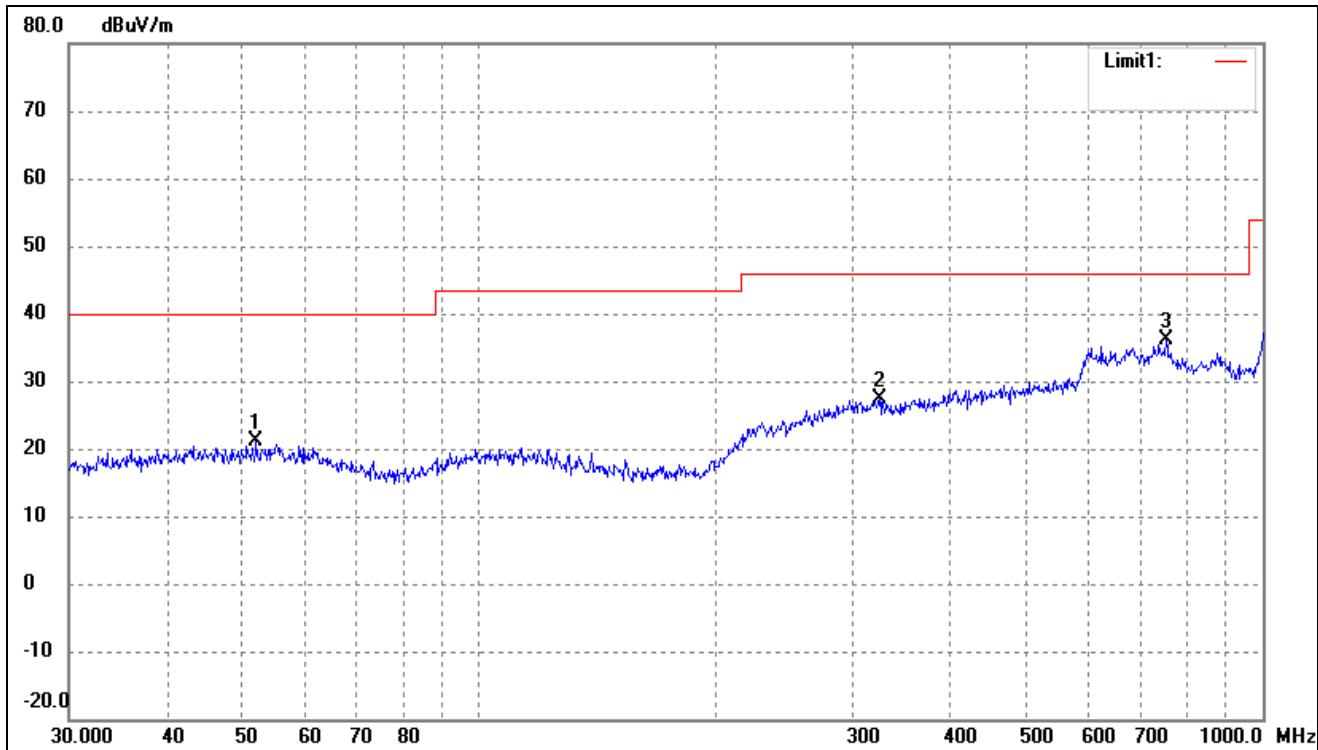


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	52.0251	15.79	5.29	21.08	40.00	-18.92	120	100	QP
2	324.4561	15.26	12.16	27.42	46.00	-18.58	250	100	QP
3	752.7432	17.22	18.98	36.20	46.00	-9.80	360	100	QP

Test Specification: Vertical

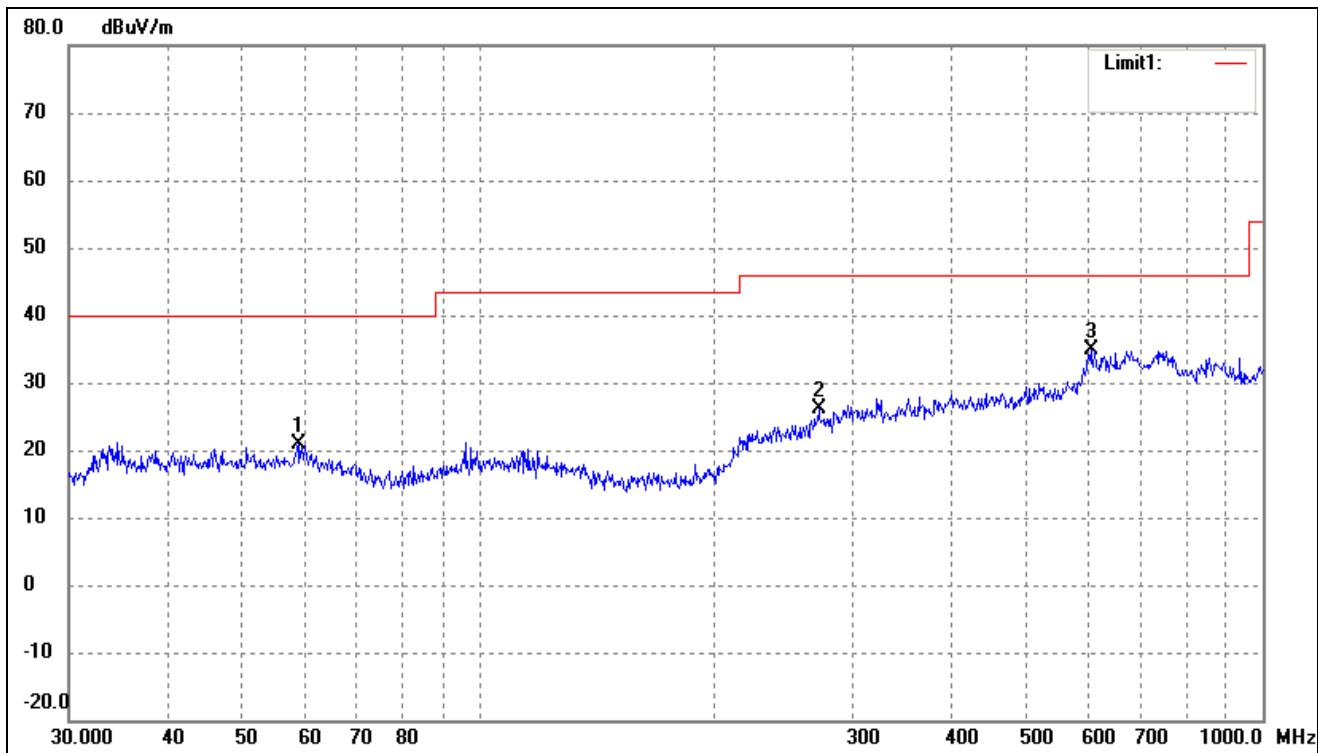


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	58.8185	15.53	5.37	20.90	40.00	-19.10	360	100	QP
2	271.3246	15.29	10.81	26.10	46.00	-19.90	200	100	QP
3	603.5392	15.93	19.06	34.99	46.00	-11.01	120	100	QP

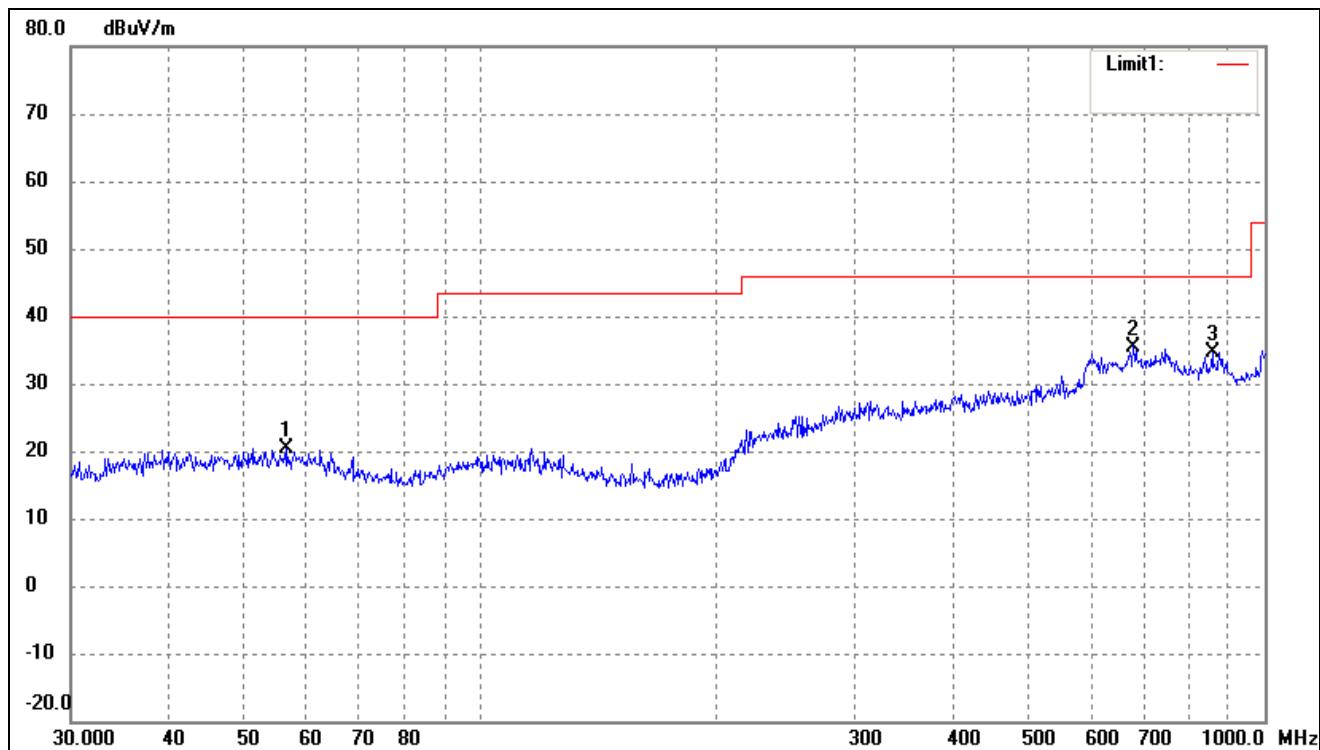Plot of Radiated Emissions Test Data (30MHz to 1GHz)*EUT:* Mobile Phone*Tested Model:* Q65*Operating Condition:* 802.11g Transmitting Low Channel-2412MHz*Comment:* Battery: DC3.7V*Test Specification:* Horizontal

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	56.5929	14.94	5.34	20.28	40.00	-19.72	170	100	QP
2	679.9600	16.24	19.26	35.50	46.00	-10.50	20	100	QP
3	857.0247	17.37	17.32	34.69	46.00	-11.31	320	100	QP


Test Specification: Vertical

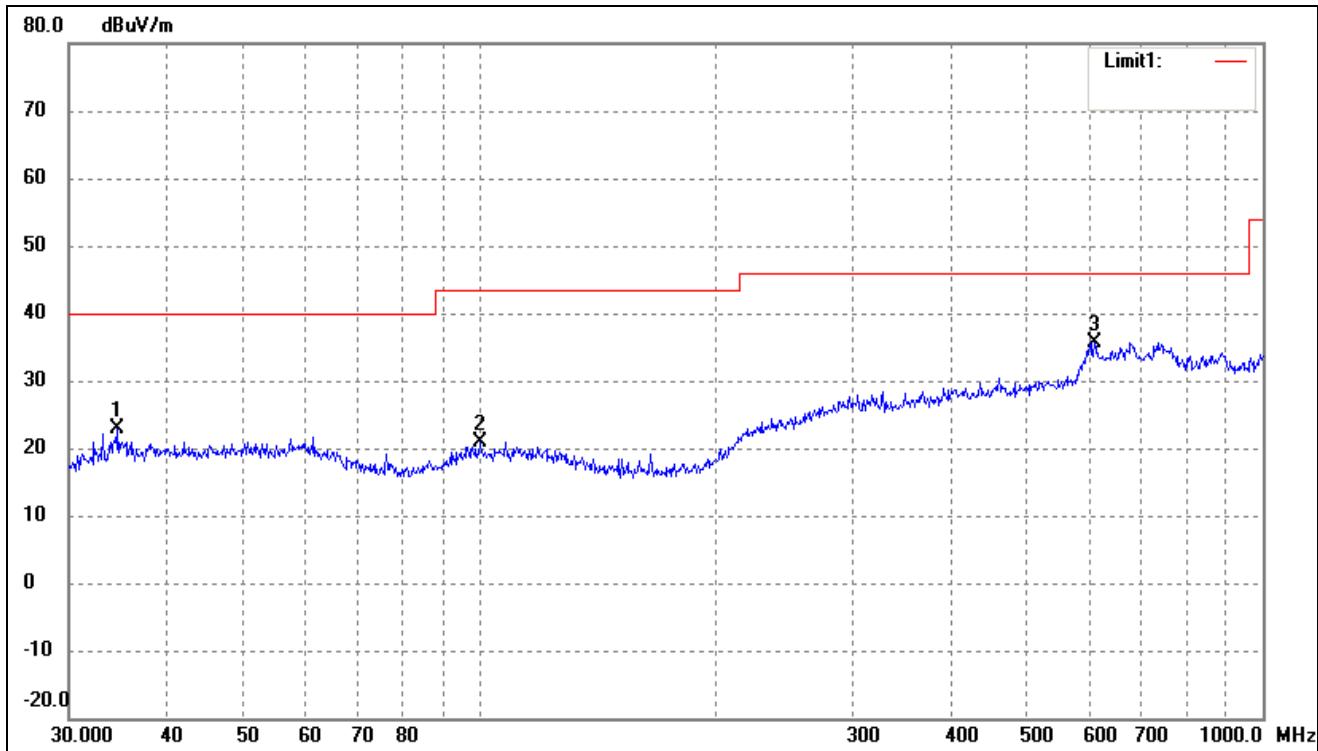

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	34.6385	18.57	4.34	22.91	40.00	-17.09	270	100	QP
2	100.2286	15.75	5.13	20.88	43.50	-22.62	190	100	QP
3	609.9217	17.12	18.63	35.75	46.00	-10.25	360	100	QP


Operating Condition: 802.11g Transmitting Middle Channel-2437MHz
Comment: Battery: DC3.7V

Test Specification: Horizontal

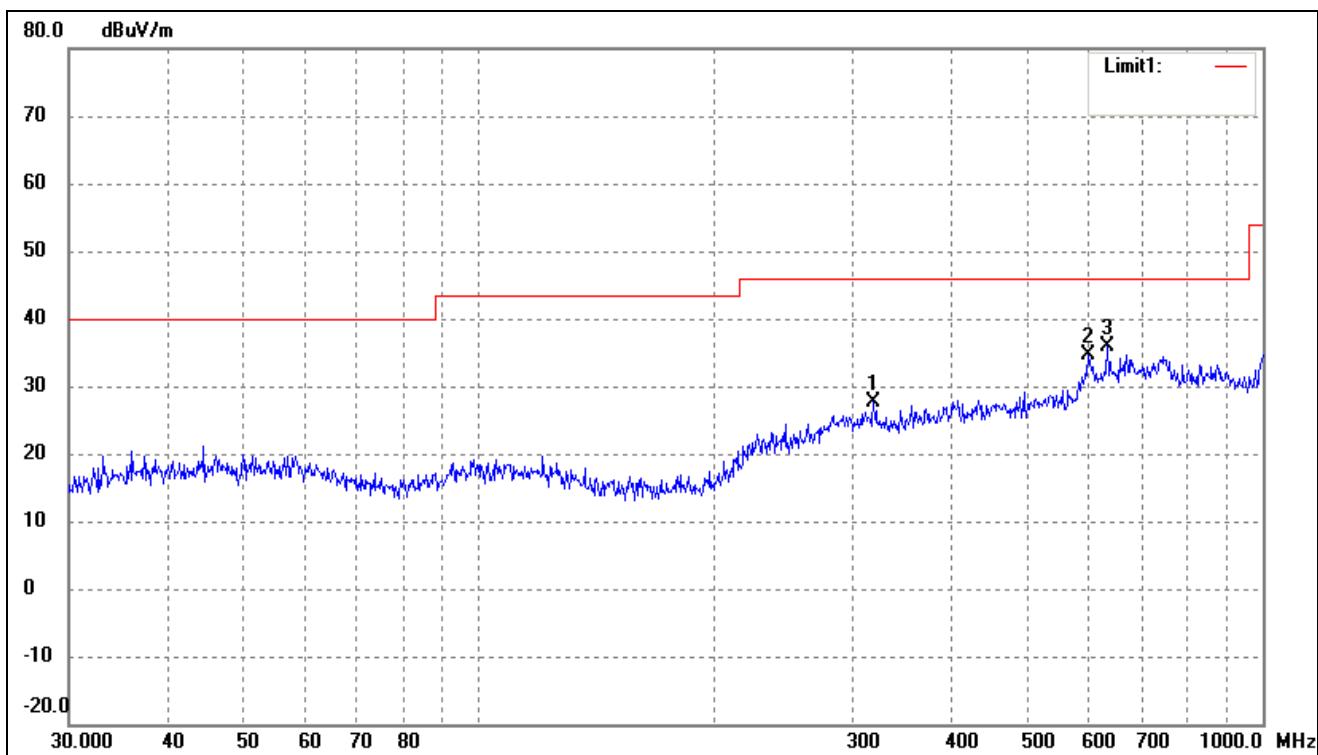

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	318.8170	15.36	12.28	27.64	46.00	-18.36	270	100	QP
2	599.3213	15.42	19.19	34.61	46.00	-11.39	160	100	QP
3	633.9073	17.56	18.41	35.97	46.00	-10.03	228	200	QP

Test Specification: Vertical

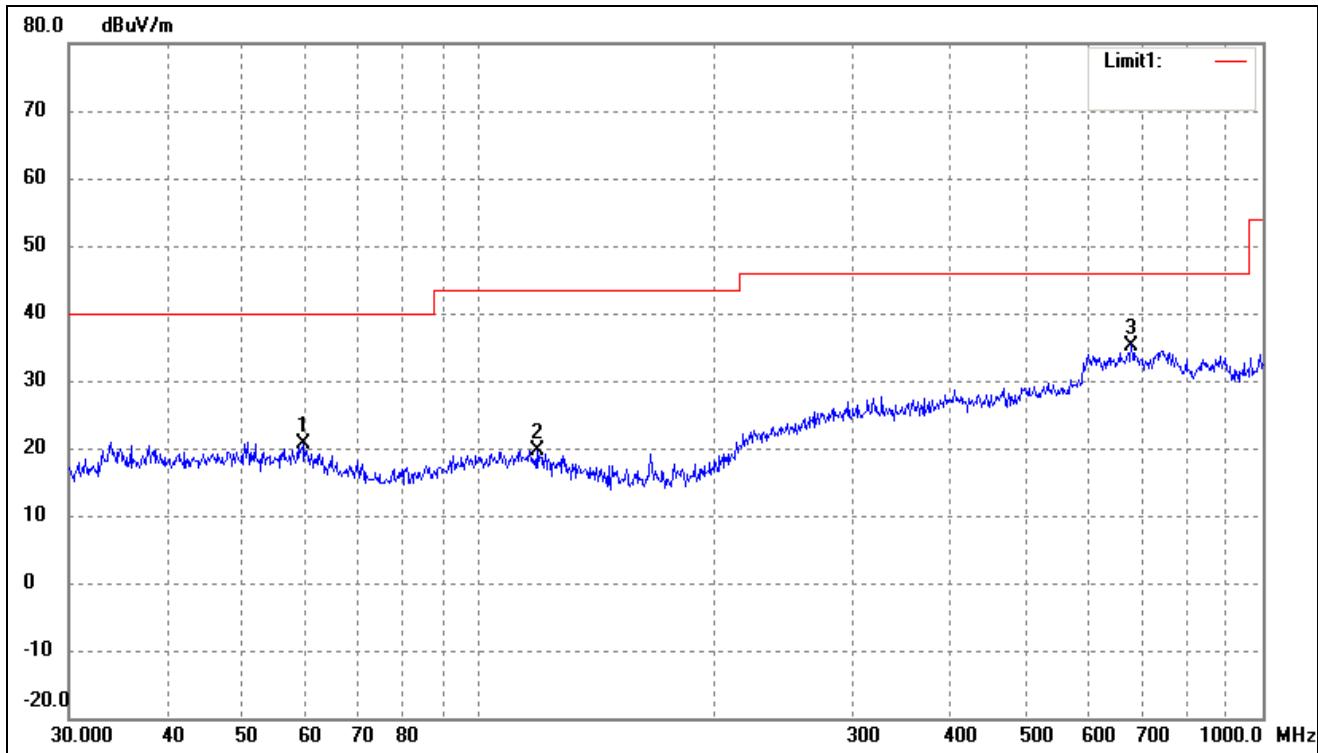


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	59.6493	15.24	5.38	20.62	40.00	-19.38	360	100	QP
2	118.6014	14.70	5.03	19.73	43.50	-23.77	120	100	QP
3	679.9600	15.99	19.26	35.25	46.00	-10.75	270	100	QP

Operating Condition: 802.11g Transmitting High Channel-2462MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

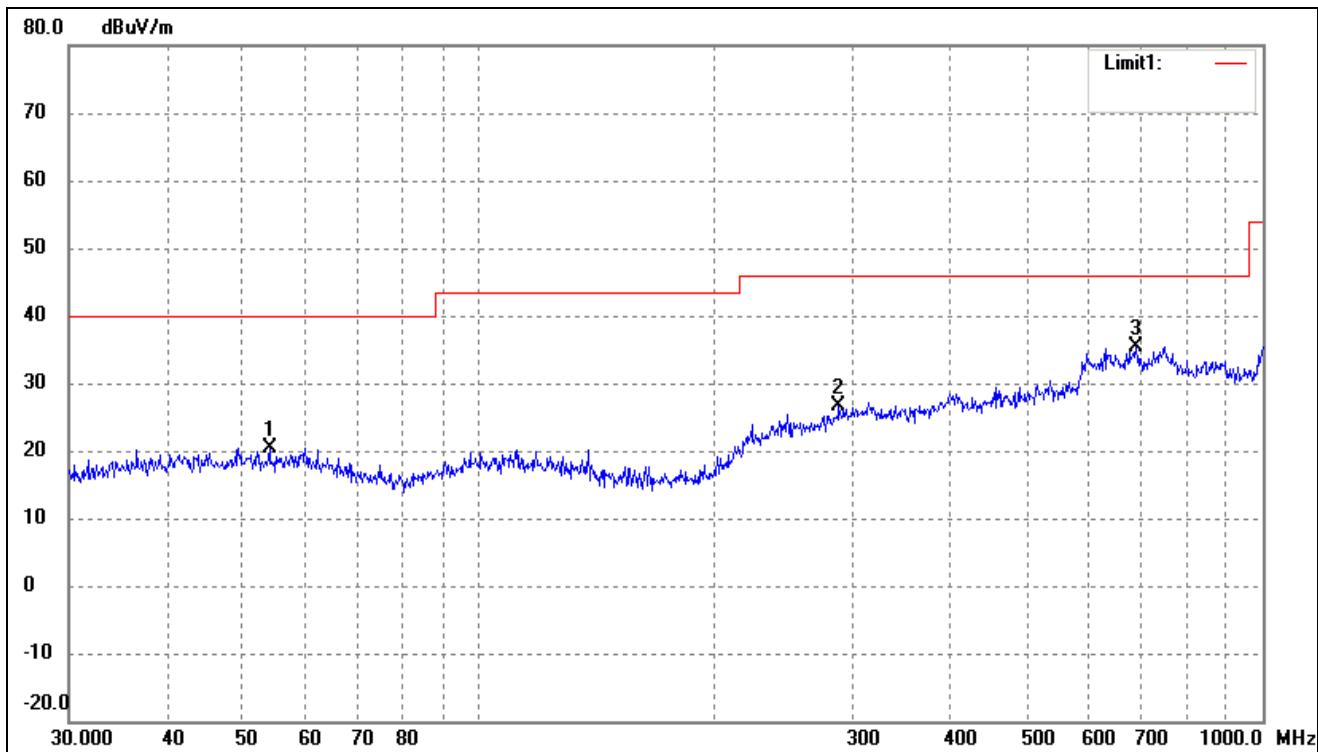

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	54.0711	15.14	5.31	20.45	40.00	-19.55	270	100	QP
2	287.9904	15.01	11.71	26.72	46.00	-19.28	150	100	QP
3	689.5644	16.88	18.55	35.43	46.00	-10.57	360	100	QP

Test Specification: Vertical

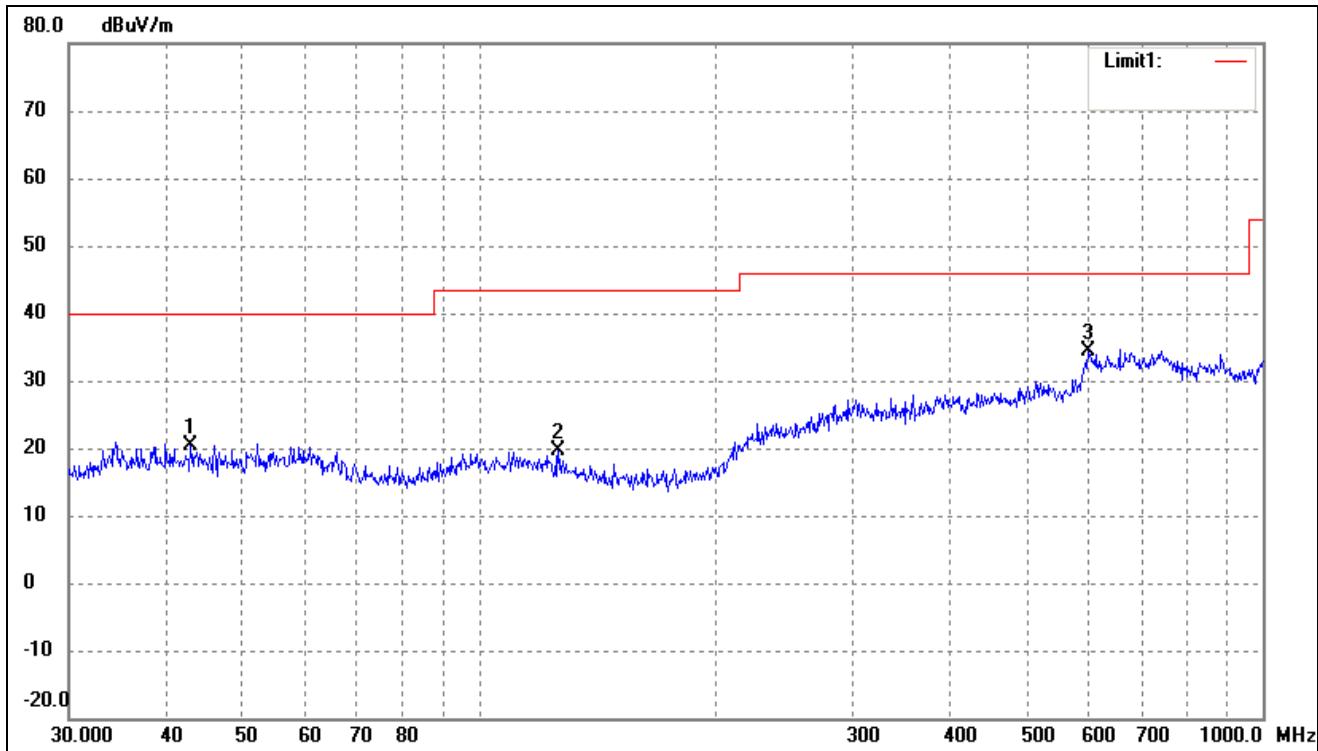

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	42.8998	15.16	5.25	20.41	40.00	-19.59	360	100	QP
2	126.3286	15.11	4.50	19.61	43.50	-23.89	180	100	QP
3	599.3212	15.08	19.19	34.27	46.00	-11.73	120	100	QP

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: Mobile Phone

Tested Model: Q65

Operating Condition: 802.11n-HT20 Transmitting Low Channel-2412MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

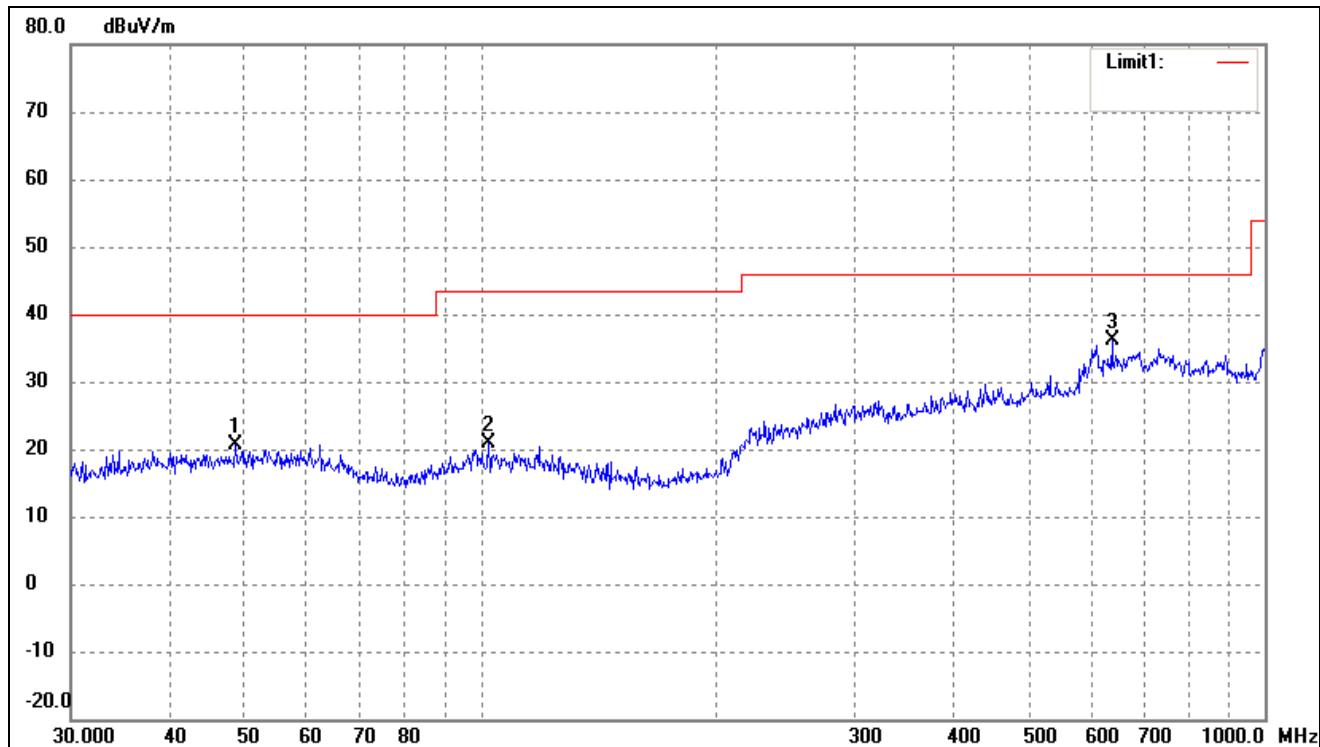

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	48.6719	15.33	5.26	20.59	40.00	-19.41	260	100	QP
2	102.3597	15.80	5.12	20.92	43.50	-22.58	120	200	QP
3	638.3686	17.57	18.56	36.13	46.00	-9.87	289	200	QP


Test Specification: Vertical

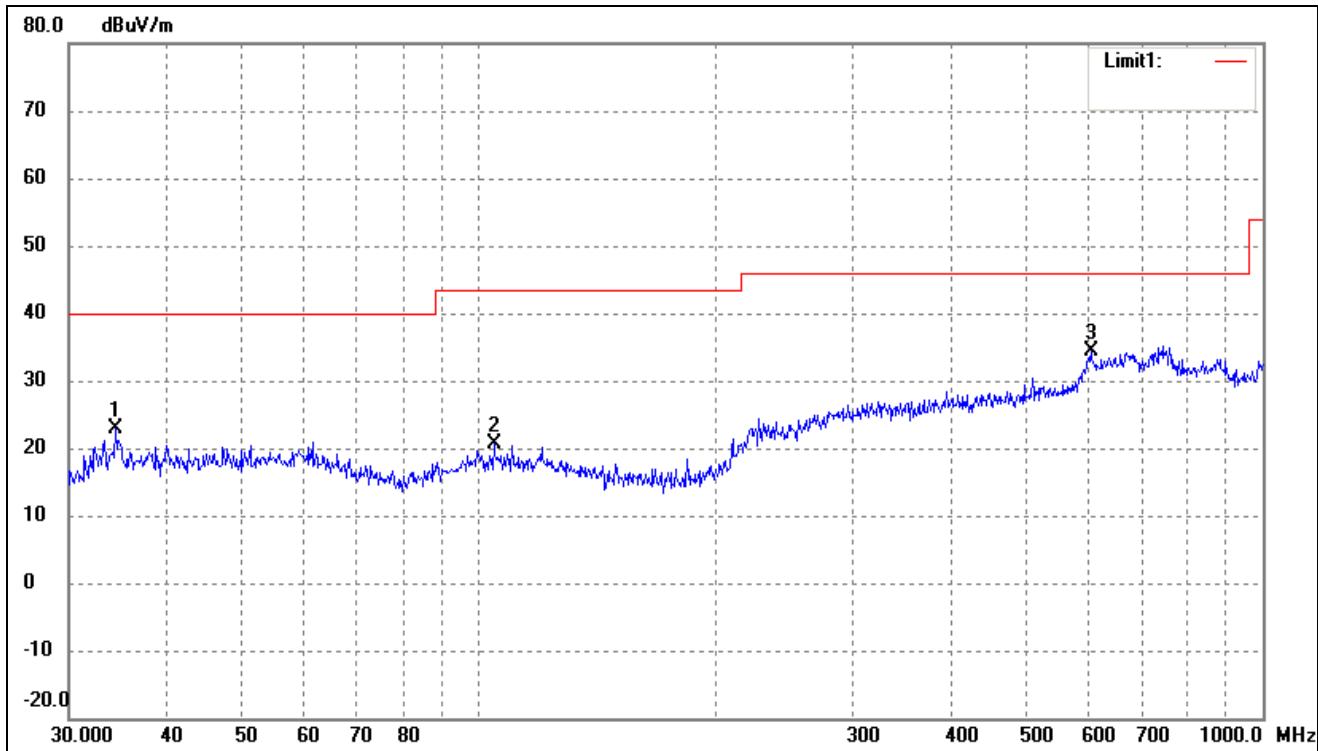

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	34.3964	18.51	4.30	22.81	40.00	-17.19	130	100	QP
2	104.5361	15.42	5.10	20.52	43.50	-22.98	120	100	QP
3	603.5392	15.21	19.06	34.27	46.00	-11.73	360	100	QP


Operating Condition: 802.11n-HT20 Transmitting Middle Channel-2437MHz
Comment: Battery: DC3.7V

Test Specification: Horizontal

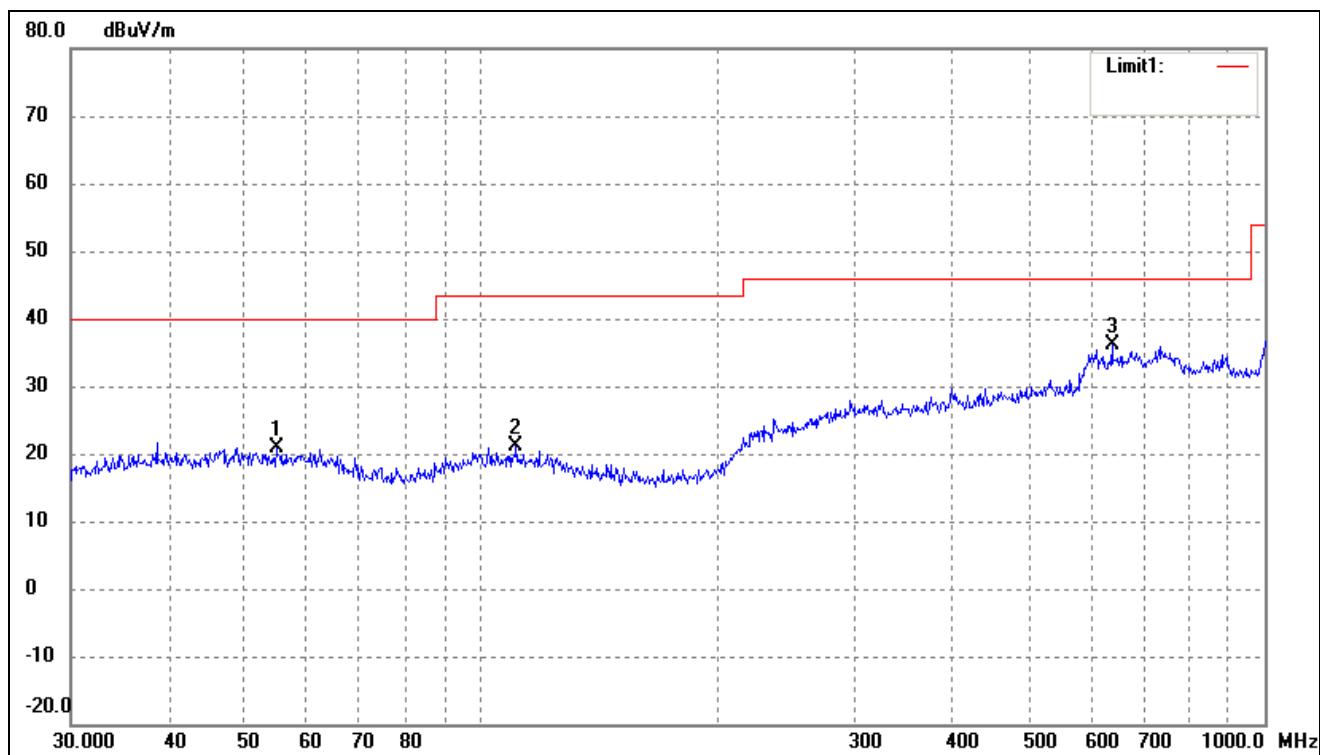

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	54.8348	15.66	5.32	20.98	40.00	-19.02	274	100	QP
2	110.9571	15.96	5.07	21.03	43.50	-22.47	130	100	QP
3	638.3686	17.57	18.56	36.13	46.00	-9.87	120	100	QP


Test Specification: Vertical

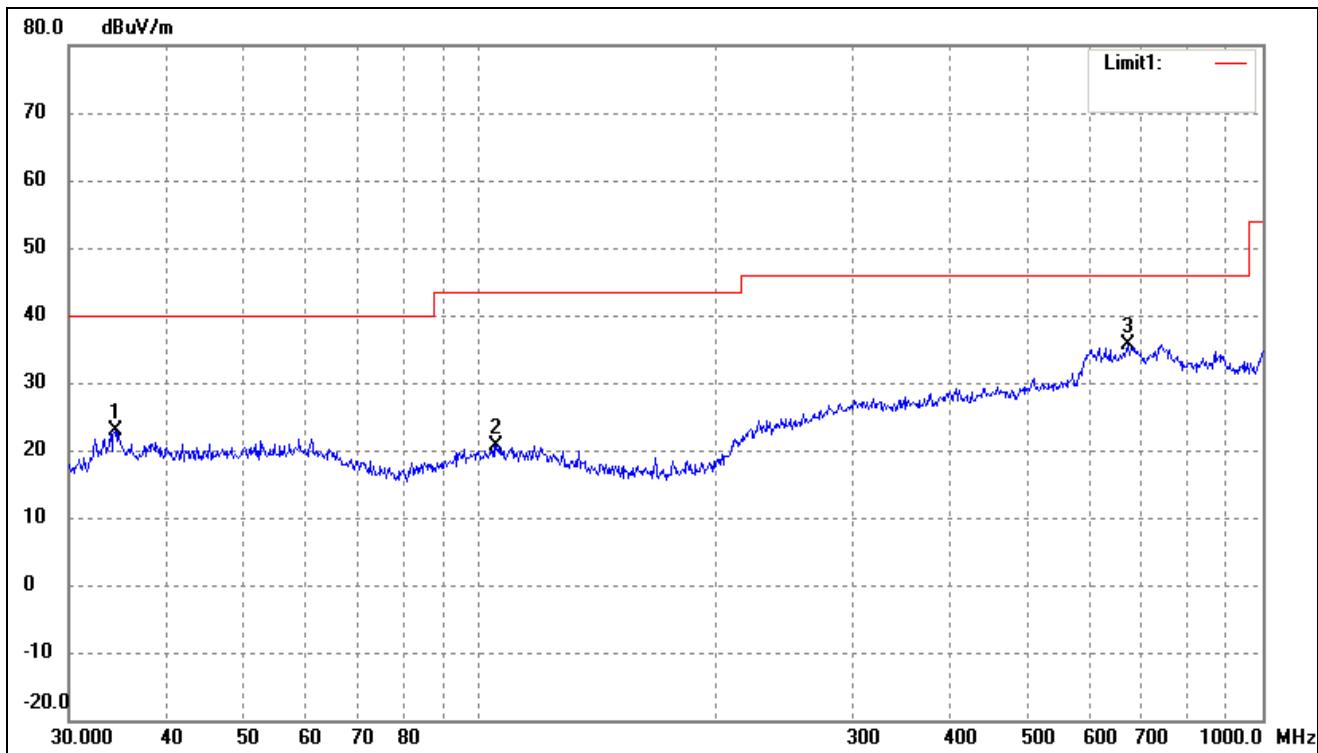

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	34.3964	18.59	4.30	22.89	40.00	-17.11	360	100	QP
2	105.2718	15.50	5.10	20.60	43.50	-22.90	110	100	QP
3	672.8444	16.73	18.87	35.60	46.00	-10.40	120	100	QP


Operating Condition: 802.11n-HT20 Transmitting High Channel-2462MHz
Comment: Battery: DC3.7V

Test Specification: Horizontal

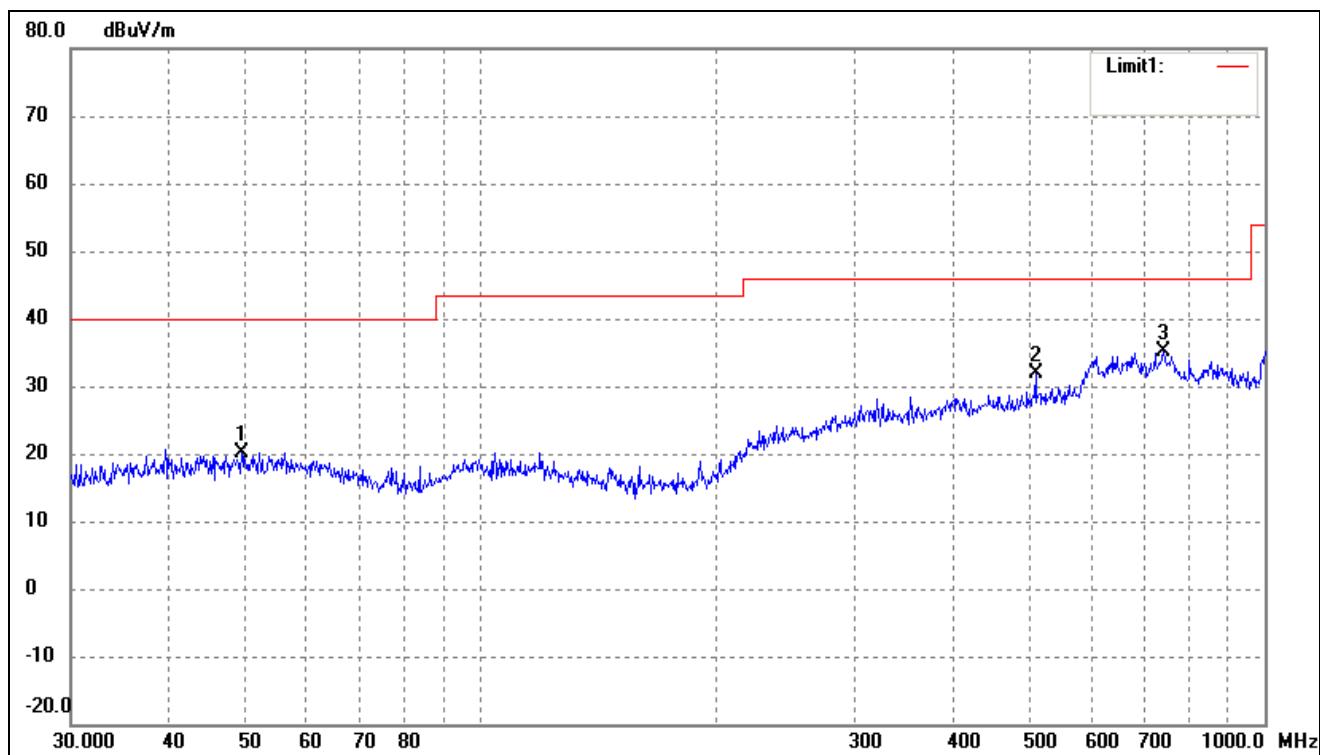

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	49.5328	14.99	5.26	20.25	40.00	-19.75	360	100	QP
2	510.0436	17.71	14.11	31.82	46.00	-14.18	138	100	QP
3	742.2587	15.56	19.45	35.01	46.00	-10.99	180	200	QP

Test Specification: Vertical

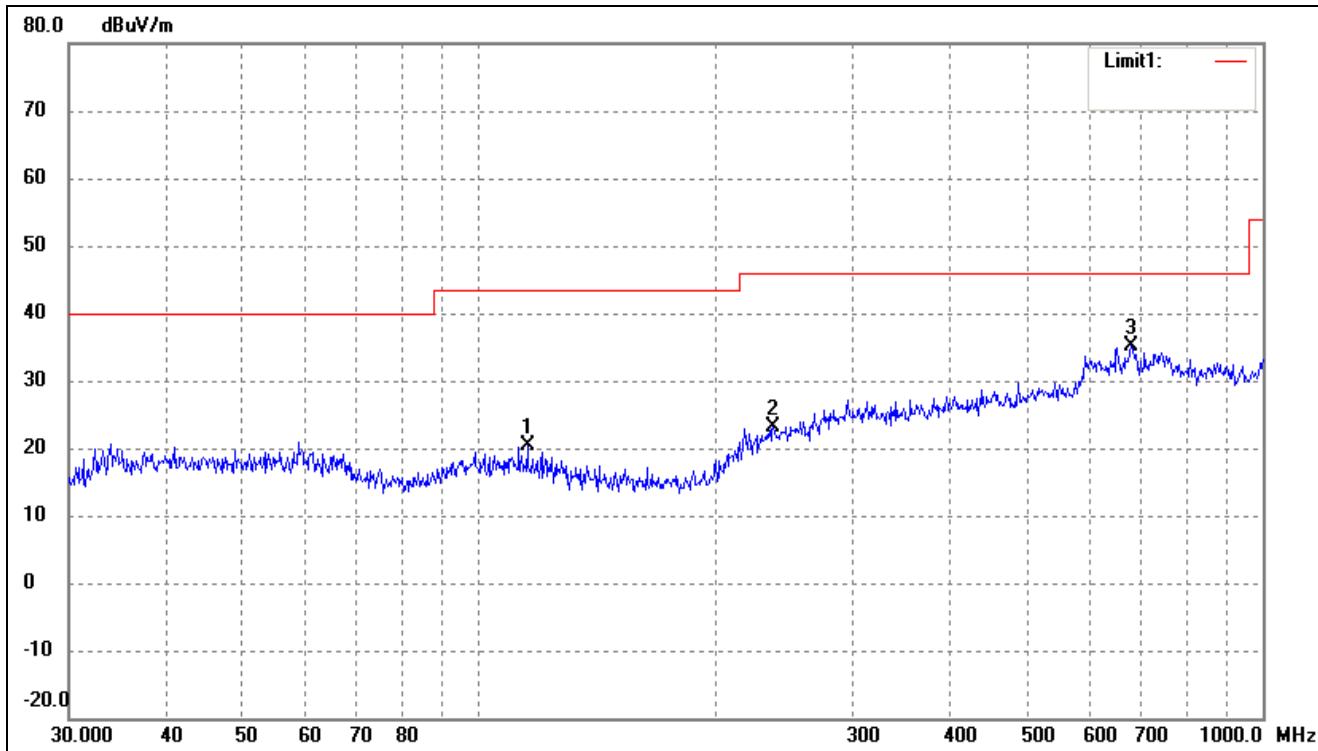

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	115.3205	15.22	5.05	20.27	43.50	-23.23	270	100	QP
2	237.4760	14.05	9.18	23.23	46.00	-22.77	120	100	QP
3	679.9600	15.76	19.26	35.02	46.00	-10.98	360	100	QP

Plot of Radiated Emissions Test Data (30MHz to 1GHz)


EUT: Mobile Phone

Tested Model: Q65

Operating Condition: 802.11n-HT40 Transmitting Low Channel-2422MHz


Comment: Battery: DC3.7V

Test Specification: Horizontal

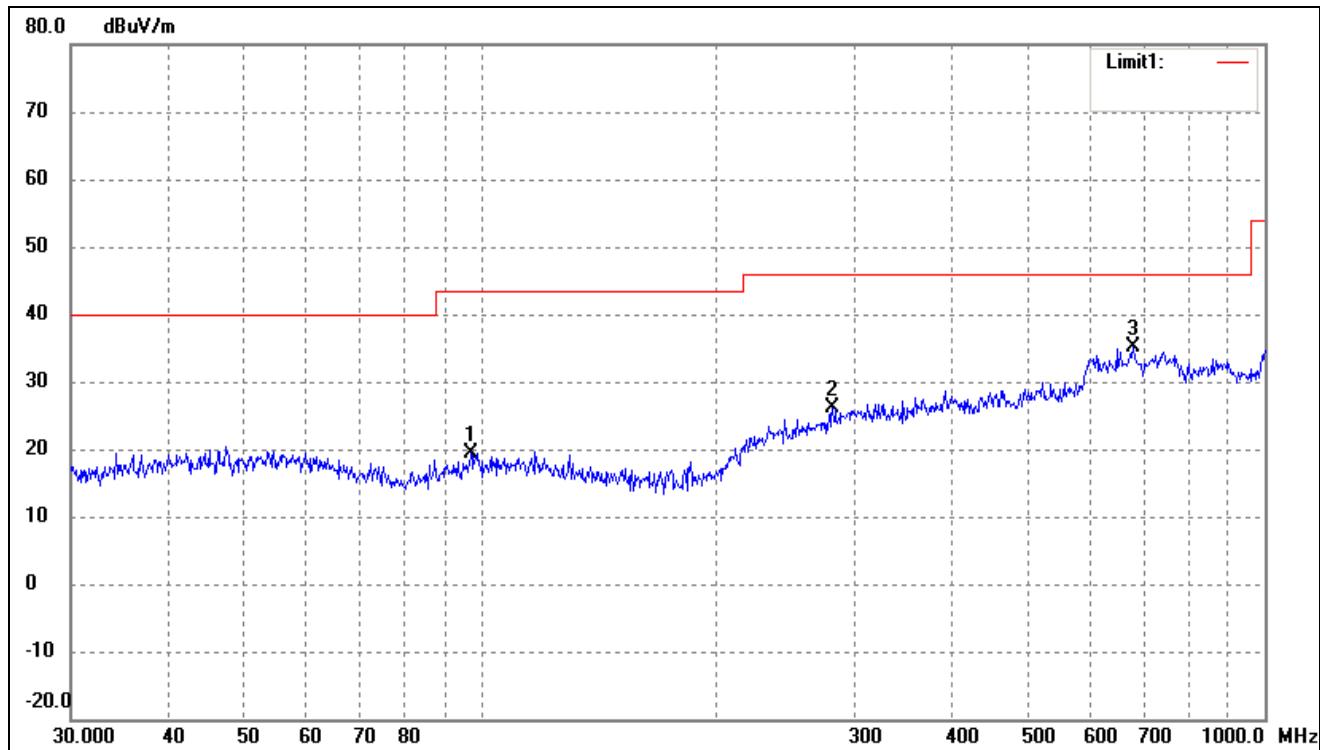

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	97.1148	14.72	4.70	19.42	43.50	-24.08	260	100	QP
2	281.0075	14.63	11.44	26.07	46.00	-19.93	120	200	QP
3	679.9600	15.85	19.26	35.11	46.00	-10.89	289	200	QP


Test Specification: Vertical

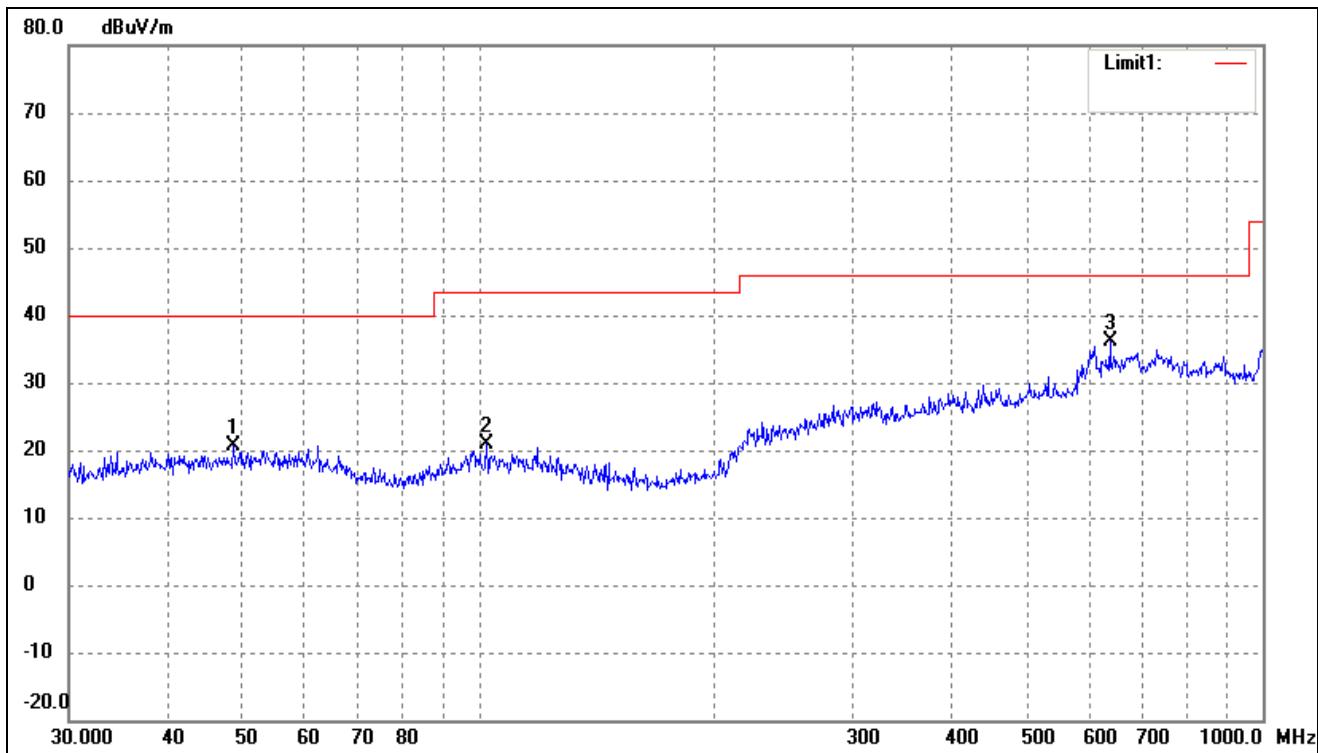

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	48.6719	15.33	5.26	20.59	40.00	-19.41	130	100	QP
2	102.3597	15.80	5.12	20.92	43.50	-22.58	120	100	QP
3	638.3686	17.57	18.56	36.13	46.00	-9.87	360	100	QP


Operating Condition: 802.11n-HT40 Transmitting Middle Channel-2437MHz
Comment: Battery: DC3.7V

Test Specification: Horizontal

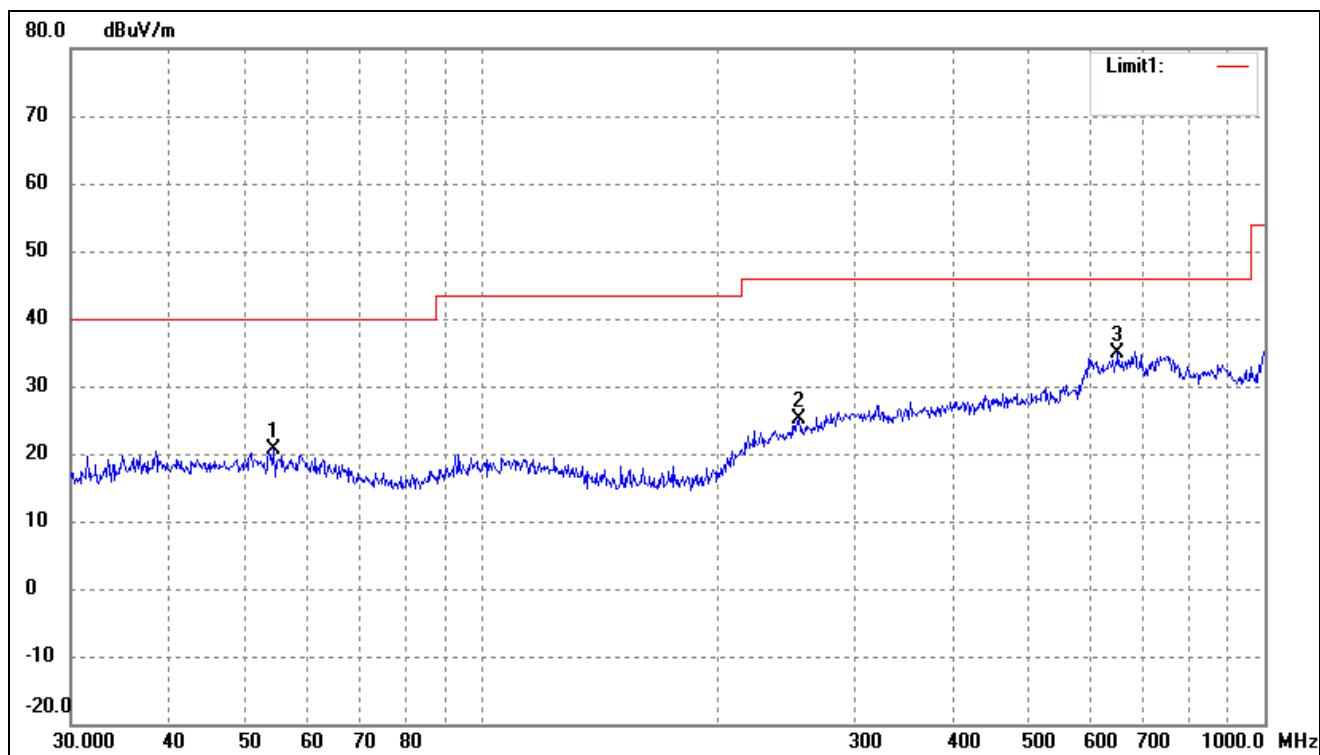

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	54.4516	15.21	5.31	20.52	40.00	-19.48	274	100	QP
2	254.7284	15.23	9.85	25.08	46.00	-20.92	130	100	QP
3	649.6597	16.51	18.39	34.90	46.00	-11.10	120	100	QP


Test Specification: Vertical

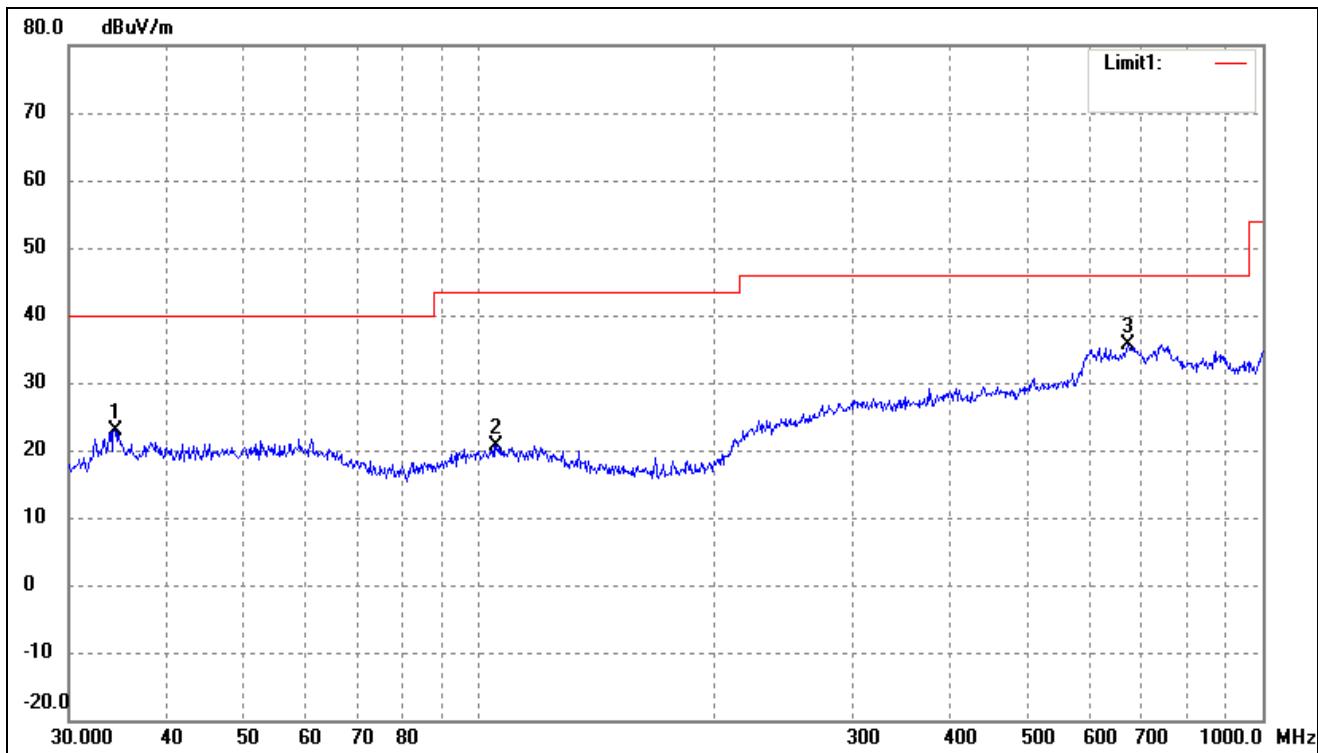

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	34.3964	18.59	4.30	22.89	40.00	-17.11	360	100	QP
2	105.2718	15.50	5.10	20.60	43.50	-22.90	110	100	QP
3	672.8444	16.73	18.87	35.60	46.00	-10.40	120	100	QP


Operating Condition: 802.11n-HT40 Transmitting High Channel-2452MHz
Comment: Battery: DC3.7V

Test Specification: Horizontal

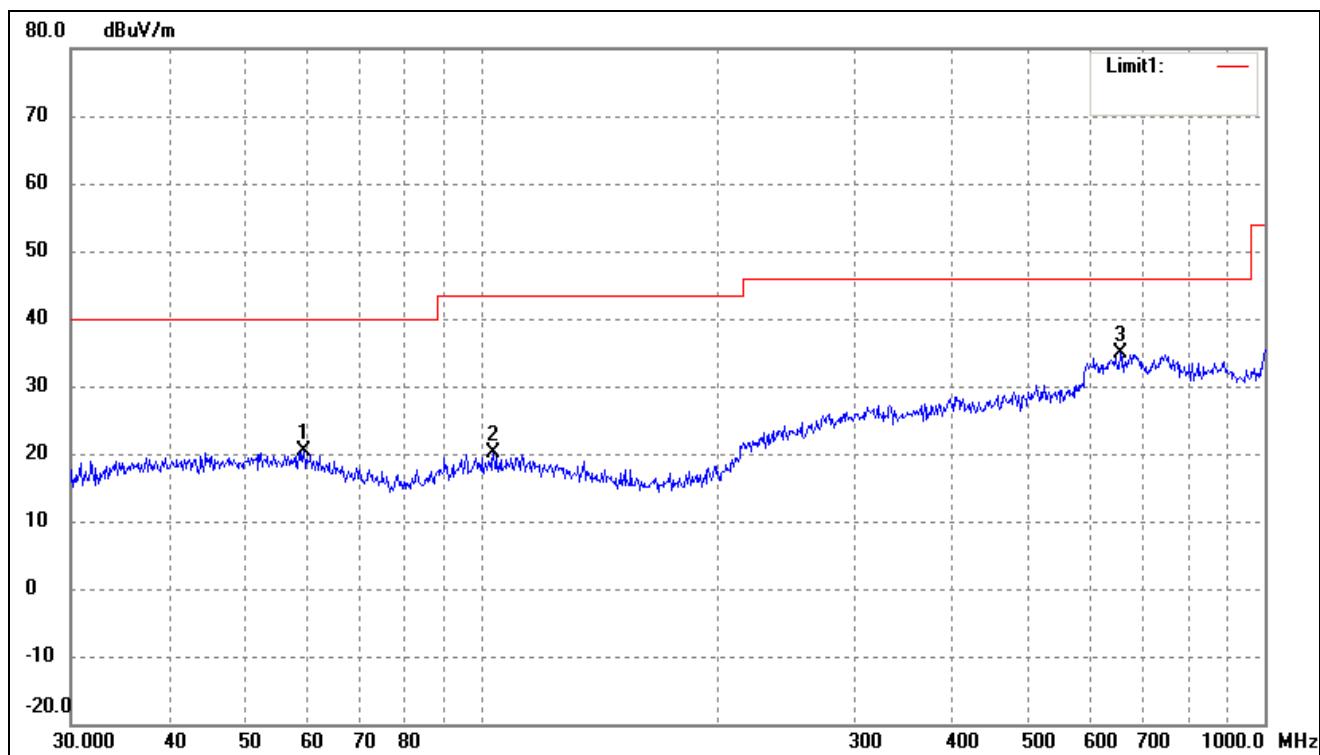

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	59.4405	15.12	5.37	20.49	40.00	-19.51	360	100	QP
2	103.8055	15.11	5.11	20.22	43.50	-23.28	138	100	QP
3	654.2318	16.50	18.27	34.77	46.00	-11.23	180	200	QP

Test Specification: *Vertical*

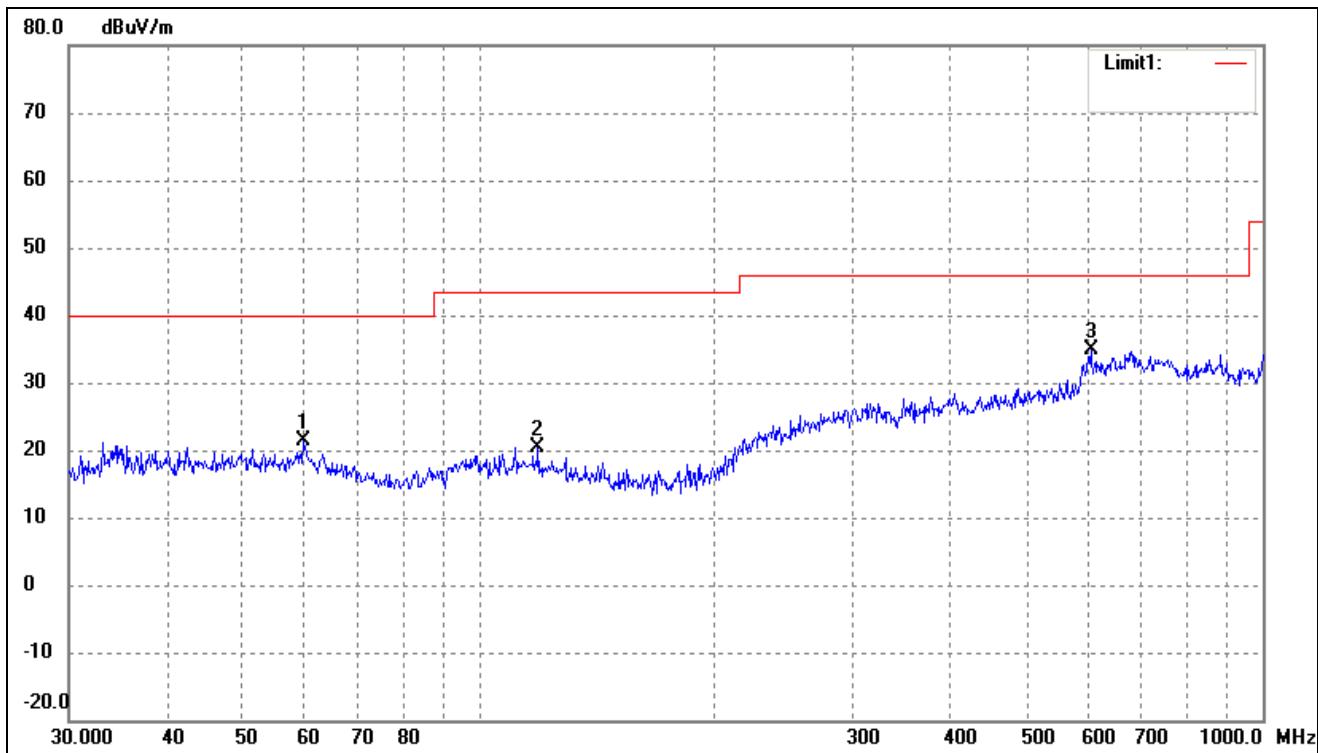

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (•)	Height (cm)	Remark
1	59.6493	15.98	5.38	21.36	40.00	-18.64	270	100	QP
2	119.0180	15.25	5.03	20.28	43.50	-23.22	120	100	QP
3	603.5392	15.75	19.06	34.81	46.00	-11.19	360	100	QP

*Spurious Emissions Above 1GHz**Test Mode: 802.11b*

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	59.24	0.57	59.81	74.00	-14.19	H	PK
4824.000	44.84	0.57	45.41	54.00	-8.59	H	AV
7236.000	35.01	3.69	38.70	74.00	-35.30	H	PK
7236.000	23.58	3.69	27.27	54.00	-26.73	H	AV
4824.000	50.85	0.57	51.42	74.00	-22.58	V	PK
4824.000	37.17	0.57	37.74	54.00	-16.26	V	AV
7236.000	34.80	3.69	38.49	74.00	-35.51	V	PK
7236.000	23.41	3.69	27.10	54.00	-26.90	V	AV
Middle Channel-2437MHz							
4874.000	57.35	0.66	58.01	74.00	-15.99	H	PK
4874.000	42.77	0.66	43.43	54.00	-10.57	H	AV
7311.000	37.61	3.76	41.37	74.00	-32.63	H	PK
7311.000	25.87	3.76	29.63	54.00	-24.37	H	AV
4874.000	51.19	0.66	51.85	74.00	-22.15	V	PK
4874.000	37.61	0.66	38.27	54.00	-15.73	V	AV
7311.000	38.83	3.76	42.59	74.00	-31.41	V	PK
7311.000	25.84	3.76	29.60	54.00	-24.40	V	AV
High Channel-2462MHz							
4924.000	56.32	0.74	57.06	74.00	-16.94	H	PK
4924.000	42.94	0.74	43.68	54.00	-10.32	H	AV
7386.000	37.91	3.83	41.74	74.00	-32.26	H	PK
7386.000	27.26	3.83	31.09	54.00	-22.91	H	AV
4924.000	53.07	0.74	53.81	74.00	-20.19	V	PK
4924.000	39.42	0.74	40.16	54.00	-13.84	V	AV
7386.000	38.69	3.83	42.52	74.00	-31.48	V	PK
7386.000	27.20	3.83	31.03	54.00	-22.97	V	AV

Test Mode: 802.11g

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	54.00	0.57	54.57	74.00	-19.43	H	PK
4824.000	47.78	0.57	48.35	54.00	-5.65	H	AV
7236.000	35.17	3.69	38.86	74.00	-35.14	H	PK
7236.000	23.82	3.69	27.51	54.00	-26.49	H	AV
4824.000	42.22	0.57	42.79	74.00	-31.21	V	PK
4824.000	33.11	0.57	33.68	54.00	-20.32	V	AV
7236.000	35.08	3.69	38.77	74.00	-35.23	V	PK
7236.000	23.89	3.69	27.58	54.00	-26.42	V	AV
Middle Channel-2437MHz							
4874.000	53.19	0.66	53.85	74.00	-20.15	H	PK
4874.000	46.35	0.66	47.01	54.00	-6.99	H	AV
7311.000	37.62	3.76	41.38	74.00	-32.62	H	PK
7311.000	26.04	3.76	29.80	54.00	-24.20	H	AV
4874.000	43.36	0.66	44.02	74.00	-29.98	V	PK
4874.000	32.19	0.66	32.85	54.00	-21.15	V	AV
7311.000	37.03	3.76	40.79	74.00	-33.21	V	PK
7311.000	26.65	3.76	30.41	54.00	-23.59	V	AV
High Channel-2462MHz							
4924.000	55.79	0.74	56.53	74.00	-17.47	H	PK
4924.000	33.00	0.74	33.74	54.00	-20.26	H	AV
7386.000	37.86	3.83	41.69	74.00	-32.31	H	PK
7386.000	27.21	3.83	31.04	54.00	-22.96	H	AV
4924.000	45.15	0.74	45.89	74.00	-28.11	V	PK
4924.000	33.60	0.74	34.34	54.00	-19.66	V	AV
7386.000	38.93	3.83	42.76	74.00	-31.24	V	PK
7386.000	27.12	3.83	30.95	54.00	-23.05	V	AV

Test Mode: 802.11n-HT20

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	55.85	0.57	56.42	74.00	-17.58	H	PK
4824.000	32.67	0.57	33.24	54.00	-20.76	H	AV
7236.000	34.49	3.69	38.18	74.00	-35.82	H	PK
7236.000	23.28	3.69	26.97	54.00	-27.03	H	AV
4824.000	43.03	0.57	43.60	74.00	-30.40	V	PK
4824.000	31.74	0.57	32.31	54.00	-21.69	V	AV
7236.000	34.59	3.69	38.28	74.00	-35.72	V	PK
7236.000	23.31	3.69	27.00	54.00	-27.00	V	AV
Middle Channel-2437MHz							
4874.000	53.08	0.66	53.74	74.00	-20.26	H	PK
4874.000	31.66	0.66	32.32	54.00	-21.68	H	AV
7311.000	36.80	3.76	40.56	74.00	-33.44	H	PK
7311.000	26.16	3.76	29.92	54.00	-24.08	H	AV
4874.000	44.14	0.66	44.80	74.00	-29.20	V	PK
4874.000	32.41	0.66	33.07	54.00	-20.93	V	AV
7311.000	37.59	3.76	41.35	74.00	-32.65	V	PK
7311.000	25.48	3.76	29.24	54.00	-24.76	V	AV
High Channel-2462MHz							
4924.000	53.25	0.74	53.99	74.00	-20.01	H	PK
4924.000	31.69	0.74	32.43	54.00	-21.57	H	AV
7386.000	38.35	3.83	42.18	74.00	-31.82	H	PK
7386.000	27.19	3.83	31.02	54.00	-22.98	H	AV
4924.000	43.52	0.74	44.26	74.00	-29.74	V	PK
4924.000	31.12	0.74	31.86	54.00	-22.14	V	AV
7386.000	38.66	3.83	42.49	74.00	-31.51	V	PK
7386.000	26.99	3.83	30.82	54.00	-23.18	V	AV

Test Mode: 802.11n-HT40

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2422MHz							
4844.000	53.25	0.60	53.85	74.00	-20.15	H	PK
4824.000	38.25	0.60	38.85	54.00	-15.15	H	AV
7266.000	46.48	3.72	50.20	74.00	-23.80	H	PK
7266.000	32.56	3.72	36.28	54.00	-17.72	H	AV
4844.000	54.22	0.60	54.82	74.00	-19.18	V	PK
4824.000	39.42	0.60	40.02	54.00	-13.98	V	AV
7266.000	48.81	3.72	52.53	74.00	-21.47	V	PK
7266.000	34.78	3.72	38.50	54.00	-15.50	V	AV
Middle Channel-2437MHz							
4874.000	52.53	0.66	53.19	74.00	-20.81	H	PK
4874.000	37.88	0.66	38.54	54.00	-15.46	H	AV
7311.000	44.88	3.76	48.64	74.00	-25.36	H	PK
7311.000	32.03	3.76	35.79	54.00	-18.21	H	AV
4874.000	53.74	0.66	54.40	74.00	-19.60	V	PK
4874.000	39.95	0.66	40.61	54.00	-13.39	V	AV
7311.000	45.78	3.76	49.54	74.00	-24.46	V	PK
7311.000	34.00	3.76	37.76	54.00	-16.24	V	AV
High Channel-2452MHz							
4904.000	52.65	0.72	53.37	74.00	-20.63	H	PK
4904.000	39.37	0.72	40.09	54.00	-13.91	H	AV
7356.000	45.63	3.81	49.44	74.00	-24.56	H	PK
7356.000	30.73	3.81	34.54	54.00	-19.46	H	AV
4904.000	54.84	0.72	55.56	74.00	-18.44	V	PK
4904.000	40.83	0.72	41.55	54.00	-12.45	V	AV
7356.000	48.18	3.81	51.99	74.00	-22.01	V	PK
7356.000	35.12	3.81	38.93	54.00	-15.07	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2015-05-28	2016-05-27
EMI Test Receiver	R&S	ESVB	825471/005	2015-05-28	2016-05-27
Pre-amplifier	Agilent	8447F	3113A06717	2015-05-28	2016-05-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2015-05-28	2016-05-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2015-05-24	2016-05-23
Horn Antenna	ETS	3117	00086197	2015-05-24	2016-05-23

9.3 Test Procedure

According to the KDB 558074D01 v03r02, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 V03r02, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.4 Environmental Conditions


Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.5 Summary of Test Results/Plots

Please refer to the test plots as below.

802.11b-Lowest Bandedge


Vertical (Worst case)

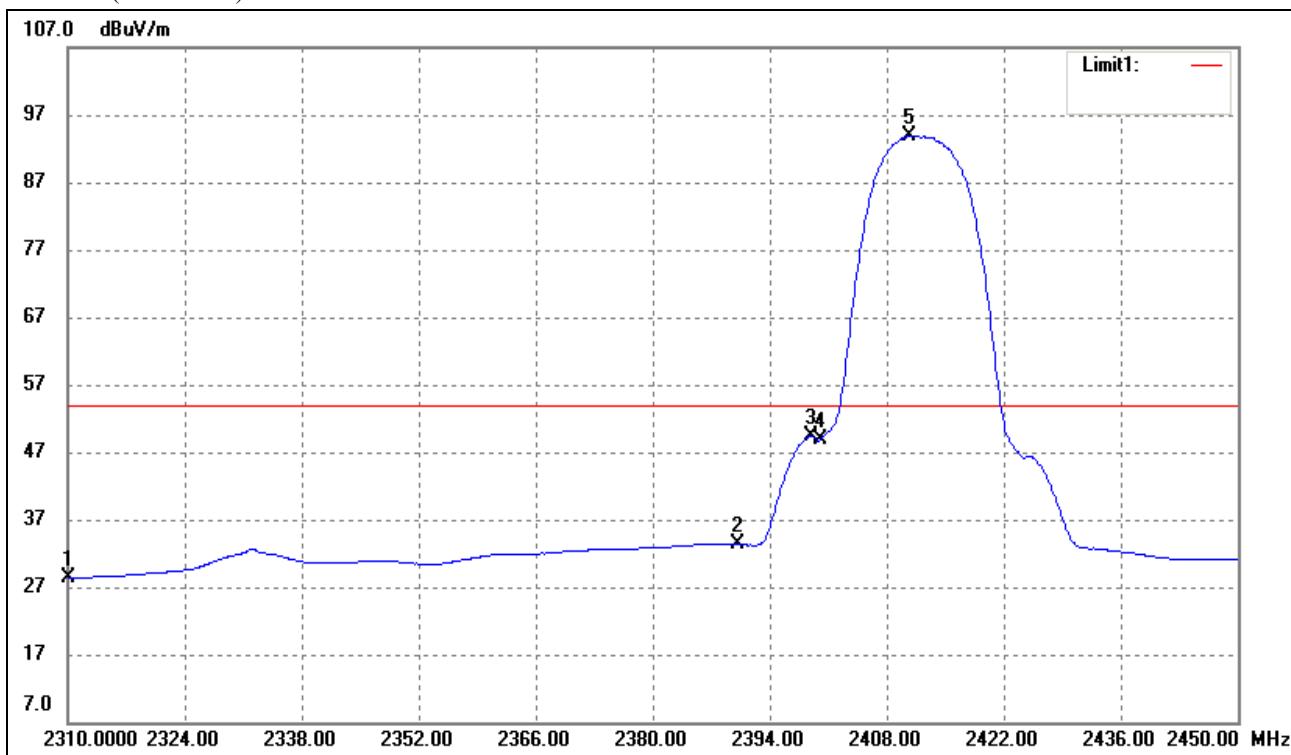

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	32.00	-3.71	28.29	54.00	-25.71	Average Detector
	2310.000	44.68	-3.71	40.97	74.00	-33.03	Peak Detector
2	2390.000	37.01	-3.54	33.47	54.00	-20.53	Average Detector
	2390.000	49.35	-3.54	45.81	74.00	-28.19	Peak Detector
3	2398.900	52.85	-3.51	49.34	54.00	-4.66	Average Detector
	2398.900	62.87	-3.51	59.36	74.00	-14.64	Peak Detector
4	2400.000	52.32	-3.51	48.81	Delta =45.04dBc	Average Detector	Average Detector
5	2410.660	97.33	-3.48	93.85			Average Detector

802.11b-Highest Bandedge


Vertical (Worst case)

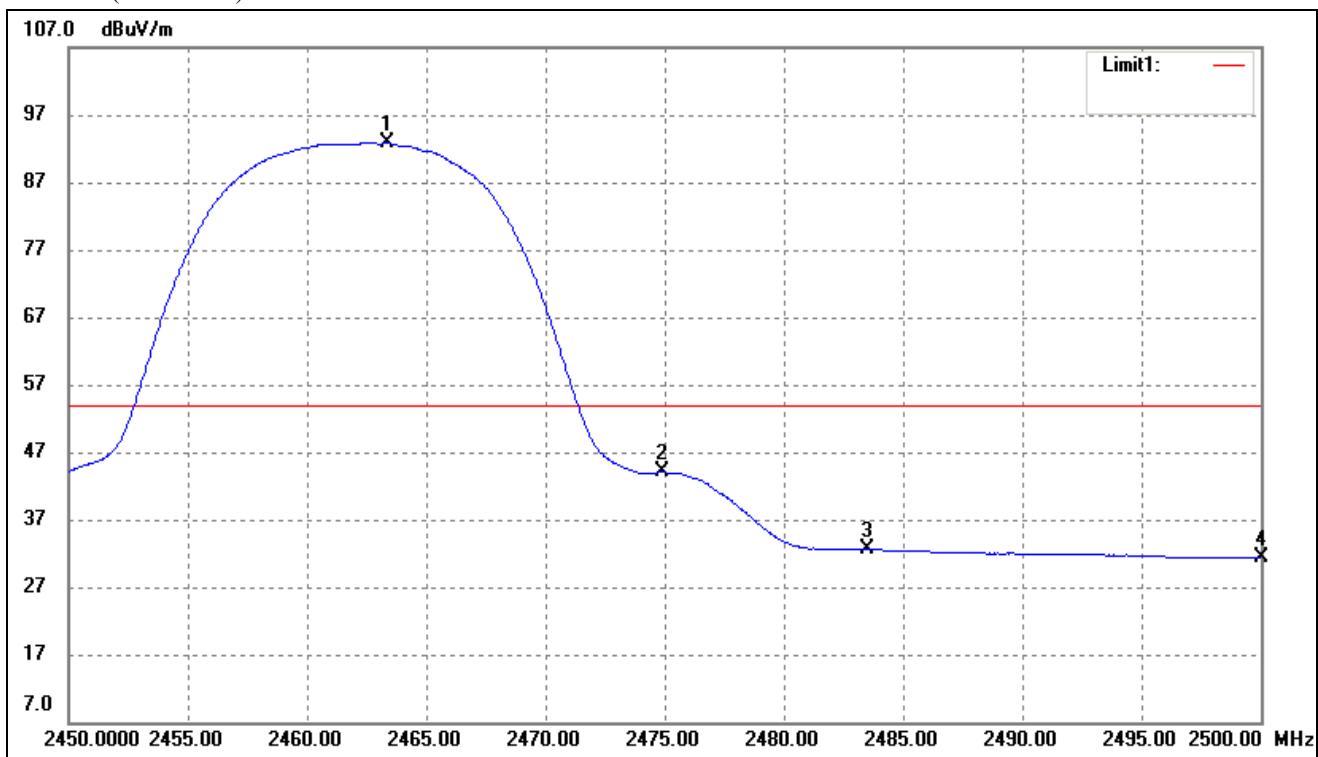

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.350	96.21	-3.36	92.85	/	/	Average Detector
	2463.300	104.80	-3.36	101.44	/	/	Peak Detector
2	2474.900	47.38	-3.33	44.05	54.00	-9.95	Average Detector
	2474.800	58.85	-3.33	55.52	74.00	-18.48	Peak Detector
3	2483.500	35.96	-3.33	32.63	54.00	-21.37	Average Detector
	2483.500	47.98	-3.33	44.65	74.00	-29.35	Peak Detector
4	2500.000	34.61	-3.28	31.33	54.00	-22.67	Average Detector
	2500.000	46.84	-3.28	43.56	74.00	-30.44	Peak Detector

802.11g-Lowest Bandedge


Vertical (Worst case)

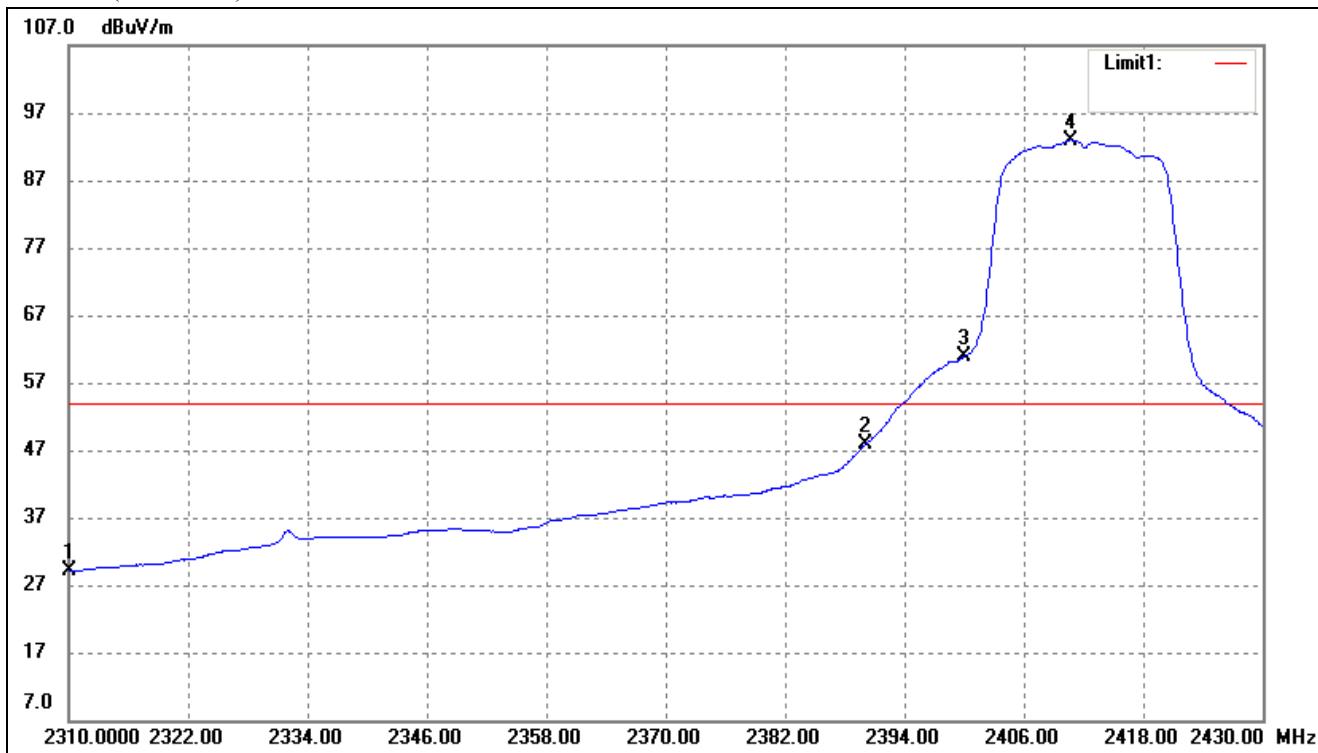

No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2310.000	32.78	-3.71	29.07	54.00	-24.93	Average Detector
	2310.000	45.98	-3.71	42.27	74.00	-31.73	Peak Detector
2	2390.000	51.37	-3.54	47.83	54.00	-6.17	Average Detector
	2390.000	69.12	-3.54	65.58	74.00	-8.42	Peak Detector
3	2400.000	64.41	-3.51	60.90	Delta =33.10dBc		Average Detector
4	2410.680	96.48	-3.48	93.00			Average Detector

802.11g-Highest Bandedge


Vertical (Worst case)

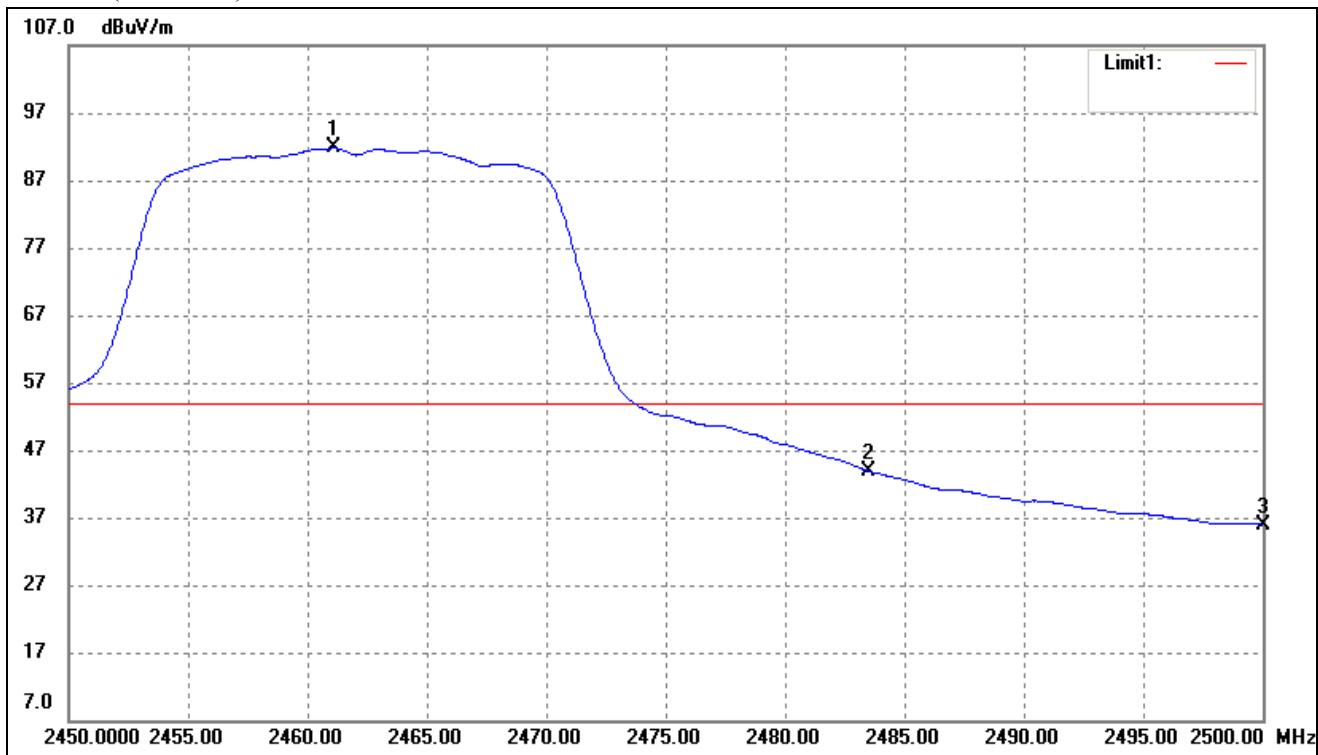

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.100	95.13	-3.37	91.76	/	/	Average Detector
	2463.750	107.16	-3.36	103.80	/	/	Peak Detector
2	2483.500	47.27	-3.33	43.94	54.00	-10.06	Average Detector
	2483.500	68.14	-3.33	64.81	74.00	-9.19	Peak Detector
3	2500.000	39.25	-3.28	35.97	54.00	-18.03	Average Detector
	2500.000	53.89	-3.28	50.61	74.00	-23.39	Peak Detector

802.11n-HT20-Lowest Bandedge


Vertical (Worst case)

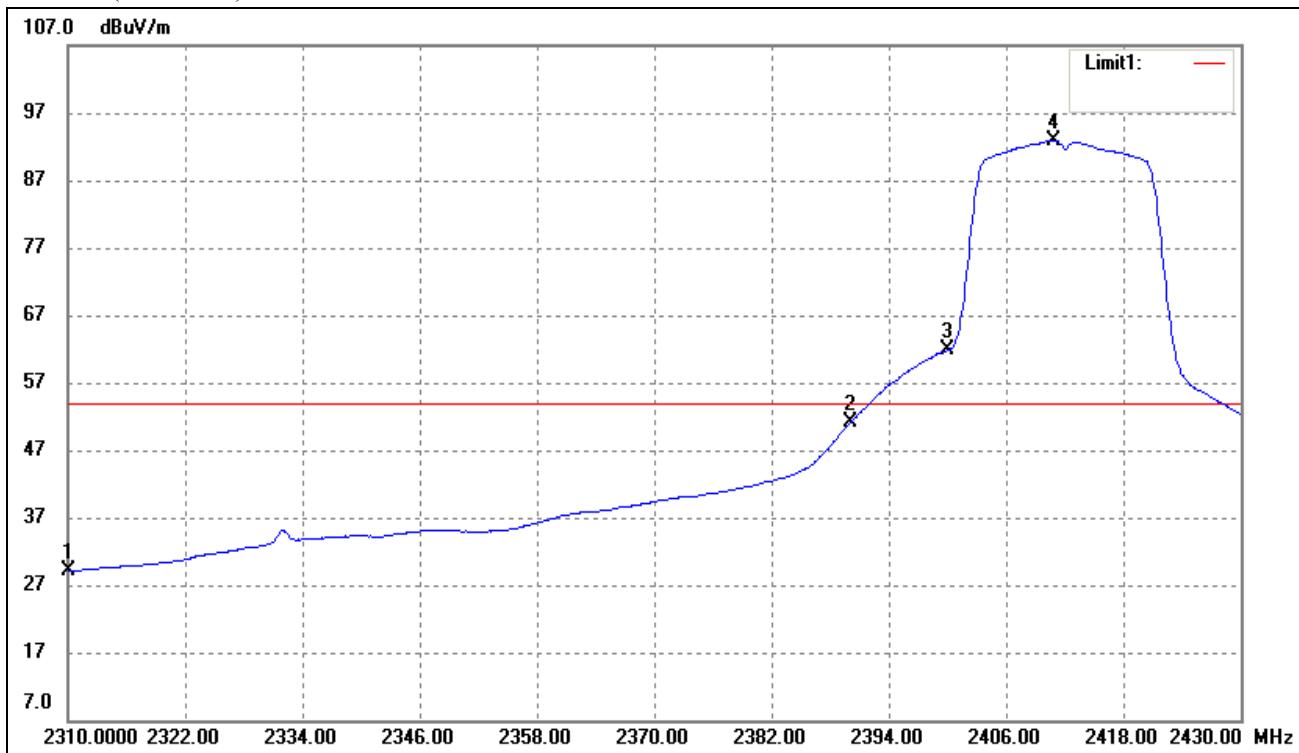

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	32.76	-3.71	29.05	54.00	-24.95	Average Detector
	2310.000	45.71	-3.71	42.00	74.00	-32.00	Peak Detector
2	2390.000	54.55	-3.54	51.01	54.00	-2.99	Average Detector
	2390.000	72.98	-3.54	69.44	74.00	-4.56	Peak Detector
3	2400.000	65.28	-3.51	61.77	Delta =31.22dBc		Average Detector
4	2410.800	96.47	-3.48	92.99			Average Detector

802.11n-HT20-Highest Bandedge


Vertical (Worst case)

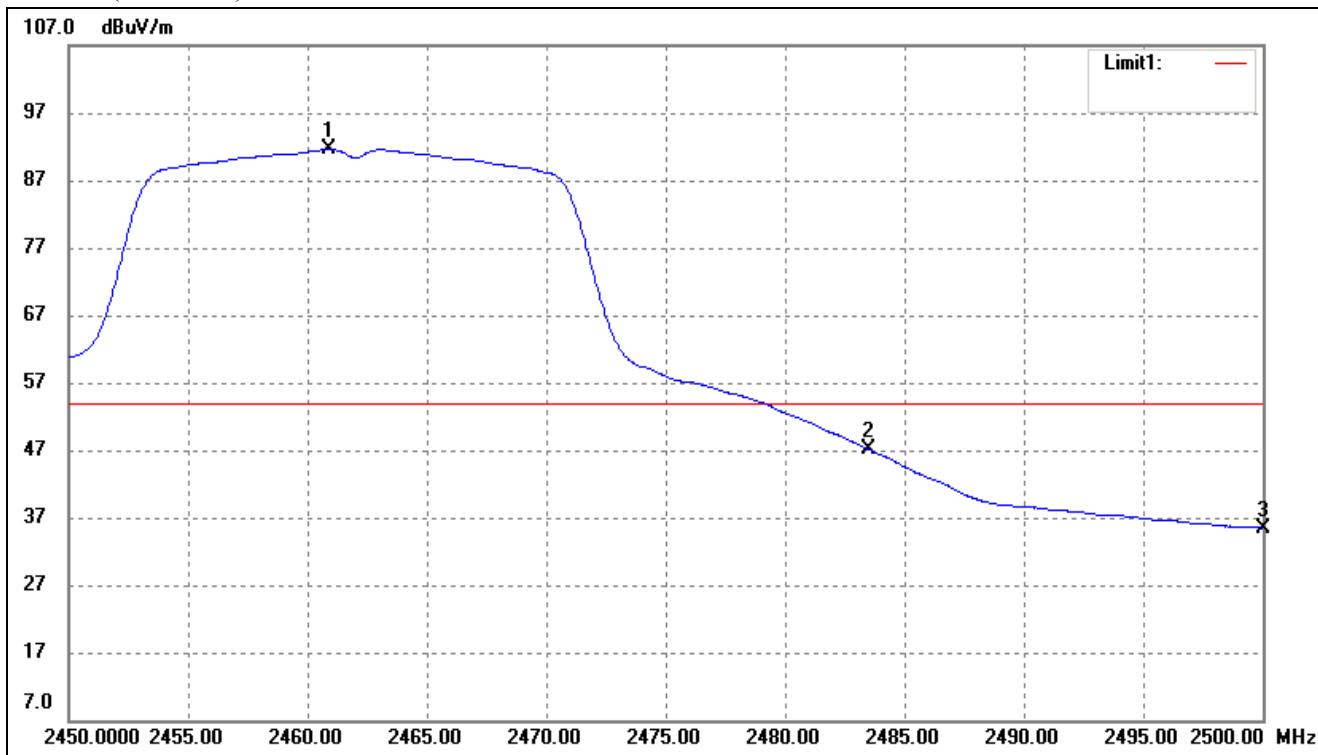

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.900	94.97	-3.37	91.60	/	/	Average Detector
	2461.400	106.90	-3.37	103.53	/	/	Peak Detector
2	2483.500	50.40	-3.33	47.07	54.00	-6.93	Average Detector
	2483.500	68.86	-3.33	65.53	74.00	-8.47	Peak Detector
3	2500.000	38.74	-3.28	35.46	54.00	-18.54	Average Detector
	2500.000	51.67	-3.28	48.39	74.00	-25.61	Peak Detector

802.11n-HT40-Lowest Bandedge


Vertical (Worst case)

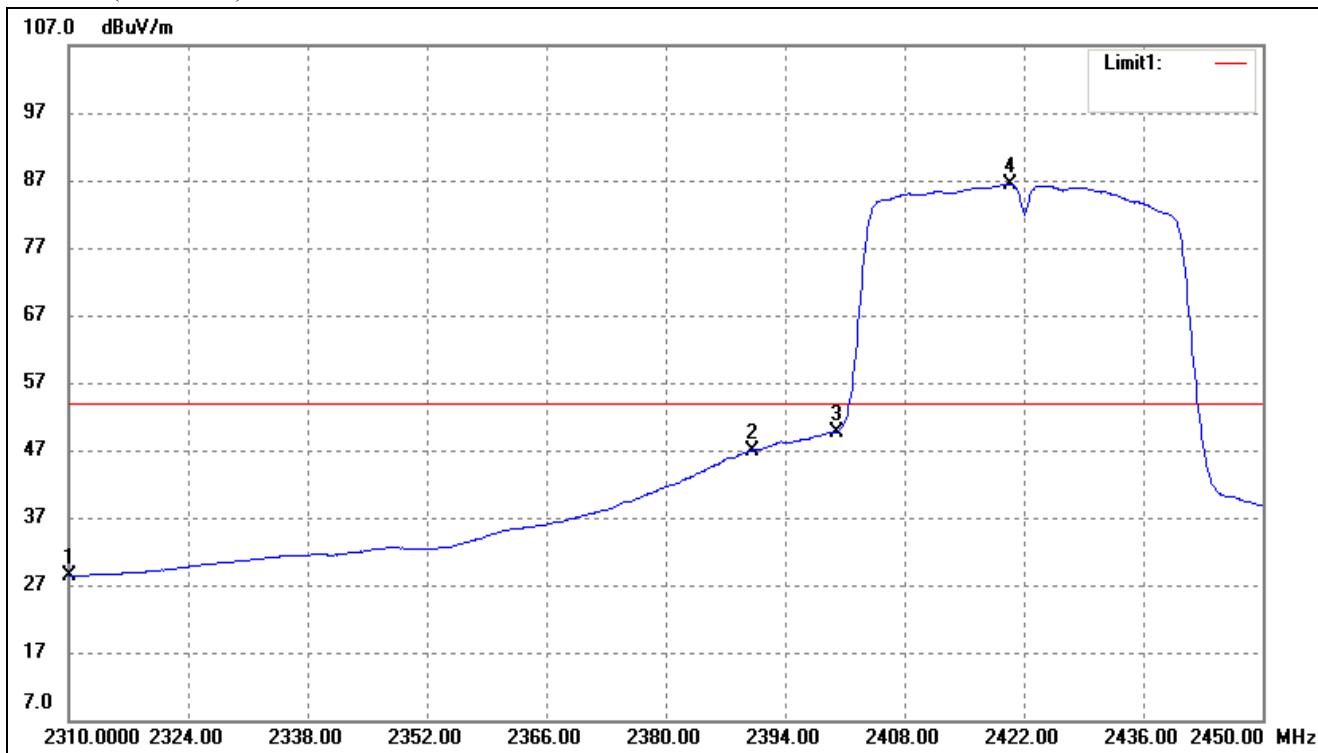

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	31.98	-3.71	28.27	54.00	-25.73	Average Detector
	2310.000	44.31	-3.71	40.60	74.00	-33.40	Peak Detector
2	2390.000	50.54	-3.54	47.00	54.00	-7.00	Average Detector
	2390.000	65.03	-3.54	61.49	74.00	-12.51	Peak Detector
3	2400.000	53.25	-3.51	49.74	Delta =36.74dBc		Average Detector
4	2420.320	89.94	-3.46	86.48			Average Detector

802.11n-HT40-Highest Bandedge


Vertical (Worst case)

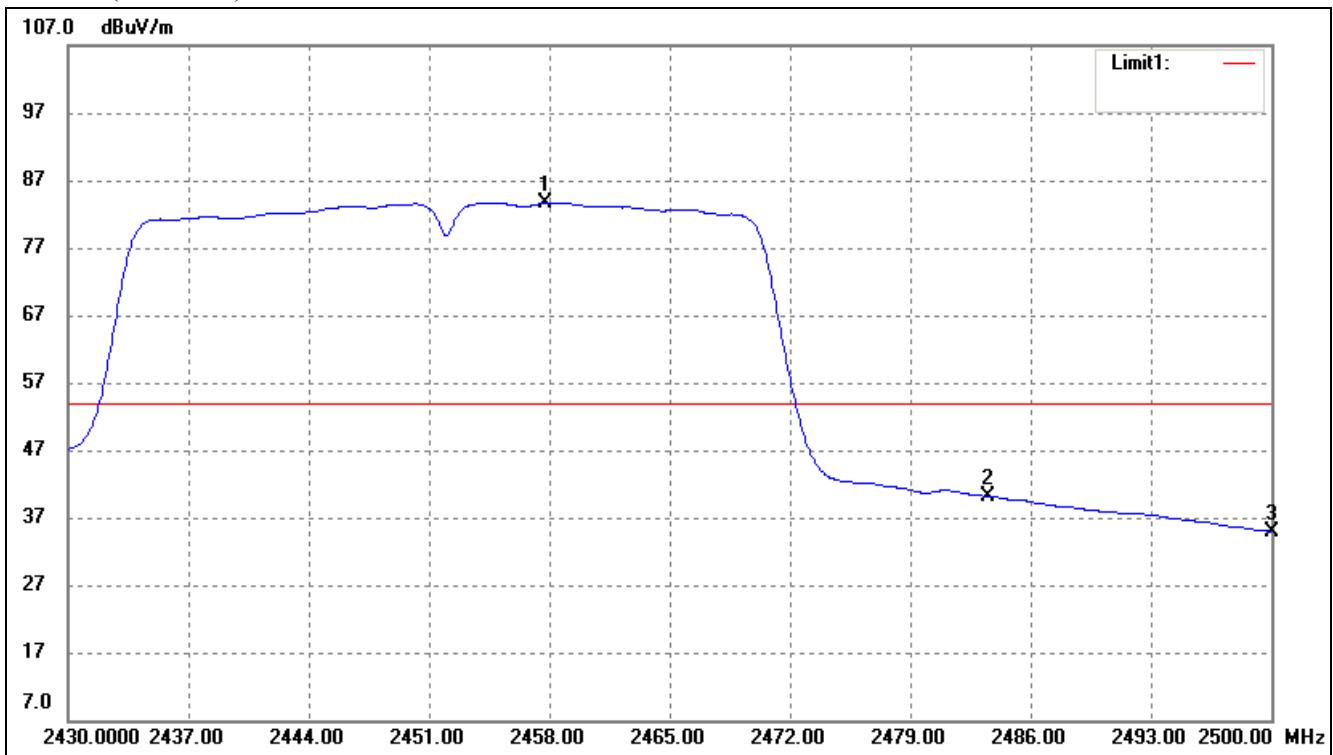


No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	
1	2457.790	87.06	-3.38	83.68	/	/	Average Detector
	2454.990	99.24	-3.38	95.86	/	/	Peak Detector
2	2483.500	43.53	-3.33	40.20	54.00	-13.80	Average Detector
	2483.500	62.09	-3.33	58.76	74.00	-15.24	Peak Detector
3	2500.000	38.23	-3.28	34.95	54.00	-19.05	Average Detector
	2500.000	54.09	-3.28	50.81	74.00	-23.19	Peak Detector

802.11b Bandedge (Conducted)


Low Channel

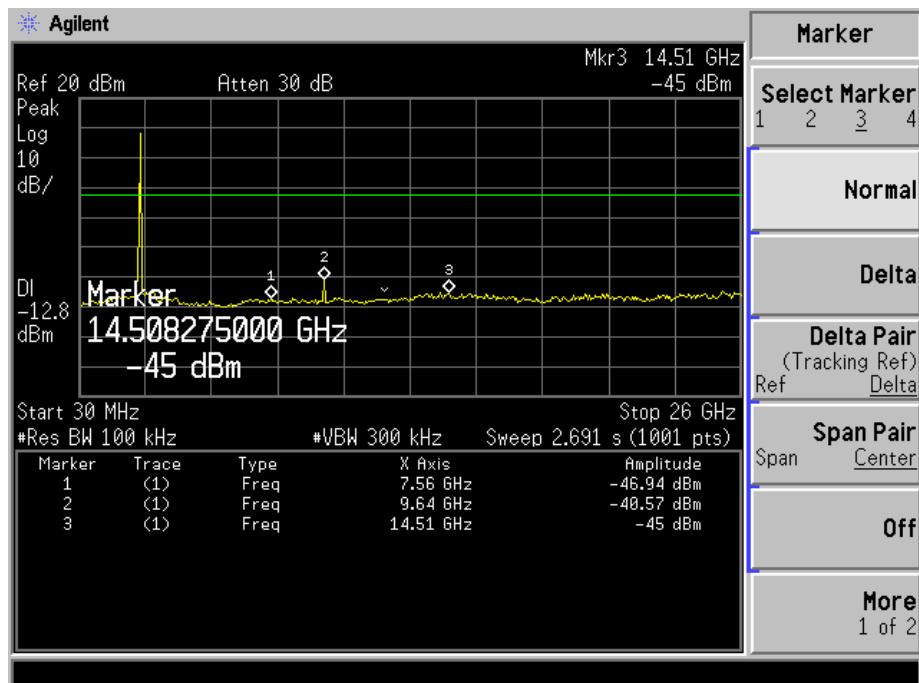

Middle Channel

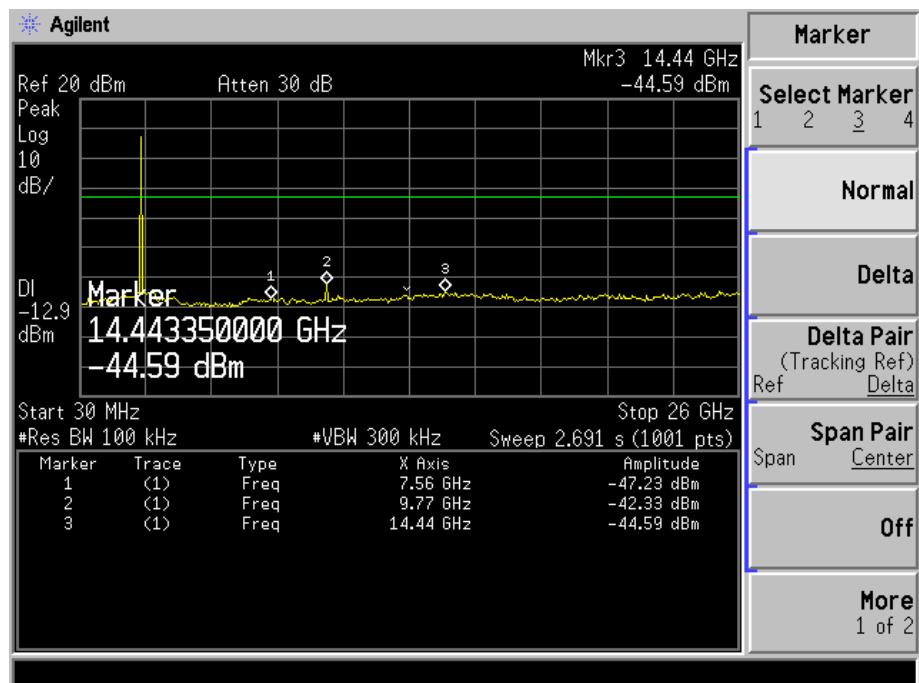


High Channel

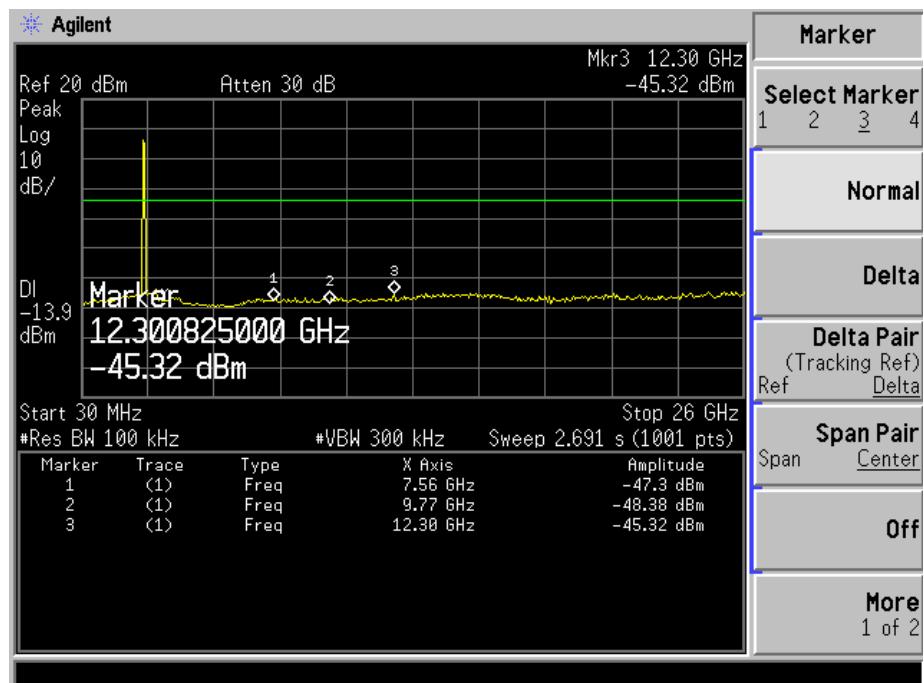


802.11g Bandedge (Conducted)


Low Channel

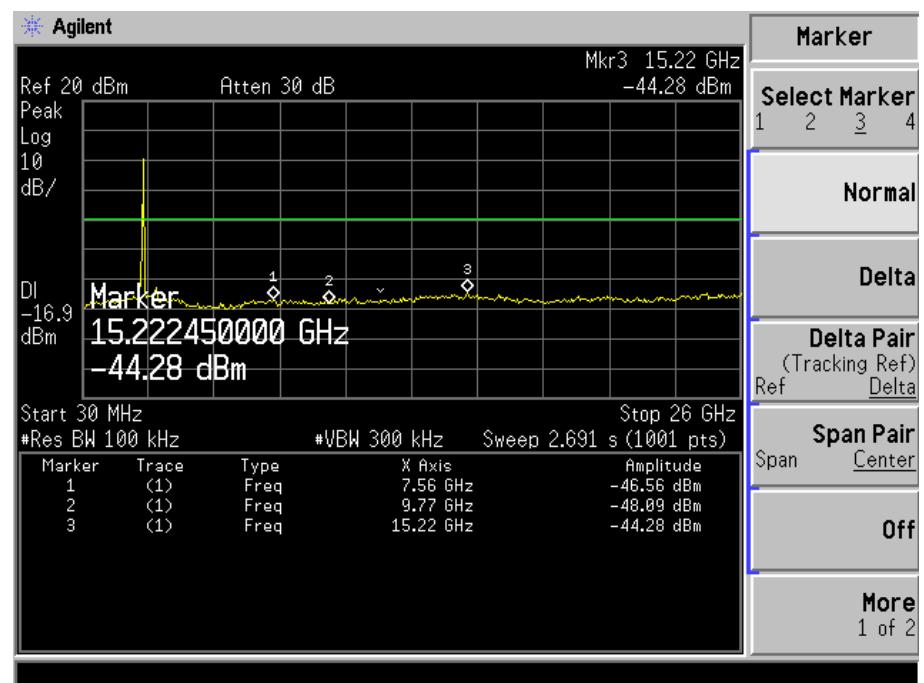

Middle Channel

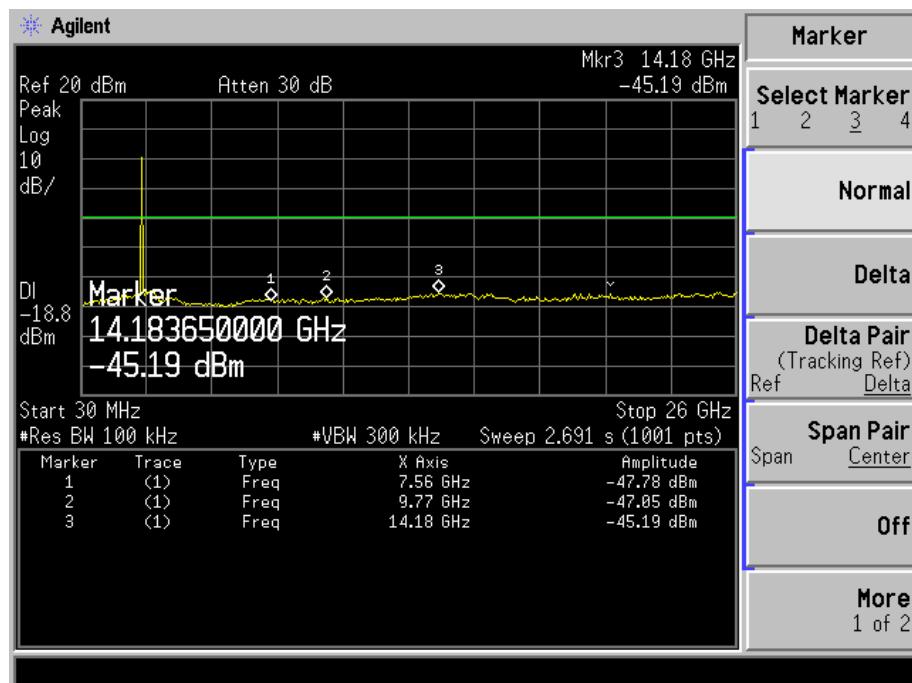


High Channel

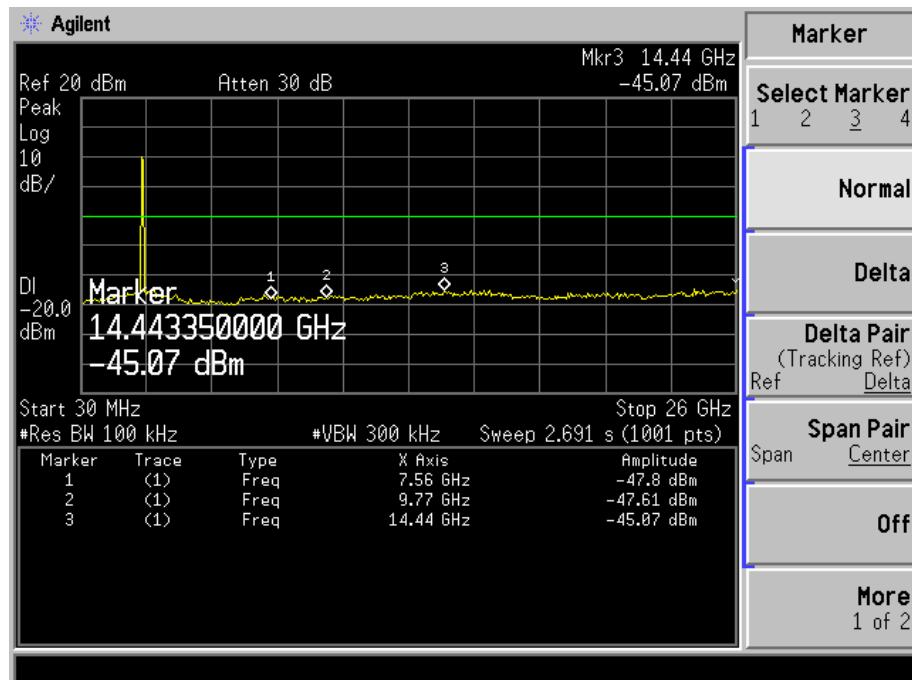


802.11n-HT20 Bandedge (Conducted)


Low Channel

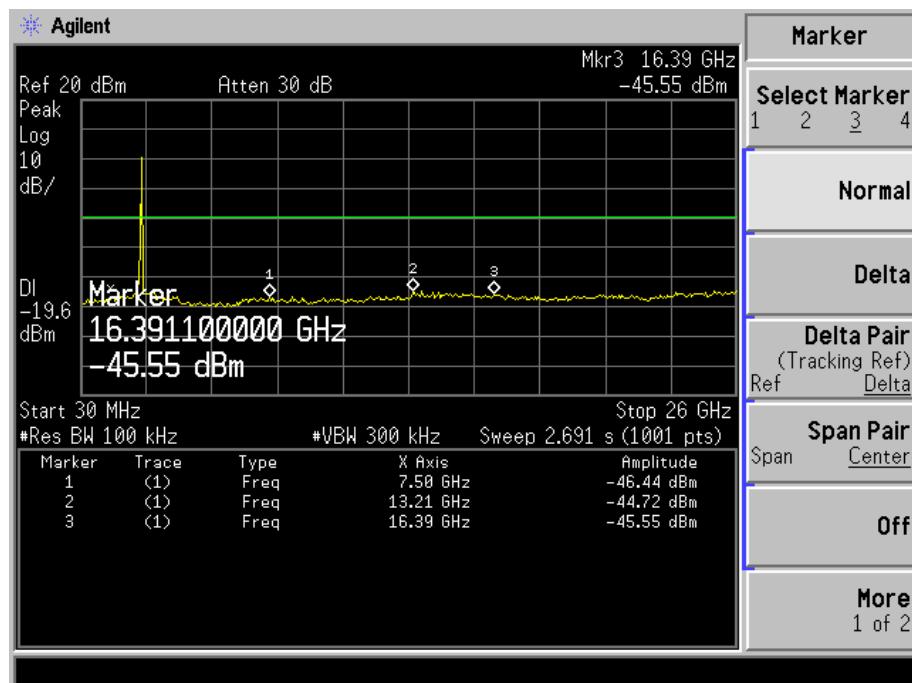

Middle Channel

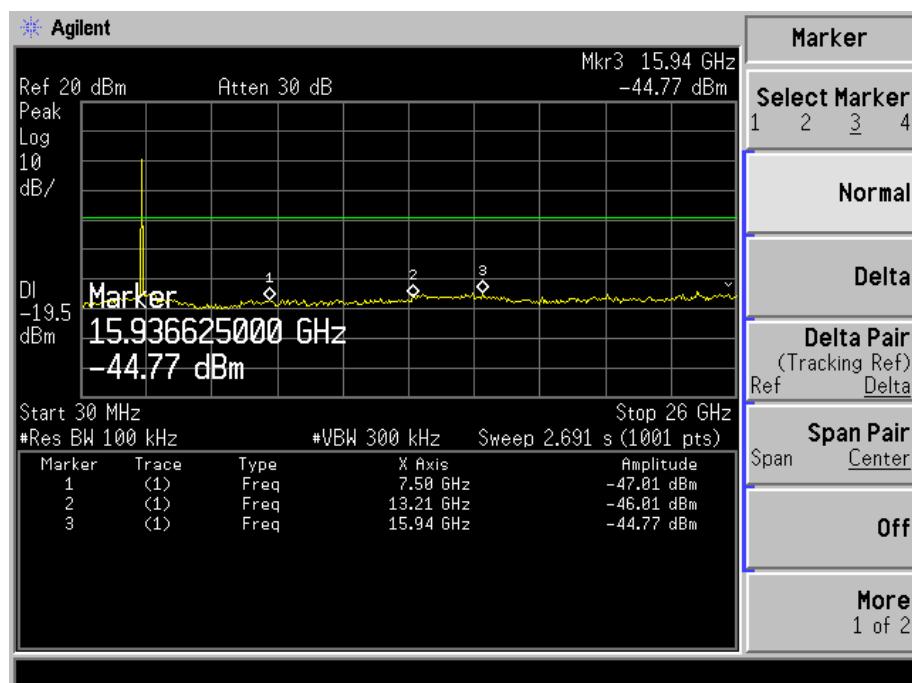


High Channel

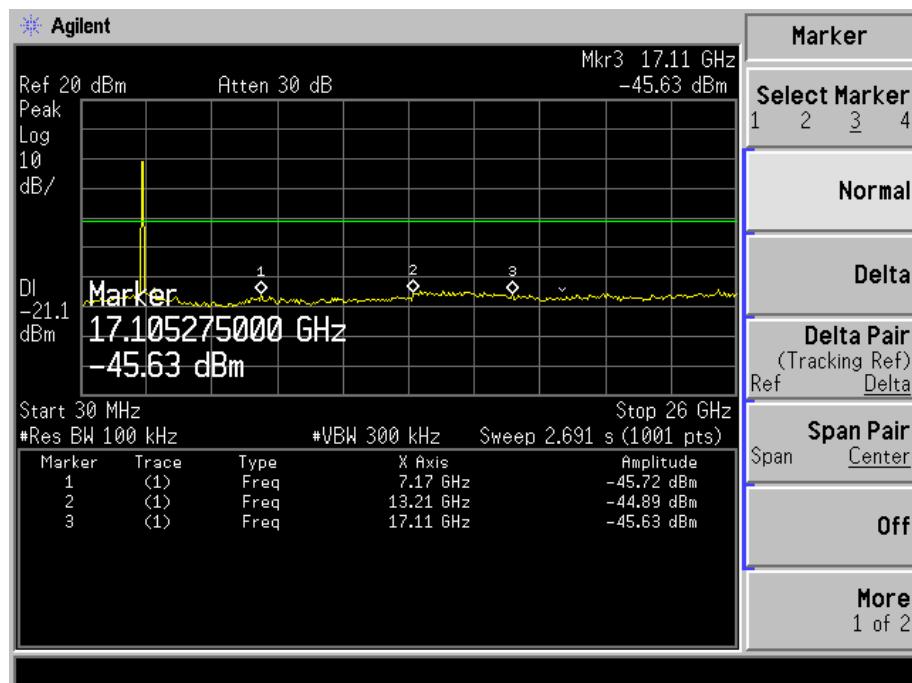


802.11n-HT40 Bandedge (Conducted)


Low Channel

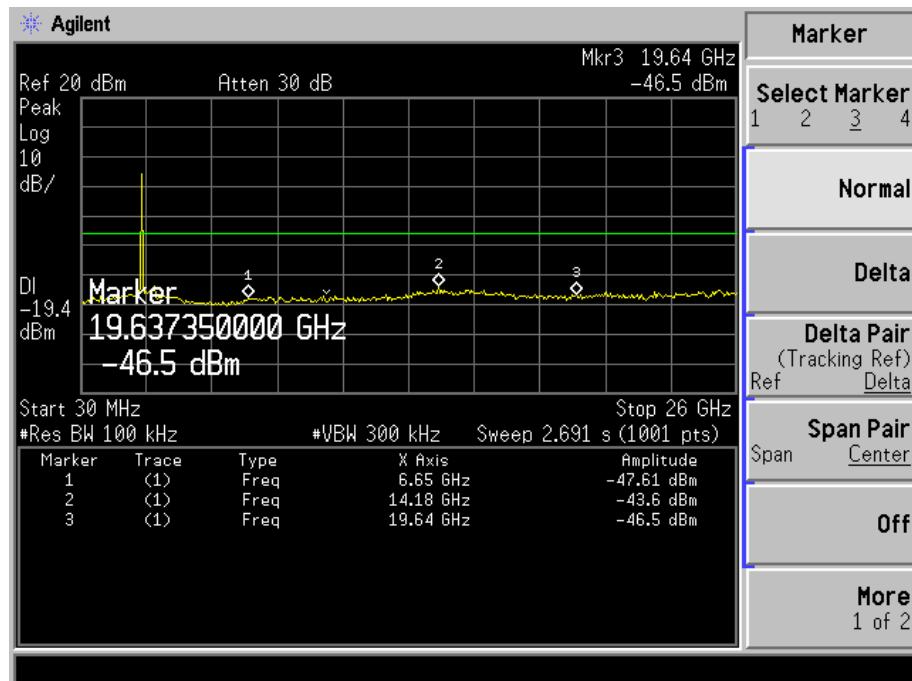

Middle Channel

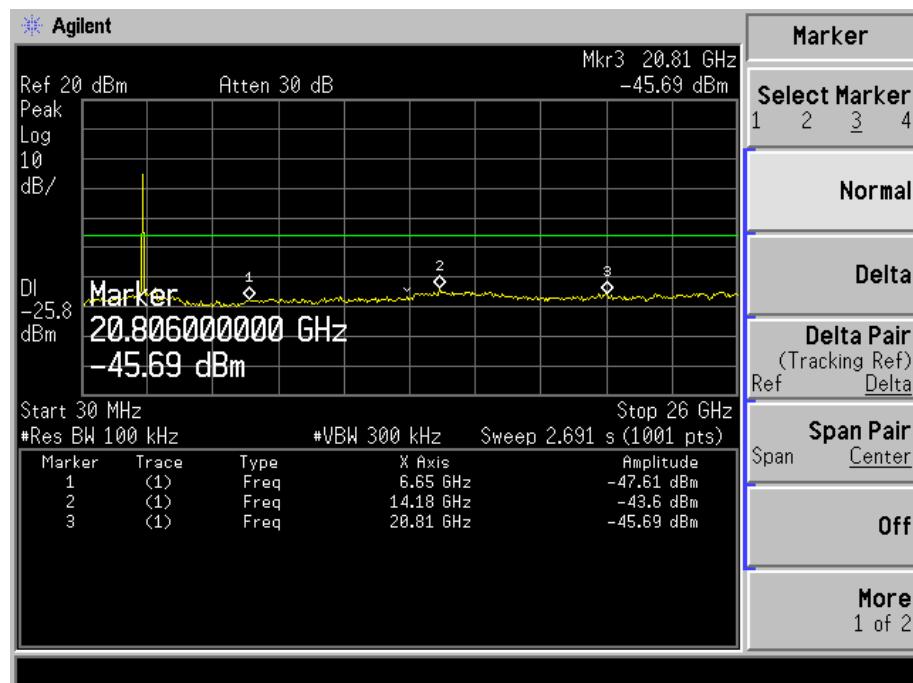

High Channel

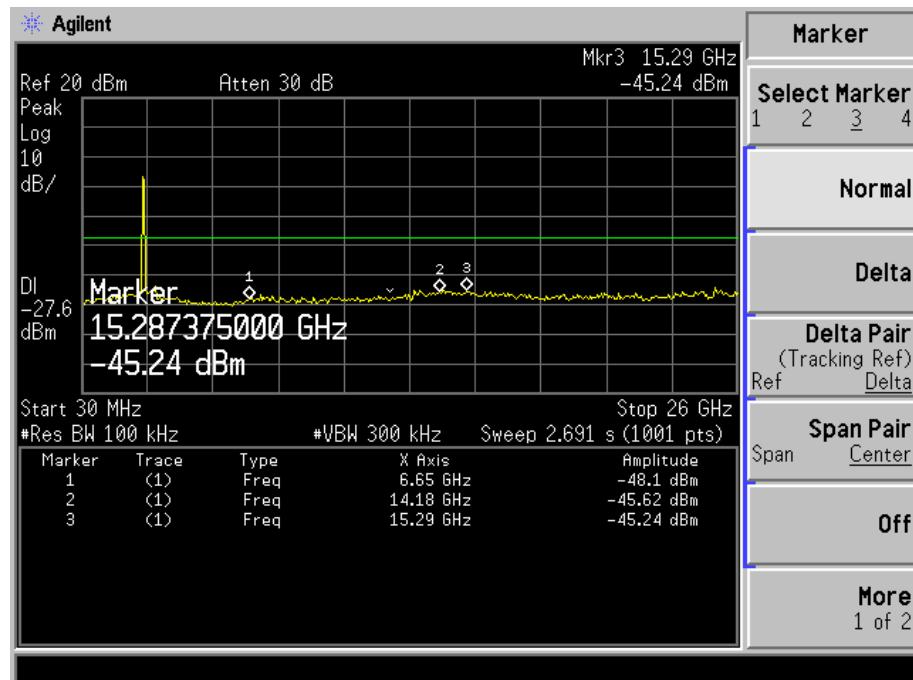

10. Conducted Emissions

10.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

10.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-05-28	2016-05-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-05-28	2016-05-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-05-28	2016-05-27

10.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.4 Basic Test Setup Block Diagram

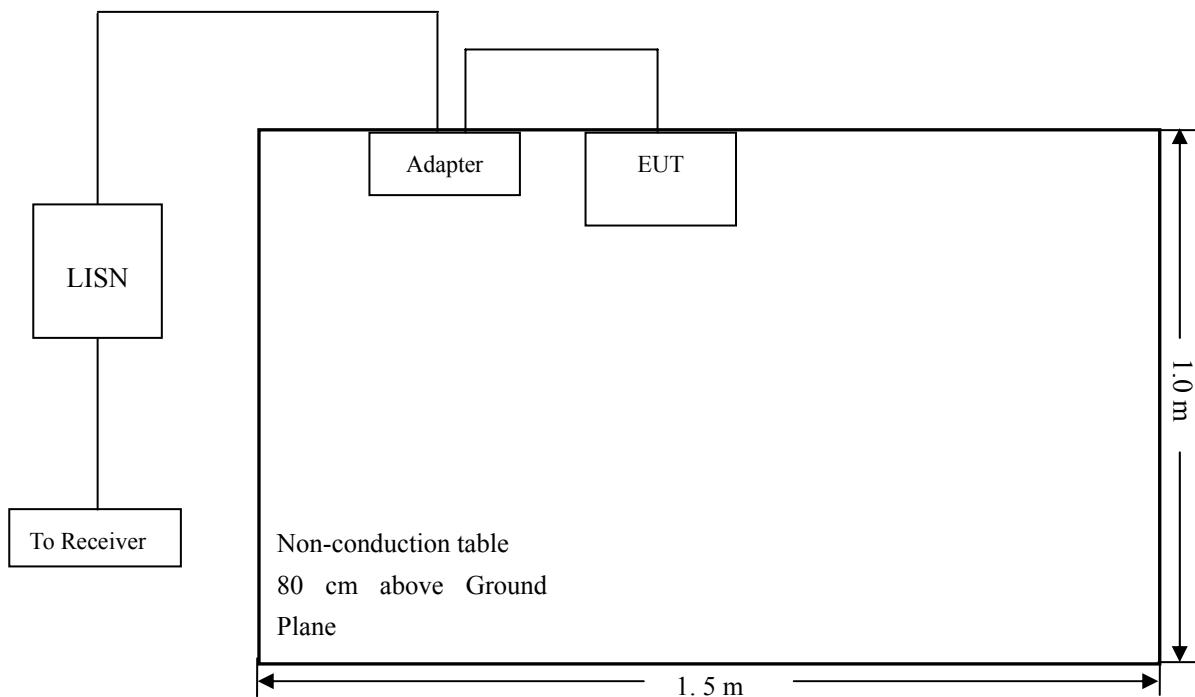

10.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
Stop Frequency..... 30 MHz
Sweep Speed Auto
IF Bandwidth..... 10 kHz
Quasi-Peak Adapter Bandwidth 9 kHz
Quasi-Peak Adapter Mode Normal

10.7 Summary of Test Results/Plots

According to the data in section 9.8, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:


-4.77dB at 0.5980 MHz in the Line, QP detector, 0.15-30MHz

10.8 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: Mobile Phone
Tested Model: Q65
Operating Condition: (WIFI)Transmitting
Comment: AC 120V/60Hz

Test Specification: Neutral

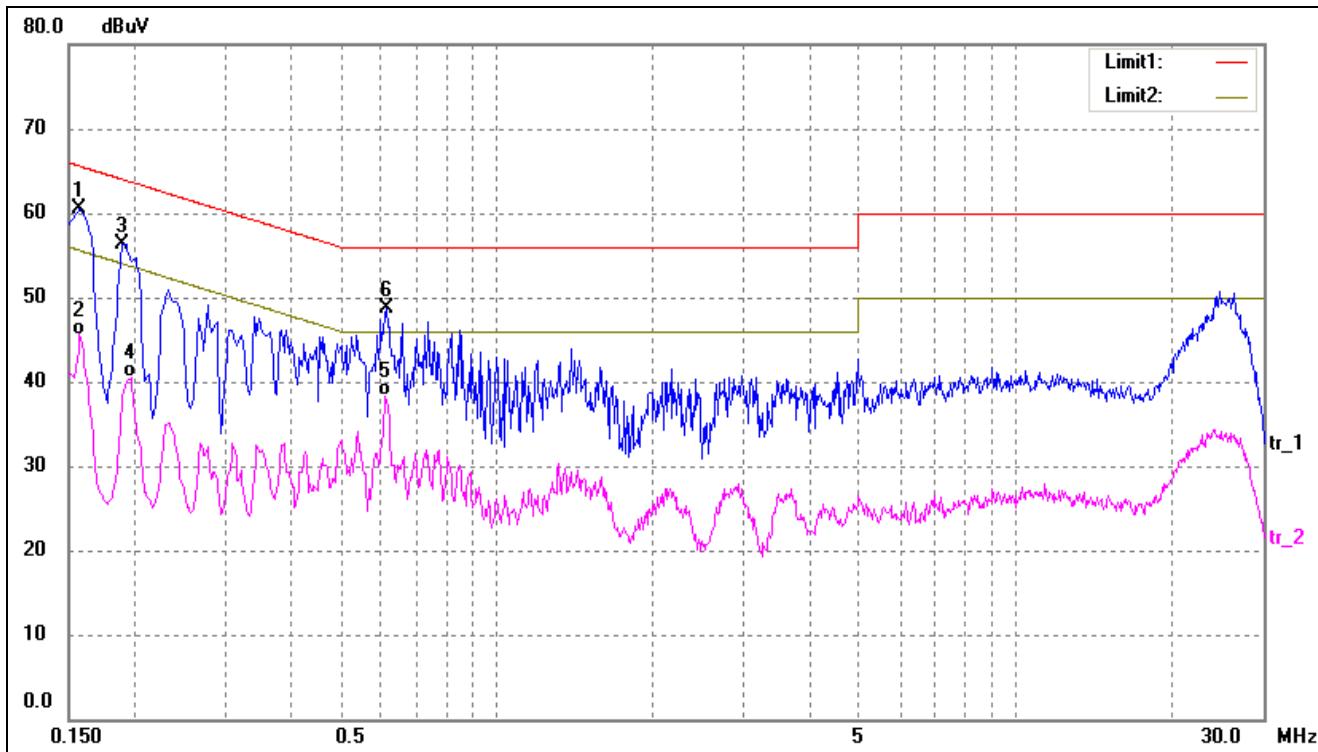

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	47.97	12.50	60.47	65.57	-5.10	QP
2	0.1580	33.10	12.50	45.60	55.57	-9.97	AVG
3	0.1904	43.85	12.50	56.35	64.02	-7.67	QP
4	0.1980	28.09	12.50	40.59	53.69	-13.10	AVG
5	0.6100	25.76	12.61	38.37	46.00	-7.63	AVG
6	0.6140	36.04	12.61	48.65	56.00	-7.35	QP

Test Specification: Line

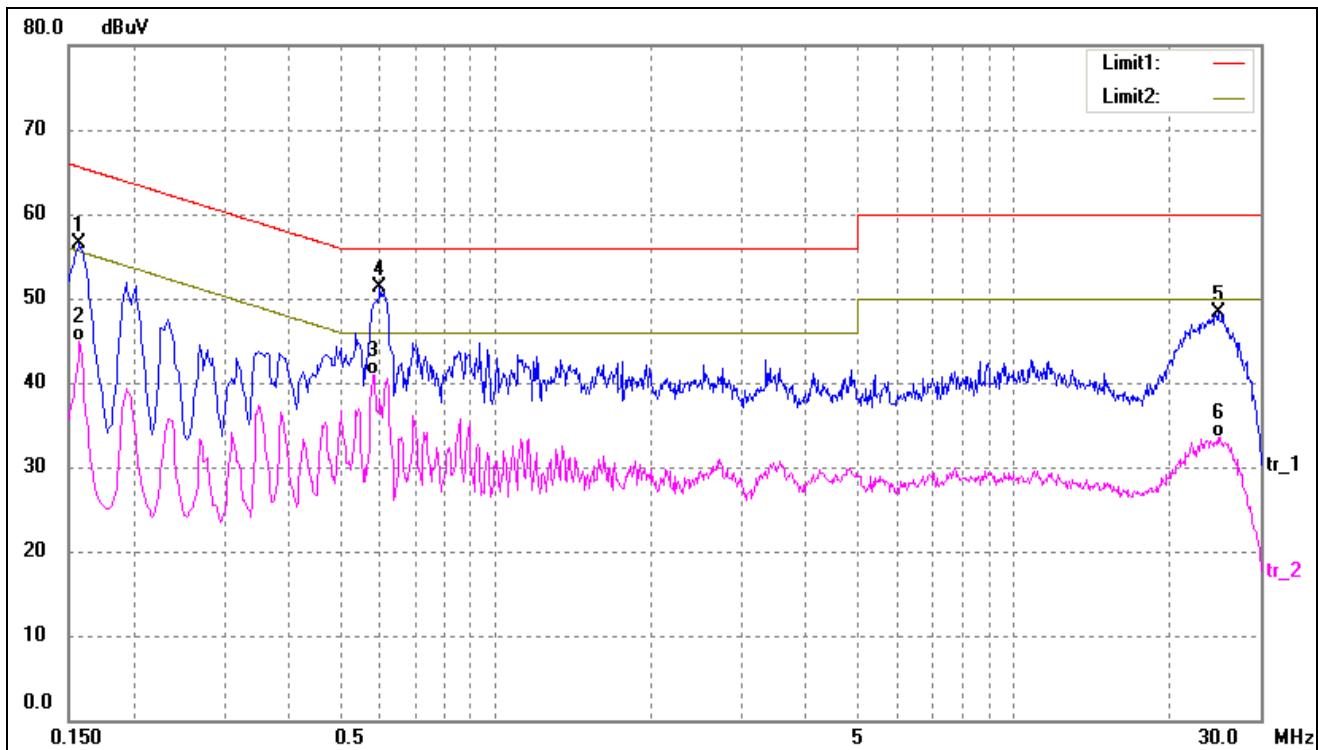

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	44.03	12.50	56.53	65.57	-9.04	QP
2	0.1580	32.44	12.50	44.94	55.57	-10.63	AVG
3	0.5820	28.38	12.58	40.96	46.00	-5.04	AVG
4	0.5980	38.63	12.60	51.23	56.00	-4.77	QP
5	24.8660	35.30	12.96	48.26	60.00	-11.74	QP
6	24.8660	20.52	12.96	33.48	50.00	-16.52	AVG

***** END OF REPORT *****