

EMC TEST REPORT



Report No.: 15070477-FCC-E

Supersede Report No.:N/A

Applicant	Santok Limited	
Product Name	Phone	
Model No.	Sync 5.5	
Serial No.	N/A	
Test Standard	FCC Part 15 Subpart B Class B:2014, ANSI C63.4: 2014	
Test Date	June 26 to July 10, 2015	
Issue Date	July 31,2015	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
<i>Lucifer He</i>	<i>David Huang</i>	
Lucifer He Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	15070477-FCC-E
Page	3 of 30

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	9
6.2 RADIATED EMISSIONS.....	15
ANNEX A. TEST INSTRUMENT.....	19
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	20
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	26
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	29
ANNEX E. DECLARATION OF SIMILARITY.....	30

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15070477-FCC-E	NONE	Original	July 10, 2015
15070477-FCC-E	V	Change the applicant's address	July 28, 2015
15070477-FCC-E	V1	Change the brand name	July 31, 2015

2. Customer information

Applicant Name	Santok Limited
Applicant Add	Santok House, Unit L, Braintree Industrial Estate, Braintree Road, South Ruislip, Middlesex
Manufacturer	shenzhen zhike communications co.,ltd
Manufacturer Add	8th Floor,B Bldg. Dianzi Fuhua Jidi,Taojindi, Longsheng community, Longhua District,Shenzhen(ShangTang Metro Station Exit A LongHua Line)

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Phone
Main Model:	Sync 5.5
Serial Model:	N/A
Antenna Gain:	<p>GSM850: 0 dBi PCS1900: 1 dBi UMTS-FDD Band V: 0 dBi UMTS-FDD Band II: 1 dBi Bluetooth/BLE: 2 dBi WIFI: 2 dBi GPS:1.5 dBi</p>
Input Power:	<p>Battery: Model: Sync 5.5 Spec: 3.7V 2300mAh (8.5Wh) Max Charging Capacity: 4.2V</p> <p>Adapter: Model: D12-0501000C Input: AC 100-240V; 50/60Hz; 0.2A Output: DC 5.0V; 1000mA</p>
Trade Name :	STK
FCC ID:	2AE7RSANTOKSYNC55
Date EUT received:	June 26, 2015

Equipment Category : JBP

Type of Modulation: GSM / GPRS: GMSK
EGPRS: GMSK, 8PSK
UMTS-FDD: QPSK, 16QAM
802.11b/g/n: DSSS, OFDM
Bluetooth: GFSK, π /4DQPSK, 8DPSK
BLE: GFSK
GPS:BPSK

RF Operating Frequency (ies): GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz
PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz
UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz
UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz
WIFI:802.11b/g/n(20M): 2412-2462 MHz
WIFI:802.11n(40M): 2422-2452 MHz
Bluetooth& BLE: 2402-2480 MHz
GPS RX:1575.42 MHz

Number of Channels: GSM 850: 124CH
PCS1900: 299CH
UMTS-FDD Band V : 102CH
UMTS-FDD Band II : 277CH
WIFI :802.11b/g/n(20M): 11CH
WIFI :802.11n(40M): 7CH
Bluetooth: 79CH
BLE: 40CH
GPS:1CH

Port: Power Port, Earphone Port, USB Port

GPRS/EGPRS Multi-slot class 8/10/12

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-


6. Measurements, Examination And Derived Results

6.1 AC Power Line Conducted Emissions

Temperature	24 °C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	July 07, 2015
Tested By :	Lucifer He

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [μ] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dBμV)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

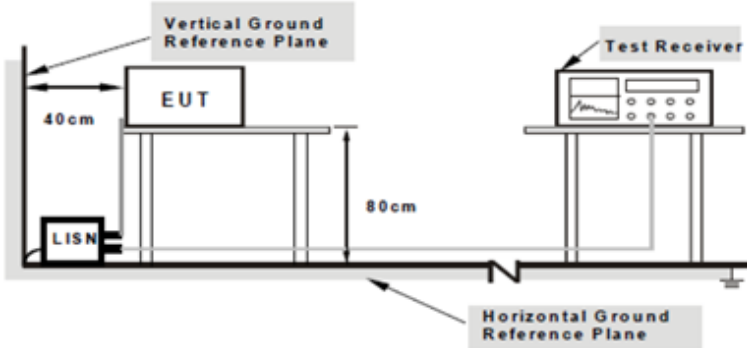Test Setup	 <p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>
------------	---

Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.
-----------	---


Test Report	15070477-FCC-E
Page	10 of 30

	<ol style="list-style-type: none"> 3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode :	USB Mode
--------------------	-----------------

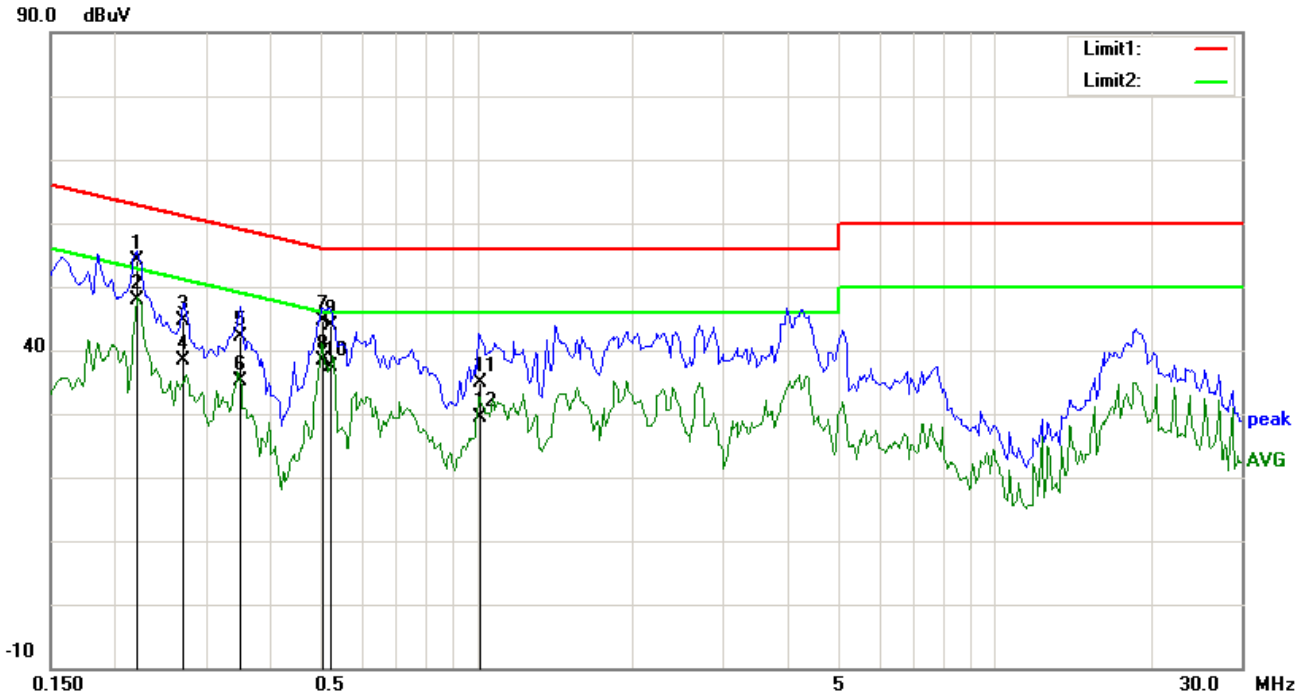


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
1	L1	0.2208	41.23	QP	12.94	54.17	62.79	-8.62	
2	L1	0.2208	34.82	AVG	12.94	47.76	52.79	-5.03	
3	L1	0.2711	31.99	QP	12.75	44.74	61.08	-16.34	
4	L1	0.2711	25.67	AVG	12.75	38.42	51.08	-12.66	
5	L1	0.3492	29.75	QP	12.46	42.21	58.98	-16.77	
6	L1	0.3492	22.61	AVG	12.46	35.07	48.98	-13.91	
7	L1	0.5047	32.76	QP	11.90	44.66	56.00	-11.34	
8	L1	0.5047	26.43	AVG	11.90	38.33	46.00	-7.67	
9	L1	0.5211	31.91	QP	11.88	43.79	56.00	-12.21	
10	L1	0.5211	25.61	AVG	11.88	37.49	46.00	-8.51	
11	L1	1.0157	23.46	QP	11.40	34.86	56.00	-21.14	
12	L1	1.0157	18.09	AVG	11.40	29.49	46.00	-16.51	

Test Mode :	USB Mode
--------------------	-----------------

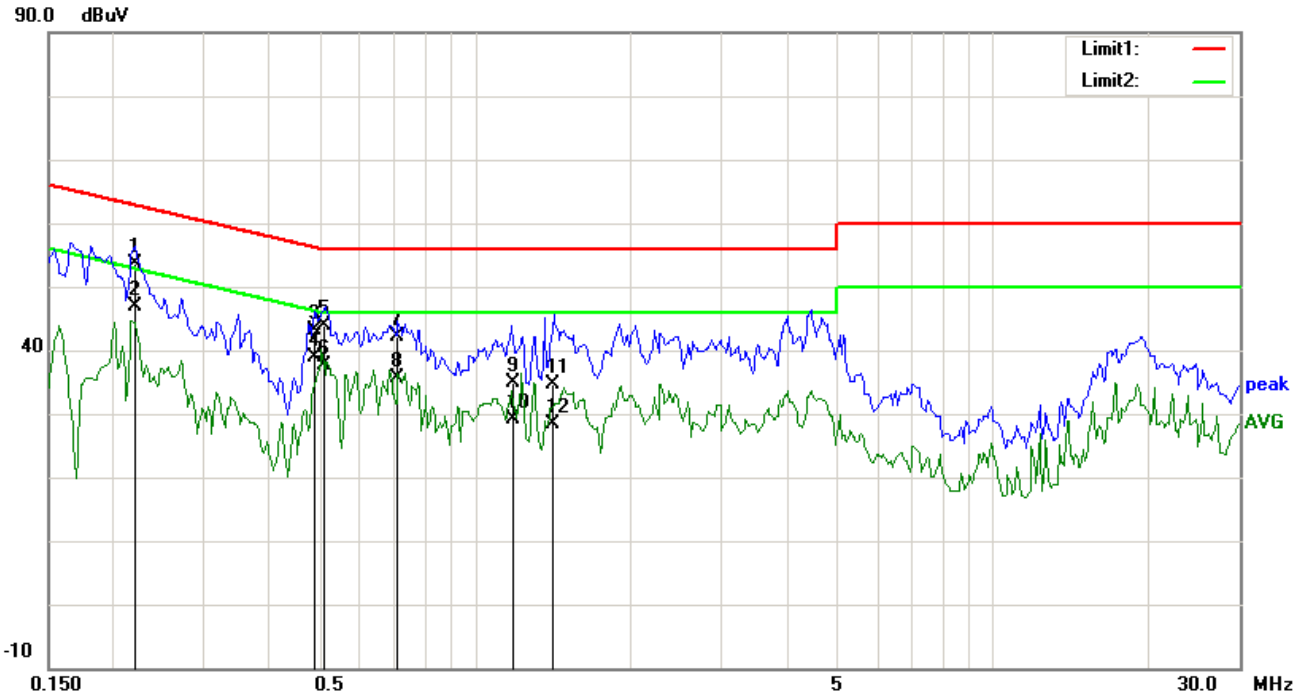


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
1	N	0.2208	40.78	QP	12.94	53.72	62.79	-9.07	
2	N	0.2208	33.88	AVG	12.94	46.82	52.79	-5.97	
3	N	0.4898	31.23	QP	11.94	43.17	56.17	-13.00	
4	N	0.4898	26.99	AVG	11.94	38.93	46.17	-7.24	
5	N	0.5101	32.10	QP	11.89	43.99	56.00	-12.01	
6	N	0.5101	25.68	AVG	11.89	37.57	46.00	-8.43	
7	N	0.7086	30.50	QP	11.69	42.19	56.00	-13.81	
8	N	0.7086	23.96	AVG	11.69	35.65	46.00	-10.35	
9	N	1.1844	23.57	QP	11.42	34.99	56.00	-21.01	
10	N	1.1844	17.76	AVG	11.42	29.18	46.00	-16.82	
11	N	1.4107	23.09	QP	11.45	34.54	56.00	-21.46	
12	N	1.4107	17.00	AVG	11.45	28.45	46.00	-17.55	

Test Mode :	USB Mode
--------------------	-----------------

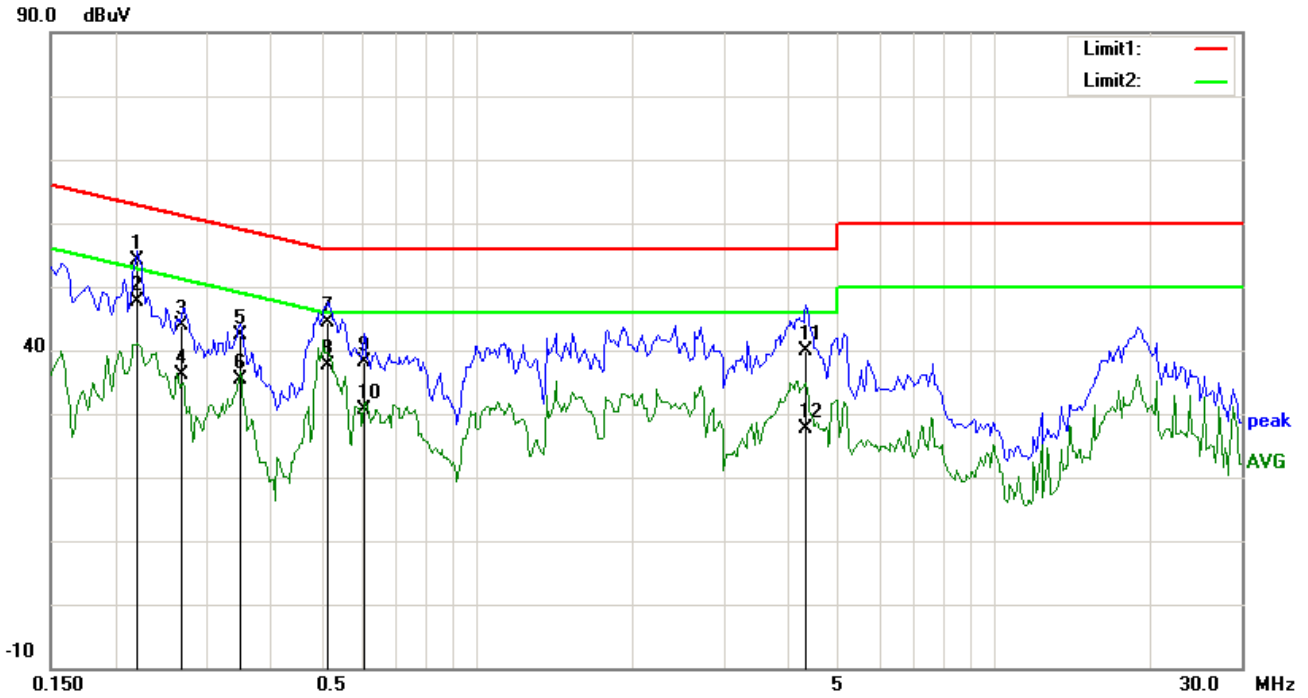


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB}	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
1	L1	0.2208	41.21	QP	12.94	54.15	62.79	-8.64	
2	L1	0.2208	34.57	AVG	12.94	47.51	52.79	-5.28	
3	L1	0.2687	31.16	QP	12.76	43.92	61.16	-17.24	
4	L1	0.2687	23.39	AVG	12.76	36.15	51.16	-15.01	
5	L1	0.3492	29.99	QP	12.46	42.45	58.98	-16.53	
6	L1	0.3492	22.88	AVG	12.46	35.34	48.98	-13.64	
7	L1	0.5172	32.46	QP	11.88	44.34	56.00	-11.66	
8	L1	0.5172	25.68	AVG	11.88	37.56	46.00	-8.44	
9	L1	0.6070	26.29	QP	11.79	38.08	56.00	-17.92	
10	L1	0.6070	18.88	AVG	11.79	30.67	46.00	-15.33	
11	L1	4.3164	28.47	QP	11.40	39.87	56.00	-16.13	
12	L1	4.3164	16.30	AVG	11.40	27.70	46.00	-18.30	

Test Mode :	USB Mode
--------------------	-----------------

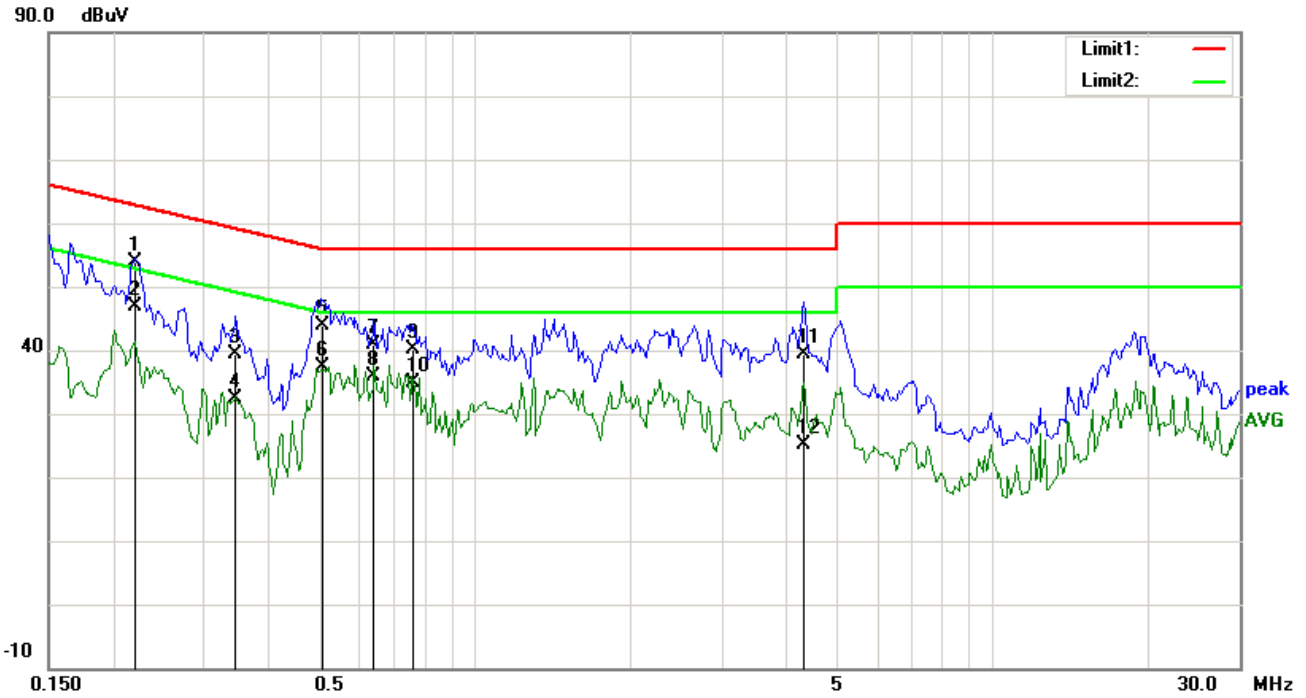

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
1	N	0.2208	40.91	QP	12.94	53.85	62.79	-8.94	
2	N	0.2208	33.93	AVG	12.94	46.87	52.79	-5.92	
3	N	0.3453	26.81	QP	12.47	39.28	59.07	-19.79	
4	N	0.3453	19.91	AVG	12.47	32.38	49.07	-16.69	
5	N	0.5074	32.09	QP	11.89	43.98	56.00	-12.02	
6	N	0.5074	25.55	AVG	11.89	37.44	46.00	-8.56	
7	N	0.6383	29.06	QP	11.76	40.82	56.00	-15.18	
8	N	0.6383	24.11	AVG	11.76	35.87	46.00	-10.13	
9	N	0.7589	28.61	QP	11.64	40.25	56.00	-15.75	
10	N	0.7589	23.28	AVG	11.64	34.92	46.00	-11.08	
11	N	4.3203	27.62	QP	11.82	39.44	56.00	-16.56	
12	N	4.3203	13.24	AVG	11.82	25.06	46.00	-20.94	

6.2 Radiated Emissions

Temperature	24 °C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	July 07, 2015
Tested By :	Lucifer He

Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.107(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>										
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (µV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength (µV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500
		Frequency range (MHz)		Field Strength (µV/m)									
		30 – 88		100									
		88 – 216		150									
216 960	200												
Above 960	500												

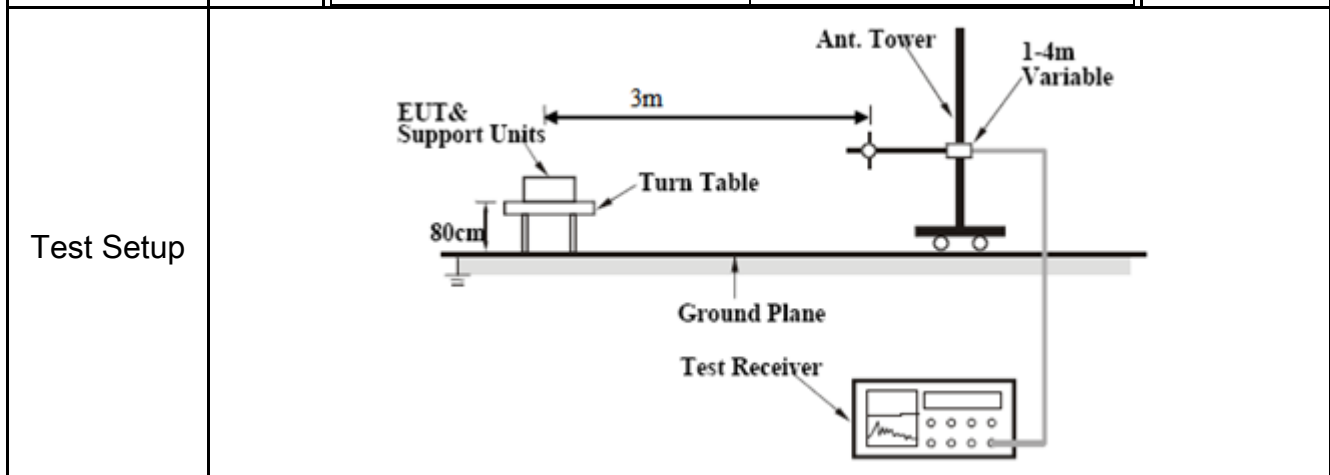

Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarization (whichever gave the higher emission level
-----------	---


	<p>over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>■ 1 kHz (Duty cycle < 98%) □ 10 Hz (Duty cycle > 98%)</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode:	USB Mode
-------------------	-----------------

Below 1GHz

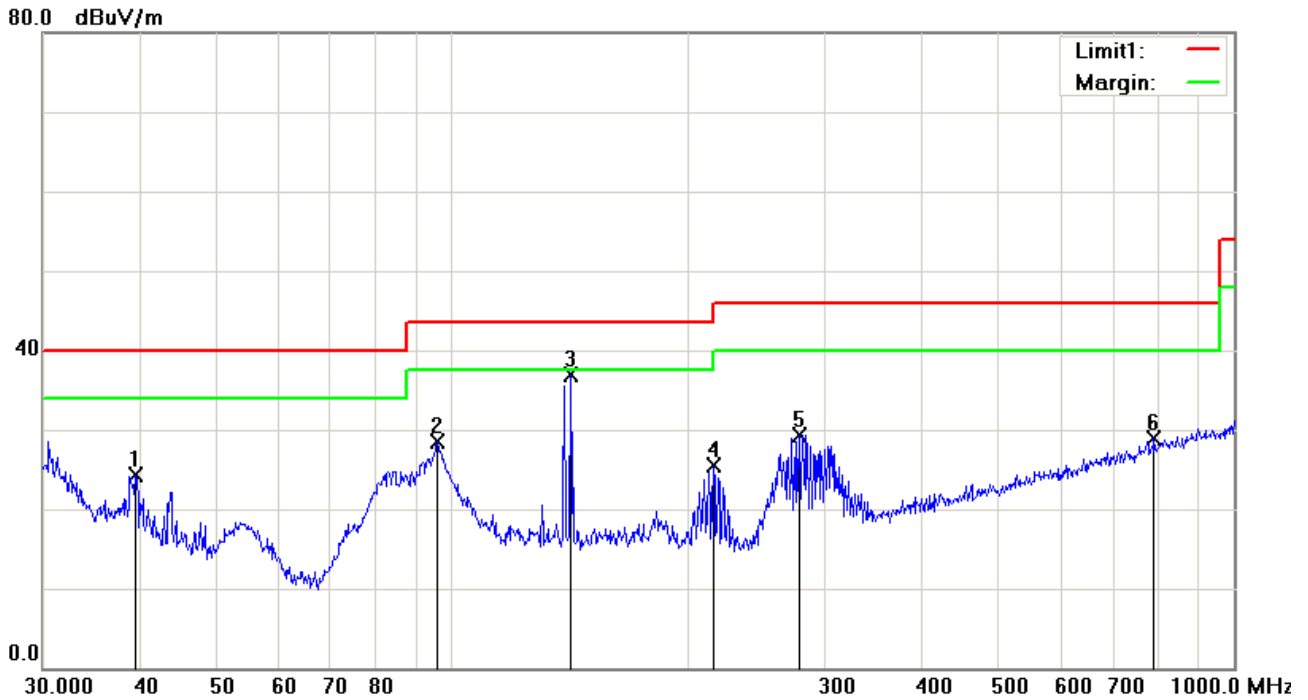

Test Data

Horizontal Polarity Plot @3m


No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ()	Comment
1	H	39.4372	31.43	peak	-7.18	24.25	40.00	-15.75	200	147	
2	H	95.7622	40.52	peak	-11.93	28.59	43.50	-14.91	200	158	
3	H	141.8262	45.40	peak	-8.52	36.88	43.50	-6.62	200	128	
4	H	216.0240	34.42	peak	-8.88	25.54	46.00	-20.46	100	137	
5	H	278.0669	37.29	peak	-7.91	29.38	46.00	-16.62	100	130	
6	H	790.6188	25.94	peak	3.06	29.00	46.00	-17.00	100	167	

Above 1GHz

Note: The frequency that above 1GHz is mainly from the environment noise.

Below 1GHz

80.0 dBuV/m

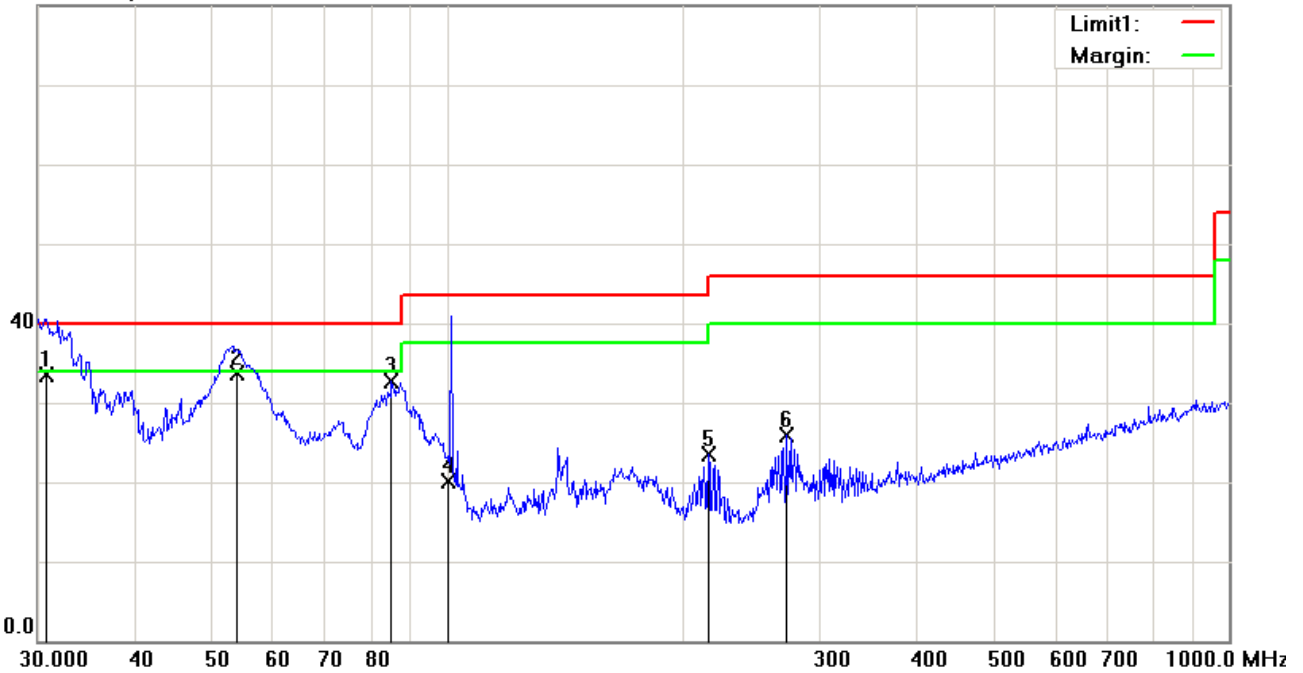

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ()	Comment
1	V	30.7455	34.23	QP	-0.81	33.42	40.00	-6.58	100	300	
2	V	54.0104	47.45	QP	-13.65	33.80	40.00	-6.20	100	304	
3	V	84.9995	46.12	peak	-13.50	32.62	40.00	-7.38	100	120	
4	V	100.6551	30.83	QP	-10.69	20.14	43.50	-23.36	100	296	
5	V	216.0240	32.41	peak	-8.88	23.53	46.00	-22.47	100	71	
6	V	272.2776	34.00	peak	-8.17	25.83	46.00	-20.17	100	53	

Above 1GHz


Note: The frequency that above 1GHz is mainly from the environment noise.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted Emissions					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191106	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191107	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna	AH-118	71259	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

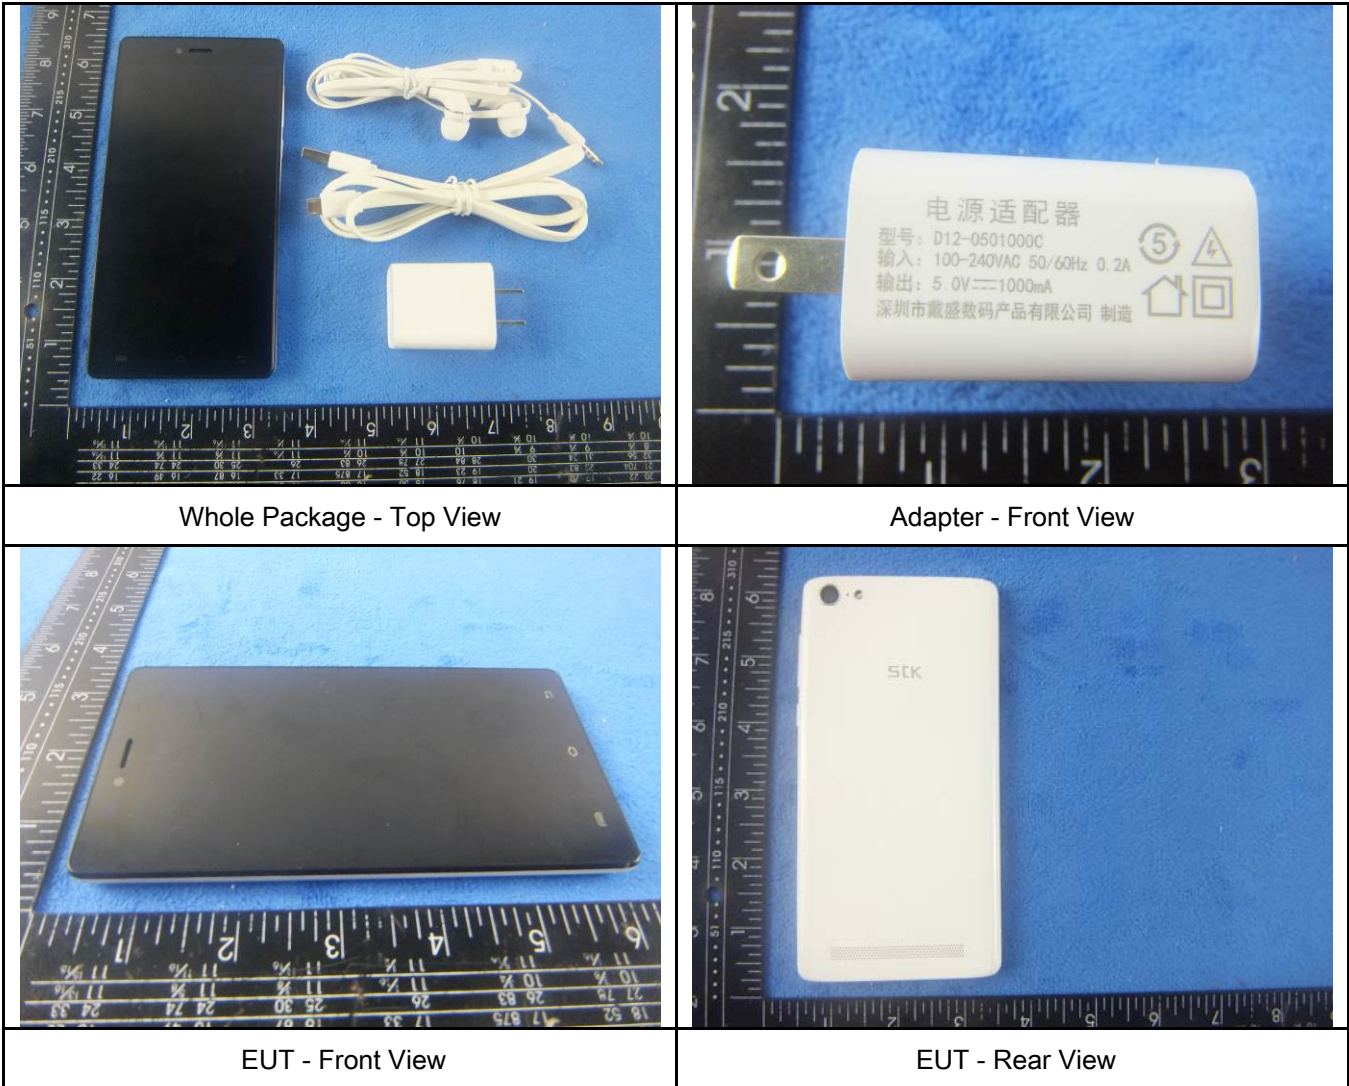



EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo




Cover Off - Top View 1




Cover Off - Top View 2




Battery - Top View

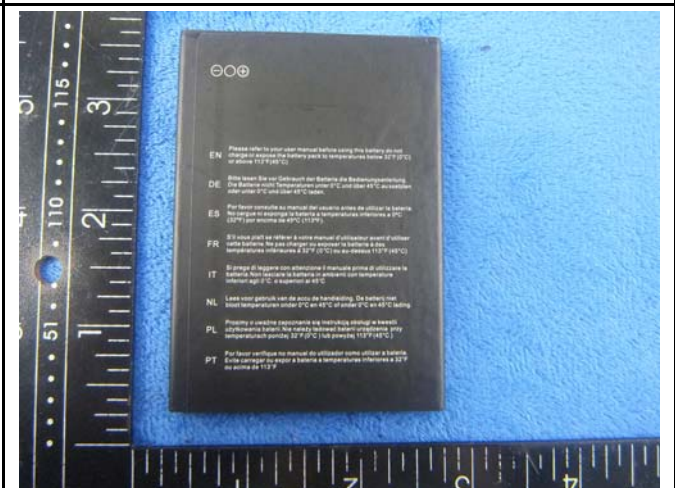


Battery - Bottom View

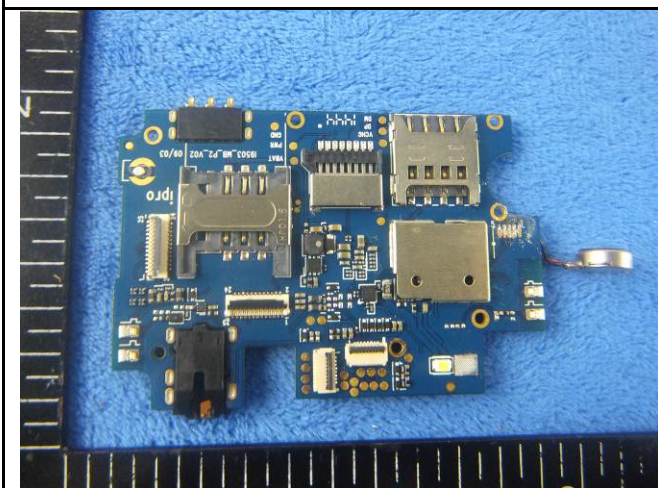


Mainboard With Shielding - Front View

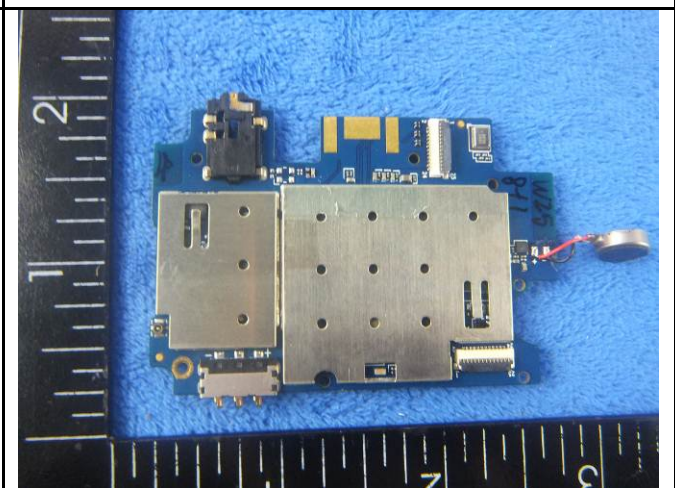


Mainboard With Shielding - Rear View

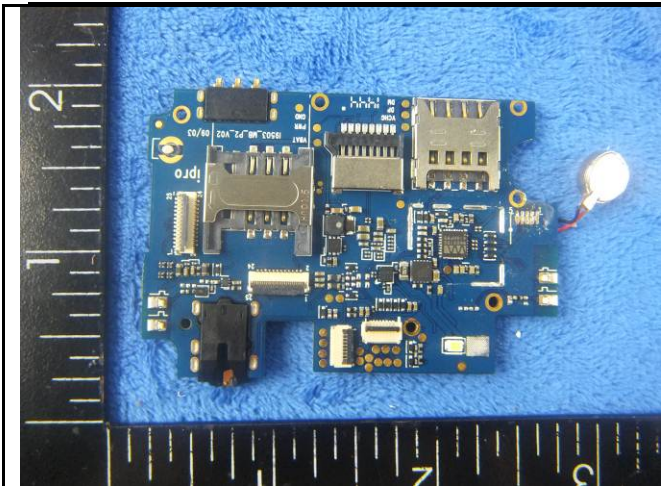


Mainboard Without Shielding - Front View

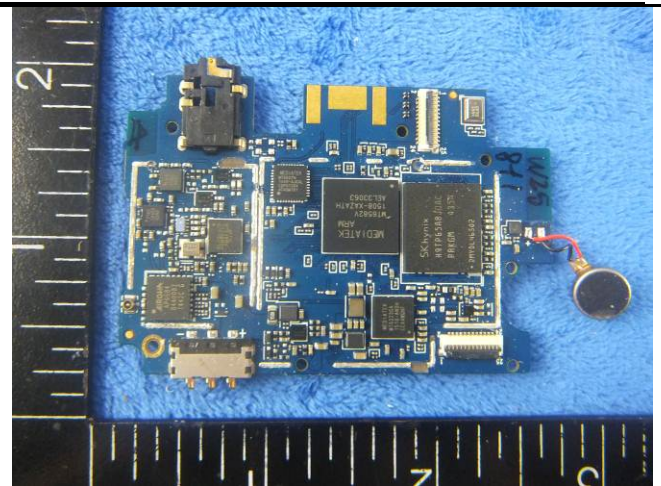


Mainboard Without Shielding - Rear View

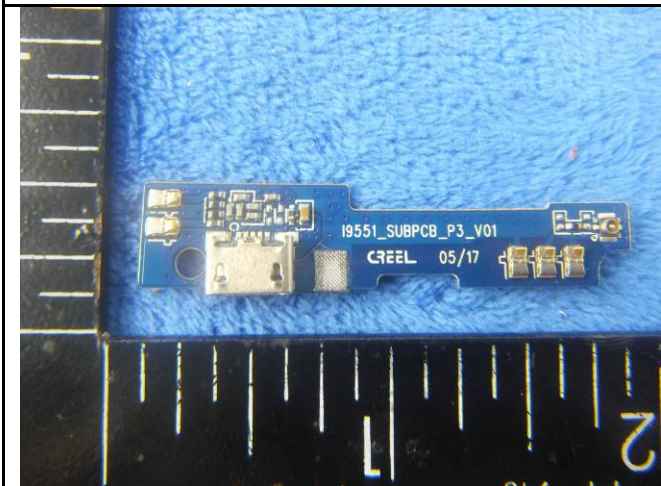

Small board With Shielding - Front View

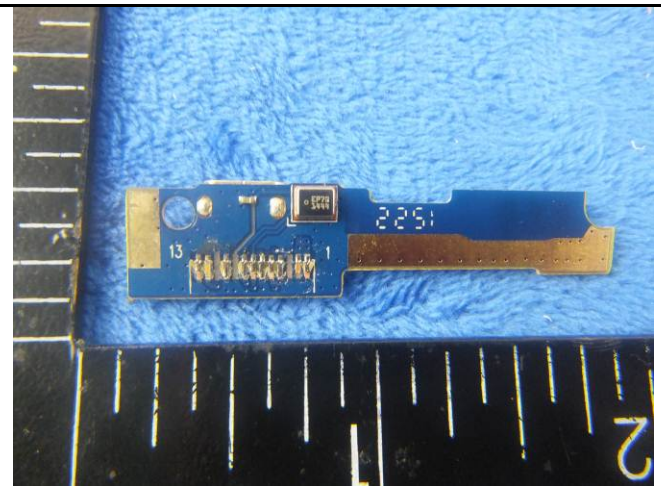

Small board With Shielding - Rear View

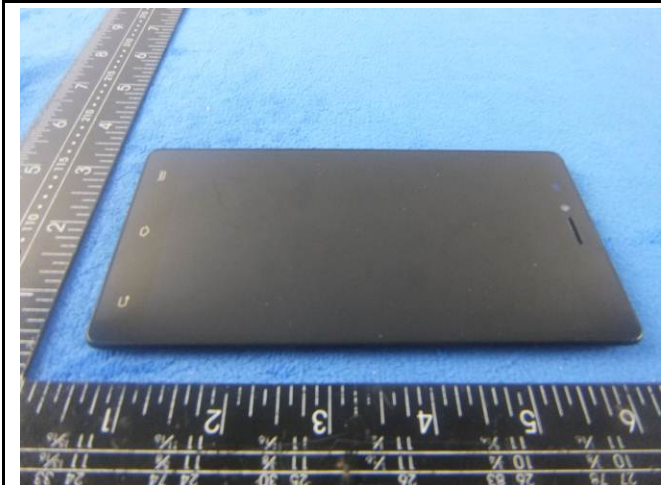

LCD - Front View



LCD - Rear View



WIFI/BT/BLE - Antenna View



GSM/PCS/UMTS-FDD Antenna View

Annex B.iii. Photograph: Test Setup Photo



Conducted Emissions Test Setup – Front View



Conducted Emissions Test Setup – Side View



Radiated Spurious Emissions Test Setup Below 1GHz




Radiated Spurious Emissions Test Setup Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for Conducted Emissions

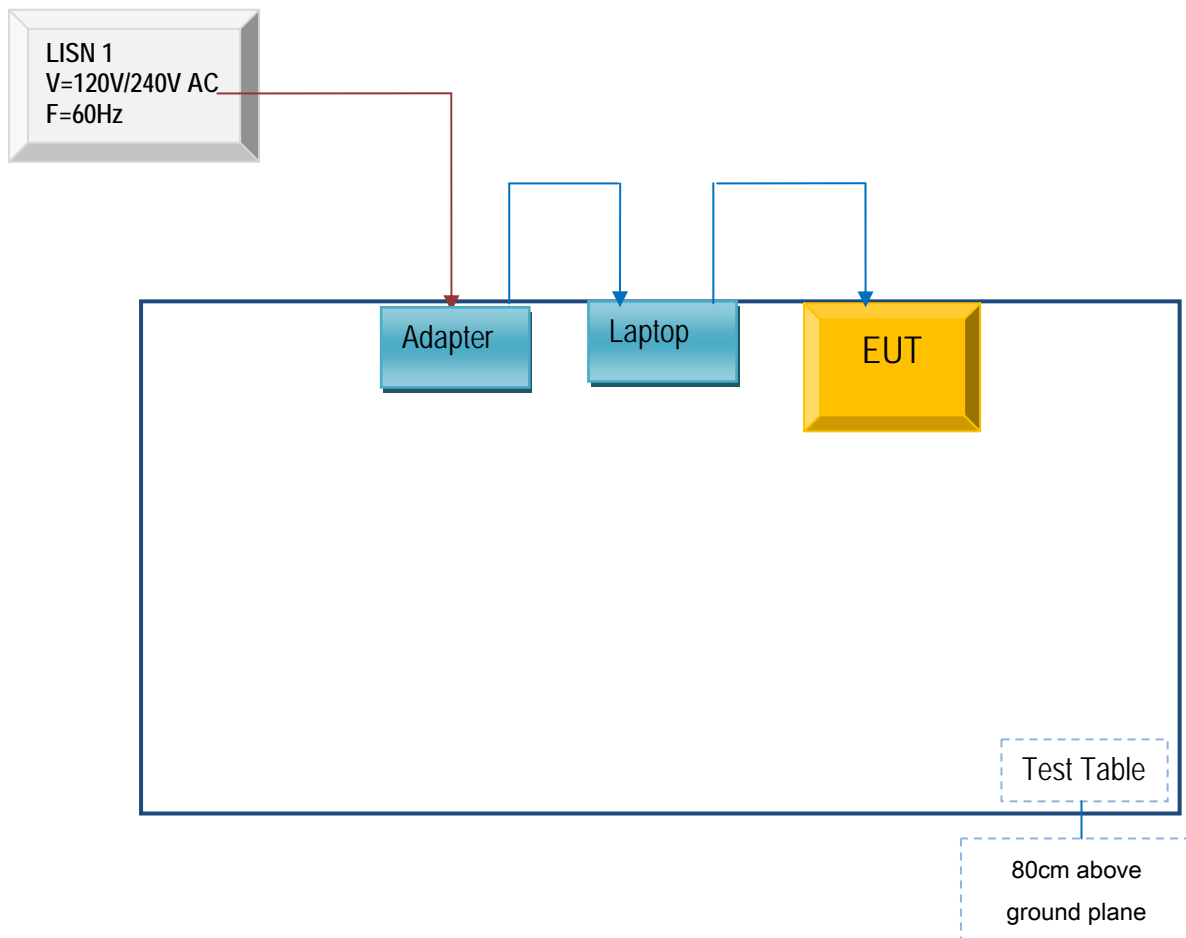

Block Configuration Diagram for Radiated Emissions

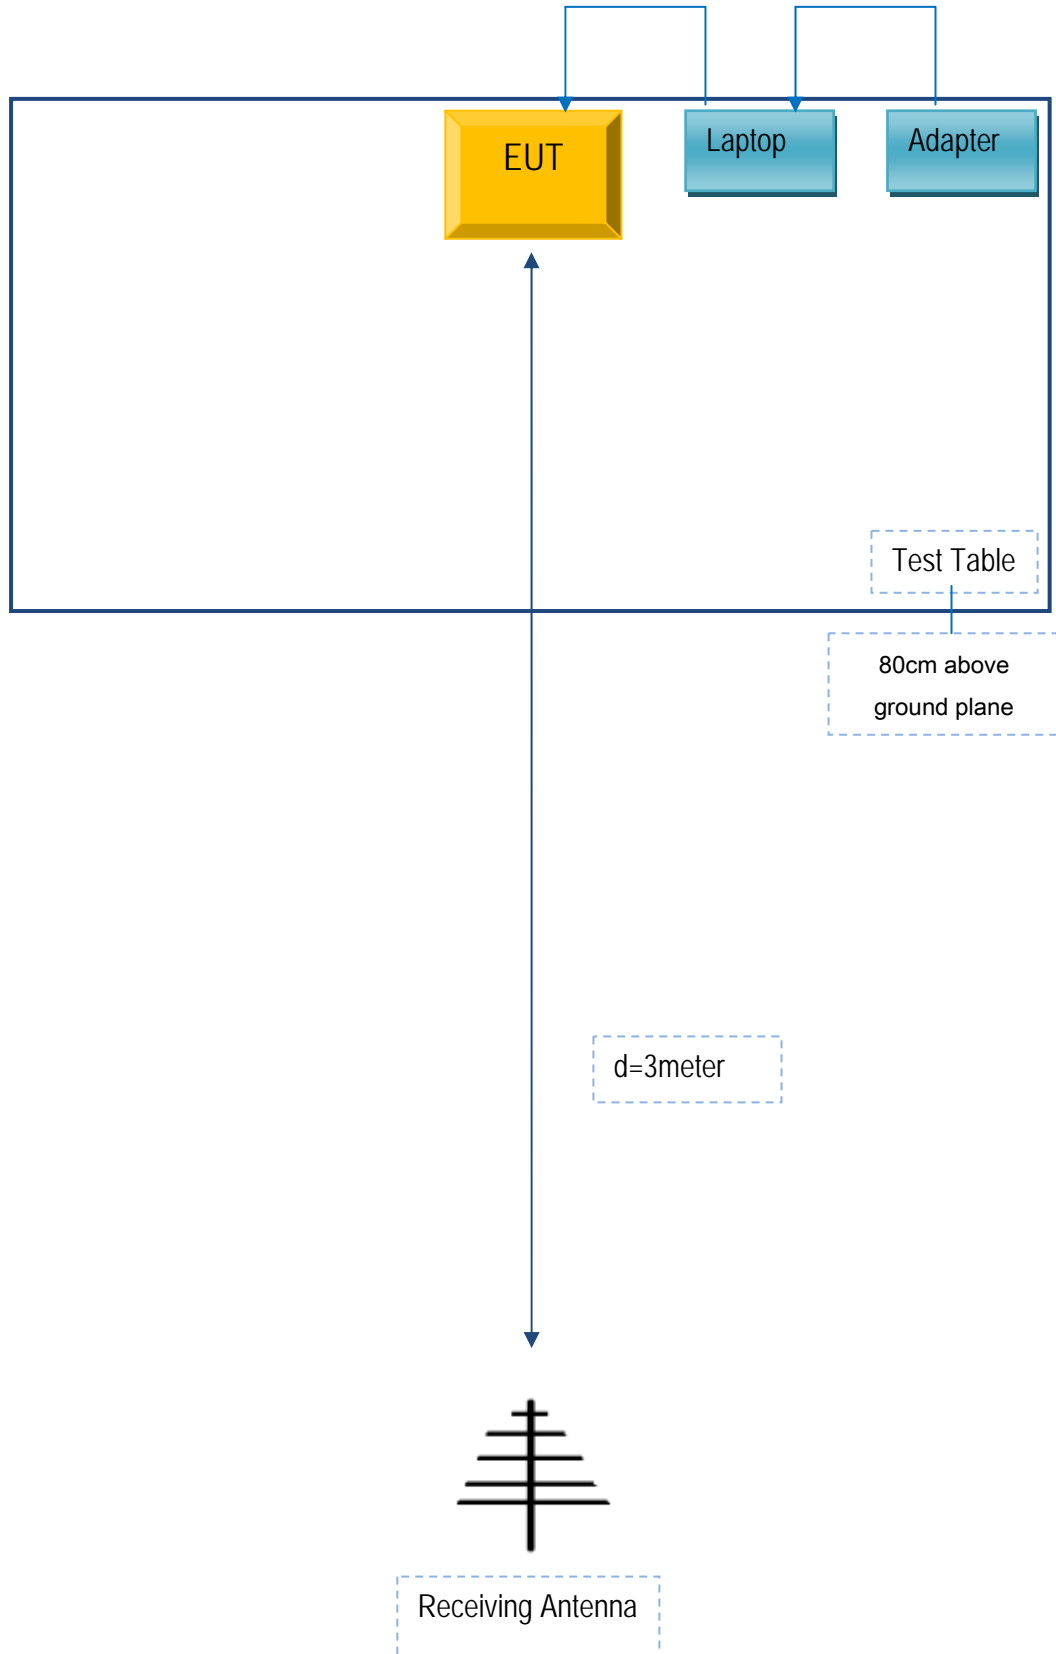

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
Lenovo	Lenovo Laptop	E40& 0579A52	N/A	N/A

Test Report	15070477-FCC-E
Page	29 of 30

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see Attachment

Test Report	15070477-FCC-E
Page	30 of 30

Annex E. DECLARATION OF SIMILARITY

N/A