

LTE RADIO TEST REPORT

Report No: STS1704241F05

Issued for

Santok Limited

Santok House, Unit L, Braintree Industrial Estate, Braintree
Road, South Ruislip, Middlesex, United Kingdom

Product Name:	Smart phone
Brand Name:	STK
Model Name:	HERO LITE
Series Model:	N/A
FCC ID:	2AE7R STKHEROLITE
Test Standard:	47 CFR Part 2, 24(E), 27

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from BZT, All Test Data Presented in this report is only applicable to presented Test sample.

BZT Testing Technology Co., Ltd
Add. : Buliding 17, Xinghua Road Xingwei industrial Park Fuyong,
Baoan District, Shenzhen, Guangdong, China
TEL: +86-755 3307 1680 FAX: +86-755 27341758 E-mail:bruce@bzt.Cn

TEST RESULT CERTIFICATION

Applicant's name : Santok Limited
Address : Santok House, Unit L, Braintree Industrial Estate, Braintree Road, South Ruislip, Middlesex, United Kingdom
Manufacture's Name : Santok Limited
Address : Santok House, Unit L, Braintree Industrial Estate, Braintree Road, South Ruislip, Middlesex, United Kingdom
Product name : Smart phone
Brand name : STK
Model and/or type reference.. : HERO LITE
Standards : 47 CFR Part 2, 24(E), 27
Test procedure : ANSI / TIA 603-D-2010

This device described above has been tested by BZT, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BZT, this document may be altered or revised by BZT, personal only, and shall be noted in the revision of the document

Date of Test

Date of performance of tests : 28 Apr. 2017~09 May. 2017

Date of Issue : 15 May. 2017

Test Result : Pass

Testing Engineer : [Signature]
(Leo li)

Technical Manager : [Signature]
(Tony liu)

Authorized Signatory : [Signature]
(Vita Li)

TABLE OF CONTENTS	Page
1. SUMMARY OF TEST RESULTS	5
2. GENERAL INFORMATION	7
3. CONDUCTED OUTPUT POWER	16
4. PEAK-TO-AVERAGE RATIO	28
5. RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER	30
6. OCCUPIED BANDWIDTH	42
7. CONDUCTED BAND EDGE	46
8. CONDUCTED SPURIOUS EMISSION	48
9. RADIATED SPURIOUS EMISSION	49
10. FREQUENCY STABILITY	72
PHOTOS OF TEST SETUP	78

Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	15 May. 2017	STS1704241F05	ALL	Initial Issue

1. SUMMARY OF TEST RESULTS

1.1 TEST RESULTS DESCRIPTION AND LABORATORY INFORMATION

Setion	FCC Rule	Description	Limit	Result
	§2.1046	Conducted Output Power	Reporting Only	PASS
	§24.232(d) §22.913(d) §27.50(a)(B)	Peak-to-Average Ratio	<13 dB	PASS
	§2.1049 §24.238(b) §27.53(h)(3) §27.53(m)(6)	Occupied Bandwidth	Reporting Only	PASS
	§2.1051) §24.238(a) §27.53(g) §27.53(h)	Conducted Band Edge Measurement	<43+10log10(P[Watts])	PASS
	§27.53(m)(4)		<43+10log10(P[Watts])	PASS
	§2.1051 §24.238(a) §27.53(g) §27.53(h)	Conducted Spurious Emission	<43+10log10(P[Watts])	PASS
	§27.53(m)(4)	Conducted Spurious Emission	< 55+10log10(P[Watts])	PASS
	§2.1055 §24.235 §27.54	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22 Within Authorized Band	PASS
	§27.50(c)(10)	Effective Radiated Power	ERP < 3 Watt	PASS
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power	EIRP < 2Watt	PASS
	§27.50(d)(4)	Equivalent Isotropic Radiated	EIRP < 1Watt	PASS
	§2.1053 §24.238(a) §27.53(g) §27.53(h)	Radiated Spurious Emission	< 43+10log10(P[Watts])	PASS
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission	< 55+10log10(P[Watts])	PASS

1.1.1 TEST FACTORY

BZT Testing Technology Co., Ltd.

Add. : Buliding 17, Xinghua Road Xingwei industrial Park Fuyong,
Baoan District, Shenzhen, Guangdong, China

FCC Registration No.: 701733

1.1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately **95 %** °

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	±2.88dB
2	Conducted Emission (150KHz-30MHz)	±2.67dB
3	RF power,conducted	±0.70dB
4	Spurious emissions,conducted	±1.19dB
5	All emissions,radiated(<1G) 30MHz-200MHz	±2.83dB
6	All emissions,radiated(<1G) 200MHz-1000MHz	±2.94dB
7	All emissions,radiated(>1G)	±3.03dB
8	Temperature	±0.5°C
9	Humidity	±2%

2. GENERAL INFORMATION

2.1 TECHNICAL SPECIFICATIONS AND REGULATIONS

2.1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Smart phone
Hardware version:	N371B-024
Software version:	STK_Hero_Lite_DS_V0.0.1_20170419
FCC ID:	2AE7RSTKHEROLITE
Frequency Bands:	U.S. Bands: <input checked="" type="checkbox"/> LTE FDD Band 2 <input checked="" type="checkbox"/> LTE FDD Band 4 <input checked="" type="checkbox"/> LTE FDD Band 5 <input checked="" type="checkbox"/> LTE FDD Band 7 <input type="checkbox"/> LTE FDD Band 12 <input type="checkbox"/> LTE FDD Band 13 <input checked="" type="checkbox"/> LTE FDD Band 17
SIM CARD:	SIM 1 and SIM 2 is a chipset unit and tested as single chipset, SIM 1 is used to tested
Antenna:	PIFA Antenna
Antenna gain:	LTE Band 2: 0.2dBi LTE Band 4: -0.08dBi LTE Band 5: -0.8dBi LTE Band 7: -0.3dBi LTE Band 17: -1.6dBi
Power Supply:	DC 3.8V by battery
Battery parameter:	Capacitance: 2400mA, Rated Voltage: 3.8V
Adapter Input:	AC100-240V, 50/60Hz, 200mA
Adapter Output:	DC 5.0V, 1000mA

2.1.2 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Product Specification Subjective To This Standard			
Tx Frequency	LTE Band 2:1850.7~1909.3MHz LTE Band 4:1710.7~1754.3MHz LTE Band 5:824.7~848.3MHz LTE Band 7:2502.7~2567.3MHz LTE Band 17:706.7~713.2MHz		
Rx Frequency	LTE Band 2:1930.7~1989.3MHz LTE Band 4:2110.7~2154.3MHz LTE Band 5:869.7~893.3MHz LTE Band 7:2622.7~2687.3MHz LTE Band 17:736.3~743.3MHz		
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz /20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz /20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz / 10MHz / 15MHz /20MHz LTE Band 17 : 5MHz / 10MHz		
Maximum Output Power		QPSK	16QAM
	LTE Band 2(EIRP)	23.42 dBm	23.35 dBm
	LTE Band 4(EIRP)	23.98 dBm	23.89 dBm
	LTE Band 5(ERP)	22.63 dBm	22.51 dBm
	LTE Band 7(EIRP)	22.21 dBm	22.15 dBm
	LTE Band 17(ERP)	23.01 dBm	22.88 dBm
Type of Modulation	QPSK / 16QAM		

2.1.3 EMISSION DESIGNATOR

LTE Band 2 BW(MHz)	Emission Designator (99%OBW)QPSK	Emission Designator (99%OBW)16QAM
1.4	1M11G7D	1 M10W7D
3	2M69G7D	2M68W7D
5	4M53G7D	4M53W7D
10	8M94G7D	8M94W7D
15	13M5G7D	13M5W7D
20	17M9G7D	17M9W7D

LTE Band 4 BW(MHz)	Emission Designator (99%OBW)QPSK	Emission Designator (99%OBW)16QAM
1.4	1M10G7D	1 M10W7D
3	2M70G7D	2M69W7D
5	4M52G7D	4M51W7D
10	8M95G7D	8M94W7D
15	13M5G7D	13M5W7D
20	18M0G7D	18M0W7D

LTE Band 5 BW(MHz)	Emission Designator (99%OBW)QPSK	Emission Designator (99%OBW)16QAM
1.4	1M10G7D	1 M10W7D
3	2M68G7D	2M69W7D
5	4M53G7D	4M54W7D
10	8M95G7D	8M95W7D

LTE Band 7 BW(MHz)	Emission Designator (99%OBW)QPSK	Emission Designator (99%OBW)16QAM
5	4M55G7D	4M54W7D
10	8M95G7D	8M95W7D
15	13M5G7D	13M5W7D
20	18M0G7D	18M0W7D

LTE Band 17 BW(MHz)	Emission Designator (99%OBW)QPSK	Emission Designator (99%OBW)16QAM
5	4M54G7D	4M55W7D
10	8M96G7D	8M95W7D

2.1.4 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D02 Power Meas. License Digital Systems with maximum output power. Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Remark:

1. The mark "v" means that this configuration is chosen for testing
2. The mark "-" means that this bandwidth is not supported.
3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated

ITEMS	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v			v	v	v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v	v	v	v
Peak&Avera Ratio	2						v	v	v	v		v	v	v	v
	4						v	v	v	v		v	v	v	v
	5						v	v	v	v		v	v	v	v
	7	-	-				v	v	v	v		v	v	v	v
	17	-	-		v	-	-	v	v	v		v	v	v	v
26dB&99% Bandwidth	2	v	v	v	v	v	v	v	v			v	v	v	v
	4	v	v	v	v	v	v	v	v			v	v	v	v
	5	v	v	v	v			v	v				v	v	v
	7	-	-	v	v	v	v	v	v			v	v	v	v
	17	-	-	v	v	-	-	v	v			v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v		v	v	v	v
	4	v	v	v	v	v	v	v	v	v		v	v	v	v
	5	v	v	v	v			v	v	v		v	v	v	v
	7	-	-	v	v	v	v	v	v	v		v	v	v	v
	17	-	-	v	v	-	-	v	v	v		v	v	v	v
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v			v	v	v
	4	v	v	v	v	v	v	v	v	v			v	v	v
	5	v	v	v	v			v	v	v			v	v	v
	7	-	-	v	v	v	v	v	v	v			v	v	v
	17	-	-	v	v	-	-	v	v	v			v	v	v

Frequency Stability	2				v			v				v		v	
	4				v			v				v		v	
	5				v			v				v		v	
	7	-	-		v			v				v		v	
	17	-	-		v	-	-	v				v		v	
E.R.P.& E.I.R.P.	2	v	v	v	v	v	v	v	v	v			v	v	v
	4	v	v	v	v	v	v	v	v	v			v	v	v
	5	v	v	v	v			v	v	v			v	v	v
	7	-	-	v	v	v	v	v	v	v			v	v	v
	17	-	-	v	v	-	-	v	v	v			v	v	v
Radiated Spurious Emission	2	v	v	v	v	v	v	v		v			v	v	v
	4	v	v	v	v	v	v	v		v			v	v	v
	5	v	v	v	v			v		v			v	v	v
	7	-	-	v	v	v	v	v		v			v	v	v
	17	-	-	v	v	-	-	v		v			v	v	v

2.1.5 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for filing to comply with the 47 CFR Part 2, 24(E), 27

2.1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with eut intended for fcc grant together.

2.1.7 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.1.8 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.1.9 CONFIGURATION OF EUT SYSTEM

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	Serial No.	Note
E-1	Smart phone	HERO LITE	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.1.10 MEASUREMENT INSTRUMENTS

The radiated emission testing was performed according to the procedures of ansi ANSI / TIA 603-D-2010 and FCC CFR 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2016.10.23	2017.10.22
Signal Analyzer	Agilent	N9020A	MY49100060	2016.10.23	2017.10.22
Test Receiver	R&S	ESCI	101427	2016.10.23	2017.10.22
Communication Tester	Agilent	8960	MY48360751	2016.10.23	2017.10.22
Wireless Communications Test Set	R&S	CMW 500	133884	2016.10.23	2017.10.22
Test Receiver	R&S	ESCI	102086	2016.10.23	2017.10.22
Bilog Antenna	TESEQ	CBL6111D	34678	2014.11.24	2017.11.23
Bilog Antenna (Calibration antenna)	TESEQ	CBL6111D	34678	2014.11.24	2017.11.23
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1343	2015.03.05	2018.03.04
Horn Antenna (Calibration antenna)	Schwarzbeck	BBHA 9120D	9120D-1343	2015.03.05	2018.03.04
MXA SIGNAL Analyzer	Agilent	N9020A	MY49100060	2016.10.23	2017.10.22
Double Ridge Horn Antenna	COM-POWER CORPORATION	AH-840	AHA-840	2016.10.23	2017.10.22
Low frequency cable	N/A	R01	N/A	NCR	NCR
High frequency cable	SCHWARZBECK	AK9515H	SN-96286/96287	NCR	NCR
Vector signal generator	Agilent	E8257D-521	MY45141029	2016.10.23	2017.10.22
Power amplifier	DESAY	ZHL-42W	9638	2016.10.23	2017.10.22
Band Reject filter(1920-1980MHz)	COM-MW	ZBSF-1920-1980	0092	2016.10.23	2017.10.22
Band Reject filter(880-915MHz)	COM-MW	ZBSF-C897.5-35	707	2016.10.23	2017.10.22
Band Reject filter(1710-1785MHz)	COM-MW	ZBSF-C1747.5-75	708	2016.10.23	2017.10.22
Band Reject filter(1850-1910MHz)	COM-MW	ZBSF-C1880-60	709	2016.10.23	2017.10.22
Band Reject filter(2500-2570MHz)	COM-MW	ZBSF-C2535-70	710	2016.10.23	2017.10.22
Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	2016.10.23	2017.10.22

2. 1.11 MEASUREMENT RESULTS EXPLANATION EXAMPLE

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF Cable Loss + Attenuator Factor.


3. CONDUCTED OUTPUT POWER

3.1 DESCRIPTION OF THE CONDUCTED OUTPUT POWER MEASUREMENT

3.1.1 MEASUREMENT METHOD

A System Simulator Was Used To Establish Communication With The EUT. Its Parameters Were Set To Force The EUT Transmitting At Maximum Output Power. The Measured Power In The Radio Frequency On The Transmitter Output Terminals Shall Be Reported. configuration follows KDB 971168 D01.

3.1.2 TEST SETUP



3.1.3 TEST PROCEDURES

1. The Transmitter Output Port Was Connected To The System Simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.1.4 TEST RESULTS

LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.15	23.18	23.18
1.4	1	2		22.88	22.97	22.89
1.4	1	5		22.64	22.67	22.63
1.4	3	0		22.35	22.44	22.33
1.4	3	1		22.15	22.22	22.06
1.4	3	2		21.85	21.97	21.83
1.4	6	0		21.56	21.73	21.58
1.4	1	0	16-QAM	22.92	22.95	22.96
1.4	1	2		22.67	22.68	22.68
1.4	1	5		22.46	22.39	22.47
1.4	3	0		22.21	22.19	22.26
1.4	3	1		21.99	21.91	22.04
1.4	3	2		21.74	21.69	21.83
1.4	6	0		21.47	21.42	21.57
3	1	0	QPSK	22.32	22.30	22.35
3	1	7		22.08	22.05	22.10
3	1	14		21.84	21.77	21.80
3	8	0		21.62	21.52	21.56
3	8	4		21.35	21.27	21.32
3	8	7		21.13	21.00	21.10
3	15	0		20.89	20.71	20.80
3	1	0	16-QAM	22.08	22.02	22.14
3	1	7		21.83	21.78	21.85
3	1	14		21.55	21.50	21.57
3	8	0		21.30	21.26	21.29
3	8	4		21.10	21.03	21.08
3	8	7		20.84	20.79	20.80
3	15	0		20.55	20.58	20.55

LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.12	23.09	23.14
5	1	12		22.91	22.81	22.89
5	1	24		22.69	22.51	22.63
5	12	0		22.42	22.22	22.36
5	12	6		22.20	21.96	22.13
5	12	11		21.95	21.71	21.88
5	25	0		21.68	21.43	21.64
5	1	0	16-QAM	22.84	22.80	22.86
5	1	12		22.55	22.57	22.59
5	1	24		22.27	22.30	22.30
5	12	0		22.06	22.08	22.09
5	12	6		21.79	21.82	21.80
5	12	11		21.55	21.54	21.55
5	25	0		21.27	21.33	21.25
10	1	0	QPSK	23.09	23.05	23.12
10	1	24		22.82	22.82	22.91
10	1	49		22.52	22.59	22.66
10	25	0		22.25	22.37	22.43
10	25	12		22.00	22.13	22.20
10	25	24		21.79	21.84	21.96
10	50	0		21.54	21.59	21.67
10	1	0	16-QAM	22.86	22.77	22.87
10	1	24		22.58	22.56	22.62
10	1	49		22.34	22.32	22.40
10	25	0		22.11	22.06	22.16
10	25	12		21.81	21.82	21.87
10	25	24		21.54	21.54	21.67
10	50	0		21.33	21.28	21.46

LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.05	23.02	22.99
15	1	37		22.80	22.78	22.73
15	1	74		22.50	22.55	22.45
15	36	0		22.22	22.27	22.18
15	36	18		21.93	22.01	21.89
15	36	39		21.65	21.73	21.63
15	75	0		21.44	21.50	21.36
15	1	0	16-QAM	22.84	22.79	22.79
15	1	38		22.59	22.53	22.57
15	1	75		22.31	22.28	22.29
15	36	0		22.02	22.07	22.01
15	36	18		21.79	21.83	21.76
15	36	39		21.51	21.60	21.48
15	75	0		21.25	21.34	21.23
20	1	0	QPSK	23.32	23.29	23.33
20	1	49		23.06	23.03	23.08
20	1	99		22.85	22.81	22.83
20	50	0		22.63	22.52	22.62
20	50	24		22.34	22.28	22.40
20	50	49		22.04	22.02	22.16
20	100	0		21.78	21.73	21.88
20	1	0	16-QAM	23.05	23.01	23.08
20	1	49		22.79	22.75	22.83
20	1	99		22.55	22.48	22.57
20	50	0		22.30	22.21	22.31
20	50	24		22.01	21.99	22.10
20	50	49		21.76	21.77	21.87
20	100	0		21.56	21.56	21.64

LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.25	23.23	23.29
1.4	1	2		23.05	23.03	23.01
1.4	1	5		22.75	22.75	22.80
1.4	3	0		22.55	22.51	22.57
1.4	3	1		22.30	22.26	22.28
1.4	3	2		22.04	21.97	21.99
1.4	6	0		21.83	21.72	21.79
1.4	1	0	16-QAM	23.01	23.01	23.03
1.4	1	2		22.76	22.77	22.80
1.4	1	5		22.53	22.48	22.53
1.4	3	0		22.29	22.27	22.26
1.4	3	1		22.02	22.07	21.97
1.4	3	2		21.75	21.79	21.75
1.4	6	0		21.53	21.56	21.50
3	1	0	QPSK	23.23	23.15	23.12
3	1	7		22.99	22.87	22.84
3	1	14		22.79	22.58	22.57
3	8	0		22.51	22.31	22.33
3	8	4		22.28	22.05	22.06
3	8	7		22.00	21.76	21.83
3	15	0		21.74	21.52	21.57
3	1	0	16-QAM	22.93	22.93	22.90
3	1	7		22.69	22.64	22.64
3	1	14		22.47	22.42	22.34
3	8	0		22.27	22.21	22.11
3	8	4		21.98	21.99	21.83
3	8	7		21.77	21.77	21.62
3	15	0		21.52	21.48	21.37

LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.18	23.11	23.09
5	1	12		22.93	22.88	22.86
5	1	24		22.66	22.63	22.64
5	12	0		22.45	22.42	22.38
5	12	6		22.19	22.12	22.13
5	12	11		21.90	21.83	21.87
5	25	0		21.67	21.61	21.58
5	1	0		16-QAM	22.93	22.83
5	1	12	22.68		22.60	22.62
5	1	24	22.48		22.39	22.35
5	12	0	22.22		22.12	22.10
5	12	6	21.95		21.92	21.81
5	12	11	21.73		21.66	21.52
5	25	0	21.46		21.41	21.24
10	1	0	QPSK		23.12	23.05
10	1	24		22.83	22.78	22.76
10	1	49		22.54	22.50	22.50
10	25	0		22.30	22.28	22.29
10	25	12		22.02	21.99	22.01
10	25	24		21.79	21.72	21.76
10	50	0		21.58	21.48	21.48
10	1	0		16-QAM	22.90	22.76
10	1	24	22.64		22.49	22.50
10	1	49	22.43		22.28	22.28
10	25	0	22.17		22.06	22.06
10	25	12	21.96		21.82	21.86
10	25	24	21.72		21.54	21.62
10	50	0	21.44		21.27	21.33

LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.42	23.45	23.48
15	1	37		23.17	23.18	23.18
15	1	74		22.94	22.94	22.89
15	36	0		22.67	22.71	22.64
15	36	18		22.40	22.51	22.42
15	36	39		22.15	22.25	22.18
15	75	0		21.88	21.97	21.91
15	1	0	16-QAM	23.22	23.25	23.20
15	1	38		22.92	22.97	22.94
15	1	75		22.64	22.70	22.72
15	36	0		22.39	22.41	22.50
15	36	18		22.17	22.20	22.22
15	36	39		21.97	21.90	22.00
15	75	0		21.73	21.64	21.76
20	1	0	QPSK	23.42	23.43	23.45
20	1	49		23.19	23.21	23.16
20	1	99		22.92	22.96	22.88
20	50	0		22.67	22.74	22.67
20	50	24		22.46	22.47	22.42
20	50	49		22.21	22.20	22.14
20	100	0		21.97	21.93	21.85
20	1	0	16-QAM	23.20	23.21	23.24
20	1	49		22.90	23.00	22.96
20	1	99		22.69	22.73	22.66
20	50	0		22.46	22.44	22.40
20	50	24		22.24	22.20	22.18
20	50	49		22.00	21.90	21.89
20	100	0		21.78	21.63	21.68

LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	22.62	22.65	22.69
1.4	1	2		22.40	22.43	22.40
1.4	1	5		22.12	22.18	22.15
1.4	3	0		21.89	21.92	21.86
1.4	3	1		21.63	21.67	21.64
1.4	3	2		21.42	21.43	21.39
1.4	6	0		21.21	21.13	21.18
1.4	1	0	16-QAM	22.38	22.41	22.48
1.4	1	2		22.10	22.18	22.23
1.4	1	5		21.86	21.90	21.96
1.4	3	0		21.61	21.69	21.67
1.4	3	1		21.40	21.48	21.47
1.4	3	2		21.14	21.19	21.18
1.4	6	0		20.91	20.95	20.98
3	1	0	QPSK	22.59	22.62	22.66
3	1	7		22.30	22.34	22.46
3	1	14		22.09	22.10	22.21
3	8	0		21.82	21.89	21.94
3	8	4		21.59	21.60	21.66
3	8	7		21.37	21.33	21.39
3	15	0		21.13	21.09	21.12
3	1	0	16-QAM	22.30	22.33	22.37
3	1	7		22.05	22.06	22.11
3	1	14		21.84	21.78	21.89
3	8	0		21.54	21.53	21.63
3	8	4		21.30	21.32	21.38
3	8	7		21.02	21.10	21.16
3	15	0		20.78	20.88	20.88

LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.59	22.55	22.56
5	1	12		22.39	22.28	22.33
5	1	24		22.09	22.07	22.07
5	12	0		21.84	21.86	21.80
5	12	6		21.60	21.61	21.59
5	12	11		21.34	21.38	21.35
5	25	0		21.09	21.10	21.05
5	1	0	16-QAM	22.34	22.34	22.31
5	1	12		22.11	22.08	22.03
5	1	24		21.90	21.86	21.76
5	12	0		21.60	21.58	21.52
5	12	6		21.31	21.37	21.31
5	12	11		21.03	21.07	21.10
5	25	0		20.80	20.78	20.82
10	1	0	QPSK	22.98	22.95	22.89
10	1	24		22.72	22.69	22.62
10	1	49		22.45	22.39	22.36
10	25	0		22.16	22.12	22.12
10	25	12		21.89	21.90	21.90
10	25	24		21.68	21.63	21.60
10	50	0		21.44	21.35	21.39
10	1	0	16-QAM	22.69	22.68	22.60
10	1	24		22.44	22.44	22.34
10	1	49		22.14	22.24	22.10
10	25	0		21.93	21.99	21.81
10	25	12		21.68	21.70	21.55
10	25	24		21.41	21.48	21.29
10	50	0		21.19	21.21	21.05

LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.32	22.33	22.35
5	1	12		22.06	22.10	22.14
5	1	24		21.84	21.89	21.89
5	12	0		21.57	21.65	21.62
5	12	6		21.29	21.38	21.37
5	12	11		21.01	21.15	21.15
5	25	0		20.75	20.94	20.91
5	1	0	16-QAM	22.04	22.09	22.11
5	1	12		21.75	21.85	21.88
5	1	24		21.53	21.65	21.61
5	12	0		21.30	21.44	21.35
5	12	6		21.05	21.24	21.07
5	12	11		20.80	21.01	20.85
5	25	0		20.55	20.76	20.57
10	1	0	QPSK	22.29	22.31	22.33
10	1	24		22.01	22.07	22.09
10	1	49		21.75	21.87	21.88
10	25	0		21.45	21.59	21.63
10	25	12		21.21	21.29	21.33
10	25	24		21.00	21.07	21.12
10	50	0		20.77	20.83	20.84
10	1	0	16-QAM	22.03	22.03	22.06
10	1	24		21.82	21.78	21.83
10	1	49		21.54	21.58	21.61
10	25	0		21.34	21.33	21.39
10	25	12		21.06	21.06	21.15
10	25	24		20.86	20.76	20.93
10	50	0		20.65	20.56	20.69

LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	22.51	22.48	22.47
15	1	37		22.21	22.27	22.23
15	1	74		21.93	21.99	21.98
15	36	0		21.64	21.69	21.69
15	36	18		21.34	21.44	21.40
15	36	39		21.12	21.17	21.10
15	75	0		20.82	20.94	20.83
15	1	0	16-QAM	22.31	22.21	22.26
15	1	38		22.06	21.92	22.04
15	1	75		21.77	21.71	21.78
15	36	0		21.54	21.43	21.55
15	36	18		21.30	21.17	21.33
15	36	39		21.02	20.91	21.05
15	75	0		20.78	20.66	20.84
20	1	0	QPSK	22.98	22.95	22.89
20	1	49		22.73	22.72	22.66
20	1	99		22.46	22.50	22.40
20	50	0		22.23	22.26	22.15
20	50	24		22.01	22.03	21.89
20	50	49		21.72	21.75	21.65
20	100	0		21.51	21.48	21.42
20	1	0	16-QAM	22.75	22.65	22.68
20	1	49		22.54	22.36	22.41
20	1	99		22.24	22.12	22.20
20	50	0		22.01	21.84	21.93
20	50	24		21.74	21.57	21.70
20	50	49		21.53	21.34	21.47
20	100	0		21.26	21.10	21.19

LTE BAND 17

LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.91	22.89	22.86
5	1	12		22.65	22.63	22.61
5	1	24		22.44	22.38	22.37
5	12	0		22.23	22.15	22.17
5	12	6		21.95	21.90	21.87
5	12	11		21.71	21.68	21.59
5	25	0		21.42	21.44	21.37
5	1	0	16-QAM	22.64	22.62	22.62
5	1	12		22.34	22.33	22.41
5	1	24		22.06	22.13	22.13
5	12	0		21.82	21.84	21.90
5	12	6		21.60	21.56	21.61
5	12	11		21.35	21.33	21.38
5	25	0		21.06	21.09	21.17
10	1	0	QPSK	23.38	23.32	23.29
10	1	24		23.08	23.06	23.03
10	1	49		22.88	22.84	22.78
10	25	0		22.68	22.62	22.48
10	25	12		22.48	22.37	22.20
10	25	24		22.21	22.15	21.98
10	50	0		21.98	21.93	21.69
10	1	0	16-QAM	23.08	23.05	23.06
10	1	24		22.80	22.77	22.83
10	1	49		22.58	22.50	22.58
10	25	0		22.35	22.26	22.34
10	25	12		22.11	22.01	22.05
10	25	24		21.81	21.73	21.81
10	50	0		21.53	21.49	21.56

4.1.4 TEST RESULTS

LTE BAND 2

LTE Band 2 PAR [dB]											
BW [MHz]	RB Size	Modulation	Lowest			Middle			Highest		
			PEAK	AVG	P-A	PEAK	AVG	P-A	PEAK	AVG	P-A
20	1	QPSK	25.78	23.32	2.46	25.70	23.29	2.41	25.67	23.33	2.34
20	100		24.27	21.78	2.49	24.11	21.73	2.32	24.32	21.88	2.44
20	1	16-QAM	25.37	23.05	2.32	25.43	23.01	2.42	25.54	23.08	2.46
20	100		23.90	21.56	2.34	21.58	21.56	0.02	24.09	21.64	2.45
Limit			≤13dBm								

LTE BAND 5

LTE Band 5 PAR [dB]											
BW [MHz]	RB Size	Modulation	Lowest			Middle			Highest		
			PEAK	AVG	P-A	PEAK	AVG	P-A	PEAK	AVG	P-A
10	1	QPSK	24.54	22.98	1.56	25.06	22.95	2.11	25.42	22.89	2.53
10	50		23.10	21.44	1.66	24.00	21.35	2.65	23.54	21.39	2.15
10	1	16-QAM	24.69	22.69	2.00	24.89	22.68	2.21	25.14	22.60	2.54
10	50		23.45	21.19	2.26	23.93	21.21	2.72	23.62	21.05	2.57
Limit			≤13dBm								

5. RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

5.1 DESCRIPTION OF THE ERP/EIRP MEASUREMENT


5.1.1 MEASUREMENT METHOD

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems. Mobile and portable (hand-held) stations operating are limited to average ERP, Equivalent isotropic radiated power output measurements by substitution method according to ANSI /TIA / EIA-603-D, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas ,Mobile and portable (hand-held) stations operating are limited to average EIRP.


5.1.2 TEST SETUP

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = R_x(\text{dBuV}) + CL(\text{dB}) + SA(\text{dB}) + \text{Gain}(\text{dBi}) - 107(\text{dBuV to dBm})$ The SA is calibrated using following setup.

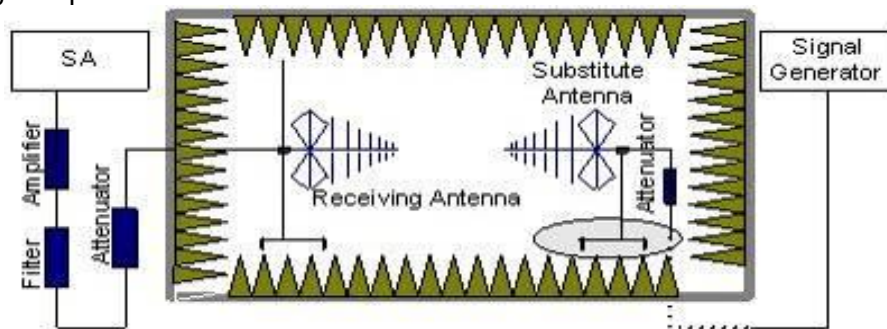

b) EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

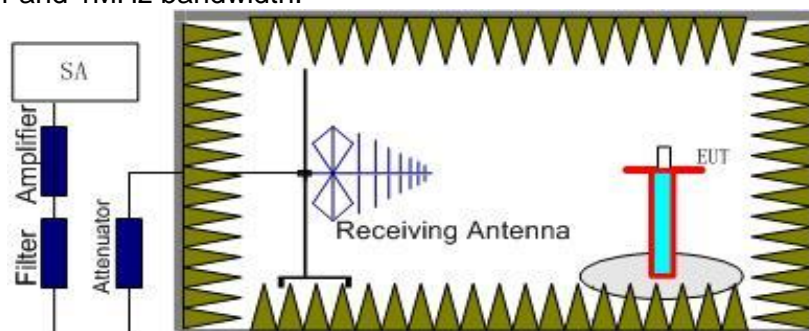

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:

Power=PMea+ARpl

5.1.3 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 5.6. and ANSI / TIA-603-D-2010 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 1.5 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with Peak detector.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.
5. RB Set greater than bandwidth, Vb Set spectrum analyzer Maximum support.

5.1.4 TEST RESULTS

LTE Band 2

Radiated Power (EIRP) for LTE Band 2 / 1.4M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
								Of Max. EIRP	
QPSK	1	0	Lowest	13.53	2.37	10.40	21.56	Horizontal	Pass
	1	0	Middle	15.39	2.39	10.42	23.42	Vertical	Pass
	1	0	Highest	13.43	2.40	10.44	21.47	Horizontal	Pass
	1	0	Lowest	15.38	2.37	10.40	23.41	Vertical	Pass
	1	0	Middle	13.64	2.39	10.42	21.67	Horizontal	Pass
	1	0	Highest	15.35	2.40	10.44	23.39	Vertical	Pass
16QAM	1	0	Lowest	13.67	2.37	10.40	21.70	Horizontal	Pass
	1	0	Middle	15.32	2.39	10.42	23.35	Vertical	Pass
	1	0	Highest	13.55	2.40	10.44	21.59	Horizontal	Pass
	1	0	Lowest	15.12	2.37	10.40	23.15	Vertical	Pass
	1	0	Middle	13.45	2.39	10.42	21.48	Horizontal	Pass
	1	0	Highest	15.07	2.40	10.44	23.11	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 2 / 3M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
								Of Max. EIRP	
QPSK	1	0	Lowest	13.35	2.37	10.40	21.38	Horizontal	Pass
	1	0	Middle	15.35	2.39	10.42	23.38	Vertical	Pass
	1	0	Highest	13.59	2.40	10.44	21.63	Horizontal	Pass
	1	0	Lowest	15.36	2.37	10.40	23.39	Vertical	Pass
	1	0	Middle	13.33	2.39	10.42	21.36	Horizontal	Pass
	1	0	Highest	15.28	2.40	10.44	23.32	Vertical	Pass
16QAM	1	0	Lowest	13.58	2.37	10.40	21.61	Horizontal	Pass
	1	0	Middle	15.23	2.39	10.42	23.26	Vertical	Pass
	1	0	Highest	13.49	2.40	10.44	21.53	Horizontal	Pass
	1	0	Lowest	15.18	2.37	10.40	23.21	Vertical	Pass
	1	0	Middle	13.45	2.39	10.42	21.48	Horizontal	Pass
	1	0	Highest	15.01	2.40	10.44	23.05	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 2 / 5M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
								Of Max. EIRP	
QPSK	1	0	Lowest	13.33	2.37	10.40	21.36	Horizontal	Pass
	1	0	Middle	15.06	2.39	10.42	23.09	Vertical	Pass
	1	0	Highest	13.41	2.40	10.44	21.45	Horizontal	Pass
	1	0	Lowest	15.22	2.37	10.40	23.25	Vertical	Pass
	1	0	Middle	13.53	2.39	10.42	21.56	Horizontal	Pass
	1	0	Highest	15.22	2.40	10.44	23.26	Vertical	Pass
16QAM	1	0	Lowest	13.34	2.37	10.40	21.37	Horizontal	Pass
	1	0	Middle	14.9	2.39	10.42	22.93	Vertical	Pass
	1	0	Highest	13.41	2.40	10.44	21.45	Horizontal	Pass
	1	0	Lowest	15.12	2.37	10.40	23.15	Vertical	Pass
	1	0	Middle	13.36	2.39	10.42	21.39	Horizontal	Pass
	1	0	Highest	15.19	2.40	10.44	23.23	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 2 / 10M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
								Of Max. EIRP	
QPSK	1	0	Lowest	13.21	2.37	10.40	21.24	Horizontal	Pass
	1	0	Middle	15	2.39	10.42	23.03	Vertical	Pass
	1	0	Highest	13.15	2.40	10.44	21.19	Horizontal	Pass
	1	0	Lowest	14.98	2.37	10.40	23.01	Vertical	Pass
	1	0	Middle	12.98	2.39	10.42	21.01	Horizontal	Pass
	1	0	Highest	14.94	2.40	10.44	22.98	Vertical	Pass
16QAM	1	0	Lowest	13.22	2.37	10.40	21.25	Horizontal	Pass
	1	0	Middle	14.78	2.39	10.42	22.81	Vertical	Pass
	1	0	Highest	13.04	2.40	10.44	21.08	Horizontal	Pass
	1	0	Lowest	14.75	2.37	10.40	22.78	Vertical	Pass
	1	0	Middle	13.12	2.39	10.42	21.15	Horizontal	Pass
	1	0	Highest	14.8	2.40	10.44	22.84	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 2 / 15M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
								Of Max. EIRP	
QPSK	1	0	Lowest	13.18	2.37	10.40	21.21	Horizontal	Pass
	1	0	Middle	14.92	2.39	10.42	22.95	Vertical	Pass
	1	0	Highest	13.2	2.40	10.44	21.24	Horizontal	Pass
	1	0	Lowest	14.93	2.37	10.40	22.96	Vertical	Pass
	1	0	Middle	13.11	2.39	10.42	21.14	Horizontal	Pass
	1	0	Highest	14.93	2.40	10.44	22.97	Vertical	Pass
16QAM	1	0	Lowest	13.13	2.37	10.40	21.16	Horizontal	Pass
	1	0	Middle	14.83	2.39	10.42	22.86	Vertical	Pass
	1	0	Highest	13.15	2.40	10.44	21.19	Horizontal	Pass
	1	0	Lowest	14.92	2.37	10.40	22.95	Vertical	Pass
	1	0	Middle	13.03	2.39	10.42	21.06	Horizontal	Pass
	1	0	Highest	14.79	2.40	10.44	22.83	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 2 / 20M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
								Of Max. EIRP	
QPSK	1	0	Lowest	12.86	2.37	10.40	20.89	Horizontal	Pass
	1	0	Middle	14.86	2.39	10.42	22.89	Vertical	Pass
	1	0	Highest	13.05	2.40	10.44	21.09	Horizontal	Pass
	1	0	Lowest	14.82	2.37	10.40	22.85	Vertical	Pass
	1	0	Middle	12.87	2.39	10.42	20.90	Horizontal	Pass
	1	0	Highest	14.75	2.40	10.44	22.79	Vertical	Pass
16QAM	1	0	Lowest	13.11	2.37	10.40	21.14	Horizontal	Pass
	1	0	Middle	14.65	2.39	10.42	22.68	Vertical	Pass
	1	0	Highest	12.98	2.40	10.44	21.02	Horizontal	Pass
	1	0	Lowest	14.55	2.37	10.40	22.58	Vertical	Pass
	1	0	Middle	12.94	2.39	10.42	20.97	Horizontal	Pass
	1	0	Highest	14.59	2.40	10.44	22.63	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 4 / 1.4M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
								Of Max. EIRP	
QPSK	1	0	Lowest	14.21	2.35	10.13	21.99	Horizontal	Pass
	1	0	Middle	16.18	2.36	10.16	23.98	Vertical	Pass
	1	0	Highest	14.36	2.37	10.22	22.21	Horizontal	Pass
	1	0	Lowest	16.18	2.35	10.13	23.96	Vertical	Pass
	1	0	Middle	14.34	2.36	10.16	22.14	Horizontal	Pass
	1	0	Highest	16.10	2.37	10.22	23.95	Vertical	Pass
16QAM	1	0	Lowest	14.35	2.35	10.13	22.13	Horizontal	Pass
	1	0	Middle	16.04	2.36	10.16	23.84	Vertical	Pass
	1	0	Highest	14.28	2.37	10.22	22.13	Horizontal	Pass
	1	0	Lowest	15.99	2.35	10.13	23.77	Vertical	Pass
	1	0	Middle	14.20	2.36	10.16	22.00	Horizontal	Pass
	1	0	Highest	15.96	2.37	10.22	23.81	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 3M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
								Of Max. EIRP	
QPSK	1	0	Lowest	14.24	2.35	10.13	22.02	Horizontal	Pass
	1	0	Middle	16.13	2.36	10.16	23.93	Vertical	Pass
	1	0	Highest	14.24	2.37	10.22	22.09	Horizontal	Pass
	1	0	Lowest	16.16	2.35	10.13	23.94	Vertical	Pass
	1	0	Middle	14.33	2.36	10.16	22.13	Horizontal	Pass
	1	0	Highest	16.07	2.37	10.22	23.92	Vertical	Pass
16QAM	1	0	Lowest	14.29	2.35	10.13	22.07	Horizontal	Pass
	1	0	Middle	16.09	2.36	10.16	23.89	Vertical	Pass
	1	0	Highest	14.27	2.37	10.22	22.12	Horizontal	Pass
	1	0	Lowest	16.11	2.35	10.13	23.89	Vertical	Pass
	1	0	Middle	14.33	2.36	10.16	22.13	Horizontal	Pass
	1	0	Highest	15.96	2.37	10.22	23.81	Vertical	Pass
Limit	EIRP<1W=30dBm								
Radiated Power (EIRP) for LTE Band 4 / 5M									

Modulation	RB		Channel	Result					Conclusion
				S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
	Size	Offset						Of Max. EIRP	
QPSK	1	0	Lowest	14.19	2.35	10.13	21.97	Horizontal	Pass
	1	0	Middle	16.06	2.36	10.16	23.86	Vertical	Pass
	1	0	Highest	14.13	2.37	10.22	21.98	Horizontal	Pass
	1	0	Lowest	16.09	2.35	10.13	23.87	Vertical	Pass
	1	0	Middle	14.30	2.36	10.16	22.10	Horizontal	Pass
	1	0	Highest	15.99	2.37	10.22	23.84	Vertical	Pass
16QAM	1	0	Lowest	14.23	2.35	10.13	22.01	Horizontal	Pass
	1	0	Middle	15.82	2.36	10.16	23.62	Vertical	Pass
	1	0	Highest	14.20	2.37	10.22	22.05	Horizontal	Pass
	1	0	Lowest	16.03	2.35	10.13	23.81	Vertical	Pass
	1	0	Middle	14.15	2.36	10.16	21.95	Horizontal	Pass
	1	0	Highest	15.88	2.37	10.22	23.73	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 10M									
Modulation	RB		Channel	Result					Conclusion
				S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
	Size	Offset						Of Max. EIRP	
QPSK	1	0	Lowest	13.57	2.35	10.13	21.35	Horizontal	Pass
	1	0	Middle	15.43	2.36	10.16	23.23	Vertical	Pass
	1	0	Highest	13.58	2.37	10.22	21.43	Horizontal	Pass
	1	0	Lowest	15.43	2.35	10.13	23.21	Vertical	Pass
	1	0	Middle	13.68	2.36	10.16	21.48	Horizontal	Pass
	1	0	Highest	15.34	2.37	10.22	23.19	Vertical	Pass
16QAM	1	0	Lowest	13.71	2.35	10.13	21.49	Horizontal	Pass
	1	0	Middle	15.39	2.36	10.16	23.19	Vertical	Pass
	1	0	Highest	13.49	2.37	10.22	21.34	Horizontal	Pass
	1	0	Lowest	15.40	2.35	10.13	23.18	Vertical	Pass
	1	0	Middle	13.42	2.36	10.16	21.22	Horizontal	Pass
	1	0	Highest	15.27	2.37	10.22	23.12	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 15M				
Modulation	RB	Channel	Result	Conclusion

	RB		Channel	S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
	Size	Offset						Of Max. EIRP	
QPSK	1	0	Lowest	13.54	2.35	10.13	21.32	Horizontal	Pass
	1	0	Middle	15.39	2.36	10.16	23.19	Vertical	Pass
	1	0	Highest	13.29	2.37	10.22	21.14	Horizontal	Pass
	1	0	Lowest	15.34	2.35	10.13	23.12	Vertical	Pass
	1	0	Middle	13.48	2.36	10.16	21.28	Horizontal	Pass
	1	0	Highest	15.28	2.37	10.22	23.13	Vertical	Pass
16QAM	1	0	Lowest	13.48	2.35	10.13	21.26	Horizontal	Pass
	1	0	Middle	15.18	2.36	10.16	22.98	Vertical	Pass
	1	0	Highest	13.42	2.37	10.22	21.27	Horizontal	Pass
	1	0	Lowest	15.08	2.35	10.13	22.86	Vertical	Pass
	1	0	Middle	13.42	2.36	10.16	21.22	Horizontal	Pass
	1	0	Highest	15.23	2.37	10.22	23.08	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 20M

Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
								Of Max. EIRP	
QPSK	1	0	Lowest	13.57	2.35	10.13	21.35	Horizontal	Pass
	1	0	Middle	15.35	2.36	10.16	23.15	Vertical	Pass
	1	0	Highest	13.3	2.37	10.22	21.15	Horizontal	Pass
	1	0	Lowest	15.34	2.35	10.13	23.12	Vertical	Pass
	1	0	Middle	13.5	2.36	10.16	21.30	Horizontal	Pass
	1	0	Highest	15.24	2.37	10.22	23.09	Vertical	Pass
16QAM	1	0	Lowest	13.58	2.35	10.13	21.36	Horizontal	Pass
	1	0	Middle	15.25	2.36	10.16	23.05	Vertical	Pass
	1	0	Highest	13.53	2.37	10.22	21.38	Horizontal	Pass
	1	0	Lowest	15.18	2.35	10.13	22.96	Vertical	Pass
	1	0	Middle	13.46	2.36	10.16	21.26	Horizontal	Pass
	1	0	Highest	15.12	2.37	10.22	22.97	Vertical	Pass
Limit	EIRP<1W=30dBm								

LTE Band 5

Radiated Power (ERP) for LTE Band 5 / 1.4M

Modulation	RB	Channel	Result	Conclusion
------------	----	---------	--------	------------

	RB		Channel	S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas ERP(dBm)	Polarization	
	Size	Offset						Of Max. ERP	
QPSK	1	0	Lowest	15.22	1.27	6.70	20.65	Horizontal	Pass
	1	0	Middle	17.14	1.28	6.70	22.56	Vertical	Pass
	1	0	Highest	15.26	1.29	6.70	20.67	Horizontal	Pass
	1	0	Lowest	17.16	1.27	6.70	22.59	Vertical	Pass
	1	0	Middle	15.29	1.28	6.70	20.71	Horizontal	Pass
	1	0	Highest	17.22	1.29	6.70	22.63	Vertical	Pass
16QAM	1	0	Lowest	15.41	1.27	6.70	20.84	Horizontal	Pass
	1	0	Middle	17.07	1.28	6.70	22.49	Vertical	Pass
	1	0	Highest	15.32	1.29	6.70	20.73	Horizontal	Pass
	1	0	Lowest	16.96	1.27	6.70	22.39	Vertical	Pass
	1	0	Middle	15.35	1.28	6.70	20.77	Horizontal	Pass
	1	0	Highest	17.1	1.29	6.70	22.51	Vertical	Pass
Limit	ERP<7W=38.45dBm								

Radiated Power (ERP) for LTE Band 5 / 3M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas ERP(dBm)	Polarization Of Max. ERP	
QPSK	1	0	Lowest	15.14	1.27	6.70	20.57	Horizontal	Pass
	1	0	Middle	17.11	1.28	6.70	22.53	Vertical	Pass
	1	0	Highest	15.16	1.29	6.70	20.57	Horizontal	Pass
	1	0	Lowest	17.13	1.27	6.70	22.56	Vertical	Pass
	1	0	Middle	15.28	1.28	6.70	20.70	Horizontal	Pass
	1	0	Highest	17.18	1.29	6.70	22.59	Vertical	Pass
16QAM	1	0	Lowest	15.34	1.27	6.70	20.77	Horizontal	Pass
	1	0	Middle	17.03	1.28	6.70	22.45	Vertical	Pass
	1	0	Highest	15.28	1.29	6.70	20.69	Horizontal	Pass
	1	0	Lowest	17.06	1.27	6.70	22.49	Vertical	Pass
	1	0	Middle	15.36	1.28	6.70	20.78	Horizontal	Pass
	1	0	Highest	17.07	1.29	6.70	22.48	Vertical	Pass
Limit	ERP<7W=38.45dBm								

Radiated Power (ERP) for LTE Band 5 / 5M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas ERP(dBm)	Polarization	

	Size	Offset		(dBm)	loss	(dBi)	ERP(dBm)	Of Max. ERP	
QPSK	1	0	Lowest	15.16	1.27	6.70	20.59	Horizontal	Pass
	1	0	Middle	17.1	1.28	6.70	22.52	Vertical	Pass
	1	0	Highest	15.29	1.29	6.70	20.70	Horizontal	Pass
	1	0	Lowest	17.1	1.27	6.70	22.53	Vertical	Pass
	1	0	Middle	15.24	1.28	6.70	20.66	Horizontal	Pass
	1	0	Highest	17.17	1.29	6.70	22.58	Vertical	Pass
16QAM	1	0	Lowest	15.23	1.27	6.70	20.66	Horizontal	Pass
	1	0	Middle	16.91	1.28	6.70	22.33	Vertical	Pass
	1	0	Highest	15.31	1.29	6.70	20.72	Horizontal	Pass
	1	0	Lowest	16.83	1.27	6.70	22.26	Vertical	Pass
	1	0	Middle	15.4	1.28	6.70	20.82	Horizontal	Pass
	1	0	Highest	16.94	1.29	6.70	22.35	Vertical	Pass
Limit	ERP<7W=38.45dBm								

Radiated Power (ERP) for LTE Band 5 / 10M

Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas ERP(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	15.29	1.27	6.70	20.72	Horizontal	Pass
	1	0	Middle	17.07	1.28	6.70	22.49	Vertical	Pass
	1	0	Highest	15.21	1.29	6.70	20.62	Horizontal	Pass
	1	0	Lowest	17.08	1.27	6.70	22.51	Vertical	Pass
	1	0	Middle	15.13	1.28	6.70	20.55	Horizontal	Pass
	1	0	Highest	17.08	1.29	6.70	22.49	Vertical	Pass
16QAM	1	0	Lowest	15.28	1.27	6.70	20.71	Horizontal	Pass
	1	0	Middle	17.01	1.28	6.70	22.43	Vertical	Pass
	1	0	Highest	15.38	1.29	6.70	20.79	Horizontal	Pass
	1	0	Lowest	17.01	1.27	6.70	22.44	Vertical	Pass
	1	0	Middle	15.17	1.28	6.70	20.59	Horizontal	Pass
	1	0	Highest	17.03	1.29	6.70	22.44	Vertical	Pass
Limit	ERP<7W=38.45dBm								

LTE Band 7

Radiated Power (EIRP) for LTE Band 7 / 5M

Modulation	RB	Channel	Result	Conclusion
------------	----	---------	--------	------------

	RB		Channel	S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	Conclusion
	Size	Offset						Of Max. EIRP	
QPSK	1	0	Lowest	11.54	2.56	10.60	19.58	Horizontal	Pass
	1	0	Middle	13.34	2.67	10.65	21.32	Vertical	Pass
	1	0	Highest	11.45	2.72	10.70	19.43	Horizontal	Pass
	1	0	Lowest	13.39	2.56	10.60	21.43	Vertical	Pass
	1	0	Middle	11.3	2.67	10.65	19.28	Horizontal	Pass
	1	0	Highest	13.14	2.72	10.70	21.12	Vertical	Pass
16QAM	1	0	Lowest	11.39	2.56	10.60	19.43	Horizontal	Pass
	1	0	Middle	13.13	2.67	10.65	21.11	Vertical	Pass
	1	0	Highest	11.66	2.72	10.70	19.64	Horizontal	Pass
	1	0	Lowest	13.36	2.56	10.60	21.40	Vertical	Pass
	1	0	Middle	11.37	2.67	10.65	19.35	Horizontal	Pass
	1	0	Highest	12.92	2.72	10.70	20.90	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 7 /10M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization Of Max. EIRP	
QPSK	1	0	Lowest	12.18	2.56	10.60	20.22	Horizontal	Pass
	1	0	Middle	14.23	2.67	10.65	22.21	Vertical	Pass
	1	0	Highest	12.23	2.72	10.70	20.21	Horizontal	Pass
	1	0	Lowest	14.15	2.56	10.60	22.19	Vertical	Pass
	1	0	Middle	12.28	2.67	10.65	20.26	Horizontal	Pass
	1	0	Highest	14.14	2.72	10.70	22.12	Vertical	Pass
16QAM	1	0	Lowest	12.44	2.56	10.60	20.48	Horizontal	Pass
	1	0	Middle	14.09	2.67	10.65	22.07	Vertical	Pass
	1	0	Highest	12.33	2.72	10.70	20.31	Horizontal	Pass
	1	0	Lowest	14.11	2.56	10.60	22.15	Vertical	Pass
	1	0	Middle	12.4	2.67	10.65	20.38	Horizontal	Pass
	1	0	Highest	14.03	2.72	10.70	22.01	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 7 /15M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	

	Size	Offset		(dBm)	loss	(dBi)	EIRP(dBm)	Of Max. EIRP	
QPSK	1	0	Lowest	12.28	2.56	10.60	20.32	Horizontal	Pass
	1	0	Middle	14.21	2.67	10.65	22.19	Vertical	Pass
	1	0	Highest	12.18	2.72	10.70	20.16	Horizontal	Pass
	1	0	Lowest	14.12	2.56	10.60	22.16	Vertical	Pass
	1	0	Middle	12.22	2.67	10.65	20.20	Horizontal	Pass
	1	0	Highest	14.14	2.72	10.70	22.12	Vertical	Pass
16QAM	1	0	Lowest	12.17	2.56	10.60	20.21	Horizontal	Pass
	1	0	Middle	14	2.67	10.65	21.98	Vertical	Pass
	1	0	Highest	12.39	2.72	10.70	20.37	Horizontal	Pass
	1	0	Lowest	14.02	2.56	10.60	22.06	Vertical	Pass
	1	0	Middle	12.14	2.67	10.65	20.12	Horizontal	Pass
	1	0	Highest	13.87	2.72	10.70	21.85	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 7 /20M

Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas EIRP(dBm)	Polarization	
								Of Max. EIRP	
QPSK	1	0	Lowest	12.28	2.56	10.60	20.32	Horizontal	Pass
	1	0	Middle	14.2	2.67	10.65	22.18	Vertical	Pass
	1	0	Highest	12.22	2.72	10.70	20.20	Horizontal	Pass
	1	0	Lowest	14.11	2.56	10.60	22.15	Vertical	Pass
	1	0	Middle	12.36	2.67	10.65	20.34	Horizontal	Pass
	1	0	Highest	14.14	2.72	10.70	22.12	Vertical	Pass
16QAM	1	0	Lowest	12.24	2.56	10.60	20.28	Horizontal	Pass
	1	0	Middle	14.05	2.67	10.65	22.03	Vertical	Pass
	1	0	Highest	12.46	2.72	10.70	20.44	Horizontal	Pass
	1	0	Lowest	13.94	2.56	10.60	21.98	Vertical	Pass
	1	0	Middle	12.32	2.67	10.65	20.30	Horizontal	Pass
	1	0	Highest	13.85	2.72	10.70	21.83	Vertical	Pass
Limit	EIRP<2W=33dBm								

LTE Band 17

Radiated Power (ERP) for LTE Band 17 /5M

Modulation	RB	Channel	Result	Conclusion
------------	----	---------	--------	------------

	RB		Channel	S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas ERP(dBm)	Polarization	
	Size	Offset						Of Max. ERP	
QPSK	1	0	Lowest	16.01	1.21	6.40	21.20	Horizontal	Pass
	1	0	Middle	17.83	1.22	6.40	23.01	Vertical	Pass
	1	0	Highest	15.87	1.23	6.40	21.04	Horizontal	Pass
	1	0	Lowest	17.76	1.21	6.40	22.95	Vertical	Pass
	1	0	Middle	15.82	1.22	6.40	21.00	Horizontal	Pass
	1	0	Highest	17.79	1.23	6.40	22.96	Vertical	Pass
16QAM	1	0	Lowest	15.95	1.21	6.40	21.14	Horizontal	Pass
	1	0	Middle	17.7	1.22	6.40	22.88	Vertical	Pass
	1	0	Highest	15.81	1.23	6.40	20.98	Horizontal	Pass
	1	0	Lowest	17.63	1.21	6.40	22.82	Vertical	Pass
	1	0	Middle	15.95	1.22	6.40	21.13	Horizontal	Pass
	1	0	Highest	17.62	1.23	6.40	22.79	Vertical	Pass
Limit	ERP<3W=34.77dBm								

Radiated Power (ERP) for LTE Band 17 /10M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas ERP(dBm)	Polarization Of Max. ERP	
QPSK	1	0	Lowest	15.74	1.21	6.40	20.93	Horizontal	Pass
	1	0	Middle	17.71	1.22	6.40	22.89	Vertical	Pass
	1	0	Highest	15.81	1.23	6.40	20.98	Horizontal	Pass
	1	0	Lowest	17.66	1.21	6.40	22.85	Vertical	Pass
	1	0	Middle	15.7	1.22	6.40	20.88	Horizontal	Pass
	1	0	Highest	17.65	1.23	6.40	22.82	Vertical	Pass
16QAM	1	0	Lowest	15.73	1.21	6.40	20.92	Horizontal	Pass
	1	0	Middle	17.64	1.22	6.40	22.82	Vertical	Pass
	1	0	Highest	15.76	1.23	6.40	20.93	Horizontal	Pass
	1	0	Lowest	17.63	1.21	6.40	22.82	Vertical	Pass
	1	0	Middle	15.9	1.22	6.40	21.08	Horizontal	Pass
	1	0	Highest	17.41	1.23	6.40	22.58	Vertical	Pass
Limit	ERP<3W=34.77dBm								

6. OCCUPIED BANDWIDTH

6.1 DESCRIPTION OF OCCUPIED BANDWIDTH MEASUREMENT

6.1.4 MEASUREMENT RESULT

LTE BAND 2

LTE Band 2 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
1.4	QPSK	1.279	1.0962	1.268	1.0945	1.263	1.1057
1.4	16-QAM	1.259	1.0922	1.280	1.1005	1.281	1.0959
3	QPSK	2.907	2.6859	2.913	2.6791	2.907	2.6822
3	16-QAM	2.906	2.6806	2.893	2.6823	2.905	2.6777
5	QPSK	5.011	4.5258	5.083	4.5212	5.095	4.5265
5	16-QAM	5.069	4.5234	5.068	4.5250	5.076	4.5241
10	QPSK	9.675	8.9337	9.752	8.9419	9.678	8.9417
10	16-QAM	9.747	8.9421	9.694	8.9401	9.620	8.9349
15	QPSK	14.81	13.455	14.90	13.514	14.71	13.452
15	16-QAM	14.78	13.455	14.77	13.499	14.77	13.460
20	QPSK	19.23	17.932	19.33	17.920	19.18	17.883
20	16-QAM	19.34	17.943	19.46	17.937	19.23	17.877

LTE BAND 4

LTE Band 4 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
1.4	QPSK	1.283	1.0914	1.278	1.0966	1.253	1.0973
1.4	16-QAM	1.253	1.0899	1.272	1.0959	1.270	1.0934
3	QPSK	2.951	2.6875	2.907	2.6832	4.936	2.7016
3	16-QAM	2.945	2.6881	2.925	2.6826	3.447	2.6909
5	QPSK	5.074	4.5183	5.022	4.5180	5.024	4.5047
5	16-QAM	5.044	4.5125	5.057	4.5091	5.021	4.5122
10	QPSK	9.658	8.9241	9.799	8.9478	9.668	8.9420
10	16-QAM	9.684	8.9348	9.612	8.9387	9.671	8.9425
15	QPSK	14.71	13.445	14.92	13.518	14.88	13.468
15	16-QAM	14.76	13.492	14.72	13.507	14.80	13.468
20	QPSK	19.38	17.918	19.24	17.897	19.51	17.952
20	16-QAM	19.52	17.950	19.30	17.938	19.50	17.942

LTE BAND 5

LTE Band 5 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
1.4	QPSK	1.276	1.0984	1.269	1.0918	1.266	1.1039
1.4	16-QAM	1.280	1.0950	1.265	1.0918	1.262	1.1009
3	QPSK	2.875	2.6823	2.898	2.6834	2.906	2.6814
3	16-QAM	2.894	2.6874	2.894	2.6837	2.920	2.6849
5	QPSK	5.058	4.5295	5.061	4.5205	5.078	4.5285
5	16-QAM	5.074	4.5326	5.065	4.5200	5.080	4.5389
10	QPSK	9.789	8.9549	9.751	8.9431	9.685	8.9463
10	16-QAM	9.644	8.9498	9.762	8.9525	9.711	8.9432

LTE BAND 7

LTE Band 7 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
5	QPSK	5.094	4.5251	5.729	4.5461	5.016	4.5189
5	16-QAM	5.121	4.5284	5.737	4.5404	5.026	4.5219
10	QPSK	9.851	8.9482	9.857	8.9423	9.623	8.9489
10	16-QAM	9.835	8.9400	9.956	8.9544	9.748	8.9440
15	QPSK	15.09	13.493	14.91	13.520	14.92	13.485
15	16-QAM	15.11	13.469	14.82	13.506	14.90	13.491
20	QPSK	19.67	17.961	19.16	17.885	19.37	17.964
20	16-QAM	19.66	17.986	19.32	17.917	19.35	17.932

LTE BAND 17

LTE Band 17 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
5	QPSK	5.074	4.5255	5.078	4.5360	5.052	4.5175
5	16-QAM	5.095	4.5364	5.059	4.5242	5.093	4.5497
10	QPSK	9.816	8.9476	9.738	8.9597	9.687	8.9518
10	16-QAM	9.751	8.9517	9.604	8.9396	9.713	8.9514

NOTE: Test chart See Appendix A

7. CONDUCTED BAND EDGE

7.1 DESCRIPTION OF CONDUCTED BAND EDGE MEASUREMENT

7.1.1 MEASUREMENT METHOD

1. §22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

2. §24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed

3. §27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4. §27.53(m)(4)

For operations in the 2500 MHz ~ 2570 MHz band this section, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

5. §27.53 (g)

For operations in the 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

7.1.2 TEST SETUP

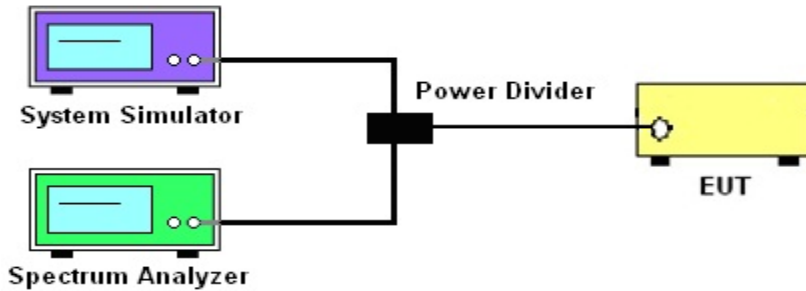

7.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 v02r02 Section 6.0. and ANSI/TIA-603-D-2010-Section 2.2.13.2(d)
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS/AVG detector
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$

Band 7:

$$= P(W) - [55 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)}$$

$$= -25\text{dBm}.$$

	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	12MHz	13MHz	15MHz	20MHz	25MHz	30MHz
RBW	30kHz	30kHz	100kHz	100kHz	300kHz	300kHz
VBW	100kHz	100kHz	300kHz	300kHz	1000kHz	1000kHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Max	Max	Max	Max	Max	Max
Sweep Count	Auto	Auto	Auto	Auto	Auto	Auto

7.1.4 MEASUREMENT RESULT

NOTE: Test chart See Appendix B

8. CONDUCTED SPURIOUS EMISSION

8.1 DESCRIPTION OF CONDUCTED SPURIOUS EMISSION MEASUREMENT

8.1.1 MEASUREMENT METHOD


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

8.1.2 TEST SETUP

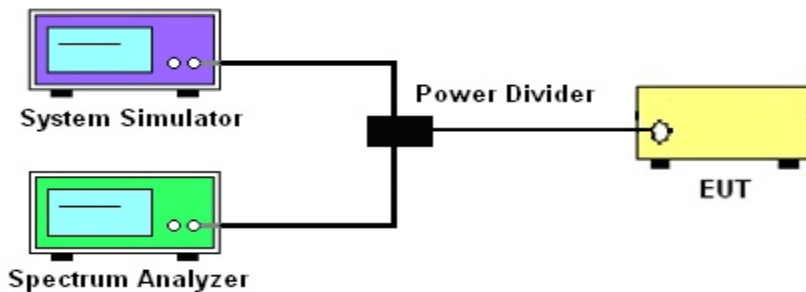

8.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 v02r02 Section 6.0. and ANSI/TIA-603-D-2010-Section 2.2.13.2(d)
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement
4. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)} = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}$.
 For Band 7: $P(W) - [43 + 10\log(P)] \text{ (dB)} = -25\text{dBm}$

	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	Auto	Auto	Auto	Auto	Auto	Auto
RBW	1000kHz	1000kHz	1000kHz	1000kHz	1000kHz	1000kHz
VBW	3000kHz	3000kHz	3000kHz	3000kHz	3000kHz	3000kHz
Detector	PK	PK	PK	PK	PK	PK
Trace	Max	Max	Max	Max	Max	Max

8.1.4 TEST RESULTS

NOTE: Test chart See Appendix C

9. RADIATED SPURIOUS EMISSION

9.1 DESCRIPTION OF RADIATED SPURIOUS EMISSION


9.1.1 MEASUREMENT METHOD

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. For Band 7 The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB. For Band. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


5.1.2 Test Setup

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = R_x \text{ (dBUV)} + CL \text{ (dB)} + SA \text{ (dB)} + \text{Gain (dBi)} - 107 \text{ (dBUV to dBm)}$ The SA is calibrated using following setup.

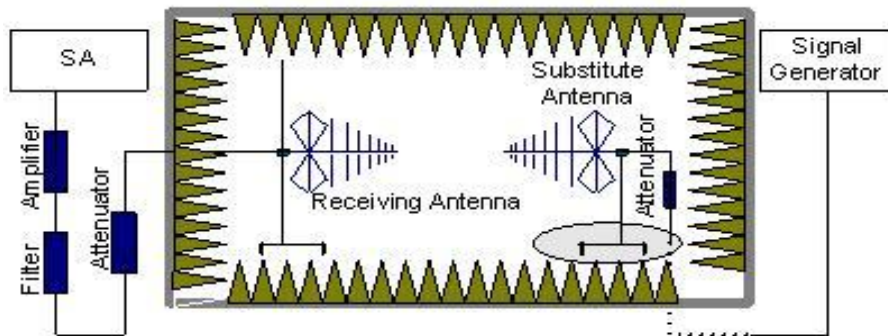

b) EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

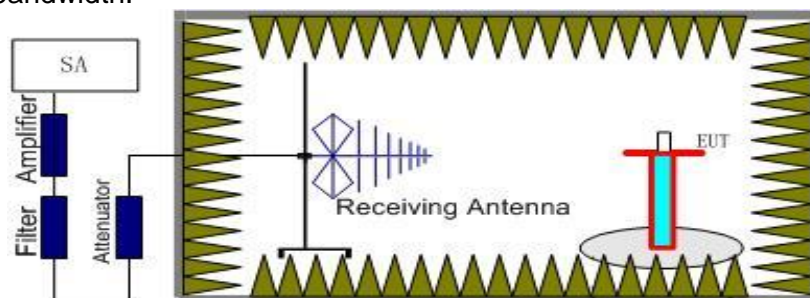

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Pow-

$er = P_{Mea} + AR_{pl}$

9.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI/TIA-603-D-2010-Section 2.2.12.2(b)
2. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}$$

.

For Band 7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)}$$

$$= -25\text{dBm}$$

$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$

$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$

9.1.4 TEST RESULTS

LTE BAND 2

LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3701.45	-33.81	12.60	12.93	-34.14	-13.00	-21.14	H
5552.01	-35.25	13.10	17.11	-39.26	-13.00	-26.26	H
7402.88	-32.32	11.50	22.20	-43.02	-13.00	-30.02	H
3701.45	-35.21	12.60	12.93	-35.54	-13.00	-22.54	V
5552.01	-34.93	13.10	17.11	-38.94	-13.00	-25.94	V
7402.88	-33.17	11.50	22.20	-43.87	-13.00	-30.87	V
LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3760.11	-33.77	12.60	12.93	-34.10	-13.00	-21.10	H
5640.24	-34.18	13.10	17.11	-38.19	-13.00	-25.19	H
7519.99	-33.54	11.50	22.20	-44.24	-13.00	-31.24	H
3760.11	-35.08	12.60	12.93	-35.41	-13.00	-22.41	V
5640.24	-33.97	13.10	17.11	-37.98	-13.00	-24.98	V
7519.99	-32.89	11.50	22.20	-43.59	-13.00	-30.59	V
LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3818.46	-33.79	12.60	12.93	-34.12	-13.00	-21.12	H
5727.50	-34.23	13.10	17.11	-38.24	-13.00	-25.24	H
7637.12	-33.38	11.50	22.20	-44.08	-13.00	-31.08	H
3818.46	-35.44	12.60	12.93	-35.77	-13.00	-22.77	V
5727.50	-34.41	13.10	17.11	-38.42	-13.00	-25.42	V
7637.12	-32.16	11.50	22.20	-42.86	-13.00	-29.86	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND2

LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3703.19	-34.37	12.60	12.93	-34.70	-13.00	-21.70	H
5554.45	-34.92	13.10	17.11	-38.93	-13.00	-25.93	H
7406.49	-33.65	11.50	22.20	-44.35	-13.00	-31.35	H
3703.19	-34.58	12.60	12.93	-34.91	-13.00	-21.91	V
5554.45	-34.88	13.10	17.11	-38.89	-13.00	-25.89	V
7406.49	-32.95	11.50	22.20	-43.65	-13.00	-30.65	V
LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3759.99	-34.75	12.60	12.93	-35.08	-13.00	-22.08	H
5639.93	-34.02	13.10	17.11	-38.03	-13.00	-25.03	H
7520.15	-32.74	11.50	22.20	-43.44	-13.00	-30.44	H
3759.99	-35.00	12.60	12.93	-35.33	-13.00	-22.33	V
5639.93	-35.11	13.10	17.11	-39.12	-13.00	-26.12	V
7520.15	-31.75	11.50	22.20	-42.45	-13.00	-29.45	V
LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3816.35	-34.07	12.60	12.93	-34.40	-13.00	-21.40	H
5724.78	-35.05	13.10	17.11	-39.06	-13.00	-26.06	H
7633.17	-33.15	11.50	22.20	-43.85	-13.00	-30.85	H
3816.35	-34.58	12.60	12.93	-34.91	-13.00	-21.91	V
5724.78	-34.59	13.10	17.11	-38.60	-13.00	-25.60	V
7633.17	-31.85	11.50	22.20	-42.55	-13.00	-29.55	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
 Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 2

LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3705.11	-33.87	12.60	12.93	-34.20	-13.00	-21.20	H
5557.81	-35.48	13.10	17.11	-39.49	-13.00	-26.49	H
7410.37	-33.50	11.50	22.20	-44.20	-13.00	-31.20	H
3705.11	-35.88	12.60	12.93	-36.21	-13.00	-23.21	V
5557.81	-35.23	13.10	17.11	-39.24	-13.00	-26.24	V
7410.37	-32.43	11.50	22.20	-43.13	-13.00	-30.13	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3760.05	-34.39	12.60	12.93	-34.72	-13.00	-21.72	H
5640.18	-34.22	13.10	17.11	-38.23	-13.00	-25.23	H
7520.05	-33.57	11.50	22.20	-44.27	-13.00	-31.27	H
3760.05	-34.89	12.60	12.93	-35.22	-13.00	-22.22	V
5640.18	-35.22	13.10	17.11	-39.23	-13.00	-26.23	V
7520.05	-31.76	11.50	22.20	-42.46	-13.00	-29.46	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3814.28	-34.20	12.60	12.93	-34.53	-13.00	-21.53	H
5721.48	-34.79	13.10	17.11	-38.80	-13.00	-25.80	H
7628.56	-32.20	11.50	22.20	-42.90	-13.00	-29.90	H
3814.28	-34.53	12.60	12.93	-34.86	-13.00	-21.86	V
5721.48	-34.62	13.10	17.11	-38.63	-13.00	-25.63	V
7628.56	-32.04	11.50	22.20	-42.74	-13.00	-29.74	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND2

LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3710.27	-34.29	12.60	12.93	-34.62	-13.00	-21.62	H
5565.72	-35.07	13.10	17.11	-39.08	-13.00	-26.08	H
7420.83	-32.99	11.50	22.20	-43.69	-13.00	-30.69	H
3710.27	-35.84	12.60	12.93	-36.17	-13.00	-23.17	V
5565.72	-34.13	13.10	17.11	-38.14	-13.00	-25.14	V
7420.83	-31.85	11.50	22.20	-42.55	-13.00	-29.55	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3759.86	-34.37	12.60	12.93	-34.70	-13.00	-21.70	H
5640.02	-35.24	13.10	17.11	-39.25	-13.00	-26.25	H
7519.95	-33.48	11.50	22.20	-44.18	-13.00	-31.18	H
3759.86	-34.93	12.60	12.93	-35.26	-13.00	-22.26	V
5640.02	-35.17	13.10	17.11	-39.18	-13.00	-26.18	V
7519.95	-33.20	11.50	22.20	-43.90	-13.00	-30.90	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3809.11	-33.65	12.60	12.93	-33.98	-13.00	-20.98	H
5714.02	-35.15	13.10	17.11	-39.16	-13.00	-26.16	H
7618.32	-33.13	11.50	22.20	-43.83	-13.00	-30.83	H
3809.11	-34.58	12.60	12.93	-34.91	-13.00	-21.91	V
5714.02	-34.63	13.10	17.11	-38.64	-13.00	-25.64	V
7618.32	-32.72	11.50	22.20	-43.42	-13.00	-30.42	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

LTE Band 2 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3716.09	-34.36	12.60	12.93	-34.69	-13.00	-21.69	H
5574.11	-35.19	13.10	17.11	-39.20	-13.00	-26.20	H
7618.44	-33.02	11.50	22.20	-43.72	-13.00	-30.72	H
3716.09	-34.94	12.60	12.93	-35.27	-13.00	-22.27	V
5574.11	-33.90	13.10	17.11	-37.91	-13.00	-24.91	V
7618.44	-31.72	11.50	22.20	-42.42	-13.00	-29.42	V
LTE Band 2 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3759.86	-34.65	12.60	12.93	-34.98	-13.00	-21.98	H
5640.20	-35.23	13.10	17.11	-39.24	-13.00	-26.24	H
7519.91	-32.36	11.50	22.20	-43.06	-13.00	-30.06	H
3759.86	-36.01	12.60	12.93	-36.34	-13.00	-23.34	V
5640.20	-34.97	13.10	17.11	-38.98	-13.00	-25.98	V
7519.91	-32.83	11.50	22.20	-43.53	-13.00	-30.53	V
LTE Band 2 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3803.48	-34.92	12.60	12.93	-35.25	-13.00	-22.25	H
5705.42	-34.60	13.10	17.11	-38.61	-13.00	-25.61	H
7607.31	-32.46	11.50	22.20	-43.16	-13.00	-30.16	H
3803.48	-34.78	12.60	12.93	-35.11	-13.00	-22.11	V
5705.42	-34.22	13.10	17.11	-38.23	-13.00	-25.23	V
7607.31	-32.17	11.50	22.20	-42.87	-13.00	-29.87	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 2

LTE Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3721.02	-33.61	12.60	12.93	-33.94	-13.00	-20.94	H
5581.46	-35.12	13.10	17.11	-39.13	-13.00	-26.13	H
7441.88	-32.95	11.50	22.20	-43.65	-13.00	-30.65	H
3721.02	-35.03	12.60	12.93	-35.36	-13.00	-22.36	V
5581.46	-34.51	13.10	17.11	-38.52	-13.00	-25.52	V
7441.88	-32.90	11.50	22.20	-43.60	-13.00	-30.60	V
LTE Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3760.09	-34.33	12.60	12.93	-34.66	-13.00	-21.66	H
5639.95	-35.45	13.10	17.11	-39.46	-13.00	-26.46	H
7519.87	-32.76	11.50	22.20	-43.46	-13.00	-30.46	H
3760.09	-34.97	12.60	12.93	-35.30	-13.00	-22.30	V
5639.95	-33.98	13.10	17.11	-37.99	-13.00	-24.99	V
7519.87	-32.91	11.50	22.20	-43.61	-13.00	-30.61	V
LTE Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3798.27	-34.91	12.60	12.93	-35.24	-13.00	-22.24	H
5697.25	-34.83	13.10	17.11	-38.84	-13.00	-25.84	H
7596.75	-32.65	11.50	22.20	-43.35	-13.00	-30.35	H
3798.27	-35.82	12.60	12.93	-36.15	-13.00	-23.15	V
5697.25	-34.74	13.10	17.11	-38.75	-13.00	-25.75	V
7596.75	-31.73	11.50	22.20	-42.43	-13.00	-29.43	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

LTE Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3422.33	-34.50	12.90	12.56	-34.16	-13.00	-21.16	H
5133.47	-34.46	13.10	12.46	-33.82	-13.00	-20.82	H
6844.95	-32.73	12.33	21.13	-41.53	-13.00	-28.53	H
3422.33	-35.30	12.90	12.76	-35.16	-13.00	-22.16	V
5133.47	-33.83	13.10	16.32	-37.05	-13.00	-24.05	V
6844.95	-32.76	12.33	21.13	-41.56	-13.00	-28.56	V
LTE Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3466.05	-33.69	12.80	12.56	-33.45	-13.00	-20.45	H
5199.16	-35.01	13.10	12.46	-34.37	-13.00	-21.37	H
6932.23	-32.50	12.33	21.13	-41.30	-13.00	-28.30	H
3466.05	-35.14	12.80	12.76	-35.10	-13.00	-22.10	V
5199.16	-34.80	13.10	16.32	-38.02	-13.00	-25.02	V
6932.23	-32.41	12.33	21.13	-41.21	-13.00	-28.21	V
LTE Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3508.33	-34.43	12.61	12.56	-34.38	-13.00	-21.38	H
5262.47	-35.00	13.12	12.46	-34.34	-13.00	-21.34	H
7016.22	-32.93	12.32	21.13	-41.74	-13.00	-28.74	H
3508.33	-34.67	12.61	12.76	-34.82	-13.00	-21.82	V
5262.47	-34.71	13.12	16.32	-37.91	-13.00	-24.91	V
7016.22	-32.29	12.32	21.13	-41.10	-13.00	-28.10	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

LTE Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3424.16	-33.58	12.90	12.56	-33.24	-13.00	-20.24	H
5136.33	-35.38	13.10	12.46	-34.74	-13.00	-21.74	H
6848.68	-33.37	12.33	21.13	-42.17	-13.00	-29.17	H
3424.16	-34.69	12.90	12.76	-34.55	-13.00	-21.55	V
5136.33	-34.03	13.10	16.32	-37.25	-13.00	-24.25	V
6848.68	-32.06	12.33	21.13	-40.86	-13.00	-27.86	V
LTE Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3466.06	-33.71	12.80	12.56	-33.47	-13.00	-20.47	H
5199.26	-34.39	13.10	12.46	-33.75	-13.00	-20.75	H
6931.98	-32.68	12.33	21.13	-41.48	-13.00	-28.48	H
3466.06	-35.48	12.80	12.76	-35.44	-13.00	-22.44	V
5199.26	-33.90	13.10	16.32	-37.12	-13.00	-24.12	V
6931.98	-32.76	12.33	21.13	-41.56	-13.00	-28.56	V
LTE Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3506.47	-34.56	12.61	12.56	-34.51	-13.00	-21.51	H
5262.13	-34.16	13.12	12.46	-33.50	-13.00	-20.50	H
7013.01	-32.65	12.32	21.13	-41.46	-13.00	-28.46	H
3506.47	-35.48	12.61	12.76	-35.63	-13.00	-22.63	V
5262.13	-34.04	13.12	16.32	-37.24	-13.00	-24.24	V
7013.01	-32.24	12.32	21.13	-41.05	-13.00	-28.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
 Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3426.45	-34.36	12.90	12.56	-34.02	-13.00	-21.02	H
5139.67	-34.11	13.10	12.46	-33.47	-13.00	-20.47	H
6852.65	-33.50	12.33	21.13	-42.30	-13.00	-29.30	H
3426.45	-34.57	12.90	12.76	-34.43	-13.00	-21.43	V
5139.67	-35.23	13.10	16.32	-38.45	-13.00	-25.45	V
6852.65	-31.98	12.33	21.13	-40.78	-13.00	-27.78	V
LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3466.03	-33.97	12.80	12.56	-33.73	-13.00	-20.73	H
5199.13	-34.45	13.10	12.46	-33.81	-13.00	-20.81	H
6931.97	-33.35	12.33	21.13	-42.15	-13.00	-29.15	H
3466.03	-34.71	12.80	12.76	-34.67	-13.00	-21.67	V
5199.13	-34.78	13.10	16.32	-38.00	-13.00	-25.00	V
6931.97	-32.89	12.33	21.13	-41.69	-13.00	-28.69	V
LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3506.72	-34.84	12.61	12.56	-34.79	-13.00	-21.79	H
5262.50	-35.17	13.12	12.46	-34.51	-13.00	-21.51	H
7012.88	-32.34	12.32	21.13	-41.15	-13.00	-28.15	H
3506.72	-35.18	12.61	12.76	-35.33	-13.00	-22.33	V
5262.50	-34.95	13.12	16.32	-38.15	-13.00	-25.15	V
7012.88	-32.23	12.32	21.13	-41.04	-13.00	-28.04	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3436.04	-33.49	12.90	12.56	-33.15	-13.00	-20.15	H
5154.41	-34.30	13.10	12.46	-33.66	-13.00	-20.66	H
6872.54	-32.36	12.33	21.13	-41.16	-13.00	-28.16	H
3436.04	-35.96	12.90	12.76	-35.82	-13.00	-22.82	V
5154.41	-34.65	13.10	16.32	-37.87	-13.00	-24.87	V
6872.54	-32.74	12.33	21.13	-41.54	-13.00	-28.54	V
LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3465.79	-34.47	12.80	12.56	-34.23	-13.00	-21.23	H
5199.28	-35.14	13.10	12.46	-34.50	-13.00	-21.50	H
6931.92	-32.63	12.33	21.13	-41.43	-13.00	-28.43	H
3465.79	-34.75	12.80	12.76	-34.71	-13.00	-21.71	V
5199.28	-34.28	13.10	16.32	-37.50	-13.00	-24.50	V
6931.92	-32.61	12.33	21.13	-41.41	-13.00	-28.41	V
LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3494.55	-34.26	12.61	12.56	-34.21	-13.00	-21.21	H
5241.15	-35.12	13.12	12.46	-34.46	-13.00	-21.46	H
6988.16	-32.36	12.32	21.13	-41.17	-13.00	-28.17	H
3494.55	-35.86	12.61	12.76	-36.01	-13.00	-23.01	V
5241.15	-34.41	13.12	16.32	-37.61	-13.00	-24.61	V
6988.16	-32.22	12.32	21.13	-41.03	-13.00	-28.03	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

LTE Band 4 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3436.16	-34.10	12.90	12.56	-33.76	-13.00	-20.76	H
5154.23	-34.85	13.10	12.46	-34.21	-13.00	-21.21	H
6872.67	-32.17	12.33	21.13	-40.97	-13.00	-27.97	H
3436.16	-35.81	12.90	12.76	-35.67	-13.00	-22.67	V
5154.23	-34.95	13.10	16.32	-38.17	-13.00	-25.17	V
6872.67	-31.88	12.33	21.13	-40.68	-13.00	-27.68	V
LTE Band 4 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3466.01	-34.38	12.80	12.56	-34.14	-13.00	-21.14	H
5198.88	-34.35	13.10	12.46	-33.71	-13.00	-20.71	H
6931.97	-32.20	12.33	21.13	-41.00	-13.00	-28.00	H
3466.01	-35.62	12.80	12.76	-35.58	-13.00	-22.58	V
5198.88	-34.02	13.10	16.32	-37.24	-13.00	-24.24	V
6931.97	-32.81	12.33	21.13	-41.61	-13.00	-28.61	V
LTE Band 4 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3495.42	-34.25	12.61	12.56	-34.20	-13.00	-21.20	H
5241.13	-35.33	13.12	12.46	-34.67	-13.00	-21.67	H
6989.21	-33.05	12.32	21.13	-41.86	-13.00	-28.86	H
3495.42	-34.88	12.61	12.76	-35.03	-13.00	-22.03	V
5241.13	-36.42	13.12	16.32	-39.62	-13.00	-26.62	V
6989.21	-34.12	12.32	21.13	-42.93	-13.00	-29.93	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

LTE Band 4 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3440.00	-34.29	12.90	12.56	-33.95	-13.00	-20.95	H
5160.46	-34.66	13.10	12.46	-34.02	-13.00	-21.02	H
6880.88	-32.17	12.33	21.13	-40.97	-13.00	-27.97	H
3440.00	-35.94	12.90	12.76	-35.80	-13.00	-22.80	V
5160.46	-34.31	13.10	16.32	-37.53	-13.00	-24.53	V
6880.88	-32.14	12.33	21.13	-40.94	-13.00	-27.94	V
LTE Band 4 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3466.19	-33.62	12.80	12.56	-33.38	-13.00	-20.38	H
5199.19	-34.62	13.10	12.46	-33.98	-13.00	-20.98	H
6931.85	-33.27	12.33	21.13	-42.07	-13.00	-29.07	H
3466.19	-35.60	12.80	12.76	-35.56	-13.00	-22.56	V
5199.19	-34.09	13.10	16.32	-37.31	-13.00	-24.31	V
6931.85	-32.50	12.33	21.13	-41.30	-13.00	-28.30	V
LTE Band 4 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
3494.77	-33.54	12.61	12.56	-33.49	-13.00	-20.49	H
5242.13	-35.12	13.12	12.46	-34.46	-13.00	-21.46	H
6989.69	-32.80	12.32	21.13	-41.61	-13.00	-28.61	H
3494.77	-35.08	12.61	12.76	-35.23	-13.00	-22.23	V
5242.13	-34.61	13.12	16.32	-37.81	-13.00	-24.81	V
6989.69	-32.35	12.32	21.13	-41.16	-13.00	-28.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 5

LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1649.03	-33.57	9.56	9.72	-33.73	-13.00	-20.73	H
2473.88	-34.42	10.50	10.86	-34.78	-13.00	-21.78	H
3298.74	-32.20	12.78	11.57	-30.99	-13.00	-17.99	H
1649.03	-35.09	9.56	9.34	-34.87	-13.00	-21.87	V
2473.88	-34.08	10.50	10.42	-34.00	-13.00	-21.00	V
3298.74	-32.42	12.78	11.12	-30.76	-13.00	-17.76	V
LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1672.73	-34.20	9.56	9.72	-34.36	-13.00	-21.36	H
2509.50	-34.54	10.50	10.86	-34.90	-13.00	-21.90	H
3345.81	-33.30	12.78	11.57	-32.09	-13.00	-19.09	H
1672.73	-34.68	9.56	9.34	-34.46	-13.00	-21.46	V
2509.50	-34.24	10.50	10.42	-34.16	-13.00	-21.16	V
3345.81	-31.81	12.78	11.12	-30.15	-13.00	-17.15	V
LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1696.17	-34.91	9.56	9.72	-35.07	-13.00	-22.07	H
2544.85	-35.43	10.50	10.86	-35.79	-13.00	-22.79	H
3393.09	-33.26	12.78	11.57	-32.05	-13.00	-19.05	H
1696.17	-34.56	9.56	9.34	-34.34	-13.00	-21.34	V
2544.85	-34.83	10.50	10.42	-34.75	-13.00	-21.75	V
3393.09	-32.64	12.78	11.12	-30.98	-13.00	-17.98	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 5

LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1650.96	-33.79	9.56	9.72	-33.95	-13.00	-20.95	H
2476.05	-34.53	10.50	10.86	-34.89	-13.00	-21.89	H
3301.84	-32.79	12.78	11.57	-31.58	-13.00	-18.58	H
1650.96	-36.01	9.56	9.34	-35.79	-13.00	-22.79	V
2476.05	-33.95	10.50	10.42	-33.87	-13.00	-20.87	V
3301.84	-33.20	12.78	11.12	-31.54	-13.00	-18.54	V
LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1672.51	-34.76	9.56	9.72	-34.92	-13.00	-21.92	H
2509.09	-34.61	10.50	10.86	-34.97	-13.00	-21.97	H
3345.57	-32.42	12.78	11.57	-31.21	-13.00	-18.21	H
1672.51	-35.20	9.56	9.34	-34.98	-13.00	-21.98	V
2509.09	-35.24	10.50	10.42	-35.16	-13.00	-22.16	V
3345.57	-33.07	12.78	11.12	-31.41	-13.00	-18.41	V
LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1694.69	-34.88	9.56	9.72	-35.04	-13.00	-22.04	H
2542.26	-34.28	10.50	10.86	-34.64	-13.00	-21.64	H
3389.83	-33.00	12.78	11.57	-31.79	-13.00	-18.79	H
1694.69	-35.99	9.56	9.34	-35.77	-13.00	-22.77	V
2542.26	-33.89	10.50	10.42	-33.81	-13.00	-20.81	V
3389.83	-32.36	12.78	11.12	-30.70	-13.00	-17.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
 Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

LTE Band 5 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1652.94	-34.85	9.56	9.72	-35.01	-13.00	-22.01	H
2479.27	-34.92	10.50	10.86	-35.28	-13.00	-22.28	H
3305.93	-33.20	12.78	11.57	-31.99	-13.00	-18.99	H
1652.94	-35.65	9.56	9.34	-35.43	-13.00	-22.43	V
2479.27	-34.75	10.50	10.42	-34.67	-13.00	-21.67	V
3305.93	-32.87	12.78	11.12	-31.21	-13.00	-18.21	V
LTE Band 5 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1672.91	-34.91	9.56	9.72	-35.07	-13.00	-22.07	H
2509.32	-34.09	10.50	10.86	-34.45	-13.00	-21.45	H
3345.60	-32.80	12.78	11.57	-31.59	-13.00	-18.59	H
1672.91	-35.87	9.56	9.34	-35.65	-13.00	-22.65	V
2509.32	-35.07	10.50	10.42	-34.99	-13.00	-21.99	V
3345.60	-31.80	12.78	11.12	-30.14	-13.00	-17.14	V
LTE Band 5 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1692.70	-34.33	9.56	9.72	-34.49	-13.00	-21.49	H
2539.01	-34.64	10.50	10.86	-35.00	-13.00	-22.00	H
3385.57	-32.75	12.78	11.57	-31.54	-13.00	-18.54	H
1692.70	-34.63	9.56	9.34	-34.41	-13.00	-21.41	V
2539.01	-34.58	10.50	10.42	-34.50	-13.00	-21.50	V
3385.57	-32.38	12.78	11.12	-30.72	-13.00	-17.72	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 5

LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1657.76	-34.21	9.56	9.72	-34.37	-13.00	-21.37	H
2486.56	-34.87	10.50	10.86	-35.23	-13.00	-22.23	H
3315.96	-33.38	12.78	11.57	-32.17	-13.00	-19.17	H
1657.76	-34.69	9.56	9.34	-34.47	-13.00	-21.47	V
2486.56	-34.63	10.50	10.42	-34.55	-13.00	-21.55	V
3315.96	-32.87	12.78	11.12	-31.21	-13.00	-18.21	V
LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1672.56	-34.64	9.56	9.72	-34.80	-13.00	-21.80	H
2509.15	-35.44	10.50	10.86	-35.80	-13.00	-22.80	H
3345.71	-33.55	12.78	11.57	-32.34	-13.00	-19.34	H
1672.56	-35.23	9.56	9.34	-35.01	-13.00	-22.01	V
2509.15	-34.75	10.50	10.42	-34.67	-13.00	-21.67	V
3345.71	-31.81	12.78	11.12	-30.15	-13.00	-17.15	V
LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1688.00	-33.99	9.56	9.72	-34.15	-13.00	-21.15	H
2531.56	-34.14	10.50	10.86	-34.50	-13.00	-21.50	H
3375.83	-32.78	12.78	11.57	-31.57	-13.00	-18.57	H
1688.00	-35.85	9.56	9.34	-35.63	-13.00	-22.63	V
2531.56	-34.08	10.50	10.42	-34.00	-13.00	-21.00	V
3375.83	-31.74	12.78	11.12	-30.08	-13.00	-17.08	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 7

LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5005.03	-34.79	12.66	12.54	-34.67	-25.00	-9.67	H
7507.92	-34.49	11.46	12.57	-35.60	-25.00	-10.60	H
10010.52	-32.71	12.79	21.23	-41.15	-25.00	-16.15	H
5005.03	-35.16	12.66	12.54	-35.04	-25.00	-10.04	V
7507.92	-34.46	11.46	12.57	-35.57	-25.00	-10.57	V
10010.52	-31.89	12.79	21.23	-40.33	-25.00	-15.33	V
LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5070.20	-33.54	12.72	12.55	-33.37	-25.00	-8.37	H
7605.19	-34.53	11.46	12.57	-35.64	-25.00	-10.64	H
10139.82	-33.03	12.09	21.25	-42.19	-25.00	-17.19	H
5070.20	-34.59	12.80	12.55	-34.34	-25.00	-9.34	V
7605.19	-34.06	13.10	12.57	-33.53	-25.00	-8.53	V
10139.82	-32.31	12.33	21.25	-41.23	-25.00	-16.23	V
LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5134.35	-33.62	12.76	12.57	-33.43	-25.00	-8.43	H
7701.35	-34.29	11.45	12.58	-35.42	-25.00	-10.42	H
10268.79	-32.54	12.28	21.27	-41.53	-25.00	-16.53	H
5134.35	-35.27	12.76	12.57	-35.08	-25.00	-10.08	V
7701.35	-35.03	11.45	12.58	-36.16	-25.00	-11.16	V
10268.79	-32.17	12.28	21.27	-41.16	-25.00	-16.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 7

LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5010.53	-34.21	12.66	12.54	-34.09	-25.00	-9.09	H
7515.82	-35.24	11.46	12.57	-36.35	-25.00	-11.35	H
10021.13	-32.74	12.79	21.23	-41.18	-25.00	-16.18	H
5010.53	-34.73	12.66	12.54	-34.61	-25.00	-9.61	V
7515.82	-34.79	11.46	12.57	-35.90	-25.00	-10.90	V
10021.13	-32.65	12.79	21.23	-41.09	-25.00	-16.09	V
LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5069.99	-34.44	12.72	12.55	-34.27	-25.00	-9.27	H
7605.03	-35.36	11.46	12.57	-36.47	-25.00	-11.47	H
10139.87	-32.85	12.09	21.25	-42.01	-25.00	-17.01	H
5069.99	-35.09	12.80	12.55	-34.84	-25.00	-9.84	V
7605.03	-34.91	13.10	12.57	-34.38	-25.00	-9.38	V
10139.87	-32.85	12.33	21.25	-41.77	-25.00	-16.77	V
LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5129.18	-33.67	12.76	12.57	-33.48	-25.00	-8.48	H
7694.29	-34.02	11.45	12.58	-35.15	-25.00	-10.15	H
10258.77	-33.29	12.28	21.27	-42.28	-25.00	-17.28	H
5129.18	-34.66	12.76	12.57	-34.47	-25.00	-9.47	V
7694.29	-34.08	11.45	12.58	-35.21	-25.00	-10.21	V
10258.77	-33.21	12.28	21.27	-42.20	-25.00	-17.2	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.
 Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 7

LTE Band 7 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5015.90	-33.61	12.66	12.54	-33.49	-25.00	-8.49	H
7524.15	-34.05	11.46	12.57	-35.16	-25.00	-10.16	H
10031.98	-33.39	12.79	21.23	-41.83	-25.00	-16.83	H
5015.90	-35.58	12.66	12.54	-35.46	-25.00	-10.46	V
7524.15	-33.84	11.46	12.57	-34.95	-25.00	-9.95	V
10031.98	-32.24	12.79	21.23	-40.68	-25.00	-15.68	V
LTE Band 7 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5069.84	-34.05	12.72	12.55	-33.88	-25.00	-8.88	H
7605.04	-34.94	11.46	12.57	-36.05	-25.00	-11.05	H
10140.21	-33.56	12.09	21.25	-42.72	-25.00	-17.72	H
5069.84	-35.93	12.80	12.55	-35.68	-25.00	-10.68	V
7605.04	-34.20	13.10	12.57	-33.67	-25.00	-8.67	V
10140.21	-32.66	12.33	21.25	-41.58	-25.00	-16.58	V
LTE Band 7 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5123.48	-33.61	12.76	12.57	-33.42	-25.00	-8.42	H
7524.10	-34.90	11.45	12.58	-36.03	-25.00	-11.03	H
10031.95	-33.59	12.28	21.27	-42.58	-25.00	-17.58	H
5123.48	-35.64	12.76	12.57	-35.45	-25.00	-10.45	V
7524.10	-34.18	11.45	12.58	-35.31	-25.00	-10.31	V
10031.95	-31.79	12.28	21.27	-40.78	-25.00	-15.78	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE Band 7 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5021.34	-33.84	12.66	12.54	-33.72	-25.00	-20.72	H
7531.30	-35.33	11.46	12.57	-36.44	-25.00	-23.44	H
7524.26	-32.51	12.79	21.23	-40.95	-25.00	-27.95	H
5021.34	-35.96	12.66	12.54	-35.84	-25.00	-22.84	V
7531.30	-34.78	11.46	12.57	-35.89	-25.00	-22.89	V
7524.26	-32.30	12.79	21.23	-40.74	-25.00	-27.74	V
LTE Band 7 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5070.05	-34.32	12.72	12.55	-34.15	-25.00	-21.15	H
7604.82	-34.36	11.46	12.57	-35.47	-25.00	-22.47	H
10140.00	-32.89	12.09	21.25	-42.05	-25.00	-29.05	H
5070.05	-35.81	12.80	12.55	-35.56	-25.00	-22.56	V
7604.82	-34.51	13.10	12.57	-33.98	-25.00	-20.98	V
10140.00	-31.99	12.33	21.25	-40.91	-25.00	-27.91	V
LTE Band 7 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
5119.01	-34.21	12.76	12.57	-34.02	-25.00	-21.02	H
7678.32	-35.42	11.45	12.58	-36.55	-25.00	-23.55	H
10238.27	-33.61	12.28	21.27	-42.60	-25.00	-29.60	H
5119.01	-35.22	12.76	12.57	-35.03	-25.00	-22.03	V
7678.32	-35.04	11.45	12.58	-36.17	-25.00	-23.17	V
10238.27	-32.73	12.28	21.27	-41.72	-25.00	-28.72	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 17

LTE Band 17 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1413.03	-33.48	8.17	9.34	-34.65	-13.00	-21.65	H
2120.19	-34.71	9.53	10.42	-35.60	-13.00	-22.60	H
2826.83	-32.49	11.27	11.12	-32.34	-13.00	-19.34	H
1413.03	-35.46	8.17	9.34	-36.63	-13.00	-23.63	V
2120.19	-33.91	9.53	10.42	-34.80	-13.00	-21.80	V
2826.83	-32.81	11.27	11.12	-32.66	-13.00	-19.66	V
LTE Band 17 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1419.90	-33.97	8.17	9.34	-35.14	-13.00	-22.14	H
2129.85	-35.12	9.53	10.42	-36.01	-13.00	-23.01	H
2839.91	-32.72	11.27	11.12	-32.57	-13.00	-19.57	H
1419.90	-35.90	8.17	9.34	-37.07	-13.00	-24.07	V
2129.85	-34.17	9.53	10.42	-35.06	-13.00	-22.06	V
2839.91	-32.59	11.27	11.12	-32.44	-13.00	-19.44	V
LTE Band 17 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1426.04	-34.51	8.17	9.34	-35.68	-13.00	-22.68	H
2139.13	-34.02	9.53	10.42	-34.91	-13.00	-21.91	H
2852.66	-32.91	11.27	11.12	-32.76	-13.00	-19.76	H
1426.04	-35.12	8.17	9.34	-36.29	-13.00	-23.29	V
2139.13	-34.51	9.53	10.42	-35.40	-13.00	-22.40	V
2852.66	-32.01	11.27	11.12	-31.86	-13.00	-18.86	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 17

LTE Band 17 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1418.10	-34.56	8.17	9.34	-35.73	-13.00	-22.73	H
2127.58	-34.00	9.53	10.42	-34.89	-13.00	-21.89	H
2836.86	-33.14	11.27	11.12	-32.99	-13.00	-19.99	H
1418.10	-35.15	8.17	9.34	-36.32	-13.00	-23.32	V
2127.58	-34.63	9.53	10.42	-35.52	-13.00	-22.52	V
2836.86	-32.16	11.27	11.12	-32.01	-13.00	-19.01	V
LTE Band 17 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1420.07	-33.66	8.17	9.34	-34.83	-13.00	-21.83	H
2130.17	-35.23	9.53	10.42	-36.12	-13.00	-23.12	H
2840.27	-33.51	11.27	11.12	-33.36	-13.00	-20.36	H
1420.07	-35.12	8.17	9.34	-36.29	-13.00	-23.29	V
2130.17	-34.97	9.53	10.42	-35.86	-13.00	-22.86	V
2840.27	-32.40	11.27	11.12	-32.25	-13.00	-19.25	V
LTE Band 17 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Ant(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dB)	
1421.32	-34.60	8.17	9.34	-35.77	-13.00	-22.77	H
2131.76	-34.24	9.53	10.42	-35.13	-13.00	-22.13	H
2842.82	-33.30	11.27	11.12	-33.15	-13.00	-20.15	H
1421.32	-34.85	8.17	9.34	-36.02	-13.00	-23.02	V
2131.76	-34.02	9.53	10.42	-34.91	-13.00	-21.91	V
2842.82	-32.38	11.27	11.12	-32.23	-13.00	-19.23	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.


10. FREQUENCY STABILITY

10.1 DESCRIPTION OF FREQUENCY STABILITY MEASUREMENT

10.1.1 MEASUREMENT METHOD

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

10.1.2 Test Setup

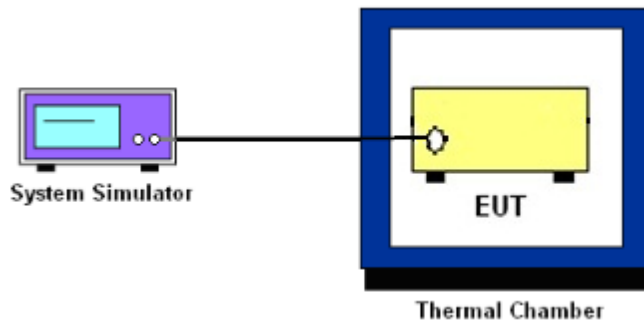

10.1.3 TEST PROCEDURES FOR TEMPERATURE VARIATION

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

10.1.4 TEST PROCEDURES FOR VOLTAGE VARIATION

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

10.1.4 MEASUREMENT RESULT

LTE BAND 2

LTE Band 2 (QPSK) / 1880MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	24.77	0.013	2.5ppm	PASS
40		19.62	0.010		
30		27.63	0.015		
20		31.93	0.017		
10		27.04	0.014		
0		17.70	0.009		
-10		14.95	0.008		
-20		21.73	0.012		
-30		32.04	0.017		
25		Maximum Voltage	18.00		
25	BEP	20.79	0.011		

LTE Band 2 (QPSK) / 1880MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	24.71	0.013	2.5ppm	PASS
40		33.38	0.018		
30		33.40	0.018		
20		23.40	0.012		
10		28.13	0.015		
0		20.34	0.011		
-10		34.95	0.019		
-20		34.75	0.018		
-30		30.91	0.016		
25		Maximum Voltage	24.58		
25	BEP	13.64	0.007		

Note: 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage = 4.35 V

2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

LTE BAND 4

LTE Band 4 (QPSK) / 1733MHz / BW10M

Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	33.54	0.019	2.5ppm	PASS
40		15.92	0.009		
30		26.78	0.015		
20		35.73	0.021		
10		25.49	0.015		
0		28.11	0.016		
-10		32.61	0.019		
-20		15.61	0.009		
-30		11.53	0.007		
25		Maximum Voltage	20.97		
25	BEP	15.70	0.009		

LTE Band 4 (QPSK) / 1733MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	27.31	0.016	2.5ppm	PASS
40		14.03	0.008		
30		27.78	0.016		
20		27.23	0.016		
10		19.79	0.011		
0		17.16	0.010		
-10		15.26	0.009		
-20		27.43	0.016		
-30		29.10	0.017		
25		Maximum Voltage	14.93		
25	BEP	20.25	0.012		

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage = 4.35 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

LTE BAND 5

LTE Band 5 (QPSK) / 836.5MHz / BW5M

Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	12.35	0.017	2.5ppm	PASS
40		26.44	0.037		
30		29.87	0.042		
20		27.03	0.038		
10		20.22	0.028		
0		27.43	0.039		
-10		23.64	0.003		
-20		33.18	0.047		
-30		29.46	0.041		
25		Maximum Voltage	23.98		
25	BEP	29.52	0.042		

LTE Band 5 (QPSK) / 836.5MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	28.13	0.040	2.5ppm	PASS
40		23.23	0.033		
30		28.59	0.040		
20		15.28	0.022		
10		12.90	0.018		
0		23.26	0.033		
-10		30.36	0.004		
-20		27.21	0.038		
-30		33.84	0.048		
25		Maximum Voltage	11.89		
25	BEP	23.99	0.034		

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage = 4.35 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

LTE BAND 7

LTE Band 7 (QPSK) / 2535MHz / BW10M

Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	14.02	0.006	2.5ppm	PASS
40		31.53	0.012		
30		35.99	0.014		
20		23.09	0.009		
10		17.41	0.007		
0		21.78	0.009		
-10		17.00	0.007		
-20		11.82	0.005		
-30		29.18	0.012		
25		Maximum Voltage	24.16		
25	BEP	36.04	0.014		

LTE Band 7 (QPSK) / 2535MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	25.71	0.010	2.5ppm	PASS
40		26.95	0.011		
30		18.97	0.007		
20		26.52	0.010		
10		23.27	0.009		
0		34.93	0.014		
-10		18.83	0.007		
-20		26.64	0.011		
-30		30.29	0.012		
25		Maximum Voltage	32.87		
25	BEP	36.48	0.014		

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage = 4.35 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

LTE BAND 17

LTE Band 17 (QPSK) / 710MHz / BW5M

Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	18.83	0.027	2.5ppm	PASS
40		19.51	0.027		
30		11.91	0.017		
20		31.44	0.044		
10		30.33	0.043		
0		31.66	0.045		
-10		26.93	0.004		
-20		32.19	0.045		
-30		15.72	0.022		
25		Maximum Voltage	14.12		
25	BEP	12.85	0.018		



LTE Band 17 (QPSK) / 710MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	28.66	0.040	2.5ppm	PASS
40		11.79	0.017		
30		22.08	0.031		
20		13.54	0.019		
10		22.40	0.032		
0		31.26	0.044		
-10		23.33	0.003		
-20		34.66	0.049		
-30		14.08	0.020		
25		Maximum Voltage	30.62		
25	BEP	14.61	0.021		

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage = 4.35 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

PHOTOS OF TEST SETUP

RADIATED SPURIOUS EMISSION

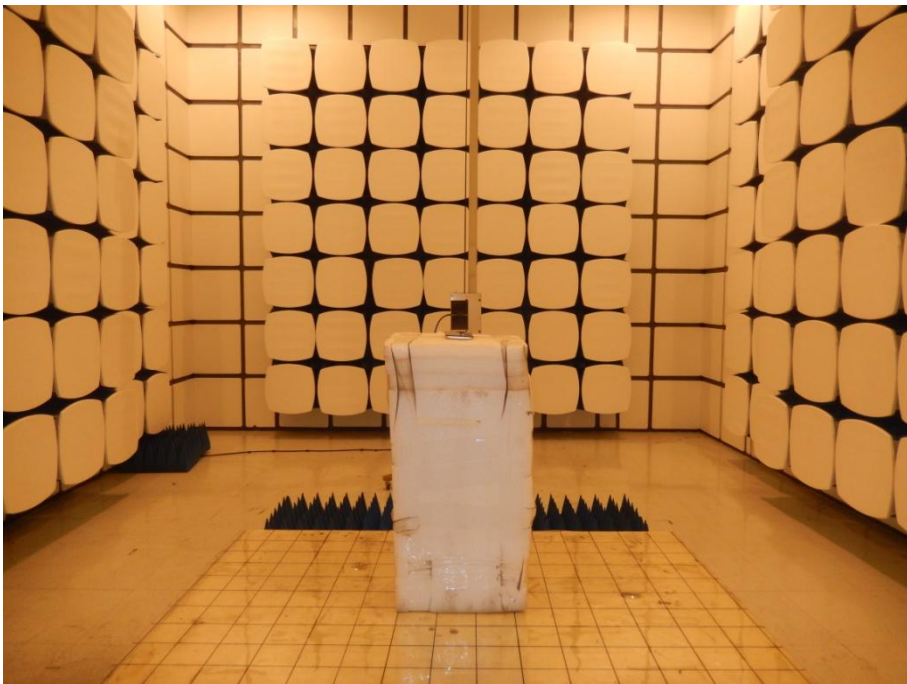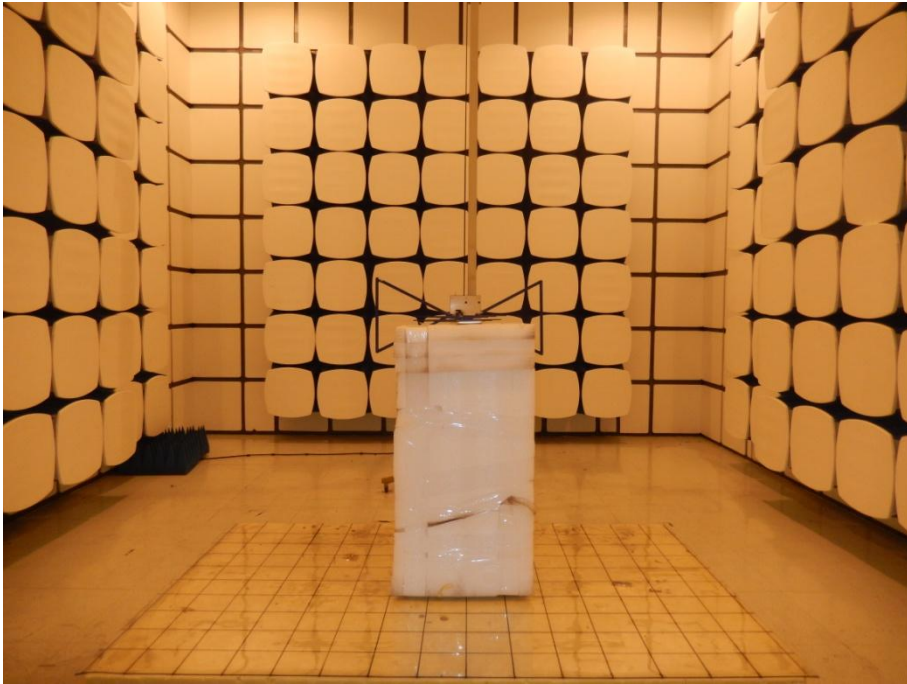

*****END OF THE REPORT*****