



FCC SAR TEST REPORT

Report No: STS1603157H01

Issued for

Santok Limited

Santok House, Unit L, Braintree Industrial Estate, Braintree Road, South Ruislip, Middlesex, HA4 0EJ United Kingdom

Product Name:	4G Mobile phone
Brand Name:	STK
Model Name:	Hero X
Series Model:	N/A
FCC ID:	2AE7RSTKHEROX
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report SAR (1g):	Head:0.303 W/kg
	Body:1.352 W/kg



Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test Sample.



Test Report Certification

Applicant's name: Santok Limited
Address.....: Santok House, Unit L, Braintree Industrial Estate, Braintree Road, South Ruislip, Middlesex, HA4 0EJ United Kingdom
Manufacture's Name.....: Shenzhen Grand Time Technology Co.,Ltd
Address.....: RM701, East Block, Skyworth Semiconductor Design Building, Gaoxin South Road, Nanshan District, Shenzhen, China

Product description

Product name: 4G Mobile phone
Trademark: STK
Model and/or type reference ..: Hero X
Series Model : N/A

Standards: ANSI/IEEE Std. C95.1-1992
 FCC 47 CFR Part 2 (2.1093)
 IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test.....: :
Date (s) of performance of tests.....: 01 Apr. 2016
Date of Issue.....: 06 Apr. 2016
Test Result.....: **Pass**

Testing Engineer : Allen Chen
 (Allen Chen)

Technical Manager : John Zou
 (John Zou)

Authorized Signatory : Bovey Yang
 (Bovey Yang)





TABLE OF CONTENTS

1. General Information	4
1.1 EUT Description	4
1.2 Test Environment	6
1.3 Test Factory	6
2. Test Standards And Limits	7
3. SAR Measurement System	8
3.1 Definition Of Specific Absorption Rate (SAR)	8
3.2 SAR System	8
3.2.1 Probe	9
3.2.2 Phantom	10
3.2.3 Device Holder	10
4. Tissue Simulating Liquids	11
4.1 Simulating Liquids Parameter Check	11
5. SAR System Validation	13
5.1 Validation System	13
5.2 Validation Result	13
6. SAR Evaluation Procedures	14
7. EUT Antenna Location Sketch	15
7.1 SAR test exclusion consider table	16
8. EUT Test Position	17
8.1 Define Two Imaginary Lines On The Handset	17
8.2 Hotspot mode exposure position condition	18
9. Uncertainty	19
9.1 Measurement Uncertainty	19
9.2 System validation Uncertainty	21
10. Conducted Power Measurement	23
10.1 Test Result	23
10.2 Tune-up Power	35
10.3 SAR Test Exclusions Applied	37
11. EUT And Test Setup Photo	38
11.1 EUT Photo	38
11.2 Setup Photo	41
12. SAR Result Summary	47
12.1 Head SAR	47
12.2 Body-worn and Hotspot SAR	49
12.3 repeated SAR measurement	51
13. Equipment List	54
Appendix A. System Validation Plots	55
Appendix B. SAR Test Plots	79
Appendix C. Probe Calibration And Dipole Calibration Report	99



1.General Information


Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Equipment	4G Mobile phone			
Brand Name	STK			
Model No.	Hero X			
Series Model	N/A			
FCC ID	2AE7RSTKHEROX			
Model Difference	N/A			
Adapter	Input: AC100-240V,150mA, 50/60 Hz Output: DC 5V, 1000mA			
Battery	Rated Voltage: 3.8V; Charge Limit: 4.35V; Capacity: 2050mAh			
Device Category	Portable			
Product stage	Production unit			
RF Exposure Environment	General Population / Uncontrolled			
IMEI	235376433244440			
Hardware Version	HERO_X_MO_V0.01			
Software Version	Hero_X_DS_891_V0.0.2_20160321			
Frequency Range	GSM 850:824.2~848.8MHz PCS1900:1850.2~1909.8MHz WCDMA Band II:1852.4~1907.6MHz WCDMA Band V:826.4~846.6MHz LTE Band 2:1850.7~1909.3MHz LTE Band 4:1710.7~1754.3MHz LTE Band 5:824.7~848.3MHz		LTE Band 7:2502.5~2567.5MHz LTE Band 17:706.5~713.5MHz WLAN802.11b/g/n(HT20):2412~2462MHz WLAN 802.11n(HT40):2422~2452MHz Bluetooth:2402~ 2480MHz	
Max. Reported SAR(1g):	Band	Mode	Head (W/kg)	Body Worn and Hotspot(W/kg)
	PCE	GSM 850	0.126	0.254
	PCE	GSM 1900	0.121	1.352
	PCE	WCDMA Band II	0.177	1.195
	PCE	WCDMA Band V	0.077	0.175
	PCE	LTE Band 2	0.058	0.350
	PCE	LTE Band 4	0.117	1.327
	PCE	LTE Band 5	0.112	0.175
	PCE	LTE Band 7	0.299	0.666
	PCE	LTE Band 17	0.303	0.477
	DTS	WIFI	0.044	0.026
	DSS	Bluetooth ^{Note}	0.052	0.026
1-g Sum SAR			0.351	1.378
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter (DSS) Digital Transmission System (DTS)			



Operating Mode:	GSM: GSM Voice; GPRS; EGPRS Class 12; WCDMA:RMC,HSDPA,HSUPA Release 6; LTE:QPSK,16QAM; WLAN: 802.11 b/g/n(HT20) /n(HT40); Bluetooth: V4.0 + EDR (GFSK + $\pi/4$ DQPSK+8DPSK) ;
Antenna Specification:	GSM,WCDMA,LTE: PIFA Antenna BT,WIFI: PIFA Antenna
SIM Card	Support dual-SIM, dual standby, the multiple SIM card with two lines cannot transmitting at the same time
Hotspot Mode:	Support
DTM Mode:	Not Support
Note: 1. Bluetooth SAR was estimated 2. The dual SIM card mobile has 2 SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active) 3. After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 card to perform all tests. 4. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power	

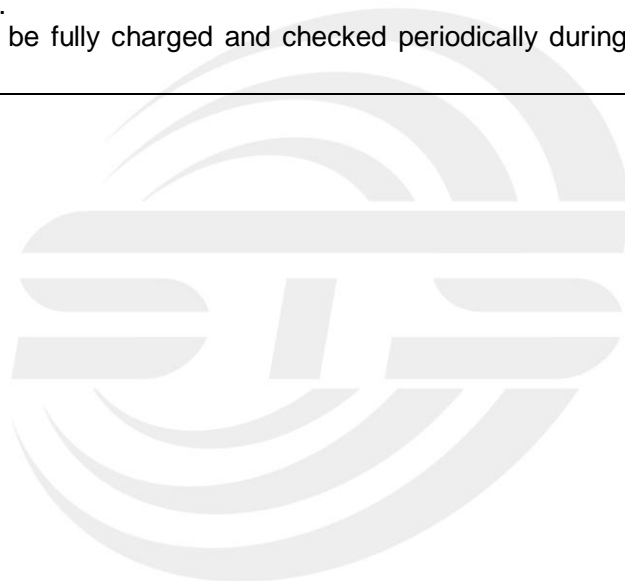



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required	Actual
Temperature (°C)	18-25	22~23
Humidity (%RH)	30-70	55~65

1.3 Test Factory

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F, Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong, Baoan District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649;

FCC Registration No.: 842334;

IC Registration No.: 12108A-1





2. Test Standards And Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r04	SAR for LTE Devices
9	FCC KDB 941225 D06 v02r01	Hotspot Mode SAR
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.4 8.0 20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body Partial-Body Hands, Wrists, Feet and Ankles

0.08 1.6 4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

3. SAR Measurement System

3.1 Definition Of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

SATIMO SAR System Diagram:

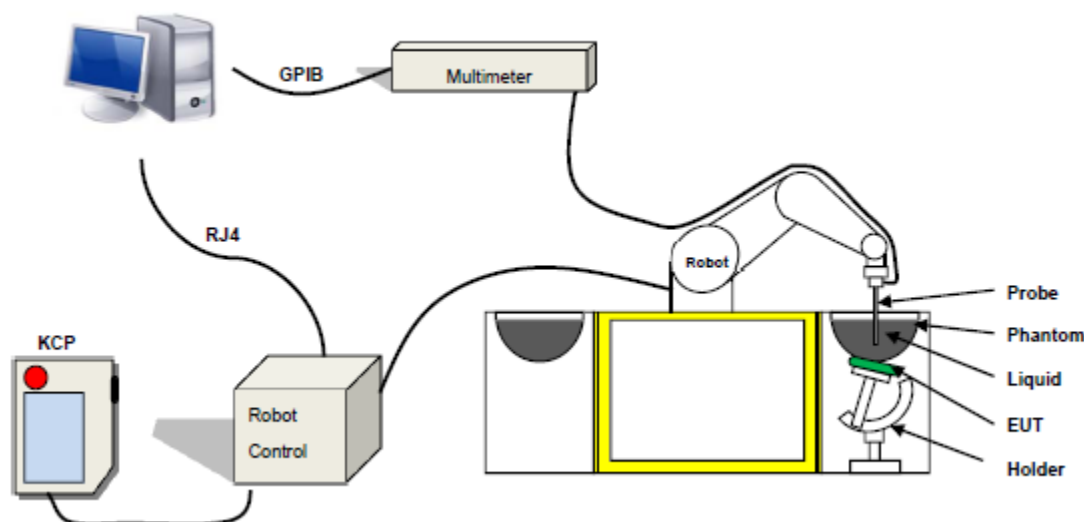

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 45/15 EPGO281 with following specifications is used

- Dynamic range: 0.01-100 W/kg
 - Tip Diameter: 2.5 mm
 - Length of Individual Dipoles: 2 mm
 - Maximum external diameter: 8 mm
 - Distance between dipoles / probe extremity: 2.7 mm (repeatability better than +/- 1mm)
 - Probe linearity: $0 \pm 2.60\%$ (± 0.11 dB)
 - Axial Isotropy: < 0.25 dB
 - Spherical Isotropy: < 0.25 dB
 - Calibration range: 450MHz to 6GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1 – MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.


SN 32/14 SAM115



SN 32/14 SAM116



3.2.3 Device Holder

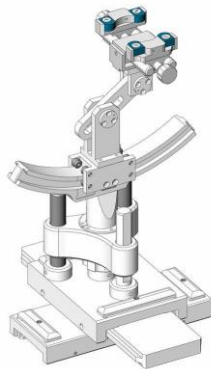

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Frequency (MHz)	Bactericide	DGBE	HEC	NaCl	Sucrose	1,2-Propanediol	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	%	σ	ϵ_r
750	/	/	/	0.79	/	64.81	/	34.40	0.97	41.8
835	/	/	/	0.79	/	64.81	/	34.40	0.97	41.8
900	/	/	/	0.79	/	64.81	/	34.40	0.97	41.8
1800	/	13.84	/	0.35	/	/	30.45	55.36	1.38	41.0
1900	/	13.84	/	0.35	/	/	30.45	55.36	1.38	41.0
2000	/	7.99	/	0.16	/	/	19.97	71.88	1.55	41.1
2450	/	7.99	/	0.16	/	/	19.97	71.88	1.88	40.3
2600	/	7.99	/	0.16	/	/	19.97	71.88	1.88	40.3

Tissue dielectric parameters for head and body phantoms				
Frequency	ϵ_r		σ S/m	
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	58.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
3000	38.5	52.0	2.40	2.73
5800	35.3	48.2	5.27	6.00



LIQUID MEASUREMENT RESULTS

Date: 01 Apr. 2016 **Ambient condition:** Temperature 22.7°C **Relative humidity:** 49%

Head Simulating Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
750 MHz	22.30	Permittivity:	41.9	41.2	-1.67	±5
		Conductivity:	0.89	0.91	2.25	±5
835 MHz	22.30	Permittivity:	41.5	41	-1.20	±5
		Conductivity:	0.9	0.86	-4.44	±5
1800 MHz	22.30	Permittivity:	40.1	40.2	0.25	±5
		Conductivity:	1.37	1.31	-4.38	±5
1900 MHz	22.30	Permittivity:	40	39.5	-1.25	±5
		Conductivity:	1.4	1.43	2.14	±5
2450 MHz	22.30	Permittivity:	39.2	39.18	-0.05	±5
		Conductivity:	1.8	1.88	4.44	±5
2600 MHz	22.30	Permittivity:	39.0	40.01	2.59	±5
		Conductivity:	1.96	1.88	-4.08	±5


Body Simulating Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
750 MHz	22.30	Permittivity:	55.5	55.26	-0.43	± 5
		Conductivity:	0.96	0.91	-5.21	± 5
835 MHz	22.30	Permittivity:	55.2	54.7	-0.91	± 5
		Conductivity:	0.97	0.98	1.03	± 5
1800 MHz	22.30	Permittivity:	53.4	52.6	-1.50	± 5
		Conductivity:	1.49	1.38	-7.38	± 5
1900 MHz	22.30	Permittivity:	53.3	52.31	-1.86	± 5
		Conductivity:	1.52	1.5	-1.32	± 5
2450 MHz	22.30	Permittivity:	52.7	52.32	-0.72	± 5
		Conductivity:	1.95	1.92	-1.54	± 5
2600 MHz	22.30	Permittivity:	52.5	52.67	0.32	± 5
		Conductivity:	2.16	2.17	0.46	± 5

5. SAR System Validation

5.1 Validation System

Each SATIMO system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

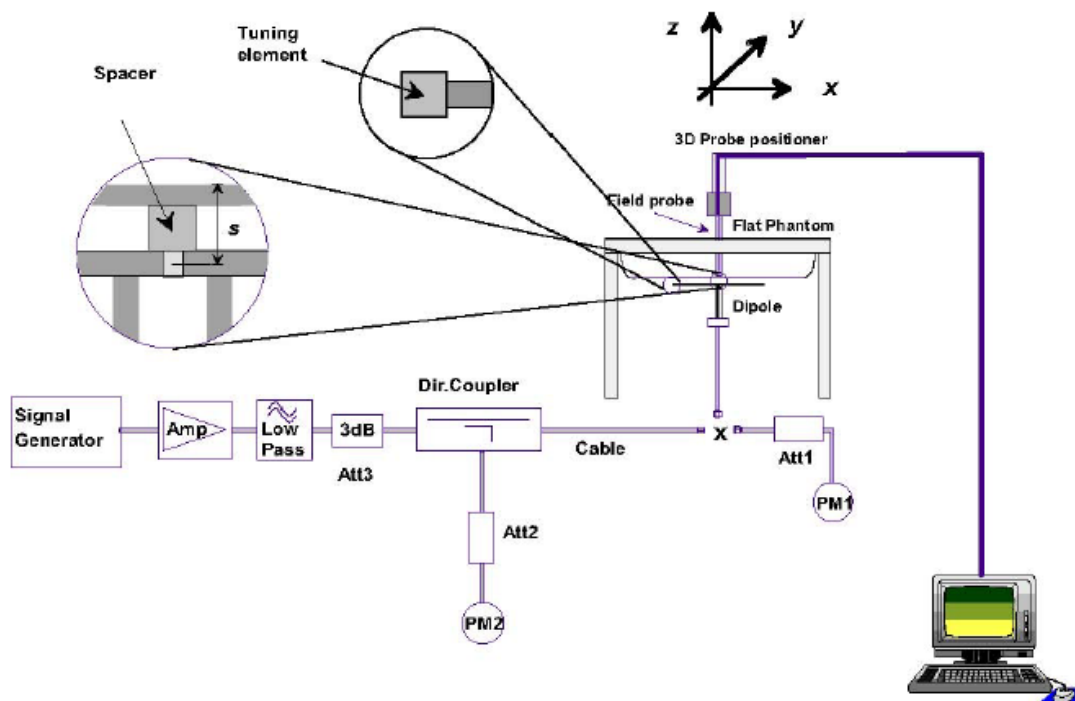

5.2 Validation Result

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %.

Ambient condition: Temperature 22.7°C Relative humidity: 49%

Freq.(MHz)	Power(mW)	Tested Value (W/Kg)	Normalized SAR (W/kg)	Target(W/Kg)	Tolerance(%)	Date
750 Head	100	0.838	8.38	8.49	-1.30	2016-04-01
750 Body	100	0.856	8.56	8.49	0.82	2016-04-01
835 Head	100	0.937	9.37	9.56	-1.99	2016-04-01
835 Body	100	0.947	9.47	9.56	-0.94	2016-04-01
1800 Head	100	3.760	37.60	38.4	-2.08	2016-04-01
1800 Body	100	3.880	38.80	38.4	1.04	2016-04-01
1900 Head	100	3.892	38.92	39.7	2.26	2016-04-01
1900 Body	100	4.124	41.24	39.7	-3.49	2016-04-01
2450 Head	100	5.392	53.92	52.4	2.90	2016-04-01
2450 Body	100	5.164	51.64	52.4	-1.45	2016-04-01
2600 Head	100	5.490	54.90	55.30	-0.72	2016-01-18
2600 Body	100	5.570	55.70	55.30	0.72	2016-01-18

Note: The tolerance limit of System validation $\pm 10\%$.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:


The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

➤ Area Scan & Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

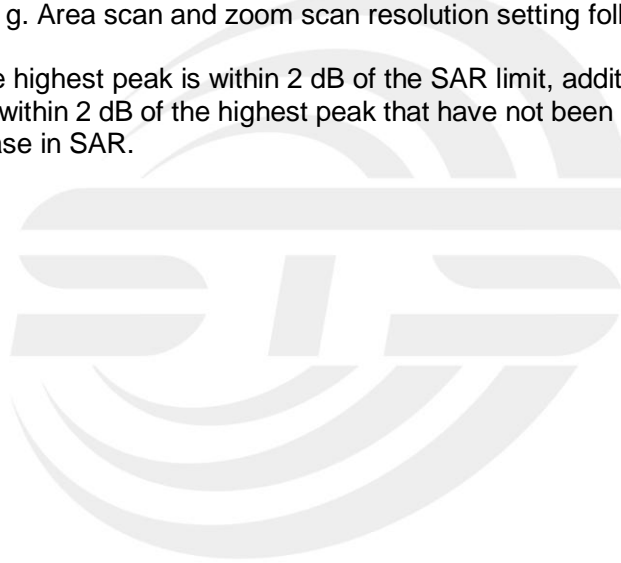



7.1 SAR test exclusion consider table

According with FCC KDB 447498 D01, appendix A, <SAR test exclusion thresholds for 100MHz ~6GHz and ≤50mm> table, this device SAR test configurations consider as following:

Band	Test position configurations					
	Front	Back	Right edge	Left edge	Top edge	Bottom edge
WWAN	<5mm	<5mm	<5mm	<5mm	122mm	<5mm
	Yes	Yes	Yes	Yes	No	Yes
WIFI/BT	<5mm	<5mm	56mm	<5mm	<5mm	122mm
	Yes	Yes	No	Yes	Yes	No

Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <5mm, 5mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance ≤50mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, Mw}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
, f(GHz) is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation. The result is rounded to one decimal place for comparison
For <50mm distance, we just calculate mW of the exclusion threshold value(3.0) to do compare
5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following
 - a) [threshold at 50mm in step 1] + (test separation distance - 50mm) * (f (MHz)/150)] mW, at 100 MHz to 1500 MHz
 - b) [threshold at 50mm in step 1] + (test separation distance - 50mm) * 10] mW at > 1500MHz and ≤6GHz
6. Per KDB 447498 D02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/ HSUPA/DC-HSDPA output power is <0.25db higher than RMC 12.2Kbps, or reported SAR with RMC 12.2kbps setting is ≤1.2W/Kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
7. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8. for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode, thus the SAR can be excluded.

8. EUT Test Position


This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.

8.1 Define Two Imaginary Lines On The Handset

(1) The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the handset.

(2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.


(3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

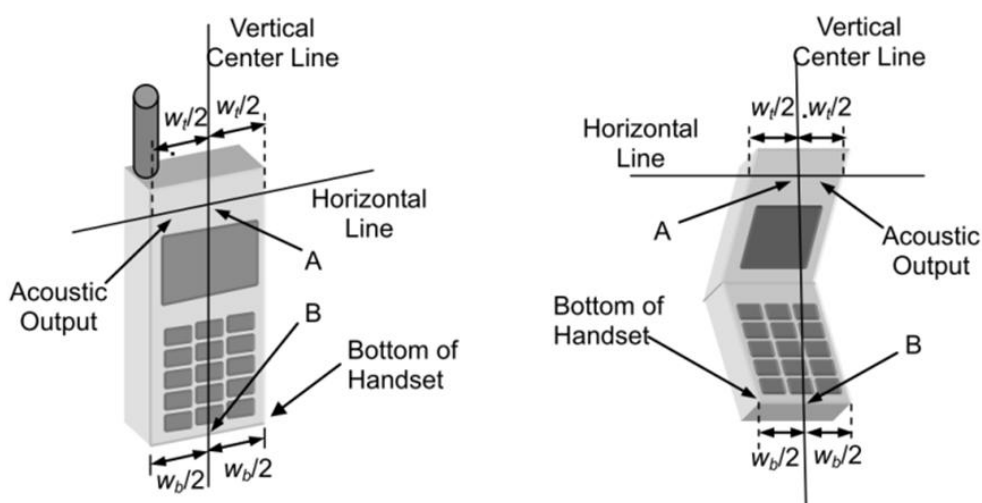

Cheek Position

1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.


2) To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost

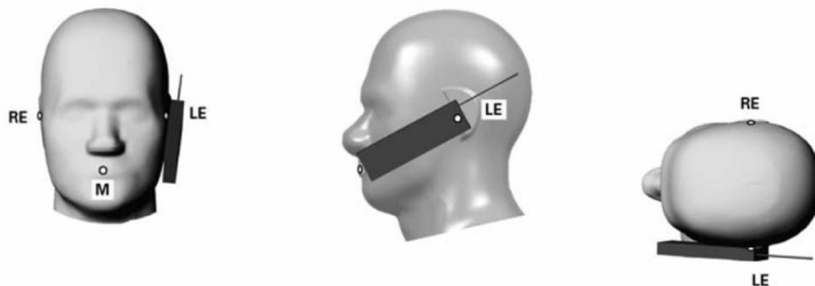

Title Position


(1) To position the device in the "cheek" position described above.

(2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.

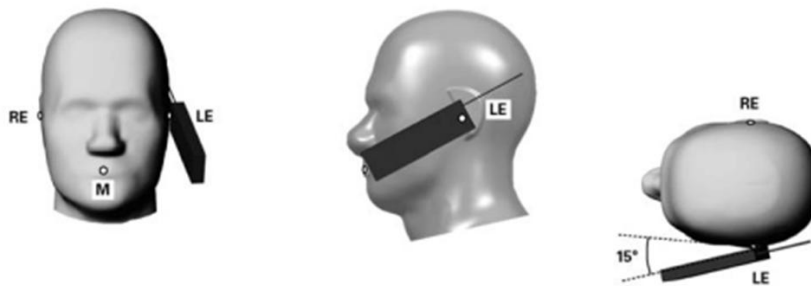


Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

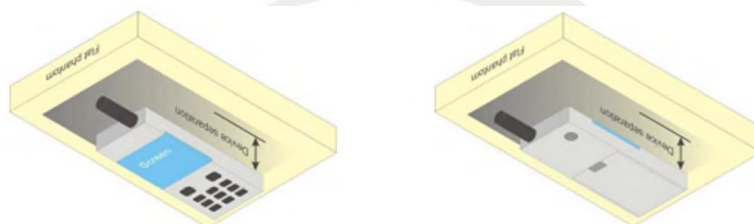

8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge. When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration(surface).

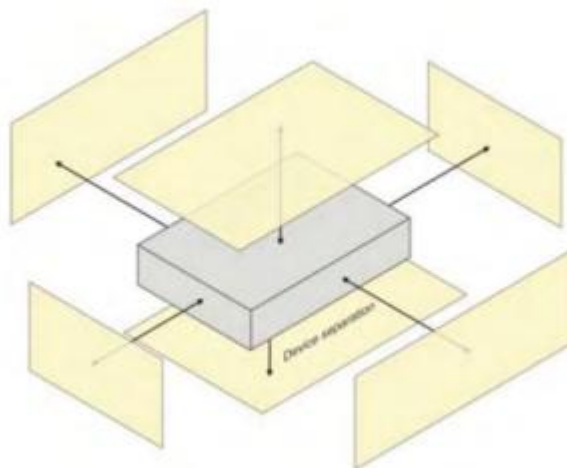



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

NO	Source	Tol(%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	1gUi	10gUi	Veff
Measurement System □									
1	Probe calibration	5.8	N	1	1	1	5.8	5.8	∞
2	Axial isotropy	3.5	R	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.43	1.43	∞
3	Hemispherical isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
4	Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
5	Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
6	System Detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
7	Readout electronics	0.5	N	1	1	1	0.50	0.50	∞
8	Response time	0	R	$\sqrt{3}$	1	1	0	0	∞
9	Integration time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
10	Ambient noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
11	Ambient reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
12	Probe positioner mech. restrictions	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
13	Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
14	Max.SAR evaluation	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Test sample related									



15	Device positioning	2.6	N	1	1	1	2.6	2.6	11
16	Device holder	3	N	1	1	1	3.0	3.0	7
17	Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and set-up									
18	Phantom uncertainty	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
19	Liquid conductivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	5
20	Liquid conductivity (meas)	4	N	1	0.23	0.26	0.92	1.04	5
21	Liquid Permittivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	∞
22	Liquid Permittivity (meas)	5.0	N	1	0.23	0.26	1.15	1.30	∞
Combined standard			RSS	$U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$			10.63%	10.54%	
Expanded uncertainty (P=95%)		$U = k U_c, k=2$					21.26%	21.08%	



9.2 System validation Uncertainty

NO	Source	Tol(%)	Prob. Dist.	Div. k	ci (1g)	ci (10g)	1gUi	10gUi	Veff
Measurement System □									
1	Probe calibration	5.8	N	1	1	1	5.8	5.8	∞
2	Axial isotropy	3.5	R	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.43	1.43	∞
3	Hemispherical isotropy	5.9	R	$\sqrt{3}$	$\sqrt{C_p}$	$\sqrt{C_p}$	2.41	2.41	∞
4	Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
5	Linearity	4.7	R	$\sqrt{3}$	1	1	2.71	2.71	∞
6	System Detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
7	Modulation response	0	N	1	1	1	0	0	∞
8	Readout electronics	0.5	N	1	1	1	0.50	0.50	∞
9	Response time	0	R	$\sqrt{3}$	1	1	0	0	∞
10	Integration time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
11	Ambient noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
12	Ambient reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
13	Probe positioner mech. restrictions	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
14	Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
15	Max.SAR evaluation	1.0	R	$\sqrt{3}$	1	1	0.6	0.6	∞
Dipole									
16	Deviation of experimental source from	4	N	1	1	1	4.00	4.00	∞



17	Input power and SAR drit measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
18	Dipole Axis to liquid Distance	2	R	$\sqrt{3}$	1	1			∞
Phantom and set-up									
19	Phantom uncertainty	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
20	Uncertainty in SAR correction for deviation(in	2.0	N	1	1	0.84	2	1.68	∞
21	Liquid conductivity (target)	2	N	1	1	0.84	2.00	1.68	∞
22	Liquid conductivity (temperature uncertainty)	2.5	N	1	0.78	0.71	1.95	1.78	5
23	Liquid conductivity (meas)	4	N	1	0.23	0.26	0.92	1.04	5
24	Liquid Permittivity (target)	2.5	N	1	0.78	0.71	1.95	1.78	∞
25	Liquid Permittivity (temperature uncertainty)	2.5	N	1	0.78	0.71	1.95	1.78	5
26	Liquid Permittivity (meas)	5.0	N	1	0.23	0.26	1.15	1.30	∞
Combined standard			RSS	$U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$			10.15%	10.05%	
Expanded uncertainty (P=95%)		$U = k U_c, k=2$					20.29%	20.10%	



10. Conducted Power Measurement

10.1 Test Result

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	33.00	33.13	33.20	29.52	29.59	29.61
GPRS (GMSK, 1-Slot)	32.74	32.83	32.93	29.22	29.29	29.41
GPRS (GMSK, 2-Slot)	32.30	32.41	32.51	28.74	28.80	28.92
GPRS (GMSK, 3-Slot)	30.95	31.02	31.11	27.37	27.48	27.52
GPRS (GMSK, 4-Slot)	30.47	30.62	30.66	26.95	27.02	27.09
EGPRS(8PSK, 1-Slot)	32.85	33.00	33.06	29.45	29.41	29.56
EGPRS(8PSK, 2-Slot)	32.37	32.51	32.58	29.00	29.00	29.14
EGPRS(8PSK, 3-Slot)	31.02	31.18	31.23	27.68	27.63	27.82
EGPRS(8PSK, 4-Slot)	30.22	30.44	30.46	26.91	26.91	27.08

Remark: GPRS, CS4 coding scheme. EGPRS, MCS9 coding scheme.
 Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link
 Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link
 Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

Fram- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GSM(GMSK, 1-Slot)	23.97	24.10	24.17	20.49	20.56	20.58
GPRS (GMSK, 1-Slot)	23.71	23.80	23.90	20.19	20.26	20.38
GPRS (GMSK, 2-Slot)	26.28	26.39	26.49	22.72	22.78	22.90
GPRS (GMSK, 3-Slot)	26.69	26.76	26.85	23.11	23.22	23.26
GPRS (GMSK, 4-Slot)	27.46	27.61	27.65	23.94	24.01	24.08
EGPRS(8PSK, 1-Slot)	23.82	23.97	24.03	20.42	20.38	20.53
EGPRS(8PSK, 2-Slot)	26.35	26.49	26.56	22.98	22.98	23.12
EGPRS(8PSK, 3-Slot)	26.76	26.92	26.97	23.42	23.37	23.56
EGPRS(8PSK, 4-Slot)	27.21	27.43	27.45	23.90	23.90	24.07

Remark :

- SAR testing was performed on the maximum frame-averaged power mode.
- The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:
 Frame-averaged power = Burst averaged power (1 Tx Slot) – 9.03 dB
 Frame-averaged power = Burst averaged power (2 Tx Slots) – 6.02 dB
 Frame-averaged power = Burst averaged power (3 Tx Slots) - 4.26 dB
 Frame-averaged power = Burst averaged power (4 Tx Slots) – 3.01 dB



WCDMA

Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency (MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
AMR 12.2Kbps	21.65	21.70	21.82	20.29	20.16	20.37
RMC 12.2Kbps	21.86	21.89	21.93	20.43	20.37	20.44
HSDPA Subtest-1	21.23	21.12	21.22	19.79	19.66	19.75
HSDPA Subtest-2	20.14	20.01	20.10	18.67	18.62	18.67
HSDPA Subtest-3	19.61	19.36	19.51	18.01	18.00	18.03
HSDPA Subtest-4	18.92	18.86	18.86	17.45	17.44	17.52
HSUPA Subtest-1	21.05	21.04	21.16	19.65	19.47	19.67
HSUPA Subtest-2	20.04	20.01	20.13	18.65	18.41	18.49
HSUPA Subtest-3	19.49	19.48	19.47	18.12	17.80	17.85
HSUPA Subtest-4	18.80	18.83	18.96	17.47	17.11	17.32
HSUPA Subtest-5	18.11	18.31	18.45	16.92	16.46	16.63

According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_{c}/\beta_{d}=12/15$, $\beta_{hs}/\beta_{c}=24/15$.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

**WIFI**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11b	1	2412	13.91
	6	2437	14.31
	11	2462	14.71
802.11g	1	2412	9.51
	6	2437	12.11
	11	2462	10.41
802.11n(HT 20)	1	2412	9.36
	6	2437	12.16
	11	2462	10.26
802.11n(HT 40)	3	2422	7.11
	6	2437	11.41
	9	2452	8.01

Bluetooth

Mode	Channel Number	Frequency (MHz)	Peak Power (dBm)
GFSK(1Mbps)	0	2402	-2.07
	39	2441	-0.47
	78	2480	-3.17
$\pi/4$ -DQPSK(2Mbps)	0	2402	-4.21
	39	2441	-2.71
	78	2480	-5.21
8-DPSK(3Mbps)	0	2402	-4.17
	39	2441	-2.57
	78	2480	-5.07

BT 4.0

Mode	Channel Number	Frequency (MHz)	Peak Power (dBm)
GFSK(1Mbps)	0	2402	-4.000
	19	2440	-2.500
	39	2480	-4.900



LTE Conducted Power

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.





LTE Band 2

BW(MHz)	Modulation	RB Size	RB Offset	Power Low CH./Freq.	Power Middle CH./Freq.	Power High CH./Freq.
Channel				18700	18900	19100
Frequency(MHz)				1860	1880	1900
20	QPSK	1	0	21.46	21.41	21.34
20	QPSK	1	49	21.40	21.36	21.37
20	QPSK	1	99	21.40	21.43	21.51
20	QPSK	50	0	20.45	20.34	20.36
20	QPSK	50	24	20.42	20.30	20.35
20	QPSK	50	49	20.37	20.34	20.43
20	QPSK	100	0	20.40	20.33	20.36
20	16QAM	1	0	20.46	20.75	20.89
20	16QAM	1	49	20.45	20.70	20.90
20	16QAM	1	99	20.43	20.77	20.97
20	16QAM	50	0	19.55	19.40	19.40
20	16QAM	50	24	19.52	19.36	19.39
20	16QAM	50	49	19.46	19.39	19.48
20	16QAM	100	0	19.49	19.42	19.48
Channel				18675	18900	19125
Frequency(MHz)				1857.5	1880	1902.5
15	QPSK	1	0	21.37	21.35	21.30
15	QPSK	1	37	21.24	21.18	21.30
15	QPSK	1	74	21.27	21.28	21.44
15	QPSK	36	0	20.36	20.22	20.29
15	QPSK	36	18	20.33	20.21	20.32
15	QPSK	36	39	20.30	20.23	20.36
15	QPSK	75	0	20.34	20.25	20.37
15	16QAM	1	0	20.60	20.54	20.25
15	16QAM	1	38	20.55	20.46	20.23
15	16QAM	1	75	20.52	20.55	20.28
15	16QAM	36	0	19.48	19.31	19.34
15	16QAM	36	18	19.44	19.29	19.40
15	16QAM	36	39	19.42	19.32	19.44
15	16QAM	75	0	19.38	19.33	19.34
Channel				18650	18900	19150
Frequency(MHz)				1855	1880	1905
10	QPSK	1	0	21.31	21.23	21.30
10	QPSK	1	24	21.31	21.20	21.32
10	QPSK	1	49	21.26	21.20	21.41
10	QPSK	25	0	20.39	20.26	20.32
10	QPSK	25	12	20.40	20.27	20.33
10	QPSK	25	24	20.43	20.26	20.33
10	QPSK	50	0	20.43	20.32	20.39
10	16QAM	1	0	20.57	20.56	20.52
10	16QAM	1	24	20.59	20.52	20.53
10	16QAM	1	49	20.54	20.54	20.53
10	16QAM	25	0	19.55	19.41	20.54
10	16QAM	25	12	19.56	19.40	19.54
10	16QAM	25	24	19.57	19.41	19.55
10	16QAM	50	0	19.48	19.37	19.57



Channel				18625	18900	19175
Frequency(MHz)				1852.5	1880	1907.5
5	QPSK	1	0	21.35	21.27	21.33
5	QPSK	1	12	21.30	21.22	21.31
5	QPSK	1	24	21.31	21.25	21.36
5	QPSK	12	0	20.42	20.28	20.39
5	QPSK	12	6	20.41	20.28	20.38
5	QPSK	12	11	20.42	20.28	20.38
5	QPSK	25	0	20.35	20.23	20.79
5	16QAM	1	0	20.63	20.50	20.74
5	16QAM	1	12	20.59	20.46	20.74
5	16QAM	1	24	20.58	20.46	19.49
5	16QAM	12	0	19.59	19.45	19.47
5	16QAM	12	6	19.60	19.43	19.46
5	16QAM	12	11	19.59	19.42	19.43
5	16QAM	25	0	19.55	19.31	19.43
Channel				18615	18900	19185
Frequency(MHz)				1851.5	1880	1908.5
3	QPSK	1	0	21.23	21.15	21.29
3	QPSK	1	7	21.17	21.13	21.29
3	QPSK	1	14	21.21	21.12	21.36
3	QPSK	8	0	20.31	20.18	20.28
3	QPSK	8	4	20.35	20.18	20.31
3	QPSK	8	7	20.32	20.17	20.28
3	QPSK	15	0	20.35	20.21	20.34
3	16QAM	1	0	20.49	20.45	20.48
3	16QAM	1	7	20.50	20.39	20.49
3	16QAM	1	14	20.48	20.46	20.50
3	16QAM	8	0	19.58	19.43	19.45
3	16QAM	8	4	19.58	19.44	19.46
3	16QAM	8	7	19.58	19.42	19.46
3	16QAM	15	0	19.48	19.33	19.47
Channel				18607	18900	19193
Frequency(MHz)				1850.7	1880	1909.3
1.4	QPSK	1	0	21.30	21.15	21.28
1.4	QPSK	1	2	21.29	21.13	21.35
1.4	QPSK	1	5	21.33	21.16	21.34
1.4	QPSK	3	0	21.45	21.31	21.45
1.4	QPSK	3	1	21.38	21.23	21.32
1.4	QPSK	3	2	21.41	21.28	21.37
1.4	QPSK	6	0	20.23	20.07	20.16
1.4	16QAM	1	0	20.27	20.46	20.49
1.4	16QAM	1	2	20.25	20.45	20.45
1.4	16QAM	1	5	20.27	20.47	20.48
1.4	16QAM	3	0	20.47	20.34	20.38
1.4	16QAM	3	1	20.38	20.22	20.32
1.4	16QAM	3	2	20.41	20.24	20.35
1.4	16QAM	6	0	19.46	19.26	19.34



LTE Band 4

BW(MHz)	Modulation	RB Size	RB Offset	Power Low CH./Freq.	Power Middle CH./Freq.	Power High CH./Freq.
Channel				20050	20175	20300
Frequency(MHz)				1720	1732.5	1745
20	QPSK	1	0	21.68	21.73	21.70
20	QPSK	1	49	21.63	21.73	21.64
20	QPSK	1	99	21.72	21.76	21.65
20	QPSK	50	0	20.62	20.64	20.66
20	QPSK	50	24	20.62	20.63	20.64
20	QPSK	50	49	20.67	20.65	20.64
20	QPSK	100	0	20.64	20.61	20.64
20	16QAM	1	0	20.65	21.02	21.20
20	16QAM	1	49	20.64	21.05	21.16
20	16QAM	1	99	20.72	21.07	21.18
20	16QAM	50	0	19.68	19.67	19.66
20	16QAM	50	24	19.69	19.65	19.66
20	16QAM	50	49	19.72	19.68	19.65
20	16QAM	100	0	19.67	19.69	19.73
Channel				20025	20175	20325
Frequency(MHz)				1717.5	1732.5	1747.5
15	QPSK	1	0	21.59	21.59	21.64
15	QPSK	1	37	21.52	21.55	21.55
15	QPSK	1	74	21.61	21.62	21.58
15	QPSK	36	0	20.58	20.57	20.58
15	QPSK	36	18	20.62	20.58	20.59
15	QPSK	36	39	20.63	20.60	20.57
15	QPSK	75	0	20.61	20.61	20.60
15	16QAM	1	0	20.75	20.84	20.59
15	16QAM	1	38	20.76	20.76	20.52
15	16QAM	1	75	20.78	20.86	20.51
15	16QAM	36	0	19.65	19.61	19.63
15	16QAM	36	18	19.69	19.66	19.63
15	16QAM	36	39	19.72	19.66	19.58
15	16QAM	75	0	19.63	19.66	19.58
Channel				20000	20175	20350
Frequency(MHz)				1715	1732.5	1750
10	QPSK	1	0	21.59	21.57	21.56
10	QPSK	1	24	21.56	21.58	21.56
10	QPSK	1	49	21.59	21.59	21.54
10	QPSK	25	0	20.58	20.59	20.56
10	QPSK	25	12	20.57	20.58	20.54
10	QPSK	25	24	20.61	20.62	20.55
10	QPSK	50	0	20.59	20.61	20.60
10	16QAM	1	0	20.72	20.81	20.78
10	16QAM	1	24	20.76	20.85	20.79
10	16QAM	1	49	20.76	20.82	20.75
10	16QAM	25	0	19.66	19.66	19.70
10	16QAM	25	12	19.65	19.68	19.71
10	16QAM	25	24	19.70	19.72	19.72
10	16QAM	50	0	19.60	19.64	19.63



Channel				19975	20175	20375
Frequency(MHz)				1712.5	1732.5	1752.5
5	QPSK	1	0	21.60	21.68	21.64
5	QPSK	1	12	21.54	21.63	21.56
5	QPSK	1	24	21.55	21.63	21.56
5	QPSK	12	0	20.61	20.64	20.63
5	QPSK	12	6	20.61	20.62	20.59
5	QPSK	12	11	20.62	20.63	20.58
5	QPSK	25	0	20.54	20.58	20.57
5	16QAM	1	0	20.77	20.84	21.07
5	16QAM	1	12	20.73	20.82	21.02
5	16QAM	1	24	20.72	20.82	21.01
5	16QAM	12	0	19.71	19.73	19.67
5	16QAM	12	6	19.71	19.70	19.64
5	16QAM	12	11	19.72	19.71	19.63
5	16QAM	25	0	19.66	19.59	19.62
Channel				19965	20175	20385
Frequency(MHz)				1711.5	1732.5	1753.5
3	QPSK	1	0	21.52	21.51	21.48
3	QPSK	1	7	21.49	21.50	21.48
3	QPSK	1	14	21.51	21.51	21.48
3	QPSK	8	0	20.59	20.57	20.56
3	QPSK	8	4	20.59	20.57	20.55
3	QPSK	8	7	20.60	20.58	20.54
3	QPSK	15	0	20.58	20.58	20.57
3	16QAM	1	0	20.68	20.77	20.73
3	16QAM	1	7	20.71	20.75	20.76
3	16QAM	1	14	20.67	20.76	20.73
3	16QAM	8	0	19.77	19.76	19.72
3	16QAM	8	4	19.75	19.73	19.68
3	16QAM	8	7	19.77	19.76	19.70
3	16QAM	15	0	19.64	19.65	19.65
Channel				19957	20175	20393
Frequency(MHz)				1710.7	1732.5	1754.3
1.4	QPSK	1	0	21.56	21.52	21.48
1.4	QPSK	1	2	21.53	21.51	21.50
1.4	QPSK	1	5	21.56	21.53	21.49
1.4	QPSK	3	0	21.57	21.60	21.62
1.4	QPSK	3	1	21.51	21.54	21.56
1.4	QPSK	3	2	21.59	21.62	21.60
1.4	QPSK	6	0	20.50	20.49	20.42
1.4	16QAM	1	0	20.45	20.75	20.74
1.4	16QAM	1	2	20.44	20.75	20.70
1.4	16QAM	1	5	20.46	20.77	20.72
1.4	16QAM	3	0	20.52	20.62	20.60
1.4	16QAM	3	1	20.47	20.52	20.55
1.4	16QAM	3	2	20.54	20.56	20.57
1.4	16QAM	6	0	19.61	19.57	19.59



LTE Band 5

BW(MHz)	Modulation	RB Size	RB Offset	Power Low CH./Freq.	Power Middle CH./Freq.	Power High CH./Freq.
Channel				20450	20525	20600
Frequency(MHz)				829.0	836.5	844.0
10	QPSK	1	0	22.73	22.74	22.80
10	QPSK	1	13	22.71	22.73	22.82
10	QPSK	1	24	22.72	22.77	22.81
10	QPSK	25	0	21.77	21.79	21.80
10	QPSK	25	6	21.80	21.78	21.83
10	QPSK	25	13	21.85	21.79	21.88
10	QPSK	50	0	21.80	21.79	21.84
10	16QAM	1	0	21.91	22.08	21.95
10	16QAM	1	13	21.98	21.99	22.02
10	16QAM	1	24	21.99	21.99	22.08
10	16QAM	25	0	20.86	20.85	20.91
10	16QAM	25	6	20.88	20.82	20.96
10	16QAM	25	13	20.94	20.84	21.01
10	16QAM	50	0	20.80	20.80	20.82
Channel				20425	20525	20625
Frequency(MHz)				826.5	836.5	846.5
5	QPSK	1	0	22.79	22.83	22.88
5	QPSK	1	13	22.74	22.79	22.81
5	QPSK	1	24	22.71	22.82	22.84
5	QPSK	12	0	21.83	21.83	21.91
5	QPSK	12	6	21.84	21.80	21.90
5	QPSK	12	13	21.84	21.78	21.93
5	QPSK	25	0	21.80	21.77	21.88
5	16QAM	1	0	21.99	22.03	22.33
5	16QAM	1	13	21.98	21.95	22.27
5	16QAM	1	24	22.01	21.91	22.29
5	16QAM	12	0	20.93	20.71	20.93
5	16QAM	12	6	20.94	20.87	20.92
5	16QAM	12	13	20.93	20.85	20.94
5	16QAM	25	0	20.90	20.76	20.90
Channel				20415	20525	20635
Frequency(MHz)				825.5	836.5	847.5
3	QPSK	1	0	22.69	22.66	22.75
3	QPSK	1	7	22.66	22.65	22.76
3	QPSK	1	14	22.65	22.67	22.75
3	QPSK	8	0	21.77	21.75	21.81
3	QPSK	8	4	21.79	21.75	21.86
3	QPSK	8	7	21.76	21.79	21.62
3	QPSK	15	0	21.76	21.74	21.85
3	16QAM	1	0	21.87	21.96	22.04
3	16QAM	1	7	21.91	21.90	22.04
3	16QAM	1	14	21.90	21.91	22.04
3	16QAM	8	0	20.95	20.94	20.96
3	16QAM	8	4	20.96	20.93	20.98
3	16QAM	8	7	20.95	20.94	20.99
3	16QAM	15	0	20.83	20.79	20.93



Channel				20407	20525	20643
Frequency(MHz)				824.7	836.5	848.3
1.4	QPSK	1	0	22.73	22.70	22.78
1.4	QPSK	1	2	22.72	22.68	22.81
1.4	QPSK	1	5	22.77	22.73	22.78
1.4	QPSK	3	0	22.79	22.76	22.93
1.4	QPSK	3	1	22.74	22.68	22.85
1.4	QPSK	3	2	22.78	22.79	22.90
1.4	QPSK	6	0	21.70	21.69	21.73
1.4	16QAM	1	0	21.65	21.94	22.07
1.4	16QAM	1	2	21.65	21.91	21.99
1.4	16QAM	1	5	21.67	21.95	22.02
1.4	16QAM	3	0	21.73	21.75	21.86
1.4	16QAM	3	1	21.66	21.64	21.79
1.4	16QAM	3	2	21.71	21.70	21.84
1.4	16QAM	6	0	20.83	20.81	20.92

LTE Band 7

BW(MHz)	Modulation	RB Size	RB Offset	Power Low CH./Freq.	Power Middle CH./Freq.	Power High CH./Freq.
Channel				20850	21100	21350
Frequency(MHz)				2510	2535	2560
20	QPSK	1	0	23.04	21.59	21.85
20	QPSK	1	50	22.76	22.11	21.37
20	QPSK	1	99	21.88	22.67	22.19
20	QPSK	50	0	21.78	21.19	21.03
20	QPSK	50	24	21.78	21.54	20.92
20	QPSK	50	50	21.81	21.88	21.07
20	QPSK	100	0	21.79	21.52	21.08
20	16QAM	1	0	21.86	20.87	21.44
20	16QAM	1	50	21.87	21.56	21.00
20	16QAM	1	99	21.11	22.06	21.70
20	16QAM	50	0	20.72	20.27	20.15
20	16QAM	50	24	20.72	20.65	20.04
20	16QAM	50	50	20.73	20.85	20.26
20	16QAM	100	0	20.72	20.69	20.29
Channel				20825	21100	21350
Frequency(MHz)				2507.5	2535	2562.5
15	QPSK	1	0	22.63	21.67	21.58
15	QPSK	1	38	22.66	22.06	21.49
15	QPSK	1	75	22.15	22.65	22.33
15	QPSK	36	0	21.87	21.24	20.87
15	QPSK	36	18	21.89	21.50	20.94
15	QPSK	36	75	21.97	21.80	21.19
15	QPSK	75	0	21.91	21.50	21.02
15	16QAM	1	0	21.71	20.89	20.55
15	16QAM	1	38	21.87	21.34	20.52
15	16QAM	1	75	21.45	21.97	21.22
15	16QAM	36	0	20.83	20.41	20.06
15	16QAM	36	18	20.82	20.68	20.15
15	16QAM	36	75	20.88	20.94	20.41
15	16QAM	75	0	20.83	20.72	20.21



Channel				20800	21100	21400
Frequency(MHz)				2505	2535	2565
10	QPSK	1	0	22.97	21.95	21.70
10	QPSK	1	13	22.97	22.35	21.97
10	QPSK	1	24	22.98	22.42	22.40
10	QPSK	25	0	21.72	21.58	21.20
10	QPSK	25	6	21.77	21.75	21.30
10	QPSK	25	13	21.77	21.85	21.54
10	QPSK	50	0	21.75	21.74	21.33
10	16QAM	1	0	21.90	21.21	20.79
10	16QAM	1	13	21.91	21.64	21.10
10	16QAM	1	24	21.91	21.75	21.38
10	16QAM	25	0	20.72	20.69	20.36
10	16QAM	25	6	20.76	20.84	20.55
10	16QAM	25	13	20.77	20.86	20.79
10	16QAM	50	0	20.68	20.79	20.49
Channel				20775	21100	21425
Frequency(MHz)				2502.5	2535	2567.5
5	QPSK	1	0	23.02	22.62	22.40
5	QPSK	1	13	22.84	22.31	22.21
5	QPSK	1	24	22.97	22.90	22.89
5	QPSK	12	0	21.78	21.68	21.50
5	QPSK	12	6	21.76	21.69	21.58
5	QPSK	12	13	21.77	21.79	21.76
5	QPSK	25	0	21.72	21.73	21.62
5	16QAM	1	0	21.86	21.65	21.69
5	16QAM	1	13	21.81	21.50	21.57
5	16QAM	1	24	21.80	21.91	22.17
5	16QAM	12	0	20.77	20.83	20.61
5	16QAM	12	6	20.77	20.82	20.68
5	16QAM	12	13	20.79	20.85	20.83
5	16QAM	25	0	20.77	20.74	20.77

LTE Band 17

BW(MHz)	Modulation	RB Size	RB Offset	Power Low CH./Freq.	Power Middle CH./Freq.	Power High CH./Freq.
Channel				23780	23790	23800
Frequency(MHz)				709	710	711
10	QPSK	1	0	22.83	22.88	22.89
10	QPSK	1	24	22.82	22.77	22.84
10	QPSK	1	49	22.74	22.77	22.85
10	QPSK	25	0	21.76	21.75	21.76
10	QPSK	25	12	21.78	21.76	21.77
10	QPSK	25	24	21.82	21.77	21.80
10	QPSK	50	0	21.83	21.73	21.84
10	16QAM	1	0	21.91	21.97	21.87
10	16QAM	1	24	21.89	21.97	21.94
10	16QAM	1	49	21.96	22.02	20.94
10	16QAM	25	0	20.89	20.86	20.94
10	16QAM	25	12	20.92	20.92	20.99
10	16QAM	25	24	20.96	20.94	21.03
10	16QAM	50	0	20.88	20.89	20.90



Channel				23755	23790	23825
Frequency(MHz)				706.5	710	713.5
5	QPSK	1	0	22.85	22.92	22.80
5	QPSK	1	12	22.85	22.88	22.73
5	QPSK	1	24	22.84	22.83	22.76
5	QPSK	12	0	21.86	21.80	21.83
5	QPSK	12	6	21.82	21.80	21.82
5	QPSK	12	11	21.83	21.80	21.82
5	QPSK	25	0	21.77	21.78	21.78
5	16QAM	1	0	21.94	21.89	22.19
5	16QAM	1	12	21.89	21.93	22.17
5	16QAM	1	24	21.89	21.91	22.12
5	16QAM	12	0	20.96	20.93	20.90
5	16QAM	12	6	20.93	20.95	20.89
5	16QAM	12	11	20.96	20.95	20.88
5	16QAM	25	0	20.94	20.84	20.85





10.2 Tune-up Power

Mode	GSM850(AVG)	GSM1900(AVG)
GSM/PCS	33±1dBm	29±1dBm
GPRS (1 Slot)	32±1dBm	29±1dBm
GPRS (2 Slot)	32±1dBm	28±1dBm
GPRS (3 Slot)	31±1dBm	27±1dBm
GPRS (4 Slot)	30±1dBm	26.1±1dBm
EDGE (1 Slot)	33±1dBm	29±1dBm
EDGE (2 Slot)	32±1dBm	29±1dBm
EDGE (3 Slot)	31±1dBm	27±1dBm
EDGE (4 Slot)	30±1dBm	27±1dBm

Mode	WCDMA Band V(AVG)	WCDMA Band II(AVG)
RMC	21±1dBm	20±1dBm
HSDPA Subtest-1	21±1dBm	20±1dBm
HSDPA Subtest-2	21±1dBm	19±1dBm
HSDPA Subtest-3	20±1dBm	18±1dBm
HSDPA Subtest-4	19±1dBm	18±1dBm
HSUPA Subtest-1	18±1dBm	17±1dBm
HSUPA Subtest-2	21±1dBm	19±1dBm
HSUPA Subtest-3	20±1dBm	18±1dBm
HSUPA Subtest-4	19±1dBm	18±1dBm
HSUPA Subtest-5	18±1dBm	17±1dBm

Mode	WIFI(AVG)		
	Low	Mid	High
IEEE 802.11b	13±1dBm	14±1dBm	14±1dBm
IEEE 802.11g	9±1dBm	12±1dBm	10±1dBm
IEEE 802.11n(HT 20)	9±1dBm	12±1dBm	10±1dBm
IEEE 802.11n(HT 40)	7±1dBm	11±1dBm	8±1dBm

Mode	BT(AVG)		
	Low	Mid	High
GFSK	-2±1dBm	0±1dBm	-3±1dBm
π/4-DQPSK	-4±1dBm	-2±1dBm	-5±1dBm
8DPSK	-4±1dBm	-2±1dBm	-5±1dBm

Mode	BT 4.0(AVG)		
	Low	Mid	High
GFSK	-4±1dBm	-3±1dBm	-4±1dBm



LTE

BW[MHz]	RB Size	Mode	Band 2	Band 4	Band 5	Band 7	Band 17
1.4	1	QPSK	21±1dBm	21±1dBm	22±1dBm	N/A	N/A
1.4	3		21±1dBm	21±1dBm	22±1dBm	N/A	N/A
1.4	6		20±1dBm	20±1dBm	21±1dBm	N/A	N/A
1.4	1	16- QAM	20±1dBm	20±1dBm	21±1dBm	N/A	N/A
1.4	3		20±1dBm	20±1dBm	21±1dBm	N/A	N/A
1.4	6		19±1dBm	19±1dBm	20±1dBm	N/A	N/A
3	1	QPSK	21±1dBm	21±1dBm	22±1dBm	N/A	N/A
3	8		20±1dBm	20±1dBm	21±1dBm	N/A	N/A
3	15		20±1dBm	20±1dBm	21±1dBm	N/A	N/A
3	1	16- QAM	20±1dBm	20±1dBm	21±1dBm	N/A	N/A
3	8		19±1dBm	19±1dBm	20±1dBm	N/A	N/A
3	15		19±1dBm	19±1dBm	20±1dBm	N/A	N/A
5	1	QPSK	21±1dBm	21±1dBm	22±1dBm	23±1dBm	22±1dBm
5	12		20±1dBm	20±1dBm	21±1dBm	21±1dBm	21±1dBm
5	25		20±1dBm	20±1dBm	21±1dBm	21±1dBm	21±1dBm
5	1	16- QAM	20±1dBm	20±1dBm	22±1dBm	22±1dBm	21±1dBm
5	12		19±1dBm	19±1dBm	20±1dBm	20±1dBm	20±1dBm
5	25		19±1dBm	19±1dBm	20±1dBm	20±1dBm	20±1dBm
10	1	QPSK	21±1dBm	21±1dBm	22±1dBm	22±1dBm	22±1dBm
10	25		20±1dBm	20±1dBm	21±1dBm	21±1dBm	21±1dBm
10	50		20±1dBm	20±1dBm	21±1dBm	21±1dBm	21±1dBm
10	1	16- QAM	20±1dBm	20±1dBm	22±1dBm	21±1dBm	21.1±1dBm
10	25		19±1dBm	19±1dBm	21±1dBm	20±1dBm	20.1±1dBm
10	50		19±1dBm	19±1dBm	20±1dBm	20±1dBm	20±1dBm
15	1	QPSK	21±1dBm	21±1dBm	N/A	22±1dBm	N/A
15	36		20±1dBm	20±1dBm	N/A	21±1dBm	N/A
15	75		20±1dBm	20±1dBm	N/A	21±1dBm	N/A
15	1	16- QAM	20±1dBm	20±1dBm	N/A	21±1dBm	N/A
15	36		19±1dBm	19±1dBm	N/A	20±1dBm	N/A
15	75		19±1dBm	19±1dBm	N/A	20±1dBm	N/A
20	1	QPSK	21±1dBm	21±1dBm	N/A	22.1±1dBm	N/A
20	50		20±1dBm	19.7±1dBm	N/A	21±1dBm	N/A
20	100		20±1dBm	20±1dBm	N/A	21±1dBm	N/A
20	1	16- QAM	20±1dBm	20±1dBm	N/A	21.1±1dBm	N/A
20	50		19±1dBm	19±1dBm	N/A	20±1dBm	N/A
20	100		19±1dBm	19±1dBm	N/A	20±1dBm	N/A



10.3 SAR Test Exclusions Applied

Per FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHZ})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHZ})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of **Bluetooth Head** (rounded to the nearest mW) and the antenna to user separation distance,

Bluetooth Body SAR was not required; $[(0.897/5) * \sqrt{2.441}] = 0.28 < 3.0$.

Based on the maximum conducted power of **Bluetooth Body** (rounded to the nearest mW) and the antenna to user separation distance,

Bluetooth Body SAR was not required; $[(0.897/10) * \sqrt{2.441}] = 0.13 < 3.0$.

Based on the maximum conducted power of **Bluetooth LE Head** (rounded to the nearest mW) and the antenna to user separation distance,

Bluetooth LE Body SAR was not required; $[(0.562/5) * \sqrt{2.440}] = 0.18 < 3.0$.

Based on the maximum conducted power of **Bluetooth LE Body** (rounded to the nearest mW) and the antenna to user separation distance,

Bluetooth LE Body SAR was not required; $[(0.562/10) * \sqrt{2.440}] = 0.10 < 3.0$.

Based on the maximum conducted power of **2.4 GHz WIFI Head** (rounded to the nearest mW) and the antenna to user separation distance,

2.4 GHz WIFI SAR was required; $[(29.58/5) * \sqrt{2.462}] = 9.28 > 3.0$.


Based on the maximum conducted power of **2.4 GHz WIFI Body** (rounded to the nearest mW) and the antenna to user separation distance,

2.4 GHz WIFI SAR was required; $[(29.58/10) * \sqrt{2.462}] = 0.75 < 3.0$.

11. EUT And Test Setup Photo

11.1 EUT Photo

Front side

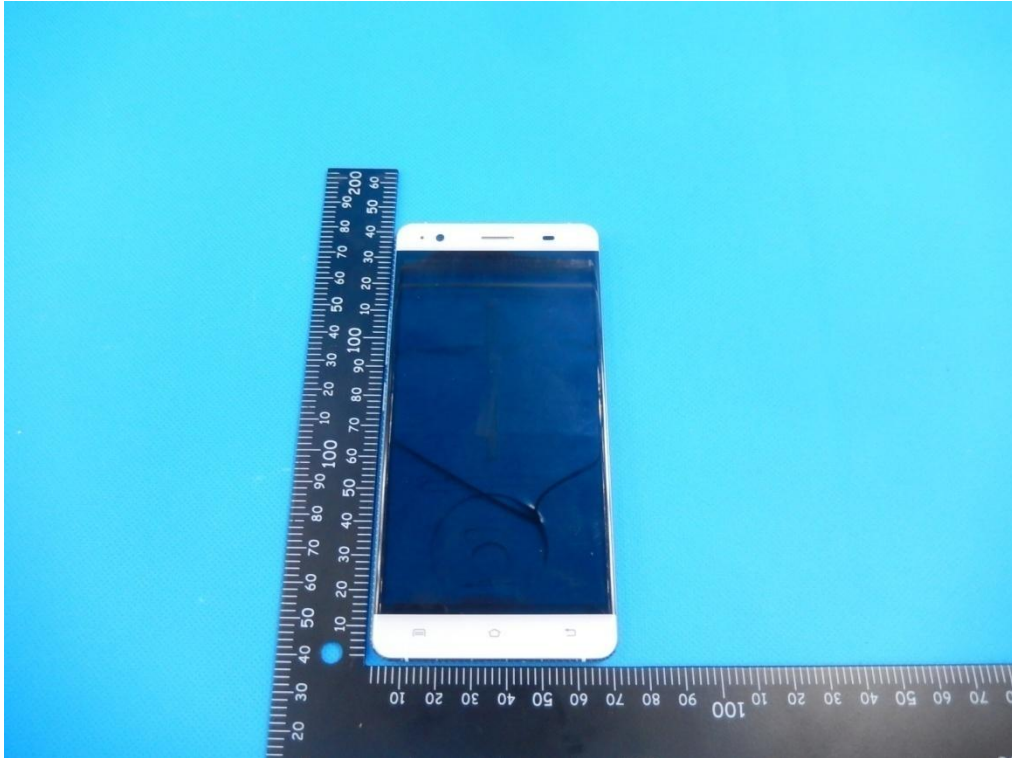


Back side







Top side

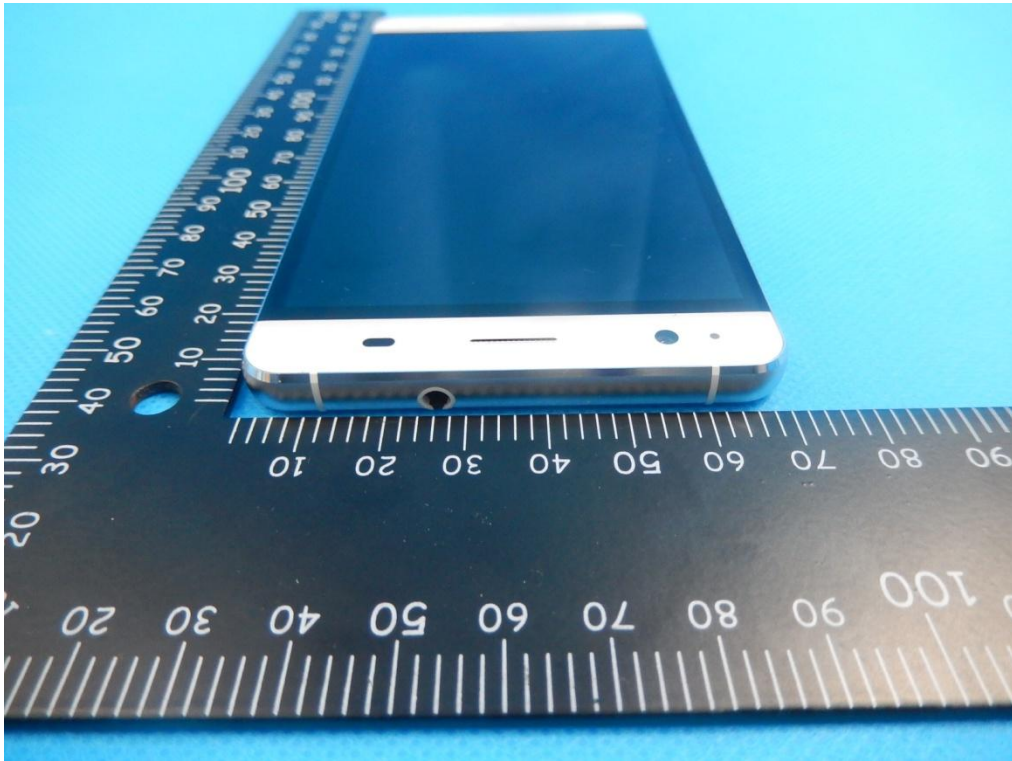


Bottom side

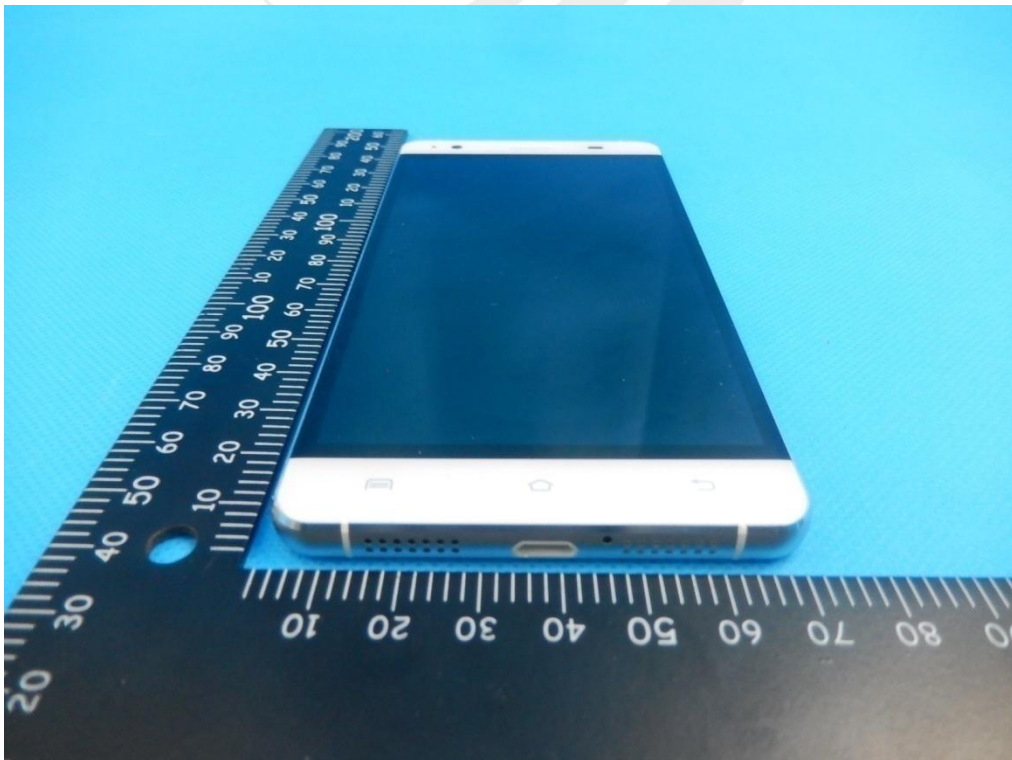

Left side

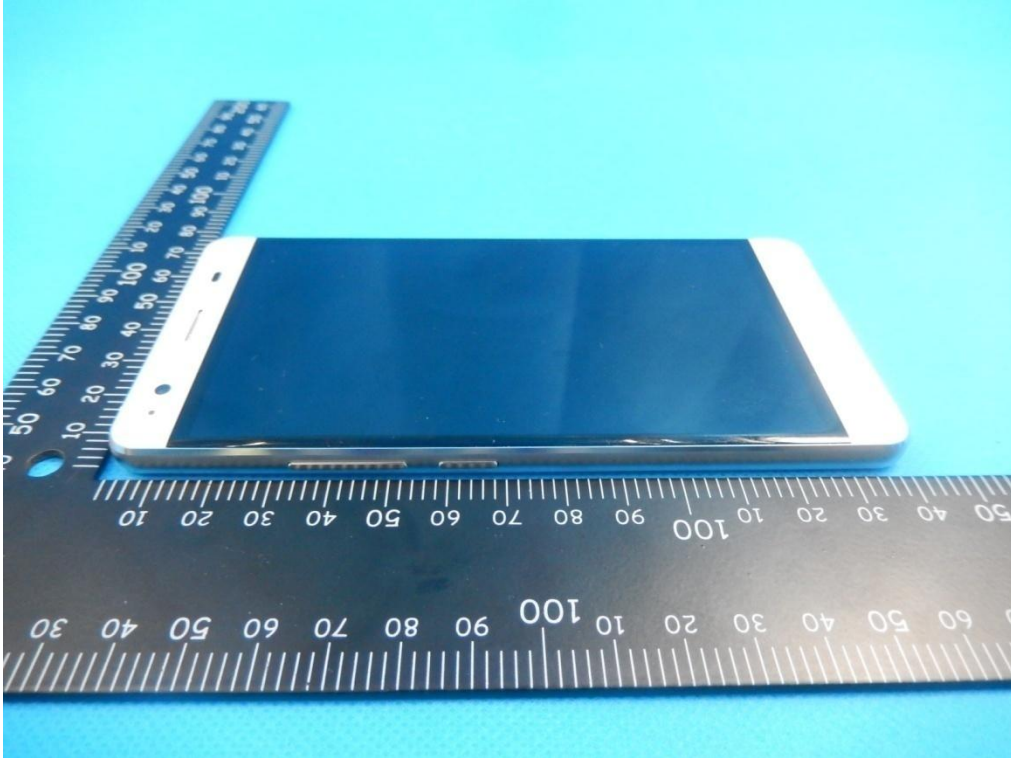


Right side

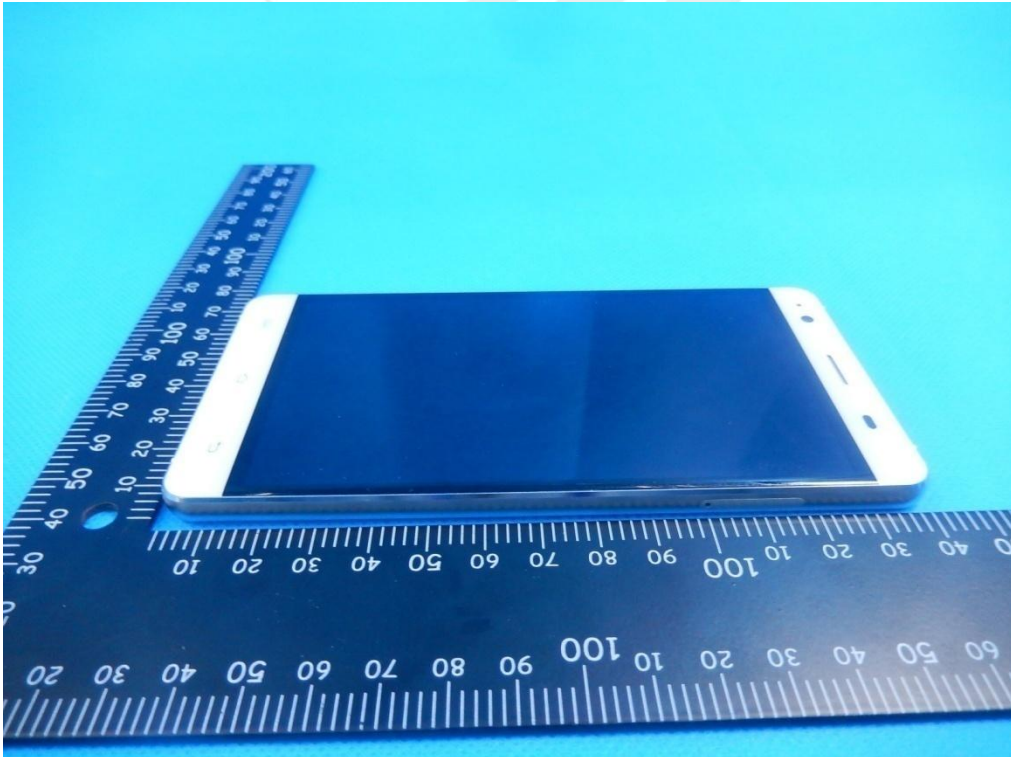


11.2 Setup Photo


Right Touch

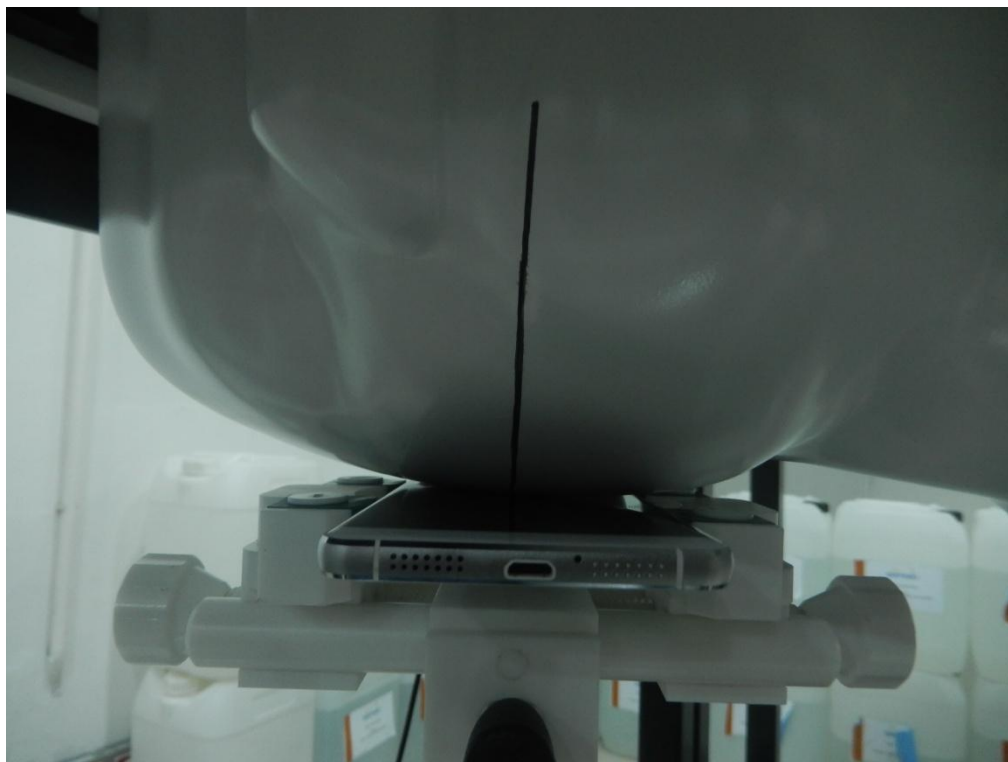


Right Tilt

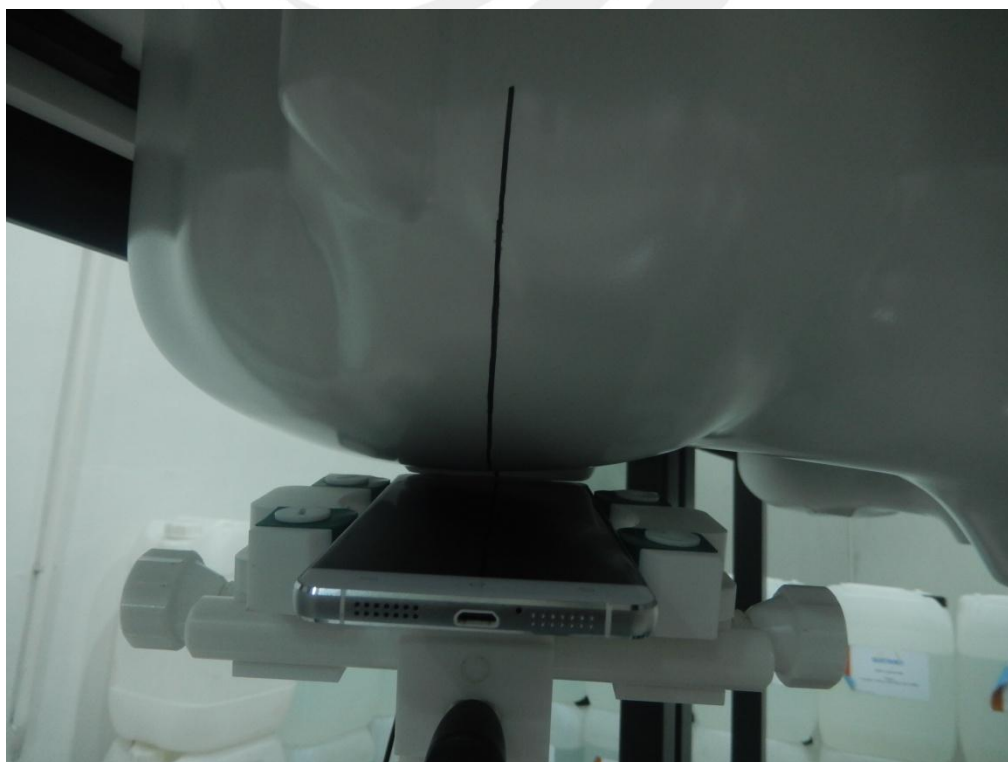


Left Touch

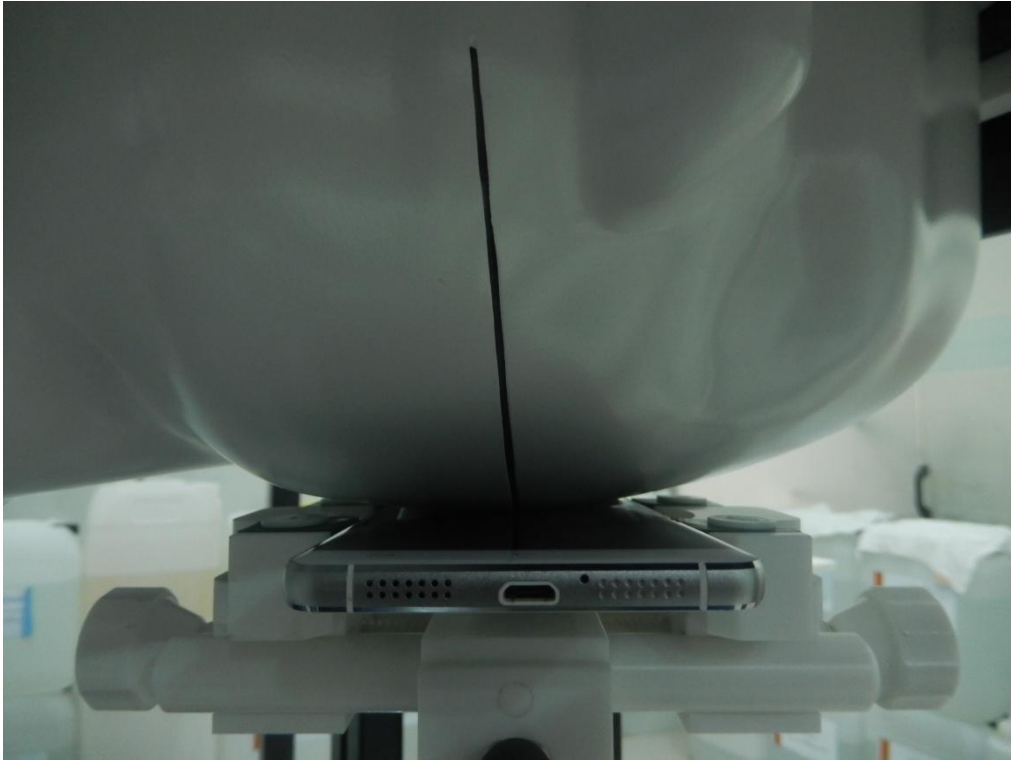


Left Tilt

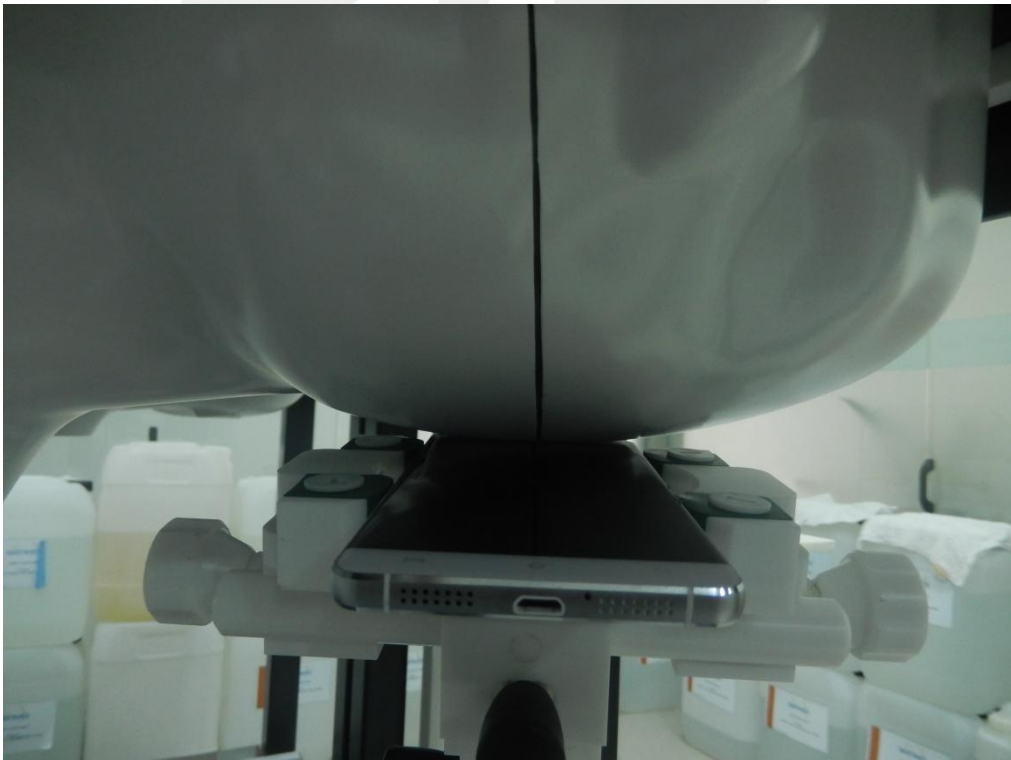

Body Front side(separation distance is 10mm)

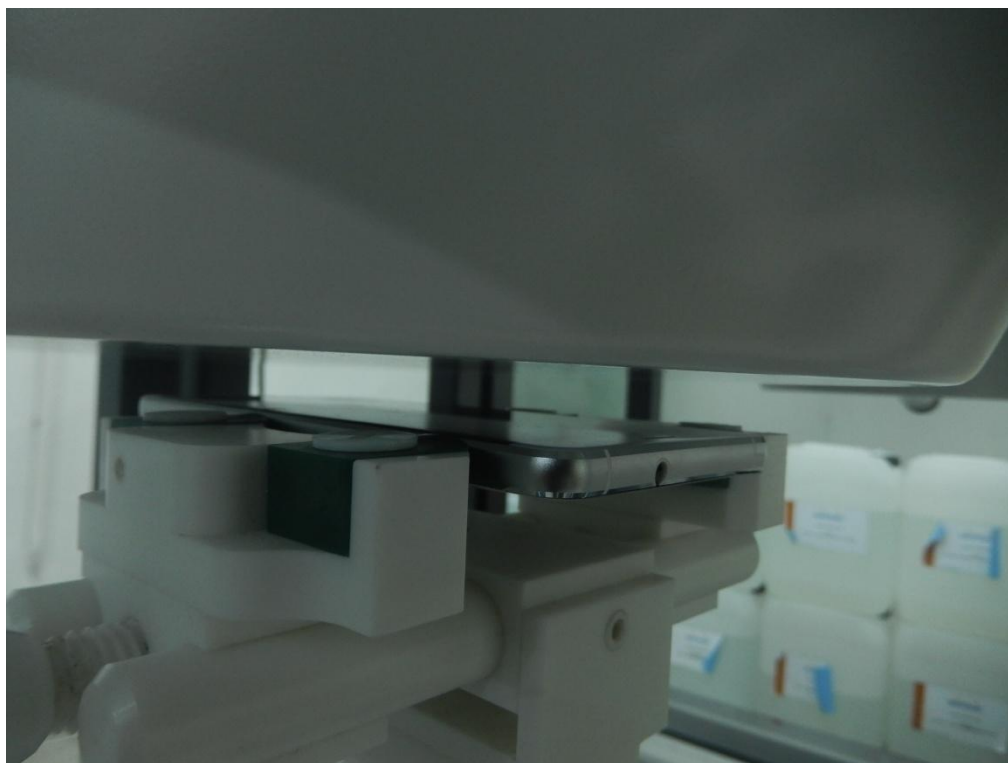


Body Back side(separation distance is 10mm)

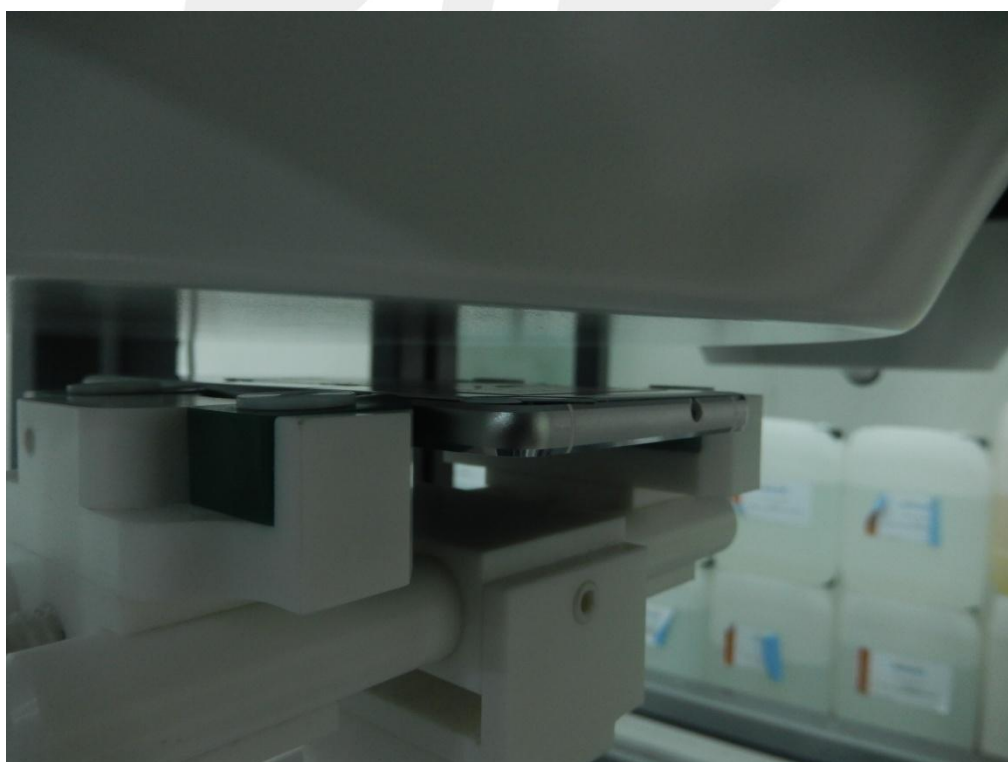

Body left side(separation distance is 10mm)




Body right side(separation distance is 10mm)

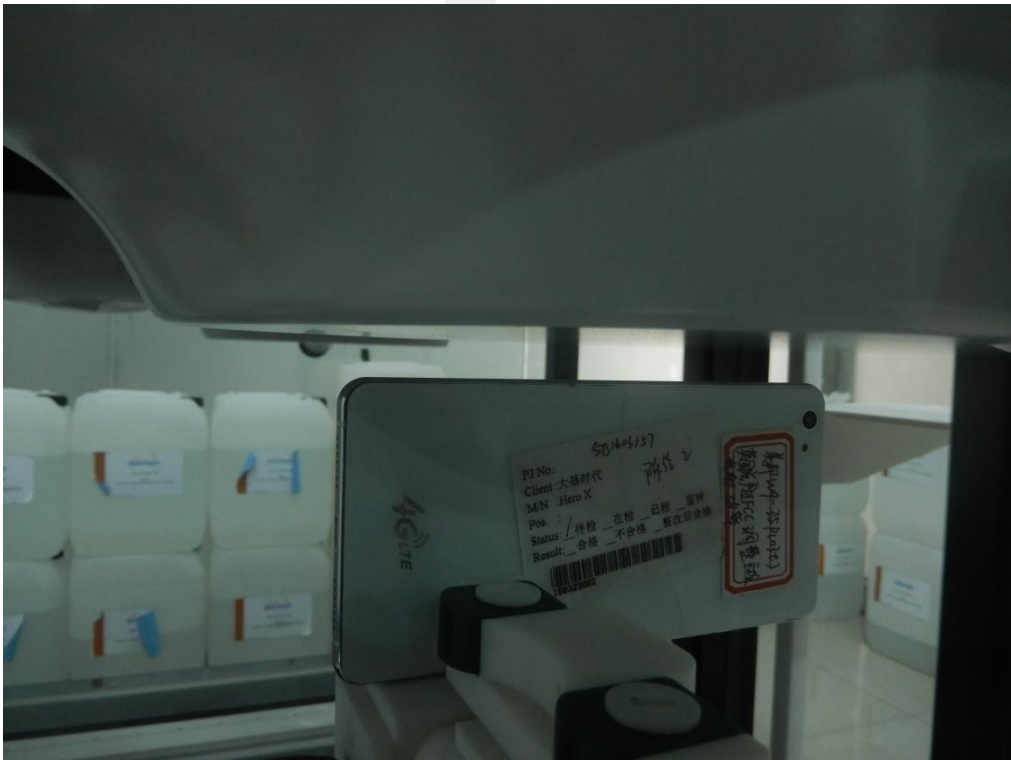


Body top side(separation distance is 10mm)



Body Bottom side(separation distance is 10mm)

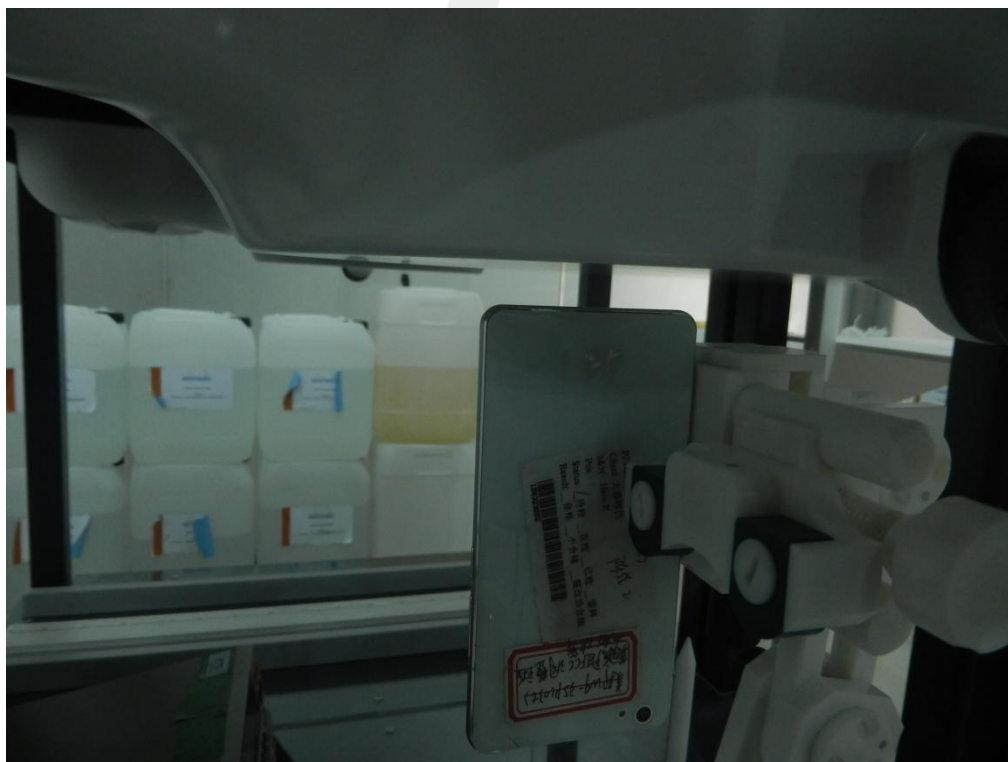

Liquid depth (15 cm)

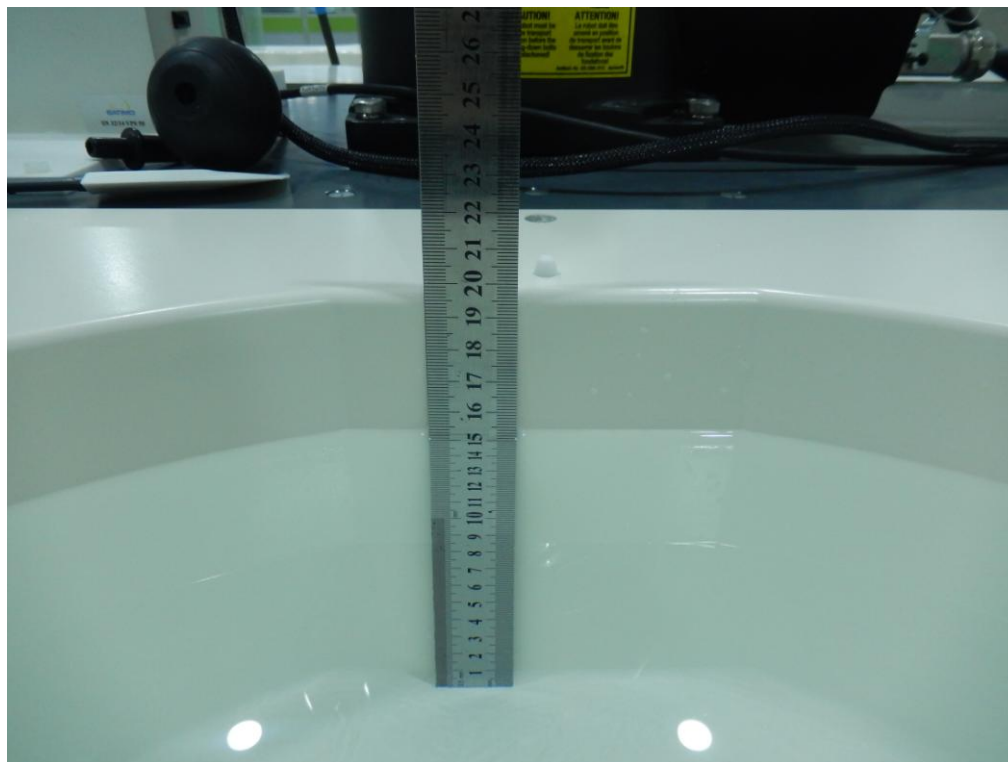



12. SAR Result Summary

12.1 Head SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	Voice	Right Cheek	251	0.074	-2.59	34	33.20	0.089	/
		Right Tilt	251	0.035	0.23	34	33.20	0.042	/
		Left Cheek	251	0.105	-1.97	34	33.20	0.126	1
		Left Tilt	251	0.064	-1.52	34	33.20	0.077	/
GSM1900	Voice	Right Cheek	810	0.086	-2.98	30	29.61	0.094	/
		Right Tilt	810	0.037	0.23	30	29.61	0.040	/
		Left Cheek	810	0.111	-2.62	30	29.61	0.121	3
		Left Tilt	810	0.049	-2.61	30	29.61	0.054	/
WCDMA II	RMC	Right Cheek	9538	0.109	-1.00	21	20.44	0.124	/
		Right Tilt	9538	0.061	-3.65	21	20.44	0.069	/
		Left Cheek	9538	0.156	-1.89	21	20.44	0.177	5
		Left Tilt	9538	0.108	0.69	21	20.44	0.123	/
WCDMA V	RMC	Right Cheek	4233	0.045	-2.16	22	21.93	0.046	/
		Right Tilt	4233	0.026	2.84	22	21.93	0.026	/
		Left Cheek	4233	0.076	4.78	22	21.93	0.077	7
		Left Tilt	4233	0.042	-1.84	22	21.93	0.043	/

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WIFI	DATA	Right Cheek	11	0.041	-2.41	15	14.71	100	0.044	9
		Right Tilt	11	0.026	4.10	15	14.71	100	0.028	/
		Left Cheek	11	0.039	-2.47	15	14.71	100	0.042	/
		Left Tilt	11	0.018	-1.64	15	14.71	100	0.019	/

Note:

1. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.020** W/Kg for Head)
2. Per KDB865664 D01, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg



Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas No.
LTE Band 2	20M	QPSK	1	99	Right Cheek	19100	0.025	-1.77	22	21.51	0.028	/
			50	0	Right Cheek	18700	0.021	0.55	21	20.45	0.024	/
			1	99	Right Tilt	19100	0.013	-0.94	22	21.51	0.015	/
			50	0	Right Tilt	18700	0.010	-3.48	21	20.45	0.011	/
			1	99	Left Cheek	19100	0.052	-0.63	22	21.51	0.058	11
			50	0	Left Cheek	18700	0.044	-0.61	21	20.45	0.050	/
			1	99	Left Tilt	19100	0.034	-3.75	22	21.51	0.038	/
			50	0	Left Tilt	18700	0.029	0.87	21	20.45	0.033	/
LTE Band 4	20M	QPSK	1	99	Right Cheek	20175	0.055	2.89	22	21.76	0.058	/
			50	49	Right Cheek	20050	0.054	-1.69	21	20.67	0.058	/
			1	99	Right Tilt	20175	0.026	-3.45	22	21.76	0.027	/
			50	49	Right Tilt	20050	0.022	-1.60	21	20.67	0.024	/
			1	99	Left Cheek	20175	0.111	2.90	22	21.76	0.117	13
			50	49	Left Cheek	20050	0.104	-1.57	21	20.67	0.112	/
			1	99	Left Tilt	20175	0.057	-2.89	22	21.76	0.060	/
			50	49	Left Tilt	20050	0.042	0.69	21	20.67	0.045	/
LTE Band 5	10M	QPSK	1	24	Right Cheek	20600	0.063	2.10	23	22.82	0.066	/
			25	24	Right Cheek	20600	0.058	-1.02	22	21.88	0.060	/
			1	24	Right Tilt	20600	0.029	-4.25	23	22.82	0.030	/
			25	24	Right Tilt	20600	0.025	-0.33	22	21.88	0.026	/
			1	24	Left Cheek	20600	0.107	-2.65	23	22.82	0.112	15
			25	24	Left Cheek	20600	0.084	-1.14	22	21.88	0.086	/
			1	24	Left Tilt	20600	0.068	-1.26	23	22.82	0.071	/
			25	24	Left Tilt	20600	0.055	0.24	22	21.88	0.057	/
LTE Band 7	20M	QPSK	1	0	Right Cheek	20850	0.295	-2.19	23.1	23.04	0.299	17
			50	49	Right Cheek	21100	0.289	2.58	22	21.88	0.297	/
			1	0	Right Tilt	20850	0.116	-4.85	23.1	23.04	0.118	/
			50	49	Right Tilt	21100	0.107	0.36	22	21.88	0.110	/
			1	0	Left Cheek	20850	0.286	-2.69	23.1	23.04	0.290	/
			50	49	Left Cheek	21100	0.276	-2.75	22	21.88	0.284	/
			1	0	Left Tilt	20850	0.125	0.17	23.1	23.04	0.127	/
			50	49	Left Tilt	21100	0.112	0.55	22	21.88	0.115	/
LTE Band 17	10M	QPSK	1	0	Right Cheek	23800	0.217	-0.77	23	22.89	0.223	/
			25	24	Right Cheek	23780	0.204	-2.58	22	21.82	0.213	/
			1	0	Right Tilt	23800	0.133	-3.67	23	22.89	0.136	/
			25	24	Right Tilt	23780	0.126	0.82	22	21.82	0.131	/
			1	0	Left Cheek	23800	0.295	-2.19	23	22.89	0.303	19
			25	24	Left Cheek	23780	0.289	-1.25	22	21.82	0.301	/
			1	0	Left Tilt	23800	0.185	0.34	23	22.89	0.190	/
			25	24	Left Tilt	23780	0.176	-1.01	22	21.82	0.183	/



12.2 Body-worn and Hotspot SAR

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	GPRS Data-4 Slot	Front side	251	0.164	-1.06	31	30.66	0.177	/
		Back side	251	0.235	-1.71	31	30.66	0.254	2
		Left side	251	0.118	-2.45	31	30.66	0.128	/
		Right side	251	0.067	4.55	31	30.66	0.072	/
		Bottom side	251	0.181	-1.65	31	30.66	0.196	/
GSM1900	GPRS Data-4 Slot	Front side	810	0.351	3.64	27.1	27.09	0.352	/
		Back side	810	0.782	0.43	27.1	27.09	0.784	/
		Left side	810	0.196	-1.02	27.1	27.09	0.196	/
		Right side	810	0.110	0.74	27.1	27.09	0.110	/
		Bottom side	512	1.287	-1.24	27.1	27.09	1.290	/
		Bottom side	661	1.344	-3.25	27.1	27.09	1.347	/
		Bottom side	804	1.349	-0.30	27.1	27.09	1.352	4
WCDMA II	RMC	Front side	9538	0.296	-1.58	21	20.44	0.337	/
		Back side	9538	0.597	4.85	21	20.44	0.679	/
		Left side	9538	0.124	-2.78	21	20.44	0.141	/
		Right side	9538	0.063	-4.78	21	20.44	0.072	/
		Bottom side	9263	0.828	2.68	21	20.43	0.944	/
		Bottom side	9400	0.912	-0.40	21	20.37	1.054	/
		Bottom side	9538	1.050	-0.59	21	20.44	1.195	6
WCDMA V	RMC	Front side	4233	0.110	-0.01	22	21.93	0.112	/
		Back side	4233	0.172	-4.28	22	21.93	0.175	8
		Left side	4233	0.069	-3.57	22	21.93	0.070	/
		Right side	4233	0.103	0.84	22	21.93	0.105	/
		Bottom side	4233	0.127	3.77	22	21.93	0.129	/

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
WIFI	802.11b	Front side	11	0.015	3.65	15	14.71	100	0.016	/
		Back side	11	0.019	2.52	15	14.71	100	0.020	/
		Left side	11	0.008	-2.61	15	14.71	100	0.009	/
		Top side	11	0.024	-4.67	15	14.71	100	0.026	10

Note:

1. The test separation of all above table is 10mm.
2. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.014** W/Kg for Body)
3. When the user enables the personal Wireless router functions for the handsets, actual operations include simultaneous transmission of both the Wi-Fi transmitting frequency and thus cannot be evaluated for SAR under actual use conditions. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.



Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas No.
LTE Band 2	20M	QPSK	1	99	Front	19100	0.156	3.42	22	21.51	0.175	/
			50	0	Front	18700	0.138	-0.48	21	20.45	0.157	/
			1	99	Back	19100	0.313	4.70	22	21.51	0.350	12
			50	0	Back	18700	0.284	-0.79	21	20.45	0.322	/
			1	99	Left Side	19100	0.106	1.97	22	21.51	0.119	/
			50	0	Left Side	18700	0.097	0.31	21	20.45	0.110	/
			1	99	Right Side	19100	0.063	-2.85	22	21.51	0.071	/
			50	0	Right Side	18700	0.055	2.74	21	20.45	0.062	/
			1	99	Bottom Side	19100	0.210	2.67	22	21.51	0.235	/
			50	0	Bottom Side	18700	0.195	1.62	21	20.45	0.221	/
LTE Band 4	20M	QPSK	1	99	Front	20175	0.584	-1.15	22	21.76	0.617	/
			50	49	Front	20050	0.492	0.22	21	20.67	0.531	/
			1	99	Back	20175	0.602	-1.02	22	21.76	0.636	/
			50	49	Back	20050	0.581	-1.95	21	20.67	0.627	/
			1	99	Left Side	20175	0.098	-2.24	22	21.76	0.104	/
			50	49	Left Side	20050	0.088	-4.60	21	20.67	0.095	/
			1	99	Right Side	20175	0.036	-1.58	22	21.76	0.038	/
			50	49	Right Side	20050	0.023	0.37	21	20.67	0.025	/
			1	99	Bottom Side	20050	1.167	2.08	22	21.72	1.245	/
			1	99	Bottom Side	20175	1.256	-0.30	22	21.76	1.327	14
			1	99	Bottom Side	20300	0.921	-0.55	22	21.70	0.987	/
			50	49	Bottom Side	20175	0.781	-1.69	20.7	20.67	0.786	/
			100	0	Bottom Side	20050	0.640	-3.86	21	20.64	0.695	/
LTE Band 5	10M	QPSK	1	24	Front	20600	0.105	1.08	23	22.82	0.109	/
			25	24	Front	20600	0.087	-2.44	22	21.88	0.089	/
			1	24	Back	20600	0.130	2.06	23	22.82	0.136	/
			25	24	Back	20600	0.116	1.27	22	21.88	0.119	/
			1	24	Left Side	20600	0.094	-1.27	23	22.82	0.098	/
			25	24	Left Side	20600	0.067	-3.94	22	21.88	0.069	/
			1	24	Right Side	20600	0.103	-1.07	23	22.82	0.107	/
			25	24	Right Side	20600	0.076	-1.21	22	21.88	0.078	/
			1	24	Bottom Side	20600	0.168	-1.19	23	22.82	0.175	16
			25	24	Bottom Side	20600	0.149	1.41	22	21.88	0.153	/
LTE Band 7	20M	QPSK	1	0	Front	20850	0.384	-0.67	23.1	23.04	0.389	/
			50	49	Front	21100	0.365	-2.85	22	21.88	0.375	/
			1	0	Back	20850	0.657	-1.49	23.1	23.04	0.666	18
			50	49	Back	21100	0.628	-1.85	22	21.88	0.646	/
			1	0	Left Side	20850	0.341	-0.32	23.1	23.04	0.346	/
			50	49	Left Side	21100	0.327	-0.78	22	21.88	0.336	/
			1	0	Right Side	20850	0.225	-1.77	23.1	23.04	0.228	/
			50	49	Right Side	21100	0.210	-0.53	22	21.88	0.216	/



			1	0	Bottom Side	20850	0.497	0.93	23.1	23.04	0.504	/
			50	49	Bottom Side	21100	0.476	0.14	22	21.88	0.489	/
LTE Band 17	10M	QPSK	1	0	Front	23800	0.264	0.51	23	22.89	0.271	/
			25	24	Front	23780	0.251	-2.68	22	21.82	0.262	/
			1	0	Back	23800	0.465	-0.01	23	22.89	0.477	20
			25	24	Back	23780	0.449	2.61	22	21.82	0.468	/
			1	0	Left Side	23800	0.196	3.48	23	22.89	0.201	/
			25	24	Left Side	23780	0.184	0.67	22	21.82	0.192	/
			1	0	Right Side	23800	0.134	0.03	23	22.89	0.137	/
			25	24	Right Side	23780	0.110	-1.67	22	21.82	0.115	/
			1	0	Bottom Side	23800	0.168	0.88	23	22.89	0.172	/
			25	24	Bottom Side	23780	0.148	-3.60	22	21.82	0.154	/

Repeated SAR

Band	Mode	Test Position	Channel	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM1900	GPRS Data-4 Slot	Bottom Side	CH 804	1.325	0.58	27.1	27.09	1.328	-
WCDMA II	RMC	Bottom Side	CH 9538	1.001	1.09	21	20.44	1.139	
LTE Band 4	QPSK body-worn	Bottom Side	CH 20175	1.247	-3.41	22	21.76	1.318	-

12.3 repeated SAR measurement

Band	Mode	Test Position	Channel	Original Measured SAR 1g(mW/g)	1st Repeated SAR 1g	Ratio	Original Measured SAR 1g(mW/g)	2nd Repeated SAR 1g	Ratio
GSM1900	GPRS Data-4 Slot	Bottom Side	CH 804	1.349	1.325	0.98	-	-	-
WCDMA II	RMC	Bottom Side	CH 9538	1.050	1.001	0.95			
LTE Band 4	QPSK body-worn	Bottom Side	CH 20175	1.256	1.247	0.99	-	-	-

Note:

1. Per KDB 865664 D01V01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is $\geq 0.8W/Kg$.
2. Per KDB 865664 D01V01,if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45W/Kg$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45W/Kg$
4. The ratio is the difference in percentage between original and repeated measured SAR.



Simultaneous Multi-band Transmission Evaluation:

Application Simultaneous Transmission information:

Position	Simultaneous state
Head	1. GSM + WIFI
	2. GSM + Bluetooth
	3. WCDMA + WIFI
	4. WCDMA + Bluetooth
	5. LTE + WIFI
	6. LTE + Bluetooth
Body	1. GSM + WIFI
	2. GSM + Bluetooth
	3. WCDMA + WIFI
	4. WCDMA + Bluetooth
	5. LTE + WIFI
	6. LTE + Bluetooth

NOTE:

- Bluetooth and WIFI can't simultaneous transmission at the same time.
- For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
- Based upon KDB 447498 D01 v05, BT SAR is excluded as below table.
- If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
- For minimum test separation distance $\leq 50\text{mm}$, Bluetooth standalone SAR is excluded according to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} (\text{GHz}) / x] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
- The reported SAR summation is calculated based on the same configuration and test position.
- KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} (\text{GHz}) / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is $>50\text{mm}$.

Estimated SAR		Maximum Power		Antenna to user(mm)	Frequency(GHz)	Stand alone SAR(1g) [W/kg]
		dBm	mW			
BT	Head	1	1.259	5	2.441	0.052
	Body			10	2.441	0.026



Simultaneous Mode	Position	Mode	Max. 1-g SAR (W/kg)	1-g Sum SAR (W/kg)
GSM + WIFI	Head	GSM Voice	0.126	0.170
		WIFI	0.044	
	Body	GSM Data	1.352	1.378
		WIFI	0.026	
GSM + Bluetooth	Head	GSM Voice	0.126	0.178
		Bluetooth	0.052	
	Body	GSM Data	1.352	1.378
		Bluetooth	0.026	
WCDMA + WIFI	Head	WCDMA RMC	0.177	0.221
		WIFI	0.044	
	Body	WCDMA RMC	1.195	1.221
		WIFI	0.026	
WCDMA + Bluetooth	Head	WCDMA RMC	0.177	0.229
		Bluetooth	0.052	
	Body	WCDMA RMC	1.195	1.221
		Bluetooth	0.026	
LTE + WIFI	Head	LTE RMC	0.299	0.343
		WIFI	0.044	
	Body	LTE RMC	1.327	1.353
		WIFI	0.026	
LTE + Bluetooth	Head	LTE RMC	0.299	0.351
		Bluetooth	0.052	
	Body	LTE RMC	1.327	1.353
		Bluetooth	0.026	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	SATIMO	SID750	SN 30/14 DIP0G750-331	2014.09.01	2017.08.31
835MHz Dipole	SATIMO	SID835	SN 30/14 DIP0G835-332	2014.09.01	2017.08.31
1800MHz Dipole	SATIMO	SID1800	SN 30/14 DIP1G800-329	2014.09.01	2017.08.31
1900MHz Dipole	SATIMO	SID1900	SN 30/14 DIP1G900-333	2014.09.01	2017.08.31
2450MHz Dipole	SATIMO	SID2450	SN 30/14 DIP2G450-335	2014.09.01	2017.08.31
2600MHz Dipole	SATIMO	SID2600	SN 30/14 DIP2G600-336	2014.09.01	2017.08.31
E-Field Probe	MVG	SSE2	SN 45/15 EPM0281	2015.10.12	2016.10.11
Antenna	SATIMO	ANTA3	SN 07/13 ZNTA52	2014.09.01	2017.08.31
Waveguide	SATIMO	SWG5500	SN 13/14 WGA32	2014.09.01	2017.08.31
Phantom1	SATIMO	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	SATIMO	SAM	SN 32/14 SAM116	N/A	N/A
SAR TEST BENCH	SATIMO	GSM and WCDMA mobile phone POSITIONING SYSTEM	SN 32/14 MSH97	N/A	N/A
SAR TEST BENCH	SATIMO	LAPTOP POSITIONING SYSTEM	SN 32/14 LSH29	N/A	N/A
Dielectric Probe Kit	SATIMO	SCLMP	SN 32/14 OCPG52	2015.09.01	2016.08.31
Multi Meter	Keithley	Multi Meter 2000	4050073	2015.11.20	2016.11.19
Signal Generator	Agilent	N5182A	MY50140530	2015.11.18	2016.11.17
Power Meter	R&S	NRP	100510	2015.10.25	2016.10.24
Power Meter	HP	EPM-442A	GB37170267	2015.10.24	2016.10.23
Power Sensor	R&S	NRP-Z11	101919	2015.10.24	2016.10.23
Power Sensor	HP	8481A	2702A65976	2015.10.24	2016.10.23
Network Analyzer	Agilent	5071C	EMY46103472	2015.12.12	2016.12.11
Attenuator 1	PE	PE7005-10	N/A	2015.10.25	2016.10.24
Attenuator 2	PE	PE7005-3	N/A	2015.10.24	2016.10.23
Attenuator 3	Woken	WK0602-XX	N/A	2015.12.12	2016.12.11
Dual Directional Coupler	Agilent	778D	50422	2015.11.18	2016.11.17



Appendix A. System Validation Plots

System Performance Check Data (750MHz Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-04-01

Measurement duration: 13 minutes 25 seconds

Experimental conditions

Phantom	Validation plane
Device Position	-
Band	750MHz
Channels	-
Signal	CW
Frequency (MHz)	750MHz
Relative permittivity (real part)	41.2
Relative permittivity	20.8
Conductivity (S/m)	0.91
Power drift (%)	2.35
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	1.53
Crest factor:	1:1




Maximum location: X=1.00, Y=0.00

SAR Peak: 1.30 W/kg

SAR 10g (W/Kg)	0.544560
SAR 1g (W/Kg)	0.838123

Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	1.30322	0.86595	0.56114	0.49582	0.31352	0.24266	0.10359

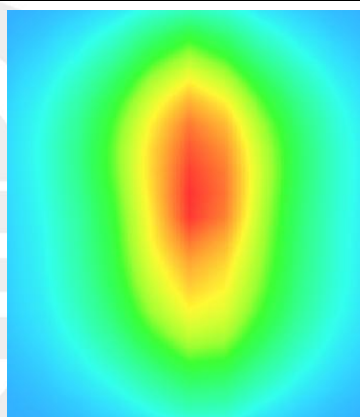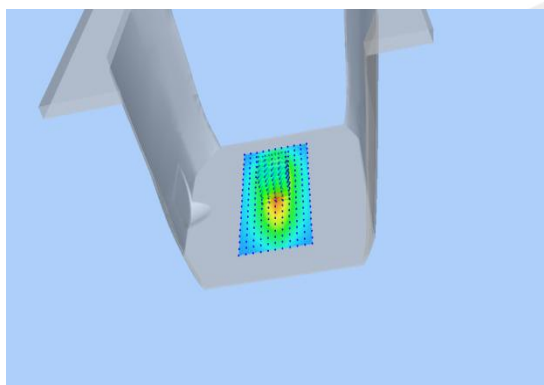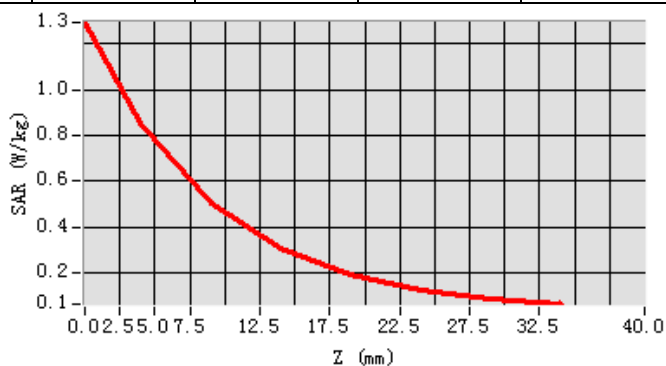

**System Performance Check Data (750MHz Body)**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-04-01

Measurement duration: 14 minutes 12 seconds

Experimental conditions.




Probe	
Phantom	Validation plane
Device Position	-
Band	750MHz
Channels	-
Signal	CW
Frequency (MHz)	750MHz
Relative permittivity (real part)	55.26
Relative permittivity	23.251187
Conductivity (S/m)	0.91
Power drift (%)	1.020000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	1.59
Crest factor:	1:1

Maximum location: X=1.00, Y=0.00**SAR Peak: 1.30 W/kg**

SAR 10g (W/Kg)	0.576142
SAR 1g (W/Kg)	0.856325

Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	1.30254	0.85658	0.56325	0.49362	0.31412	0.24366	0.10355

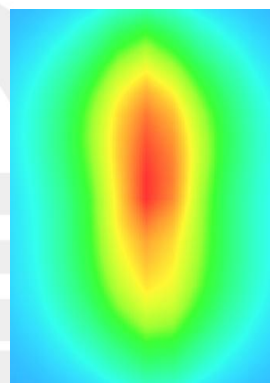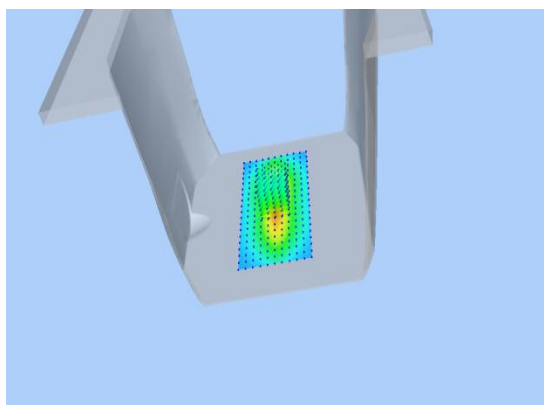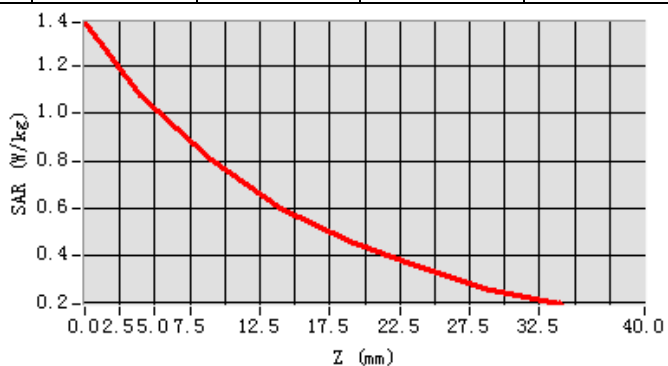



System Performance Check Data (835MHz Head)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-04-01

Measurement duration: 13 minutes 27 seconds

Experimental conditions

Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity (real part)	41.00
Relative permittivity	18.72
Conductivity (S/m)	0.86
Power drift (%)	0.45
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	1.78
Crest factor:	1:1




Maximum location: X=1.00, Y=0.00

SAR Peak: 1.39 W/kg

SAR 10g (W/Kg)	0.625623
SAR 1g (W/Kg)	0.937481

Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	1.3472	0.97891	0.66265	0.5042	0.3512	0.2505	0.11794

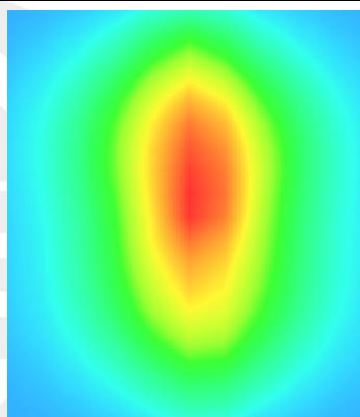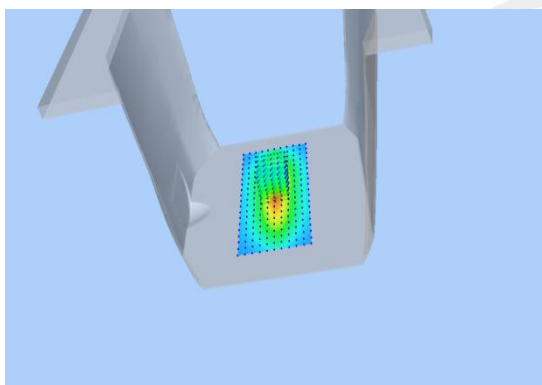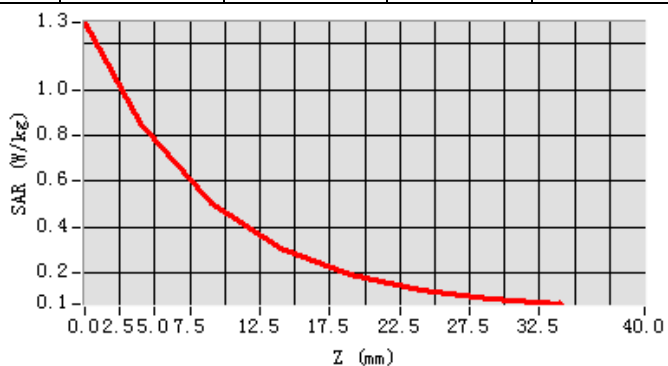

**System Performance Check Data (835MHz Body)**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-04-01

Measurement duration: 14 minutes 13 seconds

Experimental conditions.



Probe	
Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity (real part)	54.70
Relative permittivity	21.408187
Conductivity (S/m)	0.98
Power drift (%)	0.090000
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
ConvF:	1.85
Crest factor:	1:1

Maximum location: X=1.00, Y=0.00**SAR Peak: 1.50 W/kg**

SAR 10g (W/Kg)	0.603221
SAR 1g (W/Kg)	0.946658

Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	1.3725	1.0058	0.6838	0.4755	0.3314	0.2365	0.1688

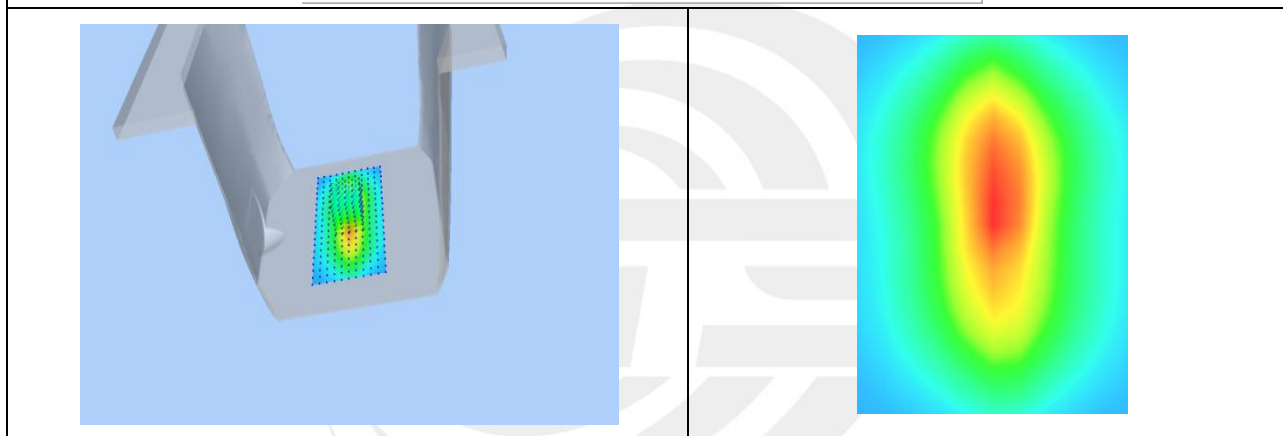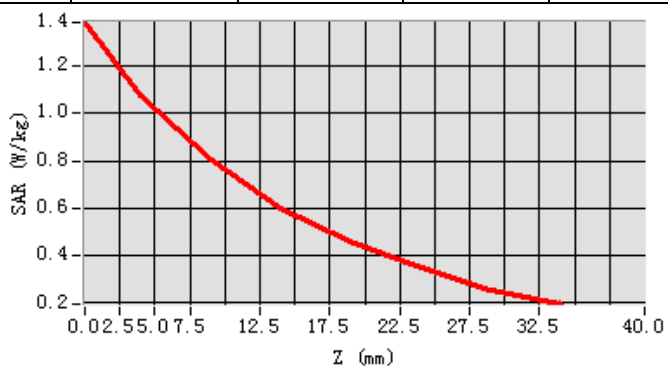

**System Performance Check Data(1800MHz Head)**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-04-01

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity (real part)	40.20
Relative permittivity	14.096855
Conductivity (S/m)	1.308491
Power drift (%)	-1.390000
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 45/15 EPGO281
ConvF	1.83
Crest factor:	1:1

Maximum location: X=7.00, Y=-1.00

SAR 10g (W/Kg)	1.980247
SAR 1g (W/Kg)	3.760154

Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	7.1146	4.0782	1.9352	1.0130	0.5642	0.3334	0.2079

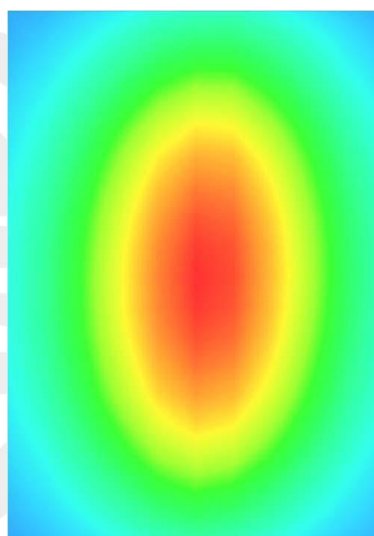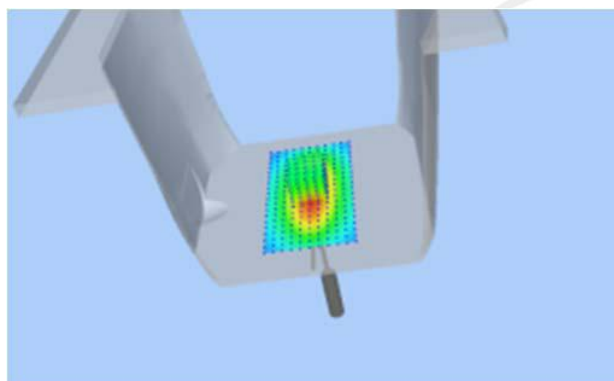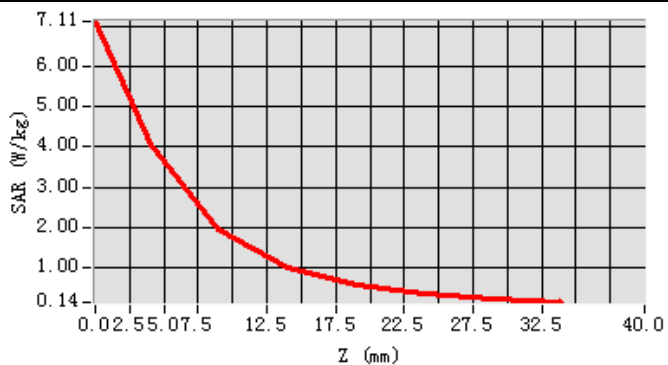

System Performance Check Data(1800MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-04-01

Experimental conditions.

Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity (real part)	52.6
Relative permittivity	15.08356
Conductivity (S/m)	1.376582
Power drift (%)	2.351
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 45/15 EPGO281
ConvF	1.87
Crest factor:	1:1

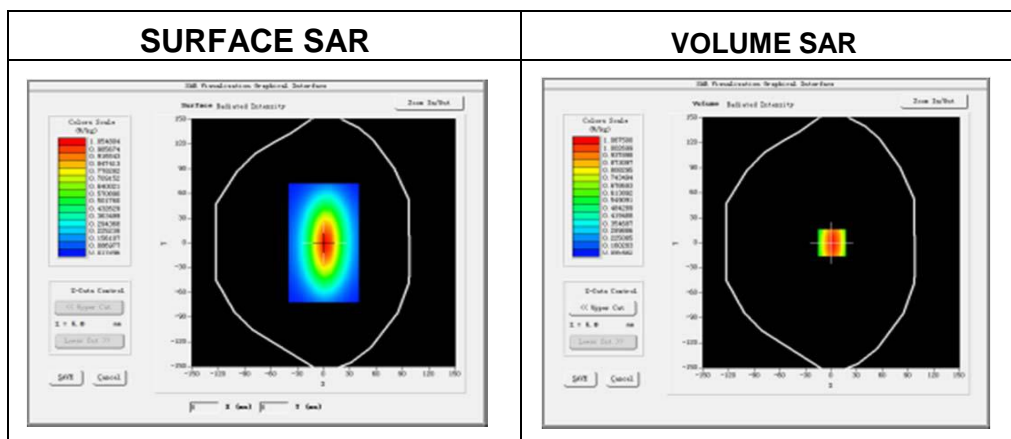






Maximum location: X=6.00, Y=2.00

SAR 10g (W/Kg)	1.99658
SAR 1g (W/Kg)	3.88325

Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	7.2356	4.1258	1.9683	1.1253	0.6535	0.3652	0.2658

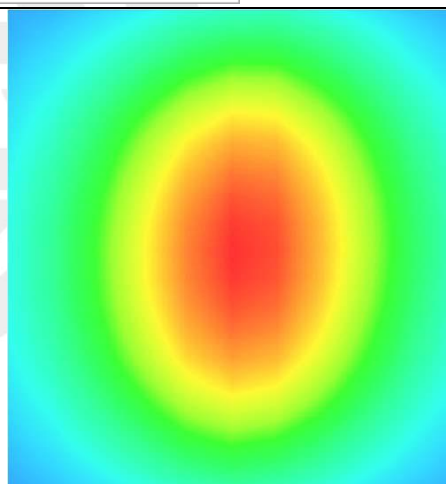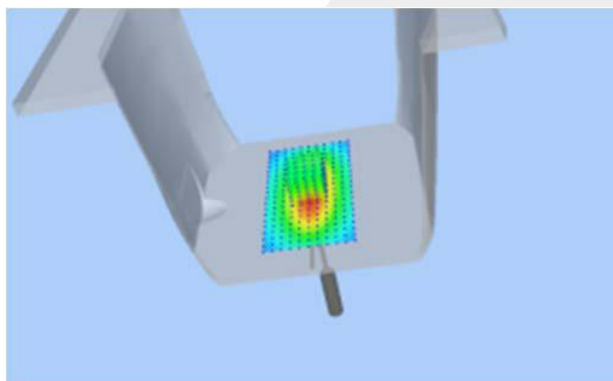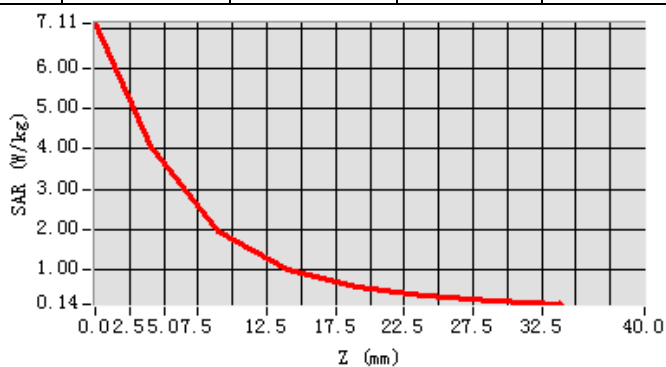


System Performance Check Data (1900MHz Head)

Type: Phone measurement (Complete)
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016-04-01
 Measurement duration: 14 minutes 12 seconds

Experimental conditions.

Phantom	Validation plane
Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity (real part)	39.50
Relative permittivity	13.26
Conductivity (S/m)	1.43
Power drift (%)	0.47
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
Probe	SN 45/15 EPGO281
ConvF:	2.10
Crest factor:	1:1

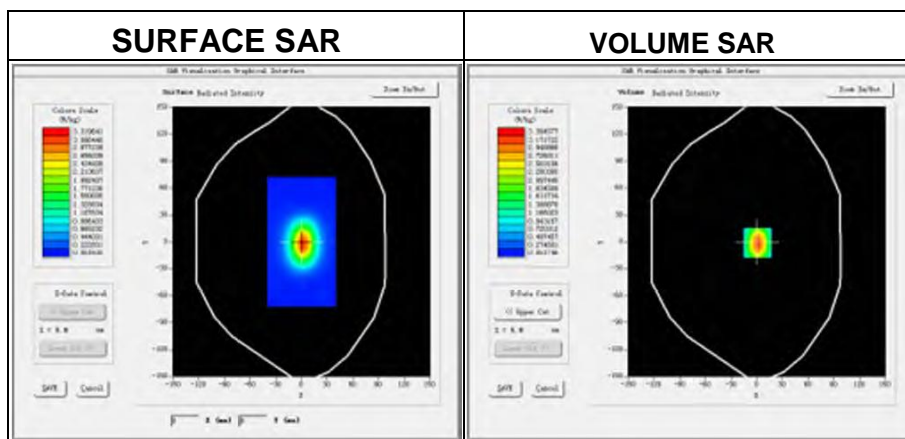




Maximum location: X=1.00, Y=0.00

SAR Peak: 5.41 W/kg

SAR 10g (W/Kg)	1.967525
SAR 1g (W/Kg)	3.856235

Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	6.5296	4.1946	2.3311	1.3187	0.5733	0.3288	0.1617

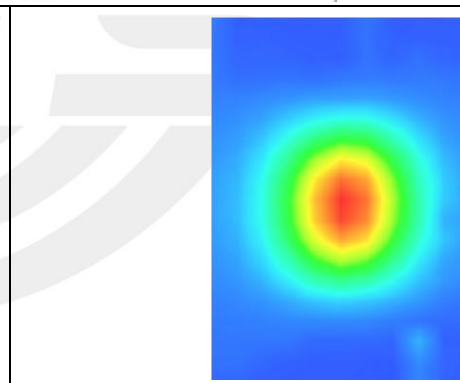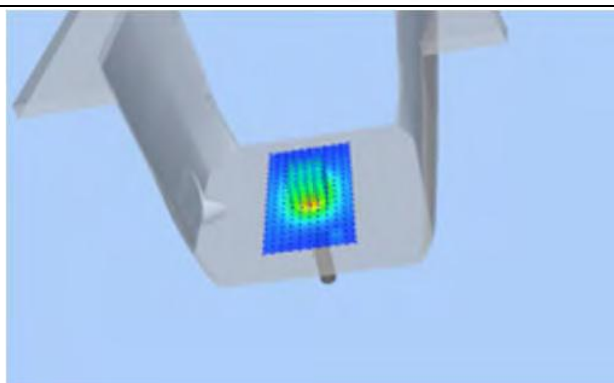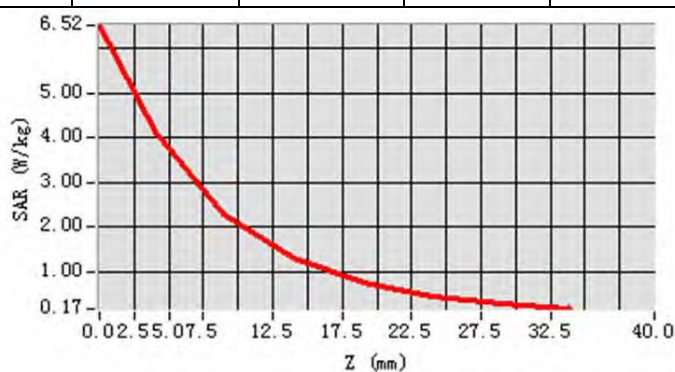

System Performance Check Data (1900MHz Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-04-01

Measurement duration: 14 minutes 46 seconds

Experimental conditions.

Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900
Relative permittivity (real part)	52.31
Relative permittivity	12.87531
Conductivity (S/m)	1.5
Power drift (%)	0.37
Ambient Temperature:	22.7°C
Liquid Temperature:	22.3°C
Probe	SN 45/15 EPGO281
ConvF:	2.16
Crest factor:	1:1

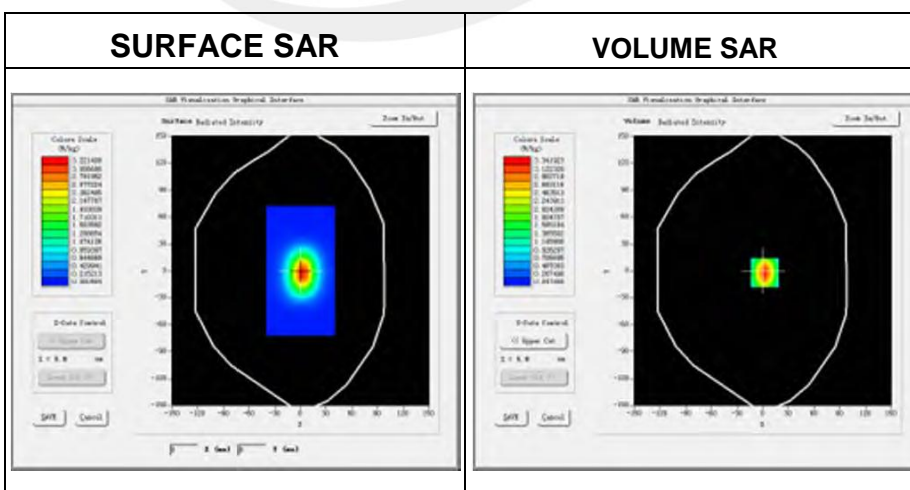






Maximum location: X=2.00, Y=2.00

SAR Peak: 5.27 W/kg

SAR 10g (W/Kg)	2.265354
SAR 1g (W/Kg)	3.986583

Z Axis Scan

Z (mm)	0	4	9	14	19	24	29
SAR(W/Kg)	5.3196	3.3419	1.8167	1.0186	0.5752	0.3285	0.1898

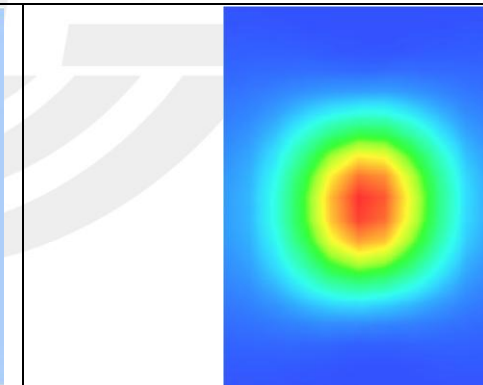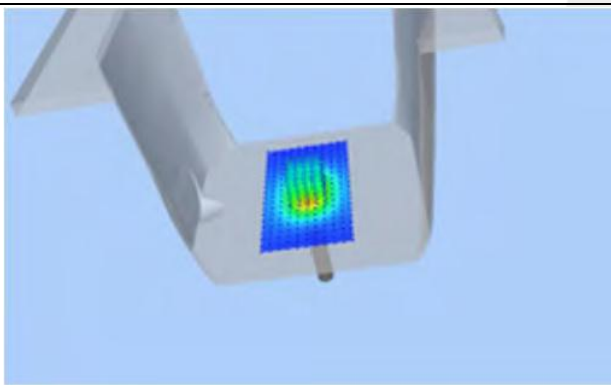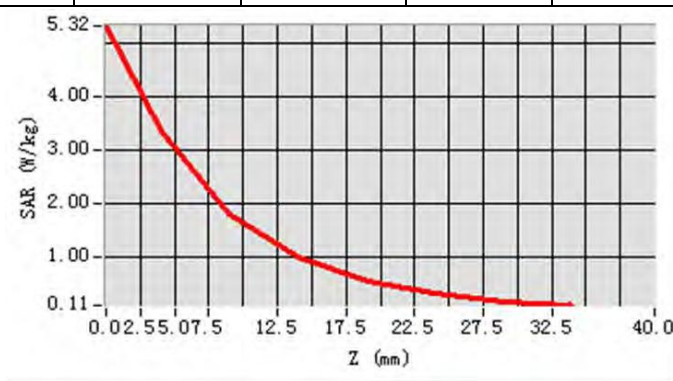


System Performance Check Data (2450MHz Head)

Type: Phone measurement (Complete)
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm
 Date of measurement: 2016-04-01
 Measurement duration: 13 minutes 51seconds

Experimental conditions.


Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity (real part)	39.176002
Relative permittivity	12.930000
Conductivity (S/m)	1.88
Power drift (%)	-1.200000
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 45/15 EPGO281
ConvF	2.21
Crest factor:	1:1

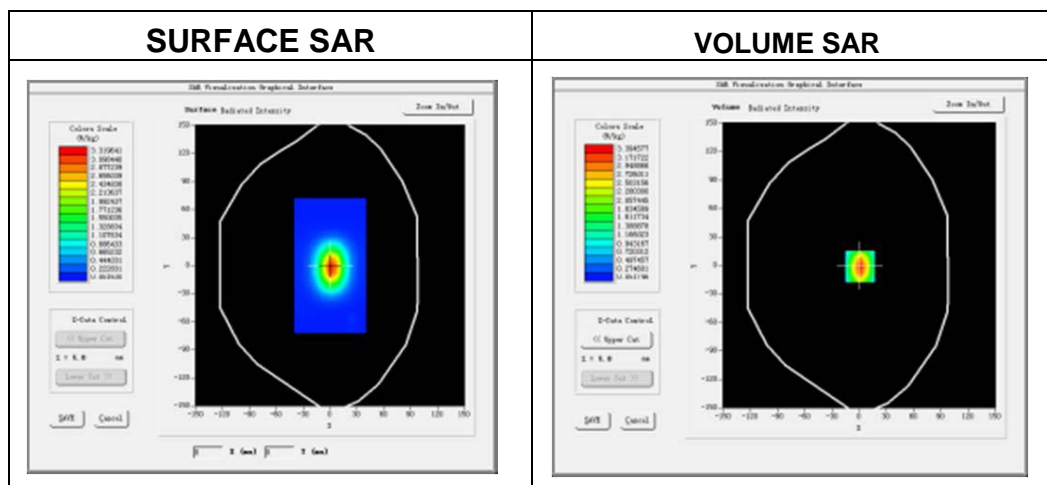

Maximum location: X=7.00, Y=6.00

SAR 10g (W/Kg)	2.574384
SAR 1g (W/Kg)	5.392438

Z Axis Scan

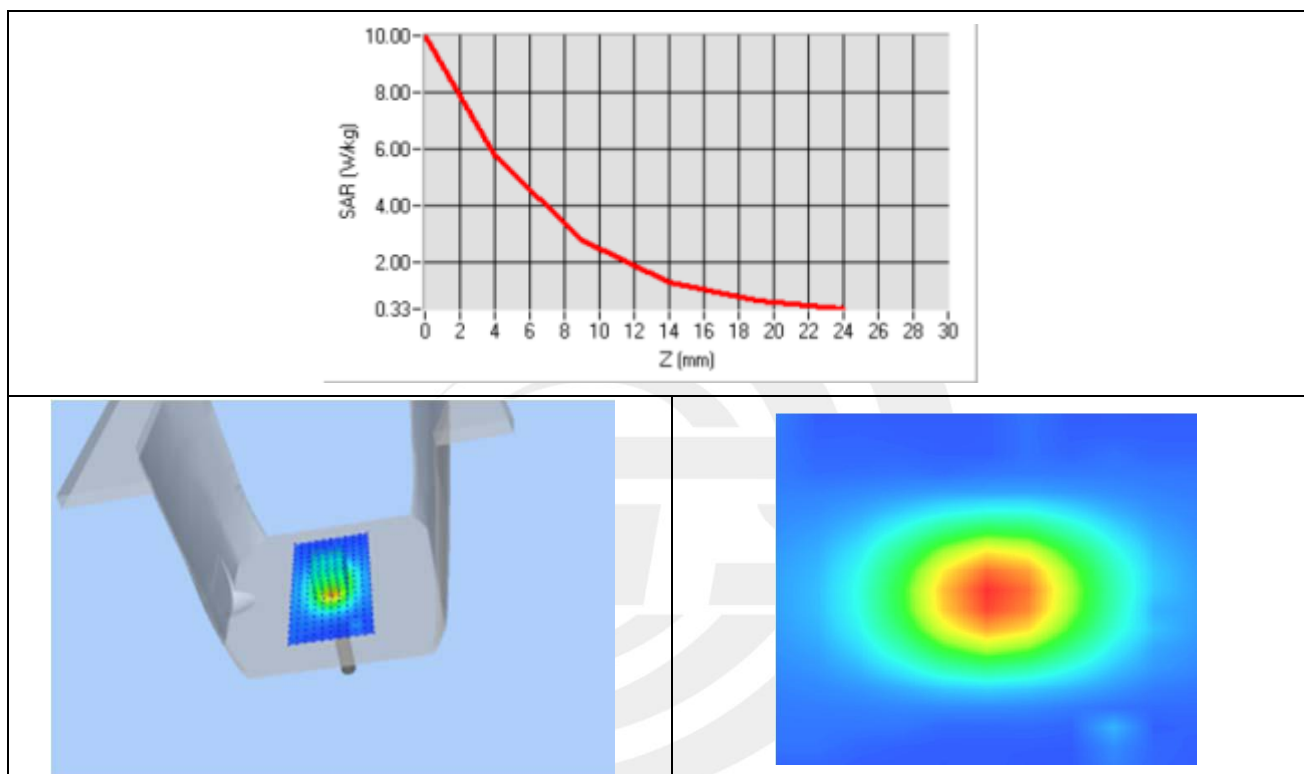

**System Performance Check Data (2450MHz Body)**

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-04-01

Measurement duration: 14 minutes 23 seconds

Experimental conditions.


Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity (real part)	52.316002
Relative permittivity	12.930000
Conductivity (S/m)	1.92
Power drift (%)	-1.200000
Ambient Temperature	22.7°C
Liquid Temperature	22.3°C
Probe	SN 45/15 EPGO281
ConvF	2.28
Crest factor:	1:1

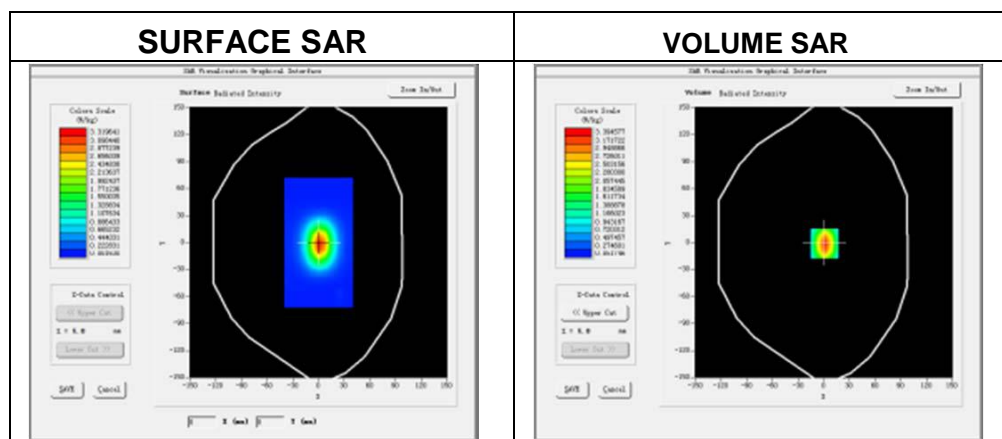

Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	2.368758
SAR 1g (W/Kg)	5.163872

Z Axis Scan

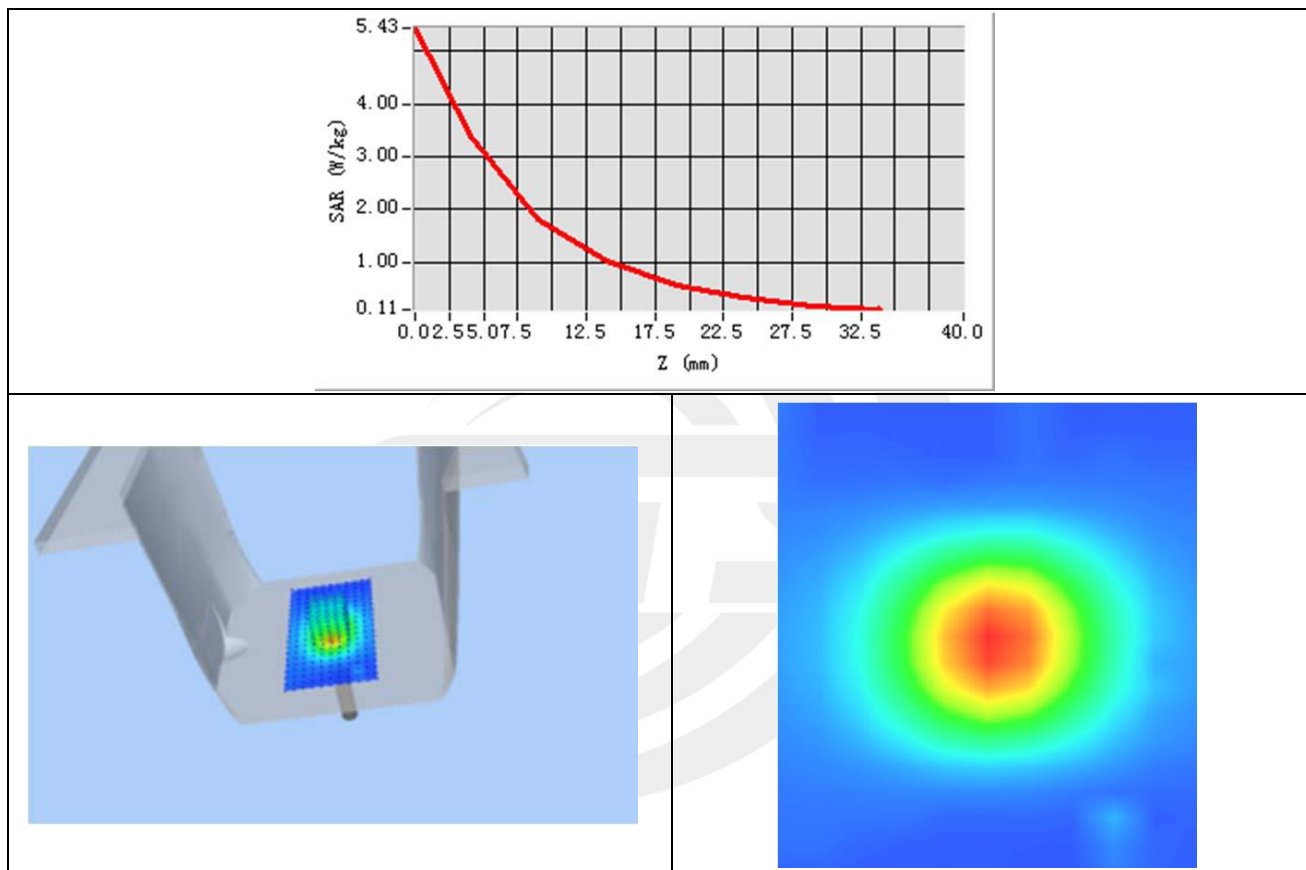



System Performance Check Data(2600MHz Head)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-04-01

Experimental conditions.


Device Position	Validation plane
Band	2600 MHz
Channels	-
Signal	CW
Frequency (MHz)	2600
Relative permittivity (real part)	38.52544
Relative permittivity	12.862300
Conductivity (S/m)	1.92000
Power drift (%)	-0.2600000
Ambient Temperature	22.7 °C
Liquid Temperature	22.3 °C
Probe	SN 17/14 EP221
ConvF	4.20
Crest factor:	1:1

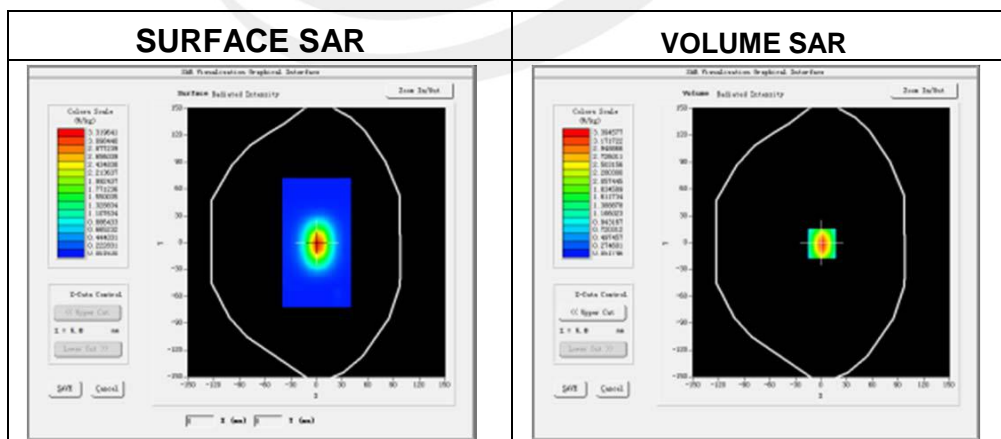

Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	2.468341
SAR 1g (W/Kg)	5.452358

Z Axis Scan

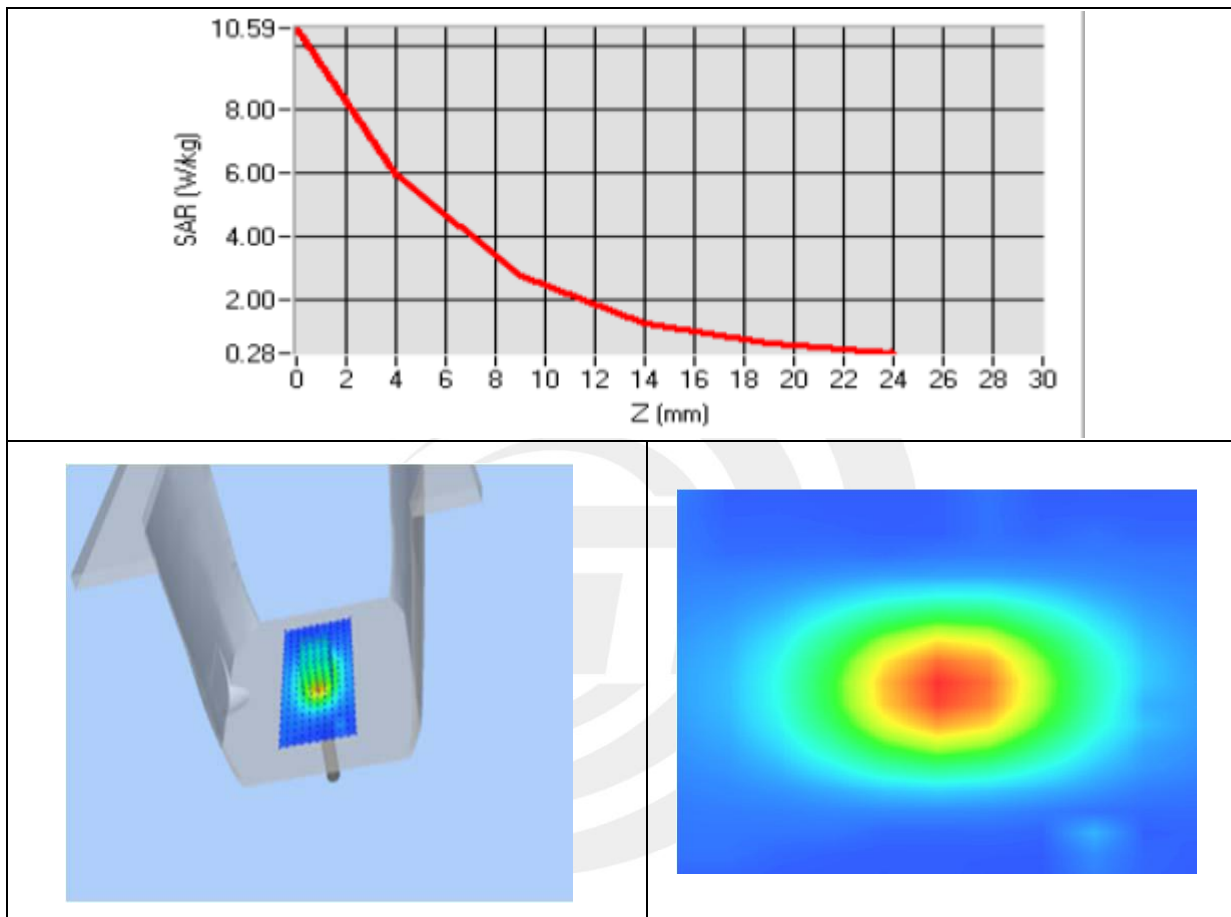

System Performance Check Data(2600MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-04-01

Experimental conditions.


Device Position	Validation plane
Band	2600 MHz
Channels	-
Signal	CW
Frequency (MHz)	2600
Relative permittivity (real part)	52.36814
Relative permittivity	12.62485
Conductivity (S/m)	2.12000
Power drift (%)	2.31
Ambient Temperature	22.7 °C
Liquid Temperature	22.3 °C
Probe	SN 17/14 EP221
ConvF	4.32
Crest factor:	1:1

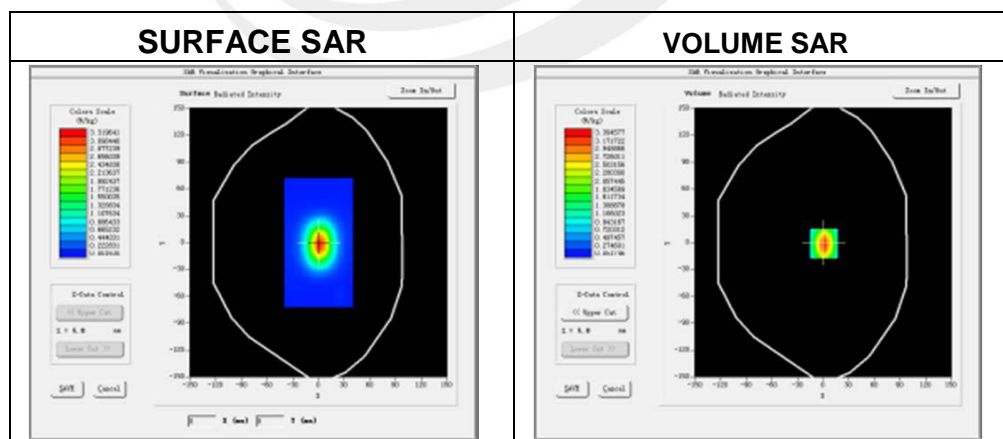

Maximum location: X=3.00, Y=1.00

SAR 10g (W/Kg)	2.398862
SAR 1g (W/Kg)	5.413682

Z Axis Scan

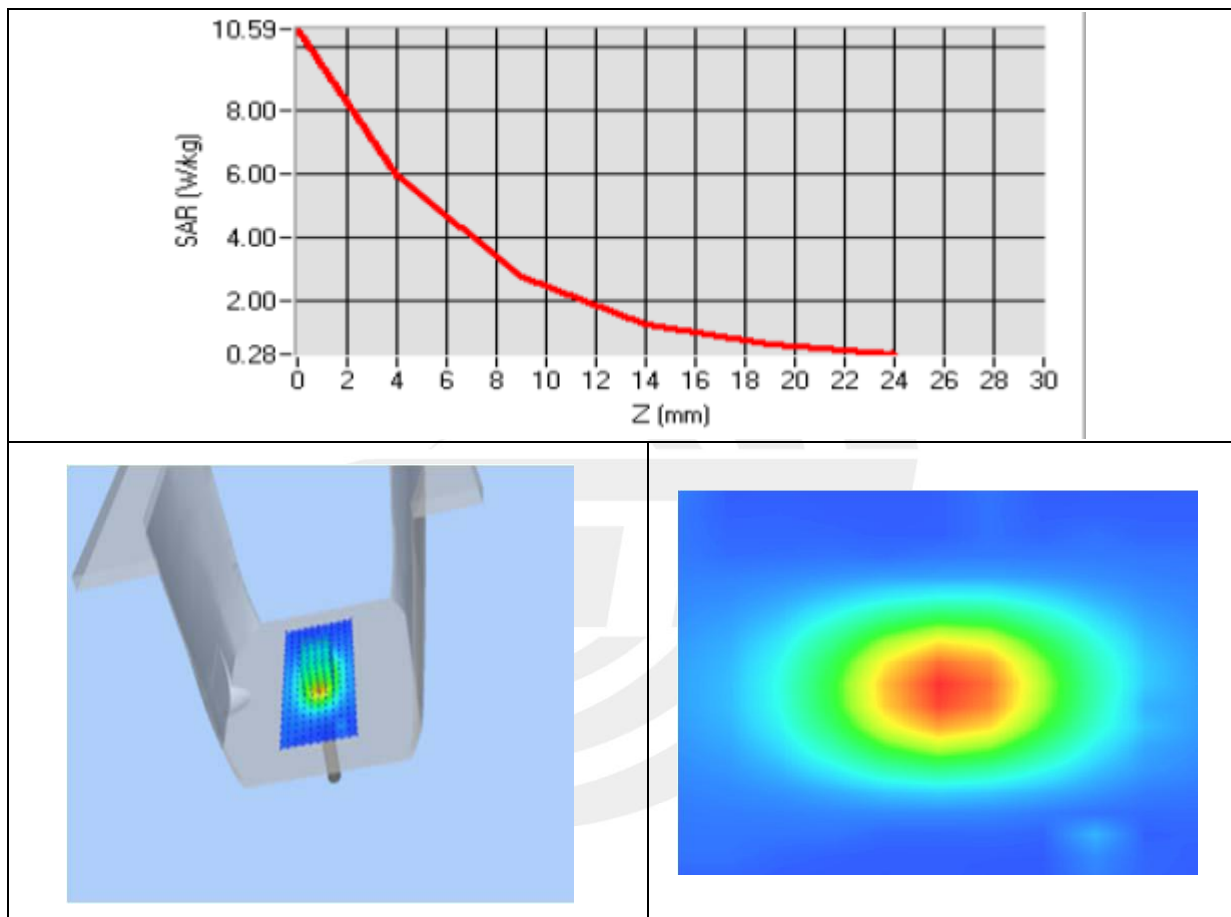

Appendix B. SAR Test Plots


Plot 1: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	TDMA (Crest factor: 8.32)
Frequency (MHz)	824.2
Relative permittivity (real part)	41.5
Conductivity (S/m)	0.90
Variation (%)	-1.97

Maximum location: X=-50.00, Y=-40.00

SAR Peak: 0.13 W/kg

SAR 10g (W/Kg)	0.070537
SAR 1g (W/Kg)	0.106097

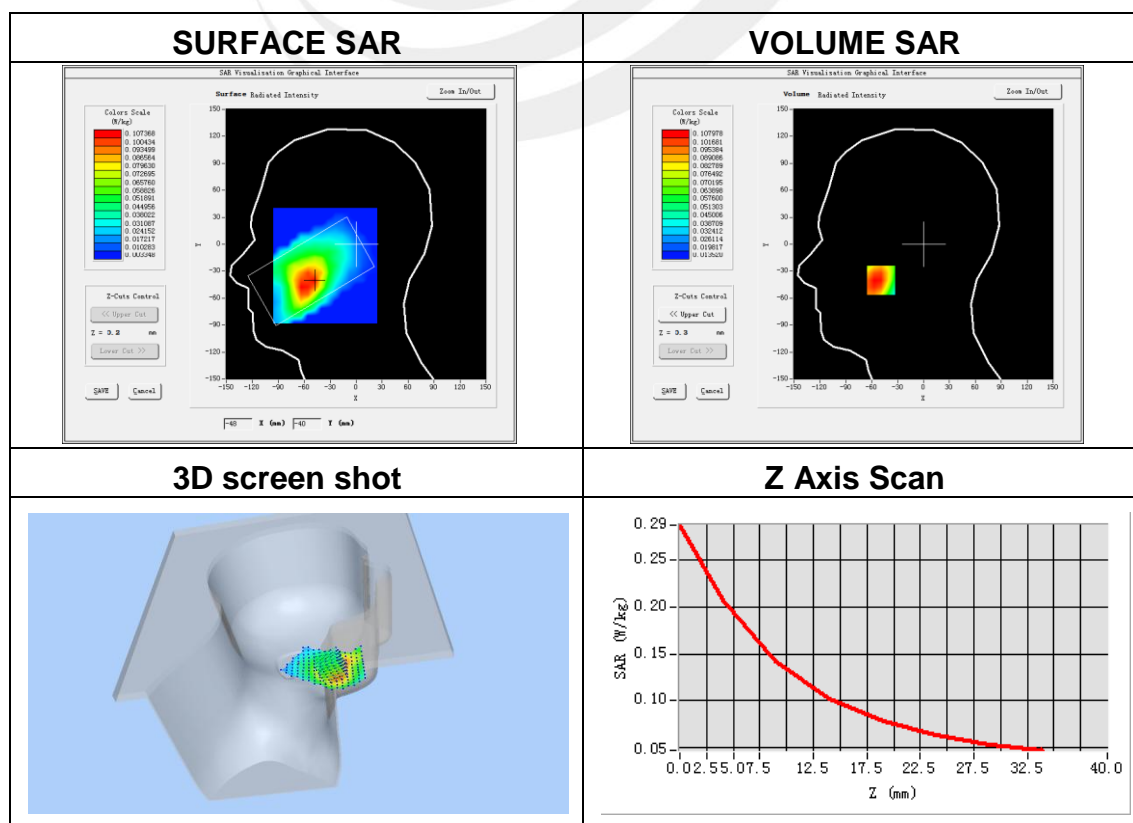


Plot 2: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Back
Band	GPRS 850
Channels	Middle
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	836.6
Relative permittivity (real part)	55.20
Conductivity (S/m)	0.97
Variation (%)	-1.71

Maximum location: X=7.00, Y=24.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.135700
SAR 1g (W/Kg)	0.235483

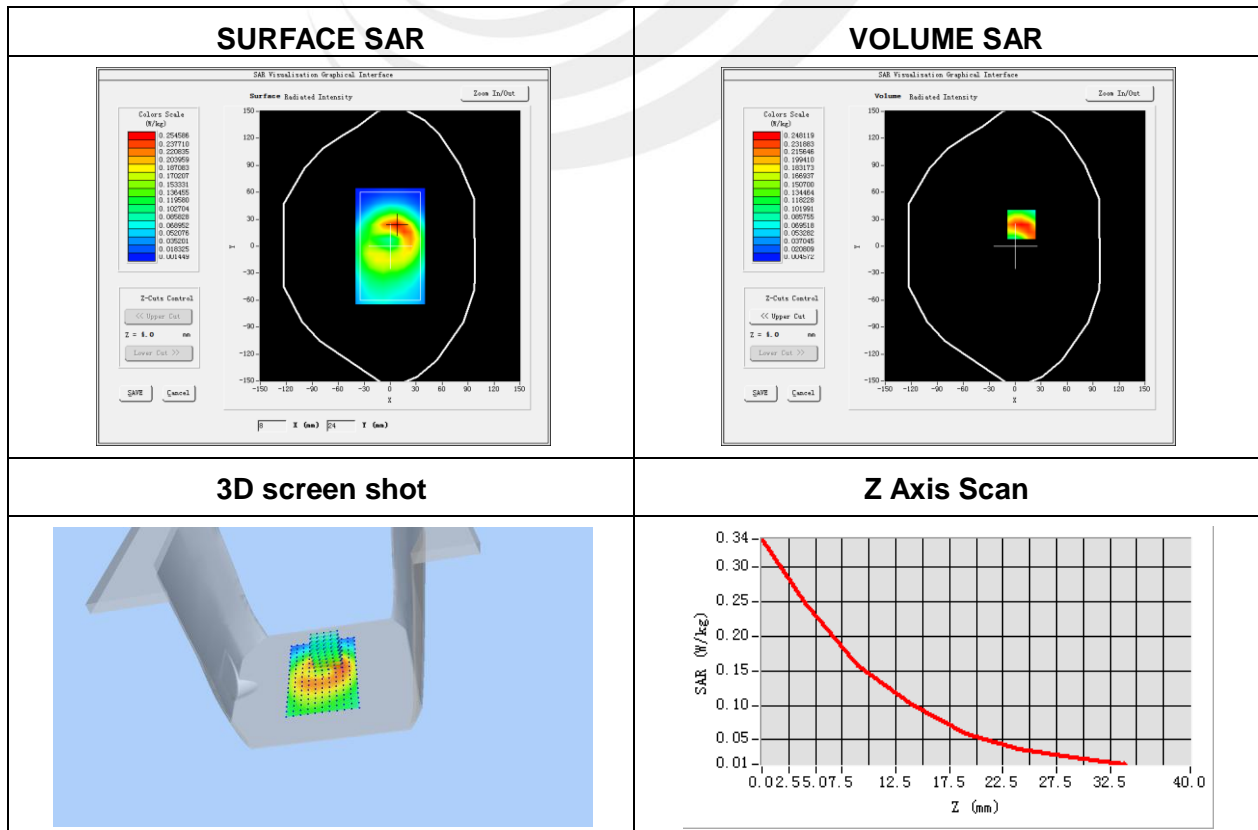


Plot 3: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	TDMA (Crest factor: 4.0)
Frequency (MHz)	1880.0
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-2.62

Maximum location: X=-64.00, Y=-72.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.063937
SAR 1g (W/Kg)	0.111203

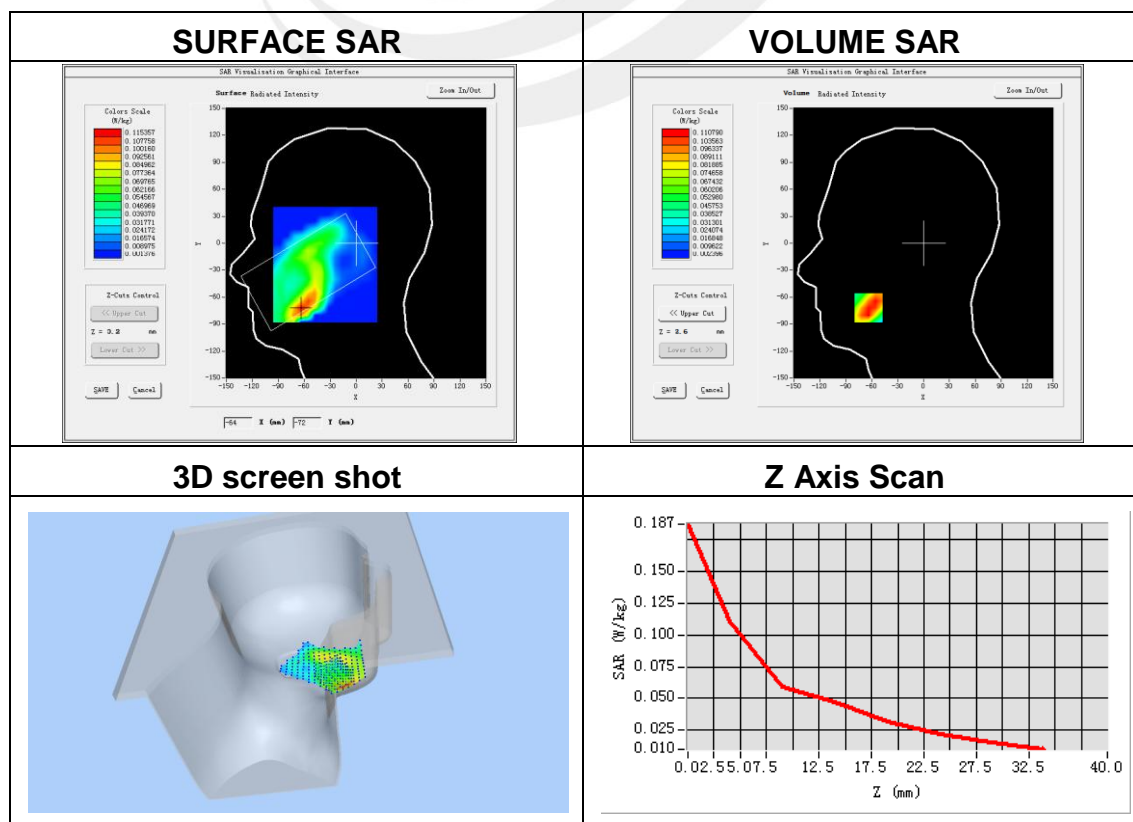


Plot 4: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body Bottom
Band	GPRS 1900
Channels	Low
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1850.2
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	-0.30

Maximum location: X=6.00, Y=7.00

SAR Peak: 2.20 W/kg

SAR 10g (W/Kg)	0.682584
SAR 1g (W/Kg)	1.348570

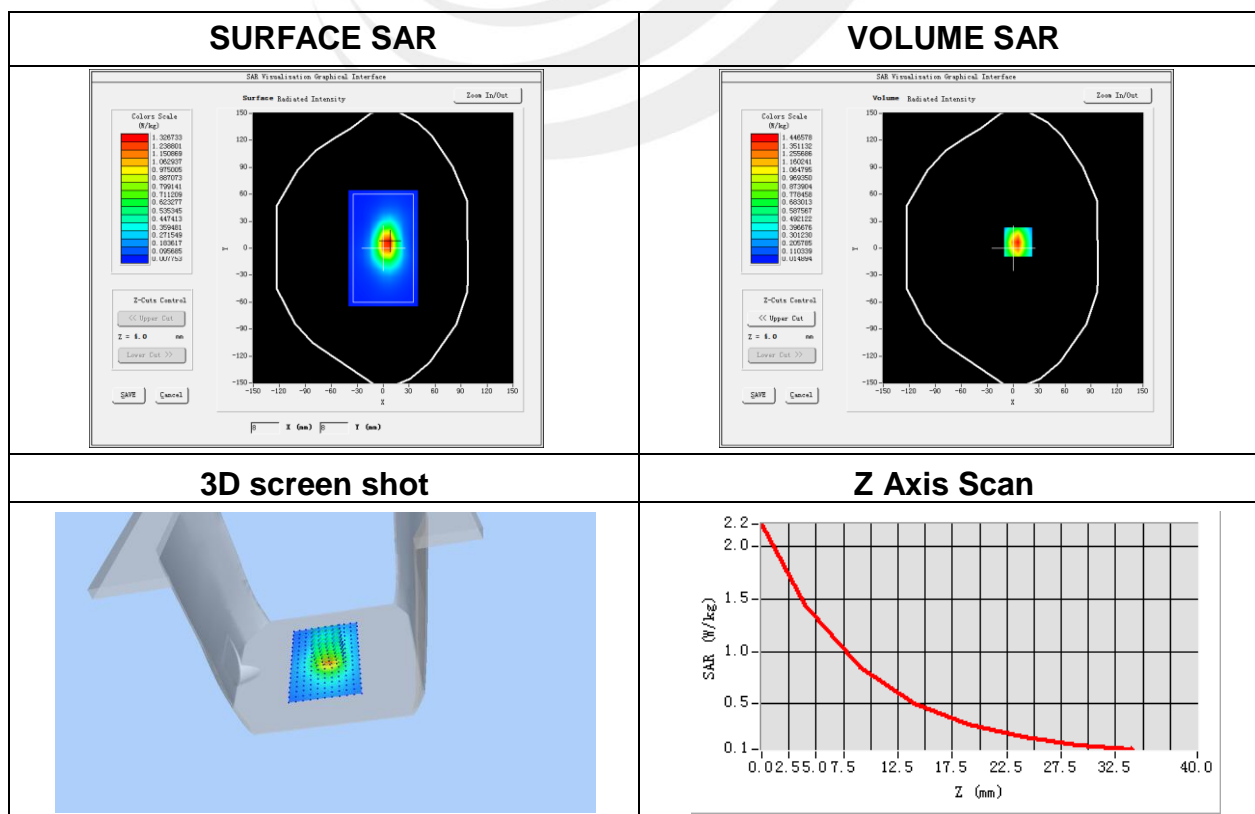


Plot 5: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA II
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1852.4
Relative permittivity (real part)	40.00
Conductivity (S/m)	1.40
Variation (%)	-1.89

Maximum location: X=-62.00, Y=-69.00

SAR Peak: 0.25 W/kg

SAR 10g (W/Kg)	0.085394
SAR 1g (W/Kg)	0.156308

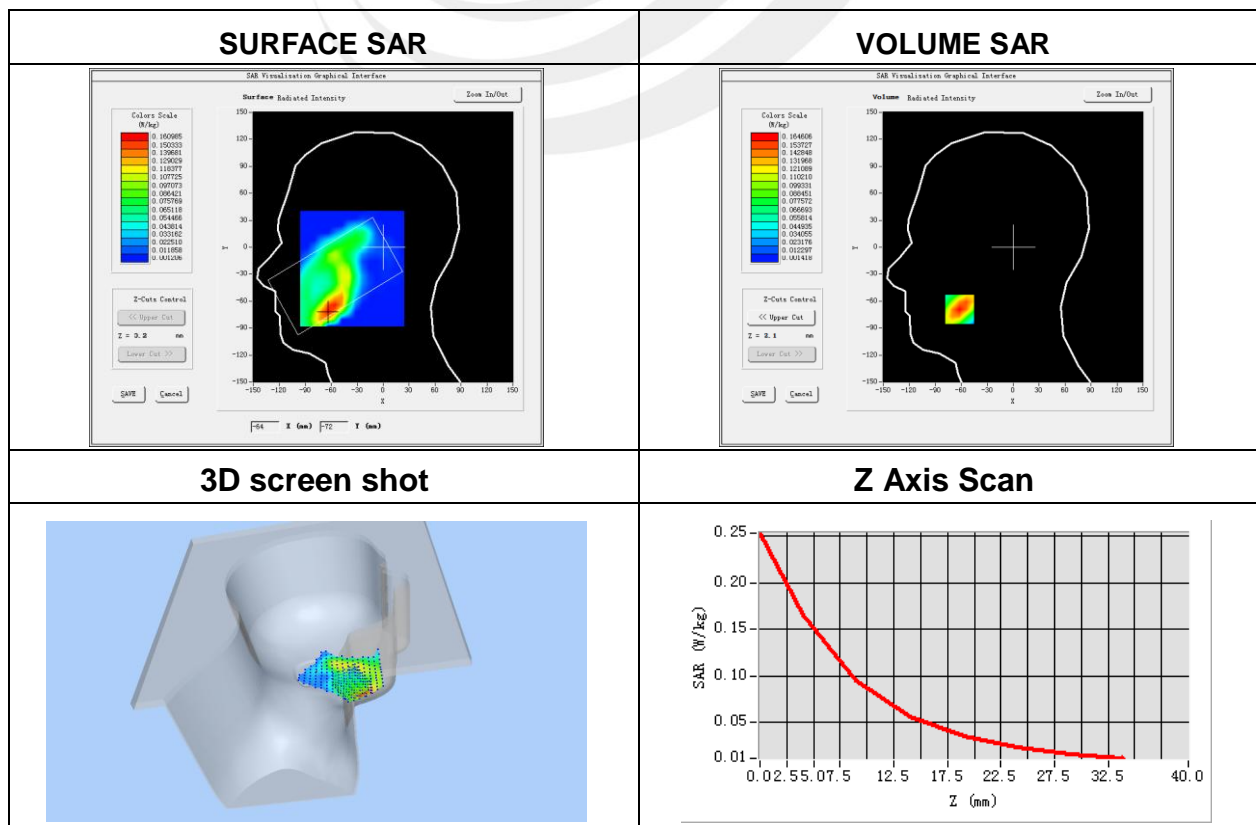


Plot 6: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body bottom side
Band	WCDMA II
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1852.4
Relative permittivity (real part)	39.71
Conductivity (S/m)	1.40
Variation (%)	-0.59

Maximum location: X=2.00, Y=1.00

SAR Peak: 1.70 W/kg

SAR 10g (W/Kg)	0.534101
SAR 1g (W/Kg)	1.049843

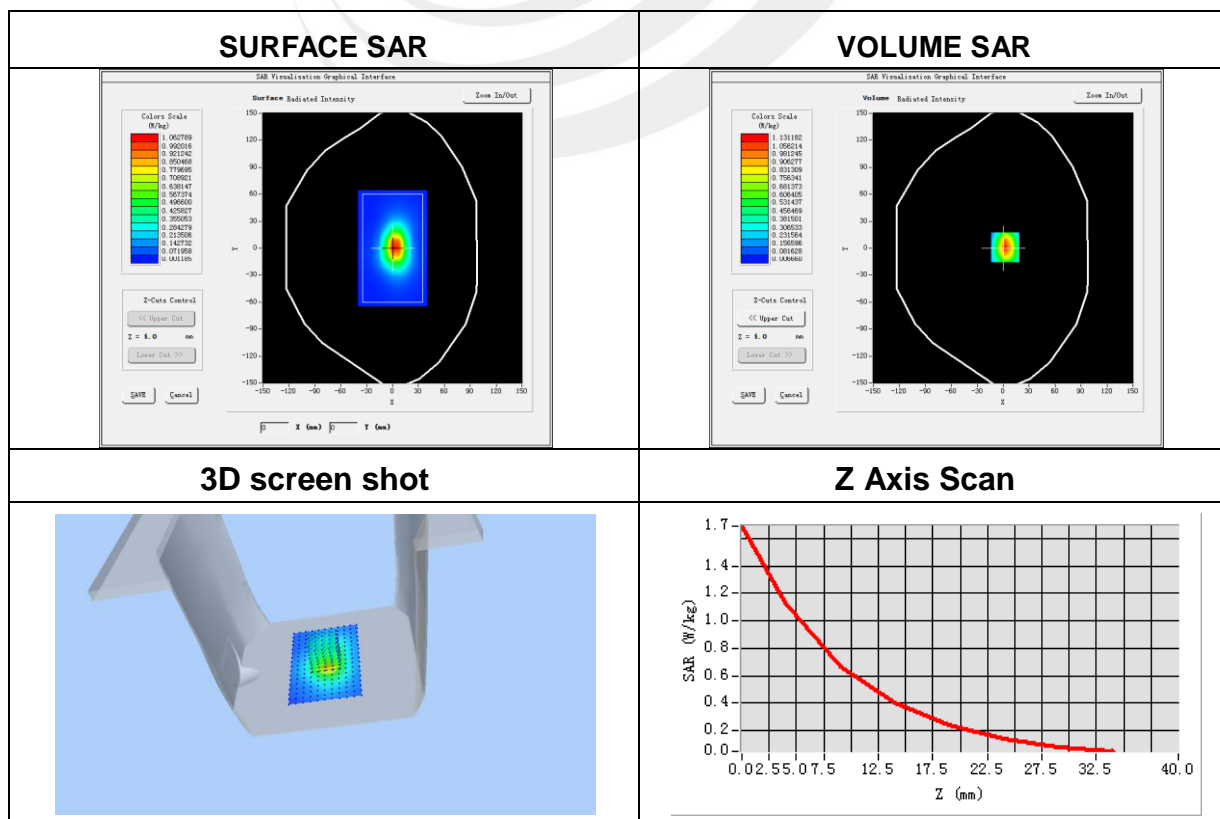


Plot 7: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	WCDMA V
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	846.6
Relative permittivity (real part)	42.27
Conductivity (S/m)	0.91
Variation (%)	4.78

Maximum location: X=-56.00, Y=-42.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.053018
SAR 1g (W/Kg)	0.076104

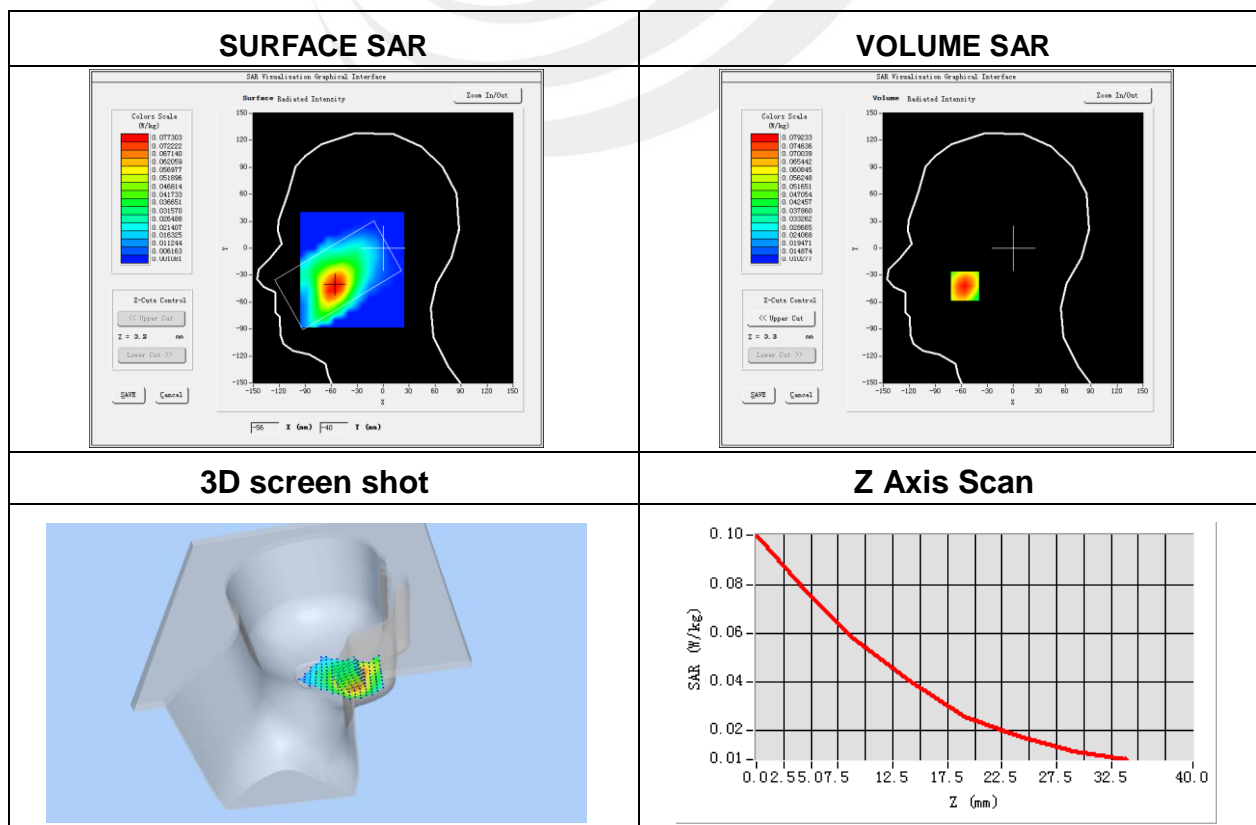


Plot 8: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	WCDMA V
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	846.6
Relative permittivity (real part)	55.5
Conductivity (S/m)	0.96
Variation (%)	-4.28

Maximum location: X=7.00, Y=22.00

SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.095069
SAR 1g (W/Kg)	0.171504

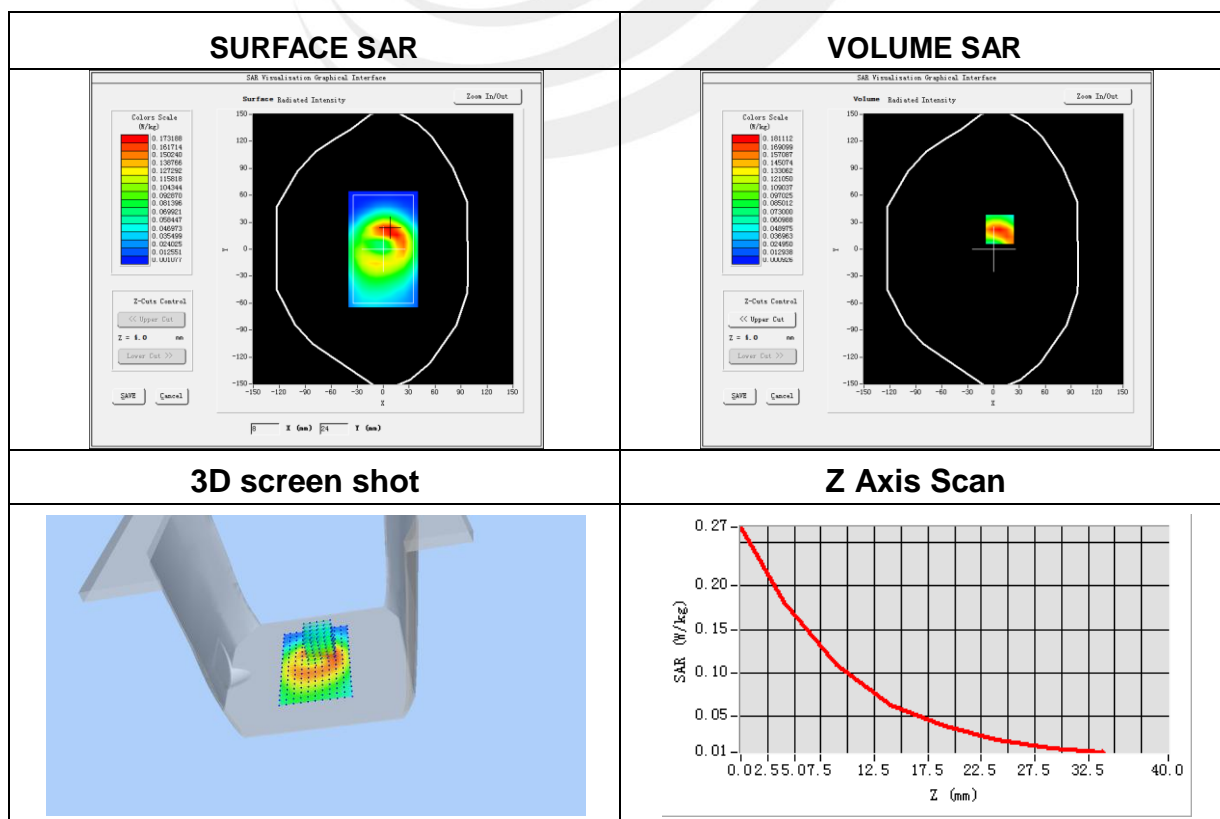


Plot 9: DUT:4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Probe	SN 45/15 EPGO281
ConvF	2.21
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Right head
Device Position	Cheek
Band	IEEE 802.11b ISM
Channels	High
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	39.23
Conductivity (S/m)	1.79
Variation (%)	-2.42

Maximum location: X=-15.00, Y=16.00
SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.012347
SAR 1g (W/Kg)	0.040578

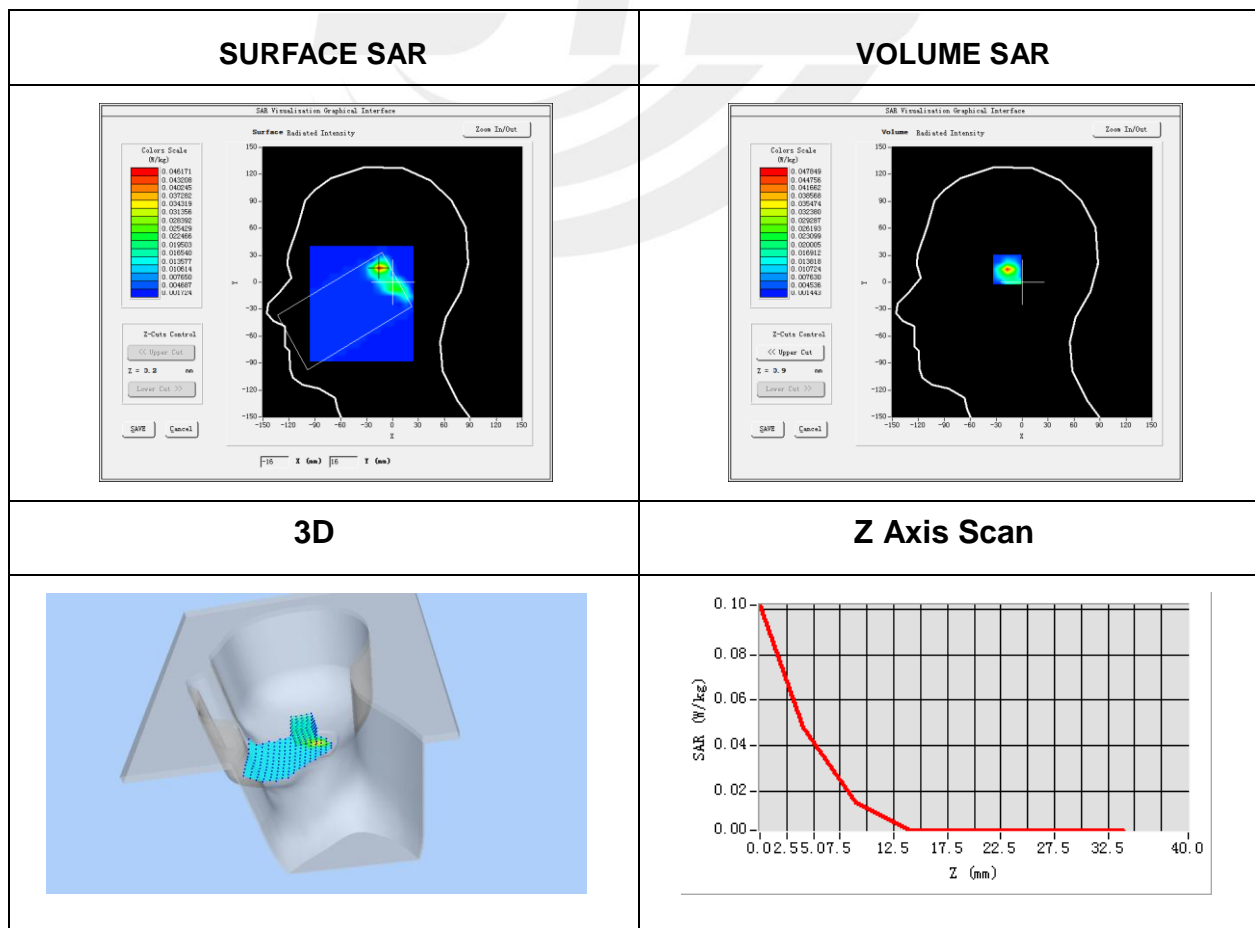


Plot 10: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Probe	SN 45/15 EPGO281
ConvF	2.28
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back side
Band	IEEE 802.11b ISM
Channels	High
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2462
Relative permittivity (real part)	52.40
Conductivity (S/m)	1.94
Variation (%)	-4.67

Maximum location: X=-13.00, Y=-6.00
SAR Peak: 0.06 W/kg

SAR 10g (W/Kg)	0.009499
SAR 1g (W/Kg)	0.024470

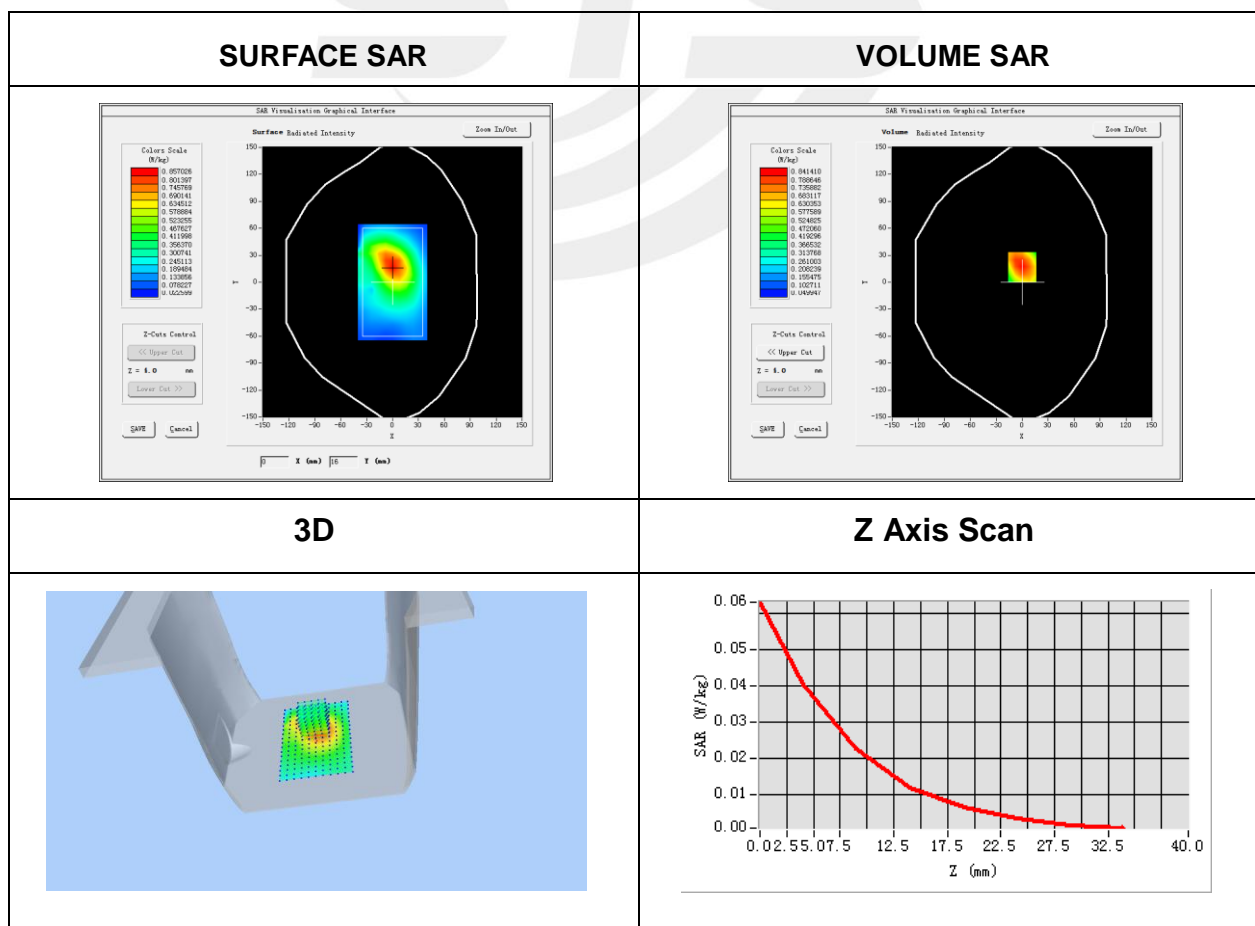


Plot 11: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	2.10
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 2 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1900.0
Relative permittivity (real part)	40.0
Conductivity (S/m)	0.91
Variation (%)	-0.63

Maximum location: X=-57.00, Y=-72.00

SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.024067
SAR 1g (W/Kg)	0.051609

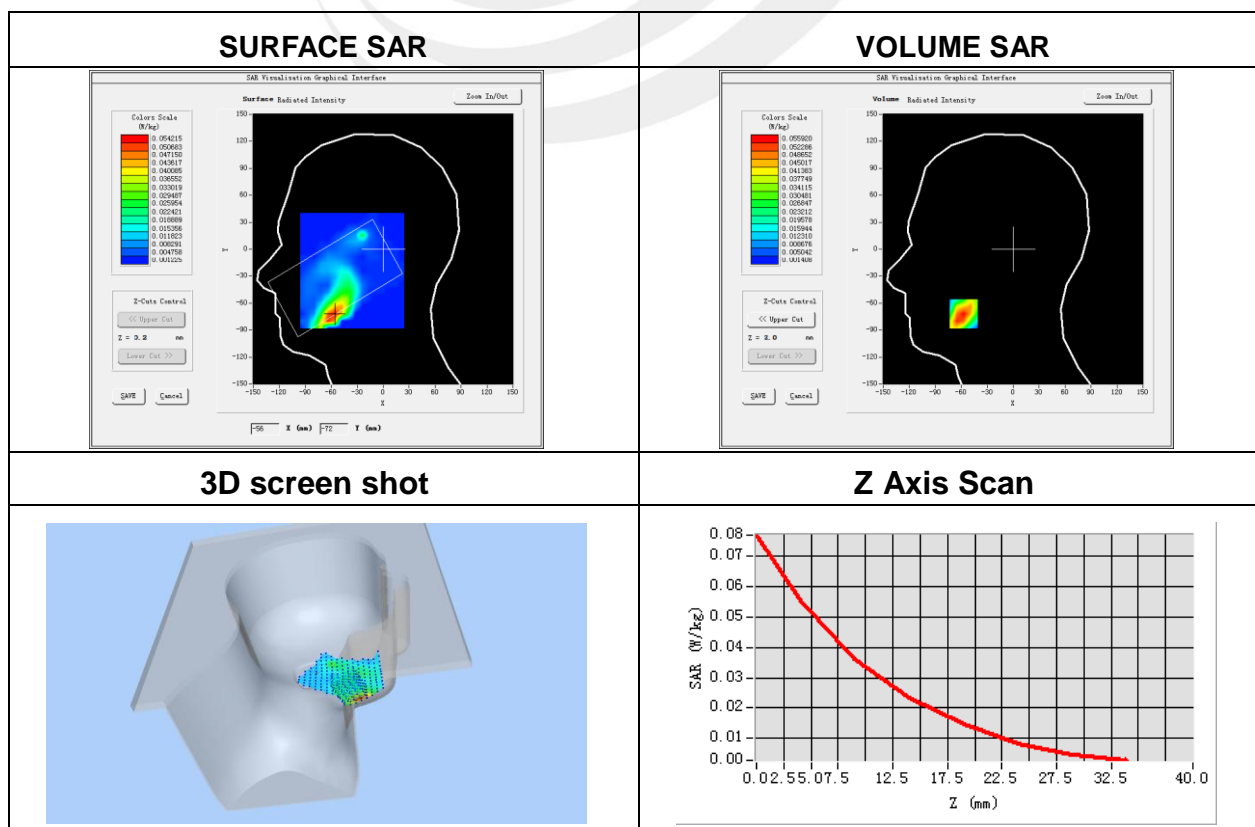


Plot 12: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	LTE Band 2(RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1900.0
Relative permittivity (real part)	53.30
Conductivity (S/m)	1.52
Variation (%)	4.70

Maximum location: X=8.00, Y=7.00

SAR Peak: 0.53 W/kg

SAR 10g (W/Kg)	0.156607
SAR 1g (W/Kg)	0.313350

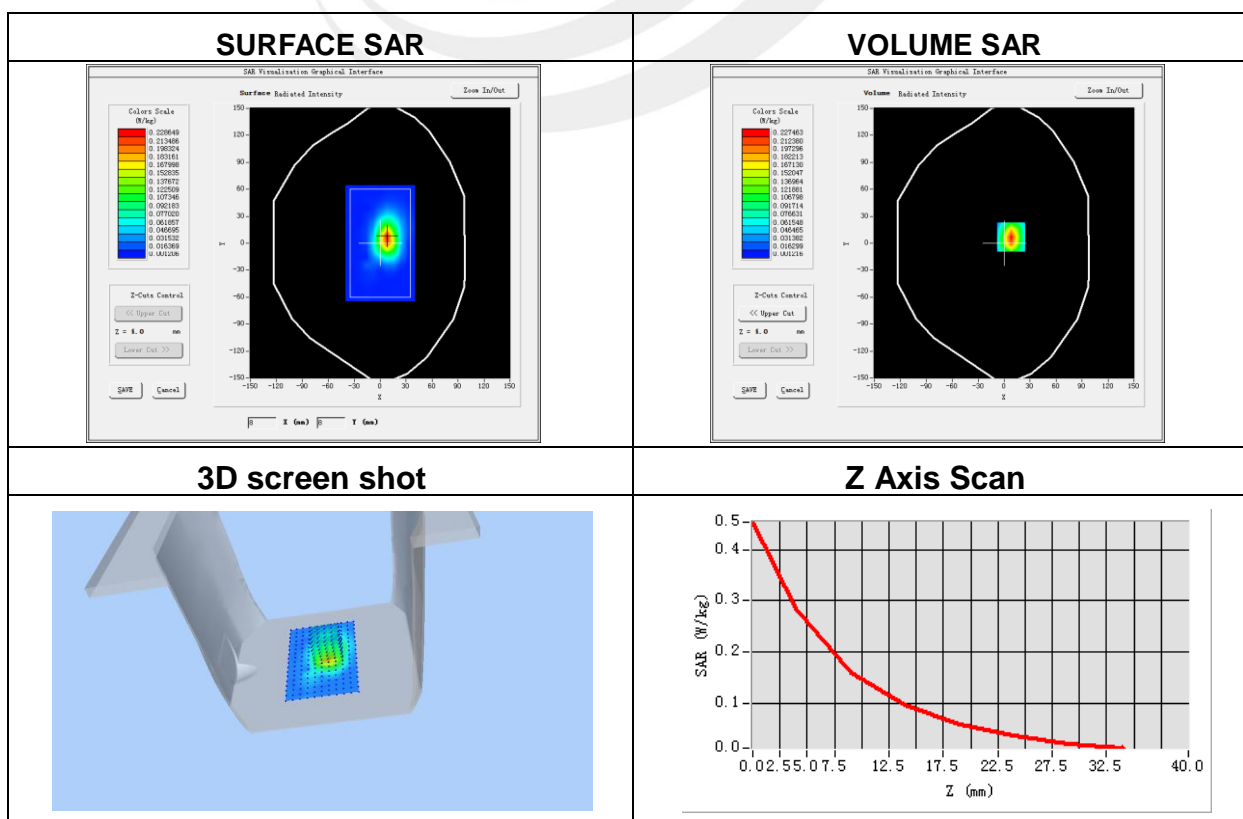


Plot 13: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.83
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 4 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1732.5
Relative permittivity (real part)	40.2
Conductivity (S/m)	1.31
Variation (%)	2.90

Maximum location: X=-55.00, Y=-65.00

SAR Peak: 0.17 W/kg

SAR 10g (W/Kg)	0.066258
SAR 1g (W/Kg)	0.111064

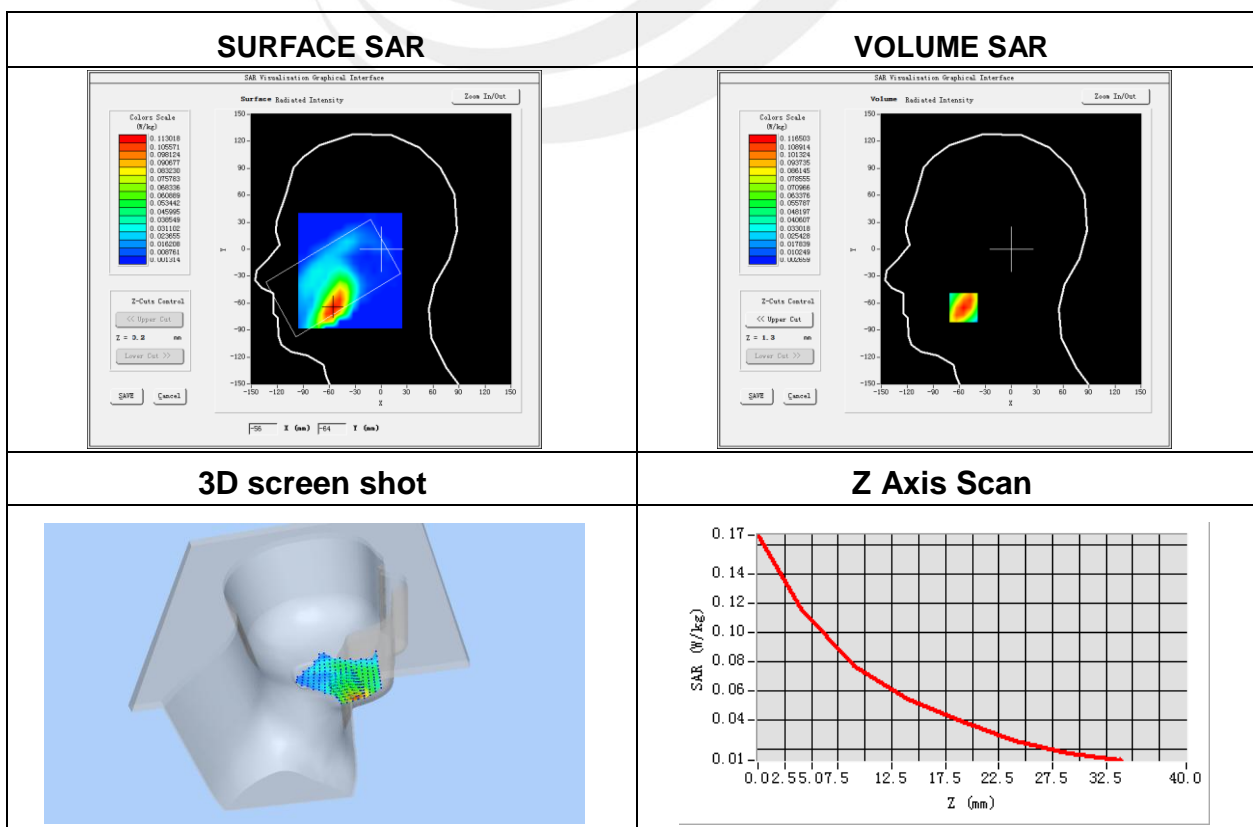


Plot 14: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.87
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body bottom
Band	LTE Band 4 (RB 1)
Channels	Middle
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1732.5
Relative permittivity (real part)	52.6
Conductivity (S/m)	1.38
Variation (%)	-0.30

Maximum location: X=3.00, Y=-1.00

SAR Peak: 1.96 W/kg

SAR 10g (W/Kg)	0.684759
SAR 1g (W/Kg)	1.256128

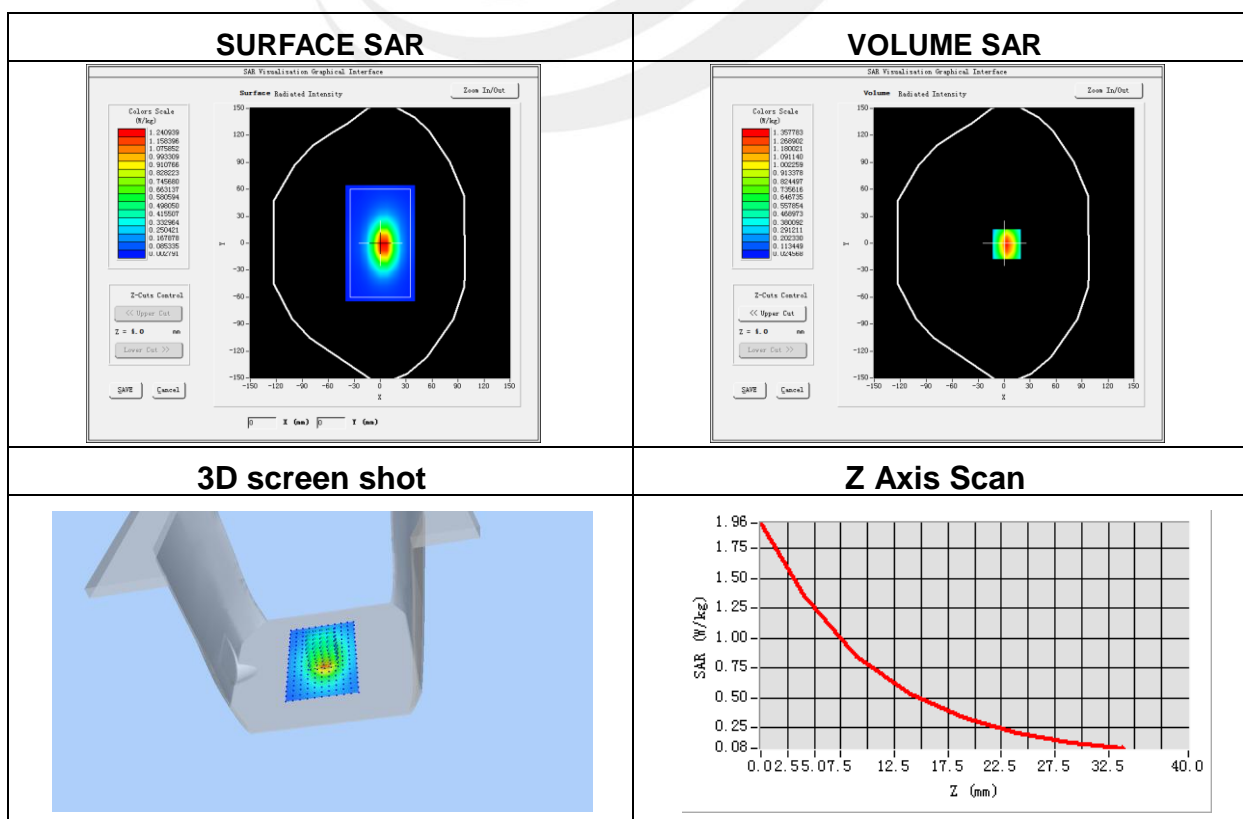


Plot 15: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.78
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 5 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844.0
Relative permittivity (real part)	42.22
Conductivity (S/m)	0.91
Variation (%)	-2.65

Maximum location: X=-56.00, Y=-43.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.074868
SAR 1g (W/Kg)	0.107376

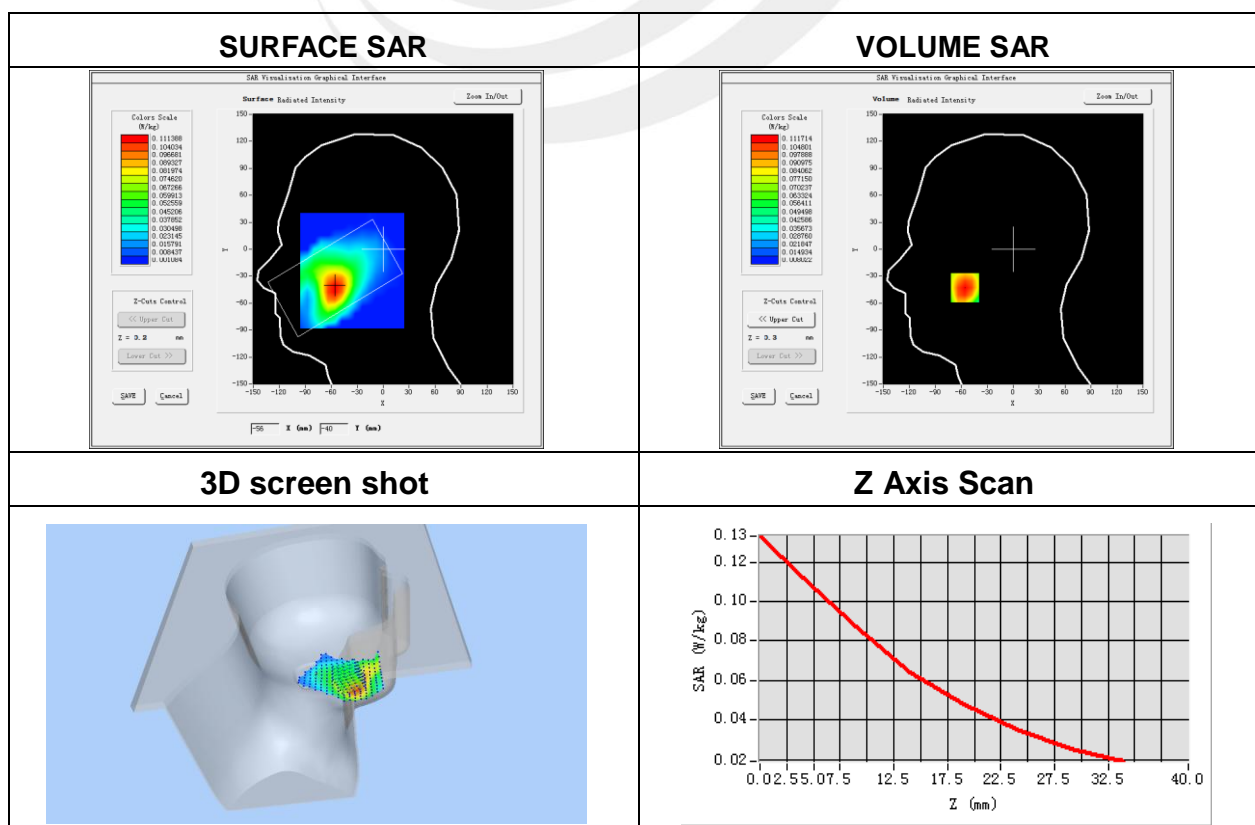


Plot 16: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.85
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	LTE Band 5 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844.0
Relative permittivity (real part)	52.3
Conductivity (S/m)	0.99
Variation (%)	-1.19

Maximum location: X=15.00, Y=24.00

SAR Peak: 0.25 W/kg

SAR 10g (W/Kg)	0.097370
SAR 1g (W/Kg)	0.167533

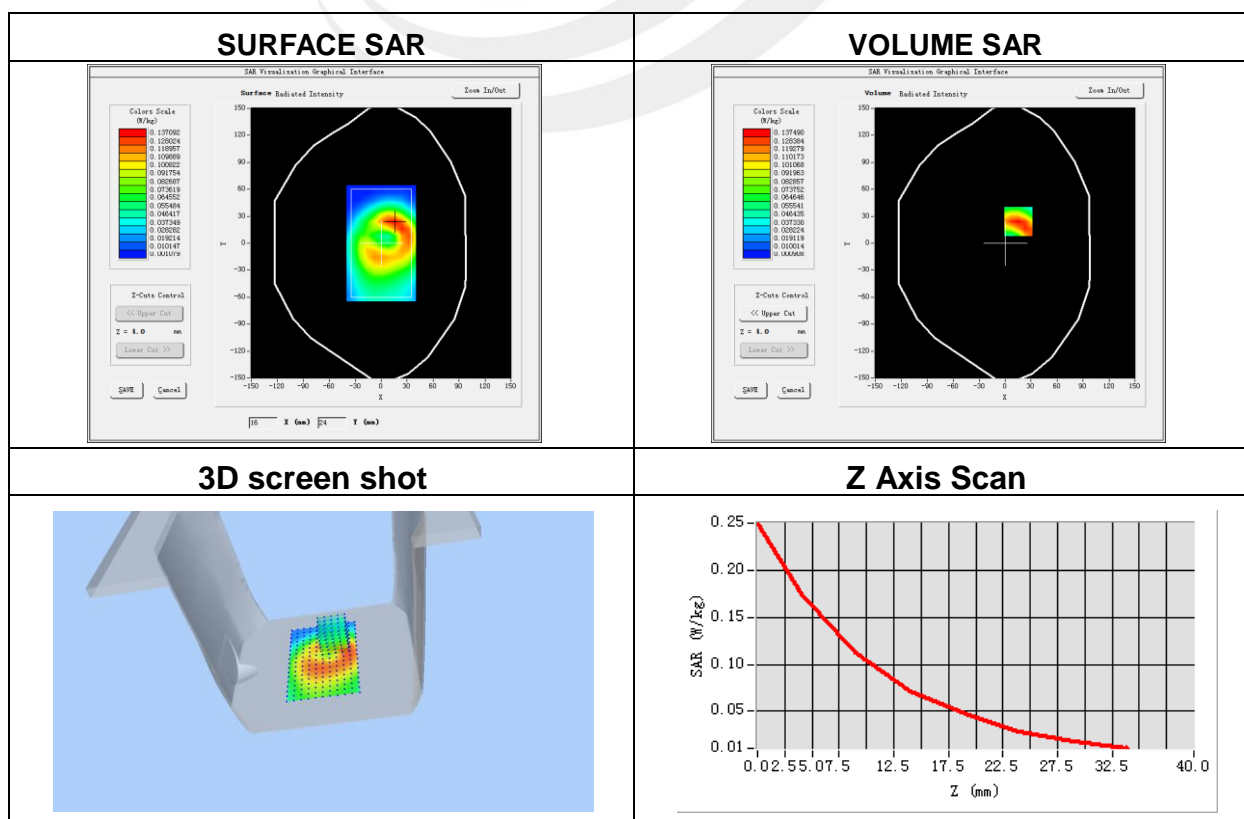


Plot 17: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	2.32
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 7 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2510
Relative permittivity (real part)	38.5
Conductivity (S/m)	1.92
Variation (%)	-2.19

Maximum location: X=-56.00, Y=-50.00

SAR Peak: 0.45 W/Kg

SAR 10g (W/Kg)	0.196794
SAR 1g (W/Kg)	0.295027

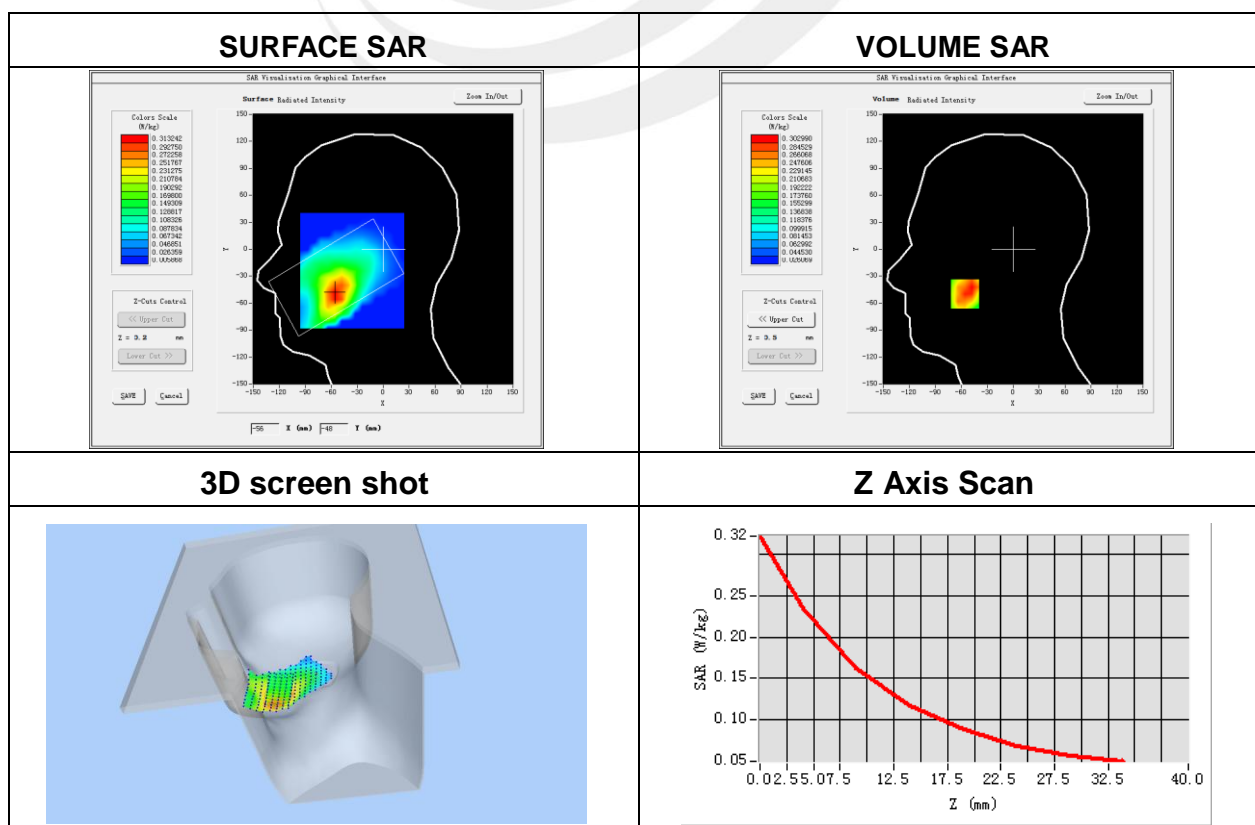


Plot 18: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	2.38
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	LTE Band 7 (RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2510
Relative permittivity (real part)	52.3
Conductivity (S/m)	2.12
Variation (%)	-1.49

Maximum location: X=-6.00, Y=-3.00

SAR Peak: 1.16 W/kg

SAR 10g (W/Kg)	0.337650
SAR 1g (W/Kg)	0.657220

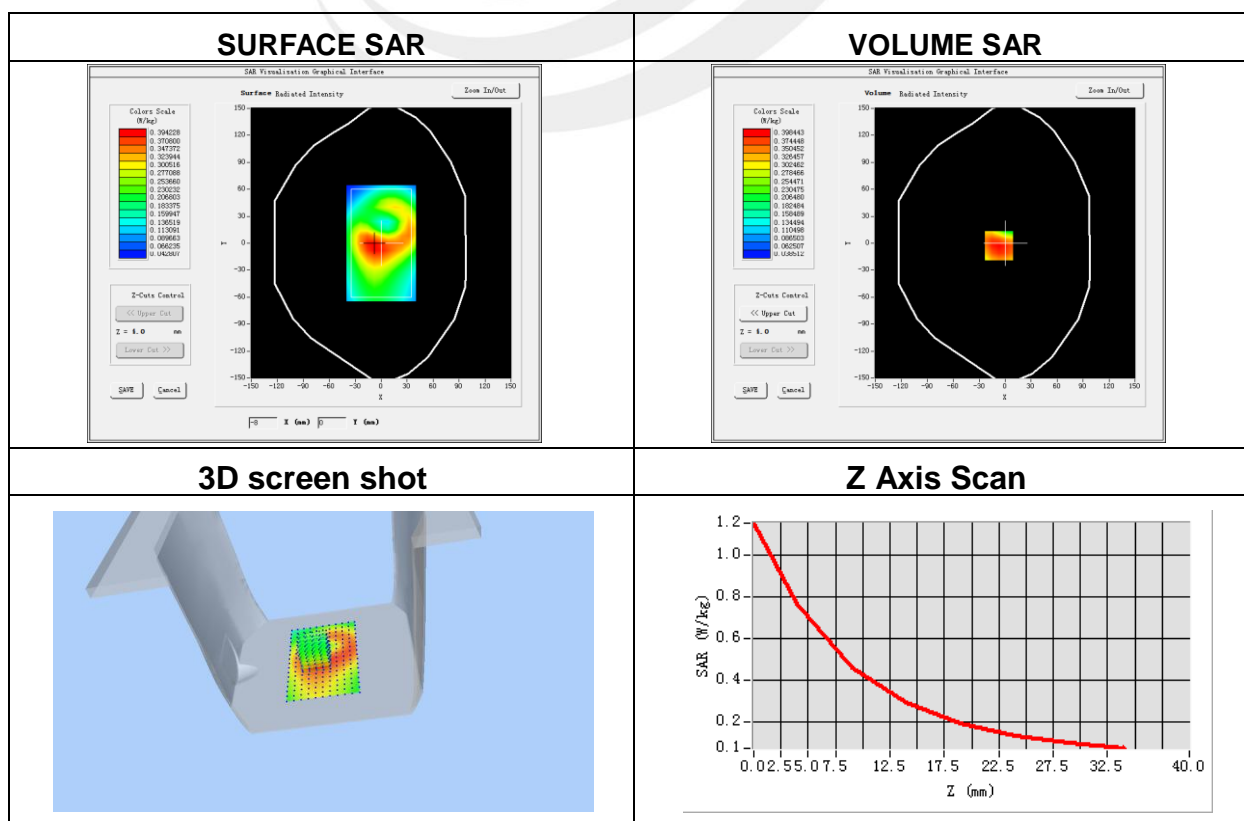


Plot 19: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.53
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Left head
Device Position	Cheek
Band	LTE Band 17 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	711.0
Relative permittivity (real part)	41.2
Conductivity (S/m)	0.91
Variation (%)	-1.70

Maximum location: X=-56.00, Y=-34.00

SAR Peak: 0.30 W/kg

SAR 10g (W/Kg)	0.196403
SAR 1g (W/Kg)	0.258613

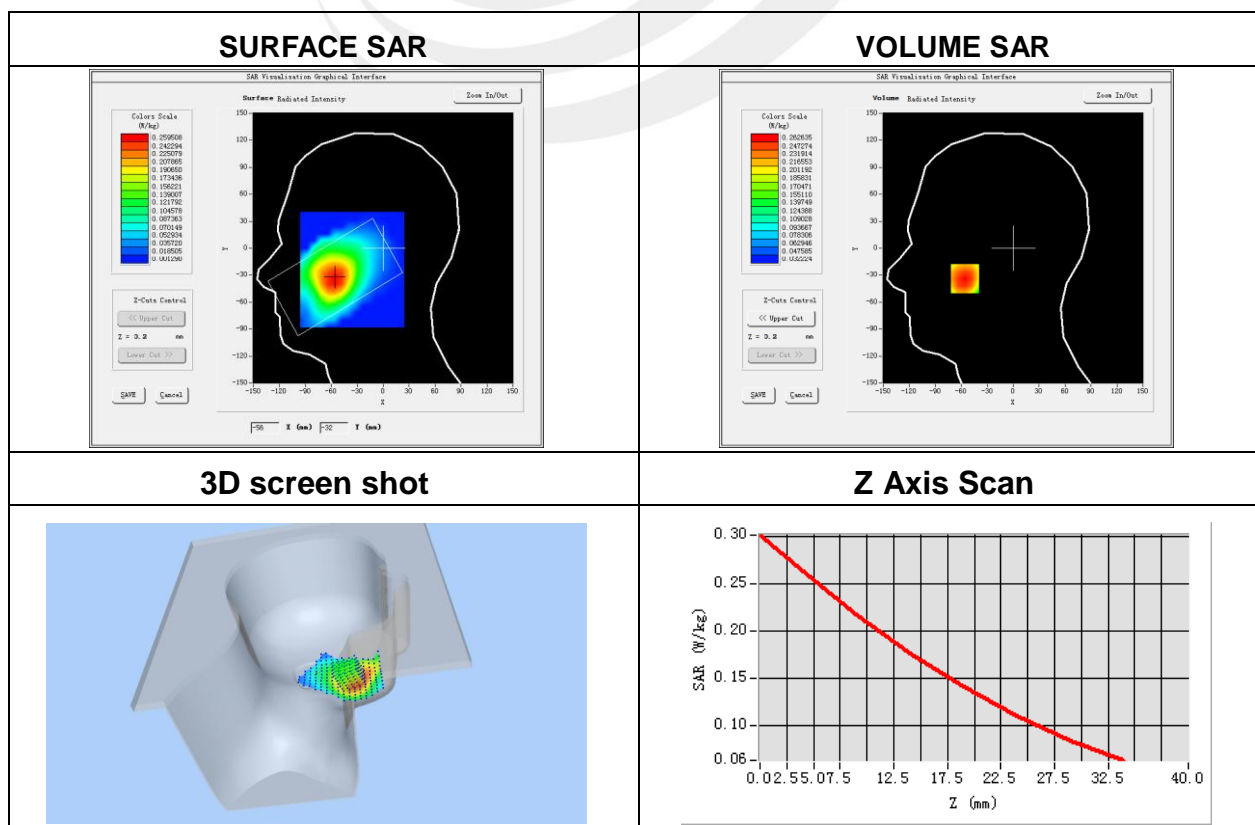


Plot 20: DUT: 4G Mobile phone ; EUT Model: Hero X

Test Data	2016-04-01
Ambient Temperature(°C)	22.70
Liquid Temperature(°C)	22.30
Probe	SN 45/15 EPGO281
ConvF	1.59
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	LTE Band 17 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	711.0
Relative permittivity (real part)	55.26
Conductivity (S/m)	0.91
Variation (%)	-0.01

Maximum location: X=1.00, Y=0.00

SAR Peak: 0.72 W/kg

SAR 10g (W/Kg)	0.269638
SAR 1g (W/Kg)	0.465021

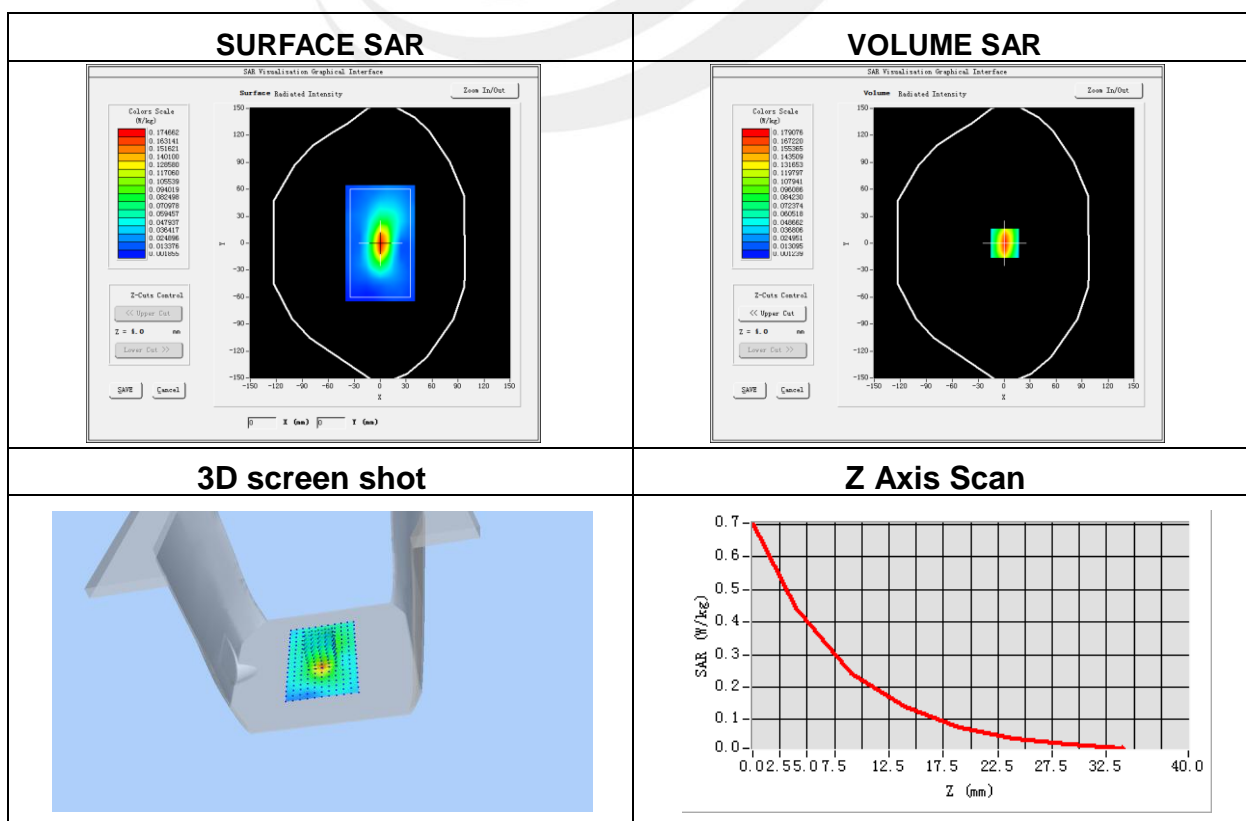



Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

