

FCC Test Report

Report No.: AGC10232230315FE02

FCC ID : 2AEAN-STREAMERX

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: Professional audio interface and video capture card

BRAND NAME : RØDE

MODEL NAME : STREAMER X

APPLICANT: Rode Microphones

DATE OF ISSUE : Apr. 17, 2023

STANDARD(S) : FCC Part 15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 61

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 17, 2023	Valid	Initial Release



Page 3 of 61

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	7
2.3. RELATED SUBMITTAL(S)/GRANT(S)	8
2.4. TEST METHODOLOGY	8
2.5. SPECIAL ACCESSORIES	
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	8
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	10
5. SYSTEM TEST CONFIGURATION	11
5.1. CONFIGURATION OF TESTED SYSTEM	11
5.2. EQUIPMENT USED IN TESTED SYSTEM	11
5.3. SUMMARY OF TEST RESULTS	11
6. TEST FACILITY	12
7. PEAK OUTPUT POWER	13
7.1. MEASUREMENT PROCEDURE	13
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	13
7.3. LIMITS AND MEASUREMENT RESULT	14
8. BANDWIDTH	18
8.1. MEASUREMENT PROCEDURE	18
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	18
8.3. LIMITS AND MEASUREMENT RESULTS	18
9. CONDUCTED SPURIOUS EMISSION	25
9.1. MEASUREMENT PROCEDURE	25
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	25
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	y the "Dedicated Testing/Inspection



Report No.: AGC10232230315FE02 Page 4 of 61

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).......37 10.4. LIMITS AND MEASUREMENT RESULT.......37 11. RADIATED EMISSION41 11.3. LIMITS AND MEASUREMENT RESULT.......43 12. LINE CONDUCTED EMISSION TEST...... 57 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST.......57 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST57 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST.......58 APPENDIX A: PHOTOGRAPHS OF TEST SETUP61 APPENDIX B: PHOTOGRAPHS OF EUT61



Page 5 of 61

1. VERIFICATION OF COMPLIANCE

Applicant	Rode Microphones			
Address	107 Carnarvon Street, Silverwater 2128, Australia			
Manufacturer	Rode Microphones			
Address	107 Carnarvon Street, Silverwater 2128, Australia			
Factory	Rode Microphones			
Address	107 Carnarvon Street, Silverwater 2128, Australia			
Product Designation	Professional audio interface and video capture card			
Brand Name	RØDE			
Test Model	STREAMER X			
Date of receipt of test item	Mar. 22, 2023			
Date of test	Mar. 22, 2023 to Apr. 13, 2023			
Deviation	No any deviation from the test method			
Condition of Test Sample	Normal			
Test Result	Pass			
Report Template	AGCRT-US-BLE/RF			

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By

Jack Gui
(Project Engineer)

Reviewed By

Calvin Liu
(Reviewer)

Apr. 17, 2023



Page 6 of 61

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Professional audio interface and video capture card". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz			
RF Output Power	Antenna 1: -4.898dBm (Max) Antenna 2: 3.623dBm (Max)			
Modulation	GFSK			
Number of channels	40 Channels			
Antenna Designation	Antenna 1: PCB Antenna (Comply with requirements of the FCC part 15.203) Antenna 2: FPC Antenna (Comply with requirements of the FCC part 15.203)			
Antenna Gain	Antenna 1: -2.85dBi Antenna 2: -1.46dBi			
Hardware Version	V1.0			
Software Version	V1.0			
Power Supply	DC 5V			



Page 7 of 61

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
	0	2402	20	2442
	1	2404	21	2444
	2	2406	22	2446
	3	2408	23	2448
	4	2410	24	2450
	5	2412	25	2452
	6	2414	26	2454
	7	2416	27	2456
	8	2418	28	2458
2400 2402 51411-	9	2420	29	2460
2400~2483.5MHz	10	2422	30	2462
	11	2424	31	2464
	12		32	2466
	13		33	2468
	14	2430	34	2470
	15	2432	35	2472
	16	2434	36	2474
	17	2436	37	2476
	18	2438	38	2478
	19	2440	39	2480



Page 8 of 61

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2AEAN-STREAMERX** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.




Page 9 of 61

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2.7 \%$
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %






4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
- 4. The antenna 1 and antenna 2 cannot transmit simultaneously.

Software Setting

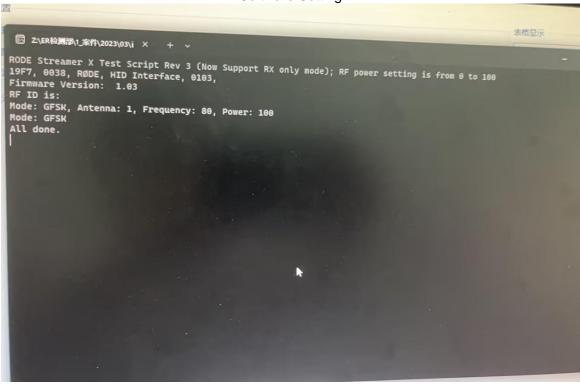




Page 11 of 61


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:



Conducted Emission Configure:



5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Professional audio interface and video capture card	STREAMER X	2AEAN-STREAMERX	EUT
2	Adapter	YDS-PD030	DC 5V	AE
3	Microphone	WIRELESS GO II	N/A	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant



Page 12 of 61

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

120. 240						
Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due	
TEST RECEIVER	R&S	ESPI	101206	Feb. 18, 2023	Feb. 17, 2024	
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023	
Test software	R&S	ES-K1	Ver.V1.71	N/A	N/A	

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Agilent	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
Signal Analyzer	Aglient	N9020A	MY52090123	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Double-Ridged Waveguide Horn	ETS	3117	00154520	Sep. 06, 2021	Sep. 05, 2023
Preamplifier Assembly	ETS	3117PA	00225134	Sep. 01, 2022	Sep. 02, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-49 4	Jan. 05, 2023	Jan. 04, 2025
Test software	FARA	EZ-EMC	Ver RA-03A	N/A	N/A



Page 13 of 61

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE


For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

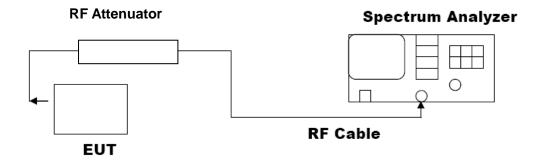







7.3. LIMITS AND MEASUREMENT RESULT

1.0					
Test Data of Conducted Output Power-ANT 1					
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	-4.898	≤30	Pass	
GFSK 1M	2440	-5.030	≤30	Pass	
	2480	-5.623	≤30	Pass	

Test Data of Conducted Output Power-ANT 2					
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	3.623	≤30	Pass	
GFSK 1M	2440	3.479	≤30	Pass	
	2480	2.367	≤30	Pass	

Test Graphs of Conducted Output Power

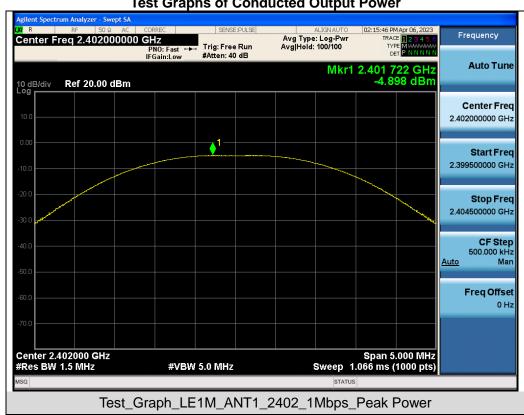
























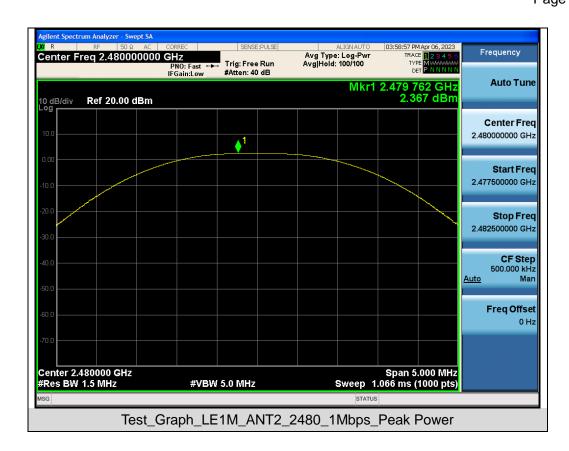



Page 18 of 61

8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥ 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.


8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.


8.3. LIMITS AND MEASUREMENT RESULTS


Test Data of Occupied Bandwidth and DTS Bandwidth-ANT 1					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	2402	1.037	0.696	≥0.5	Pass
GFSK 1M	2440	1.056	0.711	≥0.5	Pass
	2480	1.051	0.703	≥0.5	Pass

Test Data of Occupied Bandwidth and DTS Bandwidth-ANT 2					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	2402	1.047	0.698	≥0.5	Pass
GFSK 1M	2440	1.049	0.699	≥0.5	Pass
	2480	1.052	0.712	≥0.5	Pass






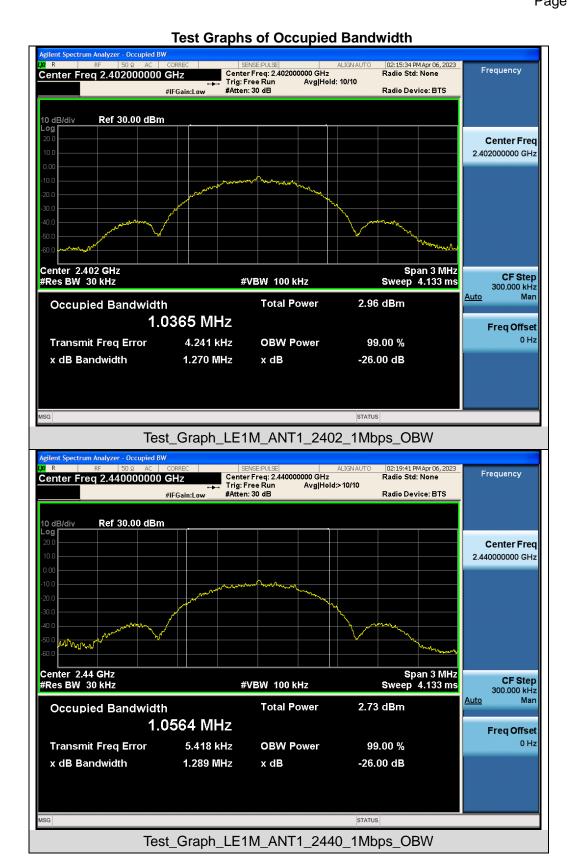






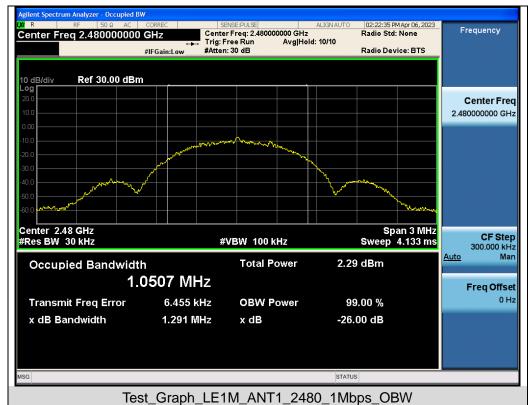






Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





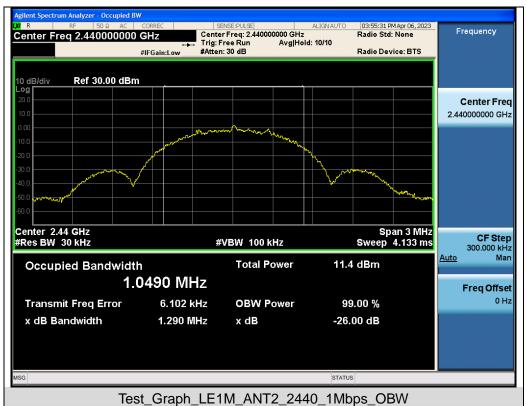

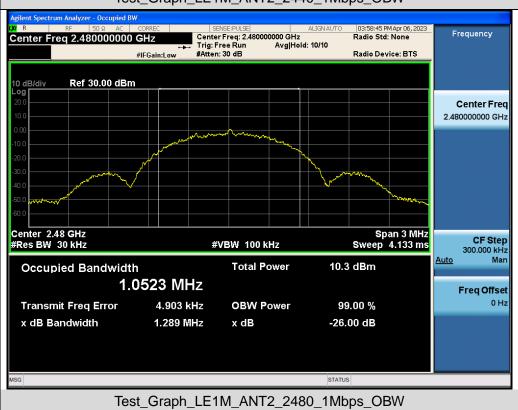






Test Graphs of DTS Bandwidth 02:15:40 PM Apr 06, 2023 Radio Std: None Frequency Center Freq: 2.402000000 GHz Center Freg 2.402000000 GHz Avg|Hold: 10/10 Trig: Free Run #Atten: 30 dB #IFGain:Low Radio Device: BTS 2.402009 GHz -5.0961 dBm Mkr1 Ref 30.00 dBm 2.402000000 GHz Center 2.402 GHz #Res BW 100 kHz Span 3 MHz CF Step 300.000 kHz #VBW 300 kHz Sweep 1 ms <u>Auto</u> Man 1.79 dBm **Total Power** Occupied Bandwidth 1.0612 MHz Freq Offset 0 Hz **Transmit Freq Error** 7.626 kHz **OBW Power** 99.00 % x dB Bandwidth 695.8 kHz x dB -6.00 dB Test_Graph_LE1M_ANT1_2402_1Mbps_DTSBW



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/














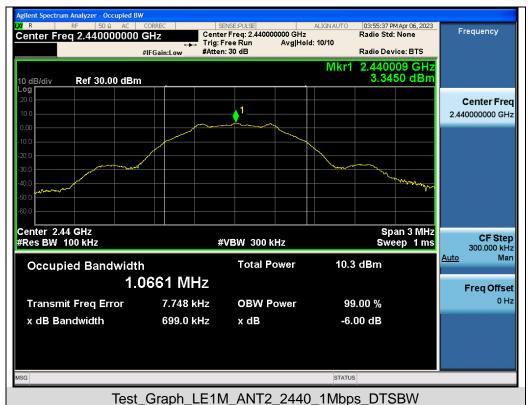





Page 25 of 61

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITO AND MEAGUDEMENT DEGULT					
LIMITS AND MEASUREMENT RESULT					
Annilia abda di insita	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS			






Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_LE1M_ANT1_2402_1Mbps_Lower Band Emissions
















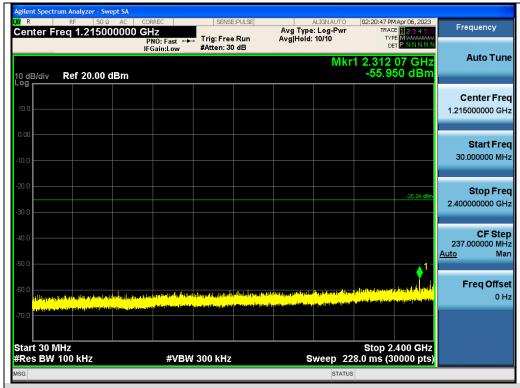

Test_Graph_LE1M_ANT1_2440_1Mbps_Lower Band Emissions

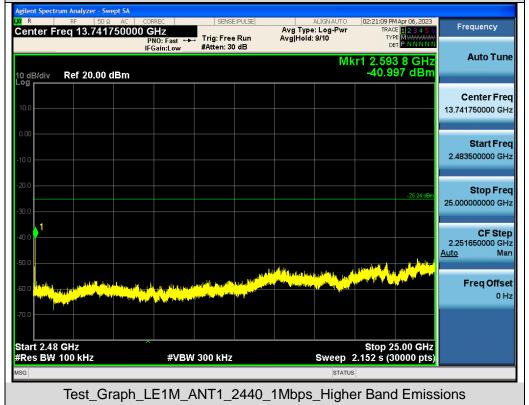











Test_Graph_LE1M_ANT1_2480_1Mbps_Lower Band Emissions









Test_Graph_LE1M_ANT1_2480_1Mbps_Higher Band Emissions ent Spectrum Analyzer - Swept SA Frequency Avg Type: Log-Pwr Avg|Hold: 10/10 Center Freq 2.402000000 GHz Trig: Free Run #Atten: 30 dB IFGain:Low **Auto Tune** 994 2 GHz 3.489 dBm Mkr1 2.401 10 dB/div Ref 20.00 dBm Center Freq 2.402000000 GHz Start Freq 2.400500000 GHz Stop Freq 2.403500000 GHz CF Step 300.000 kHz "WTWWW <u>Auto</u> Man Freq Offset 0 Hz Span 3.000 MHz Sweep 2.000 ms (30000 pts) Center 2.402000 GHz #Res BW 100 kHz #VBW 300 kHz Test_Graph_LE1M_ANT2_2402_1Mbps_Reference Level






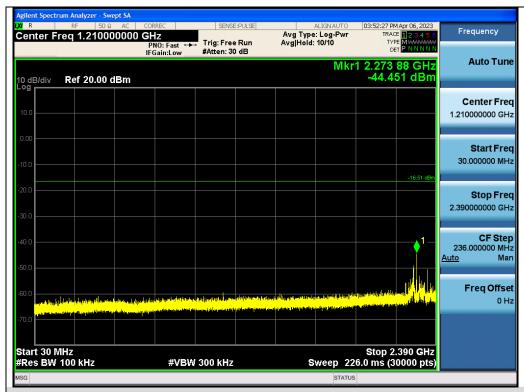













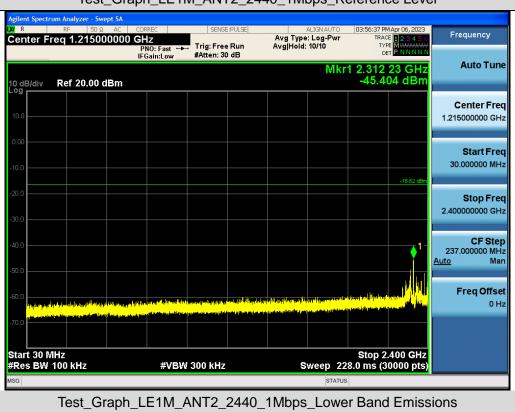









Test_Graph_LE1M_ANT2_2440_1Mbps_Higher Band Emissions









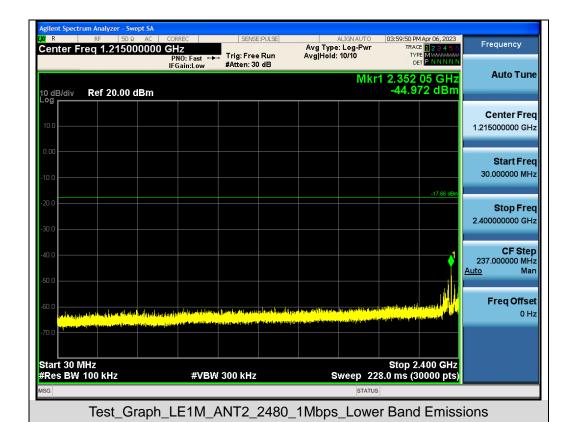


ent Spectrum Analyzer - Swept SA Frequency Avg Type: Log-Pwr Avg|Hold: 9/10 Center Freq 13.750000000 GHz Trig: Free Run #Atten: 30 dB IFGain:Low Mkr1 2.608 0 GHz -46.033 dBm 10 dB/div Ref 20.00 dBm

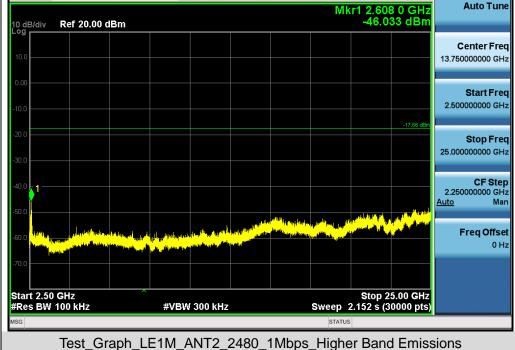






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

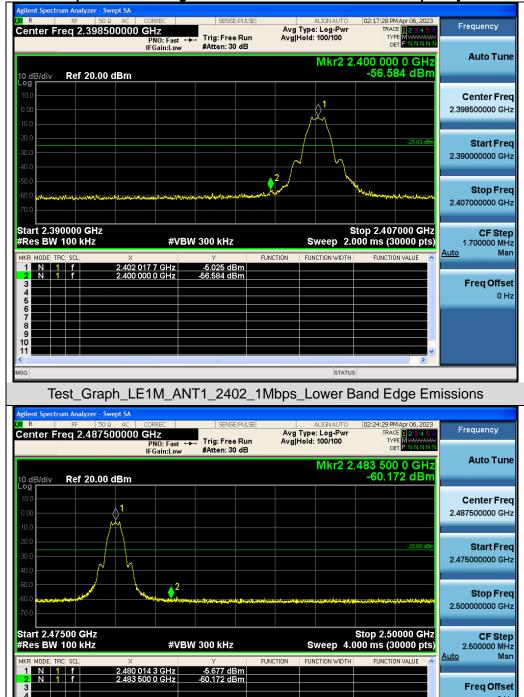



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_LE1M_ANT1_2480_1Mbps_Higher Band Edge Emissions





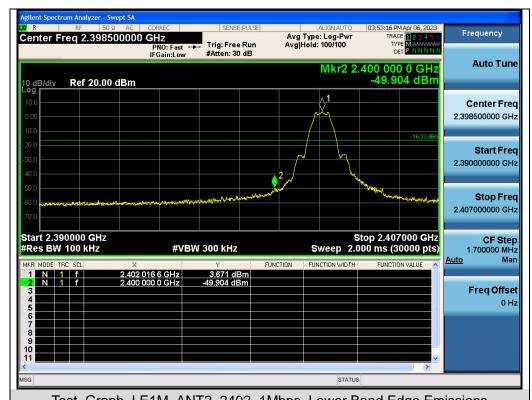

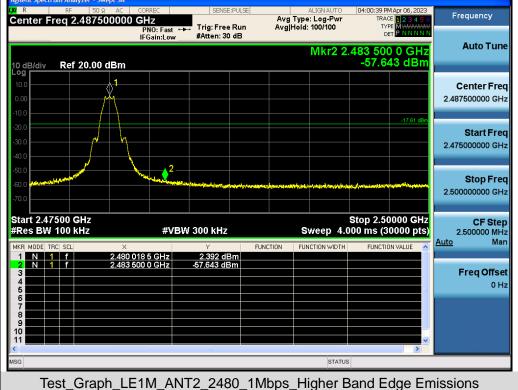



Page 37 of 61

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.


10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power Spectral Density-ANT 1						
Test Mode Test Channel Power density Limit (MHz) (dBm/3kHz) Pass or Fail						
	2402	-16.467	≤8	Pass		
GFSK 1M	2440	-16.358	≤8	Pass		
	2480	-17.437	≪8	Pass		

Test Data of Conducted Output Power Spectral Density-ANT 2					
Test Mode	Test Channel (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail	
	2402	-8.577	≤8	Pass	
GFSK 1M	2440	-7.967	≤8	Pass	
	2480	-8.524	≤8	Pass	






Test Graphs of Conducted Output Power Spectral Density Frequency Center Freq 2.402000000 GHz Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Free Run PNO: Wide ↔ IFGain:Low **Auto Tune** Mkr1 2.401 992 2 GHz -16.467 dBm Ref 20.00 dBm 2.402000000 GHz Start Freq 2.401478000 GHz Stop Freq 2.402522000 GHz CF Step 104.400 kHz <u>Auto</u> Man Freq Offset 0 Hz Center 2.4020000 GHz #Res BW 3.0 kHz Span 1.044 MHz Sweep 110.1 ms (1000 pts) #VBW 10 kHz Test_Graph_LE1M_ANT1_2402_1Mbps_PSD Frequency Center Freq 2.440000000 GHz Avg Type: Log-Pwr Avg|Hold: 100/100 Trig: Free Run IFGain:Low **Auto Tune** Mkr1 2.440 010 1 GHz -16.358 dBm Ref 20.00 dBm Center Freq 2.440000000 GHz Start Freq 2.439466750 GHz Stop Freq 2.440533250 GHz CF Step 106.650 kHz <u>Auto</u> Man Freq Offset Center 2.4400000 GHz #Res BW 3.0 kHz Span 1.067 MHz Sweep 112.5 ms (1000 pts) **#VBW 10 kHz**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


Test_Graph_LE1M_ANT1_2440_1Mbps_PSD




















Page 41 of 61

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE


- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.






11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

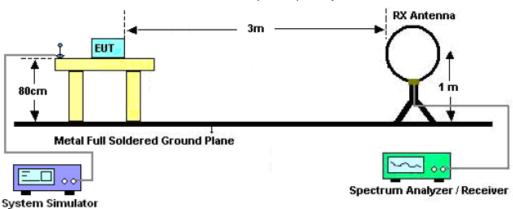

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

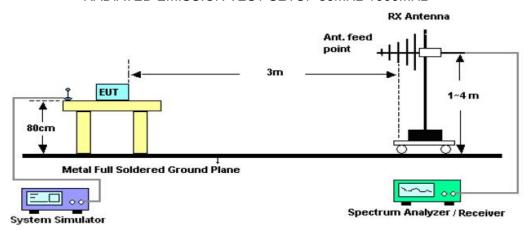

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

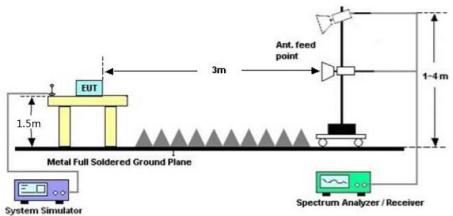



Page 43 of 61

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Page 44 of 61

Radiated emission from 30MHz to 1000MHz

EUT	Professional audio interface and video capture card	Model Name	STREAMER X
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

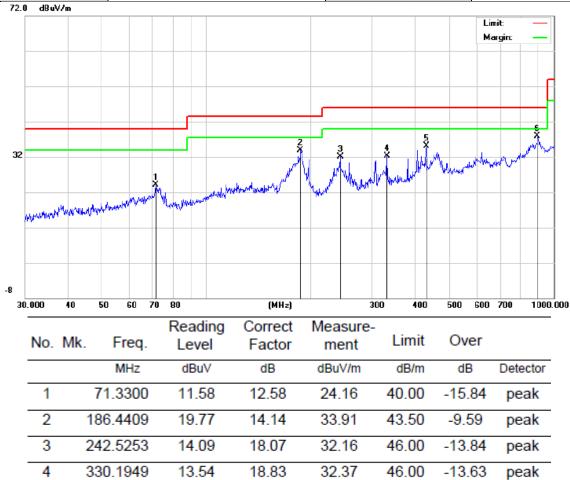

24.47

31.42

35.18

37.86

46.00

46.00

-10.82

-8.14

peak

peak

RESULT: PASS

5

429.5228

896.9965

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.


10.71

6.44



Page 45 of 61

EUT	Professional audio interface and video capture card	Model Name	STREAMER X
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

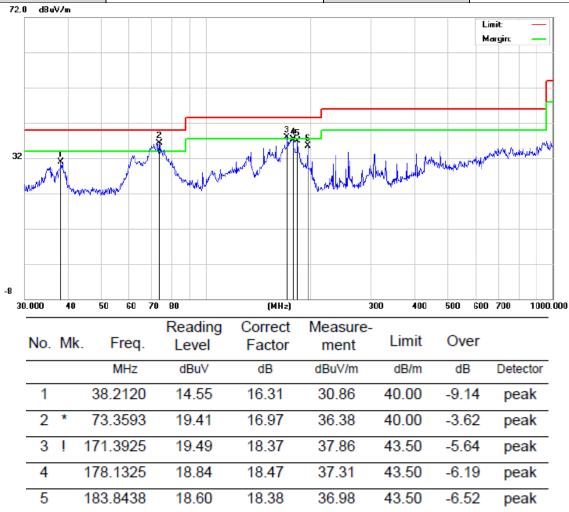

RESULT: PASS Note:

6

1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

196,5098

17.45

2. All test modes had been tested. The mode 1 of antenna 2 is the worst case and recorded in the report.

18.00

35.45

43.50

-8.05

peak



Page 46 of 61

Radiated emission above 1GHz

EUT	Professional audio interface and video capture card	Model Name	STREAMER X
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tree
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	45.26	0.08	45.34	74	-28.66	peak
4804.000	36.57	0.08	36.65	54	-17.35	AVG
7206.000	41.02	2.21	43.23	74	-30.77	peak
7206.000	32.49	2.21	34.7	54	-19.3	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	Professional audio interface and video capture card	Model Name	STREAMER X
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.59	0.08	46.67	74	-27.33	peak
4804.000	36.57	0.08	36.65	54	-17.35	AVG
7206.000	41.05	2.21	43.26	74	-30.74	peak
7206.000	31.58	2.21	33.79	54	-20.21	AVG
Remark:	Remark:					

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 47 of 61

EUT	Professional audio interface and video capture card	Model Name	STREAMER X
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	46.28	0.14	46.42	74	-27.58	peak
4880.000	36.28	0.14	36.42	54	-17.58	AVG
7320.000	40.26	2.36	42.62	74	-31.38	peak
7320.000	31.59	2.36	33.95	54	-20.05	AVG
Remark:						
Factor = Anten	na Factor + Cabl	e Loss – Pre-a	amplifier.			

EUT	Professional audio interface and video capture card	Model Name	STREAMER X
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880.000	46.29	0.14	46.43	74	-27.57	peak
4880.000	37.54	0.14	37.68	54	-16.32	AVG
7320.000	41.05	2.36	43.41	74	-30.59	peak
7320.000	32.49	2.36	34.85	54	-19.15	AVG
Remark:	1 1				1	

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 48 of 61

EUT	Professional audio interface and video capture card	Model Name	STREAMER X
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.29	0.22	46.51	74	-27.49	peak
4960.000	36.72	0.22	36.94	54	-17.06	AVG
7440.000	41.02	2.64	43.66	74	-30.34	peak
7440.000	31.58	2.64	34.22	54	-19.78	AVG
emark:						_

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	Professional audio interface and video capture card	Model Name	STREAMER X
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	45.19	0.22	45.41	74	-28.59	peak
4960.000	36.57	0.22	36.79	54	-17.21	AVG
7440.000	40.15	2.64	42.79	74	-31.21	peak
7440.000	32.54	2.64	35.18	54	-18.82	AVG
Remark:						

itemaik.

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

RESULT: PASS


Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The antenna 2 is the worst case and recorded in the report.






Test result for band edge emission at restricted bands


Antenna 1

EUT	Professional audio interface and video capture card	Model Name	STREAMER X
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal


Test Graph for Peak Measurement

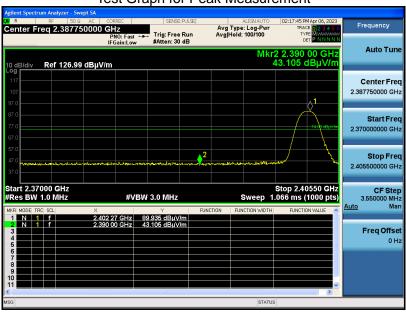



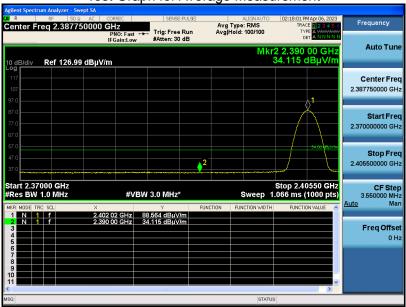


RESULT: PASS





Professional audio interface and STREAMER X **EUT Model Name** video capture card 25° C **Temperature Relative Humidity** 55.4% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Vertical Mode 1 **Antenna**


Test Graph for Peak Measurement

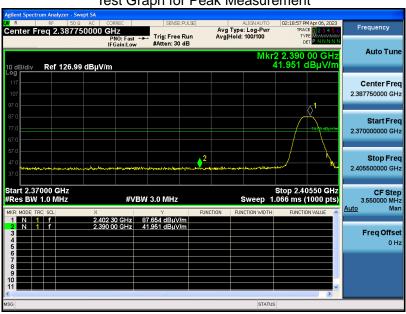

Test Graph for Average Measurement




RESULT: PASS





Professional audio interface and STREAMER X **EUT Model Name** video capture card 25° C **Temperature Relative Humidity** 55.4% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Horizontal Mode 3 **Antenna**


Test Graph for Peak Measurement

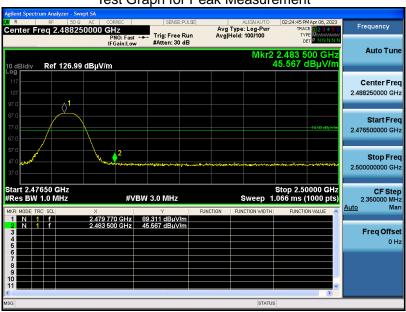

Test Graph for Average Measurement




RESULT: PASS





Professional audio interface and STREAMER X **EUT Model Name** video capture card 25° C **Temperature Relative Humidity** 55.4% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Vertical Mode 3 **Antenna**


Test Graph for Peak Measurement

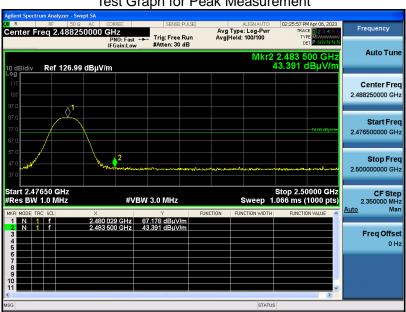





RESULT: PASS







Antenna 2

EUT	Professional audio interface and video capture card	Model Name	STREAMER X
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal


Test Graph for Peak Measurement

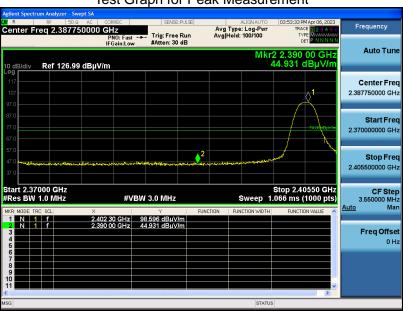



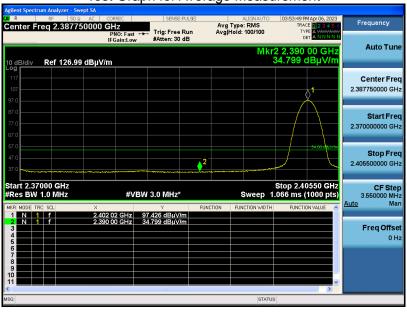

RESULT: PASS





Professional audio interface and STREAMER X **EUT Model Name** video capture card 25° C **Temperature Relative Humidity** 55.4% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Vertical Mode 1 **Antenna**


Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS





Professional audio interface and STREAMER X **EUT Model Name** video capture card 25° C **Temperature Relative Humidity** 55.4% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Horizontal Mode 3 **Antenna**


Test Graph for Peak Measurement



Test Graph for Average Measurement




RESULT: PASS





Professional audio interface and **EUT Model Name** STREAMER X video capture card 25° C **Temperature Relative Humidity** 55.4% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Mode 3 **Antenna** Vertical

Test Graph for Peak Measurement

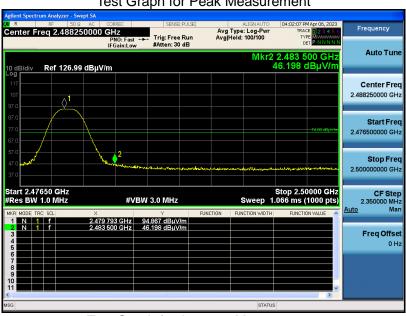

Test Graph for Average Measurement



RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 57 of 61

12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

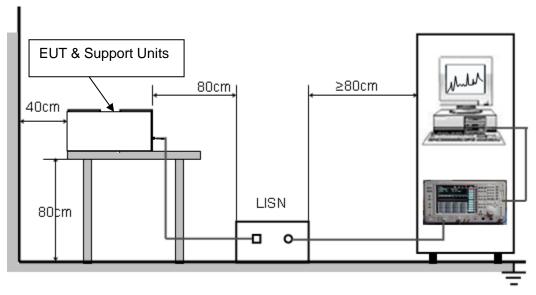



Page 58 of 61

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



Line Conducted Emission Test Line 1-L

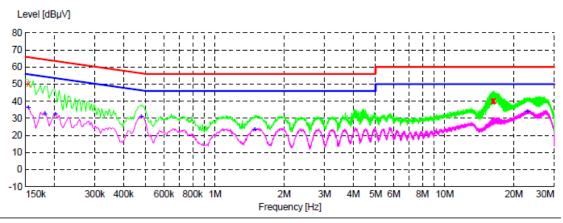

x x xMES agc_fin

MEASUREMENT RESULT: "agc_fin"

2023/3/27 11:11

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000	50.00	6.9	66	15.8	QP	L1
16.170000	39.80	8.4	60	20.2	QP	L1
16.206000	39.90	8.4	60	20.1	QP	L1
16.250000	40.10	8.5	60	19.9	QP	L1
16.382000	40.10	8.5	60	19.9	QP	L1
16.434000	40.30	8.5	60	19.7	QP	L1


MEASUREMENT RESULT: "agc_fin2"

2023/3/27 11:11

2023/3/2/ 11.	11					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000	35.90	6.9	56	19.9	AV	L1
0.182000	32.50	6.7	54	21.9	AV	L1
0.202000	32.10	6.5	54	21.4	AV	L1
0.478000	31.00	5.5	46	15.4	AV	L1
1.490000	23.50	6.0	46	22.5	AV	L1
22.878000	33.70	9.0	50	16.3	AV	L1



Line Conducted Emission Test Line 2-N

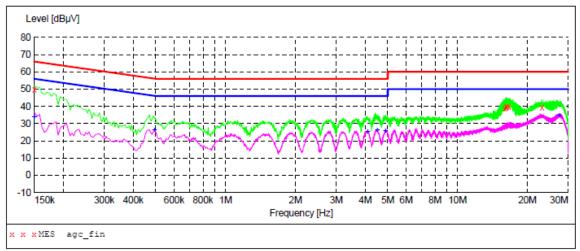

MEASUREMENT RESULT: "agc fin"

2023/3/27 1 Frequency MHz	Level	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.150000	49.50	6.9	66	16.5	QP	N
15.978000	38.90	8.4	60	21.1	QP	N
16.194000	39.40	8.4	60	20.6	QP	N
16.286000	39.70	8.5	60	20.3	QP	N
16.646000	39.60	8.5	60	20.4	QP	N
23.130000	39.10	9.0	60	20.9	QP	N

MEASUREMENT RESULT: "agc_fin2"

20	23/3/27 11:	08					
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.150000	33.90	6.9	56	22.1	AV	N
	0.494000	26.20	5.4	46	19.9	AV	N
	4.106000	25.20	6.5	46	20.8	AV	N
	4.498000	26.00	6.6	46	20.0	AV	N
	4.882000	25.50	6.6	46	20.5	AV	N
	27.446000	34.60	9.4	50	15.4	AV	N
	0.494000 4.106000 4.498000 4.882000	25.20 26.00 25.50	6.5 6.6 6.6	46 46 46	20.8 20.0 20.5	AV AV AV	N N

RESULT: PASS

Note: All test modes had been tested. The mode 1 of antenna 2 is the worst case and recorded in the report.



Page 61 of 61

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC10232230315AP01

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC10232230315AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.