FCC Test Report

Report No.: AGC10232200802FE03

FCC ID	:	2AEAN-WGOIIRX
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Wireless Microphone System - Receiver
BRAND NAME	:	RODE Microphones
MODEL NAME	:	Wireless GO II Receiver
APPLICANT	:	RODE Microphones
DATE OF ISSUE	:	Sep. 25, 2020
STANDARD(S)	:	FCC Part 15.247
REPORT VERSION	:	V1.0

*A*ttestation of *G*lobal *C*ompliance (Shenzhen) Co., Ltd

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 25, 2020	Valid	Initial Release

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE

Applicant	RODE Microphones
Address	107 Carnarvon Street, Silverwater, 2128. Australia
Manufacturer	RODE Microphones
Address	107 Carnarvon Street, Silverwater, 2128. Australia
Factory	RODE Microphones
Address	107 Carnarvon Street, Silverwater, 2128. Australia
Product Designation	Wireless Microphone System - Receiver
Brand Name	RODE Microphones
Test Model	Wireless GO II Receiver
Date of test	Sep. 04, 2020 to Sep. 25, 2020
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BLE/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By	Sky Dong (Project Engineer)	Sep. 25, 2020
Reviewed By	Max Zhang (Reviewer)	Sep. 25, 2020
Approved By	Forrest Lei (Authorized Officer)	Sep. 25, 2020

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a “Wireless Microphone System - Receiver”. It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2402-2480MHz
RF Output Power	5.263dBm (Max)
Modulation	GFSK
Number of channels	40 Channel
Antenna Designation	Antenna 1: PCB antenna Antenna 2: FPC antenna (Comply with requirements of the FCC part 15.203)
Antenna Gain	Antenna 1: 0.50dBi Antenna 2: -2.28dBi
Hardware Version	09
Software Version	0.9
Power Supply	DC 5V by adapter or DC 3.8V by battery

Note: Antenna 1 and antenna 2 cannot work simultaneously.

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	00	2402 MHz
	01	2404 MHz
	:	:
	38	2478 MHz
	39	2480 MHz

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2AEAN-WGOIIRX** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.
For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB
- Uncertainty of total RF power, conducted, Uc = ±0.8 dB
- Uncertainty of RF power density, conducted, Uc = ±2.6 dB
- Uncertainty of spurious emissions, conducted, Uc = ±2.7 dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX
2	Middle channel TX
3	High channel TX

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.
4. For battery operated equipment, the battery is full charged during test.
5. The test software is the RODE_WGO2_HID.exe which can set the EUT into the individual test modes.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:

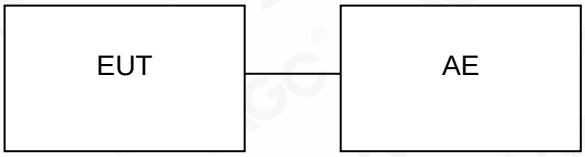

Conducted Emission Configure:

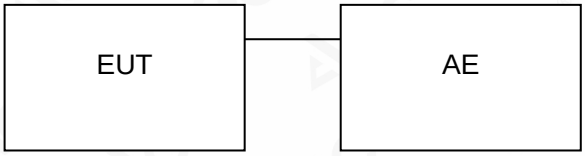

5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Wireless Microphone System - Receiver	Wireless GO II Receiver	2AEAN-WGOIIRX	EUT
2	Adapter	TY0500100E1MN	DC 5V	AE
3	Charger line	N/A	1.95m	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2020	May 14, 2021
LISN	R&S	ESH2-Z5	100086	Jul. 03,2020	Jul. 02,2021
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 12, 2019	Dec. 11, 2020
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.21, 2019	Sep. 20, 2021
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 17, 2019	May 16, 2021
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 15, 2019	Oct. 16, 2020
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 09, 2019	Jan. 08, 2021
Test software	FARA	EZ-EMC (Ver RA-03A)	N/A	N/A	N/A

7. PEAK OUTPUT POWER

7.1. MEASUREMENT PROCEDURE

For peak power test:

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. RBW≥DTS bandwidth
3. VBW≥3*RBW.
4. SPAN≥VBW.
5. Sweep: Auto.
6. Detector function: Peak.
7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

PEAK POWER TEST SETUP

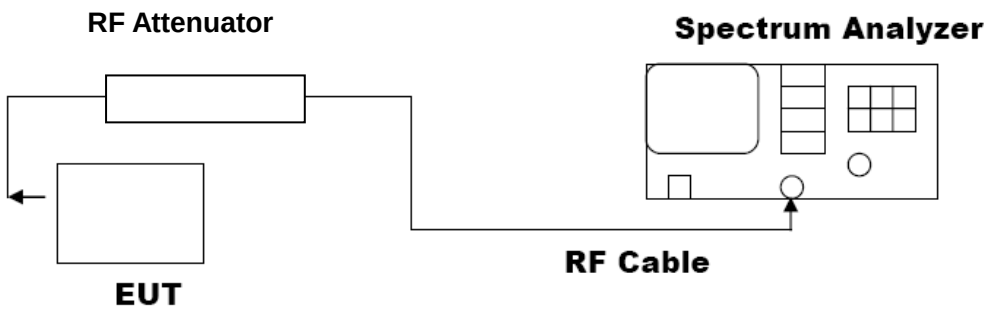

7.3. LIMITS AND MEASUREMENT RESULT

PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION				
Frequency (GHz)	Peak Power Antenna 1 (dBm)	Peak Power Antenna 2 (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	4.708	4.215	30	Pass
2.440	4.584	3.854	30	Pass
2.480	5.263	1.807	30	Pass

ANTENNA 1

CH0

CH19

CH39

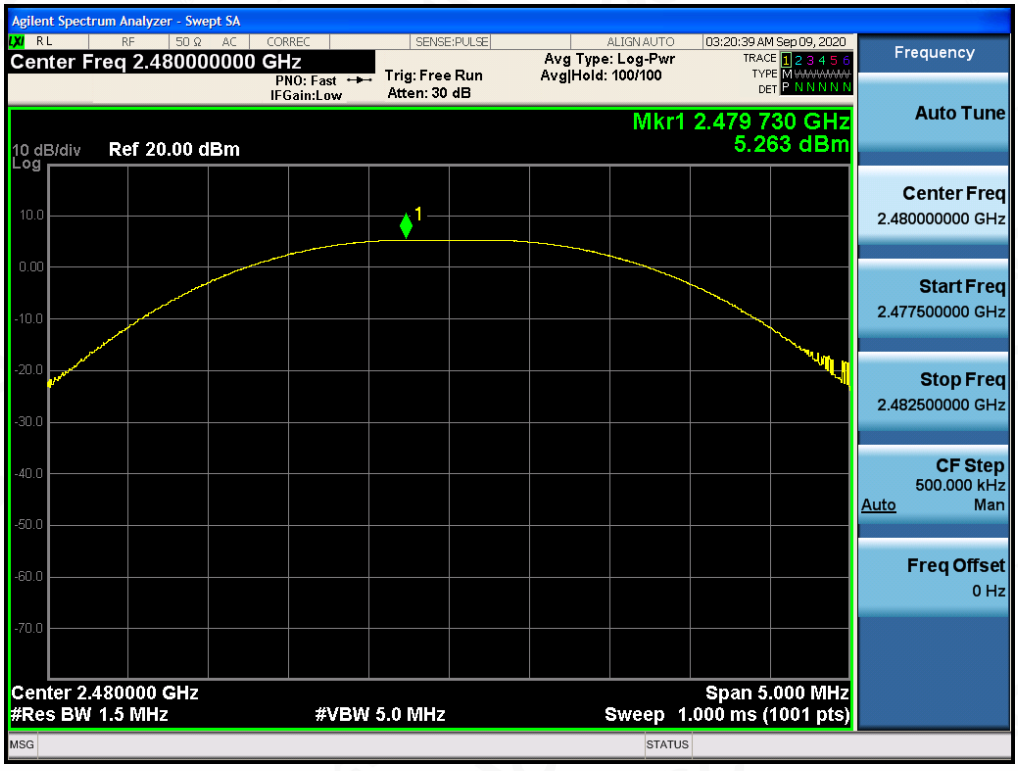

ANTENNA 2

CH0

CH19

CH39

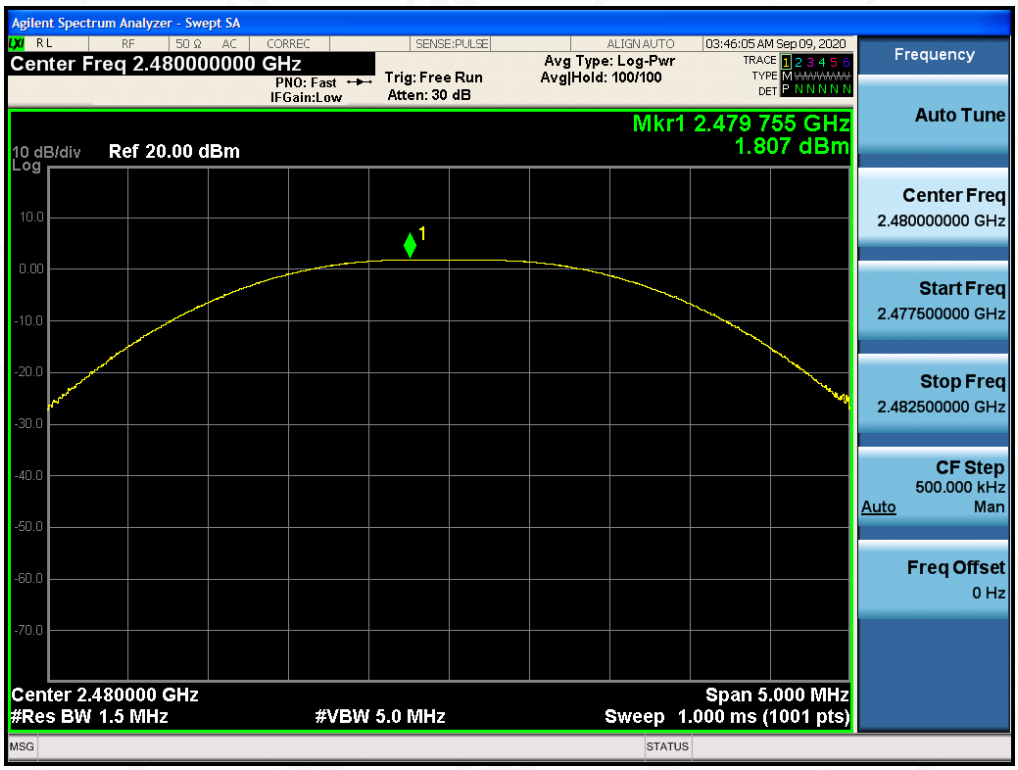

8. 6 DB BANDWIDTH

8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW≥3×RBW.
4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

8.3. LIMITS AND MEASUREMENT RESULTS

LIMITS AND MEASUREMENT RESULT-				
Applicable Limits	Applicable Limits			
	Test channel	Antenna 1 (kHz)	Antenna 2 (kHz)	Criteria
>500KHZ	Low Channel	702.6	716.0	PASS
	Middle Channel	705.3	707.4	PASS
	High Channel	716.1	702.0	PASS

ANTENNA 1

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

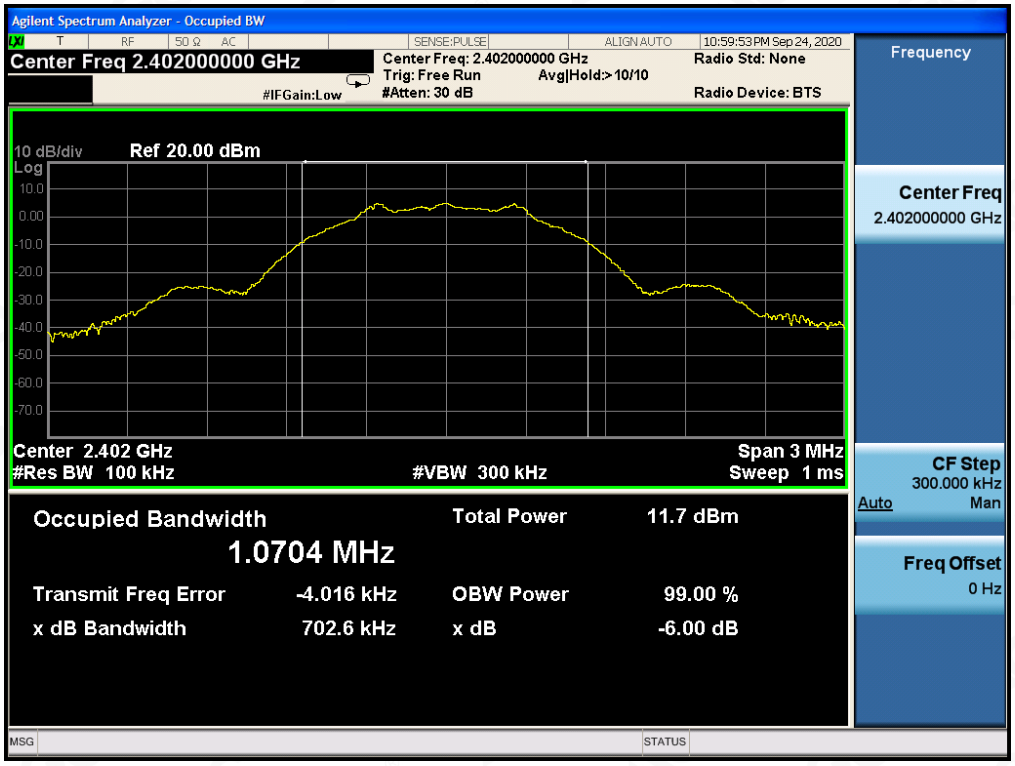

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

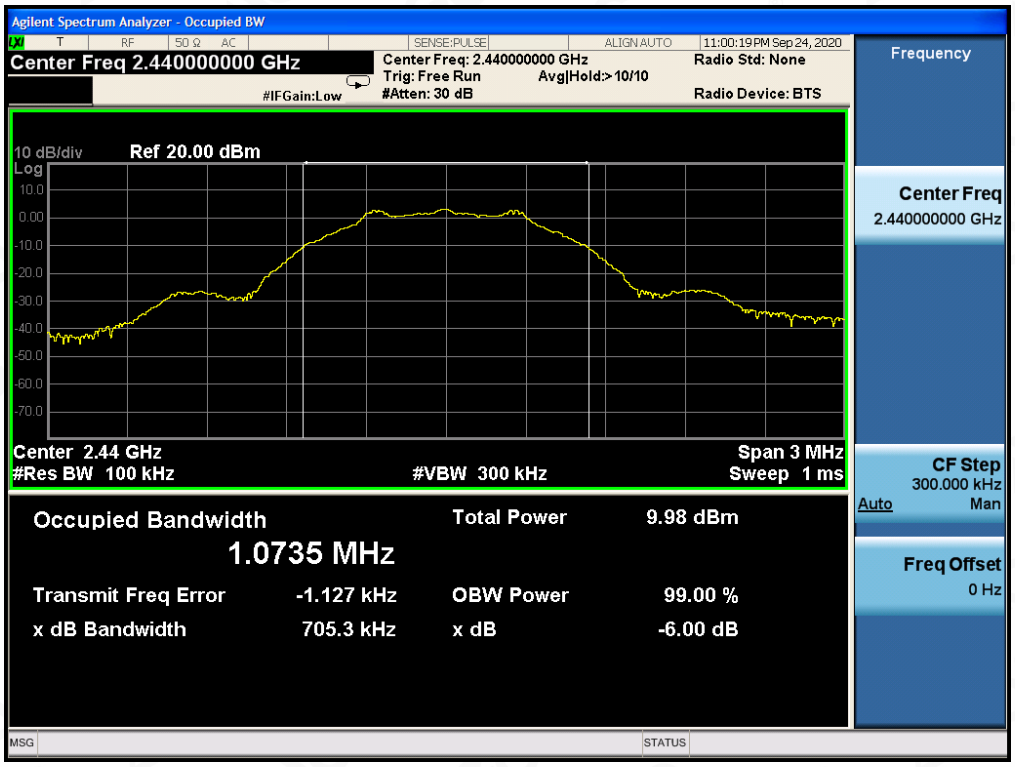

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

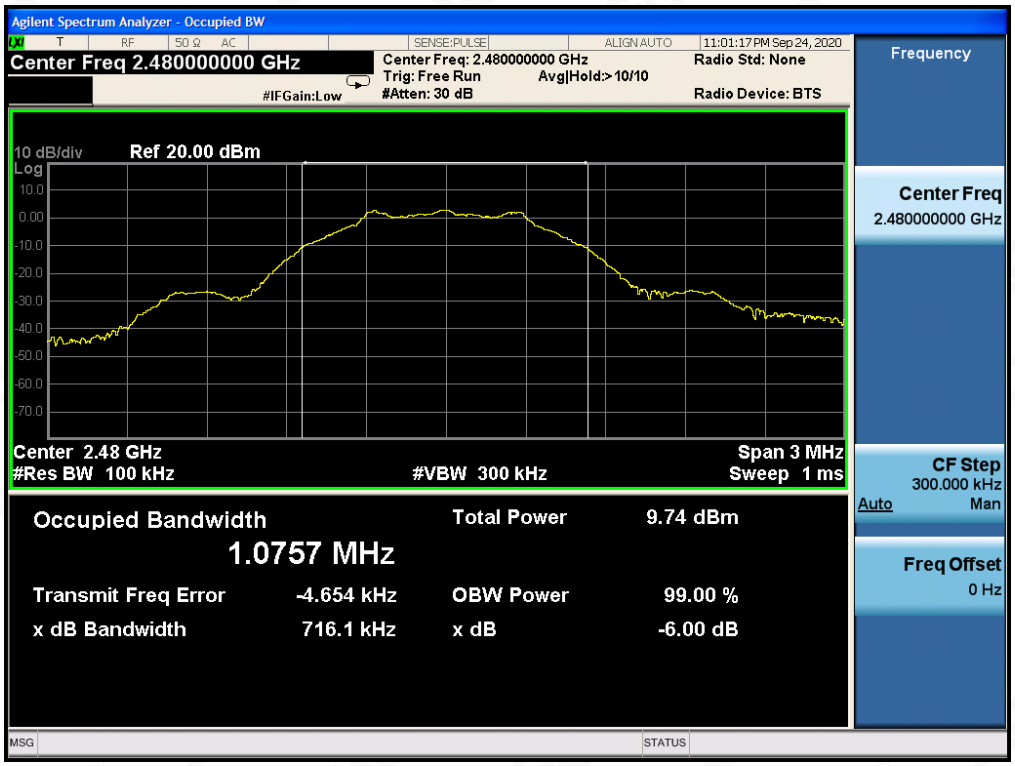

ANTENNA 2

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

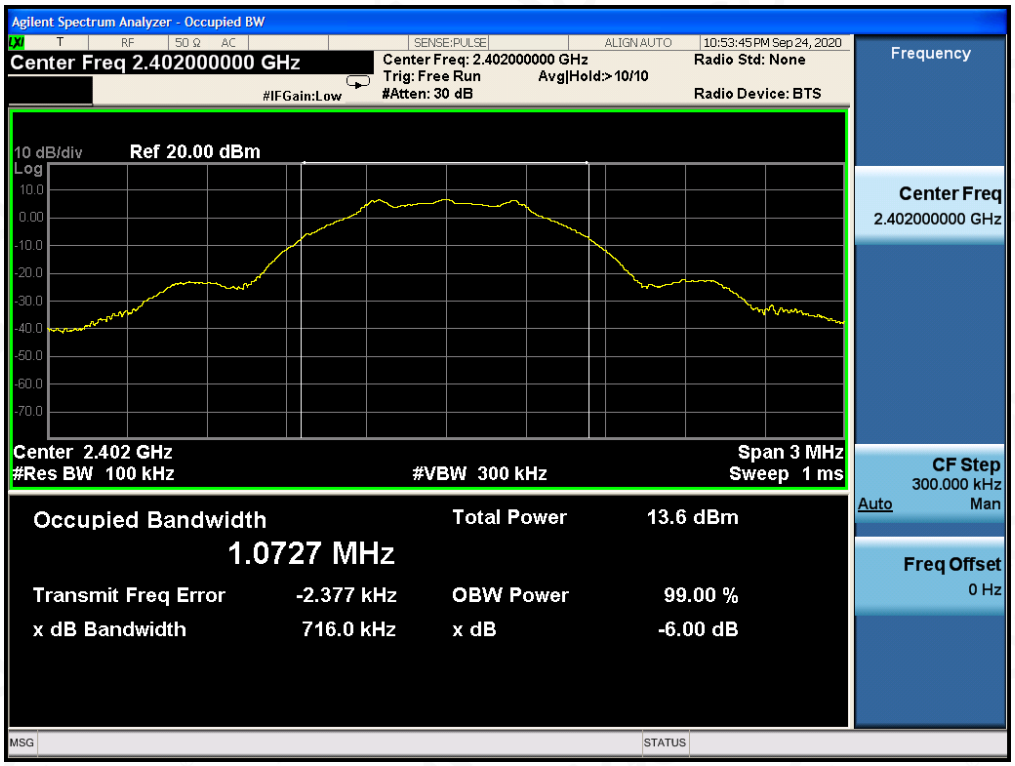

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

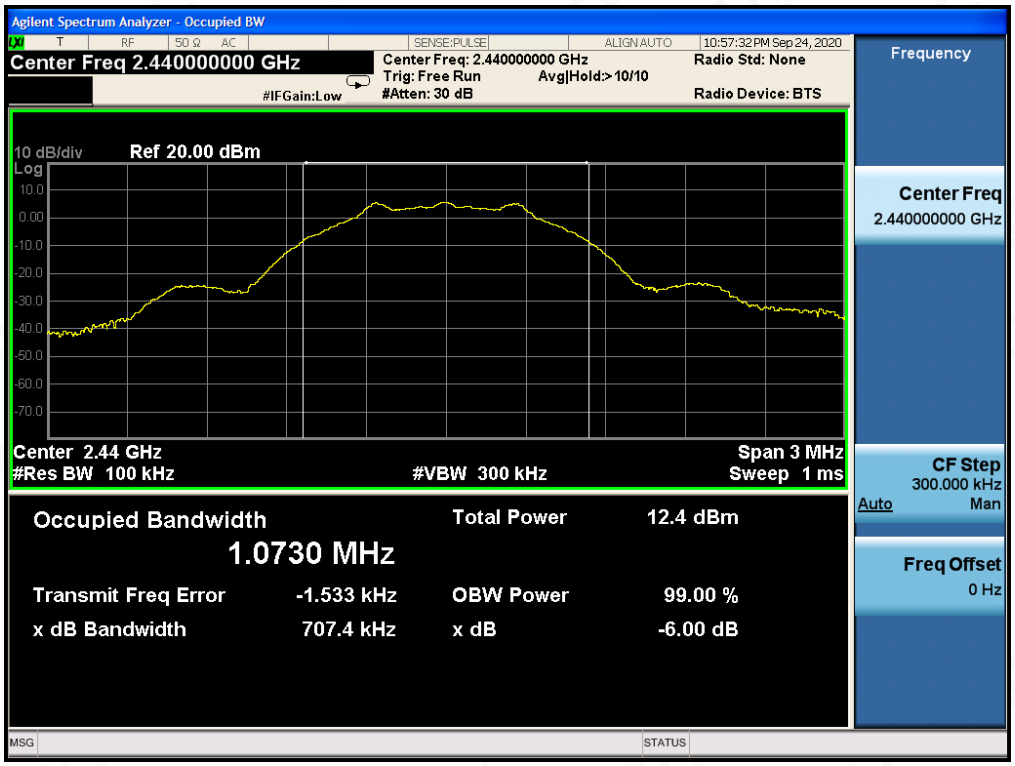

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

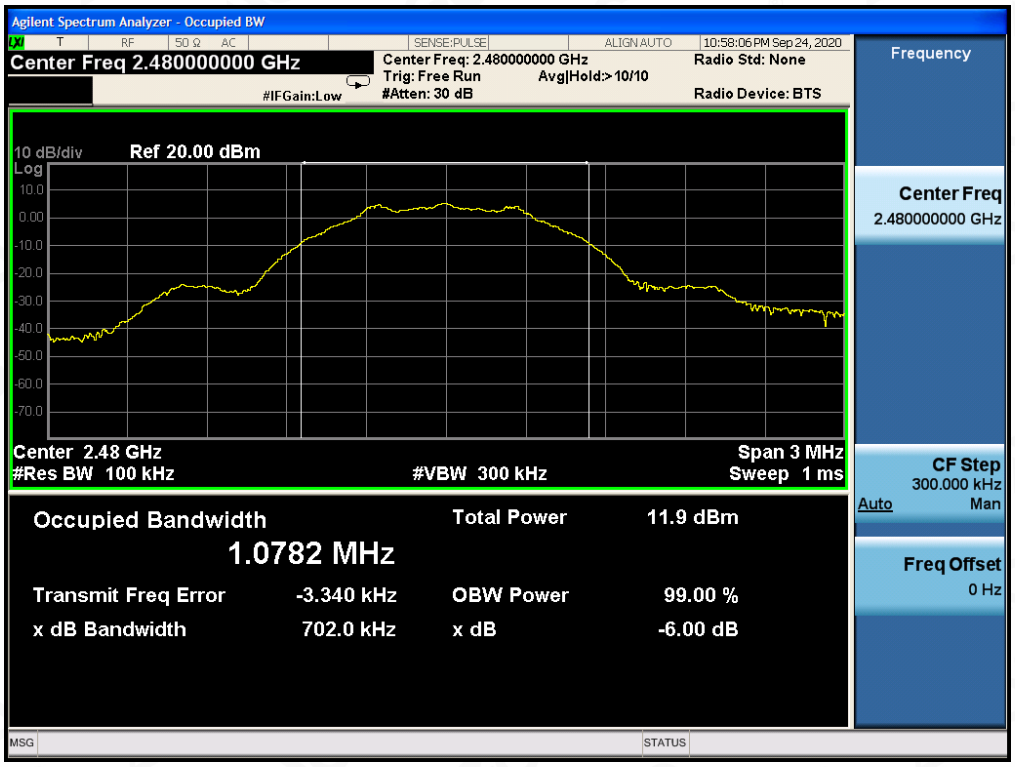

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	**Measurement Result**	
	Test Data	**Criteria**
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS

TEST RESULT FOR ENTIRE FREQUENCY RANGE

ANTENNA 1

GFSK MODULATION IN LOW CHANNEL

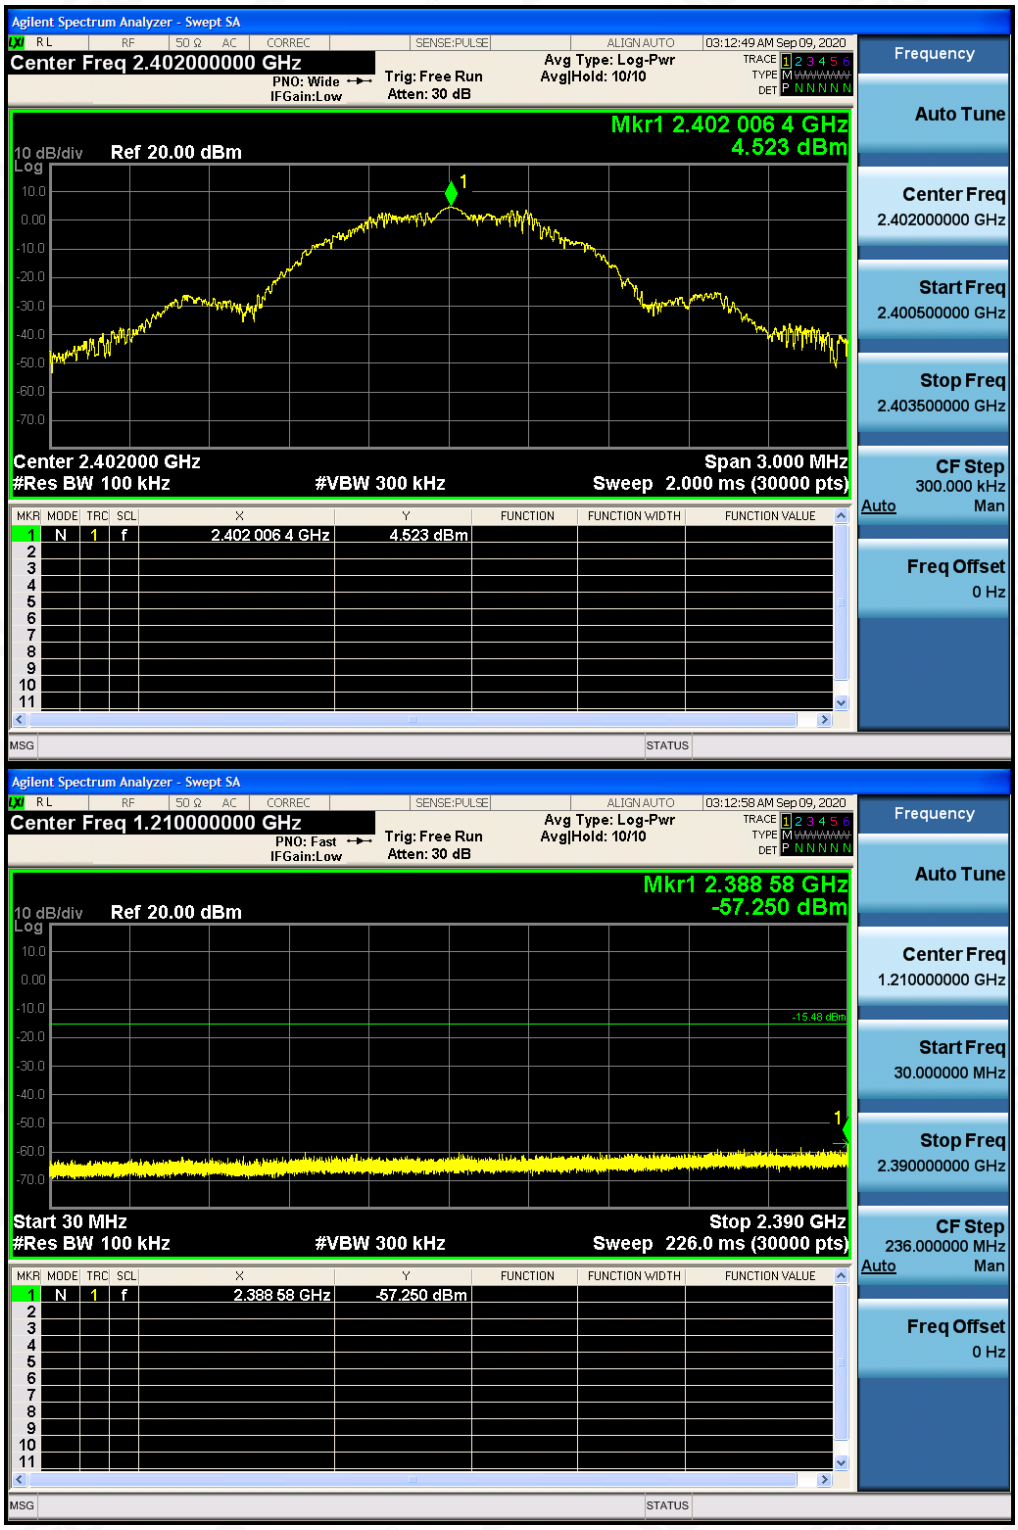

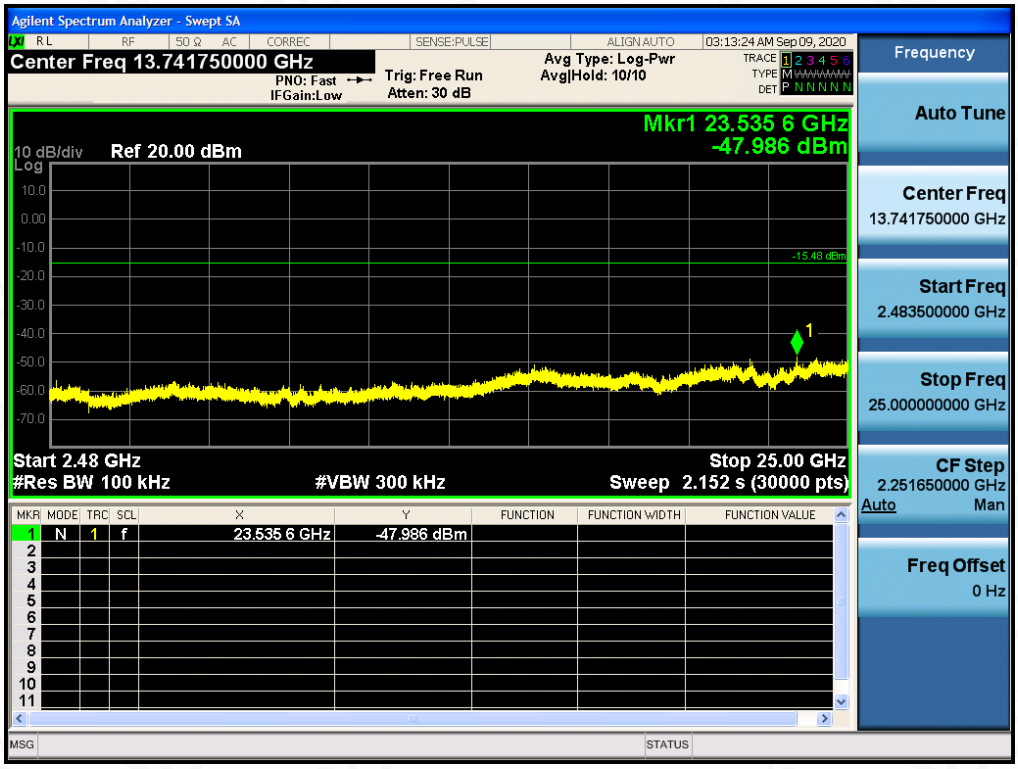

GFSK MODULATION IN MIDDLE CHANNEL

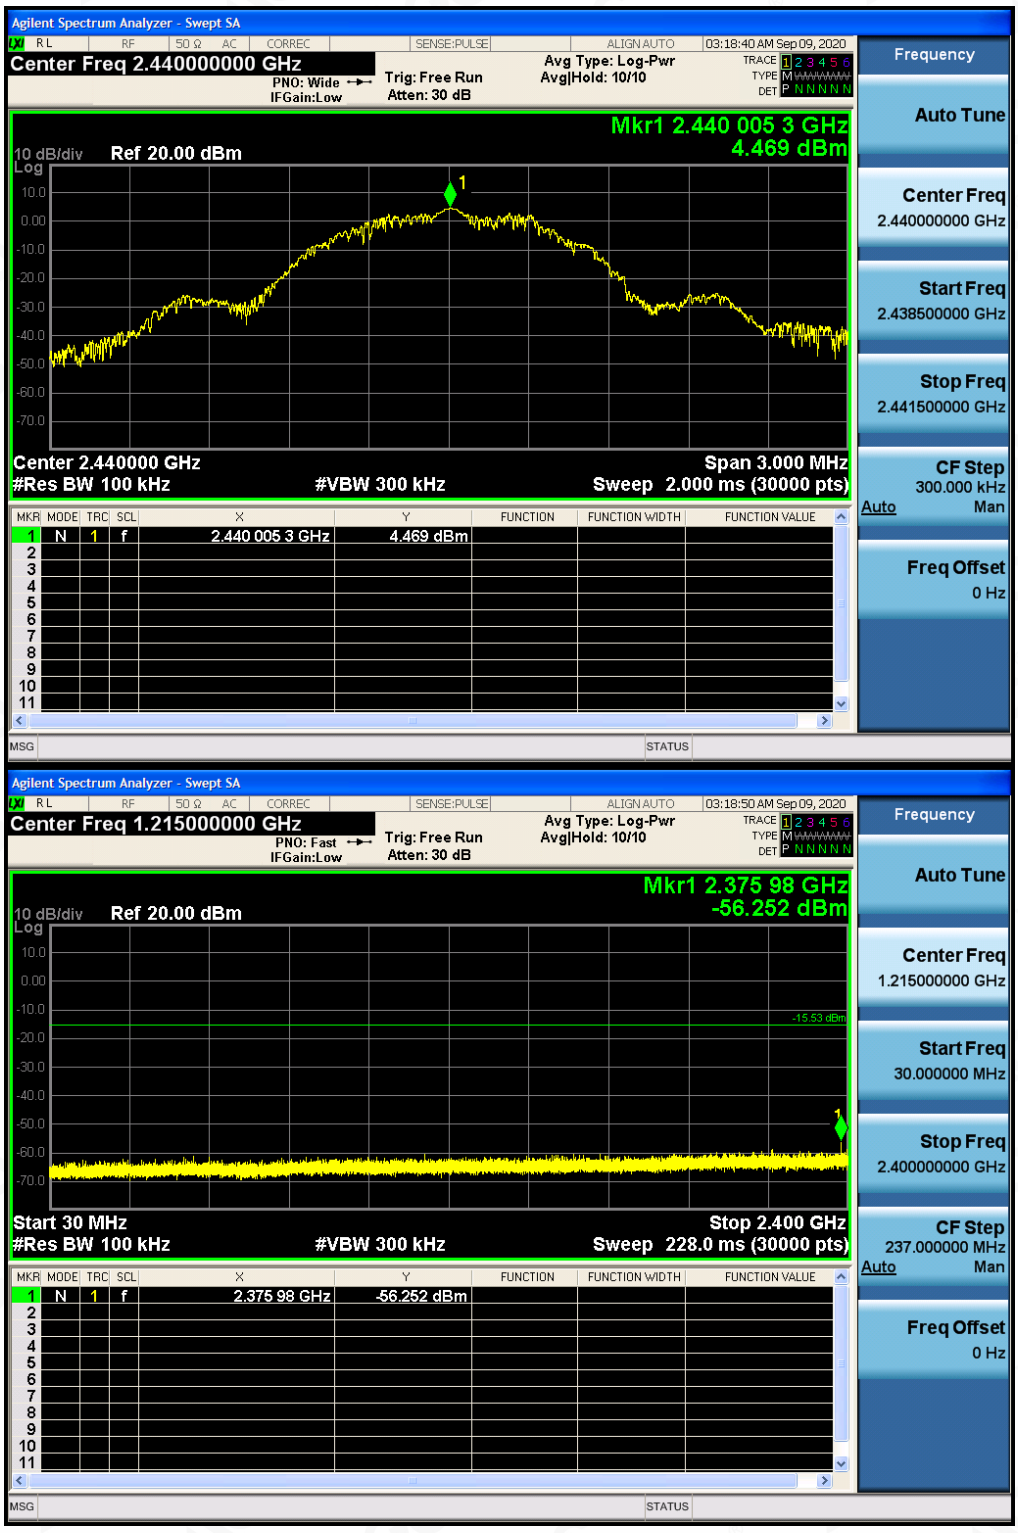

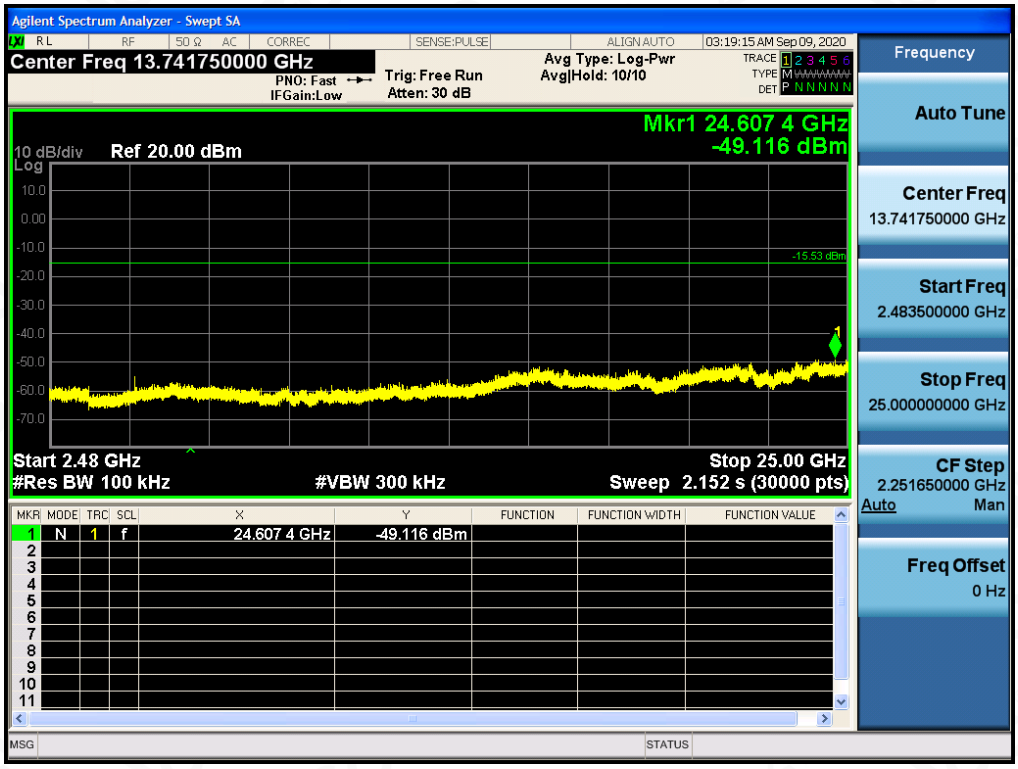

GFSK MODULATION IN HIGH CHANNEL

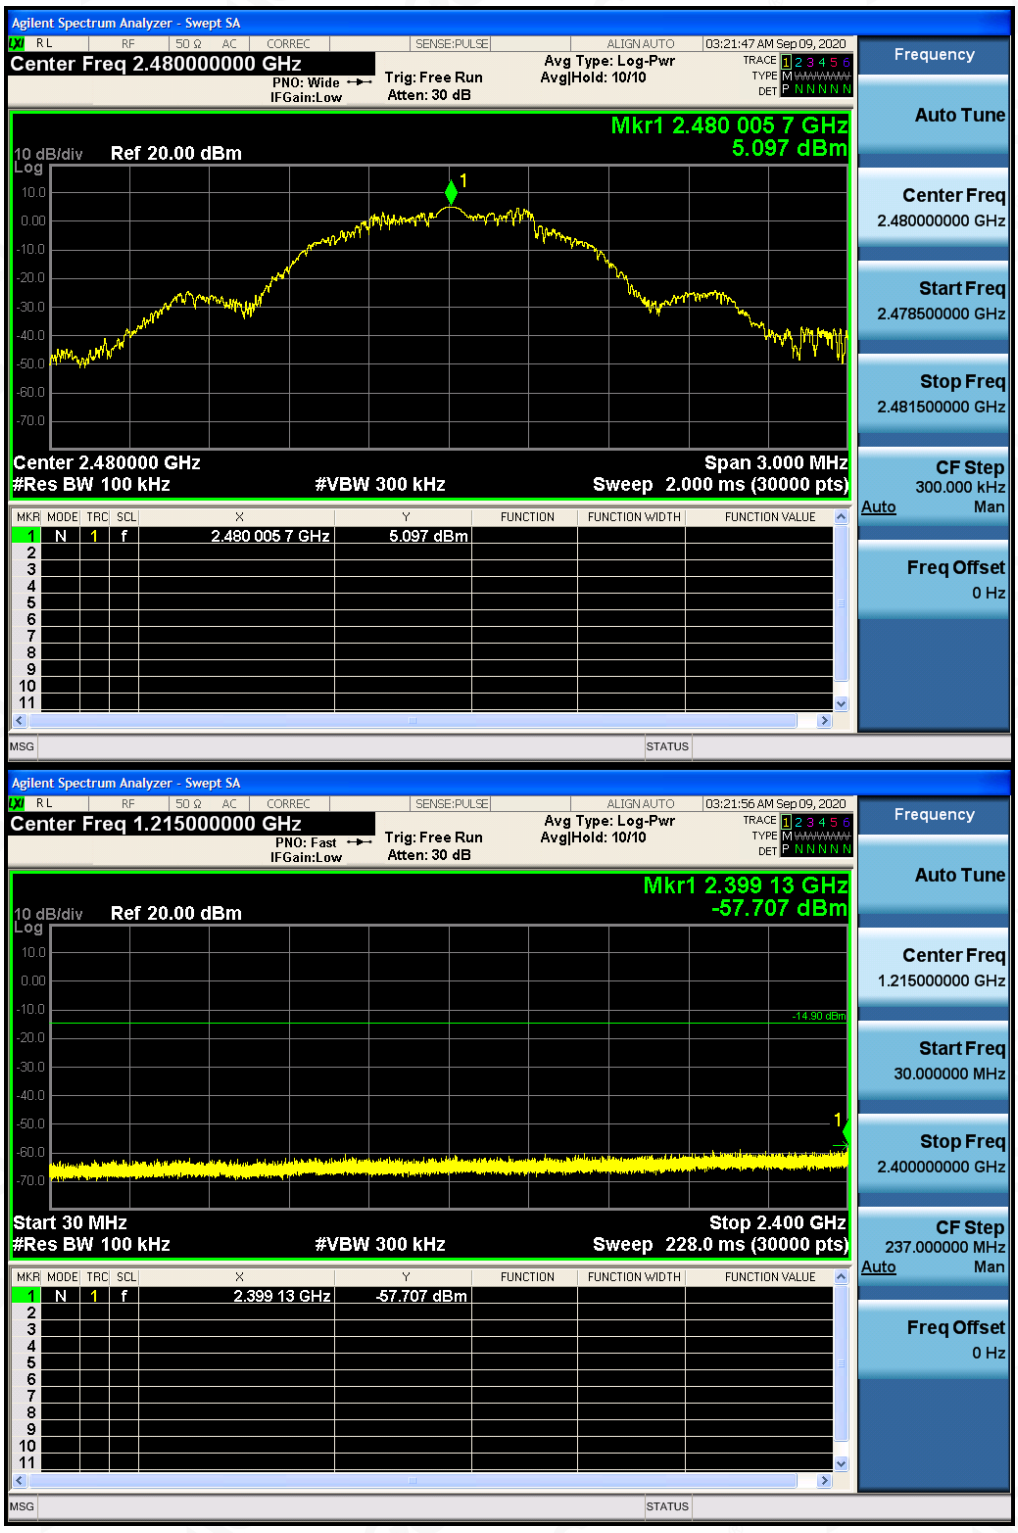

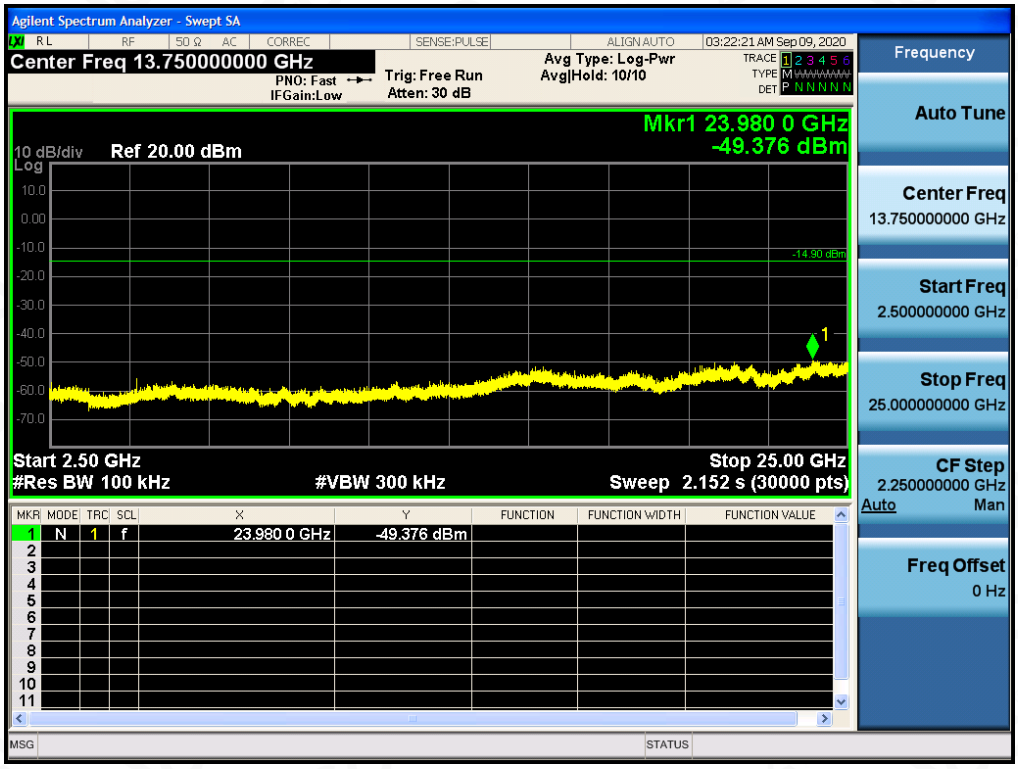

ANTENNA 2

GFSK MODULATION IN LOW CHANNEL

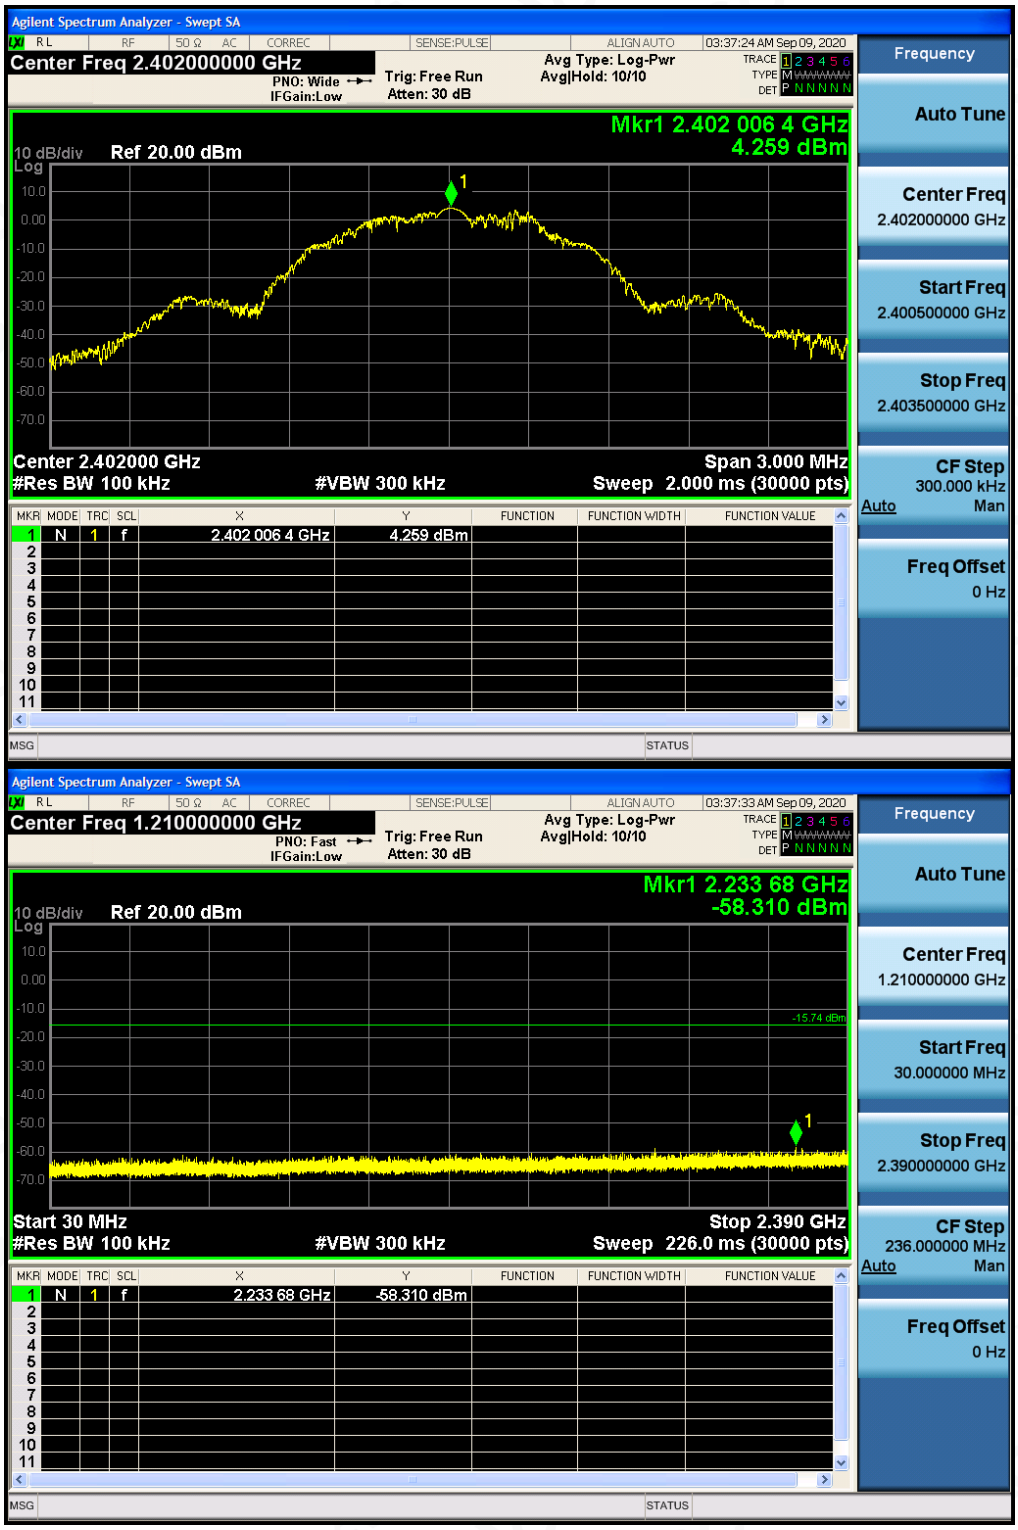

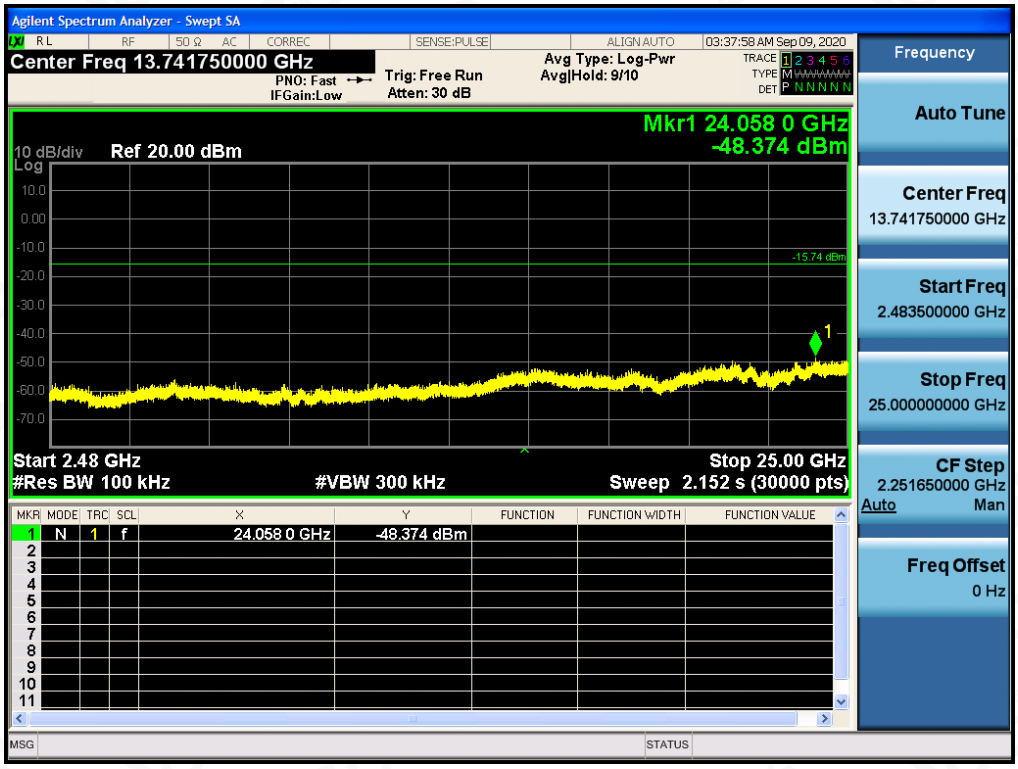

GFSK MODULATION IN MIDDLE CHANNEL

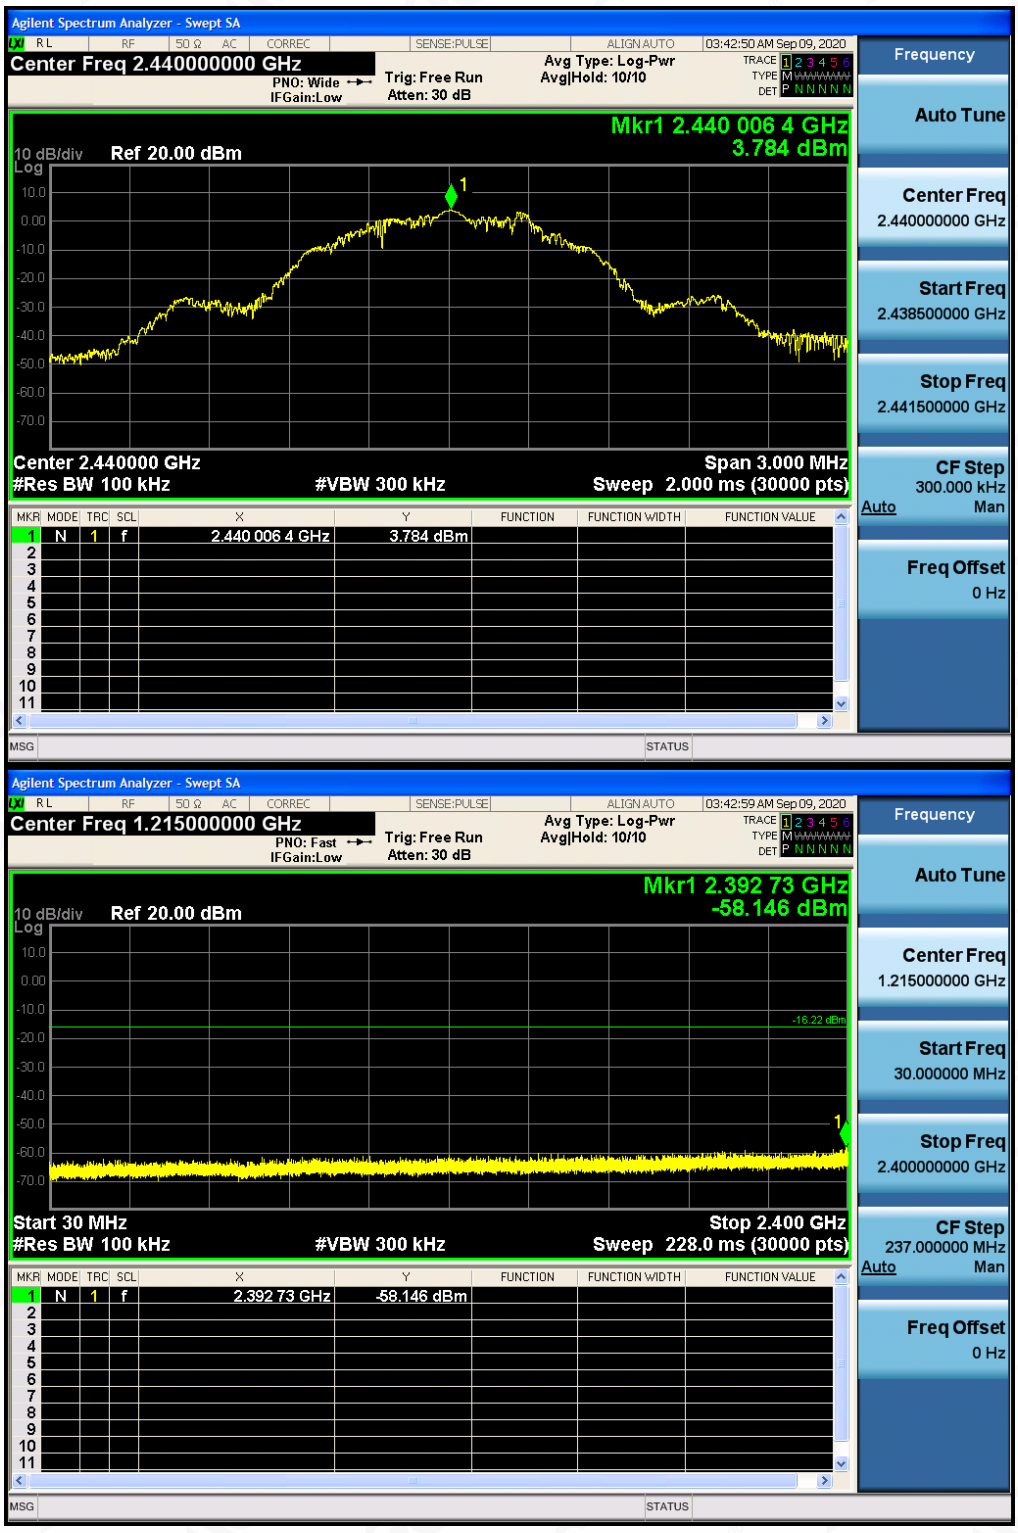

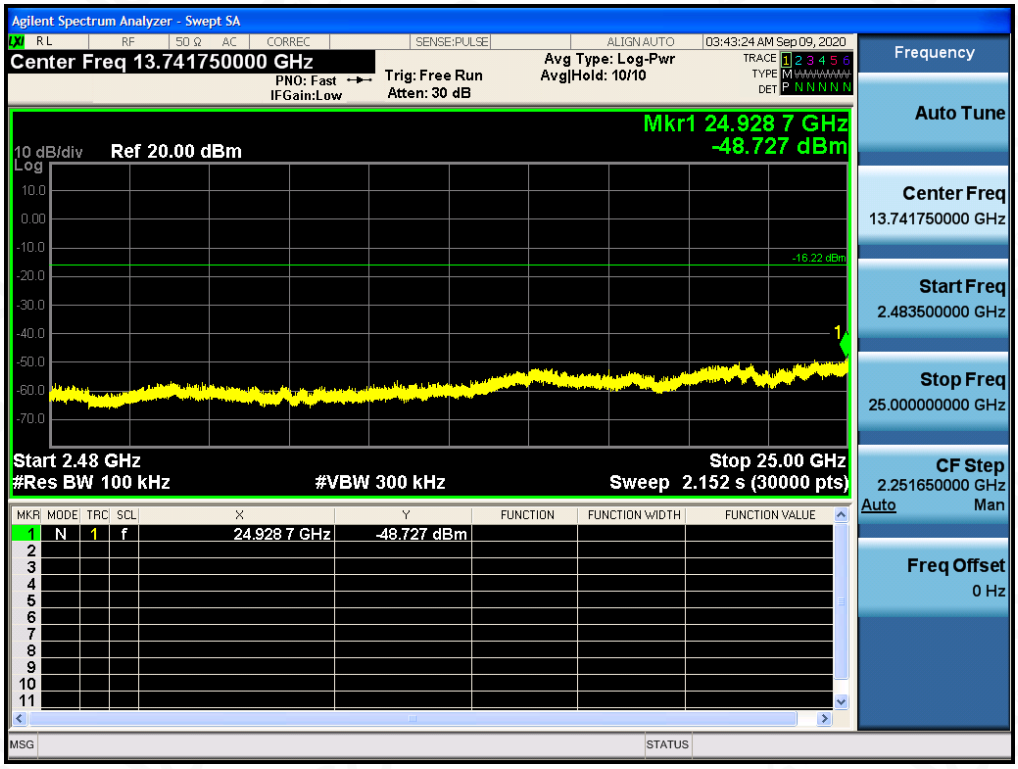

GFSK MODULATION IN HIGH CHANNEL

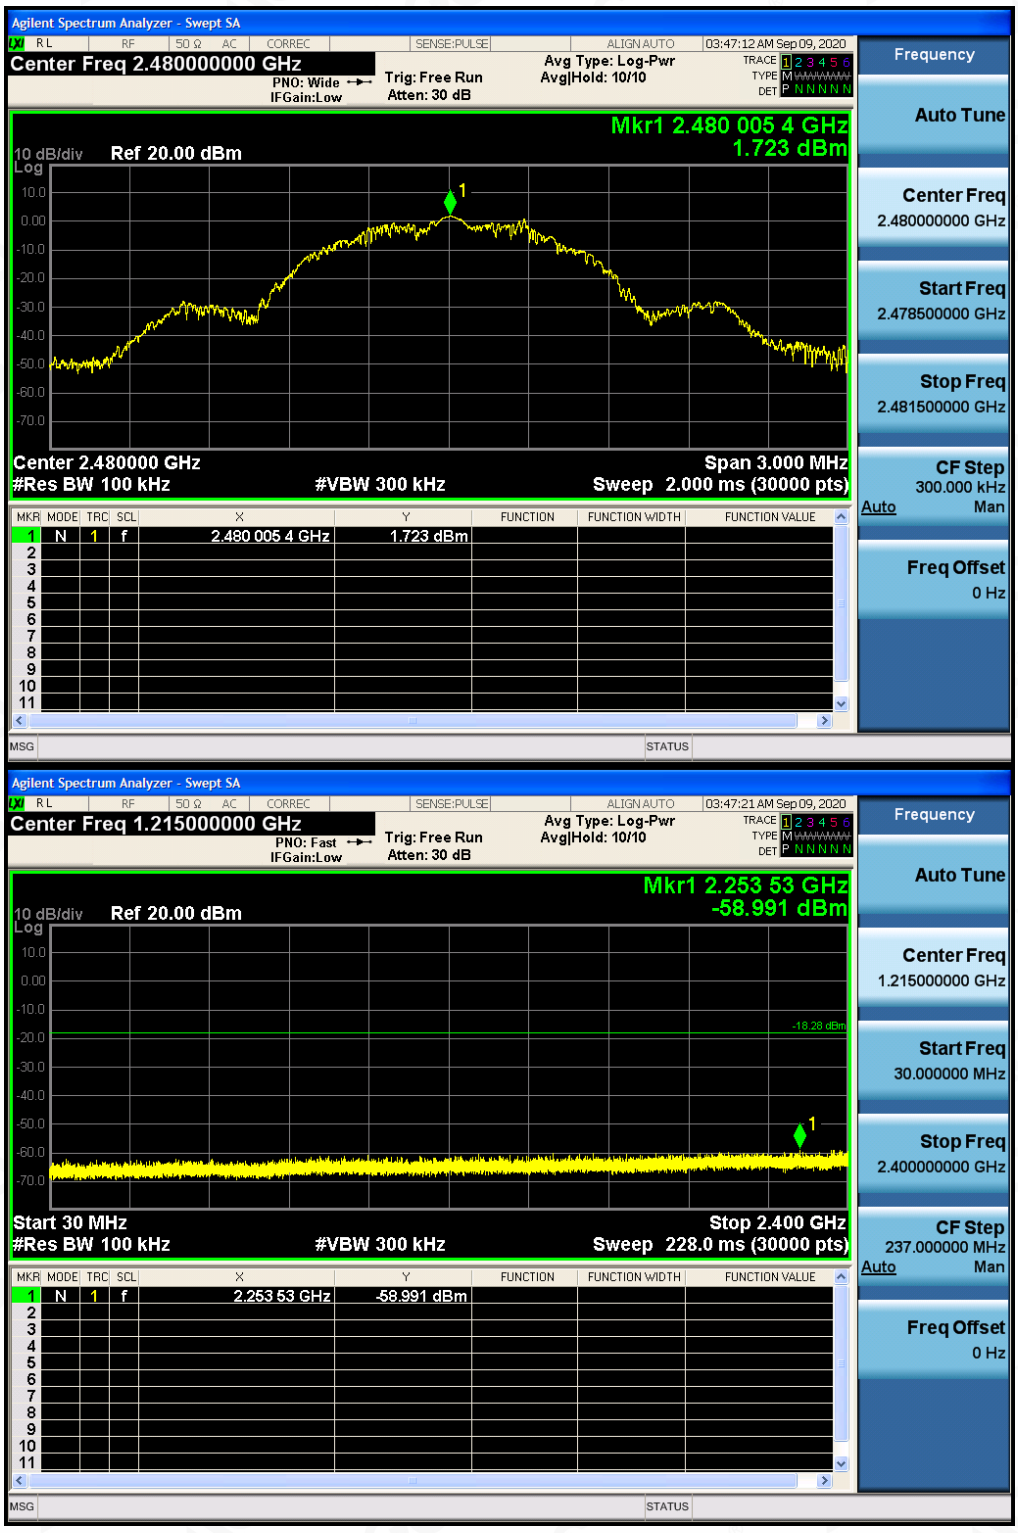

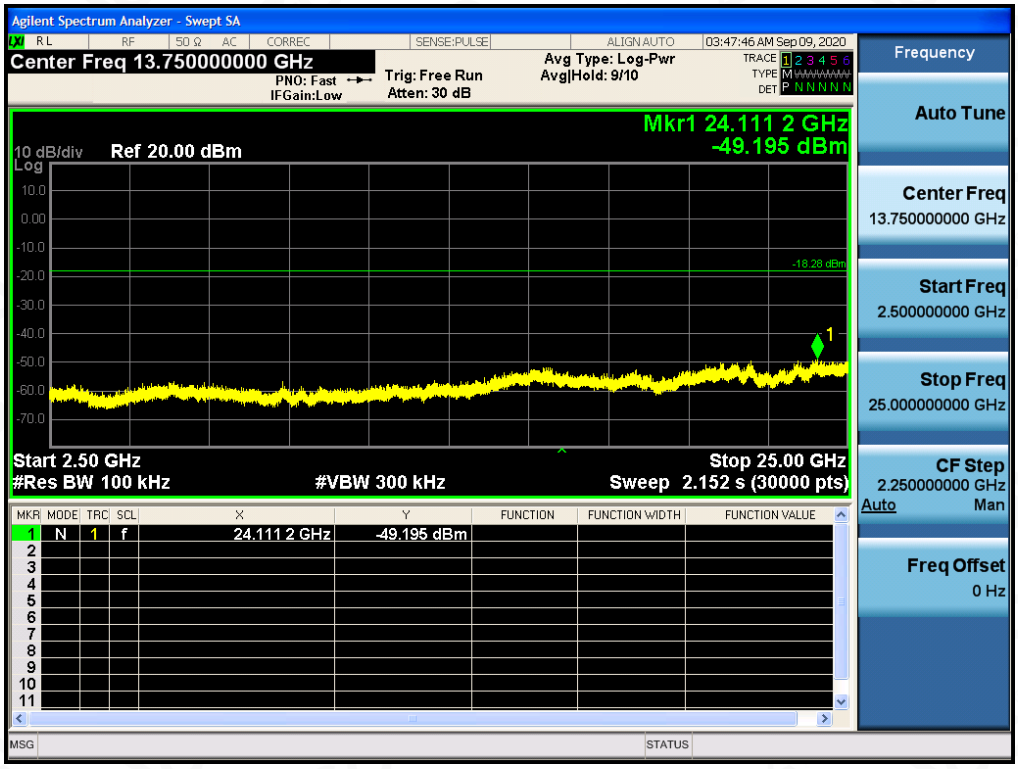

Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit.

TEST RESULT FOR BAND EDGE

GFSK MODULATION IN LOW CHANNEL-ANTENNA 1

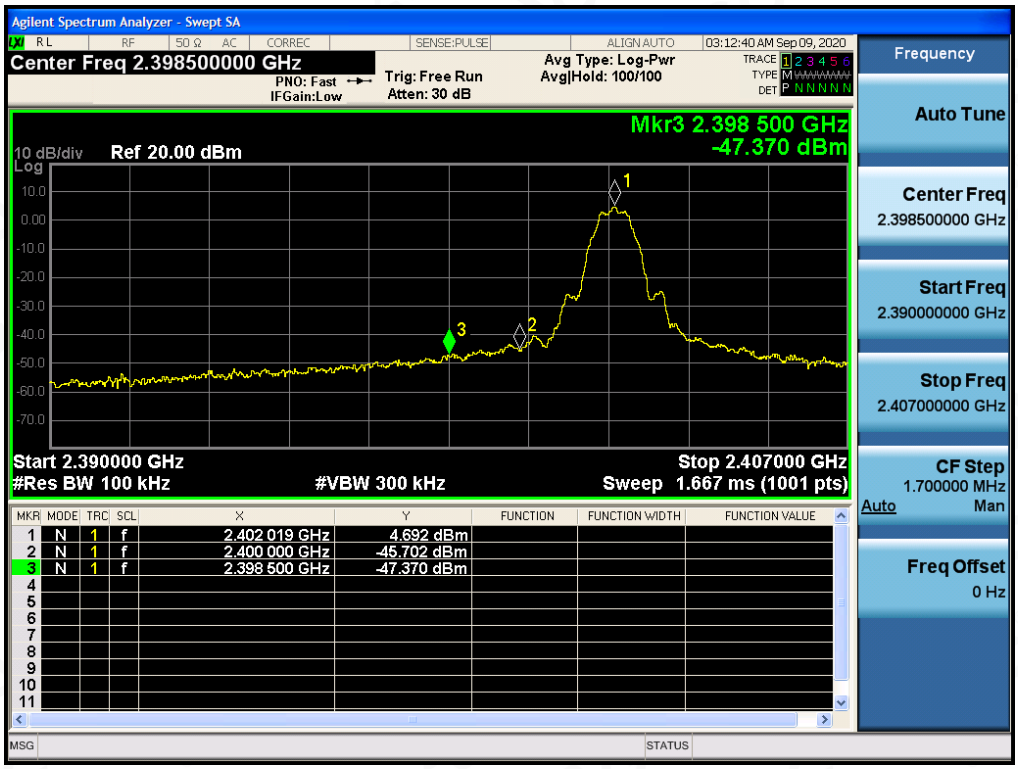

GFSK MODULATION IN HIGH CHANNEL-ANTENNA 1

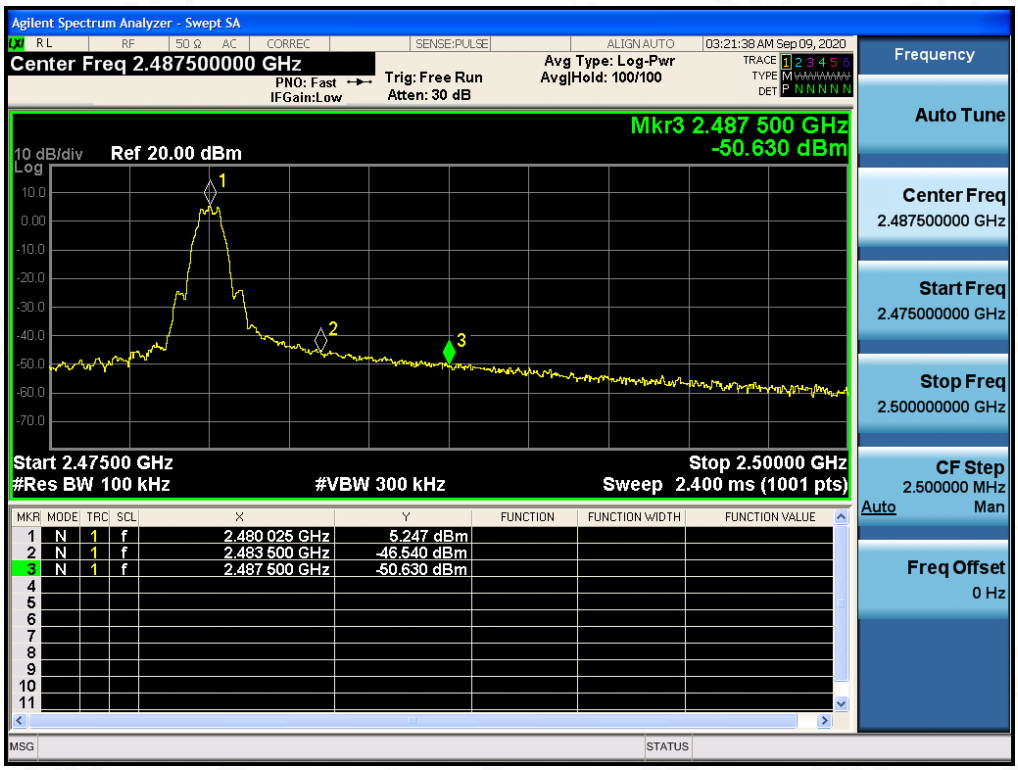

GFSK MODULATION IN LOW CHANNEL-ANTENNA 2

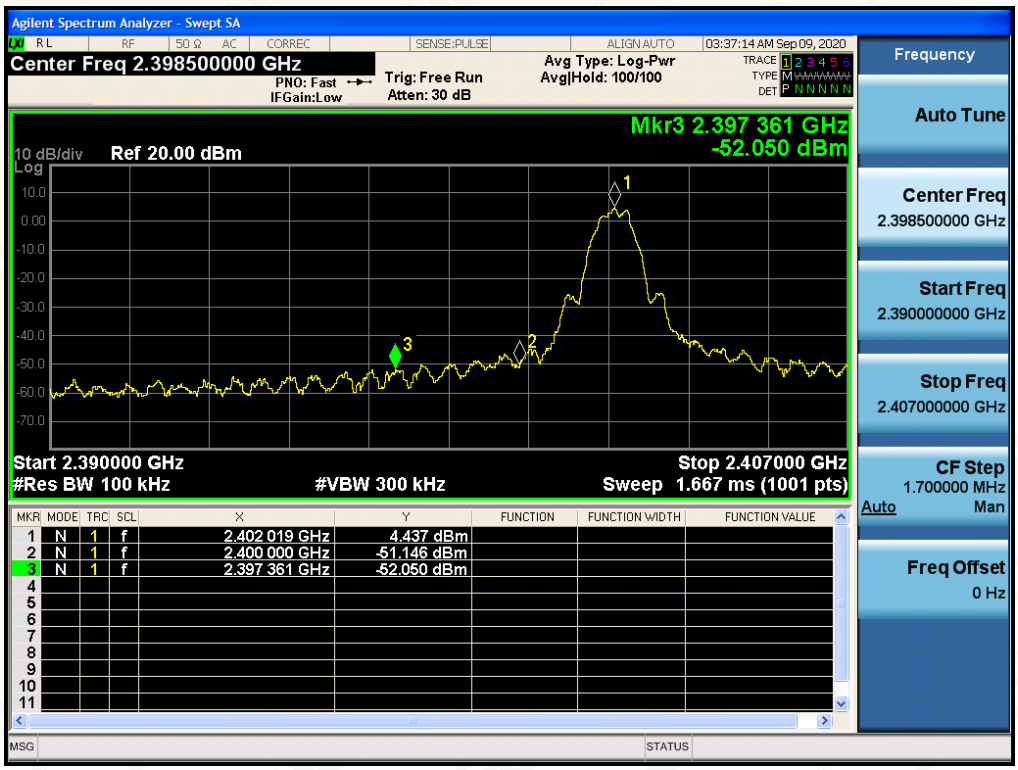

GFSK MODULATION IN HIGH CHANNEL-ANTENNA 2

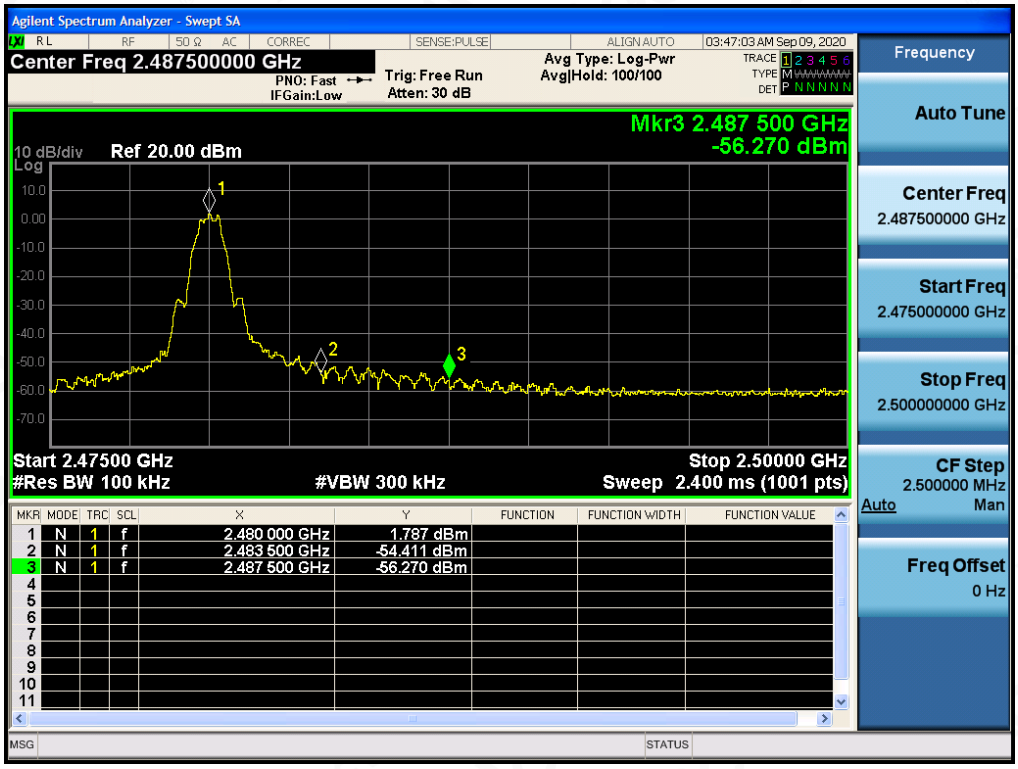

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

(1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator

(2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.

(3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 10.2 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT

Channel No.	PSD ANTENNA 1 (dBm/3kHz)	PSD ANTENNA 2 (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	-8.493	-9.399	8	Pass
Middle Channel	-9.368	-9.855	8	Pass
High Channel	-8.389	-11.942	8	Pass

ANTENNA 1

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

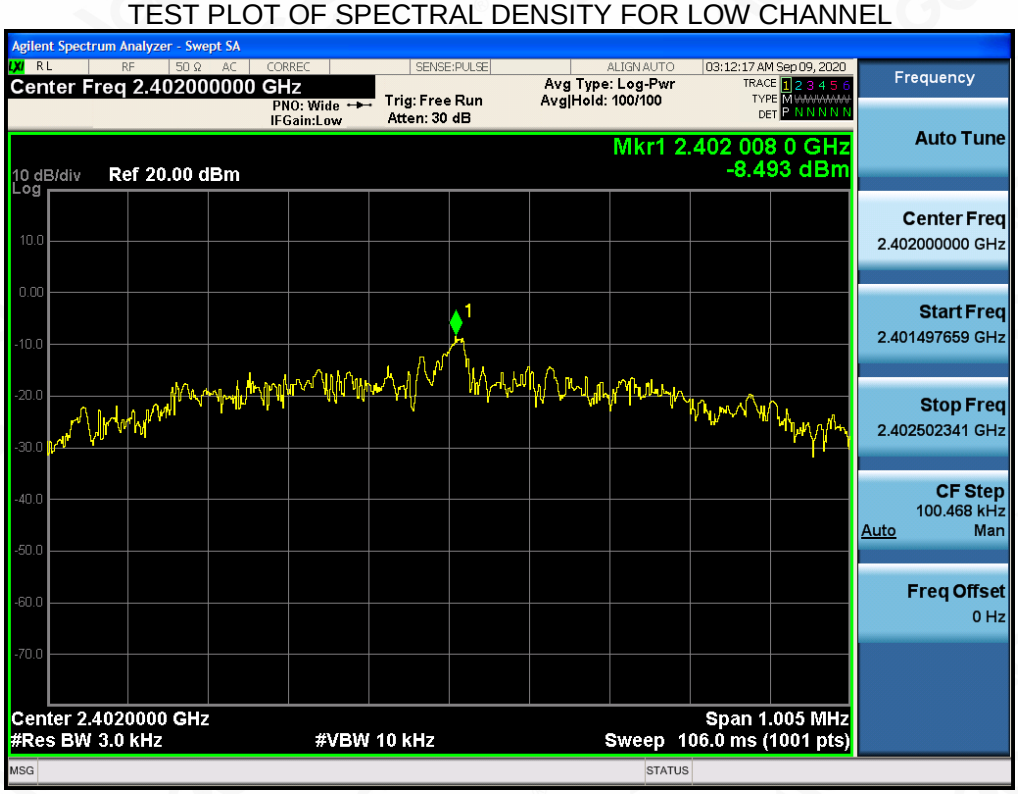

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

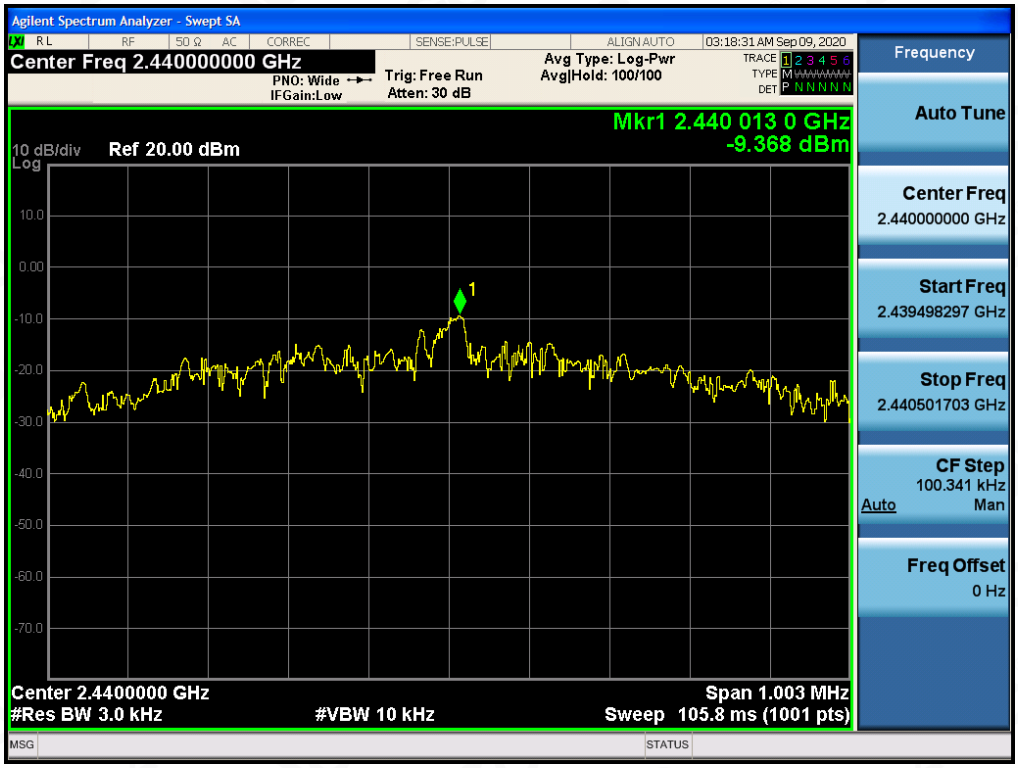

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

ANTENNA 2

TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

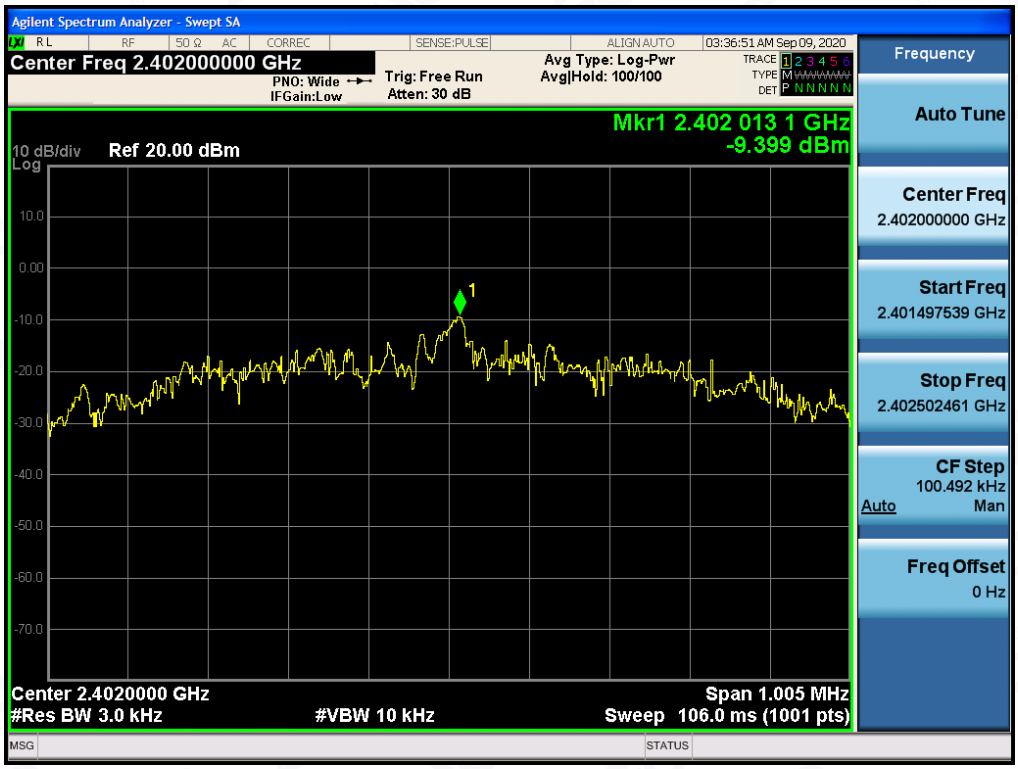

TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

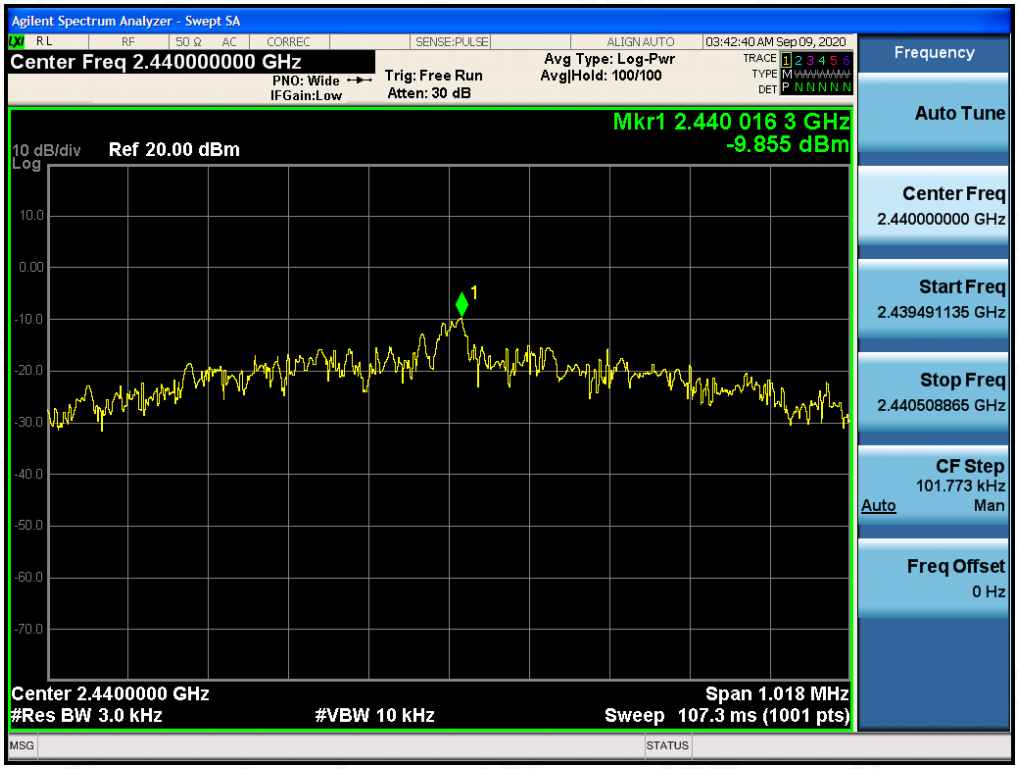

TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

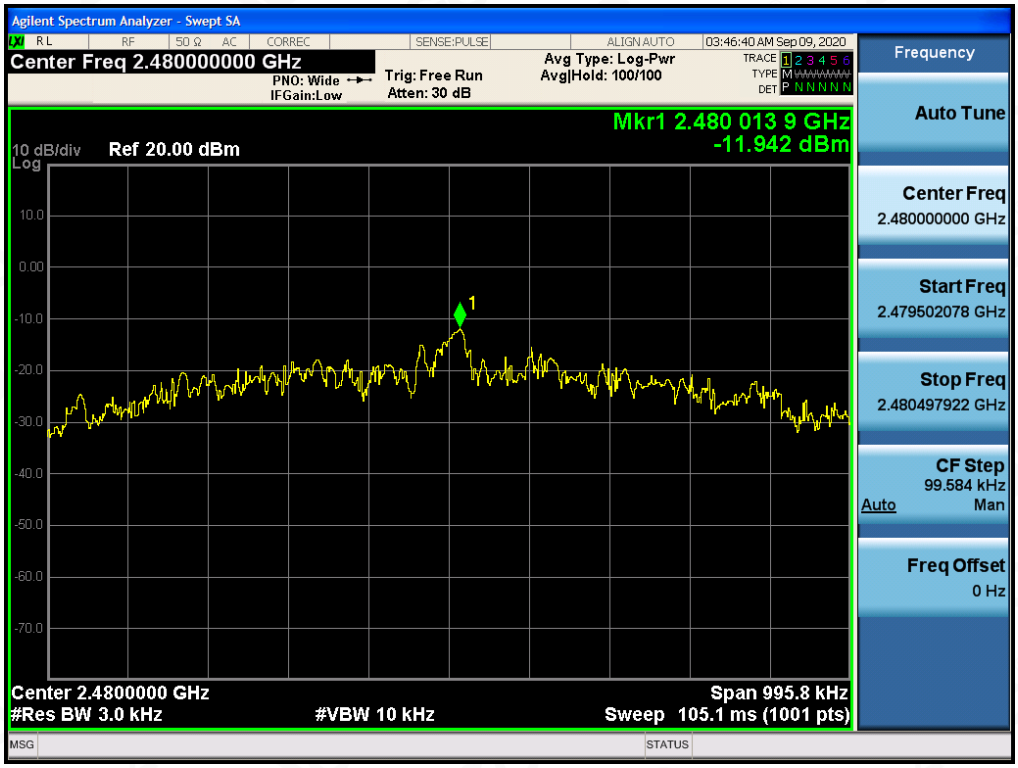

11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

11.2. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

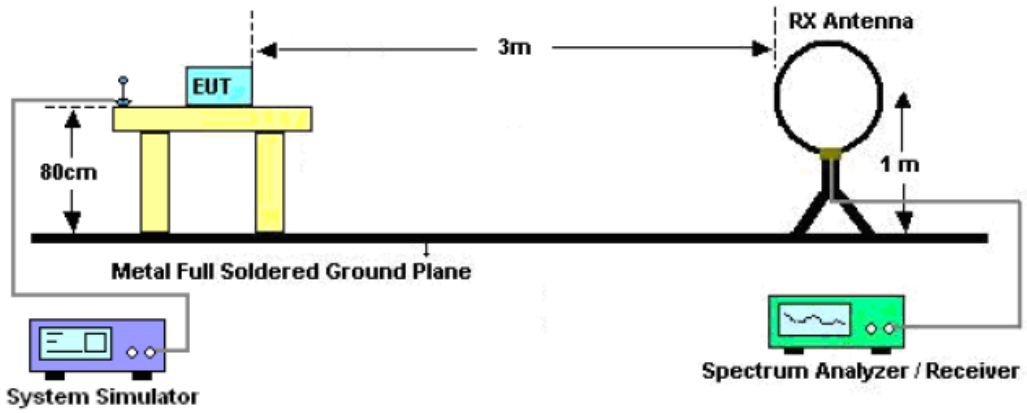

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

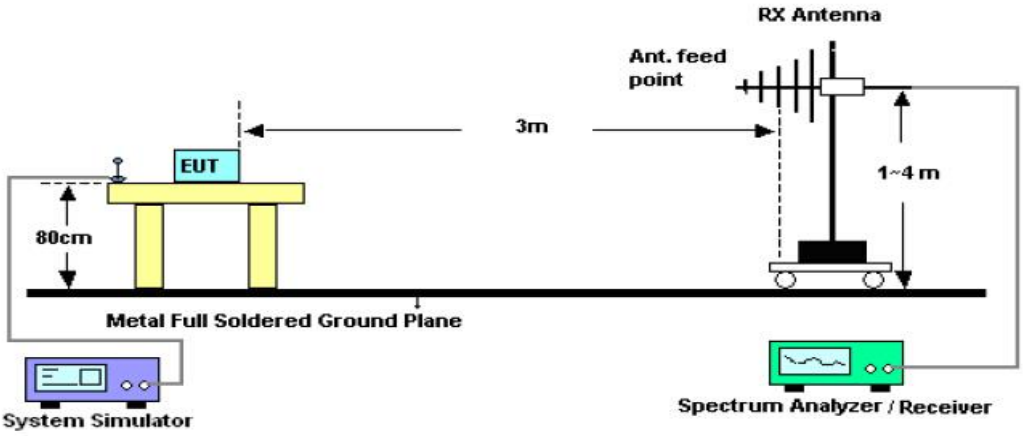

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

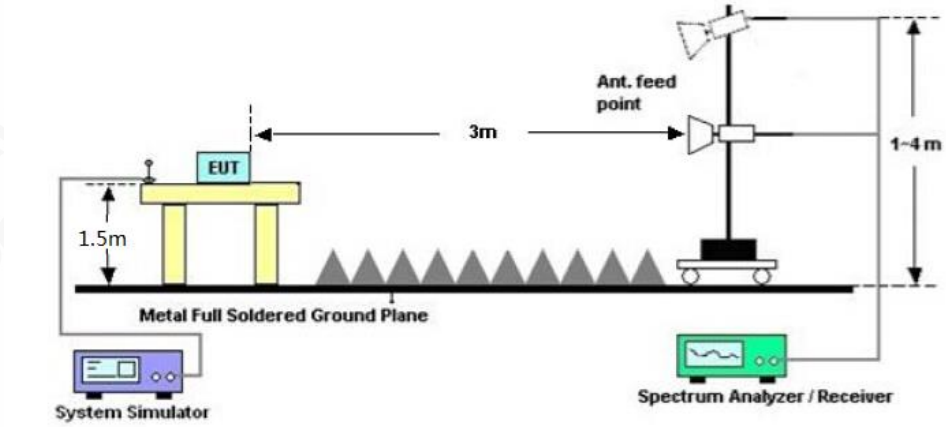

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

RADIATED EMISSION BELOW 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

RADIATED EMISSION BELOW 1GHZ

Antenna 1

EUT	Wireless Microphone System - Receiver	**Model Name**	Wireless GO II Receiver
Temperature	21.8° C	**Relative Humidity**	58%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 1	**Antenna**	Horizontal

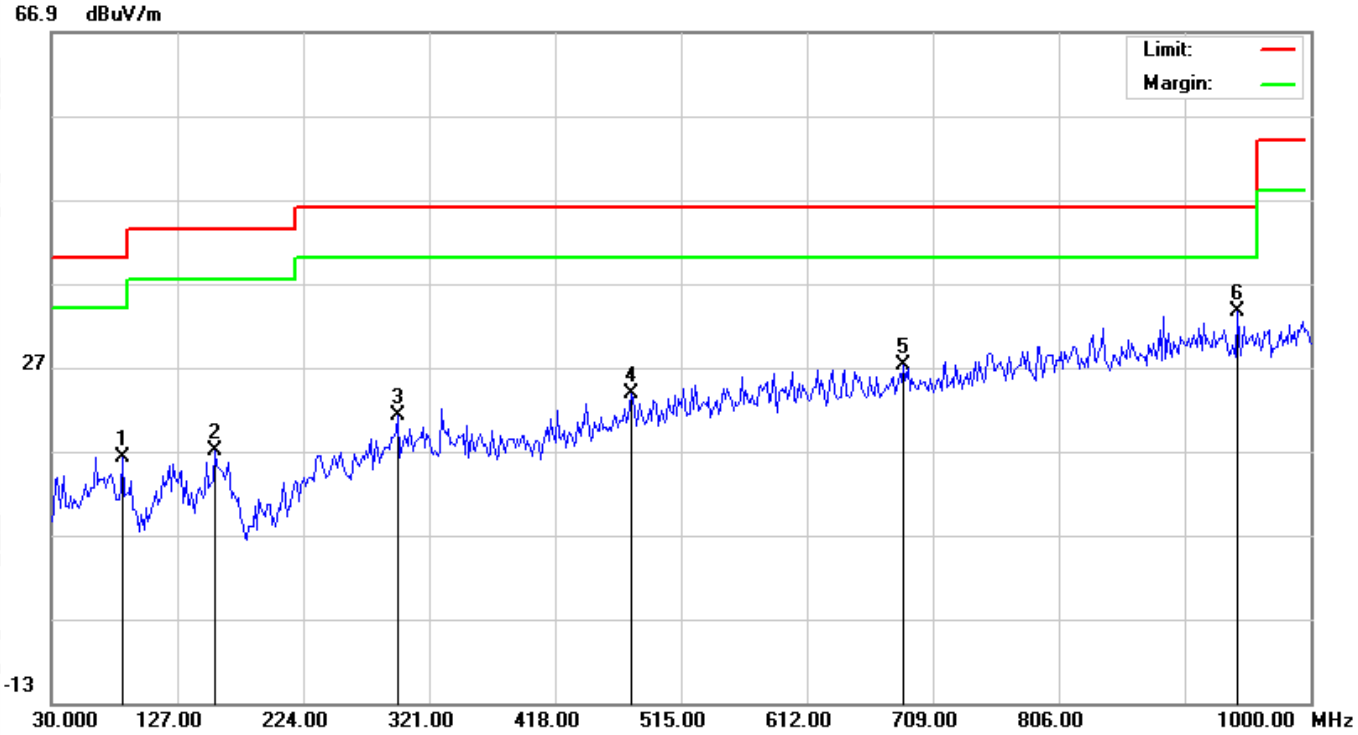

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		84.9666	1.34	14.96	16.30	40.00	-23.70	peak
2		156.1000	-1.20	18.22	17.02	43.50	-26.48	peak
3		296.7500	0.01	21.22	21.23	46.00	-24.77	peak
4		476.2000	-0.17	24.04	23.87	46.00	-22.13	peak
5		686.3667	-0.73	27.99	27.26	46.00	-18.74	peak
6	*	943.4167	1.51	32.07	33.58	46.00	-12.42	peak

RESULT: PASS

EUT	Wireless Microphone System - Receiver	Model Name	Wireless GO II Receiver
Temperature	21.8° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

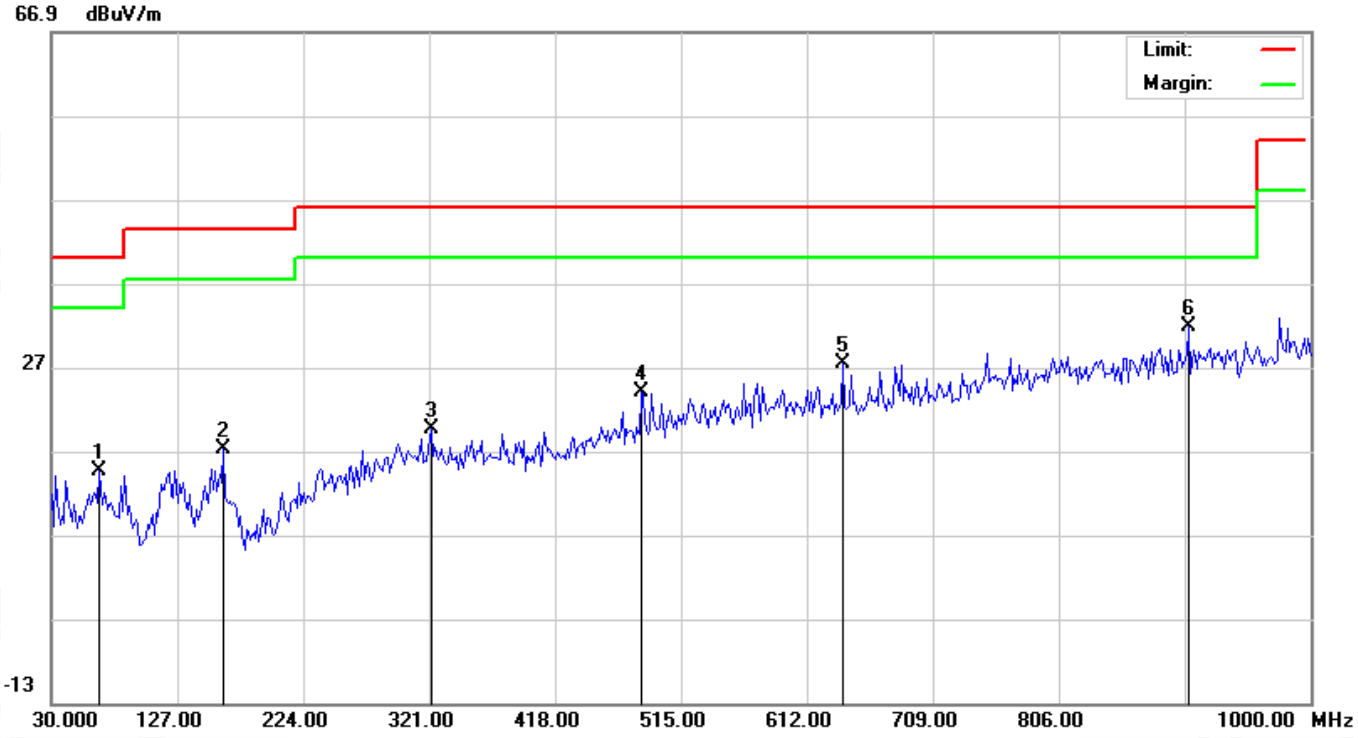

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		67.1833	-2.12	16.76	14.64	40.00	-25.36	peak
2		162.5667	-0.95	18.16	17.21	43.50	-26.29	peak
3		322.6167	-1.83	21.36	19.53	46.00	-26.47	peak
4		484.2833	-0.34	24.36	24.02	46.00	-21.98	peak
5		639.4833	0.03	27.42	27.45	46.00	-18.55	peak
6	*	906.2333	0.04	31.75	31.79	46.00	-14.21	peak

RESULT: PASS

Antenna 2

EUT	Wireless Microphone System - Receiver	Model Name	Wireless GO II Receiver
Temperature	21.8° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

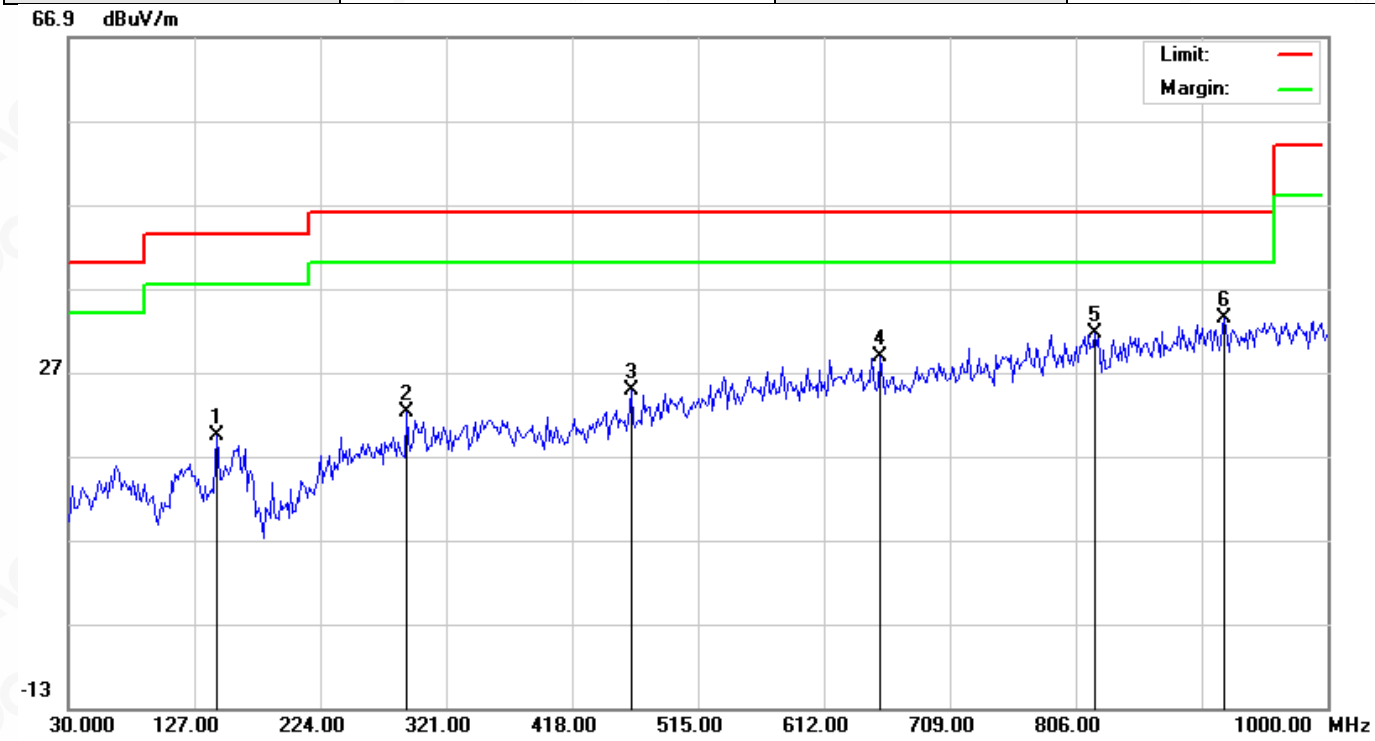

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		144.7833	4.03	15.42	19.45	43.50	-24.05	peak
2		290.2833	1.41	20.73	22.14	46.00	-23.86	peak
3		463.2667	1.38	23.52	24.90	46.00	-21.10	peak
4		655.6500	1.13	27.62	28.75	46.00	-17.25	peak
5		820.5500	1.01	30.68	31.69	46.00	-14.31	peak
6	*	920.7833	1.52	31.88	33.40	46.00	-12.60	peak

RESULT: PASS

EUT	Wireless Microphone System - Receiver	Model Name	Wireless GO II Receiver
Temperature	21.8° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

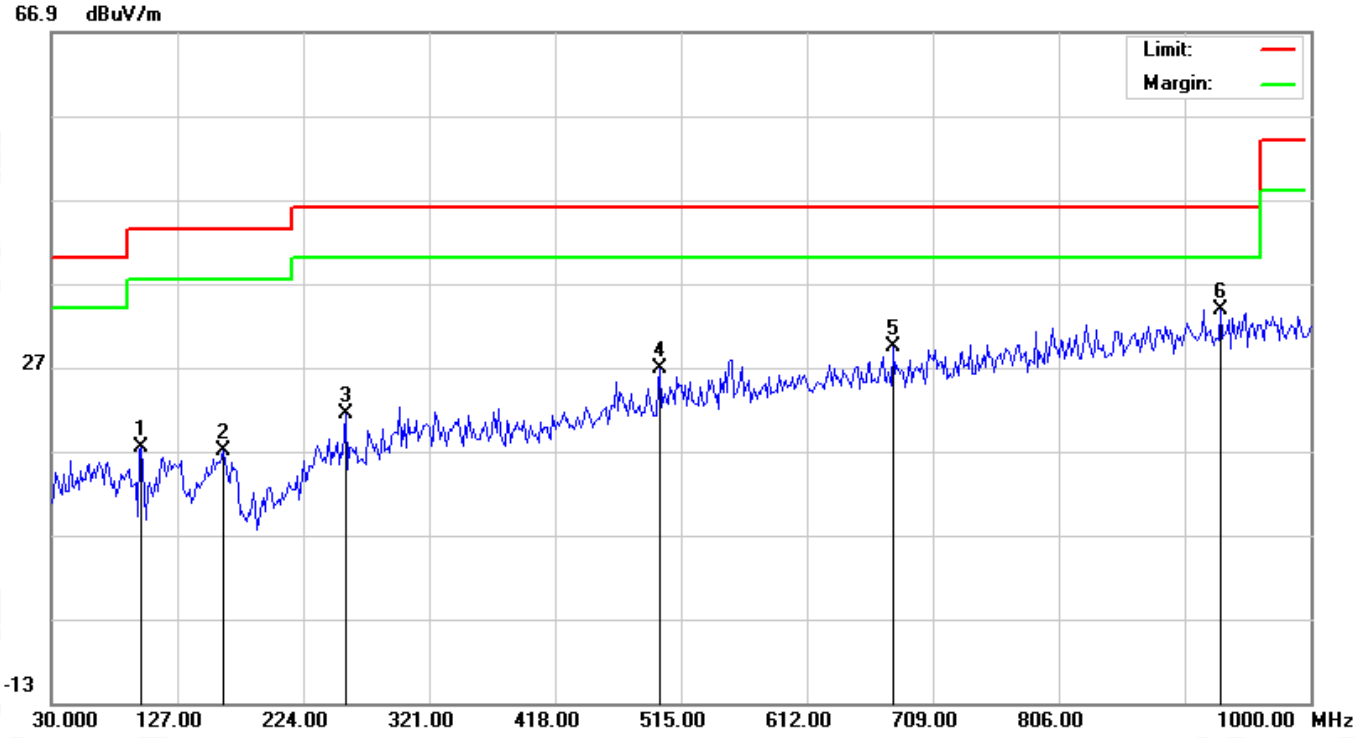

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		99.5167	6.24	11.20	17.44	43.50	-26.06	peak
2		162.5667	-1.25	18.16	16.91	43.50	-26.59	peak
3		256.3333	2.98	18.37	21.35	46.00	-24.65	peak
4		498.8333	1.95	24.94	26.89	46.00	-19.11	peak
5		678.2833	1.47	27.89	29.36	46.00	-16.64	peak
6	*	930.4833	1.82	31.96	33.78	46.00	-12.22	peak

RESULT: PASS

Note:

1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
2. All the test modes of two antennas had been tested, the mode 1 was the worst case. Only the data of the worst case would be record in this test report.

RADIATED EMISSION ABOVE 1GHZ

Antenna 1

EUT	Wireless Microphone System - Receiver	**Model Name**	Wireless GO II Receiver
Temperature	21.8° C	**Relative Humidity**	58%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 1	**Antenna**	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4804.000	47.23	0.08	47.31	74	-26.69	peak
4804.000	38.19	0.08	38.27	54	-15.73	AVG
7206.000	42.57	2.21	44.78	74	-29.22	peak
7206.000	31.05	2.21	33.26	54	-20.74	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless Microphone System - Receiver	**Model Name**	Wireless GO II Receiver
Temperature	21.8° C	**Relative Humidity**	58%
Pressure	960hPa	**Test Voltage**	Normal Voltage
Test Mode	Mode 1	**Antenna**	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4804.000	46.85	0.08	46.93	74	-27.07	peak
4804.000	35.46	0.08	35.54	54	-18.46	AVG
7206.000	40.32	2.21	42.53	74	-31.47	peak
7206.000	30.49	2.21	32.7	54	-21.3	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless Microphone System - Receiver	Model Name	Wireless GO II Receiver
Temperature	21.8° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4880.000	46.91	0.14	47.05	74	-26.95	peak
4880.000	37.02	0.14	37.16	54	-16.84	AVG
7320.000	41.55	2.36	43.91	74	-30.09	peak
7320.000	31.34	2.36	33.7	54	-20.3	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless Microphone System - Receiver	Model Name	Wireless GO II Receiver
Temperature	21.8° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4880.000	48.32	0.14	48.46	74	-25.54	peak
4880.000	37.94	0.14	38.08	54	-15.92	AVG
7320.000	42.17	2.36	44.53	74	-29.47	peak
7320.000	31.67	2.36	34.03	54	-19.97	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless Microphone System - Receiver	Model Name	Wireless GO II Receiver
Temperature	21.8° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4960.000	48.34	0.22	48.56	74	-25.44	peak
4960.000	37.13	0.22	37.35	54	-16.65	AVG
7440.000	42.94	2.64	45.58	74	-28.42	peak
7440.000	33.67	2.64	36.31	54	-17.69	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless Microphone System - Receiver	Model Name	Wireless GO II Receiver
Temperature	21.8° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4960.000	48.31	0.22	48.53	74	-25.47	peak
4960.000	37.62	0.22	37.84	54	-16.16	AVG
7440.000	42.57	2.64	45.21	74	-28.79	peak
7440.000	31.94	2.64	34.58	54	-19.42	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

RESULT: PASS

Antenna 2

EUT	Wireless Microphone System - Receiver	Model Name	Wireless GO II Receiver
Temperature	21.8° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4804.000	48.16	0.08	48.24	74	-25.76	peak
4804.000	37.45	0.08	37.53	54	-16.47	AVG
7206.000	43.51	2.21	45.72	74	-28.28	peak
7206.000	32.46	2.21	34.67	54	-19.33	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Wireless Microphone System - Receiver	Model Name	Wireless GO II Receiver
Temperature	21.8° C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Value Type
4804.000	46.95	0.08	47.03	74	-26.97	peak
4804.000	34.13	0.08	34.21	54	-19.79	AVG
7206.000	41.58	2.21	43.79	74	-30.21	peak
7206.000	30.92	2.21	33.13	54	-20.87	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						