



# FCC PART 15.231

## TEST REPORT

For

### Guangde Ledup Enterprise Inc.

Jingtang Road, Economic Development Zone, Guangde, Xuanchang, Anhui

**FCC ID: 2AEBHR41501B1**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Remote Control
<b>Test Engineer:</b> <u>Xiangguang Kong</u>	<i>Xiangguang Kong</i>
<b>Report Number:</b> <u>RSZ150305555-00</u>	
<b>Report Date:</b> <u>2015-03-13</u>	
<b>Reviewed By:</b> <u>Jimmy Xiao</u> RF Engineer	<i>Jimmy Xiao</i>
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....3**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....3

    OBJECTIVE .....3

    RELATED SUBMITTAL(S)/GRANT(S).....3

    TEST METHODOLOGY .....3

    TEST FACILITY .....4

**SYSTEM TEST CONFIGURATION.....5**

    JUSTIFICATION .....5

    SPECIAL ACCESSORIES.....5

    EQUIPMENT MODIFICATIONS .....5

    BLOCK DIAGRAM OF TEST SETUP .....5

**SUMMARY OF TEST RESULTS .....6**

**FCC §15.203 - ANTENNA REQUIREMENT.....7**

    APPLICABLE STANDARD .....7

    ANTENNA CONNECTOR CONSTRUCTION .....7

**FCC §15.205, §15.209, §15.231 (B) - RADIATED EMISSIONS .....8**

    APPLICABLE STANDARD .....8

    MEASUREMENT UNCERTAINTY.....8

    EUT SETUP .....9

    EMI TEST RECEIVER SETUP.....9

    TEST PROCEDURE .....10

    TEST EQUIPMENT LIST AND DETAILS.....10

    CORRECTED AMPLITUDE & MARGIN CALCULATION .....10

    TEST RESULTS SUMMARY .....10

    TEST DATA .....11

**FCC §15.231(C) – 20 DB EMISSION BANDWIDTH.....15**

    APPLICABLE STANDARD .....15

    TEST PROCEDURE .....15

    TEST EQUIPMENT LIST AND DETAILS.....15

    TEST DATA .....15

**FCC §15.231(A)(2) - DEACTIVATION TESTING.....17**

    APPLICABLE STANDARD .....17

    TEST PROCEDURE .....17

    TEST EQUIPMENT LIST AND DETAILS.....17

    TEST DATA .....17

**PRODUCT SIMILARITY DECLARATION LETTER.....19**

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Guangde Ledup Enterprise Inc.*'s product, model number: *3R4-1501B1* (FCC ID: *2AEBHR41501B1*) (or the "EUT") in this report was a *Remote Control*, which was measured approximately: 13.6 cm (L) x 5.0 cm (W) x 2.5 cm (H), rated input voltage: DC 9V from battery.

*Note: This product is a Remote Control, model 3R4-1501B1, 7R4-1501B1, 7R4-1502B1, 12R4-1501B1, 30R4-1501B1, 11R4-1501B1 and 8R4-1501B1 are identical schematics with the model 3R4-1501B1 was selected for fully testing. The only difference between them is model number for marketing purpose, the detailed information can be referred to the attached declaration which was stated and guaranteed by the applicant.*

*\*All measurement and test data in this report was gathered from production sample serial number: 1503009 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2015-03-05.*

### Objective

This test report is prepared on behalf of *Guangde Ledup Enterprise Inc.* All the test measurements were performed according to the measurement procedure described in ANSI C63.4-2009.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.209, 15.35(c) and 15.231 rules.

### Related Submittal(s)/Grant(s)

No related submittal(s)

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4 - 2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

## **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

---

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).


### Special Accessories

No special accessories was used

### Equipment Modifications

No modification was made to the EUT.

### Block Diagram of Test Setup

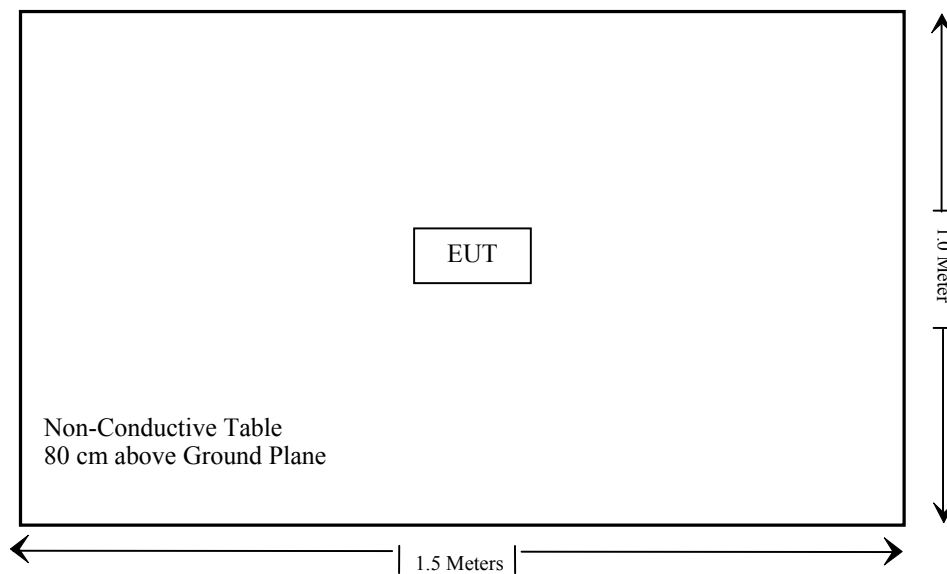

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Not Applicable
§15.205, §15.209, §15.231 (b)	Radiated Emissions	Compliance
§15.231 (c)	20dB Bandwidth	Compliance
§15.231 (a)	Deactivation time	Compliance

Not Applicable: The EUT is powered by battery only.

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **Antenna Connector Construction**

The EUT has a PCB antenna arrangement, which was permanently attached; fulfill the requirement of this section. Please refer to EUT photos.

**Result:** Compliant.

## **FCC §15.205, §15.209, §15.231 (b) - RADIATED EMISSIONS**

### **Applicable Standard**

FCC §15.205, §15.209, §15.231 (b)

According to FCC §15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

<b>Fundamental frequency (MHz)</b>	<b>Field Strength of Fundamental (Microvolts /meter)</b>	<b>Field Strength of spurious emissions ((Microvolts /meter)</b>
40.66-40.70	2250	225
70-130	1250	125
130-174	1250 to 3750**	125 to 375**
174-260	3750	375
260-470	3750 to 12500**	375 to 1250**
Above 470	12500	1250

\*Linear interpolations.

The above field strength limits are specified at a distance of 3-meters the tighter limits apply at the band edges.

### **Measurement Uncertainty**


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, and it will not be taken into consideration for the test data recorded in the report.




**EUT Setup**

**Below 1 GHz:**

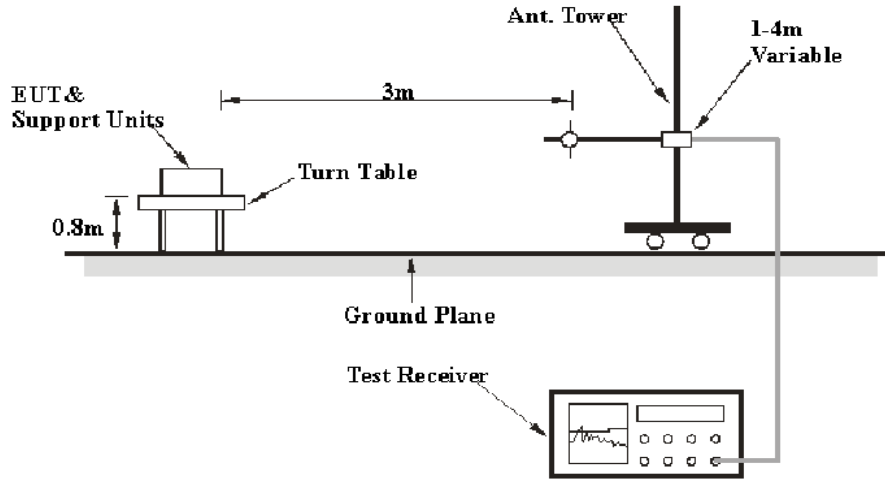

**Above 1 GHz:**

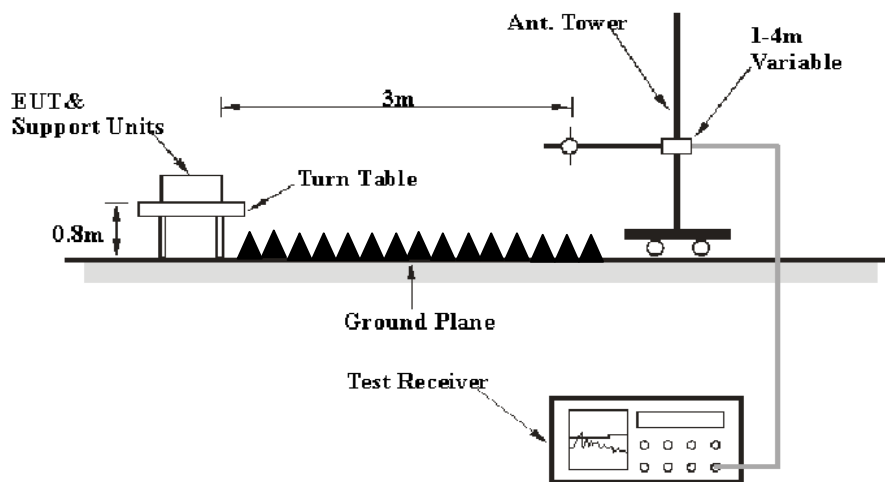

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4 - 2009. The specification used was the FCC 15 § 15.209, 15.205 and 15.231.

**EMI Test Receiver Setup**

The system was investigated from 30 MHz to 5 GHz.

During the radiated emission test, the test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in the Quasi-peak detection mode from 30MHz to 1GHz, Peak detection mode above 1 GHz.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2014-05-06	2015-05-06
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2014-11-03	2015-11-03
TDK	Chamber	Chamber A	2#	2012-10-15	2015-10-15
Sunol Sciences	Broadband Antenna	JB3	A111513	2014-06-18	2017-06-17
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-08-22	2015-08-22
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2014-04-23	2015-04-23
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-01	2017-11-30
R&S	Auto test Software	EMC32	V9.10	NCR	NCR

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 5.8 dB means the emission is 5.8 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.205, §15.209, §15.231, the worst margin reading as below:

**12.00 dB at 1301.76 MHz in the Horizontal polarization**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

In BAEL,  $U_{(L_m)}$  is less than  $+U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	23 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by Xiangguang Kong on 2015-03-05.

Test mode: Transmitting

30MHz-5GHz: (Pre-test with x, y, z axis, the worst case is y axis)

**Measure result:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dB $\mu$ V/m)	FCC Part 15.231/205/209		
	Reading (dB $\mu$ V)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dB $\mu$ V/m)	Margin (dB)	Comment
433.92	80.55	PK	117	1.5	H	-10	70.55	100.80	30.25	Fundamental
433.92	86.58	PK	2	1.5	V	-10	76.58	100.80	24.22	Fundamental
867.84	40.10	PK	246	1.5	H	-3.5	36.60	80.80	44.20	Harmonic
867.84	48.24	PK	74	1.5	V	-3.5	44.74	80.80	36.06	Harmonic
1301.76	41.96	PK	35	1.5	H	-0.78	41.18	74.00	32.82	Harmonic
1301.76	53.98	PK	182	1.6	V	-0.58	53.40	74.00	20.60	Harmonic
1735.68	38.92	PK	87	1.6	H	1.38	40.30	80.80	40.50	Harmonic
1735.68	40.08	PK	156	1.5	V	1.58	41.66	80.80	39.14	Harmonic

**Calculate result:**

Field Strength of Average Emission							
Frequency (MHz)	Peak Measurement @3m (dBµV/m)	Polar (H/V)	Duty Cycle Correction Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.231/205/209		
					Limit (dBµV/m)	Margin (dB)	Comment
433.92	70.55	H	-11.40	59.15	80.80	21.65	Fundamental
433.92	76.58	V	-11.40	65.18	80.80	15.62	Fundamental
867.84	36.60	H	-11.40	25.20	60.80	35.60	Harmonic
867.84	44.74	V	-11.40	33.34	60.80	27.46	Harmonic
1301.76	41.18	H	-11.40	29.78	54.00	24.22	Harmonic
1301.76	53.40	V	-11.40	42.00	54.00	12.00	Harmonic
1735.68	40.30	H	-11.40	28.90	60.80	31.90	Harmonic
1735.68	41.66	V	-11.40	30.26	60.80	30.54	Harmonic

Note:

Calculate Average value based on Duty Cycle correction factor:

$$Ton = Ton1N1 + Ton2N2 + \dots + TonnNn$$


$$= 0.5351 \text{ ms} * 13 + 1.5631 \text{ ms} * 4 = 13.2087\text{ms}$$

$$Tp = 49.0982\text{ms}$$


$$\text{Duty cycle factor} = 20 * \log(Ton/Tp) = 20 * \log(13.2087\text{ms}/49.0982\text{ms}) = -11.40 \text{ dB}$$

$$\text{Average} = \text{Peak} + \text{Duty Cycle factor}$$


### Duty Cycle 1

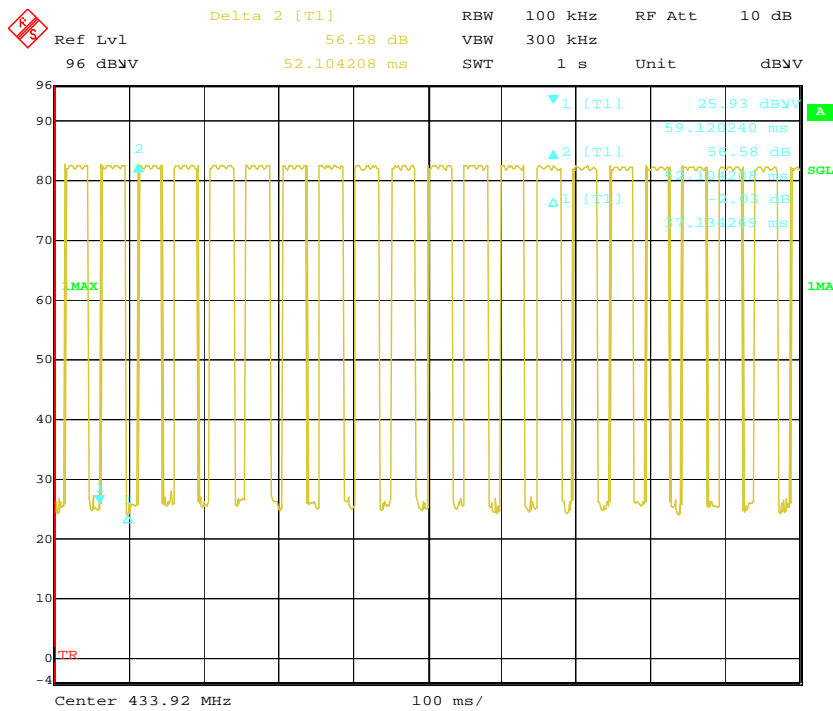

### Duty Cycle 2

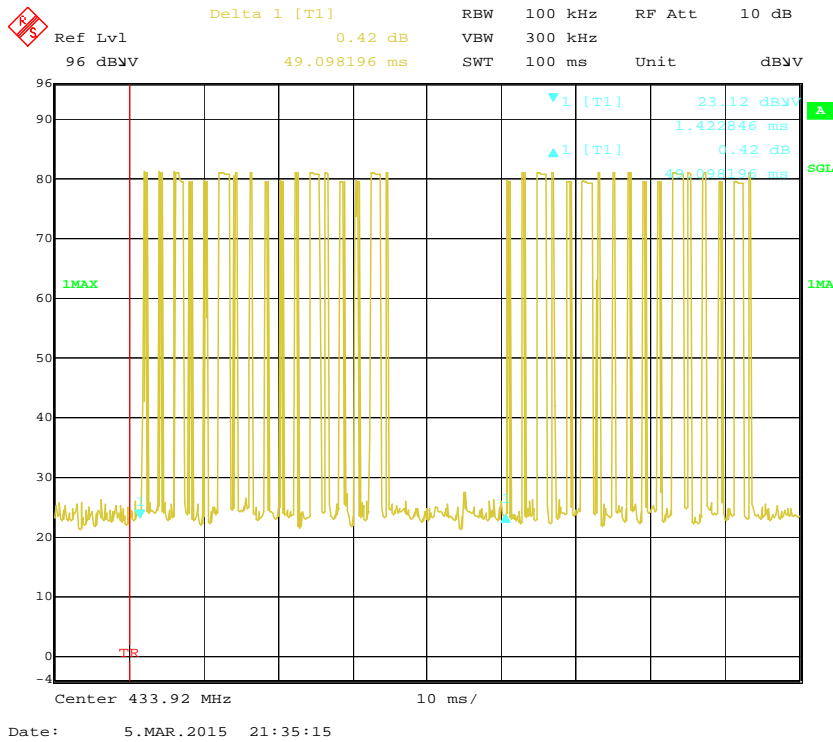


### Duty Cycle 3

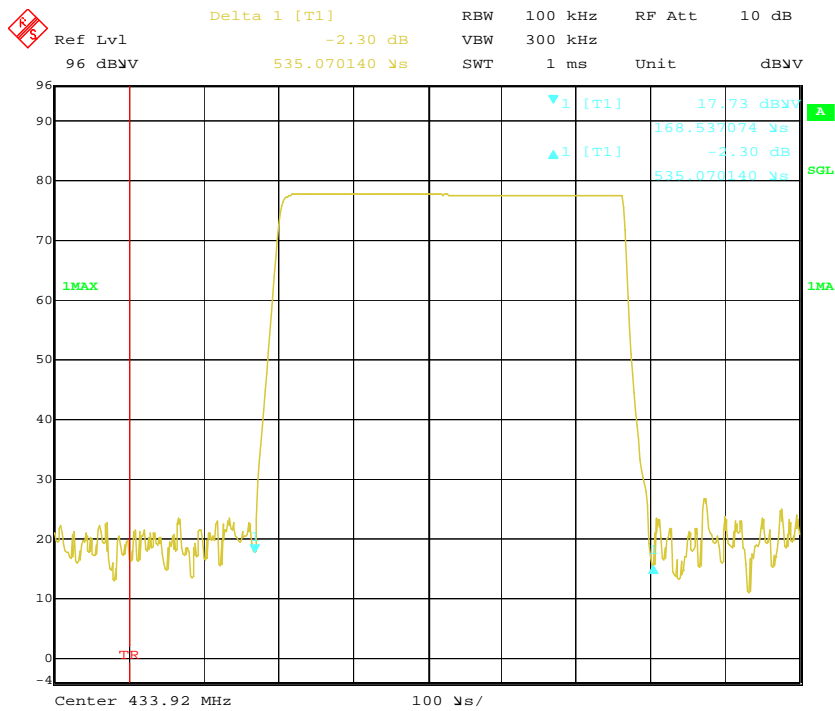

Date: 5.MAR.2015 21:46:23

### Duty Cycle 4

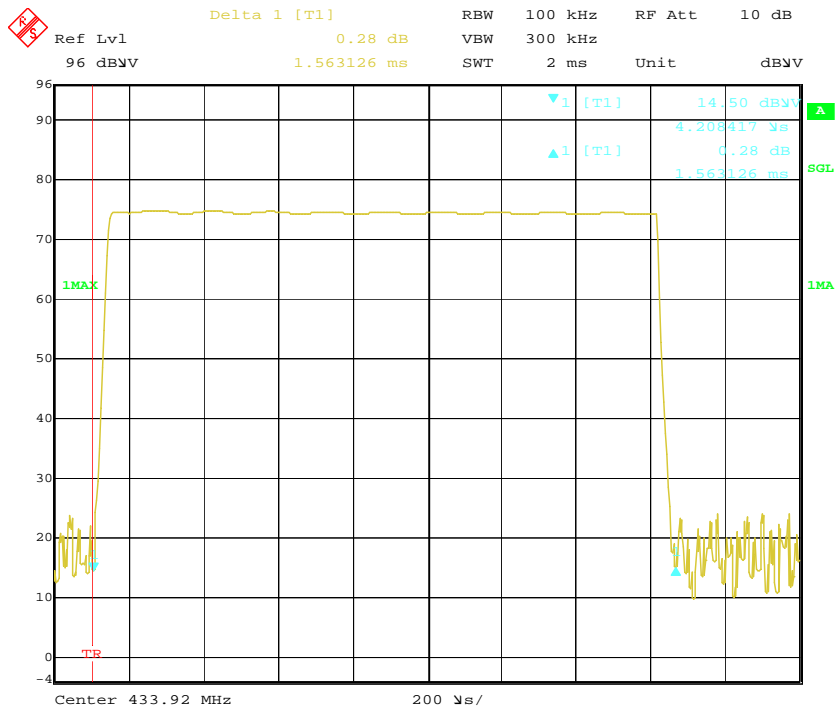

Date: 5.MAR.2015 21:51:18

## FCC §15.231(c) – 20 dB EMISSION BANDWIDTH

### Applicable Standard

Per 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

### Test Procedure

With the EUT's antenna attached, the waveform was received by the test antenna which was connected to the spectrum analyzer, plot the 20 dB bandwidth.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-08-22	2015-08-22

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

Temperature:	23 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

*The testing was performed by Xiangguang Kong on 2015-03-05.*


*Test Mode: Transmitting*

Please refer to following table and plot.

Channel Frequency (MHz)	20 dB Emission Bandwidth (kHz)	<Limit (kHz)	Result
433.92	52.1	1084.8	Pass

Note: Limit = 0.25% \* center frequency = 0.25% \* 433.92 MHz = 1084.8 kHz  
20dB bandwidth = 52.1042 kHz < 1084.8 kHz

### 20 dB Emission Bandwidth

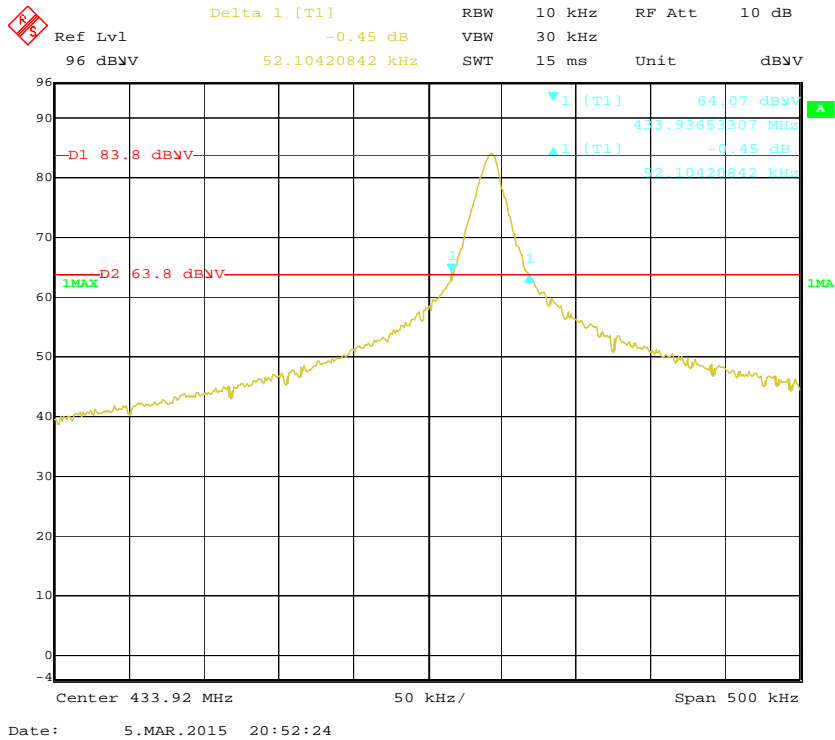



## FCC §15.231(a)(2) - DEACTIVATION TESTING

### Applicable Standard

Per FCC §15.231(a) (2), a transmitter activated automatically shall cease transmission within 5 seconds after activation.

### Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer=operating frequency.
3. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Span=0Hz.
4. Repeat above procedures until all frequency measured was complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	837405/023	2014-08-22	2015-08-22

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	23 °C
<b>Relative Humidity:</b>	51 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Xiangguang Kong on 2015-03-05.*

*Test Mode: Transmitting*

**Test Result:** Compliant, please refer to following plot

5S

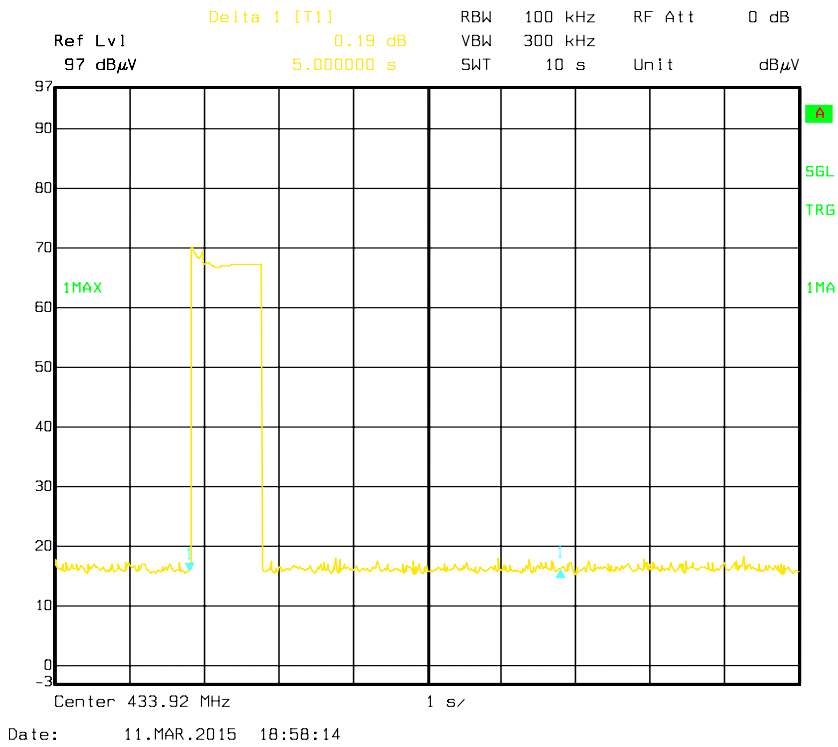

Note:

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation

---

## PRODUCT SIMILARITY DECLARATION LETTER

---



Guangde Ledup Enterprise Inc.

Add: Jintang Road, Economic Development Zone, Xuancheng City, Anhui Province, China  
Tel: 0086 18956371120 Fax:0086 563 6767225

2015-04-09

### Product Similarity Declaration

To Whom It May Concern,

We, Guangde Ledup Enterprise Inc. , hereby declare that we have a product named as Remote Control (Model number: 3R4-1501B1) was tested by BACL, meanwhile, for our marketing purpose, we would like to list a series models (7R4-1501B1, 7R4-1502B1, 12R4-1501B1, 30R4-1501B1, 11R4-1501B1, 8R4-1501B1) on reports and certificate, all the models are identical schematics.

No other changes are made to them.

We confirm that all information above is true, and we'll be responsible for all the consequences. Please contact me if you have any question.

A handwritten signature in black ink that reads "Lianfeng Ma".

Signature:

Printed Name: Lianfeng Ma

Title: General Manager

\*\*\*\*\*END OF REPORT\*\*\*\*\*