

Date: 2015-08-18 Page 1 of 24

No.: DM120401

**Applicant:** Winspeed Co., LTD

14 F-1, No. 2, Jian-Ba Rd., Chung-Ho District, New Taipei

City, Taiwan

Manufacturer: Winspeed Co., LTD

14 F-1, No. 2, Jian-Ba Rd., Chung-Ho District, New Taipei

City, Taiwan

**Description of Sample(s):** Submitted sample(s) said to be

Product: SPEEDLINK LUCIDIS Wireless Deskset

Brand Name: Speedlink

Model Number: SL-640300-BK-US

FCC ID: 2AEDNA15

**Date Sample(s) Received:** 2015-07-24

**Date Tested:** 2015-07-25 to 2015-08-17

**Investigation Requested:** Perform ElectroMagnetic Interference measurement in

accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014 and ANSI C63.10: 2013 for FCC Certification.

**Conclusion(s):** The submitted product <u>COMPLIED</u> with the requirements of

Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this

Test Report.

Remark(s): ---

(Keyboard)

Authorized Signatory

ElectroMagnetic Compatibility Department

For and on behalf of

STC (Dongguan) Company Limited

ONG Yun Jian Along

510 (Bongguan) Company Emines



2015-08-18 0M120401	Page 2 of 24
TENT:	
Cover Content	Page 1 of 24 Page 2 of 24
General Details	
Equipment Under Test [EUT]	Page 3 of 24
Description of EUT Operation	Page 3 of 24
Date of Order	Page 3 of 24
Submitted Sample	Page 3 of 24
Test Duration	Page 3 of 24
Country of Origin	Page 3 of 24
Technical Details	
Investigations Requested	Page 4 of 24
Test Standards and Results Summary	Page 4 of 24
<u>Test Results</u>	
Emission	Page 5-8 of 24
Bandwidth Measurement	Page 9-19 of 24
Appendix A	
List of Measurement Equipment	Page 20 of 24
Appendix B	
Ancillary Equipment	Page 21 of 24
Appendix C	
)	TENT:  Cover Content  General Details  Equipment Under Test [EUT]  Description of EUT Operation  Date of Order  Submitted Sample  Test Duration  Country of Origin  Technical Details  Investigations Requested  Test Standards and Results Summary  Test Results  Emission  Bandwidth Measurement  Appendix A  List of Measurement Equipment  Appendix B  Ancillary Equipment

Photographs

Page 22-24 of 24



Date: 2015-08-18 Page 3 of 24

No.: DM120401

#### 1.0 General Details

# 1.1 Equipment Under Test [EUT] Description of Sample(s)

Product: SPEEDLINK LUCIDIS Wireless Deskset

Manufacturer: Winspeed Co., LTD

14 F-1, No. 2, Jian-Ba Rd., Chung-Ho District, New Taipei

City, Taiwan

Brand Name: Speedlink

Model Number: SL-640300-BK-US

Rating: 3.0Vd.c. (Powered by "AAA" battery x2)

### 1.2 Description of EUT Operation

The Equipment Under Test (EUT) is a SPEEDLINK LUCIDIS Wireless Deskset. It is a transceiver operating at 2407MHz~2477MHz and the RF signal was modulated by IC.

### 1.3 Date of Order

2015-07-24

#### 1.4 Submitted Sample(s):

1 Sample

#### 1.5 Test Duration

2015-07-25 to 2015-08-17

### 1.6 Country of Origin

China



Date: 2015-08-18 Page 4 of 24

No.: DM120401

### **<u>2.0</u>** Technical Details

### 2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2014 Regulations and ANSI C63.10: 2013 for FCC Certification.

### 2.2 Test Standards and Results Summary Tables

EMISSION Results Summary											
Test Condition	Test Requirement	Test Method	Class /	To	est Resu	ılt					
			Severity	Pass	Fail	N/A					
Field Strength of Fundamental & Harmonics Emissions	FCC 47CFR 15.249	ANSI C63.10: 2013	N/A								
Radiated Emissions	FCC 47CFR 15.209	ANSI C63.10: 2013	N/A	$\boxtimes$							

Note: N/A - Not Applicable

Date: 2015-08-18 Page 5 of 24

No.: DM120401

3.0 Test Results

3.1 Emission

#### 3.1.1 Radiated Emissions

Test Requirement: FCC 47CFR 15.249 & FCC 47CFR 15.209

Test Method: ANSI C63.10: 2013

Test Date: 2015-07-25

Mode of Operation: Communication mode

#### **Test Method:**

For emission measurements at or below 1 GHz, the sample was placed 0.8m above the ground plane of semi-anechoic Chamber\*. For emission measurements above 1 GHz, the sample was placed 1.5m above the ground plane of semi-anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: Semi-anechoic chamber located on the STC (Dongguan) Company Ltd. 68 Fumin Nan Road, Dalang, Dongguan, Guangdong, PRC with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 629686.



Date: 2015-08-18 Page 6 of 24

No.: DM120401

#### **Spectrum Analyzer Setting:**

9KHz – 30MHz (Pk & Av) RBW: 10kHz

VBW: 30kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

30MHz – 1GHz (QP) RBW: 120kHz

VBW: 120kHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold


Above 1GHz (Pk & Av) RBW: 1MHz

VBW: 1MHz Sweep: Auto

Span: Fully capture the emissions being measured

Trace: Max. hold

#### **Test Setup:**

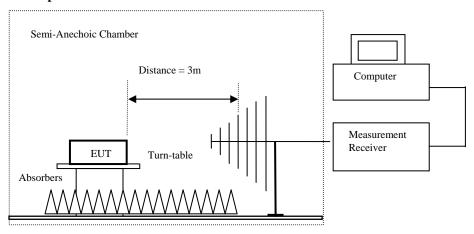

- Ground Plane
- Absorbers placed on top of the ground plane are for measurements above  $1000 \mathrm{MHz}$  only.
- Measurements between 30 MHz to 1000 MHz made with Bi-log antennas, above 1000 MHz horn antennas are used, 9 kHz to 30 MHz loop antennas are used.



Date: 2015-08-18 Page 7 of 24

No.: DM120401

### Limits for Field Strength of Fundamental & Harmonics Emissions [FCC 47CFR 15.249]:

Frequency Range of Fundamental	Field Strength of Fundamental Emission	Field Strength of Harmonics Emission
[MHz]	[microvolts/meter]	[microvolts/meter]
902-928	50,000 [Quasi-Peak]	500 [Average]
2400-2483.5	50,000 [Average]	500 [Average]

### Results of Tx mode (Lowest Frequency Channel-2407 MHz): Pass

Field Strength of Fundamental Emissions									
			Peak Value						
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m				
2407.00	38.3	36.8	75.1	5,688.5	500,000	Vertical			
2407.00	38.3	36.4	74.7	5,432.5	500,000	Horizontal			

Field Strength of Fundamental Emissions Average Value										
Frequency										
	Level @3m	Factor	Strength	Strength		Polarity				
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m					
2407.00	24.4	36.8	61.2	1,148.2	50,000	Vertical				
2407.00	23.9	36.4	60.3	1,035.1	50,000	Horizontal				

	Field Strength of Harmonics Emission										
Peak Value											
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field					
	Level @ 3m	Factor	Strength	Strength		Polarity					
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m						
4814.0	3.8	41.5	45.3	184.1	5,000	Vertical					
4814.0	3.1	42.4	45.5	188.4	5,000	Horizontal					
7221.0	3.4	45.1	48.5	266.1	5,000	Vertical					
7221.0	1.9	46.2	48.1	254.1	5,000	Horizontal					
9628.0	2.3	48.0	50.3	327.3	5,000	Vertical					
9628.0	1.2	48.8	50.0	316.2	5,000	Horizontal					



Date: 2015-08-18 Page 8 of 24

No.: DM120401

	Field Strength of Harmonics Emission										
		A	Average Valu	e							
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field					
	Level @3m	Factor	Strength	Strength		Polarity					
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m						
4814.0	-8.4	41.5	33.1	45.2	500	Vertical					
4814.0	-9.6	42.4	32.8	43.7	500	Horizontal					
7221.0	-11.0	45.1	34.1	50.7	500	Vertical					
7221.0	-10.0	46.2	36.2	64.6	500	Horizontal					
9628.0	-9.6	48.0	38.4	83.2	500	Vertical					
9628.0	-11.4	48.8	37.4	74.1	500	Horizontal					

Results of Tx mode (Middle Frequency Channel- 2437MHz): Pass

Field Strength of Fundamental Emissions									
Peak Value									
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field			
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m				
2437.00	2437.00 38.1 36.8 74.9 5,559.0 500,000 Vertical								
2437.00	38.9	36.4	75.3	5,821.0	500,000	Horizontal			

Field Strength of Fundamental Emissions										
		F	Average Valu	e						
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field				
	Level @3m	Factor	Strength	Strength		Polarity				
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m					
2437.00	23.8	36.8	60.6	1,071.5	50,000	Vertical				
2437.00	24.4	36.4	60.8	1,096.5	50,000	Horizontal				

	Field Strength of Harmonics Emission										
	3.6	G :	Peak Value	D: 11	T: :: 02	D D' 11					
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field					
	Level @3m	Factor	Strength	Strength		Polarity					
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m						
4874.0	3.5	41.6	45.1	179.9	5,000	Vertical					
4874.0	2.7	42.5	45.2	182.0	5,000	Horizontal					
7311.0	2.2	45.2	47.4	234.4	5,000	Vertical					
7311.0	1.6	46.3	47.9	248.3	5,000	Horizontal					
9748.0	2.4	48.1	50.5	335.0	5,000	Vertical					
9748.0	0.7	48.9	49.6	302.0	5,000	Horizontal					



Date: 2015-08-18 Page 9 of 24

No.: DM120401

	Field Strength of Harmonics Emission Avarage Value										
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field					
	Level @3m	Factor	Strength	Strength		Polarity					
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m						
4874.0	-8.2	41.6	33.4	46.8	500	Vertical					
4874.0	-10.0	42.5	32.5	42.2	500	Horizontal					
7311.0	-10.7	45.2	34.5	53.1	500	Vertical					
7311.0	-11.4	46.3	34.9	55.6	500	Horizontal					
9748.0	-10.3	48.1	37.8	77.6	500	Vertical					
9748.0	-12.1	48.9	36.8	69.2	500	Horizontal					

Results of Tx mode (Highest Frequency Channel – 2477MHz): Pass

Field Strength of Fundamental Emissions									
Peak Value									
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field								
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m				
2477.00	2477.00 37.4 36.8 74.2 5,128.6 500,000 Vertical								
2477.00	37.6	36.4	74.0	5,011.9	500,000	Horizontal			

Field Strength of Fundamental Emissions								
Average Value								
Frequency	Measured	Correction	Field	Field	Limit @3m	E-Field		
Level @3m Factor Strength Strength Polarit								
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m			
2477.00	22.9	36.8	59.7	966.1	50,000	Vertical		
2477.00	22.4	36.4	58.8	871.0	50,000	Horizontal		



Date: 2015-08-18 Page 10 of 24

No.: DM120401

Field Strength of Harmonics Emission Peak Value								
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field							
	Level @3m	Factor	Strength	Strength		Polarity		
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m			
4954.0	4.0	41.4	45.4	186.2	5,000	Vertical		
4954.0	2.0	42.7	44.7	171.8	5,000	Horizontal		
7431.0	1.5	45.6	47.1	226.5	5,000	Vertical		
7431.0	1.0	46.5	47.5	237.1	5,000	Horizontal		
9908.0	1.0	48.6	49.6	302.0	5,000	Vertical		
9908.0	0.5	49.7	50.2	323.6	5,000	Horizontal		

Field Strength of Harmonics Emission									
	Avarage Value								
Frequency	Frequency Measured Correction Field Field Limit @3m E-Field								
	Level @3m	Factor	Strength	Strength		Polarity			
MHz	dBμV/m	dBμV/m	dBμV/m	μV/m	μV/m				
4954.0	-8.5	41.4	32.9	44.2	500	Vertical			
4954.0	-10.0	42.7	32.7	43.2	500	Horizontal			
7431.0	-10.9	45.6	34.7	54.3	500	Vertical			
7431.0	-11.0	46.5	35.5	59.6	500	Horizontal			
9908.0	-11.2	48.6	37.4	74.1	500	Vertical			
9908.0	-12.8	49.7	36.9	70.0	500	Horizontal			

#### Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

Calculated measurement uncertainty (9kHz - 30MHz): 3.3dB

(30MHz – 1GHz): 4.6dB (1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2015-08-18 Page 11 of 24

No.: DM120401

#### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

#### Results of Communication mode (9kHz - 30MHz): PASS

Emissions detected are more than 20 dB below the FCC Limits

### Results of Communication mode (30MHz - 1GHz): PASS

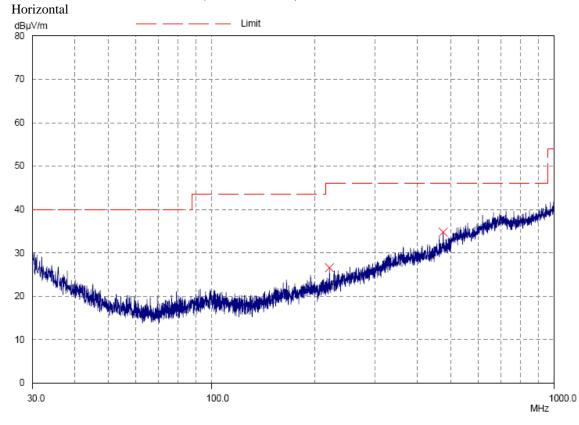



Date: 2015-08-18 Page 12 of 24

No.: DM120401

### Results of Communication mode (30MHz - 1GHz): PASS

Radiated Emissions Quasi-Peak								
Emission E-Field Level Limit Level Limit								
Frequency	Polarity @3m @3m @3m @3m							
MHz $dB\mu V/m$ $dB\mu V/m$ $\mu V/m$ $\mu V/m$								
220.9	Horizontal	26.6	46.0	21.4	200			
474.6	Horizontal	34.8	46.0	55.0	200			



Date: 2015-08-18 Page 13 of 24

No.: DM120401

### Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


Frequency Range [MHz]	Quasi-Peak Limits [μV/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### Results of Communication mode (9kHz - 30MHz): PASS

Emissions detected are more than 20 dB below the FCC Limits

### Results of Communication mode (30MHz - 1GHz): PASS

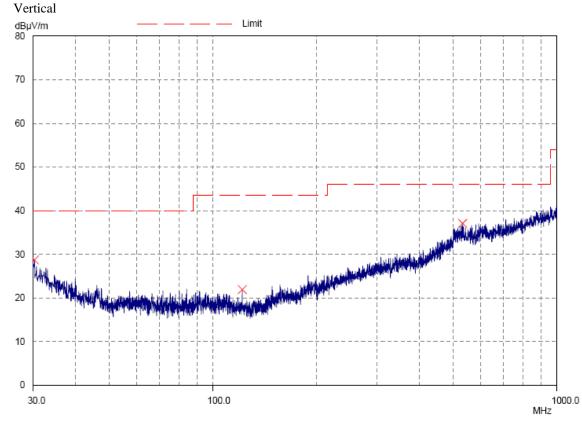



Date: 2015-08-18 Page 14 of 24

No.: DM120401

### Results of Communication mode (30MHz - 1GHz): PASS

Radiated Emissions Quasi-Peak								
Emission E-Field Level Limit Level Limit								
Frequency	Polarity @3m @3m @3m @3m							
MHz	MHz $dB\mu V/m$ $dB\mu V/m$ $\mu V/m$ $\mu V/m$							
30.3	Vertical	28.7	40.0	27.2	100			
121.9	Vertical	21.9	43.5	12.4	150			
533.0	Vertical	37.1	46.0	71.6	200			

Remarks:

Calculated measurement uncertainty (9kHz - 30MHz): 3.3dB

(30MHz – 1GHz): 4.6dB (1GHz - 26GHz): 4.4dB

Emissions in the vertical and horizontal polarizations have been investigated and the worst-case test results are recorded in this report.



Date: 2015-08-18 Page 15 of 24

No.: DM120401

#### 3.2 20dB Bandwidth of Fundamental Emission

Test Requirement: FCC 47 CFR 15.249 Test Method: ANSI C63.10: 2013

Test Date: 2015-08-17 Mode of Operation: Tx mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.




Date: 2015-08-18 Page 16 of 24

No.: DM120401

### Limits for 20dB Bandwidth of Fundamental Emission (Low Frequency Channel):

Frequency Range	20dB Bandwidth
[MHz]	[MHz]
2407	2.12

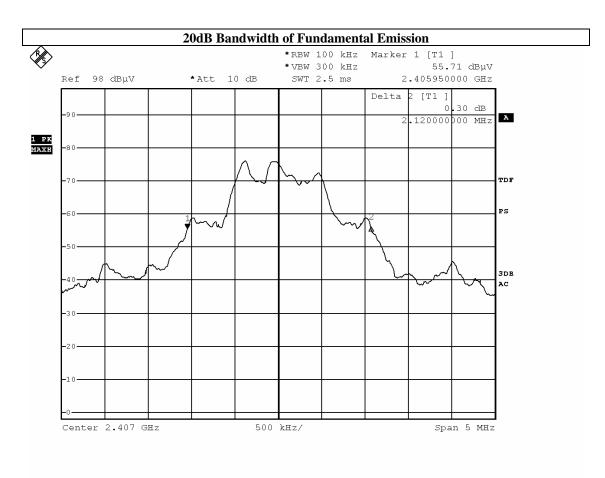




Date: 2015-08-18 Page 17 of 24

No.: DM120401

### Limits for 20dB Bandwidth of Fundamental Emission (Middle Frequency Channel):

Frequency Range	20dB Bandwidth
[MHz]	[MHz]
2437	2.12

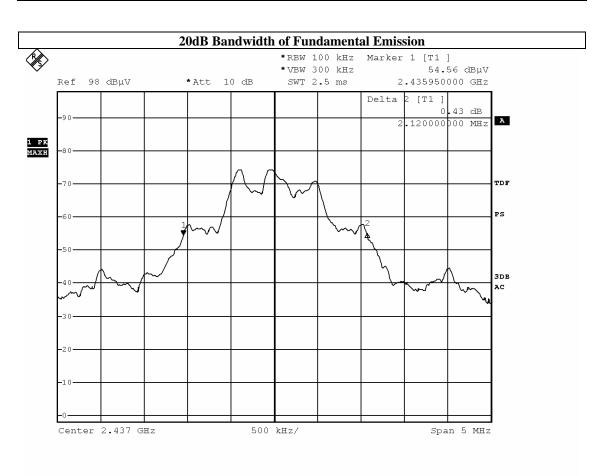




Date: 2015-08-18 Page 18 of 24

No.: DM120401

### Limits for 20dB Bandwidth of Fundamental Emission (High Frequency Channel):

Frequency Range	20dB Bandwidth
[MHz]	[MHz]
2477	2.12

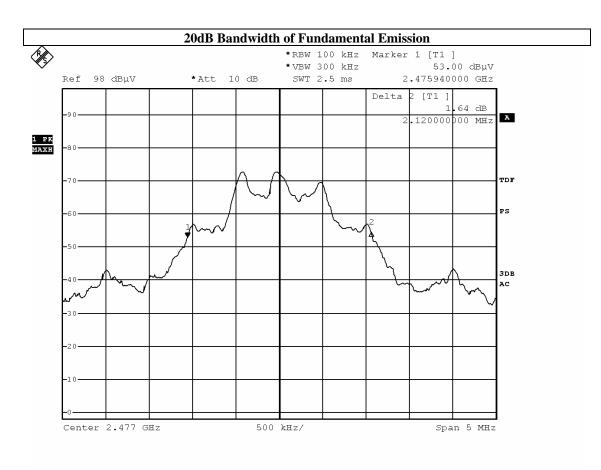



Date: 2015-08-18 Page 19 of 24

No.: DM120401

#### **RF Radiated Emissions Measurement:**

#### Limit:

Emissions radiated outside of the specified frequency bands, except t for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §115.209, whichever is the lesser attenuation.

### Result: RF Radiated Emissions (1GHz-26GHz)(worse data) (Lowest)

Field Strength of Band-edge Compliance								
Peak Value								
Frequency Measured Correction Field Limit Margin E-Field								
	Level @3m Factor Strength @3m Polarity							
MHz $dB\mu V$ $dB/m$ $dB\mu V/m$ $dB\mu V/m$ $dB\mu V/m$								
2439.0	3.9	36.8	40.7	74.0	33.3	Vertical		

Field Strength of Band-edge Compliance							
Average Value							
Frequency Measured Correction Field Limit Margin E-Field							
Level @3m Factor Strength @3m Polarity							
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$		
2439.0	-6.8	36.8	30.0	54.0	24.0	Vertical	

### Result: RF Radiated Emissions (1GHz-26GHz) (worse data) (Highest)

Field Strength of Band-edge Compliance						
Peak Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	dBμV/m	
2483.5	4.0	36.4	40.4	74.0	33.6	Horizontal

Field Strength of Band-edge Compliance						
Average Value						
Frequency	Measured	Correction	Field	Limit	Margin	E-Field
	Level @3m	Factor	Strength	@3m		Polarity
MHz	dΒμV	dB/m	$dB\mu V/m$	$dB\mu V/m$	$dB\mu V/m$	
2483.5	-5.9	36.4	30.5	54.0	23.5	Horizontal



Date: 2015-08-18 Page 20 of 24

No.: DM120401

### Appendix A

### List of Measurement Equipment

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EMD004	LISN	ROHDE & SCHWARZ	ESH3-Z5	100102	2015.3.24	2016.3.24
EMD022	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100314	2015.3.24	2016.3.24
EMD035	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	100441	2015.3.24	2016.3.24
EMD036	EMI Test Receiver	ROHDE & SCHWARZ	ESIB 26	100388	2015.3.24	2016.3.24
EMD041	TWO-LINE V- NETWORK	ROHDE & SCHWARZ	ENV216	100261	2015.3.24	2016.3.24
EMD061	Biconilog Antenna	ETS.LINDGREN	3142C	00060439	2014.11.29	2016.11.29
EMD062	Double-Ridged Waveguide (1GHz – 18GHz)	ETS.LINDGREN	3117	00075933	2014.11.15	2015.11.15
EMD084	MULTI-DVICE CONTROLLER	ETS.LINDGREN	2090	00060107	N/A	N/A
EMD088	Video Contol Unit	ETS.LINDGREN	Y21953A	2601073	N/A	N/A
EMD093	Monitor	ViewSonic	VA9036	Q8X064201876	N/A	N/A
EMD102	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707454	N/A	N/A
EMD103	Intelligent Frequency	Ainuo Instrument Co., Ltd	AN97005SS	79707455	N/A	N/A
EMD105	FACT-3 EMC Chamber	ETS.LINDGREN	FACT-3	3803	N/A	N/A
EMD106	Shielding Room #1	ETS.LINDGREN	RFD-100	3802	N/A	N/A
	100V Insertion Unit	ROHDE & SCHWARZ	URV5-Z4	100464	2015.3.24	2016.3.24
EMD113	Pre-Amplifier	ROHDE & SCHWARZ	N/A	1129588	2015.3.24	2016.3.24
EMD124	Loop Antenna	ETS-Lindgren	6502	00104905	2014.04.28	2016.04.28
EMD131	Standard Gain Horn Antenna (18GHz – 26.5GHz)	Chengdu AINFO Inc.	JXTXLB-42- 15-C-KF	J2021100721001	2013.04.09	2016.04.09

#### Remarks:-

N/A Not Applicable or Not Available



Date: 2015-08-18 Page 21 of 24

No.: DM120401

### Appendix B

### **Ancillary Equipment**

ITEM NO.	DESCRIPTION	MODEL NO.	FCC ID	REMARK
1	DELL COMPUTER	DMC	N/A	N/A
2	DELL MONITOR	E177FPB	ARSCM356N	RESOLUTION 1024*768 (DURING TESTING) 1.0M UNSHIEDED POWER VORD CONNECTED TO THE COMPUTER 1.5M SHIELDED CABLE CONNECTED TO THE COMPUTER
3	DELL MOUSE	N/A	N/A	2.4M UNSHIELDED CABLE CONNECTED TO THE COMPUTER
4	Dongle	SL-640300-BK	N/A	SPEEDLINK LUCIDIS Wireless Deskset
5	LASER PRINTER	HP LASERJET 1020 PLUS	N/A	1.8M UNSHIELDED POWER CORD 2.8M SHIELDED CABLE (BUNDLED TO 1M) CONNECTED TO THE COMPUTER



Date: 2015-08-18 Page 22 of 24

No.: DM120401

Appendix C

### Photographs of EUT


Front View of the product



**Inside View of the product** 



**Inner Circuit Bottom View** 



Rear View of the product



**Inner Circuit Top View** 







Date: 2015-08-18 Page 23 of 24

No.: DM120401

### Photographs of EUT

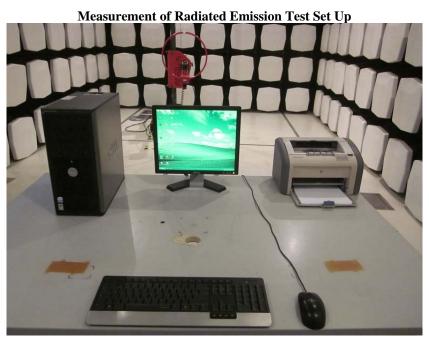

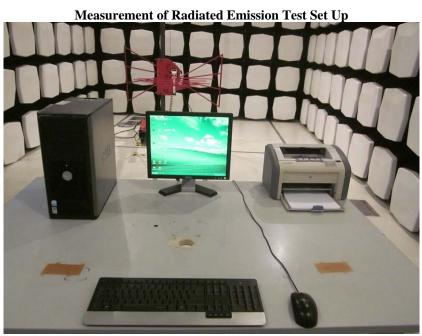

### STC (Dongguan) Company Limited



Date: 2015-08-18 Page 24 of 24

No.: DM120401

**Photographs of EUT** 



\*\*\*\*\* End of Test Report \*\*\*\*\*