


1 2 3 4 5 6 7

REV.	DESCRIPTION	ENG.	APPROVAL

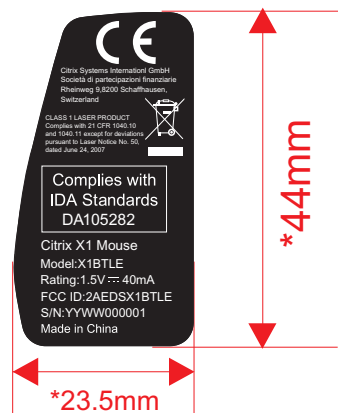


1:1

NOTE:

1. Printing: Pantone white on black background.
2. TOL: +0.3/-0.5mm
3. The dimensions marked with "*" are important.
4. Glue T=0.025~0.03mm
5. Stickiness: 3.0kg/cm²
6. Product must be halogen free
7. Requirement of PRIMAX Part:
 1. Comply with PRIMAX QW-5Q002 "Green Product Chemical Substances Specifion."
 2. Follow customer's specification as required.
 3. Follow Halogen-Free requirement: Br<900 ppm, Cl<900 ppm, Br+Cl<1500 ppm if required.
8. S/N: YY WW XXXXXX

Serial No.(From 000001.000002.000003.....999999)
Week(01.02...)此周別碼為生產日期，作大貨時請生管提供
Year(2014=14, 2015=15...)

9.30400999901X,30401019300X日期流水碼需對應,同一周別不可重號

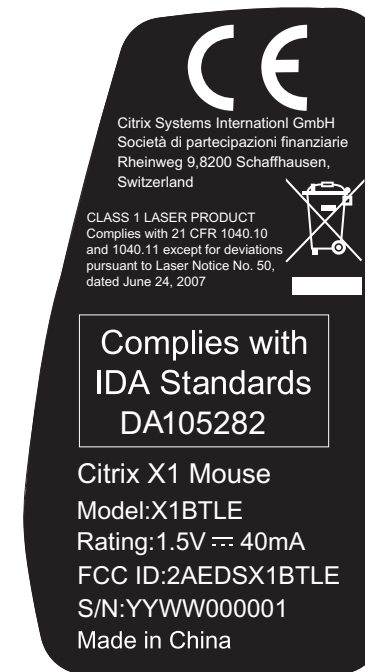

2:1

DO NOT SCALE DRAWING		PRIMAX		致伸資訊電子有限公司 PRIMAX ELECTRONICS LTD.	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF PRIMAX ELECTRONICS LTD. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF PRIMAX ELECTRONICS LTD.					
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°					
DIMENSIONS		TOLERANCE		FINISH	CHKD.
0.00 TO 30.00mm	±0.10mm			Citrix	Sarah.Lee
30.01 TO 80.00mm	±0.13mm				Apple.Zhao
80.01 TO 150.00mm	±0.15mm				
150.01 ↑	±0.20mm				
SCALE		UNIT mm		DR. Helen.Yuan2014/11/27	
TITLE		BOTTOM LABEL			
DWG NO.		304009999xxx			SIZE A4
FILE NAME		304009999xxx		SHEET	1/1
REV.		1			
80#合成紙+霧P					