

RF Exposure Report

Report No.: MFBAYG-WTW-P22050457 R1

FCC ID: 2AEEV-OBFTC0120A

Test Model: OBFTC-0120-A

Received Date: May 19, 2022

Test Date: Jul. 12 ~ Jul. 21, 2022 (Test Mode A ~ D)
Aug. 24 ~ Sep. 14, 2022 (Test Mode E ~ H)

Issued Date: Sep. 16, 2022

Applicant: Otter Products, LLC.

Address: 209 South Meldrum Street, Fort Collins, CO 80521

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 General Information	5
2.1 General Description of EUT	5
2.2 Description of Test Modes	5
3 RF Exposure	6
3.1 Description of Support Units	6
3.1.1 Configuration of System under Test	6
3.2 Test Setup	8
3.3 Test Instruments	9
3.4 Limits for Maximum Permissible Exposure (MPE).....	10
3.5 Test Point Description	10
4. Calculation Result of Maximum Conducted Power	11
5. Photographs of the Test Configuration	235

Release Control Record

Issue No.	Description	Date Issued
MF BAYG-WTW-P22050457	Original release	Aug. 12, 2022
MF BAYG-WTW-P22050457 R1	Changed Product name and added Test Mode E ~ H	Sep. 16, 2022

1 Certificate of Conformity

Product: 2-in-1 Power Bank with MagSafe
Brand: OTTERBOX
Test Model: OBFTC-0120-A
Sample Status: Engineering sample
Applicant: Otter Products, LLC.
Test Date: Jul. 12 ~ Jul. 21, 2022 (Test Mode A ~ D)
Aug. 24 ~ Sep. 14, 2022 (Test Mode E ~ H)
FCC Rule Part: FCC Part 1 (Section 1.1307(b), Section 1.1310)
FCC Part 2 (Section 2.1091)
Standards: KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Pettie Chen, **Date:** Sep. 16, 2022
Pettie Chen / Senior Specialist

Approved by : Jeremy Lin, **Date:** Sep. 16, 2022
Jeremy Lin / Project Engineer

2 General Information

2.1 General Description of EUT

Product	2-in-1 Power Bank with MagSafe
Brand	OTTERBOX
Test Model	OBFTC-0120-A
Sample Status	Engineering sample
Power Supply Rating	5~12Vdc (adapter or host equipment) 3.635Vdc (battery)
Modulation Type	ASK
Operating Frequency	127.7 kHz, 326.5 kHz, 360.0 kHz, 1.778 MHz Magsafe module: 360 kHz / 15W, for new iPhone (12 series up) 127.7 kHz / 7.5W, for legacy iPhone (11 series and before) Watch module: 1.778 MHz / 5W, for new Apple watch (7 series) 326.5 kHz / 5W, for legacy Apple watch (6 series and before)
Antenna Type	Coil Antenna (The Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible)
Field Strength	127.7 kHz: -21.2dBuV/m (300m) 360.0 kHz: -35.5dBuV/m (300m) 326.5 kHz: -31.9dBuV/m (300m) 1.778 MHz: 3.5dBuV/m (30m)
Accessory Device	NA
Data Cable Supplied	0.5m shielded USB-C to C cable
Maximum Power Output for Apple watch charging coil	5W
Maximum Power Output for Apple iPhone charging coil	15W

Note: The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2.2 Description of Test Modes

Test Mode	Tested Frequency
A	iphone 11_127.7kHz
B	iphone 12_360kHz
C	APPLE WATCH_326.5kHz
D	APPLE WATCH_1.778MHz
E	iphone 11_127.7kHz + APPLE WATCH_326.5kHz
F	iphone 11_127.7kHz + APPLE WATCH_1.778MHz
G	iphone 12_360kHz + APPLE WATCH_326.5kHz
H	iphone 12_360kHz + APPLE WATCH_1.778MHz

3 RF Exposure

3.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Adapter	ASUS	AD827M	NA	NA	Provided by lab
B.	iPhone 11	APPLE	A2215	C39YT0B4N2RQ	BCG-E3307A	Provided by client (Test Mode A, E, F)
	iPhone 12	APPLE	A2403	G6TDF1RK0F11	BCG-E3544A	Provided by client (Test Mode B, G, H)
	Apple Watch SE	APPLE	A2355	DVPCT002QD41	BCG-A2355	Provided by client (Test Mode C, E, G)
	Apple Watch Series 7	APPLE	A2473	L3792QNW99	BCG-A2473	Provided by client (Test Mode D, F, H)

Note:


1. All power cords of the above support units are non-shielded (1.8m).
2. Items B acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	USB cable (Type C to C)	1	0.5	Y	0	Accessory of EUT


3.1.1 Configuration of System under Test

Operated Mode


Test Mode A, B, C, D

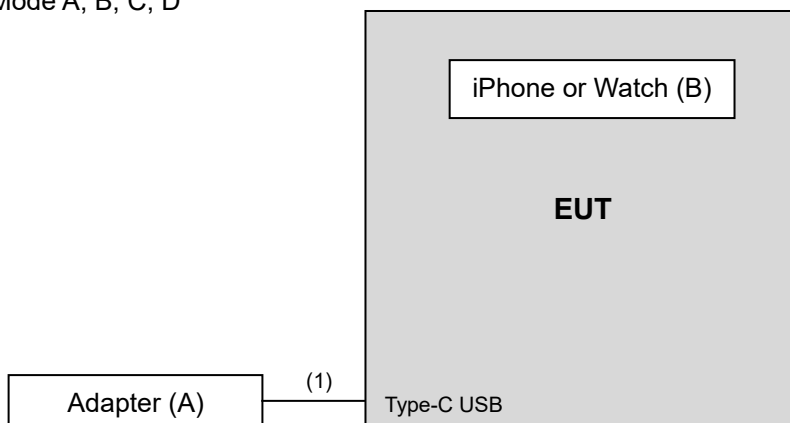


Test Mode E, F, G, H

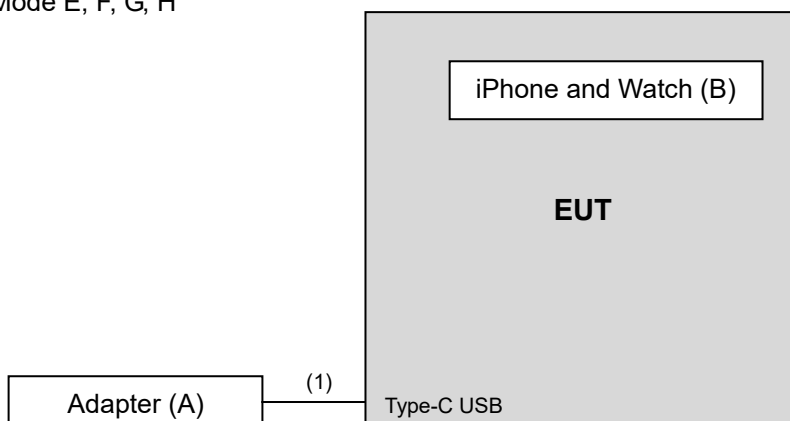


Standby Mode:

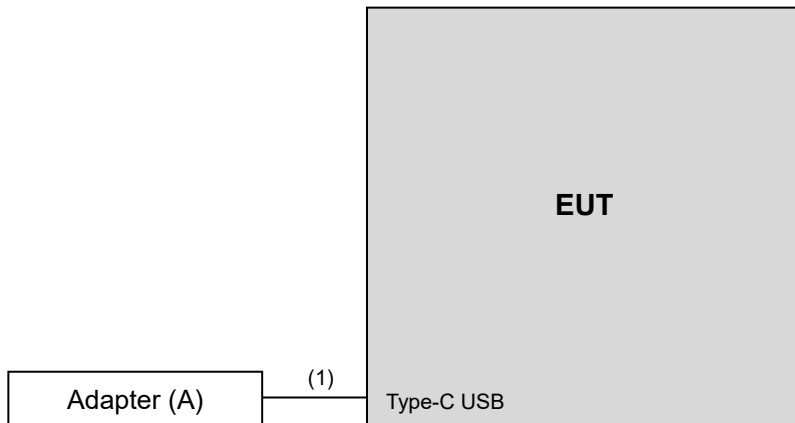

3.2 Test Setup

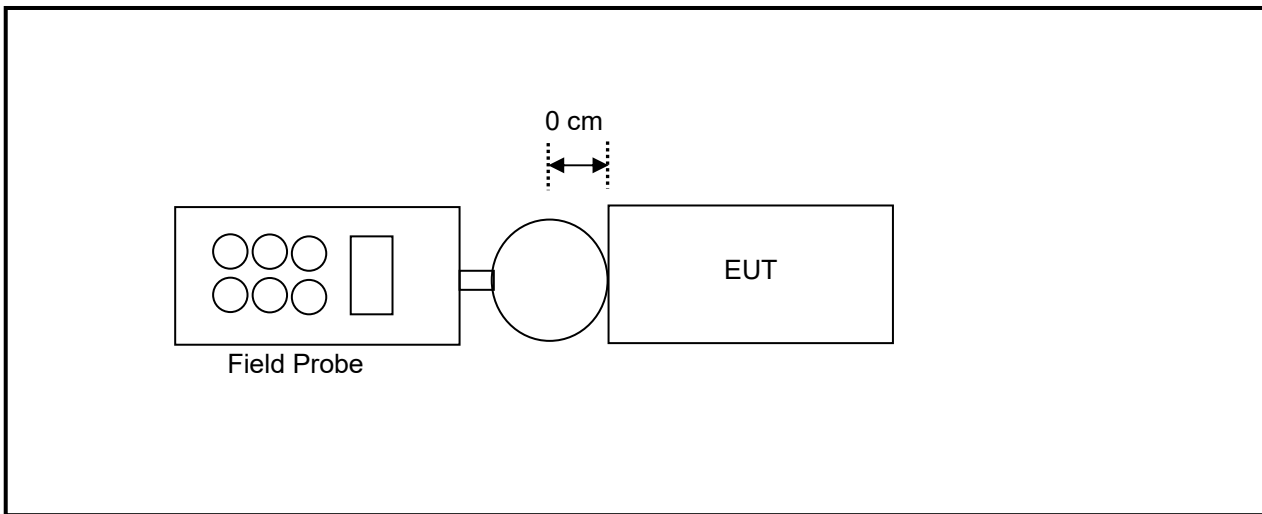

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device.

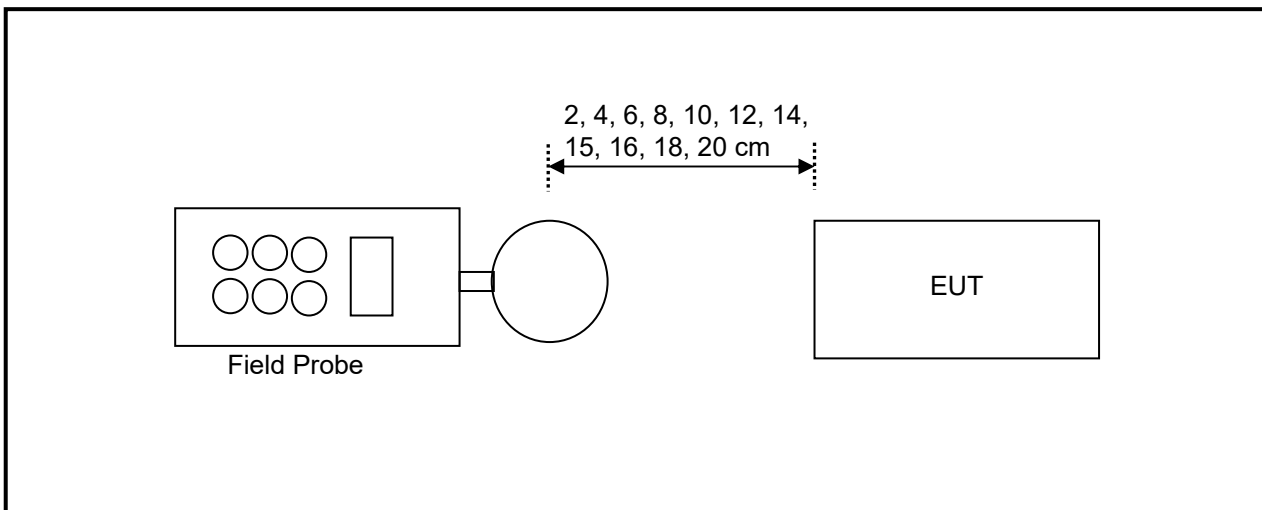

Note: Measurements should be made from all sides and the top of the primary/client pair, with the distance measured from the tip of the probe(s) to the edge of the device.

3.3 Test Instruments

Description	Brand	Model No.	Frequency Range	Calibrated Date	Calibrated Until
Broadband Field Meter	NARDA	NBM-550	-	Mar. 18, 2022	Mar. 17, 2023
Magnetic Field Meter	NARDA	ELT-400	1Hz – 400MHz	Feb. 09, 2022	Feb. 08, 2024
Magnetic Probe	NARDA	HF-3061	300kHz – 30MHz	Feb. 24, 2022	Feb. 23, 2024
Magnetic Probe	NARDA	HF-0191	27 – 1000MHz	Feb. 24, 2022	Feb. 23, 2024
Electric Field Meter	COMBINOVA	EFM 200	5Hz – 400kHz	Dec. 16, 2021	Dec. 15, 2023
E-Field Probe	NARDA	HF3091	100kHz – 3GHz	Feb. 24, 2022	Feb. 23, 2023
E-Field Probe	NARDA	EF-6091	100MHz – 60GHz	Mar. 18, 2022	Mar. 17, 2023

Note: 1. The calibration interval of the above test instruments is 12/24 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa RF Chamber

3.4 Limits for Maximum Permissible Exposure (MPE)

§ 1.1310 The criteria listed in table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency(RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density


NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

680106 D01 RF Exposure Wireless Charging Apps v03r01

The aggregate H-fields strengths at 15 or 0cm surrounding the device and 20 or 0cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

3.5 Test Point Description

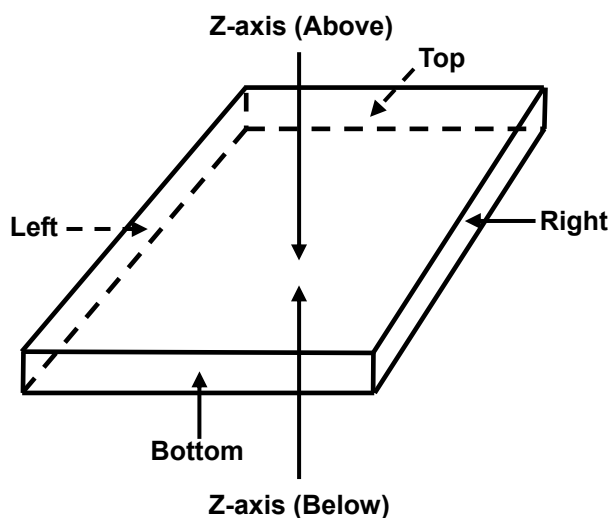

4. Calculation Result of Maximum Conducted Power

Test Mode A

127.7kHz

Operated Mode: Charging 10%

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	1.1300	1.1000	1.0800	1.0400	2.1100	1.2000
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-612.8700	-612.9000	-612.9200	-612.9600	-611.8900	-612.8000
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-305.8700	-305.9000	-305.9200	-305.9600	-304.8900	-305.8000

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	1.1600	1.1100	1.1200	1.0500	2.1500	1.2100
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-612.8400	-612.8900	-612.8800	-612.9500	-611.8500	-612.7900
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-305.8400	-305.8900	-305.8800	-305.9500	-304.8500	-305.7900

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	1.1800	1.1100	1.1300	1.0600	2.2100	1.2200
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-612.8200	-612.8900	-612.8700	-612.9400	-611.7900	-612.7800
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-305.8200	-305.8900	-305.8700	-305.9400	-304.7900	-305.7800

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	1.0500	1.0500	1.0400	0.9600	2.0100	1.0500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-612.9500	-612.9500	-612.9600	-613.0400	-611.9900	-612.9500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-305.9500	-305.9500	-305.9600	-306.0400	-304.9900	-305.9500

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	1.0600	1.0600	1.0700	0.9600	2.0200	1.1200
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-612.9400	-612.9400	-612.9300	-613.0400	-611.9800	-612.8800
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-305.9400	-305.9400	-305.9300	-306.0400	-304.9800	-305.8800

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	1.0700	1.0700	1.0800	1.0000	2.0300	1.1600
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-612.9300	-612.9300	-612.9200	-613.0000	-611.9700	-612.8400
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-305.9300	-305.9300	-305.9200	-306.0000	-304.9700	-305.8400

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.9700	0.9600	0.9600	0.9000	1.7500	1.0100
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.0300	-613.0400	-613.0400	-613.1000	-612.2500	-612.9900
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.0300	-306.0400	-306.0400	-306.1000	-305.2500	-305.9900

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.9900	0.9700	0.9800	0.9200	1.7800	1.0500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.0100	-613.0300	-613.0200	-613.0800	-612.2200	-612.9500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.0100	-306.0300	-306.0200	-306.0800	-305.2200	-305.9500

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	1.0000	0.9800	0.9900	0.9500	1.8000	1.0600
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.0000	-613.0200	-613.0100	-613.0500	-612.2000	-612.9400
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.0000	-306.0200	-306.0100	-306.0500	-305.2000	-305.9400

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.8600	0.8700	0.8600	0.8400	1.5200	0.9200
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.1400	-613.1300	-613.1400	-613.1600	-612.4800	-613.0800
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.1400	-306.1300	-306.1400	-306.1600	-305.4800	-306.0800

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0500
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0400
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.5900
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.8800	0.8900	0.8700	0.8600	1.5700	0.9500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.1200	-613.1100	-613.1300	-613.1400	-612.4300	-613.0500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.1200	-306.1100	-306.1300	-306.1400	-305.4300	-306.0500

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0500
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0400
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.5900
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.9200	0.9100	0.8800	0.8700	1.6100	0.9700
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.0800	-613.0900	-613.1200	-613.1300	-612.3900	-613.0300
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.0800	-306.0900	-306.1200	-306.1300	-305.3900	-306.0300

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.7600	0.7400	0.7700	0.7500	1.3300	0.8100
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.2400	-613.2600	-613.2300	-613.2500	-612.6700	-613.1900
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.2400	-306.2600	-306.2300	-306.2500	-305.6700	-306.1900

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0400
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0320
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.5980
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.8000	0.7700	0.7800	0.7700	1.3800	0.8500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.2000	-613.2300	-613.2200	-613.2300	-612.6200	-613.1500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.2000	-306.2300	-306.2200	-306.2300	-305.6200	-306.1500

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0400
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0320
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.5980
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.8200	0.8200	0.8100	0.8000	1.4000	0.8700
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.1800	-613.1800	-613.1900	-613.2000	-612.6000	-613.1300
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.1800	-306.1800	-306.1900	-306.2000	-305.6000	-306.1300

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.7100	0.6700	0.6800	0.6800	1.1600	0.7500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.2900	-613.3300	-613.3200	-613.3200	-612.8400	-613.2500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.2900	-306.3300	-306.3200	-306.3200	-305.8400	-306.2500

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.7200	0.6800	0.7000	0.6900	1.1800	0.0770
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.2800	-613.3200	-613.3000	-613.3100	-612.8200	-613.9230
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.2800	-306.3200	-306.3000	-306.3100	-305.8200	-306.9230

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0300
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0240
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6060
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.7300	0.6900	0.7100	0.7000	1.2000	0.0780
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.2700	-613.3100	-613.2900	-613.3000	-612.8000	-613.9220
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.2700	-306.3100	-306.2900	-306.3000	-305.8000	-306.9220

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0300
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0240
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.6060
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.6300	0.6000	0.6300	0.6200	1.0500	0.7000
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3700	-613.4000	-613.3700	-613.3800	-612.9500	-613.3000
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3700	-306.4000	-306.3700	-306.3800	-305.9500	-306.3000

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.6400	0.6200	0.6400	0.6600	1.0800	0.7300
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3600	-613.3800	-613.3600	-613.3400	-612.9200	-613.2700
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3600	-306.3800	-306.3600	-306.3400	-305.9200	-306.2700

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.6500	0.6700	0.6600	0.6800	1.1000	0.7500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3500	-613.3300	-613.3400	-613.3200	-612.9000	-613.2500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3500	-306.3300	-306.3400	-306.3200	-305.9000	-306.2500

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0300
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0240
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.6060
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5900	0.5400	0.5500	0.5800	0.9300	0.6600
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4100	-613.4600	-613.4500	-613.4200	-613.0700	-613.3400
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4100	-306.4600	-306.4500	-306.4200	-306.0700	-306.3400

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.6100	0.5600	0.5600	0.5900	0.9400	0.6800
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3900	-613.4400	-613.4400	-613.4100	-613.0600	-613.3200
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3900	-306.4400	-306.4400	-306.4100	-306.0600	-306.3200

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.6200	0.5800	0.5700	0.6100	0.9500	0.7000
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3800	-613.4200	-613.4300	-613.3900	-613.0500	-613.3000
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3800	-306.4200	-306.4300	-306.3900	-306.0500	-306.3000

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5900	0.5400	0.5500	0.5700	0.9200	0.6500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4100	-613.4600	-613.4500	-613.4300	-613.0800	-613.3500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4100	-306.4600	-306.4500	-306.4300	-306.0800	-306.3500

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.6100	0.5600	0.5600	0.5800	0.9300	0.6800
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3900	-613.4400	-613.4400	-613.4200	-613.0700	-613.3200
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3900	-306.4400	-306.4400	-306.4200	-306.0700	-306.3200

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.6200	0.5700	0.5700	0.6100	0.9500	0.0690
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3800	-613.4300	-613.4300	-613.3900	-613.0500	-613.9310
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3800	-306.4300	-306.4300	-306.3900	-306.0500	-306.9310

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5300	0.5000	0.5000	0.5200	0.7200	0.5500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4700	-613.5000	-613.5000	-613.4800	-613.2800	-613.4500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4700	-306.5000	-306.5000	-306.4800	-306.2800	-306.4500

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5300	0.5000	0.5100	0.5300	0.7400	0.5600
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4700	-613.5000	-613.4900	-613.4700	-613.2600	-613.4400
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4700	-306.5000	-306.4900	-306.4700	-306.2600	-306.4400

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5400	0.5100	0.5100	0.5300	0.7500	0.5800
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4600	-613.4900	-613.4900	-613.4700	-613.2500	-613.4200
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4600	-306.4900	-306.4900	-306.4700	-306.2500	-306.4200

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.4200	0.4300	0.4400	0.4600	0.5500	0.4800
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5800	-613.5700	-613.5600	-613.5400	-613.4500	-613.5200
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5800	-306.5700	-306.5600	-306.5400	-306.4500	-306.5200

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.4300	0.4400	0.4400	0.4600	0.5600	0.4800
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5700	-613.5600	-613.5600	-613.5400	-613.4400	-613.5200
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5700	-306.5600	-306.5600	-306.5400	-306.4400	-306.5200

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.4400	0.4500	0.4400	0.4600	0.5600	0.4900
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5600	-613.5500	-613.5600	-613.5400	-613.4400	-613.5100
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5600	-306.5500	-306.5600	-306.5400	-306.4400	-306.5100

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.3700	0.3800	0.4100	0.4100	0.4400	0.4300
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.6300	-613.6200	-613.5900	-613.5900	-613.5600	-613.5700
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.6300	-306.6200	-306.5900	-306.5900	-306.5600	-306.5700

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.3800	0.3900	0.4100	0.4100	0.4500	0.4400
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.6200	-613.6100	-613.5900	-613.5900	-613.5500	-613.5600
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.6200	-306.6100	-306.5900	-306.5900	-306.5500	-306.5600

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.4000	0.4000	0.4100	0.4200	0.4500	0.4400
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.6000	-613.6000	-613.5900	-613.5800	-613.5500	-613.5600
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.6000	-306.6000	-306.5900	-306.5800	-306.5500	-306.5600

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Standby Mode

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.9100	0.8300	0.7700	0.8700	1.4000	1.0500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.0900	-613.1700	-613.2300	-613.1300	-612.6000	-612.9500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.0900	-306.1700	-306.2300	-306.1300	-305.6000	-305.9500

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.9500	0.0600
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.7600	0.0480
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-0.8700	-1.5820
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.0550	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.7700	0.7600	0.7000	0.8000	1.2500	0.9500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.2300	-613.2400	-613.3000	-613.2000	-612.7500	-613.0500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.2300	-306.2400	-306.3000	-306.2000	-305.7500	-306.0500

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.6000	0.0500
127.7	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.4800	0.0400
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.1500	-1.5900
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.3350	-0.7750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.6900	0.7100	0.6800	0.7400	1.1700	0.8800
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3100	-613.2900	-613.3200	-613.2600	-612.8300	-613.1200
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3100	-306.2900	-306.3200	-306.2600	-305.8300	-306.1200

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0400	0.0400
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0320	0.0320
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.5980	-1.5980
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7830	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.6600	0.6700	0.6300	0.6800	1.0300	0.7600
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3400	-613.3300	-613.3700	-613.3200	-612.9700	-613.2400
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3400	-306.3300	-306.3700	-306.3200	-305.9700	-306.2400

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0300
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0240
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6060
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.6400	0.6400	0.6000	0.6400	0.9500	0.7000
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.3600	-613.3600	-613.4000	-613.3600	-613.0500	-613.3000
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.3600	-306.3600	-306.4000	-306.3600	-306.0500	-306.3000

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5900	0.6000	0.5800	0.6000	0.8400	0.6600
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4100	-613.4000	-613.4200	-613.4000	-613.1600	-613.3400
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4100	-306.4000	-306.4200	-306.4000	-306.1600	-306.3400

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5700	0.5800	0.5600	0.5500	0.7300	0.6000
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4300	-613.4200	-613.4400	-613.4500	-613.2700	-613.4000
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4300	-306.4200	-306.4400	-306.4500	-306.2700	-306.4000

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5300	0.5400	0.5000	0.5200	0.6600	0.5500
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4700	-613.4600	-613.5000	-613.4800	-613.3400	-613.4500
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4700	-306.4600	-306.5000	-306.4800	-306.3400	-306.4500

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5300	0.5400	0.5000	0.5100	0.6400	0.5400
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4700	-613.4600	-613.5000	-613.4900	-613.3600	-613.4600
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4700	-306.4600	-306.5000	-306.4900	-306.3600	-306.4600

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.4700	0.4800	0.4700	0.4800	0.5600	0.5000
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5300	-613.5200	-613.5300	-613.5200	-613.4400	-613.5000
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5300	-306.5200	-306.5300	-306.5200	-306.4400	-306.5000

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.4300	0.4200	0.4400	0.4300	0.5000	0.4600
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5700	-613.5800	-613.5600	-613.5700	-613.5000	-613.5400
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5700	-306.5800	-306.5600	-306.5700	-306.5000	-306.5400

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.3900	0.3700	0.3800	0.3800	0.4200	0.4100
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.6100	-613.6300	-613.6200	-613.6200	-613.5800	-613.5900
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.6100	-306.6300	-306.6200	-306.6200	-306.5800	-306.5900

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
127.7	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Test Mode B

360kHz

Operated Mode: Charging 10%

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	1.1500	1.1100	1.1000	1.0500	2.1200	1.1900
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-612.8500	-612.8900	-612.9000	-612.9500	-611.8800	-612.8100
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-305.8500	-305.8900	-305.9000	-305.9500	-304.8800	-305.8100

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	1.1600	1.1300	1.1200	1.0600	2.1500	1.2000
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-612.8400	-612.8700	-612.8800	-612.9400	-611.8500	-612.8000
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-305.8400	-305.8700	-305.8800	-305.9400	-304.8500	-305.8000

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	1.1800	1.1400	1.1500	1.0700	2.2000	1.2200
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-612.8200	-612.8600	-612.8500	-612.9300	-611.8000	-612.7800
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-305.8200	-305.8600	-305.8500	-305.9300	-304.8000	-305.7800

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	1.0600	1.0600	1.0500	0.9500	2.0000	1.1000
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-612.9400	-612.9400	-612.9500	-613.0500	-612.0000	-612.9000
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-305.9400	-305.9400	-305.9500	-306.0500	-305.0000	-305.9000

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	1.0700	1.0600	1.0700	0.9600	2.0200	1.1200
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-612.9300	-612.9400	-612.9300	-613.0400	-611.9800	-612.8800
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-305.9300	-305.9400	-305.9300	-306.0400	-304.9800	-305.8800

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	1.0800	1.0700	1.0800	1.0000	2.0300	1.1400
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-612.9200	-612.9300	-612.9200	-613.0000	-611.9700	-612.8600
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-305.9200	-305.9300	-305.9200	-306.0000	-304.9700	-305.8600

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.9800	0.9600	0.9700	0.9000	1.7500	1.0300
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.0200	-613.0400	-613.0300	-613.1000	-612.2500	-612.9700
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.0200	-306.0400	-306.0300	-306.1000	-305.2500	-305.9700

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.9900	0.9700	0.9900	0.9200	1.7800	1.0500
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.0100	-613.0300	-613.0100	-613.0800	-612.2200	-612.9500
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.0100	-306.0300	-306.0100	-306.0800	-305.2200	-305.9500

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	1.0000	0.9800	0.9900	0.9500	1.8000	1.0600
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.0000	-613.0200	-613.0100	-613.0500	-612.2000	-612.9400
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.0000	-306.0200	-306.0100	-306.0500	-305.2000	-305.9400

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.8600	0.8800	0.8600	0.8400	1.5500	0.9200
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.1400	-613.1200	-613.1400	-613.1600	-612.4500	-613.0800
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.1400	-306.1200	-306.1400	-306.1600	-305.4500	-306.0800

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0500
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0400
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.5900
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.8800	0.9000	0.8700	0.8500	1.5800	0.9500
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.1200	-613.1000	-613.1300	-613.1500	-612.4200	-613.0500
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.1200	-306.1000	-306.1300	-306.1500	-305.4200	-306.0500

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0500
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0400
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.5900
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.9000	0.9100	0.8800	0.8600	1.6000	0.9600
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.1000	-613.0900	-613.1200	-613.1400	-612.4000	-613.0400
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.1000	-306.0900	-306.1200	-306.1400	-305.4000	-306.0400

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.0300	0.0600
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.0240	0.0480
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.6060	-1.5820
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.7910	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.7600	0.7400	0.7600	0.7500	1.3600	0.8100
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.2400	-613.2600	-613.2400	-613.2500	-612.6400	-613.1900
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.2400	-306.2600	-306.2400	-306.2500	-305.6400	-306.1900

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0400
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0320
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.5980
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.8000	0.7800	0.7800	0.7700	1.3800	0.8500
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.2000	-613.2200	-613.2200	-613.2300	-612.6200	-613.1500
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.2000	-306.2200	-306.2200	-306.2300	-305.6200	-306.1500

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0400
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0320
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.5980
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.8200	0.8200	0.8100	0.8000	1.4000	0.8800
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.1800	-613.1800	-613.1900	-613.2000	-612.6000	-613.1200
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.1800	-306.1800	-306.1900	-306.2000	-305.6000	-306.1200

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0400
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0320
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.5980
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.7000	0.6600	0.6800	0.6800	1.1600	0.7500
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.3000	-613.3400	-613.3200	-613.3200	-612.8400	-613.2500
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.3000	-306.3400	-306.3200	-306.3200	-305.8400	-306.2500

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.7200	0.6700	0.7000	0.7000	1.1800	0.0770
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.2800	-613.3300	-613.3000	-613.3000	-612.8200	-613.9230
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.2800	-306.3300	-306.3000	-306.3000	-305.8200	-306.9230

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.7300	0.7000	0.7400	0.7300	1.2000	0.0800
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.2700	-613.3000	-613.2600	-613.2700	-612.8000	-613.9200
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.2700	-306.3000	-306.2600	-306.2700	-305.8000	-306.9200

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0300
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0240
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6060
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.6300	0.6100	0.6300	0.6200	1.0500	0.7000
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.3700	-613.3900	-613.3700	-613.3800	-612.9500	-613.3000
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.3700	-306.3900	-306.3700	-306.3800	-305.9500	-306.3000

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.6400	0.6300	0.6400	0.6600	1.0800	0.7300
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.3600	-613.3700	-613.3600	-613.3400	-612.9200	-613.2700
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.3600	-306.3700	-306.3600	-306.3400	-305.9200	-306.2700

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.6600	0.6600	0.6500	0.6800	1.1000	0.7500
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.3400	-613.3400	-613.3500	-613.3200	-612.9000	-613.2500
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.3400	-306.3400	-306.3500	-306.3200	-305.9000	-306.2500

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.6000	0.5400	0.5500	0.5800	0.9400	0.6500
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.4000	-613.4600	-613.4500	-613.4200	-613.0600	-613.3500
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.4000	-306.4600	-306.4500	-306.4200	-306.0600	-306.3500

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.6100	0.6000	0.5700	0.6000	0.9500	0.6800
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.3900	-613.4000	-613.4300	-613.4000	-613.0500	-613.3200
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.3900	-306.4000	-306.4300	-306.4000	-306.0500	-306.3200

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.6200	0.6100	0.5800	0.6200	0.9600	0.7000
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.3800	-613.3900	-613.4200	-613.3800	-613.0400	-613.3000
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.3800	-306.3900	-306.4200	-306.3800	-306.0400	-306.3000

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5900	0.5300	0.5500	0.5700	0.9400	0.6400
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.4100	-613.4700	-613.4500	-613.4300	-613.0600	-613.3600
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.4100	-306.4700	-306.4500	-306.4300	-306.0600	-306.3600

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.6100	0.6000	0.5700	0.6000	0.9400	0.6600
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.3900	-613.4000	-613.4300	-613.4000	-613.0600	-613.3400
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.3900	-306.4000	-306.4300	-306.4000	-306.0600	-306.3400

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.6200	0.6100	0.5800	0.6300	0.9600	0.6800
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.3800	-613.3900	-613.4200	-613.3700	-613.0400	-613.3200
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.3800	-306.3900	-306.4200	-306.3700	-306.0400	-306.3200

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5300	0.5000	0.5100	0.5200	0.7400	0.5500
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.4700	-613.5000	-613.4900	-613.4800	-613.2600	-613.4500
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.4700	-306.5000	-306.4900	-306.4800	-306.2600	-306.4500

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5500	0.5300	0.5200	0.5300	0.7500	0.5600
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.4500	-613.4700	-613.4800	-613.4700	-613.2500	-613.4400
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.4500	-306.4700	-306.4800	-306.4700	-306.2500	-306.4400

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5600	0.5500	0.5500	0.5500	0.7700	0.5700
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.4400	-613.4500	-613.4500	-613.4500	-613.2300	-613.4300
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.4400	-306.4500	-306.4500	-306.4500	-306.2300	-306.4300

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.4300	0.4300	0.4300	0.4600	0.5500	0.4800
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5700	-613.5700	-613.5700	-613.5400	-613.4500	-613.5200
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5700	-306.5700	-306.5700	-306.5400	-306.4500	-306.5200

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.4300	0.4400	0.4400	0.4700	0.5500	0.4900
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5700	-613.5600	-613.5600	-613.5300	-613.4500	-613.5100
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5700	-306.5600	-306.5600	-306.5300	-306.4500	-306.5100

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.4400	0.4400	0.4500	0.4700	0.5600	0.5000
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5600	-613.5600	-613.5500	-613.5300	-613.4400	-613.5000
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5600	-306.5600	-306.5500	-306.5300	-306.4400	-306.5000

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.3500	0.3500	0.3600	0.3600	0.3900	0.3800
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.6500	-613.6500	-613.6400	-613.6400	-613.6100	-613.6200
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.6500	-306.6500	-306.6400	-306.6400	-306.6100	-306.6200

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.3800	0.3700	0.3900	0.3800	0.4100	0.4000
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.6200	-613.6300	-613.6100	-613.6200	-613.5900	-613.6000
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.6200	-306.6300	-306.6100	-306.6200	-306.5900	-306.6000

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.4100	0.4000	0.4200	0.4000	0.4200	0.4000
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5900	-613.6000	-613.5800	-613.6000	-613.5800	-613.6000
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5900	-306.6000	-306.5800	-306.6000	-306.5800	-306.6000

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Standby Mode

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.9000	0.8300	0.7700	0.8800	1.4000	1.0500
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.1000	-613.1700	-613.2300	-613.1200	-612.6000	-612.9500
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.1000	-306.1700	-306.2300	-306.1200	-305.6000	-305.9500

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.9500	0.0600
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.7600	0.0480
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-0.8700	-1.5820
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.0550	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.7800	0.7600	0.7000	0.8000	1.2500	0.9500
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.2200	-613.2400	-613.3000	-613.2000	-612.7500	-613.0500
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.2200	-306.2400	-306.3000	-306.2000	-305.7500	-306.0500

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0300	0.0300	0.0200	0.0200	0.6000	0.0500
360	Max H-field (A/m)	0.0240	0.0240	0.0160	0.0160	0.4800	0.0400
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6060	-1.6060	-1.6140	-1.6140	-1.1500	-1.5900
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7910	-0.7910	-0.7990	-0.7990	-0.3350	-0.7750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.6800	0.7100	0.6800	0.7400	1.1800	0.8800
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.3200	-613.2900	-613.3200	-613.2600	-612.8200	-613.1200
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.3200	-306.2900	-306.3200	-306.2600	-305.8200	-306.1200

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0400	0.0400
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0320	0.0320
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.5980	-1.5980
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7830	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.6700	0.6800	0.6300	0.6800	1.0500	0.7600
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.3300	-613.3200	-613.3700	-613.3200	-612.9500	-613.2400
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.3300	-306.3200	-306.3700	-306.3200	-305.9500	-306.2400

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0300
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0240
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6060
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.6300	0.6400	0.6000	0.6400	0.9500	0.7000
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.3700	-613.3600	-613.4000	-613.3600	-613.0500	-613.3000
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.3700	-306.3600	-306.4000	-306.3600	-306.0500	-306.3000

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5900	0.6000	0.5800	0.6000	0.8400	0.6600
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.4100	-613.4000	-613.4200	-613.4000	-613.1600	-613.3400
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.4100	-306.4000	-306.4200	-306.4000	-306.1600	-306.3400

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5700	0.5800	0.5600	0.5500	0.7200	0.6000
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.4300	-613.4200	-613.4400	-613.4500	-613.2800	-613.4000
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.4300	-306.4200	-306.4400	-306.4500	-306.2800	-306.4000

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5200	0.5400	0.5100	0.5200	0.6600	0.5500
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.4800	-613.4600	-613.4900	-613.4800	-613.3400	-613.4500
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.4800	-306.4600	-306.4900	-306.4800	-306.3400	-306.4500

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5200	0.5300	0.5100	0.5200	0.6500	0.5400
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.4800	-613.4700	-613.4900	-613.4800	-613.3500	-613.4600
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.4800	-306.4700	-306.4900	-306.4800	-306.3500	-306.4600

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.4600	0.4800	0.4700	0.4800	0.5700	0.5100
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5400	-613.5200	-613.5300	-613.5200	-613.4300	-613.4900
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5400	-306.5200	-306.5300	-306.5200	-306.4300	-306.4900

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.4300	0.4200	0.4300	0.4300	0.5100	0.4600
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5700	-613.5800	-613.5700	-613.5700	-613.4900	-613.5400
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5700	-306.5800	-306.5700	-306.5700	-306.4900	-306.5400

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.3900	0.3700	0.3800	0.3900	0.4300	0.4200
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.6100	-613.6300	-613.6200	-613.6100	-613.5700	-613.5800
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.6100	-306.6300	-306.6200	-306.6100	-306.5700	-306.5800

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
360	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Test Mode C

326.5kHz

Operated Mode: Charging 10%

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	1.1500	0.8900	1.1000	1.0500	2.2900	1.2900
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-612.8500	-613.1100	-612.9000	-612.9500	-611.7100	-612.7100
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-305.8500	-306.1100	-305.9000	-305.9500	-304.7100	-305.7100

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0900	0.0600	0.1000	0.0300	0.0700	0.1300
326.5	Max H-field (A/m)	0.0720	0.0480	0.0800	0.0240	0.0560	0.1040
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5580	-1.5820	-1.5500	-1.6060	-1.5740	-1.5260
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7430	-0.7670	-0.7350	-0.7910	-0.7590	-0.7110

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	1.1900	0.9200	1.1500	1.0600	2.3000	1.2900
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-612.8100	-613.0800	-612.8500	-612.9400	-611.7000	-612.7100
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-305.8100	-306.0800	-305.8500	-305.9400	-304.7000	-305.7100

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0900	0.0700	0.1100	0.0300	0.0700	0.1500
326.5	Max H-field (A/m)	0.0720	0.0560	0.0880	0.0240	0.0560	0.1200
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5580	-1.5740	-1.5420	-1.6060	-1.5740	-1.5100
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7430	-0.7590	-0.7270	-0.7910	-0.7590	-0.6950

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	1.2200	0.9500	1.1800	1.0600	2.3200	1.3000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-612.7800	-613.0500	-612.8200	-612.9400	-611.6800	-612.7000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-305.7800	-306.0500	-305.8200	-305.9400	-304.6800	-305.7000

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.1000	0.0700	0.1200	0.0400	0.0700	0.1600
326.5	Max H-field (A/m)	0.0800	0.0560	0.0960	0.0320	0.0560	0.1280
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5500	-1.5740	-1.5340	-1.5980	-1.5740	-1.5020
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7350	-0.7590	-0.7190	-0.7830	-0.7590	-0.6870

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	1.0200	0.8000	0.9600	0.9500	2.0200	1.1500
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-612.9800	-613.2000	-613.0400	-613.0500	-611.9800	-612.8500
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-305.9800	-306.2000	-306.0400	-306.0500	-304.9800	-305.8500

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0800	0.0600	0.0900	0.0300	0.0700	0.1100
326.5	Max H-field (A/m)	0.0640	0.0480	0.0720	0.0240	0.0560	0.0880
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5660	-1.5820	-1.5580	-1.6060	-1.5740	-1.5420
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7510	-0.7670	-0.7430	-0.7910	-0.7590	-0.7270

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	1.0500	0.8500	1.0300	1.0000	2.0500	1.2000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-612.9500	-613.1500	-612.9700	-613.0000	-611.9500	-612.8000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-305.9500	-306.1500	-305.9700	-306.0000	-304.9500	-305.8000

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0800	0.0700	0.1000	0.0300	0.0700	0.1100
326.5	Max H-field (A/m)	0.0640	0.0560	0.0800	0.0240	0.0560	0.0880
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5660	-1.5740	-1.5500	-1.6060	-1.5740	-1.5420
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7510	-0.7590	-0.7350	-0.7910	-0.7590	-0.7270

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	1.0800	0.9000	1.0500	1.0200	2.1000	1.2200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-612.9200	-613.1000	-612.9500	-612.9800	-611.9000	-612.7800
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-305.9200	-306.1000	-305.9500	-305.9800	-304.9000	-305.7800

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0900	0.0800	0.1100	0.0400	0.0800	0.1500
326.5	Max H-field (A/m)	0.0720	0.0640	0.0880	0.0320	0.0640	0.1200
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5580	-1.5660	-1.5420	-1.5980	-1.5660	-1.5100
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7430	-0.7510	-0.7270	-0.7830	-0.7510	-0.6950

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.8500	0.7000	0.8400	0.8600	1.7500	1.0500
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.1500	-613.3000	-613.1600	-613.1400	-612.2500	-612.9500
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.1500	-306.3000	-306.1600	-306.1400	-305.2500	-305.9500

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0800	0.0600	0.0800	0.0300	0.0700	0.1000
326.5	Max H-field (A/m)	0.0640	0.0480	0.0640	0.0240	0.0560	0.0800
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5660	-1.5820	-1.5660	-1.6060	-1.5740	-1.5500
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7510	-0.7670	-0.7510	-0.7910	-0.7590	-0.7350

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.9600	0.8000	0.9500	0.9500	1.8000	1.1000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.0400	-613.2000	-613.0500	-613.0500	-612.2000	-612.9000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.0400	-306.2000	-306.0500	-306.0500	-305.2000	-305.9000

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0800	0.0700	0.0900	0.0300	0.0700	0.1100
326.5	Max H-field (A/m)	0.0640	0.0560	0.0720	0.0240	0.0560	0.0880
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5660	-1.5740	-1.5580	-1.6060	-1.5740	-1.5420
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7510	-0.7590	-0.7430	-0.7910	-0.7590	-0.7270

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.9800	0.9000	1.0000	0.9500	1.9300	1.1000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.0200	-613.1000	-613.0000	-613.0500	-612.0700	-612.9000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.0200	-306.1000	-306.0000	-306.0500	-305.0700	-305.9000

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0800	0.0800	0.1000	0.0400	0.0700	0.1300
326.5	Max H-field (A/m)	0.0640	0.0640	0.0800	0.0320	0.0560	0.1040
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5660	-1.5660	-1.5500	-1.5980	-1.5740	-1.5260
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7510	-0.7510	-0.7350	-0.7830	-0.7590	-0.7110

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.6800	0.6000	0.6500	0.7700	1.4300	0.8500
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.3200	-613.4000	-613.3500	-613.2300	-612.5700	-613.1500
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.3200	-306.4000	-306.3500	-306.2300	-305.5700	-306.1500

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0750	0.0550	0.0750	0.0300	0.0600	0.0800
326.5	Max H-field (A/m)	0.0600	0.0440	0.0600	0.0240	0.0480	0.0640
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5700	-1.5860	-1.5700	-1.6060	-1.5820	-1.5660
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7550	-0.7710	-0.7550	-0.7910	-0.7670	-0.7510

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.7200	0.6500	0.7000	0.8000	1.4600	0.8800
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.2800	-613.3500	-613.3000	-613.2000	-612.5400	-613.1200
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.2800	-306.3500	-306.3000	-306.2000	-305.5400	-306.1200

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0760	0.0640	0.0800	0.0280	0.0600	0.0800
326.5	Max H-field (A/m)	0.0608	0.0512	0.0640	0.0224	0.0480	0.0640
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5692	-1.5788	-1.5660	-1.6076	-1.5820	-1.5660
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7542	-0.7638	-0.7510	-0.7926	-0.7670	-0.7510

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.8000	0.0700	0.8500	0.9000	1.5500	0.9000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.2000	-613.9300	-613.1500	-613.1000	-612.4500	-613.1000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.2000	-306.9300	-306.1500	-306.1000	-305.4500	-306.1000

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0800	0.0700	0.1000	0.0300	0.0700	0.9000
326.5	Max H-field (A/m)	0.0640	0.0560	0.0800	0.0240	0.0560	0.7200
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5660	-1.5740	-1.5500	-1.6060	-1.5740	-0.9100
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7510	-0.7590	-0.7350	-0.7910	-0.7590	-0.0950

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.6300	0.5500	0.5000	0.6000	0.9500	0.6500
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.3700	-613.4500	-613.5000	-613.4000	-613.0500	-613.3500
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.3700	-306.4500	-306.5000	-306.4000	-306.0500	-306.3500

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0650	0.0450	0.0650	0.0250	0.0600	0.0600
326.5	Max H-field (A/m)	0.0520	0.0360	0.0520	0.0200	0.0480	0.0480
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5780	-1.5940	-1.5780	-1.6100	-1.5820	-1.5820
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7630	-0.7790	-0.7630	-0.7950	-0.7670	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.6600	0.5800	0.6000	0.6600	1.0500	0.7000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.3400	-613.4200	-613.4000	-613.3400	-612.9500	-613.3000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.3400	-306.4200	-306.4000	-306.3400	-305.9500	-306.3000

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0680	0.0500	0.0700	0.0280	0.0630	0.0600
326.5	Max H-field (A/m)	0.0544	0.0400	0.0560	0.0224	0.0504	0.0480
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5756	-1.5900	-1.5740	-1.6076	-1.5796	-1.5820
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7606	-0.7750	-0.7590	-0.7926	-0.7646	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.7200	0.6000	0.6300	0.7000	1.0500	0.7500
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.2800	-613.4000	-613.3700	-613.3000	-612.9500	-613.2500
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.2800	-306.4000	-306.3700	-306.3000	-305.9500	-306.2500

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.7400	0.0600	0.0800	0.0300	0.0700	0.0700
326.5	Max H-field (A/m)	0.5920	0.0480	0.0640	0.0240	0.0560	0.0560
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.0380	-1.5820	-1.5660	-1.6060	-1.5740	-1.5740
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.2230	-0.7670	-0.7510	-0.7910	-0.7590	-0.7590

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5800	0.5200	0.4500	0.5500	0.5800	0.5500
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4200	-613.4800	-613.5500	-613.4500	-613.4200	-613.4500
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4200	-306.4800	-306.5500	-306.4500	-306.4200	-306.4500

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0600	0.0400	0.0600	0.0300	0.0500	0.0500
326.5	Max H-field (A/m)	0.0480	0.0320	0.0480	0.0240	0.0400	0.0400
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5820	-1.5980	-1.5820	-1.6060	-1.5900	-1.5900
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7670	-0.7830	-0.7670	-0.7910	-0.7750	-0.7750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.6000	0.5300	0.5200	0.5800	0.6100	0.5600
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4000	-613.4700	-613.4800	-613.4200	-613.3900	-613.4400
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4000	-306.4700	-306.4800	-306.4200	-306.3900	-306.4400

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0700	0.0400	0.0600	0.0300	0.0550	0.0500
326.5	Max H-field (A/m)	0.0560	0.0320	0.0480	0.0240	0.0440	0.0400
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5740	-1.5980	-1.5820	-1.6060	-1.5860	-1.5900
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7590	-0.7830	-0.7670	-0.7910	-0.7710	-0.7750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.6300	0.5500	0.5500	0.6000	0.0660	0.0580
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.3700	-613.4500	-613.4500	-613.4000	-613.9340	-613.9420
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.3700	-306.4500	-306.4500	-306.4000	-306.9340	-306.9420

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0750	0.0400	0.0600	0.0300	0.0580	0.0550
326.5	Max H-field (A/m)	0.0600	0.0320	0.0480	0.0240	0.0464	0.0440
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5700	-1.5980	-1.5820	-1.6060	-1.5836	-1.5860
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7550	-0.7830	-0.7670	-0.7910	-0.7686	-0.7710

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5500	0.5000	0.4400	0.5000	0.5500	0.5000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4500	-613.5000	-613.5600	-613.5000	-613.4500	-613.5000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4500	-306.5000	-306.5600	-306.5000	-306.4500	-306.5000

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0500	0.0350	0.0500	0.0300	0.0400	0.0400
326.5	Max H-field (A/m)	0.0400	0.0280	0.0400	0.0240	0.0320	0.0320
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5900	-1.6020	-1.5900	-1.6060	-1.5980	-1.5980
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7750	-0.7870	-0.7750	-0.7910	-0.7830	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5600	0.5000	0.5000	0.5500	0.5800	0.5200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4400	-613.5000	-613.5000	-613.4500	-613.4200	-613.4800
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4400	-306.5000	-306.5000	-306.4500	-306.4200	-306.4800

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0600	0.0400	0.0550	0.0300	0.0500	0.0480
326.5	Max H-field (A/m)	0.0480	0.0320	0.0440	0.0240	0.0400	0.0384
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5820	-1.5980	-1.5860	-1.6060	-1.5900	-1.5916
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7670	-0.7830	-0.7710	-0.7910	-0.7750	-0.7766

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.6000	0.5300	0.5400	0.5800	0.6000	0.5500
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4000	-613.4700	-613.4600	-613.4200	-613.4000	-613.4500
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4000	-306.4700	-306.4600	-306.4200	-306.4000	-306.4500

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0650	0.0400	0.0560	0.0300	0.0520	0.0500
326.5	Max H-field (A/m)	0.0520	0.0320	0.0448	0.0240	0.0416	0.0400
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5780	-1.5980	-1.5852	-1.6060	-1.5884	-1.5900
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7630	-0.7830	-0.7702	-0.7910	-0.7734	-0.7750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5000	0.4800	0.4300	0.4800	0.5000	0.4600
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5000	-613.5200	-613.5700	-613.5200	-613.5000	-613.5400
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5000	-306.5200	-306.5700	-306.5200	-306.5000	-306.5400

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0480	0.0300	0.0450	0.0300	0.0400	0.0400
326.5	Max H-field (A/m)	0.0384	0.0240	0.0360	0.0240	0.0320	0.0320
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5916	-1.6060	-1.5940	-1.6060	-1.5980	-1.5980
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7766	-0.7910	-0.7790	-0.7910	-0.7830	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5300	0.5000	0.4800	0.5300	0.5200	0.5000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4700	-613.5000	-613.5200	-613.4700	-613.4800	-613.5000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4700	-306.5000	-306.5200	-306.4700	-306.4800	-306.5000

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0550	0.0380	0.0460	0.0300	0.0460	0.0450
326.5	Max H-field (A/m)	0.0440	0.0304	0.0368	0.0240	0.0368	0.0360
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5860	-1.5996	-1.5932	-1.6060	-1.5932	-1.5940
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7710	-0.7846	-0.7782	-0.7910	-0.7782	-0.7790

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5500	0.5100	0.5000	0.5500	0.5500	0.5200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4500	-613.4900	-613.5000	-613.4500	-613.4500	-613.4800
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4500	-306.4900	-306.5000	-306.4500	-306.4500	-306.4800

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0560	0.0400	0.0500	0.0300	0.0480	0.0460
326.5	Max H-field (A/m)	0.0448	0.0320	0.0400	0.0240	0.0384	0.0368
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5852	-1.5980	-1.5900	-1.6060	-1.5916	-1.5932
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7702	-0.7830	-0.7750	-0.7910	-0.7766	-0.7782

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4900	0.4800	0.4300	0.4700	0.5000	0.4600
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5100	-613.5200	-613.5700	-613.5300	-613.5000	-613.5400
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5100	-306.5200	-306.5700	-306.5300	-306.5000	-306.5400

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0470	0.0300	0.0440	0.0300	0.0400	0.0400
326.5	Max H-field (A/m)	0.0376	0.0240	0.0352	0.0240	0.0320	0.0320
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5924	-1.6060	-1.5948	-1.6060	-1.5980	-1.5980
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7774	-0.7910	-0.7798	-0.7910	-0.7830	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5200	0.5000	0.4800	0.5300	0.5100	0.5000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4800	-613.5000	-613.5200	-613.4700	-613.4900	-613.5000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4800	-306.5000	-306.5200	-306.4700	-306.4900	-306.5000

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0520	0.0380	0.0460	0.0300	0.0440	0.0450
326.5	Max H-field (A/m)	0.0416	0.0304	0.0368	0.0240	0.0352	0.0360
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5884	-1.5996	-1.5932	-1.6060	-1.5948	-1.5940
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7734	-0.7846	-0.7782	-0.7910	-0.7798	-0.7790

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5400	0.5100	0.5000	0.5500	0.5500	0.5200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4600	-613.4900	-613.5000	-613.4500	-613.4500	-613.4800
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4600	-306.4900	-306.5000	-306.4500	-306.4500	-306.4800

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0550	0.0400	0.0500	0.0300	0.0480	0.0450
326.5	Max H-field (A/m)	0.0440	0.0320	0.0400	0.0240	0.0384	0.0360
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5860	-1.5980	-1.5900	-1.6060	-1.5916	-1.5940
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7710	-0.7830	-0.7750	-0.7910	-0.7766	-0.7790

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4600	0.4600	0.4200	0.4500	0.4800	0.4400
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5400	-613.5400	-613.5800	-613.5500	-613.5200	-613.5600
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5400	-306.5400	-306.5800	-306.5500	-306.5200	-306.5600

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0440	0.0300	0.0400	0.0300	0.0350	0.0350
326.5	Max H-field (A/m)	0.0352	0.0240	0.0320	0.0240	0.0280	0.0280
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5948	-1.6060	-1.5980	-1.6060	-1.6020	-1.6020
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7798	-0.7910	-0.7830	-0.7910	-0.7870	-0.7870

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5000	0.4800	0.4600	0.5000	0.5000	0.4600
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5000	-613.5200	-613.5400	-613.5000	-613.5000	-613.5400
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5000	-306.5200	-306.5400	-306.5000	-306.5000	-306.5400

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0520	0.0350	0.0440	0.0300	0.0420	0.0400
326.5	Max H-field (A/m)	0.0416	0.0280	0.0352	0.0240	0.0336	0.0320
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5884	-1.6020	-1.5948	-1.6060	-1.5964	-1.5980
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7734	-0.7870	-0.7798	-0.7910	-0.7814	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5200	0.4900	0.4800	0.5200	0.5100	0.5000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4800	-613.5100	-613.5200	-613.4800	-613.4900	-613.5000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4800	-306.5100	-306.5200	-306.4800	-306.4900	-306.5000

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0530	0.0400	0.0460	0.0300	0.0430	0.0400
326.5	Max H-field (A/m)	0.0424	0.0320	0.0368	0.0240	0.0344	0.0320
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5876	-1.5980	-1.5932	-1.6060	-1.5956	-1.5980
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7726	-0.7830	-0.7782	-0.7910	-0.7806	-0.7830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4200	0.4000	0.4000	0.4000	0.4400	0.4200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5800	-613.6000	-613.6000	-613.6000	-613.5600	-613.5800
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5800	-306.6000	-306.6000	-306.6000	-306.5600	-306.5800

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0300	0.0250	0.0300	0.0200	0.0250	0.0220
326.5	Max H-field (A/m)	0.0240	0.0200	0.0240	0.0160	0.0200	0.0176
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6060	-1.6100	-1.6060	-1.6140	-1.6100	-1.6124
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7910	-0.7950	-0.7910	-0.7990	-0.7950	-0.7974

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4300	0.4100	0.4100	0.4200	0.4100	0.4000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5700	-613.5900	-613.5900	-613.5800	-613.5900	-613.6000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5700	-306.5900	-306.5900	-306.5800	-306.5900	-306.6000

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0450	0.0300	0.0300	0.0200	0.0300	0.0250
326.5	Max H-field (A/m)	0.0360	0.0240	0.0240	0.0160	0.0240	0.0200
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5940	-1.6060	-1.6060	-1.6140	-1.6060	-1.6100
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7790	-0.7910	-0.7910	-0.7990	-0.7910	-0.7950

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4300	0.4100	0.4100	0.4200	0.4200	0.4100
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5700	-613.5900	-613.5900	-613.5800	-613.5800	-613.5900
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5700	-306.5900	-306.5900	-306.5800	-306.5800	-306.5900

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0450	0.0310	0.0300	0.0200	0.0300	0.0260
326.5	Max H-field (A/m)	0.0360	0.0248	0.0240	0.0160	0.0240	0.0208
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5940	-1.6052	-1.6060	-1.6140	-1.6060	-1.6092
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7790	-0.7902	-0.7910	-0.7990	-0.7910	-0.7942

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.3500	0.3600	0.3800	0.3500	0.4000	0.4000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.6500	-613.6400	-613.6200	-613.6500	-613.6000	-613.6000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.6500	-306.6400	-306.6200	-306.6500	-306.6000	-306.6000

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
326.5	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.3800	0.4000	0.3800	0.3700	0.4500	0.4000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.6200	-613.6000	-613.6200	-613.6300	-613.5500	-613.6000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.6200	-306.6000	-306.6200	-306.6300	-306.5500	-306.6000

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
326.5	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4000	0.4000	0.3800	0.3800	0.4600	0.4200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.6000	-613.6000	-613.6200	-613.6200	-613.5400	-613.5800
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.6000	-306.6000	-306.6200	-306.6200	-306.5400	-306.5800

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0750	0.0400	0.0600	0.0200	0.0200	0.0200
326.5	Max H-field (A/m)	0.0600	0.0320	0.0480	0.0160	0.0160	0.0160
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5700	-1.5980	-1.5820	-1.6140	-1.6140	-1.6140
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7550	-0.7830	-0.7670	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Standby Mode

E-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.9400	0.8500	0.7500	0.8700	1.3300	1.2200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.0600	-613.1500	-613.2500	-613.1300	-612.6700	-612.7800
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.0600	-306.1500	-306.2500	-306.1300	-305.6700	-305.7800

H-Field (0cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0900	0.0700	0.0800	0.0300	0.0600	0.0800
326.5	Max H-field (A/m)	0.0720	0.0560	0.0640	0.0240	0.0480	0.0640
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5580	-1.5740	-1.5660	-1.6060	-1.5820	-1.5660
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7430	-0.7590	-0.7510	-0.7910	-0.7670	-0.7510

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.8200	0.7500	0.6600	0.7800	1.1200	1.0200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.1800	-613.2500	-613.3400	-613.2200	-612.8800	-612.9800
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.1800	-306.2500	-306.3400	-306.2200	-305.8800	-305.9800

H-Field (2cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0800	0.0650	0.0740	0.0300	0.0500	0.0740
326.5	Max H-field (A/m)	0.0640	0.0520	0.0592	0.0240	0.0400	0.0592
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5660	-1.5780	-1.5708	-1.6060	-1.5900	-1.5708
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7510	-0.7630	-0.7558	-0.7910	-0.7750	-0.7558

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.7600	0.6800	0.6000	0.6600	0.9200	0.8800
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.2400	-613.3200	-613.4000	-613.3400	-613.0800	-613.1200
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.2400	-306.3200	-306.4000	-306.3400	-306.0800	-306.1200

H-Field (4cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0700	0.0600	0.0650	0.0300	0.0500	0.0600
326.5	Max H-field (A/m)	0.0560	0.0480	0.0520	0.0240	0.0400	0.0480
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5740	-1.5820	-1.5780	-1.6060	-1.5900	-1.5820
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7590	-0.7670	-0.7630	-0.7910	-0.7750	-0.7670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.6500	0.6000	0.5800	0.6600	0.7200	0.6100
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.3500	-613.4000	-613.4200	-613.3400	-613.2800	-613.3900
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.3500	-306.4000	-306.4200	-306.3400	-306.2800	-306.3900

H-Field (6cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0500	0.0450	0.0500	0.0300	0.0500	0.0500
326.5	Max H-field (A/m)	0.0400	0.0360	0.0400	0.0240	0.0400	0.0400
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5900	-1.5940	-1.5900	-1.6060	-1.5900	-1.5900
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7750	-0.7790	-0.7750	-0.7910	-0.7750	-0.7750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5000	0.5000	0.5000	0.5000	0.5700	0.5000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5000	-613.5000	-613.5000	-613.5000	-613.4300	-613.5000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5000	-306.5000	-306.5000	-306.5000	-306.4300	-306.5000

H-Field (8cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0430	0.0400	0.0400	0.0300	0.0460	0.0450
326.5	Max H-field (A/m)	0.0344	0.0320	0.0320	0.0240	0.0368	0.0360
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.5956	-1.5980	-1.5980	-1.6060	-1.5932	-1.5940
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7806	-0.7830	-0.7830	-0.7910	-0.7782	-0.7790

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4300	0.4500	0.4400	0.4300	0.4400	0.4200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5700	-613.5500	-613.5600	-613.5700	-613.5600	-613.5800
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5700	-306.5500	-306.5600	-306.5700	-306.5600	-306.5800

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0330	0.0350	0.0340	0.0300	0.0350	0.0320
326.5	Max H-field (A/m)	0.0264	0.0280	0.0272	0.0240	0.0280	0.0256
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6036	-1.6020	-1.6028	-1.6060	-1.6020	-1.6044
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7886	-0.7870	-0.7878	-0.7910	-0.7870	-0.7894

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4200	0.4300	0.4300	0.4200	0.4000	0.4000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5800	-613.5700	-613.5700	-613.5800	-613.6000	-613.6000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5800	-306.5700	-306.5700	-306.5800	-306.6000	-306.6000

H-Field (12cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0300	0.0310	0.0320	0.0300	0.0320	0.0300
326.5	Max H-field (A/m)	0.0240	0.0248	0.0256	0.0240	0.0256	0.0240
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6060	-1.6052	-1.6044	-1.6060	-1.6044	-1.6060
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7910	-0.7902	-0.7894	-0.7910	-0.7894	-0.7910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4100	0.4200	0.4200	0.4000	0.3900	0.3800
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5900	-613.5800	-613.5800	-613.6000	-613.6100	-613.6200
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5900	-306.5800	-306.5800	-306.6000	-306.6100	-306.6200

H-Field (14cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0280	0.0290	0.0300	0.0300	0.0300	0.0280
326.5	Max H-field (A/m)	0.0224	0.0232	0.0240	0.0240	0.0240	0.0224
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6076	-1.6068	-1.6060	-1.6060	-1.6060	-1.6076
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7926	-0.7918	-0.7910	-0.7910	-0.7910	-0.7926

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4100	0.4100	0.4200	0.3900	0.3900	0.3700
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5900	-613.5900	-613.5800	-613.6100	-613.6100	-613.6300
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5900	-306.5900	-306.5800	-306.6100	-306.6100	-306.6300

H-Field (15cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0270	0.0290	0.0300	0.0300	0.0300	0.0280
326.5	Max H-field (A/m)	0.0216	0.0232	0.0240	0.0240	0.0240	0.0224
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6084	-1.6068	-1.6060	-1.6060	-1.6060	-1.6076
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7934	-0.7918	-0.7910	-0.7910	-0.7910	-0.7926

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4000	0.4000	0.4000	0.3800	0.3700	0.3600
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.6000	-613.6000	-613.6000	-613.6200	-613.6300	-613.6400
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.6000	-306.6000	-306.6000	-306.6200	-306.6300	-306.6400

H-Field (16cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0260	0.0250	0.0250	0.0260	0.0260	0.0240
326.5	Max H-field (A/m)	0.0208	0.0200	0.0200	0.0208	0.0208	0.0192
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6092	-1.6100	-1.6100	-1.6092	-1.6092	-1.6108
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7942	-0.7950	-0.7950	-0.7942	-0.7942	-0.7958

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4000	0.4000	0.3800	0.3600	0.3600	0.3500
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.6000	-613.6000	-613.6200	-613.6400	-613.6400	-613.6500
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.6000	-306.6000	-306.6200	-306.6400	-306.6400	-306.6500

H-Field (18cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0200	0.0220	0.0200	0.0200	0.0230	0.0200
326.5	Max H-field (A/m)	0.0160	0.0176	0.0160	0.0160	0.0184	0.0160
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6140	-1.6124	-1.6140	-1.6140	-1.6116	-1.6140
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7990	-0.7974	-0.7990	-0.7990	-0.7966	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.3800	0.3900	0.3600	0.3500	0.3500	0.3400
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.6200	-613.6100	-613.6400	-613.6500	-613.6500	-613.6600
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.6200	-306.6100	-306.6400	-306.6500	-306.6500	-306.6600

H-Field (20cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
326.5	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140	-1.6140
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990	-0.7990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Test Mode D
1.778MHz

Operated Mode: Charging 10%

E-Field (0cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	1.1400	0.9200	1.1000	1.0300	2.2500	1.2800
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.2600	-462.4800	-462.3000	-462.3700	-461.1500	-462.1200
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.5600	-230.7800	-230.6000	-230.6700	-229.4500	-230.4200

H-Field (0cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0900	0.0700	0.1000	0.0300	0.0700	0.1300
1.778	Max H-field (A/m)	0.0720	0.0560	0.0800	0.0240	0.0560	0.1040
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1580	-1.1740	-1.1500	-1.2060	-1.1740	-1.1260
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5430	-0.5590	-0.5350	-0.5910	-0.5590	-0.5110

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (0cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	1.1600	0.9500	1.1200	1.0500	2.2800	1.2900
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.2400	-462.4500	-462.2800	-462.3500	-461.1200	-462.1100
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.5400	-230.7500	-230.5800	-230.6500	-229.4200	-230.4100

H-Field (0cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0900	0.0700	0.1200	0.0400	0.0700	0.1300
1.778	Max H-field (A/m)	0.0720	0.0560	0.0960	0.0320	0.0560	0.1040
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1580	-1.1740	-1.1340	-1.1980	-1.1740	-1.1260
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5430	-0.5590	-0.5190	-0.5830	-0.5590	-0.5110

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (0cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	1.1600	0.9500	1.1200	1.0600	2.2800	1.3000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.2400	-462.4500	-462.2800	-462.3400	-461.1200	-462.1000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.5400	-230.7500	-230.5800	-230.6400	-229.4200	-230.4000

H-Field (0cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.1000	0.0800	0.1200	0.0500	0.0700	0.1400
1.778	Max H-field (A/m)	0.0800	0.0640	0.0960	0.0400	0.0560	0.1120
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1500	-1.1660	-1.1340	-1.1900	-1.1740	-1.1180
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5350	-0.5510	-0.5190	-0.5750	-0.5590	-0.5030

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (2cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	1.0200	0.8000	0.9500	0.9400	2.0000	1.1300
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.3800	-462.6000	-462.4500	-462.4600	-461.4000	-462.2700
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.6800	-230.9000	-230.7500	-230.7600	-229.7000	-230.5700

H-Field (2cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0800	0.0600	0.0900	0.0300	0.0700	0.0900
1.778	Max H-field (A/m)	0.0640	0.0480	0.0720	0.0240	0.0560	0.0720
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1660	-1.1820	-1.1580	-1.2060	-1.1740	-1.1580
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5510	-0.5670	-0.5430	-0.5910	-0.5590	-0.5430

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (2cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	1.0400	0.9200	0.9600	0.9500	2.0200	1.1400
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.3600	-462.4800	-462.4400	-462.4500	-461.3800	-462.2600
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.6600	-230.7800	-230.7400	-230.7500	-229.6800	-230.5600

H-Field (2cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0900	0.0700	0.1000	0.0400	0.0700	0.1000
1.778	Max H-field (A/m)	0.0720	0.0560	0.0800	0.0320	0.0560	0.0800
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1580	-1.1740	-1.1500	-1.1980	-1.1740	-1.1500
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5430	-0.5590	-0.5350	-0.5830	-0.5590	-0.5350

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (2cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	1.0600	0.9300	0.9800	0.9600	2.0500	1.1500
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.3400	-462.4700	-462.4200	-462.4400	-461.3500	-462.2500
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.6400	-230.7700	-230.7200	-230.7400	-229.6500	-230.5500

H-Field (2cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.1000	0.0800	0.1100	0.0500	0.0700	0.1000
1.778	Max H-field (A/m)	0.0800	0.0640	0.0880	0.0400	0.0560	0.0800
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1500	-1.1660	-1.1420	-1.1900	-1.1740	-1.1500
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5350	-0.5510	-0.5270	-0.5750	-0.5590	-0.5350

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (4cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.8600	0.7000	0.8300	0.8400	1.7300	1.0100
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.5400	-462.7000	-462.5700	-462.5600	-461.6700	-462.3900
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.8400	-231.0000	-230.8700	-230.8600	-229.9700	-230.6900

H-Field (4cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0700	0.0600	0.0800	0.0300	0.0600	0.0800
1.778	Max H-field (A/m)	0.0560	0.0480	0.0640	0.0240	0.0480	0.0640
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1740	-1.1820	-1.1660	-1.2060	-1.1820	-1.1660
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5590	-0.5670	-0.5510	-0.5910	-0.5670	-0.5510

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (4cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.8600	0.7200	0.8400	0.8500	1.7500	1.0100
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.5400	-462.6800	-462.5600	-462.5500	-461.6500	-462.3900
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.8400	-230.9800	-230.8600	-230.8500	-229.9500	-230.6900

H-Field (4cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0700	0.0600	0.0800	0.0300	0.0600	0.0800
1.778	Max H-field (A/m)	0.0560	0.0480	0.0640	0.0240	0.0480	0.0640
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1740	-1.1820	-1.1660	-1.2060	-1.1820	-1.1660
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5590	-0.5670	-0.5510	-0.5910	-0.5670	-0.5510

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (4cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.8900	0.7300	0.8400	0.8500	1.7600	1.0300
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.5100	-462.6700	-462.5600	-462.5500	-461.6400	-462.3700
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.8100	-230.9700	-230.8600	-230.8500	-229.9400	-230.6700

H-Field (4cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0800	0.0700	0.0800	0.0400	0.0700	0.0900
1.778	Max H-field (A/m)	0.0640	0.0560	0.0640	0.0320	0.0560	0.0720
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1660	-1.1740	-1.1660	-1.1980	-1.1740	-1.1580
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5510	-0.5590	-0.5510	-0.5830	-0.5590	-0.5430

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (6cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.6900	0.6000	0.6600	0.7400	1.4400	0.8400
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.7100	-462.8000	-462.7400	-462.6600	-461.9600	-462.5600
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.0100	-231.1000	-231.0400	-230.9600	-230.2600	-230.8600

H-Field (6cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0500	0.0550	0.0710	0.0300	0.0600	0.0600
1.778	Max H-field (A/m)	0.0400	0.0440	0.0568	0.0240	0.0480	0.0480
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1900	-1.1860	-1.1732	-1.2060	-1.1820	-1.1820
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5750	-0.5710	-0.5582	-0.5910	-0.5670	-0.5670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (6cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.7200	0.6200	0.6900	0.7600	1.4600	0.8600
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.6800	-462.7800	-462.7100	-462.6400	-461.9400	-462.5400
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.9800	-231.0800	-231.0100	-230.9400	-230.2400	-230.8400

H-Field (6cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0600	0.0580	0.0740	0.0300	0.0610	0.0600
1.778	Max H-field (A/m)	0.0480	0.0464	0.0592	0.0240	0.0488	0.0480
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1820	-1.1836	-1.1708	-1.2060	-1.1812	-1.1820
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5670	-0.5686	-0.5558	-0.5910	-0.5662	-0.5670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (6cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.7500	0.6500	0.7000	0.7700	1.4600	0.8700
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.6500	-462.7500	-462.7000	-462.6300	-461.9400	-462.5300
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.9500	-231.0500	-231.0000	-230.9300	-230.2400	-230.8300

H-Field (6cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0700	0.0620	0.0740	0.0300	0.0650	0.0600
1.778	Max H-field (A/m)	0.0560	0.0496	0.0592	0.0240	0.0520	0.0480
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1740	-1.1804	-1.1708	-1.2060	-1.1780	-1.1820
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5590	-0.5654	-0.5558	-0.5910	-0.5630	-0.5670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (8cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.6300	0.5500	0.0520	0.6300	0.9400	0.6700
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.7700	-462.8500	-463.3480	-462.7700	-462.4600	-462.7300
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.0700	-231.1500	-231.6480	-231.0700	-230.7600	-231.0300

H-Field (8cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0480	0.0500	0.0640	0.0250	0.0580	0.0550
1.778	Max H-field (A/m)	0.0384	0.0400	0.0512	0.0200	0.0464	0.0440
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1916	-1.1900	-1.1788	-1.2100	-1.1836	-1.1860
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5766	-0.5750	-0.5638	-0.5950	-0.5686	-0.5710

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (8cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.6400	0.5600	0.5500	0.6600	0.9500	0.6800
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.7600	-462.8400	-462.8500	-462.7400	-462.4500	-462.7200
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.0600	-231.1400	-231.1500	-231.0400	-230.7500	-231.0200

H-Field (8cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0500	0.0510	0.0660	0.0260	0.0580	0.0580
1.778	Max H-field (A/m)	0.0400	0.0408	0.0528	0.0208	0.0464	0.0464
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1900	-1.1892	-1.1772	-1.2092	-1.1836	-1.1836
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5750	-0.5742	-0.5622	-0.5942	-0.5686	-0.5686

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (8cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.6600	0.6100	0.6000	0.6900	0.9800	0.7000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.7400	-462.7900	-462.8000	-462.7100	-462.4200	-462.7000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.0400	-231.0900	-231.1000	-231.0100	-230.7200	-231.0000

H-Field (8cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0620	0.0540	0.0670	0.0260	0.0600	0.0600
1.778	Max H-field (A/m)	0.0496	0.0432	0.0536	0.0208	0.0480	0.0480
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1804	-1.1868	-1.1764	-1.2092	-1.1820	-1.1820
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5654	-0.5718	-0.5614	-0.5942	-0.5670	-0.5670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5500	0.4600	0.4700	0.5700	0.7400	0.5900
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.8500	-462.9400	-462.9300	-462.8300	-462.6600	-462.8100
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.1500	-231.2400	-231.2300	-231.1300	-230.9600	-231.1100

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0400	0.0400	0.0600	0.0200	0.0500	0.0500
1.778	Max H-field (A/m)	0.0320	0.0320	0.0480	0.0160	0.0400	0.0400
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1980	-1.1980	-1.1820	-1.2140	-1.1900	-1.1900
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5830	-0.5830	-0.5670	-0.5990	-0.5750	-0.5750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5600	0.4800	0.4700	0.5800	0.7100	0.6000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.8400	-462.9200	-462.9300	-462.8200	-462.6900	-462.8000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.1400	-231.2200	-231.2300	-231.1200	-230.9900	-231.1000

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0500	0.0400	0.0600	0.0220	0.0550	0.0520
1.778	Max H-field (A/m)	0.0400	0.0320	0.0480	0.0176	0.0440	0.0416
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1900	-1.1980	-1.1820	-1.2124	-1.1860	-1.1884
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5750	-0.5830	-0.5670	-0.5974	-0.5710	-0.5734

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5600	0.5200	0.5000	0.6000	0.7200	0.6000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.8400	-462.8800	-462.9000	-462.8000	-462.6800	-462.8000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.1400	-231.1800	-231.2000	-231.1000	-230.9800	-231.1000

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0550	0.0450	0.0630	0.0220	0.0550	0.0550
1.778	Max H-field (A/m)	0.0440	0.0360	0.0504	0.0176	0.0440	0.0440
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1860	-1.1940	-1.1796	-1.2124	-1.1860	-1.1860
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5710	-0.5790	-0.5646	-0.5974	-0.5710	-0.5710

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (12cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5000	0.4600	0.4400	0.5100	0.6000	0.5500
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9000	-462.9400	-462.9600	-462.8900	-462.8000	-462.8500
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2000	-231.2400	-231.2600	-231.1900	-231.1000	-231.1500

H-Field (12cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0300	0.0300	0.0500	0.0200	0.0400	0.0400
1.778	Max H-field (A/m)	0.0240	0.0240	0.0400	0.0160	0.0320	0.0320
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2060	-1.2060	-1.1900	-1.2140	-1.1980	-1.1980
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5910	-0.5910	-0.5750	-0.5990	-0.5830	-0.5830

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (12cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5100	0.4600	0.4400	0.5200	0.6200	0.5500
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.8900	-462.9400	-462.9600	-462.8800	-462.7800	-462.8500
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.1900	-231.2400	-231.2600	-231.1800	-231.0800	-231.1500

H-Field (12cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0400	0.0300	0.0500	0.0200	0.0400	0.0430
1.778	Max H-field (A/m)	0.0320	0.0240	0.0400	0.0160	0.0320	0.0344
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1980	-1.2060	-1.1900	-1.2140	-1.1980	-1.1956
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5830	-0.5910	-0.5750	-0.5990	-0.5830	-0.5806

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (12cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5200	0.4700	0.4500	0.5400	0.6200	0.5500
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.8800	-462.9300	-462.9500	-462.8600	-462.7800	-462.8500
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.1800	-231.2300	-231.2500	-231.1600	-231.0800	-231.1500

H-Field (12cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0420	0.0380	0.0550	0.0200	0.0420	0.0440
1.778	Max H-field (A/m)	0.0336	0.0304	0.0440	0.0160	0.0336	0.0352
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1964	-1.1996	-1.1860	-1.2140	-1.1964	-1.1948
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5814	-0.5846	-0.5710	-0.5990	-0.5814	-0.5798

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (14cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4800	0.4400	0.4300	0.4900	0.5000	0.5000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9200	-462.9600	-462.9700	-462.9100	-462.9000	-462.9000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2200	-231.2600	-231.2700	-231.2100	-231.2000	-231.2000

H-Field (14cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0300	0.0300	0.0400	0.0200	0.0300	0.0300
1.778	Max H-field (A/m)	0.0240	0.0240	0.0320	0.0160	0.0240	0.0240
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2060	-1.2060	-1.1980	-1.2140	-1.2060	-1.2060
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5910	-0.5910	-0.5830	-0.5990	-0.5910	-0.5910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (14cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4900	0.4500	0.4400	0.5000	0.5200	0.5000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9100	-462.9500	-462.9600	-462.9000	-462.8800	-462.9000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2100	-231.2500	-231.2600	-231.2000	-231.1800	-231.2000

H-Field (14cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0300	0.0300	0.0400	0.0200	0.0300	0.0300
1.778	Max H-field (A/m)	0.0240	0.0240	0.0320	0.0160	0.0240	0.0240
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2060	-1.2060	-1.1980	-1.2140	-1.2060	-1.2060
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5910	-0.5910	-0.5830	-0.5990	-0.5910	-0.5910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (14cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5000	0.4500	0.4500	0.5200	0.5200	0.5100
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9000	-462.9500	-462.9500	-462.8800	-462.8800	-462.8900
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2000	-231.2500	-231.2500	-231.1800	-231.1800	-231.1900

H-Field (14cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0400	0.0300	0.0400	0.0200	0.0400	0.0300
1.778	Max H-field (A/m)	0.0320	0.0240	0.0320	0.0160	0.0320	0.0240
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1980	-1.2060	-1.1980	-1.2140	-1.1980	-1.2060
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5830	-0.5910	-0.5830	-0.5990	-0.5830	-0.5910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (15cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4700	0.4300	0.4300	0.4800	0.5000	0.4900
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9300	-462.9700	-462.9700	-462.9200	-462.9000	-462.9100
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2300	-231.2700	-231.2700	-231.2200	-231.2000	-231.2100

H-Field (15cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0300	0.0300	0.0400	0.0200	0.0300	0.0300
1.778	Max H-field (A/m)	0.0240	0.0240	0.0320	0.0160	0.0240	0.0240
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2060	-1.2060	-1.1980	-1.2140	-1.2060	-1.2060
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5910	-0.5910	-0.5830	-0.5990	-0.5910	-0.5910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (15cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4900	0.4500	0.4400	0.4900	0.5200	0.5000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9100	-462.9500	-462.9600	-462.9100	-462.8800	-462.9000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2100	-231.2500	-231.2600	-231.2100	-231.1800	-231.2000

H-Field (15cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0300	0.0300	0.0400	0.0200	0.0300	0.0300
1.778	Max H-field (A/m)	0.0240	0.0240	0.0320	0.0160	0.0240	0.0240
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2060	-1.2060	-1.1980	-1.2140	-1.2060	-1.2060
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5910	-0.5910	-0.5830	-0.5990	-0.5910	-0.5910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (15cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5000	0.4500	0.4500	0.5200	0.5200	0.5100
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9000	-462.9500	-462.9500	-462.8800	-462.8800	-462.8900
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2000	-231.2500	-231.2500	-231.1800	-231.1800	-231.1900

H-Field (15cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0400	0.0300	0.0400	0.0200	0.0400	0.0300
1.778	Max H-field (A/m)	0.0320	0.0240	0.0320	0.0160	0.0320	0.0240
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1980	-1.2060	-1.1980	-1.2140	-1.1980	-1.2060
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5830	-0.5910	-0.5830	-0.5990	-0.5830	-0.5910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (16cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4400	0.4100	0.4200	0.4500	0.4600	0.4500
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9600	-462.9900	-462.9800	-462.9500	-462.9400	-462.9500
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2600	-231.2900	-231.2800	-231.2500	-231.2400	-231.2500

H-Field (16cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0200	0.0200	0.0300	0.0200	0.0200	0.0200
1.778	Max H-field (A/m)	0.0160	0.0160	0.0240	0.0160	0.0160	0.0160
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2140	-1.2140	-1.2060	-1.2140	-1.2140	-1.2140
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5990	-0.5990	-0.5910	-0.5990	-0.5990	-0.5990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (16cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4500	0.4200	0.4300	0.4600	0.4600	0.4600
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9500	-462.9800	-462.9700	-462.9400	-462.9400	-462.9400
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2500	-231.2800	-231.2700	-231.2400	-231.2400	-231.2400

H-Field (16cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0200	0.0200	0.0300	0.0200	0.0200	0.0200
1.778	Max H-field (A/m)	0.0160	0.0160	0.0240	0.0160	0.0160	0.0160
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2140	-1.2140	-1.2060	-1.2140	-1.2140	-1.2140
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5990	-0.5990	-0.5910	-0.5990	-0.5990	-0.5990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (16cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4500	0.4300	0.4400	0.4600	0.4700	0.4600
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9500	-462.9700	-462.9600	-462.9400	-462.9300	-462.9400
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2500	-231.2700	-231.2600	-231.2400	-231.2300	-231.2400

H-Field (16cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0200	0.0200	0.0300	0.0200	0.0200	0.0200
1.778	Max H-field (A/m)	0.0160	0.0160	0.0240	0.0160	0.0160	0.0160
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2140	-1.2140	-1.2060	-1.2140	-1.2140	-1.2140
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5990	-0.5990	-0.5910	-0.5990	-0.5990	-0.5990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (18cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4200	0.4000	0.4000	0.4300	0.4100	0.4300
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9800	-463.0000	-463.0000	-462.9700	-462.9900	-462.9700
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2800	-231.3000	-231.3000	-231.2700	-231.2900	-231.2700

H-Field (18cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
1.778	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (18cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4200	0.4000	0.4000	0.4300	0.4100	0.4400
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9800	-463.0000	-463.0000	-462.9700	-462.9900	-462.9600
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2800	-231.3000	-231.3000	-231.2700	-231.2900	-231.2600

H-Field (18cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
1.778	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (18cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4200	0.4100	0.4100	0.4300	0.4200	0.4400
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9800	-462.9900	-462.9900	-462.9700	-462.9800	-462.9600
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2800	-231.2900	-231.2900	-231.2700	-231.2800	-231.2600

H-Field (18cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0200	0.0200	0.0300	0.0200	0.0200	0.0200
1.778	Max H-field (A/m)	0.0160	0.0160	0.0240	0.0160	0.0160	0.0160
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2140	-1.2140	-1.2060	-1.2140	-1.2140	-1.2140
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5990	-0.5990	-0.5910	-0.5990	-0.5990	-0.5990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%

E-Field (20cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.3500	0.3500	0.3600	0.3700	0.3800	0.4000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-463.0500	-463.0500	-463.0400	-463.0300	-463.0200	-463.0000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.3500	-231.3500	-231.3400	-231.3300	-231.3200	-231.3000

H-Field (20cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
1.778	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%

E-Field (20cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.3600	0.3600	0.3600	0.3800	0.3800	0.4000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-463.0400	-463.0400	-463.0400	-463.0200	-463.0200	-463.0000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.3400	-231.3400	-231.3400	-231.3200	-231.3200	-231.3000

H-Field (20cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
1.778	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%

E-Field (20cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.3700	0.3800	0.3800	0.3900	0.3900	0.4100
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-463.0300	-463.0200	-463.0200	-463.0100	-463.0100	-462.9900
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.3300	-231.3200	-231.3200	-231.3100	-231.3100	-231.2900

H-Field (20cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0200	0.0200	0.0300	0.0200	0.0200	0.0200
1.778	Max H-field (A/m)	0.0160	0.0160	0.0240	0.0160	0.0160	0.0160
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2140	-1.2140	-1.2060	-1.2140	-1.2140	-1.2140
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5990	-0.5990	-0.5910	-0.5990	-0.5990	-0.5990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Standby Mode

E-Field (0cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.9400	0.8500	0.7500	0.8700	1.3200	1.2200
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.4600	-462.5500	-462.6500	-462.5300	-462.0800	-462.1800
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.7600	-230.8500	-230.9500	-230.8300	-230.3800	-230.4800

H-Field (0cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0900	0.0700	0.0800	0.0300	0.0600	0.0800
1.778	Max H-field (A/m)	0.0720	0.0560	0.0640	0.0240	0.0480	0.0640
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1580	-1.1740	-1.1660	-1.2060	-1.1820	-1.1660
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5430	-0.5590	-0.5510	-0.5910	-0.5670	-0.5510

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 0 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (2cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.8200	0.7400	0.6700	0.7800	1.1100	1.0100
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.5800	-462.6600	-462.7300	-462.6200	-462.2900	-462.3900
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.8800	-230.9600	-231.0300	-230.9200	-230.5900	-230.6900

H-Field (2cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0800	0.0660	0.0740	0.0300	0.0500	0.0740
1.778	Max H-field (A/m)	0.0640	0.0528	0.0592	0.0240	0.0400	0.0592
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1660	-1.1772	-1.1708	-1.2060	-1.1900	-1.1708
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5510	-0.5622	-0.5558	-0.5910	-0.5750	-0.5558

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 2 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (4cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.7600	0.6700	0.6000	0.6600	0.9300	0.8800
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.6400	-462.7300	-462.8000	-462.7400	-462.4700	-462.5200
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-230.9400	-231.0300	-231.1000	-231.0400	-230.7700	-230.8200

H-Field (4cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0700	0.0600	0.0600	0.0300	0.0500	0.0600
1.778	Max H-field (A/m)	0.0560	0.0480	0.0480	0.0240	0.0400	0.0480
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1740	-1.1820	-1.1820	-1.2060	-1.1900	-1.1820
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5590	-0.5670	-0.5670	-0.5910	-0.5750	-0.5670

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 4 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (6cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.6500	0.6000	0.5800	0.6400	0.7200	0.6300
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.7500	-462.8000	-462.8200	-462.7600	-462.6800	-462.7700
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.0500	-231.1000	-231.1200	-231.0600	-230.9800	-231.0700

H-Field (6cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0500	0.0450	0.0500	0.0300	0.0500	0.0500
1.778	Max H-field (A/m)	0.0400	0.0360	0.0400	0.0240	0.0400	0.0400
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1900	-1.1940	-1.1900	-1.2060	-1.1900	-1.1900
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5750	-0.5790	-0.5750	-0.5910	-0.5750	-0.5750

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 6 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (8cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5300	0.5200	0.5500	0.5300	0.5700	0.5300
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.8700	-462.8800	-462.8500	-462.8700	-462.8300	-462.8700
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.1700	-231.1800	-231.1500	-231.1700	-231.1300	-231.1700

H-Field (8cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0440	0.0400	0.0400	0.0300	0.0450	0.0450
1.778	Max H-field (A/m)	0.0352	0.0320	0.0320	0.0240	0.0360	0.0360
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.1948	-1.1980	-1.1980	-1.2060	-1.1940	-1.1940
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5798	-0.5830	-0.5830	-0.5910	-0.5790	-0.5790

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 8 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4300	0.4500	0.4400	0.4500	0.4400	0.4400
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9700	-462.9500	-462.9600	-462.9500	-462.9600	-462.9600
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2700	-231.2500	-231.2600	-231.2500	-231.2600	-231.2600

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0330	0.0350	0.0340	0.0300	0.0350	0.0330
1.778	Max H-field (A/m)	0.0264	0.0280	0.0272	0.0240	0.0280	0.0264
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2036	-1.2020	-1.2028	-1.2060	-1.2020	-1.2036
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5886	-0.5870	-0.5878	-0.5910	-0.5870	-0.5886

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (12cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4100	0.4200	0.4300	0.4100	0.4000	0.4000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9900	-462.9800	-462.9700	-462.9900	-463.0000	-463.0000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2900	-231.2800	-231.2700	-231.2900	-231.3000	-231.3000

H-Field (12cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0300	0.0310	0.0330	0.0300	0.0320	0.0300
1.778	Max H-field (A/m)	0.0240	0.0248	0.0264	0.0240	0.0256	0.0240
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2060	-1.2052	-1.2036	-1.2060	-1.2044	-1.2060
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5910	-0.5902	-0.5886	-0.5910	-0.5894	-0.5910

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 12 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (14cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4000	0.4100	0.4100	0.4000	0.3900	0.3900
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-463.0000	-462.9900	-462.9900	-463.0000	-463.0100	-463.0100
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.3000	-231.2900	-231.2900	-231.3000	-231.3100	-231.3100

H-Field (14cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0280	0.0280	0.0300	0.0300	0.0300	0.0280
1.778	Max H-field (A/m)	0.0224	0.0224	0.0240	0.0240	0.0240	0.0224
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2076	-1.2076	-1.2060	-1.2060	-1.2060	-1.2076
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5926	-0.5926	-0.5910	-0.5910	-0.5910	-0.5926

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 14 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (15cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4000	0.4100	0.4000	0.3900	0.3900	0.3800
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-463.0000	-462.9900	-463.0000	-463.0100	-463.0100	-463.0200
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.3000	-231.2900	-231.3000	-231.3100	-231.3100	-231.3200

H-Field (15cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0270	0.0270	0.0300	0.0300	0.0300	0.0280
1.778	Max H-field (A/m)	0.0216	0.0216	0.0240	0.0240	0.0240	0.0224
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2084	-1.2084	-1.2060	-1.2060	-1.2060	-1.2076
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5934	-0.5934	-0.5910	-0.5910	-0.5910	-0.5926

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (16cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.3900	0.4000	0.4000	0.3800	0.3700	0.3600
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-463.0100	-463.0000	-463.0000	-463.0200	-463.0300	-463.0400
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.3100	-231.3000	-231.3000	-231.3200	-231.3300	-231.3400

H-Field (16cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0260	0.0250	0.0240	0.0260	0.0260	0.0250
1.778	Max H-field (A/m)	0.0208	0.0200	0.0192	0.0208	0.0208	0.0200
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2092	-1.2100	-1.2108	-1.2092	-1.2092	-1.2100
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5942	-0.5950	-0.5958	-0.5942	-0.5942	-0.5950

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 16 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (18cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.3800	0.3900	0.3900	0.3700	0.3600	0.3500
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-463.0200	-463.0100	-463.0100	-463.0300	-463.0400	-463.0500
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.3200	-231.3100	-231.3100	-231.3300	-231.3400	-231.3500

H-Field (18cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0200	0.0230	0.0200	0.0200	0.0220	0.0200
1.778	Max H-field (A/m)	0.0160	0.0184	0.0160	0.0160	0.0176	0.0160
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2140	-1.2116	-1.2140	-1.2140	-1.2124	-1.2140
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5990	-0.5966	-0.5990	-0.5990	-0.5974	-0.5990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 18 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

E-Field (20cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.3700	0.3800	0.3700	0.3500	0.3500	0.3400
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-463.0300	-463.0200	-463.0300	-463.0500	-463.0500	-463.0600
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.3300	-231.3200	-231.3300	-231.3500	-231.3500	-231.3600

H-Field (20cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0200	0.0200	0.0200	0.0200	0.0200	0.0200
1.778	Max H-field (A/m)	0.0160	0.0160	0.0160	0.0160	0.0160	0.0160
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140	-1.2140
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990	-0.5990

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 20 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Test Mode E

Operated Mode: Charging 10%

127.7kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5000	0.4700	0.4800	0.5200	0.5100	0.4900
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5000	-613.5300	-613.5200	-613.4800	-613.4900	-613.5100
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5000	-306.5300	-306.5200	-306.4800	-306.4900	-306.5100

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0100	0.0080	0.0090	0.0100	0.0100	0.0100
127.7	Max H-field (A/m)	0.0080	0.0064	0.0072	0.0080	0.0080	0.0080
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6220	-1.6236	-1.6228	-1.6220	-1.6220	-1.6220
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.8070	-0.8086	-0.8078	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%
326.5kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4900	0.5200	0.4800	0.4900	0.5100	0.5000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5100	-613.4800	-613.5200	-613.5100	-613.4900	-613.5000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5100	-306.4800	-306.5200	-306.5100	-306.4900	-306.5000

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0100	0.0100	0.0080	0.0080	0.0090	0.0100
326.5	Max H-field (A/m)	0.0080	0.0080	0.0064	0.0064	0.0072	0.0080
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6220	-1.6220	-1.6236	-1.6236	-1.6228	-1.6220
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.8070	-0.8070	-0.8086	-0.8086	-0.8078	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%
127.7kHz + 326.5kHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0016	0.0016	0.0016	0.0016	0.0017	0.0016
Limit	1	1	1	1	1	1
Margin	-0.9984	-0.9984	-0.9984	-0.9984	-0.9983	-0.9984

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](326.5kHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0098	0.0088	0.0083	0.0088	0.0093	0.0098
Limit	1	1	1	1	1	1
Margin	-0.9902	-0.9912	-0.9917	-0.9912	-0.9907	-0.9902

*H-field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](326.5kHz)

Operated Mode: Charging 50%
127.7kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5000	0.4800	0.4900	0.5100	0.5100	0.5000
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5000	-613.5200	-613.5100	-613.4900	-613.4900	-613.5000
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5000	-306.5200	-306.5100	-306.4900	-306.4900	-306.5000

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0100	0.0090	0.0100	0.0100	0.0100	0.0100
127.7	Max H-field (A/m)	0.0080	0.0072	0.0080	0.0080	0.0080	0.0080
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6220	-1.6228	-1.6220	-1.6220	-1.6220	-1.6220
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.8070	-0.8078	-0.8070	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%
326.5kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5000	0.5200	0.4900	0.5000	0.5100	0.5100
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5000	-613.4800	-613.5100	-613.5000	-613.4900	-613.4900
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5000	-306.4800	-306.5100	-306.5000	-306.4900	-306.4900

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0100	0.0100	0.0090	0.0090	0.0100	0.0100
326.5	Max H-field (A/m)	0.0080	0.0080	0.0072	0.0072	0.0080	0.0080
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6220	-1.6220	-1.6228	-1.6228	-1.6220	-1.6220
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.8070	-0.8070	-0.8078	-0.8078	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%
127.7kHz + 326.5kHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0016	0.0016	0.0016	0.0016	0.0017	0.0016
Limit	1	1	1	1	1	1
Margin	-0.9984	-0.9984	-0.9984	-0.9984	-0.9983	-0.9984

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](326.5kHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0098	0.0093	0.0093	0.0093	0.0098	0.0098
Limit	1	1	1	1	1	1
Margin	-0.9902	-0.9907	-0.9907	-0.9907	-0.9902	-0.9902

*H-field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](326.5kHz)

Operated Mode: Charging 90%
127.7kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5100	0.5000	0.5000	0.5100	0.5200	0.5100
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4900	-613.5000	-613.5000	-613.4900	-613.4800	-613.4900
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4900	-306.5000	-306.5000	-306.4900	-306.4800	-306.4900

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0100	0.0100	0.0100	0.0100	0.0100	0.0100
127.7	Max H-field (A/m)	0.0080	0.0080	0.0080	0.0080	0.0080	0.0080
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%
326.5kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5100	0.5200	0.5000	0.5100	0.5300	0.5200
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4900	-613.4800	-613.5000	-613.4900	-613.4700	-613.4800
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4900	-306.4800	-306.5000	-306.4900	-306.4700	-306.4800

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0100	0.0100	0.0100	0.0100	0.0100	0.0100
326.5	Max H-field (A/m)	0.0080	0.0080	0.0080	0.0080	0.0080	0.0080
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%
127.7kHz + 326.5kHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0017	0.0017	0.0016	0.0017	0.0017	0.0017
Limit	1	1	1	1	1	1
Margin	-0.9983	-0.9983	-0.9984	-0.9983	-0.9983	-0.9983

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](326.5kHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0098	0.0098	0.0098	0.0098	0.0098	0.0098
Limit	1	1	1	1	1	1
Margin	-0.9902	-0.9902	-0.9902	-0.9902	-0.9902	-0.9902

*H-field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](326.5kHz)

Standby Mode
127.7kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5100	0.4700	0.5200	0.5200	0.5200	0.4900
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4900	-613.5300	-613.4800	-613.4800	-613.4800	-613.5100
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4900	-306.5300	-306.4800	-306.4800	-306.4800	-306.5100

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0100	0.0100	0.0090	0.0080	0.0100	0.0100
127.7	Max H-field (A/m)	0.0080	0.0080	0.0072	0.0064	0.0080	0.0080
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6220	-1.6220	-1.6228	-1.6236	-1.6220	-1.6220
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.8070	-0.8070	-0.8078	-0.8086	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

326.5kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5200	0.4600	0.5300	0.5500	0.5300	0.5000
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4800	-613.5400	-613.4700	-613.4500	-613.4700	-613.5000
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4800	-306.5400	-306.4700	-306.4500	-306.4700	-306.5000

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0100	0.0090	0.0100	0.0100	0.0100	0.0090
326.5	Max H-field (A/m)	0.0080	0.0072	0.0080	0.0080	0.0080	0.0072
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6220	-1.6228	-1.6220	-1.6220	-1.6220	-1.6228
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.8070	-0.8078	-0.8070	-0.8070	-0.8070	-0.8078

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

127.7kHz + 326.5kHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0017	0.0015	0.0017	0.0017	0.0017	0.0016
Limit	1	1	1	1	1	1
Margin	-0.9983	-0.9985	-0.9983	-0.9983	-0.9983	-0.9984

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](326.5kHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0098	0.0093	0.0093	0.0088	0.0098	0.0093
Limit	1	1	1	1	1	1
Margin	-0.9902	-0.9907	-0.9907	-0.9912	-0.9902	-0.9907

*H-field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](326.5kHz)

Test Mode F

Operated Mode: Charging 10%

127.7kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.4900	0.4800	0.4900	0.5100	0.5100	0.5000
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5100	-613.5200	-613.5100	-613.4900	-613.4900	-613.5000
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5100	-306.5200	-306.5100	-306.4900	-306.4900	-306.5000

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0100	0.0080	0.0100	0.0100	0.0100	0.0100
127.7	Max H-field (A/m)	0.0080	0.0064	0.0080	0.0080	0.0080	0.0080
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6220	-1.6236	-1.6220	-1.6220	-1.6220	-1.6220
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.8070	-0.8086	-0.8070	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%
1.778MHz

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5000	0.5200	0.4900	0.4900	0.5000	0.4900
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9000	-462.8800	-462.9100	-462.9100	-462.9000	-462.9100
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2000	-231.1800	-231.2100	-231.2100	-231.2000	-231.2100

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0100	0.0100	0.0080	0.0090	0.0100	0.0100
1.778	Max H-field (A/m)	0.0080	0.0080	0.0064	0.0072	0.0080	0.0080
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2220	-1.2220	-1.2236	-1.2228	-1.2220	-1.2220
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.6070	-0.6070	-0.6086	-0.6078	-0.6070	-0.6070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%
127.7kHz + 1.778MHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0019	0.0019	0.0019	0.0019	0.0019	0.0019
Limit	1	1	1	1	1	1
Margin	-0.9981	-0.9981	-0.9981	-0.9981	-0.9981	-0.9981

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](1.778MHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0114	0.0104	0.0101	0.0108	0.0114	0.0114
Limit	1	1	1	1	1	1
Margin	-0.9886	-0.9896	-0.9899	-0.9892	-0.9886	-0.9886

*H-field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](1.778MHz)

Operated Mode: Charging 50%
127.7kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5000	0.4900	0.5000	0.5100	0.5100	0.5000
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5000	-613.5100	-613.5000	-613.4900	-613.4900	-613.5000
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5000	-306.5100	-306.5000	-306.4900	-306.4900	-306.5000

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0100	0.0090	0.0100	0.0100	0.0100	0.0100
127.7	Max H-field (A/m)	0.0080	0.0072	0.0080	0.0080	0.0080	0.0080
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6220	-1.6228	-1.6220	-1.6220	-1.6220	-1.6220
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.8070	-0.8078	-0.8070	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%
1.778MHz

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5000	0.5300	0.5000	0.5000	0.5100	0.5000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9000	-462.8700	-462.9000	-462.9000	-462.8900	-462.9000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2000	-231.1700	-231.2000	-231.2000	-231.1900	-231.2000

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0100	0.0100	0.0090	0.0090	0.0100	0.0100
1.778	Max H-field (A/m)	0.0080	0.0080	0.0072	0.0072	0.0080	0.0080
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2220	-1.2220	-1.2228	-1.2228	-1.2220	-1.2220
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.6070	-0.6070	-0.6078	-0.6078	-0.6070	-0.6070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%
127.7kHz + 1.778MHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0019	0.0019	0.0019	0.0019	0.0019	0.0019
Limit	1	1	1	1	1	1
Margin	-0.9981	-0.9981	-0.9981	-0.9981	-0.9981	-0.9981

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](1.778MHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0114	0.0109	0.0108	0.0108	0.0114	0.0114
Limit	1	1	1	1	1	1
Margin	-0.9886	-0.9891	-0.9892	-0.9892	-0.9886	-0.9886

*H-field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](1.778MHz)

Operated Mode: Charging 90%
127.7kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.5100	0.5000	0.5000	0.5100	0.5200	0.5100
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.4900	-613.5000	-613.5000	-613.4900	-613.4800	-613.4900
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.4900	-306.5000	-306.5000	-306.4900	-306.4800	-306.4900

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0100	0.0100	0.0100	0.0100	0.0100	0.0100
127.7	Max H-field (A/m)	0.0080	0.0080	0.0080	0.0080	0.0080	0.0080
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%
1.778MHz

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5100	0.5300	0.5000	0.5100	0.5200	0.5000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.8900	-462.8700	-462.9000	-462.8900	-462.8800	-462.9000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.1900	-231.1700	-231.2000	-231.1900	-231.1800	-231.2000

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0100	0.0100	0.0100	0.0100	0.0100	0.0100
1.778	Max H-field (A/m)	0.0080	0.0080	0.0080	0.0080	0.0080	0.0080
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2220	-1.2220	-1.2220	-1.2220	-1.2220	-1.2220
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.6070	-0.6070	-0.6070	-0.6070	-0.6070	-0.6070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%
127.7kHz + 1.778MHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0019	0.0020	0.0019	0.0019	0.0020	0.0019
Limit	1	1	1	1	1	1
Margin	-0.9981	-0.9980	-0.9981	-0.9981	-0.9980	-0.9981

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](1.778MHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0114	0.0114	0.0114	0.0114	0.0114	0.0114
Limit	1	1	1	1	1	1
Margin	-0.9886	-0.9886	-0.9886	-0.9886	-0.9886	-0.9886

*H-field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](1.778MHz)

Standby Mode
127.7kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max E-field (V/m)	0.4900	0.4700	0.5000	0.4900	0.5000	0.4800
127.7	Limit (V/m)	614	614	614	614	614	614
127.7	Margin (V/m)	-613.5100	-613.5300	-613.5000	-613.5100	-613.5000	-613.5200
127.7	50 % Limit (V/m)	307	307	307	307	307	307
127.7	50 % Margin (V/m)	-306.5100	-306.5300	-306.5000	-306.5100	-306.5000	-306.5200

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
127.7	Max H-field (uT)	0.0100	0.0100	0.0090	0.0090	0.0090	0.0080
127.7	Max H-field (A/m)	0.0080	0.0080	0.0072	0.0072	0.0072	0.0064
127.7	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
127.7	Margin (A/m)	-1.6220	-1.6220	-1.6228	-1.6228	-1.6228	-1.6236
127.7	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
127.7	50 % Margin (A/m)	-0.8070	-0.8070	-0.8078	-0.8078	-0.8078	-0.8086

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

1.778MHz

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5100	0.4700	0.5000	0.5200	0.5200	0.5000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.8900	-462.9300	-462.9000	-462.8800	-462.8800	-462.9000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.1900	-231.2300	-231.2000	-231.1800	-231.1800	-231.2000

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0100	0.0090	0.0080	0.0100	0.0100	0.0080
1.778	Max H-field (A/m)	0.0080	0.0072	0.0064	0.0080	0.0080	0.0064
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2220	-1.2228	-1.2236	-1.2220	-1.2220	-1.2236
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.6070	-0.6078	-0.6086	-0.6070	-0.6070	-0.6086

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

127.7kHz + 1.778MHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0019	0.0018	0.0019	0.0019	0.0019	0.0019
Limit	1	1	1	1	1	1
Margin	-0.9981	-0.9982	-0.9981	-0.9981	-0.9981	-0.9981

*E-field Total Ratio = [Max E-field / Limit](127.7kHz) + [Max E-field / Limit](1.778MHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0114	0.0108	0.0096	0.0109	0.0109	0.0091
Limit	1	1	1	1	1	1
Margin	-0.9886	-0.9892	-0.9904	-0.9891	-0.9891	-0.9909

*H-field Total Ratio = [Max H-field / Limit](127.7kHz) + [Max H-field / Limit](1.778MHz)

Test Mode G

Operated Mode: Charging 10%

360kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5000	0.4600	0.4800	0.5000	0.5100	0.4800
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5000	-613.5400	-613.5200	-613.5000	-613.4900	-613.5200
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5000	-306.5400	-306.5200	-306.5000	-306.4900	-306.5200

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0090	0.0080	0.0090	0.0100	0.0100	0.0100
360	Max H-field (A/m)	0.0072	0.0064	0.0072	0.0080	0.0080	0.0080
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6228	-1.6236	-1.6228	-1.6220	-1.6220	-1.6220
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.8078	-0.8086	-0.8078	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%
326.5kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.4900	0.5100	0.4800	0.4900	0.5000	0.4800
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5100	-613.4900	-613.5200	-613.5100	-613.5000	-613.5200
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5100	-306.4900	-306.5200	-306.5100	-306.5000	-306.5200

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0100	0.0090	0.0080	0.0090	0.0100	0.0100
326.5	Max H-field (A/m)	0.0080	0.0072	0.0064	0.0072	0.0080	0.0080
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6220	-1.6228	-1.6236	-1.6228	-1.6220	-1.6220
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.8070	-0.8078	-0.8086	-0.8078	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%
360kHz + 326.5kHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0016	0.0016	0.0016	0.0016	0.0016	0.0016
Limit	1	1	1	1	1	1
Margin	-0.9984	-0.9984	-0.9984	-0.9984	-0.9984	-0.9984

*E-field Total Ratio = [Max E-field / Limit](360kHz) + [Max E-field / Limit](326.5kHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0093	0.0083	0.0083	0.0093	0.0098	0.0098
Limit	1	1	1	1	1	1
Margin	-0.9907	-0.9917	-0.9917	-0.9907	-0.9902	-0.9902

*H-field Total Ratio = [Max H-field / Limit](360kHz) + [Max H-field / Limit](326.5kHz)

Operated Mode: Charging 50%
360kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5000	0.4800	0.4900	0.5100	0.5100	0.5000
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5000	-613.5200	-613.5100	-613.4900	-613.4900	-613.5000
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5000	-306.5200	-306.5100	-306.4900	-306.4900	-306.5000

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0100	0.0090	0.0100	0.0100	0.0100	0.0100
360	Max H-field (A/m)	0.0080	0.0072	0.0080	0.0080	0.0080	0.0080
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6220	-1.6228	-1.6220	-1.6220	-1.6220	-1.6220
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.8070	-0.8078	-0.8070	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%
326.5kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5000	0.5200	0.4900	0.5100	0.5100	0.5100
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5000	-613.4800	-613.5100	-613.4900	-613.4900	-613.4900
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5000	-306.4800	-306.5100	-306.4900	-306.4900	-306.4900

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0100	0.0100	0.0090	0.0090	0.0100	0.0100
326.5	Max H-field (A/m)	0.0080	0.0080	0.0072	0.0072	0.0080	0.0080
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6220	-1.6220	-1.6228	-1.6228	-1.6220	-1.6220
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.8070	-0.8070	-0.8078	-0.8078	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%
360kHz + 326.5kHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0016	0.0016	0.0016	0.0017	0.0017	0.0016
Limit	1	1	1	1	1	1
Margin	-0.9984	-0.9984	-0.9984	-0.9983	-0.9983	-0.9984

*E-field Total Ratio = [Max E-field / Limit](360kHz) + [Max E-field / Limit](326.5kHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0098	0.0093	0.0093	0.0093	0.0098	0.0098
Limit	1	1	1	1	1	1
Margin	-0.9902	-0.9907	-0.9907	-0.9907	-0.9902	-0.9902

*H-field Total Ratio = [Max H-field / Limit](360kHz) + [Max H-field / Limit](326.5kHz)

Operated Mode: Charging 90%
360kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5100	0.5000	0.5100	0.5100	0.5100	0.5100
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.4900	-613.5000	-613.4900	-613.4900	-613.4900	-613.4900
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.4900	-306.5000	-306.4900	-306.4900	-306.4900	-306.4900

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0100	0.0100	0.0100	0.0100	0.0100	0.0100
360	Max H-field (A/m)	0.0080	0.0080	0.0080	0.0080	0.0080	0.0080
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%
326.5kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5100	0.5100	0.5000	0.5100	0.5200	0.5100
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.4900	-613.4900	-613.5000	-613.4900	-613.4800	-613.4900
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.4900	-306.4900	-306.5000	-306.4900	-306.4800	-306.4900

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0100	0.0100	0.0100	0.0100	0.0100	0.0100
326.5	Max H-field (A/m)	0.0080	0.0080	0.0080	0.0080	0.0080	0.0080
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%
360kHz + 326.5kHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0017	0.0016	0.0016	0.0017	0.0017	0.0017
Limit	1	1	1	1	1	1
Margin	-0.9983	-0.9984	-0.9984	-0.9983	-0.9983	-0.9983

*E-field Total Ratio = [Max E-field / Limit](360kHz) + [Max E-field / Limit](326.5kHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0098	0.0098	0.0098	0.0098	0.0098	0.0098
Limit	1	1	1	1	1	1
Margin	-0.9902	-0.9902	-0.9902	-0.9902	-0.9902	-0.9902

*H-field Total Ratio = [Max H-field / Limit](360kHz) + [Max H-field / Limit](326.5kHz)

Standby Mode
360kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5000	0.4700	0.4900	0.5100	0.5000	0.4800
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5000	-613.5300	-613.5100	-613.4900	-613.5000	-613.5200
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5000	-306.5300	-306.5100	-306.4900	-306.5000	-306.5200

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0100	0.0080	0.0090	0.0080	0.0100	0.0080
360	Max H-field (A/m)	0.0080	0.0064	0.0072	0.0064	0.0080	0.0064
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6220	-1.6236	-1.6228	-1.6236	-1.6220	-1.6236
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.8070	-0.8086	-0.8078	-0.8086	-0.8070	-0.8086

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

326.5kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max E-field (V/m)	0.5000	0.4700	0.5100	0.5000	0.4900	0.4800
326.5	Limit (V/m)	614	614	614	614	614	614
326.5	Margin (V/m)	-613.5000	-613.5300	-613.4900	-613.5000	-613.5100	-613.5200
326.5	50 % Limit (V/m)	307	307	307	307	307	307
326.5	50 % Margin (V/m)	-306.5000	-306.5300	-306.4900	-306.5000	-306.5100	-306.5200

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
326.5	Max H-field (uT)	0.0100	0.0090	0.0090	0.0100	0.0100	0.0080
326.5	Max H-field (A/m)	0.0080	0.0072	0.0072	0.0080	0.0080	0.0064
326.5	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
326.5	Margin (A/m)	-1.6220	-1.6228	-1.6228	-1.6220	-1.6220	-1.6236
326.5	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
326.5	50 % Margin (A/m)	-0.8070	-0.8078	-0.8078	-0.8070	-0.8070	-0.8086

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

360kHz + 326.5kHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0016	0.0015	0.0016	0.0016	0.0016	0.0016
Limit	1	1	1	1	1	1
Margin	-0.9984	-0.9985	-0.9984	-0.9984	-0.9984	-0.9984

*E-field Total Ratio = [Max E-field / Limit](360kHz) + [Max E-field / Limit](326.5kHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0098	0.0083	0.0088	0.0088	0.0098	0.0079
Limit	1	1	1	1	1	1
Margin	-0.9902	-0.9917	-0.9912	-0.9912	-0.9902	-0.9921

*H-field Total Ratio = [Max H-field / Limit](360kHz) + [Max H-field / Limit](326.5kHz)

Test Mode H

Operated Mode: Charging 10%

360kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5000	0.4700	0.4900	0.5000	0.5100	0.4900
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5000	-613.5300	-613.5100	-613.5000	-613.4900	-613.5100
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5000	-306.5300	-306.5100	-306.5000	-306.4900	-306.5100

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0090	0.0090	0.0090	0.0100	0.0100	0.0100
360	Max H-field (A/m)	0.0072	0.0072	0.0072	0.0080	0.0080	0.0080
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6228	-1.6228	-1.6228	-1.6220	-1.6220	-1.6220
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.8078	-0.8078	-0.8078	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%
1.778MHz

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.4900	0.5100	0.5000	0.5000	0.5000	0.4900
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9100	-462.8900	-462.9000	-462.9000	-462.9000	-462.9100
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2100	-231.1900	-231.2000	-231.2000	-231.2000	-231.2100

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0100	0.0090	0.0100	0.0090	0.0100	0.0100
1.778	Max H-field (A/m)	0.0080	0.0072	0.0080	0.0072	0.0080	0.0080
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2220	-1.2228	-1.2220	-1.2228	-1.2220	-1.2220
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.6070	-0.6078	-0.6070	-0.6078	-0.6070	-0.6070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 10%
360kHz + 1.778MHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0019	0.0019	0.0019	0.0019	0.0019	0.0019
Limit	1	1	1	1	1	1
Margin	-0.9981	-0.9981	-0.9981	-0.9981	-0.9981	-0.9981

*E-field Total Ratio = [Max E-field / Limit](360kHz) + [Max E-field / Limit](1.778MHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0109	0.0103	0.0109	0.0108	0.0114	0.0114
Limit	1	1	1	1	1	1
Margin	-0.9891	-0.9897	-0.9891	-0.9892	-0.9886	-0.9886

*H-field Total Ratio = [Max H-field / Limit](360kHz) + [Max H-field / Limit](1.778MHz)

Operated Mode: Charging 50%
360kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5000	0.4800	0.5000	0.5100	0.5200	0.5000
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5000	-613.5200	-613.5000	-613.4900	-613.4800	-613.5000
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5000	-306.5200	-306.5000	-306.4900	-306.4800	-306.5000

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0100	0.0100	0.0100	0.0100	0.0100	0.0100
360	Max H-field (A/m)	0.0080	0.0080	0.0080	0.0080	0.0080	0.0080
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%
1.778MHz

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5000	0.5200	0.5100	0.5100	0.5100	0.5000
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9000	-462.8800	-462.8900	-462.8900	-462.8900	-462.9000
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2000	-231.1800	-231.1900	-231.1900	-231.1900	-231.2000

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0100	0.0100	0.0090	0.0090	0.0100	0.0100
1.778	Max H-field (A/m)	0.0080	0.0080	0.0072	0.0072	0.0080	0.0080
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2220	-1.2220	-1.2228	-1.2228	-1.2220	-1.2220
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.6070	-0.6070	-0.6078	-0.6078	-0.6070	-0.6070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 50%
360kHz + 1.778MHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0019	0.0019	0.0019	0.0019	0.0019	0.0019
Limit	1	1	1	1	1	1
Margin	-0.9981	-0.9981	-0.9981	-0.9981	-0.9981	-0.9981

*E-field Total Ratio = [Max E-field / Limit](360kHz) + [Max E-field / Limit](1.778MHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0114	0.0114	0.0108	0.0108	0.0114	0.0114
Limit	1	1	1	1	1	1
Margin	-0.9886	-0.9886	-0.9892	-0.9892	-0.9886	-0.9886

*H-field Total Ratio = [Max H-field / Limit](360kHz) + [Max H-field / Limit](1.778MHz)

Operated Mode: Charging 90%
360kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5200	0.5100	0.5200	0.5100	0.5300	0.5100
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.4800	-613.4900	-613.4800	-613.4900	-613.4700	-613.4900
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.4800	-306.4900	-306.4800	-306.4900	-306.4700	-306.4900

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0100	0.0100	0.0100	0.0100	0.0100	0.0100
360	Max H-field (A/m)	0.0080	0.0080	0.0080	0.0080	0.0080	0.0080
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220	-1.6220
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%
1.778MHz

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5100	0.5100	0.5000	0.5100	0.5200	0.5100
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.8900	-462.8900	-462.9000	-462.8900	-462.8800	-462.8900
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.1900	-231.1900	-231.2000	-231.1900	-231.1800	-231.1900

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0100	0.0100	0.0100	0.0100	0.0100	0.0100
1.778	Max H-field (A/m)	0.0080	0.0080	0.0080	0.0080	0.0080	0.0080
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2220	-1.2220	-1.2220	-1.2220	-1.2220	-1.2220
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.6070	-0.6070	-0.6070	-0.6070	-0.6070	-0.6070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

Operated Mode: Charging 90%
360kHz + 1.778MHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0019	0.0019	0.0019	0.0019	0.0020	0.0019
Limit	1	1	1	1	1	1
Margin	-0.9981	-0.9981	-0.9981	-0.9981	-0.9980	-0.9981

*E-field Total Ratio = [Max E-field / Limit](360kHz) + [Max E-field / Limit](1.778MHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0114	0.0114	0.0114	0.0114	0.0114	0.0114
Limit	1	1	1	1	1	1
Margin	-0.9886	-0.9886	-0.9886	-0.9886	-0.9886	-0.9886

*H-field Total Ratio = [Max H-field / Limit](360kHz) + [Max H-field / Limit](1.778MHz)

Standby Mode
360kHz

E-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max E-field (V/m)	0.5000	0.4800	0.4900	0.5100	0.5000	0.4900
360	Limit (V/m)	614	614	614	614	614	614
360	Margin (V/m)	-613.5000	-613.5200	-613.5100	-613.4900	-613.5000	-613.5100
360	50 % Limit (V/m)	307	307	307	307	307	307
360	50 % Margin (V/m)	-306.5000	-306.5200	-306.5100	-306.4900	-306.5000	-306.5100

H-Field (10cm)							
Frequency (kHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
360	Max H-field (uT)	0.0100	0.0080	0.0090	0.0100	0.0100	0.0100
360	Max H-field (A/m)	0.0080	0.0064	0.0072	0.0080	0.0080	0.0080
360	Limit (A/m)	1.63	1.63	1.63	1.63	1.63	1.63
360	Margin (A/m)	-1.6220	-1.6236	-1.6228	-1.6220	-1.6220	-1.6220
360	50 % Limit (A/m)	0.815	0.815	0.815	0.815	0.815	0.815
360	50 % Margin (A/m)	-0.8070	-0.8086	-0.8078	-0.8070	-0.8070	-0.8070

Note:

1. Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

1.778MHz

E-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max E-field (V/m)	0.5000	0.4800	0.5100	0.5000	0.5000	0.4800
1.778	Limit (V/m)	463.4	463.4	463.4	463.4	463.4	463.4
1.778	Margin (V/m)	-462.9000	-462.9200	-462.8900	-462.9000	-462.9000	-462.9200
1.778	50 % Limit (V/m)	231.7	231.7	231.7	231.7	231.7	231.7
1.778	50 % Margin (V/m)	-231.2000	-231.2200	-231.1900	-231.2000	-231.2000	-231.2200

H-Field (10cm)							
Frequency (MHz)	EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
1.778	Max H-field (uT)	0.0100	0.0090	0.0100	0.0100	0.0100	0.0090
1.778	Max H-field (A/m)	0.0080	0.0072	0.0080	0.0080	0.0080	0.0072
1.778	Limit (A/m)	1.23	1.23	1.23	1.23	1.23	1.23
1.778	Margin (A/m)	-1.2220	-1.2228	-1.2220	-1.2220	-1.2220	-1.2228
1.778	50 % Limit (A/m)	0.615	0.615	0.615	0.615	0.615	0.615
1.778	50 % Margin (A/m)	-0.6070	-0.6078	-0.6070	-0.6070	-0.6070	-0.6078

Note:

- Measurements was made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. The highest emission level was recorded.

360kHz + 1.778MHz

E-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max E-field Total Ratio	0.0019	0.0018	0.0019	0.0019	0.0019	0.0018
Limit	1	1	1	1	1	1
Margin	-0.9981	-0.9982	-0.9981	-0.9981	-0.9981	-0.9982

*E-field Total Ratio = [Max E-field / Limit](360kHz) + [Max E-field / Limit](1.778MHz)

H-Field Measurement (10cm)						
EUT Side	Left	Right	Top	Bottom	Z-axis (Above)	Z-axis (Below)
Max H-field Total Ratio	0.0114	0.0098	0.0109	0.0114	0.0114	0.0108
Limit	1	1	1	1	1	1
Margin	-0.9886	-0.9902	-0.9891	-0.9886	-0.9886	-0.9892

*H-field Total Ratio = [Max H-field / Limit](360kHz) + [Max H-field / Limit](1.778MHz)

5. Photographs of the Test Configuration

Please refer to the attached file (Test Setup Photo).

--- END ---