

FCC Radio Test Report

FCC ID: 2AEEX-GEMINI

This report concerns (check one): ☒ Original Grant ☐ Class II Change

Project No. : 1504C059
Equipment : Smart Phone
Model Name : Gemini
Applicant : SACO LLC
Address : 2170 NW 87th Ave, Doral Florida, 33172, Doral,
Florida, United States 33172

Date of Receipt : Apr. 07, 2015
Date of Test : Apr. 07, 2015~ May 25, 2015
Issued Date : May 26, 2015
Tested by : BTL Inc.

Testing Engineer : David Mao
(David Mao)

Technical Manager : Leo Hung
(Leo Hung)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	6
1 . CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	11
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . TEST RESULT	13
4.1 RADIATED RF OUTPUT POWER MEASUREMENT	13
4.1.1 LIMIT	13
4.1.2 MEASURING INSTRUMENTS AND SETTING	13
4.1.3 TEST PROCEDURE	13
4.1.4 TEST SETUP LAYOUT	14
4.1.5 TEST DEVIATION	14
4.1.6 EUT OPERATION DURING TEST	14
4.1.7 EUT TEST CONDITIONS	14
4.1.8 TEST RESULTS	14
4.2 99% OCCUPIED BANDWIDTH MEASUREMENT	15
4.2.1 LIMIT	15
4.2.2 MEASURING INSTRUMENTS AND SETTING	15
4.2.3 TEST PROCEDURE	15
4.2.4 TEST SETUP LAYOUT	15
4.2.5 TEST DEVIATION	15
4.2.6 EUT OPERATION DURING TEST	15
4.2.7 EUT TEST CONDITIONS	15
4.2.8 TEST RESULTS	16
4.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS MEASUREMENT	17
4.3.1 LIMIT	17
4.3.2 MEASURING INSTRUMENTS AND SETTING	17
4.3.3 TEST PROCEDURES	17
4.3.4 TEST SETUP LAYOUT	17
4.3.5 TEST DEVIATION	17
4.3.6 EUT OPERATION DURING TEST	17
4.3.7 EUT TEST CONDITIONS	18

Table of Contents	Page
4.3.8 TEST RESULTS	18
4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT	19
4.4.1 LIMIT	19
4.4.2 MEASURING INSTRUMENTS AND SETTING	19
4.4.3 TEST PROCEDURES	19
4.4.4 TEST SETUP LAYOUT	20
4.4.5 TEST DEVIATION	20
4.4.6 EUT OPERATION DURING TEST	20
4.4.7 EUT TEST CONDITIONS	20
4.4.8 TEST RESULTS	20
4.5 BAND EDGE MEASUREMENT	21
4.5.1 LIMIT	21
4.5.2 MEASURING INSTRUMENTS AND SETTING	21
4.5.3 TEST PROCEDURES	21
4.5.4 TEST SETUP LAYOUT	21
4.5.5 TEST DEVIATION	21
4.5.6 EUT OPERATION DURING TEST	21
4.5.7 EUT TEST CONDITIONS	21
4.5.8 TEST RESULTS	22
4.6 FREQUENCY STABILITY MEASUREMENT	23
4.6.1 LIMIT	23
4.6.2 MEASURING INSTRUMENTS AND SETTING	23
4.6.3 TEST PROCEDURES	23
4.6.4 TEST SETUP LAYOUT	23
4.6.5 TEST DEVIATION	23
4.6.6 EUT OPERATION DURING TEST	23
4.6.7 EUT TEST CONDITIONS	24
4.6.8 TEST RESULTS	24
4.7 PEAK TO AVERAGE RADIO	25
4.7.1 LIMIT	25
4.7.2 TEST PROCEDURES	25
4.7.3 TEST SETUP LAYOUT	25
4.7.4 TEST DEVIATION	25
4.7.5 EUT OPERATION DURING TEST	25
4.7.6 EUT TEST CONDITIONS	25
4.7.7 TEST RESULTS	25
4.7 CONDUCTED EMISSION MEASUREMENT	26
4.7.1 POWER LINE CONDUCTED EMISSION LIMITS	26
4.7.2 TEST PROCEDURE	27
4.7.3 DEVIATION FROM TEST STANDARD	27
4.7.4 TEST SETUP	27
4.7.5 EUT OPERATING CONDITIONS	27
4.7.6 EUT TEST CONDITIONS	27

Table of Contents	Page
4.7.8 TEST RESULTS	27
5. LIST OF MEASUREMENT EQUIPMENTS	28
5 . EUT TEST PHOTO	30
ATTACHMENT A - RADIATED RF OUTPUT POWER	32
ATTACHMENT B - 99% OCCUPIED BANDWIDTH	37
ATTACHMENT C - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	62
ATTACHMENT D - SPURIOUS RADIATED EMISSION	75
ATTACHMENT E - BAND EDGE	100
ATTACHMENT F - FREQUENCY STABILITY	125
ATTACHMENT G - PEAK TO AVERAGE RADIO	132
ATTACHMENT H - CONDUCTED EMISSION	157

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-8-1504C059	Original Issue.	May 26, 2015

1. CERTIFICATION

Equipment : Smart Phone
Brand Name : AFFIX
Model Name : Gemini
Applicant : SACO LLC
Manufacturer : shanghai YIXI technology co., LTD
Address : 8F modernmodern logistics plaza 102 rd qinjiang,caohejing,hi-tech park shang
city 200233pr china
Factory : Skycom Telecommunications Co., Limited
Address : 4 Floor,Building A,Zhi Yang Technology Park.No.014 Tang Qian Zhang Qi
Road,Zhang Ge Community,Guan Lan Street,Long Hua New Dictrict,Shen
Zhen.
Date of Test : Apr. 07, 2015~ May 25, 2015
Test Sample : ENGINEERING SAMPLE
Standard(s) : 47 CFR FCC Part 27 & ANSI C63.4 : 2009
47 CFR FCC Part 2 & ANSI/TIA-603-C-2004

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-8-1504C059) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the LTE BAND IV approval part of the product.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 27 & Part 2			
Standard(s) Section	Test Item	Judgment	Remark
FCC			
2.1047(d)	Modulation Characteristics	PASS	
2.1046(a) 27.50(d)(4)	Radiated RF Output	PASS	
2.1049(h) 27.53(h)	99% Occupied Bandwidth	PASS	
2.1051 27.53(h)	Spurious Emissions at Antenna Terminal	PASS	
2.1053 27.53(h)	Spurious Radiated Emissions	PASS	
27.53(h)	Band Edge Emissions	PASS	
2.1055 27.54	Frequency Stability	PASS	
2.1046(d) 27.50(d)(5)	Peak to Average Ratio	PASS	
15.207	Conducted Emission	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this test report

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** .

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)	Note
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Parameter	Uncertainty
DG-CB12	All emissions, radiated	± 6 dB

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone	
Brand Name	AFFIX	
Model Name	Gemini	
Model Difference	N/A	
Product Description	Operation Frequency	LTE Band IV: TX:1710.7MHz~1754.3MHz RX:2110.7MHz~2154.3MHz
	Modulation Type	QPSK;16QAM
	Bandwidth	1.4M/3M/5M/10M/15M/20M
	EIRP Output Power	13.84dBm
Power Source	#1 DC voltage supplied from AC/DC adapter. Brand/Model: Avvio/A31-501000 #2 Battery supplied. Brand/Model: AFFIX/ROCKET #3 Supplied from USB port.	
Power Rating	#1 I/P:100-240V~50/60Hz 0.5A MAX O/P: DC 5V/2A #2 DC 3.8V 3000mAh #3 DC 5V	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Table for Filed Antenna @LTE Band IV

Ant.	Manufacture	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Printed	N/A	-2.5

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Test Items	Worst TX Mode	Channel
Radiated RF Output	QPSK/16QAM	Lowest/Middle/Highest
Spurious Radiated Emissions	QPSK	Lowest/Middle/Highest
Band Edge Emissions	QPSK/16QAM	Lowest/Highest
Frequency Stability	QPSK	Middle
99% Occupied Bandwidth	QPSK/16QAM	Lowest/Middle/Highest
Spurious Emissions at Antenna Terminal	QPSK	Lowest/Middle/Highest
Peak to Average Ratio	QPSK/16QAM	Middle

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The EUT is considered a portable unit; it was pre-tested on the position of each 3 axis. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.
- (3) Both adapter and battery are evaluated, operated the battery is the worst and recorded as below test data

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
-	-	-	-	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	

4. TEST RESULT

4.1 RADIATED RF OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

The Radiated Peak Output Power shall be according to the specific rule Part27.50(d)(4) that “Mobile/Portable station are limited to 2 watts e.i.r.p.” and 27.50(d)(4) specified that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.

4.1.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Center Frequency	Low / middle / high channels
Span Frequency	10MHz
RB / VB	3MHz / 3MHz for Peak

4.1.3 TEST PROCEDURE

1. The EUT was set up for the maximum peak power with QPSK link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, Lowest, Middle and Highest (low, middle and high operational frequency range).
2. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 3MHz, then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data)
3. E.I.R.P peak power measurement. In the fully anechoic chamber, EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
4. The substitution horn antenna is substituted for EUT at the same position, and signal generator export the CW signal to the calibration antenna. Rotated the Turn Table to find the maximum radiation power. “Raw” is the spectrum reading value, “SG” is signal generator export power, “TX Gain” is calibration antenna isotropic gain value, “TX cable” is the transmitted cable loss between the calibration antenna and signal generator. The “Factor” means that the transmission path loss is equal to “SG” - “TX cable” + “TX Gain” – “Raw”.
5. Actually the real E.I.R.P peak power is equal to “Read Value” + “Factor”

4.1.4 TEST SETUP LAYOUT EIRP Power Measurement

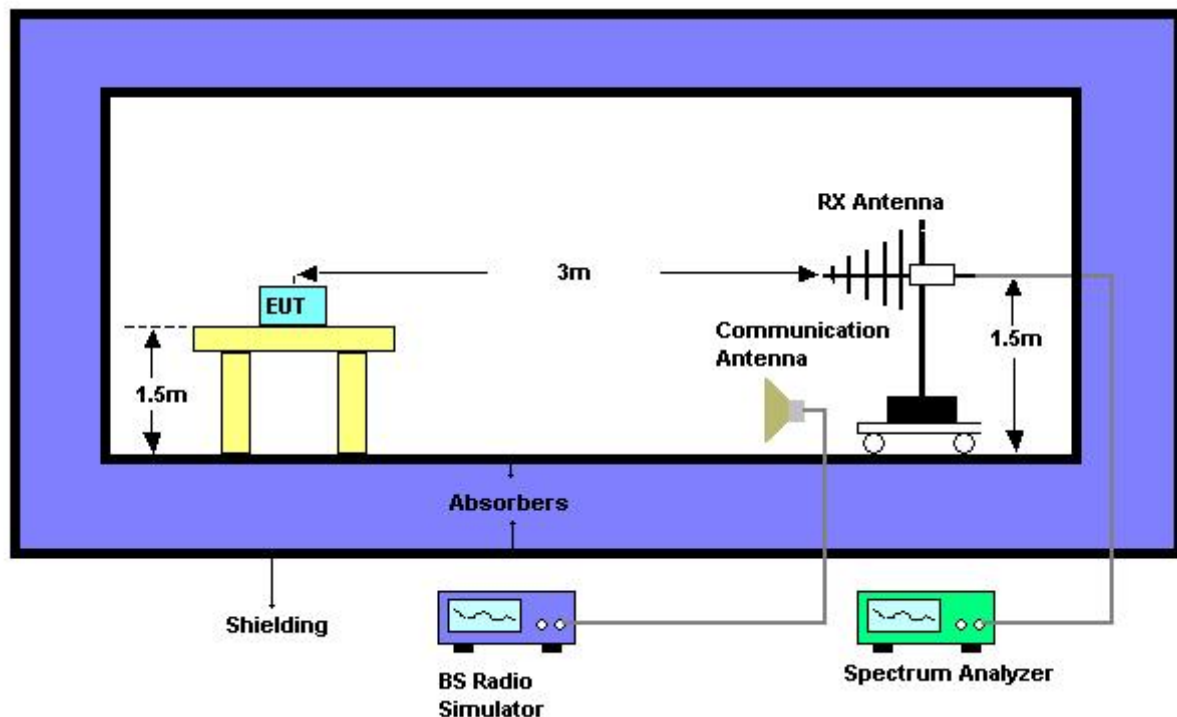

4.1.5 TEST DEVIATION

There is no deviation with the original standard.

4.1.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.1.7 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage: DC 3.8V

4.1.8 TEST RESULTS

Please refer to the Attachment A.

4.2 99% OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 LIMIT

According to FCC 27.53(h) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

4.2.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	30 kHz
VB	100 kHz
Trace	Max Hold

4.2.3 TEST PROCEDURE

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Used measurement function of spectrum to measure the 99% occupied bandwidth..

4.2.4 TEST SETUP LAYOUT

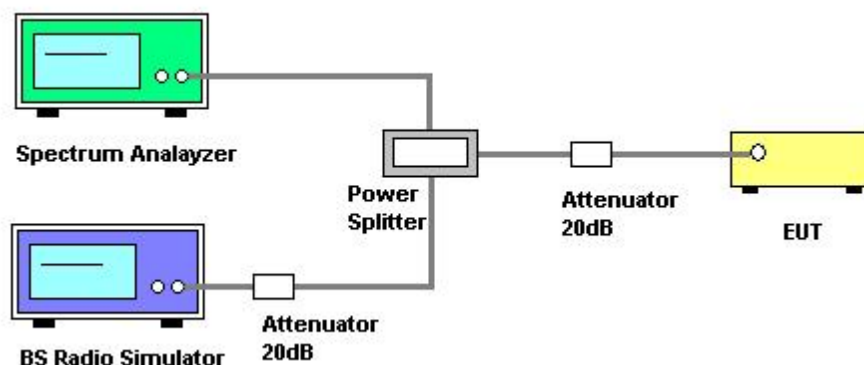

4.2.5 TEST DEVIATION

There is no deviation with the original standard.

4.2.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.2.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

4.2.8 TEST RESULTS

Please refer to the Attachment B.

4.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS MEASUREMENT

4.3.1 LIMIT

In the FCC 27.53(h), on any frequency outside a licensee's frequency block within GSM spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm.

4.3.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	30MHz
Stop Frequency	10th carrier harmonic
RB / VB	1 MHz / 1MHz for Peak

4.3.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with QPSK link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, Lowest,Middle,Highest(low, middle and high operational frequency range.)
2. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4.5dB in the transmitted path track.
3. When the spectrum scanned from 9kHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.
4. When the spectrum scanned from 3GHz to 10GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.

4.3.4 TEST SETUP LAYOUT

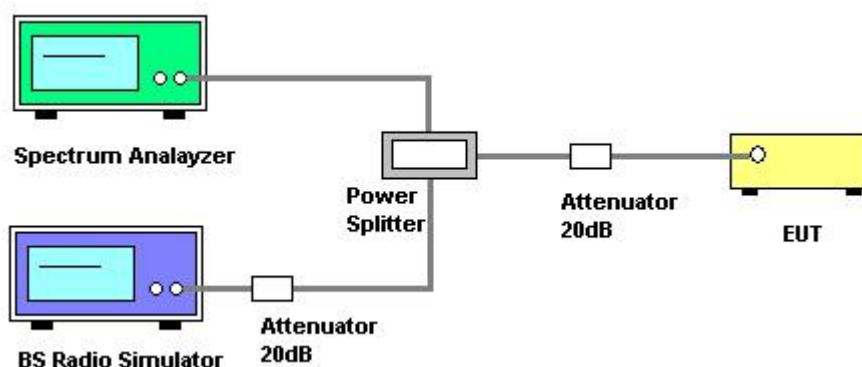

4.3.5 TEST DEVIATION

There is no deviation with the original standard.

4.3.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.3.7 EUT TEST CONDITIONS

Temperature: 25°C
Relative Humidity: 55%
Test Voltage:DC 3.8V

4.3.8 TEST RESULTS

Please refer to the Attachment C.

4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT

4.4.1 LIMIT

In the FCC 27.53(h), On any frequency outside a licensee's frequency block within GSM spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm . At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to -13dBm . So the limit of emission is the same absolute specified line.

4.4.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	10th carrier harmonic
Detector	Positive Peak
Span	100 MHz
Sweep Time	1s
RB / VB	1 MHz / 1MHz
Attenuation	Positive Peak

4.4.3 TEST PROCEDURES

1. The EUT was placed on the top of the turntable in fully anechoic chamber.
2. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. This measurement shall be repeated with the transmitter in standby mode where applicable.
4. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. For 1~10th carrier harmonic measurement, the receiving Horn antenna was placed 1.5 meters far away from the turntable.
5. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
6. Replace the EUT by standard antenna and feed the RF port by signal generator.
7. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
8. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
9. The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.

4.4.4 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.4.

4.4.5 TEST DEVIATION

There is no deviation with the original standard.

4.4.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.4.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

4.4.8 TEST RESULTS

Please refer to the Attachment D.

4.5 BAND EDGE MEASUREMENT

4.5.1 LIMIT

According to FCC 27.53(h) specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300kHz and the resolution bandwidth is 3kHz.

4.5.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	5 MHz
RB / VB	10 kHz /30 kHz
Trace	Sample
Sweep Time	Auto

4.5.3 TEST PROCEDURES

1. The EUT was set up for the maximum peak power with QPSK link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, Lowest and Highest(low and high operational frequency range.)
2. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
3. The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 10kHz and VB of the spectrum is 30KHz.
4. Record the Sample trace plot into the test report.

4.5.4 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.4.

4.5.5 TEST DEVIATION

There is no deviation with the original standard.

4.5.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.5.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

4.5.8 TEST RESULTS

Please refer to the Attachment E.

4.6 FREQUENCY STABILITY MEASUREMENT

4.6.1 LIMIT

According to the FCC part 27.54 shall be tested the frequency stability. The rule is defined that "The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 0.1 ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) $-30^{\circ}\text{C} \sim 50^{\circ}\text{C}$.

4.6.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the BS Simulator.

Spectrum Parameters	Setting
Frequency Error	The maximum of transmit frequency error

4.6.3 TEST PROCEDURES

1. The transmitter output (antenna port) was connected to the BS Simulator.
2. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.
3. BS simulator used the frequency error function and measured the peak frequency error.
Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.1 Volts to 4.3 Volts. Each step shall be record the frequency error rate.
5. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
6. Extreme temperature rule is $0^{\circ}\text{C} \sim 40^{\circ}\text{C}$.

4.6.4 TEST SETUP LAYOUT

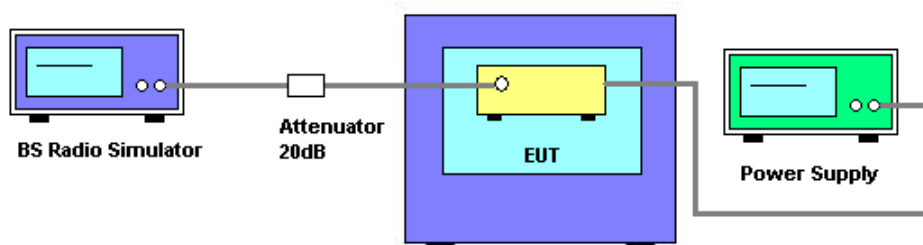

4.6.5 TEST DEVIATION

There is no deviation with the original standard.

4.6.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.6.7 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: DC 3.8V

4.6.8 TEST RESULTS

Please refer to the Attachment F.

4.7 PEAK TO AVERAGE RADIO

4.7.1 LIMIT

In the FCC 27.50) Peak transmit power shall be measured over any interval of continuous transmission using instrumentation calibrated in terms of rms-equivalent voltage.

The measurement results shall be properly adjusted for any instrument limitations, such as detector re-sponse times, limited resolution bandwidth capability when compared to the emission bandwidth, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

To measure transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission shall not exceed 13 dB.

4.7.2 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;

4.7.3 TEST SETUP LAYOUT

Please refer to section 3.4 in this report.

4.7.4 TEST DEVIATION

There is no deviation with the original standard.

4.7.5 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.7.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage:DC 3.8V

4.7.7 TEST RESULTS

Please refer to the Attachment G.

4.7 CONDUCTED EMISSION MEASUREMENT

4.7.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)
 Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.7.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.7.3 DEVIATION FROM TEST STANDARD

No deviation

4.7.4 TEST SETUP

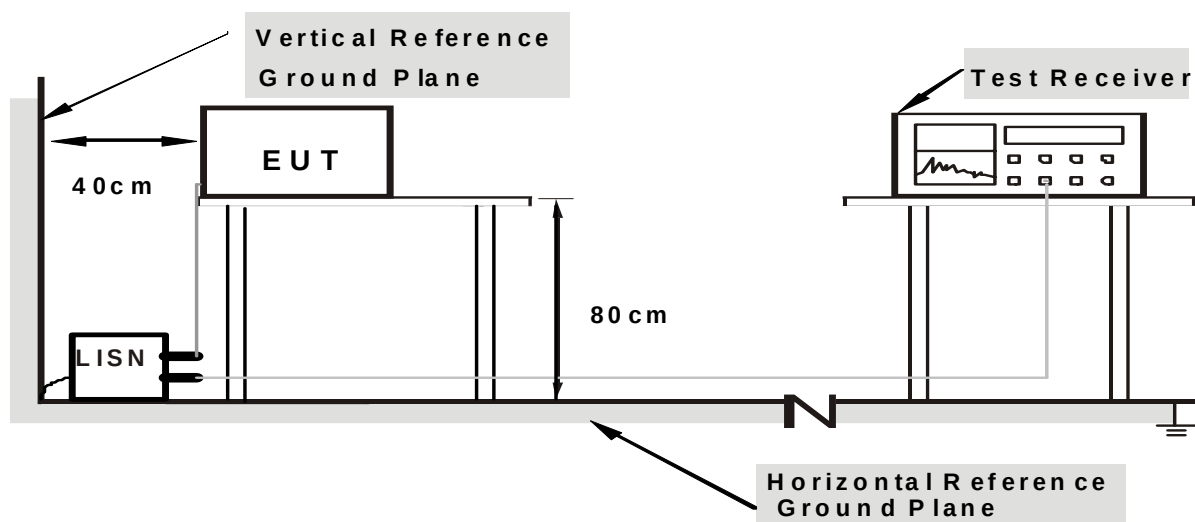

Note: 1.Support units were connected to second LISN .

2.Both of LISN s (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

4.7.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.7.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: 120V/60Hz

4.7.8 TEST RESULTS

Please refer to the Attachment H.

5. LIST OF MEASUREMENT EQUIPMENTS

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Mar. 28, 2016
2	LISN	R&S	ENV216	101447	Mar. 28, 2016
3	Test Cable	N/A	C_17	N/A	Mar.13, 2016
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Mar. 28, 2016
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Mar. 28, 2016
6	wideband radion communication tester	R&S	CMW500	15237	Jan. 30, 2016
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1 -01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 28, 2016
2	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC012645B	980221	Oct. 22, 2015
3	Amplifier	Agilent	8449B	3008A02274	Nov. 02, 2015
4	Double Ridged Guide Antenna	ETS·LINDGREN	3115	00075846	Mar. 28, 2016
5	Antenna	SCHWARZBECK	VULB 9160	9160-3231	Mar. 28, 2016
6	Test Cable	N/A	CL-CB12-001	N/A	Oct. 22, 2015
7	Test Cable	N/A	CL-CB12-004	N/A	Oct. 22, 2015
8	Test Cable	N/A	CL-CB12-006	N/A	Oct. 22, 2015
9	Controller	CT	SC100	N/A	N/A
10	Wireless Communication Test SET	(8960 Series) Agilent	E5515C	MY48364183	Mar. 15, 2016
11	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1710/1785-169 0/1805-60/12S S	38	Mar. 04, 2016
12	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 824/849-810/8 63-60/9SS	7	Mar. 04, 2016
13	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 880/915-860/9 35-60/9SS	14	Mar. 04, 2016
14	Band Reject Filter	Wairwright Instruments Gmbh	WRCG 1850/1910-183 0/1930-60/10S S	17	Mar. 04, 2016

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	wideband radion communication tester	R&S	CMW500	15237	Jan. 30, 2016

Band Edge Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	wideband radion communication tester	R&S	CMW500	15237	Jan. 30, 2016

99% Occupied Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	wideband radion communication tester	R&S	CMW500	15237	Jan. 30, 2016

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 02, 2015
2	wideband radion communication tester	R&S	CMW500	15237	Jan. 30, 2016


Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

5. EUT TEST PHOTO

Conducted Measurement Photos



Radiated Measurement Photos

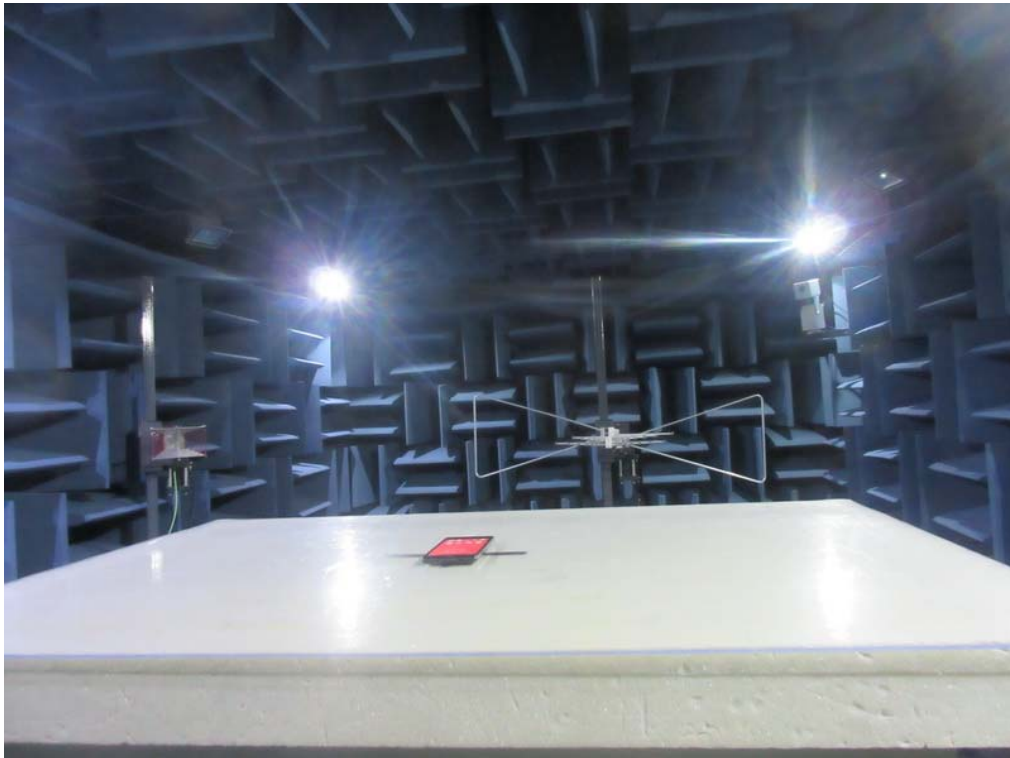

ATTACHMENT A - RADIATED RF OUTPUT POWER

Test Mode :	TX Mode
-------------	---------

LTE Band IV				Radiated Power (dBm)			Max. Limit (dBm)	Result
BW	Modulation	RB Size	V/H	Lowest	Middle	Highest		
1.4M	QPSK	1RB	V	7.78	7.20	7.62	30	Complies
			H	12.88	12.94	13.54	30	Complies
3M			V	9.00	9.38	9.14	30	Complies
			H	13.48	13.63	13.75	30	Complies
5M			V	8.98	10.03	10.00	30	Complies
			H	13.50	13.71	13.77	30	Complies
10M			V	11.26	11.53	11.50	30	Complies
			H	13.57	13.78	13.84	30	Complies
15M			V	11.20	11.35	11.35	30	Complies
			H	13.60	13.77	13.76	30	Complies
20M			V	11.28	11.35	11.19	30	Complies
			H	13.56	13.71	13.77	30	Complies
1.4M	16-QAM	1RB	V	7.05	8.04	7.40	30	Complies
			H	12.48	12.73	13.37	30	Complies
3M			V	9.32	9.22	9.13	30	Complies
			H	13.51	13.58	13.79	30	Complies
5M			V	10.06	10.20	10.13	30	Complies
			H	13.53	13.75	13.74	30	Complies
10M			V	11.20	11.58	11.38	30	Complies
			H	13.57	13.82	13.81	30	Complies
15M			V	11.17	11.50	11.41	30	Complies
			H	13.54	13.73	13.78	30	Complies
20M			V	11.13	11.60	11.26	30	Complies
			H	13.56	13.71	13.74	30	Complies

REMARKS:

1. Radiated Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB) +Ant Gain(dBi)
2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)
3. The EUT does employ a power control function by which the output power is controlled from +28dBm to +19dBm (nominal) by 2dB steps. Consequently the EUT meets the requirement of Part24.232(c).
4. The antenna gain is -2.50dBi

Test Mode :	TX Mode
-------------	---------

Bandwidth	Modulation	RB size	Conducted Power		
			Lowest	Middle	Highest
1.4MHz	QPSK	1	23.30	22.76	22.92
		1	23.31	22.72	22.84
		1	23.29	22.81	22.83
		3	23.31	22.75	22.80
		3	23.30	22.76	22.86
		3	23.24	22.78	22.92
		6	22.31	21.83	21.88
	16-QAM	1	22.46	21.35	21.80
		1	22.47	21.33	21.80
		1	22.44	21.45	21.88
		3	22.30	22.05	21.92
		3	22.29	22.01	21.81
		3	22.28	22.02	21.80
		6	21.20	21.17	21.01

Bandwidth	Modulation	RB size	Conducted Power		
			Lowest	Middle	Highest
3MHz	QPSK	1	23.06	22.87	22.77
		1	23.03	22.93	22.78
		1	23.06	22.87	22.72
		8	22.29	21.81	21.77
		8	22.21	21.71	21.75
		8	22.15	21.87	21.76
		15	22.24	21.87	21.77
	16-QAM	1	21.96	21.92	21.42
		1	21.79	22.01	21.47
		1	21.82	21.97	21.35
		8	21.34	20.81	20.94
		8	21.37	20.83	20.85
		8	21.35	20.96	20.98
		15	21.33	20.84	20.85

Bandwidth	Modulation	RB size	Conducted Power		
			Lowest	Middle	Highest
5MHz	QPSK	1	23.26	22.85	22.90
		1	23.22	22.84	22.91
		1	23.07	22.84	22.90
		12	22.25	21.86	21.75
		12	22.16	21.76	21.78
		12	22.13	21.86	21.77
		25	22.14	21.77	21.74
	16-QAM	1	22.18	22.01	21.71
		1	22.18	22.03	21.67
		1	22.13	21.95	21.74
		12	21.40	21.01	20.86
		12	21.21	20.95	20.81
		12	21.22	21.01	20.82
		25	21.16	20.92	20.84

Bandwidth	Modulation	RB size	Conducted Power		
			Lowest	Middle	Highest
10MHz	QPSK	1	23.28	22.89	22.60
		1	23.11	22.75	22.67
		1	22.97	22.76	22.71
		25	22.18	21.83	21.73
		25	22.12	21.81	21.70
		25	21.94	21.80	21.71
		50	21.97	21.68	21.69
	16-QAM	1	22.36	21.60	21.37
		1	22.23	21.39	21.26
		1	22.10	21.45	21.42
		25	21.22	21.01	20.83
		25	21.19	20.89	20.82
		25	21.02	20.96	20.83
		50	21.06	20.84	20.72

Bandwidth	Modulation	RB size	Conducted Power		
			Lowest	Middle	Highest
15MHz	QPSK	1	23.29	23.02	22.78
		1	23.04	22.91	22.75
		1	22.92	22.73	22.81
		36	22.13	21.88	22.85
		36	21.90	21.80	21.74
		36	21.83	21.79	21.77
		75	21.92	21.80	21.72
	16-QAM	1	22.43	22.19	22.03
		1	22.20	22.02	22.05
		1	22.00	21.84	21.83
		36	21.24	21.03	20.82
		36	21.02	20.93	20.79
		36	21.91	20.86	20.83
		75	21.00	20.89	20.78


Bandwidth	Modulation	RB size	Conducted Power		
			Lowest	Middle	Highest
20MHz	QPSK	1	23.17	22.76	22.76
		1	22.75	22.78	22.63
		1	22.71	22.66	22.70
		50	21.90	21.70	21.67
		50	21.75	21.67	21.65
		50	21.72	21.62	21.66
		100	21.82	21.62	21.69
	16-QAM	1	22.25	21.95	21.91
		1	21.81	21.96	21.75
		1	21.87	21.80	21.85
		50	20.93	20.76	20.72
		50	20.84	20.75	20.74
		50	20.76	20.68	20.66
		100	20.89	20.65	20.78

REMARKS:

1. Radiated Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB) +Ant Gain(dBi)
5. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)
6. The EUT does employ a power control function by which the output power is controlled from +28dBm to +19dBm (nominal) by 2dB steps. Consequently the EUT meets the requirement of Part24.232(c).
7. The antenna gain is -2.50dBi

ATTACHMENT B - 99% OCCUPIED BANDWIDTH

99% Occupied Bandwidth channel Middle

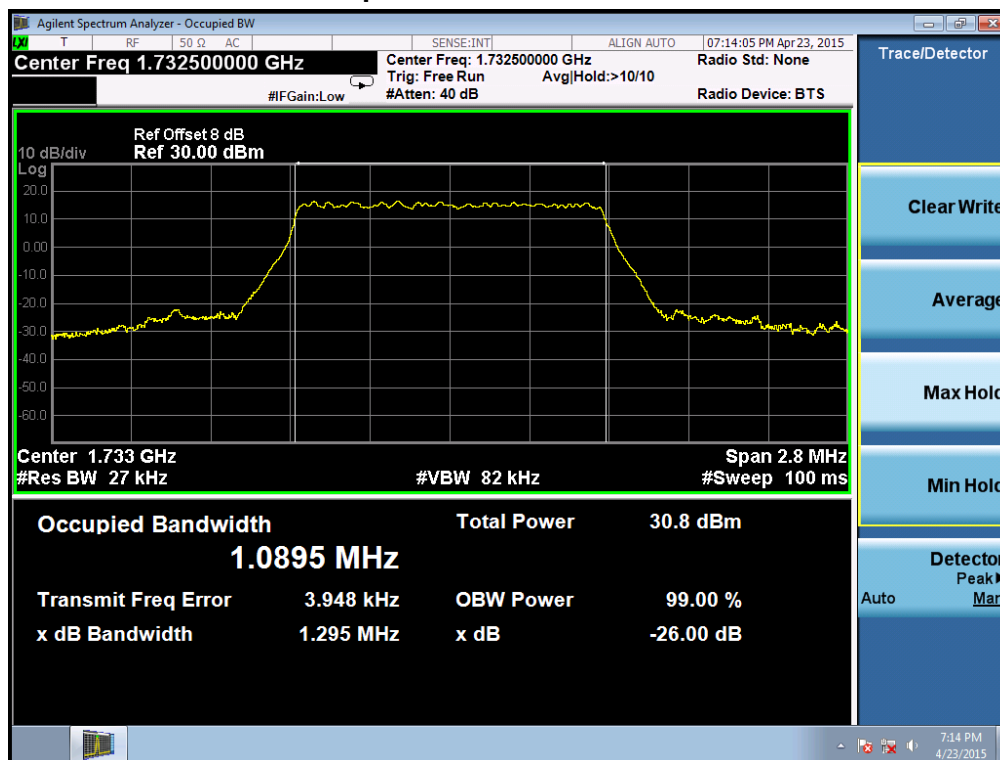


99% Occupied Bandwidth channel Highest




Test Mode : TX Mode Configuration QPSK-3M/15RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	2.709	3.001	Complies
Middle	2.706	2.983	Complies
Highest	2.705	3.004	Complies


99% Occupied Bandwidth channel Lowest

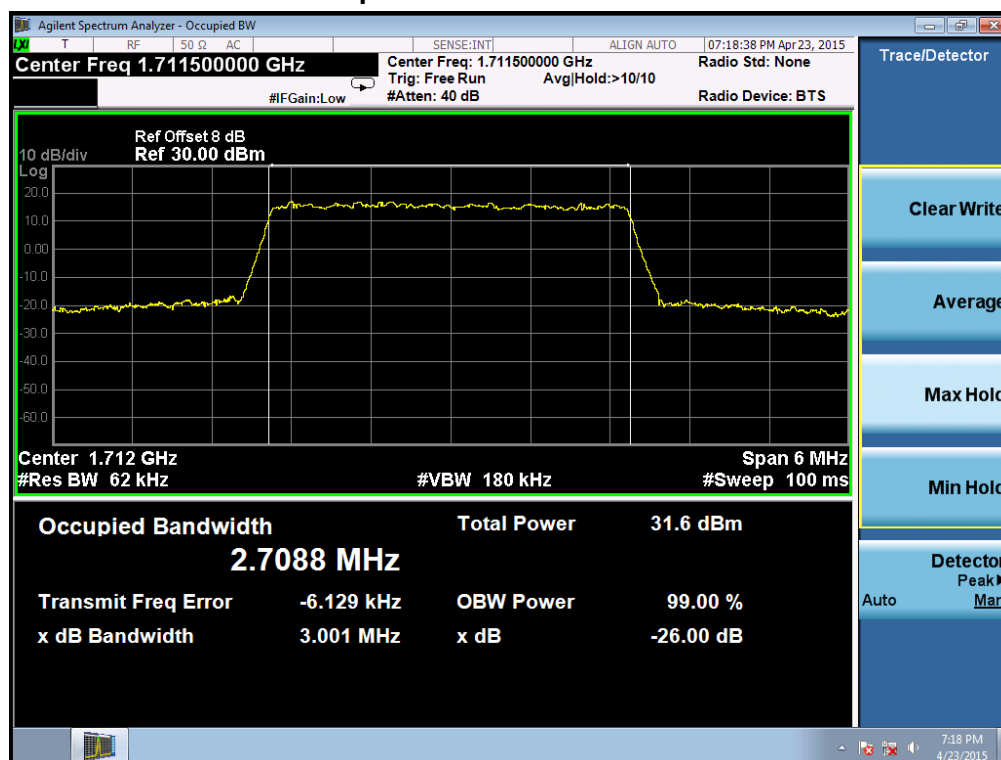

99% Occupied Bandwidth channel Middle

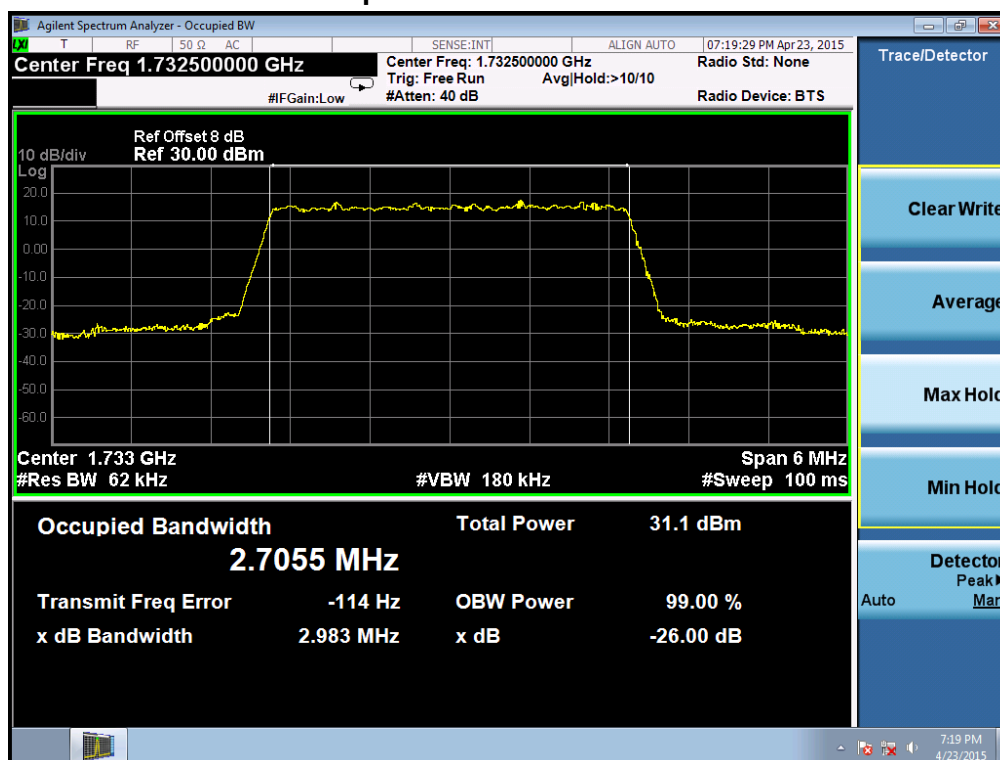


99% Occupied Bandwidth channel Highest

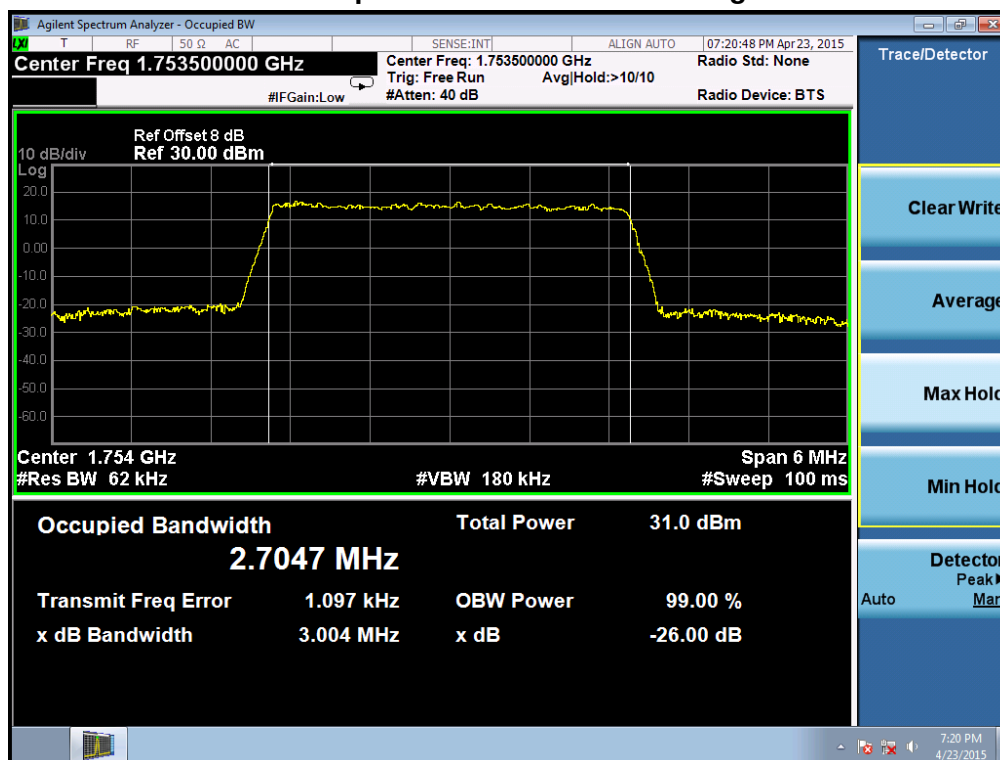


Test Mode : TX Mode Configuration QPSK-5M/25RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	4.514	5.002	Complies
Middle	4.509	4.985	Complies
Highest	4.542	5.052	Complies


99% Occupied Bandwidth channel Lowest

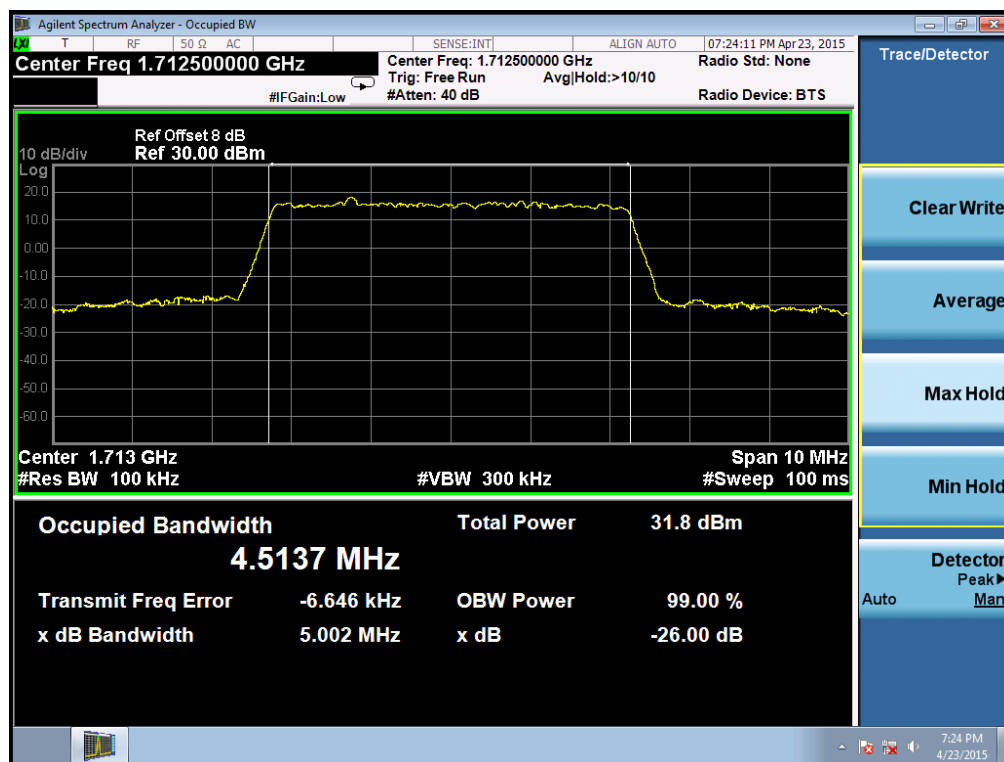

99% Occupied Bandwidth channel Middle

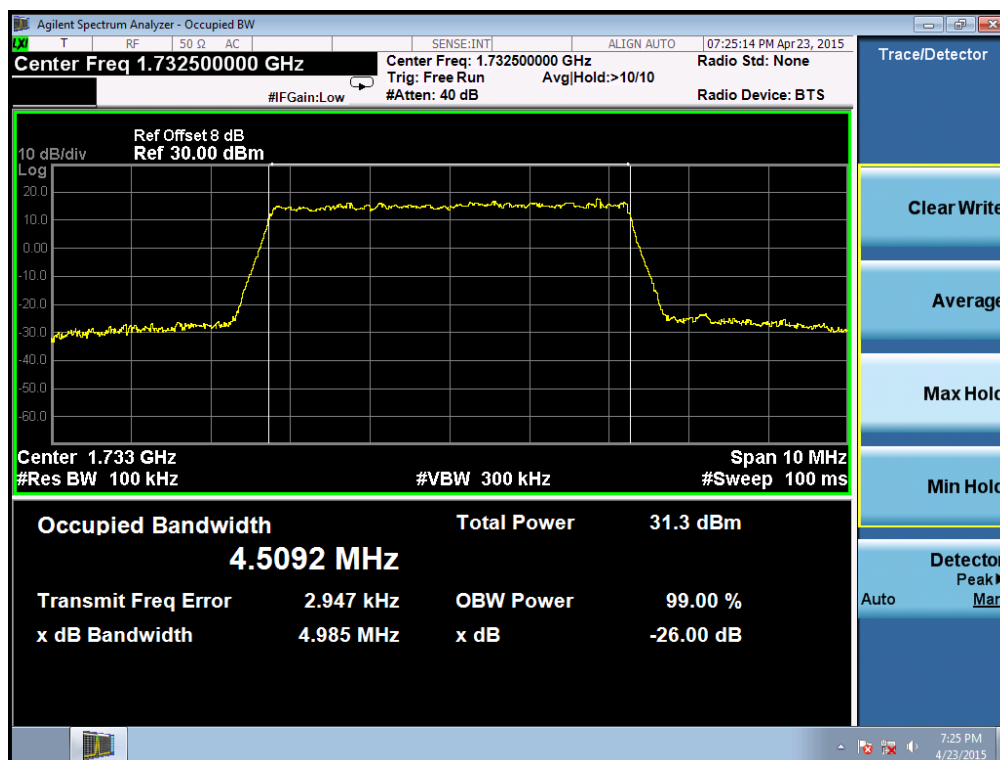


99% Occupied Bandwidth channel Highest

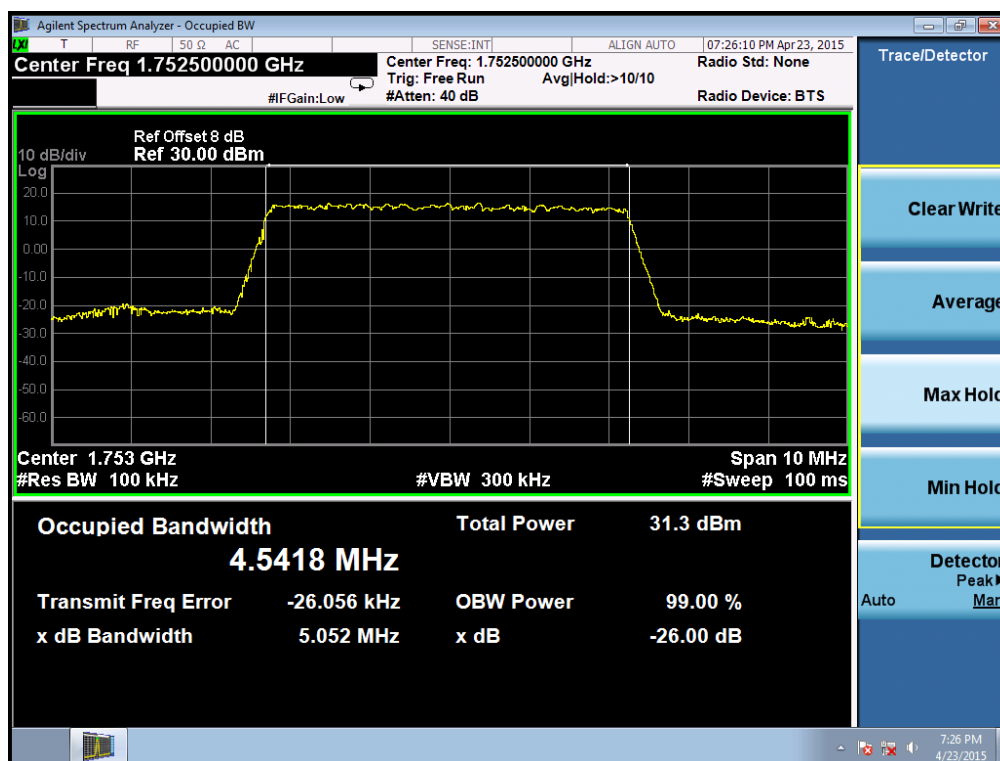


Test Mode : TX Mode Configuration QPSK-10M/50RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	9.004	9.991	Complies
Middle	9.048	9.983	Complies
Highest	8.997	10.000	Complies

99% Occupied Bandwidth channel Lowest

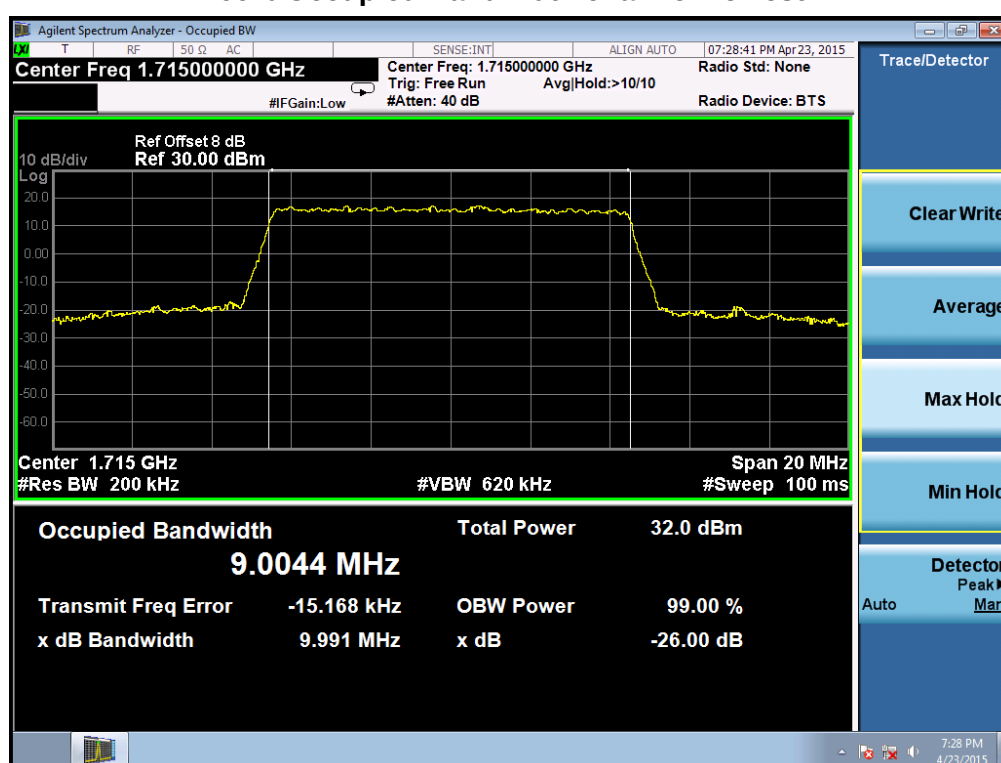

99% Occupied Bandwidth channel Middle

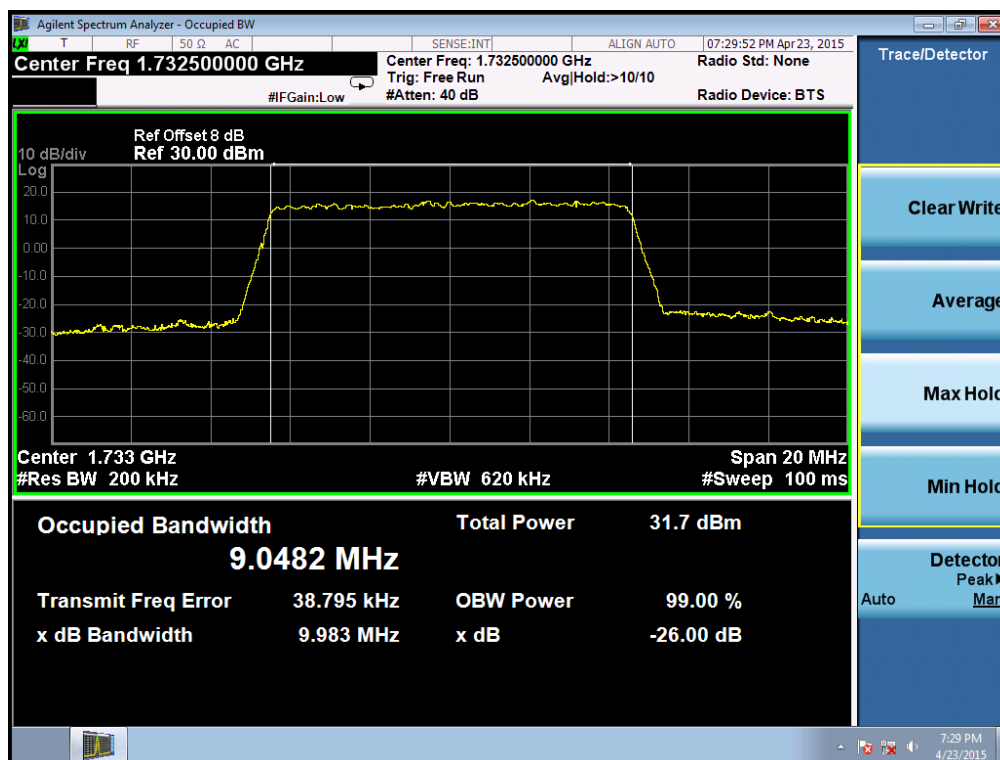


99% Occupied Bandwidth channel Highest




Test Mode : TX Mode Configuration QPSK-15M/75RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	13.482	14.730	Complies
Middle	13.437	14.730	Complies
Highest	13.438	14.720	Complies


99% Occupied Bandwidth channel Lowest

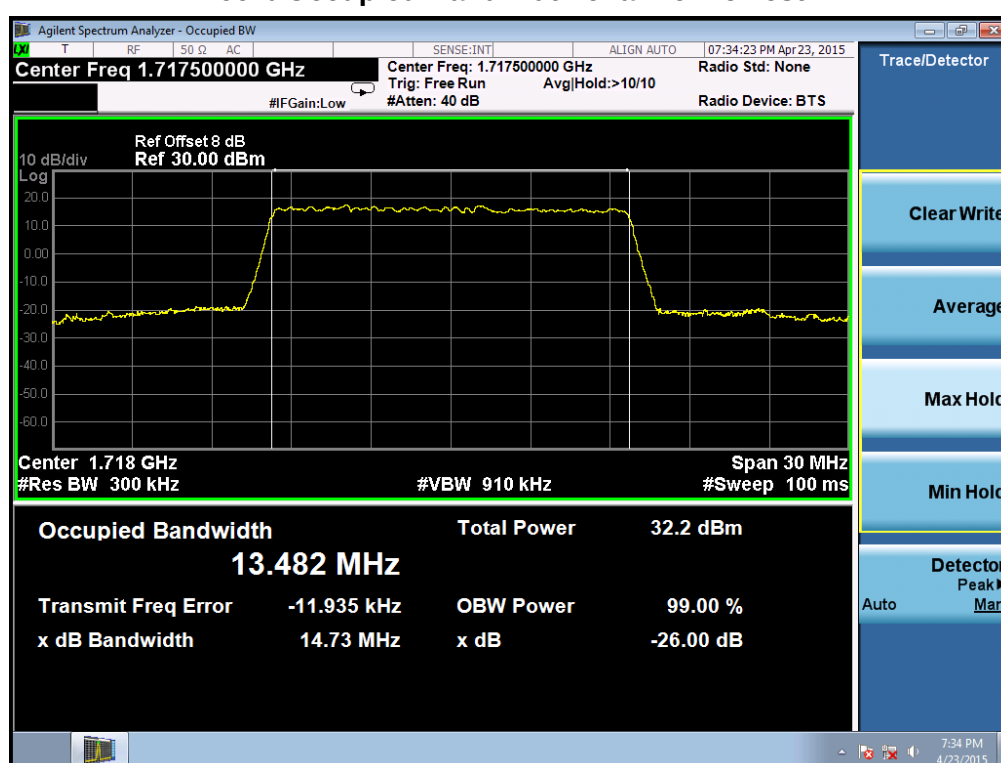

99% Occupied Bandwidth channel Middle

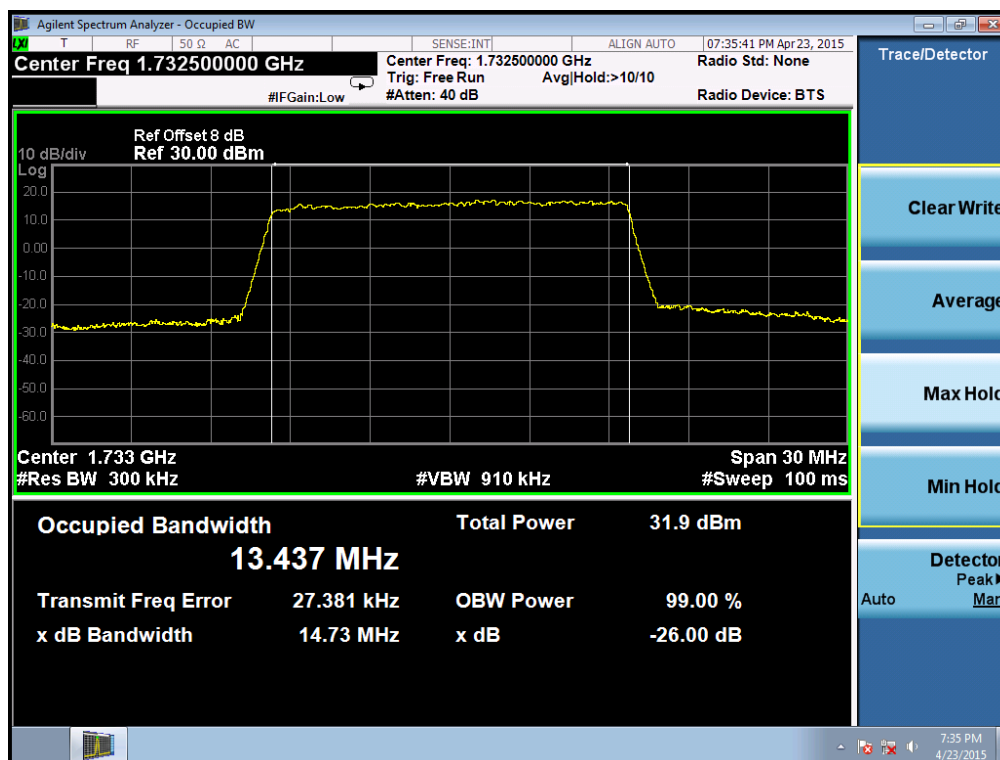


99% Occupied Bandwidth channel Highest

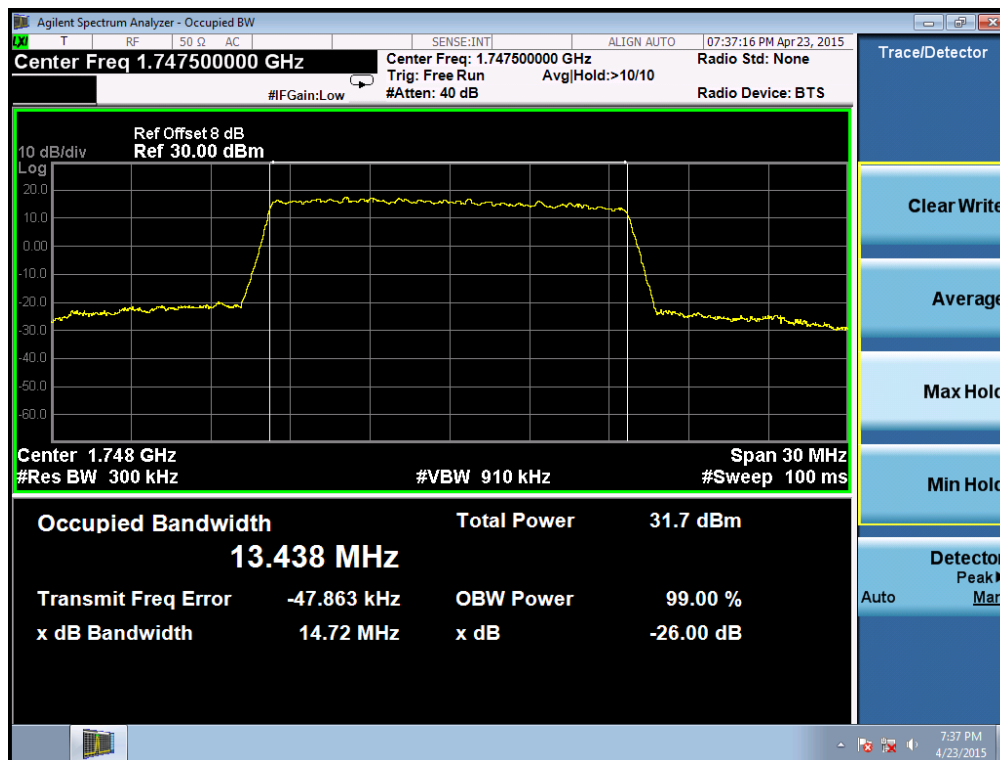


Test Mode : TX Mode Configuration QPSK-20M/100RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	17.987	19.600	Complies
Middle	17.876	19.430	Complies
Highest	17.849	19.420	Complies


99% Occupied Bandwidth channel Lowest

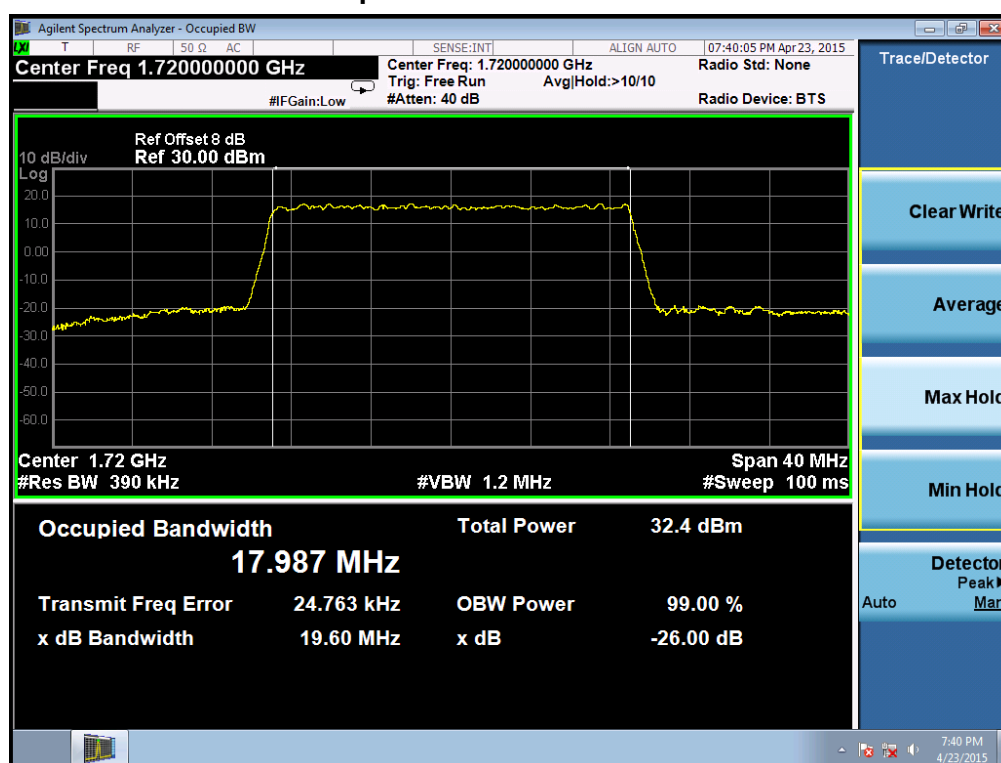

99% Occupied Bandwidth channel Middle

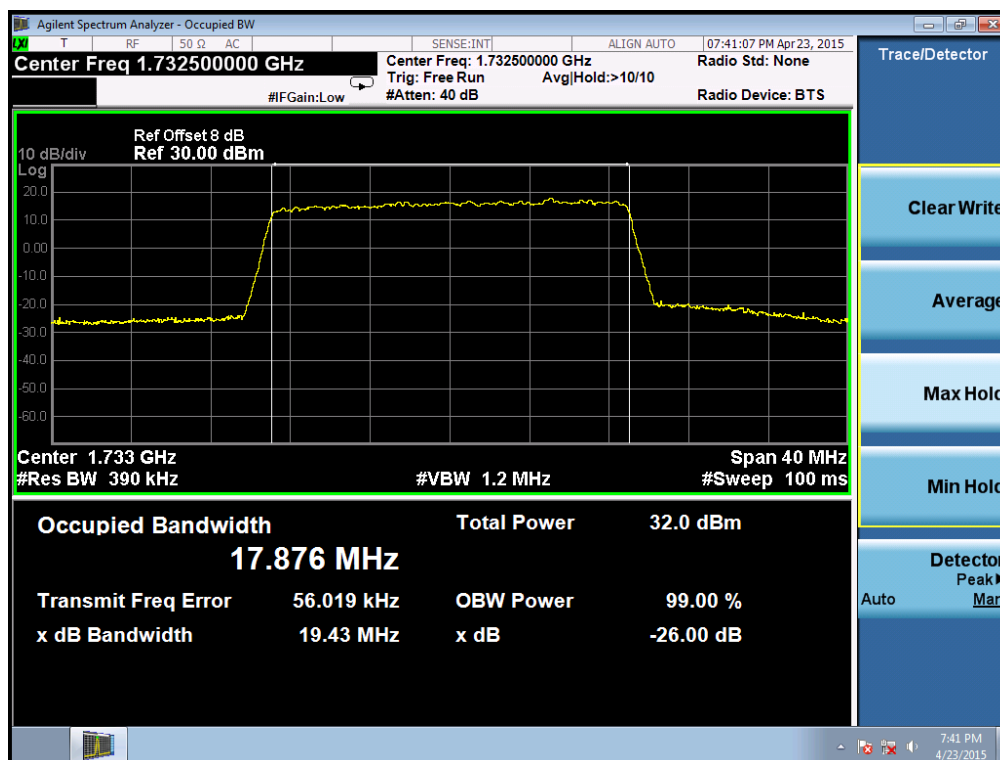


99% Occupied Bandwidth channel Highest

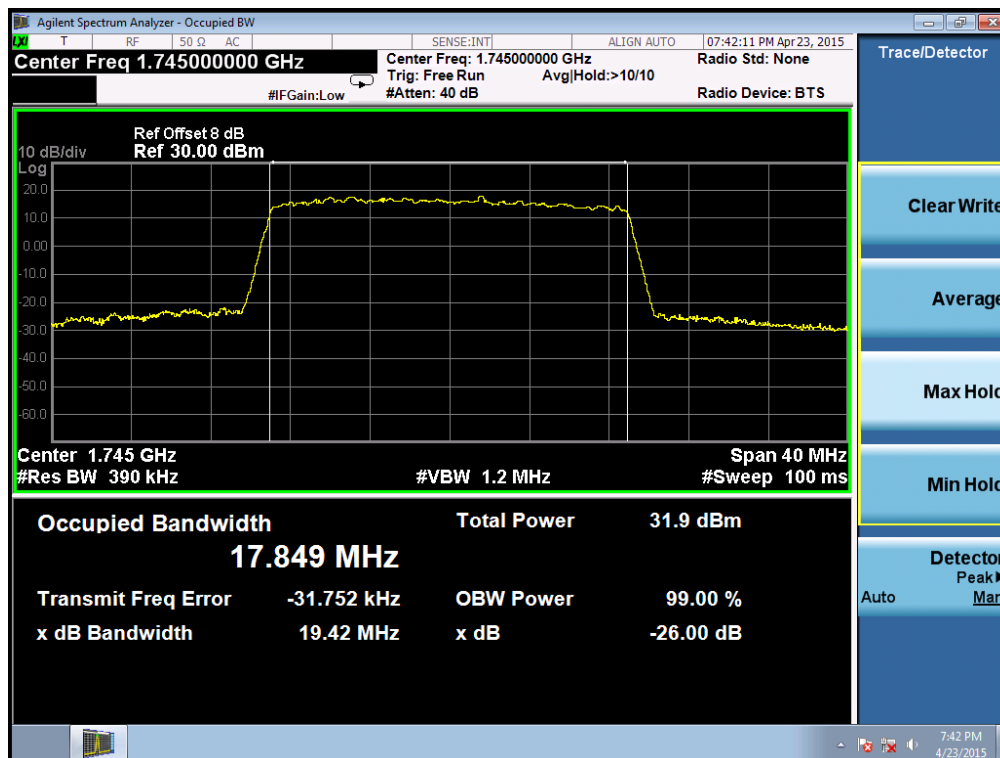

Test Mode : TX Mode Configuration 16-QAM-1.4M/6RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	1.092	1.294	Complies
Middle	1.090	1.294	Complies
Highest	1.103	1.305	Complies


99% Occupied Bandwidth channel Lowest

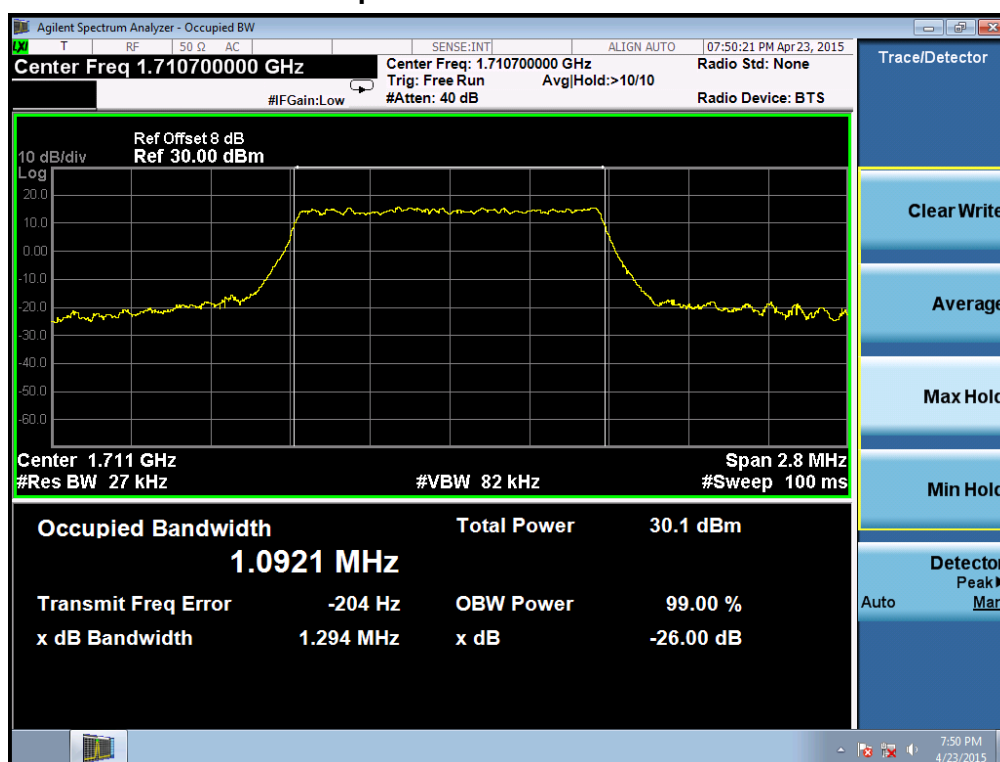

99% Occupied Bandwidth channel Middle




99% Occupied Bandwidth channel Highest

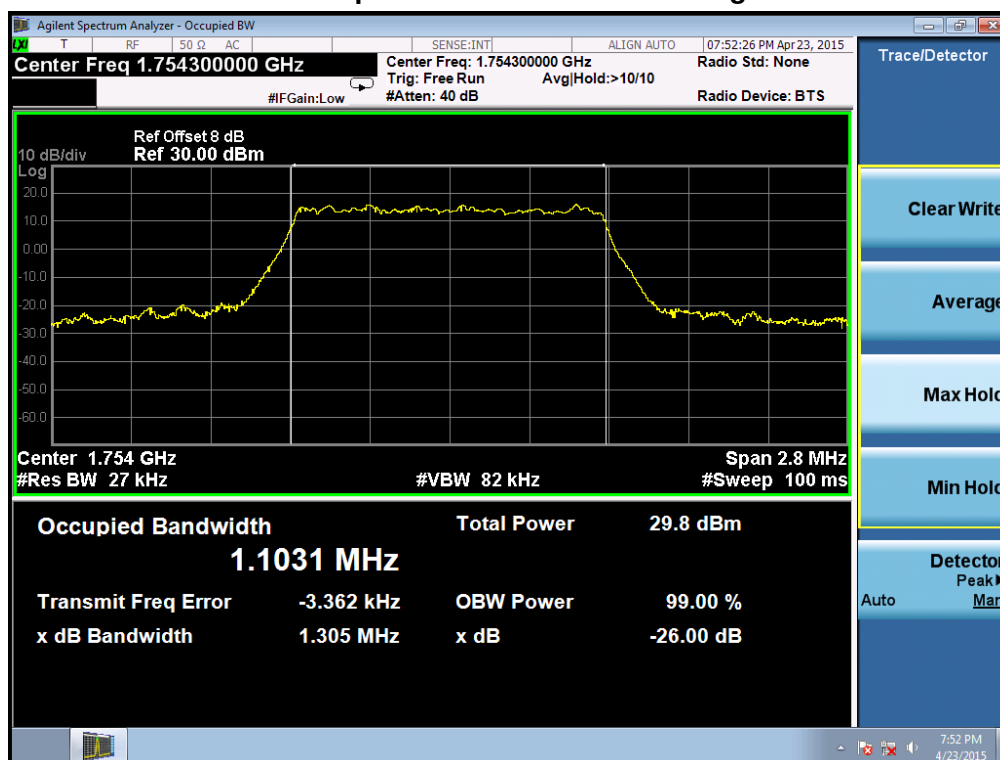


Test Mode : TX Mode Configuration 16-QAM-3M/15RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	2.708	3.004	Complies
Middle	2.700	3.009	Complies
Highest	2.711	3.005	Complies


99% Occupied Bandwidth channel Lowest

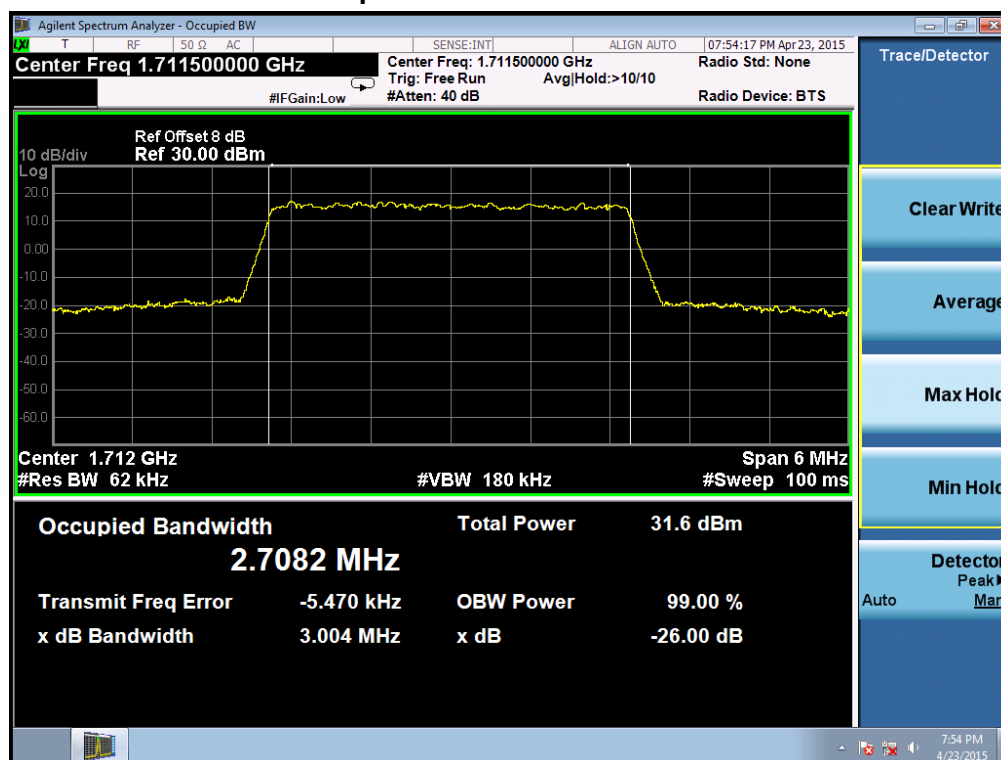

99% Occupied Bandwidth channel Middle

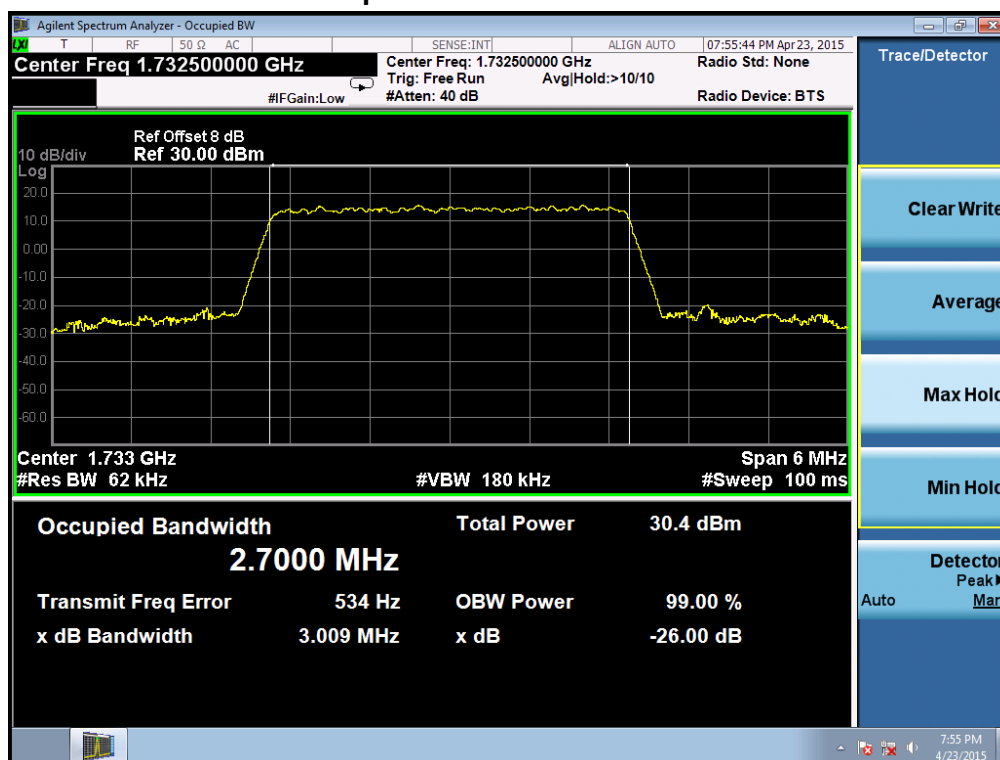


99% Occupied Bandwidth channel Highest

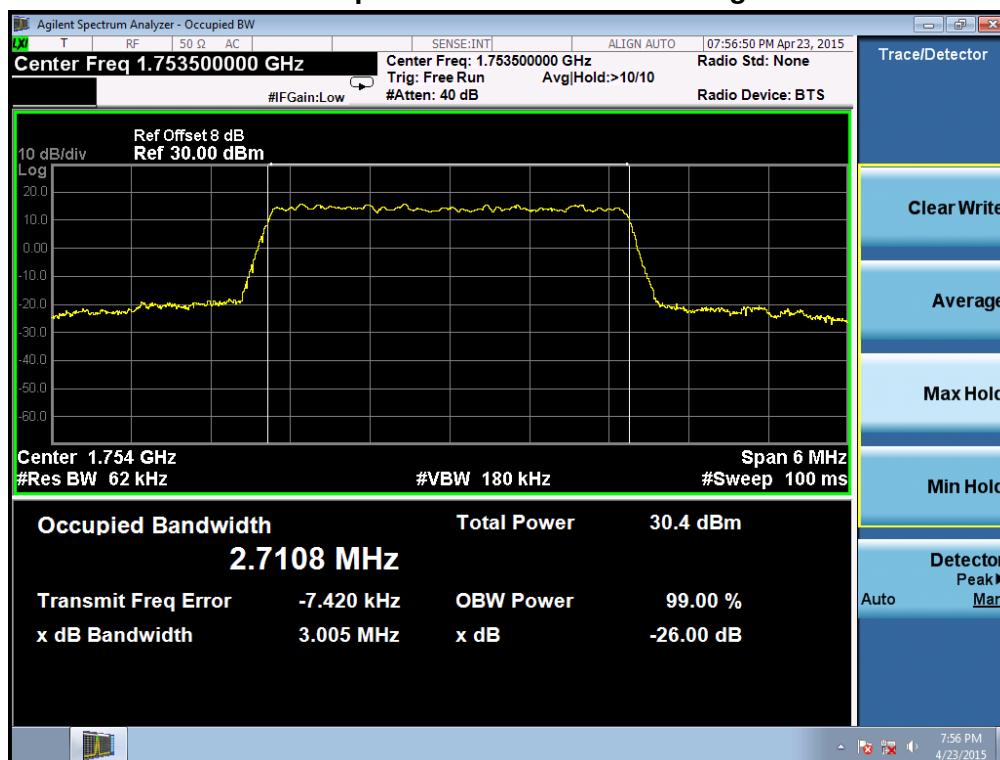


Test Mode : TX Mode Configuration 16-QAM-5M//25RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	4.509	5.005	Complies
Middle	4.495	4.981	Complies
Highest	4.510	5.004	Complies


99% Occupied Bandwidth channel Lowest

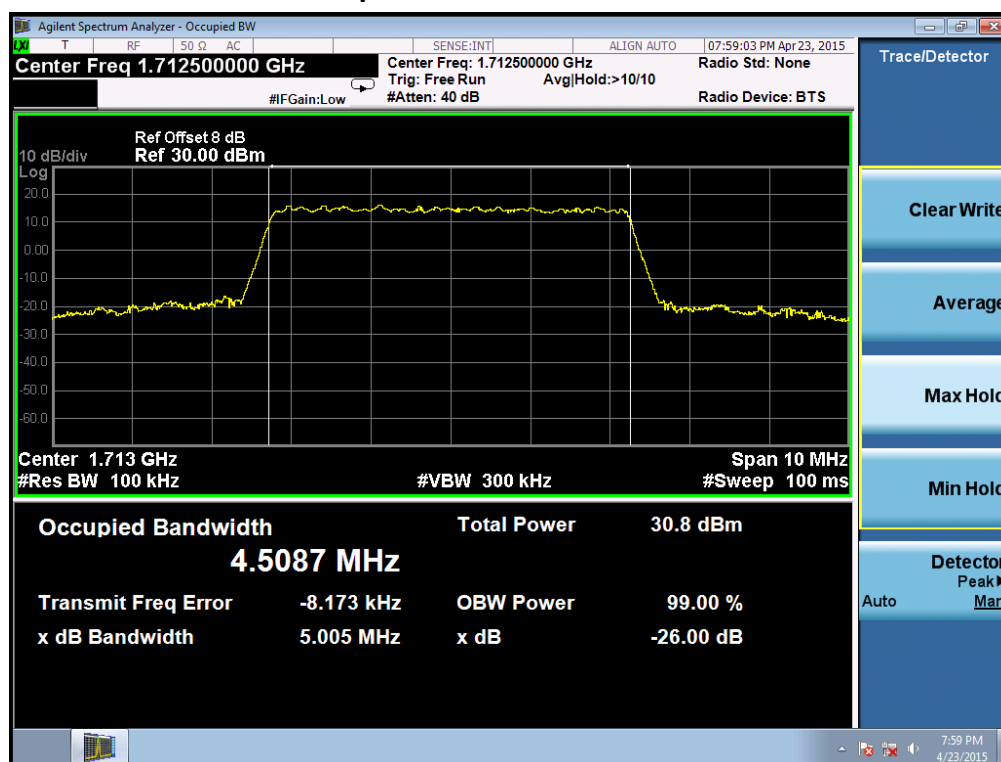

99% Occupied Bandwidth channel Middle

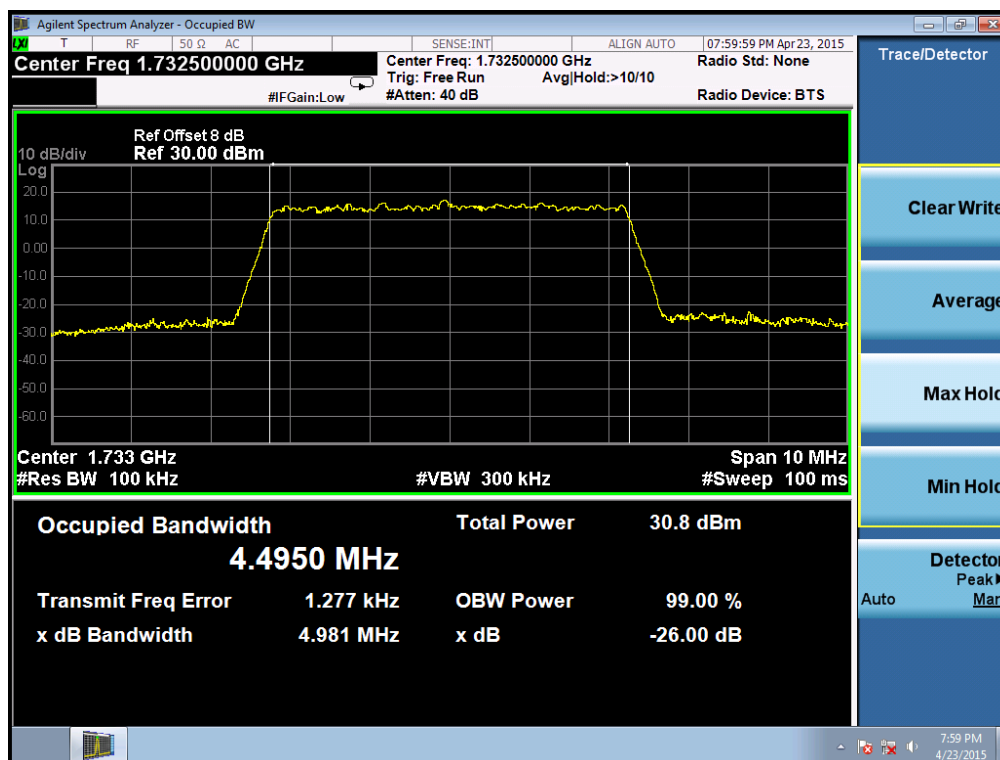


99% Occupied Bandwidth channel Highest

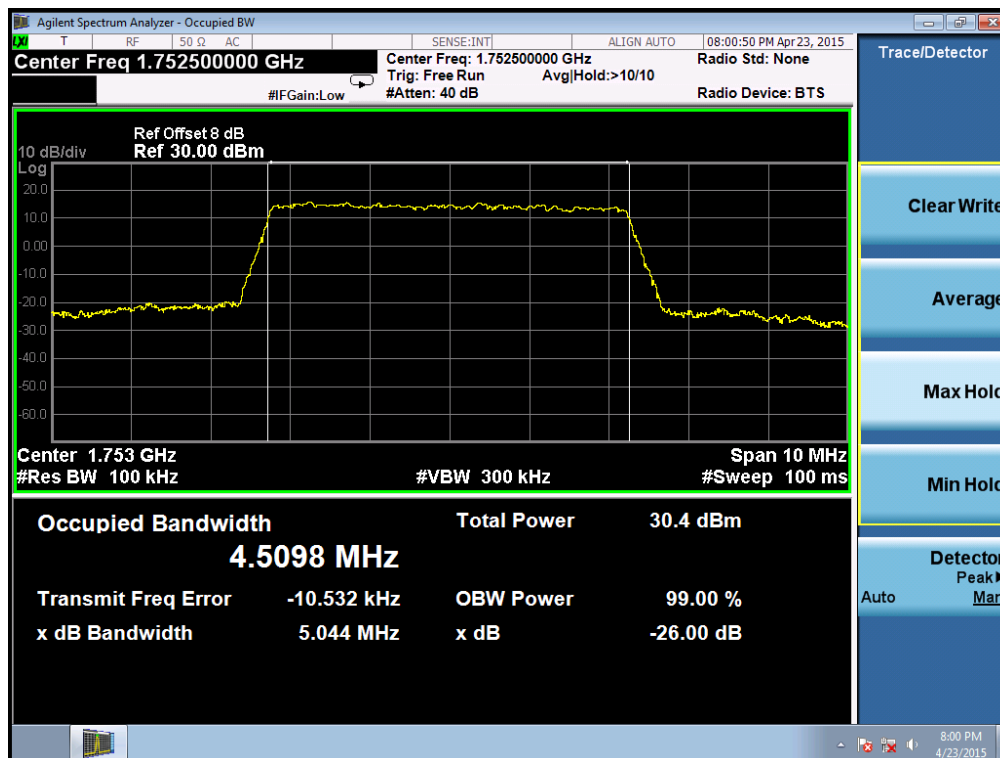


Test Mode : TX Mode Configuration 16-QAM-10M/50RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	8.987	9.968	Complies
Middle	9.010	9.927	Complies
Highest	9.003	9.950	Complies


99% Occupied Bandwidth channel Lowest

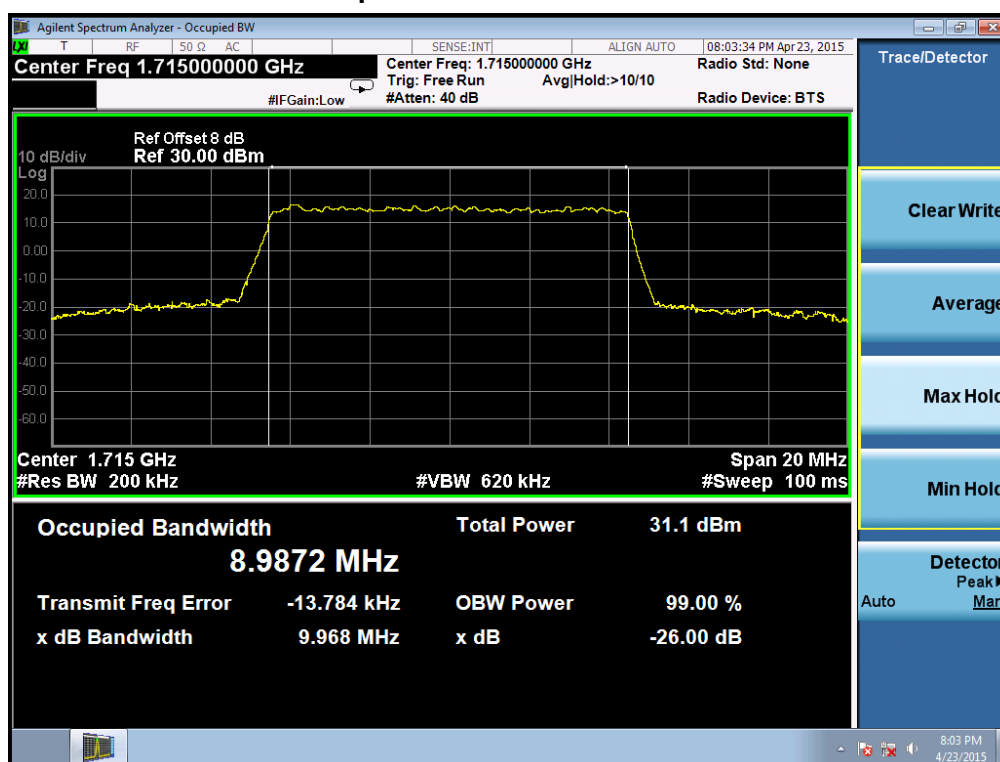

99% Occupied Bandwidth channel Middle

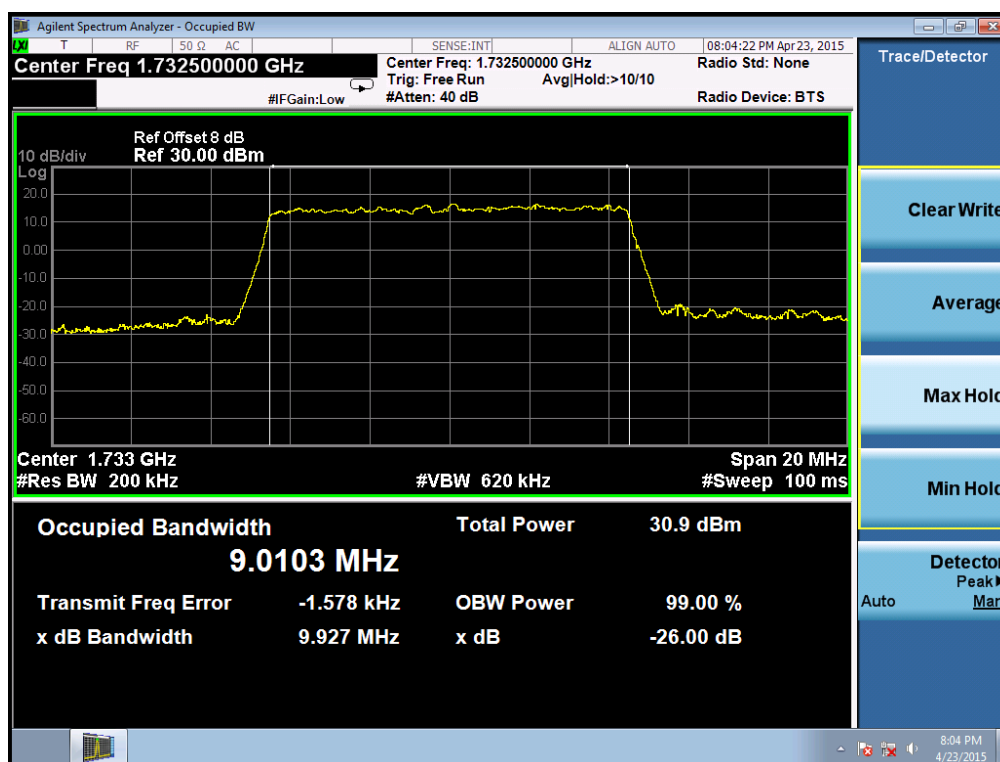


99% Occupied Bandwidth channel Highest

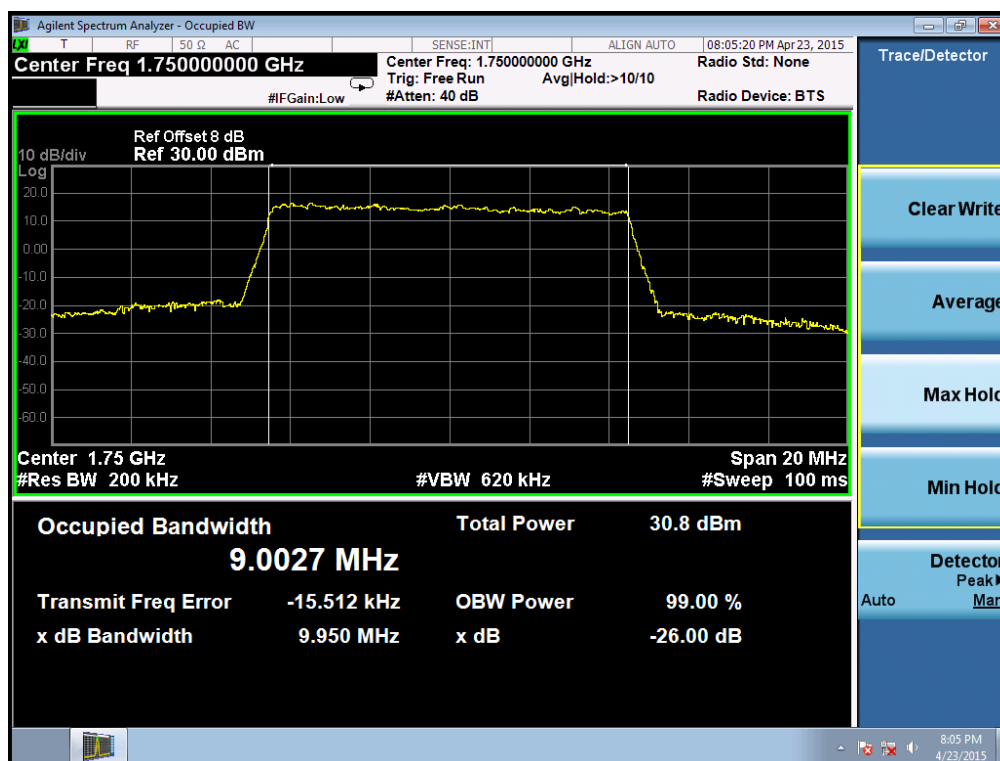


Test Mode : TX Mode Configuration 16-QAM-15M/75RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	13.481	14.810	Complies
Middle	13.426	14.680	Complies
Highest	13.446	14.670	Complies


99% Occupied Bandwidth channel Lowest

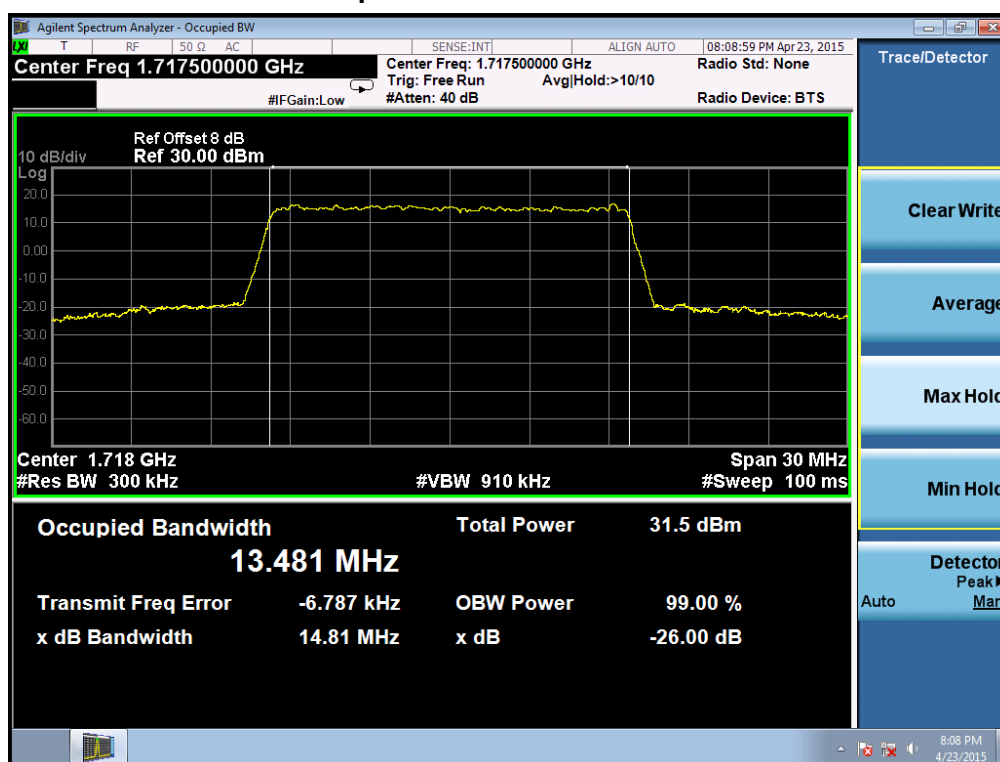

99% Occupied Bandwidth channel Middle

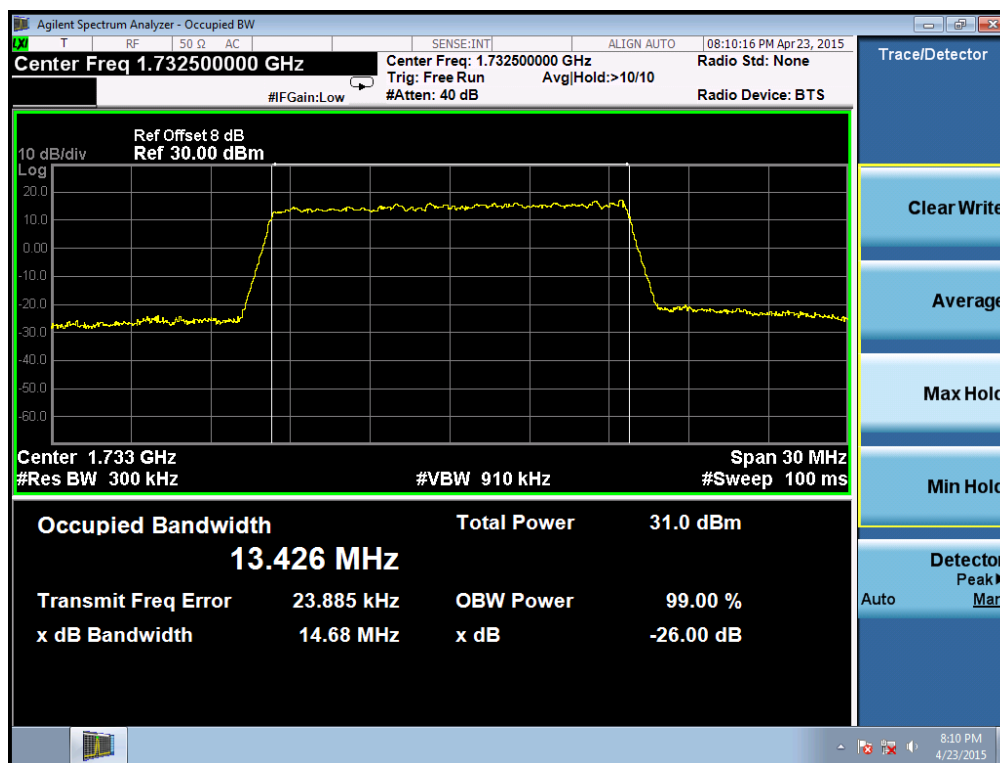


99% Occupied Bandwidth channel Highest

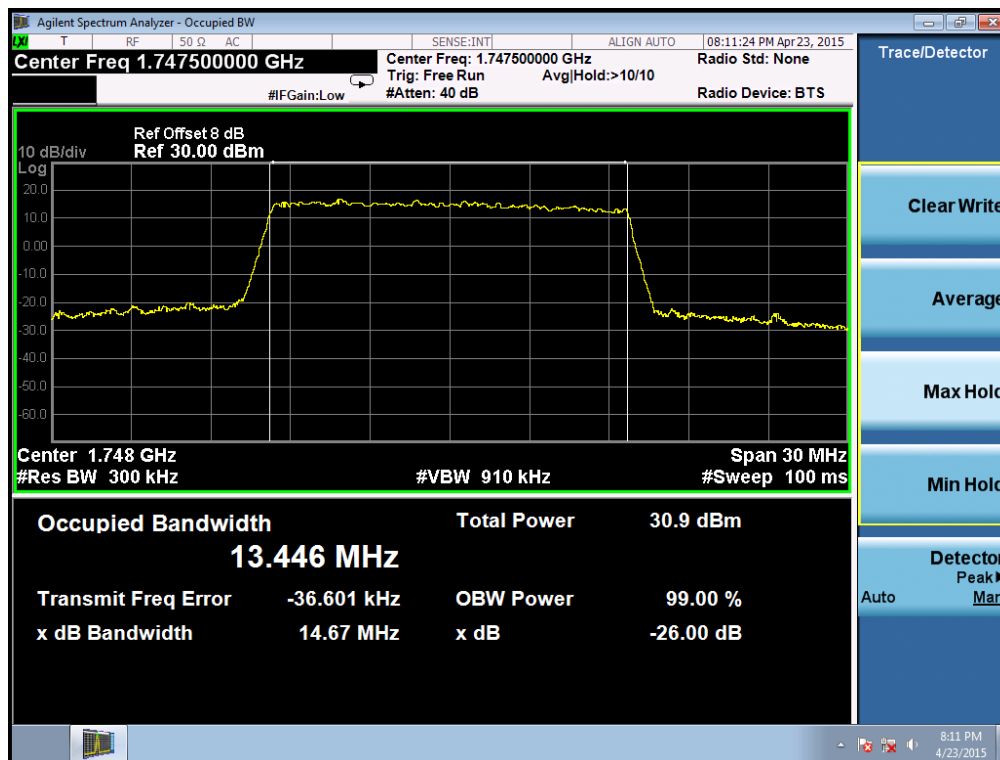


Test Mode : TX Mode Configuration 16-QAM-20M/100RB			
Channel	99% OBW (MHz)	-26dBc Bandwidth	Result
Lowest	17.950	19.560	Complies
Middle	17.886	19.440	Complies
Highest	17.850	19.380	Complies


99% Occupied Bandwidth channel Lowest

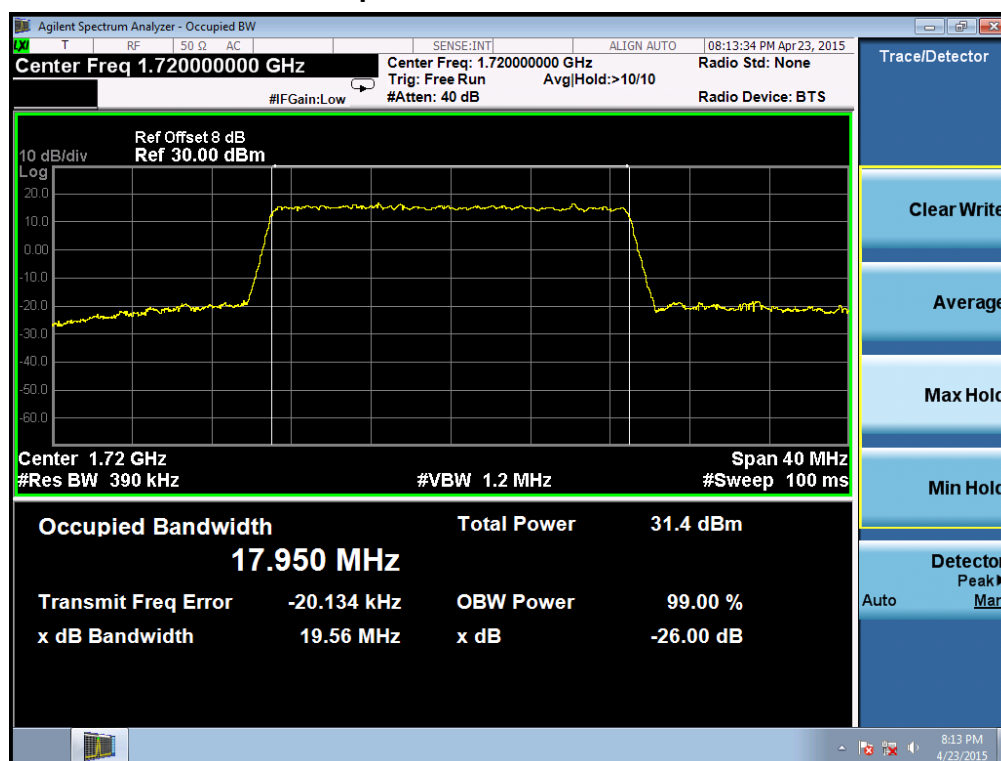

99% Occupied Bandwidth channel Middle

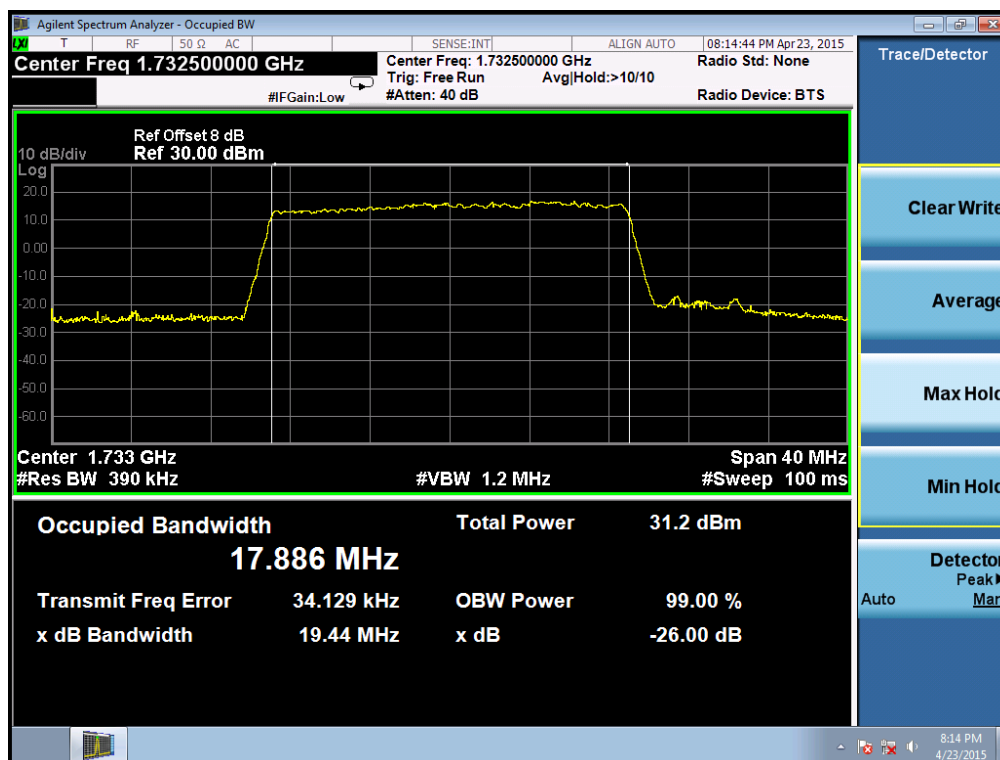


99% Occupied Bandwidth channel Highest

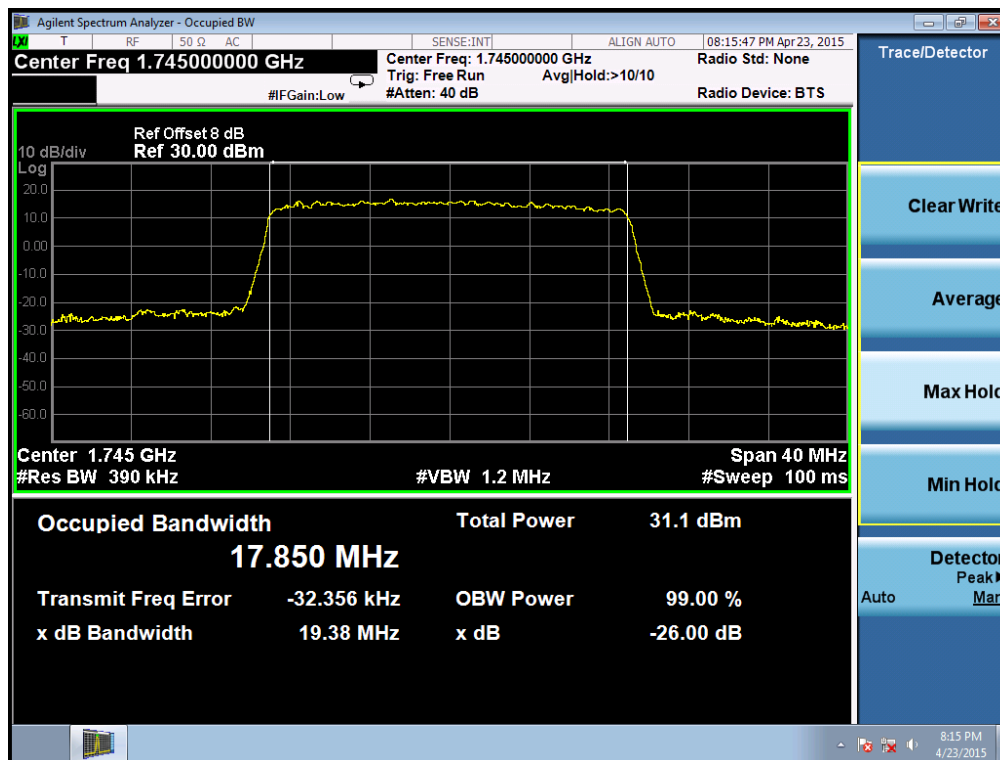

ATTACHMENT C - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Conducted Spurious of Configuration- QPSK-1.4M/1RB channel Lowest

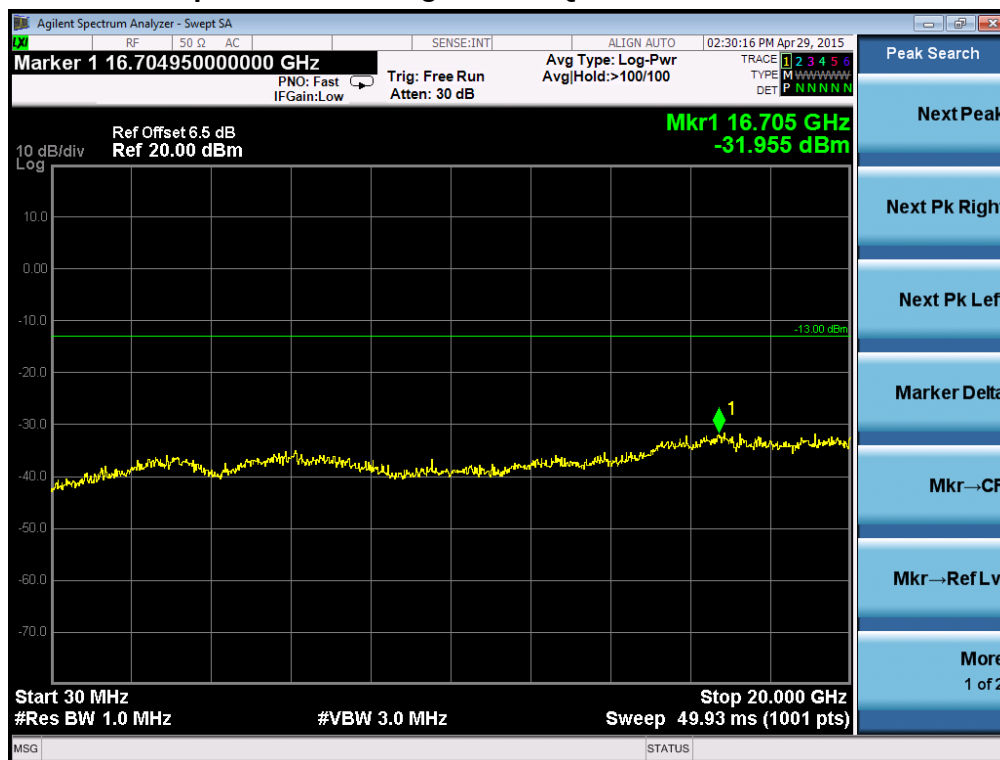


Conducted Spurious of Configuration- QPSK-1.4M/1RB channel Middle




Conducted Spurious of Configuration- QPSK-1.4M/1RB channel Highest

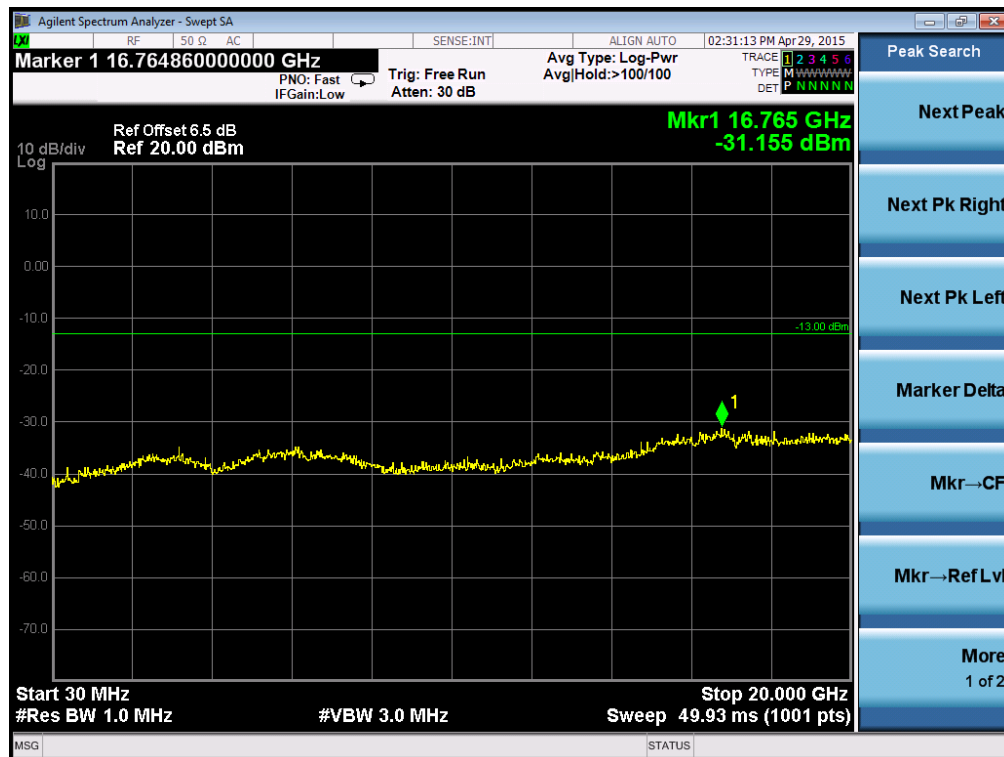


Conducted Spurious of Configuration- QPSK-3M/1RB channel Lowest

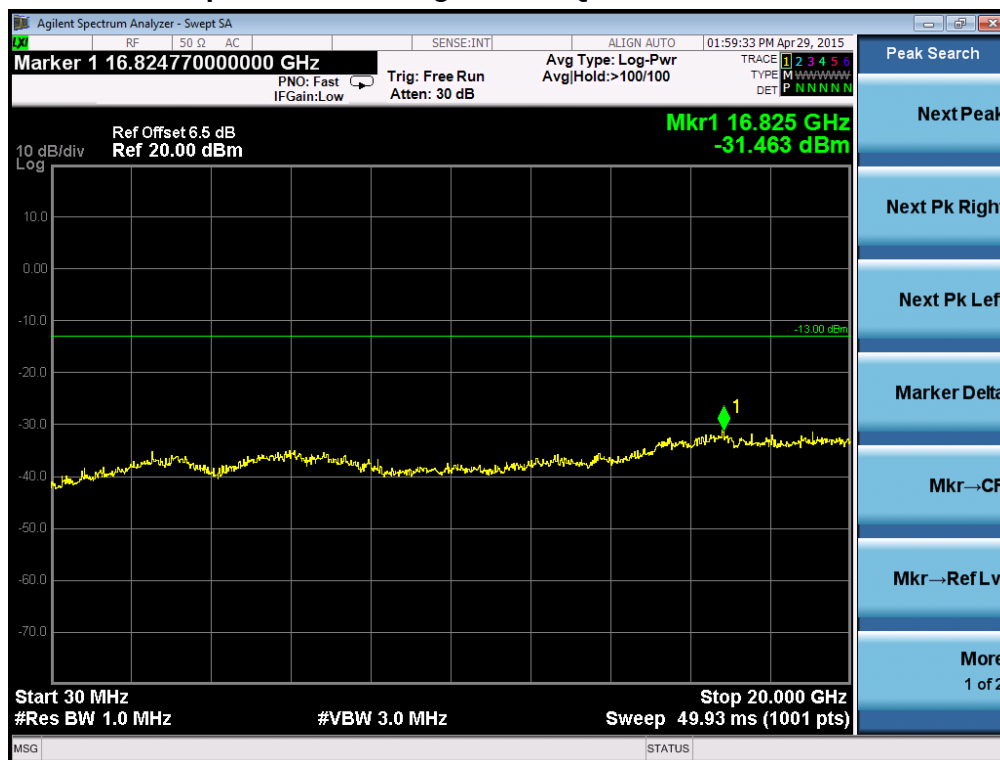


Conducted Spurious of Configuration- QPSK-3M/1RB channel Middle

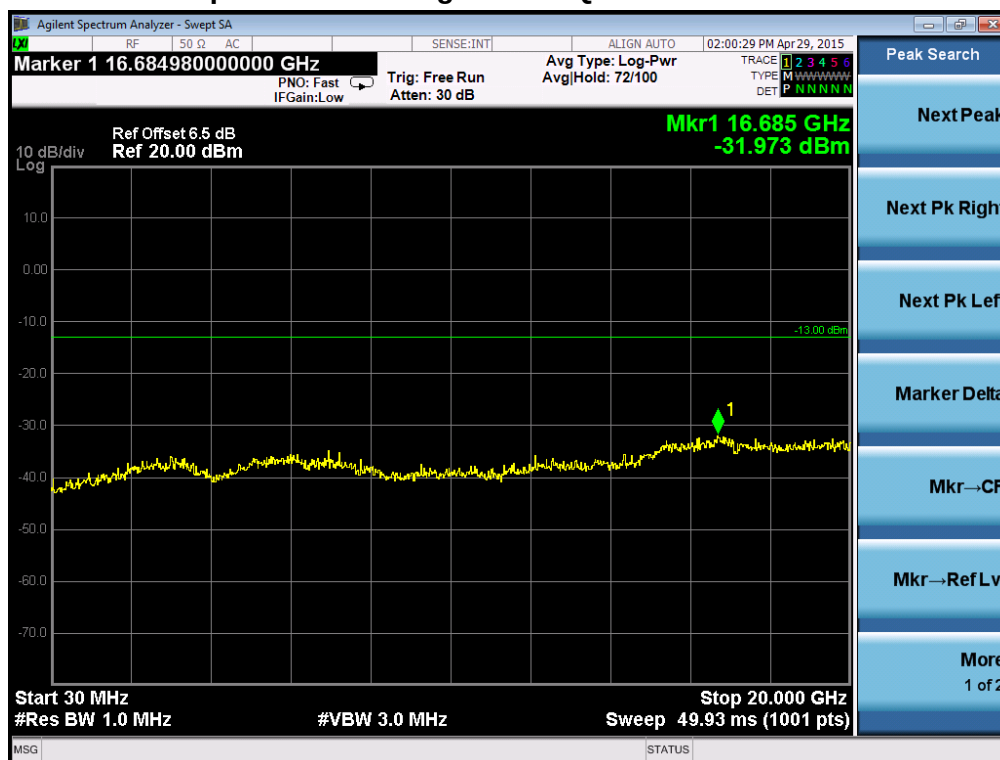


Conducted Spurious of Configuration- QPSK-3M/1RB channel Highest

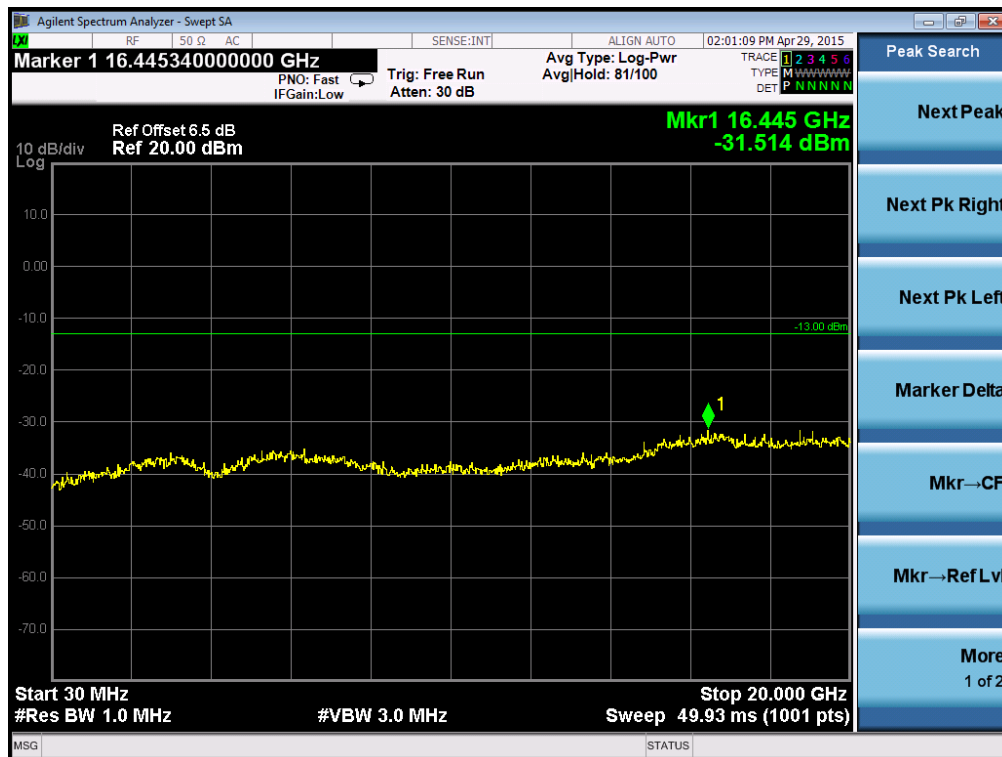


Conducted Spurious of Configuration- QPSK-5M/1RB channel Lowest

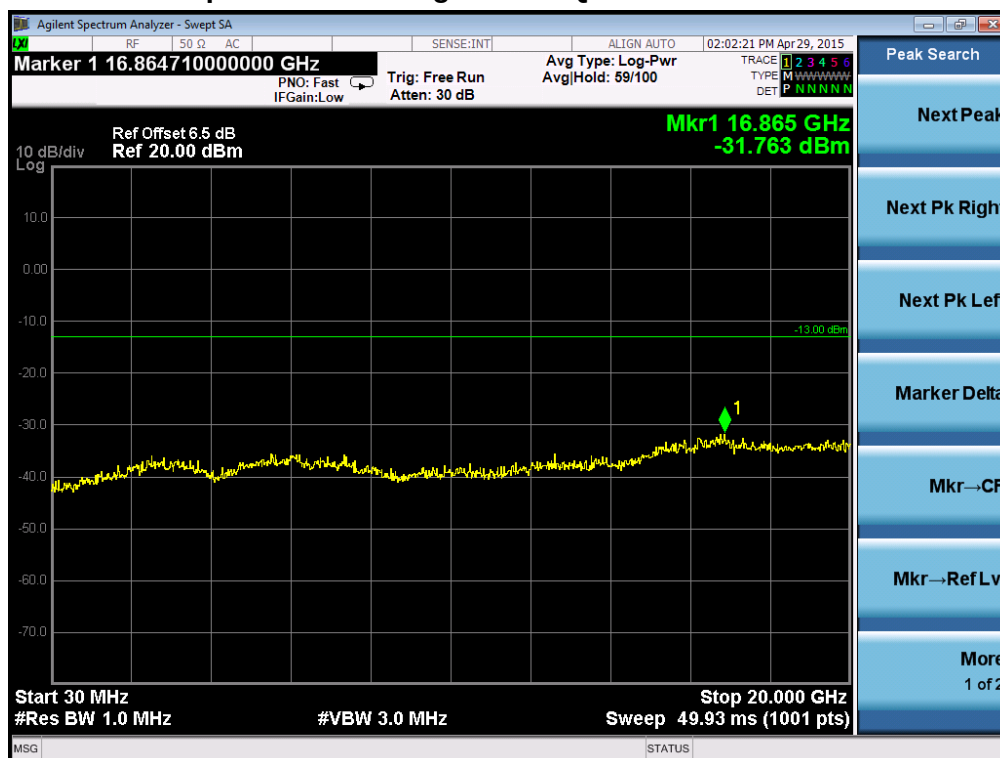


Conducted Spurious of Configuration- QPSK-5M/1RB channel Middle

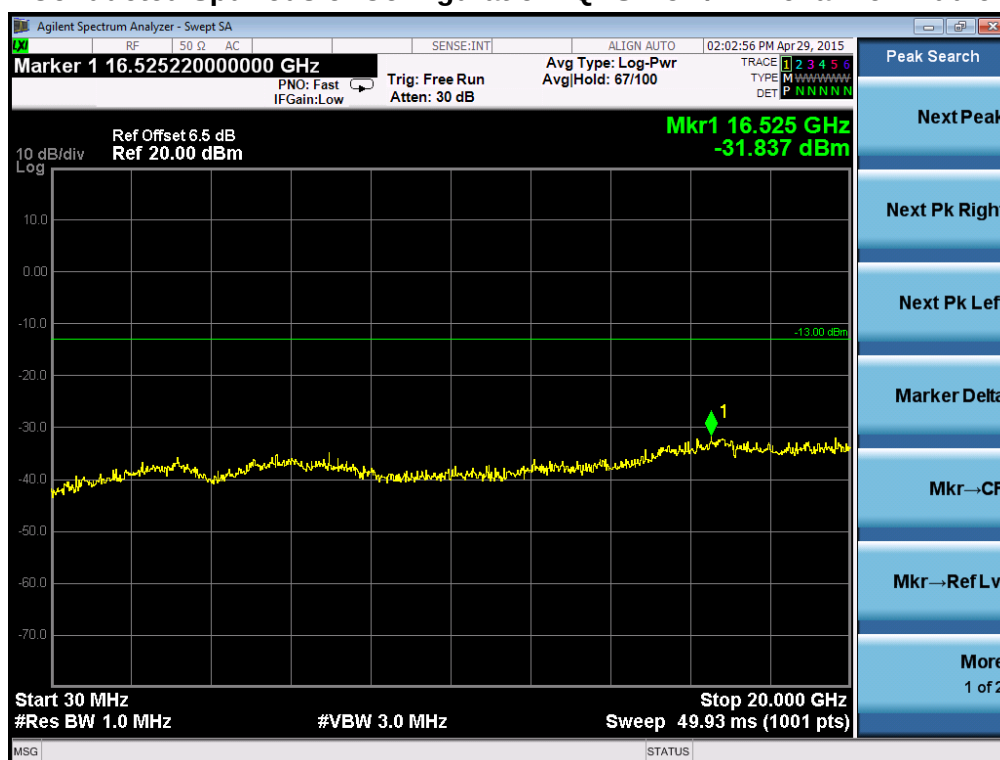


Conducted Spurious of Configuration- QPSK-5M/1RB channel Highest

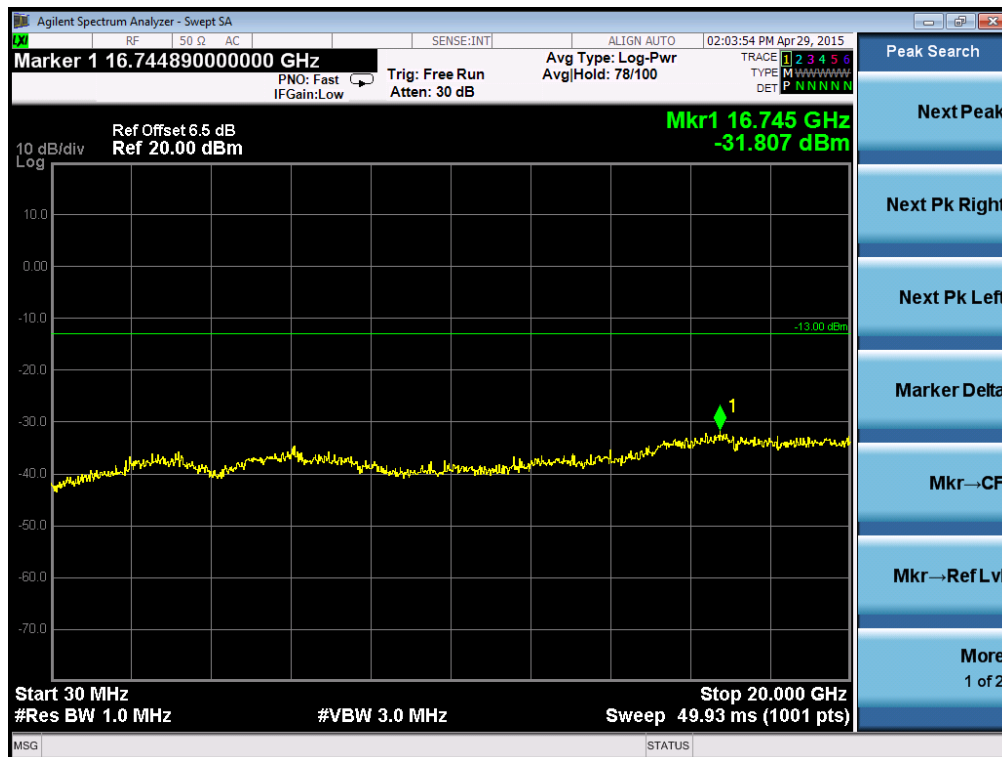


Conducted Spurious of Configuration- QPSK-10M/1RB channel Lowest

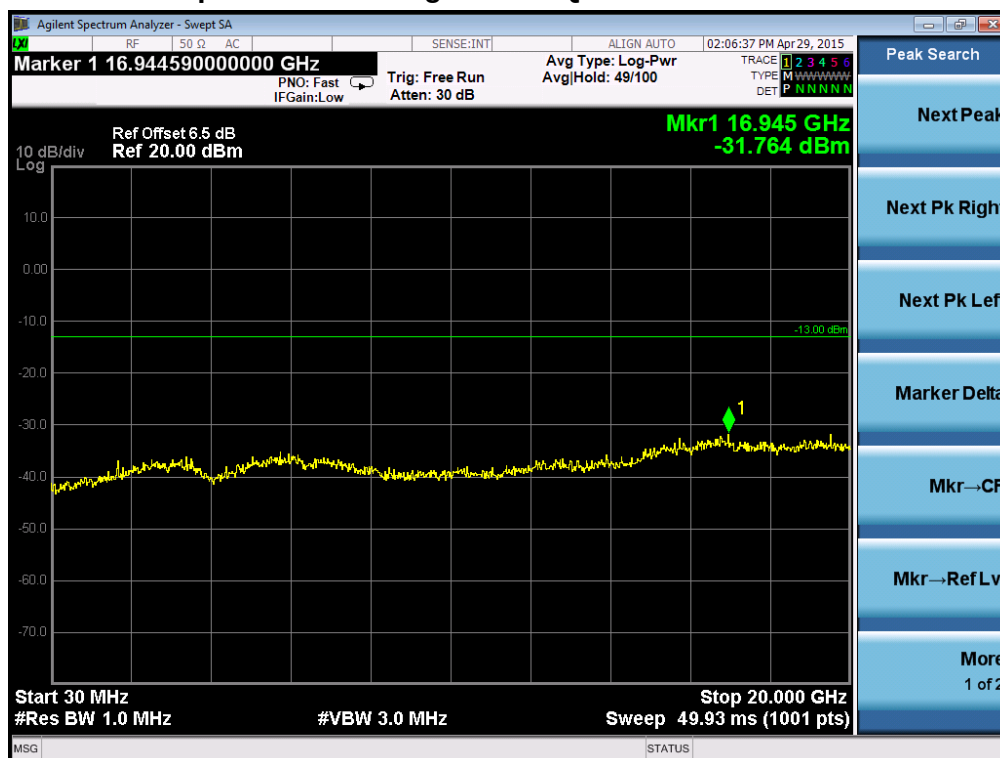


Conducted Spurious of Configuration- QPSK-10M/1RB channel Middle

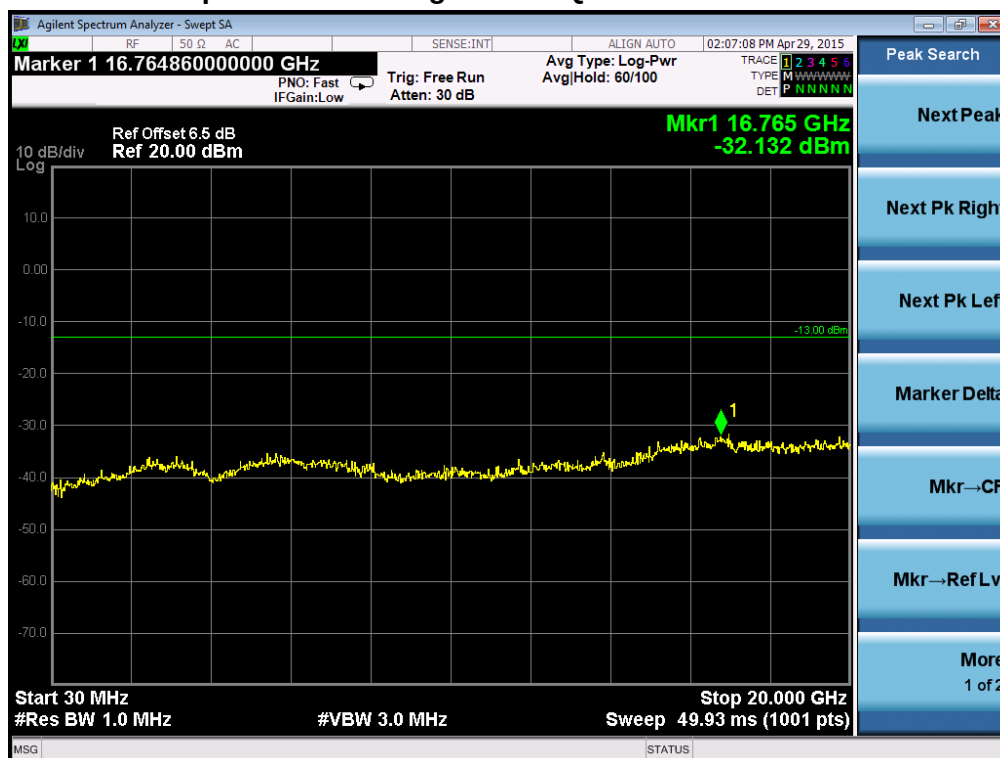


Conducted Spurious of Configuration- QPSK-10M/1RB channel Highest

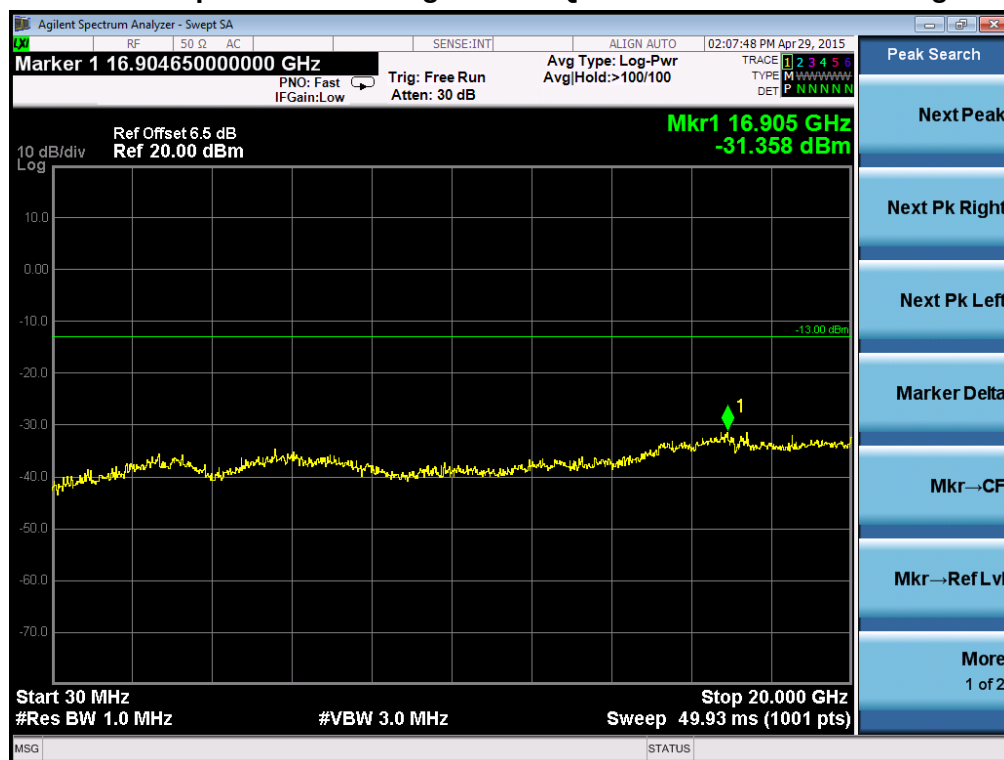


Conducted Spurious of Configuration- QPSK-15M/1RB channel Lowest

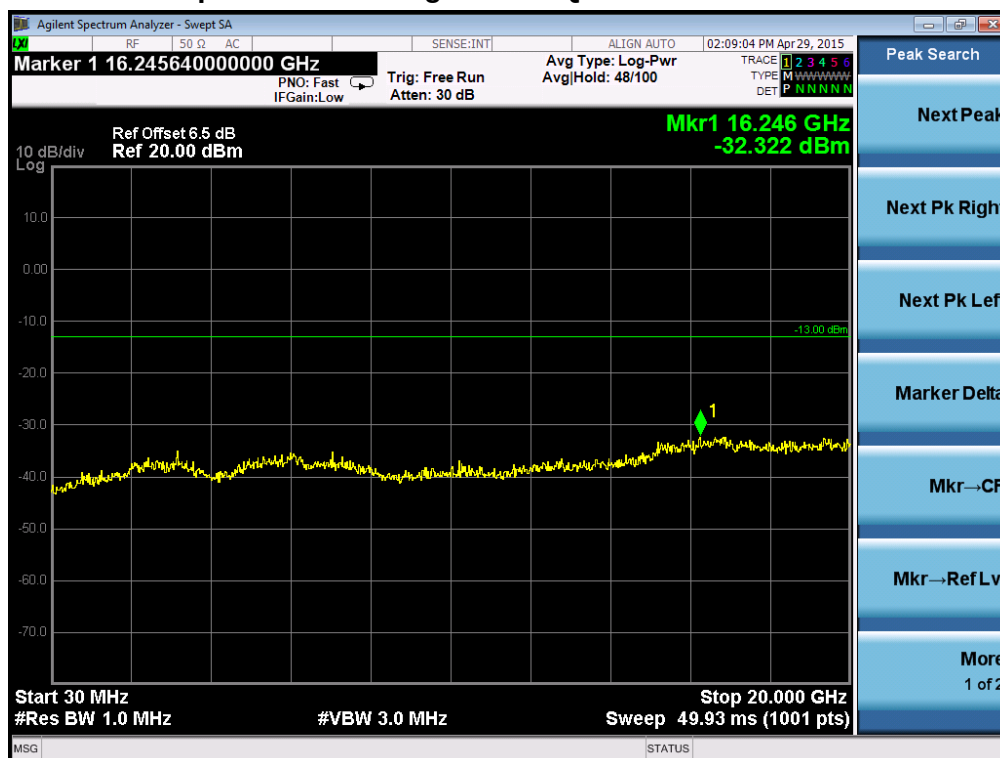


Conducted Spurious of Configuration- QPSK-15M/1RB channel Middle

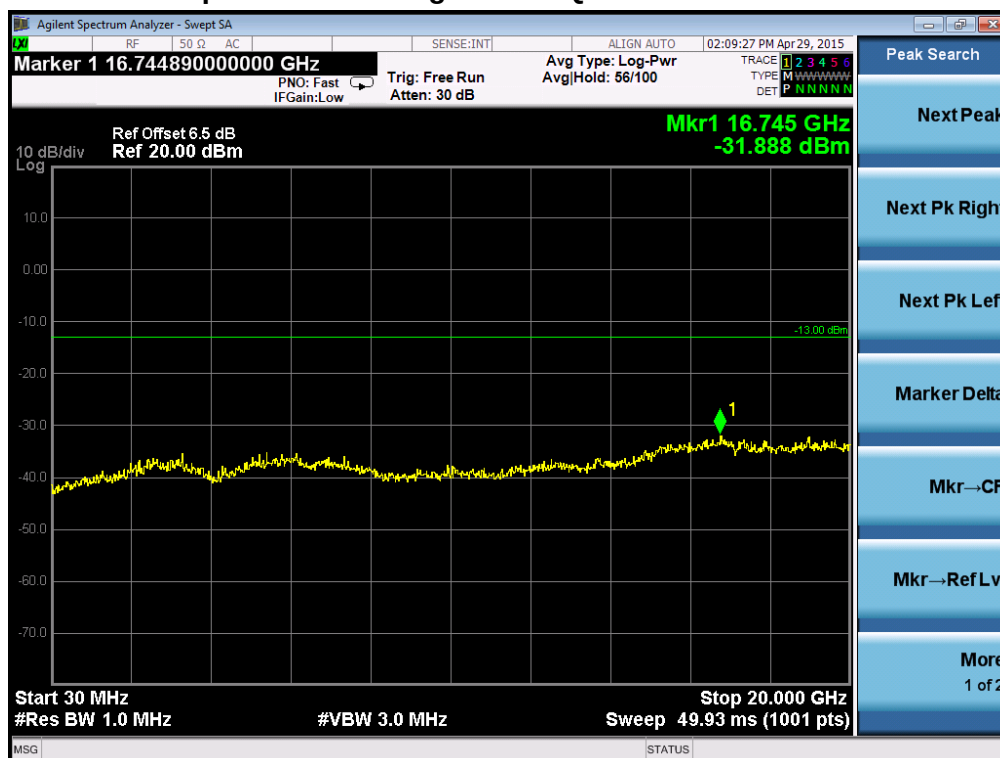


Conducted Spurious of Configuration- QPSK-15M/1RB channel Highest

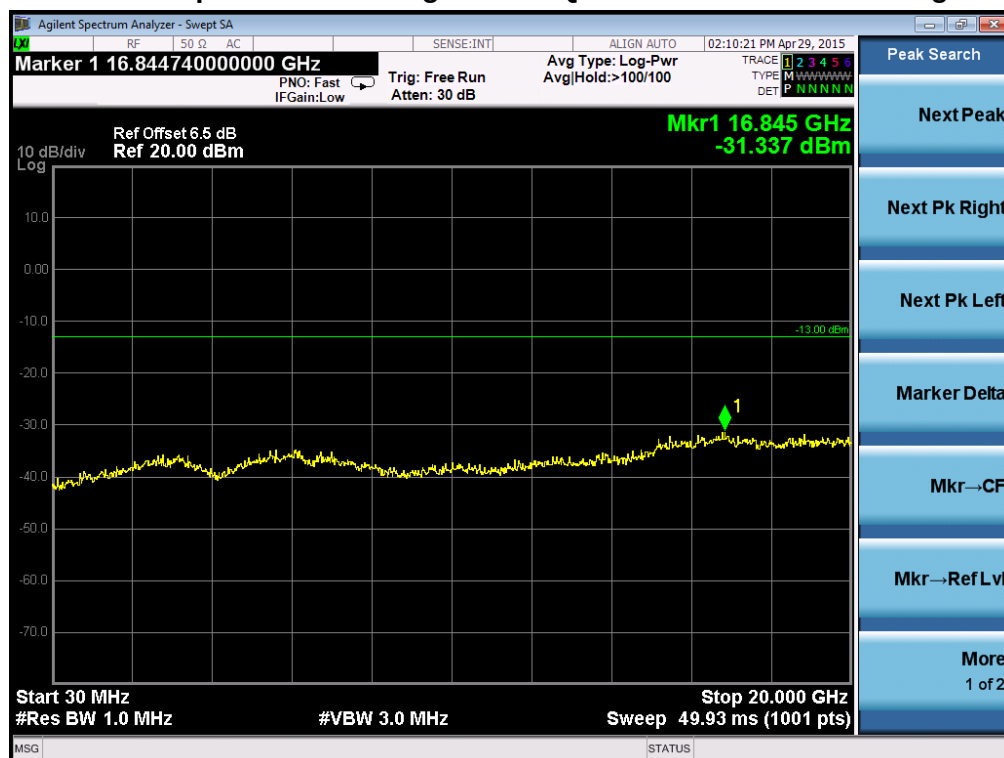

Conducted Spurious of Configuration- QPSK-20M/1RB channel Lowest

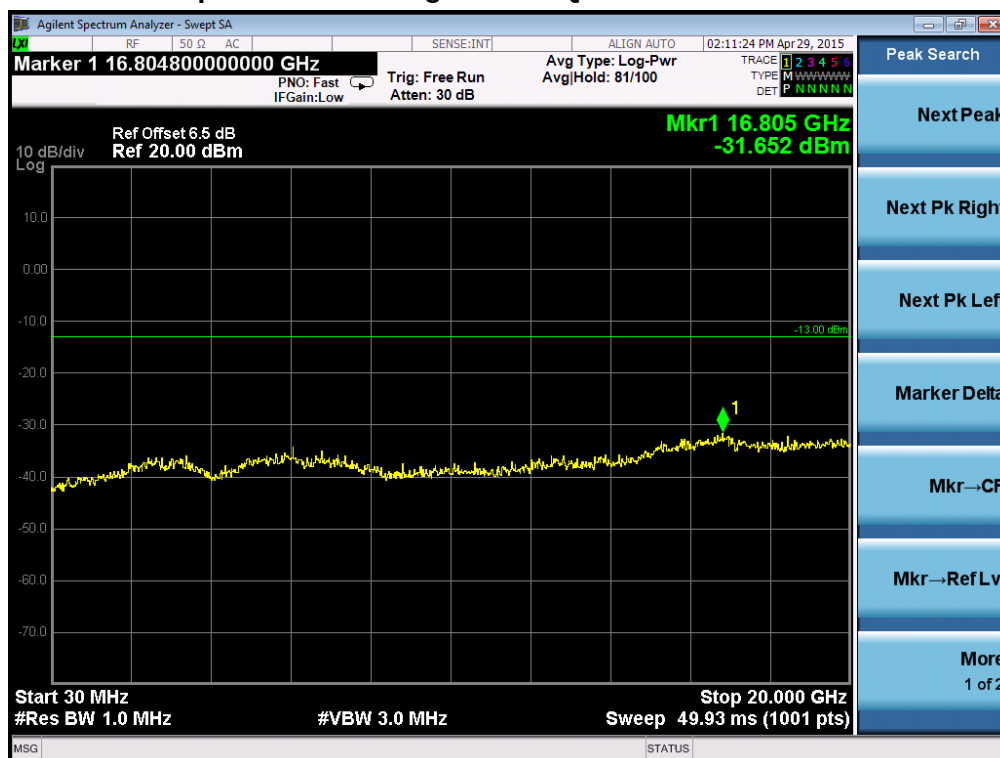

Conducted Spurious of Configuration- QPSK-20M/1RB channel Middle

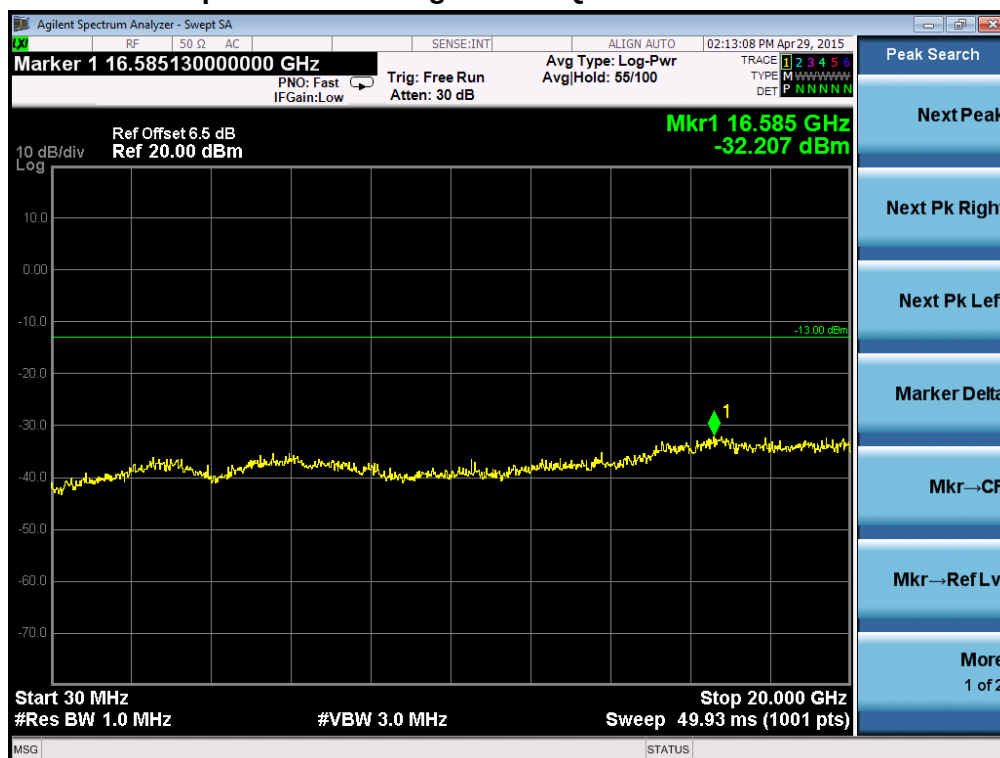


Conducted Spurious of Configuration- QPSK-20M/1RB channel Highest



ATTACHMENT D - SPURIOUS RADIATED EMISSION

Test Mode : TX Channel Middle-QPSK 1.4M/1RB


Vertical

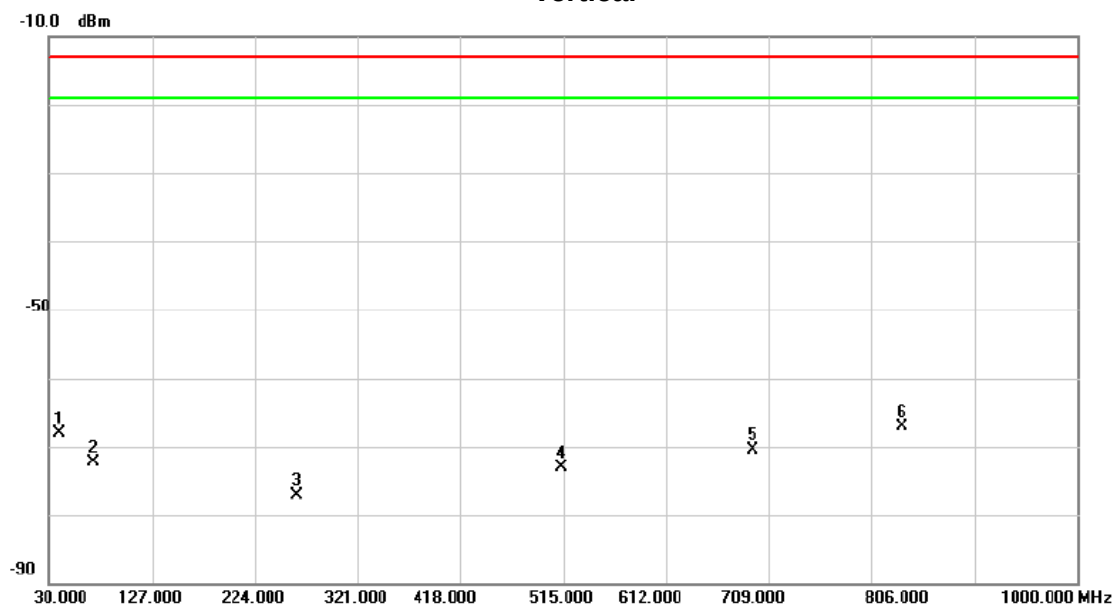

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		39.7000	-70.09	1.90	-68.19	-13.0	-55.19	peak	
2		71.7100	-70.31	-1.94	-72.25	-13.0	-59.25	peak	
3		262.8000	-78.18	1.15	-77.03	-13.0	-64.03	peak	
4		513.0600	-80.59	7.52	-73.07	-13.0	-60.07	peak	
5		693.4800	-81.02	10.43	-70.59	-13.0	-57.59	peak	
6	*	835.1000	-80.76	13.71	-67.05	-13.0	-54.05	peak	

Test Mode : TX Channel Middle-QPSK 1.4M/1RB


Horizontal

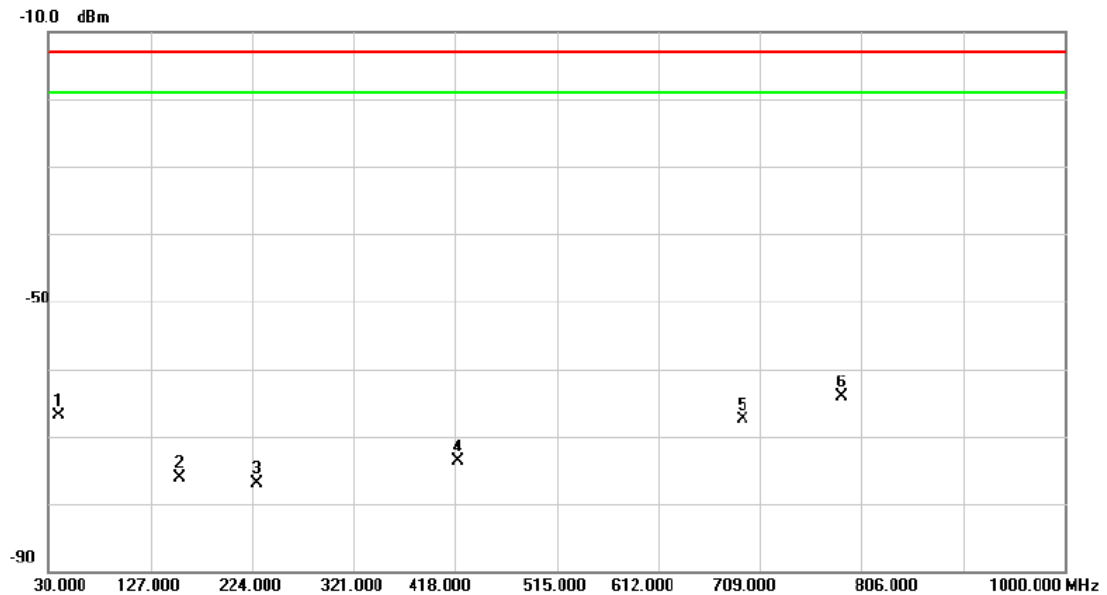

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		39.7000	-68.82	1.97	-66.85	-13.0	-53.85	peak	
2		154.1600	-79.74	3.62	-76.12	-13.0	-63.12	peak	
3		228.8500	-79.82	2.94	-76.88	-13.0	-63.88	peak	
4		420.9100	-80.40	6.78	-73.62	-13.0	-60.62	peak	
5		692.5100	-81.02	13.47	-67.55	-13.0	-54.55	peak	
6	*	787.5700	-76.27	12.22	-64.05	-13.0	-51.05	peak	

Test Mode : TX Channel Middle-QPSK 3M/1RB


Vertical

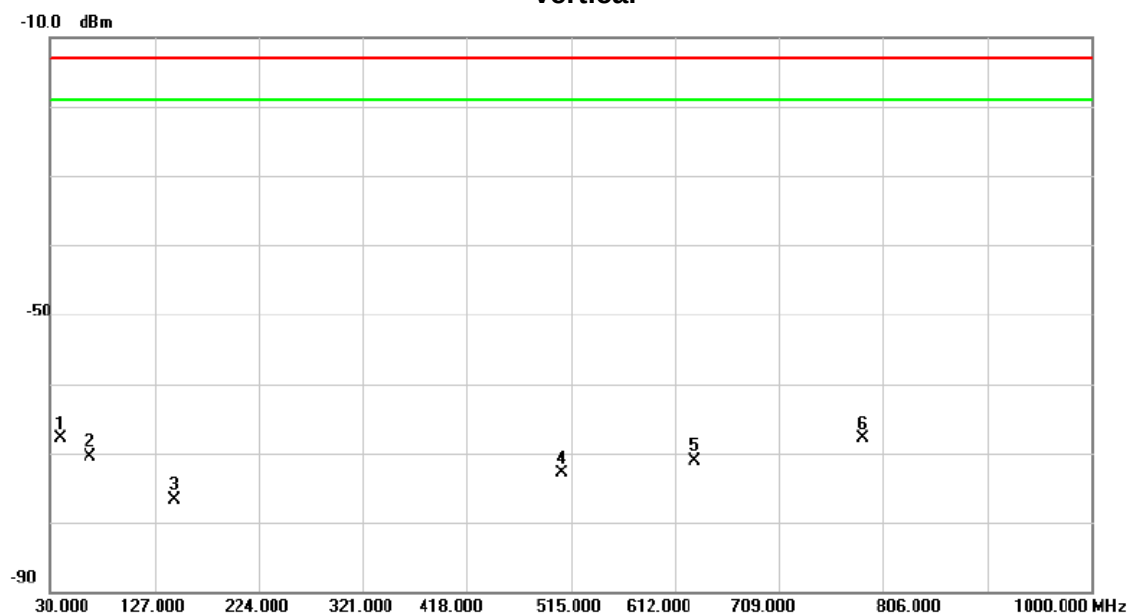

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	39.7000	-69.82	1.90	-67.92	-13.0	-54.92	peak	
2		66.8600	-71.08	0.65	-70.43	-13.0	-57.43	peak	
3		145.4300	-79.36	2.69	-76.67	-13.0	-63.67	peak	
4		506.2700	-80.41	7.54	-72.87	-13.0	-59.87	peak	
5		630.4300	-80.74	9.56	-71.18	-13.0	-58.18	peak	
6		787.5700	-80.00	12.03	-67.97	-13.0	-54.97	peak	

Test Mode : TX Channel Middle-QPSK 3M/1RB


Horizontal

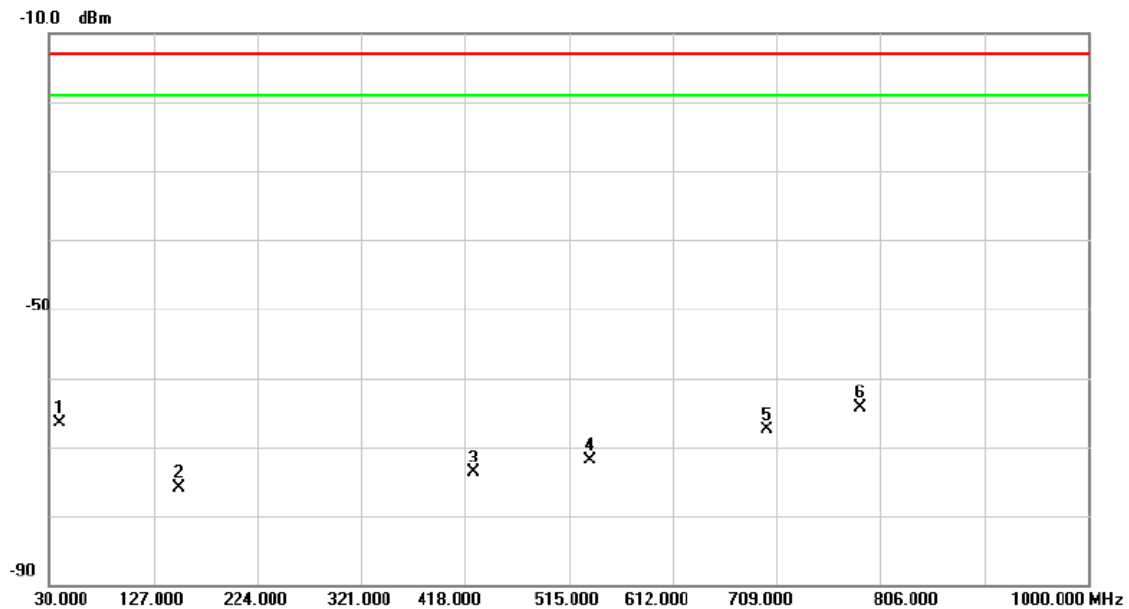

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBm	dB	dBm	dBm	dB		
1		39.7000	-68.49	1.97	-66.52	-13.0	-53.52	peak	
2		151.2500	-79.97	4.05	-75.92	-13.0	-62.92	peak	
3		426.7300	-79.83	6.12	-73.71	-13.0	-60.71	peak	
4		535.3700	-80.00	8.09	-71.91	-13.0	-58.91	peak	
5		700.2700	-81.39	13.97	-67.42	-13.0	-54.42	peak	
6	*	787.5700	-76.58	12.22	-64.36	-13.0	-51.36	peak	

Test Mode : TX Channel Middle-QPSK 5M/1RB

Vertical

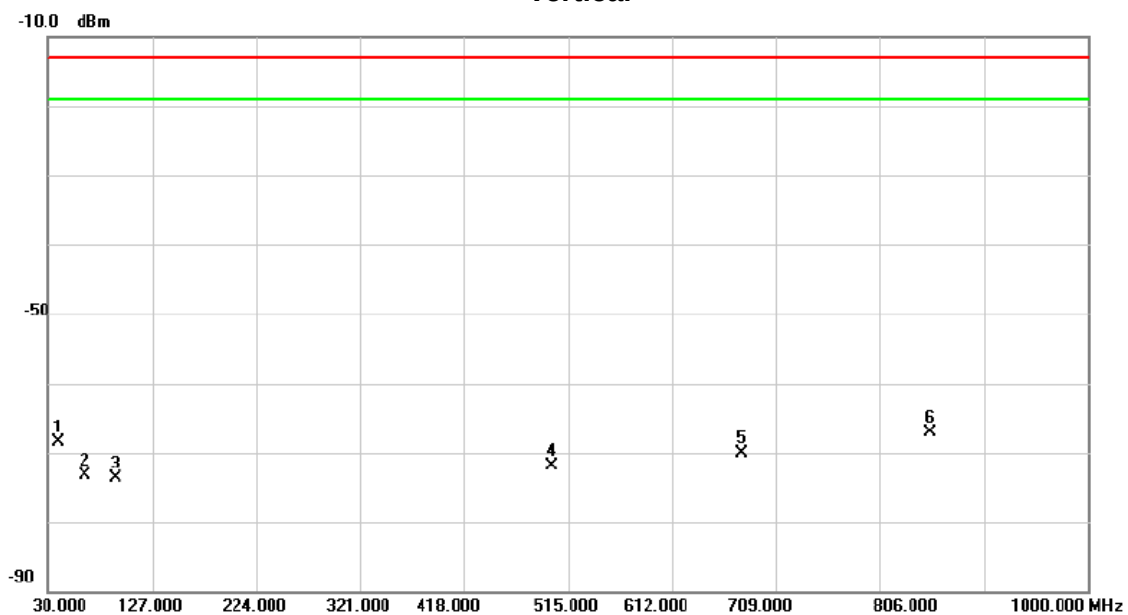

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		39.7000	-70.33	1.90	-68.43	-13.0	-55.43	peak	
2		63.9500	-74.33	0.98	-73.35	-13.0	-60.35	peak	
3		92.0800	-69.82	-3.93	-73.75	-13.0	-60.75	peak	
4		499.4800	-79.37	7.52	-71.85	-13.0	-58.85	peak	
5		676.9900	-80.42	10.31	-70.11	-13.0	-57.11	peak	
6	*	853.5300	-81.54	14.35	-67.19	-13.0	-54.19	peak	

Test Mode : TX Channel Middle-QPSK 5M/1RB


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		39.7000	-68.86	1.97	-66.89	-13.0	-53.89	peak	
2		146.4000	-79.96	3.84	-76.12	-13.0	-63.12	peak	
3		418.0000	-80.05	6.78	-73.27	-13.0	-60.27	peak	
4		496.5700	-80.74	7.81	-72.93	-13.0	-59.93	peak	
5		693.4800	-81.07	13.54	-67.53	-13.0	-54.53	peak	
6	*	787.5700	-76.30	12.22	-64.08	-13.0	-51.08	peak	

Test Mode : TX Channel Middle-QPSK 10M/1RB


Vertical

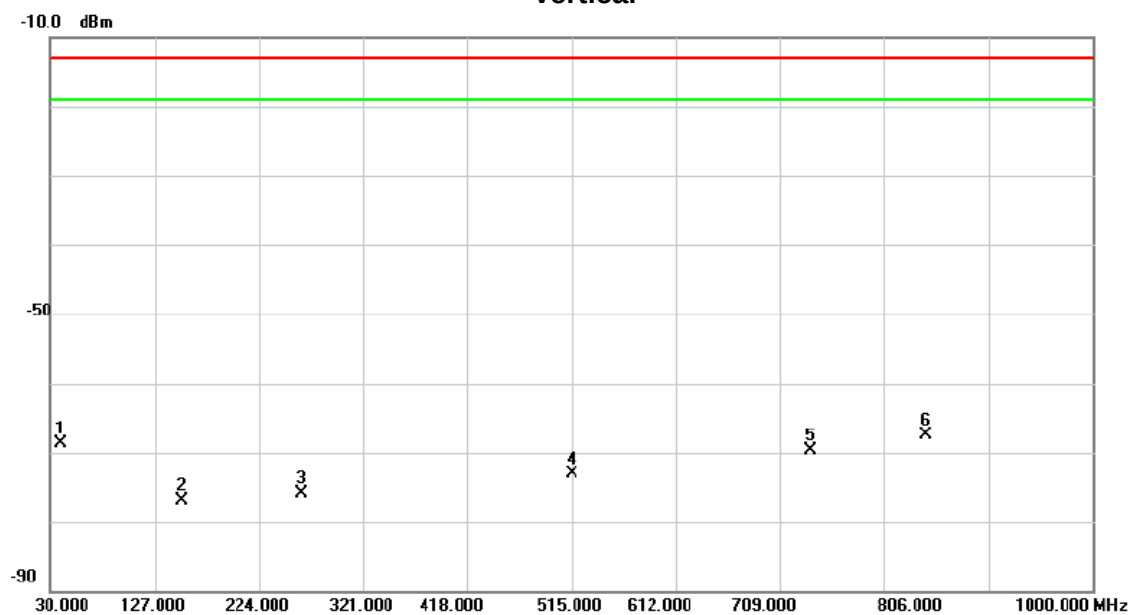

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1		39.7000	-70.56	1.90	-68.66	-13.0	-55.66	peak	
2		152.2200	-79.99	3.16	-76.83	-13.0	-63.83	peak	
3		262.8000	-77.04	1.15	-75.89	-13.0	-62.89	peak	
4		515.0000	-80.65	7.52	-73.13	-13.0	-60.13	peak	
5		738.1000	-81.73	12.00	-69.73	-13.0	-56.73	peak	
6	*	845.7700	-81.84	14.26	-67.58	-13.0	-54.58	peak	

Test Mode : TX Channel Middle-QPSK 10M/1RB


Horizontal

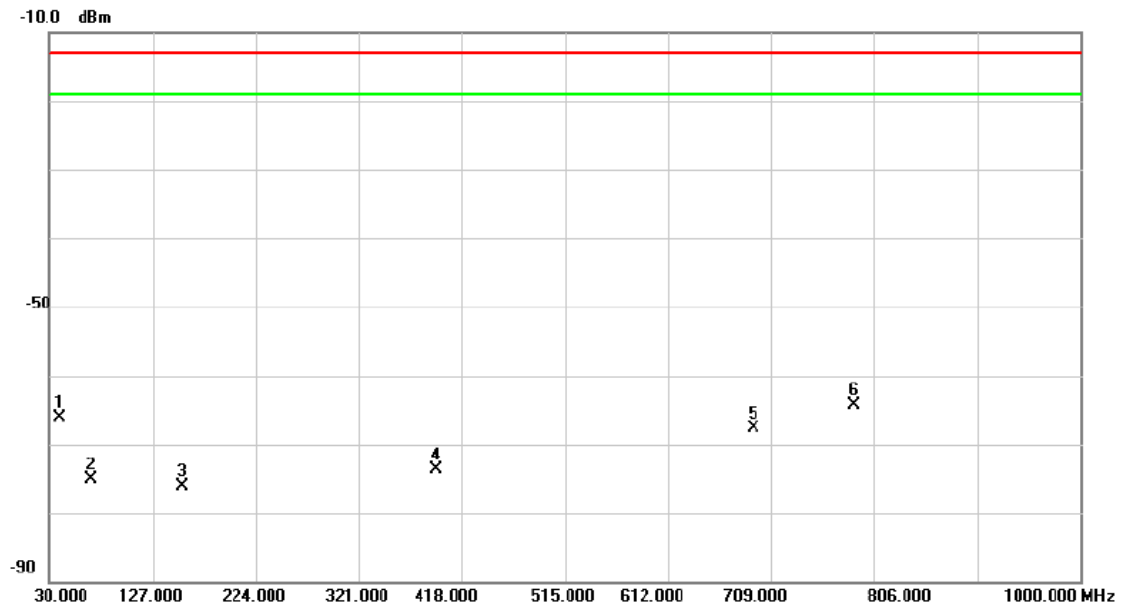

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		39.7000	-68.13	1.97	-66.16	-13.0	-53.16	peak	
2		68.8000	-71.81	-3.29	-75.10	-13.0	-62.10	peak	
3		154.1600	-79.67	3.62	-76.05	-13.0	-63.05	peak	
4		393.7500	-79.62	5.95	-73.67	-13.0	-60.67	peak	
5		692.5100	-81.23	13.47	-67.76	-13.0	-54.76	peak	
6	*	787.5700	-76.45	12.22	-64.23	-13.0	-51.23	peak	


Test Mode : TX Channel Middle-QPSK 15M/1RB

Vertical

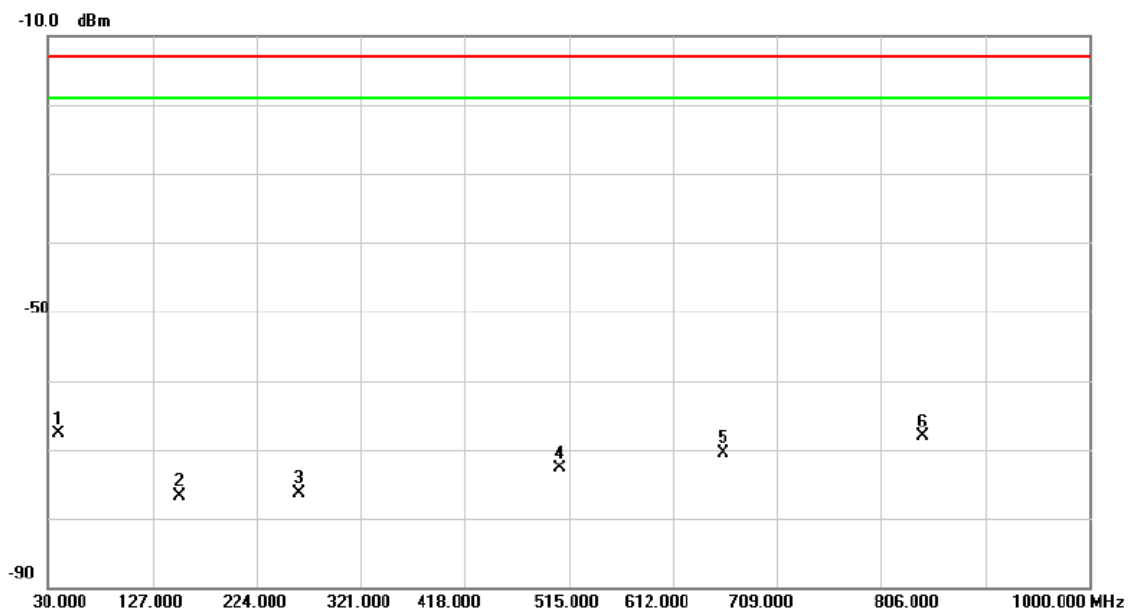

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1	*	39.7000	-69.66	1.90	-67.76	-13.0	-54.76	peak	
2		152.2200	-79.93	3.16	-76.77	-13.0	-63.77	peak	
3		262.8000	-77.46	1.15	-76.31	-13.0	-63.31	peak	
4		506.2700	-80.24	7.54	-72.70	-13.0	-59.70	peak	
5		658.5600	-80.70	10.18	-70.52	-13.0	-57.52	peak	
6		844.8000	-82.30	14.21	-68.09	-13.0	-55.09	peak	


Test Mode : TX Channel Middle-QPSK 15M/1RB

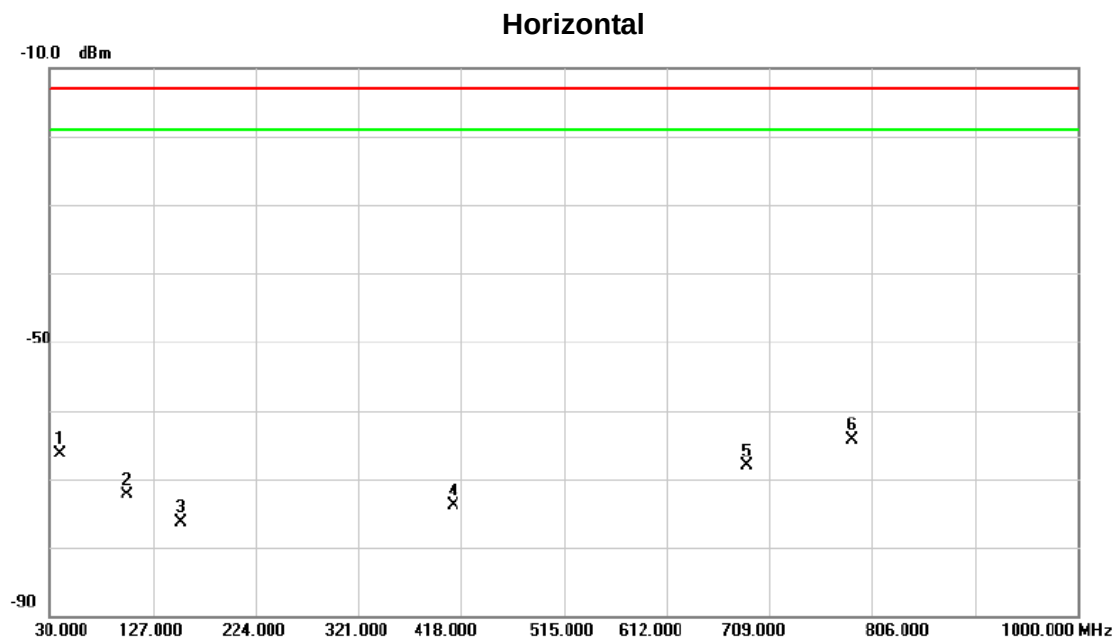

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		39.7000	-68.22	1.97	-66.25	-13.0	-53.25	peak	
2		102.7500	-68.77	-3.44	-72.21	-13.0	-59.21	peak	
3		153.1900	-80.09	3.76	-76.33	-13.0	-63.33	peak	
4		411.2100	-80.28	6.44	-73.84	-13.0	-60.84	peak	
5		687.6600	-81.28	13.14	-68.14	-13.0	-55.14	peak	
6	*	787.5700	-76.56	12.22	-64.34	-13.0	-51.34	peak	


Test Mode : TX Channel Middle-QPSK 20M/1RB

Vertical

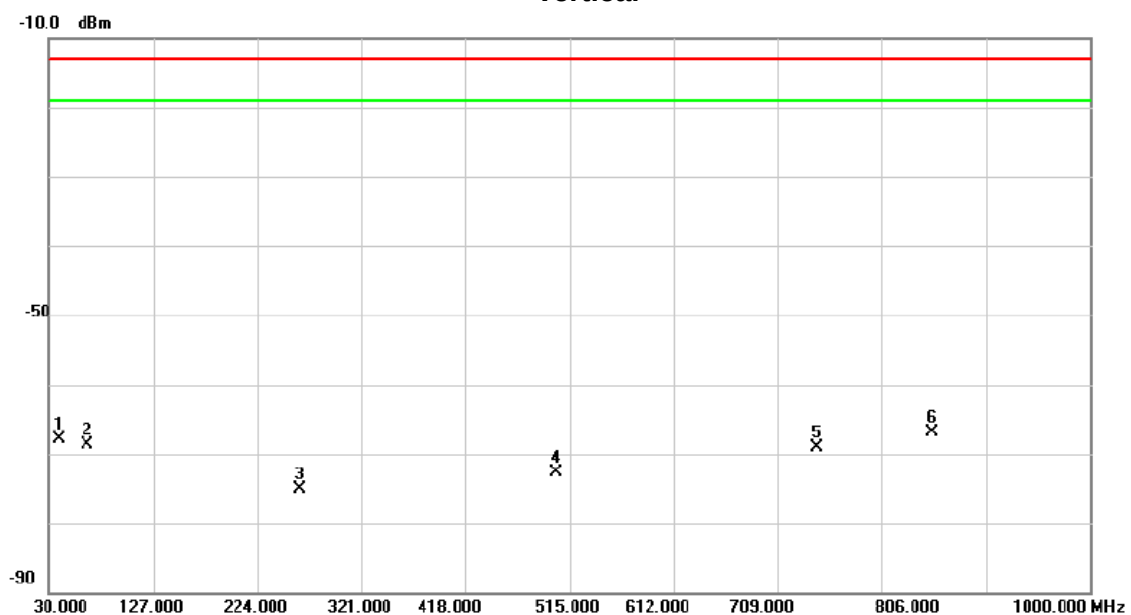

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		39.7000	-69.79	1.90	-67.89	-13.0	-54.89	peak	
2		65.8900	-69.69	0.89	-68.80	-13.0	-55.80	peak	
3		262.8000	-76.15	1.15	-75.00	-13.0	-62.00	peak	
4		502.3900	-80.26	7.55	-72.71	-13.0	-59.71	peak	
5		745.8600	-81.43	12.31	-69.12	-13.0	-56.12	peak	
6	*	853.5300	-81.20	14.35	-66.85	-13.0	-53.85	peak	


Test Mode : TX Channel Middle-QPSK 20M/1RB

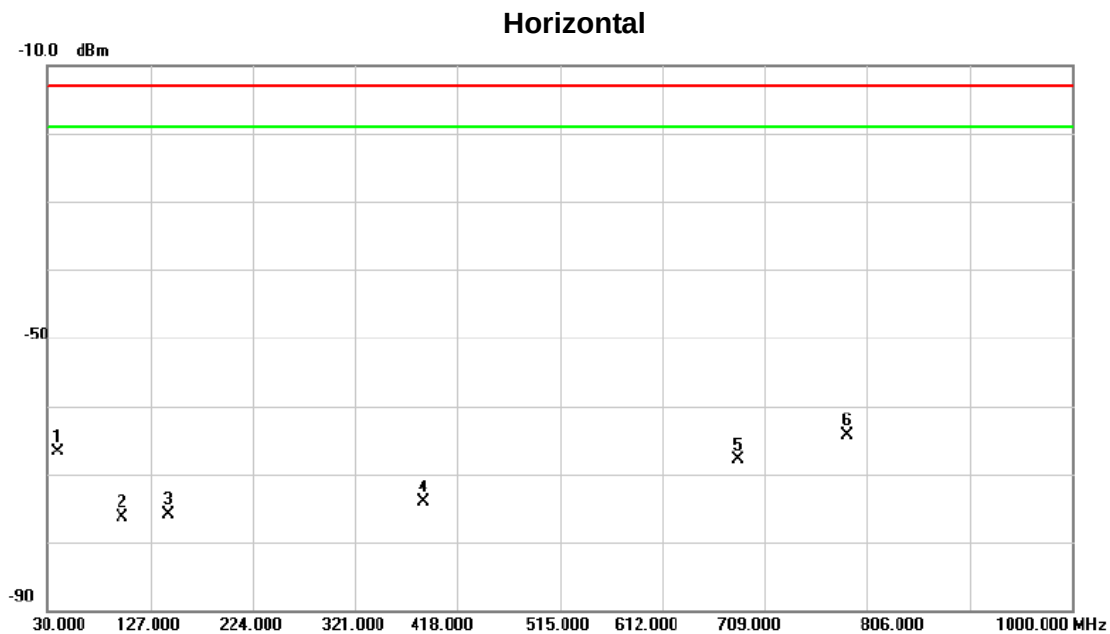

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		39.7000	-68.75	1.97	-66.78	-13.0	-53.78	peak	
2		99.8400	-72.51	-3.86	-76.37	-13.0	-63.37	peak	
3		144.4600	-79.45	3.63	-75.82	-13.0	-62.82	peak	
4		385.9900	-80.21	6.03	-74.18	-13.0	-61.18	peak	
5		683.7800	-80.81	12.87	-67.94	-13.0	-54.94	peak	
6	*	787.5700	-76.61	12.22	-64.39	-13.0	-51.39	peak	

Test Mode : TX Channel Middle-QPSK 1.4M/1RB


Vertical

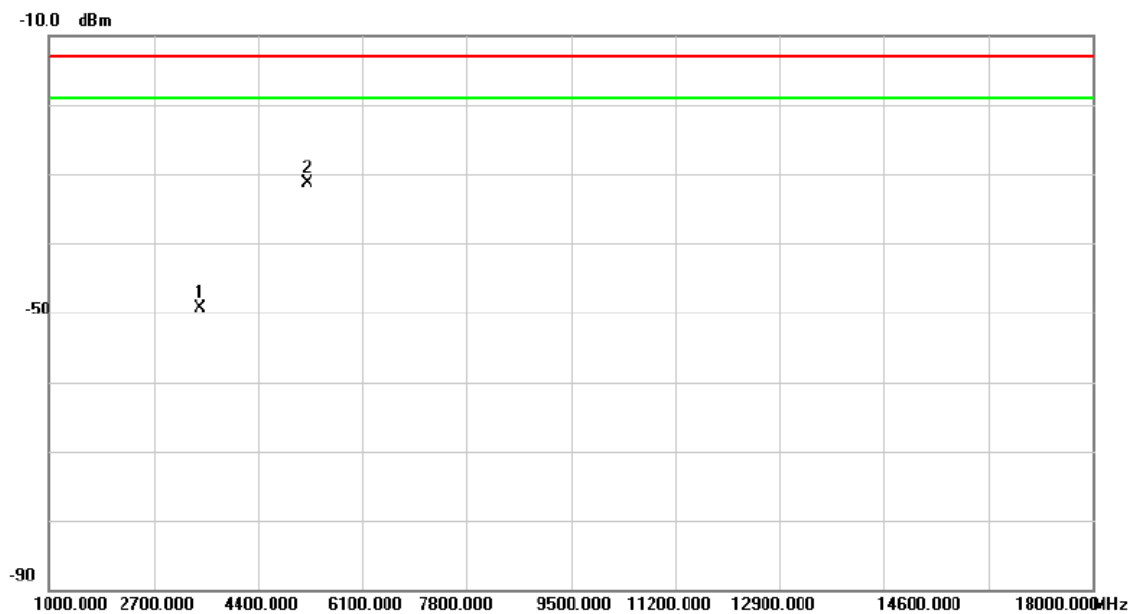

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3465.000	-55.72	6.47	-49.25	-13.0	-36.25	peak	
2	*	5195.600	-40.00	8.70	-31.30	-13.0	-18.30	peak	

Test Mode : TX Channel Middle-QPSK 1.4M/1RB


Horizontal

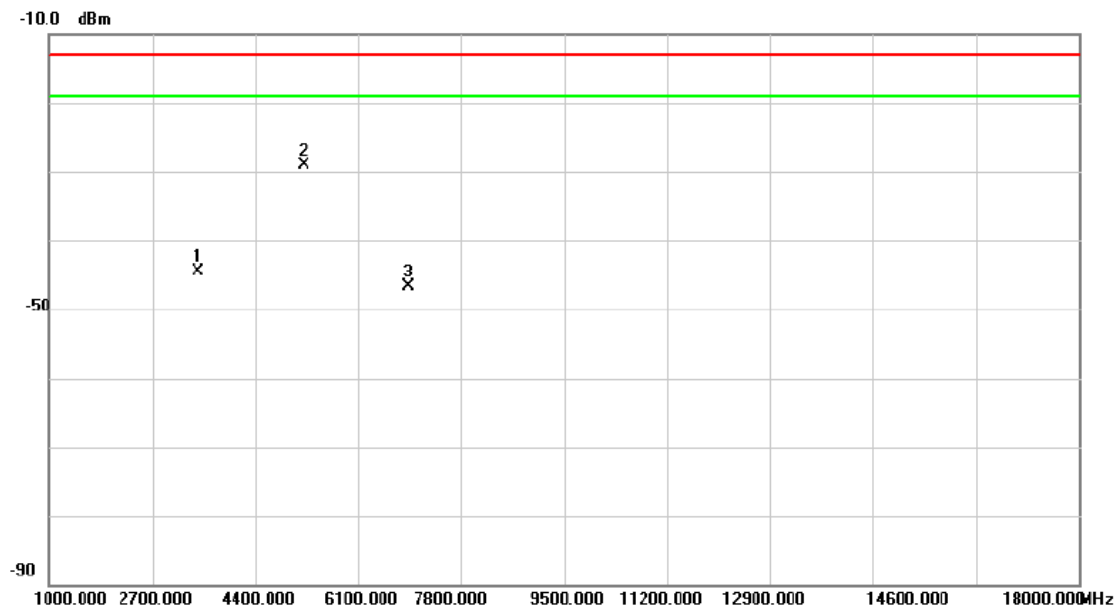

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3465.000	-53.03	8.60	-44.43	-13.0	-31.43	peak	
2	*	5195.600	-36.71	7.67	-29.04	-13.0	-16.04	peak	
3		6929.600	-56.68	10.03	-46.65	-13.0	-33.65	peak	

Test Mode : TX Channel Middle-QPSK 3M/1RB


Vertical

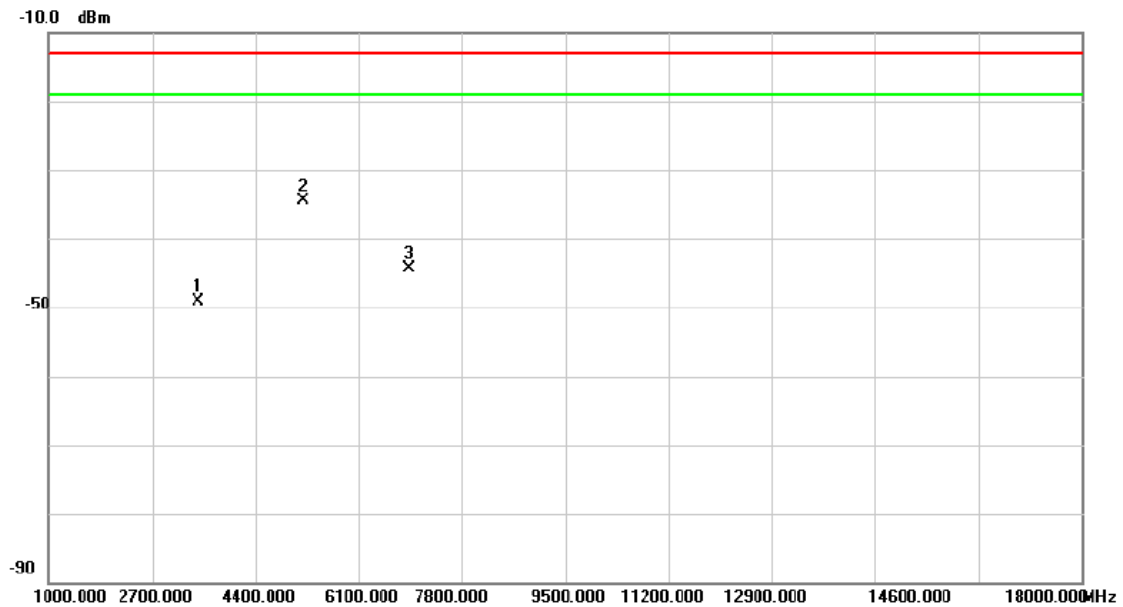

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3461.600	-55.57	6.45	-49.12	-13.0	-36.12	peak	
2	*	5192.200	-43.13	8.68	-34.45	-13.0	-21.45	peak	
3		6926.200	-55.51	11.12	-44.39	-13.0	-31.39	peak	


Test Mode : TX Channel Middle-QPSK 3M/1RB

Horizontal

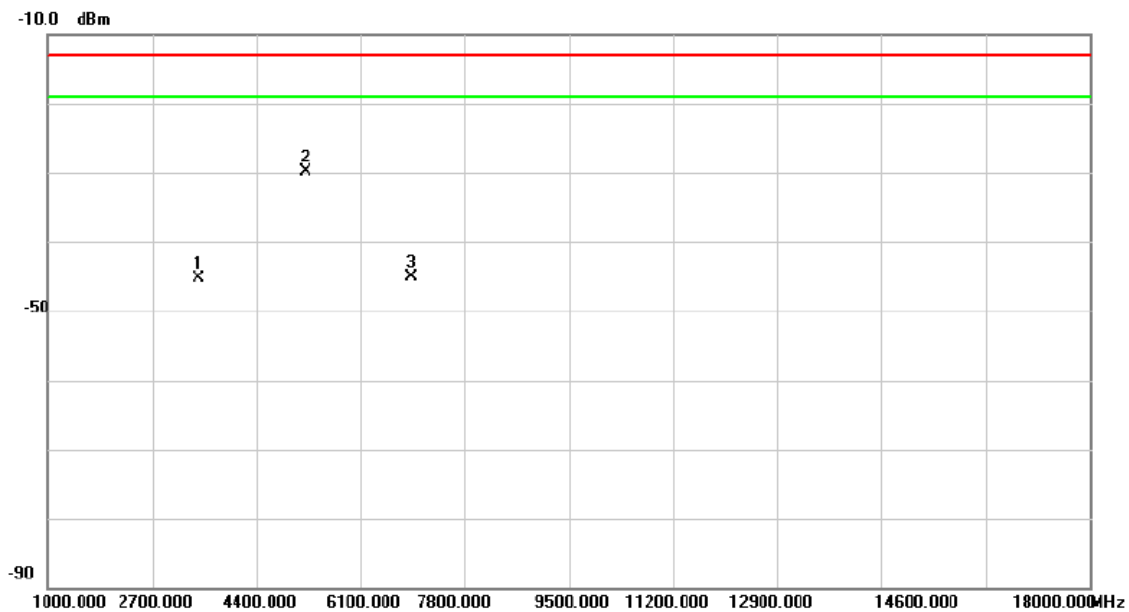

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3461.600	-53.87	8.58	-45.29	-13.0	-32.29	peak	
2	*	5195.600	-37.58	7.67	-29.91	-13.0	-16.91	peak	
3		6926.200	-55.17	10.04	-45.13	-13.0	-32.13	peak	


Test Mode : TX Channel Middle-QPSK 5M/1RB

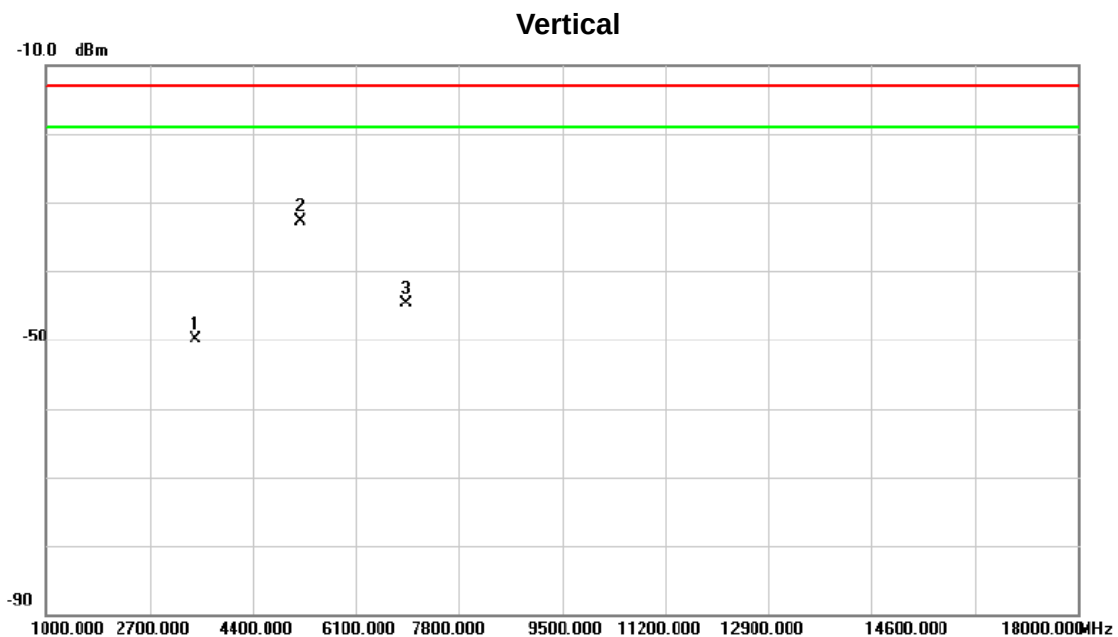

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3461.600	-56.44	6.45	-49.99	-13.0	-36.99	peak	
2	*	5192.200	-41.35	8.68	-32.67	-13.0	-19.67	peak	
3		6922.800	-55.79	11.13	-44.66	-13.0	-31.66	peak	

Test Mode : TX Channel Middle-QPSK 5M/1RB


Horizontal

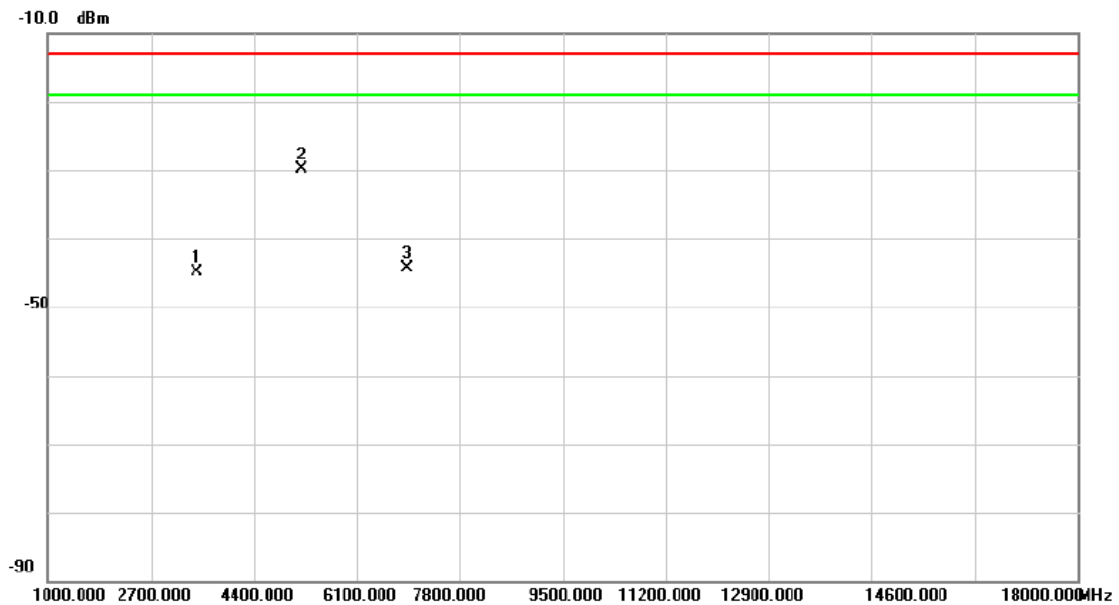

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3461.600	-53.50	8.58	-44.92	-13.0	-31.92	peak	
2	*	5192.200	-37.61	7.64	-29.97	-13.0	-16.97	peak	
3		6922.800	-54.33	10.05	-44.28	-13.0	-31.28	peak	

Test Mode : TX Channel Middle-QPSK 10M/1RB


Vertical

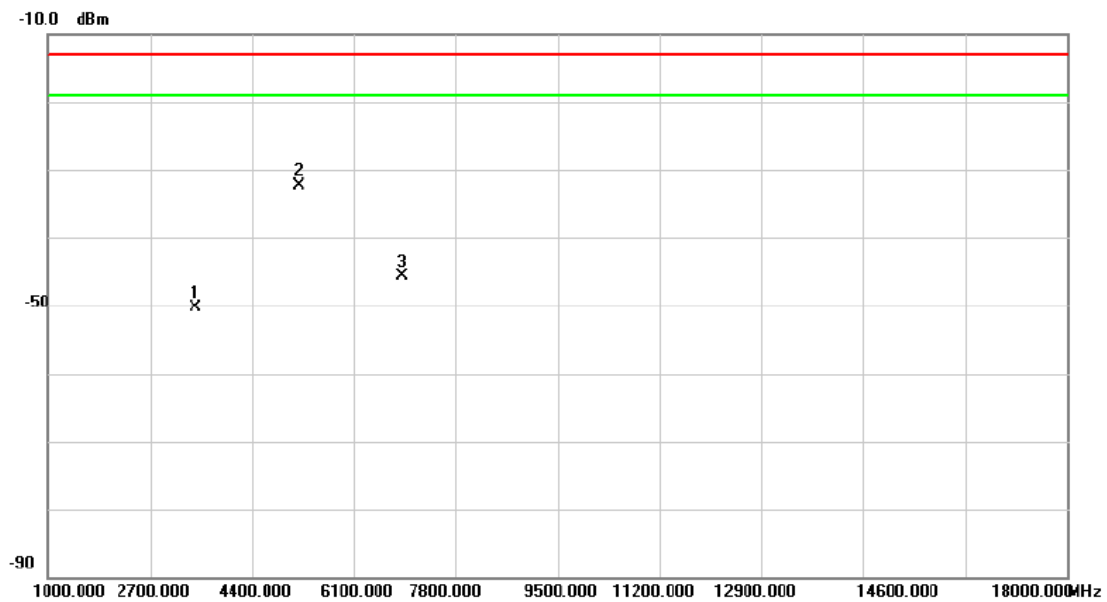

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3461.500	-56.78	6.45	-50.33	-13.0	-37.33	peak	
2	*	5185.400	-40.89	8.63	-32.26	-13.0	-19.26	peak	
3		6912.600	-56.77	11.16	-45.61	-13.0	-32.61	peak	


Test Mode : TX Channel Middle-QPSK 10M/1RB

Horizontal

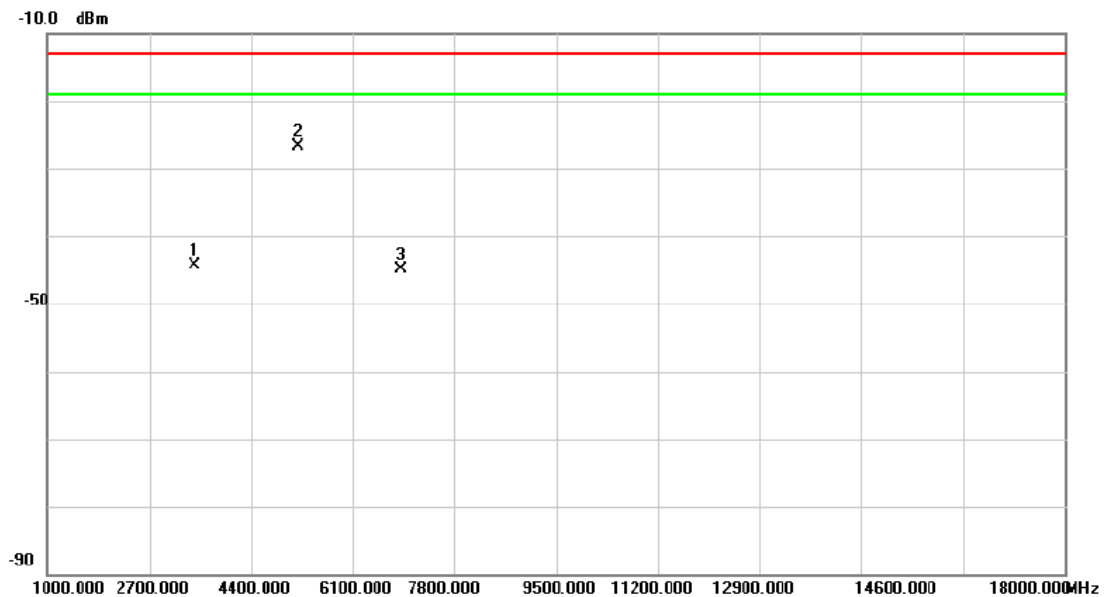

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3454.800	-52.85	8.54	-44.31	-13.0	-31.31	peak	
2	*	5185.400	-34.22	7.60	-26.62	-13.0	-13.62	peak	
3		6912.600	-54.90	10.08	-44.82	-13.0	-31.82	peak	


Test Mode : TX Channel Middle-QPSK 15M/1RB

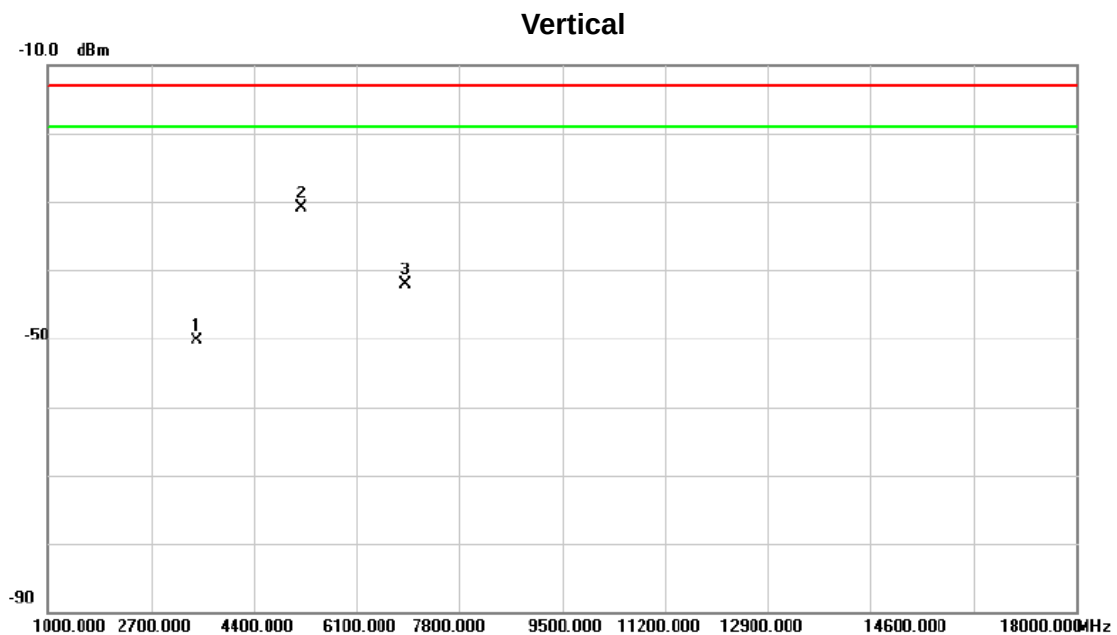

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3451.400	-56.76	6.39	-50.37	-13.0	-37.37	peak	
2	*	5178.600	-39.43	8.58	-30.85	-13.0	-17.85	peak	
3		6902.400	-53.33	11.19	-42.14	-13.0	-29.14	peak	

Test Mode : TX Channel Middle-QPSK 15M/1RB


Horizontal

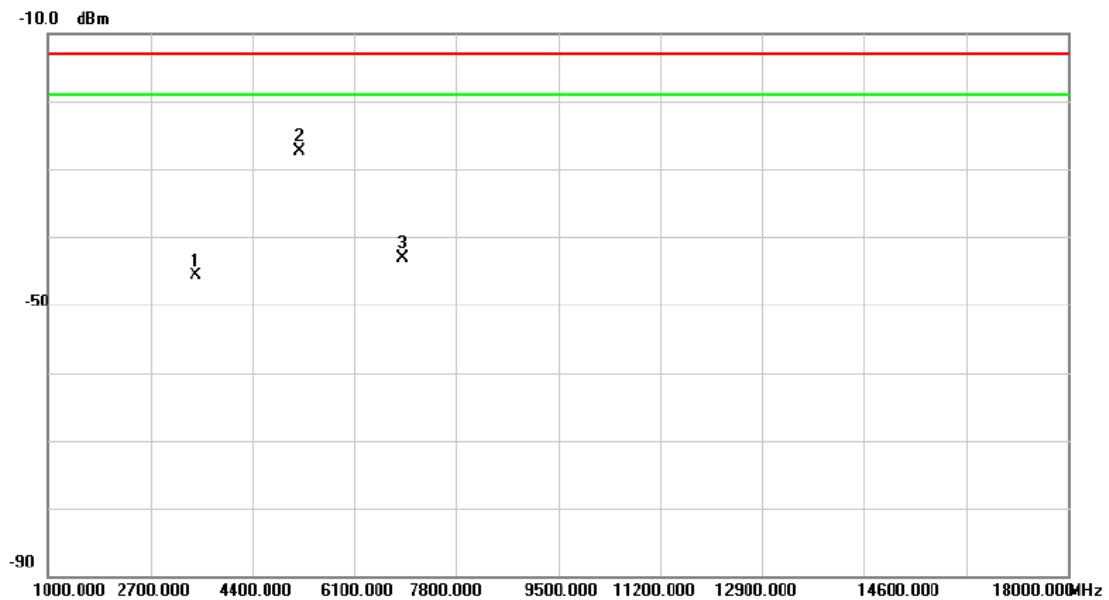

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3451.400	-54.28	8.52	-45.76	-13.0	-32.76	peak	
2	*	5178.600	-34.79	7.55	-27.24	-13.0	-14.24	peak	
3		6902.400	-53.15	10.10	-43.05	-13.0	-30.05	peak	

Test Mode : TX Channel Middle-QPSK 20M/1RB


Vertical

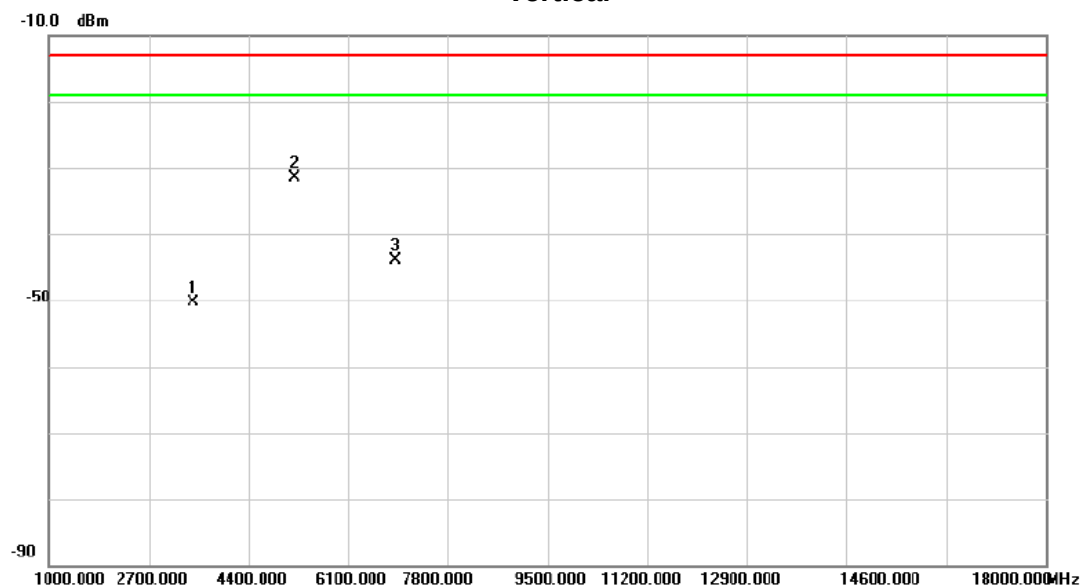

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3448.000	-56.71	6.37	-50.34	-13.0	-37.34	peak	
2	*	5171.800	-39.95	8.54	-31.41	-13.0	-18.41	peak	
3		6895.600	-55.01	11.21	-43.80	-13.0	-30.80	peak	

Test Mode : TX Channel Middle-QPSK 20M/1RB

Horizontal

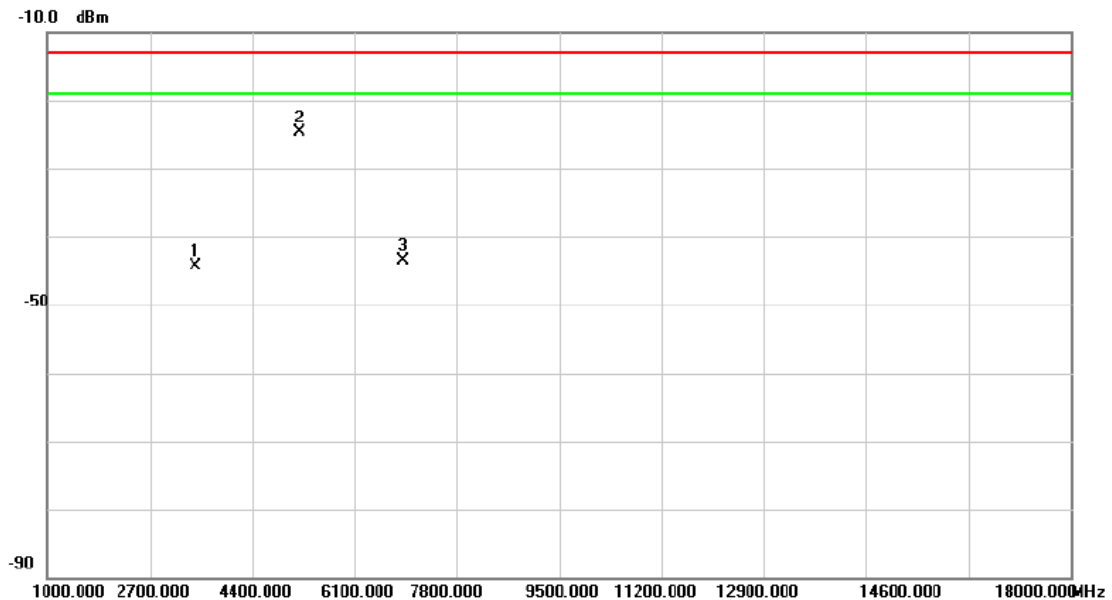

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Over dB	Detector	Comment
1		3448.000	-52.78	8.51	-44.27	-13.0	-31.27	peak	
2	*	5171.800	-32.30	7.51	-24.79	-13.0	-11.79	peak	
3		6895.600	-53.59	10.12	-43.47	-13.0	-30.47	peak	

ATTACHMENT E - BAND EDGE