



RF TEST REPORT

Report No.: SET2015-02661

Product Name: CATCH

FCC ID: 2AEFICATCH2015

Model No. : FS8010-300

Applicant: Anhui Fu Guang Industrial Co., Ltd

Address: No.53 Kexue Ave. High-tech Zone, Hefei, China

Issued by: CCIC-SET

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 47 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.

Test Report

Product Name.....: CATCH

Brand Name.....: Fu Guang

Trade Name.....: Fu Guang

Applicant.....: Anhui Fu Guang Industrial Co., Ltd

Applicant Address: No.53 Kexue Ave. High-tech Zone, Hefei, China


Manufacturer: Anhui Fu Guang Industrial Co., Ltd

Manufacturer Address: No.53 Kexue Ave. High-tech Zone, Hefei, China

Test Standards: 47 CFR Part 15 Subpart C2013: Radio Frequency Devices
ANSI C63.10:2014 : American National Standard for
Testing Unlicensed Wireless Devices
KDB558074 D01 DTS Meas Guidance v03r02

Test Result.....: PASS

Tested by



2015.03.04

Haigang He, Test Engineer

Reviewed by



2015.03.04

Zhu Qi, Senior Engineer

Approved by



2015.03.04

Wu Li'an, Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1. EUT Description	4
1.2. Test Standards and Results.....	5
1.3. Facilities and Accreditations	6
2. 47 CFR PART 15C REQUIREMENTS.....	7
2.1. Antenna requirement.....	7
2.2. Peak Output Power.....	8
2.3. Average power	11
2.4. 6dB & 99% Bandwidth	12
2.5. Conducted Spurious Emissions.....	16
2.6. Power spectral density (PSD)	20
2.7. Band Edge	23
2.8. Conducted Emission	27
2.9. Radiated Emission.....	31

ANNEX A **ACCREDITATION CERTIFICATE** 错误！未定义书签。

ANNEX B **PHOTOGRAPHS OF THE EUT.....** **错误！未定义书签。**

ANNEX C PHOTOGRAHPS OF THE TEST SETUP.....错误！未定义书签。

1. CONDUCTED MEASUREMENT SETUP..... 错误！未定义书签。

2. RADIATED MEASUREMENT SETUP.....错误！未定义书签。

2. RADIATED MEASUREMENT SETUP 首段：未定义布点。

Change History		
Issue	Date	Reason for change
1.0	2015-03-04	First edition

1. General Information

1.1. EUT Description

EUT Type: CATCH
Hardware Version: FUG300 Rev1.0
Software Version: 1.0.16
Frequency Range: The frequency range used is 2402MHz - 2480MHz (40 channels, at intervals of 2MHz);
Modulation Type: GFSK
Antenna Type: Ceramic antenna
Antenna Gain: -0.5dBi

Note 1: The EUT is CATCH, it contain Bluetooth 4.0 LTE Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth 4.0 LTE is $F(\text{MHz})=2402+2*n$ ($0 \leq n \leq 39$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 20(2442MHz) and 39 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 3: The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC Certification:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart C 2013	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.203	Antenna Requirement	PASS
2	15.247(b)	Peak Output Power	PASS
3	15.247(b)	Average power	PASS
4	15.247(a)	6dB Bandwidth & 99% Bandwidth	PASS
5	15.247(d)	Conducted Spurious Emission	PASS
6	15.247(e)	Power spectral density (PSD)	PASS
7	15.247(d)	Band Edge	PASS
8	15.207	Conducted Emission	PASS
9	15.209 15.247(d)	Radiated Emission	PASS
10	1.1307(b)	RF exposure evaluation	PASS

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2014.

These RF tests were performed according to the method of measurements prescribed in KDB558074 D01 V03r02 (04/09/2013).

1.3. Facilities and Accreditations

1.3.1. Facilities

CNAS-Lab Code: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, valid time is until October 28, 2017.

IC-Registration No.: 11185A-1

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on July. 15, 2013, valid time is until July. 15, 2016.

1.3.2. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 °C - 35 °C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa

2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

2.1.2. Antenna Information

Antenna Category: External antenna

An External antenna was soldered to the antenna port of EUT via an adaptor cable, can't be removed.

Antenna General Information:

No.	EUT Model	Ant. Cat.	Ant. Type	Gain(dBi)
1	FS8010-300	External	Ceramic antenna	-0.5

2.1.3. Result: comply

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Peak Output Power


2.2.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2. Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

A. Test Setup:

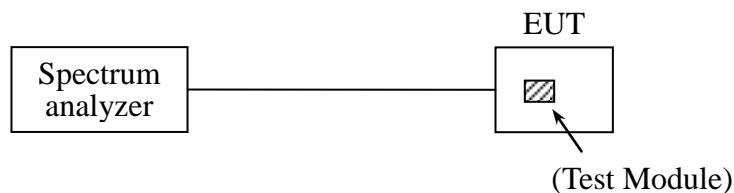

The EUT (Equipment under the test) which is powered by the Battery is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Date	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.07.07	2015.07.06


2.2.3. Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Refer to Plot	Limit (dBm)	Verdict
0	2402	-3.76	Plot A	30	PASS
20	2442	-5.68			PASS
39	2480	-4.79			PASS


B. Test Plots:

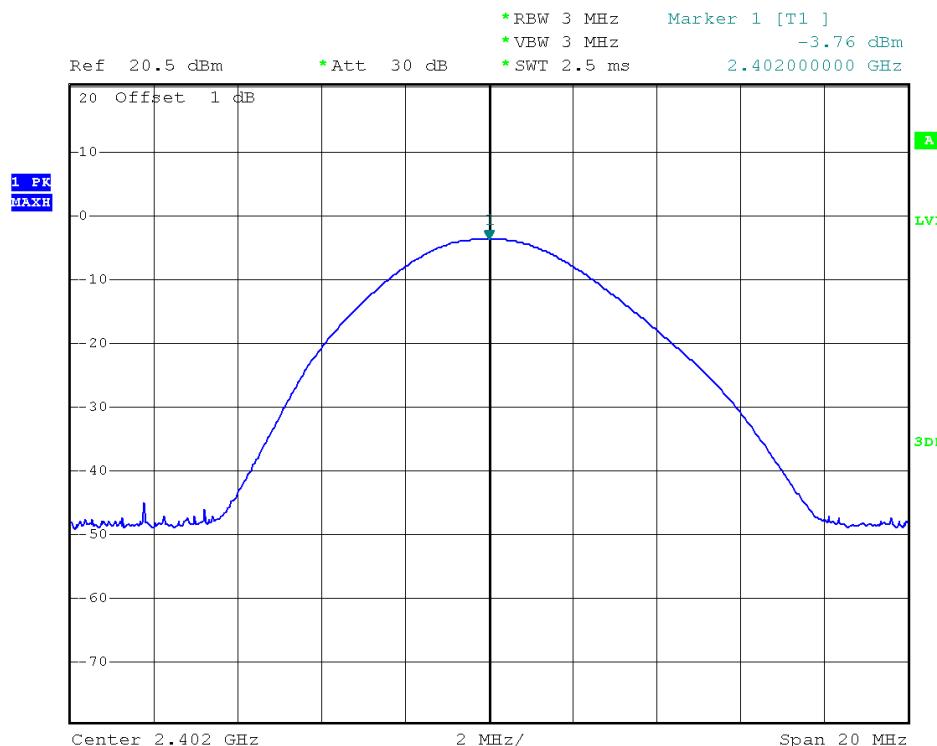

(Plot A: Channel 0: 2402MHz)

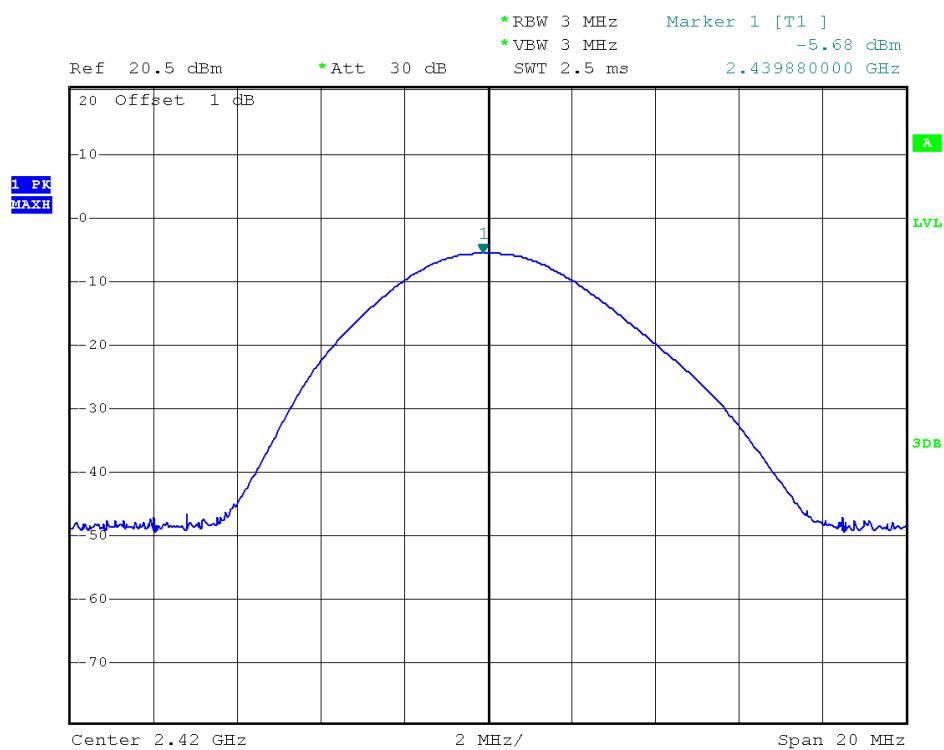

(Plot B: Channel 20: 2442MHz)

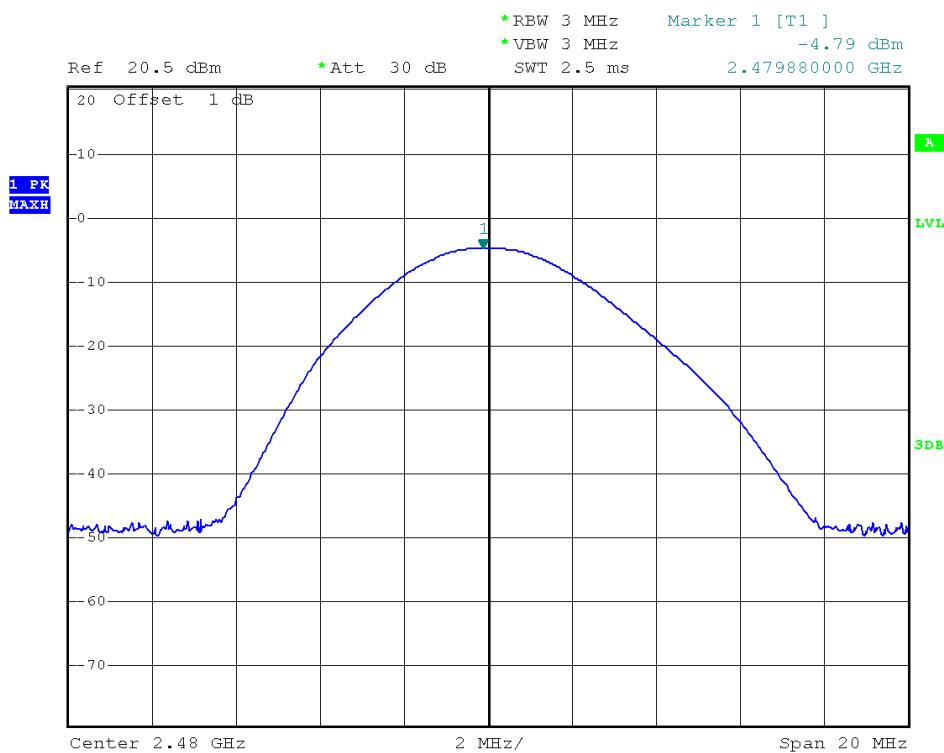

(Plot C: Channel 39: 2480MHz)

2.3. Average power


2.3.1. Requirement

None; for reporting purposes only.

2.3.2. Test Description

The transmitter output is connected to a power meter.

A. Test Setup:

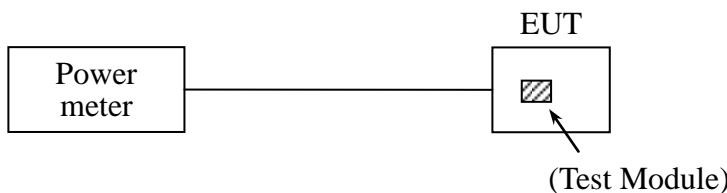

The EUT was directly connected to the power meter by 20dB Atten and antenna output port as show in the block diagram as TEST CONFIGURATION shows.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due Date
Power Meter	R&S	NRVS	1020.1809.02	2014.06.08	2015.06.07
Power Sensor	R&S	NRV-Z4	823.3618.03	2014.06.08	2015.06.07

2.3.3. Results

The cable assembly insertion loss of 1.5dB was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
0	2402	-4.15
20	2442	-5.87
39	2480	-5.17


2.4. 6dB & 99%Bandwidth

2.4.1. Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.4.2. Test Description

A. Test Set:

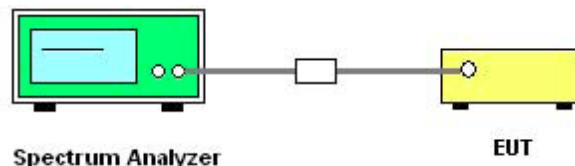

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

2.4.3. Test Result

Description	Manufacturer	Model	Serial No.	Cal.Date	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.07.07	2015.07.06


The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.

A. Test Verdict:


Channe 1	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Bandwidth (MHz)	Refer to Plot	Limits (kHz)	Result
0	2402	0.720	1.04	Plot A1/A2	≥ 500	PASS
20	2442	0.700	1.05	Plot B1/B2	≥ 500	PASS
39	2480	0.720	1.05	Plot C1/C2	≥ 500	PASS

B. Test Plots:


6 dB Bandwidth

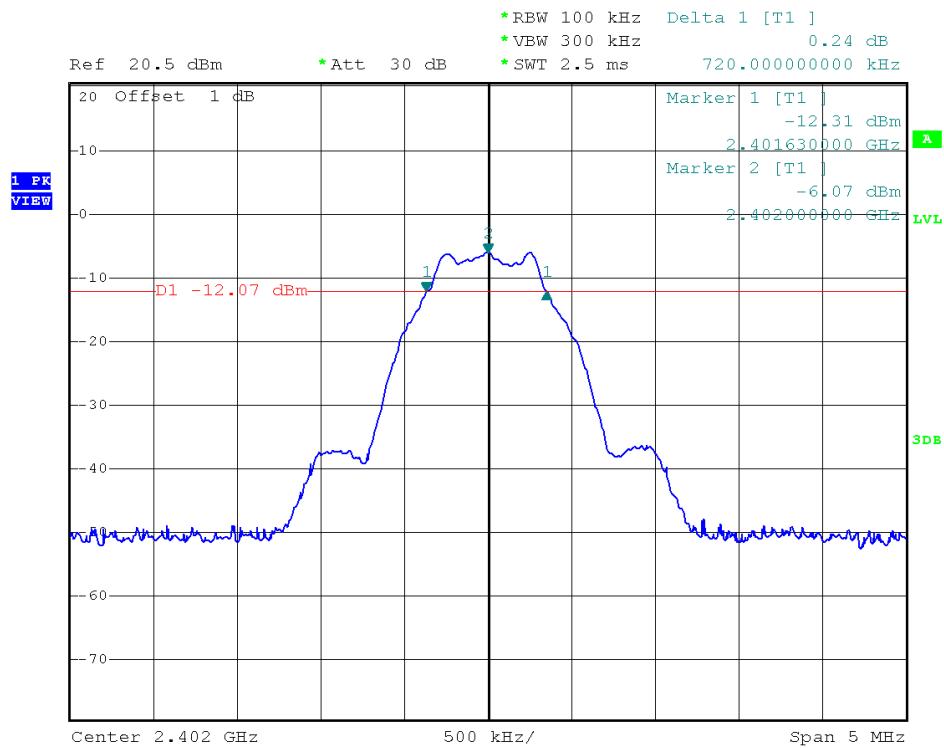

(Plot A1:Channel 0: 2402MHz)

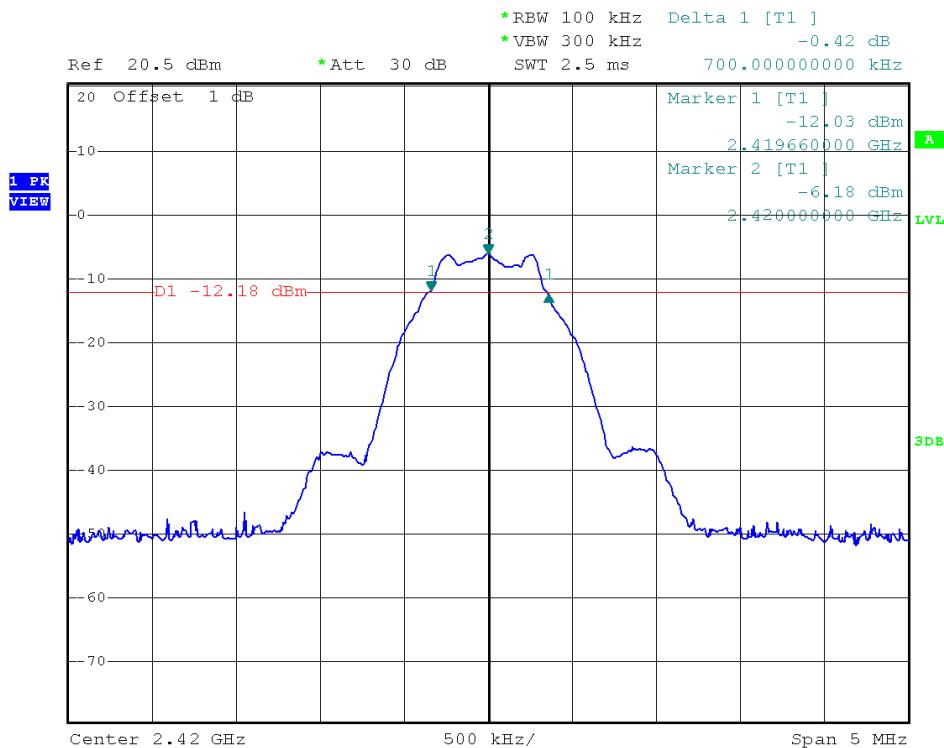


(Plot B1: Channel 20: 2442 MHz)

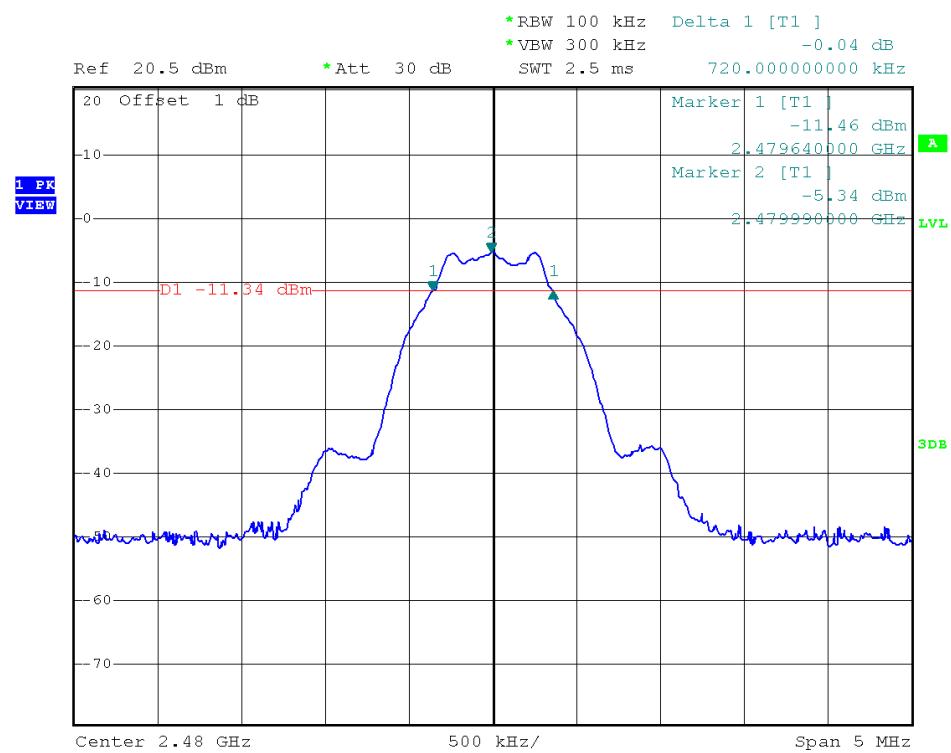


(Plot C1: Channel 39: 2480MHz)


99% Bandwidth

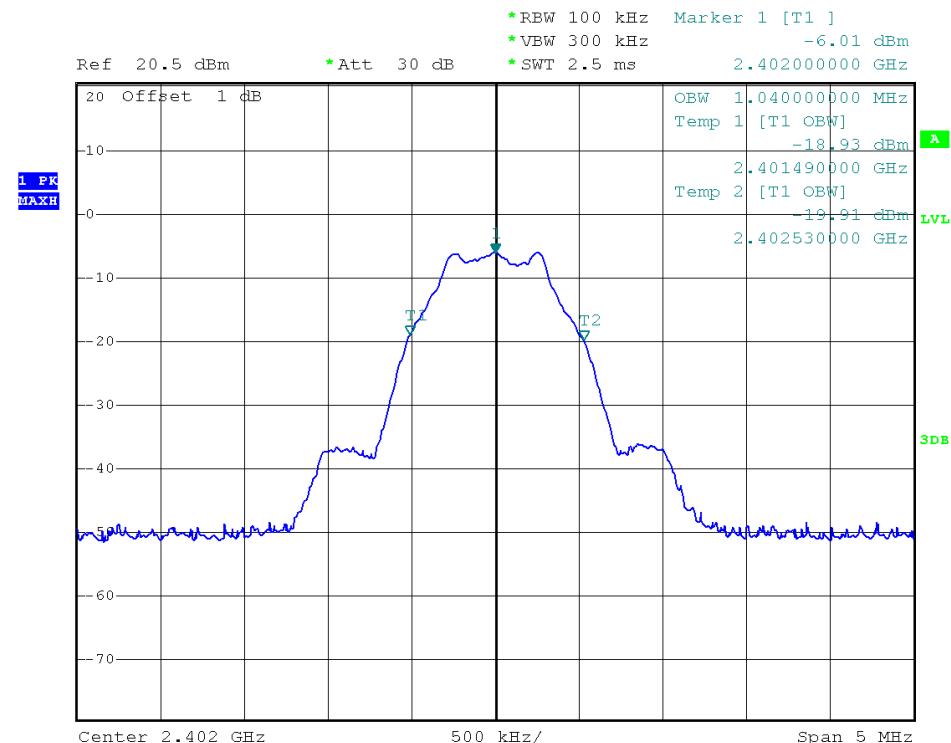

(Plot A2:Channel 0: 2402MHz)

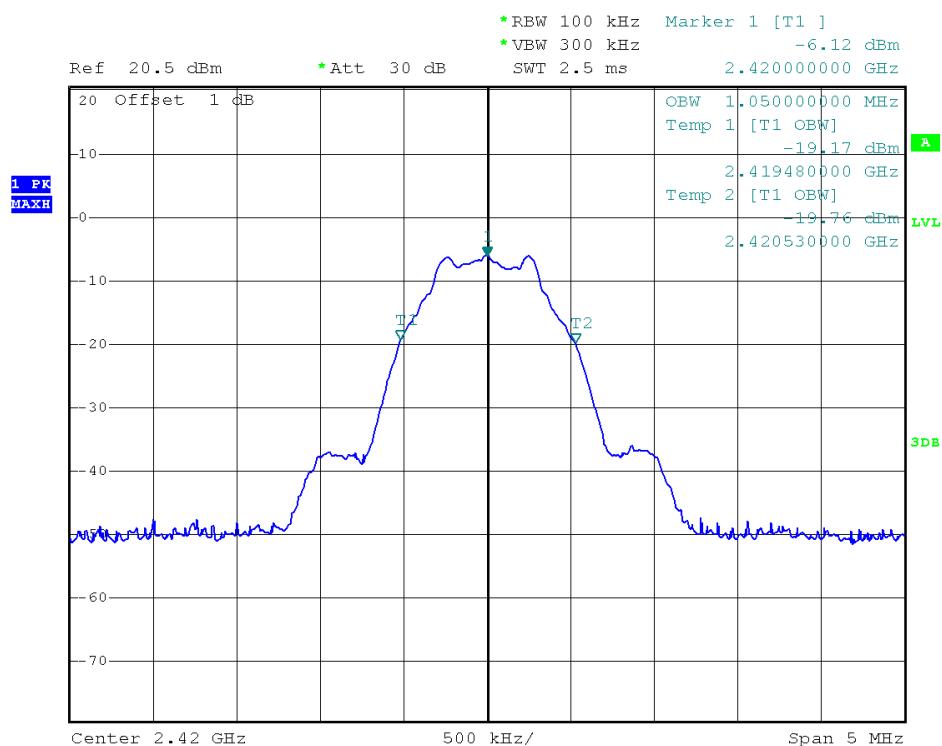

(Plot B2: Channel 20: 2442 MHz)

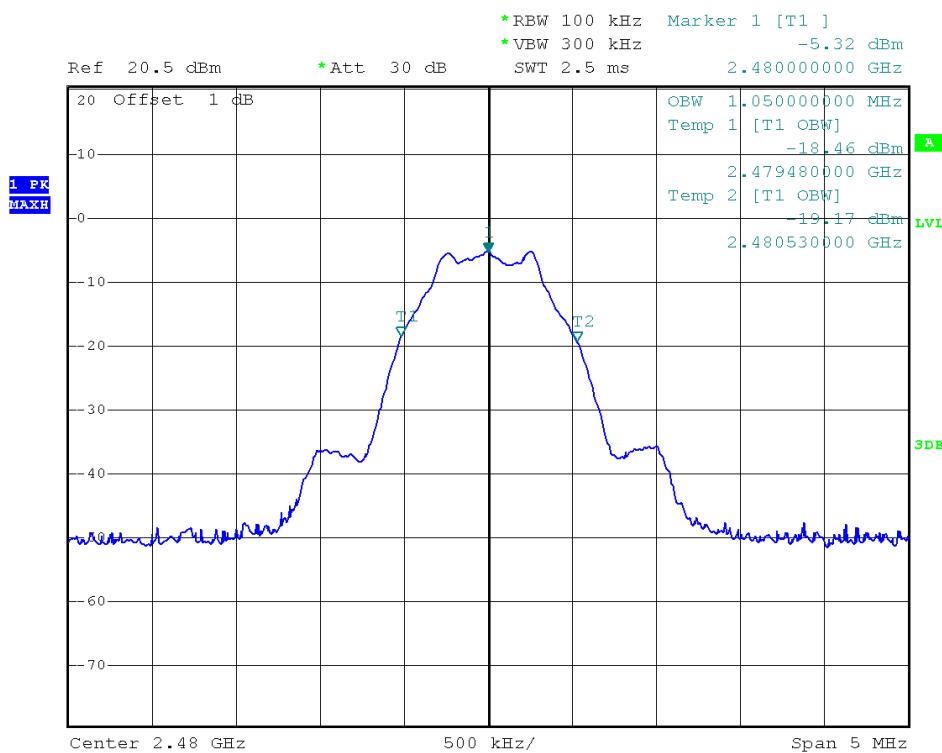

(Plot C2: Channel 39: 2480MHz)


2.5. Conducted Spurious Emissions

2.5.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.5.2. Test Description

A. Test Set:

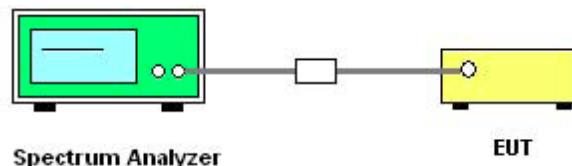

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Date	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.07.07	2015.07.06

2.5.3. Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-42.25	Plot A.1/A.2	-6.76	-26.76	PASS
20	2442	-42.77	Plot B.1/B.2	-7.32	-27.32	PASS
39	2480	-42.70	Plot C.1/C.2	-5.73	-25.73	PASS

B. Test Plots:


Note: The power of the Module transmitting frequency should be ignored.

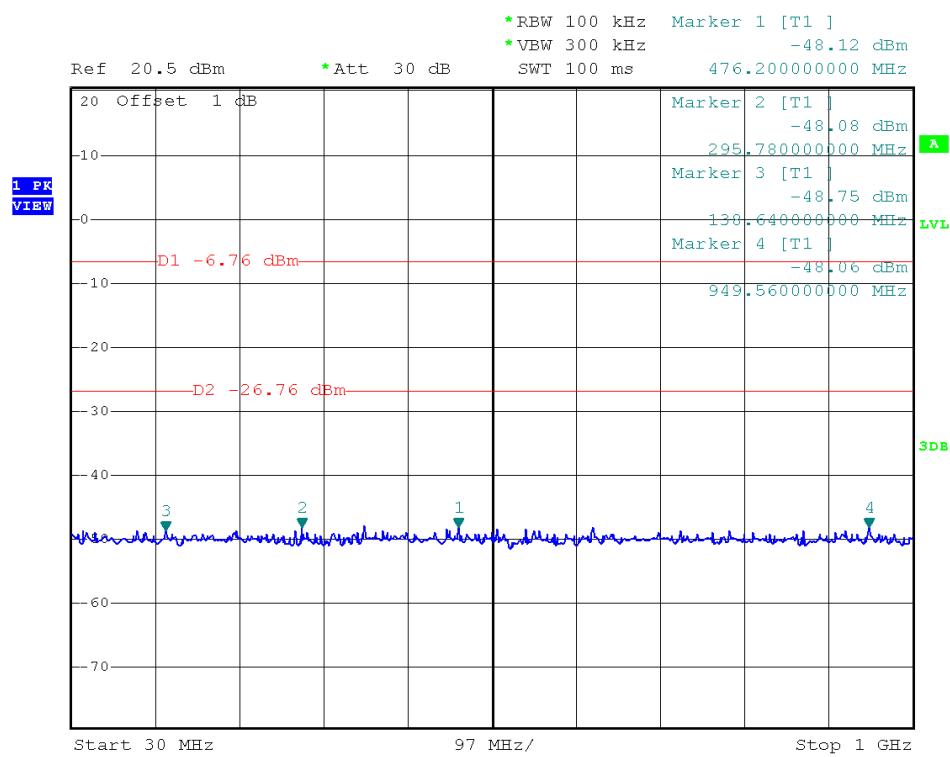


(Plot A.1: Channel = 0, 30MHz to 1GHz)

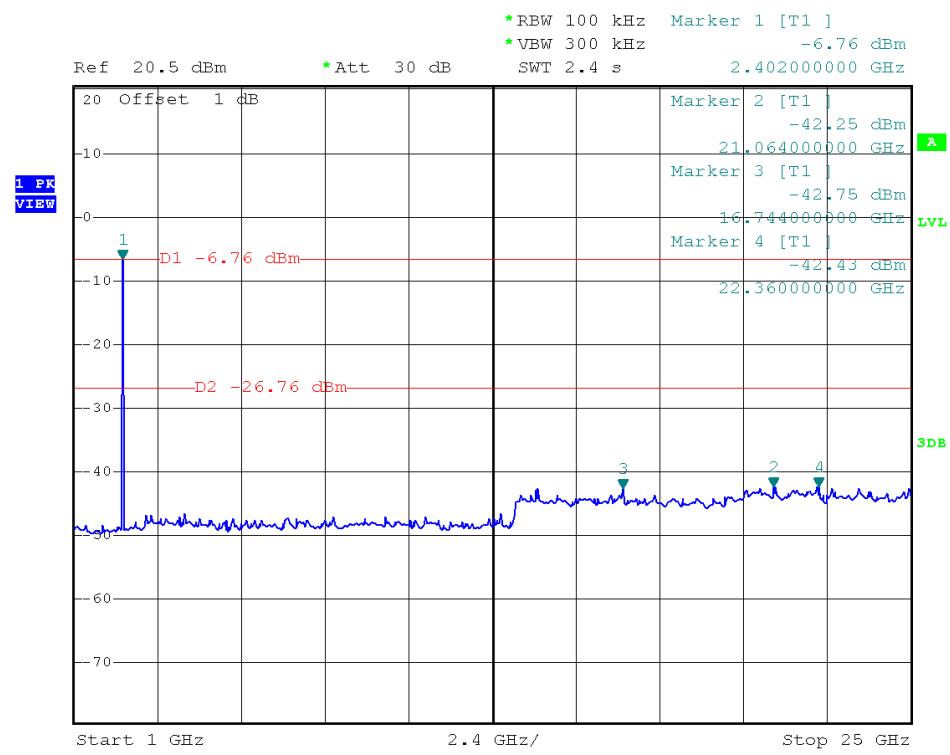


(Plot A.2: Channel = 0, 1GHz to 25GHz)

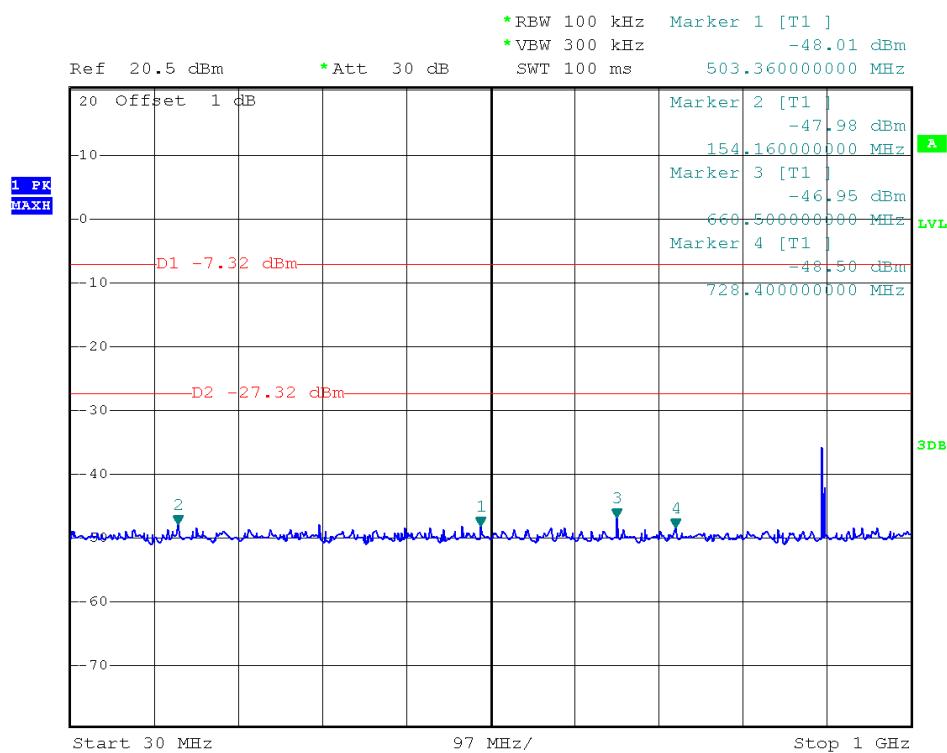


(Plot B.1: Channel = 20, 30MHz to 1GHz)

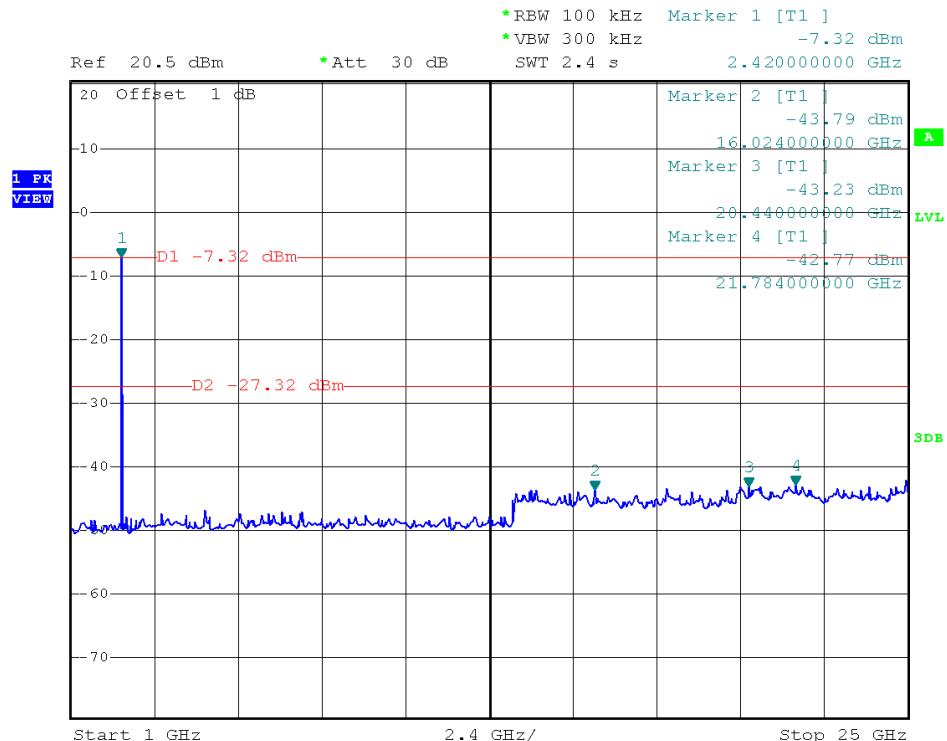

(Plot B.2: Channel = 20, 1GHz to 25GHz)

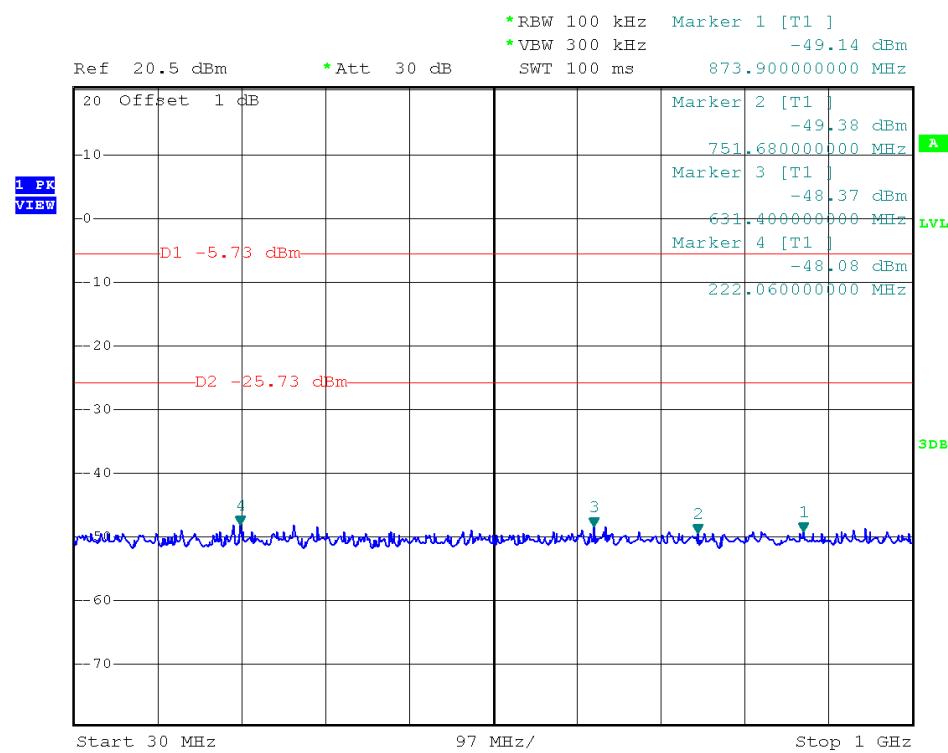

(Plot C.1: Channel = 39, 30MHz to 25GHz)

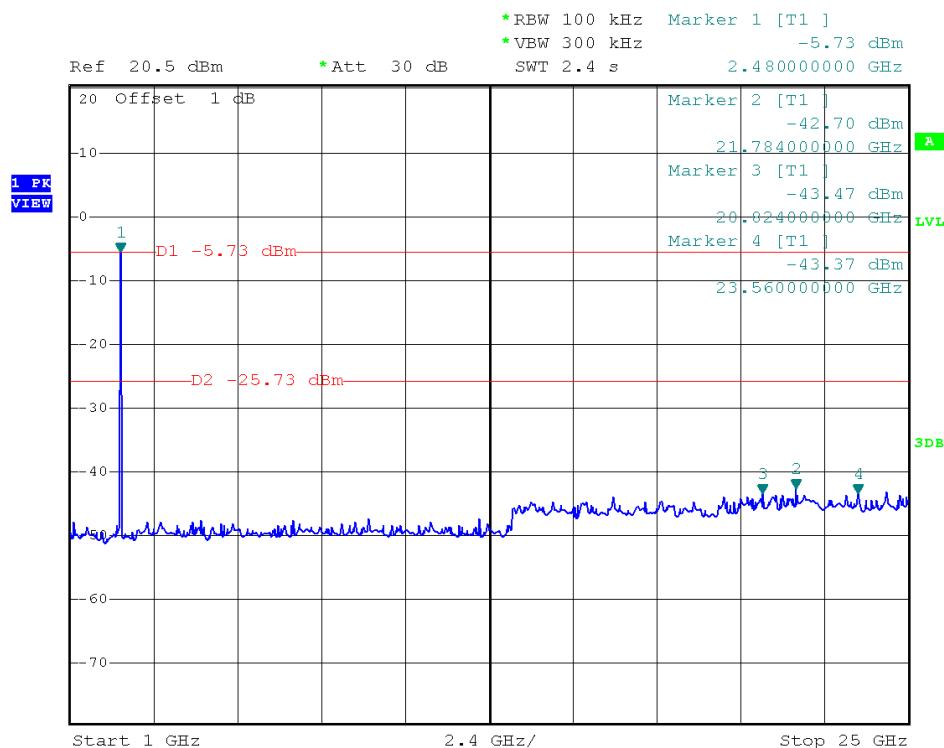

(Plot C.2: Channel = 39, 30MHz to 25GHz)


2.6. Power spectral density (PSD)

2.6.1. Requirement

According to FCC section 15.247(e), the same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

2.6.2. Test Description

A. Test Set:

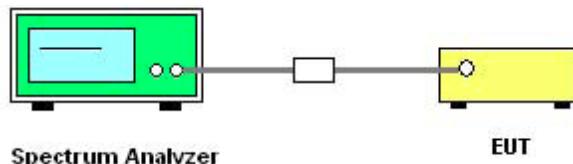

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Date	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.07.07	2015.07.06


2.6.3. Test Result

The lowest, middle and highest channels are tested.


Bandwidth correction: $10\log(3\text{kHz}/100\text{kHz}) = -15.2\text{dB}$

A. Test Verdict:


Spectral power density						
Channel	Frequency (MHz)	Measured PSD (dBm/100kHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
0	2402	-5.74	-20.94	Plot A	8	PASS
20	2442	-6.06	-21.26	Plot B	8	PASS
39	2480	-4.82	-20.02	Plot C	8	PASS
Measurement uncertainty: $\pm 1.3\text{dB}$						

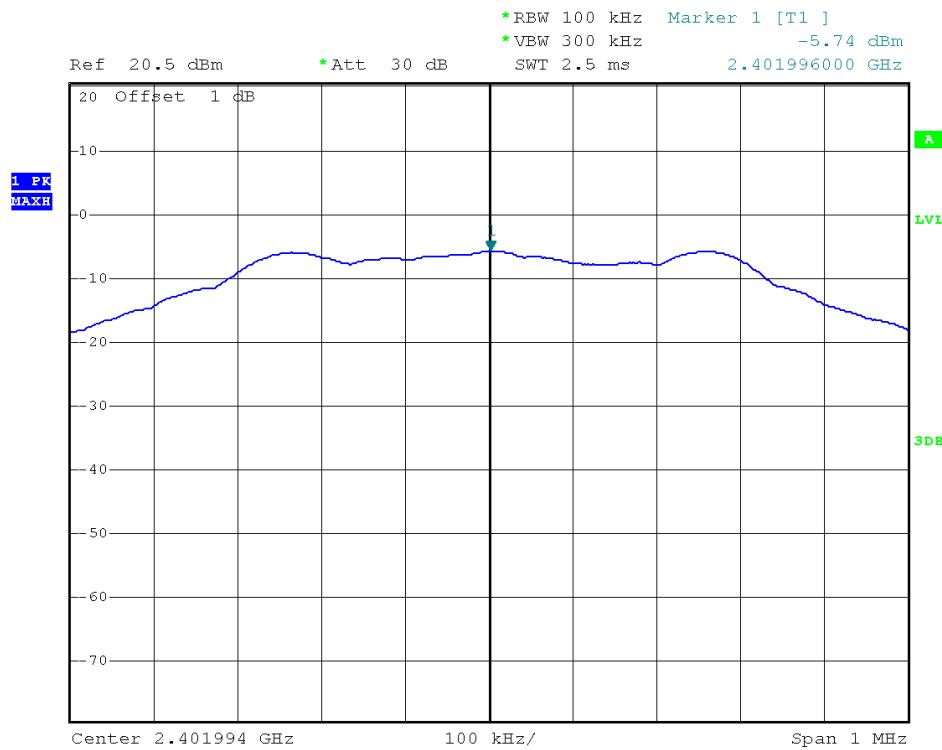B. Test Plots:


(Plot A: Channel = 0)

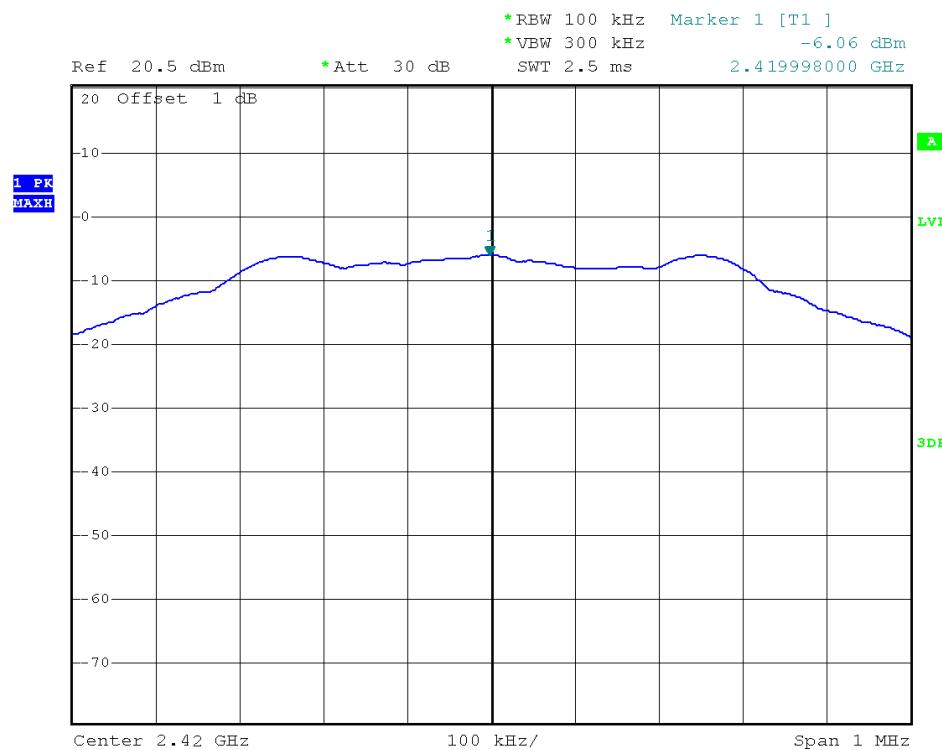

(Plot B: Channel = 20)

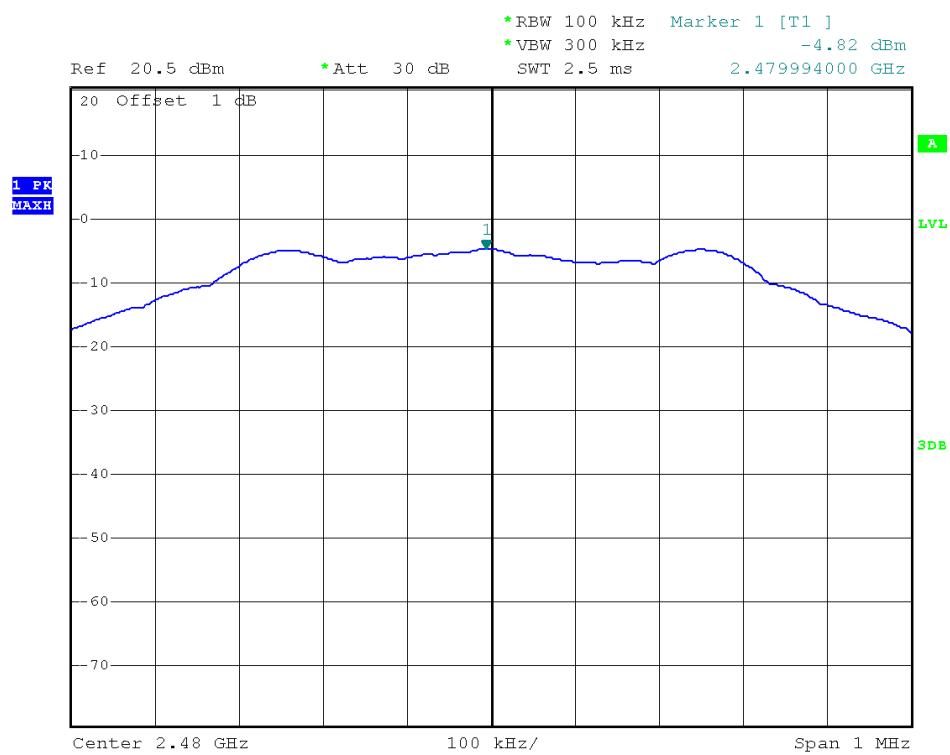

(Plot C: Channel = 39)


2.7. Band Edge

2.7.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.7.2. Test Description

A. Test Setup

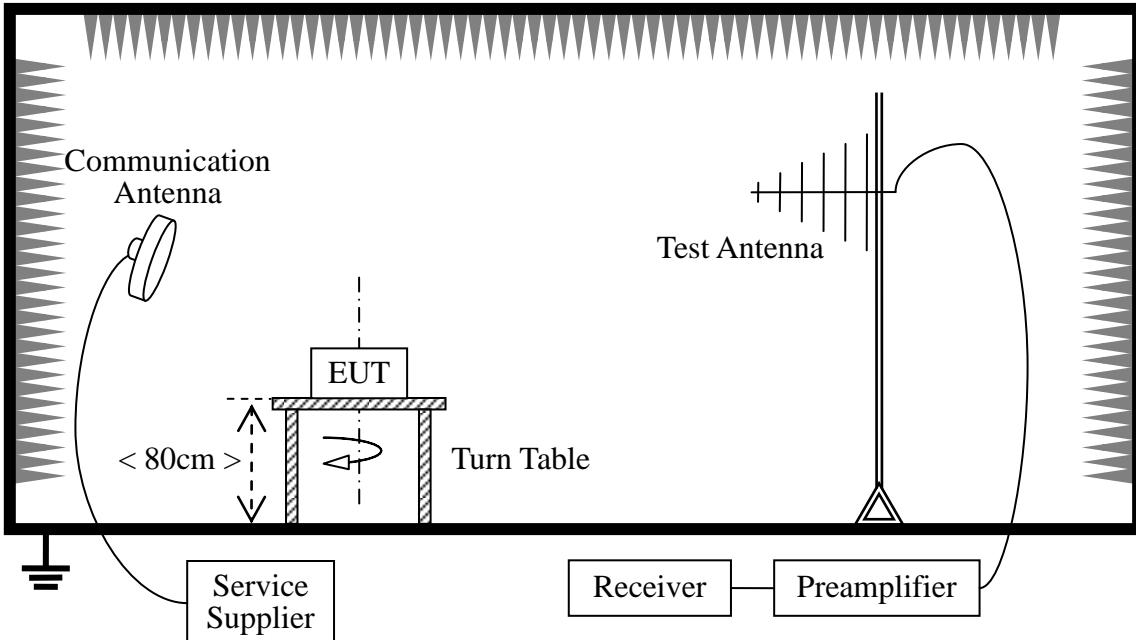

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due Date
Receiver	R&S	FSP40	1164.4391.40	2014.07.07	2015.07.06
Full-Anechoic Chamber	Albatross	12.8m*6.8m *6.4m	A0412372	2015.01.05	2016.01.04
Double ridge horn antenna	R&S	HF906	100150	2014.06.11	2015.06.10
Ultra-wideband antenna	R&S	HL562	A0304224	2014.06.11	2015.06.10
Amplifier 1G~18GHz	R&S	MITEQ AFS42-0010 1800	25-S-42	2014.06.11	2015.06.10
Cable	SUNHNER	SUCOFLEX 100	/	2014.06.05	2015.06.04
Cable	SUNHNER	SUCOFLEX 104	/	2014.06.05	2015.06.04

2.7.3. Test Result
Radiated band edge Measurement:

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver	AT (dB)	AFactor (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
			Reading UR (dBuV)					
PK/ AV								
0	2393.486	PK	59.65	-31.7	28.3	56.25	74	Pass
0	2371.217	AV	49.19	-31.7	28.3	45.79	54	Pass
39	2485.260	PK	59.68	-29.45	29.2	59.43	74	Pass
39	2484.952	AV	48.40	-29.45	29.2	48.15	54	Pass

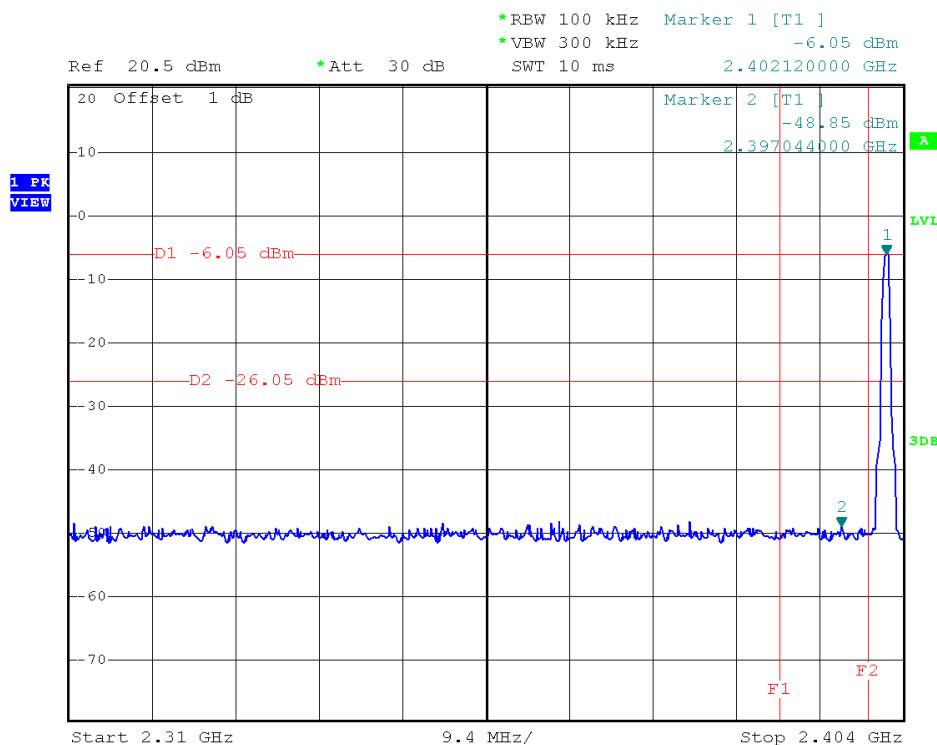B. Test Plots:


(Plot A1: Channel = 0 PEAK)

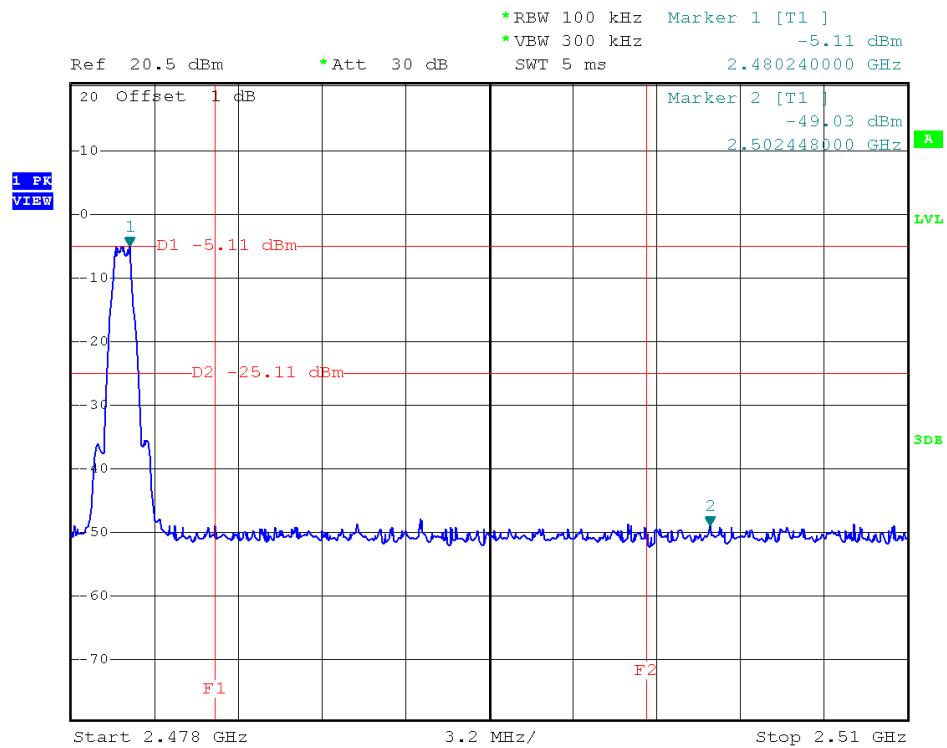

(Plot B1: Channel = 39 PEAK)

2.8. Conducted Emission

2.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.8.2. Test Description

A. Test Setup:

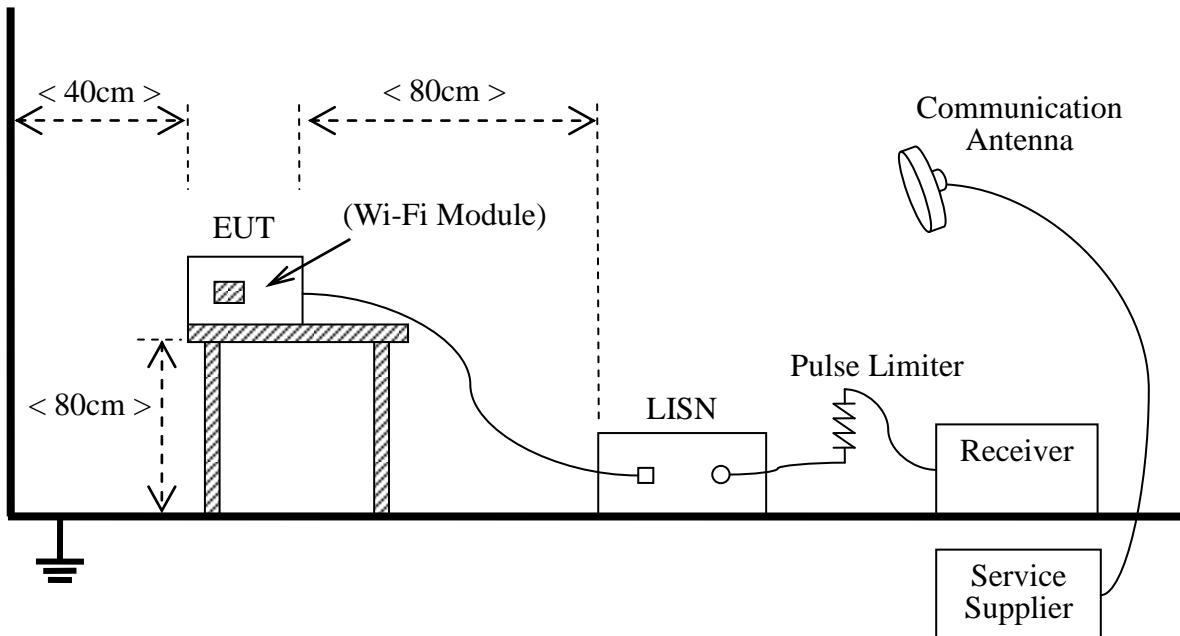

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

B. Equipments List:


Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due Date
Test Receiver	R&S	ESCS30	A0304260	2014.06.11	2015.06.10
LISN	R&S	ESH2-Z5	A0304221	2014.06.11	2015.06.10
Service Supplier	R&S	CMU200	A0304252	2014.06.11	2015.06.10
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	A0304291	(n.a.)	(n.a.)
Cable	MATCHING PAD	W7	/	2014.06.05	2015.06.04

2.8.3. Test Result

A Test setup:

The EUT configuration of the emission tests is EUT + PC.


B Test Plots:

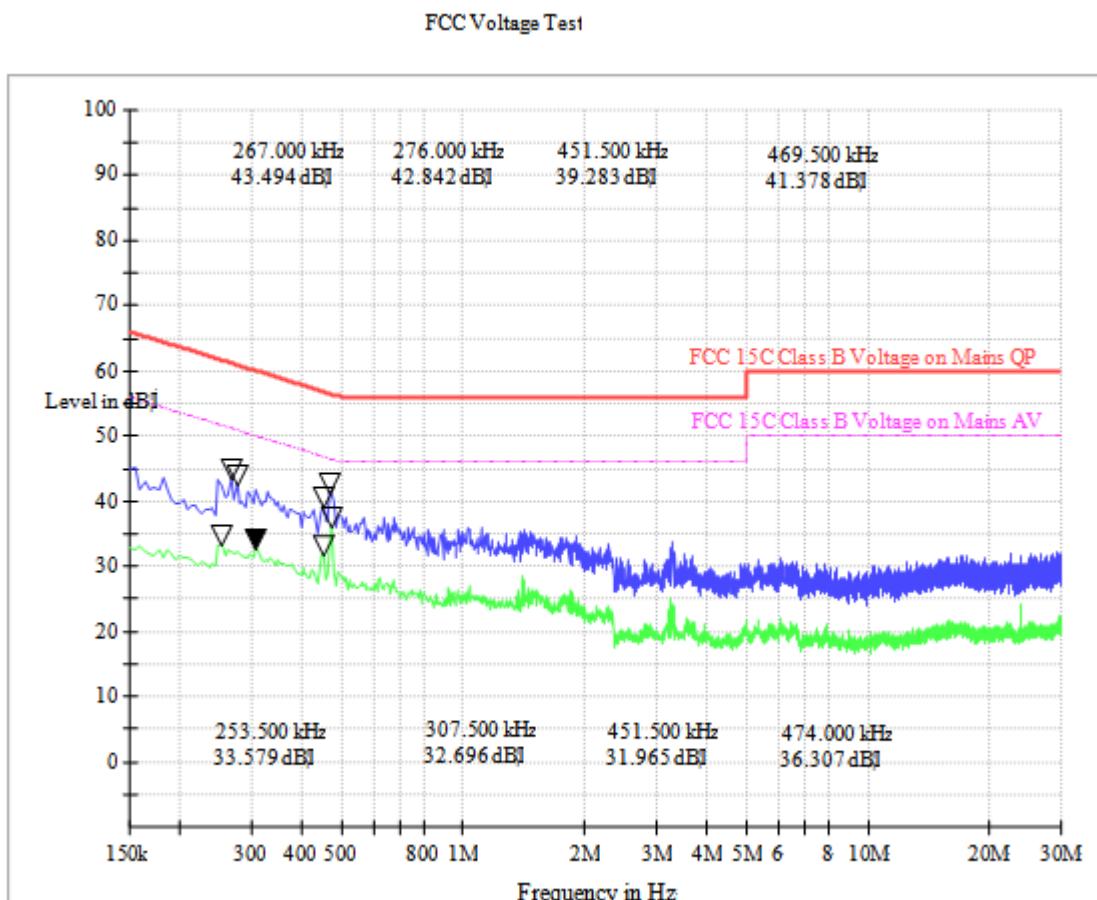

(Plot A: L Phase)

Conducted Disturbance at Mains Terminals					
L Test Data					
QP			AV		
Frequency (MHz)	Limits (dB μ V)	Measurement Value (dB μ V)	Frequency (MHz)	Limits (dB μ V)	Measurement Value (dB μ V)
0.267	61.2	43.49	0.254	51.6	33.58
0.276	60.9	42.84	0.308	50.0	32.70
0.452	56.8	39.28	0.452	46.8	31.97
0.470	56.5	41.38	0.474	46.4	36.31

FCC Voltage Test

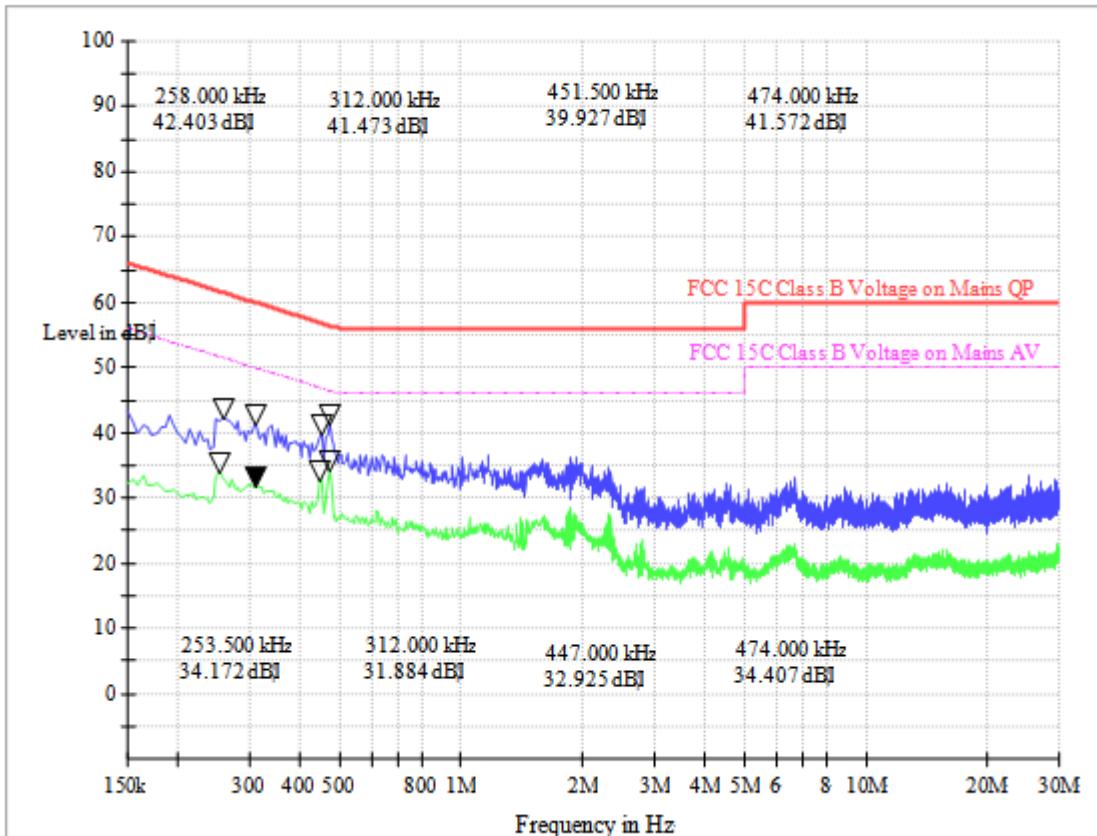

(Plot B: N Phase)

Conducted Disturbance at Mains Terminals					
N Test Data					
QP			AV		
Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)	Frequency (MHz)	Limits (dBμV)	Measurement Value (dBμV)
0.258	61.5	42.40	0.254	51.6	34.17
0.312	59.9	41.47	0.312	49.9	31.88
0.452	56.8	39.93	0.447	46.9	32.93
0.474	56.4	41.57	0.474	46.4	34.41

Test Result: PASS

2.9. Radiated Emission

2.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dB_{AV}/m@3m (AV) and 74dB_{PK}/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.9.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

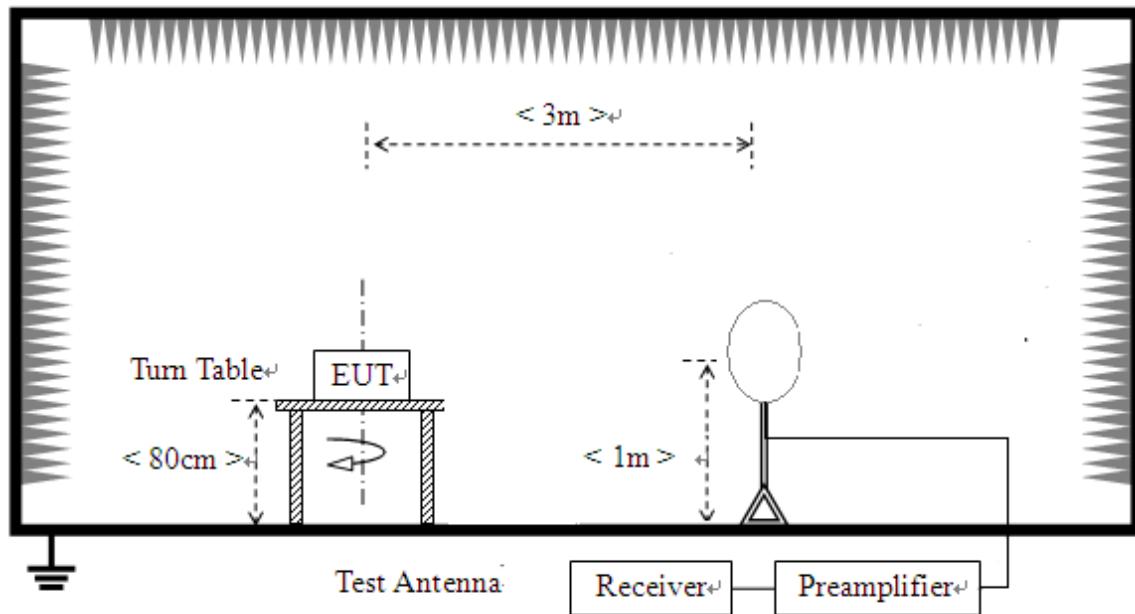

2) For radiated emissions from 30MHz to1GHz

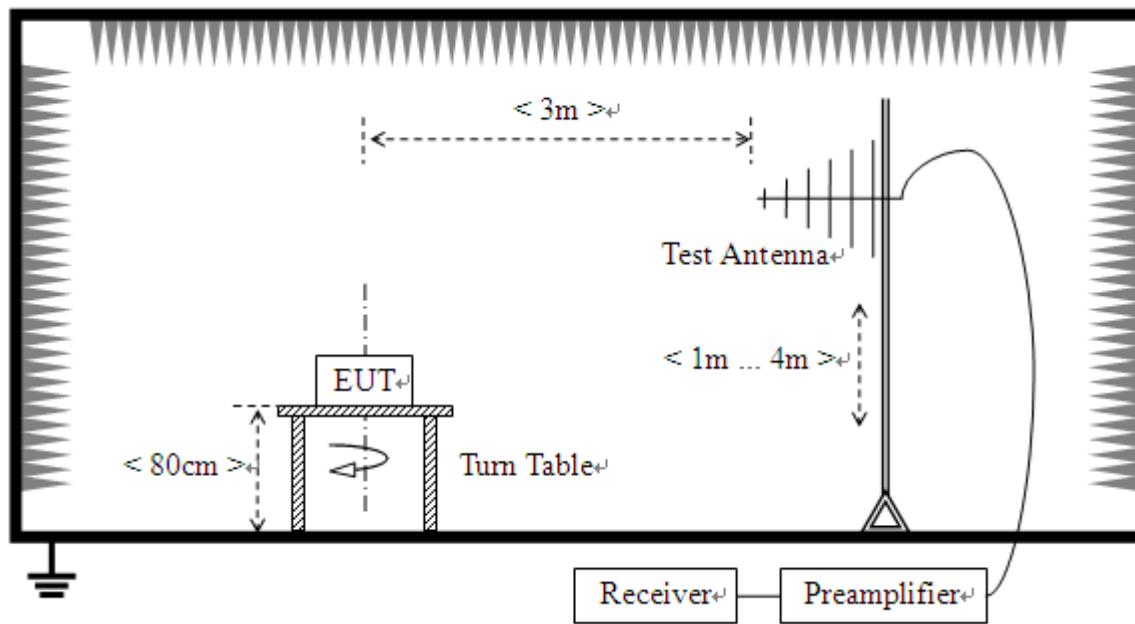

3) For radiated emissions above 1GHz

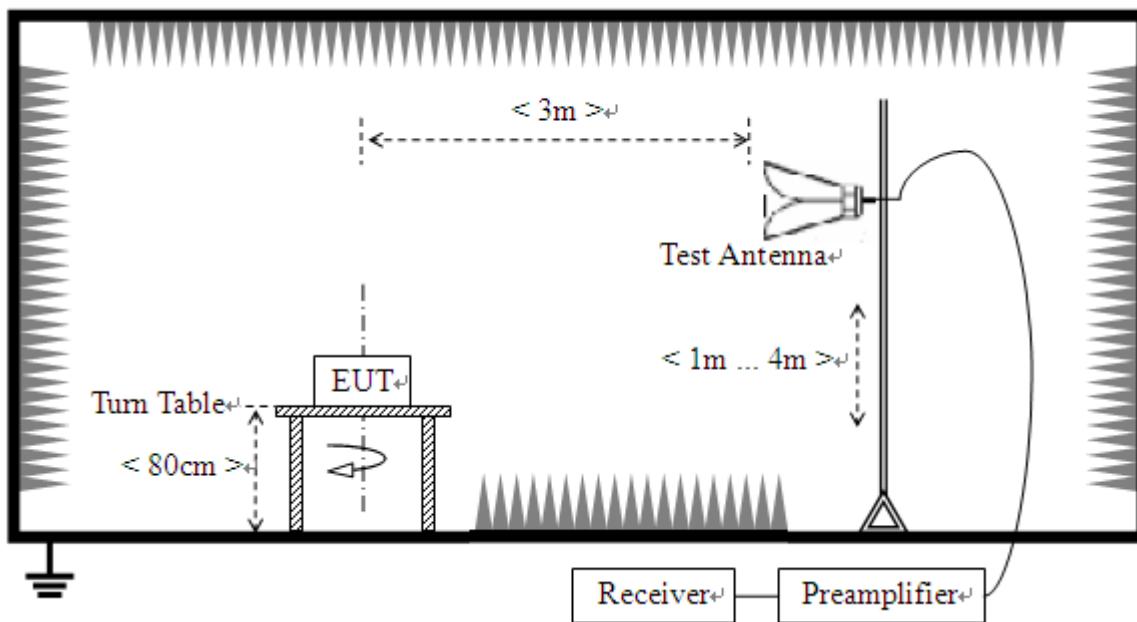

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT of the EUT is powered by the Battery charged with the AC Adapter which is powered by 120V, 60Hz AC mains supply. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the EUT is activated and controlled by the Wireless Router via a Common Antenna, and is set to operate under hopping-on test mode.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 2GHz) and Horn Test Antenna (above 2GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due Date
Receiver	R&S	ESIB26	A0304218	2014.06.11	2015.06.10
Full-Anechoic Chamber	Albatross	12.8m*6.8m*6.4m	A0412372	2015.01.05	2016.01.04
Test Antenna - Bi-Log	Schwarz beck	VULB 9163	9163-274	2014.06.11	2015.06.10
Test Antenna - Horn	R&S	BBHA 9120D	9120C-963	2014.06.11	2015.06.10
Test Antenna - Horn	R&S	HF960	100150	2014.06.11	2015.06.10
Test Antenna – Horn (18-25GHz)	ETS	UG-596A/U	A0902607	2014.06.11	2015.06.10
Test Antenna -Loop	Schwarz beck	HFH2-Z2	100047	2014.06.11	2015.06.10
Amplifier 1G~18GHz	R&S	MITEQ AFS42-001018 00	25-S-42	2014.06.11	2015.06.10
Amplifier 18G~40GHz	R&S	JS42-18002600 -28-5A	12111.0980 .00	2014.06.11	2015.06.10
amplifier 20M~3GHz	R&S	PAP-0203H	22018	2014.06.11	2015.06.10
Cable	SUNHNER	SUCOFLEX 100	/	2014.06.05	2015.06.04
Cable	SUNHNER	SUCOFLEX 104	/	2014.06.05	2015.06.04

2.9.3. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Test Plots for the Whole Measurement Frequency Range:


For 9KHz to 30MHz

The test has been performed, and the Radiated Emission level is too low to the limit.

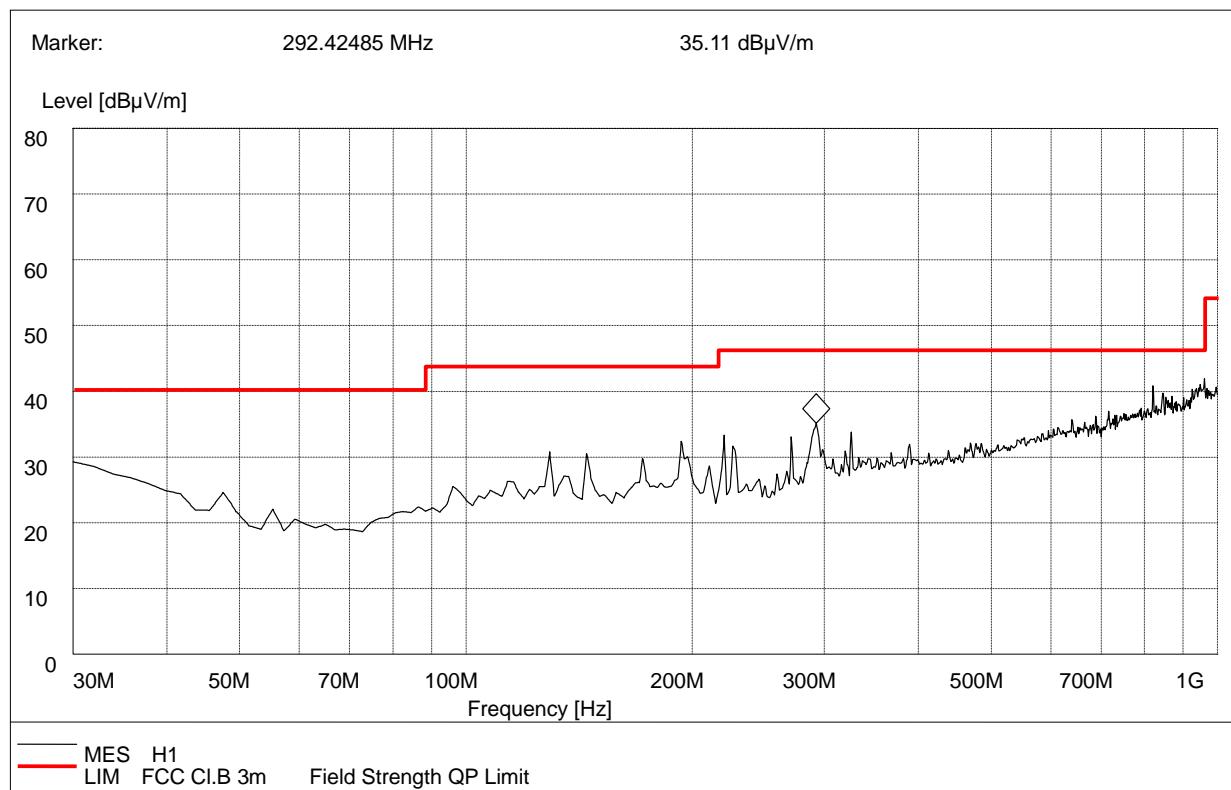For 30MHz to 1000 MHz

(Plot A: 30MHz to 1GHz, Antenna Horizontal)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Antenna	Verdict
275.62	33.46	120.000	100.0	46.0	Horizontal	Pass
292.42	35.11	120.000	100.0	46.0	Horizontal	Pass
323.57	33.97	120.000	100.0	46.0	Horizontal	Pass

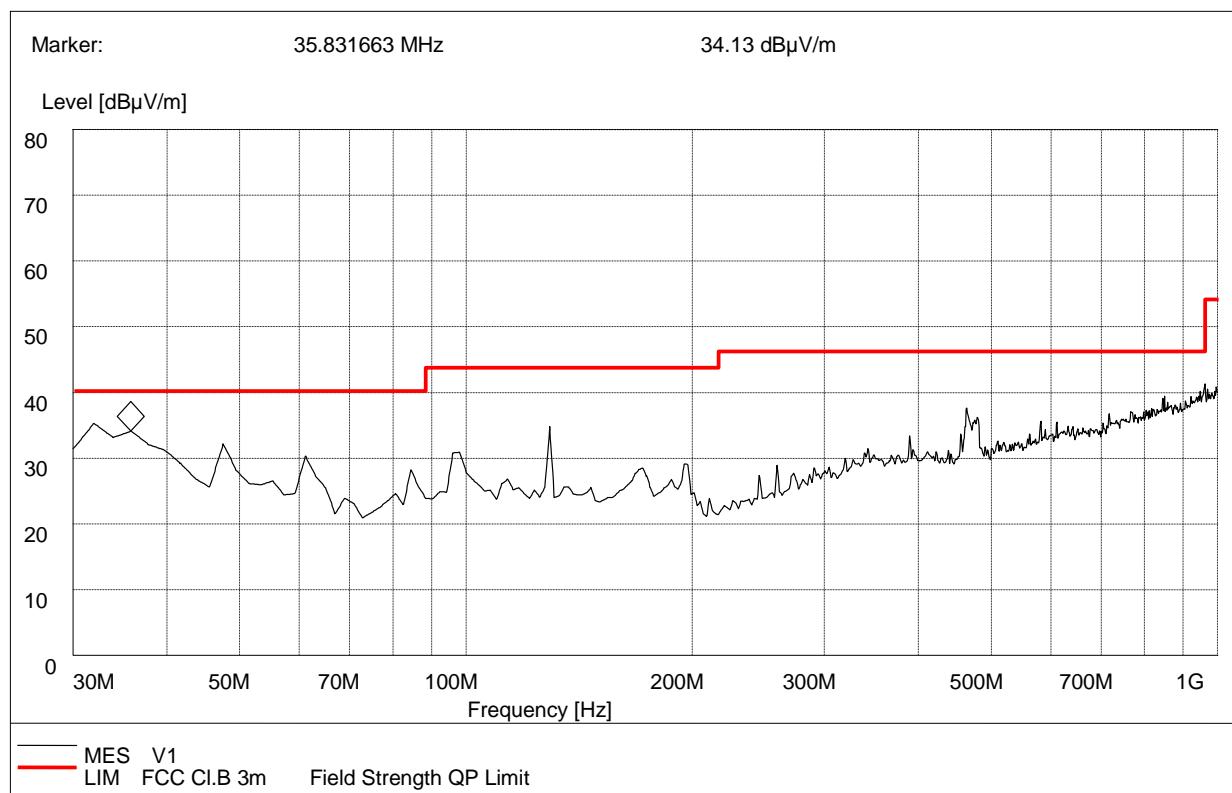

(Plot B: 30MHz to 1GHz, Antenna Vertical)

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Antenna	Verdict
35.83	34.13	120.000	100.0	40.00	Vertical	Pass
137.59	35.47	120.000	100.0	43.50	Vertical	Pass
468.67	377.64	120.000	100.0	46.00	Vertical	Pass

For 1GHz to 25GHz
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (0CH_2402MHz)

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2402.00	104.28	PK	/	/	1.00 H	112	107.68	28.3	4.90	-36.6
1	*2402.00	97.48	AV	/	/	1.00 H	112	100.88	28.3	4.90	-36.6
2	4804.00	47.99	PK	74.00	26.01	1.00 H	254	44.79	32.7	7.00	-36.5
2	4804.00	41.58	AV	54.00	12.42	1.00 H	254	38.38	32.7	7.00	-36.5
3	7206.00	49.55	PK	74.00	24.45	1.00 H	104	40.15	35.8	8.90	-35.3
3	7206.00	43.99	AV	54.00	10.01	1.00 H	104	34.59	35.8	8.90	-35.3
4	9608.00	48.52	PK	74.00	25.48	1.00 H	10	35.92	37.2	10.20	-34.8
4	9608.00	44.97	AV	54.00	9.03	1.00 H	10	32.37	37.2	10.20	-34.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (0CH_2402MHz)

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2402.00	103.86	PK	/	/	1.00 V	84	107.26	28.3	4.90	-36.6
1	*2402.00	95.67	AV	/	/	1.00 V	84	99.07	28.3	4.90	-36.6
2	4804.00	48.68	PK	74.00	25.32	1.00 V	109	45.48	32.7	7.00	-36.5
2	4804.00	45.24	AV	54.00	8.76	1.00 V	109	42.04	32.7	7.00	-36.5
3	7206.00	49.66	PK	74.00	24.34	1.00 V	22	40.26	35.8	8.90	-35.3
3	7206.00	42.95	AV	54.00	11.05	1.00 V	22	33.55	35.8	8.90	-35.3
4	9608.00	51.12	PK	74.00	22.88	1.00 V	323	38.52	37.2	10.20	-34.8
4	9608.00	44.92	AV	54.00	9.08	1.00 V	323	32.32	37.2	10.20	-34.8

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (20CH_2442MHz)

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2442.00	104.50	PK	/	/	1.00 H	15	107.7	28.3	5.10	-36.6
1	*2442.00	98.16	AV	/	/	1.00 H	15	101.36	28.3	5.10	-36.6
2	4884.00	46.38	PK	74.00	27.62	1.00 H	28	42.98	32.3	7.60	-36.5
2	4884.00	42.31	AV	54.00	11.69	1.00 H	28	38.91	32.3	7.60	-36.5
3	7326.00	51.41	PK	74.00	22.59	1.00 H	39	42.01	36.1	8.60	-35.3
3	7326.00	45.53	AV	54.00	8.47	1.00 H	39	36.13	36.1	8.60	-35.3
4	9768.00	49.90	PK	74.00	24.10	1.00 H	205	37.3	37.2	10.20	-34.8
4	9768.00	44.76	AV	54.00	9.24	1.00 H	205	32.16	37.2	10.20	-34.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (20CH_2442MHz)

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2442.00	104.41	PK	/	/	1.00 V	87	107.61	28.3	5.10	-36.6
1	*2442.00	96.50	AV	/	/	1.00 V	87	99.7	28.3	5.10	-36.6
2	4884.00	47.48	PK	74.00	26.52	1.00 V	112	44.08	32.3	7.60	-36.5
2	4884.00	41.46	AV	54.00	12.54	1.00 V	112	38.06	32.3	7.60	-36.5
3	7326.00	53.98	PK	74.00	20.02	1.00 V	91	44.58	36.1	8.60	-35.3
3	7326.00	46.35	AV	54.00	7.65	1.00 V	91	36.95	36.1	8.60	-35.3
4	9768.00	49.13	PK	74.00	24.87	1.00 V	336	36.53	37.2	10.20	-34.8
4	9768.00	44.32	AV	54.00	9.68	1.00 V	336	31.72	37.2	10.20	-34.8

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (39CH_2480MHz)

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2480.00	105.20	PK	/	/	1.00 H	15	108.5	28.6	4.70	-36.6
1	*2480.00	97.83	AV	/	/	1.00 H	15	101.13	28.6	4.70	-36.6
2	4960.00	50.53	PK	74.00	23.47	1.00 H	99	46.73	33	7.00	-36.2
2	4960.00	43.43	AV	54.00	10.57	1.00 H	99	39.63	33	7.00	-36.2
3	7440.00	49.55	PK	74.00	24.45	1.00 H	215	40.15	36.2	8.50	-35.3
3	7440.00	42.96	AV	54.00	11.04	1.00 H	215	33.56	36.2	8.50	-35.3
4	9920.00	50.38	PK	74.00	23.62	1.00 H	9	37.78	37.2	10.20	-34.8
4	9920.00	41.30	AV	54.00	12.70	1.00 H	9	28.7	37.2	10.20	-34.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (39CH_2480MHz)

No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2480.00	104.76	PK	/	/	1.00 V	29	108.06	28.6	4.70	-36.6
1	*2480.00	97.52	AV	/	/	1.00 V	29	100.82	28.6	4.70	-36.6
2	4960.00	49.78	PK	74.00	24.22	1.00 V	114	45.98	33	7.00	-36.2
2	4960.00	48.02	AV	54.00	5.98	1.00 V	114	44.22	33	7.00	-36.2
3	7440.00	49.76	PK	74.00	24.24	1.00 V	87	40.36	36.2	8.50	-35.3
3	7440.00	44.08	AV	54.00	9.92	1.00 V	87	34.68	36.2	8.50	-35.3
4	9920.00	49.63	PK	74.00	24.37	1.00 V	168	37.03	37.2	10.20	-34.8
4	9920.00	44.87	AV	54.00	9.13	1.00 V	168	32.27	37.2	10.20	-34.8

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Antenna Factor (dB/m) + Cable Factor (dB) + Pre-amplifier Factor
2. The other emission levels were very low against the limit.
3. The other emission levels were very low against the limit.
4. Margin value = Limit value - Emission level.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency

2.10. RF exposure evaluation

According to § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy lever in excess of Commission's guideline.

According to 447498 D01 General RF Exposure Guidance v05, exclusion threshold values at selected frequencies and distances table as following.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	
MHz	30	35	40	45	50	mm
150	232	271	310	349	387	SAR Test Exclusion Threshold (mW)
300	164	192	219	246	274	
450	134	157	179	201	224	
835	98	115	131	148	164	
900	95	111	126	142	158	
1500	73	86	98	110	122	
1900	65	76	87	98	109	
2450	57	67	77	86	96	
3600	47	55	63	71	79	
5200	39	46	53	59	66	
5400	39	45	52	58	65	
5800	37	44	50	56	62	

Routine SAR evaluation refers to the specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evolution is not required, the portable transmitters with output power greater than the applicable low threshold SAR evolution to qualify for TCB approval.

Result:

This is portable device and the Max conducted peak output power is -3.76dBm, the maximum gain of antenna is 0dBi, the maximum output power is -3.76dBm (3.75mW), which is lower than the exclusion threshold 10mW, at frequency 2450MHz, and distance is 5mm.

The SAR measurement is not required.

** END OF REPORT **