




BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,385.500	52.77	74.00	21.23	6.84	V	0.9	2
1	2,390.000	53.05	74.00	20.95	6.84	V	5.4	2
1	2,415.500	99.70			6.96	V	0.9	2

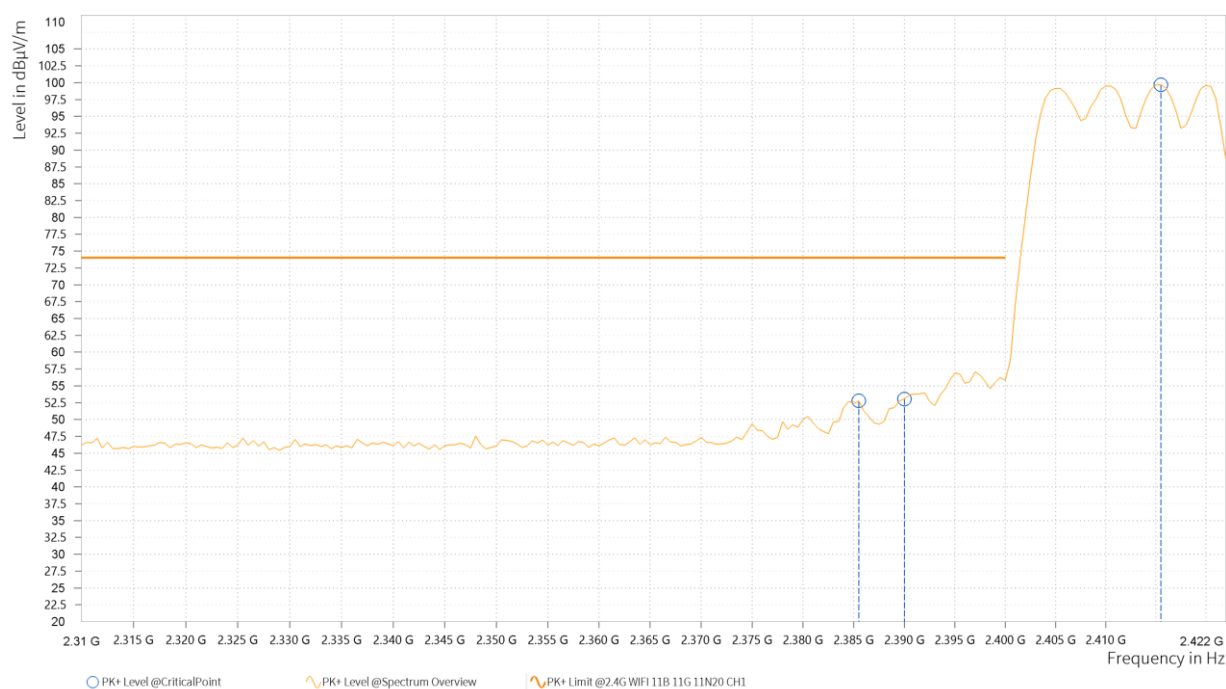




**BUREAU
VERITAS**

Test Report No.: PSU-QSU2306260109RF09

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
1	2,389.000	39.65	54.00	14.35	6.84	V	107	1
1	2,390.000	39.49	54.00	14.51	6.84	V	107	1
1	2,405.500	89.54			6.89	V	107	1

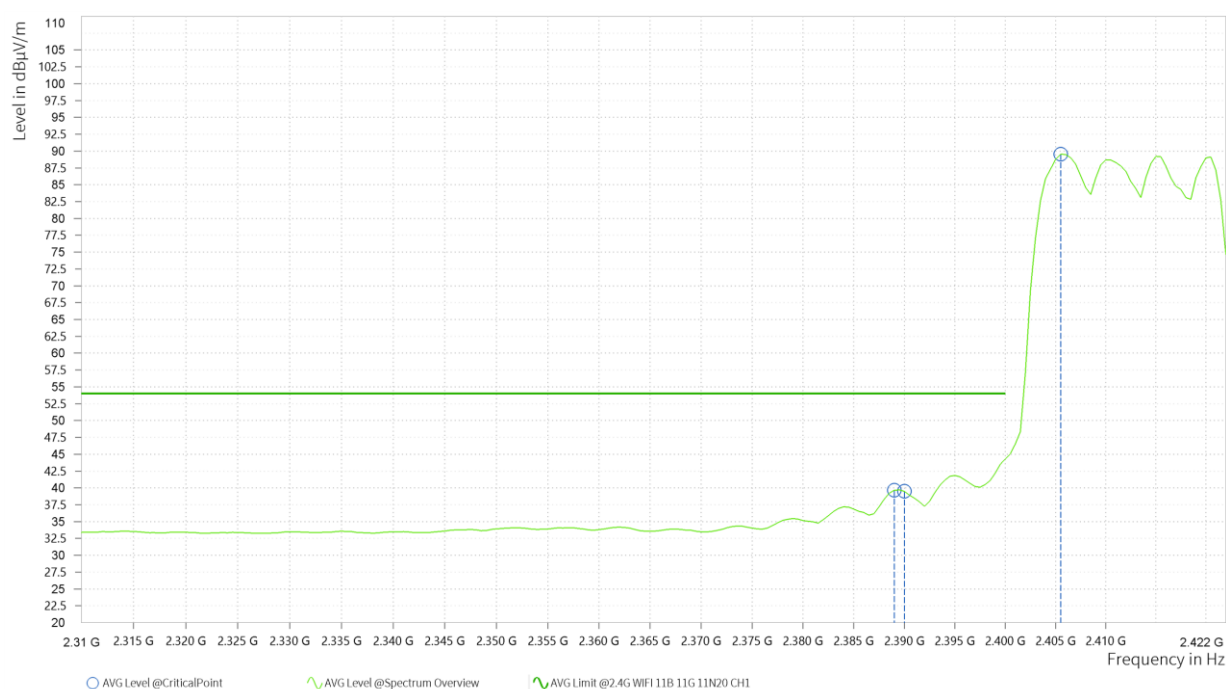

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level..
2. 2412MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,874.000	49.77	74.00	24.23	38.50	54.00	15.50	14.98	H	224.3	1
4	7,801.500	53.79	74.00	20.21	39.72	54.00	14.28	17.97	H	359	2

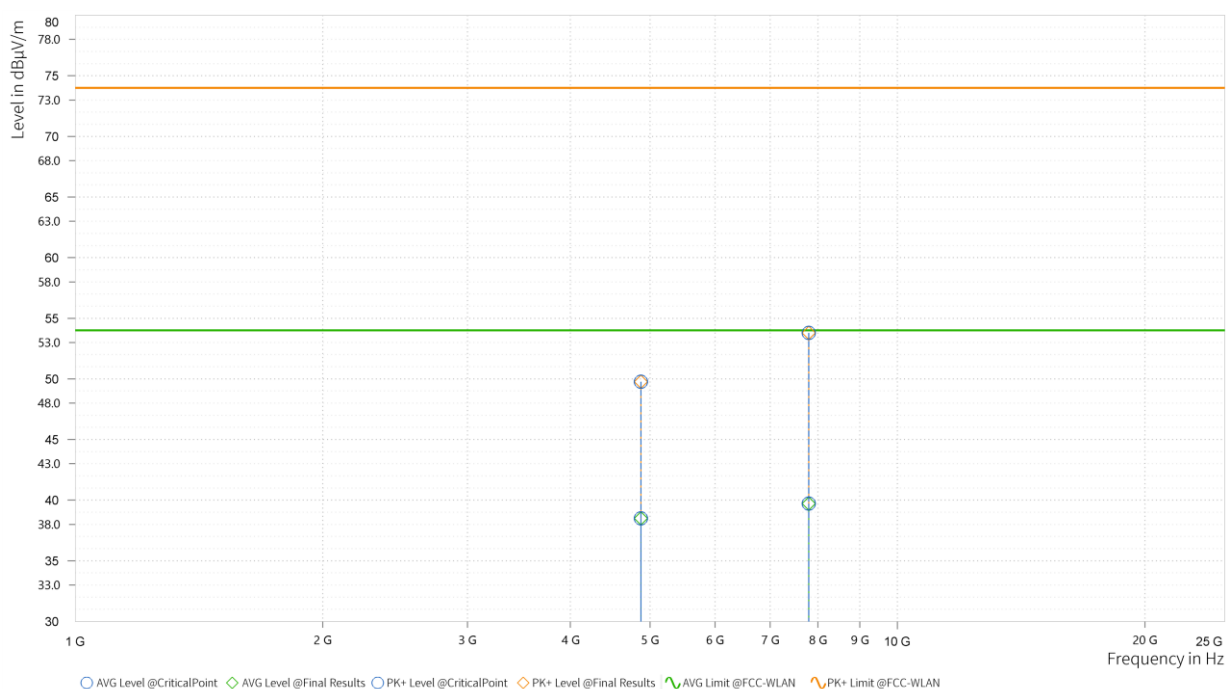




BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,874.000	48.46	74.00	25.54	38.50	54.00	15.50	14.98	V	223.1	2
4	6,335.000	53.57	74.00	20.43	39.73	54.00	14.27	17.67	V	334.2	2

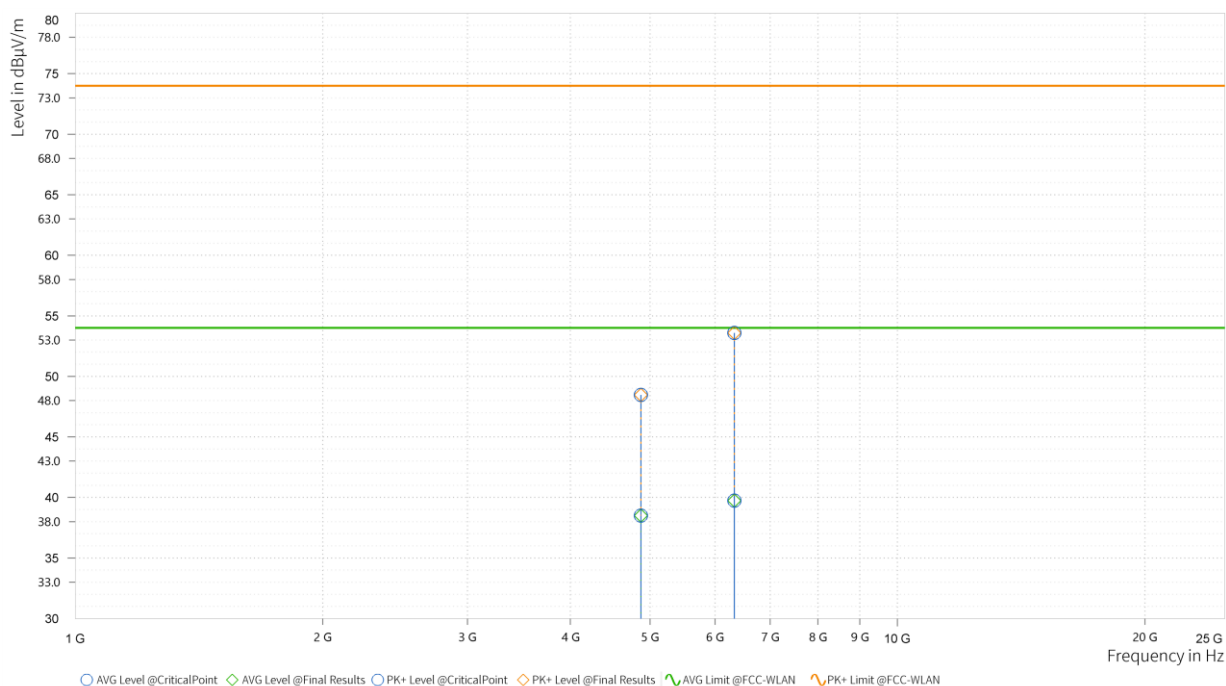

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level..
- 2412MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,464.500	103.09			7.00	H	49.8	2
2	2,483.500	58.42	74.00	15.58	6.99	H	275.5	1
2	2,486.000	57.86	74.00	16.14	7.00	H	49.8	2

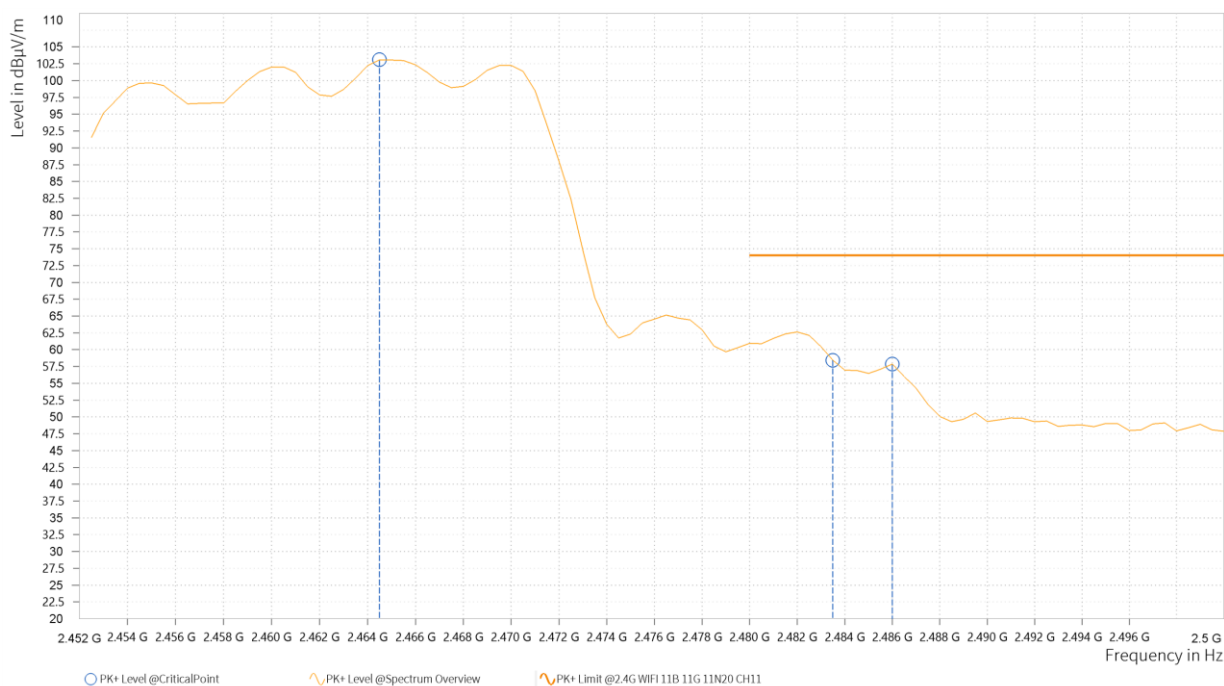



BUREAU VERITAS Test Report No.: PSU-QSU2306260109RF09

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,465.000	89.23			7.00	H	186.1	2
2	2,483.500	41.73	54.00	12.27	6.99	H	245.8	2
2	2,485.500	38.87	54.00	15.13	7.00	H	66.6	2






BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,469.500	101.56			6.98	V	8.2	2
2	2,483.500	62.02	74.00	11.98	6.99	V	140.3	1
2	2,485.000	58.47	74.00	15.53	7.00	V	1.1	2

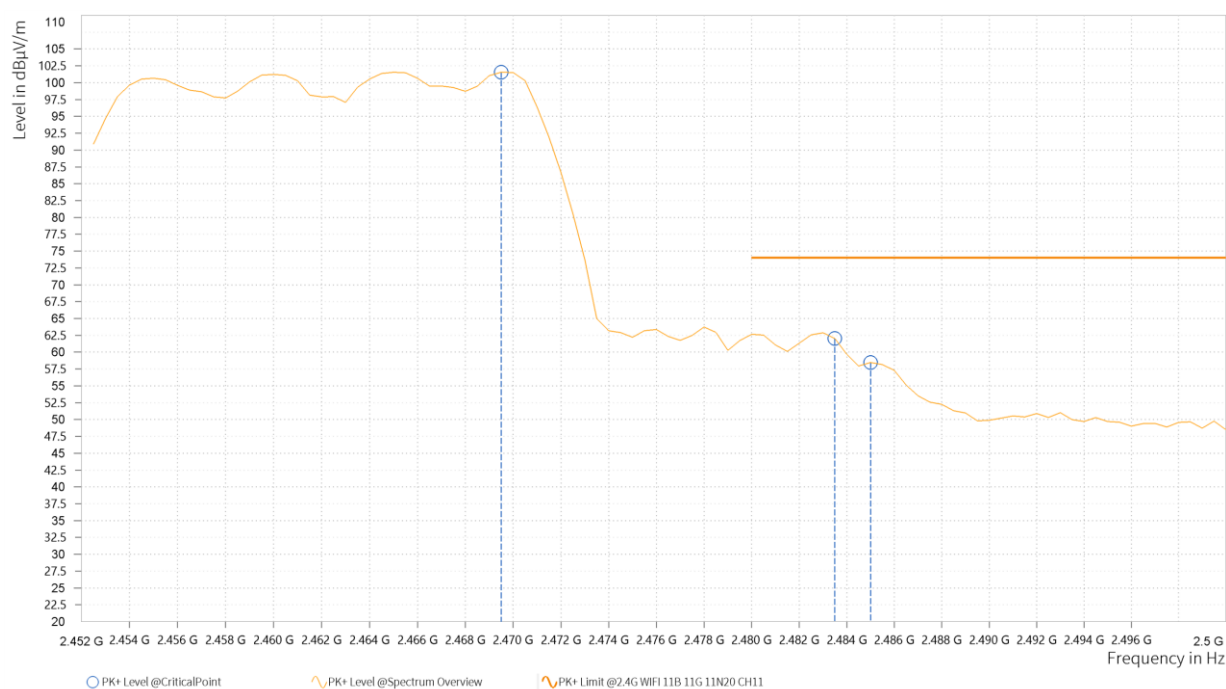



BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
2	2,470.000	91.34			6.97	V	0.9	2
2	2,483.500	41.63	54.00	12.37	6.99	V	356.2	2
2	2,485.000	40.57	54.00	13.43	7.00	V	13.5	2



REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level..
2. 2412MHz: Fundamental frequency.



BUREAU VERITAS Test Report No.: PSU-QSU2306260109RF09
802.11n (40MHz)-MIMO

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,382.000	53.84	74.00	20.16	6.84	H	184.6	1
3	2,390.000	53.49	74.00	20.51	6.84	H	279	1
3	2,438.500	99.95			7.07	H	279	1





BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,384.000	38.71	54.00	15.29	6.84	H	250.6	2
3	2,390.000	40.35	54.00	13.65	6.84	H	218.2	1
3	2,438.500	90.05			7.07	H	218.2	1





BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,382.000	54.62	74.00	19.38	6.84	V	1	2
3	2,390.000	51.75	74.00	22.25	6.84	V	359	2





Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	2,384.500	41.82	54.00	12.18	6.84	V	104.6	1
3	2,390.000	43.49	54.00	10.51	6.84	V	104.6	1
3	2,417.000	91.22			6.97	V	104.6	1

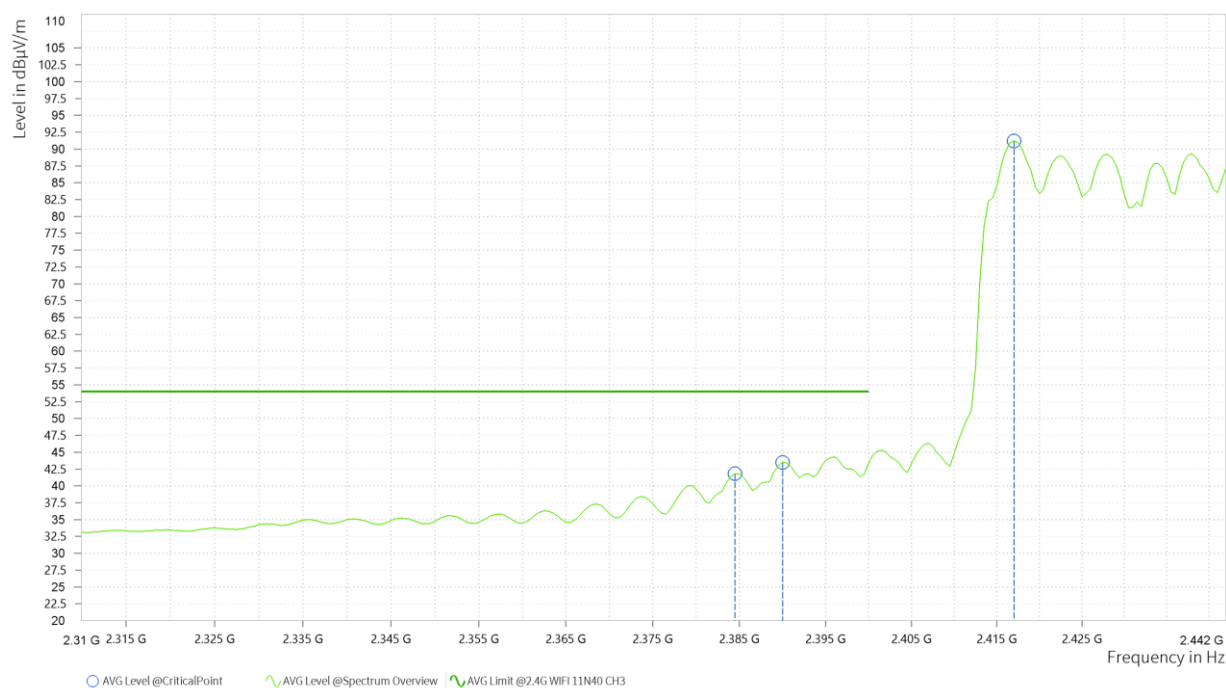

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level..
2. 2412MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,874.000	48.57	74.00	25.43	38.75	54.00	15.25	14.98	H	359.1	2
4	6,590.500	53.75	74.00	20.25	39.19	54.00	14.81	17.18	H	359.1	1

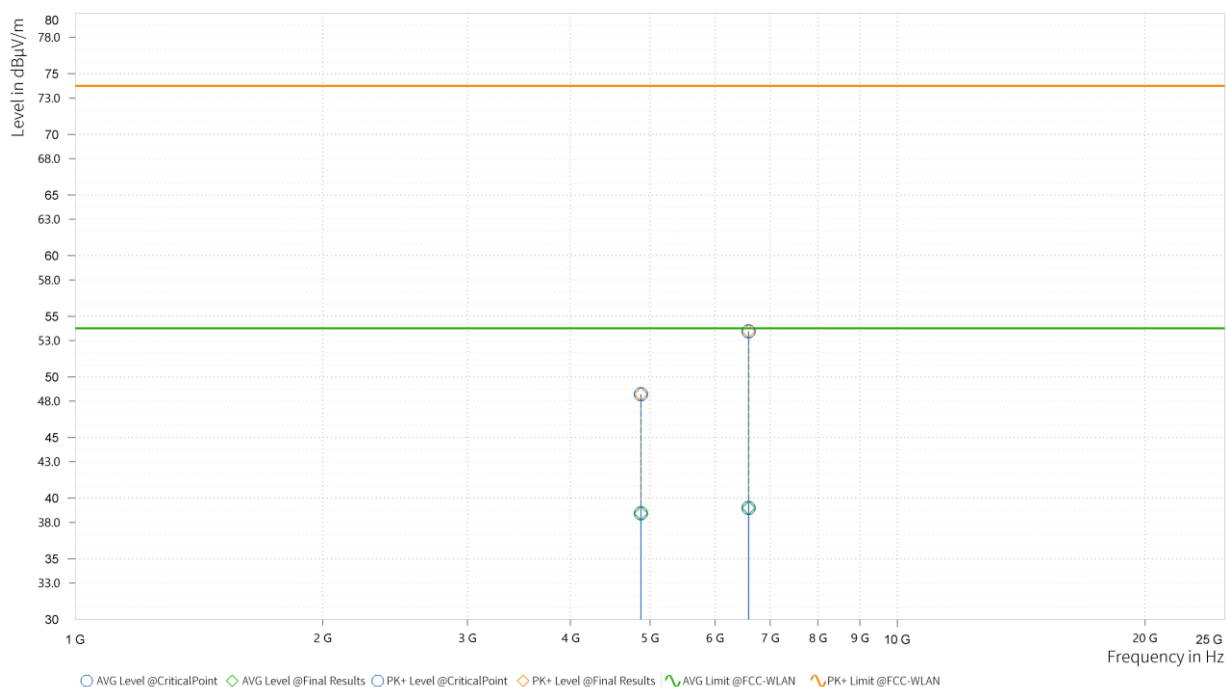




BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,874.000	49.69	74.00	24.31	38.58	54.00	15.42	14.98	V	226.7	1
3	6,288.500	53.47	74.00	20.53	40.00	54.00	14.00	16.58	V	359.1	1

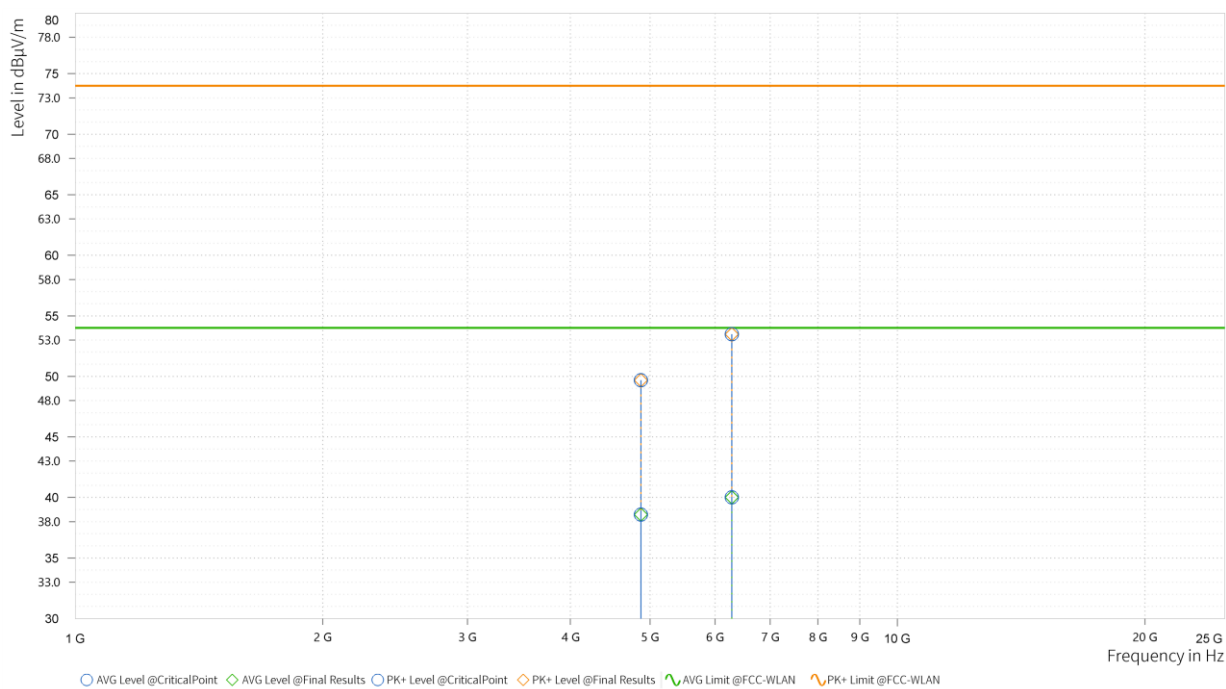

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level..
- 2412MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,456.000	104.79			7.05	H	51	2
4	2,483.500	56.87	74.00	17.13	6.99	H	277.8	1
4	2,485.000	58.23	74.00	15.77	7.00	H	184.6	1

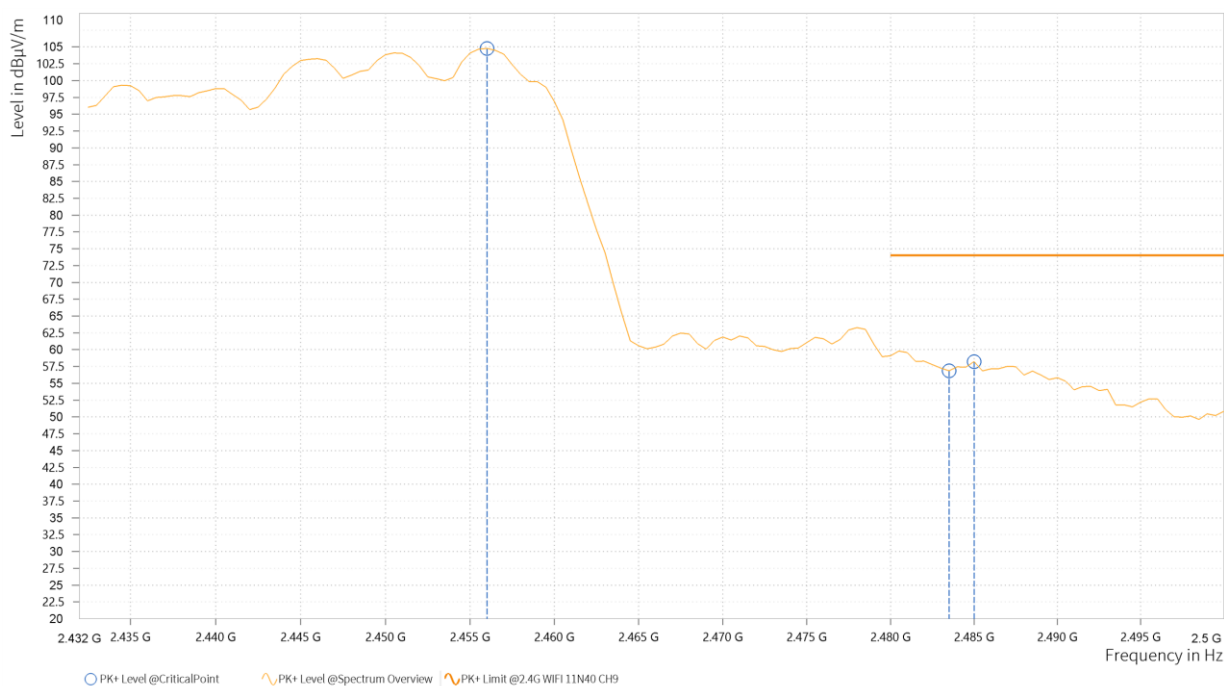



Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,457.000	90.26			7.05	H	244.7	2
4	2,483.500	42.39	54.00	11.61	6.99	H	244.7	2
4	2,486.000	42.35	54.00	11.65	7.00	H	294.6	1






BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,455.500	101.54			7.06	V	0.9	2
4	2,483.500	56.75	74.00	17.25	6.99	V	0.9	2
4	2,486.500	58.55	74.00	15.45	7.00	V	0.9	2

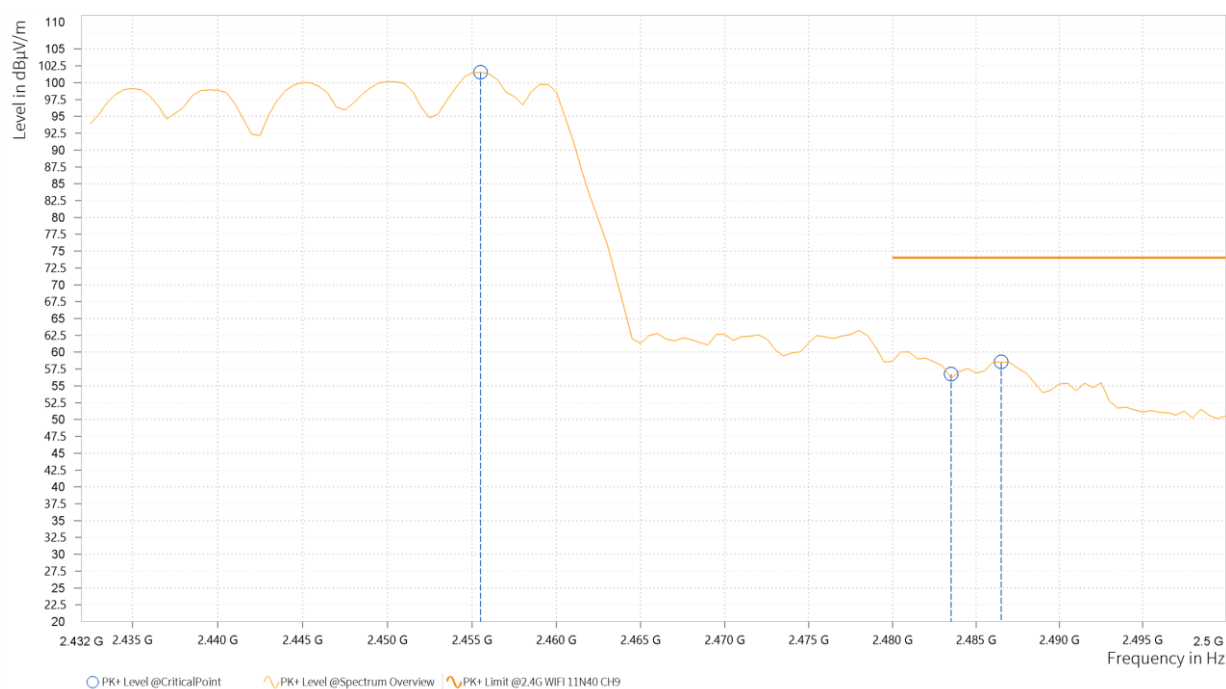




**BUREAU
VERITAS**

Test Report No.: PSU-QSU2306260109RF09

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
4	2,455.500	91.17			7.06	V	1	2
4	2,483.500	42.08	54.00	11.92	6.99	V	116.5	1
4	2,486.000	42.34	54.00	11.66	7.00	V	8.2	2

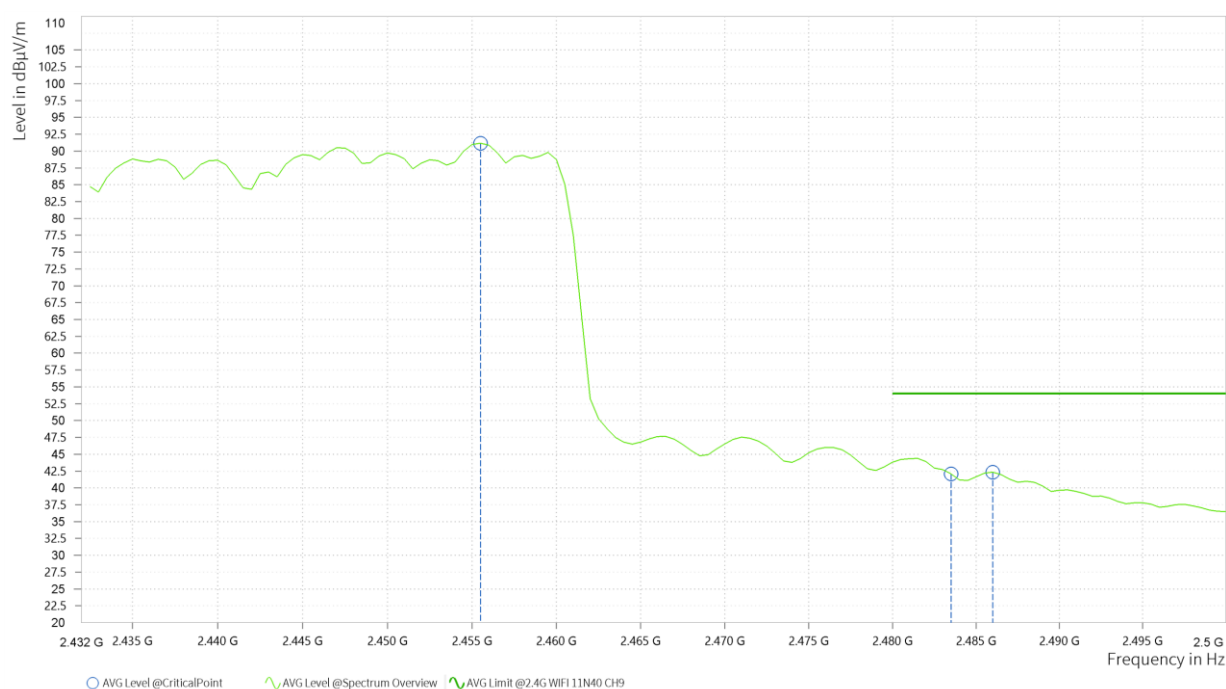

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level..
2. 2412MHz: Fundamental frequency.



BUREAU VERITAS Test Report No.: PSU-QSU2306260109RF09

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:

BT-LE _1M


CHANNEL	TX Channel 19	ODETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	47.800	37.45	40.00	2.55	-7.46	H	102.2	2	120.000
1	76.512	35.53	40.00	4.47	-13.63	H	232.5	2	120.000
1	141.162	33.07	43.50	10.43	-12.45	H	232.5	2	120.000
1	292.725	30.77	46.00	15.23	-5.78	H	358.1	1	120.000
1	500.014	29.63	46.00	16.37	-3.53	H	2	2	120.000
1	749.983	26.53	46.00	19.47	0.55	H	354.8	2	120.000

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

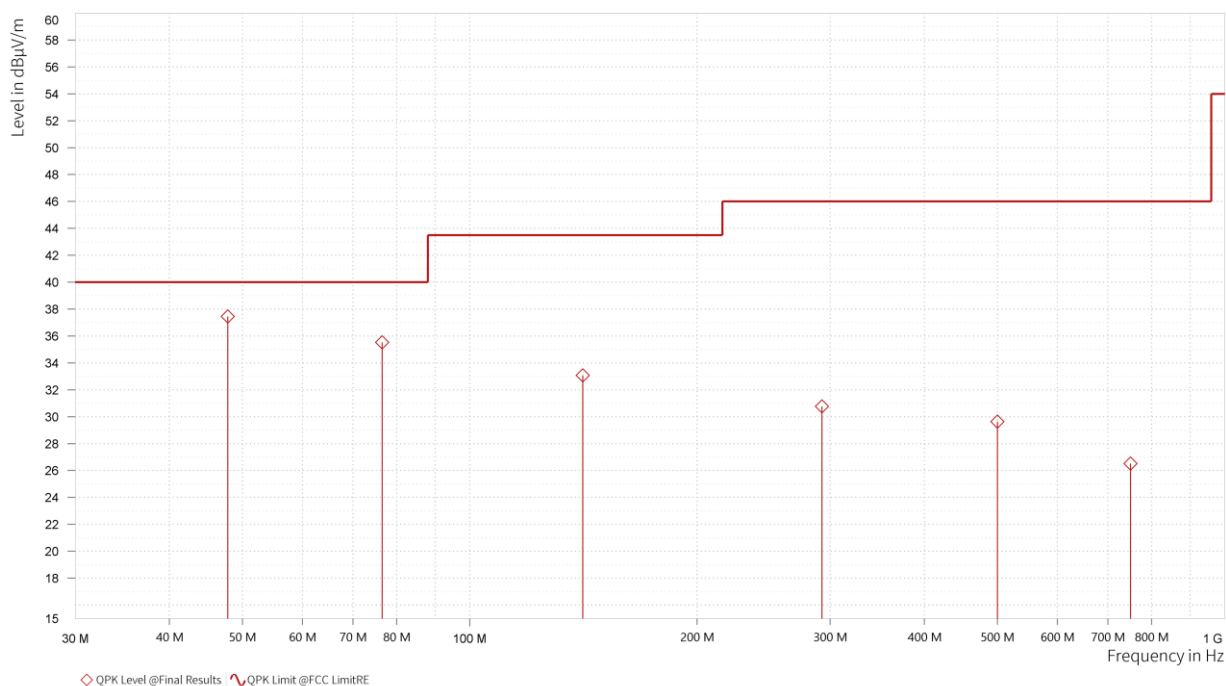




CHANNEL	TX Channel 19	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	QPK Level [dBμV/m]	QPK Limit [dBμV/m]	QPK Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]	Meas. BW [kHz]
1	47.800	31.13	40.00	8.87	-7.46	V	266.1	1	120.000
1	74.572	28.97	40.00	11.03	-13.29	V	2.1	2	120.000
1	141.162	24.68	43.50	18.82	-12.45	V	266.1	1	120.000
1	307.857	29.94	46.00	16.06	-5.41	V	354.8	2	120.000
1	549.969	23.41	46.00	22.59	-3.02	V	101	2	120.000
1	898.538	27.03	46.00	18.97	2.89	V	2.1	2	120.000

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

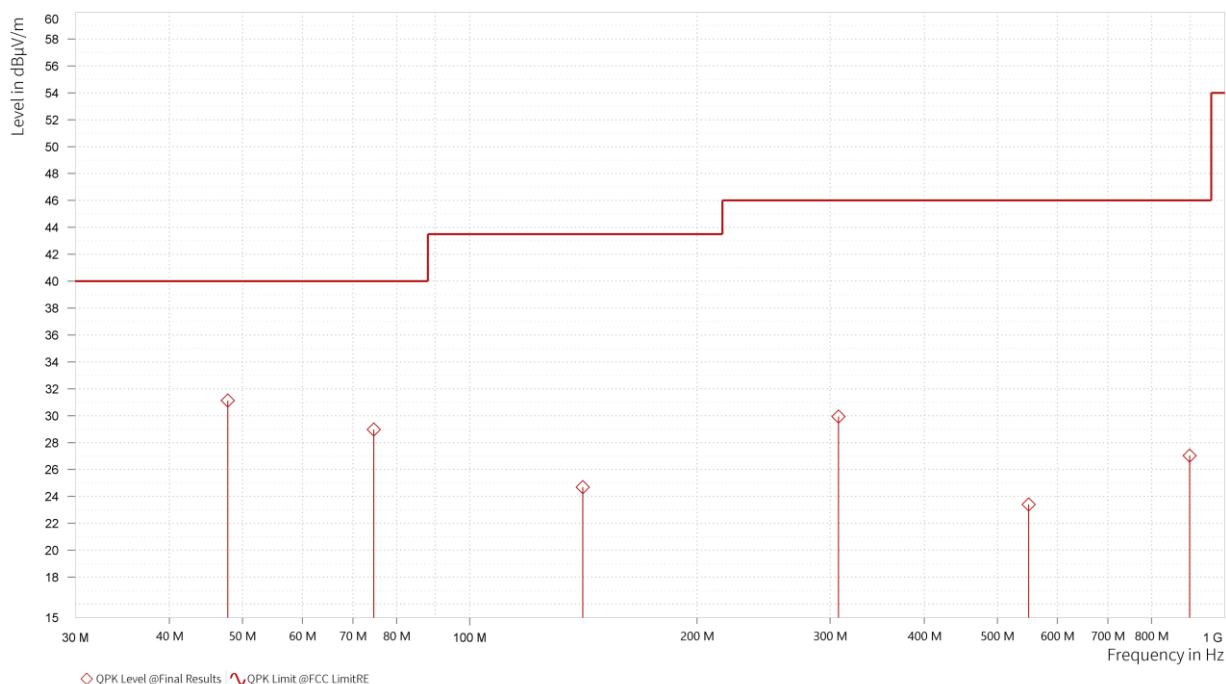

**ABOVE 1GHz TEST DATA**

Note: 1. For radiated emissions testing , the full testing range of different modes have been scanned , only the worst case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit was not recorded

BT-LE _1M

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dB μ V/m]	PK+ Limit [dB μ V/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,333.500	48.67	74.00	25.33	6.85	H	128.8	2
5	2,390.000	46.07	74.00	27.93	6.84	H	359.1	1
5	2,402.500	104.90			6.86	H	80.9	2





Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,333.750	33.15	54.00	20.85	6.54	H	317.4	2
5	2,390.000	31.37	54.00	22.63	6.75	H	1	1
5	2,402.150	96.73			6.83	H	5.2	1






BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,333.500	49.98	74.00	24.02	6.85	V	144	1
5	2,390.000	46.31	74.00	27.69	6.84	V	316.4	2
5	2,402.000	100.15			6.86	V	144	1

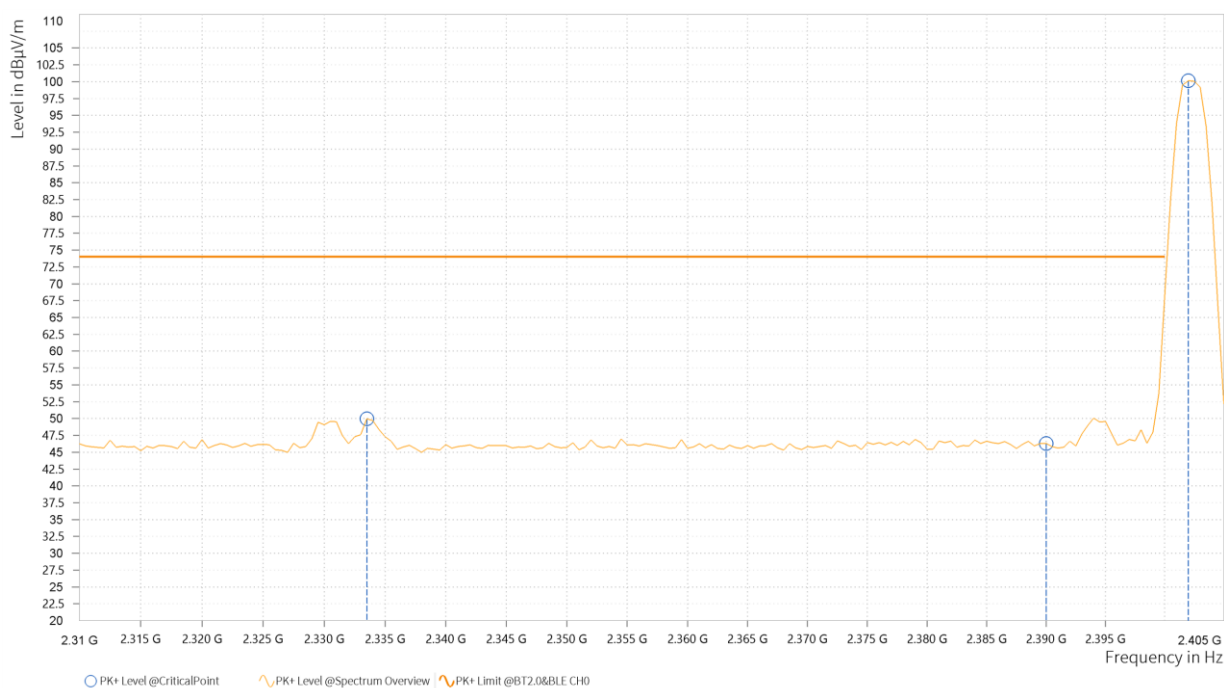




**BUREAU
VERITAS**

Test Report No.: PSU-QSU2306260109RF09

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
5	2,330.425	34.30	54.00	19.70	6.54	V	43.7	1
5	2,390.000	30.91	54.00	23.09	6.75	V	43.7	1
5	2,402.150	93.86			6.83	V	5.1	1

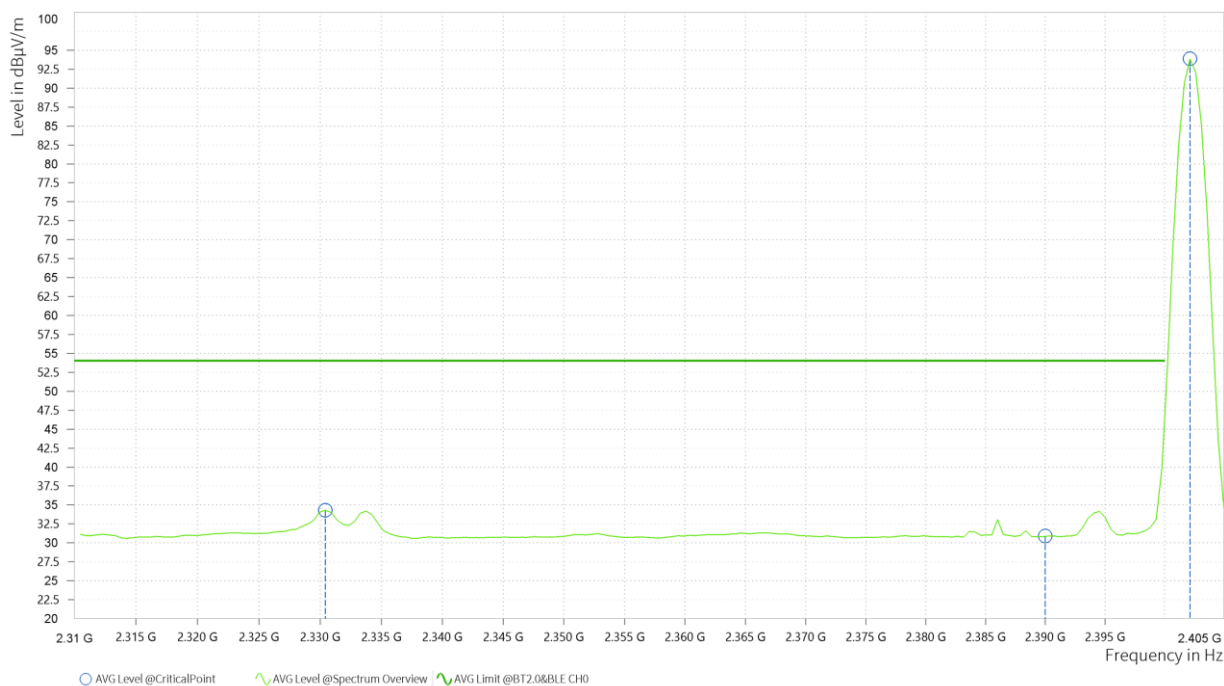

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
2. 2402MHz: Fundamental frequency.




BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,788.000	48.56	74.00	25.44	37.89	54.00	16.11	14.31	H	359.1	2
4	7,221.500	53.71	74.00	20.29	40.24	54.00	13.76	17.92	H	359.1	1

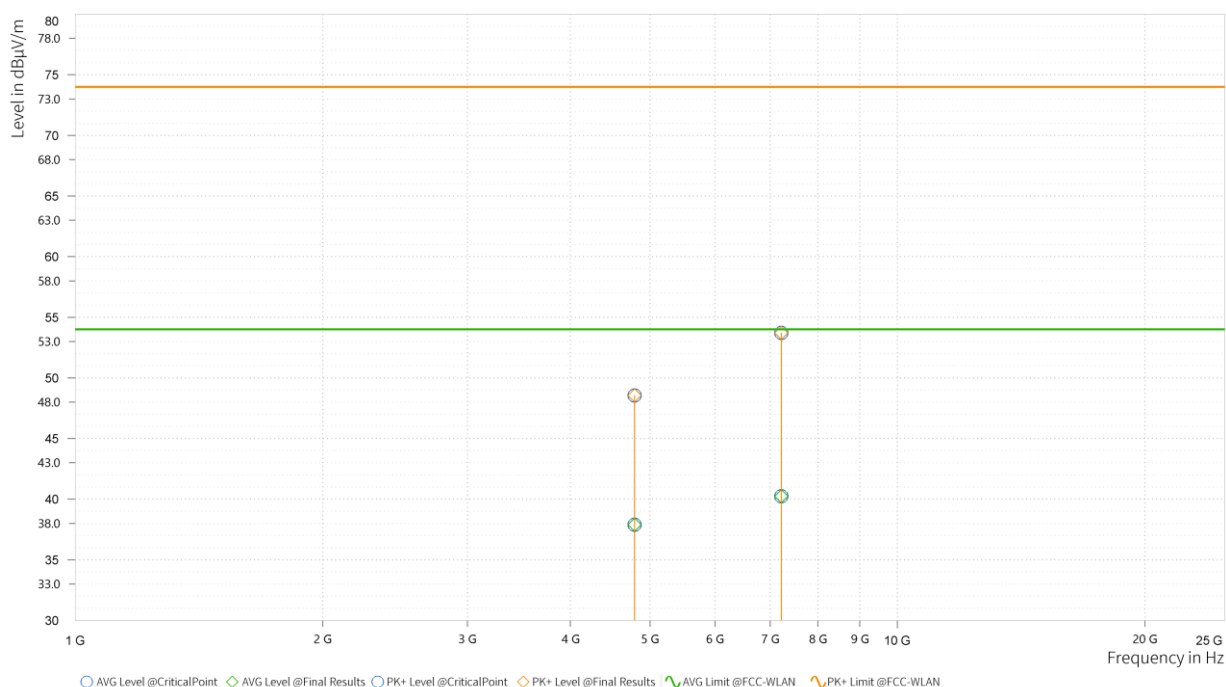




BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
3	4,880.000	50.34	74.00	23.66	37.82	54.00	16.18	14.95	V	221.9	2
4	7,556.000	53.69	74.00	20.31	39.90	54.00	14.10	17.94	V	359.1	2

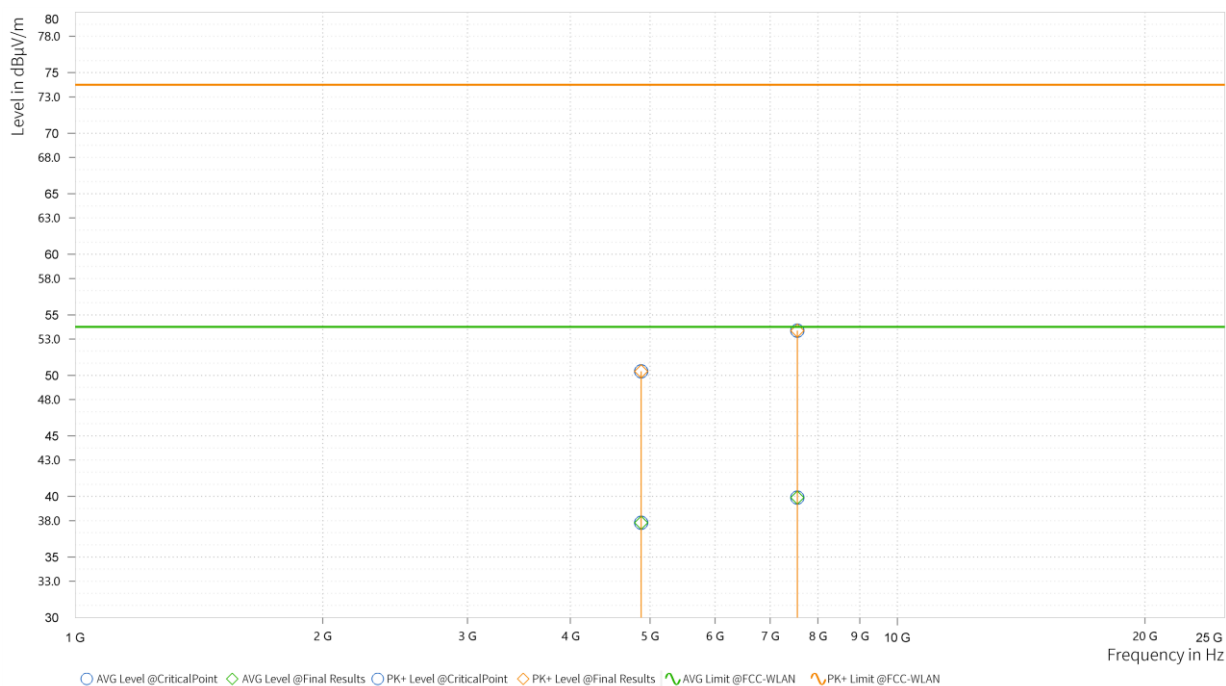

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2440MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.700	95.35			6.98	H	31.9	2
6	2,483.500	46.94	74.00	27.06	6.99	H	357.4	1
6	2,488.100	47.97	74.00	26.03	7.01	H	79.8	2





Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	92.12			6.73	H	316.2	2
6	2,483.500	32.33	54.00	21.67	6.74	H	316.2	2
6	2,487.680	35.01	54.00	18.99	6.76	H	316.2	2

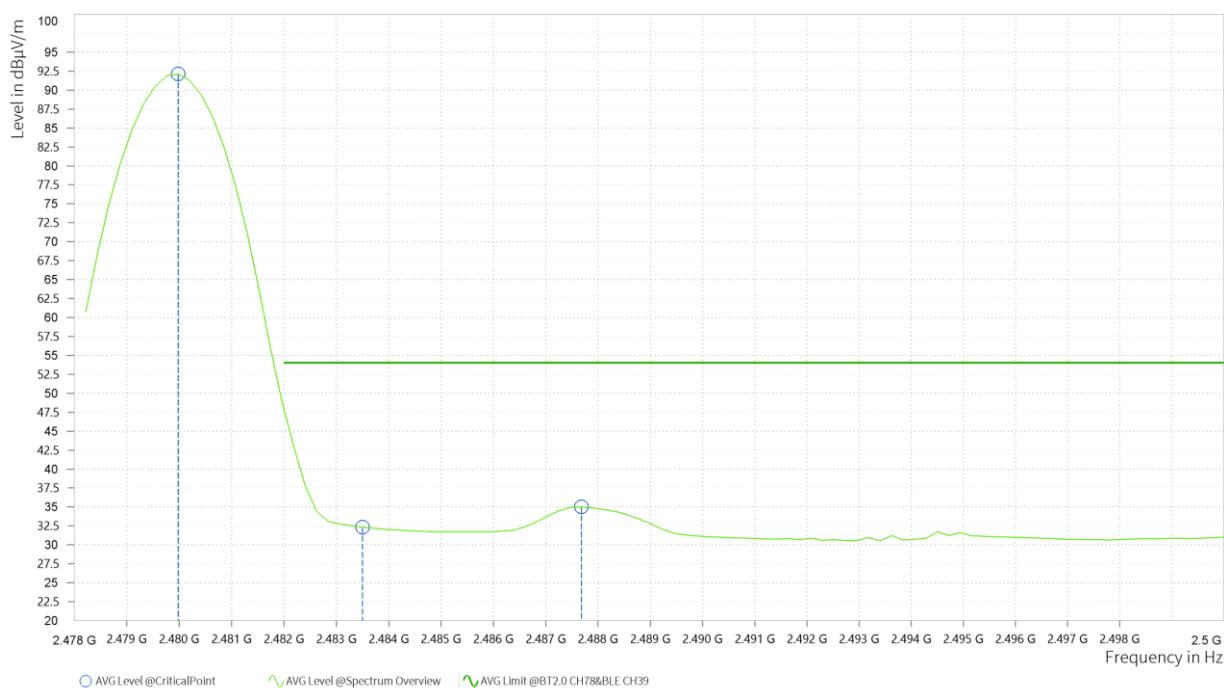



BUREAU
VERITAS

Test Report No.: PSU-QSU2306260109RF09

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 25GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

Rg	Frequency [MHz]	PK+ Level [dBμV/m]	PK+ Limit [dBμV/m]	PK+ Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,480.000	96.65			6.98	V	189.4	1
6	2,483.500	47.59	74.00	26.41	6.99	V	359	2
6	2,485.000	47.55	74.00	26.45	7.00	V	189.4	1





**BUREAU
VERITAS**

Test Report No.: PSU-QSU2306260109RF09

Rg	Frequency [MHz]	AVG Level [dBμV/m]	AVG Limit [dBμV/m]	AVG Margin [dB]	Correction [dB]	Polarization	Azimuth [deg]	Antenna Height [m]
6	2,479.980	92.08			6.73	V	42.5	1
6	2,483.500	32.32	54.00	21.68	6.74	V	42.5	1
6	2,487.680	33.95	54.00	20.05	6.76	V	42.5	1



REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Limit value – Emission level.
- 2402MHz: Fundamental frequency.



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	R&S	ESW 44	101973	Feb.25,22	Feb.24,24
Open Switch and Control Unit	R&S	OSP-B157W8	100836	N/A	N/A
Vector Signal Generator	R&S	SMBV100B	102176	Feb.16,22	Feb.15,24
Signal Generator	R&S	SMB100A03	182185	Feb.16,22	Feb.15,24
Wideband Radio Communication	R&S	CMW500	169399	Jun.26,22	Jun.25,24
Hygrothermograph	DELI	20210528	SZ015	Sep.06,22	Sep.05,24
PC	LENOVO	E14	HRSW0024	N/A	N/A
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Apr.28,23	Oct.27,23
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Oct.27,23	Apr.26,24
CABLE	R&S	J12J103539-00-1	SEP-03-20-070	Apr.28,23	Oct.27,23
CABLE	R&S	J12J103539-00-1	SEP-03-20-069	Oct.27,23	Apr.26,24
Test Software	EMC32	EMC32	N/A	N/A	N/A
Temperature Chamber	votsch	VT4002	58566078100050	May.31,22	May.30,24

NOTE:

1. The calibration interval of the above test instruments is 6 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.



3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

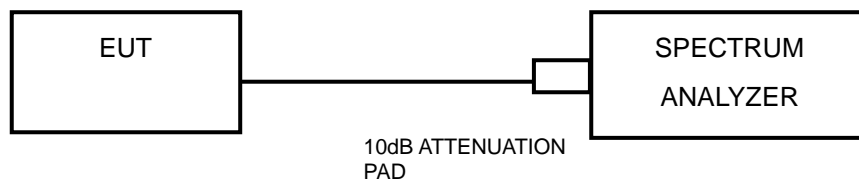

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU VERITAS Test Report No.: PSU-QSU2306260109RF09

3.3.7 TEST RESULTS

Please Refer to the module report (Report No.: FR740702AC& FR740702AE, Model Name: ST60-SIPT, FCC ID: SQG-60SIPT).




3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

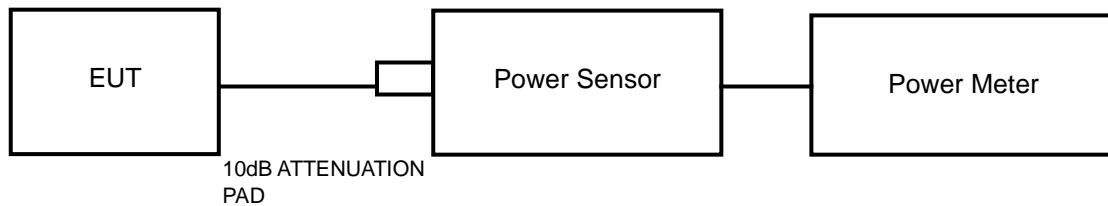

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

NOTE: This report verifies output power and the verify results are lower than the module report, so the results of output power please Refer to the module report (Report No.: FR740702AC& FR740702AE, Model Name: ST60-SIPT, FCC ID: SQG-60SIPT).



Test Report No.: PSU-QSU2306260109RF09

3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

NOTE: This report verifies output power and the verify results are lower than the module report, so the results of output power please Refer to the module report (Report No.: FR740702AC& FR740702AE, Model Name: ST60-SIPT, FCC ID: SQG-60SIPT).




3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP



3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



Test Report No.: PSU-QSU2306260109RF09

3.5.7 TEST RESULTS

Please Refer to the module report (Report No.: FR740702AC& FR740702AE, Model Name: ST60-SIPT, FCC ID: SQG-60SIPT).




3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

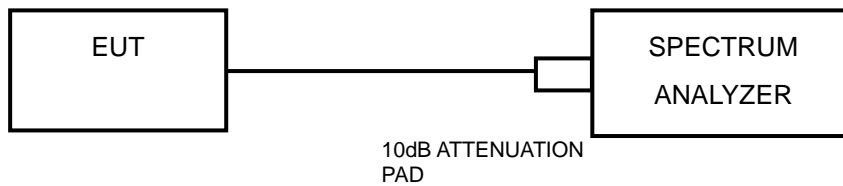

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to the module report (Report No.: FR740702AC& FR740702AE, Model Name: ST60-SIPT, FCC ID: SQG-60SIPT).



4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: PSU-QSU2306260109RF09

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--END--