



Shenzhen CTL Testing Technology Co., Ltd.  
Tel: +86-755-89486194 Fax: +86-755-26636041

### FCC PART 15 SUBPART C TEST REPORT

**Report Reference No.**.....: **CTL1503310745-WF**

Compiled by

( position+printed name+signature)...: File administrators Happy Guo

Name of the organization performing the tests

Test Engineer Nice Nong

( position+printed name+signature)...:

Approved by

( position+printed name+signature)...: Manager Tracy Qi

Date of issue.....: Apr. 15, 2015

**Test Firm**.....: **Shenzhen CTL Testing Technology Co., Ltd.**

Address.....: Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China.

**Applicant's name**.....: **Francase Limited**

Address.....: 11 FLOOR, 63 WYNDHAM STREET, CENTRAL, HONGKONG

**Test specification:**

Standard .....: **FCC Part 15.249:** Operation within the bands 920-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

**Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....: **Bluetooth Speaker**

Trade Mark .....: Francase

Models/Type reference.....: L01, L02, L03, L04, L05, L06

Modulation .....: FHSS

Work Frequency.....: 2402 MHz~2480 MHz

Antenna Type.....: internal

FCC ID .....: 2AEHE-L01

Result.....: **Positive**

# TEST REPORT

<b>Test Report No. :</b>	<b>CTL1503310745-WF</b>	Apr. 15, 2015
		Date of issue

Equipment under Test : Bluetooth Speaker

Model /Type : L01

Listed Modes L02, L03, L04, L05, L06

Difference Description Only the appearance and model's name is different

**Applicant** : **Francase Limited**

Address : 11 FLOOR, 63 WYNDHAM STREET, CENTRAL, HONGKONG

**Manufacturer** **Francase Limited**

Address 11 FLOOR, 63 WYNDHAM STREET, CENTRAL, HONGKONG

<b>Test Result</b> according to the standards on page 4:	<b>Positive</b>
--	-----------------

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b><u>1.</u></b>	<b><u>TEST STANDARDS .....</u></b>	<b><u>4</u></b>
<b><u>2.</u></b>	<b><u>SUMMARY .....</u></b>	<b><u>5</u></b>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	6
2.5.	EUT configuration	6
2.6.	Related Submittal(s) / Grant (s)	6
2.7.	Modifications	6
<b><u>3.</u></b>	<b><u>TEST ENVIRONMENT .....</u></b>	<b><u>7</u></b>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Configuration of Tested System	7
3.5.	Statement of the measurement uncertainty	8
3.6.	Equipments Used during the Test	9
<b><u>4.</u></b>	<b><u>TEST CONDITIONS AND RESULTS .....</u></b>	<b><u>10</u></b>
4.1.	Conducted Emissions Test	10
4.2.	Fundamental Emissions	13
4.3.	Transmitter Radiated Unwanted Emissions	14
4.4.	Band Edge Measurement	30
4.5.	Occupied Bandwidth Measurement	39
<b><u>5.</u></b>	<b><u>ANTENNA REQUIREMENT .....</u></b>	<b><u>41</u></b>
<b><u>6.</u></b>	<b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b><u>42</u></b>
<b><u>7.</u></b>	<b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</u></b>	<b><u>44</u></b>

## 1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.249](#): Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

[ANSI C63.4-2009](#)





## 2.4. EUT operation mode

Test Mode(TM)	Description	Remark
TM1	Bottom Channel Transmitting	/
TM2	Middle Channel Transmitting	/
TM3	Top Channel Transmitting	/
TM4	Charging and keeping TX	USB power by PC

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The following data show only with the worst case setup.

The worst case of Y axis was reported.

Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

Remark: All modes 1Mbps(GFSK), 2Mbps(Pi/4 DQPSK), 3Mbps(8DPSK) have been tested , only worse case GFSK is reported.

## 2.5. EUT configuration

**The following peripheral devices and interface cables were connected during the measurement:**

○ - supplied by the manufacturer

● - supplied by the lab

● Notebook PC  
FCC doc approved


Manufacturer : DELL  
Model No. : PP18L  
Approval : FCC DOC

## 2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AEHE-L01 filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

## 2.7. Modifications

No modifications were implemented to meet testing criteria.

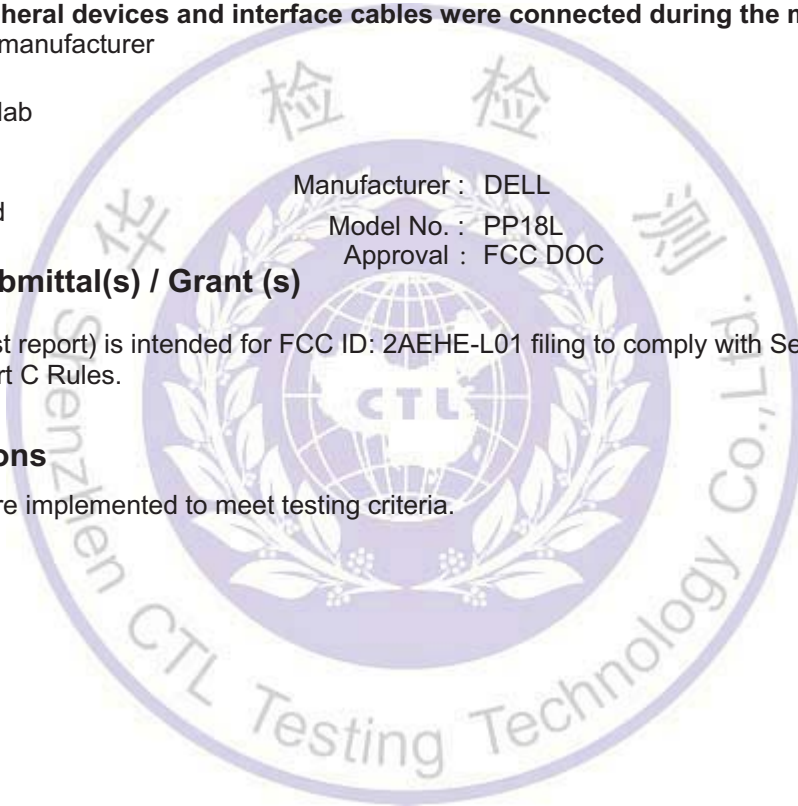

### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

Shenzhen CTL Testing Technology Co., Ltd.  
Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **IC Registration No.: 9618B**

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

##### **FCC-Registration No.: 970318**

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

#### **3.3. Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:


Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

#### **3.4. Configuration of Tested System**

**Fig. 2-1 Configuration of Tested System**

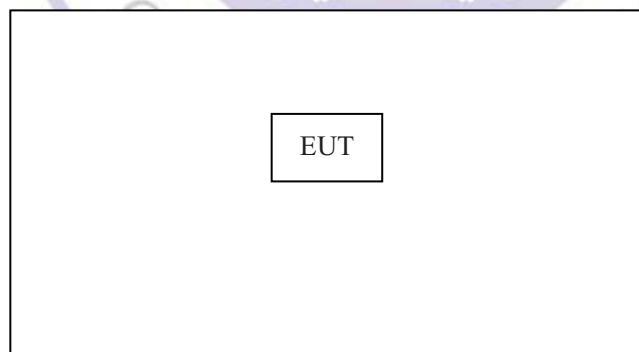

### 3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~26.5GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.






### 3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2014/07/12	2015/07/11
EMI Test Receiver	R&S	ESCI	103710	2014/07/10	2015/07/09
Spectrum Analyzer	Agilent	E4407B	MY45108355	2014/07/06	2015/07/05
Controller	EM Electronics	Controller EM 1000	N/A	2014/07/06	2015/07/05
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2014/07/12	2015/07/11
Horn Antenna	SCHWARZBECK	BBHA9170	1562	2014/07/12	2015/07/11
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2014/07/12	2015/07/11
LISN	R&S	ENV216	101316	2014/07/10	2015/07/09
LISN	SCHWARZBECK	NSLK8127	8127687	2014/07/10	2015/07/09
Microwave Preamplifier	HP	8349B	3155A00882	2014/07/10	2015/07/09
Amplifier	HP	8447D	3113A07663	2014/07/10	2015/07/09
Transient Limiter	Com-Power	LIT-153	532226	2014/07/10	2015/07/09
Radio Communication Tester	R&S	CMU200	3655A03522	2014/07/06	2015/07/05
Temperature/Humidity Meter	zhicheng	ZC1-2	22522	2014/07/10	2015/07/09
SIGNAL GENERATOR	HP	8647A	3200A00852	2014/07/10	2015/07/09
Wideband Peak Power Meter	Anritsu	ML2495A	220.23.35	2014/07/06	2015/07/05
Climate Chamber	ESPEC	EL-10KA	A20120523	2014/07/06	2015/07/05
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	/	2014/07/06	2015/07/05
High-Pass Filter	K&L	41H10-1375/U12750-O/O	/	2014/07/06	2015/07/05

## 4. TEST CONDITIONS AND RESULTS

### 4.1. Conducted Emissions Test

#### TEST CONFIGURATION

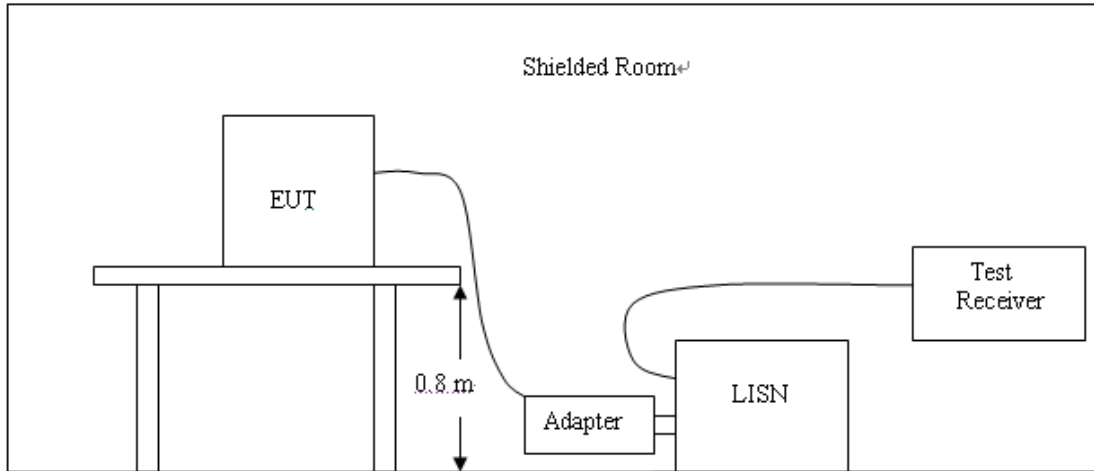

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4.
- 2 Support equipment, if needed, was placed as per ANSI C63.4.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4 If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

**The RBW/VBW for 150KHz to 30MHz: 9KHz**

**Test mode: TM4**

**CONDUCTED POWER LINE EMISSION LIMIT**

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBµV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


\* Decreasing linearly with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

**TEST RESULTS**

**SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

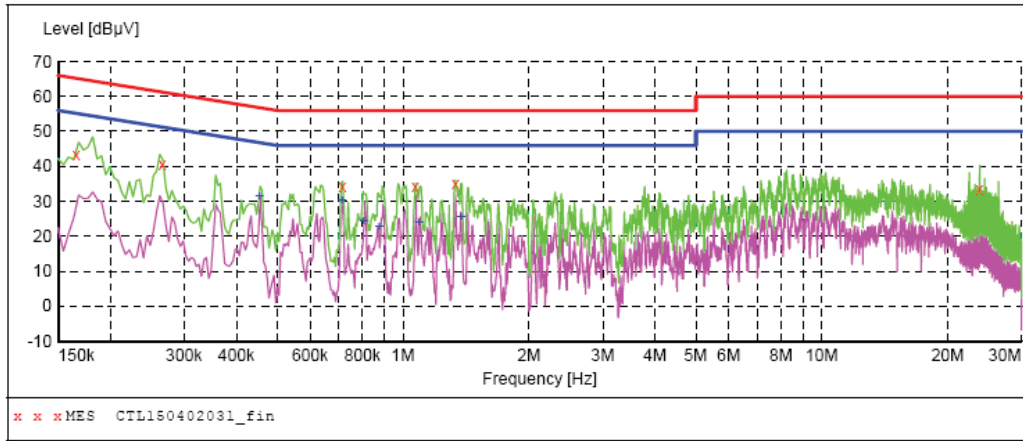

**MEASUREMENT RESULT: "CTL150402031\_fin"**

4/2/2015 11:06AM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.166000	43.20	10.2	65	22.0	QP	L1	GND
0.266000	40.60	10.2	61	20.6	QP	L1	GND
0.716000	34.30	10.2	56	21.7	QP	L1	GND
1.070000	34.10	10.3	56	21.9	QP	L1	GND
1.334000	35.10	10.3	56	20.9	QP	L1	GND
23.822000	33.60	11.1	60	26.4	QP	L1	GND

**MEASUREMENT RESULT: "CTL150402031\_fin2"**

4/2/2015 11:06AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.454000	31.60	10.2	47	15.2	AV	L1	GND
0.716000	30.30	10.2	46	15.7	AV	L1	GND
0.806000	24.20	10.2	46	21.8	AV	L1	GND
0.878000	22.60	10.2	46	23.4	AV	L1	GND
1.094000	23.80	10.3	46	22.2	AV	L1	GND
1.376000	25.50	10.3	46	20.5	AV	L1	GND

**SCAN TABLE: "Voltage (9K-30M)FIN"**  
 Short Description: 150K-30M Voltage

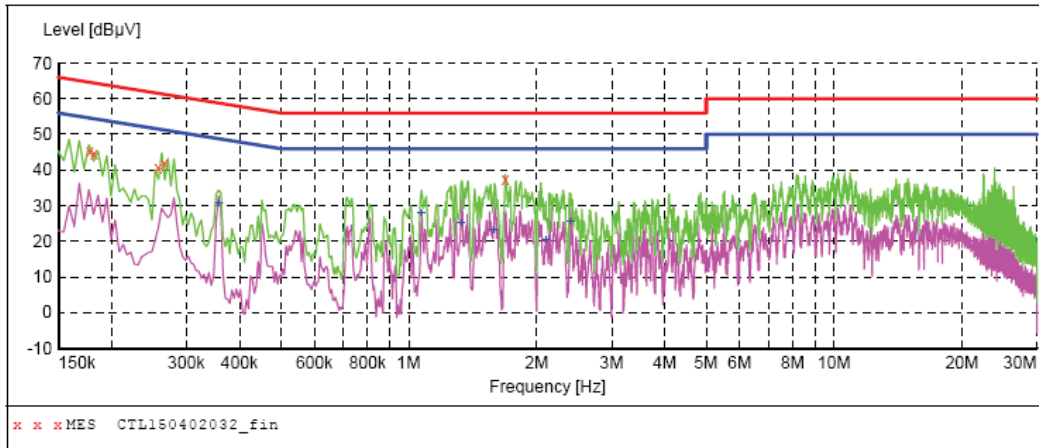

**MEASUREMENT RESULT: "CTL150402032\_fin"**

4/2/2015 11:09AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.178000	45.30	10.2	65	19.3	QP	N	GND
0.182000	44.50	10.2	64	19.9	QP	N	GND
0.258000	40.60	10.2	62	20.9	QP	N	GND
0.266000	41.80	10.2	61	19.4	QP	N	GND
1.688000	37.40	10.3	56	18.6	QP	N	GND

**MEASUREMENT RESULT: "CTL150402032\_fin2"**


4/2/2015 11:09AM

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.358000	30.70	10.2	49	18.1	AV	N	GND
1.070000	27.70	10.3	46	18.3	AV	N	GND
1.328000	25.00	10.3	46	21.0	AV	N	GND
1.586000	23.20	10.3	46	22.8	AV	N	GND
2.102000	20.30	10.4	46	25.7	AV	N	GND
2.402000	25.50	10.4	46	20.5	AV	N	GND



## 4.2. Fundamental Emissions

### TEST CONFIGURATION

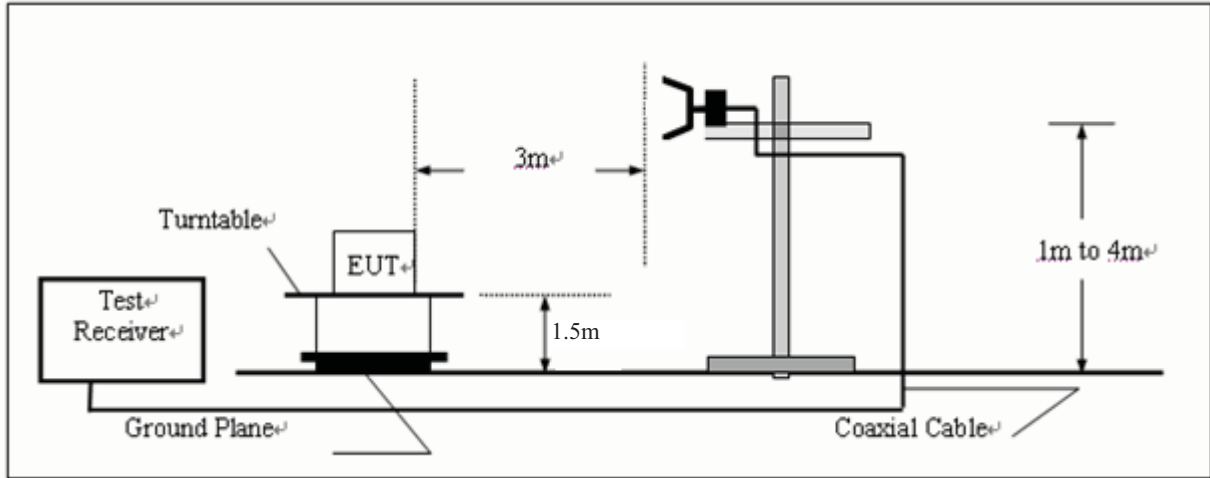

### Fundamental Emissions Limit

2400-2483.5 MHz Band: 94 dBuV/m (average)

Peak limit= Average limit + 20dB=114dBuV/m

RBW=1MHz, VBW=3MHz Peak detector for PK value

RBW=1MHz VBW=10Hz , Peak detector for AV value

### TEST RESULTS


Field Strength of Fundamental Emissions Result					
Modulation	Frequency	Max.Fundamental	Margin	Limit	Type
	(MHz)	(dBuV/m)@3m	(dB)	(dBuV/m)@3m	
GFSK	2402	93.19	20.81	114	peak
GFSK	2402	79.02	14.98	94	average
GFSK	2441	92.88	21.12	114	peak
GFSK	2441	78.51	15.49	94	average
GFSK	2480	93.03	20.97	114	peak
GFSK	2480	78.44	15.56	94	average

Note: Measurement worst emissions of receive antenna polarization: Vertical.


### 4.3. Transmitter Radiated Unwanted Emissions

#### TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

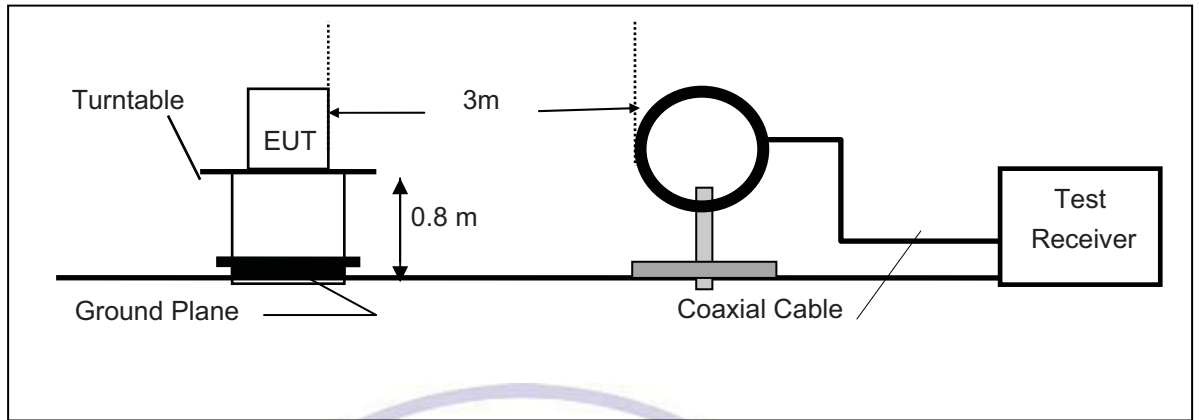

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

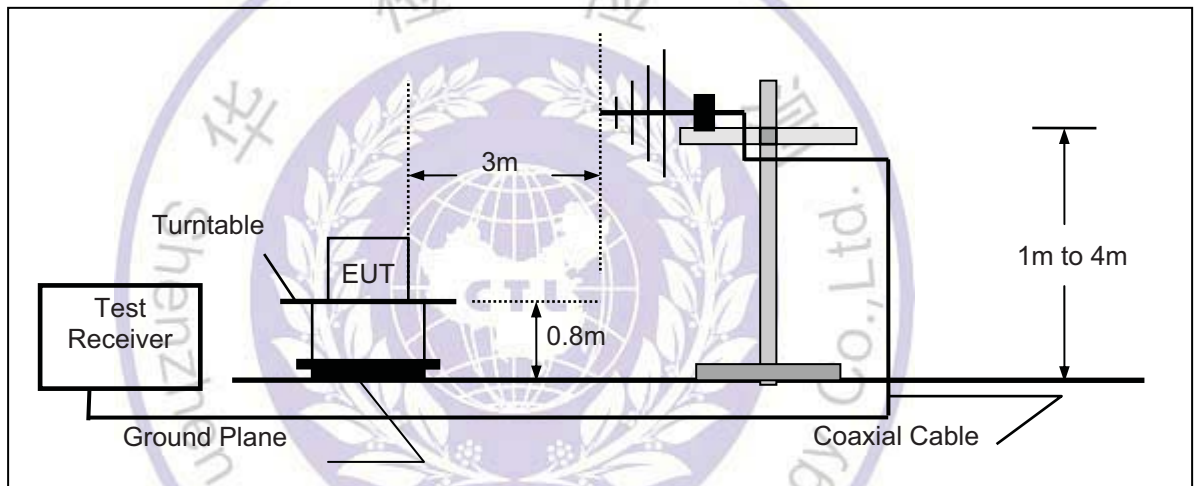

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

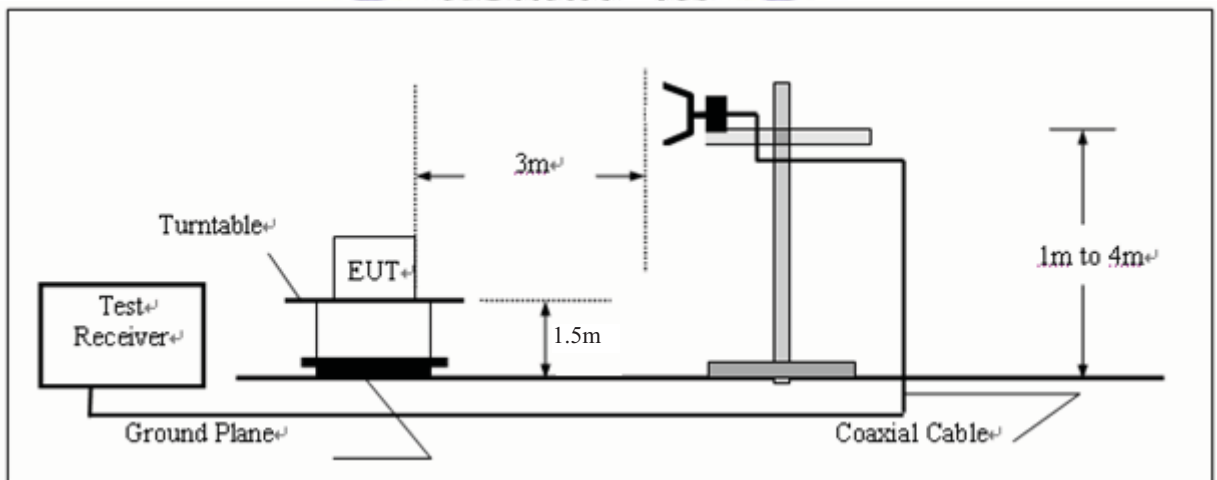

**FIELD STRENGTH CALCULATION**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

**RADIATION LIMIT**

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

**TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz , 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Based on the Frequency Generator in the device include 26MHz.The test frequency range from 9KHz to 25GHz per FCC PART 15.33(a).

**Note:**

Three axes are chosen for pretest, the Y axis is the worst mode for final test.

For battery operated equipment, the equipment tests shall be performed using a new battery.


**TEST RESULTS**

All the test modes (TM1, TM2, TM3 and TM4) completed for test. The worst case of Radiated Emission is TM1; the test data of this mode was reported.

Below 1GHz Test Results:

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency	Frequency				
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

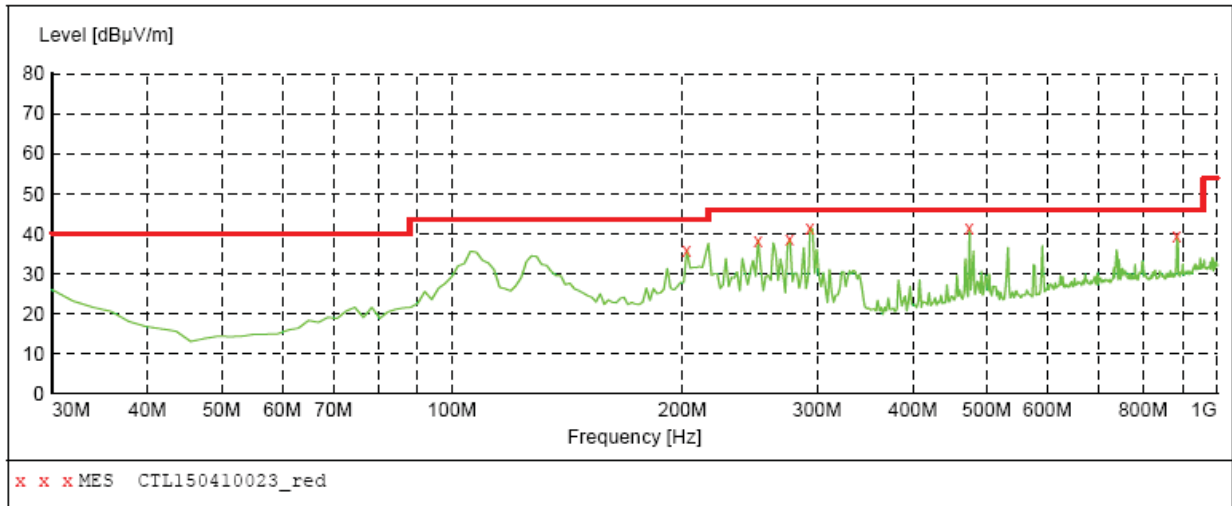

**MEASUREMENT RESULT: "CTL150410023\_red"**

4/10/2015 9:23AM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
202.660000	35.80	14.4	43.5	7.7	---	0.0	0.00	VERTICAL
251.160000	38.40	14.2	46.0	7.6	---	0.0	0.00	VERTICAL
276.380000	38.50	15.4	46.0	7.5	---	0.0	0.00	VERTICAL
293.840000	41.50	15.4	46.0	4.5	---	0.0	0.00	VERTICAL
474.260000	41.30	20.0	46.0	4.7	---	0.0	0.00	VERTICAL
885.540000	39.40	25.8	46.0	6.6	---	0.0	0.00	VERTICAL


Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.



**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
30.0 MHz	1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

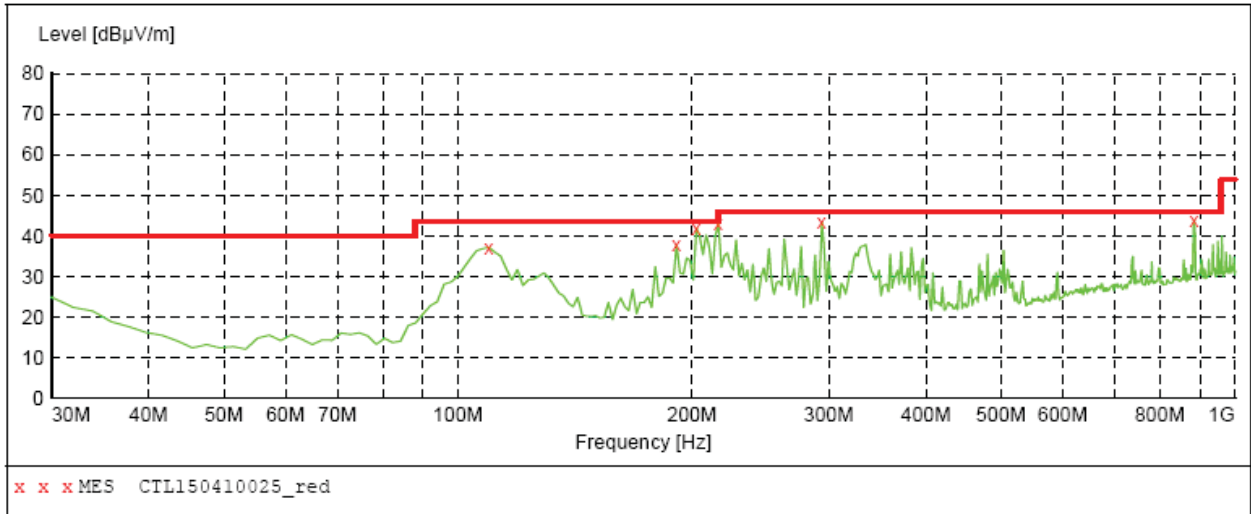

**MEASUREMENT RESULT: "CTL150410025\_red"**

4/10/2015 9:31AM


Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
109.540000	37.20	13.7	43.5	6.3	---	0.0	0.00	HORIZONTAL
191.020000	37.70	13.4	43.5	5.8	---	0.0	0.00	HORIZONTAL
202.660000	41.90	14.4	43.5	1.6	---	0.0	0.00	HORIZONTAL
216.240000	43.00	14.2	46.0	3.0	---	0.0	0.00	HORIZONTAL
293.840000	43.30	15.4	46.0	2.7	---	0.0	0.00	HORIZONTAL
885.540000	43.90	25.8	46.0	2.1	---	0.0	0.00	HORIZONTAL

Remark:

- (1) Measuring frequencies from 9 KHz to the 1 GHz, Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.

**Above 1 GHz Test Results:**


Bottom Channel (2402MHz):

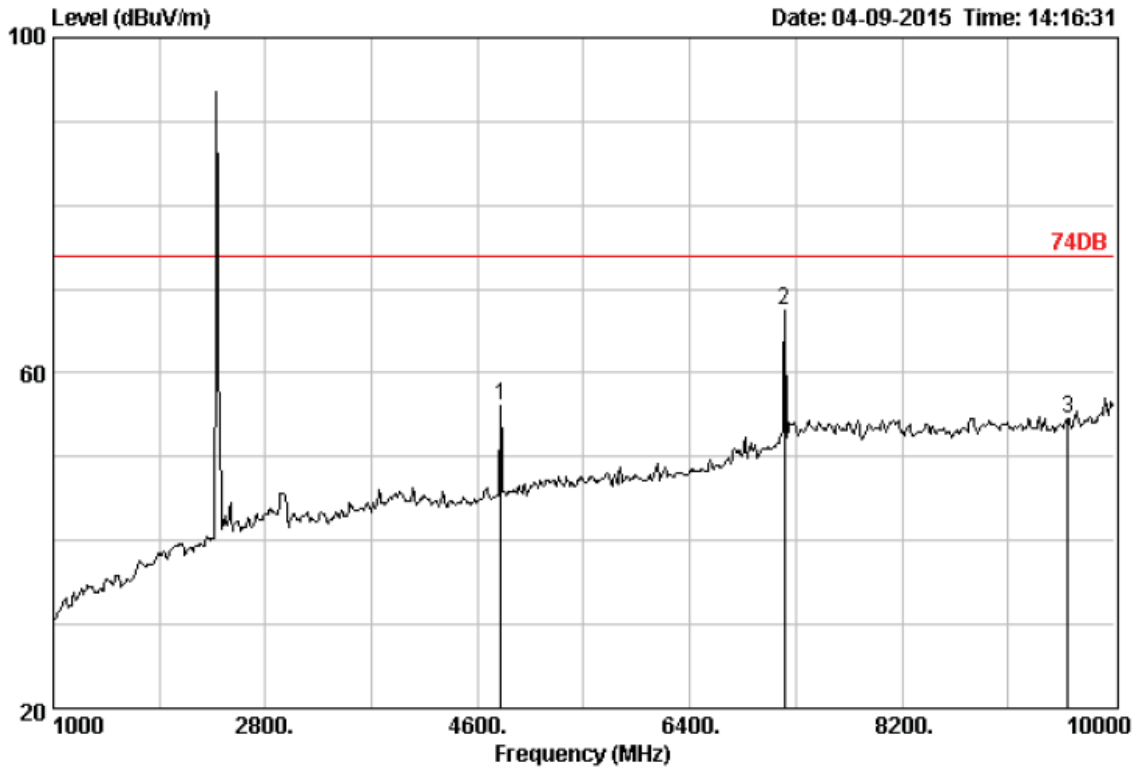

Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 74DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Data no. : 925  
 Ant. pol. : HORIZONTAL


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				Remark
				Reading (dBUV)	Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	
1	4798.00	33.44	6.90	50.07	56.06	74.00	17.94	Peak
2	7201.00	36.92	9.18	56.32	67.39	74.00	6.61	Peak
3	9608.00	38.53	10.97	40.94	54.45	74.00	19.55	Peak

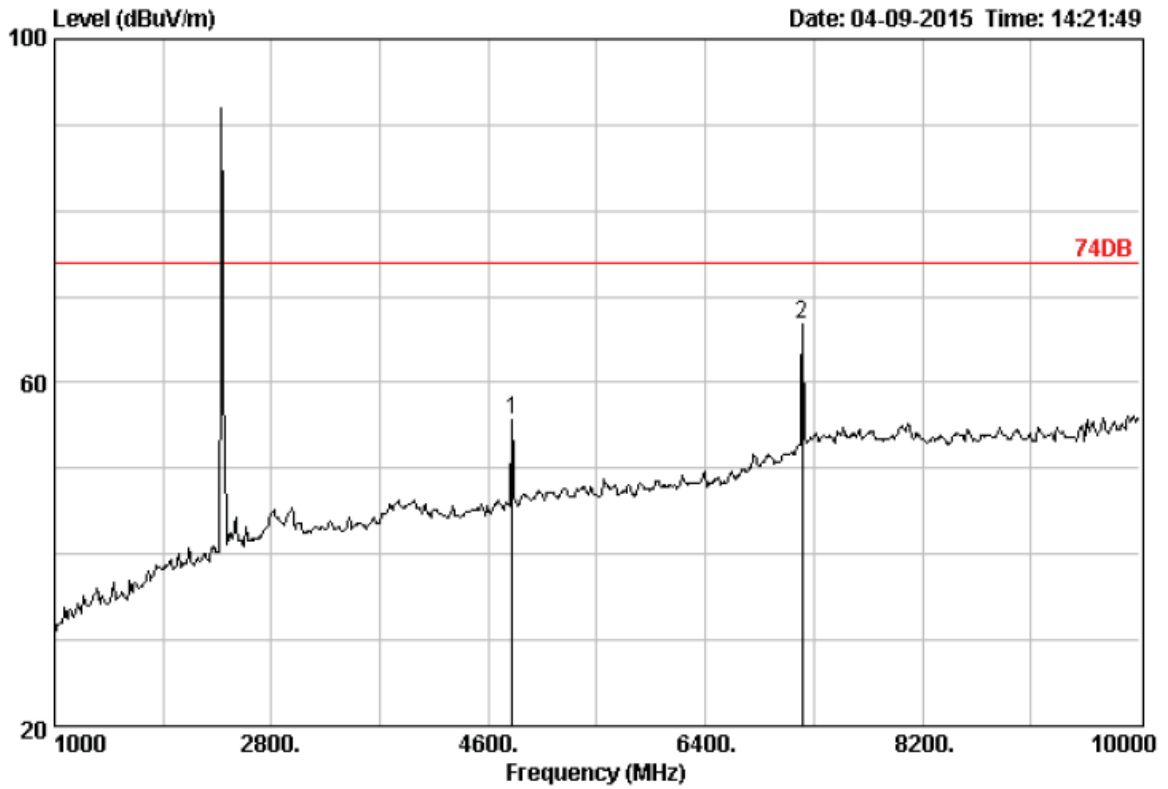

Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 74DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Data no. : 926  
 Ant. pol. : VERTICAL


No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	4798.00	33.44	6.90	49.73	55.72	74.00	18.28	Peak
2	7201.00	36.92	9.18	55.83	66.90	74.00	7.10	Peak

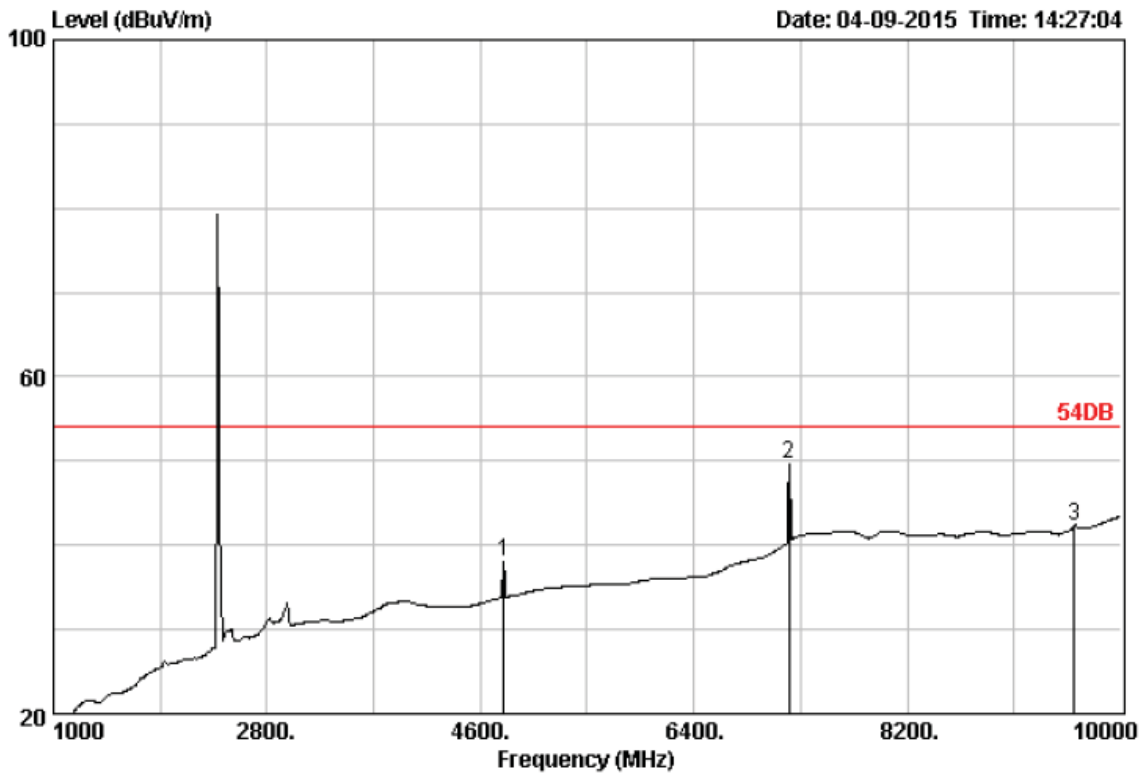

Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 54DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Data no. : 928  
 Ant. pol. : HORIZONTAL

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission		Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)		
1	4798.00	33.44	6.90	32.11	38.10	15.90	Average
2	7201.00	36.92	9.18	38.50	49.57	4.43	Average
3	9608.00	38.53	10.97	28.72	42.23	11.77	Average

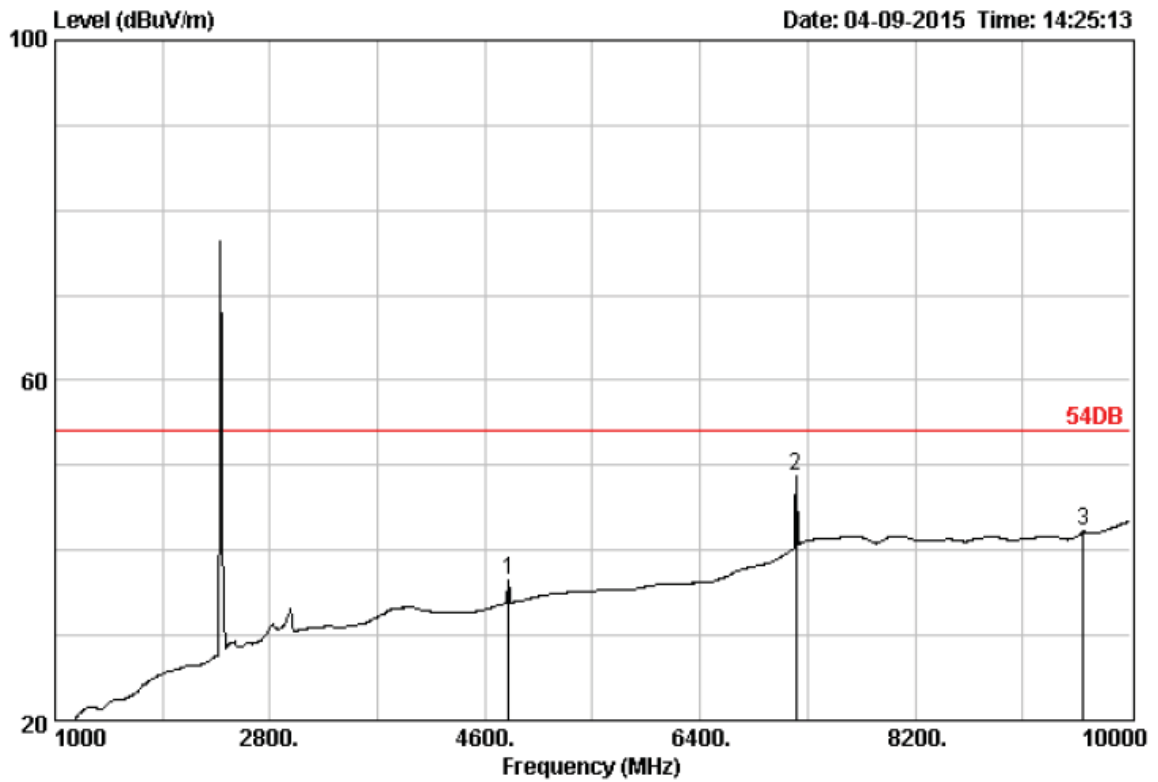


Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 54DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Data no. : 927  
 Ant. pol. : VERTICAL


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4798.00	33.44	6.90	30.49	36.48	54.00	17.52	Average
2	7201.00	36.92	9.18	37.71	48.78	54.00	5.22	Average

Middle Channel(2441 MHz):

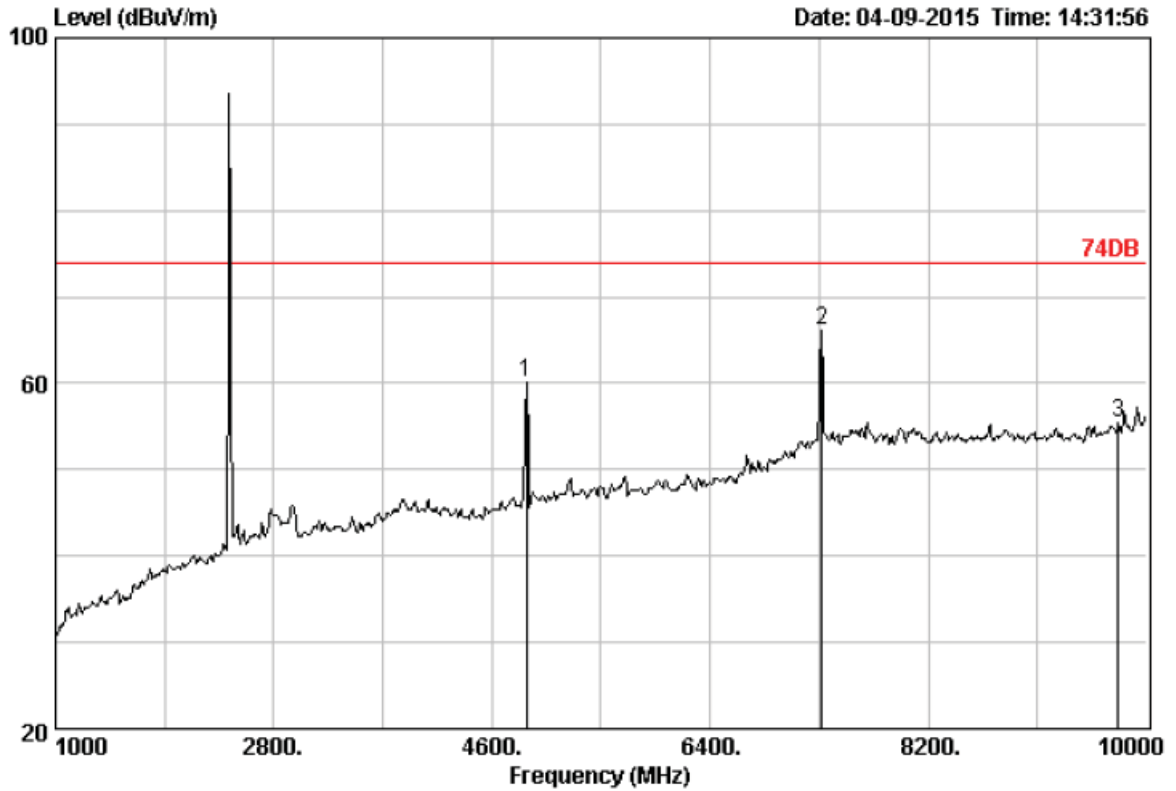


Site no. : 3m Chamber Data no. : 929  
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL  
 Limit : 74DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4888.00	33.63	6.96	53.89	60.19	74.00	13.81	Peak
2	7318.00	37.46	9.23	54.41	66.10	74.00	7.90	Peak
3	9764.00	38.67	11.04	41.34	55.37	74.00	18.63	Peak

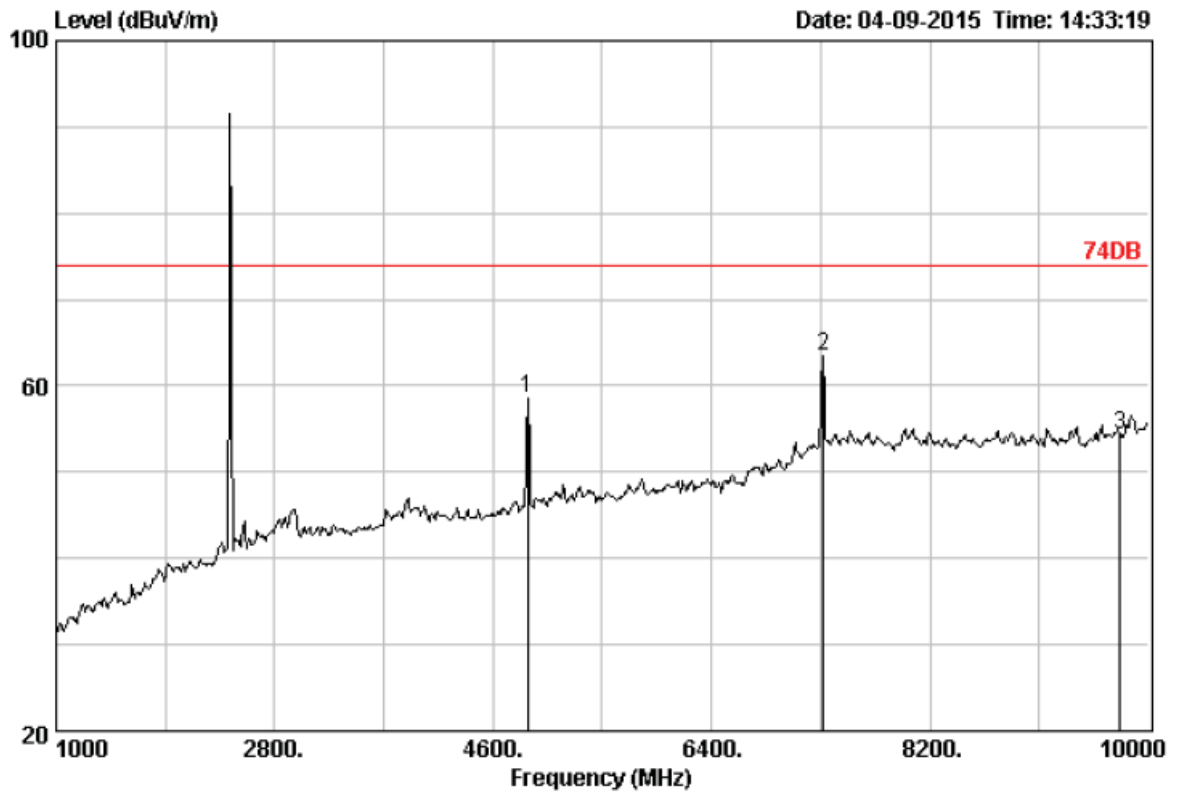

Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 74DB  
 Env. / Ins. : 23\*C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :  
 Data no. : 930  
 Ant. pol. : VERTICAL

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4888.00	33.63	6.96	52.27	58.57	74.00	15.43	Peak
2	7318.00	37.46	9.23	51.84	63.53	74.00	10.47	Peak
3	9764.00	38.67	11.04	40.29	54.32	74.00	19.68	Peak

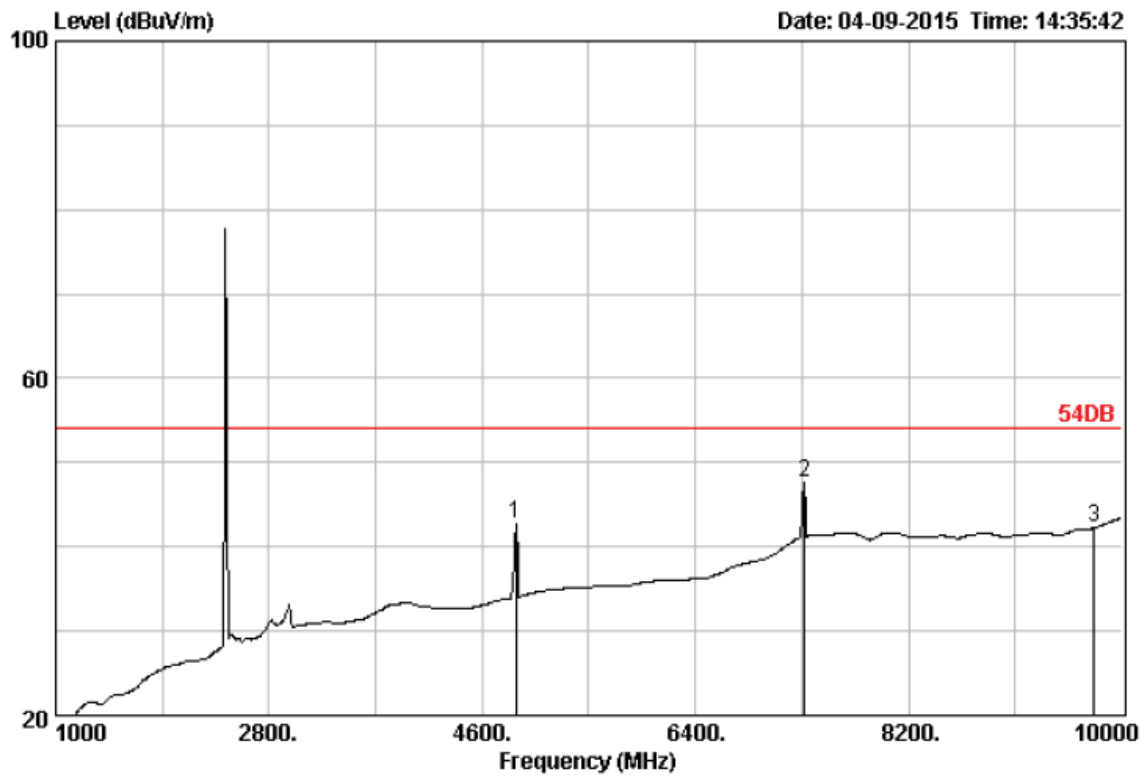


Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 54DB  
 Env. / Ins. : 23\*C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Data no. : 931  
 Ant. pol. : HORIZONTAL

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4888.00	33.63	6.96	36.41	42.71	54.00	11.29	Average
2	7318.00	37.46	9.23	35.90	47.59	54.00	6.41	Average
3	9764.00	38.67	11.04	28.26	42.29	54.00	11.71	Average




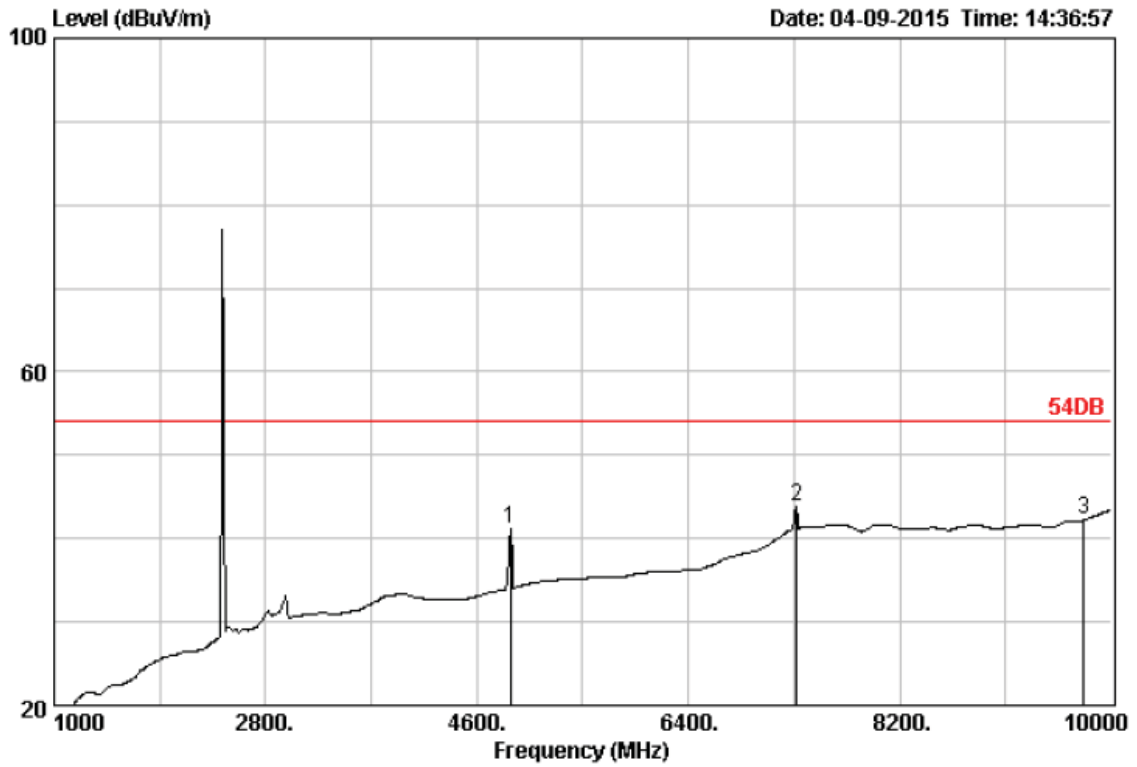

Site no. : 3m Chamber Data no. : 932  
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL  
 Limit : 54DB  
 Env. / Ins. : 23\*C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission			Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)		
1	4888.00	33.63	6.96	34.86	41.16	54.00	12.84	Average
2	7318.00	37.46	9.23	32.18	43.87	54.00	10.13	Average
3	9764.00	38.67	11.04	28.22	42.25	54.00	11.75	Average

Top Channel (2480MHz):

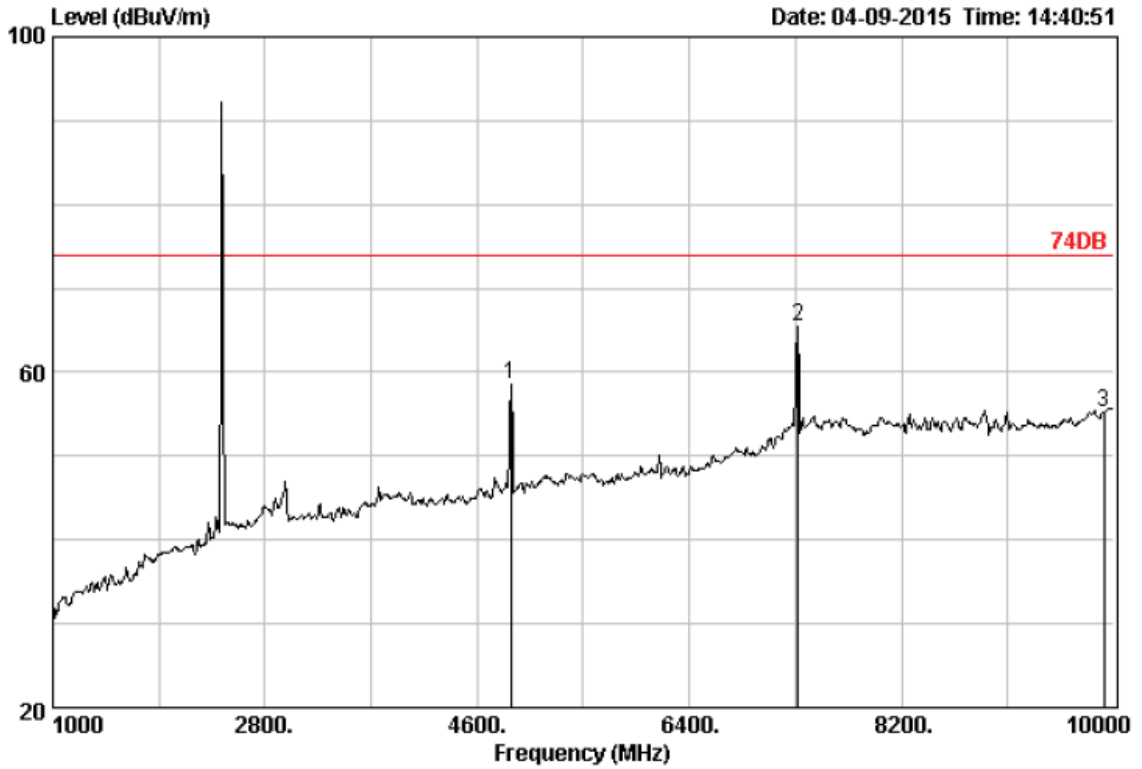


Site no. : 3m Chamber Data no. : 934  
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL  
 Limit : 74DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	4888.00	33.63	6.96	52.31	58.61	74.00	15.39	Peak
2	7318.00	37.46	9.23	53.66	65.35	74.00	8.65	Peak
3	9920.00	38.90	11.10	40.59	55.22	74.00	18.78	Peak

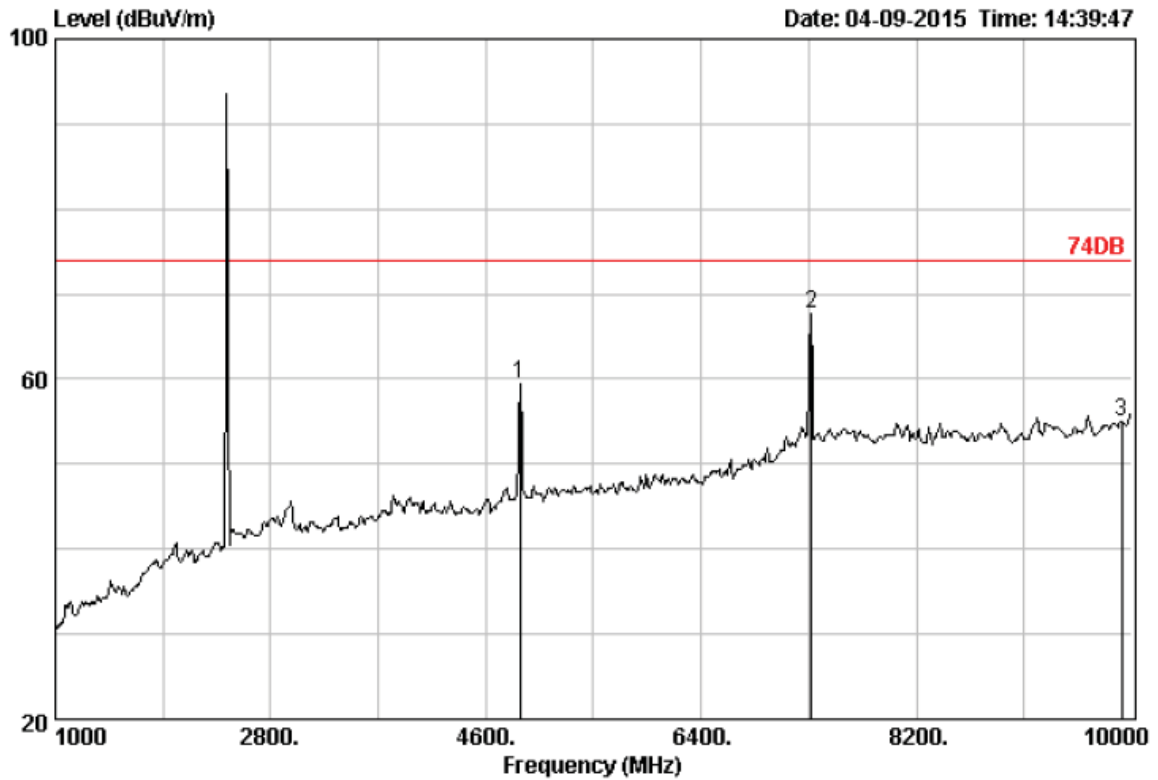


Site no. : 3m Chamber Data no. : 933  
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL  
 Limit : 74DB  
 Env. / Ins. : 23\*C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1	4888.00	33.63	6.96	53.10	59.40	74.00	14.60	Peak
2	7318.00	37.46	9.23	55.91	67.60	74.00	6.40	Peak
3	9920.00	38.90	11.10	40.35	54.98	74.00	19.02	Peak

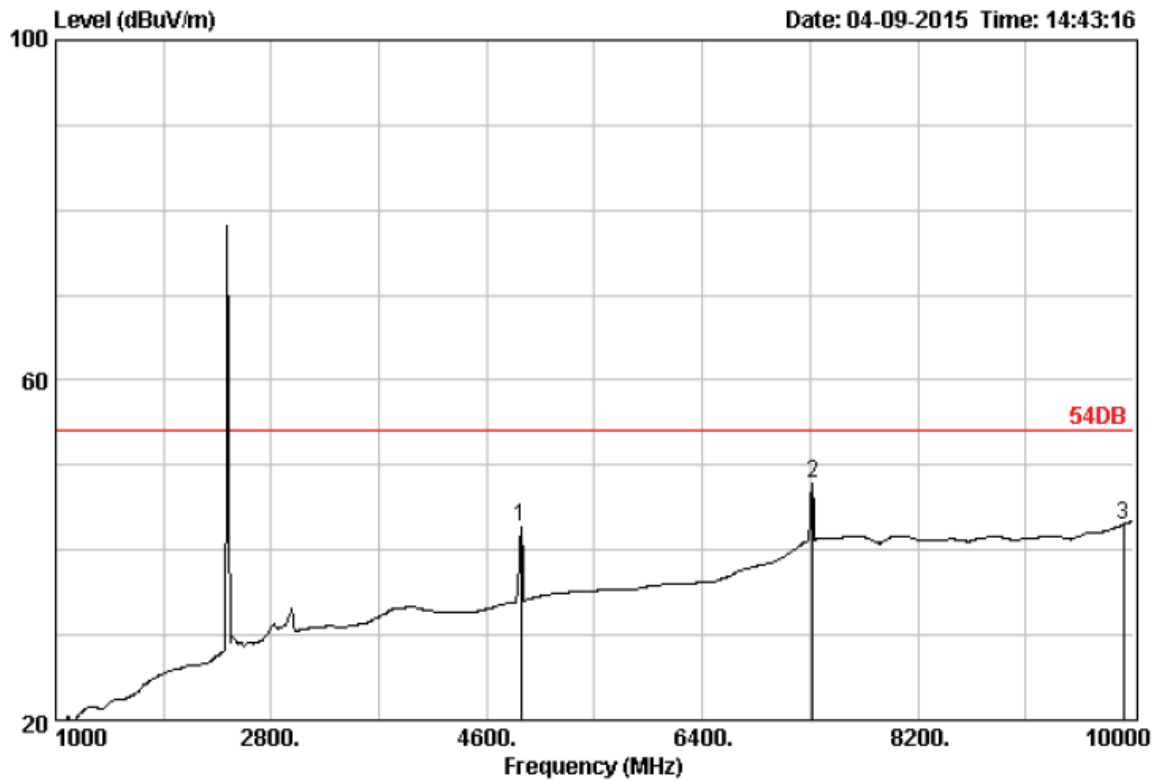

Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 54DB  
 Env. / Ins. : 23\*C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :  
 Data no. : 935  
 Ant. pol. : HORIZONTAL

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission			Margin (dB)	Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)		
1	33.63	6.96	36.39	42.69	54.00	11.31	Average
2	37.46	9.23	36.22	47.91	54.00	6.09	Average
3	38.90	11.10	28.40	43.03	54.00	10.97	Average

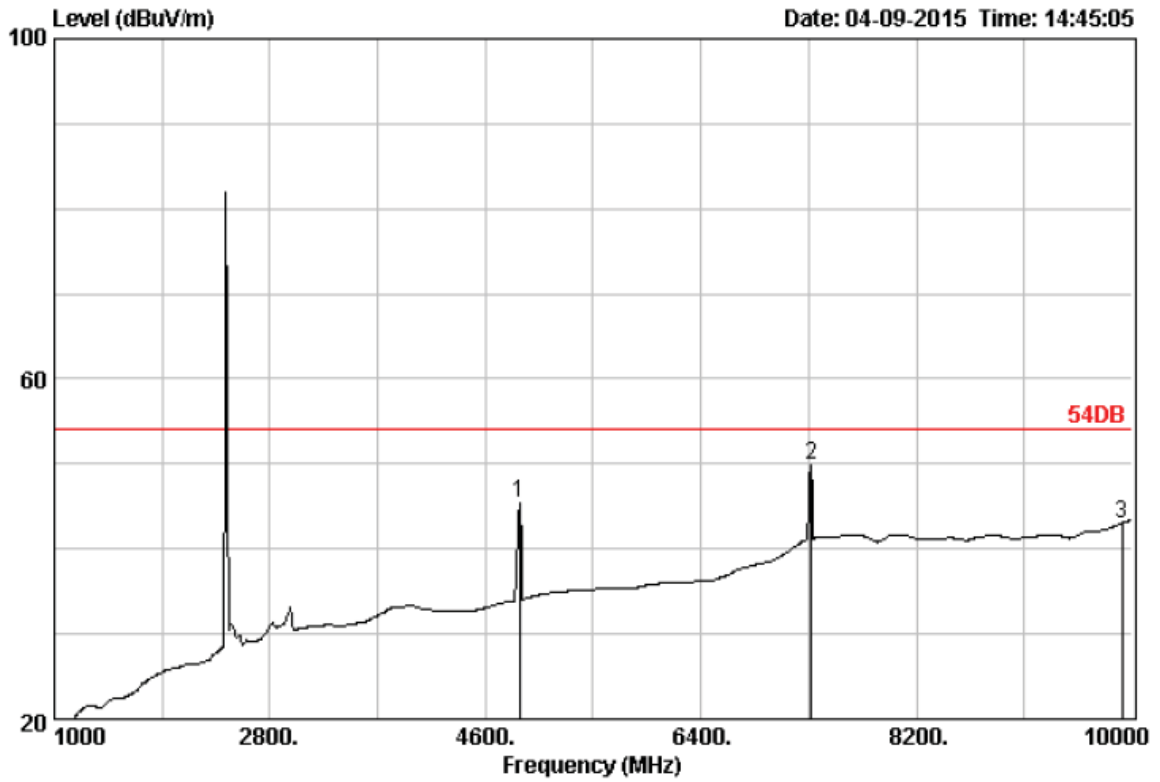

Site no. : 3m Chamber Data no. : 936  
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL  
 Limit : 54DB  
 Env. / Ins. : 23\*C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark	
			Reading (dBuV)	Level (dBuV/m)				
1	4888.00	33.63	6.96	39.19	45.49	54.00	8.51	Average
2	7318.00	37.46	9.23	38.12	49.81	54.00	4.19	Average
3	9920.00	38.90	11.10	28.40	43.03	54.00	10.97	Average

Note: above 10GHz up to 25GHz was verified, and no any emission was found except system base noise.

#### 4.4. Band Edge Measurement

##### TEST CONFIGURATION

Same as Section 4.2

##### TEST PROCEDURE


The band edge compliance of RF radiated emission should be measured by following the guidance in ANSI C63.4 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW to 1 MHz and VBM to 3MHz to measure the peak field strength and set RBW to 1MHz and VBW to 10Hz to measure the average radiated field strength. Peak detector is used for both.

##### LIMIT

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

##### TEST RESULTS


Please see the next page:

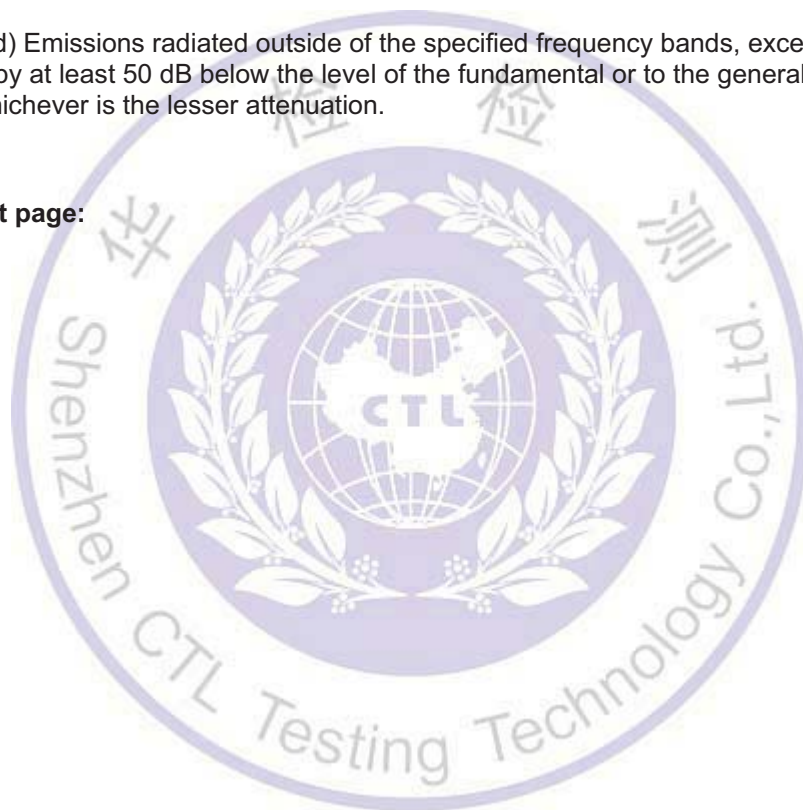

**Radiated Test:**

Operation Mode: TX on Bot Channel


Polarity: Hor.

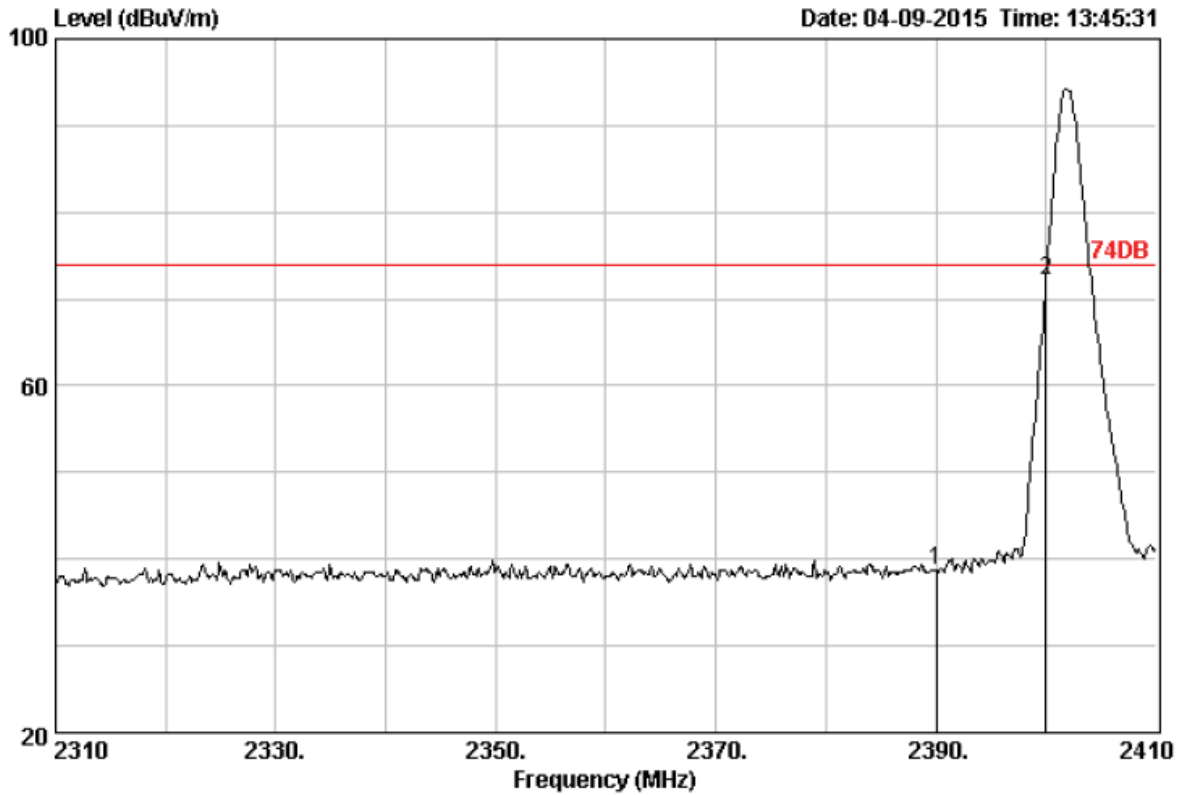

```

Site no.      : 3m Chamber                      Data no. : 922
Dis. / Ant.   : 3m DRH-118                    Ant. pol. : HORIZONTAL
Limit        : 74DB
Env. / Ins.   : 23*C/54%
Engineer     :
EUT          :
Power        :
M/N         :
Test Mode    :
    
```

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.78	4.61	40.65	38.68	74.00	35.32	Peak
2	2400.00	28.78	4.61	74.11	72.14	74.00	1.86	Peak

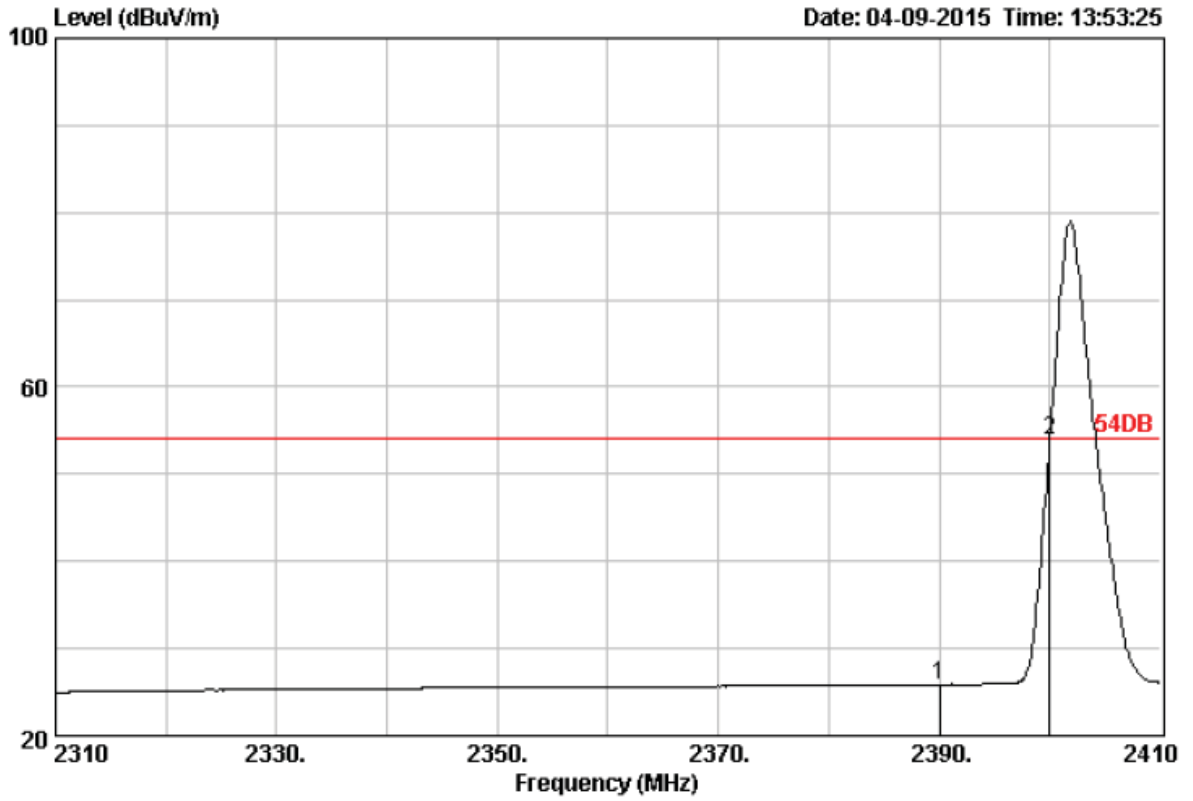

Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 54DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :


Data no. : 923  
 Ant. pol. : HORIZONTAL

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.78	4.61	27.80	25.83	54.00	28.17	Average
2	2400.00	28.78	4.61	55.79	53.82	54.00	0.18	Average



Operation Mode: TX on Bot Channel


Polarity: Ver.

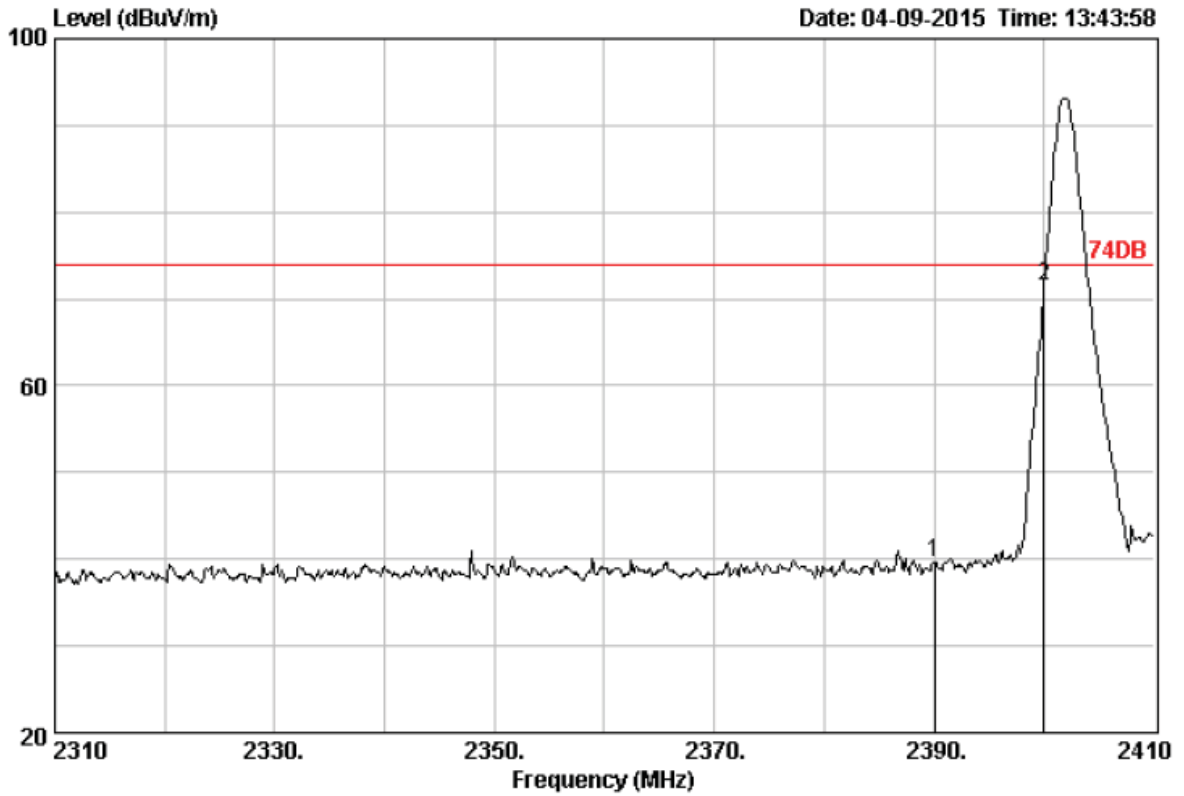

```

Site no.      : 3m Chamber
Dis. / Ant.  : 3m DRH-118
Limit        : 74DB
Env. / Ins.  : 23*C/54%
Engineer     :
EUT          :
Power        :
M/N         :
Test Mode    :
Data no.     : 921
Ant. pol.    : VERTICAL
    
```

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2390.00	28.78	4.61	41.52	39.55	74.00	34.45	Peak
2	2400.00	28.78	4.61	73.51	71.54	74.00	2.46	Peak

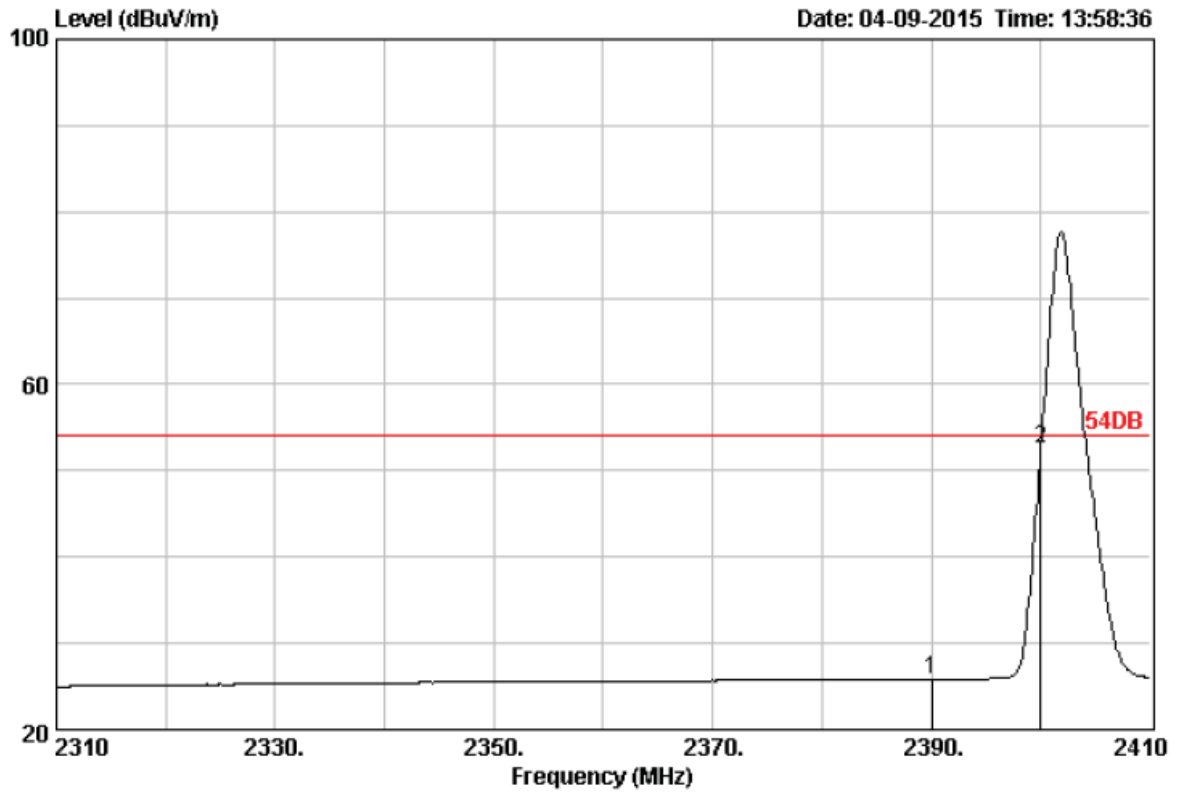


Site no. : 3m Chamber  
 Dis. / Ant. : 3m DRH-118  
 Limit : 54DB  
 Env. / Ins. : 23°C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :  
 Data no. : 924  
 Ant. pol. : VERTICAL

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				Remark
				Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	2390.00	28.78	4.61	27.79	25.82	54.00	28.18	Average
2	2400.00	28.78	4.61	54.51	52.54	54.00	1.46	Average

Note: The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.

Operation Mode: TX on Top Channel


Polarity: Hor.

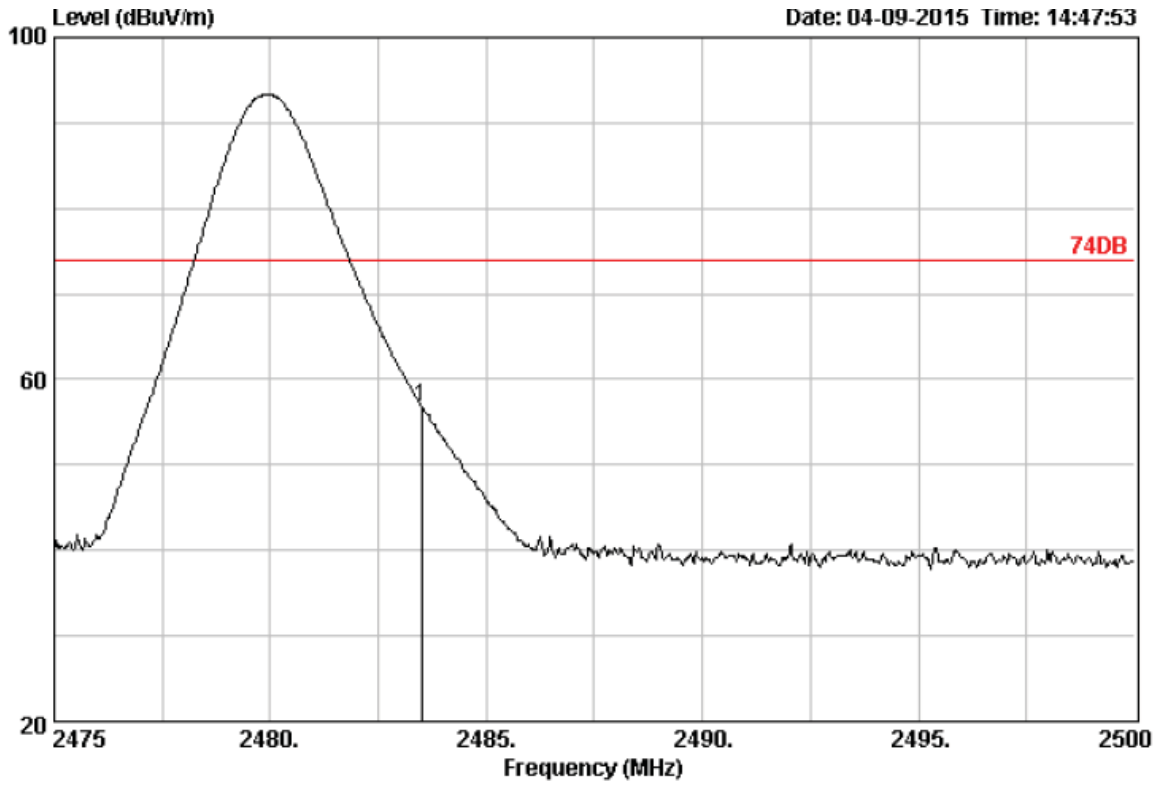

```

Site no.      : 3m Chamber                      Data no. : 938
Dis. / Ant.  : 3m DRH-118                     Ant. pol. : HORIZONTAL
Limit        : 74DB
Env. / Ins.  : 23*C/54%
Engineer     :
EUT          :
Power        :
M/N         :
Test Mode    :
  
```

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission				Margin (dB)	Remark
			Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)			
1 2483.50	28.93	4.70	58.63	56.88	74.00	17.12	Peak	

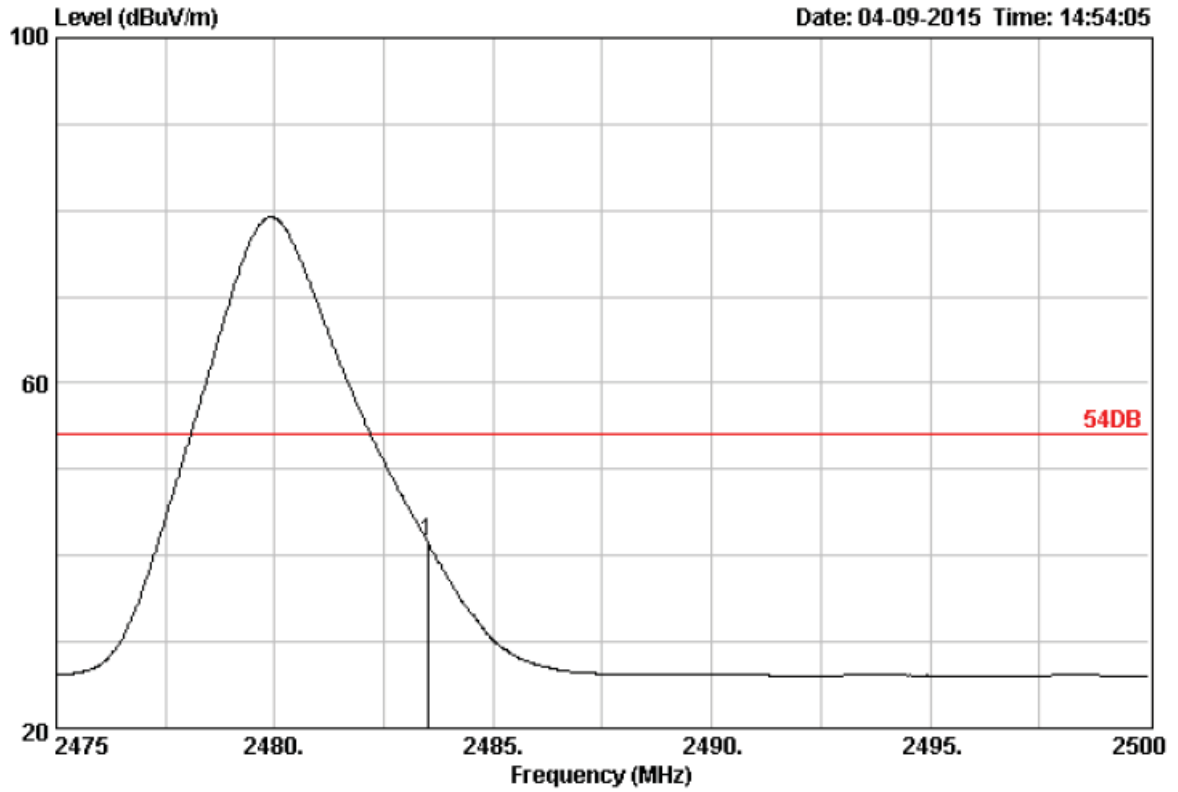


Site no. : 3m Chamber Data no. : 940  
 Dis. / Ant. : 3m DRH-118 Ant. pol. : HORIZONTAL  
 Limit : 54DB  
 Env. / Ins. : 23\*C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
			Reading (dBuV)	Level (dBuV/m)			
1 2483.50	28.93	4.70	43.35	41.60	54.00	12.40	Average

Operation Mode: TX on Top Channel


Polarity: Ver.

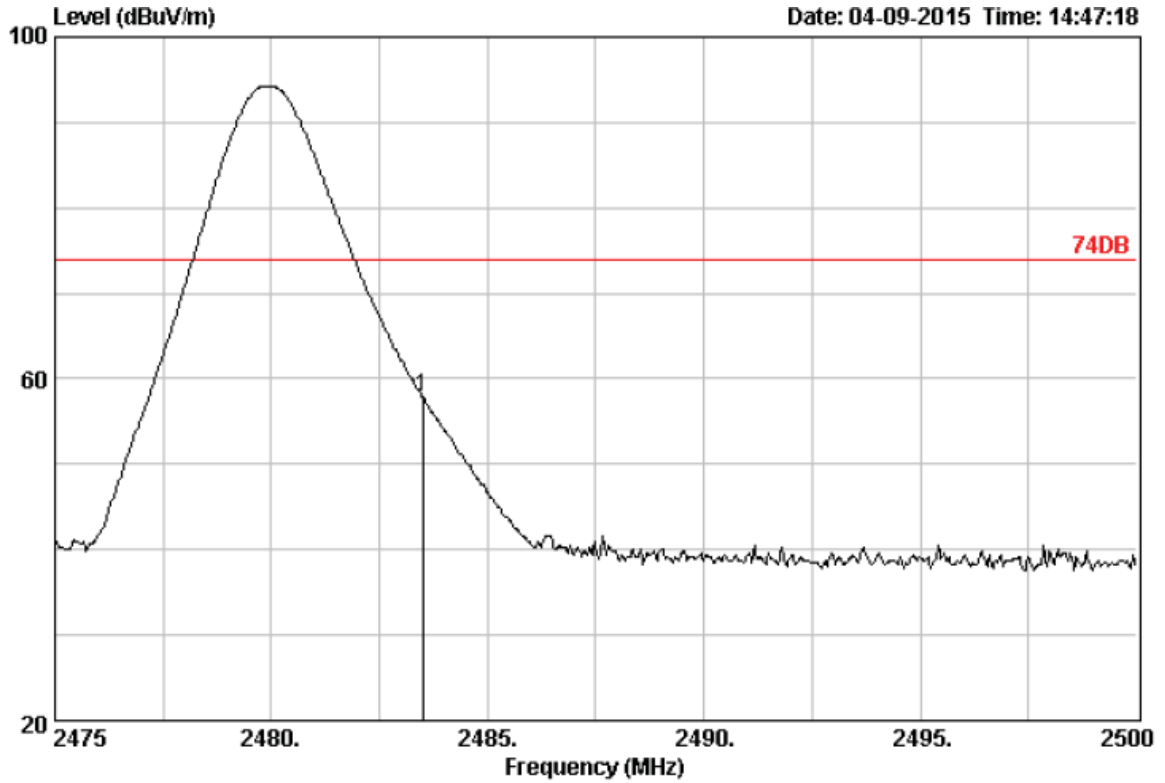

```

Site no.      : 3m Chamber
Dis. / Ant.  : 3m DRH-118
Limit        : 74DB
Env. / Ins.  : 23*C/54%
Engineer     :
EUT          :
Power        :
M/N          :
Test Mode    :
Data no.     : 937
Ant. pol.    : VERTICAL
  
```

No.	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission		Margin (dB)	Remark
				Reading (dBuV)	Level Limits (dBuV/m)		
1	2483.50	28.93	4.70	59.58	74.00	16.17	Peak

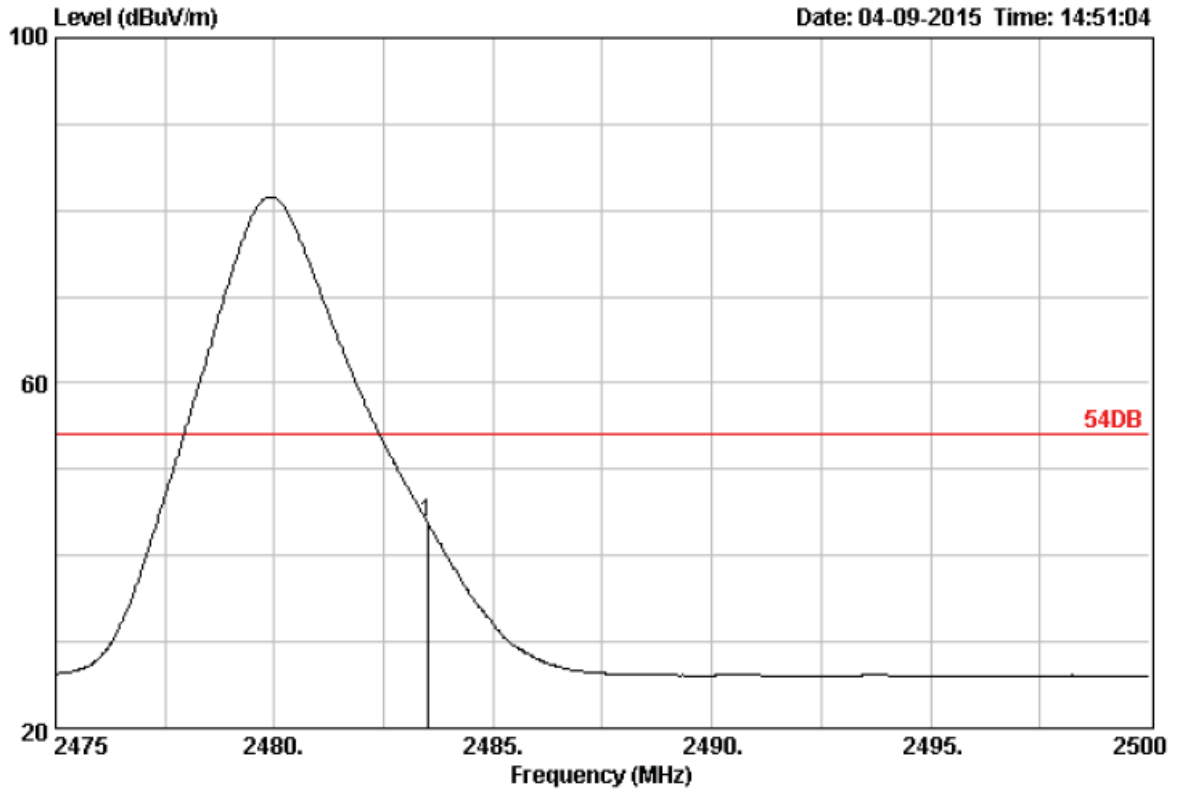

Site no. : 3m Chamber Data no. : 939  
 Dis. / Ant. : 3m DRH-118 Ant. pol. : VERTICAL  
 Limit : 54DB  
 Env. / Ins. : 23\*C/54%  
 Engineer :  
 EUT :  
 Power :  
 M/N :  
 Test Mode :

Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
			Reading (dBuV)	Level (dBuV/m)			
1 2483.50	28.93	4.70	45.55	43.80	54.00	10.20	Average

Note: The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in Section 15.209.


### 4.5. Occupied Bandwidth Measurement

#### Measurement Procedure

1. Set EUT as keeping TX
2.  $RBW \geq 1\%$  of the 20 dB bandwidth,  $VBW \geq RBW$ .
3. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.


#### Measurement Results

2402MHz

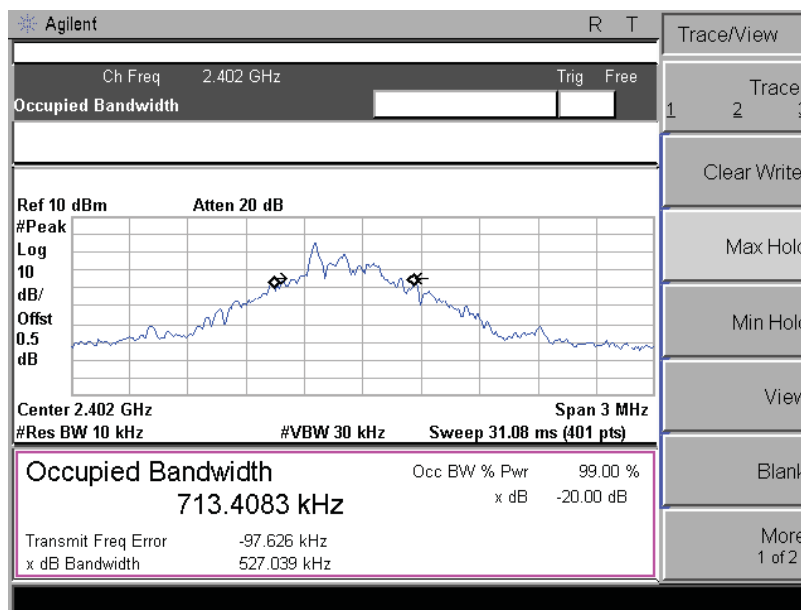


20dB Bandwidth: 527.039KHz

2441MHz

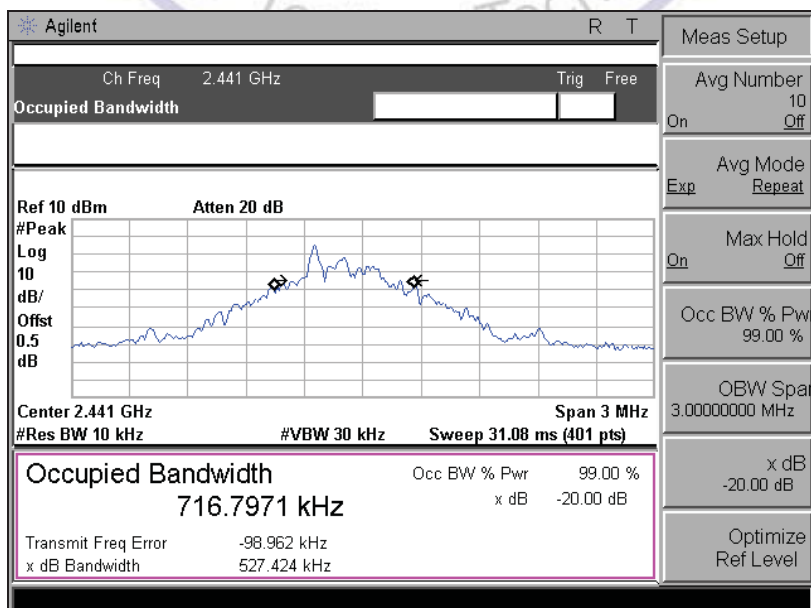

20dB Bandwidth: 527.424KHz

2480MHz

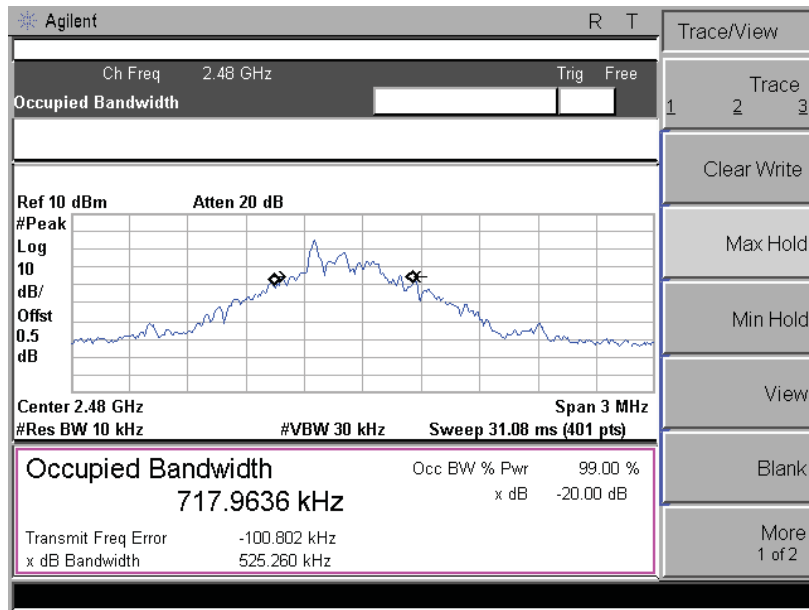

20dB Bandwidth: 525.260KHz





## **5. Antenna Requirement**

### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **Refer to statement below for compliance.**


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **Antenna Connected Construction**

The antenna used in this product is an internal Antenna, The directional gains of antenna used for transmitting is -1.61 dBi.



## 6. Test Setup Photos of the EUT

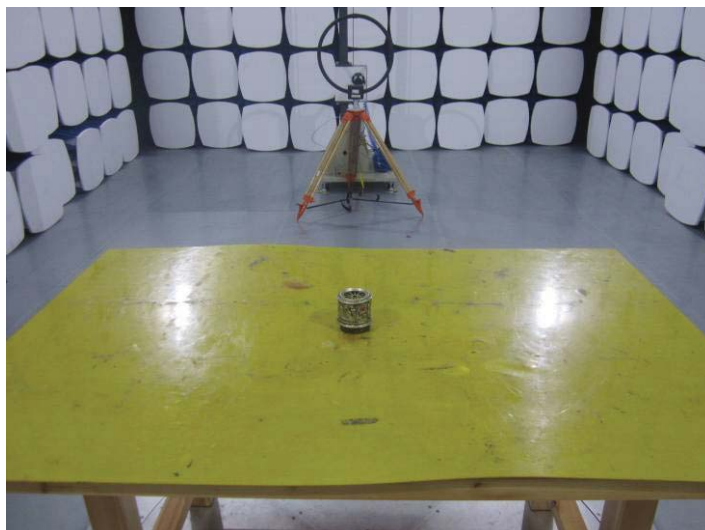



## 7. External and Internal Photos of the EUT



### External Photos of EUT










Internal Photos of EUT

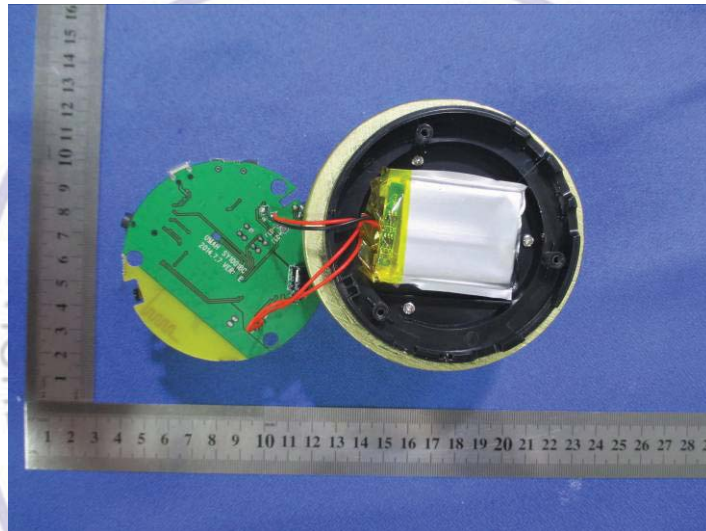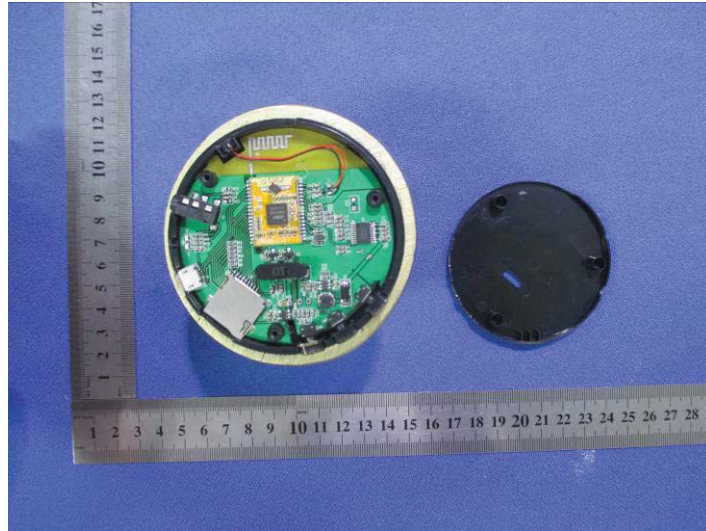

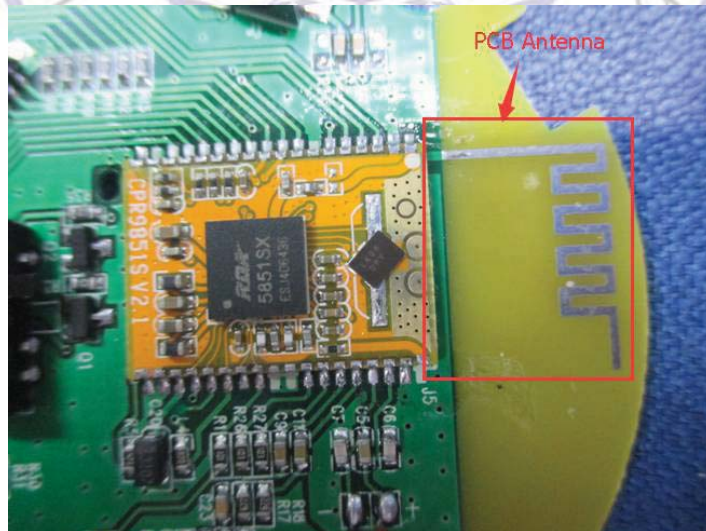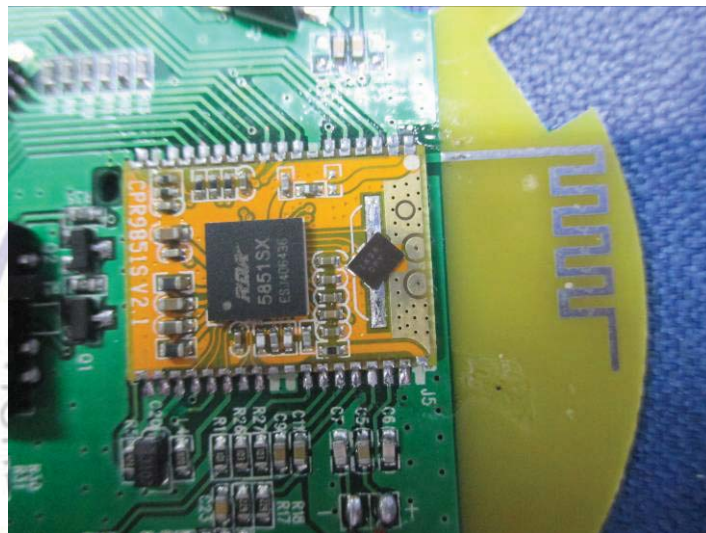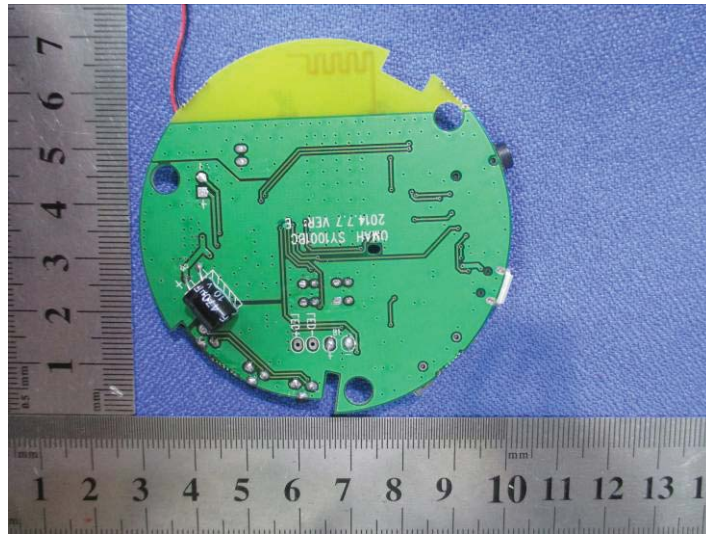



Listed Models



.....End of Report.....

