

TEST REPORT

Reference No...... : WTS16S1063232-2E
FCC ID : 2AEHF-VOLTNX5
Applicant..... : NOBUX, LLC
Address..... : 8600 NW SOUTH RIVER DR #103 MIAMI, FLORIDA, United States
Manufacturer : NOBUX, LLC
Address..... : 8600 NW SOUTH RIVER DR #103 MIAMI, FLORIDA, United States
Product Name..... : 3G Mobile Phone
Model No..... : SMART VOLT NX5
Brand..... : NOBUX
Standards..... : FCC CFR47 Part 15.247:2015
Date of Receipt sample : Oct. 20, 2016
Date of Test : Oct. 21-Nov. 05, 2016
Date of Issue..... : Nov. 08, 2016
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services Test Group Ltd is a professional third-party testing and certification organization with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by CNAS (China National Accreditation Service for Conformity Assessment) AQSIIQ, CMA and IECEE for CBTL. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CPSC(Consumer Product Safety Commission), CEC(California energy efficiency), IC(Industry Canada) and ELI(Efficient Lighting Initiative). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as UL, Intertek(ETL-SEMKO), CSA, TÜV Rheinland, TÜV SÜD, etc.



Waltek Services Test Group Ltd. is one of the largest and the most comprehensive third party testing organizations in China, our headquarter located in Shenzhen and have branches in Foshan, Dongguan, Zhongshan, Suzhou, Ningbo and Hong Kong, Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), reliability and energy performance, Chemical test. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

3 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
3 CONTENTS.....	3
4 REVISION HISTORY.....	5
5 GENERAL INFORMATION.....	6
5.1 GENERAL DESCRIPTION OF E.U.T.	6
5.2 DETAILS OF E.U.T.	6
5.3 CHANNEL LIST.....	8
5.4 TEST MODE.....	9
5.5 TEST FACILITY.....	10
6 TEST SUMMARY.....	11
7 EQUIPMENT USED DURING TEST.....	12
7.1 EQUIPMENTS LIST.....	12
7.2 DESCRIPTION OF SUPPORT UNITS.....	13
7.3 MEASUREMENT UNCERTAINTY.....	13
7.4 TEST EQUIPMENT CALIBRATION.....	13
8 CONDUCTED EMISSION.....	14
8.1 E.U.T. OPERATION.....	14
8.2 EUT SETUP.....	14
8.3 MEASUREMENT DESCRIPTION.....	14
8.4 CONDUCTED EMISSION TEST RESULT.....	15
9 RADIATED EMISSIONS.....	19
9.1 EUT OPERATION.....	19
9.2 TEST SETUP.....	20
9.3 SPECTRUM ANALYZER SETUP.....	21
9.4 TEST PROCEDURE.....	22
9.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	22
9.6 SUMMARY OF TEST RESULTS.....	23
10 CONDUCTED SPURIOUS EMISSIONS.....	31
10.1 TEST PROCEDURE.....	31
10.2 TEST RESULT.....	32
11 BAND EDGE MEASUREMENT.....	48
11.1 TEST PRODUCE.....	48
11.2 TEST RESULT.....	49
12 6 DB BANDWIDTH MEASUREMENT.....	64
12.1 TEST PROCEDURE:.....	64
12.2 TEST RESULT:.....	64
13 MAXIMUM PEAK OUTPUT POWER.....	73
13.1 TEST PROCEDURE:.....	73
13.2 TEST RESULT:.....	74
14 POWER SPECTRAL DENSITY.....	83
14.1 TEST PROCEDURE:.....	83
14.2 TEST RESULT:.....	83

15 ANTENNA REQUIREMENT 92

16 RF EXPOSURE..... 93

17 PHOTOGRAPHS OF TEST SETUP AND EUT..... 94

4 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS16S1063232-2E	Oct. 20, 2016	Oct. 21-Nov. 05, 2016	Nov. 08, 2016	original	-	Valid

5 General Information

5.1 General Description of E.U.T.

Product Name:	3G Mobile Phone
Model No.:	SMART VOLT NX5
Model Description:	N/A
GSM Band(s):	GSM 850/900/1800/1900MHz
GPRS/EGPRS Class:	12
WCDMA Band(s):	FDD Band I/II/V
LTE Band(s):	N/A
Wi-Fi Specification:	2.4G-802.11b/g/n HT20/n HT40
Bluetooth Version:	Bluetooth v4.0 with BLE
GPS:	Support
NFC:	N/A
Hardware Version:	WF5 2.1
Software Version:	WF581.JF.M0.F.GAL1SAG1.B125.0622.V3.03.Test
Highest frequency (Exclude Radio):	26MHz
Storage Location:	Internal Storage

5.2 Details of E.U.T.

Operation Frequency:	GSM/GPRS/EDGE 850: 824~849MHz PCS/GPRS/EDGE 1900: 1850~1910MHz WCDMA Band II: 1850~1910MHz WCDMA Band V: 824~849MHz WiFi: 802.11b/g/n HT20: 2412~2462MHz 802.11n HT40: 2422~2452MHz Bluetooth: 2402~2480MHz
Max. RF output power:	GSM 850: 32.85dBm PCS1900: 29.90dBm WCDMA Band II: 22.63dBm WCDMA Band V: 22.59dBm WiFi (2.4G): 9.48dBm Bluetooth: 1.09dBm
Type of Modulation:	GSM,GPRS: GMSK EDGE: GMSK, 8PSK WCDMA: BPSK WiFi: CCK, OFDM Bluetooth: GFSK, Pi/4 DQPSK, 8DPSK

Antenna installation:	GSM/WCDMA: internal permanent antenna WiFi/Bluetooth: internal permanent antenna
Antenna Gain:	GSM 850: -0.8dBi PCS1900: -1.0dBi WCDMA Band II: -1.0dBi WCDMA Band V: -0.8dBi WiFi(2.4G): -0.7dBi Bluetooth: -0.7dBi
Technical Data:	Battery DC 3.8V, 2200mAh DC 5V, 1.0A, charging from adapter (Adapter Input: 100-240V~50/60Hz 0.15A)
Adapter:	Manufacture: Shenzhen Lianxunweiye Teehnology Co.ltd. Model No.: LXD-S15B

5.3 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

5.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
6dB Bandwidth	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Band Edge	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

5.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2015.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

6 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

7 Equipment Used during Test

7.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.12,2016	Sep.11,2017
2.	LISN	R&S	ENV216	101215	Sep.12,2016	Sep.11,2017
3.	Cable	Top	TYPE16(3.5M)	-	Sep.12,2016	Sep.11,2017
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.12,2016	Sep.11,2017
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.12,2016	Sep.11,2017
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.12,2016	Sep.11,2017
4.	Cable	LARGE	RF300	-	Sep.12,2016	Sep.11,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	Apr.29, 2016	Apr.28, 2017
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Apr.09,2016	Apr.08,2017
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.09,2016	Apr.08,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.12,2016	Sep.11,2017
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.09,2016	Apr.08,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.09,2016	Apr.08,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Apr.13,2016	Apr.12,2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.13,2016	Apr.12,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Apr.13,2016	Apr.12,2017
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Apr.09,2016	Apr.08,2017
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Apr.13,2016	Apr.12,2017
4	Cable	HUBER+SUHNER	CBL2	525178	Apr.13,2016	Apr.12,2017

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.12,2016	Sep.11,2017
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.12,2016	Sep.11,2017
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.12,2016	Sep.11,2017

7.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

7.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz) ± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

7.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

8 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207
Test Method: ANSI C63.10:2013
Test Result: PASS
Frequency Range: 150kHz to 30MHz
Class/Severity: Class B
Limit:

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	60
5 to 30	60	50


8.1 E.U.T. Operation

Operating Environment :
Temperature: 21.5 °C
Humidity: 51.9 % RH
Atmospheric Pressure: 101.2kPa

EUT Operation :
The test was performed in WIFI link mode, the worst data were shown in the report.

8.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

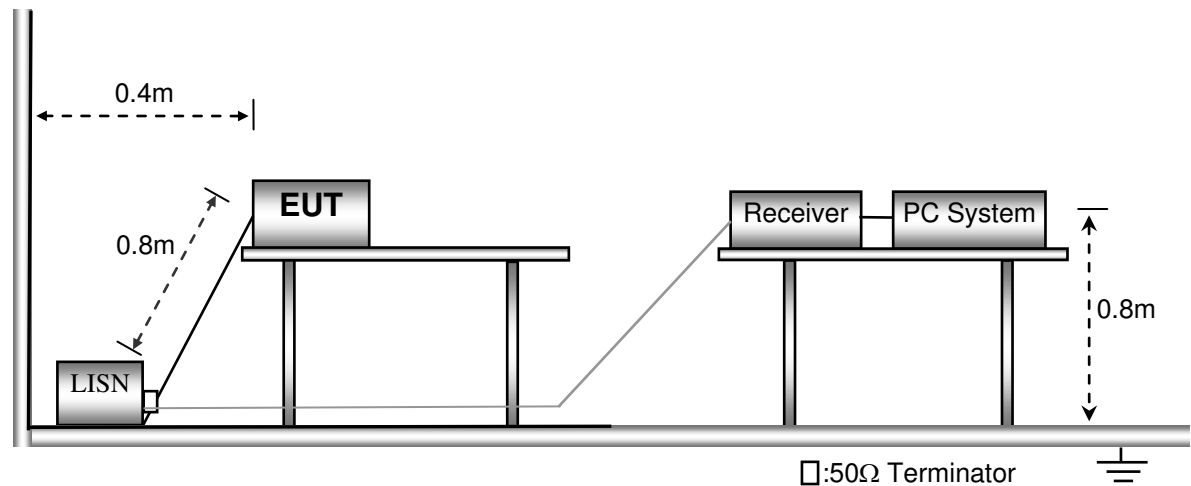

8.3 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

8.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Worst Mode: WIFI mode

Live line:

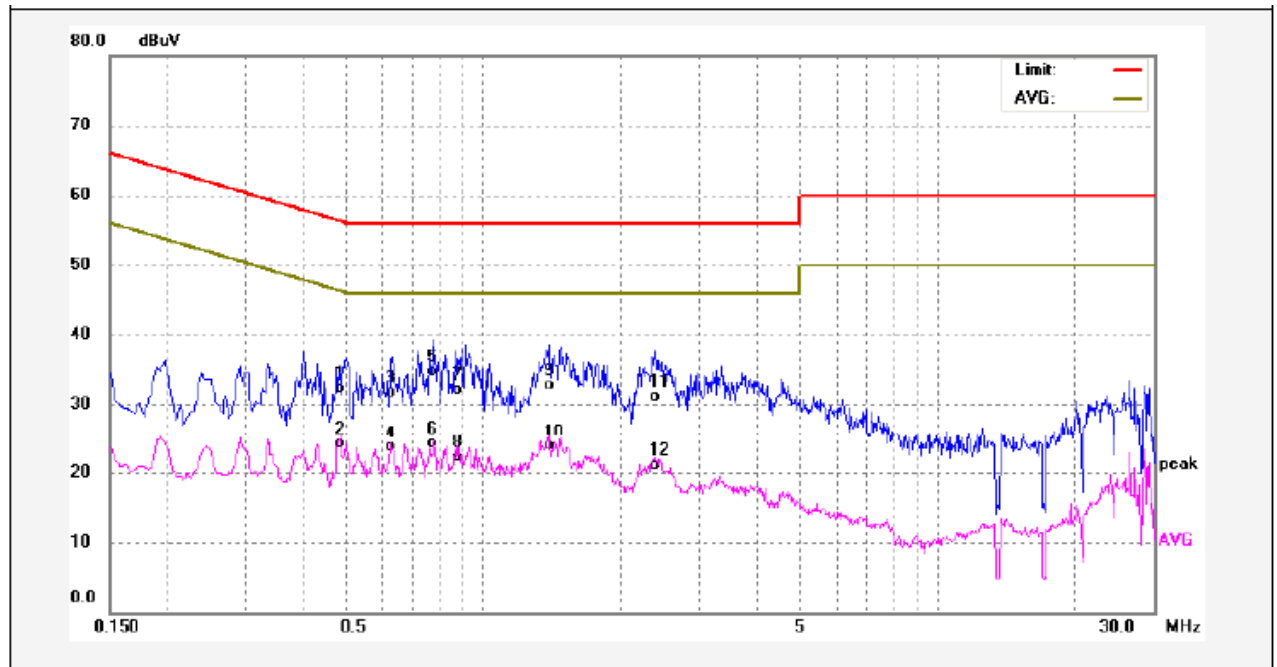

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.4820	22.13	10.25	32.38	56.30	-23.92	QP	
2	0.4820	13.96	10.25	24.21	46.30	-22.09	AVG	
3	0.6220	21.47	10.31	31.78	56.00	-24.22	QP	
4	0.6220	13.32	10.31	23.63	46.00	-22.37	AVG	
5	0.7780	24.31	10.36	34.67	56.00	-21.33	QP	
6	0.7780	13.94	10.36	24.30	46.00	-21.70	AVG	
7	0.8740	21.68	10.37	32.05	56.00	-23.95	QP	
8	0.8740	11.98	10.37	22.35	46.00	-23.65	AVG	
9	1.3900	22.33	10.42	32.75	56.00	-23.25	QP	
10	1.3900	13.52	10.42	23.94	46.00	-22.06	AVG	
11	2.3900	20.71	10.48	31.19	56.00	-24.81	QP	
12	2.3900	10.65	10.48	21.13	46.00	-24.87	AVG	


Neutral line:

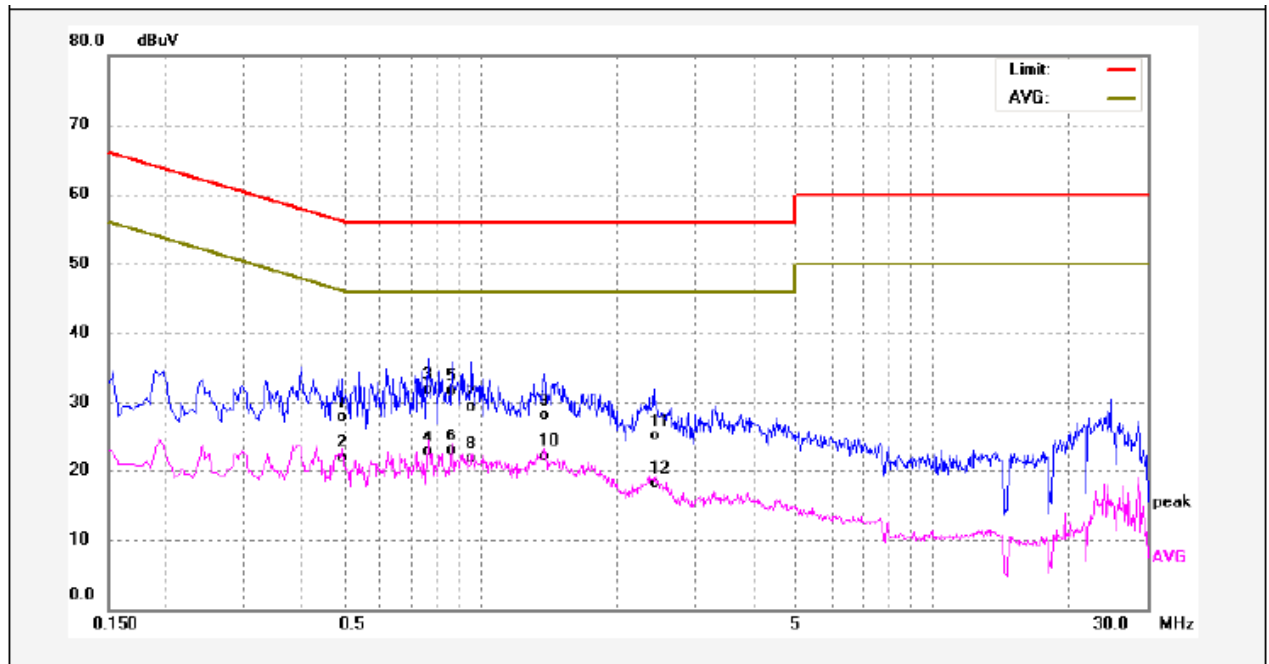

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.4940	17.68	10.25	27.93	56.10	-28.17	QP	
2	0.4940	11.56	10.25	21.81	46.10	-24.29	AVG	
3	0.7660	21.56	10.36	31.92	56.00	-24.08	QP	
4	0.7660	12.37	10.36	22.73	46.00	-23.27	AVG	
5	0.8620	21.36	10.37	31.73	56.00	-24.27	QP	
6	0.8620	12.44	10.37	22.81	46.00	-23.19	AVG	
7	0.9620	18.99	10.39	29.38	56.00	-26.62	QP	
8	0.9620	11.25	10.39	21.64	46.00	-24.36	AVG	
9	1.3860	17.74	10.42	28.16	56.00	-27.84	QP	
10	1.3860	11.60	10.42	22.02	46.00	-23.98	AVG	
11	2.4460	14.61	10.48	25.09	56.00	-30.91	QP	
12	2.4460	7.58	10.48	18.06	46.00	-27.94	AVG	


Worst Mode: BLE mode

Live line:

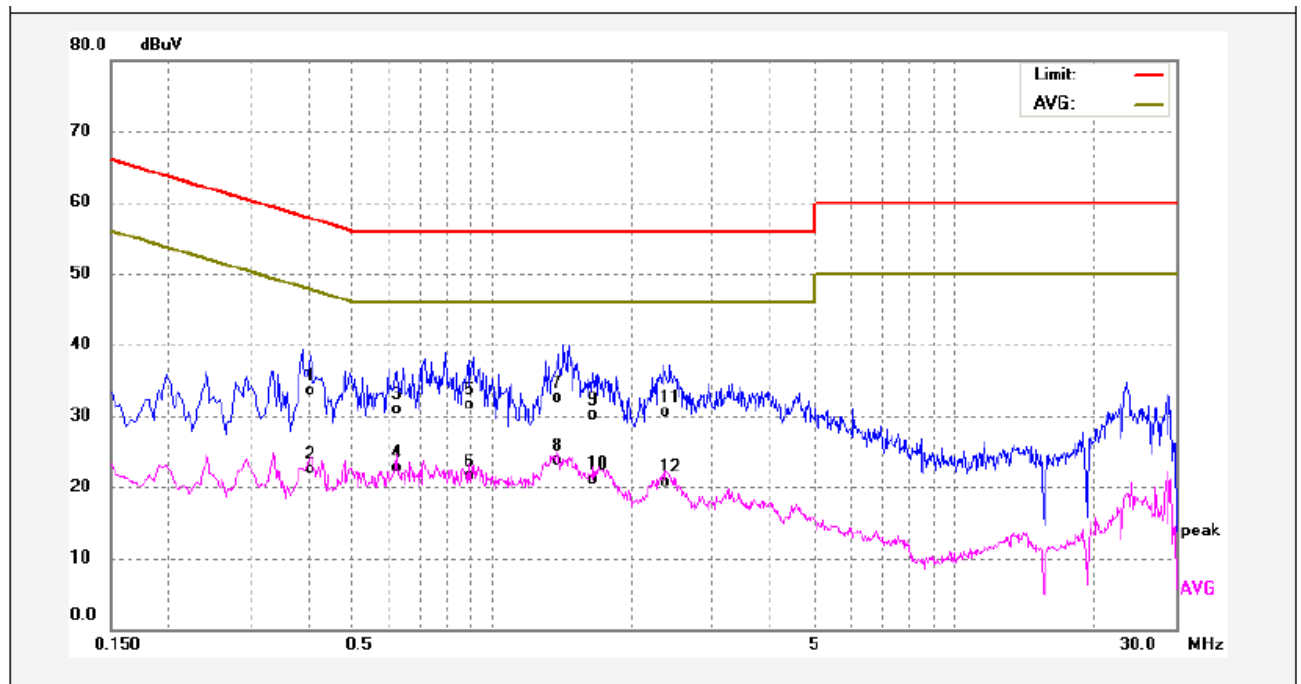

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.4060	23.27	10.27	33.54	57.73	-24.19	QP	
2	0.4060	12.33	10.27	22.60	47.73	-25.13	AVG	
3	0.6220	20.62	10.31	30.93	56.00	-25.07	QP	
4	0.6220	12.43	10.31	22.74	46.00	-23.26	AVG	
5	0.8900	21.14	10.38	31.52	56.00	-24.48	QP	
6	0.8900	11.17	10.38	21.55	46.00	-24.45	AVG	
7	1.3860	21.99	10.42	32.41	56.00	-23.59	QP	
8	1.3860	13.22	10.42	23.64	46.00	-22.36	AVG	
9	1.6580	19.69	10.44	30.13	56.00	-25.87	QP	
10	1.6580	10.72	10.44	21.16	46.00	-24.84	AVG	
11	2.3740	20.12	10.48	30.60	56.00	-25.40	QP	
12	2.3740	10.26	10.48	20.74	46.00	-25.26	AVG	

Neutral line:

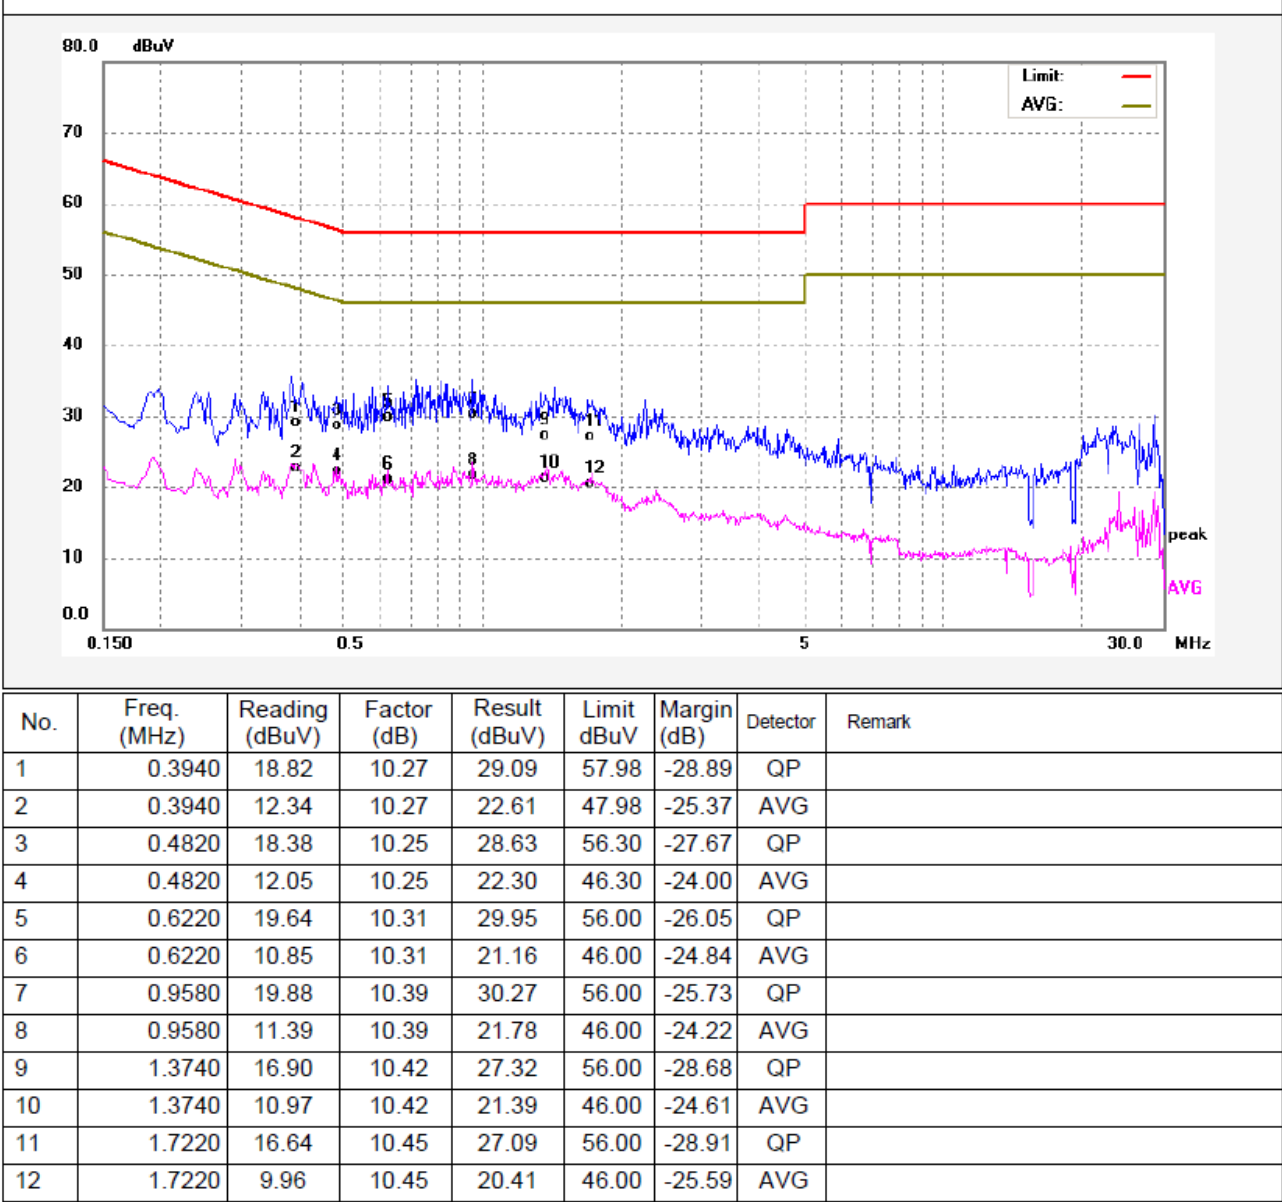

9 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

9.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in WIFI link mode, the test data were shown in the report.


9.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

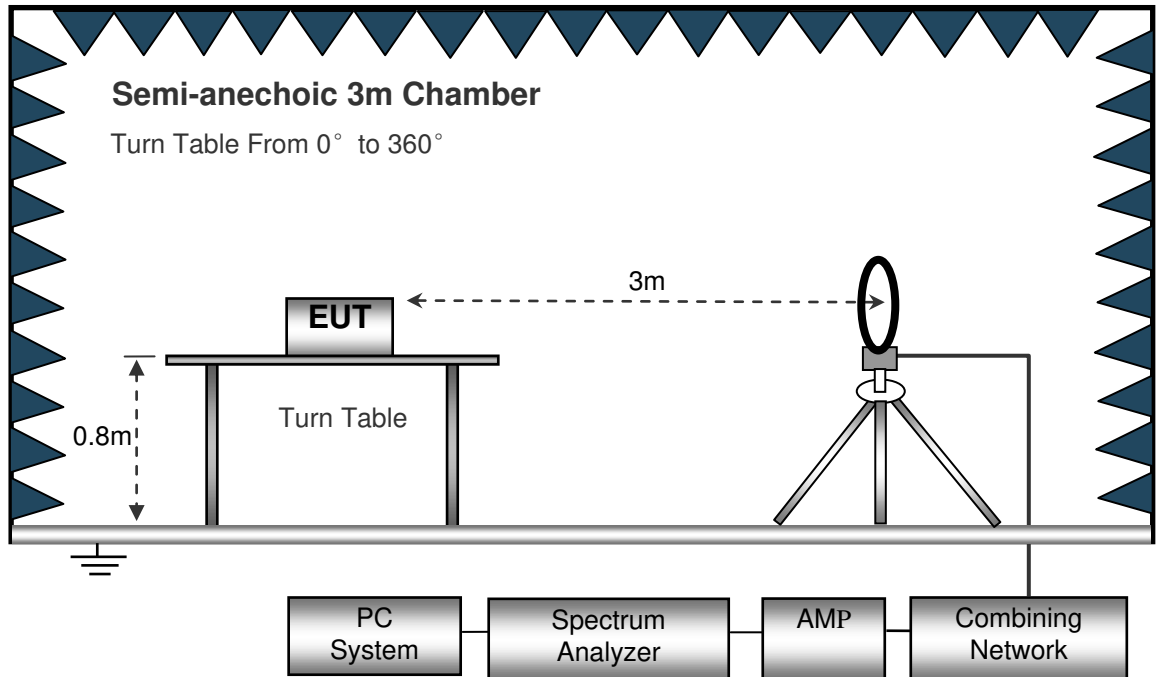

The test setup for emission measurement from 30 MHz to 1 GHz.

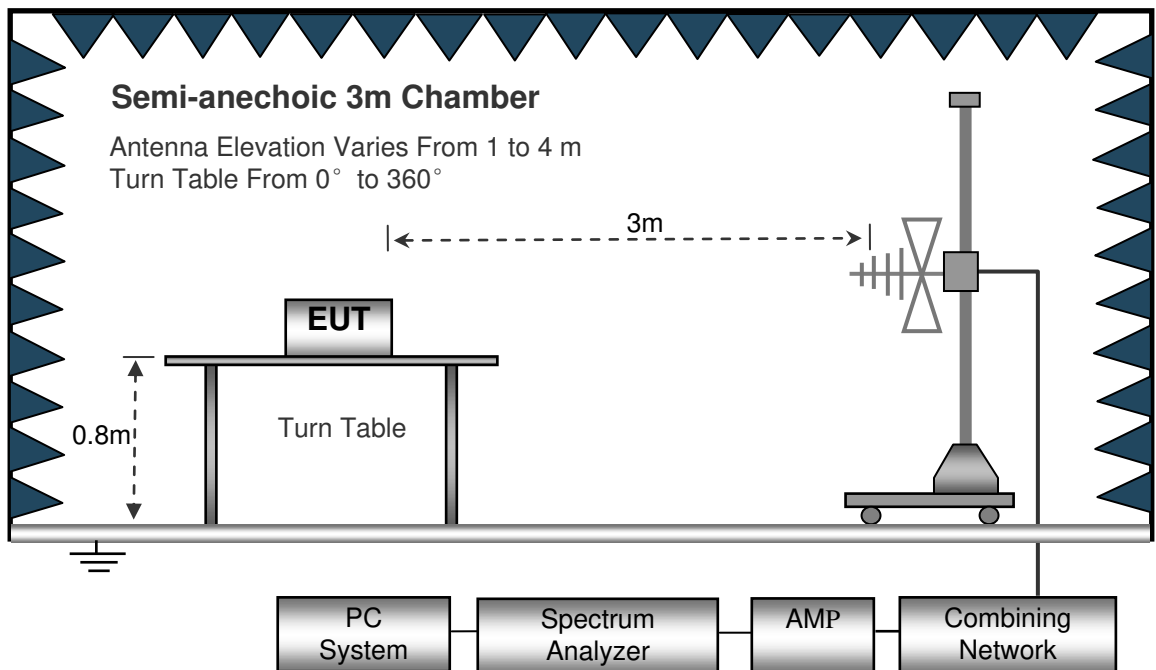

The test setup for emission measurement above 1 GHz.

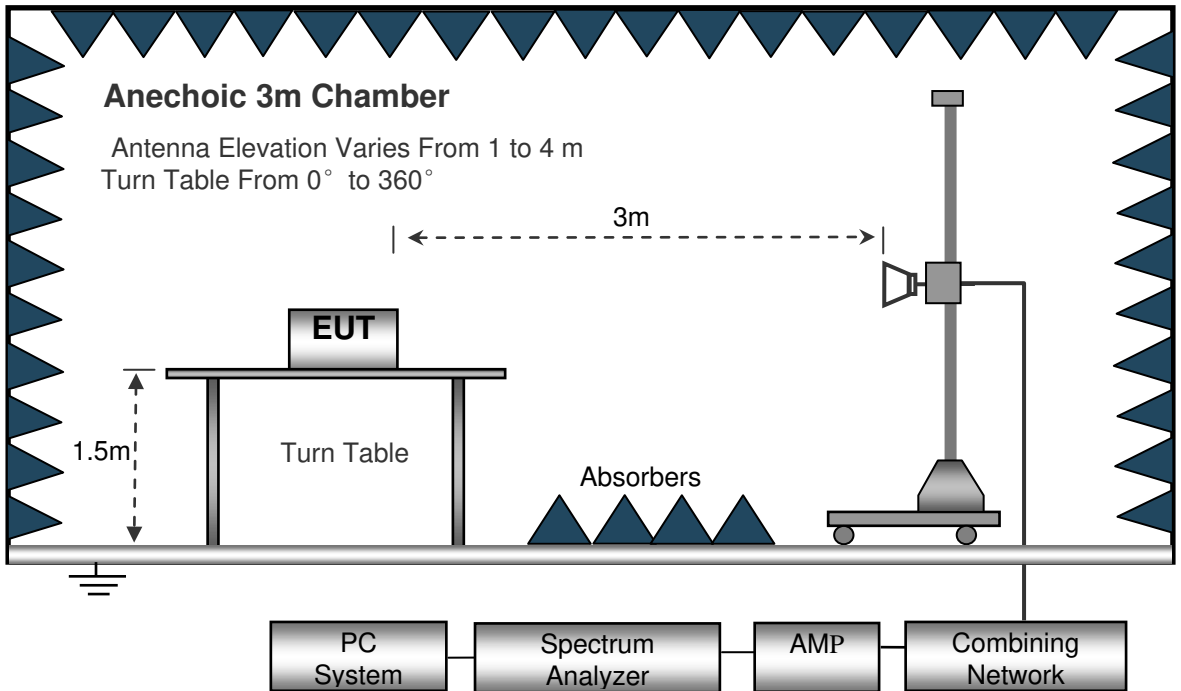

9.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
Detector Ave.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

9.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m(30M-1GHz) 1.5m(above 1GHz) above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

9.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

9.6 Summary of Test Results

Wifi:


Test Frequency: 9KHz~30MHz

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
802.11b							
6.054	25.74	QP	21.84	40.00	7.58	29.54	-21.96
8.366	26.58	QP	21.02	40.00	7.60	29.54	-21.94
26.785	24.69	QP	20.55	40.00	5.24	29.54	-24.30
802.11g							
6.054	25.13	QP	21.84	40.00	6.97	29.54	-22.57
8.366	25.23	QP	21.02	40.00	6.25	29.54	-23.29
26.785	24.57	QP	20.55	40.00	5.12	29.54	-24.42
802.11n(HT20)							
6.054	24.16	QP	21.84	40.00	6.00	29.54	-23.54
8.366	26.57	QP	21.02	40.00	7.59	29.54	-21.95
26.785	25.33	QP	20.55	40.00	5.88	29.54	-23.66
802.11n(HT40)							
6.054	24.82	QP	21.84	40.00	6.66	29.54	-22.88
8.366	26.95	QP	21.02	40.00	7.97	29.54	-21.57
26.785	25.48	QP	20.55	40.00	6.03	29.54	-23.51


Test Frequency : 30MHz ~ 1GHz

Remark: only the worst data (802.11n HT40 Low channel mode) were reported

Low Channel – Horizontal

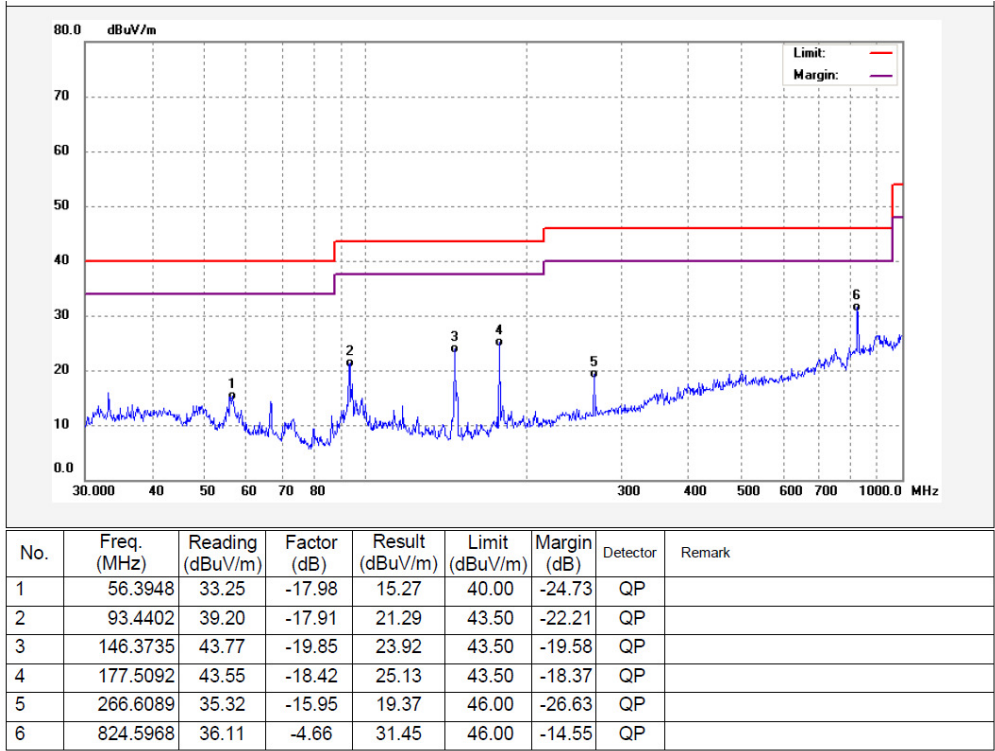


Low Channel – Vertical

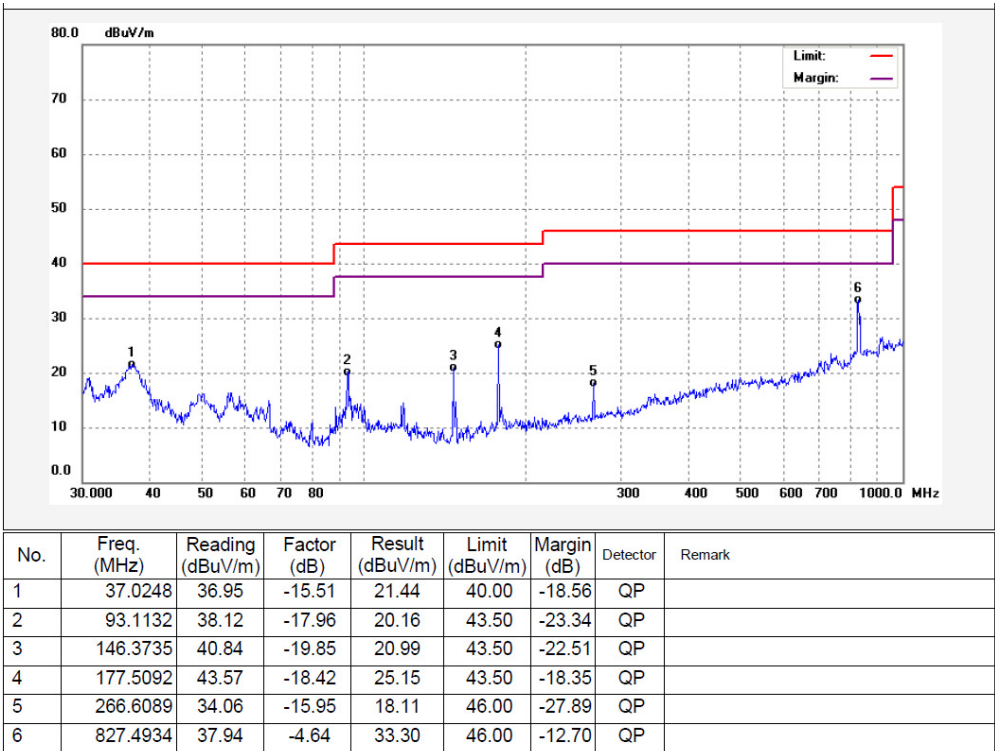


Test Frequency : Above 1GHz

Remark: only the worst data (802.11n HT40 Low channel mode) were reported

Low Channel – Horizontal

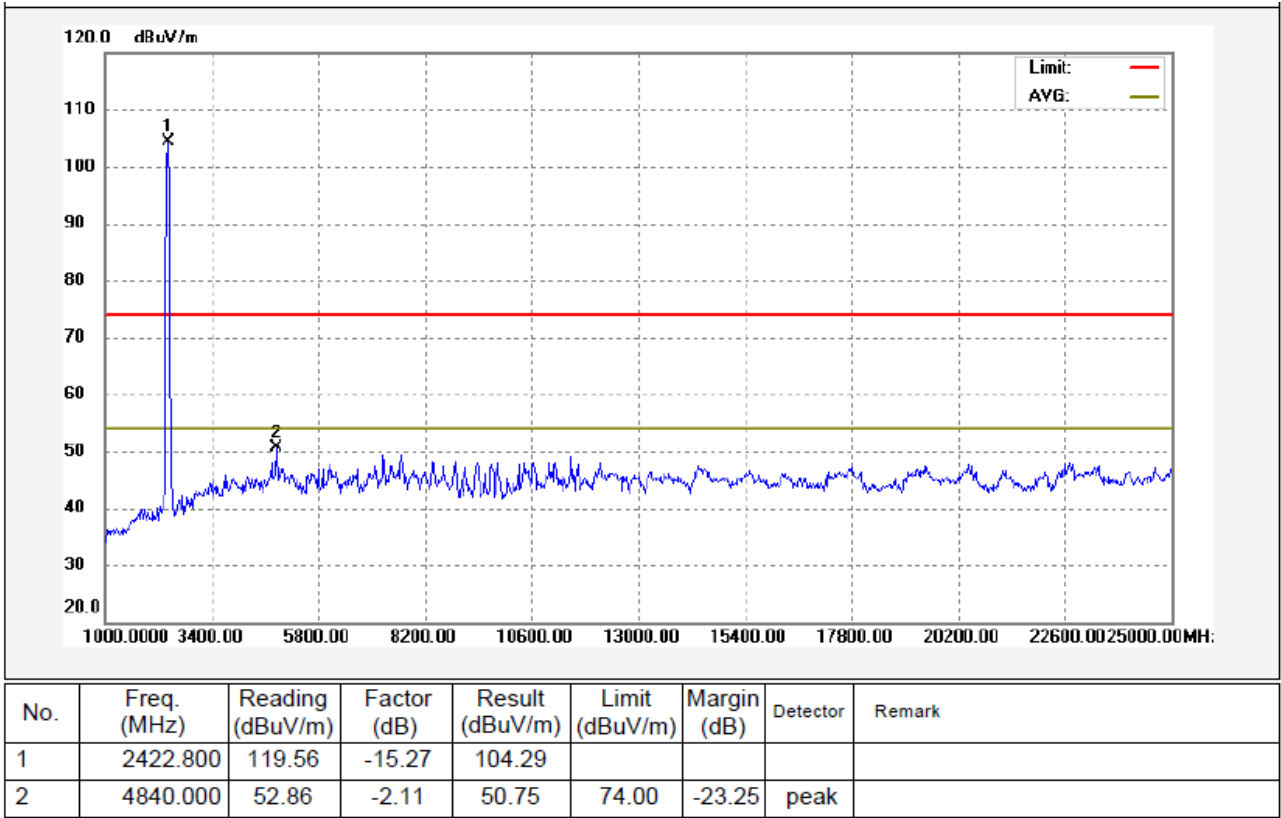

Low Channel – Vertical

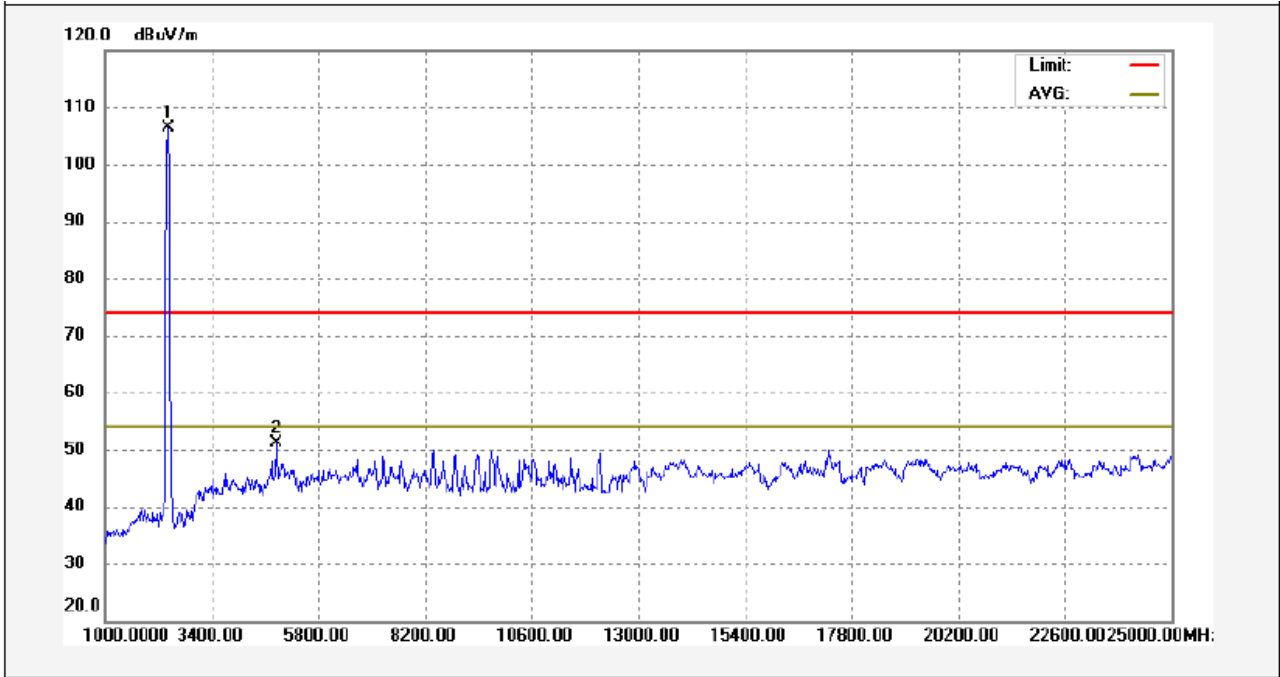

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2423.400	121.57	-15.28	106.29				
2	4840.000	53.36	-2.11	51.25	74.00	-22.75	peak	

BT BLE:**Test Frequency: 9KHz~26MHz**

Frequency	Measurement results dB μ V @3m	Detector PK/QP	Correct factor dB/m	Extrapolation factor dB	Measurement results (calculated) dB μ V/m @30m	Limits dB μ V/m @30m	Margin dB
(MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
6.201	25.53	QP	21.84	40.00	7.47	29.54	-22.07
8.652	25.36	QP	21.02	40.00	6.38	29.54	-23.16
25.630	20.33	QP	20.55	40.00	0.87	29.54	-28.67


Test Frequency : 26MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 1GHz


only the worst data (high Channel) were reported

High Channel – Horizontal

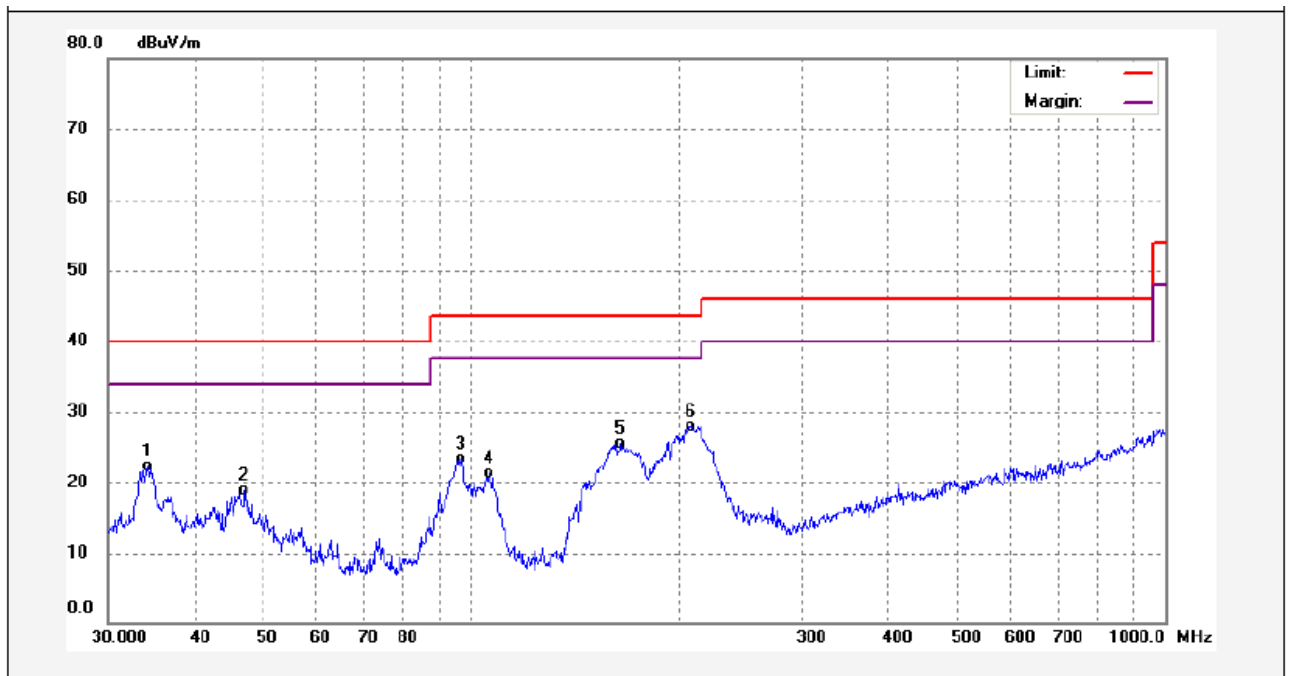

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	34.2760	36.41	-14.09	22.32	40.00	-17.68	QP	
2	47.1599	35.18	-16.33	18.85	40.00	-21.15	QP	
3	96.7749	41.60	-18.23	23.37	43.50	-20.13	QP	
4	106.0126	38.39	-17.08	21.31	43.50	-22.19	QP	
5	164.3301	42.46	-16.92	25.54	43.50	-17.96	QP	
6	207.1226	43.40	-15.45	27.95	43.50	-15.55	QP	


High Channel – Vertical

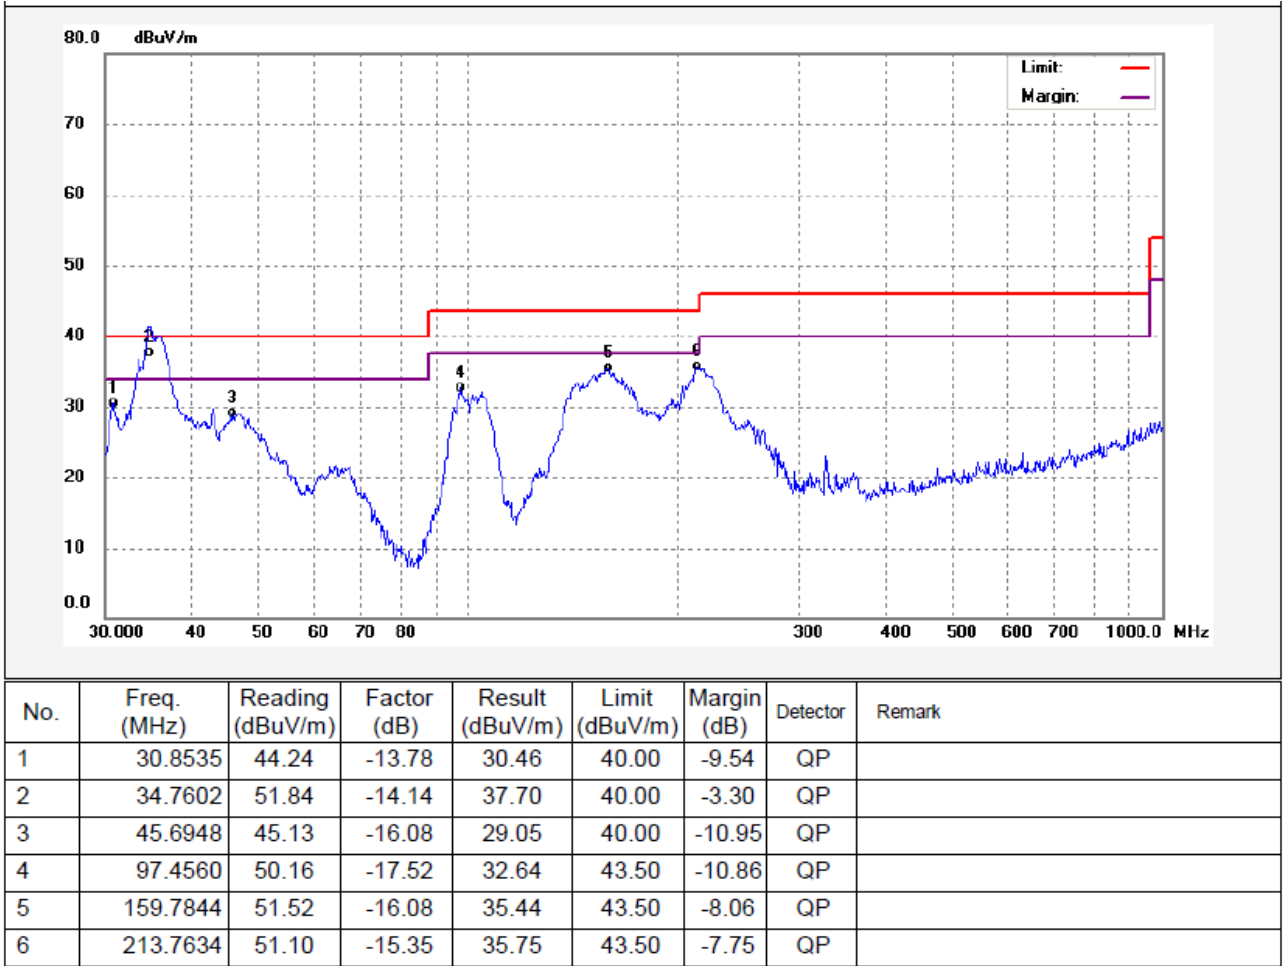


Test Frequency : Above 1GHz

only the worst data (high Channel) were reported

High Channel - Horizontal

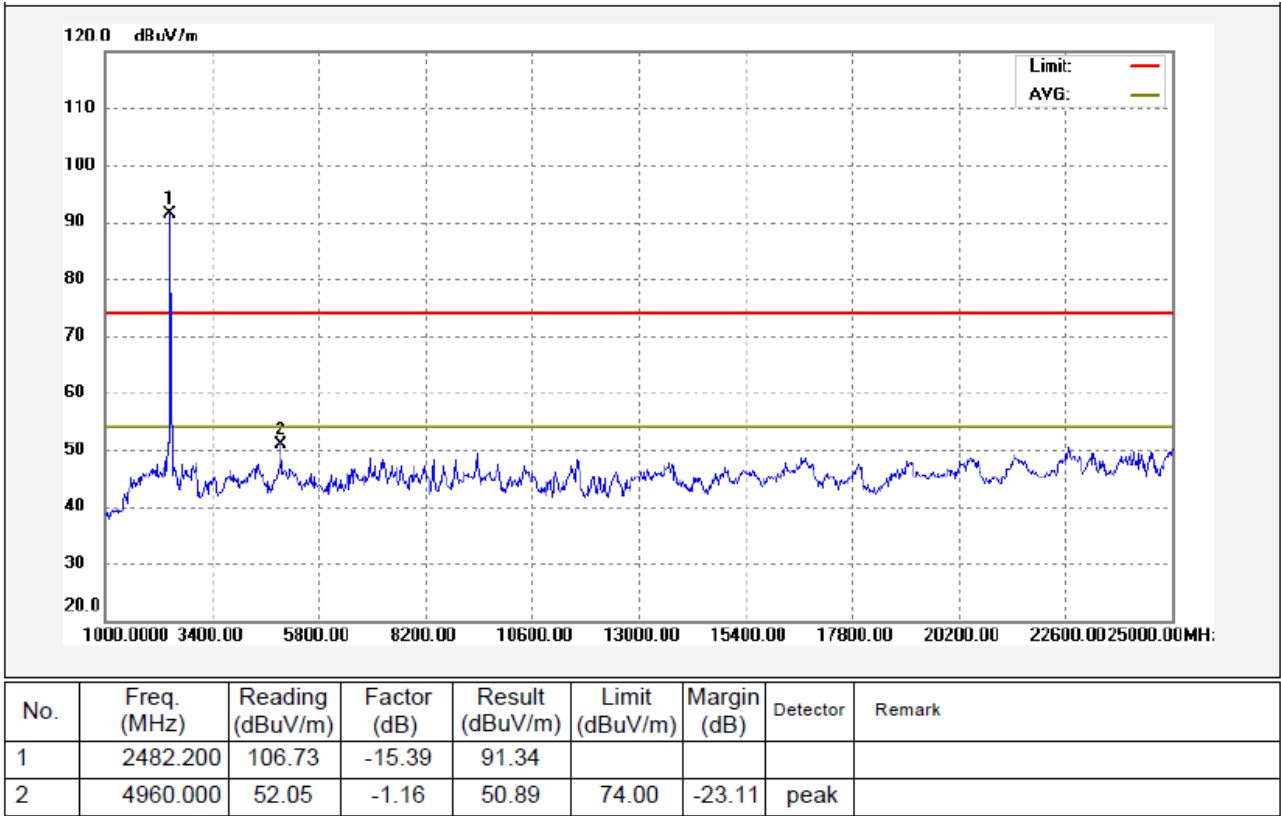

High Channel - Vertical

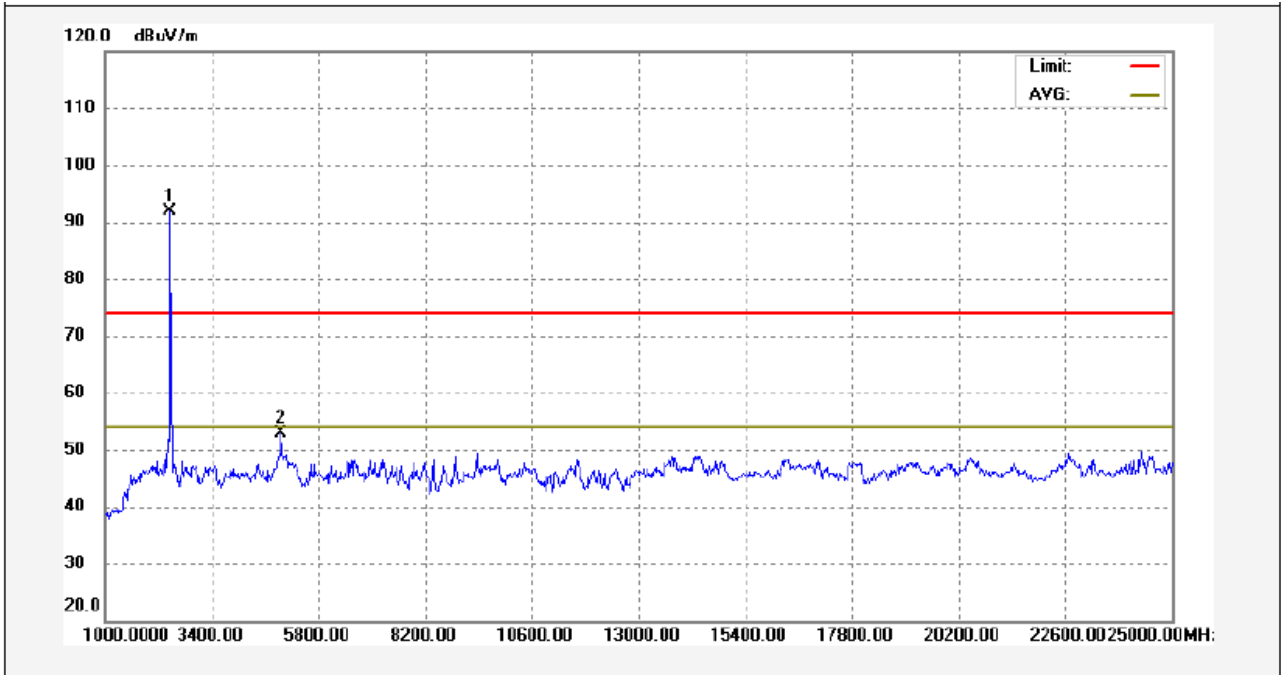

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2481.700	107.23	-15.39	91.84	74.00	-21.11	peak	
2	4960.000	54.05	-1.16	52.89	74.00	-21.11	peak	

10 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016

Test Result: PASS



Limit:



In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).



10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


10.2 Test Result

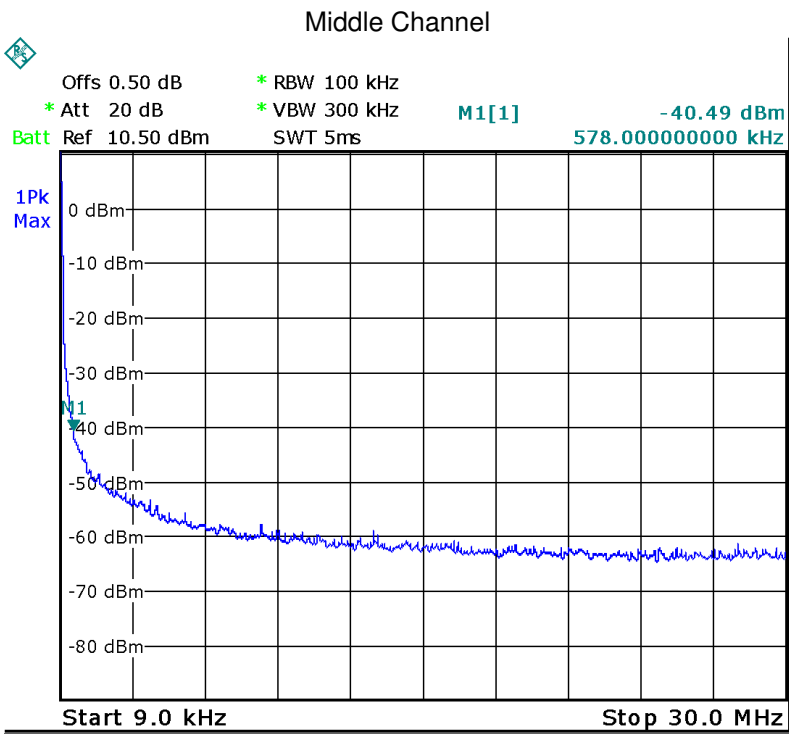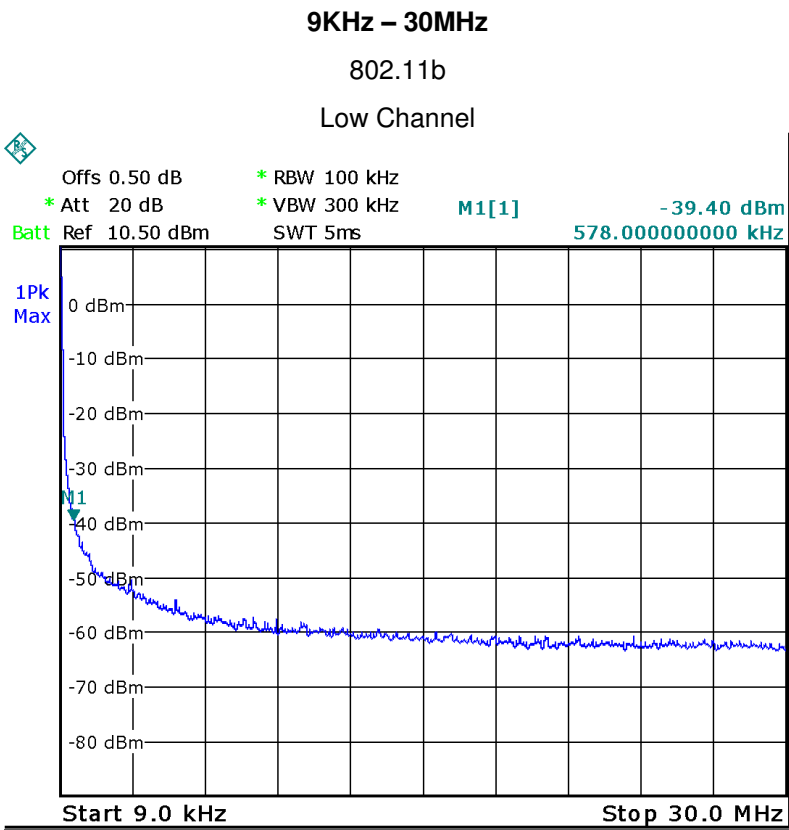

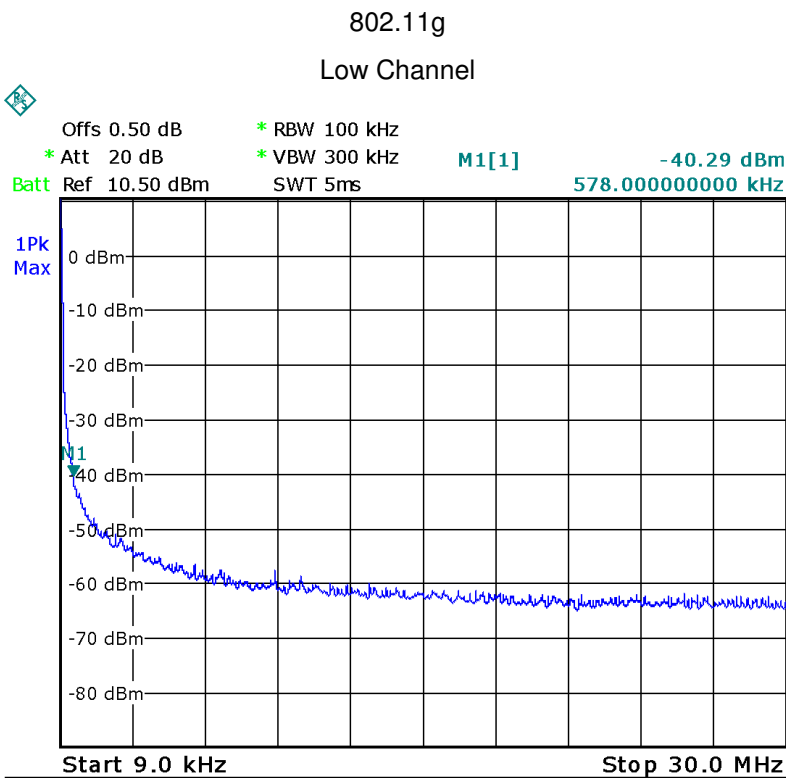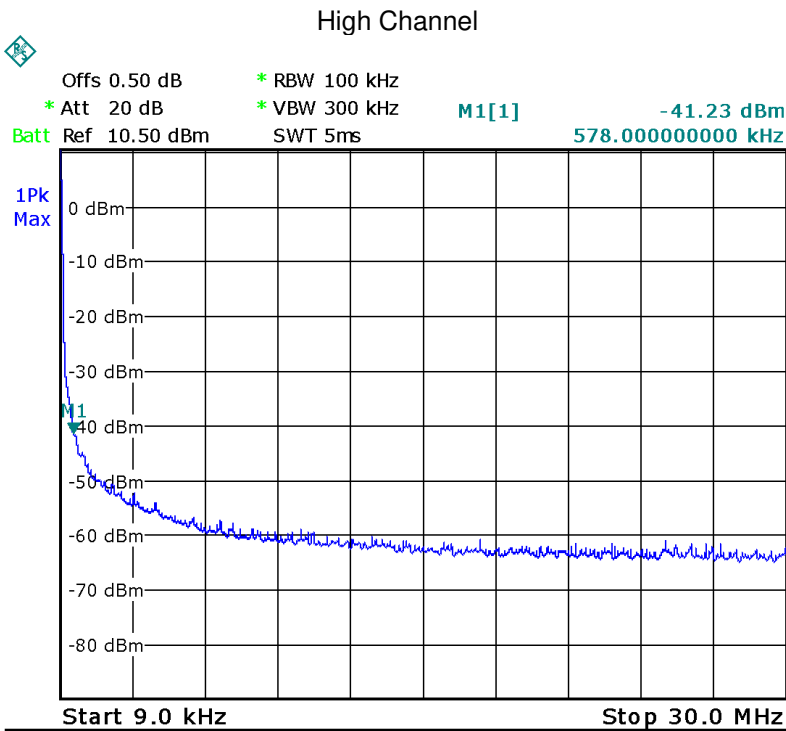


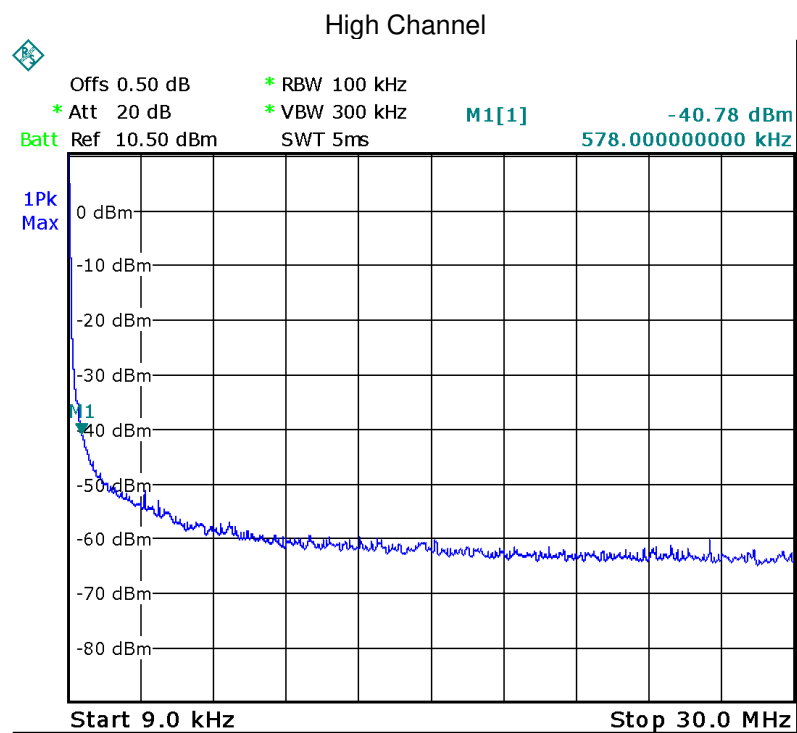
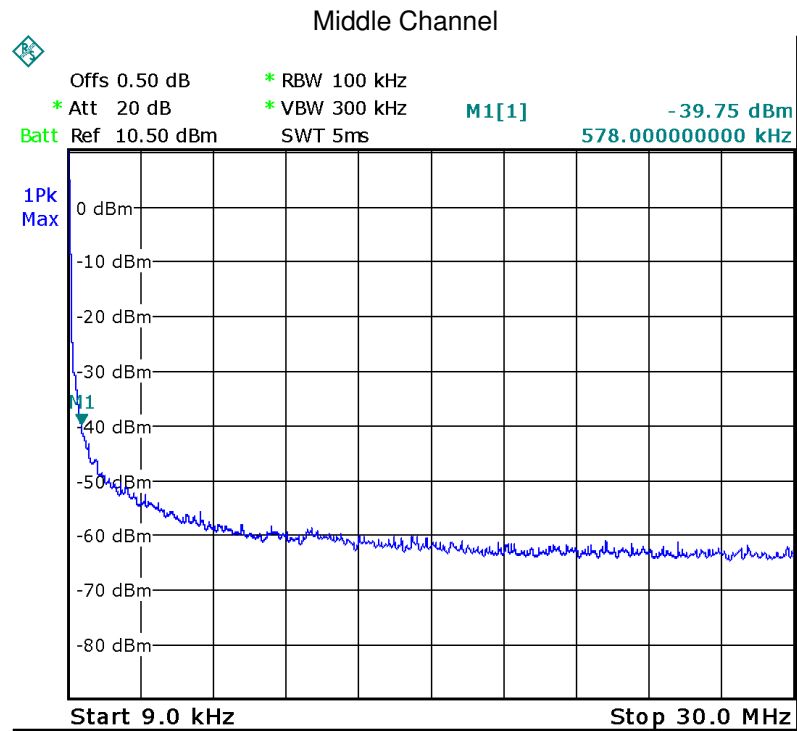




802.11n HT20
Low Channel

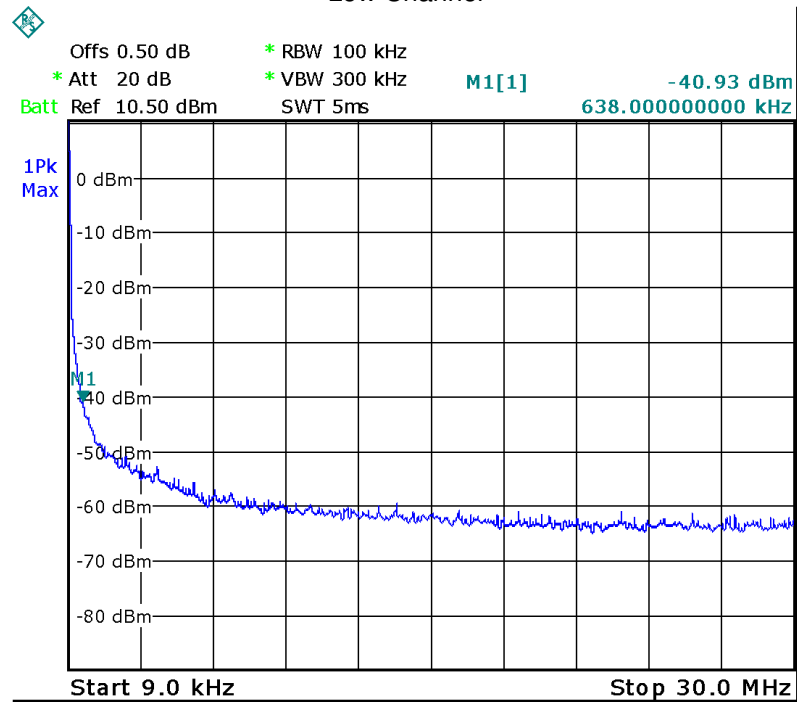

Middle Channel

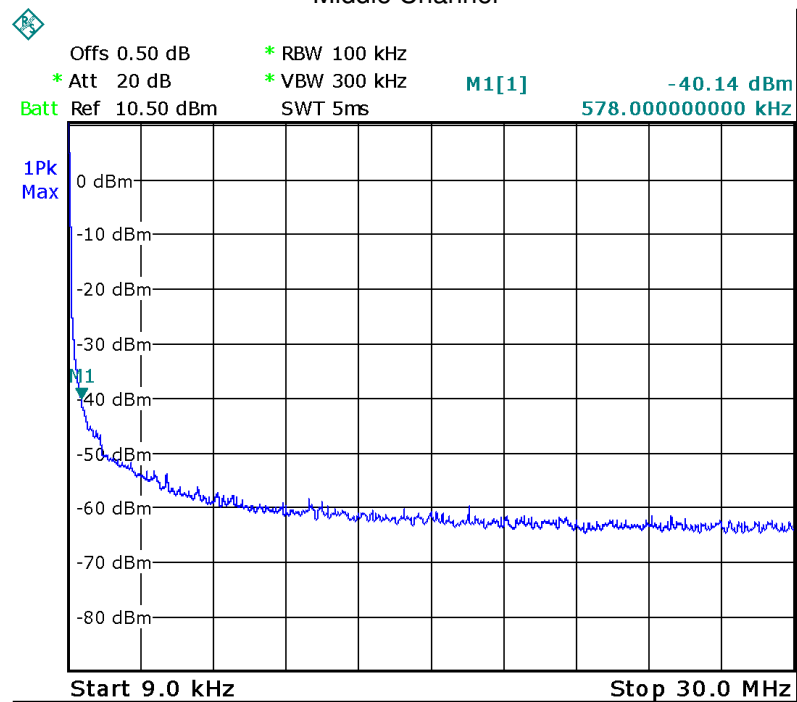


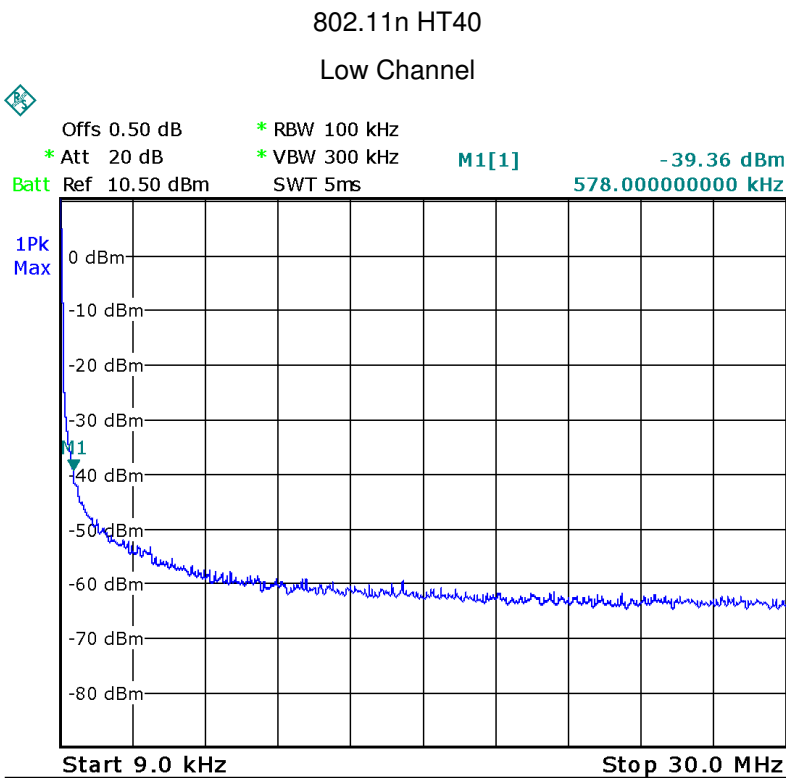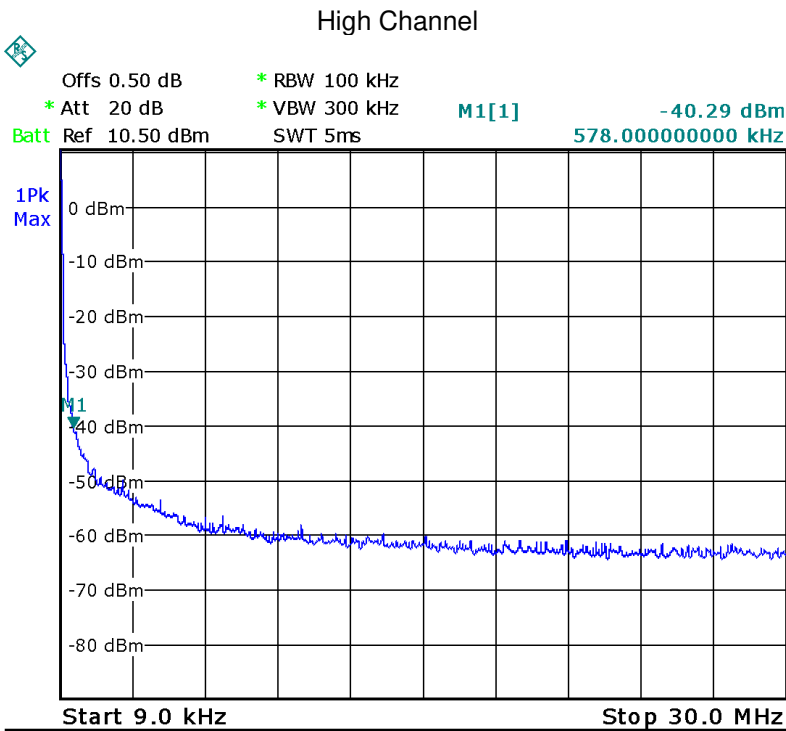

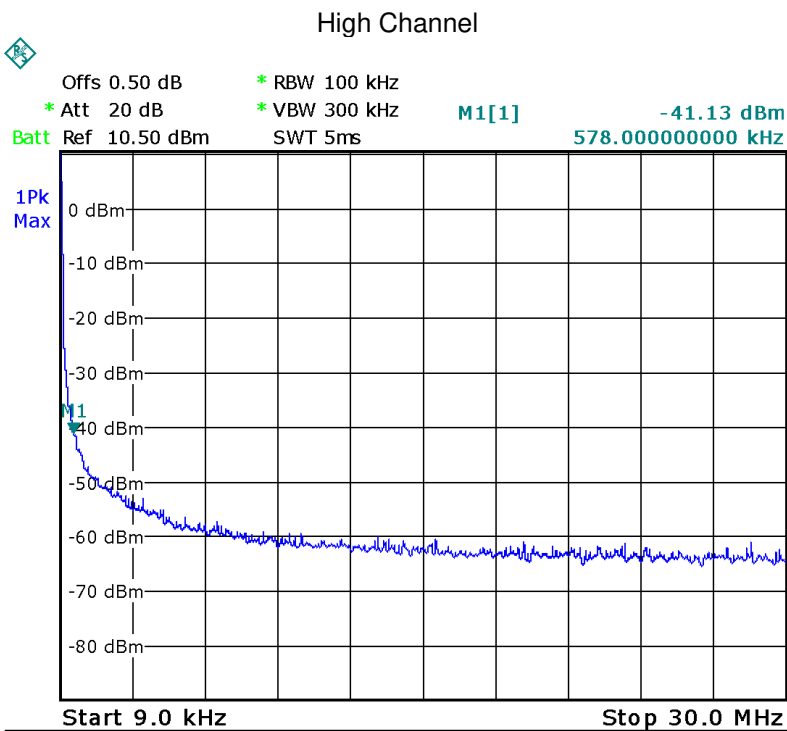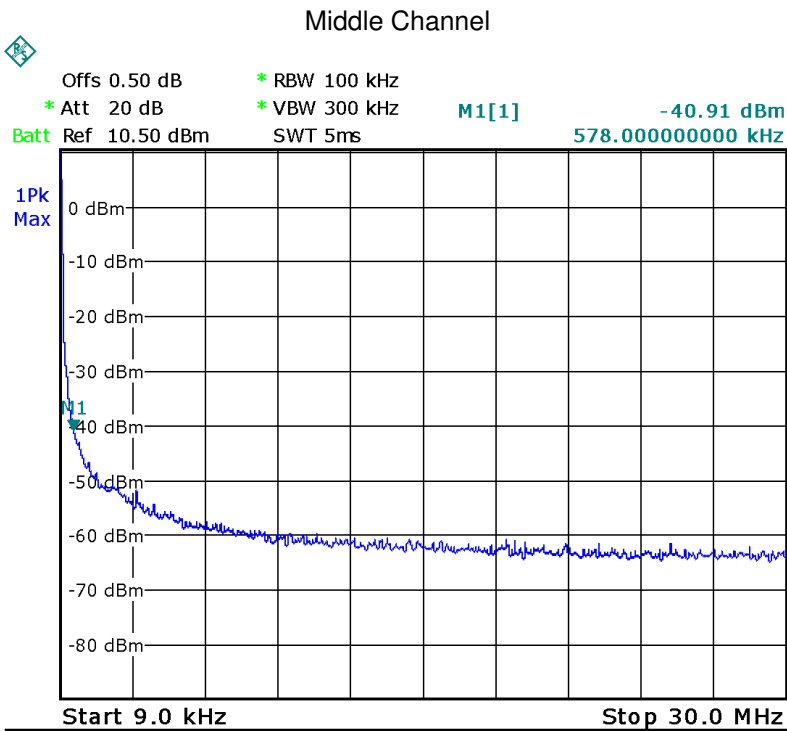



BLE

Low Channel

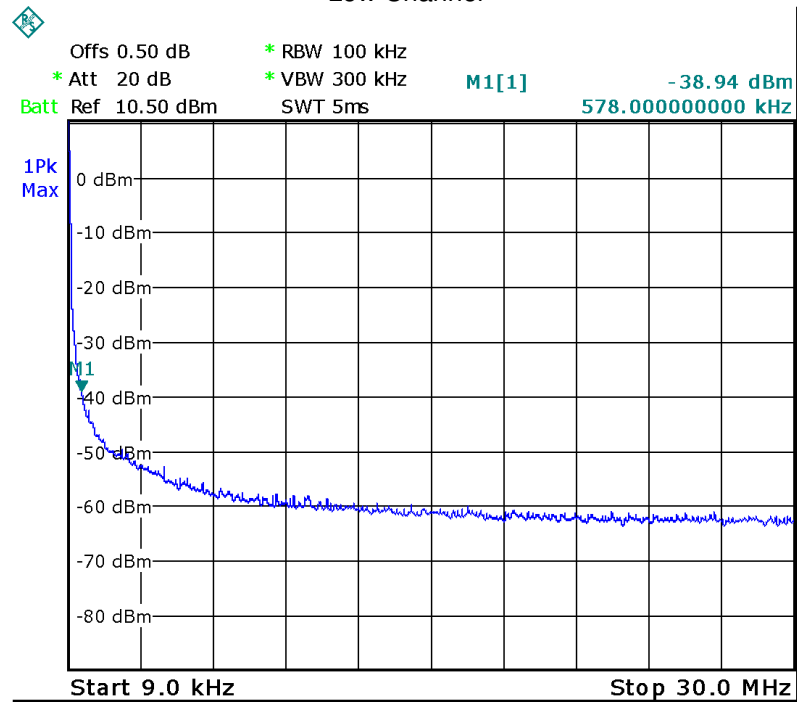


Middle Channel

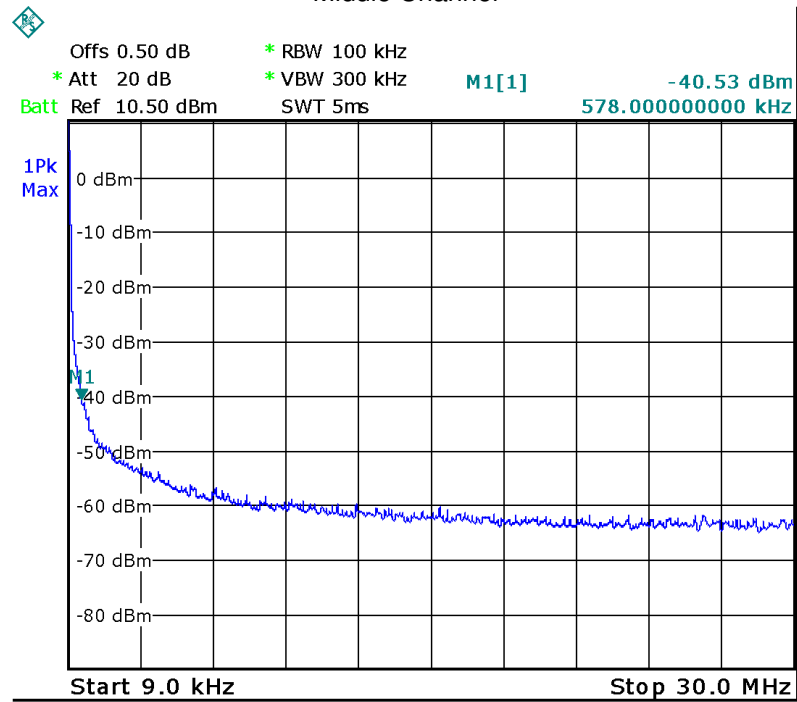

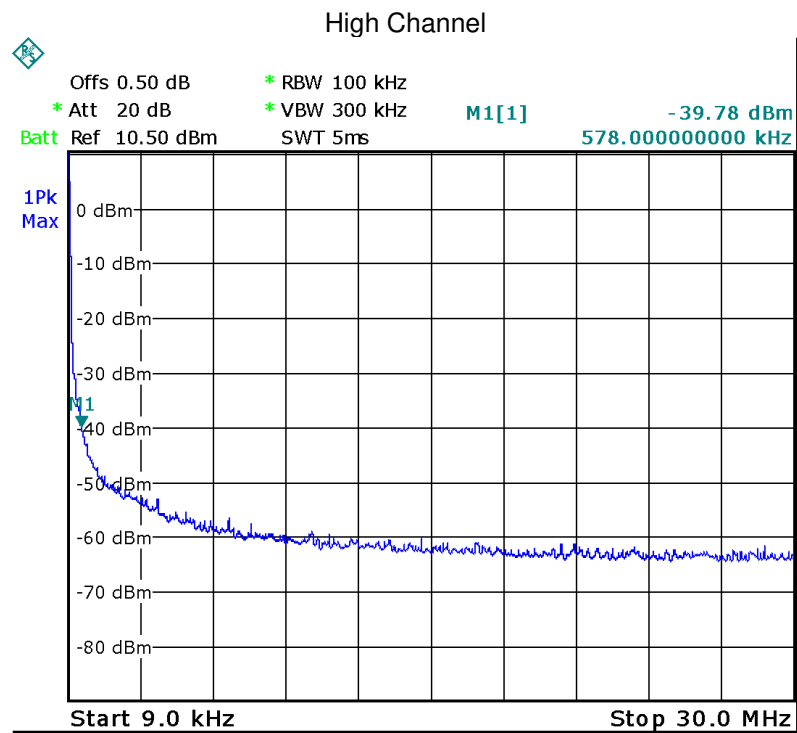


Above 30MHz
802.11b
Low Channel

Fundamental

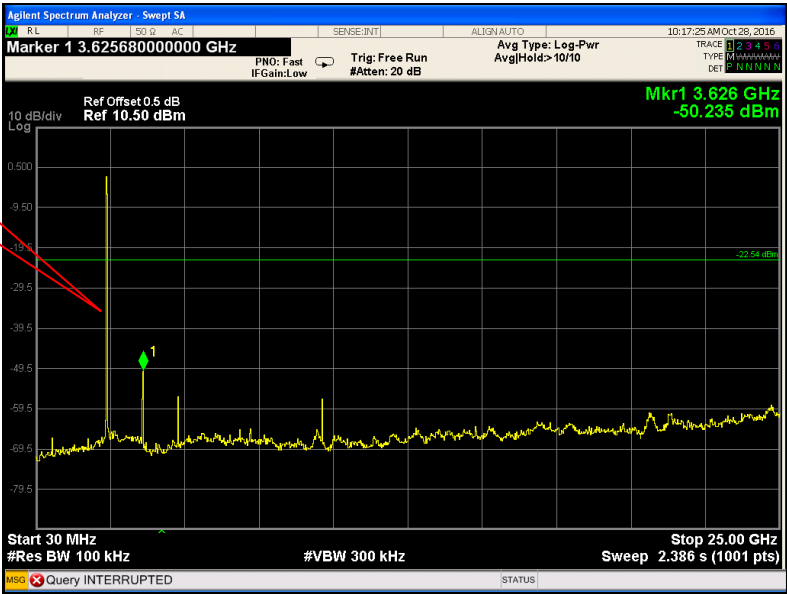


Middle Channel

Fundamental

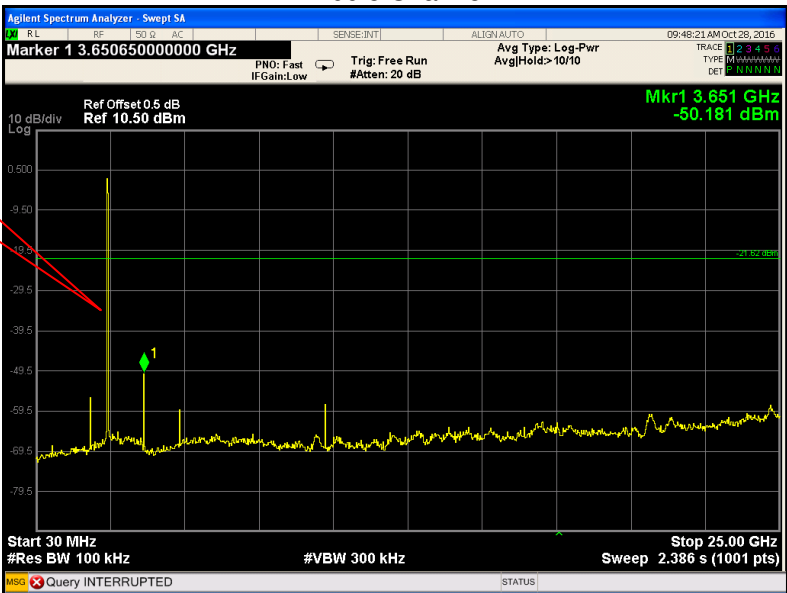

High Channel


Fundamental

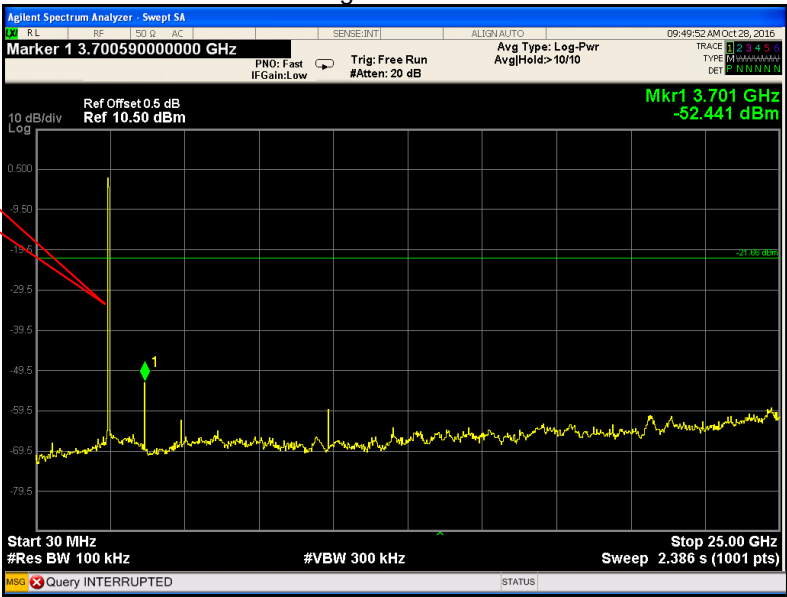

802.11g


Low Channel

Fundamental

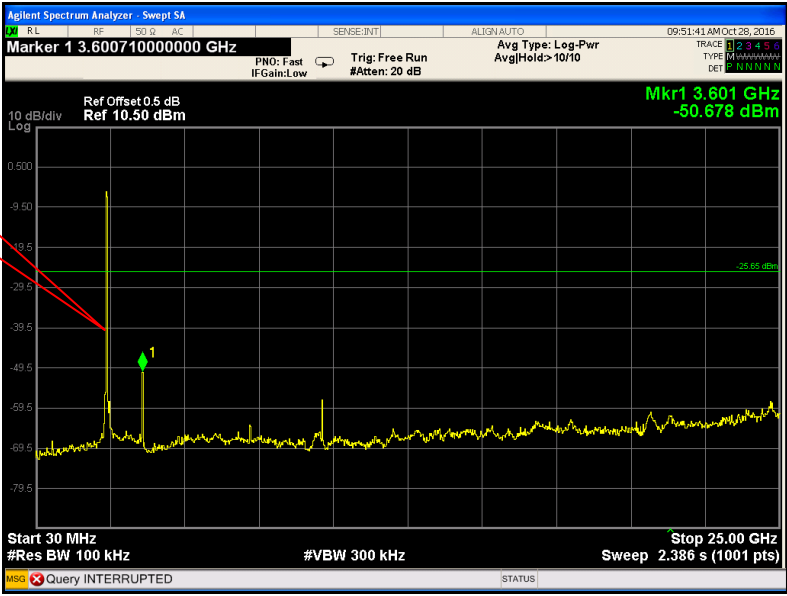


Middle Channel

Fundamental

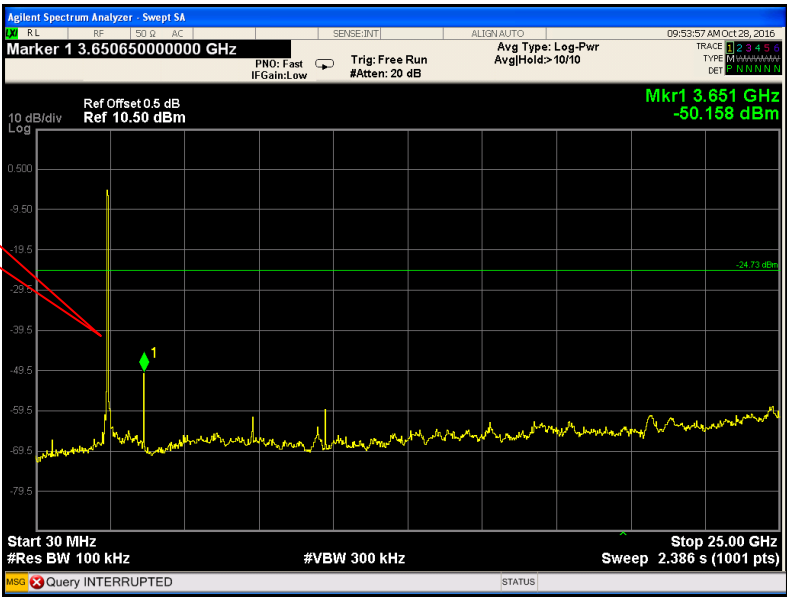

High Channel


Fundamental

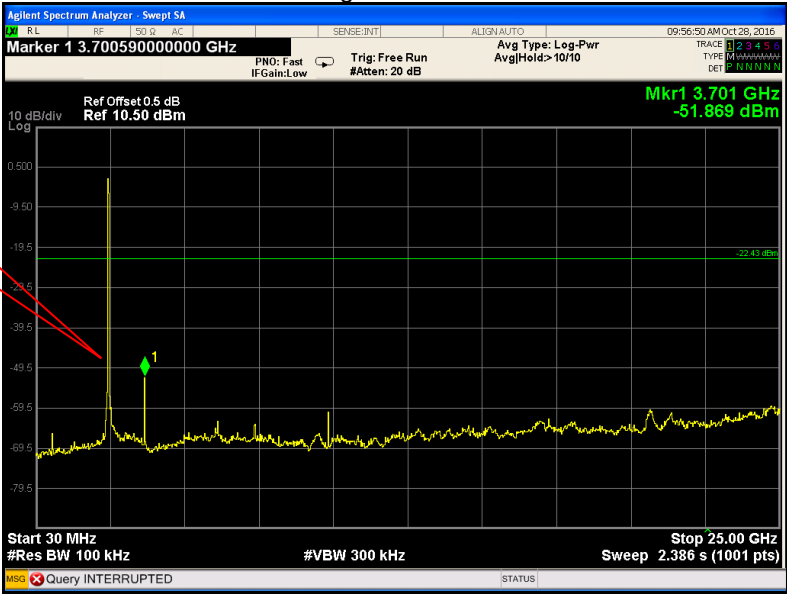

802.11n HT20


Low Channel

Fundamental

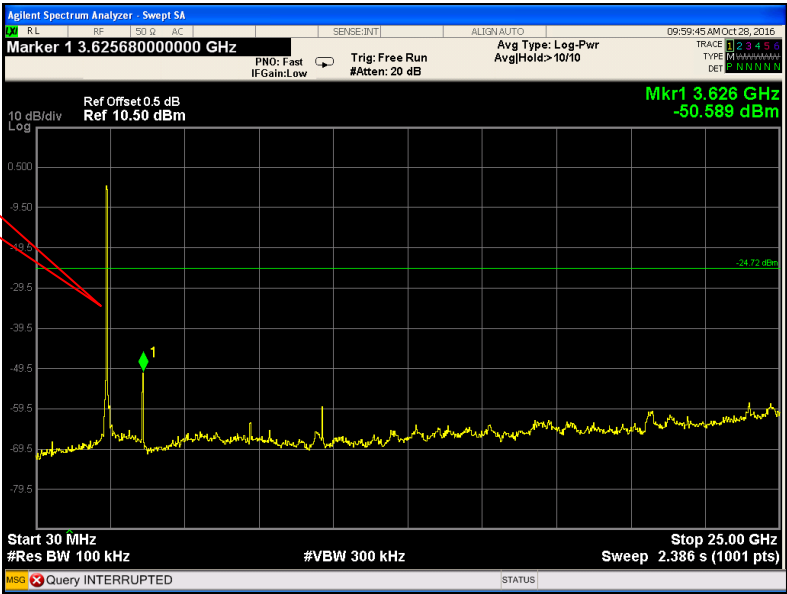


Middle Channel

Fundamental

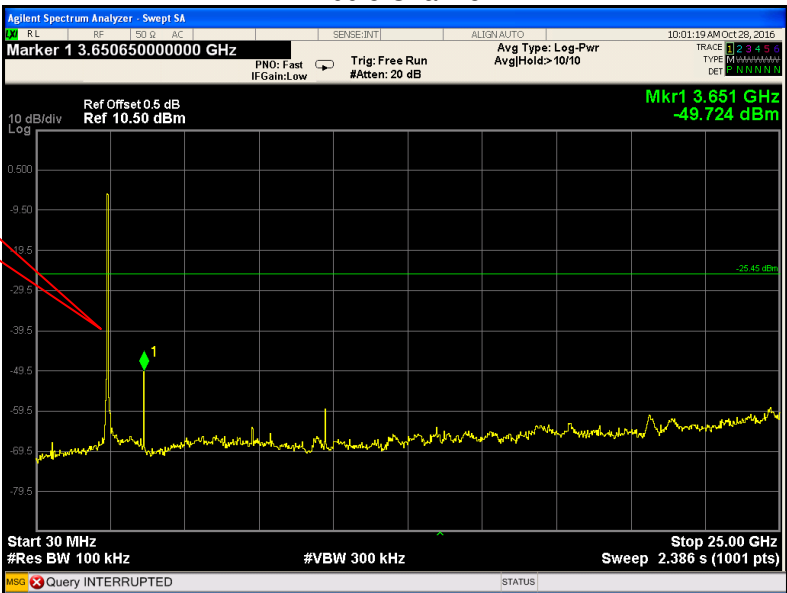

High Channel


Fundamental

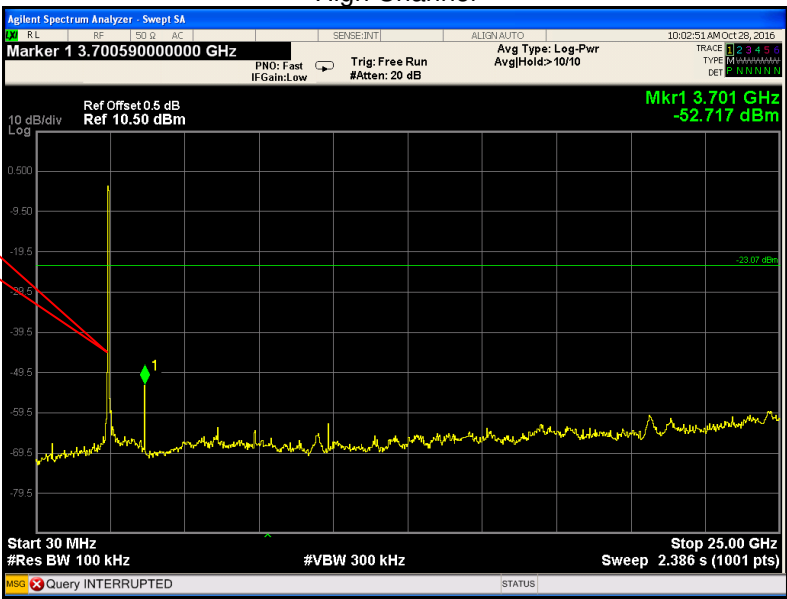

802.11n HT40


Low Channel

Fundamental

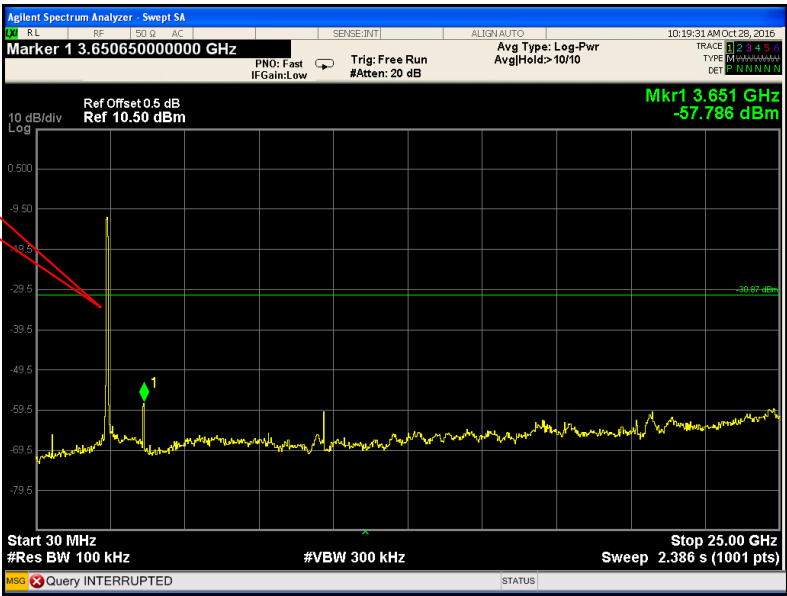


Middle Channel

Fundamental

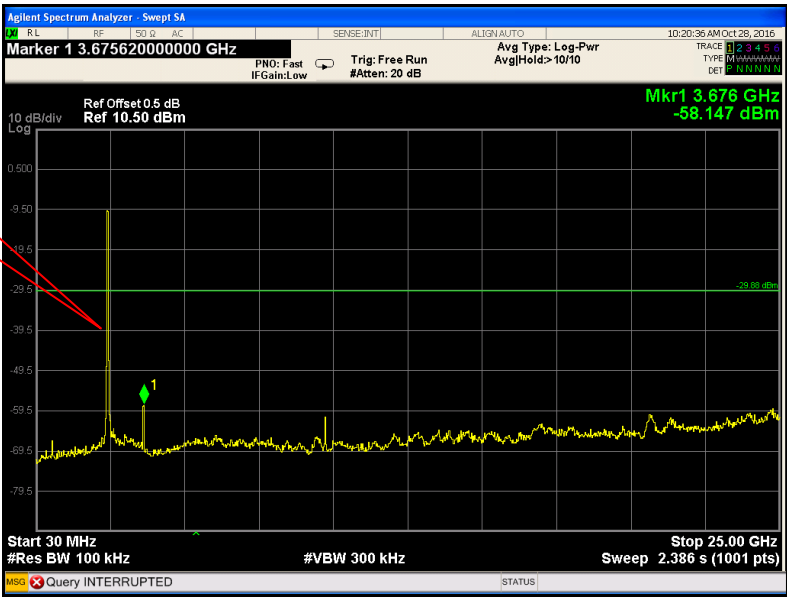

High Channel


Fundamental

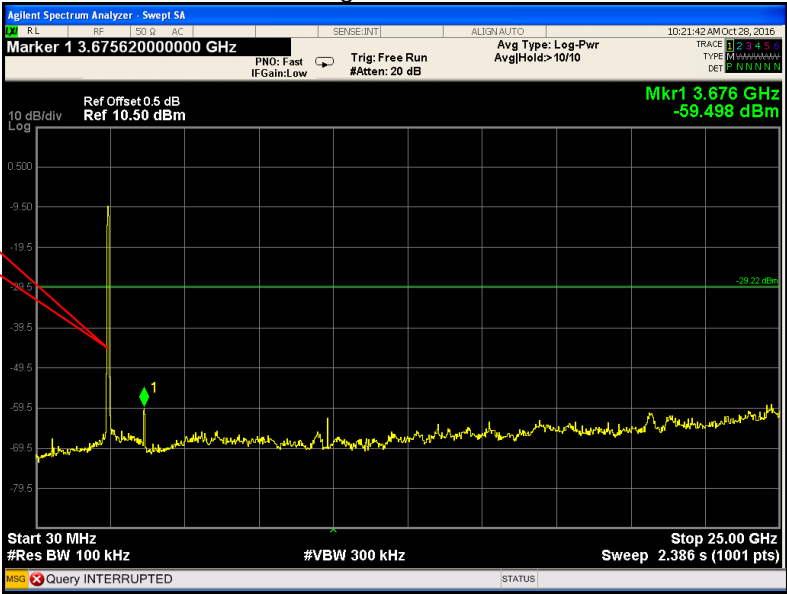

BLE


Low Channel

Fundamental

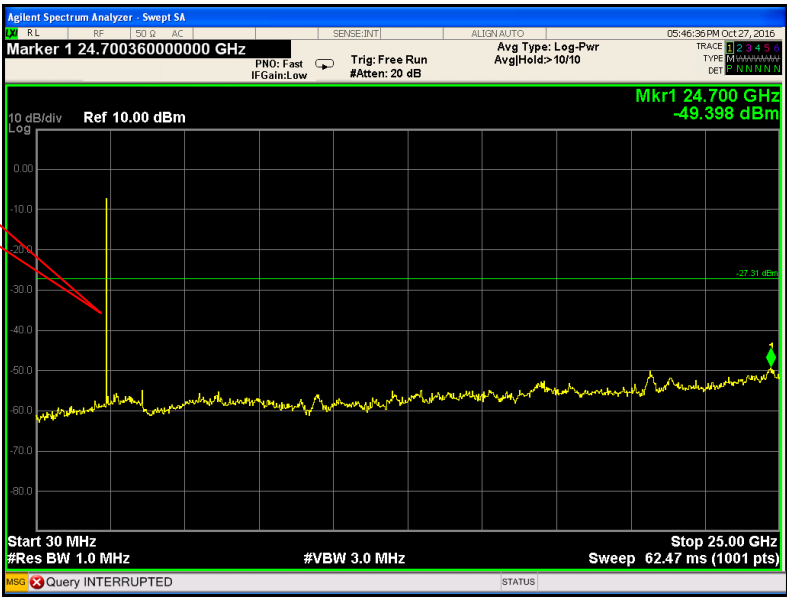


Middle Channel

Fundamental

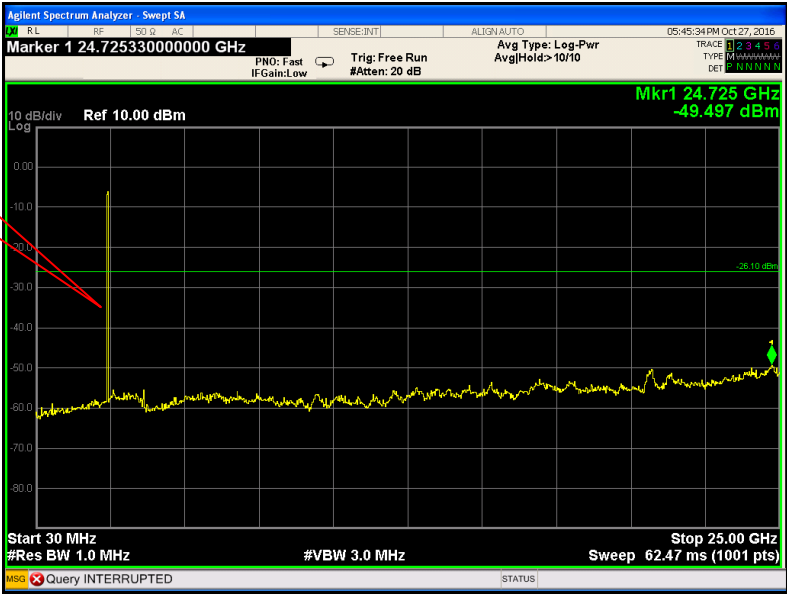

High Channel

Fundamental

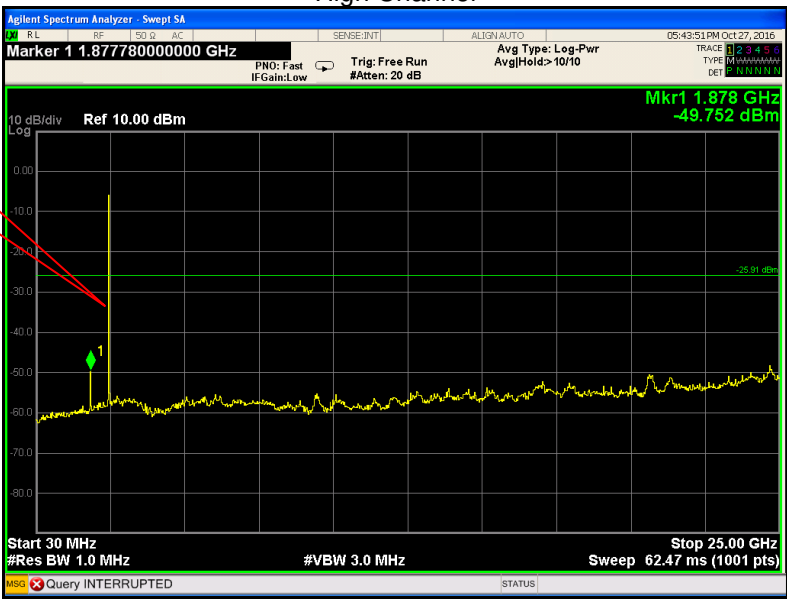

11 Band Edge Measurement



Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting



11.1 Test Produce



1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



11.2 Test Result



Test result plots shown as follows:

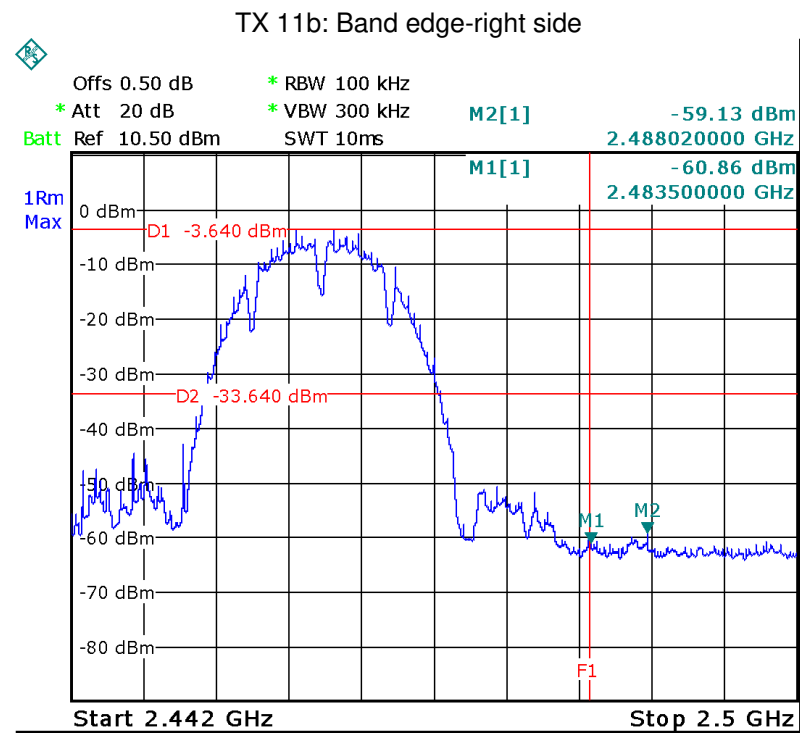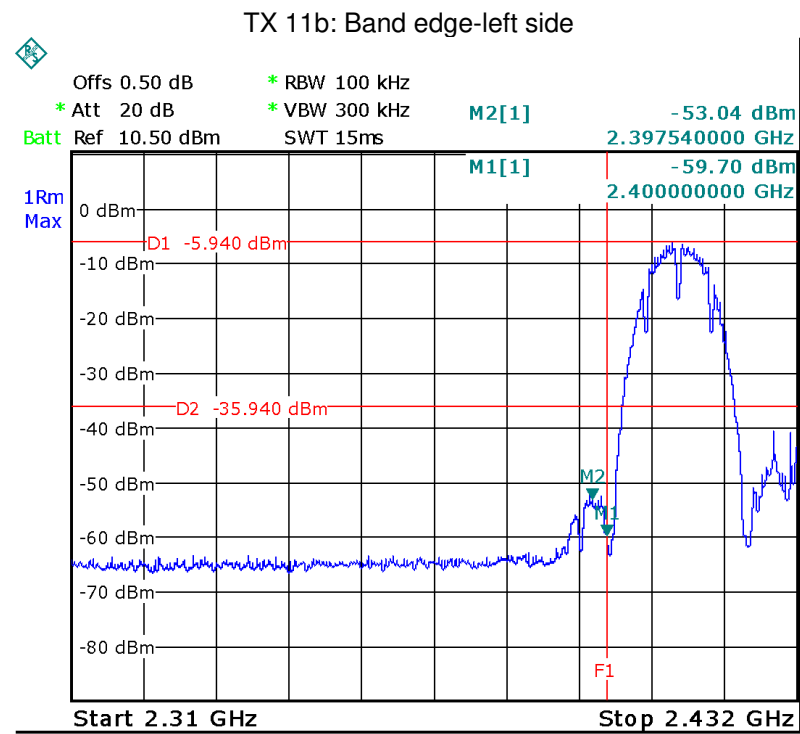

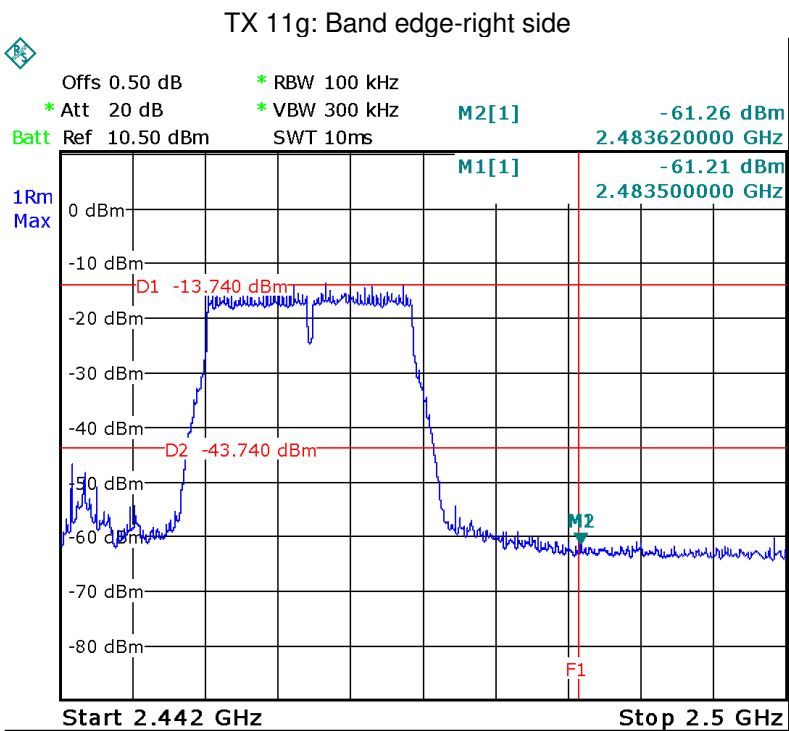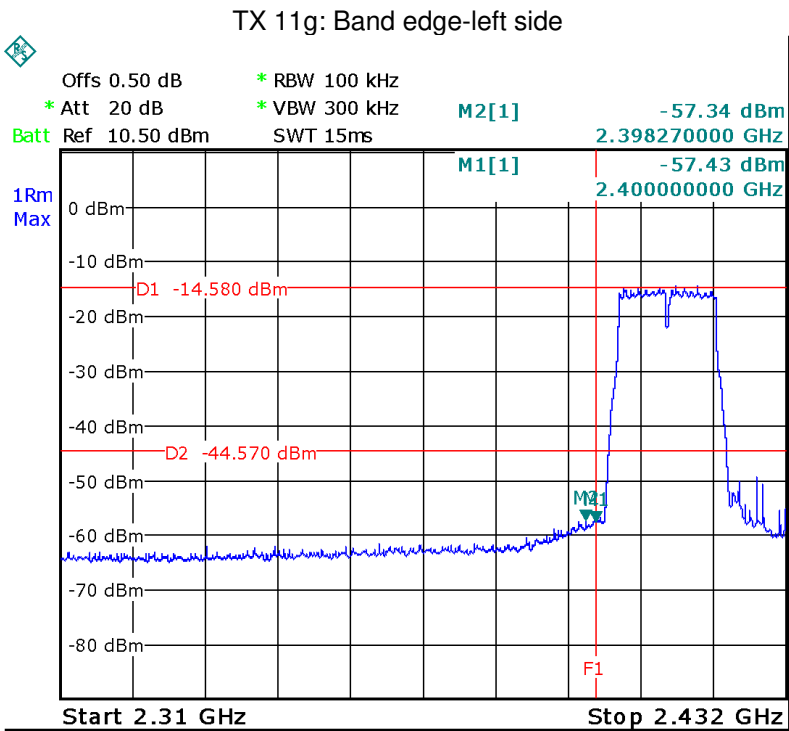


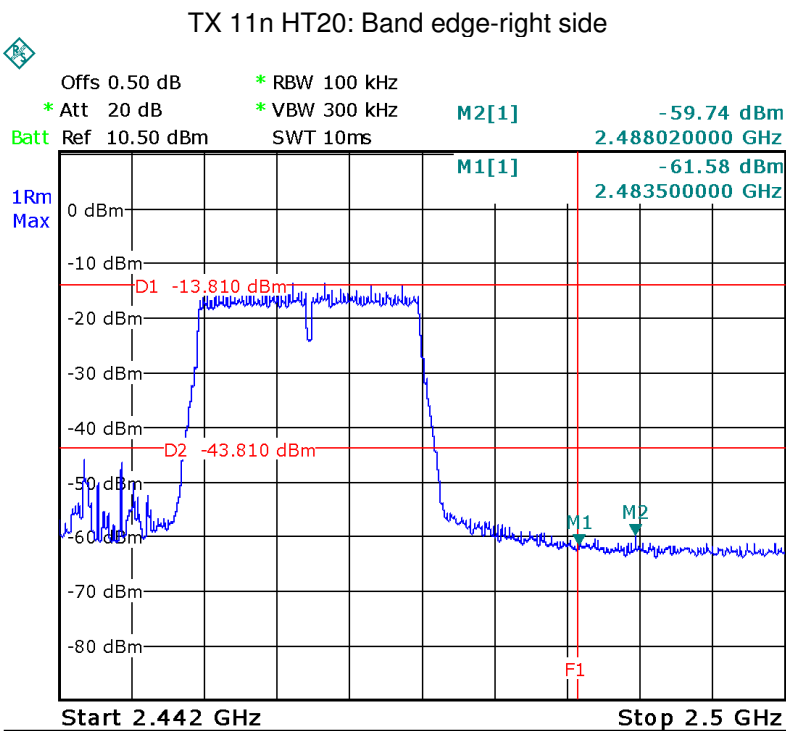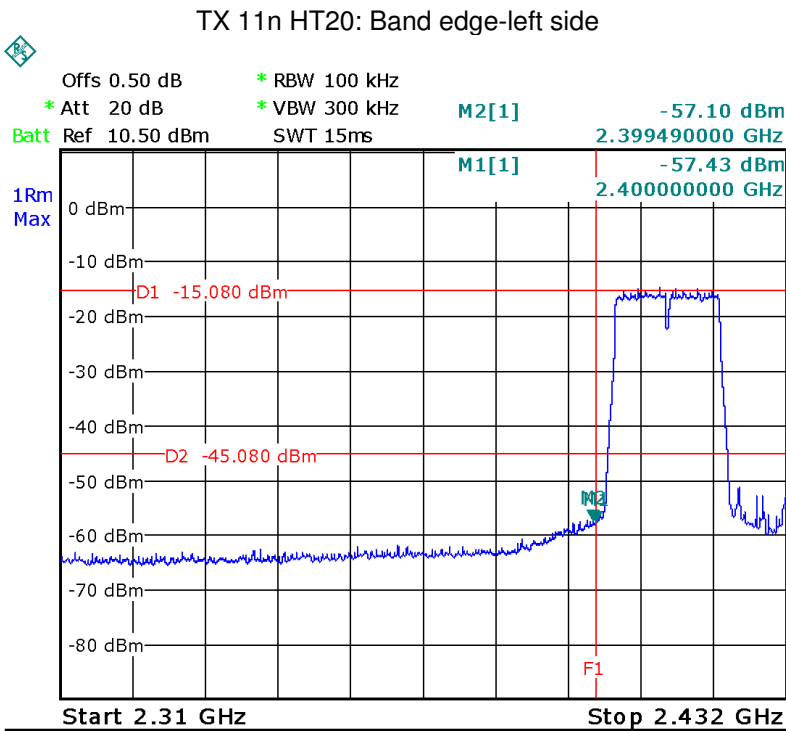

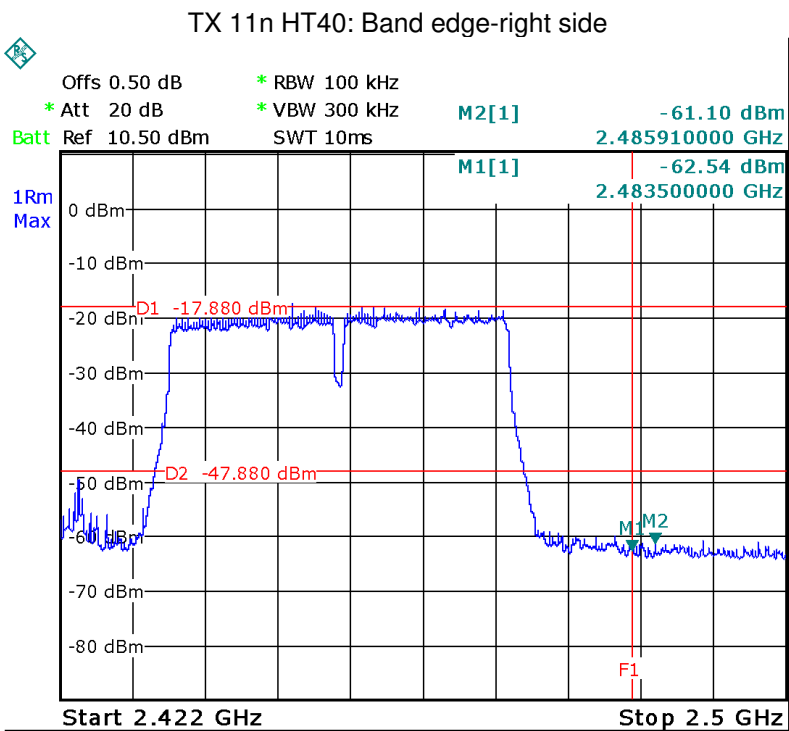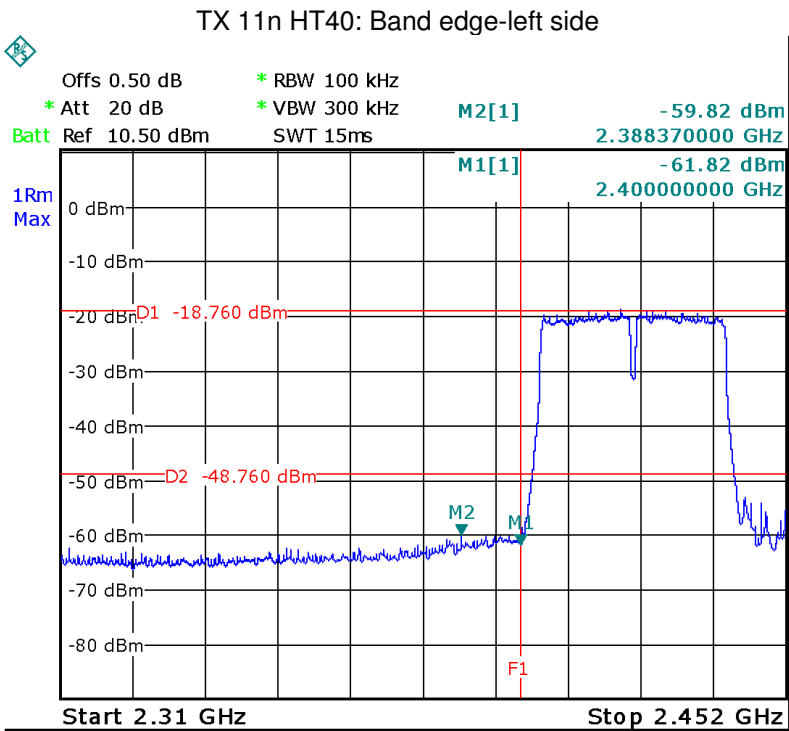


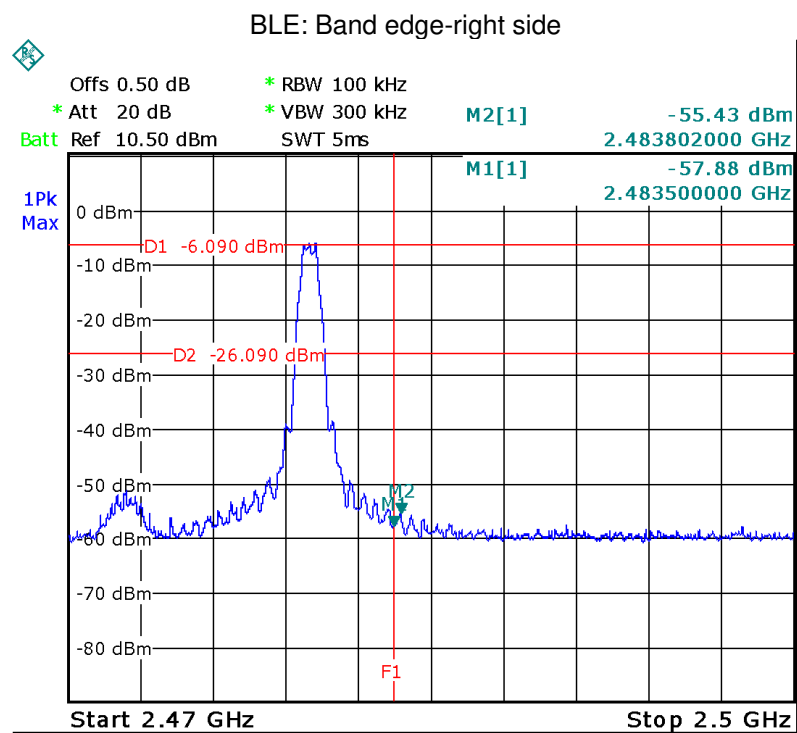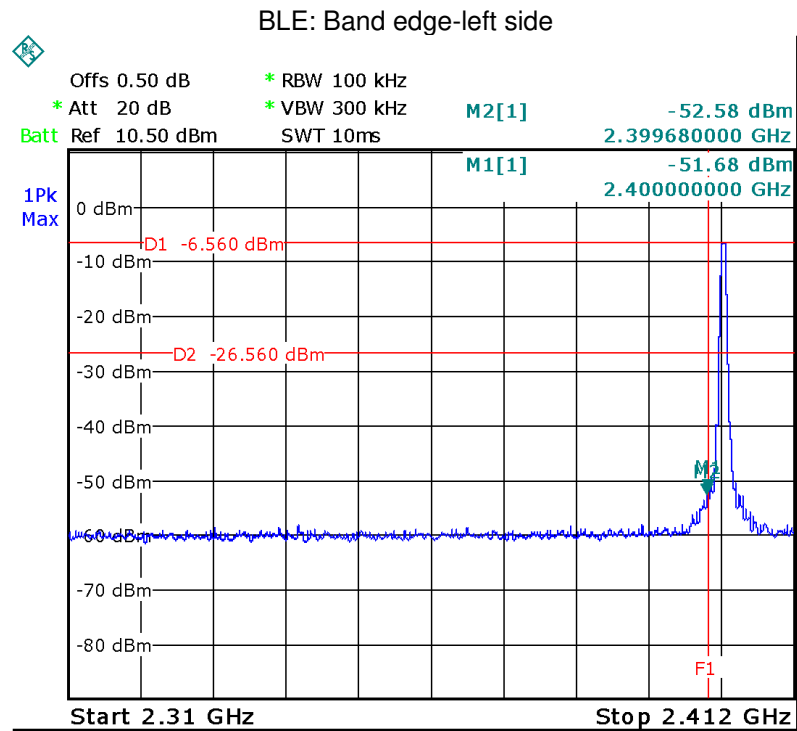


TX 11b: Band edge-left side Horizontal

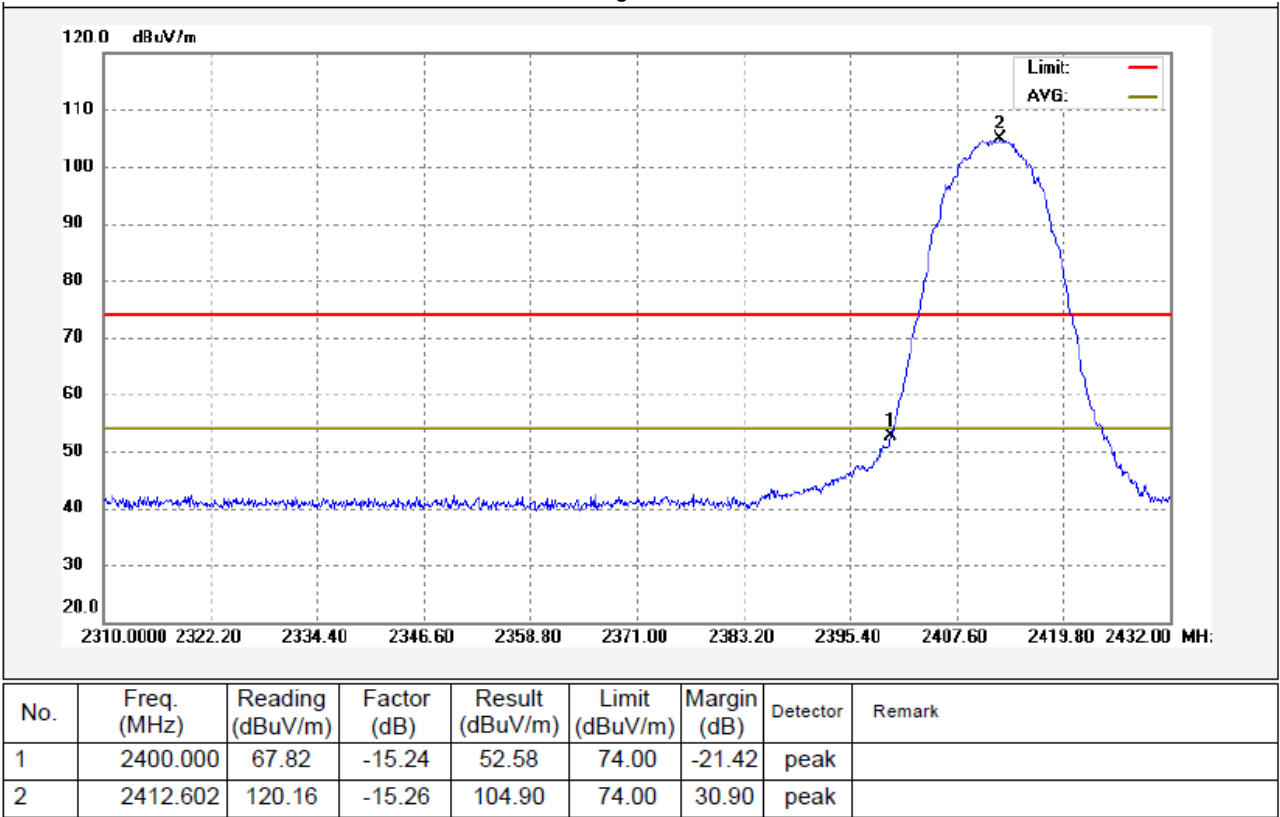


TX 11b: Band edge-left side Vertical

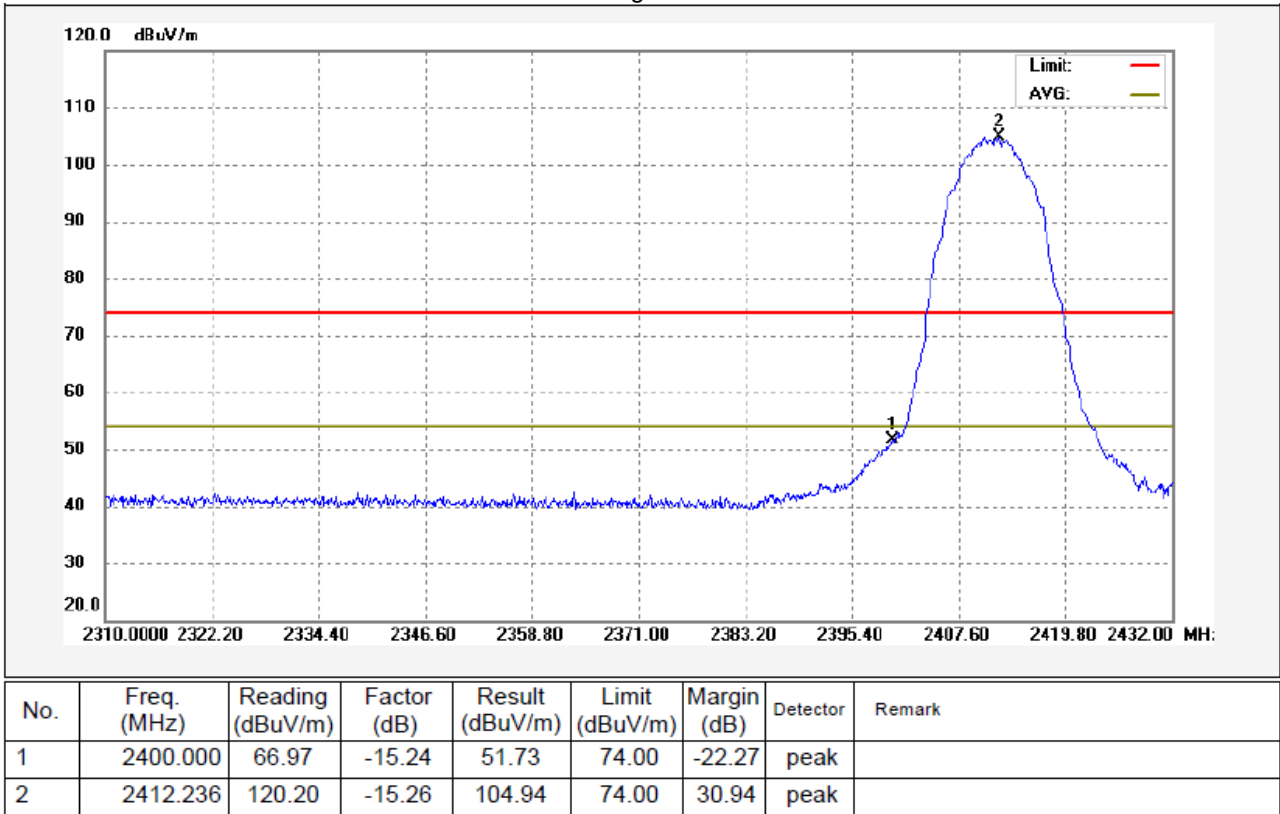


TX 11b: Band edge-right side Horizontal

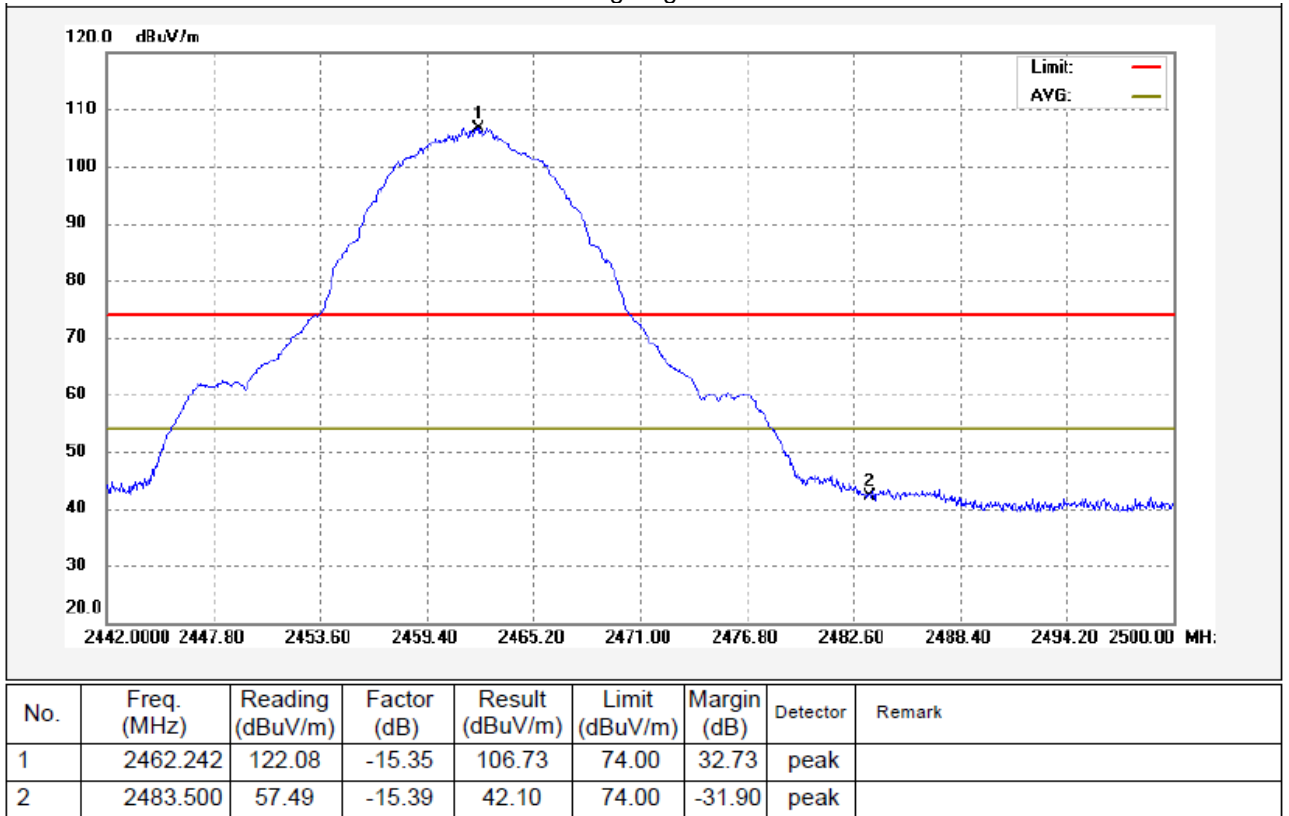

TX 11b: Band edge-right side Vertical

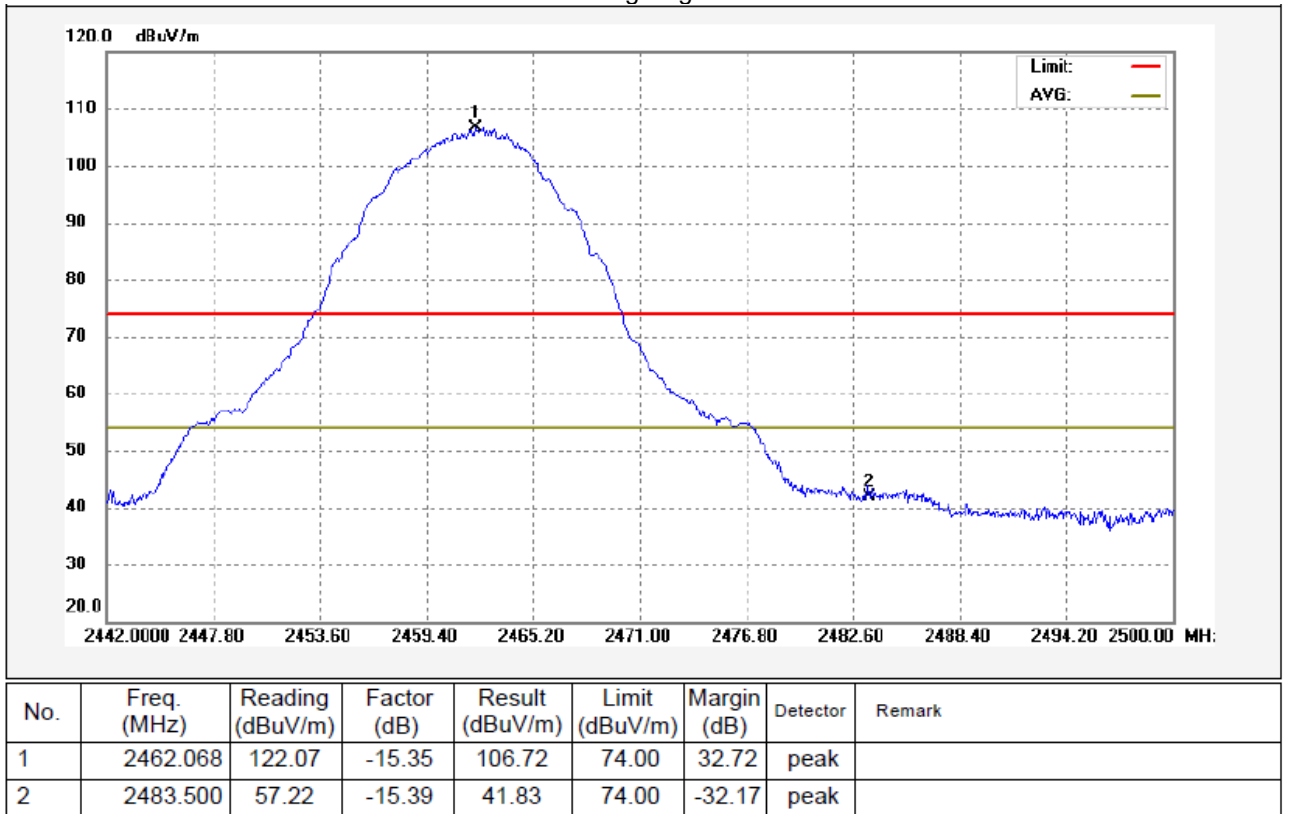


TX 11g: Band edge-left side Horizontal

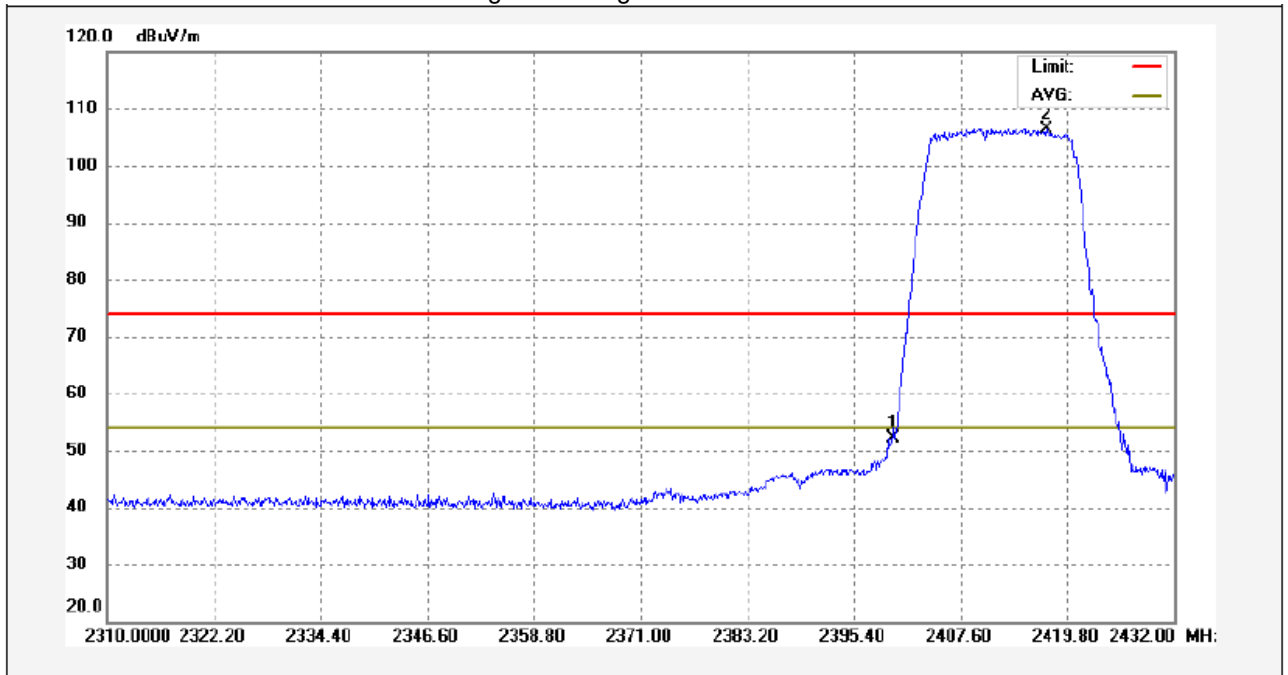


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2400.000	67.33	-15.24	52.09	74.00	-21.91	peak	
2	2417.360	121.68	-15.26	106.42	74.00	32.42	peak	

TX 11g: Band edge-left side Vertical

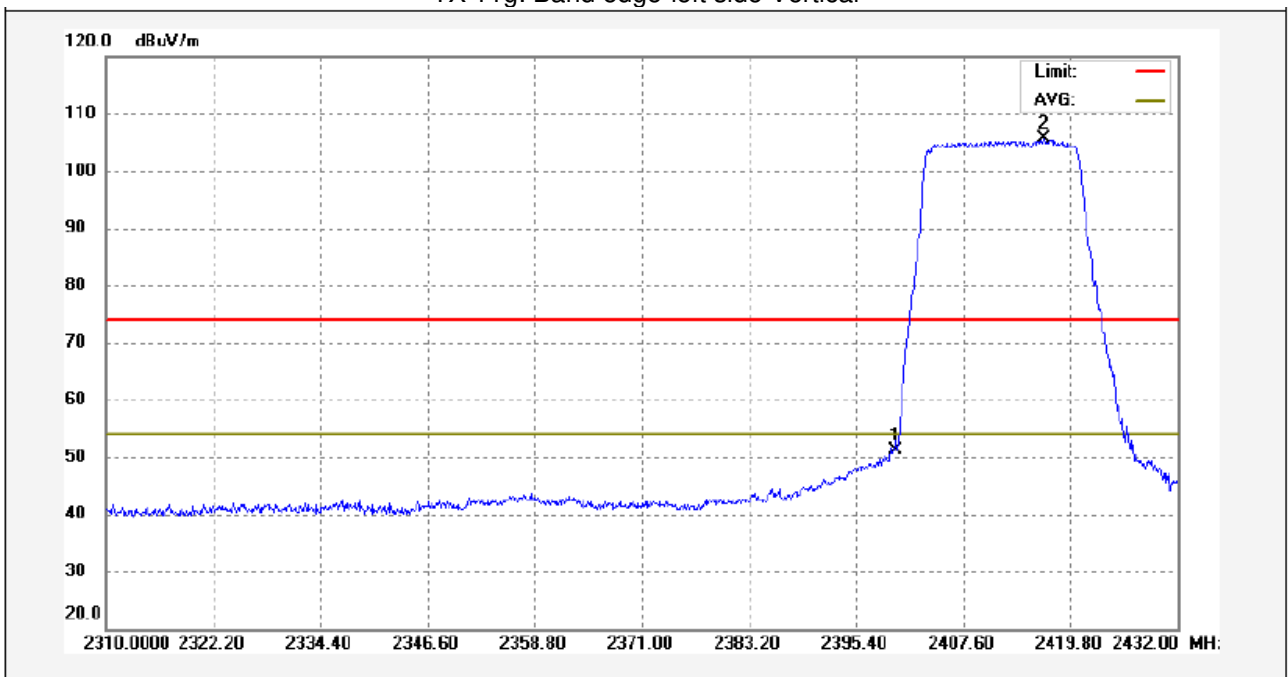


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2400.000	66.33	-15.24	51.09	74.00	-22.91	peak	
2	2416.750	120.83	-15.26	105.57	74.00	31.57	peak	


TX 11g: Band edge-right side Horizontal

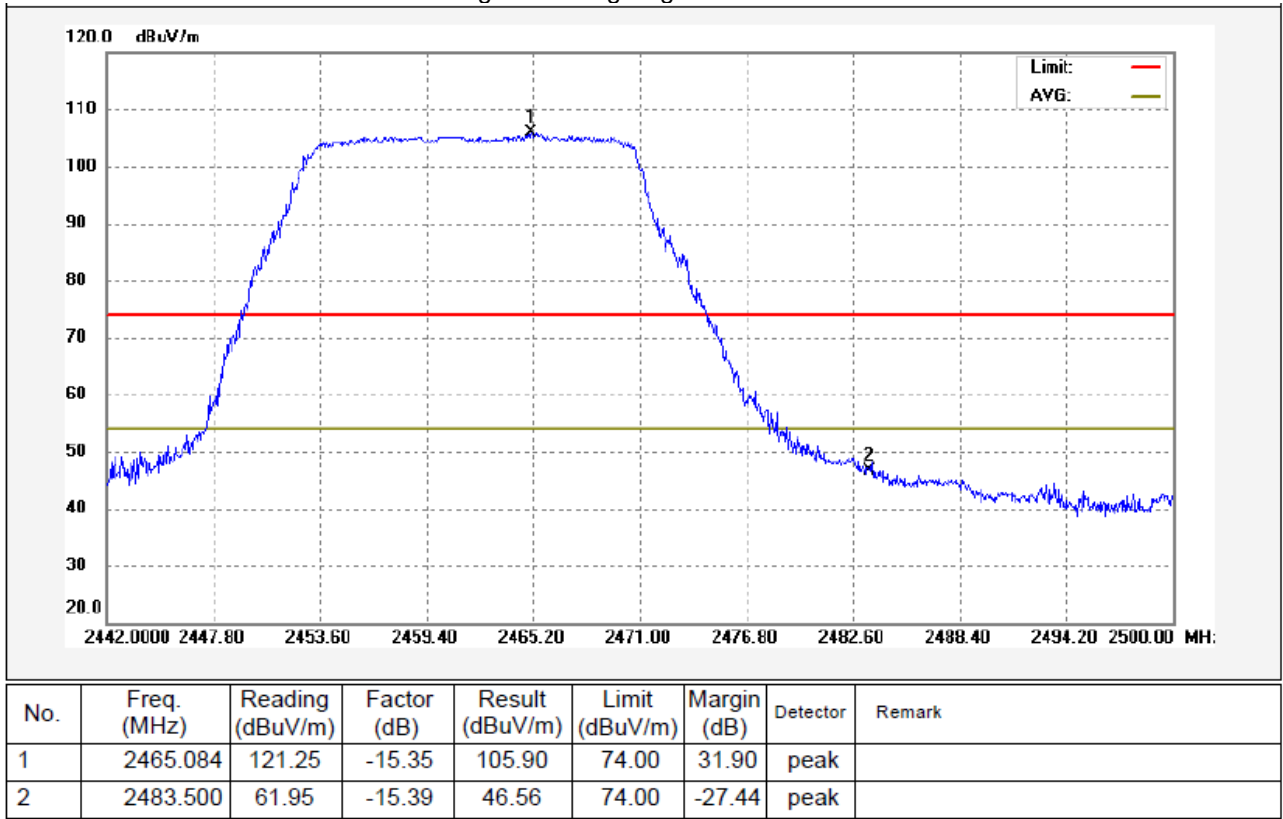


TX 11g: Band edge-right side Vertical

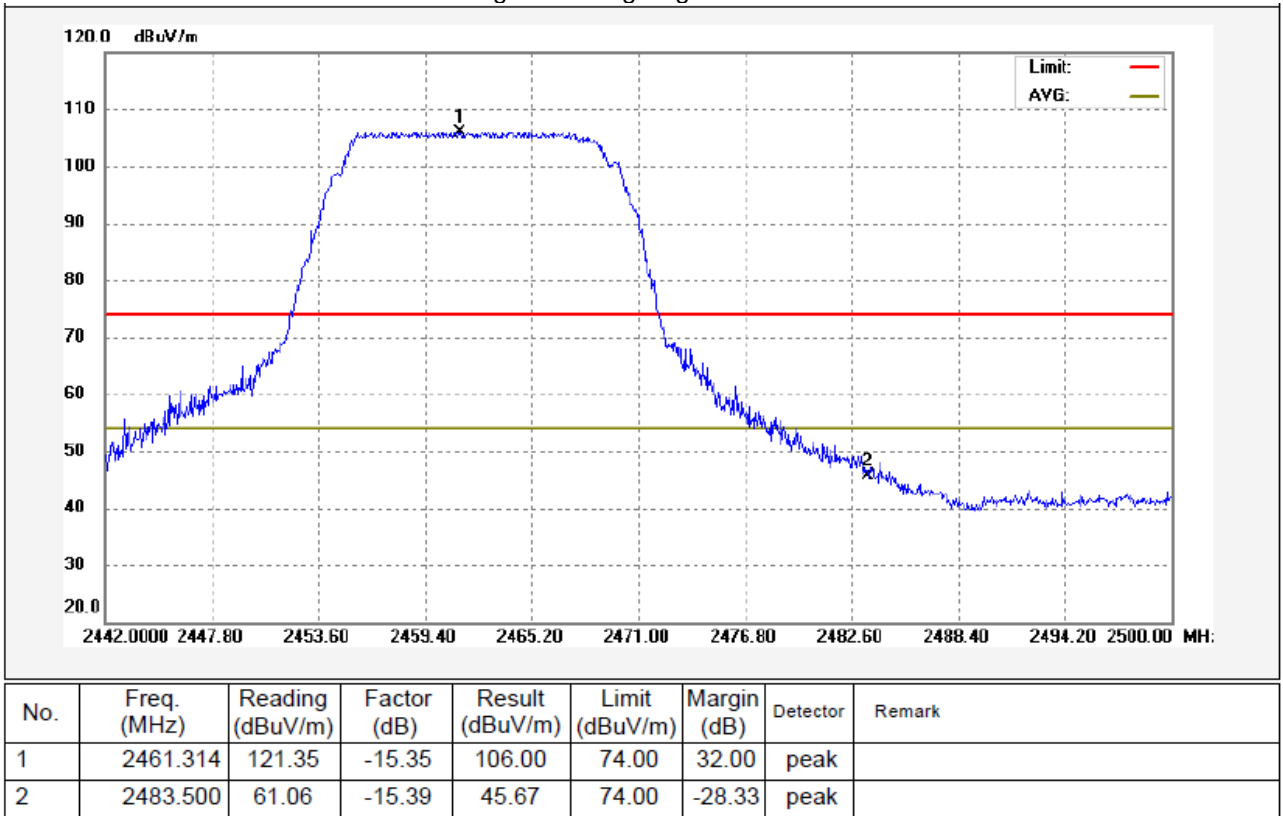


TX 11n HT20: Band edge-left side Horizontal

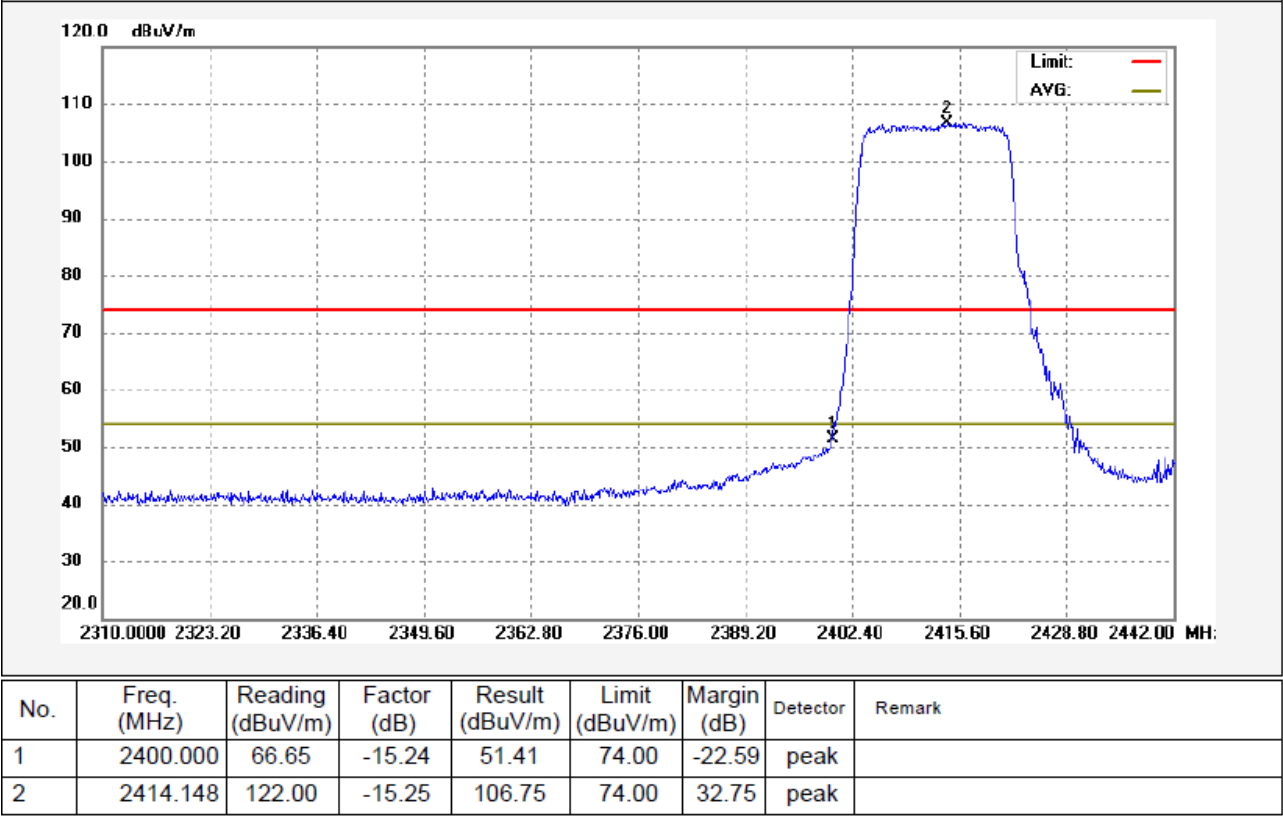


TX 11n HT20: Band edge-left side Vertical

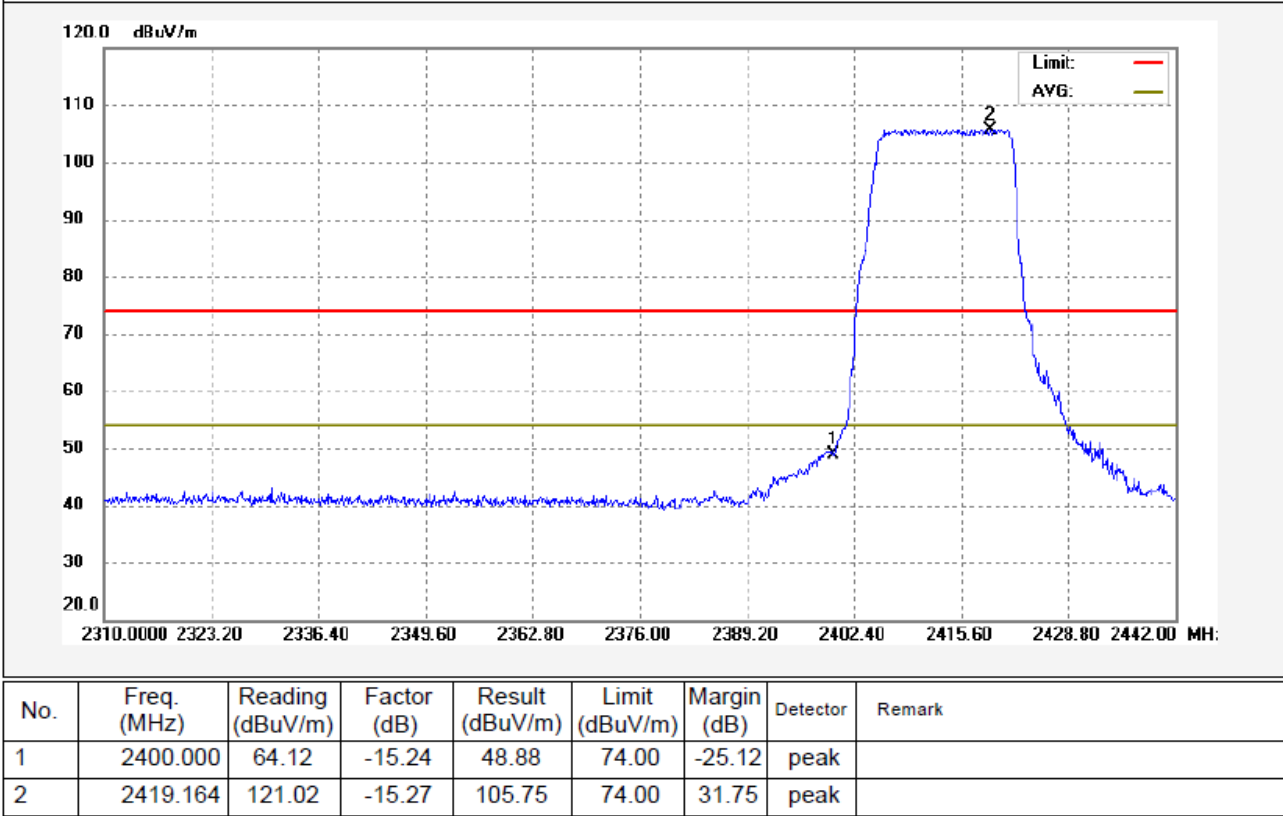


TX 11n HT20: Band edge-right side Horizontal

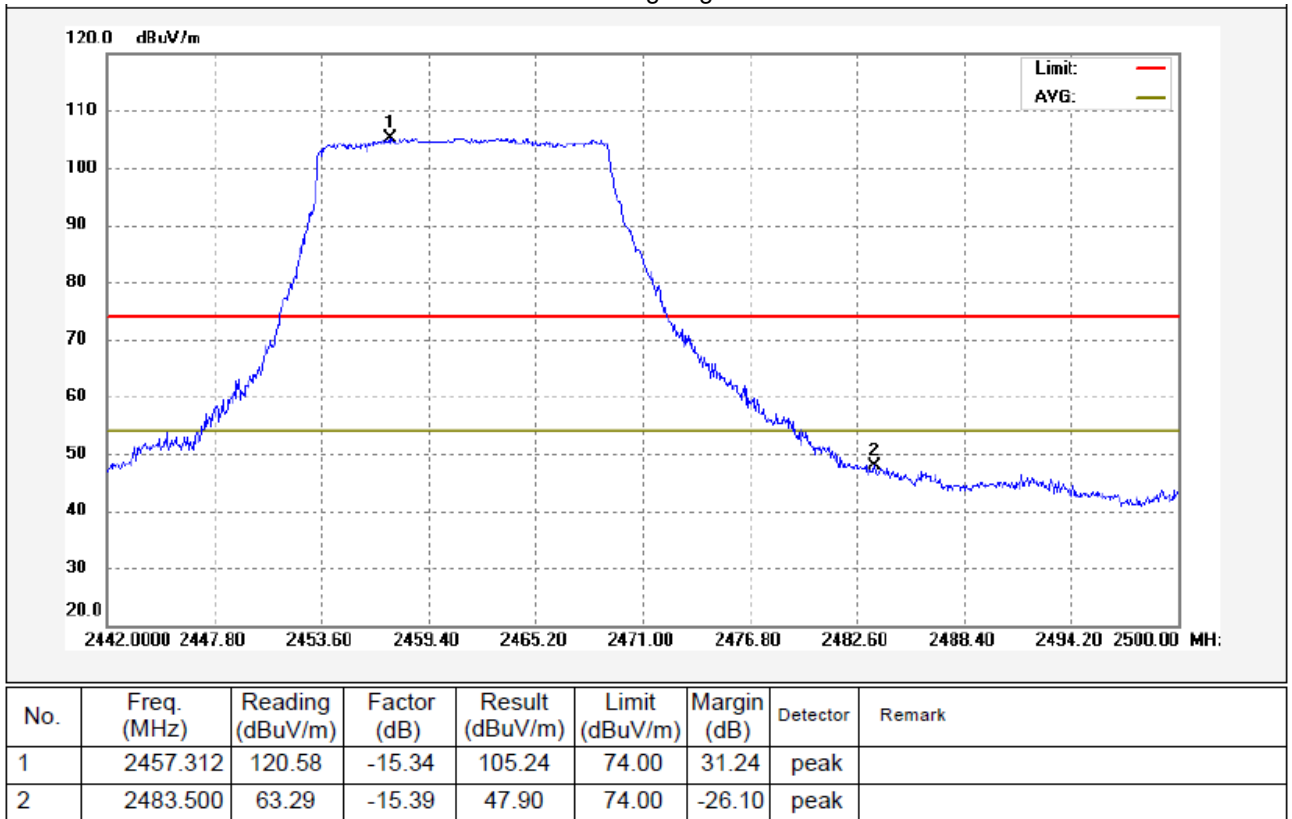


TX 11n HT20: Band edge-right side Vertical

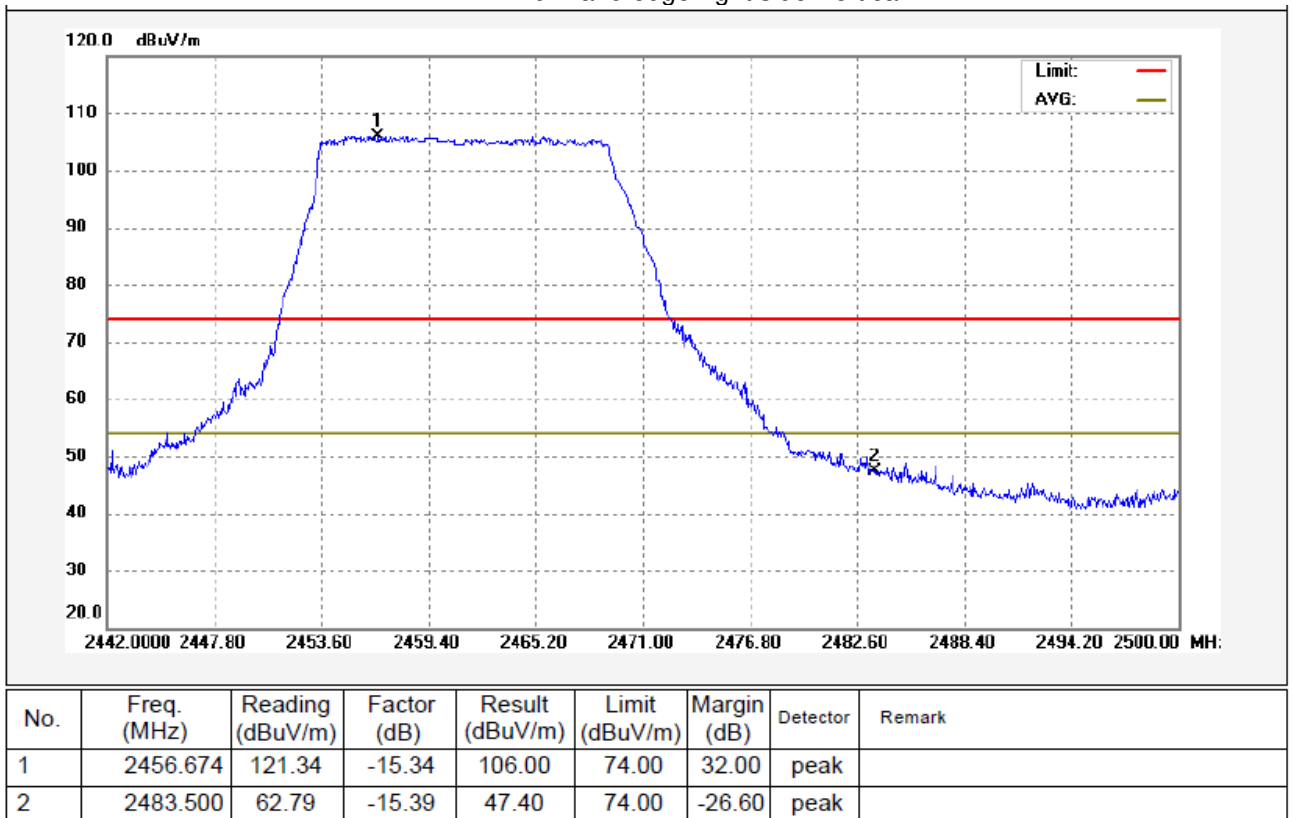


TX 11n HT40: Band edge-left side Horizontal

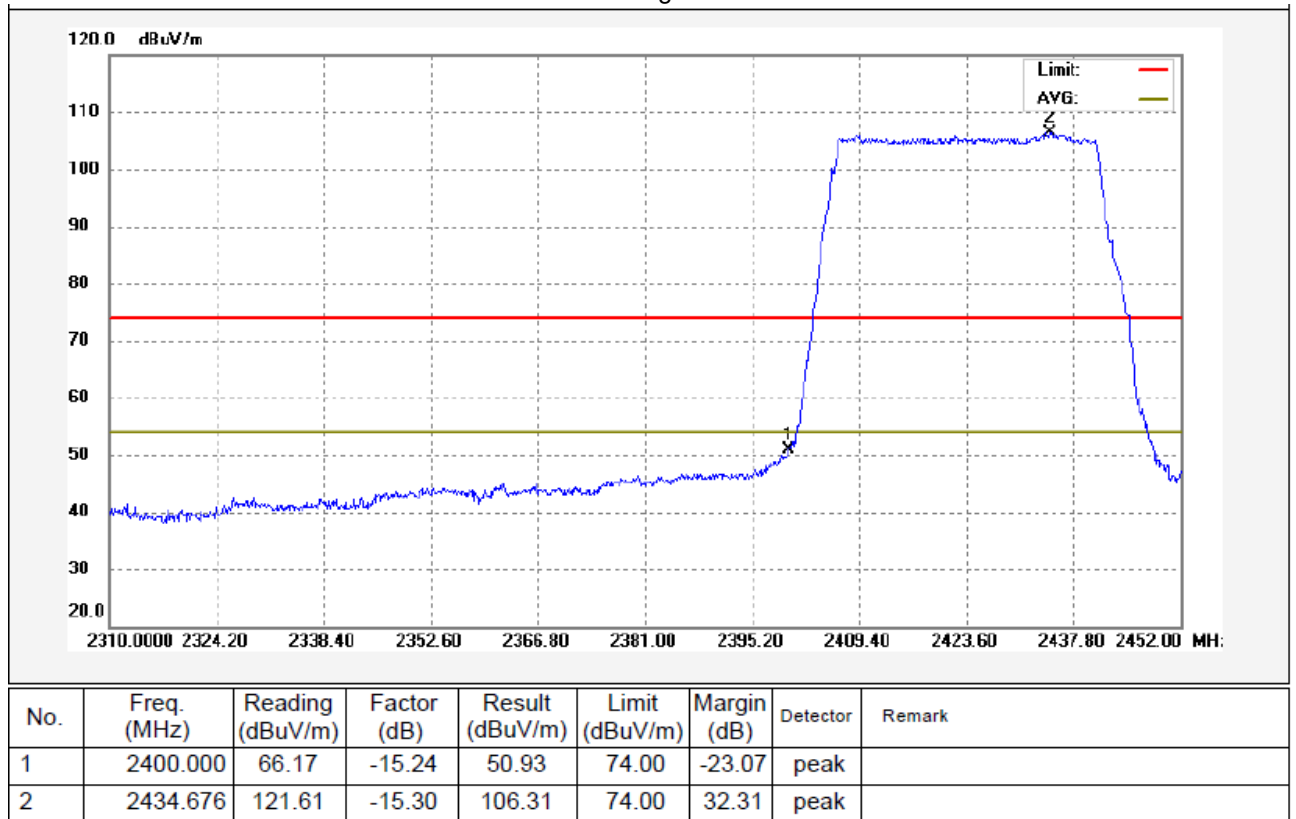


TX 11n HT40: Band edge-left side Vertical

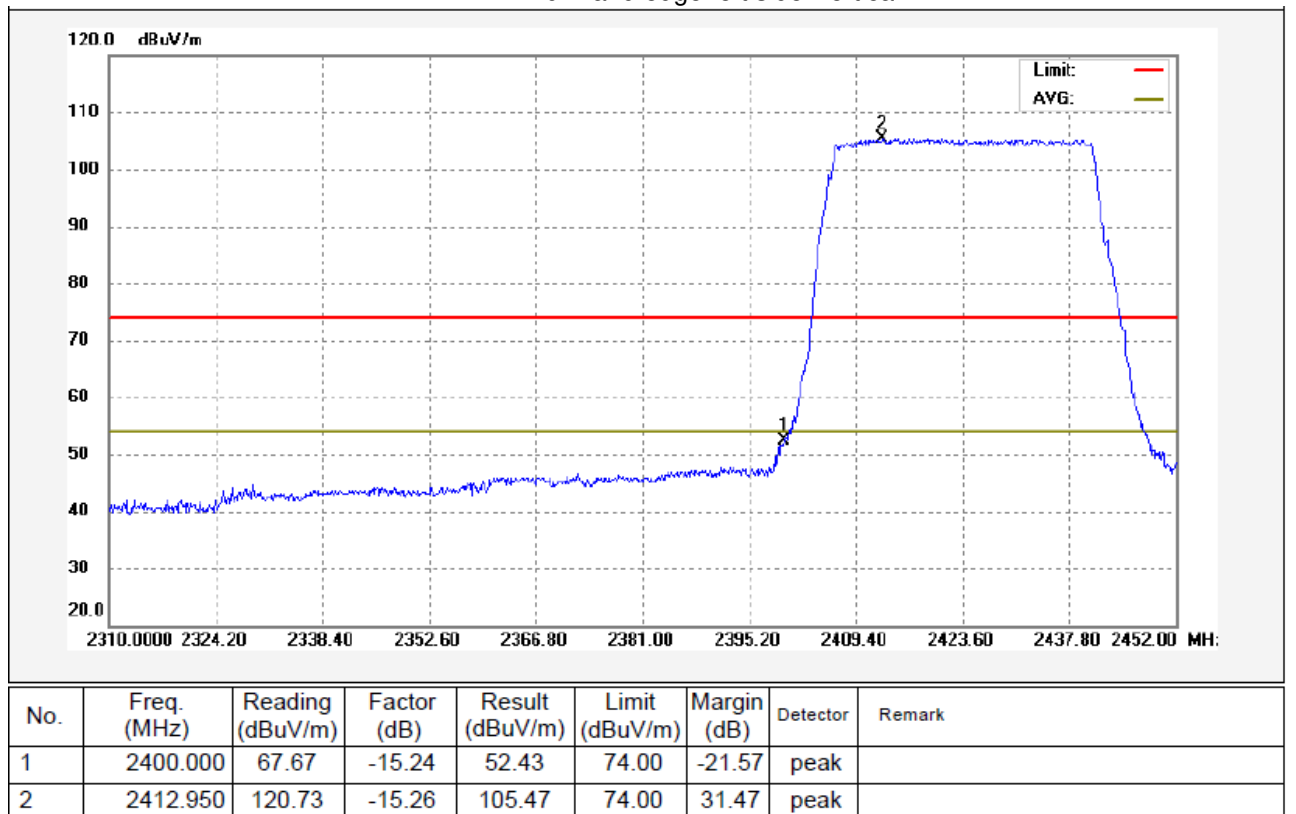


TX 11n HT40: Band edge-right side Horizontal

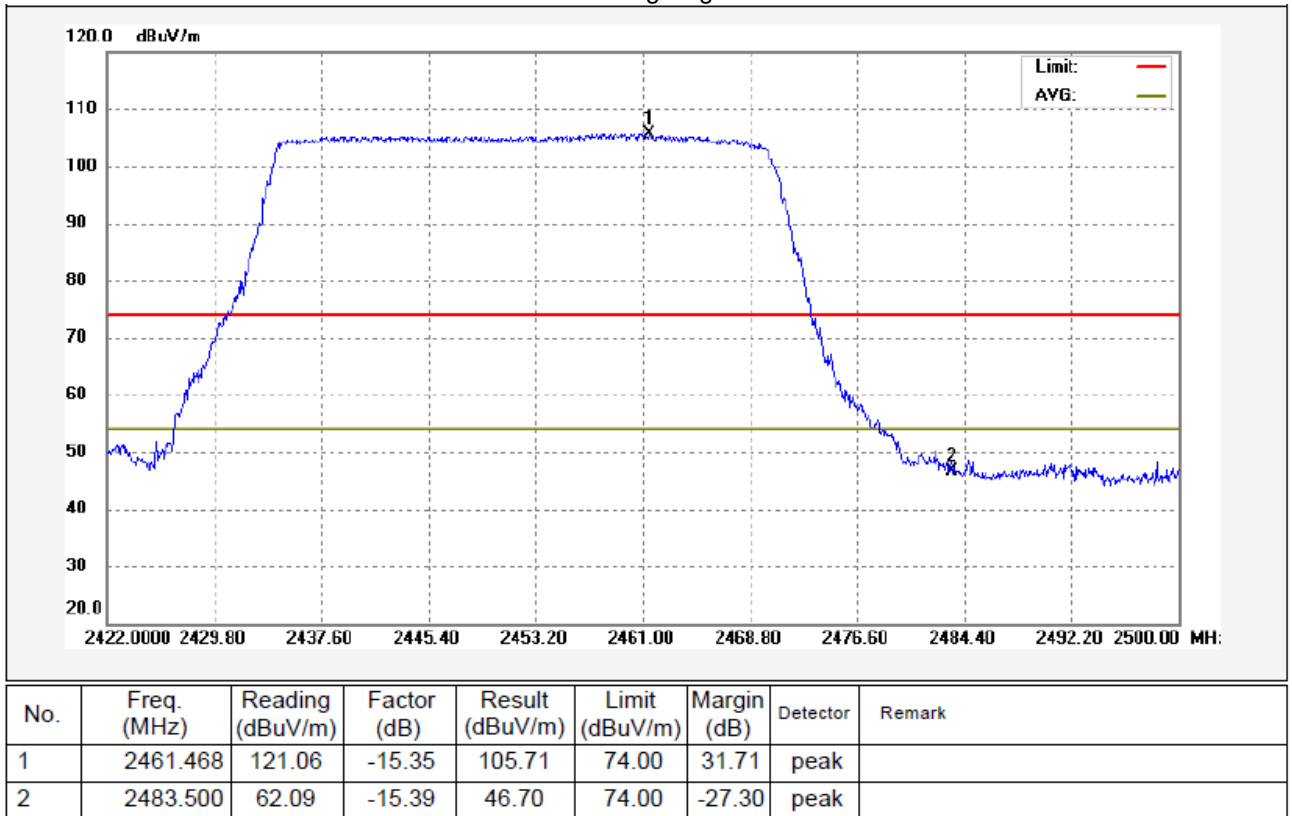


TX 11n HT40: Band edge-right side Vertical

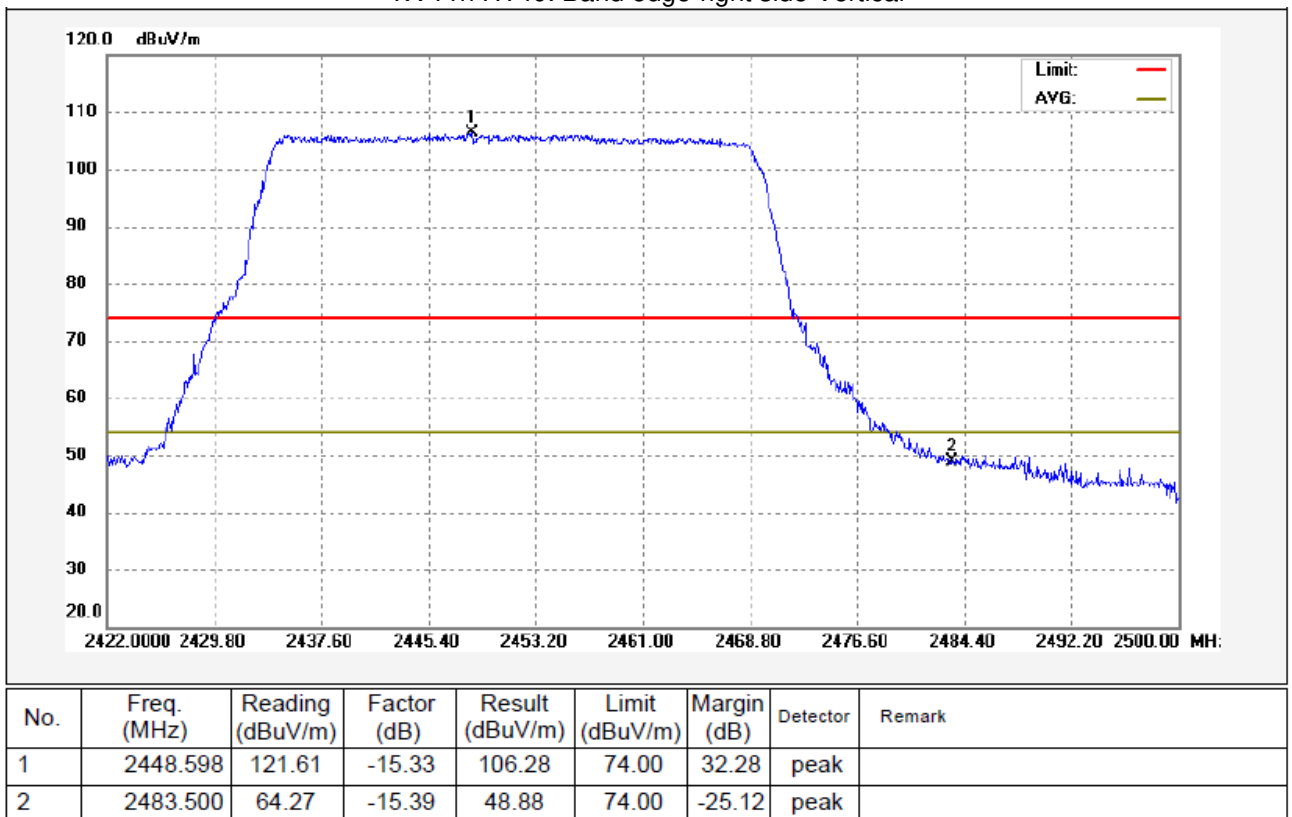


BLE: Band edge-left side Horizontal

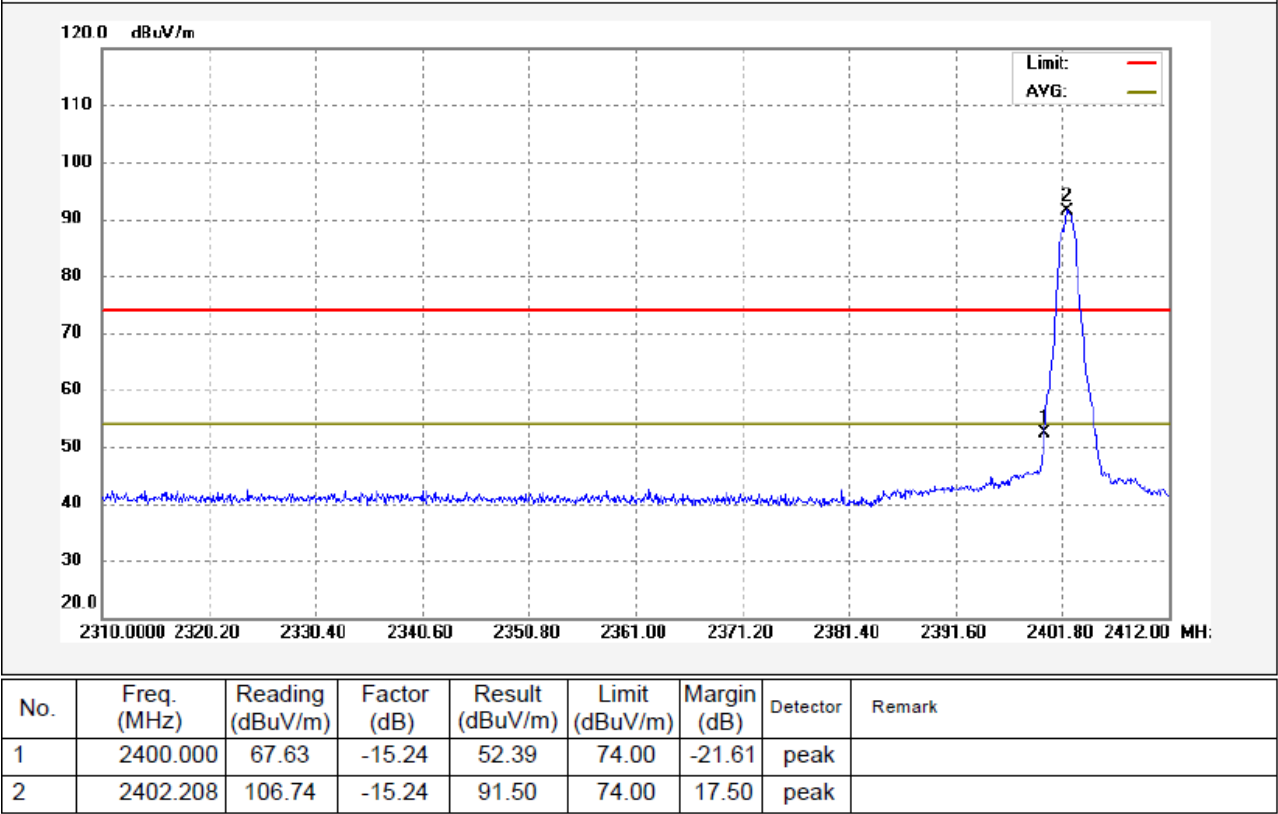


BLE: Band edge-left side Vertical

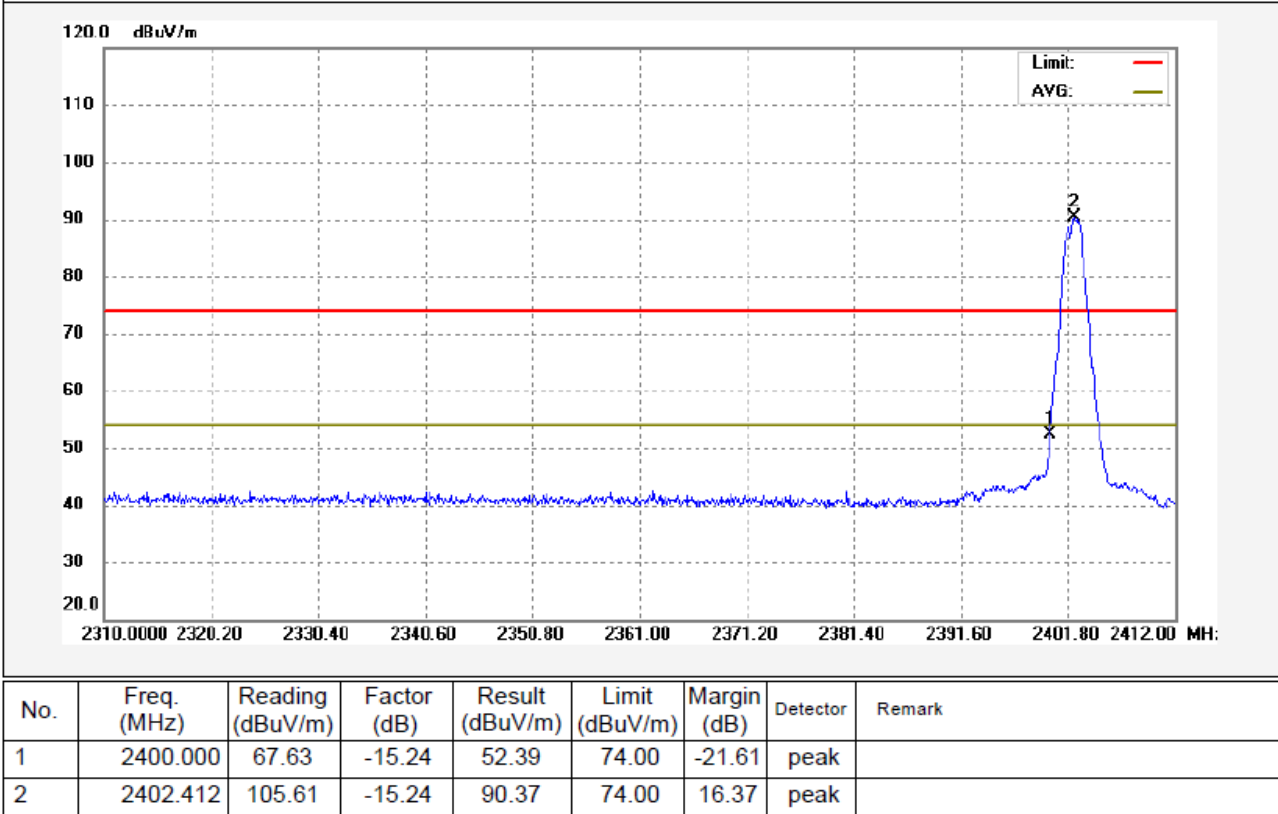

BLE: Band edge-right side Horizontal

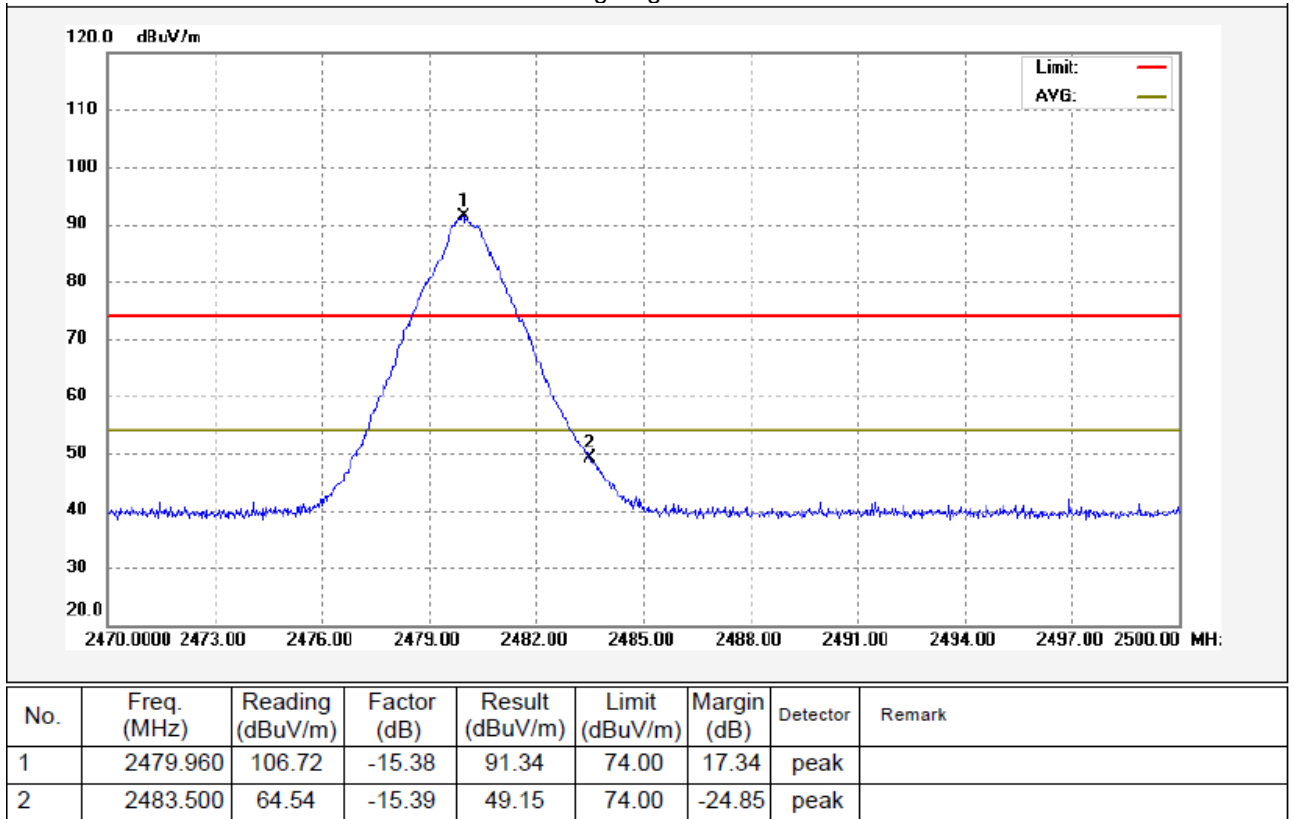

BLE: Band edge-right side Vertical

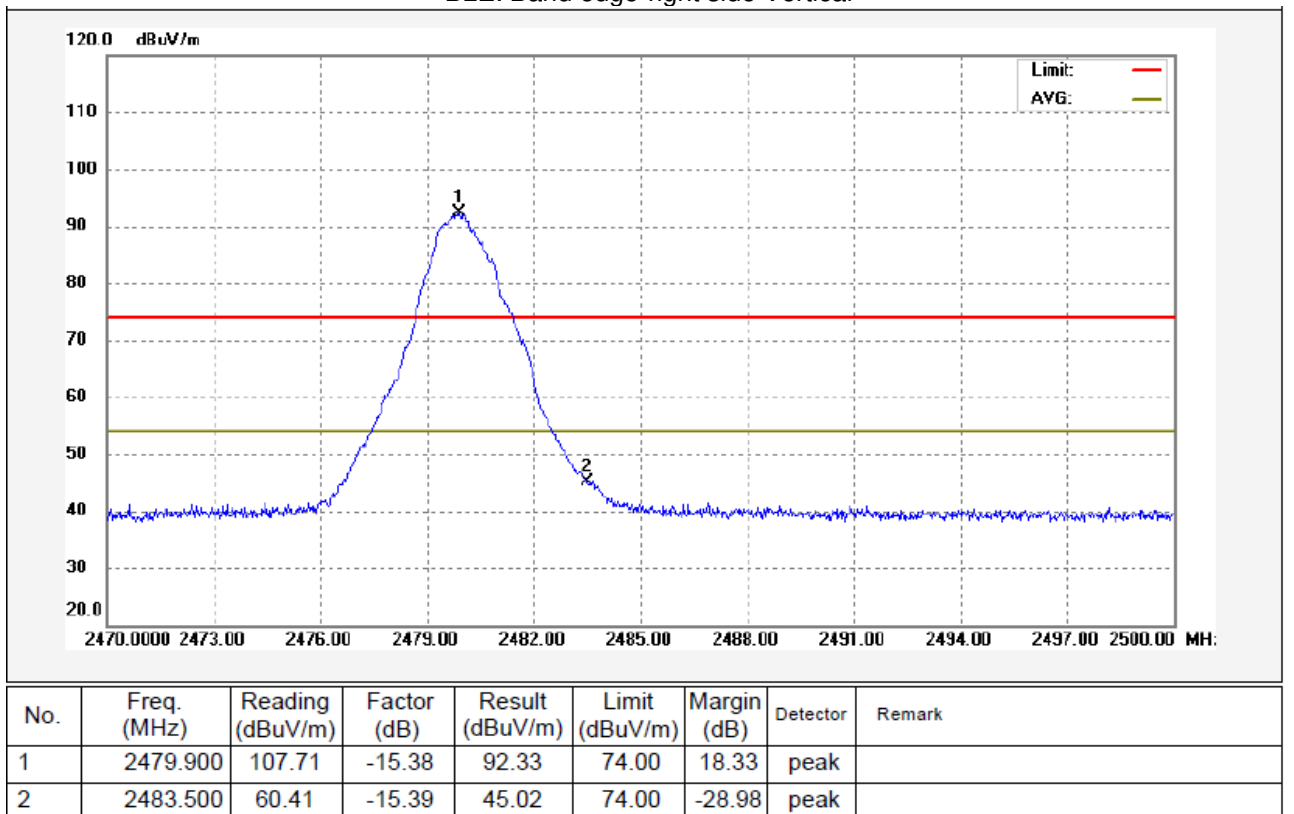

12 6 dB Bandwidth Measurement

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016



12.1 Test Procedure:



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz



12.2 Test Result:



Operation mode	Test Channel	Bandwidth (MHz)
TX 11b	Channel 1	10.092
	Channel 6	10.092
	Channel 11	10.092
TX 11g	Channel 1	16.417
	Channel 6	16.417
	Channel 11	16.417
TX 11n HT20	Channel 1	17.623
	Channel 6	17.623
	Channel 11	17.623
TX 11n HT40	Channel 3	36.120
	Channel 6	36.120
	Channel 9	36.120
BLE	Channel 0	0.701
	Channel 19	0.701
	Channel 39	0.701



Test result plot:

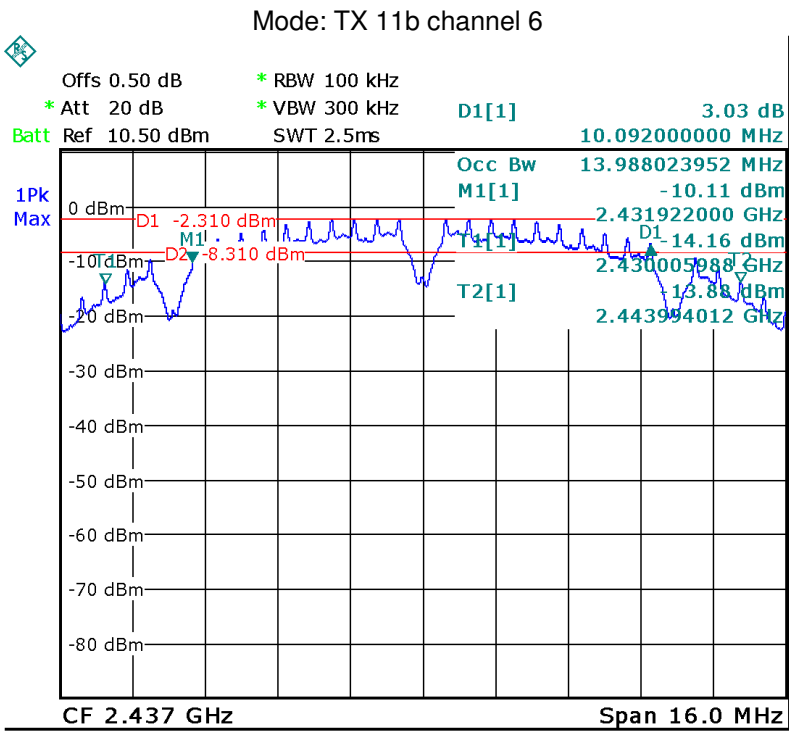
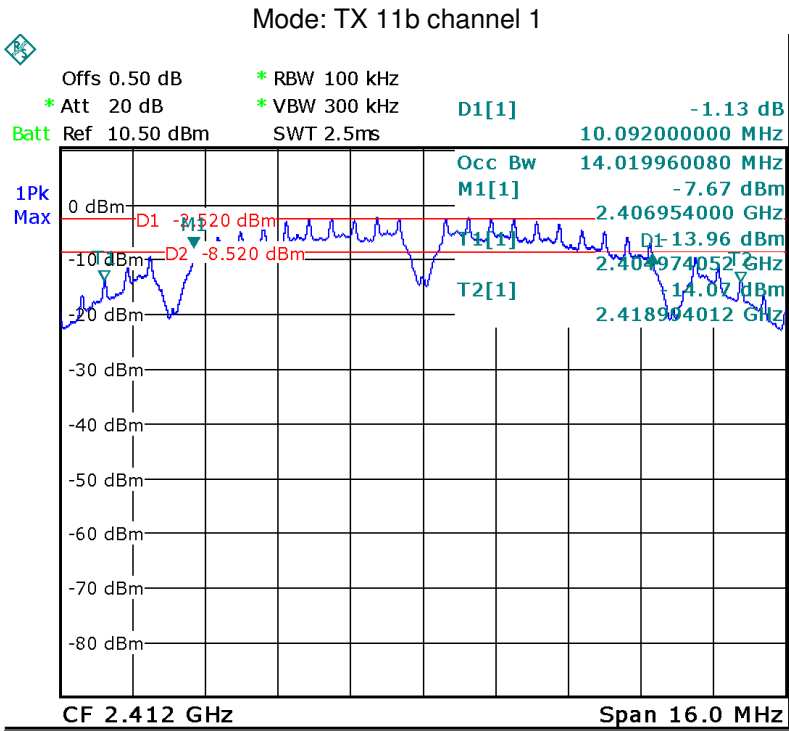


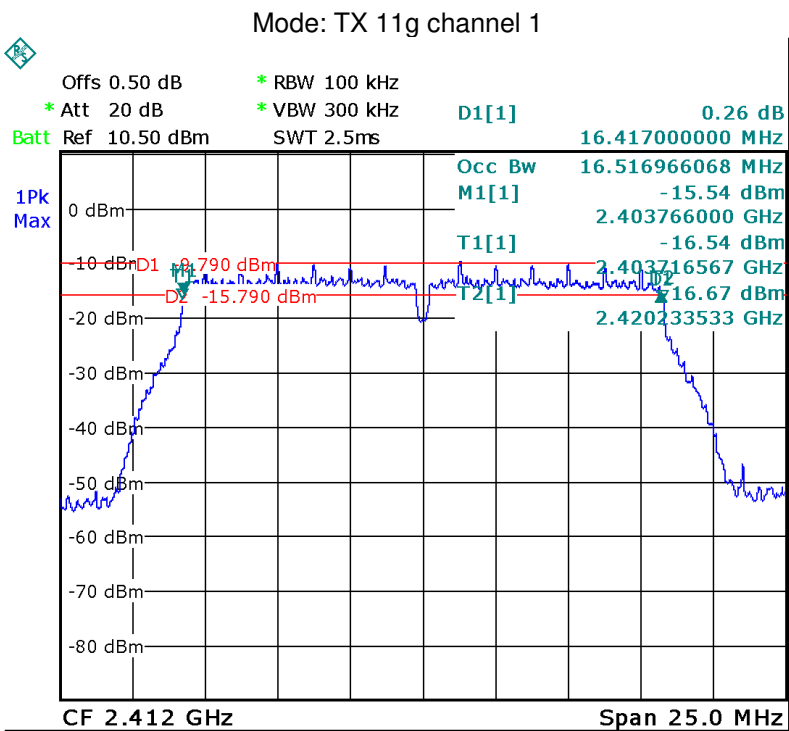
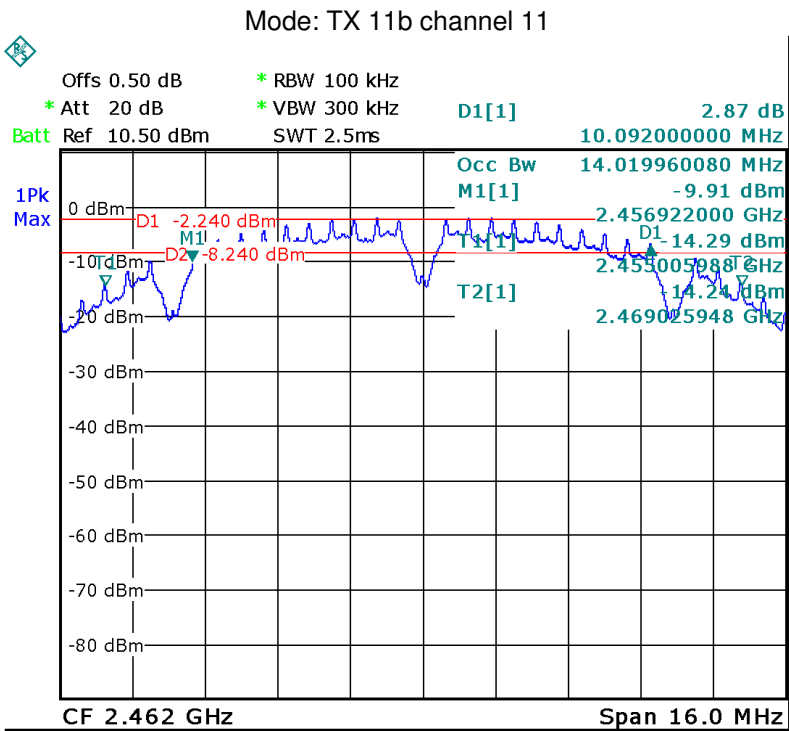


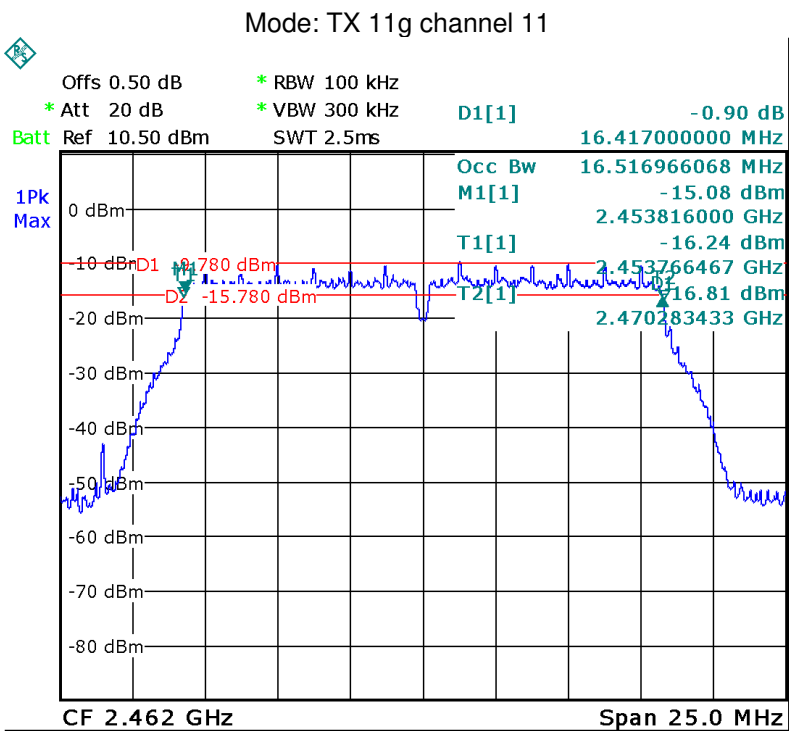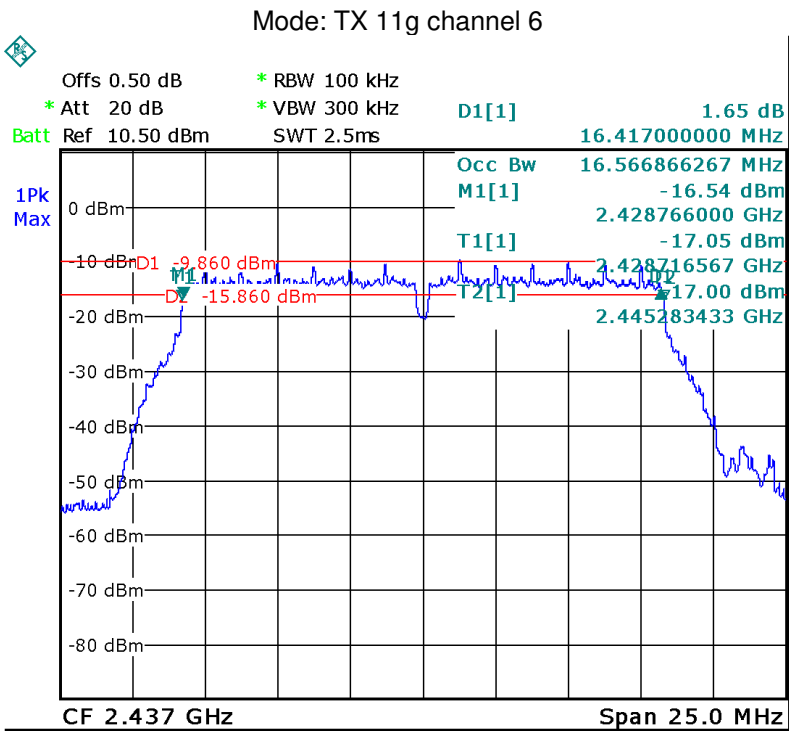


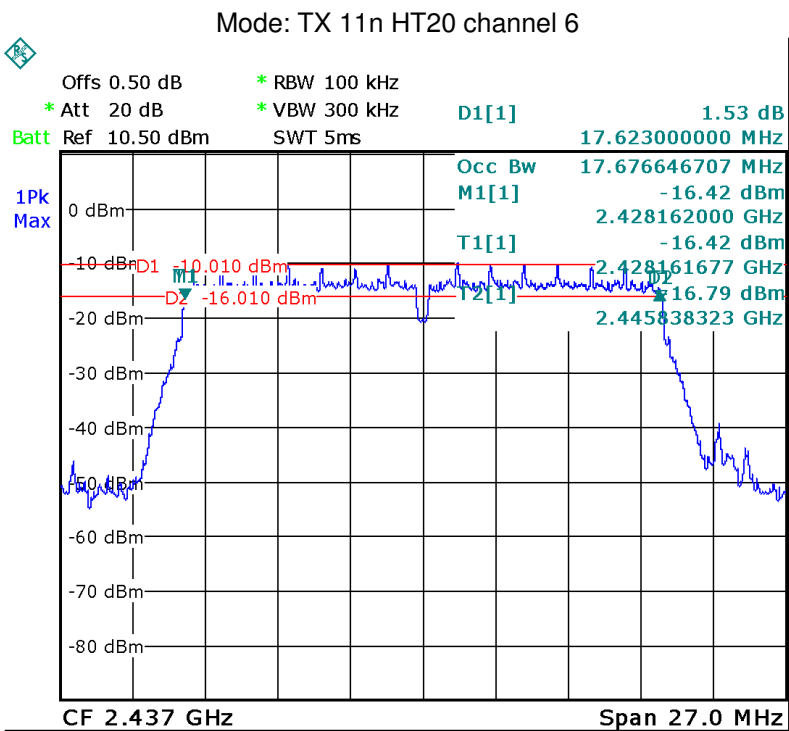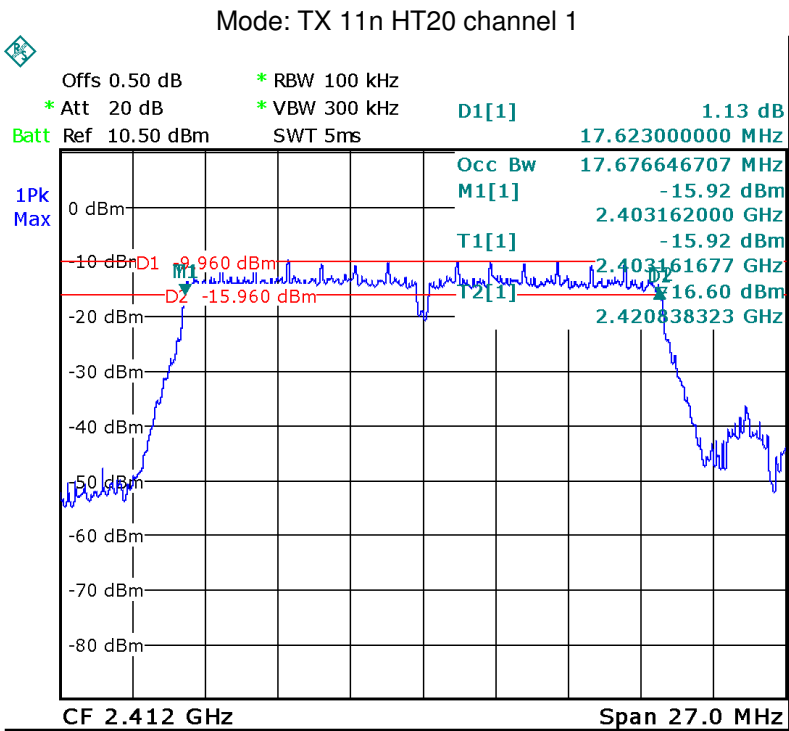

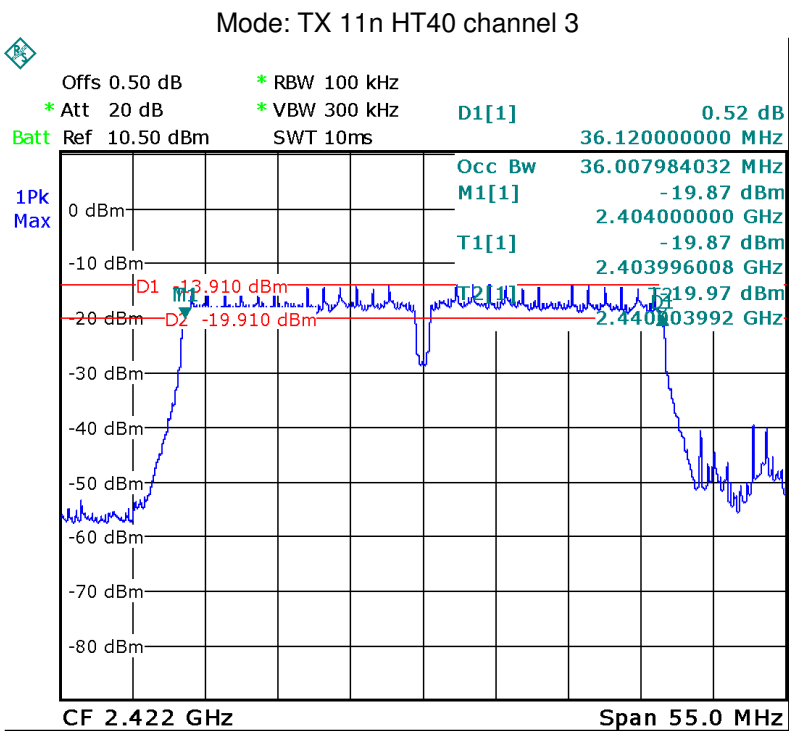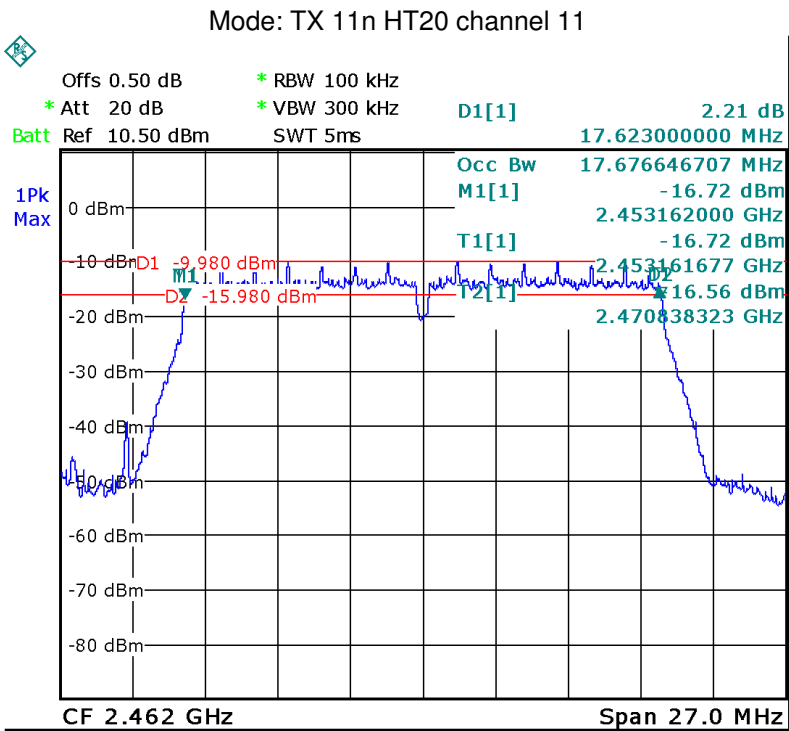

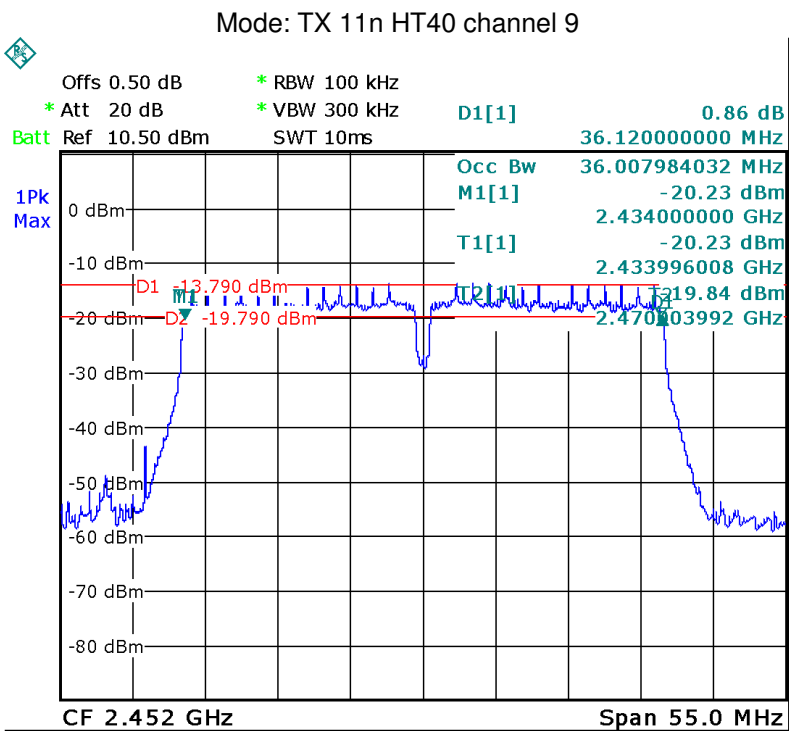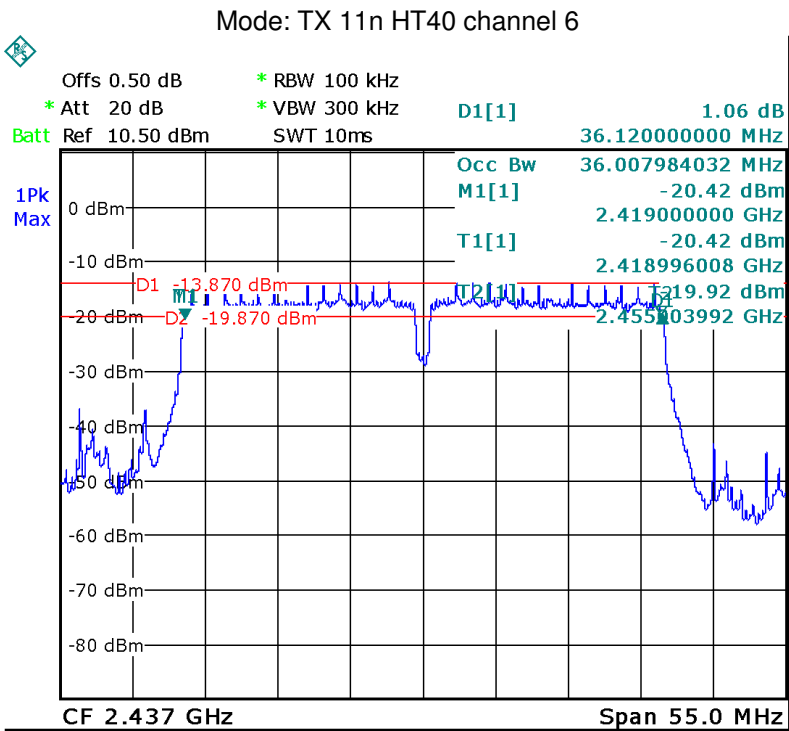

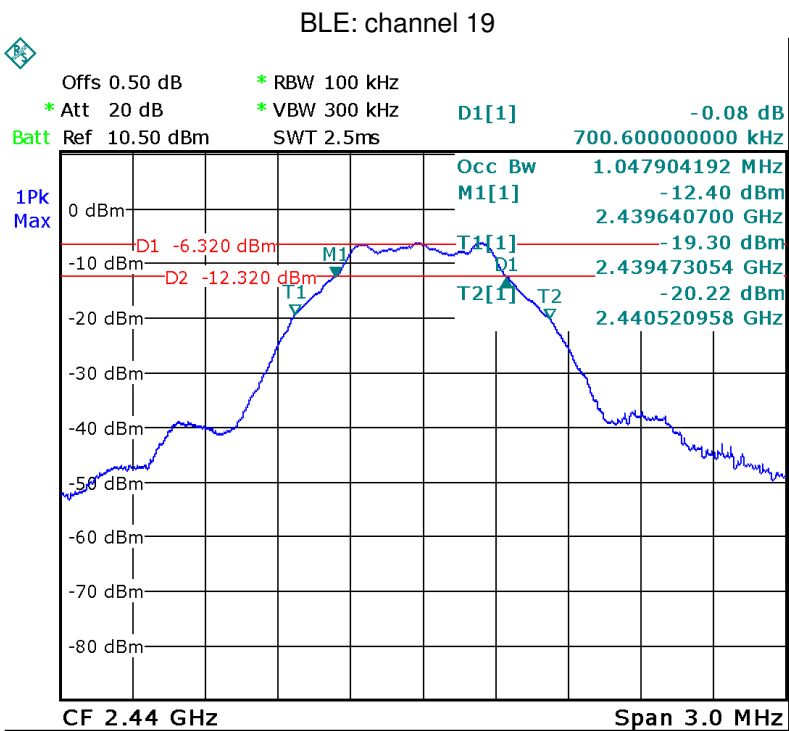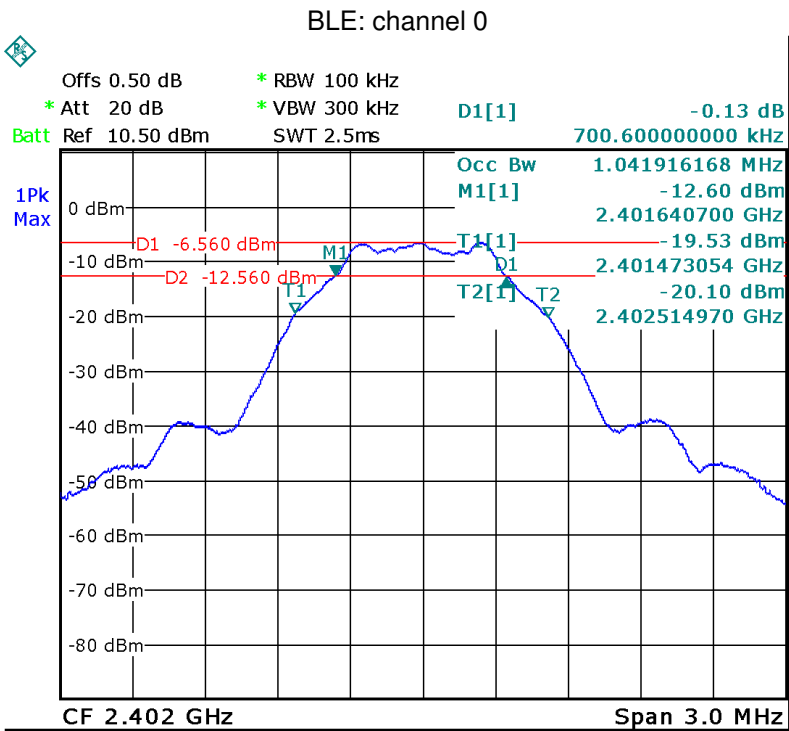

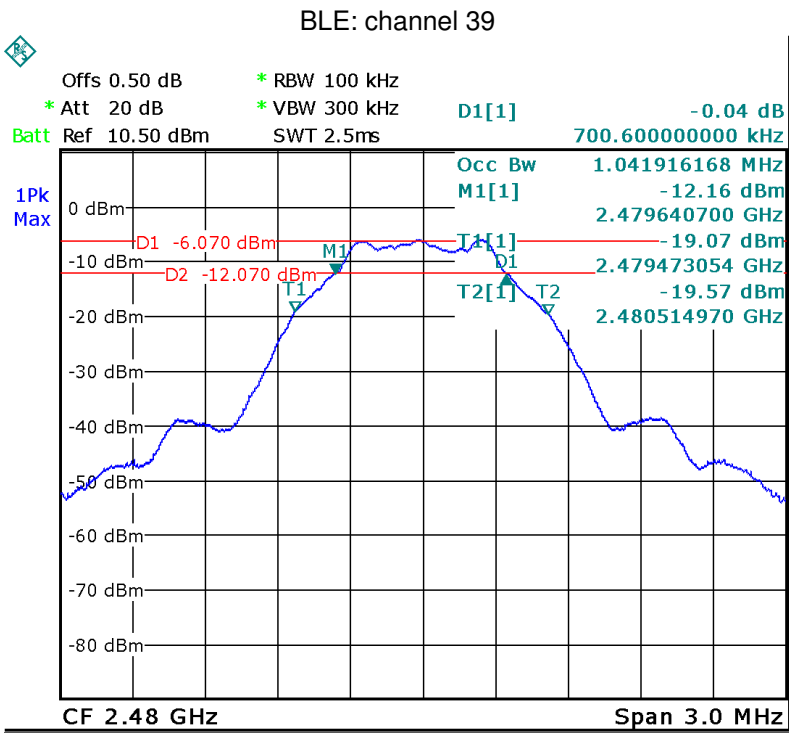

13 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016

13.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the $RBW \geq DTS$ bandwidth.
- b) Set $VBW \geq 3 \times RBW$.
- c) Set $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 9.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.


- a) Set the $RBW = 1 \text{ MHz}$.
- b) Set the $VBW \geq 3 \times RBW$
- c) Set the $span \geq 1.5 \times DTS$ bandwidth.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

13.2 Test Result:


Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	9.37	1W/30dBm
	Middle-2437	9.32	1W/30dBm
	High-2462	9.34	1W/30dBm
TX 11g	Low-2412	9.36	1W/30dBm
	Middle-2437	9.19	1W/30dBm
	High-2462	9.29	1W/30dBm
TX 11n HT20	Low-2412	9.48	1W/30dBm
	Middle-2437	9.44	1W/30dBm
	High-2462	9.30	1W/30dBm
TX 11n HT40	Low-2422	9.31	1W/30dBm
	Middle-2437	9.21	1W/30dBm
	High-2452	9.34	1W/30dBm
BLE	Low-2402	-5.87	1W/30dBm
	Middle-2440	-5.60	1W/30dBm
	High-2480	-5.35	1W/30dBm



Test Plot



Mode: TX 11b channel 1


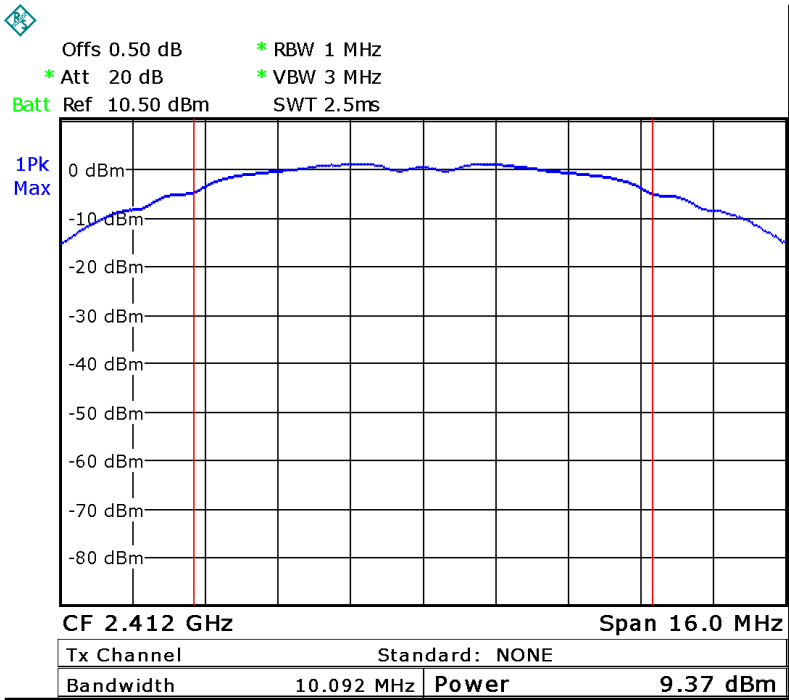




Mode: TX 11b channel 6


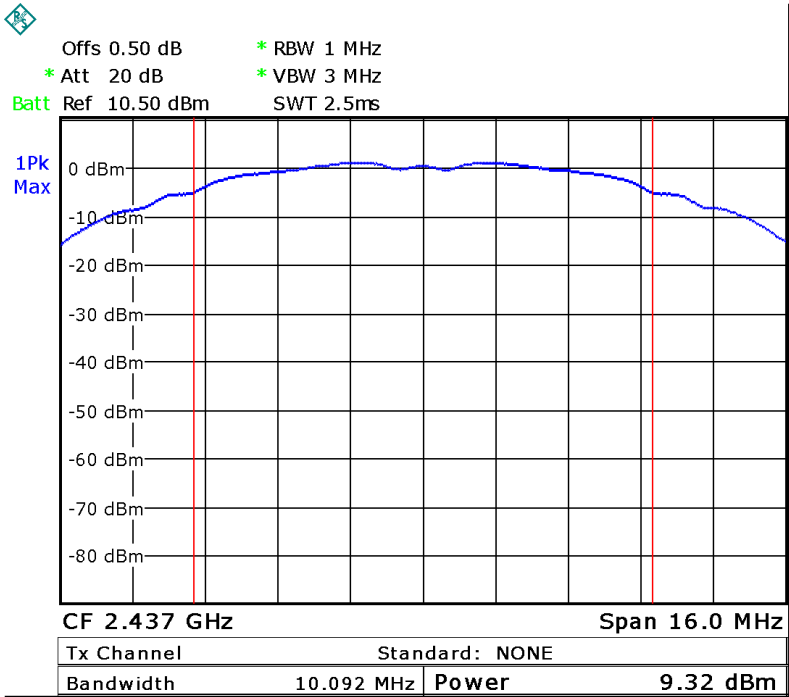


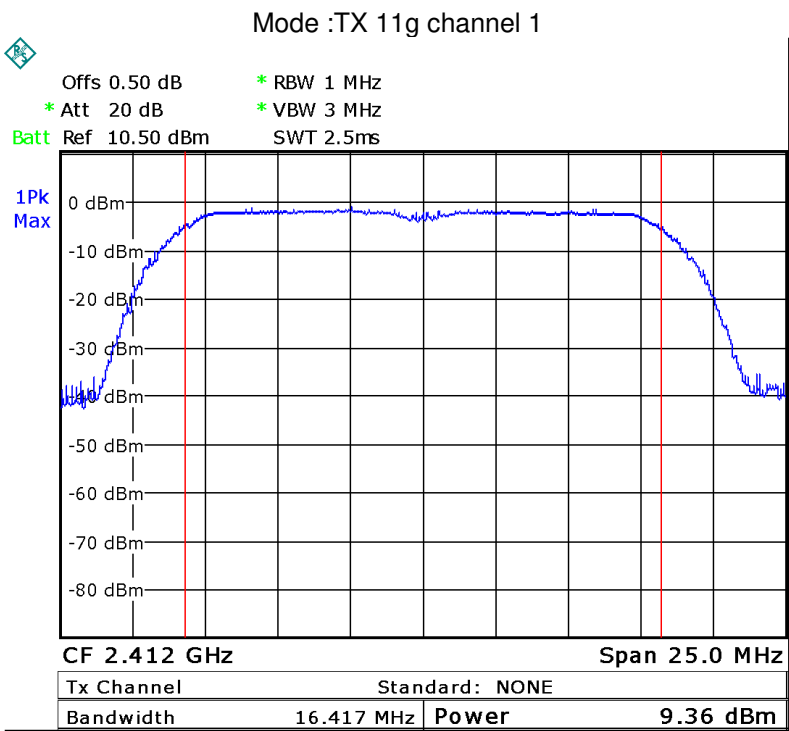
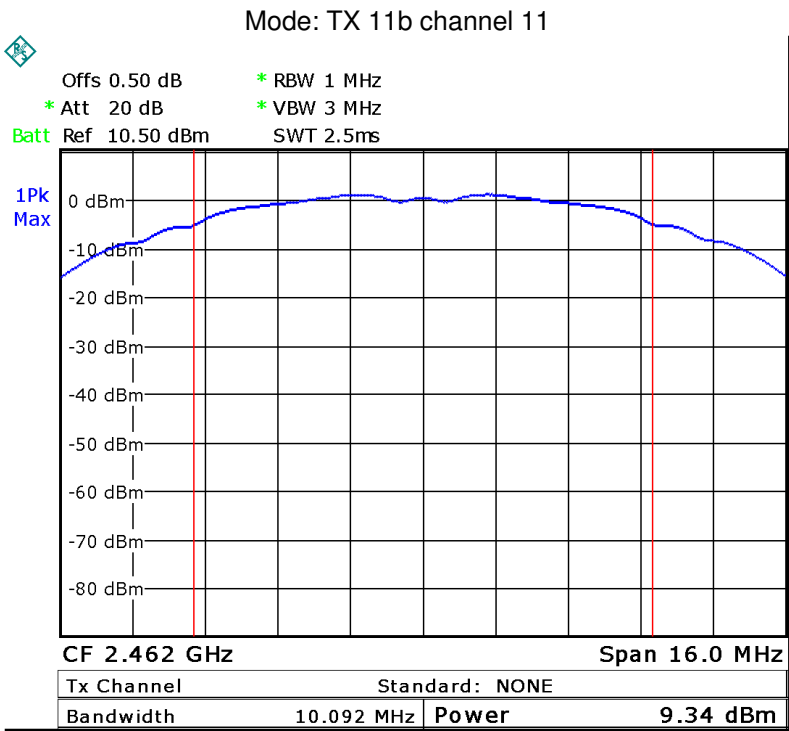


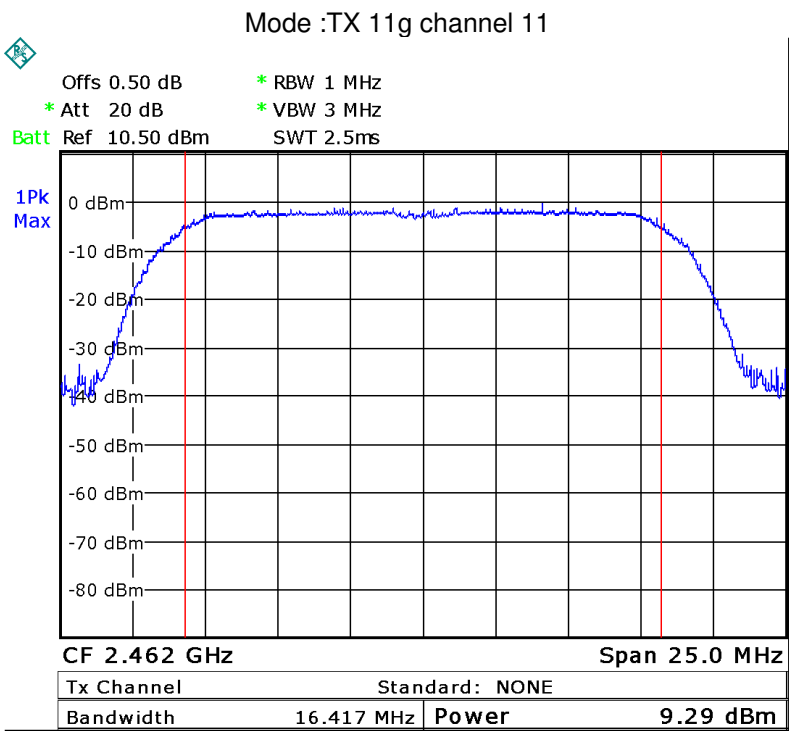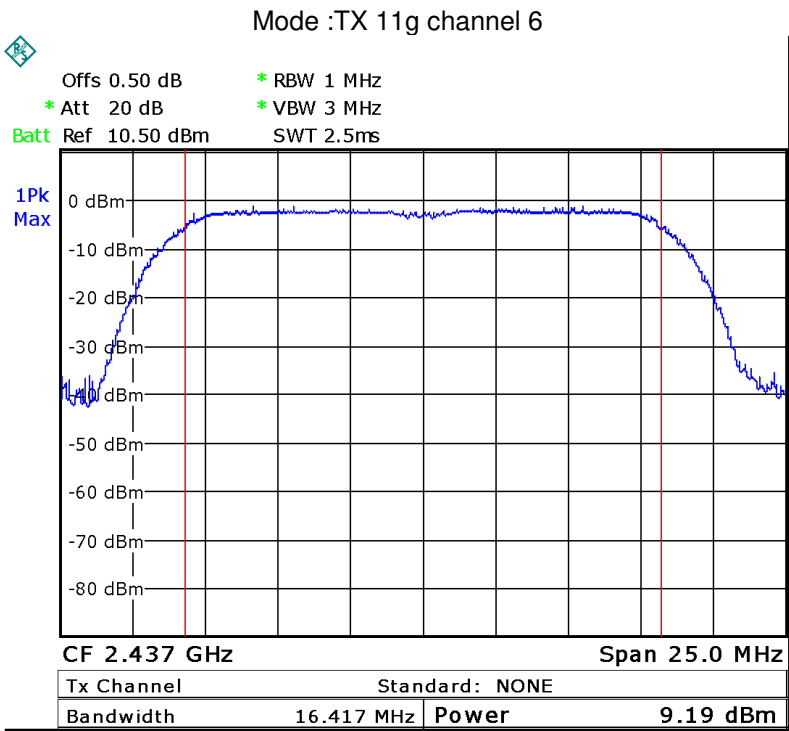


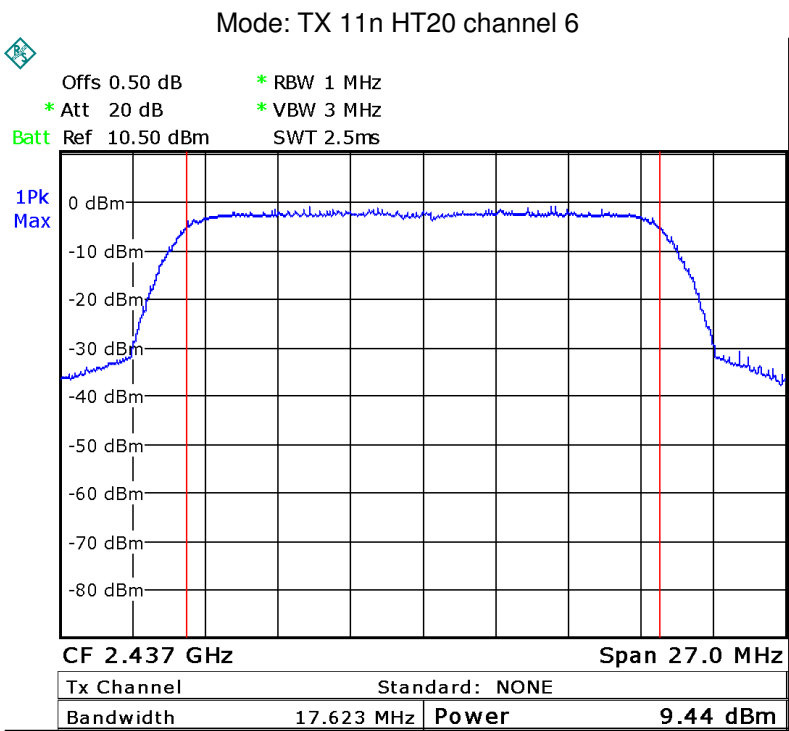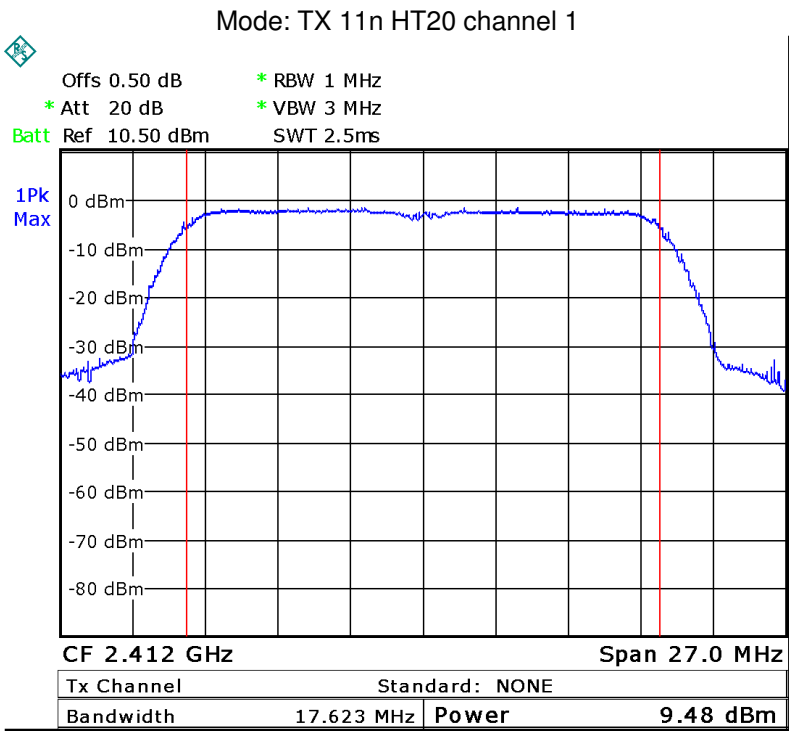

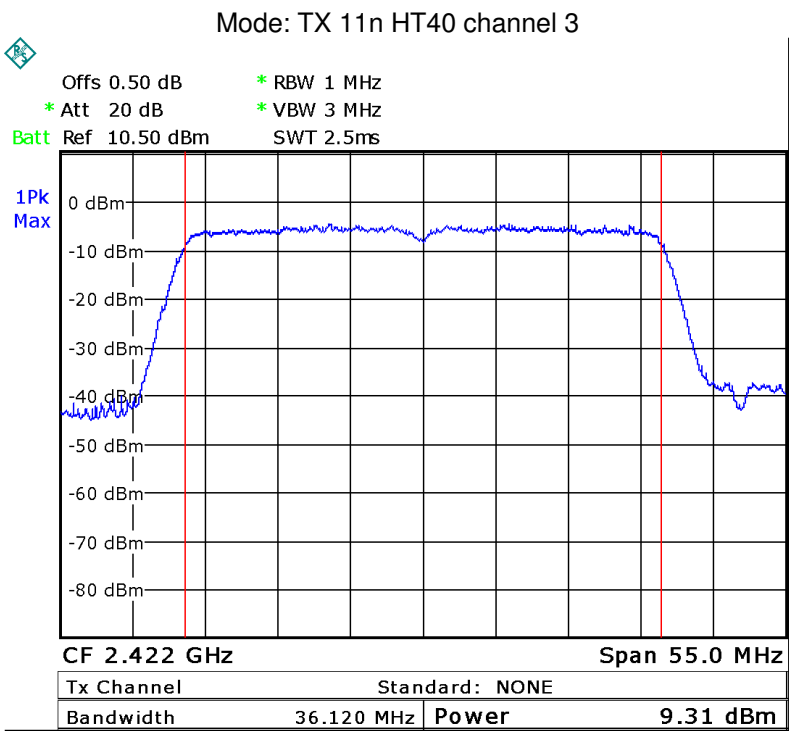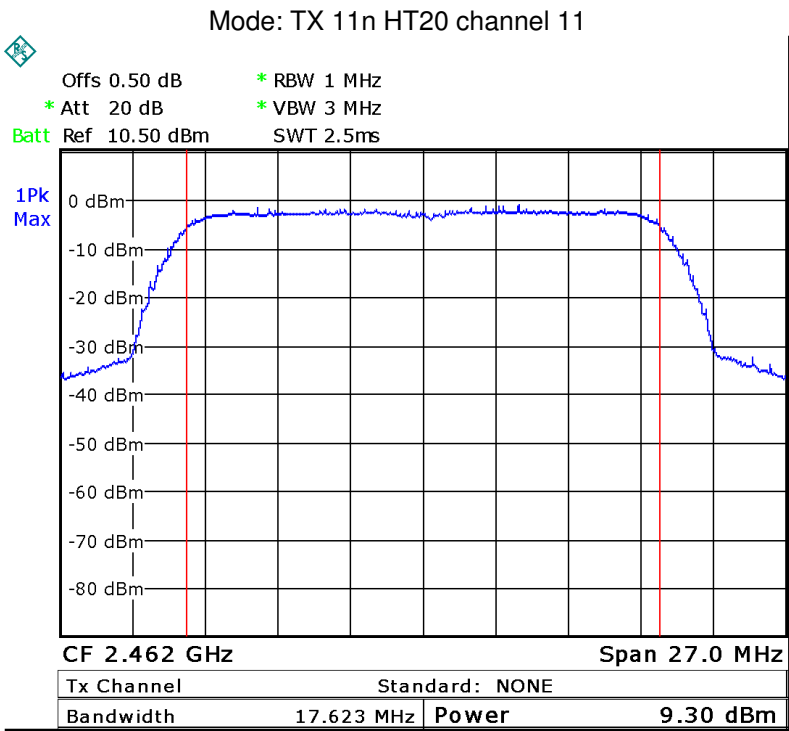

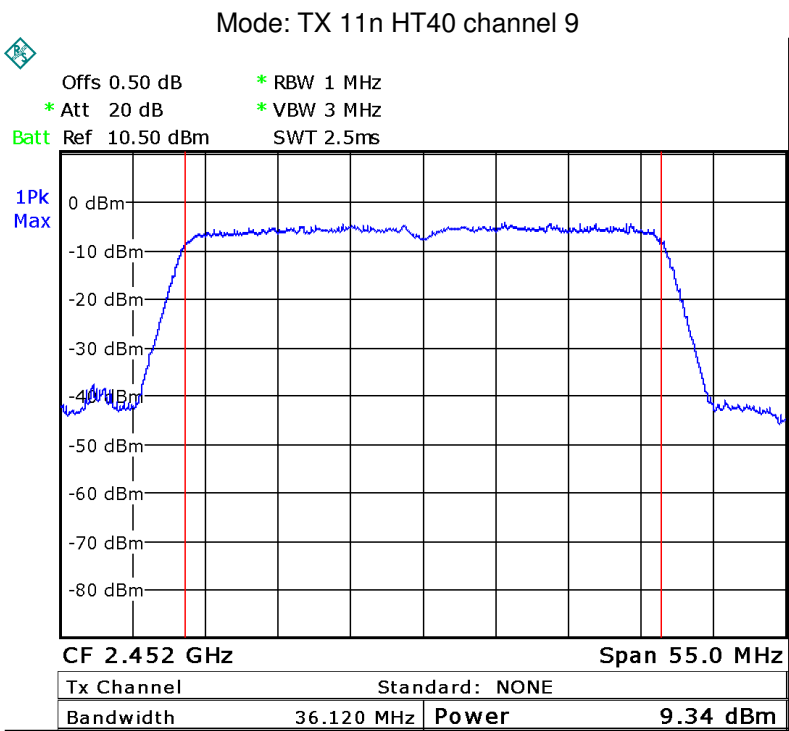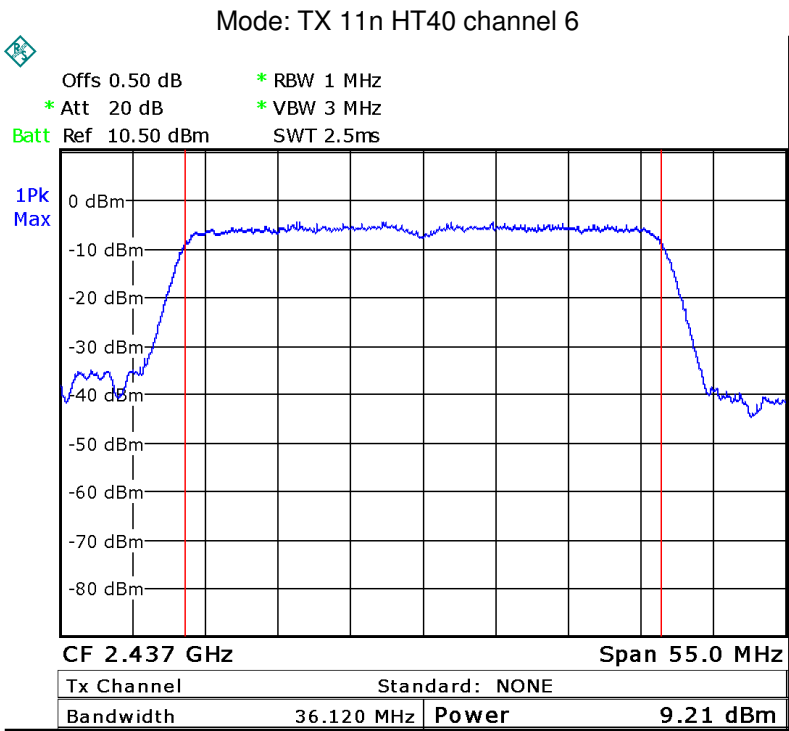

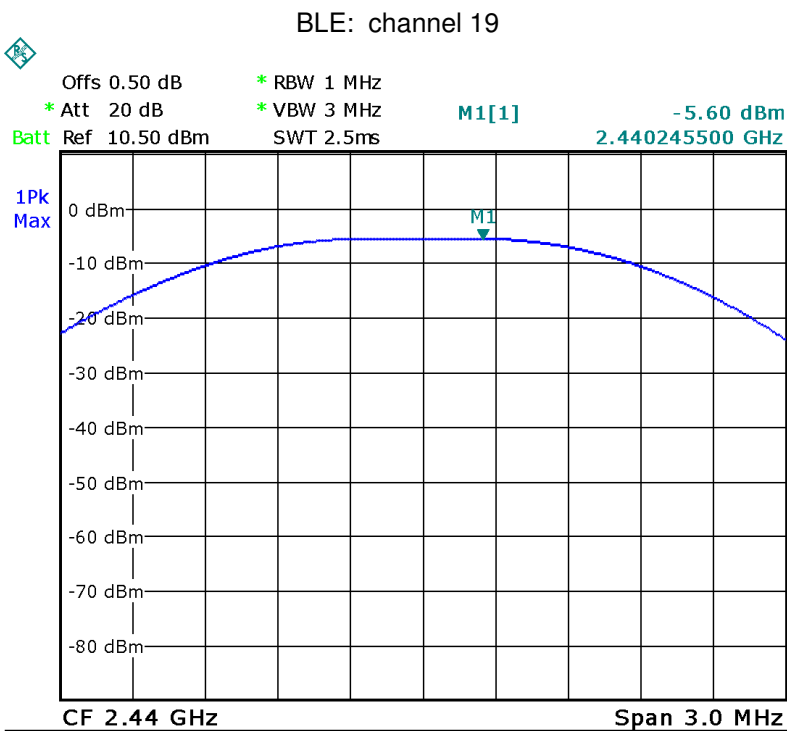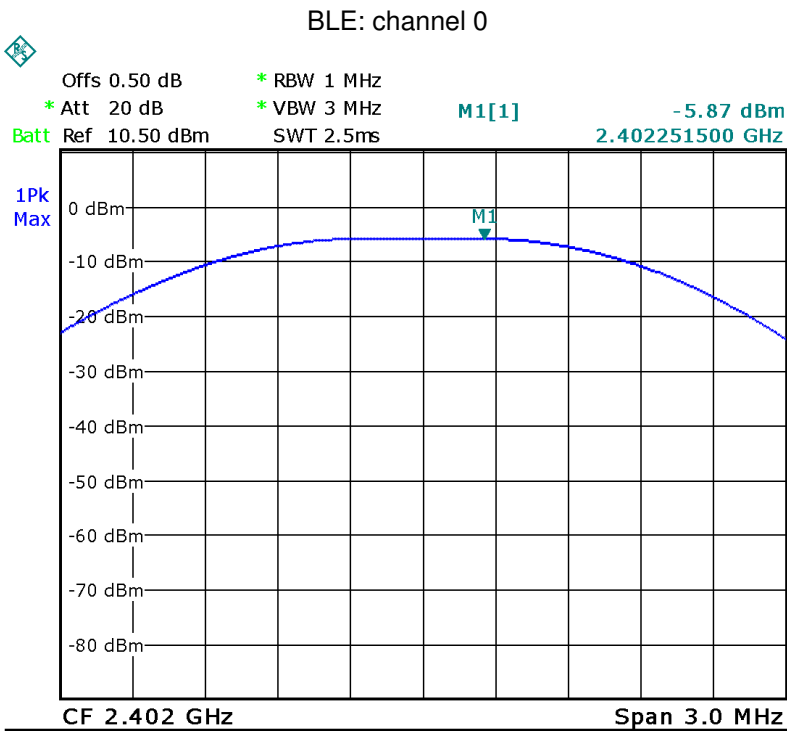

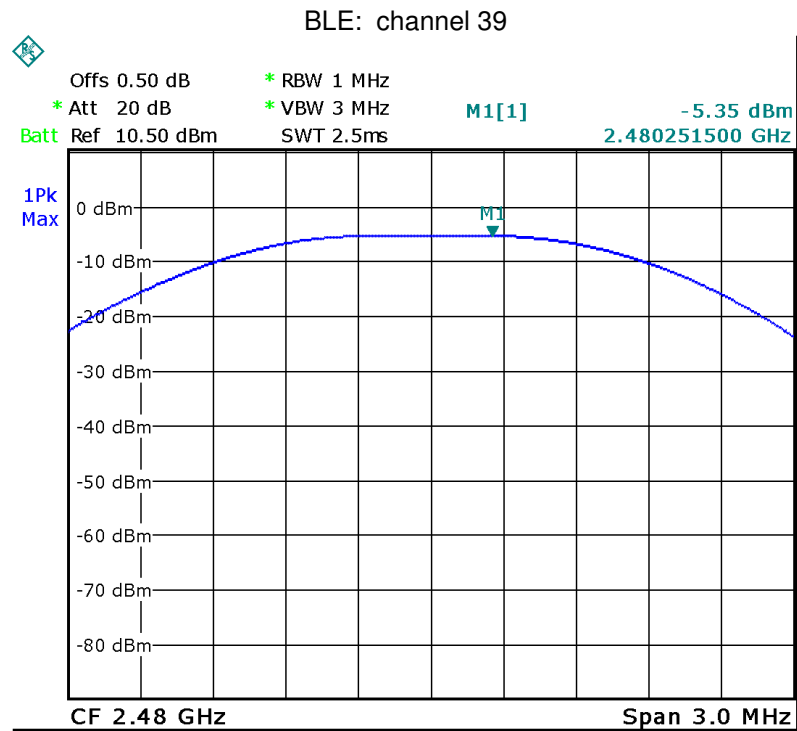

14 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016



14.1 Test Procedure:



KDB 558074 D01 DTS Meas Guidance v03r04 January 7, 2016 section 10.2



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.



14.2 Test Result:



Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-16.70	8dBm per 3kHz
	Middle-2437	-15.62	8dBm per 3kHz
	High-2462	-12.51	8dBm per 3kHz
TX 11g	Low-2412	-23.57	8dBm per 3kHz
	Middle-2437	-23.07	8dBm per 3kHz
	High-2462	-24.31	8dBm per 3kHz
TX 11n HT20	Low-2412	-22.85	8dBm per 3kHz
	Middle-2437	-24.15	8dBm per 3kHz
	High-2462	-24.38	8dBm per 3kHz
TX 11n HT40	Low-2422	-27.34	8dBm per 3kHz
	Middle-2437	-27.55	8dBm per 3kHz
	High-2452	-27.78	8dBm per 3kHz
BLE	Low-2402	-21.69	8dBm per 3kHz
	Middle-2440	-21.28	8dBm per 3kHz
	High-2480	-21.01	8dBm per 3kHz

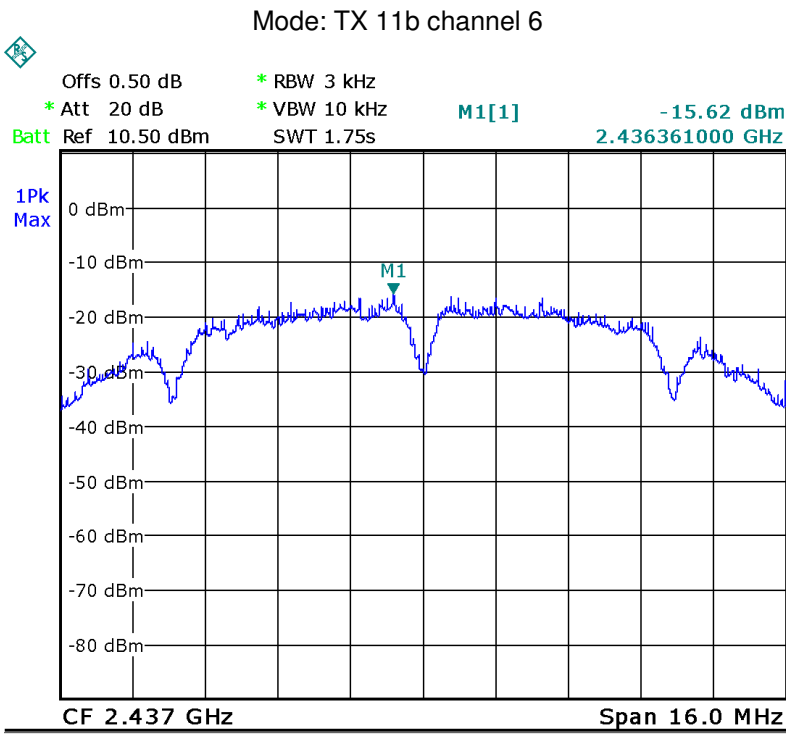
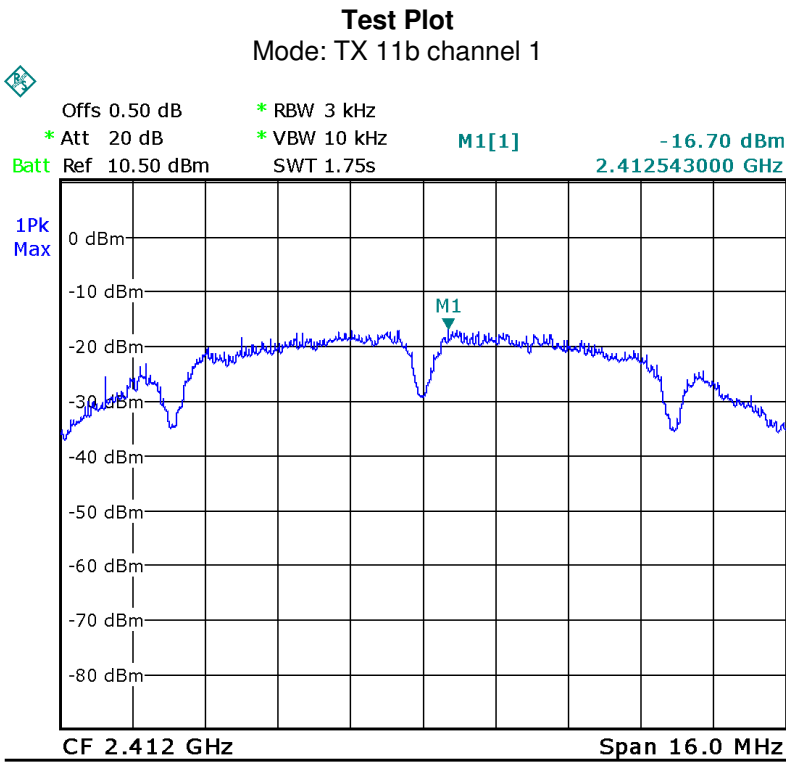


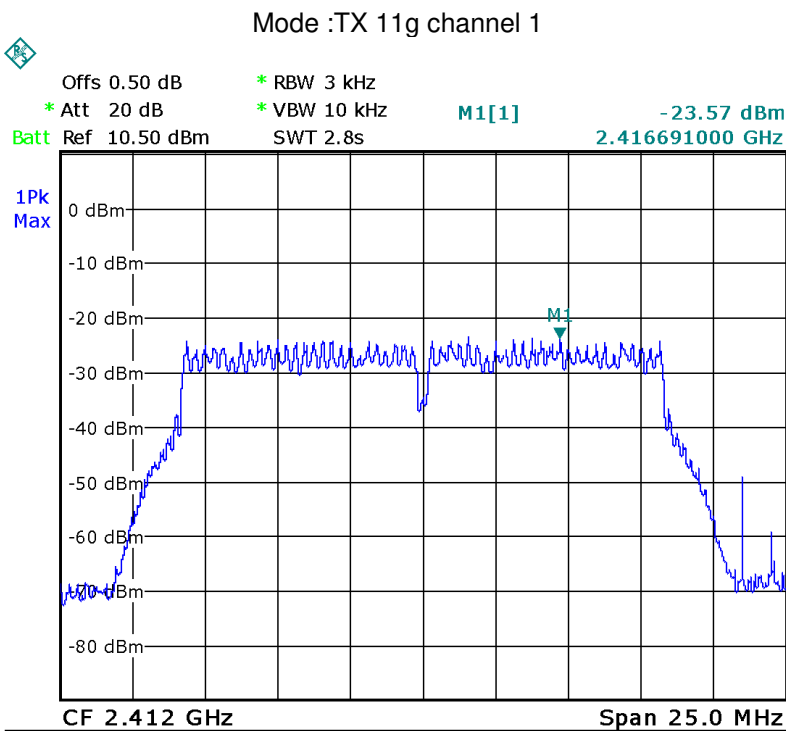
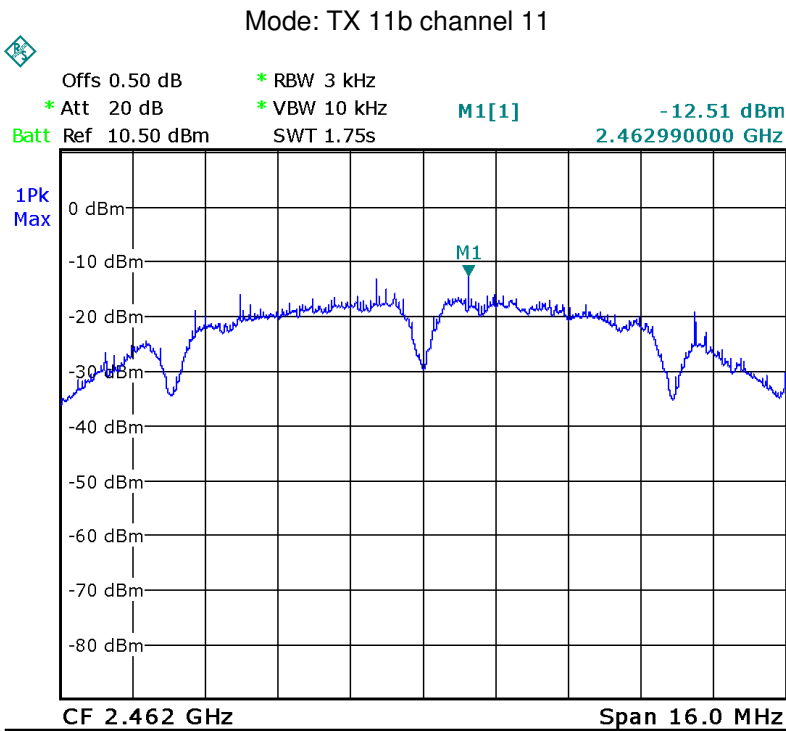


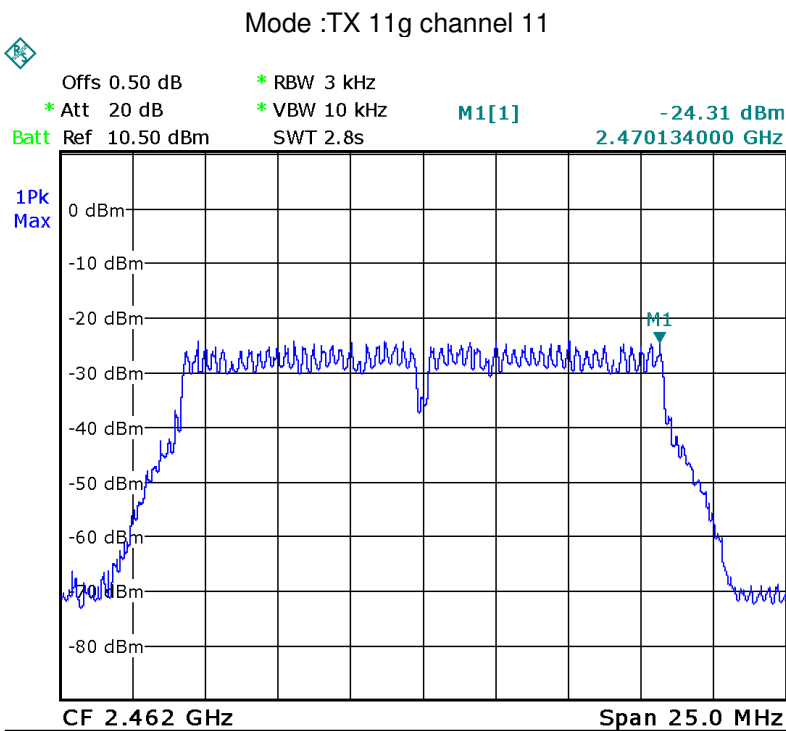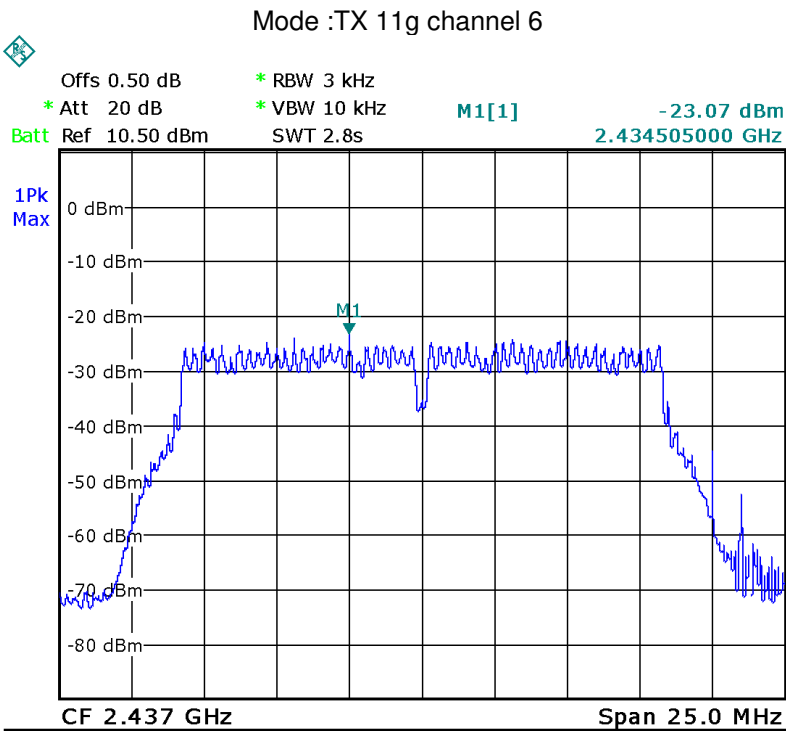


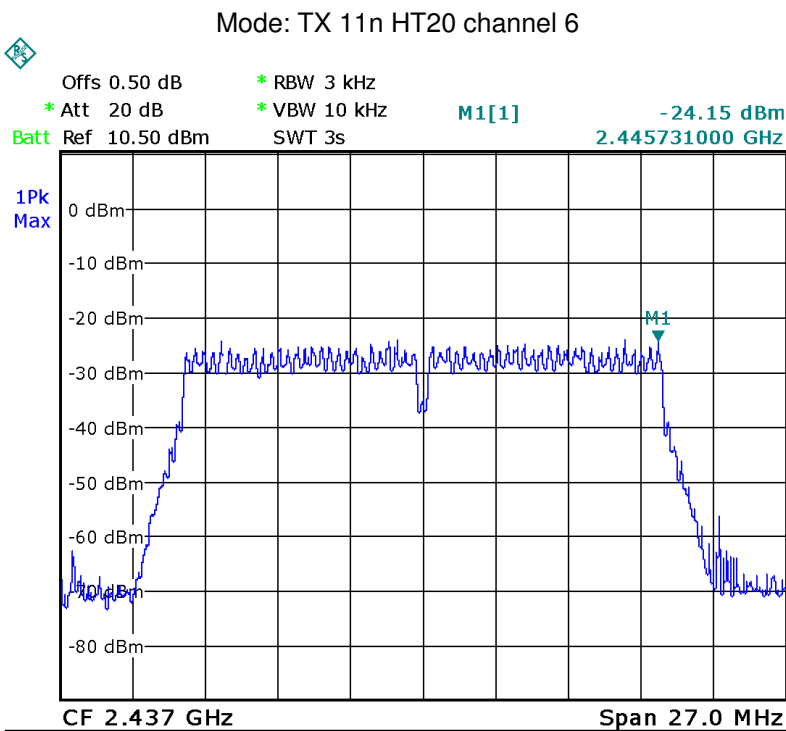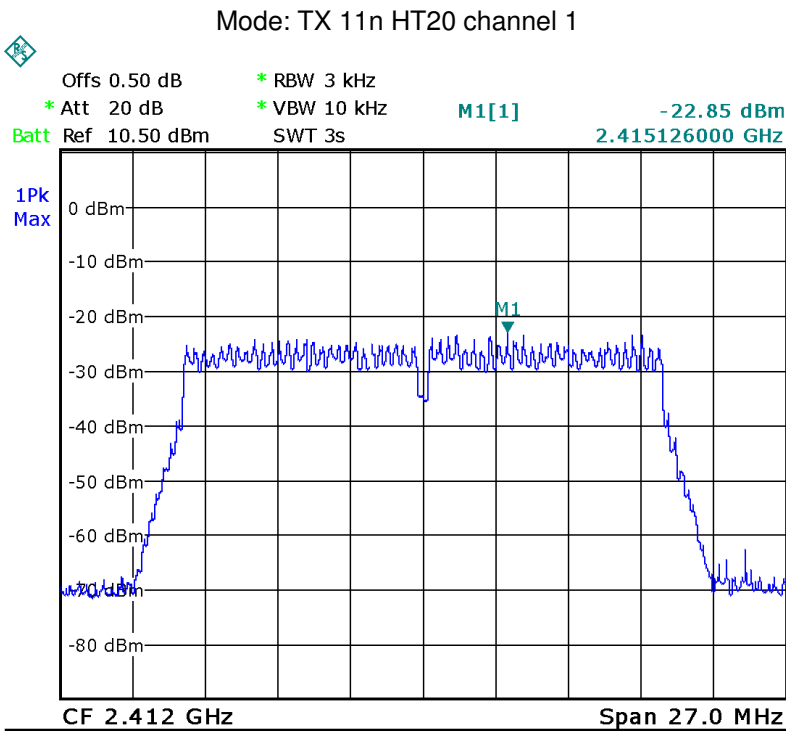

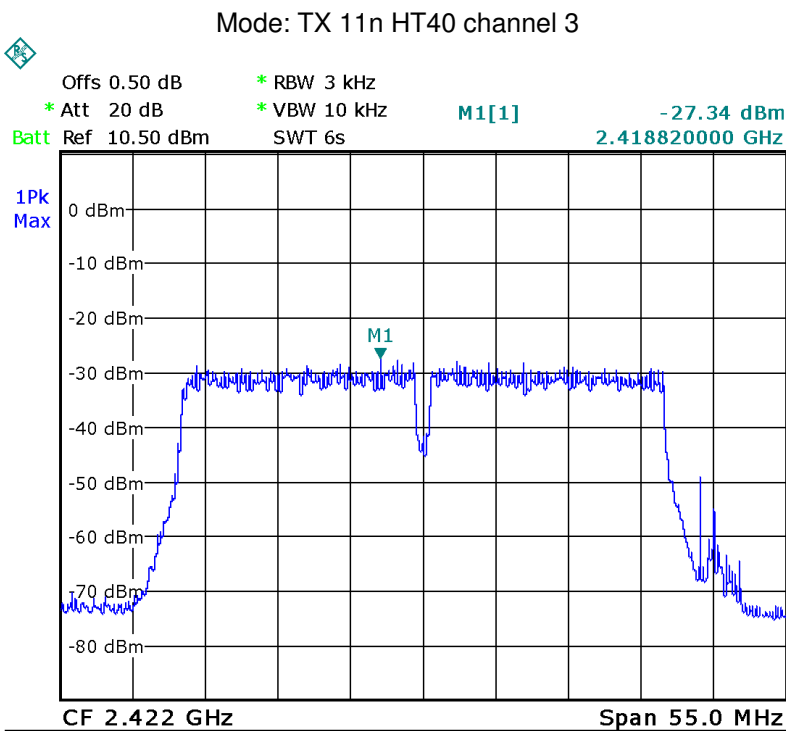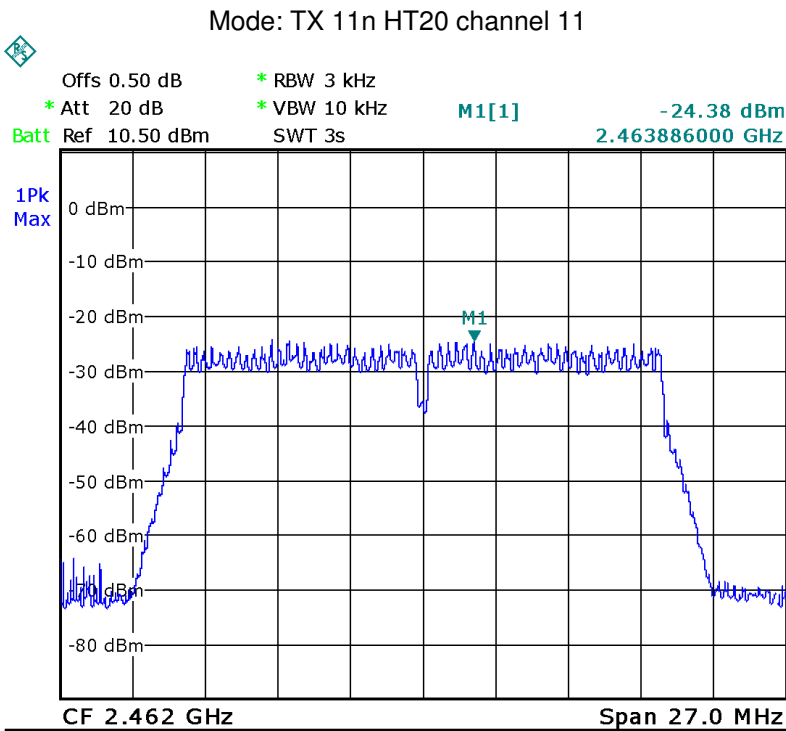

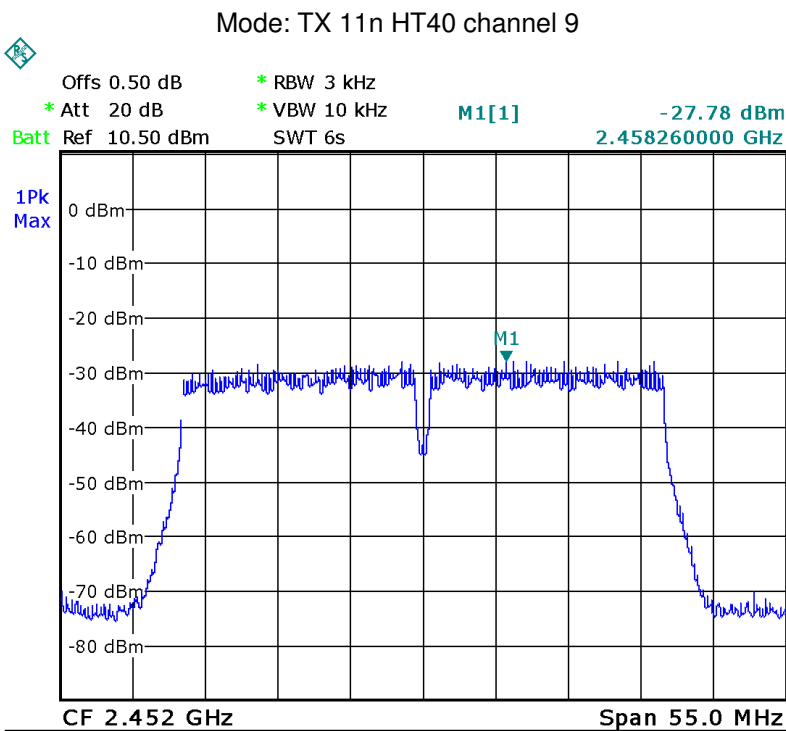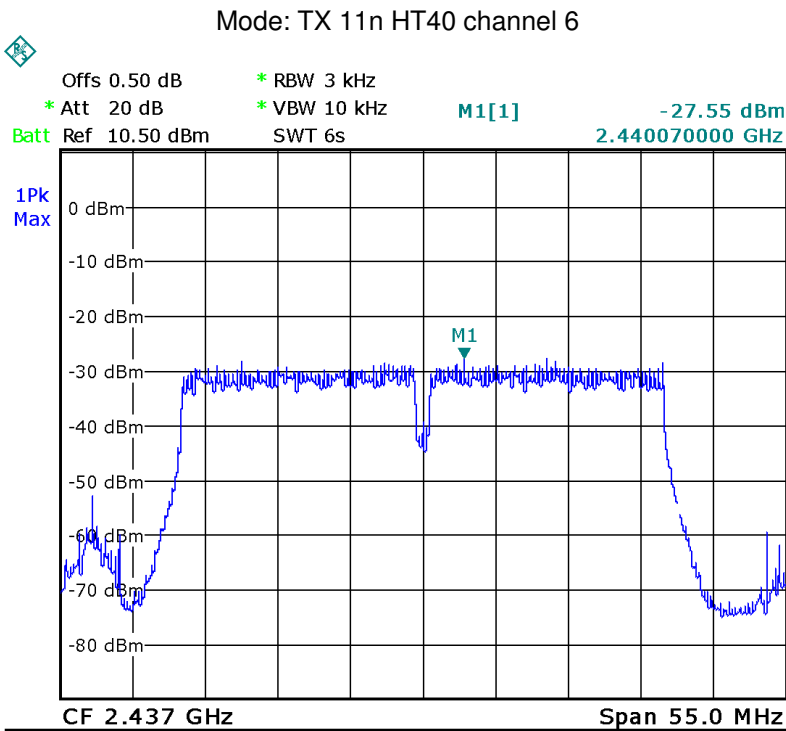

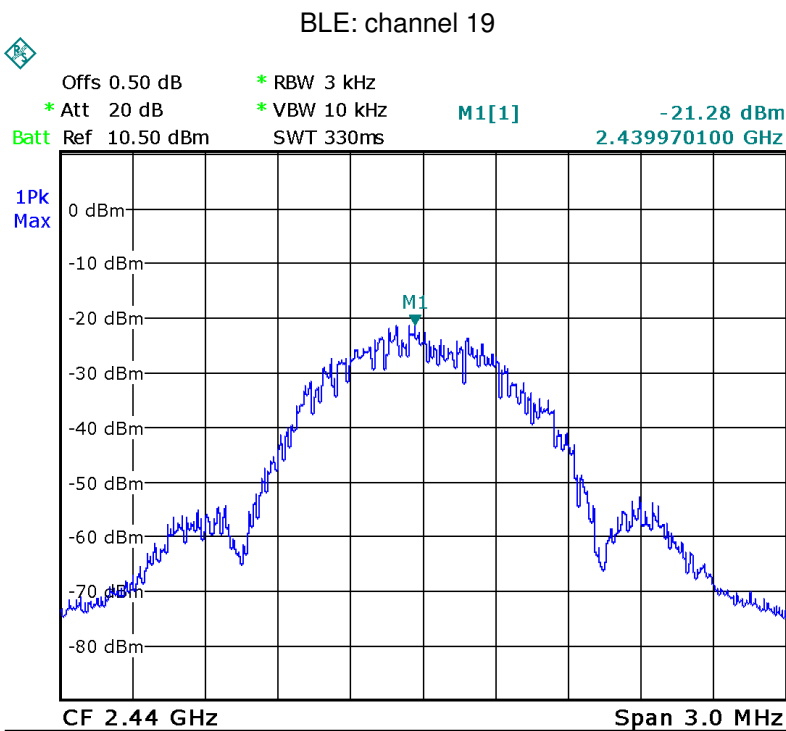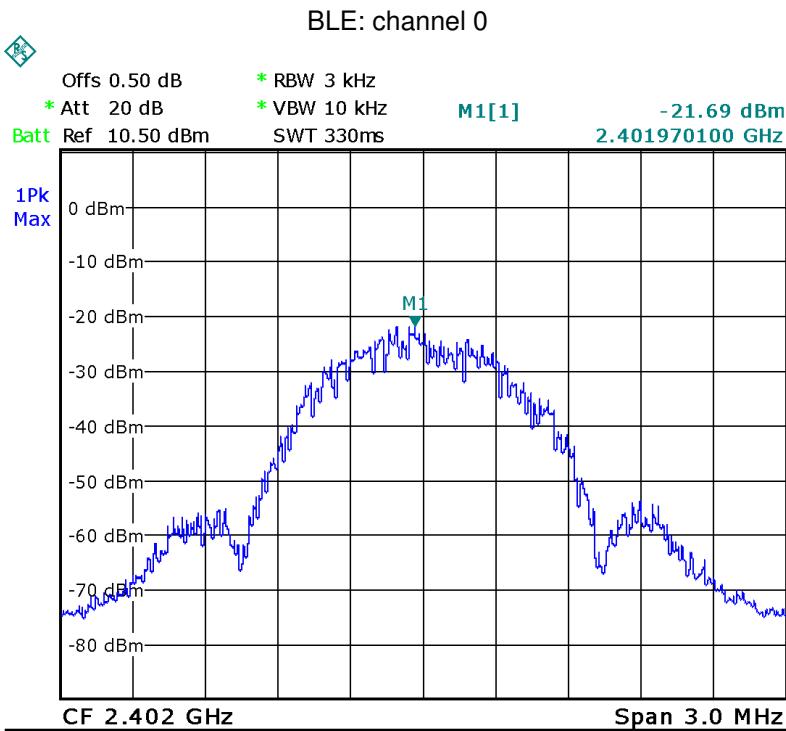

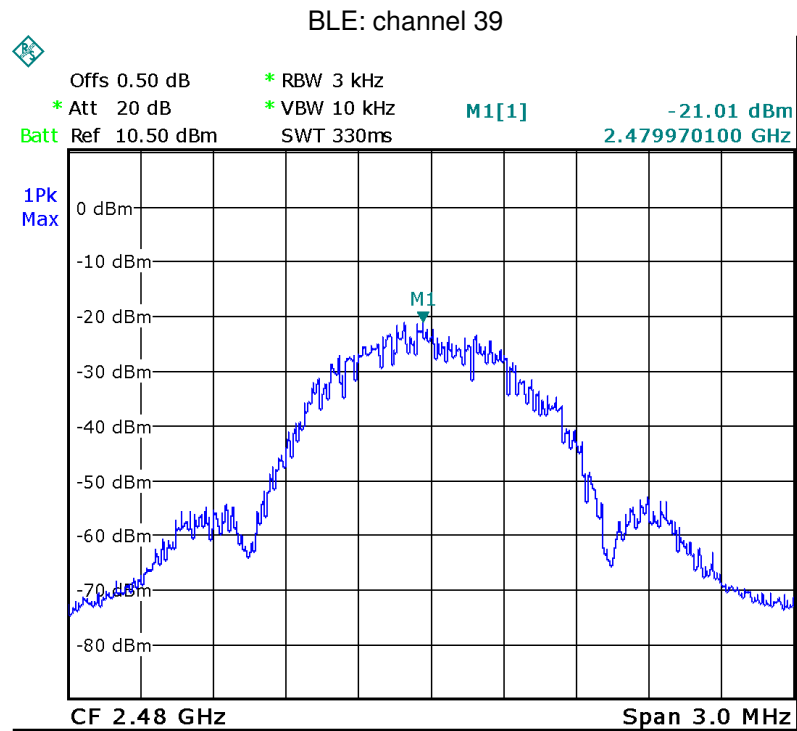

15 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfill the requirement of this section.

16 RF Exposure

Remark: refer to SAR test report: WTS16S1063229E

17 Photographs of test setup and EUT.

Note: Please refer to appendix: WTS16S1063232E_Photo.

=====End of Report=====