

FCC REPORT

(WIFI)

Applicant: 8devices

Address of Applicant: Gedimino 47, Kaunas, LT-44242, Lithuania

Equipment Under Test (EUT)

Product Name: Broadband Digital Transmission System

Model No.: Lima

FCC ID: Z9W-CM4

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: 10 May, 2016

Date of Test: 11 May, to 01 Jun., 2016

Date of report issued: 01 Jun., 2016

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	01 Jun., 2016	Original

Tested by:

MT.Liang

Test Engineer

Date:

01 Jun., 2016

Reviewed by:

Wimer Zhang

Project Engineer

Date:

01 Jun., 2016

3. Contents

	Page
1. COVER PAGE.....	1
2. VERSION	2
3. CONTENTS	3
4. TEST SUMMARY.....	4
5. GENERAL INFORMATION.....	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 TEST ENVIRONMENT AND MODE	7
5.4 MEASUREMENT UNCERTAINTY.....	7
5.5 LABORATORY FACILITY.....	8
5.6 LABORATORY LOCATION	8
5.7 DESCRIPTION OF SUPPORT UNITS.....	8
5.8 TEST INSTRUMENTS LIST.....	9
6. TEST RESULTS AND MEASUREMENT DATA.....	10
6.1 ANTENNA REQUIREMENT:.....	10
6.2 CONDUCTED EMISSION	11
6.3 CONDUCTED OUTPUT POWER	14
6.4 OCCUPY BANDWIDTH	24
6.5 POWER SPECTRAL DENSITY	42
6.6 BAND EDGE	52
6.6.1 CONDUCTED EMISSION METHOD	52
6.6.2 RADIATED EMISSION METHOD	57
6.7 SPURIOUS EMISSION.....	74
6.7.1 CONDUCTED EMISSION METHOD.....	74
6.7.2 RADIATED EMISSION METHOD	91
7 TEST SETUP PHOTO	99
8 EUT CONSTRUCTIONAL DETAILS	102

4. Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
6dB Emission Bandwidth 99% Occupied Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

5. General Information

5.1 Client Information

Applicant:	8devices
Address of Applicant:	Gedimino 47, Kaunas, LT-44242, Lithuania
Manufacturer:	8devices
Address of Manufacturer:	Gedimino 47, Kaunas, LT-44242, Lithuania

5.2 General Description of E.U.T.

Product Name:	Broadband Digital Transmission System
Model No.:	Lima
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(H20)) 2422MHz~2452MHz (802.11n(H40))
Channel numbers:	11 for 802.11b/802.11g/802.11(H20) 7 for 802.11n(H40)
Channel separation:	5MHz
Modulation technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum (DSSS)
Modulation technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	Antenna 0: Ceramic Antenna Antenna 1: Omni Antenna
Antenna gain:	Antenna 0: 3dBi Antenna 1: 10dBi
Power supply:	DC 5V
Remark:	802.11b/g/n all support 2×2 MIMO

Operation Frequency each of channel For 802.11b/g/n(H20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Operation Frequency each of channel For 802.11n(H40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
		4	2427MHz	7	2442MHz		
		5	2432MHz	8	2447MHz		
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

802.11b/802.11g/802.11n (H20)

Channel	Frequency
The lowest channel	2412MHz
The middle channel	2437MHz
The Highest channel	2462MHz

802.11n (H40)

Channel	Frequency
The lowest channel	2422MHz
The middle channel	2437MHz
The Highest channel	2452MHz

5.3 Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Operation mode	Keep the EUT in continuous transmitting with modulation
Remark	During the test, pre-scan the Antenna 0 and Antenna 1, and found the Antenna 1 is the worst case, so only shows the data of Antenna 1 in this report.
The sample was placed 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps
802.11n(H40)	13.5Mbps

Final Test Mode:

According to ANSI C63.4 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20) and 13.5 Mbps for 802.11n(H40). Duty cycle setting during the transmission is 100% with maximum power setting for all modulations.

5.4 Measurement Uncertainty

Items	Expanded Uncertainty (Confidence of 95%)
Conducted Emission (9kHz ~ 30MHz)	2.14 dB (k=2)
Radiated Emission (9kHz ~ 30MHz)	4.24 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	4.35 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	4.44 dB (k=2)
Radiated Emission (18GHz ~ 26.5GHz)	4.56 dB (k=2)

5.5 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 817957, February 27, 2012.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

5.6 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,

Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282

Fax: +86-755-23116366

5.7 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC ID/DoC
DELL	PC	OPTIPLEX745	N/A	DoC
DELL	MONITOR	E178FPC	N/A	DoC
DELL	KEYBOARD	SK-8115	N/A	DoC
DELL	MOUSE	MOC5UO	N/A	DoC


5.8 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	3m SAC	SAEMC	9(L)*6(W)* 6(H)	CCIS0001	08-23-2014	08-22-2017
2	BiConiLog Antenna	SCHWARZBECK	VULB9163	CCIS0005	03-25-2016	03-25-2017
3	Horn Antenna	SCHWARZBECK	BBHA9120D	CCIS0006	03-25-2016	03-25-2017
4	Pre-amplifier (10kHz-1.3GHz)	HP	8447D	CCIS0003	04-01-2016	03-31-2017
5	Pre-amplifier (1GHz-18GHz)	Compliance Direction Systems Inc.	PAP-1G18	CCIS0011	04-01-2016	03-31-2017
6	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	04-01-2016	03-31-2017
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	04-01-2016	03-31-2017
8	Spectrum analyzer 9k-30GHz	Rohde & Schwarz	FSP30	CCIS0023	03-28-2016	03-28-2017
9	EMI Test Receiver	Rohde & Schwarz	ESRP7	CCIS0167	03-28-2016	03-28-2017
10	Loop antenna	Laplace instrument	RF300	EMC0701	04-01-2016	03-31-2017
11	EMI Test Software	AUDIX	E3	N/A	N/A	N/A


Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
1	Shielding Room	ZhongShuo Electron	11.0(L)x4.0(W)x3.0(H)	CCIS0061	08-23-2014	08-22-2017
2	EMI Test Receiver	Rohde & Schwarz	ESCI	CCIS0002	03-24-2016	03-24-2017
3	LISN	CHASE	MN2050D	CCIS0074	03-26-2016	03-26-2017
4	Coaxial Cable	CCIS	N/A	CCIS0086	04-01-2016	03-31-2017
5	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6. Test results and Measurement Data

6.1 Antenna requirement:

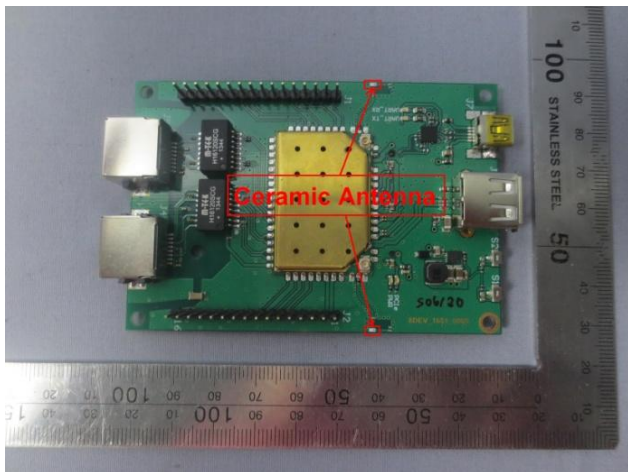Standard requirement:	FCC Part 15 C Section 15.203 /247(c)										
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.											
E.U.T Antenna:											
The product is a professionally installed device which has two types of antennas for the application. The antennas information as below table: <table><tr><td>Antenna No.</td><td>Antenna Type</td><td>Antenna Gain (dBi)</td></tr><tr><td>Antenna 0</td><td>Ceramic Antenna</td><td>3</td></tr><tr><td>Antenna 1</td><td>Omni Antenna</td><td>10</td></tr></table> According to above information, the antennas meet the requirements of this section			Antenna No.	Antenna Type	Antenna Gain (dBi)	Antenna 0	Ceramic Antenna	3	Antenna 1	Omni Antenna	10
Antenna No.	Antenna Type	Antenna Gain (dBi)									
Antenna 0	Ceramic Antenna	3									
Antenna 1	Omni Antenna	10									
Antenna 0:		Antenna 1:									
											


6.2 Conducted Emission

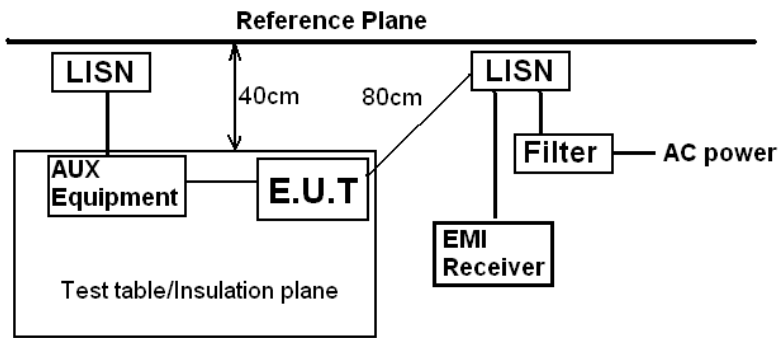Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.4: 2014		
TestFrequencyRange:	150kHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9kHz, VBW=30kHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test procedure	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.), which provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.		
Test setup:	 <i>Remark</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i>		
Test Instruments:	Refer to section 5.8 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Passed		

Measurement Data:

MIMO TX mode

Neutral:

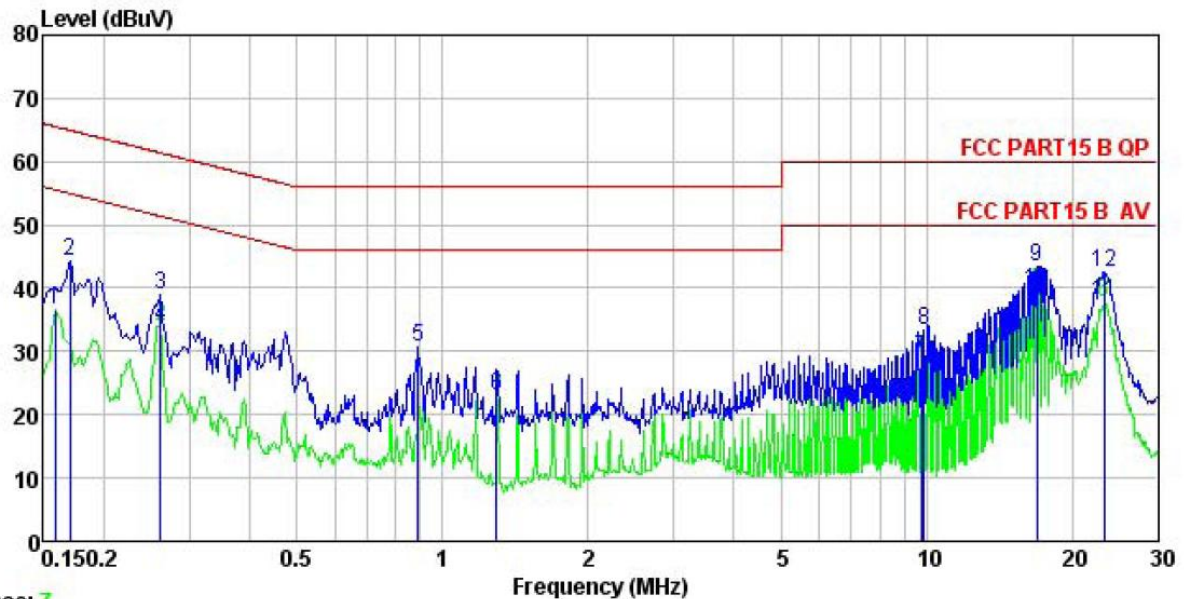

Trace: 7


Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN NEUTRAL
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test Mode : TX mode
 Power Rating : AC 120/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: MT
 Remark :

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.158	25.58	0.13	10.78	36.49	55.56	-19.07	Average
2	0.170	33.35	0.13	10.77	44.25	64.94	-20.69	QP
3	0.262	28.07	0.18	10.75	39.00	61.38	-22.38	QP
4	0.262	23.16	0.18	10.75	34.09	51.38	-17.29	Average
5	0.890	19.68	0.28	10.84	30.80	56.00	-25.20	QP
6	1.296	11.75	0.26	10.90	22.91	46.00	-23.09	Average
7	9.757	17.87	0.25	10.93	29.05	50.00	-20.95	Average
8	9.861	22.25	0.24	10.93	33.42	60.00	-26.58	QP
9	16.928	32.14	0.27	10.91	43.32	60.00	-16.68	QP
10	16.928	28.44	0.27	10.91	39.62	50.00	-10.38	Average
11	23.263	26.63	0.25	10.89	37.77	50.00	-12.23	Average
12	23.387	31.32	0.25	10.89	42.46	60.00	-17.54	QP

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss.

Line:

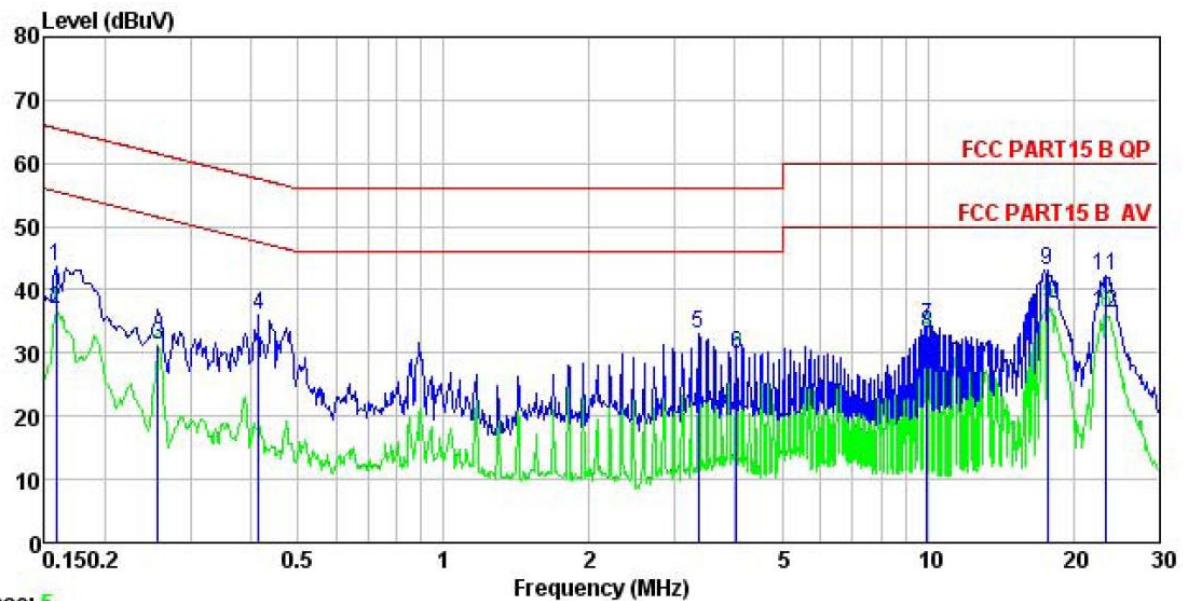

Trace: 5


Site : CCIS Shielding Room
 Condition : FCC PART15 B QP LISN LINE
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test Mode : TX mode
 Power Rating : AC 120/60Hz
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa
 Test Engineer: MT
 Remark :

	Read	LISN	Cable		Limit	Over	
Freq	Level	Factor	Loss	Level	Line	Limit	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.158	32.81	0.14	10.78	43.73	65.56	-21.83 QP
2	0.158	26.12	0.14	10.78	37.04	55.56	-18.52 Average
3	0.258	20.24	0.16	10.75	31.15	51.51	-20.36 Average
4	0.415	24.97	0.24	10.73	35.94	57.55	-21.61 QP
5	3.364	21.74	0.33	10.91	32.98	56.00	-23.02 QP
6	4.027	18.67	0.34	10.89	29.90	46.00	-16.10 Average
7	9.966	23.07	0.30	10.94	34.31	60.00	-25.69 QP
8	9.966	21.70	0.30	10.94	32.94	50.00	-17.06 Average
9	17.661	31.93	0.30	10.90	43.13	60.00	-16.87 QP
10	17.755	26.52	0.30	10.90	37.72	50.00	-12.28 Average
11	23.263	30.90	0.35	10.89	42.14	60.00	-17.86 QP
12	23.387	25.02	0.35	10.89	36.26	50.00	-13.74 Average

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.

6.3 Conducted Output Power

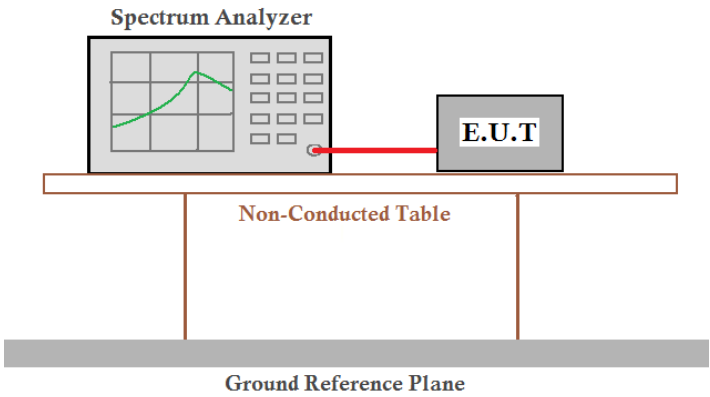Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074v03r05 section 9.2.2.2
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs and is positioned above a Ground Reference Plane, which is represented by a thick grey bar at the bottom of the diagram.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Mode	Test CH	Ant. Port	Conducted Output power (dBm)	Total power (dBm)	Limit (dBm)	Result
802.11b	Lowest	TX 0	17.01	18.63	26.00	Pass
		TX 1	13.55			
	Middle	TX 0	18.07	20.23	26.00	Pass
		TX 1	16.17			
	Highest	TX 0	18.08	20.24	26.00	Pass
		TX 1	16.18			
802.11g	Lowest	TX 0	18.31	20.75	26.00	Pass
		TX 1	17.09			
	Middle	TX 0	19.56	22.57	26.00	Pass
		TX 1	19.55			
	Highest	TX 0	19.23	22.58	26.00	Pass
		TX 1	19.88			
802.11n(H20)	Lowest	TX 0	18.22	20.69	26.00	Pass
		TX 1	17.06			
	Middle	TX 0	19.33	22.44	26.00	Pass
		TX 1	19.52			
	Highest	TX 0	19.43	22.57	26.00	Pass
		TX 1	19.69			
802.11n(H40)	Lowest	TX 0	16.25	17.53	26.00	Pass
		TX 1	11.61			
	Middle	TX 0	19.33	22.43	26.00	Pass
		TX 1	19.51			
	Highest	TX 0	17.09	19.49	26.00	Pass
		TX 1	15.78			


Note:

1. Because the transmit signals are completely uncorrelated, so the Directional gain = G_{ANT} .
2. The maximum directional gain of antenna =10 dBi, so limit = 26 dBm.


Test plot as follows:

TX 0


Test mode:802.11b

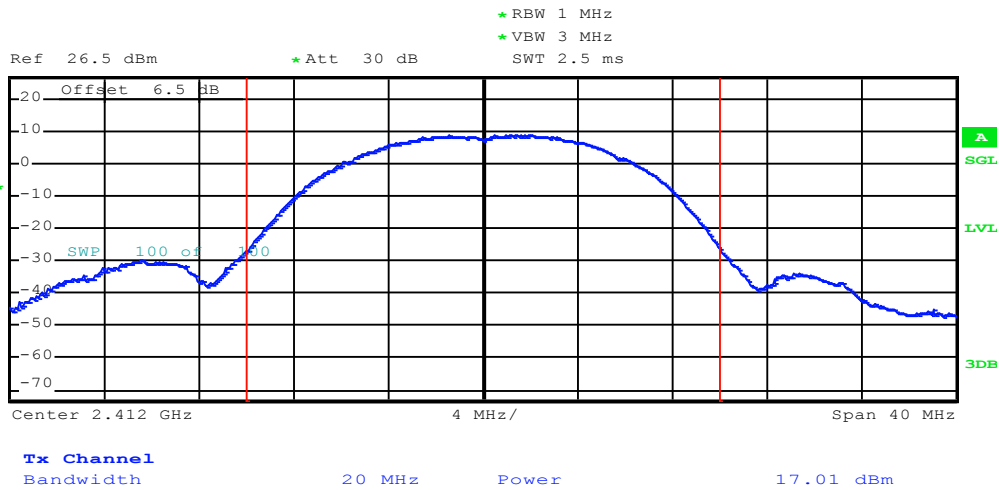

Lowest channel

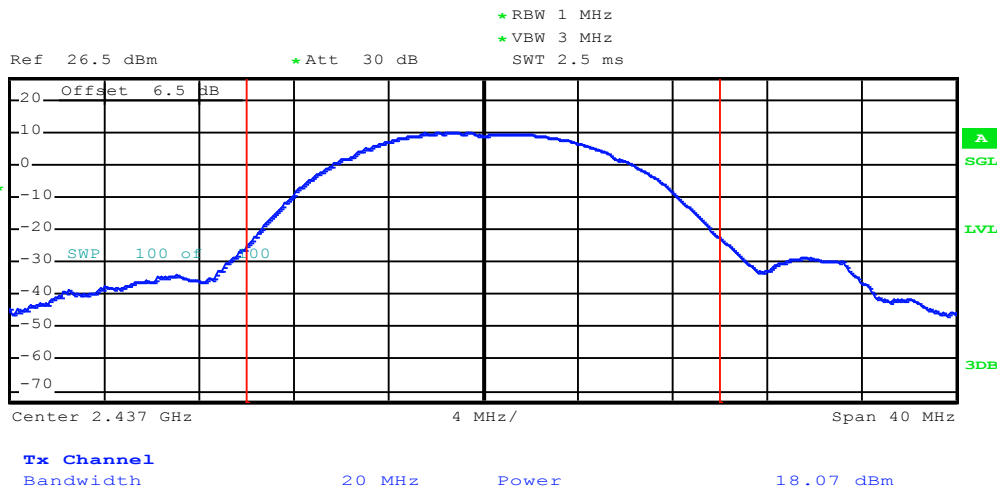


Middle channel

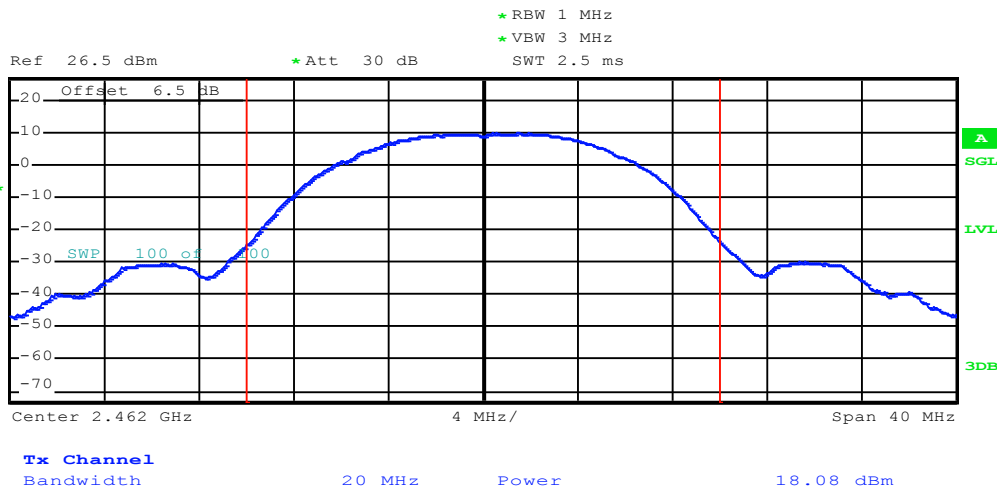


Highest channel


Test mode: 802.11g

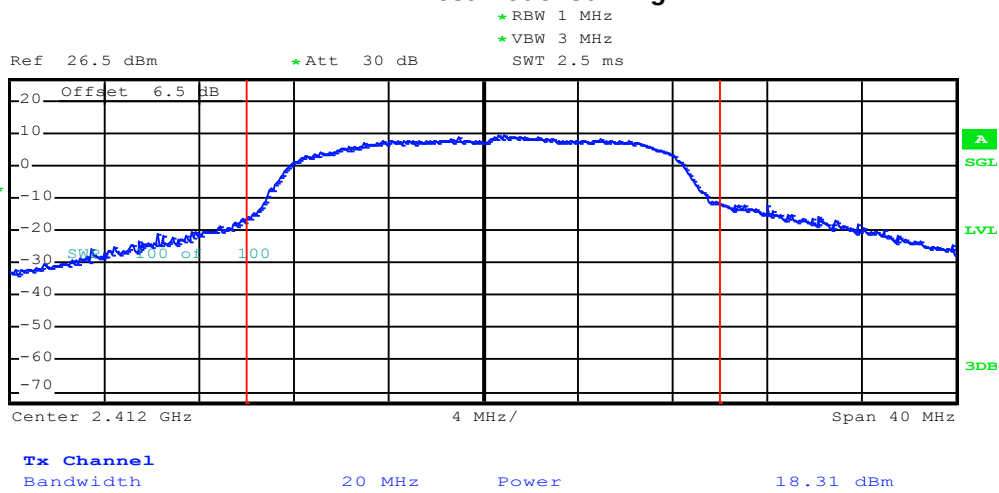

Lowest channel

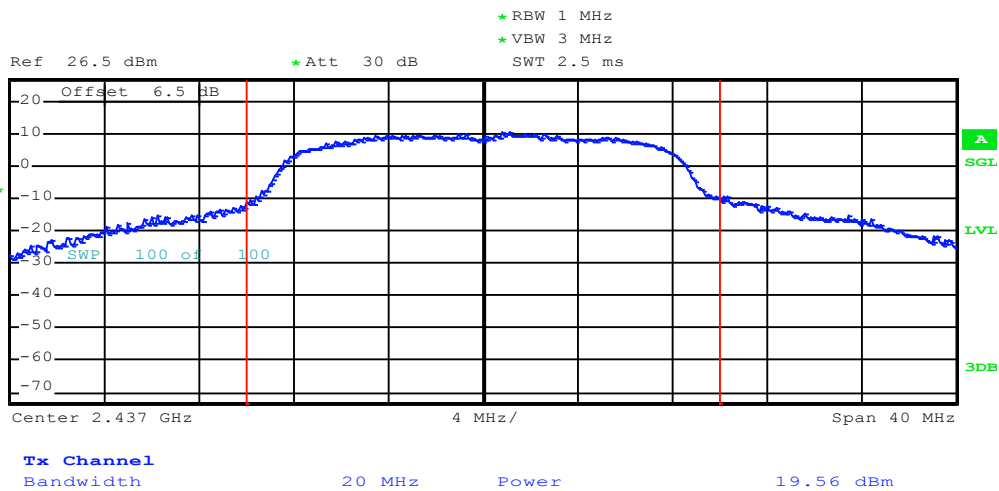


Middle channel

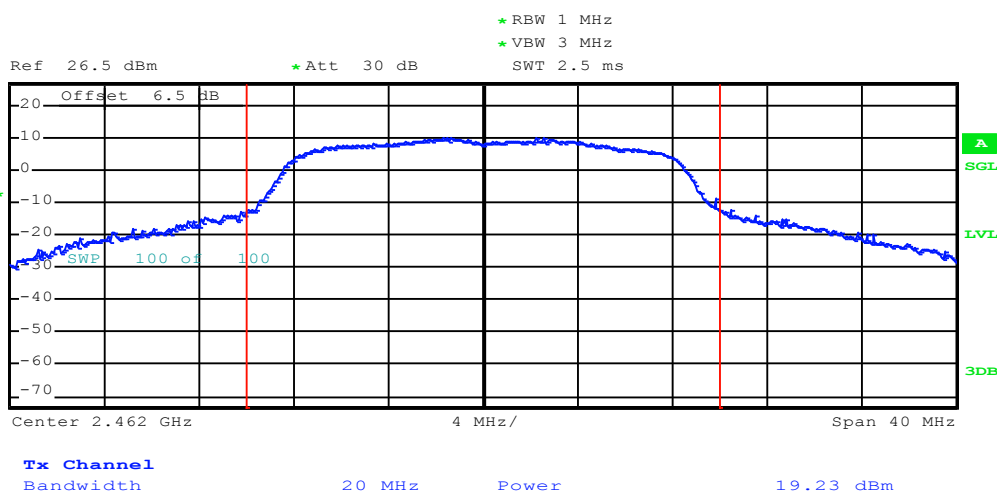


Highest channel


Test mode: 802.11n(H20)

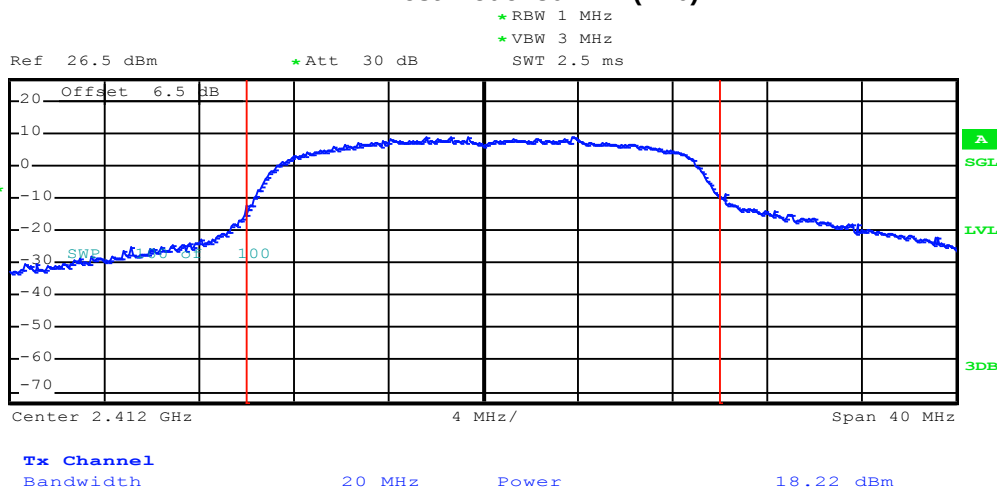

Lowest channel

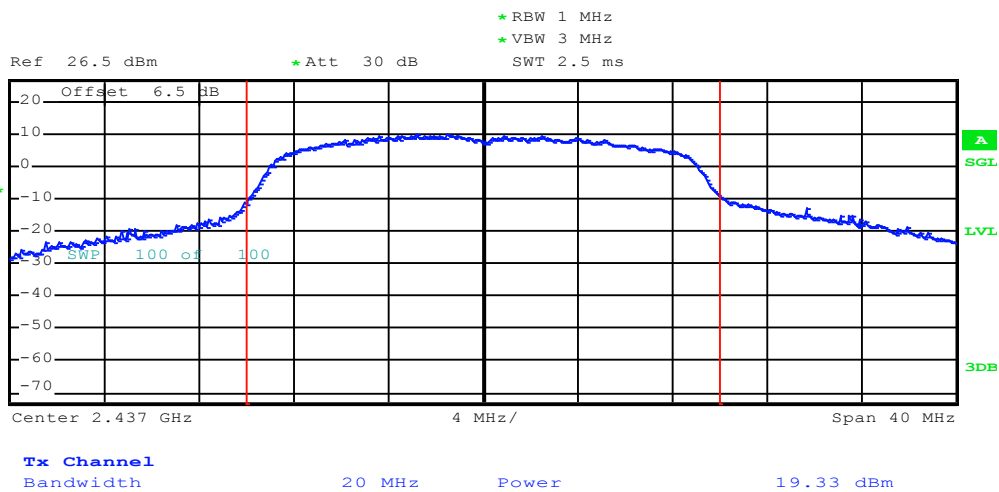


Middle channel

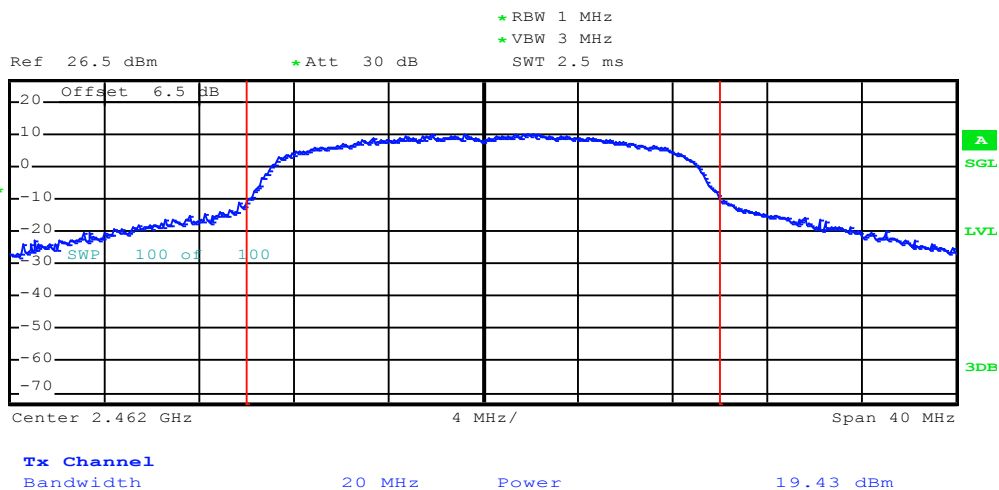


Highest channel

Test mode:802.11n(H40)

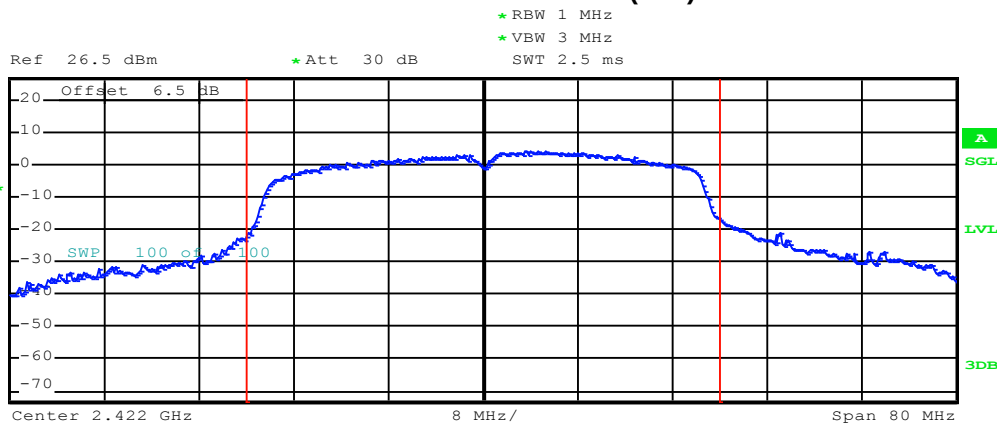


Tx Channel
Bandwidth 40 MHz Power 16.25 dBm

Lowest channel

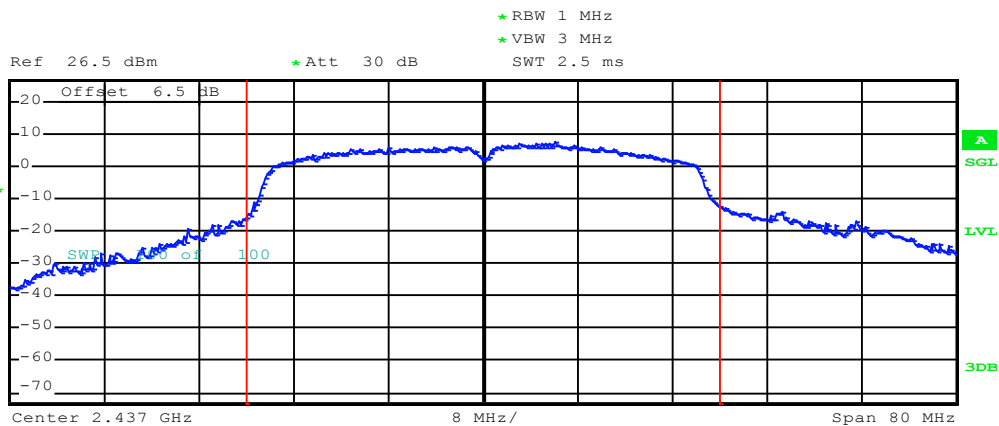

Tx Channel
Bandwidth 40 MHz Power 19.33 dBm

Middle channel

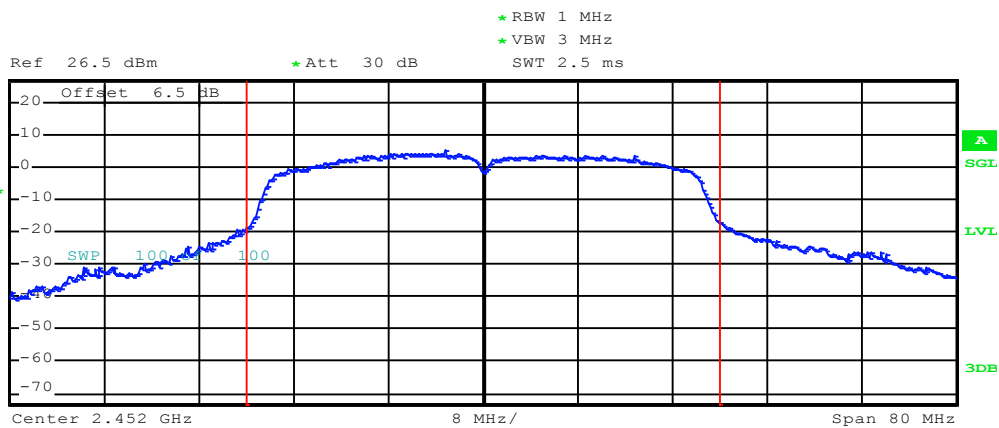

Tx Channel
Bandwidth 40 MHz Power 17.09 dBm

Highest channel

TX 1


Test mode:802.11b



Ref 26.5 dBm * Att 30 dB

* RBW 1 MHz
* VBW 3 MHz
SWT 2.5 ms

1 RM
MAXH

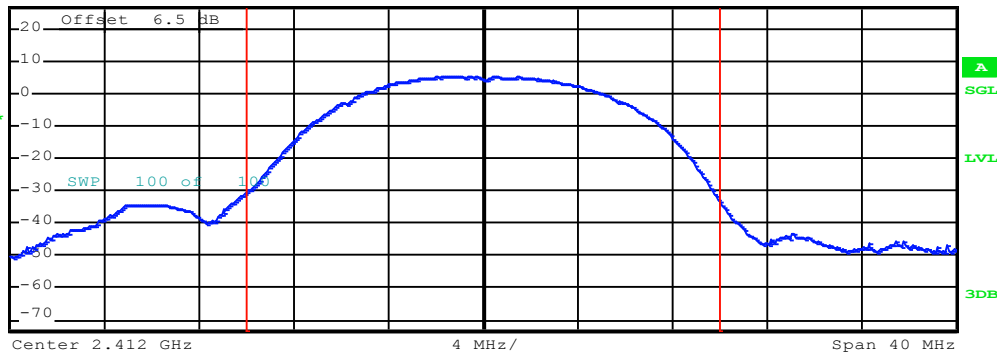

Tx Channel

Bandwidth

20 MHz

Power

13.55 dBm


Lowest channel



Ref 26.5 dBm * Att 30 dB

* RBW 1 MHz
* VBW 3 MHz
SWT 2.5 ms

1 RM
MAXH

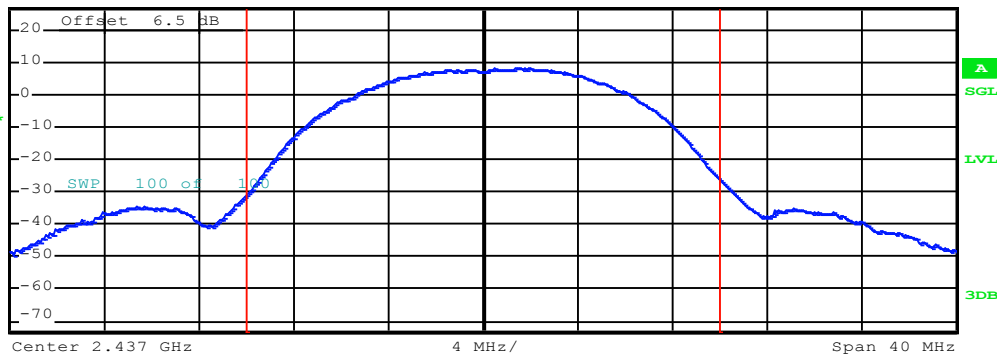

Tx Channel

Bandwidth

20 MHz

Power

16.17 dBm


Middle channel



Ref 26.5 dBm * Att 30 dB

* RBW 1 MHz
* VBW 3 MHz
SWT 2.5 ms

1 RM
MAXH

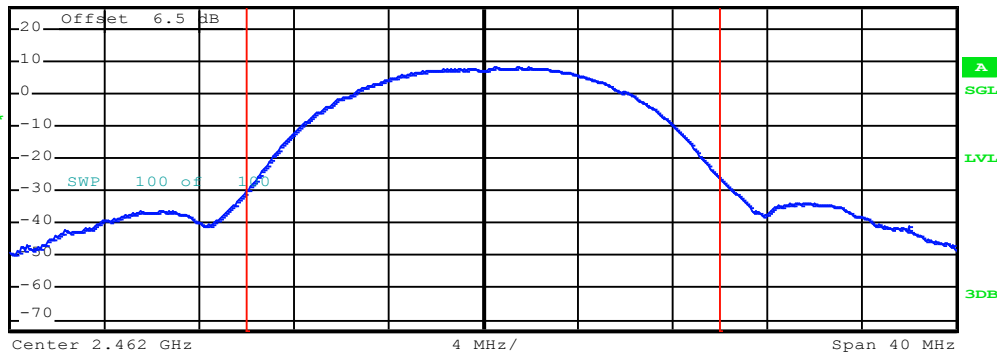

Tx Channel

Bandwidth


20 MHz

Power


16.18 dBm

Highest channel


Test mode: 802.11g

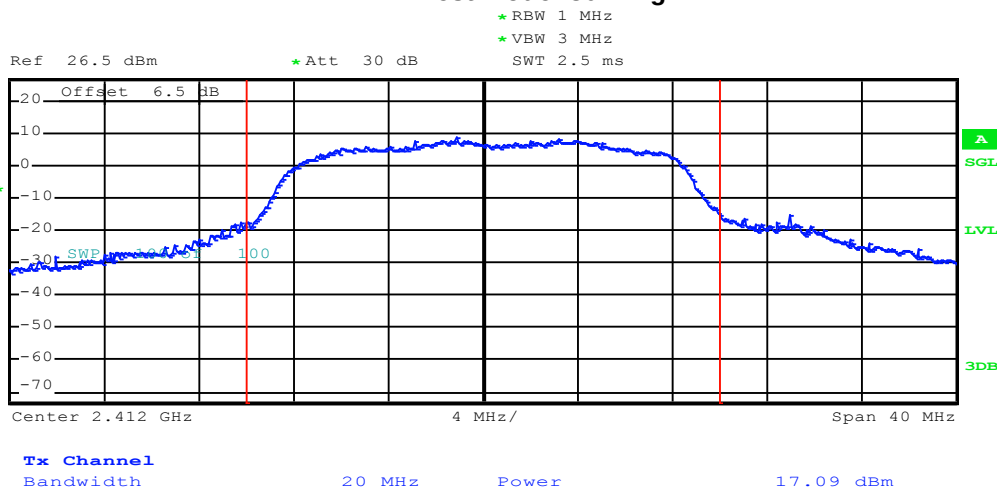

Lowest channel

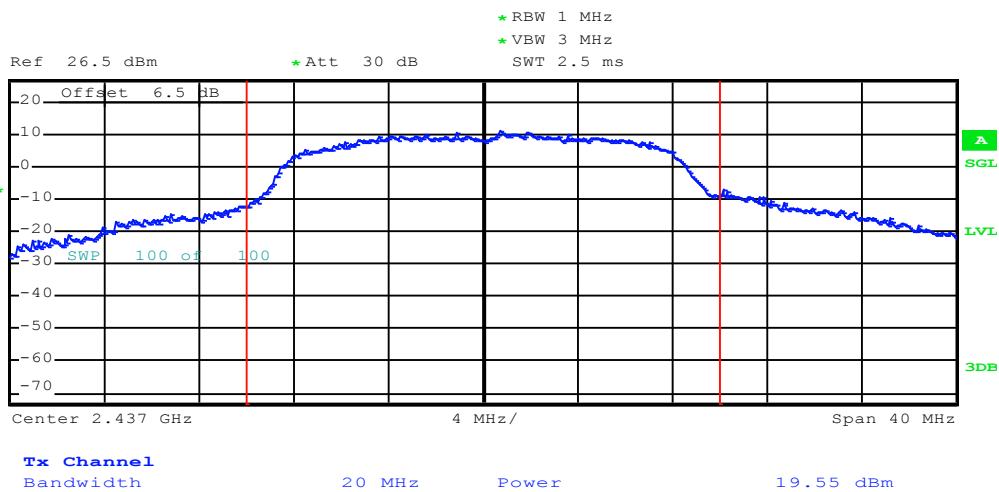


Middle channel

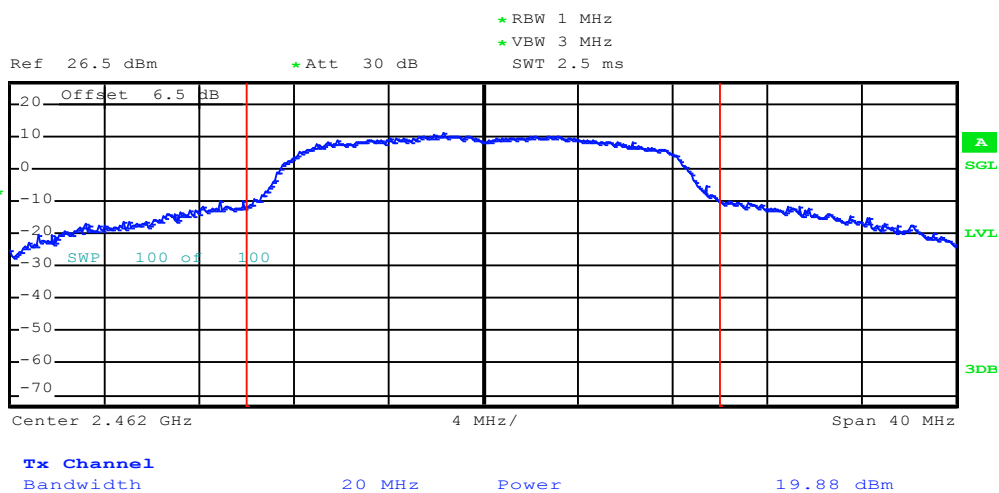


Highest channel


Test mode: 802.11n(H20)

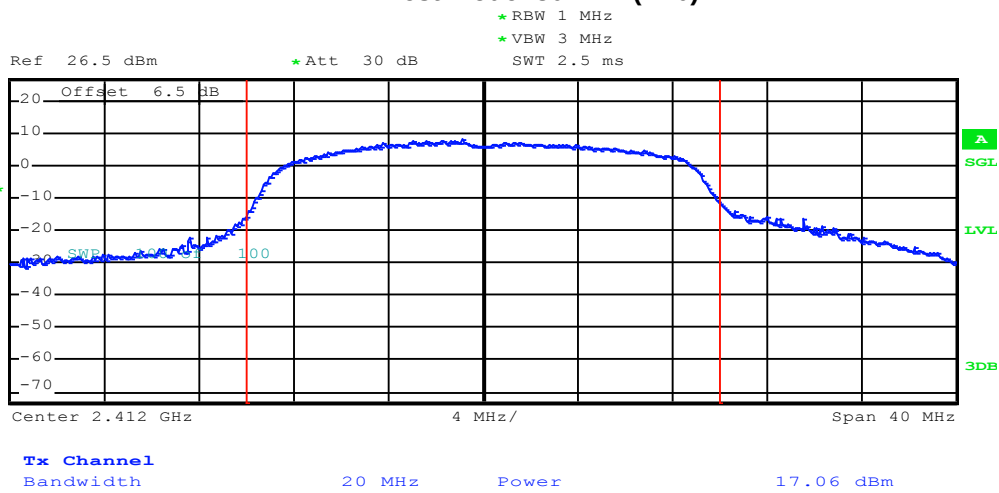

Lowest channel

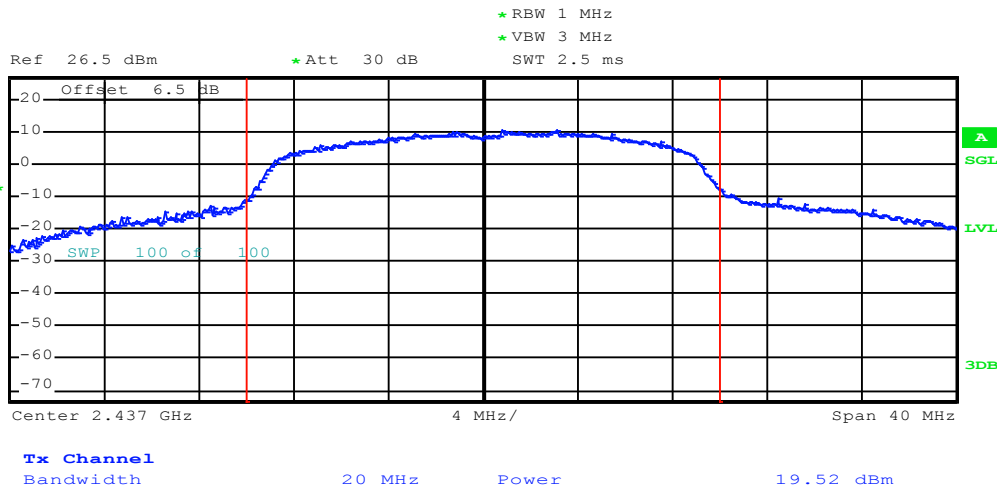


Middle channel

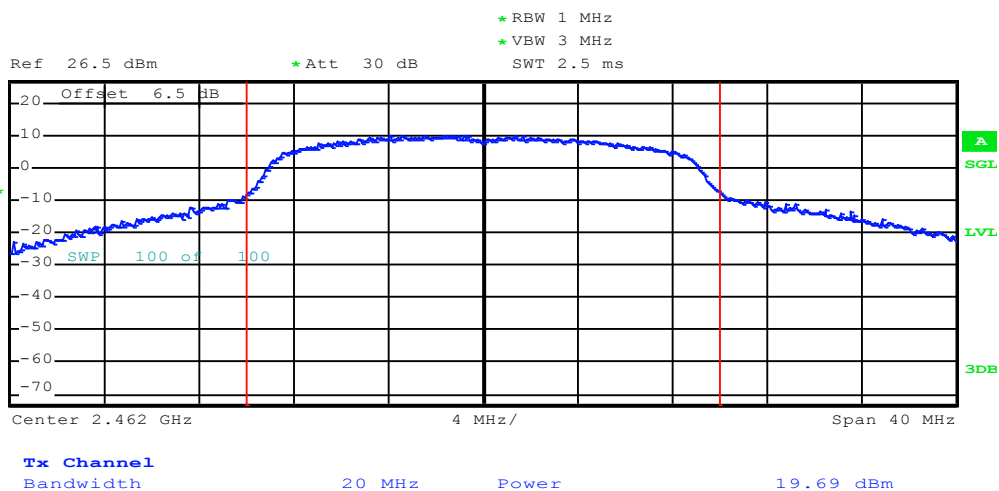


Highest channel


Test mode:802.11n(H40)

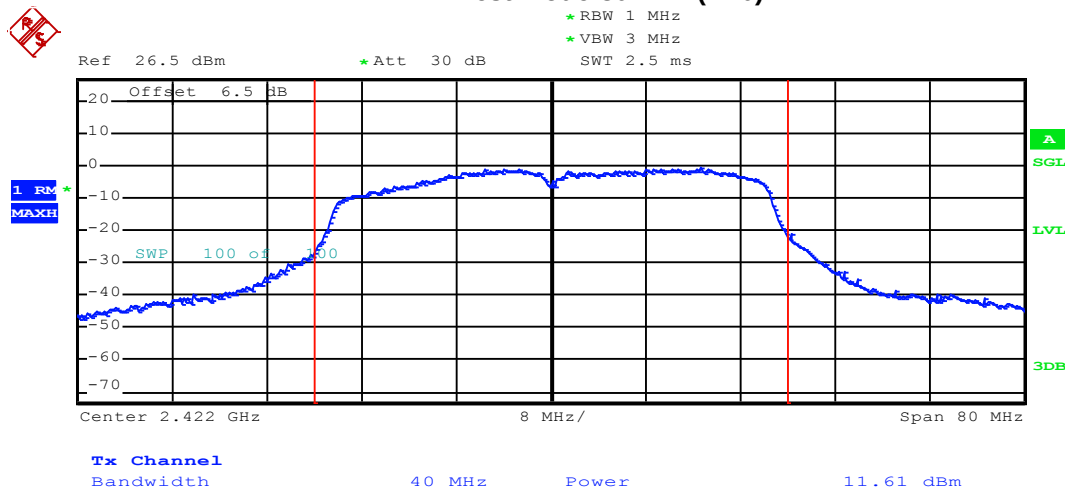

Lowest channel

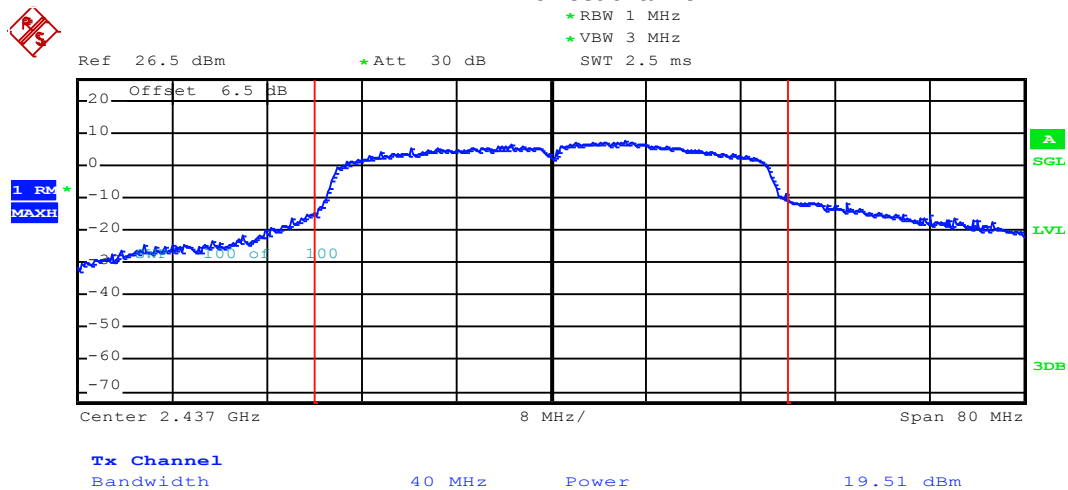


Middle channel

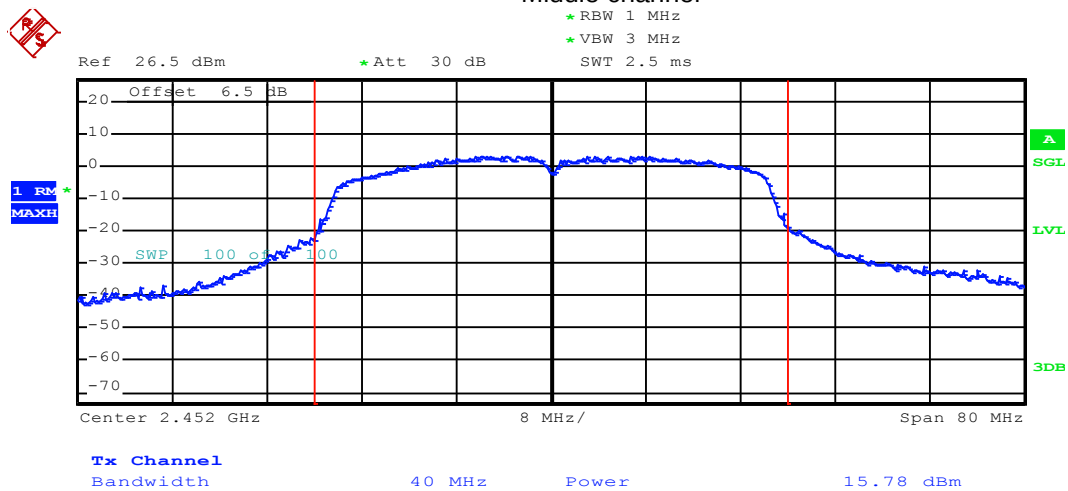

Highest channel

6.4 Occupy Bandwidth

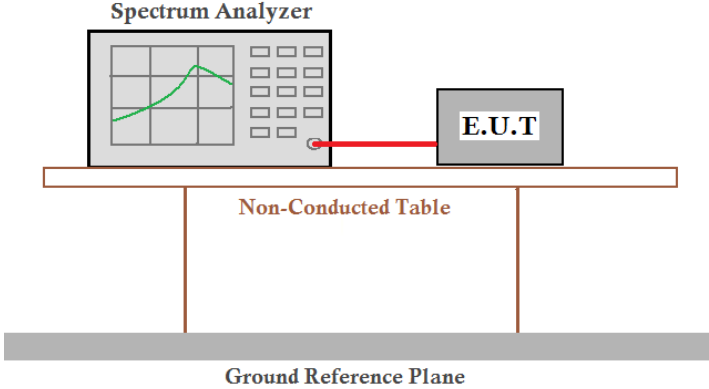Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074v03r05 section 8.1
Limit:	>500kHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a grid and a green curve on its screen, is connected to an E.U.T (Equipment Under Test) box by a red cable. Both the Spectrum Analyzer and the E.U.T are positioned on a 'Non-Conducted Table', which is a white rectangular platform supported by two vertical brown legs. Below this table is a 'Ground Reference Plane', represented by a thick grey horizontal bar.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

TX 0


Test CH	6dB Emission Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	10.16	15.20	15.28	32.96	>500	Pass
Middle	10.24	15.28	15.28	31.68		
Highest	10.16	15.28	15.28	32.96		
Test CH	99%Occupy Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	14.88	16.40	17.36	35.68	N/A	N/A
Middle	15.04	17.04	17.68	36.32		
Highest	14.16	16.40	17.52	35.84		

TX 1

Test CH	6dB Emission Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	10.24	15.28	14.00	31.68	>500	Pass
Middle	10.24	15.84	15.20	34.24		
Highest	10.24	15.28	15.28	32.96		
Test CH	99% Occupy Bandwidth (MHz)				Limit(kHz)	Result
	802.11b	802.11g	802.11n(H20)	802.11n(H40)		
Lowest	16.24	16.32	17.36	35.68	N/A	N/A
Middle	14.96	18.40	18.64	41.60		
Highest	15.28	17.52	18.56	35.68		


Test plot as follows:
TX 0

6dB EBW Test mode: 802.11b

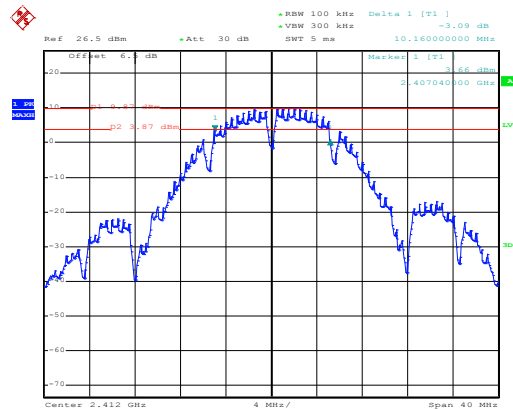


Date: 17.MAY.2016 11:17:33

Lowest channel

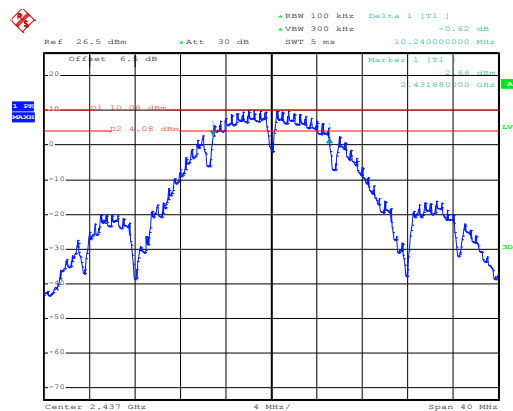

Date: 17.MAY.2016 11:15:41


Middle channel

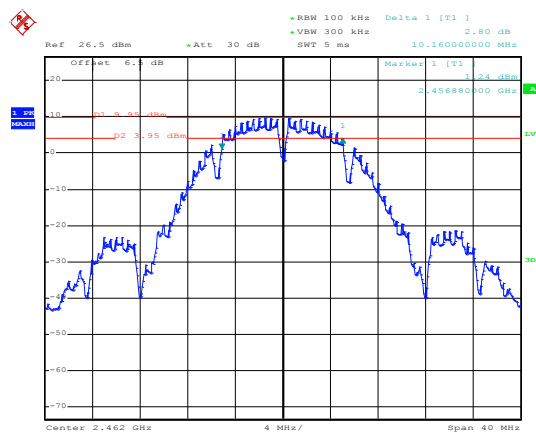

Date: 17.MAY.2016 11:19:51


Highest channel

Test mode: 802.11g

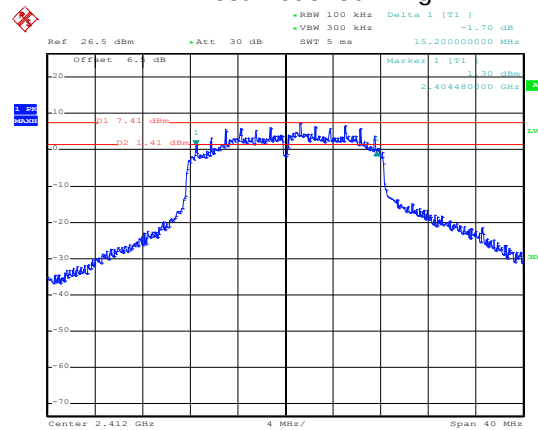


Date: 17.MAY.2016 11:22:05

Lowest channel

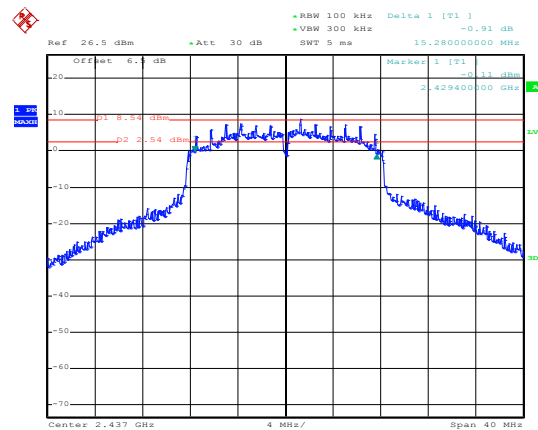

Date: 17.MAY.2016 11:23:46


Middle channel

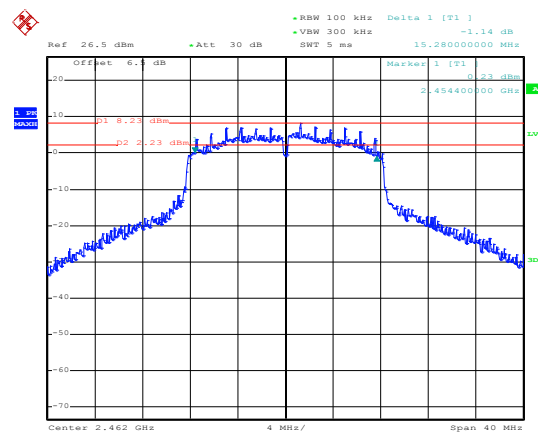

Date: 17.MAY.2016 11:25:12


Highest channel

Test mode: 802.11n(H20)

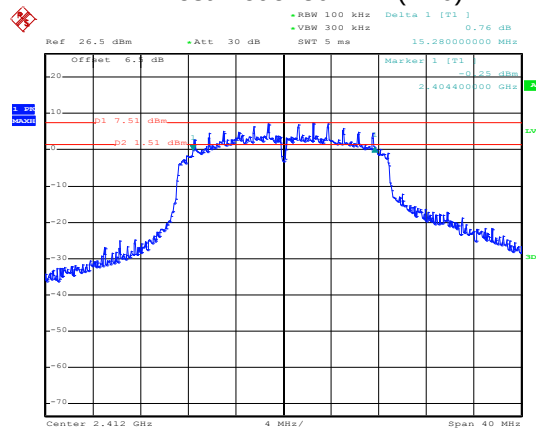


Date: 17.MAY.2016 11:26:38

Lowest channel

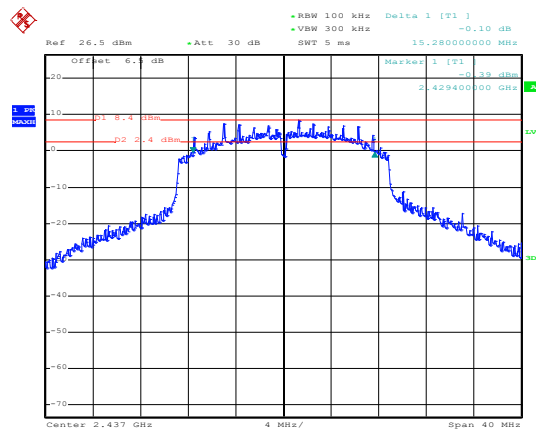

Date: 17.MAY.2016 11:27:59


Middle channel

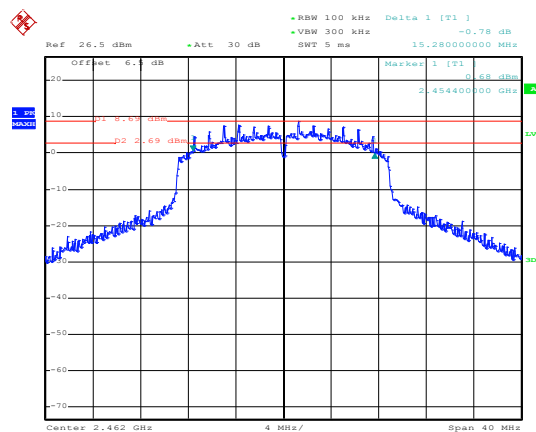

Date: 17.MAY.2016 11:30:06


Highest channel

Test mode: 802.11n(H40)

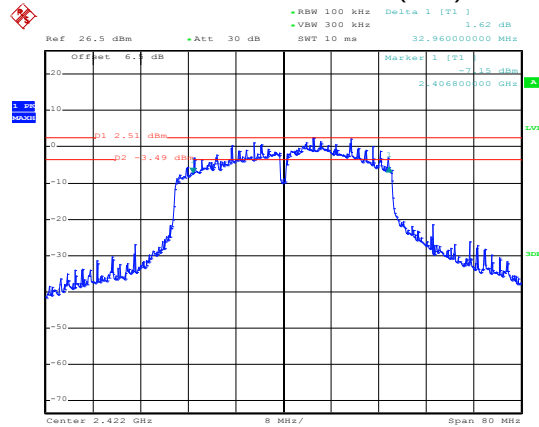


Date: 17.MAY.2016 11:33:11

Lowest channel

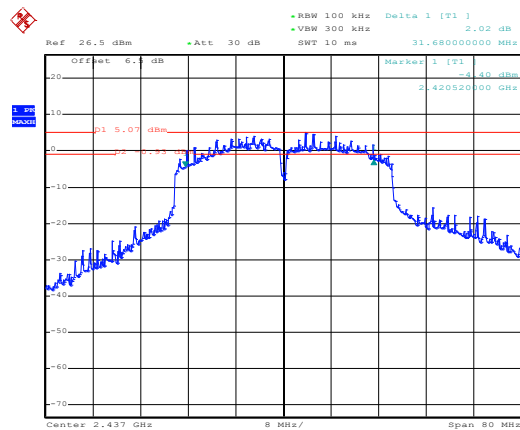

Date: 17.MAY.2016 11:35:52


Middle channel

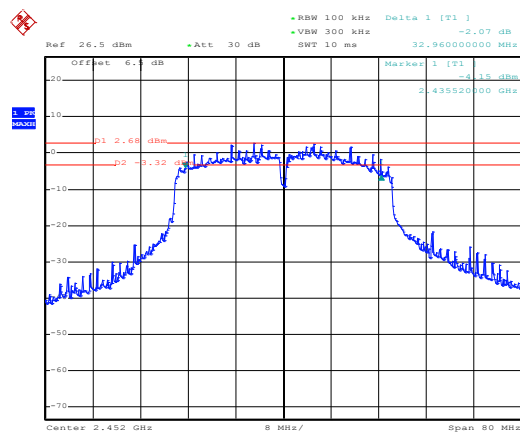

Date: 17.MAY.2016 11:37:25


Highest channel

99% OBW Test mode: 802.11b

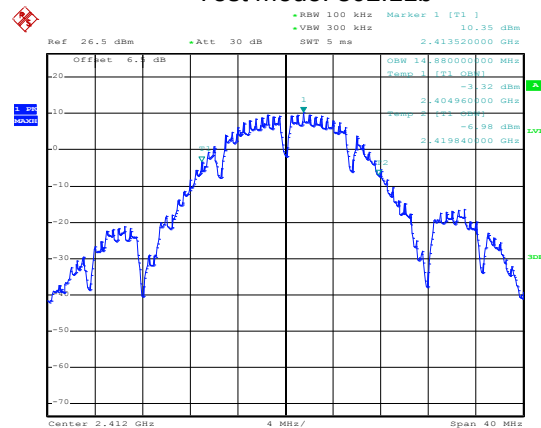


Date: 17.MAY.2016 11:39:12

Lowest channel

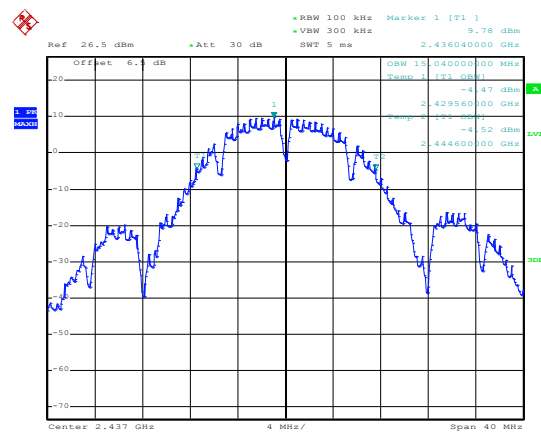

Date: 17.MAY.2016 11:39:59


Middle channel

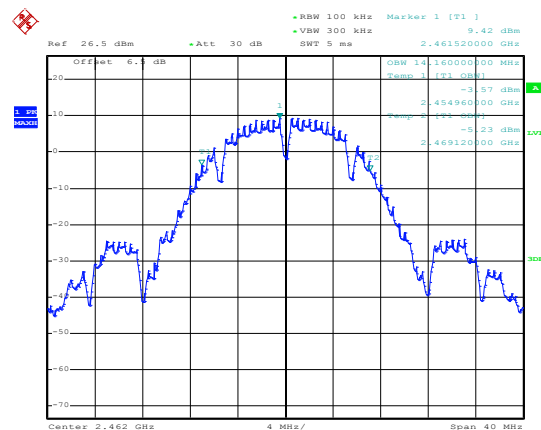

Date: 17.MAY.2016 11:40:58


Highest channel

Test mode: 802.11g

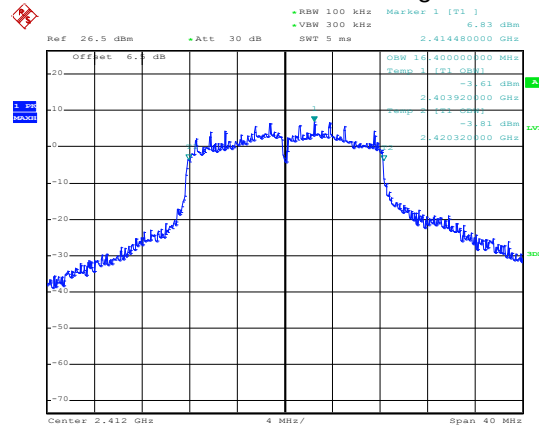


Date: 17.MAY.2016 11:41:40

Lowest channel

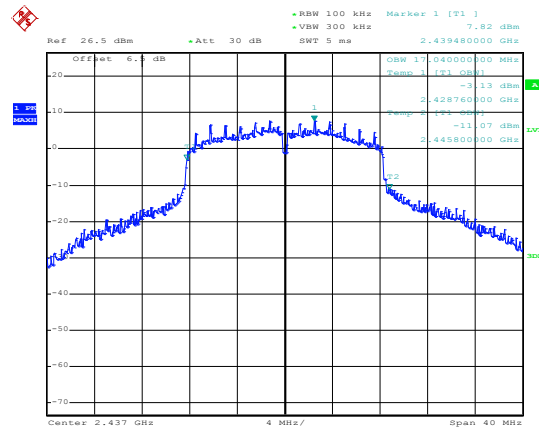

Date: 17.MAY.2016 11:43:42


Middle channel

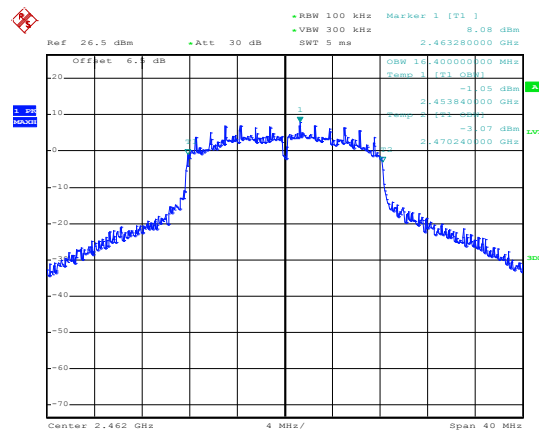

Date: 17.MAY.2016 11:44:29


Highest channel

Test mode: 802.11n(H20)

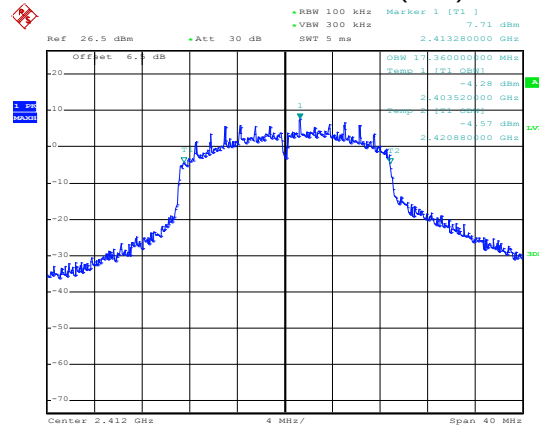


Date: 17.MAY.2016 11:45:10

Lowest channel

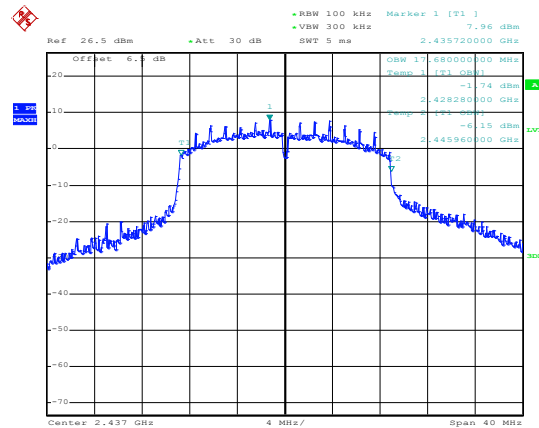

Date: 17.MAY.2016 11:45:52


Middle channel

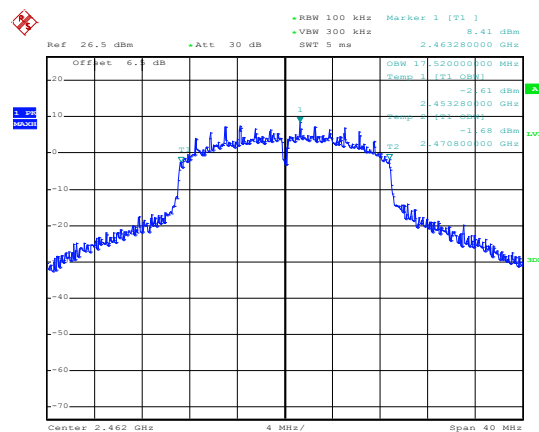

Date: 17.MAY.2016 11:46:27


Highest channel

Test mode: 802.11n(H40)

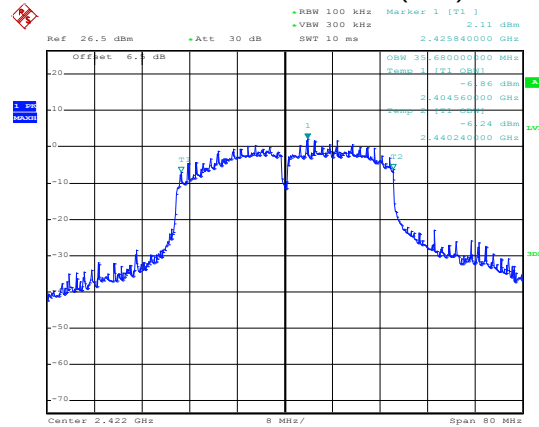


Date: 17.MAY.2016 11:47:24

Lowest channel

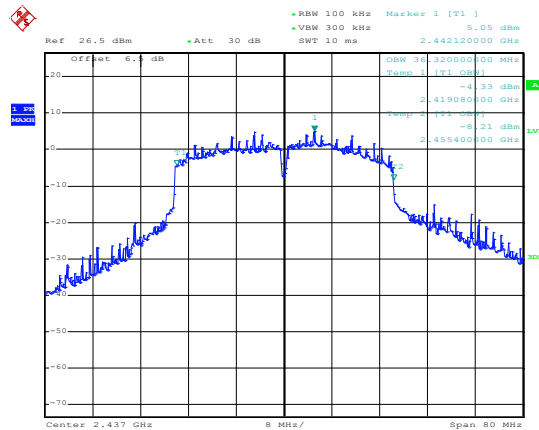

Date: 17.MAY.2016 11:48:07

Middle channel

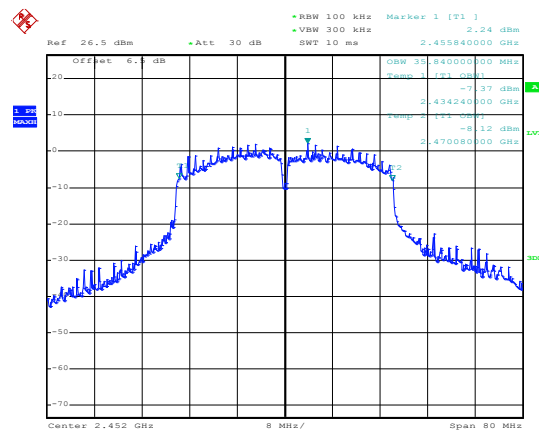


Date: 17.MAY.2016 11:48:47

Highest channel


TX 1

6dB EBW Test mode: 802.11b

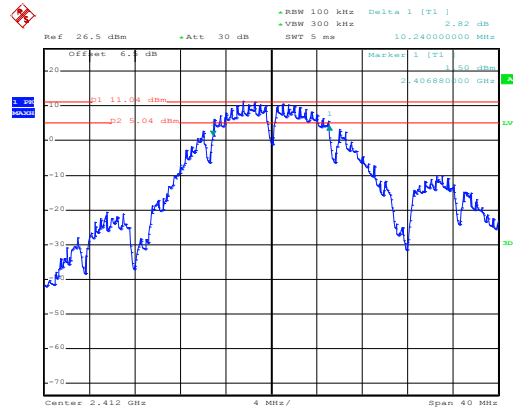


Date: 20.MAY.2016 13:37:36

Lowest channel

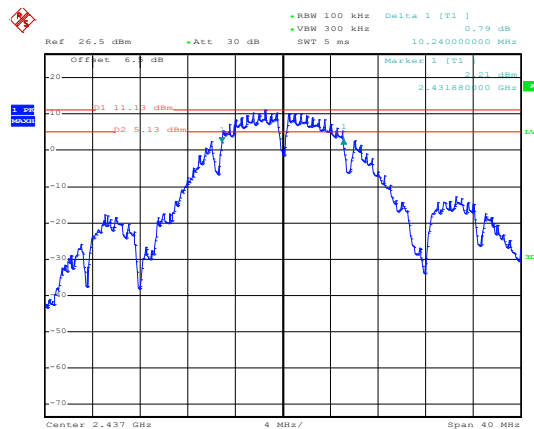

Date: 20.MAY.2016 13:38:53


Middle channel

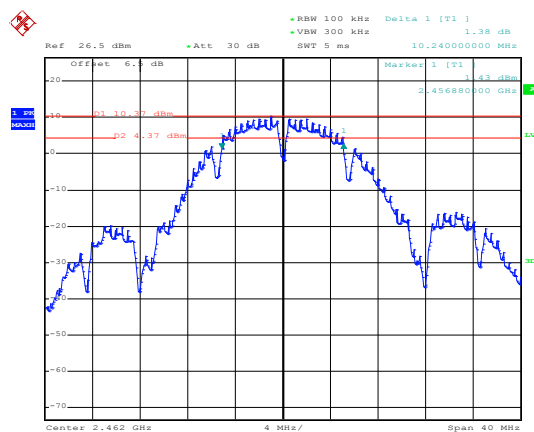

Date: 20.MAY.2016 13:40:51


Highest channel

Test mode: 802.11g

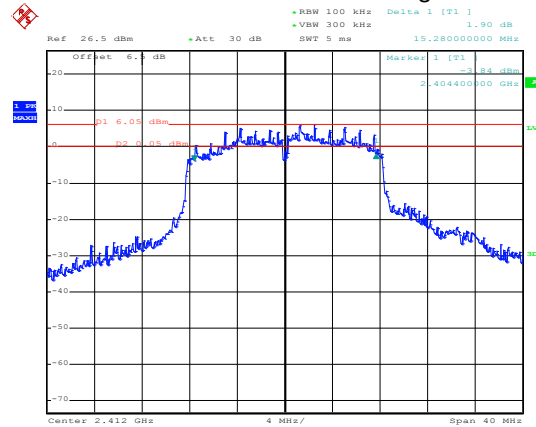


Date: 20.MAY.2016 13:42:18

Lowest channel

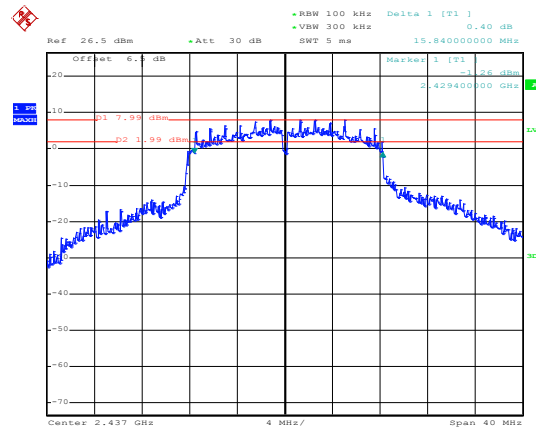

Date: 20.MAY.2016 13:43:56


Middle channel

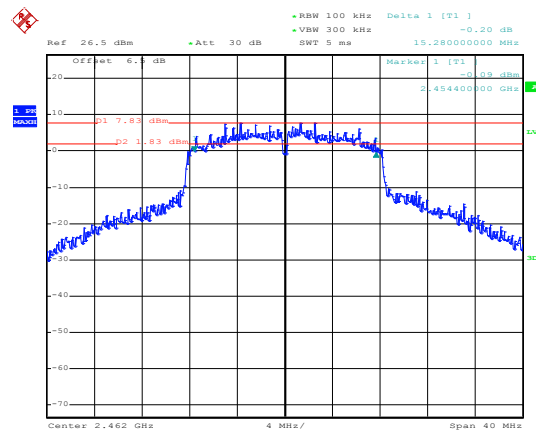

Date: 20.MAY.2016 13:44:59


Highest channel

Test mode: 802.11n(H20)

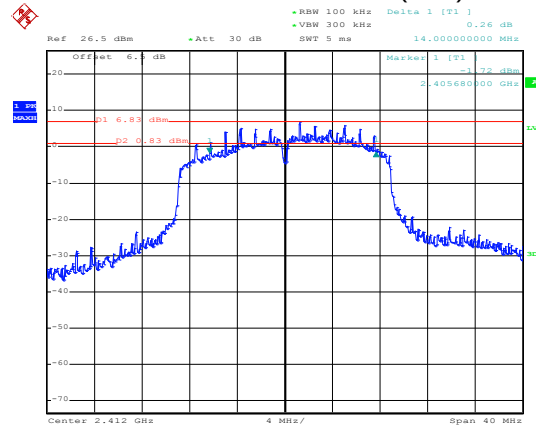


Date: 20.MAY.2016 13:46:17

Lowest channel

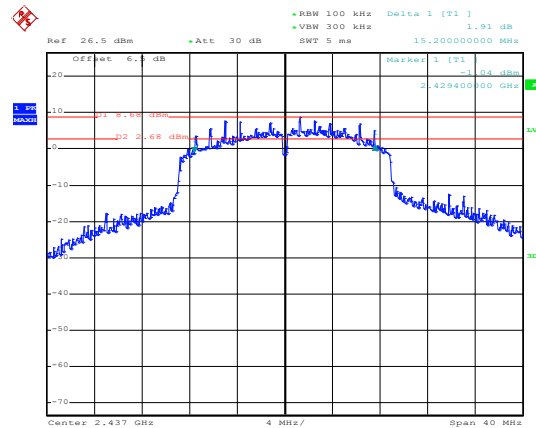

Date: 20.MAY.2016 13:47:24


Middle channel

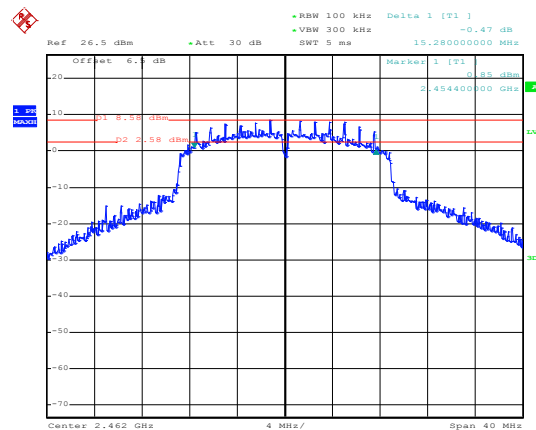

Date: 20.MAY.2016 13:48:29


Highest channel

Test mode: 802.11n(H40)

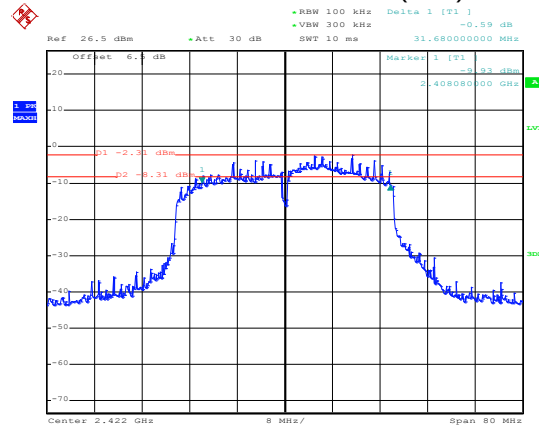


Date: 20.MAY.2016 13:50:19

Lowest channel

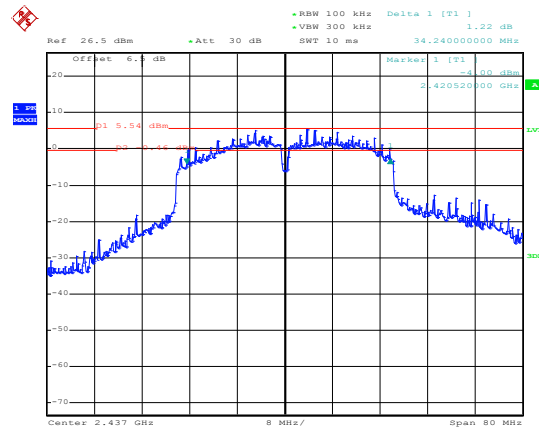

Date: 20.MAY.2016 13:51:55


Middle channel

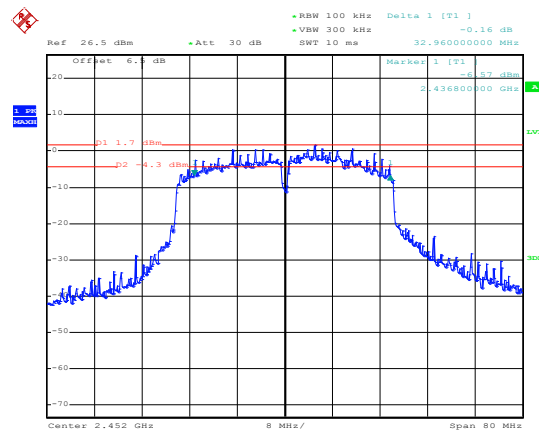

Date: 20.MAY.2016 13:53:35


Highest channel

99% OBW
Test mode: 802.11b

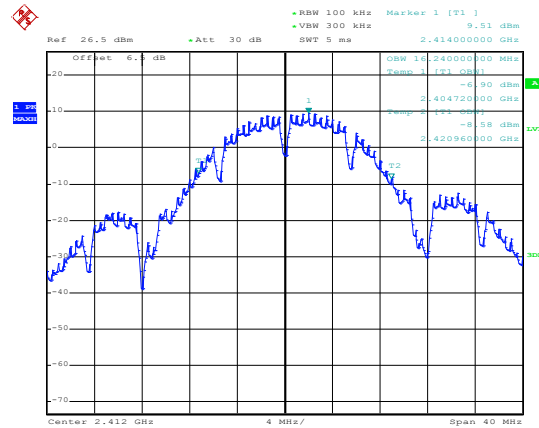


Date: 20.MAY.2016 13:55:09

Lowest channel

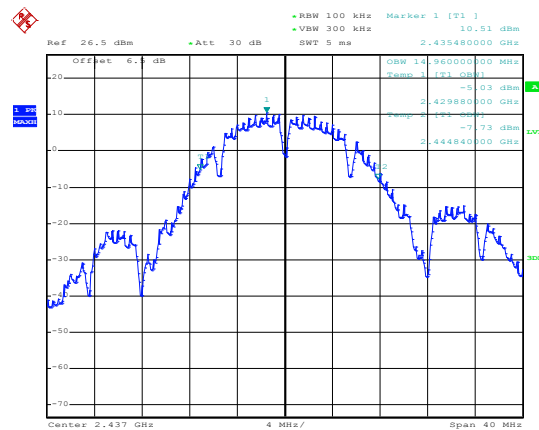

Date: 20.MAY.2016 13:55:51


Middle channel

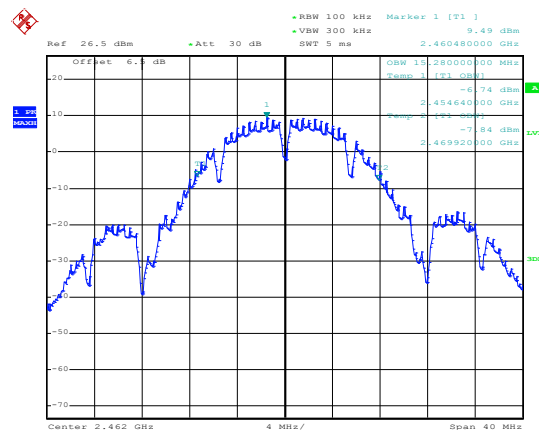

Date: 20.MAY.2016 13:56:34


Highest channel

Test mode: 802.11g

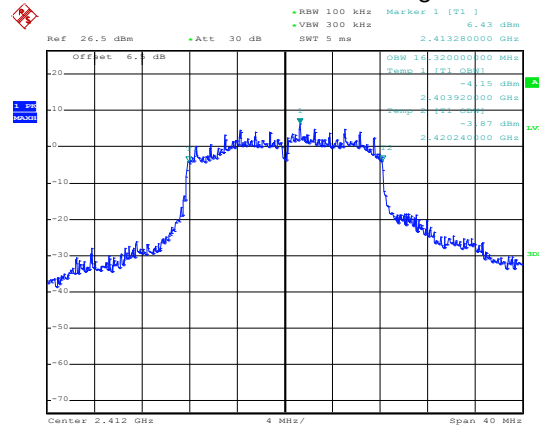


Date: 20.MAY.2016 13:57:18

Lowest channel

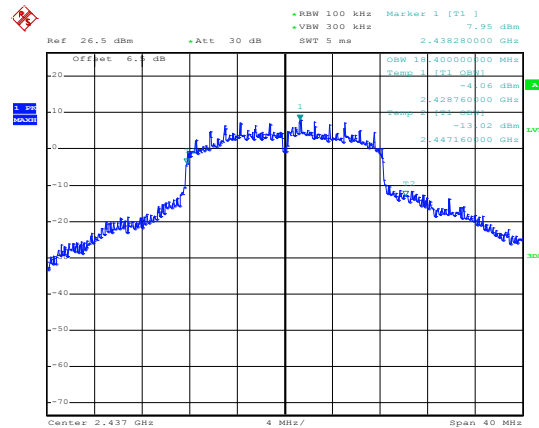

Date: 20.MAY.2016 13:58:17


Middle channel

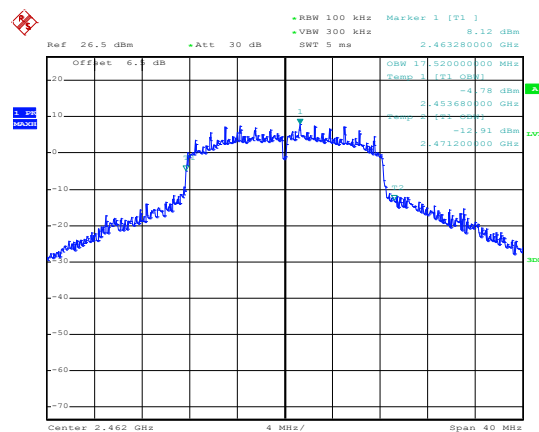

Date: 20.MAY.2016 13:58:55


Highest channel

Test mode: 802.11n(H20)

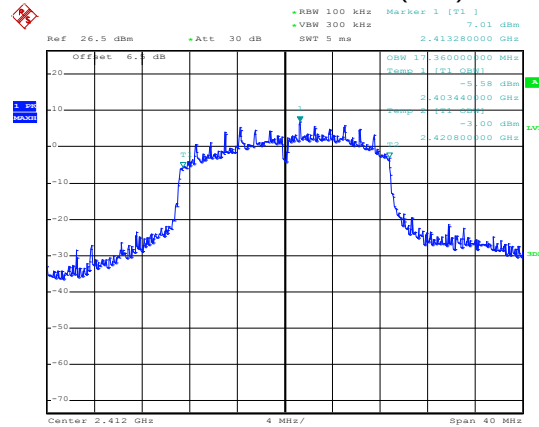


Date: 20.MAY.2016 13:59:46

Lowest channel

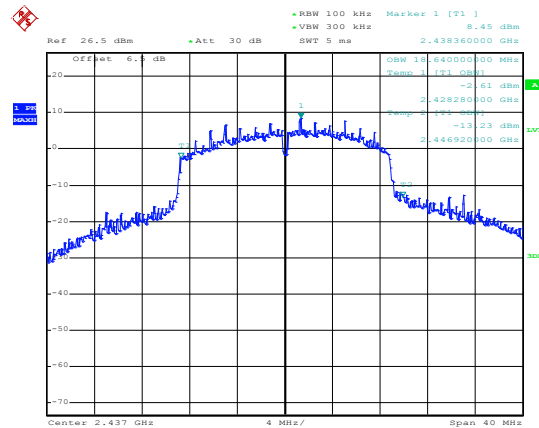

Date: 20.MAY.2016 14:00:24


Middle channel

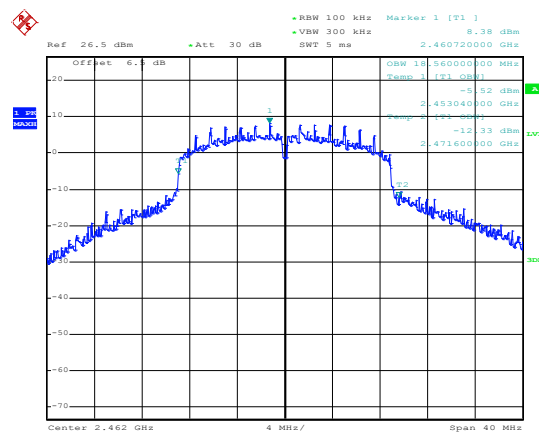

Date: 20.MAY.2016 14:01:07


Highest channel

Test mode: 802.11n(H40)

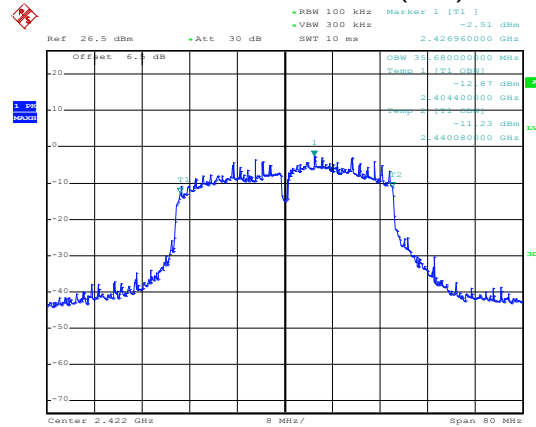


Date: 20.MAY.2016 14:01:58

Lowest channel

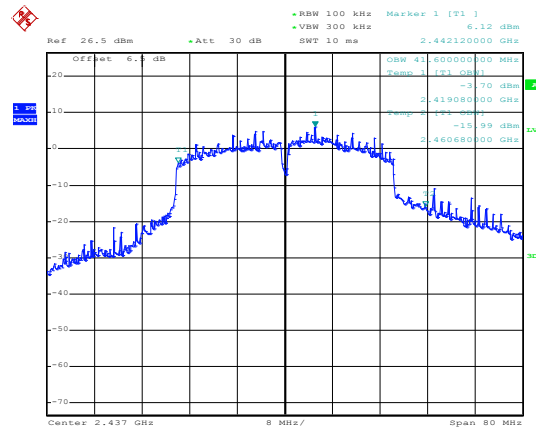

Date: 20.MAY.2016 14:02:44


Middle channel

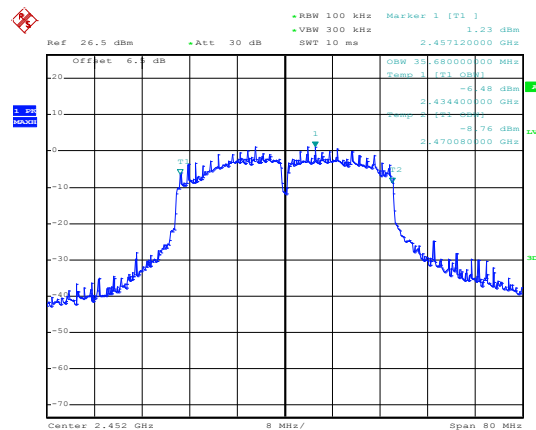

Date: 20.MAY.2016 14:03:26

Highest channel

6.5 Power Spectral Density

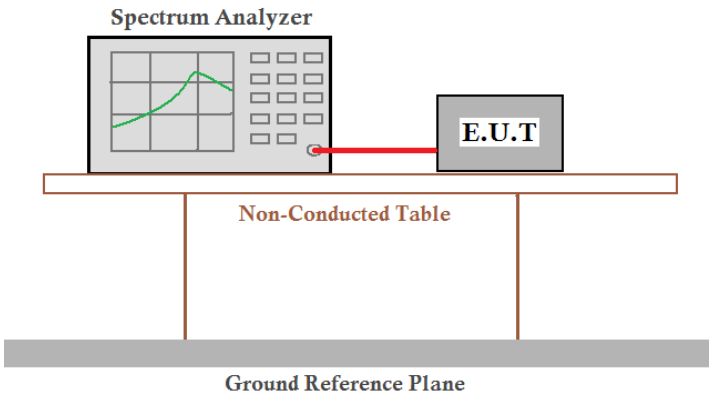
Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074v03r05 section 10.2
Limit:	8dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Mode	Test Channel	Ant. Port	PSD (dBm)	Total PSD (dBm)	Limit (dBm)	Result
802.11b	Lowest	TX 0	4.44	7.57	8.00	Pass
		TX 1	4.67			
	Middle	TX 0	3.50	6.99	8.00	Pass
		TX 1	4.41			
	Highest	TX 0	3.82	6.45	8.00	Pass
		TX 1	3.03			
802.11g	Lowest	TX 0	2.11	4.32	8.00	Pass
		TX 1	0.34			
	Middle	TX 0	3.06	6.22	8.00	Pass
		TX 1	3.35			
	Highest	TX 0	3.44	6.36	8.00	Pass
		TX 1	3.25			
802.11n(H20)	Lowest	TX 0	1.06	3.84	8.00	Pass
		TX 1	0.58			
	Middle	TX 0	2.73	5.83	8.00	Pass
		TX 1	2.91			
	Highest	TX 0	2.79	5.92	8.00	Pass
		TX 1	3.02			
802.11n(H40)	Lowest	TX 0	-2.62	-1.45	8.00	Pass
		TX 1	-7.70			
	Middle	TX 0	-0.39	2.90	8.00	Pass
		TX 1	0.15			
	Highest	TX 0	-2.59	0.00	8.00	Pass
		TX 1	-3.47			


Test plot as follows:
TX 0

Test mode: 802.11b

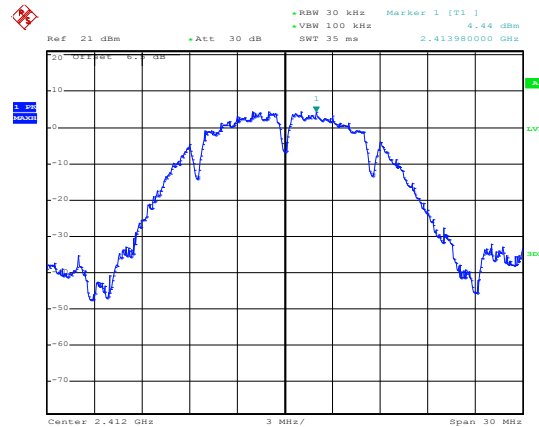


Date: 1.JUN.2016 11:01:31

Lowest channel

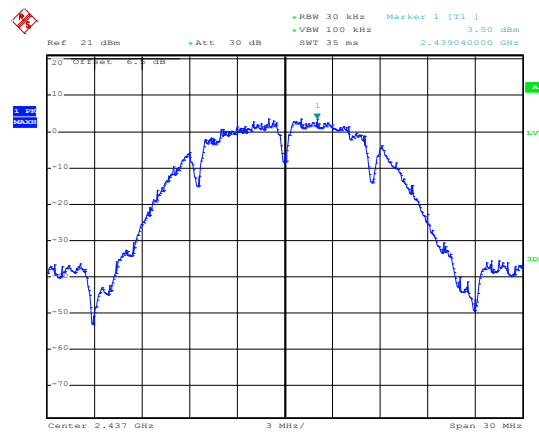

Date: 1.JUN.2016 11:01:59


Middle channel

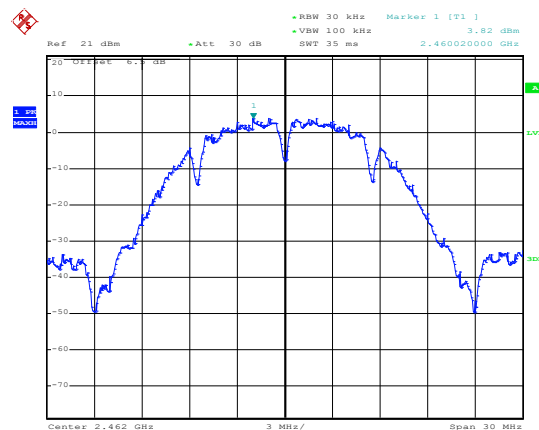

Date: 1.JUN.2016 11:02:33


Highest channel

Test mode: 802.11g

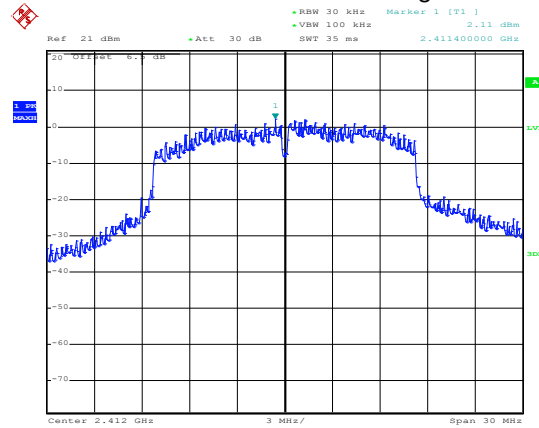


Date: 17.MAY.2016 16:17:35

Lowest channel

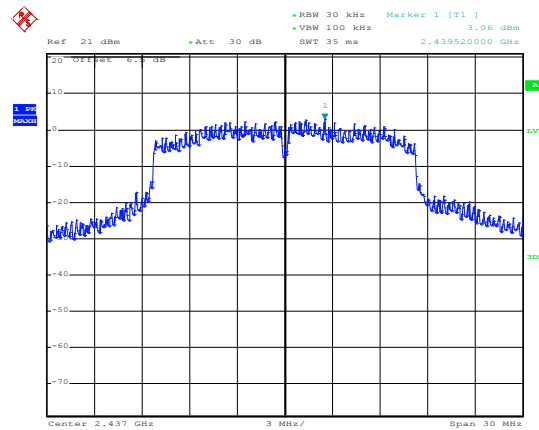

Date: 17.MAY.2016 16:16:51


Middle channel

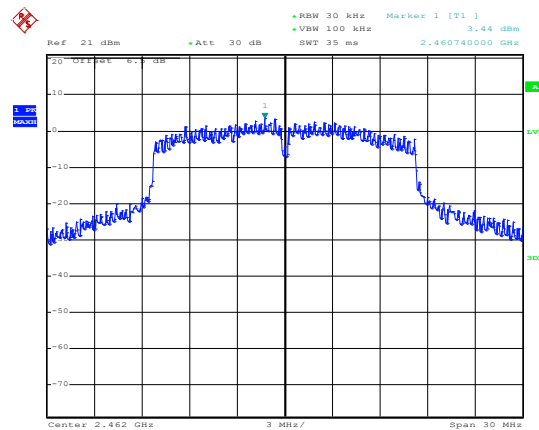

Date: 17.MAY.2016 16:15:25


Highest channel

Test mode: 802.11n(H20)

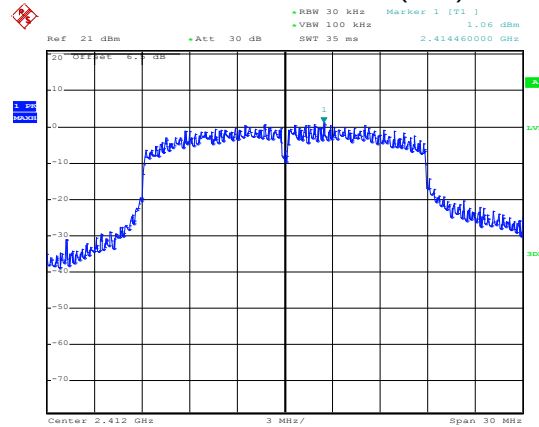


Date: 17.MAY.2016 16:18:57

Lowest channel

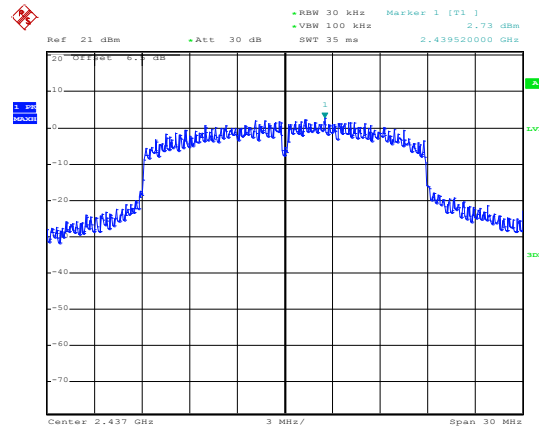

Date: 17.MAY.2016 16:19:39


Middle channel

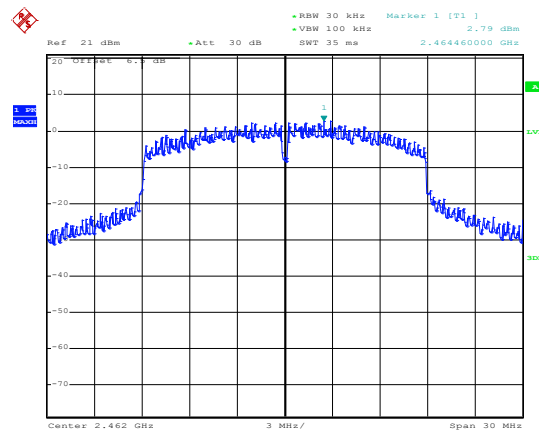

Date: 17.MAY.2016 16:20:18


Highest channel

Test mode: 802.11n(H40)

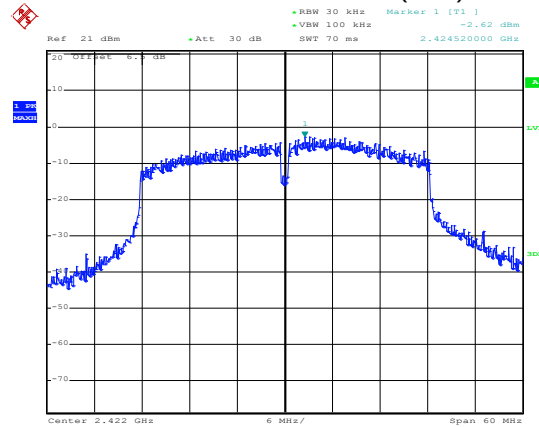


Date: 17.MAY.2016 16:21:51

Lowest channel

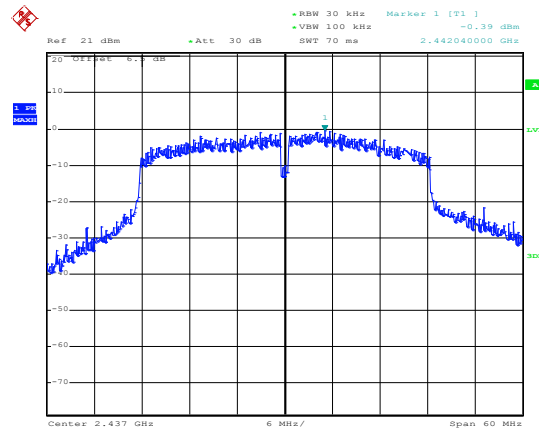

Date: 17.MAY.2016 16:22:44

Middle channel

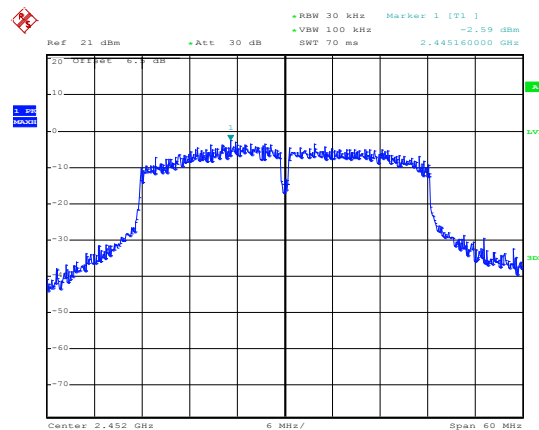


Date: 17.MAY.2016 16:23:49

Highest channel


TX 1

Test mode: 802.11b

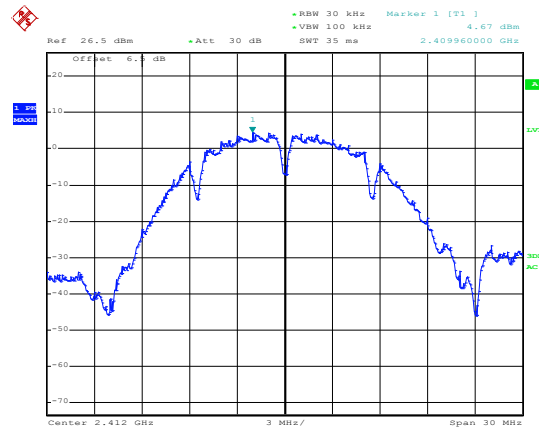


Date: 18.JUL.2016 09:15:08

Lowest channel

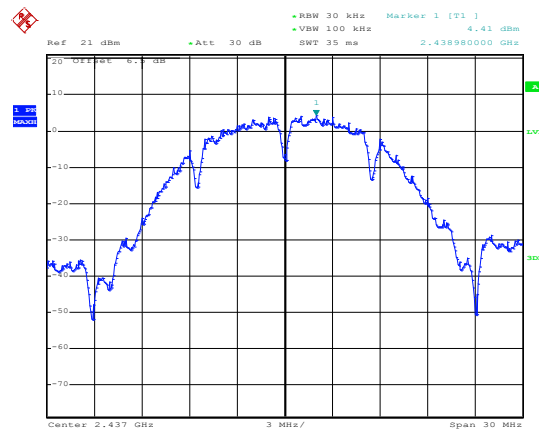

Date: 1.JUN.2016 11:06:19


Middle channel

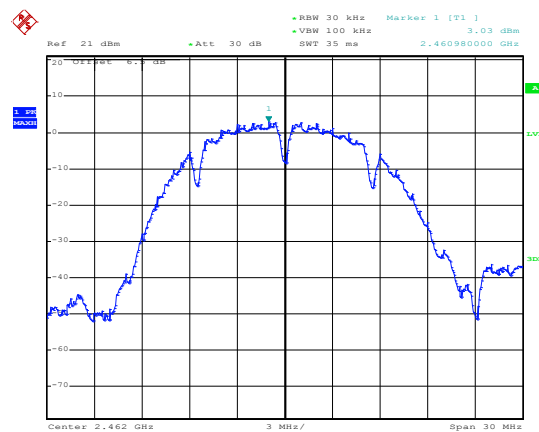

Date: 1.JUN.2016 11:03:30


Highest channel

Test mode: 802.11g

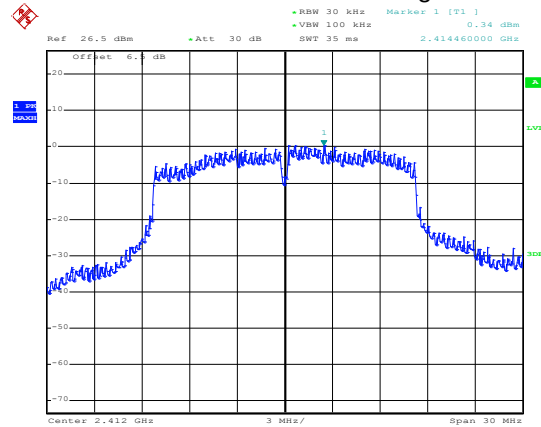


Date: 20.MAY.2016 14:07:01

Lowest channel

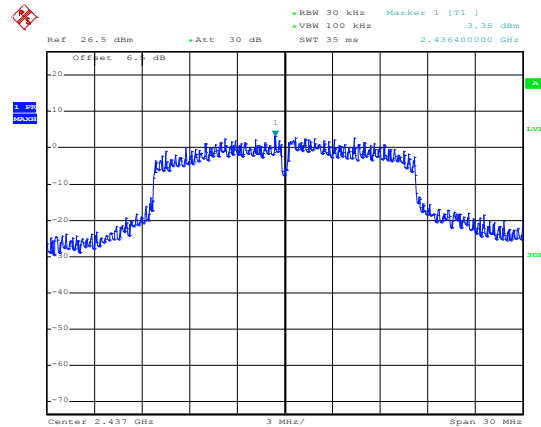

Date: 20.MAY.2016 14:07:37


Middle channel

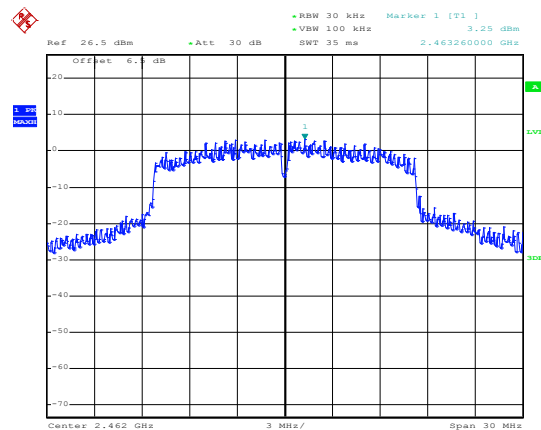

Date: 20.MAY.2016 14:08:08


Highest channel

Test mode: 802.11n(H20)

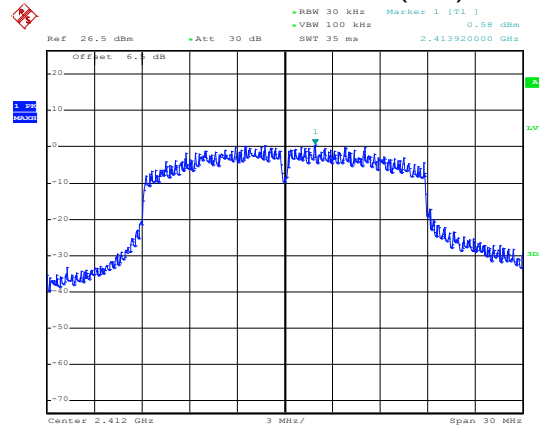


Date: 20.MAY.2016 14:08:54

Lowest channel

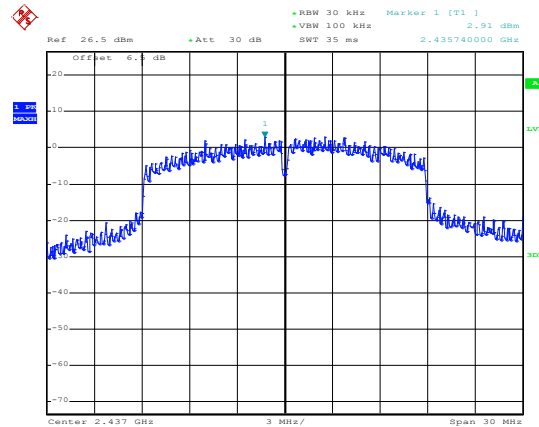

Date: 20.MAY.2016 14:09:34


Middle channel

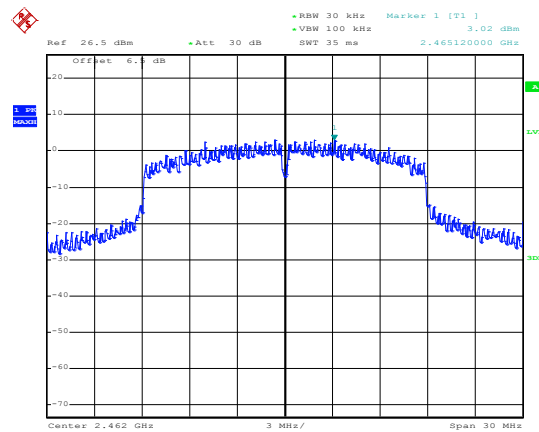

Date: 20.MAY.2016 14:10:06


Highest channel

Test mode: 802.11n(H40)

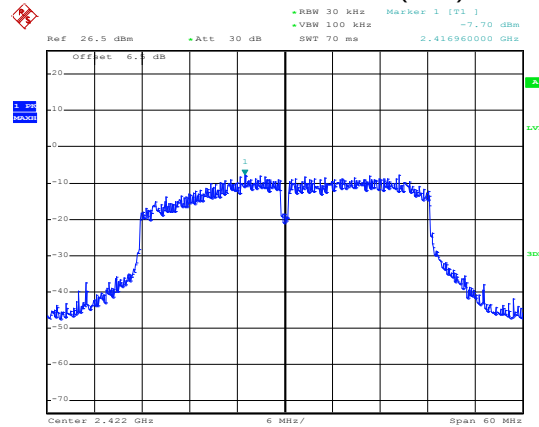


Date: 20.MAY.2016 14:11:13

Lowest channel

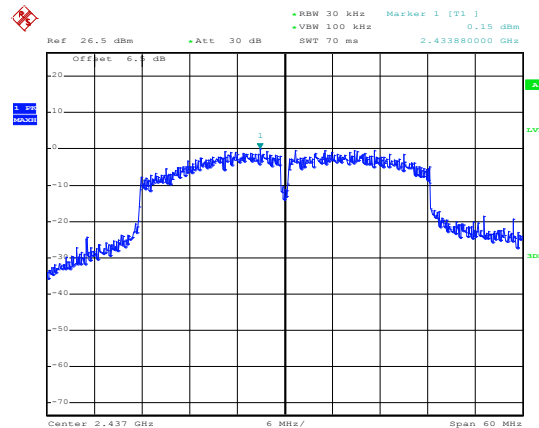

Date: 20.MAY.2016 14:12:20

Middle channel

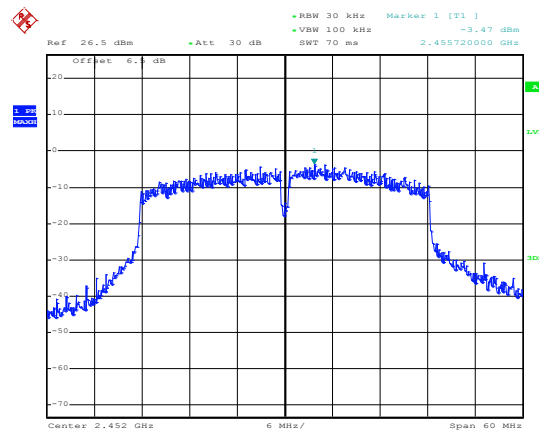


Date: 20.MAY.2016 14:12:54

Highest channel

6.6 Band Edge


6.6.1 Conducted Emission Method

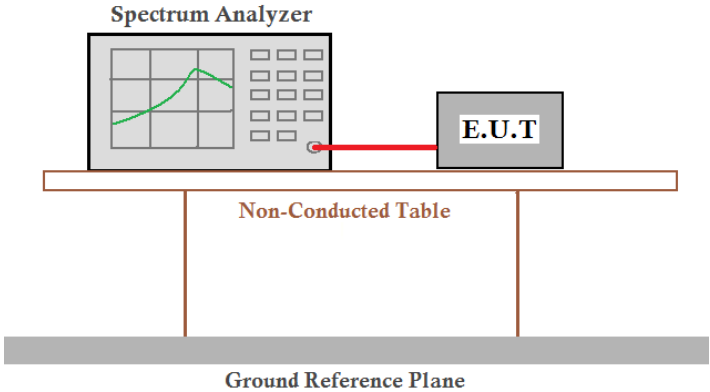Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074v03r05 section 13
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T (Equipment Under Test). Both are placed on a Non-Conducted Table, which sits on a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:


TX 0

802.11b

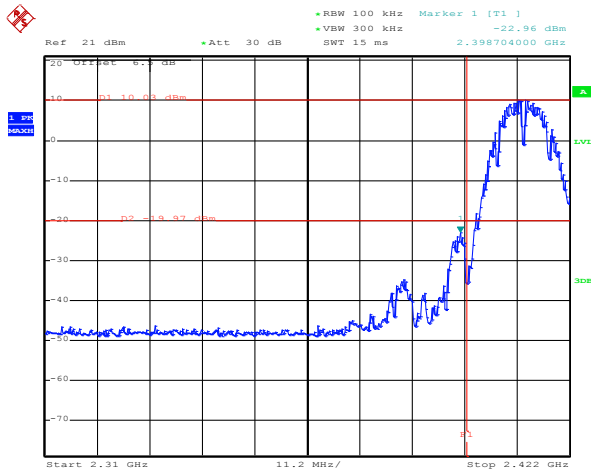

Date: 17.MAY.2016 13:41:27


Lowest channel

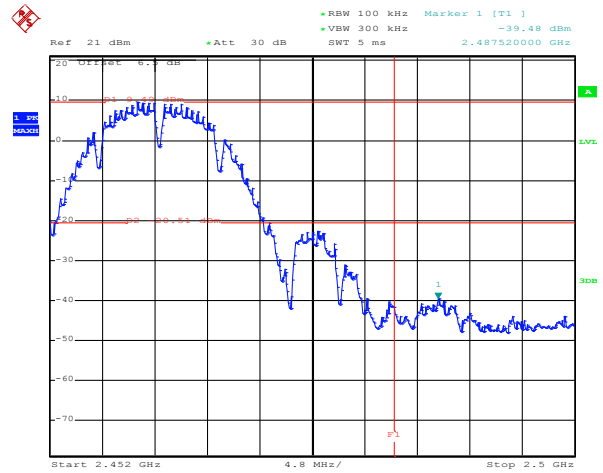

Date: 17.MAY.2016 13:45:42


Highest channel

802.11g

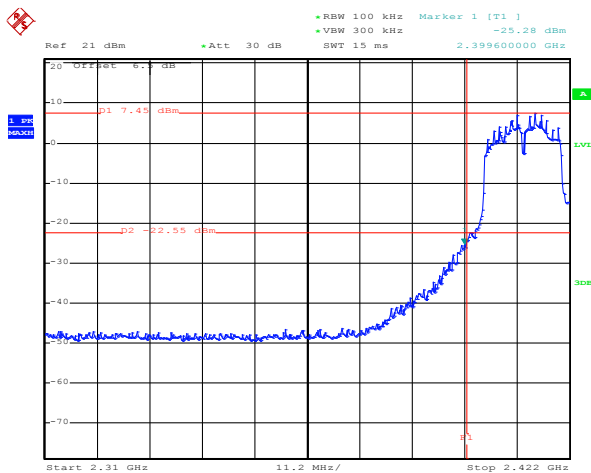

Date: 17.MAY.2016 13:49:25


Lowest channel

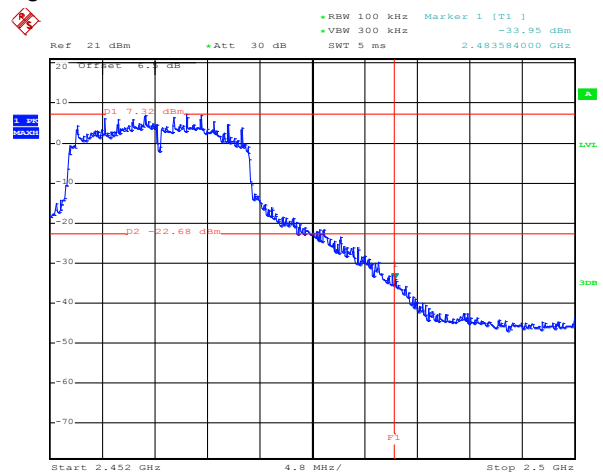

Date: 17.MAY.2016 13:47:14


Highest channel

802.11n(H20)

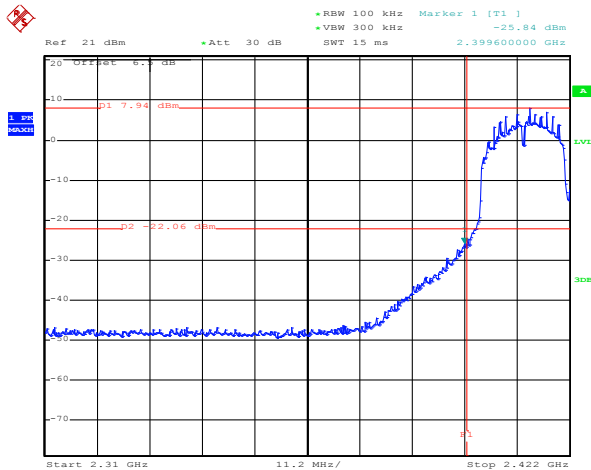

Date: 17.MAY.2016 13:51:04


Lowest channel

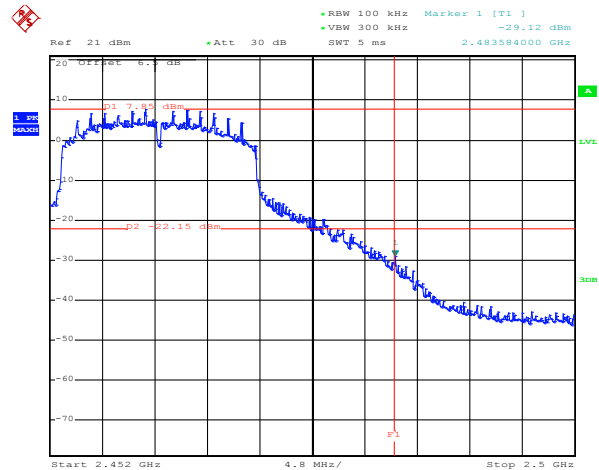

Date: 17.MAY.2016 13:52:35


Highest channel

802.11n(H40)

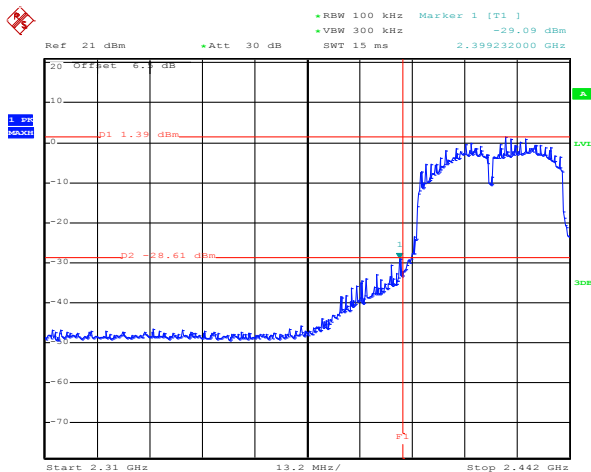

Date: 17.MAY.2016 14:02:18

Lowest channel

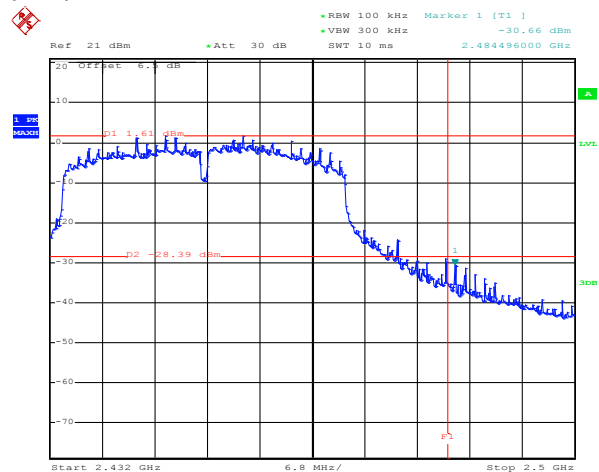


Date: 17.MAY.2016 13:58:59

Highest channel


TX 1

802.11b

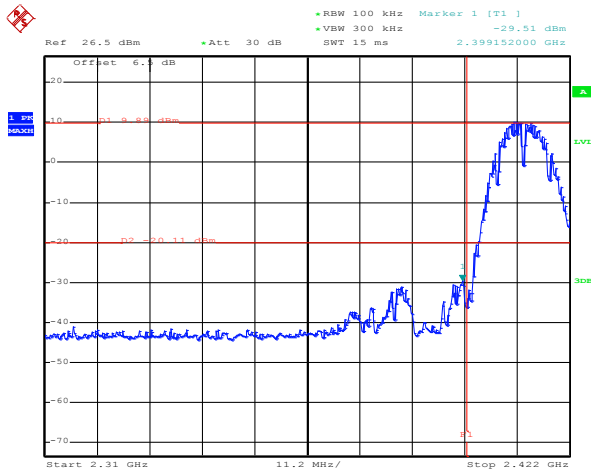

Date: 20.MAY.2016 11:58:31


Lowest channel

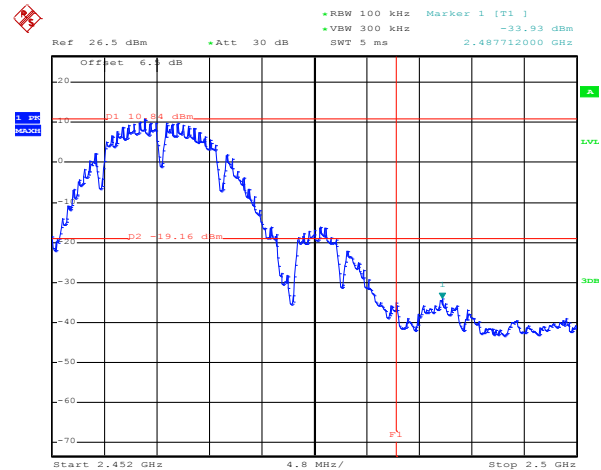

Date: 20.MAY.2016 11:44:43


Highest channel

802.11g

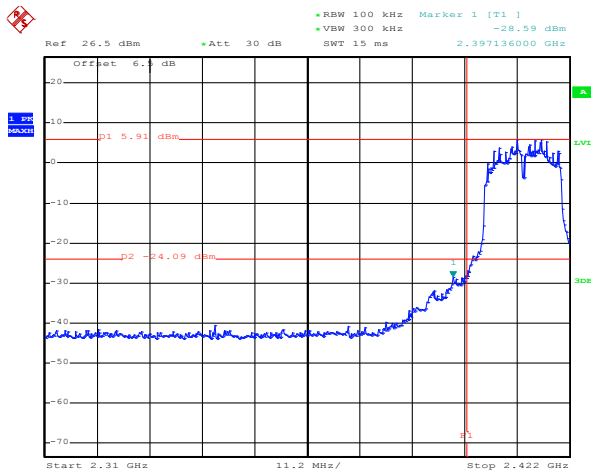

Date: 20.MAY.2016 11:34:58


Lowest channel

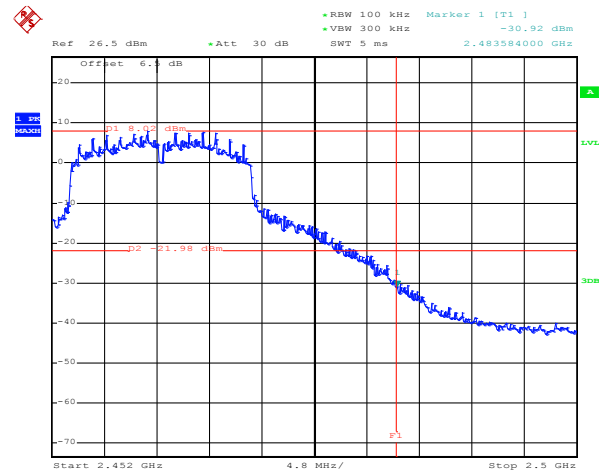

Date: 20.MAY.2016 11:46:02


Highest channel

802.11n(H20)

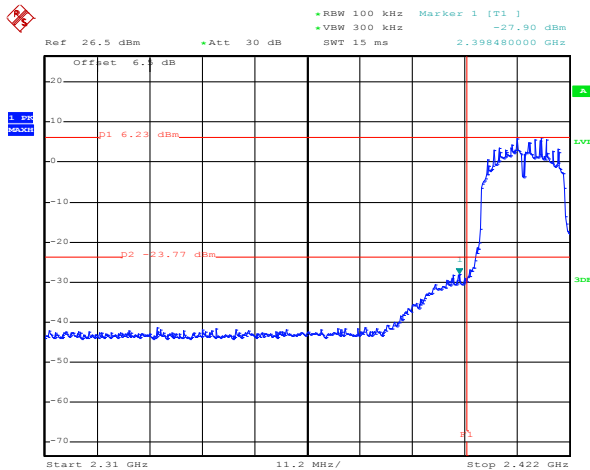

Date: 20.MAY.2016 11:36:43


Lowest channel

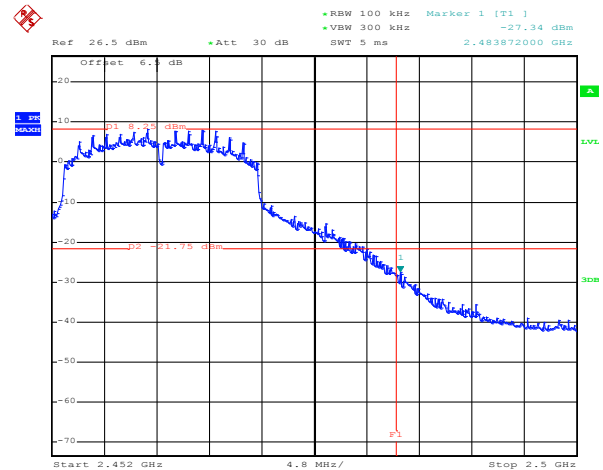

Date: 20.MAY.2016 11:47:36


Highest channel

802.11n(H40)

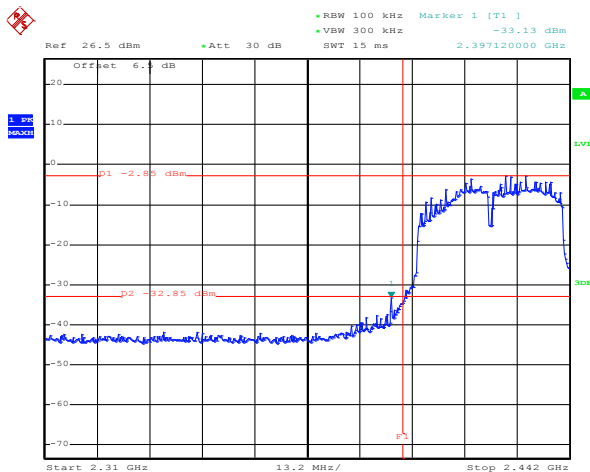

Date: 20.MAY.2016 11:39:08


Lowest channel

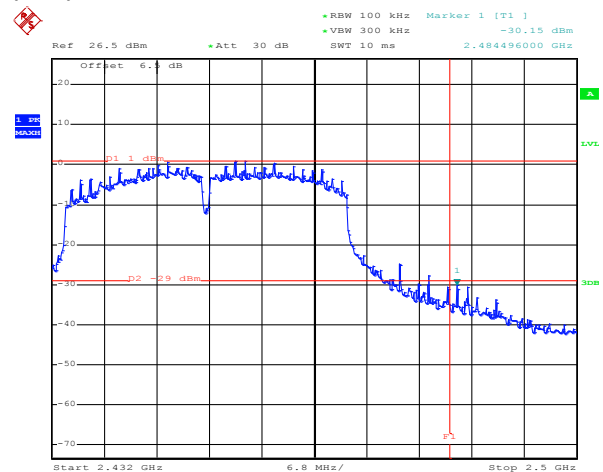

Date: 20.MAY.2016 11:50:11

Highest channel

6.6.2 Radiated Emission Method

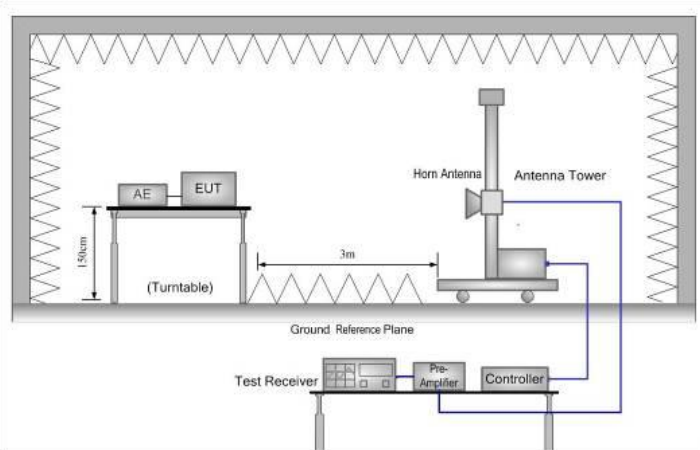
Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013 and KDB 558074v03r05 section 12.1				
TestFrequencyRange:	2.3GHz to 2.5GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	Above 1GHz	54.00		Average Value	
		74.00		Peak Value	
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the groundat a 3 meter camber. The table was rotated 360 degrees todetermine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, whichwas mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and thenthe antenna was tuned to heights from 1 meter to 4 meters and the rotatablewas turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and SpecifiedBandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limitspecified, then testing could be stopped and the peak values of the EUT wouldbe reported. Otherwise the emissions that did not have 10dB margin would bere-tested one by one using peak, quasi-peak or average method as specified andthen reported in a data sheet.				
Test setup:					
Test Instruments:	Refer to section 5.8 for details				
Test mode:	Refer to section 5.3 for details				
Test results:	Passed				

MIMO TX mode

802.11b

Test channel: Lowest

Horizontal:

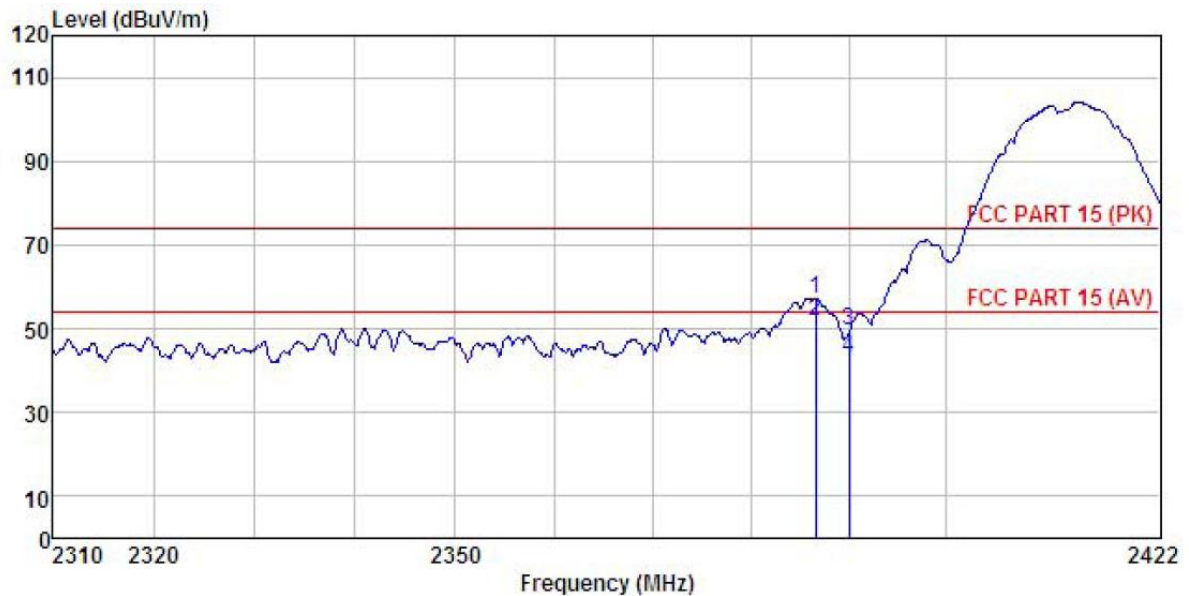


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : B-L mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	Read	Antenna	Cable	Preamp	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2386.598	26.94	23.68	6.63	0.00	57.25	74.00	-16.75 Peak
2	2386.598	21.70	23.68	6.63	0.00	52.01	54.00	-1.99 Average
3	2390.000	19.11	23.68	6.63	0.00	49.42	74.00	-24.58 Peak
4	2390.000	12.52	23.68	6.63	0.00	42.83	54.00	-11.17 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical:

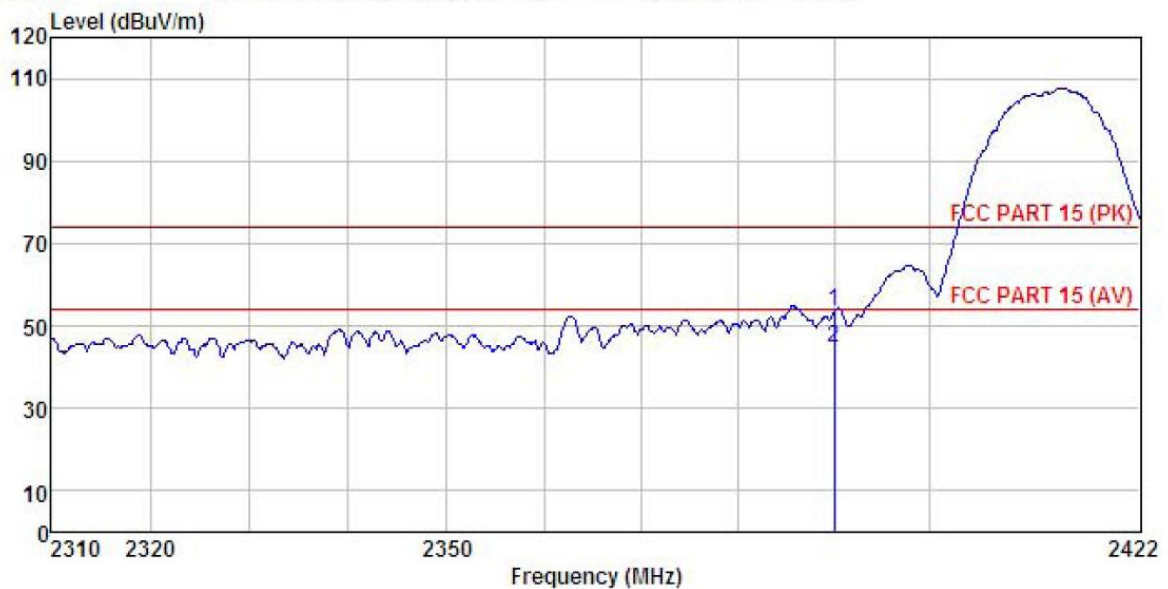

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : B-L mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	23.47	23.68	6.63	0.00	53.78	74.00	-20.22	Peak
2	2390.000	14.28	23.68	6.63	0.00	44.59	54.00	-9.41	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel: Highest

Horizontal:

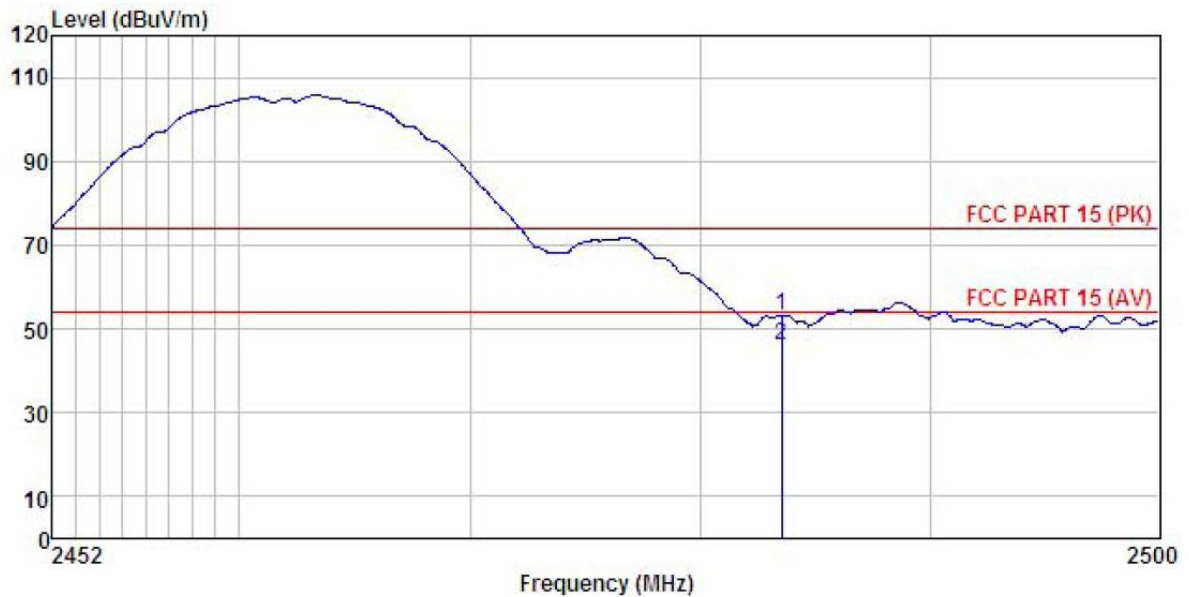


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : B-H mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

		ReadAntenna	Cable	Preamp		Limit	Over	
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	22.57	23.70	6.85	0.00	53.12	74.00	-20.88 Peak
2	2483.500	15.28	23.70	6.85	0.00	45.83	54.00	-8.17 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical:

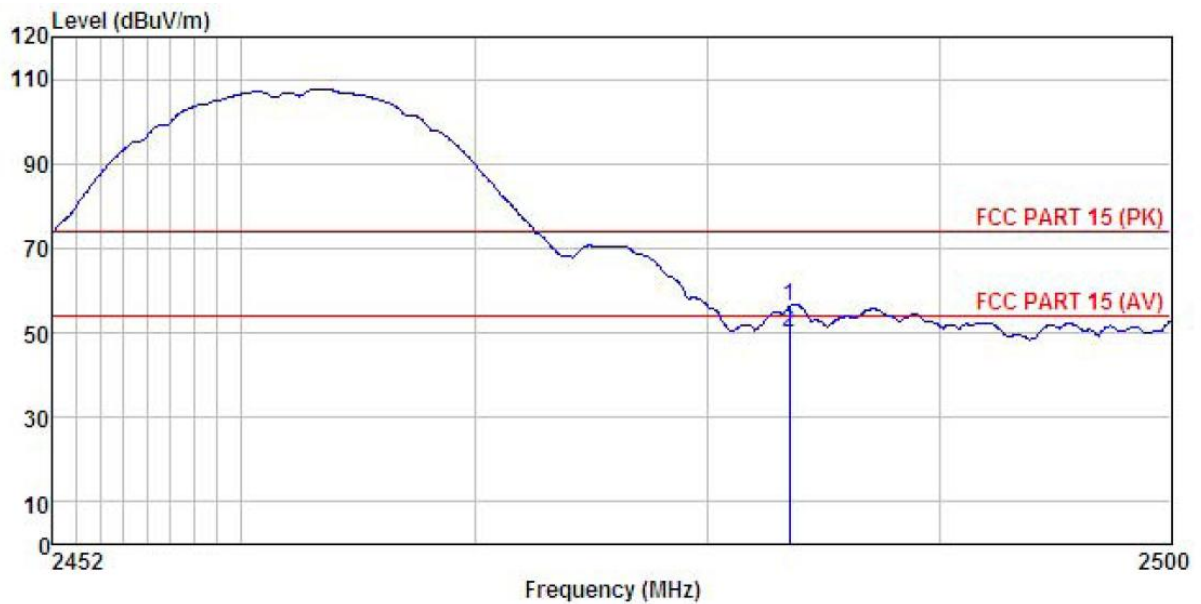

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : B-H mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBuV/m	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	25.73	23.70	6.85	0.00	56.28	74.00	-17.72	Peak
2	2483.500	19.29	23.70	6.85	0.00	49.84	54.00	-4.16	Average


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11g

Test channel: Lowest

Horizontal:

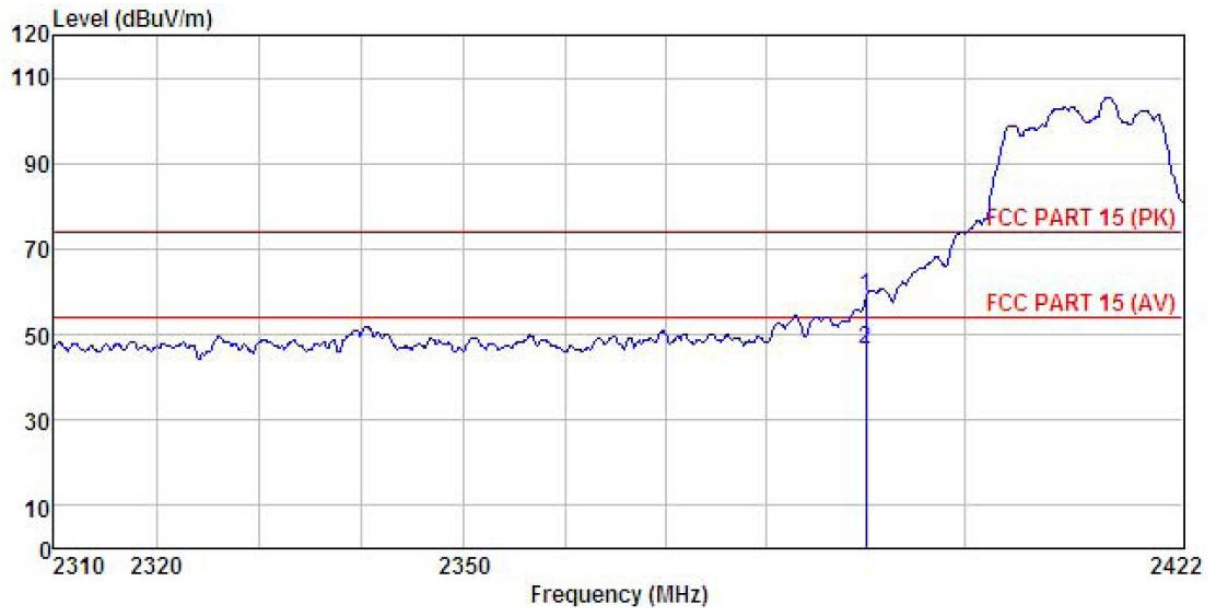


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : G-L mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	28.79	23.68	6.63	0.00	59.10	74.00	-14.90 Peak
2	2390.000	15.97	23.68	6.63	0.00	46.28	54.00	-7.72 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical:

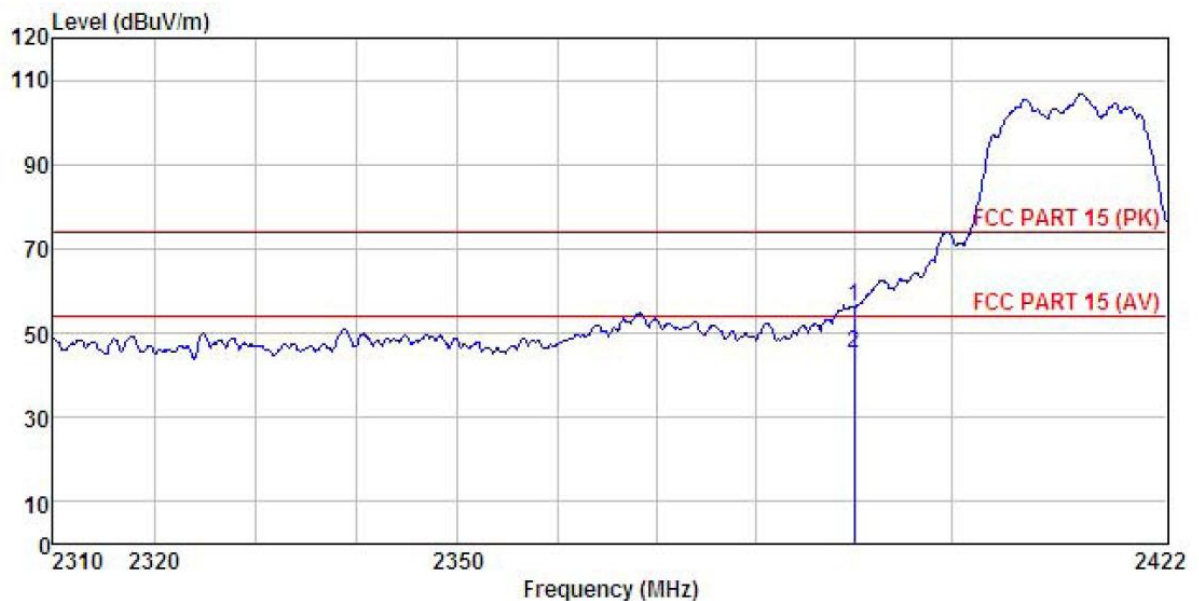

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : G-L mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	25.90	23.68	6.63	0.00	56.21	74.00	-17.79	Peak
2	2390.000	15.00	23.68	6.63	0.00	45.31	54.00	-8.69	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel: Highest

Horizontal:

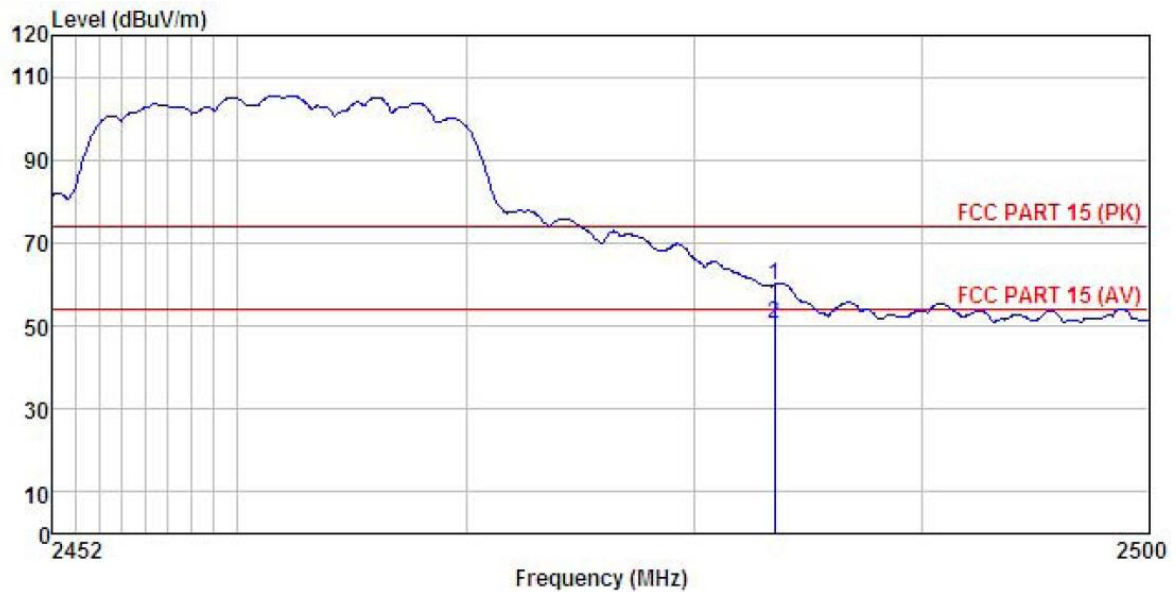


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : G-H mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	29.44	23.70	6.85	0.00	59.99	74.00	-14.01	Peak
2	2483.500	20.02	23.70	6.85	0.00	50.57	54.00	-3.43	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical:

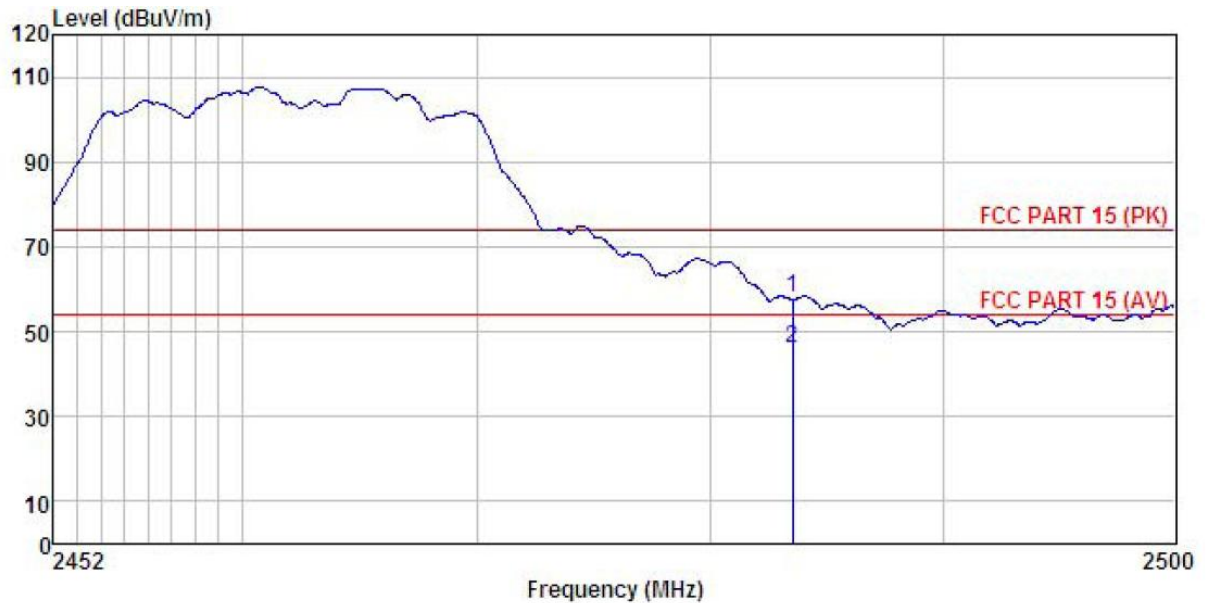

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : G-H mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m dB
1	2483.500	27.39	23.70	6.85	0.00	57.94	74.00 -16.06 Peak
2	2483.500	15.42	23.70	6.85	0.00	45.97	54.00 -8.03 Average


Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n (H20)

Test channel: Lowest

Horizontal:

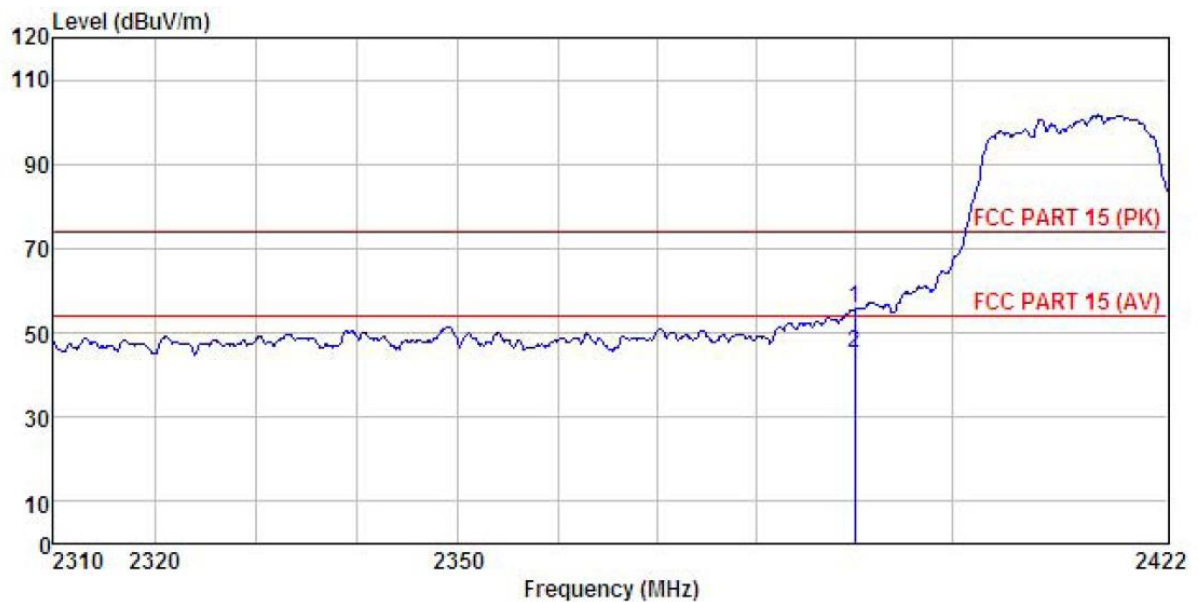


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : N20-L mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	25.32	23.68	6.63	0.00	55.63	74.00	-18.37	Peak
2	2390.000	15.05	23.68	6.63	0.00	45.36	54.00	-8.64	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical:

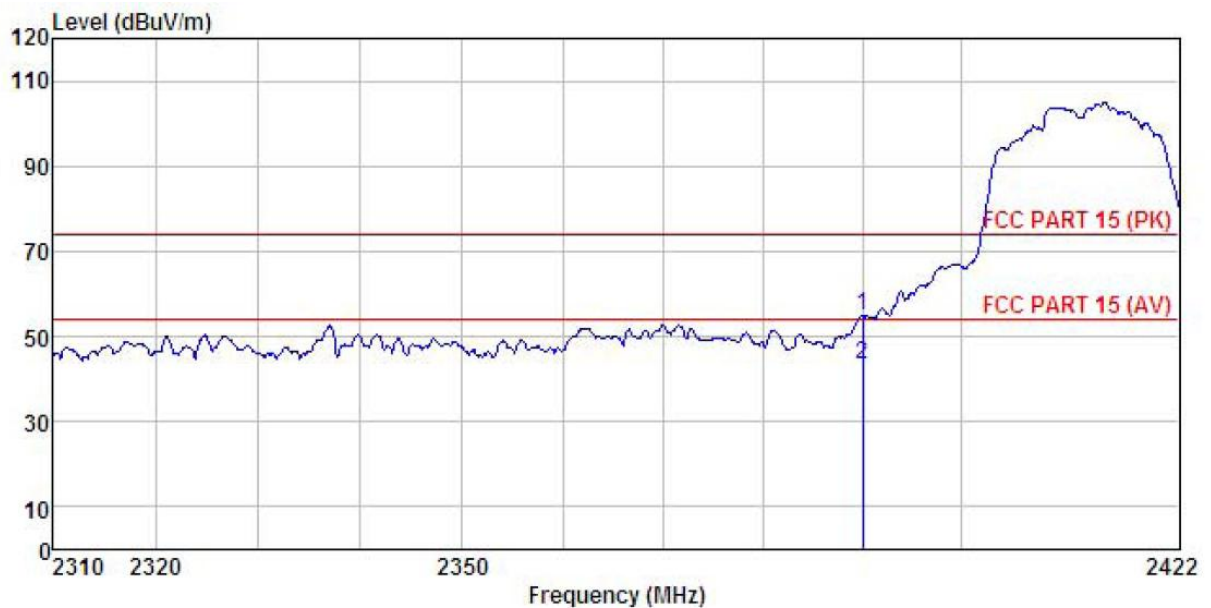

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : N20-L mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	24.43	23.68	6.63	0.00	54.74	74.00	-19.26	Peak
2	2390.000	13.20	23.68	6.63	0.00	43.51	54.00	-10.49	Average

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel: Highest

Horizontal:

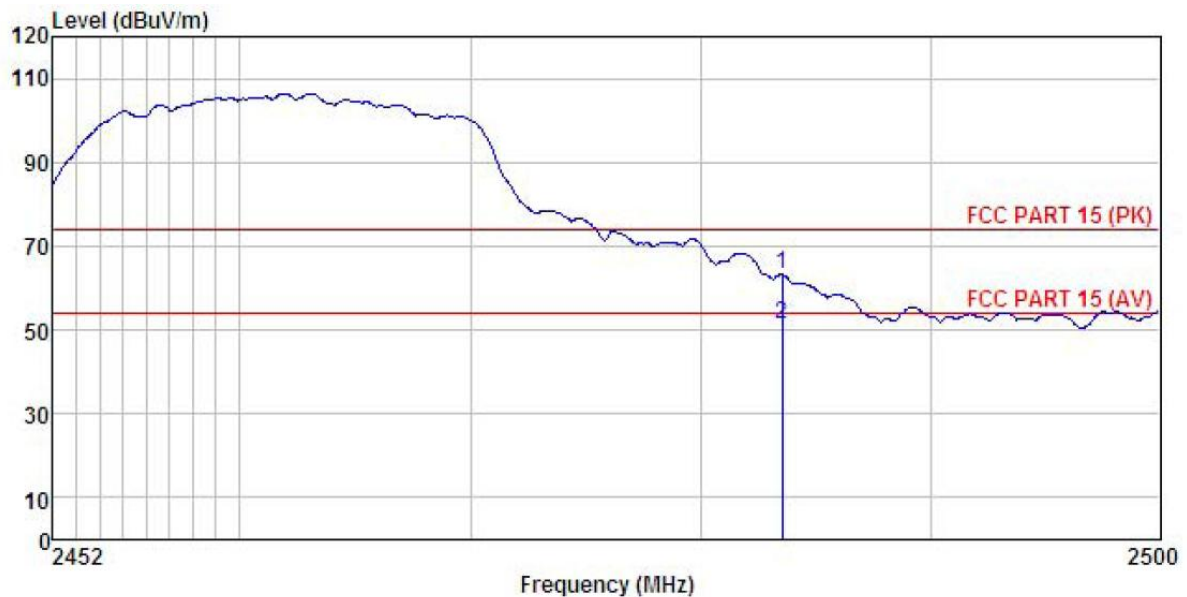


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : N20-H mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	32.60	23.70	6.85	0.00	63.15	74.00	-10.85	Peak
2	2483.500	20.60	23.70	6.85	0.00	51.15	54.00	-2.85	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical:

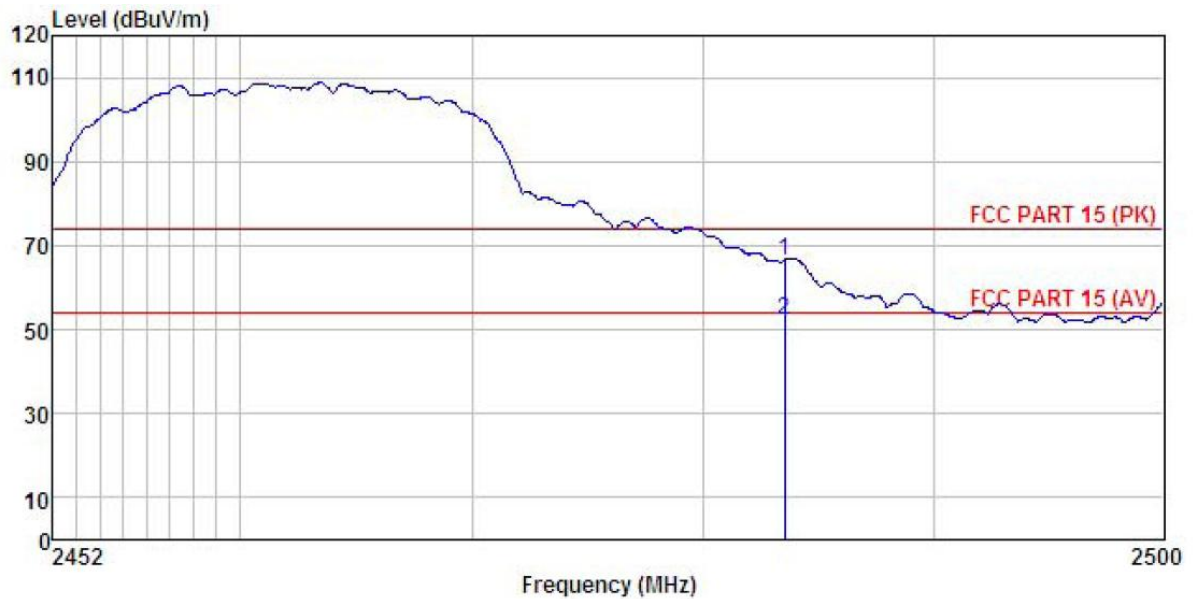

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : N20-H mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	35.92	23.70	6.85	0.00	66.47	74.00	-7.53	Peak
2	2483.500	21.68	23.70	6.85	0.00	52.23	54.00	-1.77	Average


Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n (H40)

Test channel: Lowest

Horizontal:

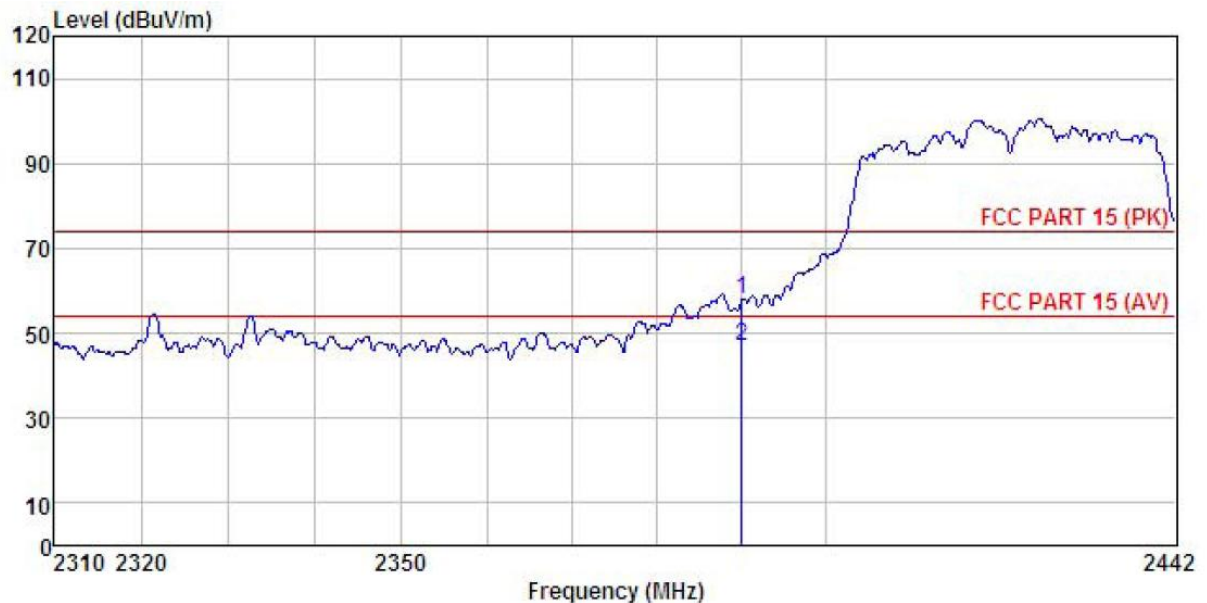


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : N40-L mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	Read	Antenna	Cable	Preamp	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2390.000	27.57	23.68	6.63	0.00	57.88	74.00	-16.12 Peak
2	2390.000	16.48	23.68	6.63	0.00	46.79	54.00	-7.21 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical:

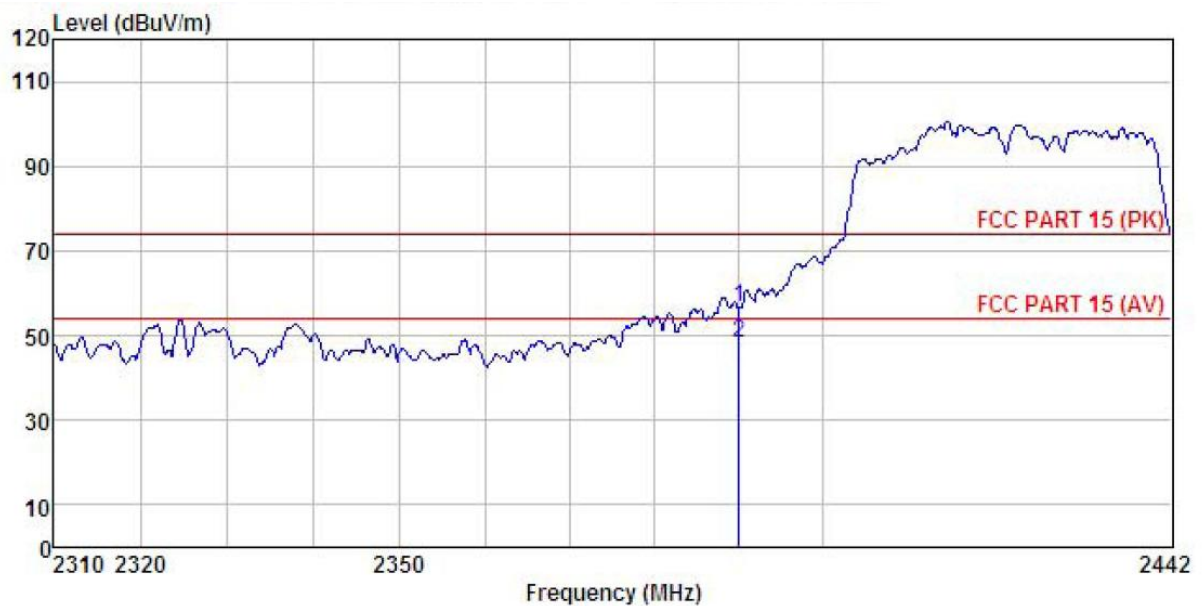

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : N40-L mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	26.32	23.68	6.63	0.00	56.63	74.00	-17.37	Peak
2	2390.000	17.95	23.68	6.63	0.00	48.26	54.00	-5.74	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test channel: Highest

Horizontal:

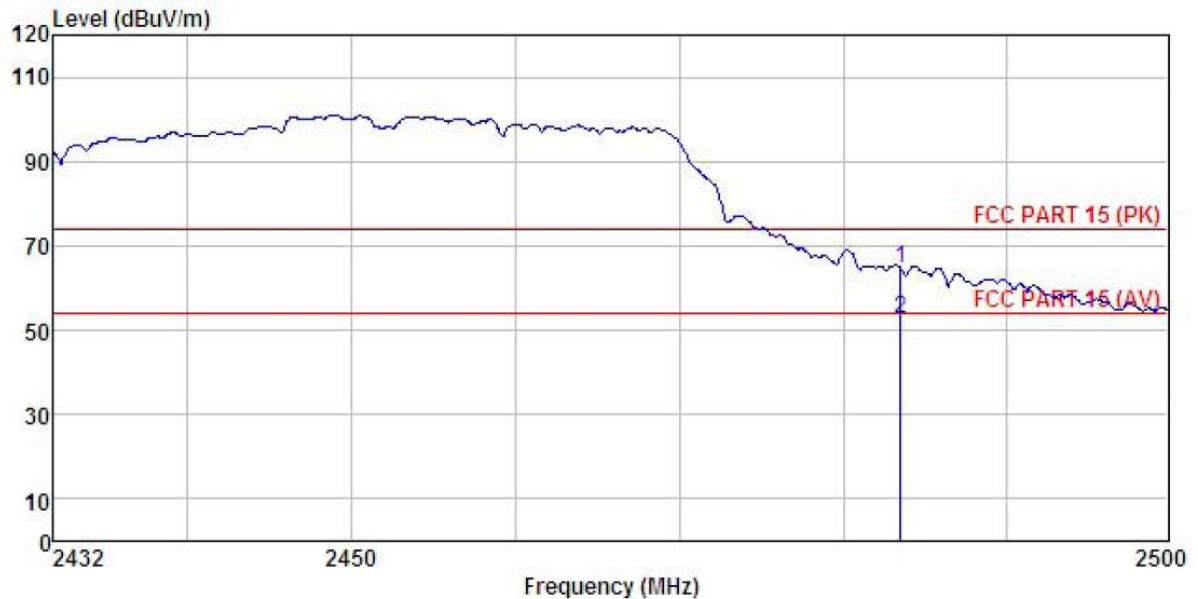


Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : N40-H mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	34.19	23.70	6.85	0.00	64.74	74.00	-9.26	Peak
2	2483.500	22.03	23.70	6.85	0.00	52.58	54.00	-1.42	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical:

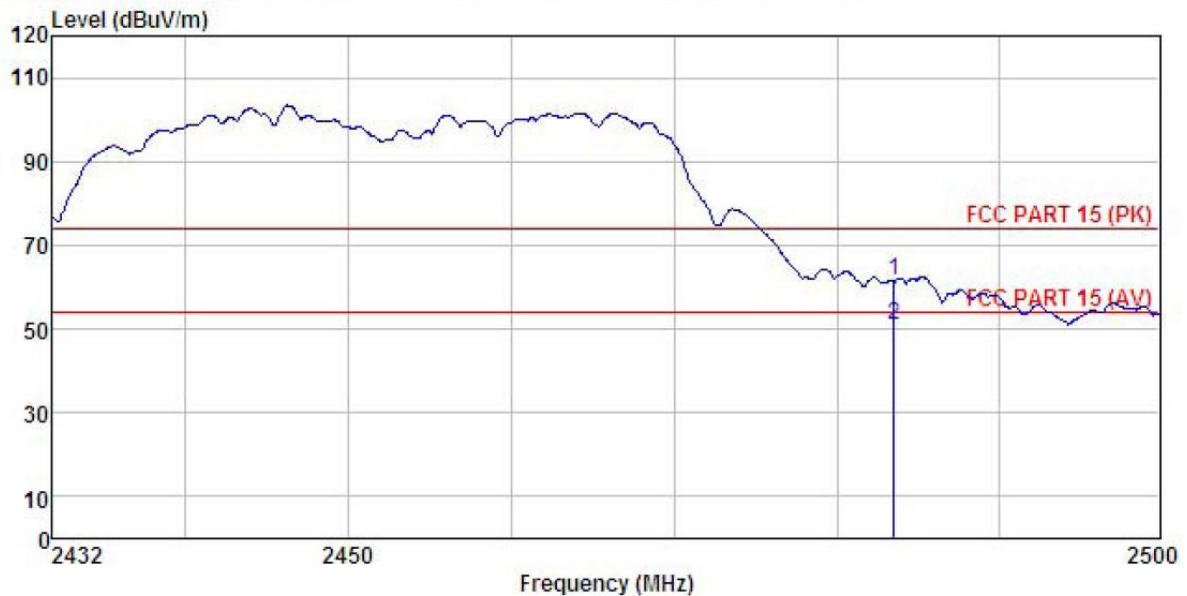

Site : 3m chamber
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : N40-H mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :


	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	30.86	23.70	6.85	0.00	61.41	74.00	-12.59 Peak
2	2483.500	20.17	23.70	6.85	0.00	50.72	54.00	-3.28 Average

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.7 Spurious Emission

6.7.1 Conducted Emission Method

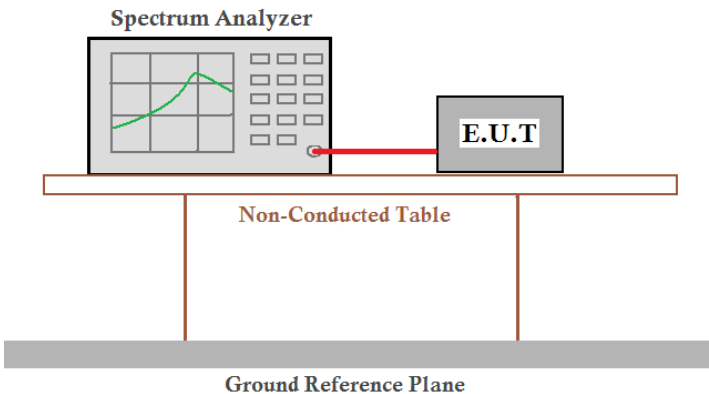
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074v03r05 section 11
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	 The diagram illustrates the test setup for conducted emission measurements. A Spectrum Analyzer is connected to the Equipment Under Test (E.U.T) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by two vertical legs and sits on a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plot as follows:

TX 0

Test mode: 802.11b


Lowest channel

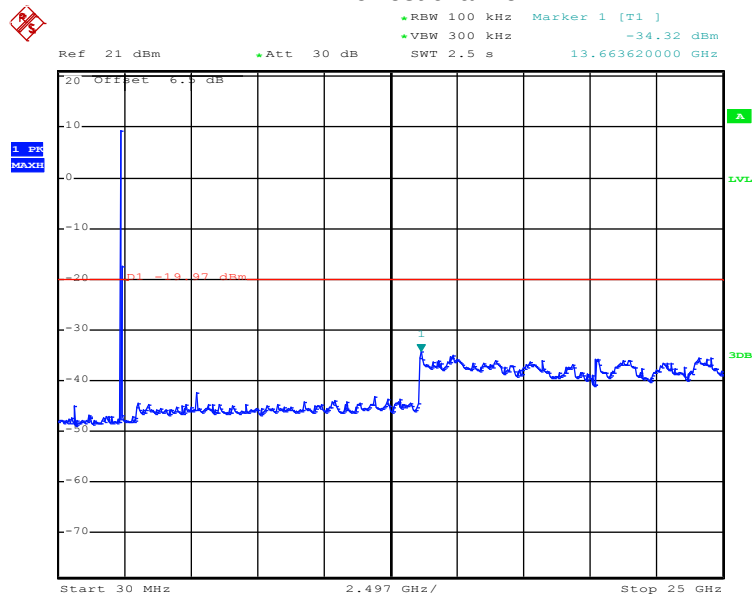

Date: 17.MAY.2016 16:34:44


30MHz~25GHz

Middle channel

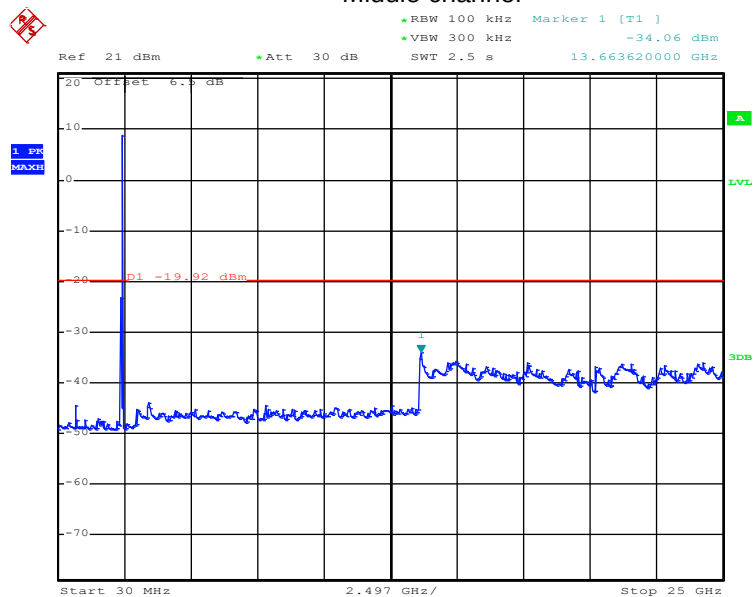

Date: 17.MAY.2016 16:35:37

30MHz~25GHz

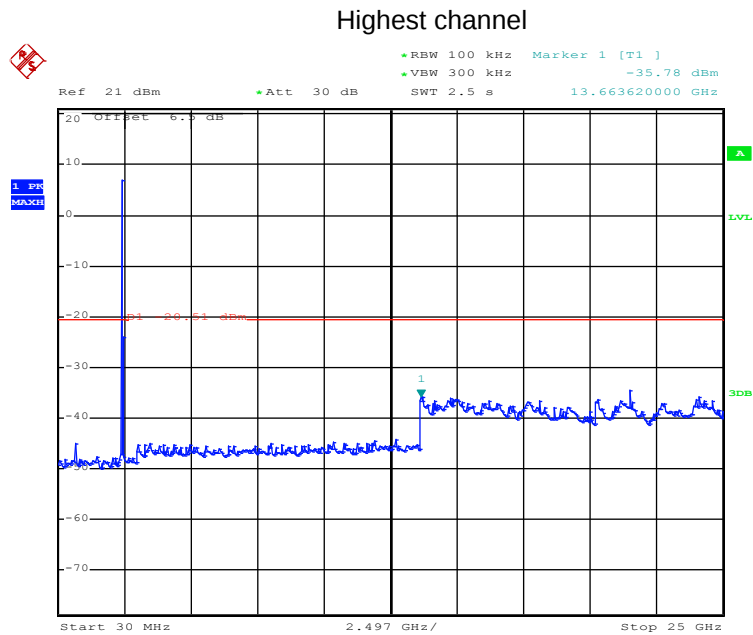


Date: 17.MAY.2016 16:36:18

30MHz~25GHz

Test mode: 802.11g


Lowest channel

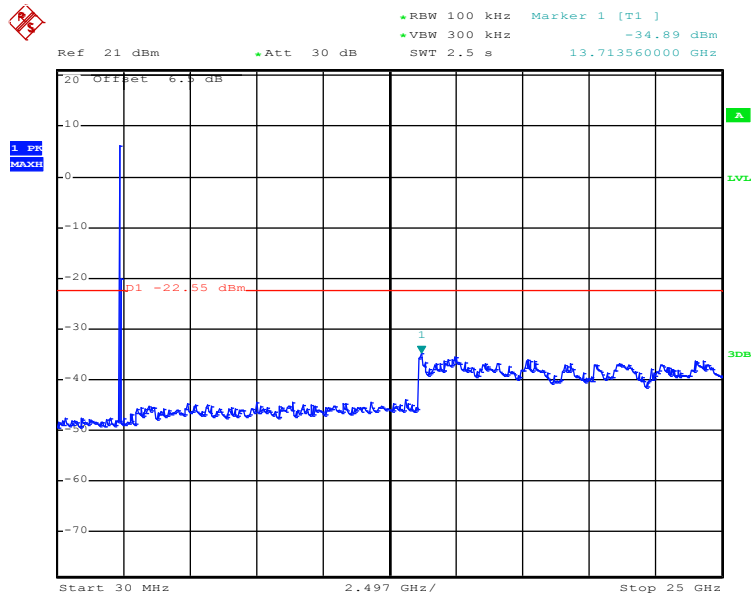

Date: 17.MAY.2016 16:37:14


30MHz~25GHz

Middle channel

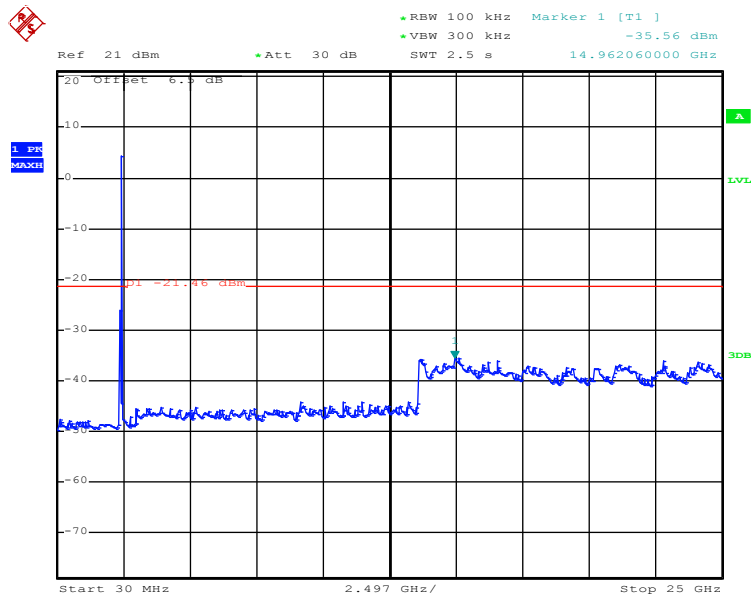

Date: 17.MAY.2016 16:37:54

30MHz~25GHz

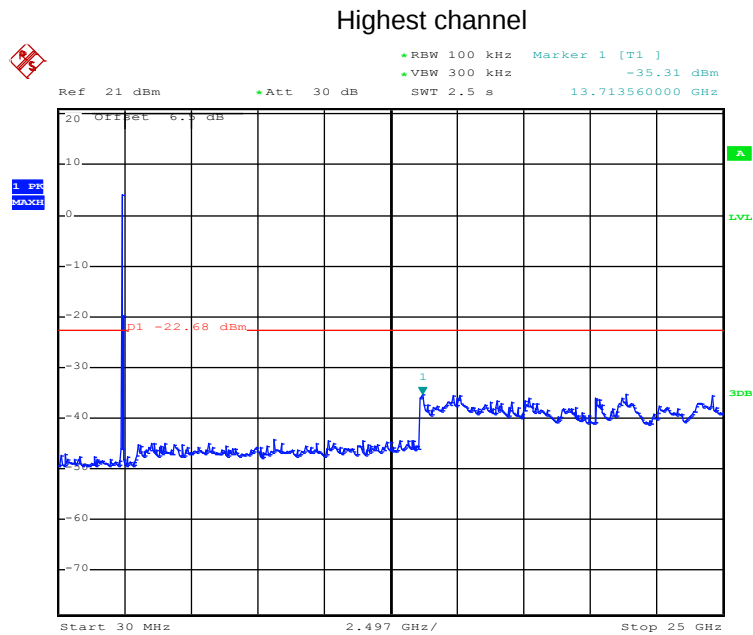


Date: 17.MAY.2016 16:38:33

30MHz~25GHz

Test mode: 802.11n(H20)


Lowest channel

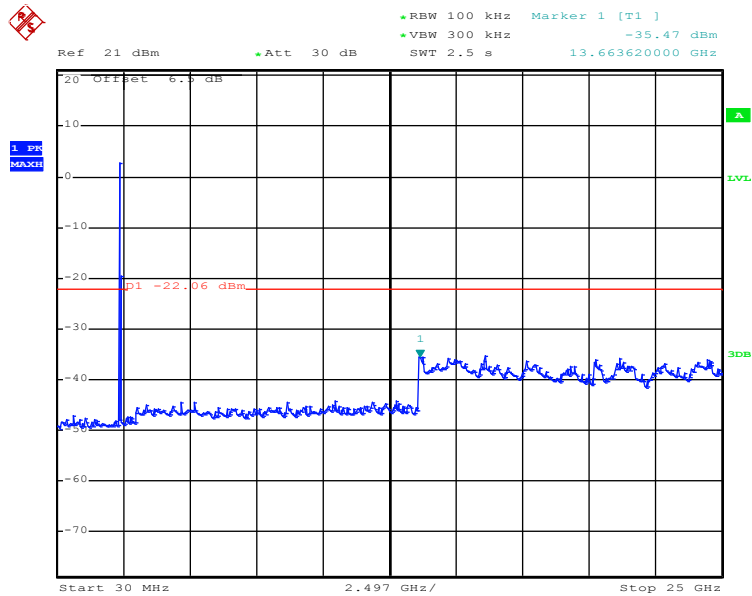

Date: 17.MAY.2016 16:39:24


30MHz~25GHz

Middle channel

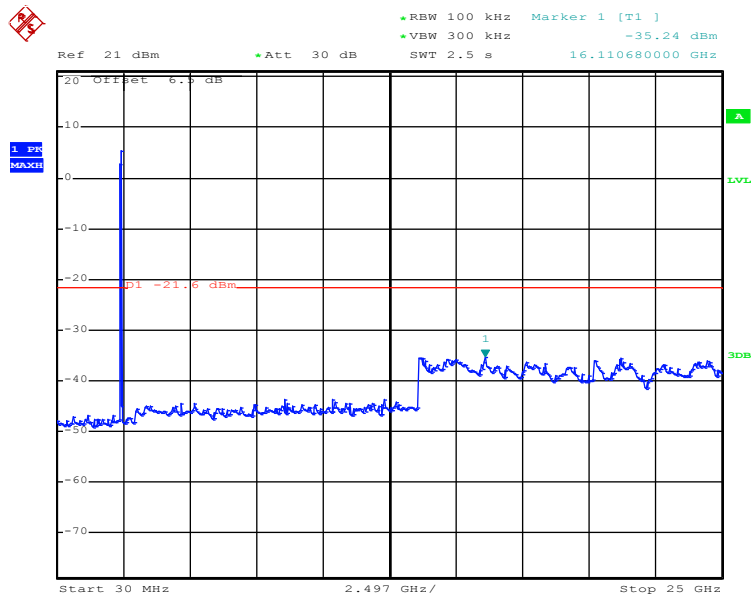

Date: 17.MAY.2016 16:40:07

30MHz~25GHz

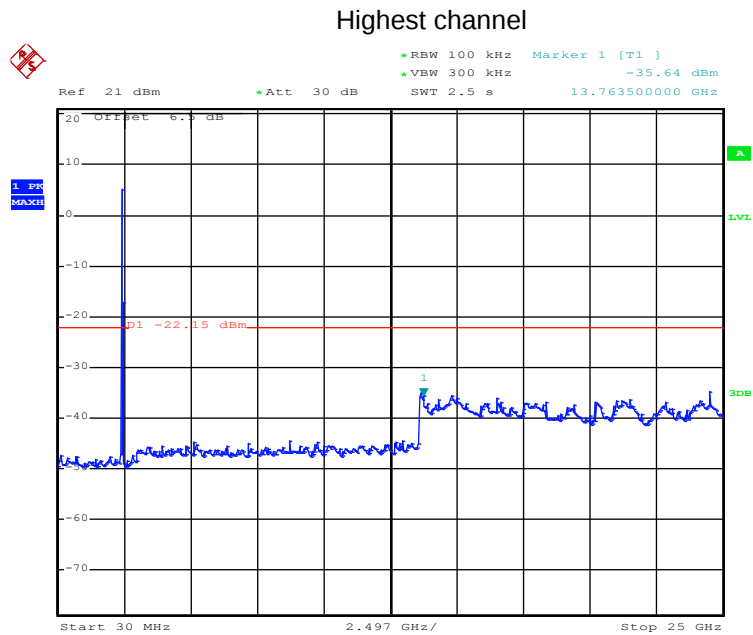


Date: 17.MAY.2016 16:40:45

30MHz~25GHz

Test mode: 802.11n(H40)


Lowest channel

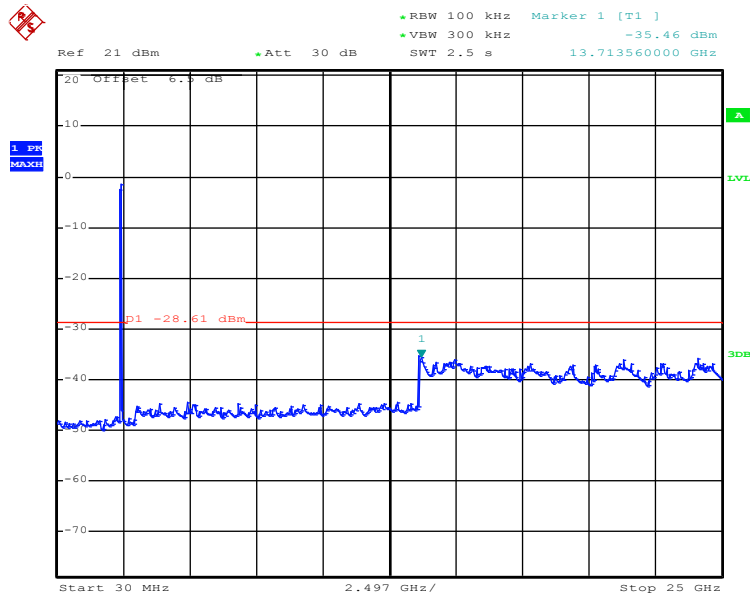

Date: 17.MAY.2016 16:41:43


30MHz~25GHz

Middle channel

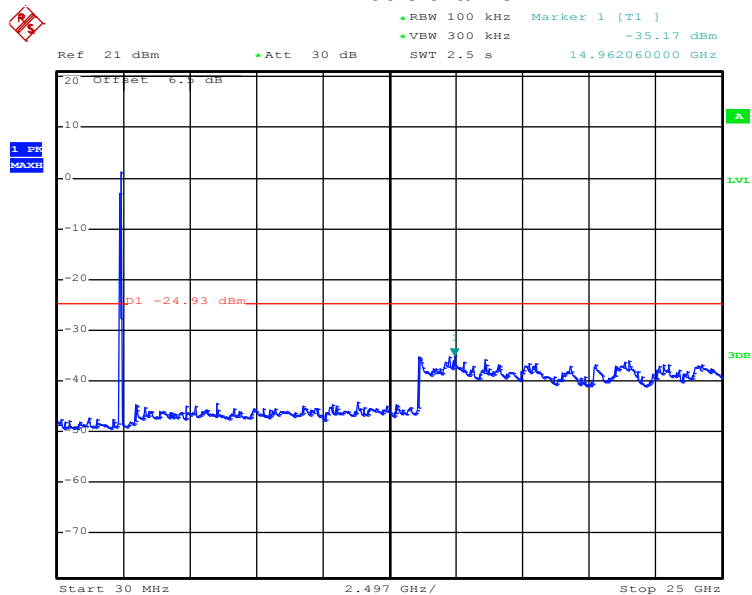

Date: 17.MAY.2016 16:42:36

30MHz~25GHz

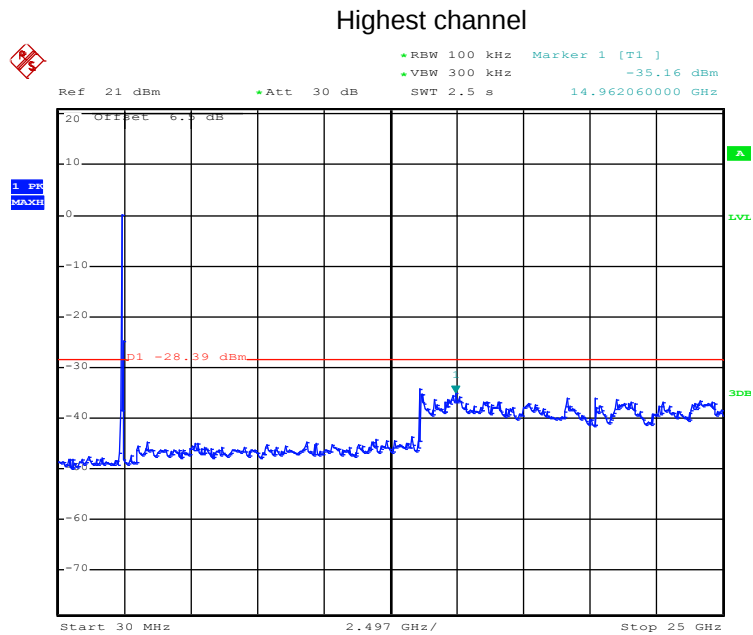


Date: 17.MAY.2016 16:43:22

30MHz~25GHz

TX 1

Test mode: 802.11b


Lowest channel

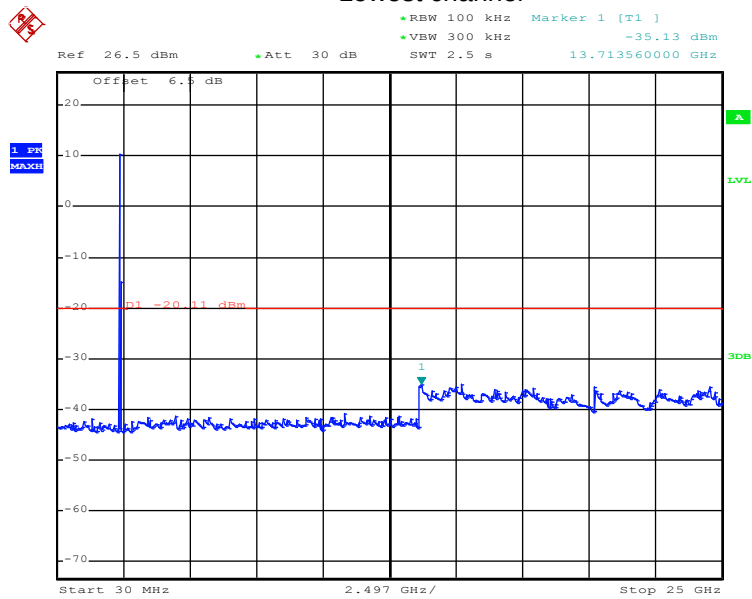

Date: 20.MAY.2016 14:29:47


30MHz~25GHz

Middle channel

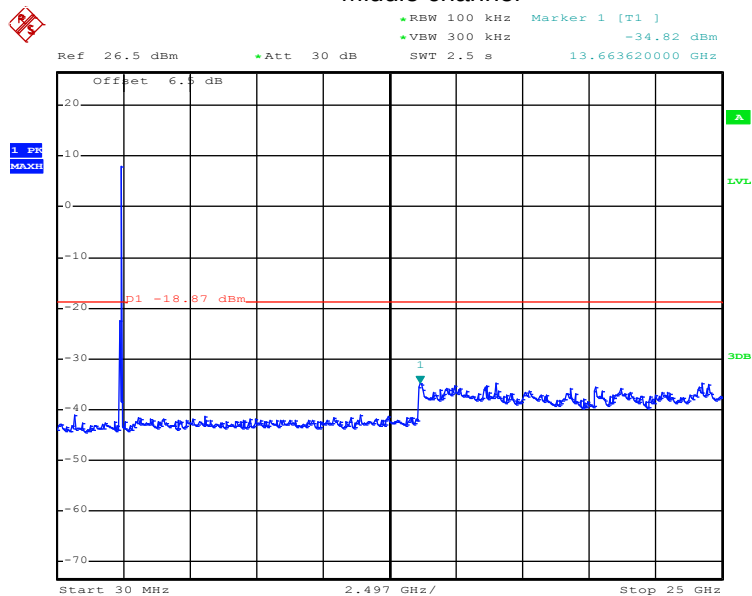

Date: 20.MAY.2016 14:30:37

30MHz~25GHz

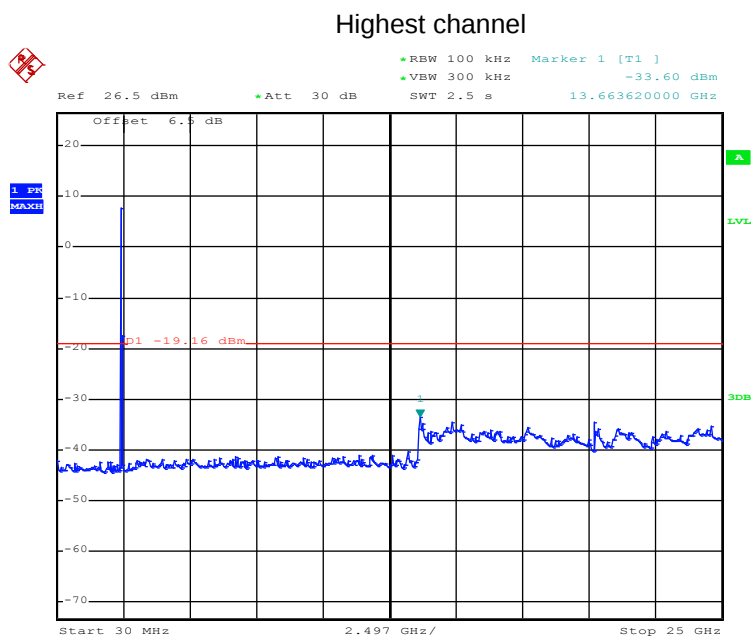


Date: 20.MAY.2016 14:31:24

30MHz~25GHz

Test mode: 802.11g


Lowest channel

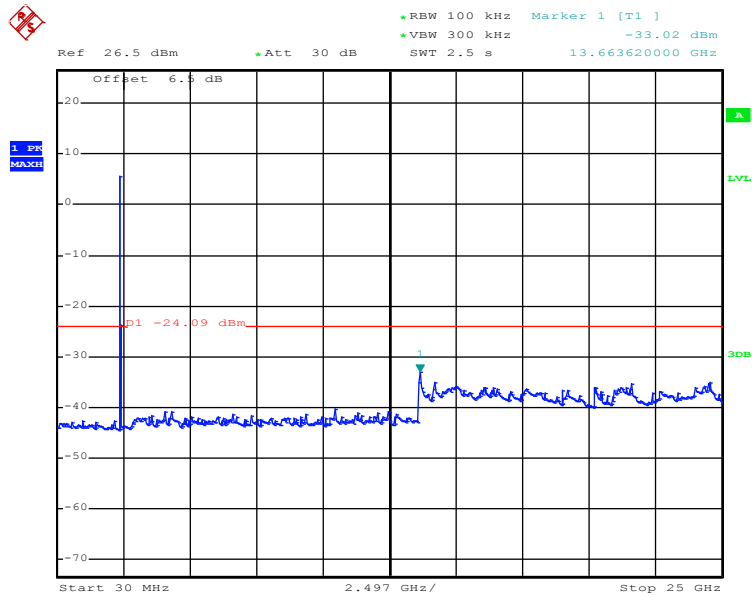

Date: 20.MAY.2016 14:32:11


30MHz~25GHz

Middle channel

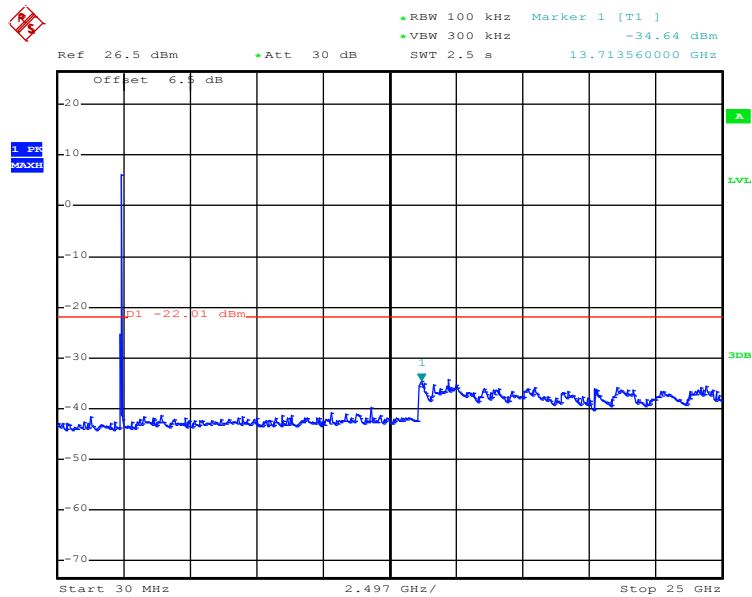

Date: 20.MAY.2016 14:33:04

30MHz~25GHz

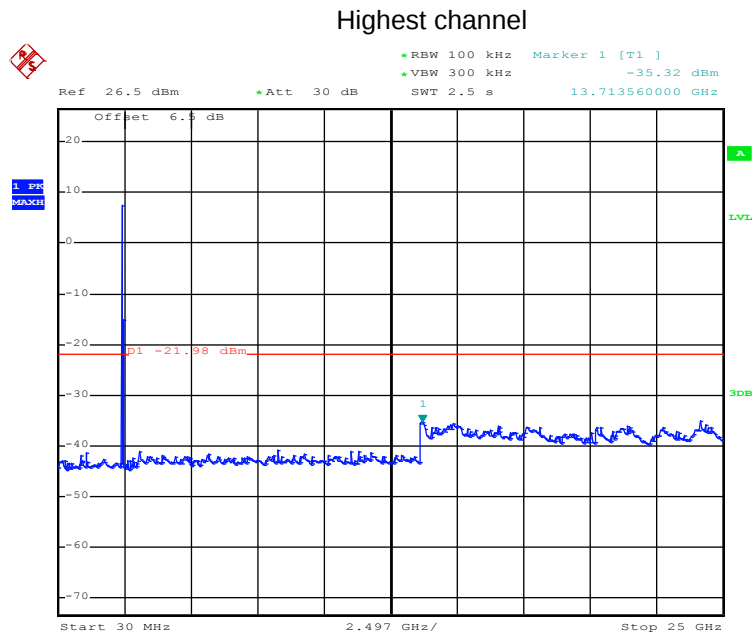


Date: 20.MAY.2016 14:34:39

30MHz~25GHz

Test mode: 802.11n(H20)


Lowest channel

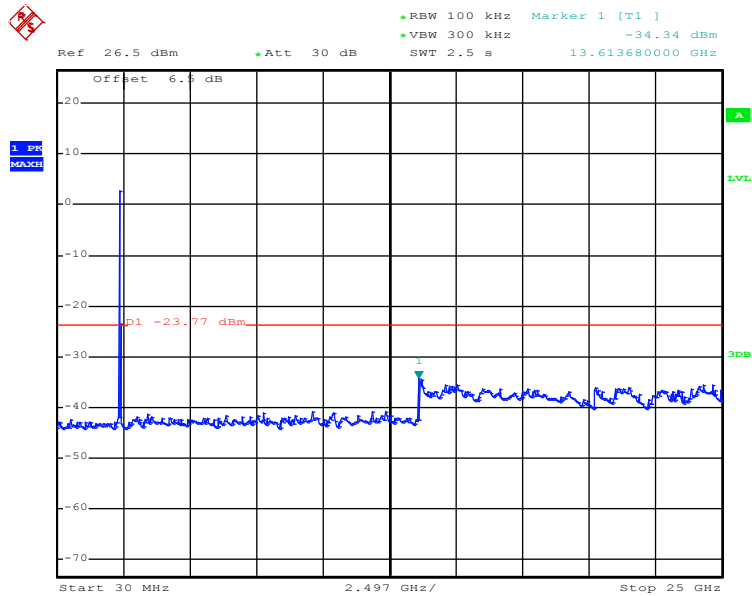

Date: 20.MAY.2016 14:35:27


30MHz~25GHz

Middle channel

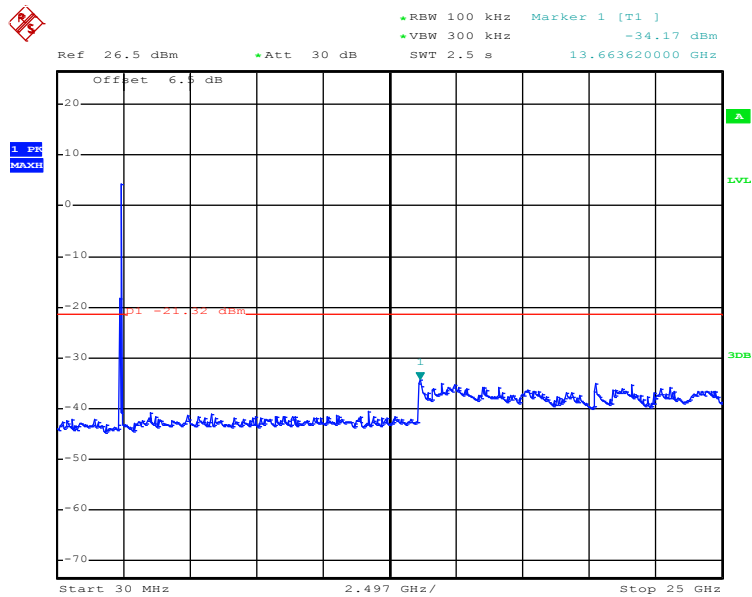

Date: 20.MAY.2016 14:36:16

30MHz~25GHz

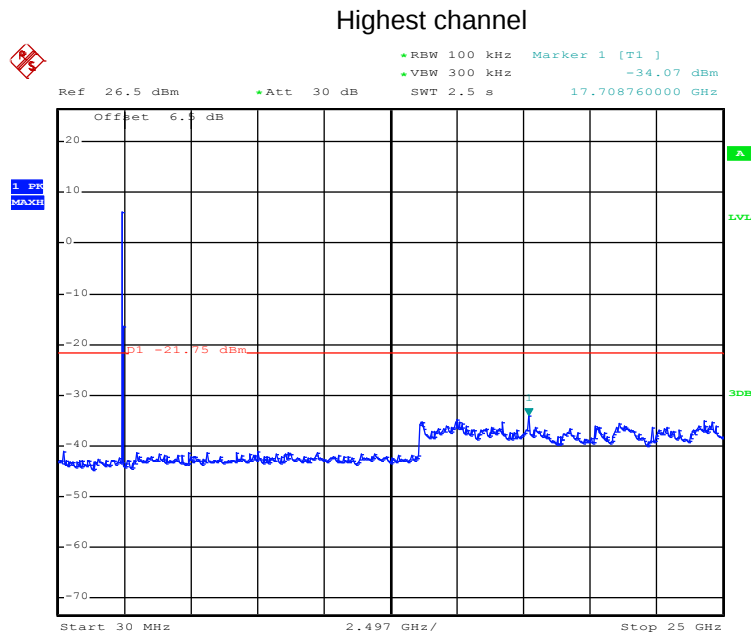


Date: 20.MAY.2016 14:37:06

30MHz~25GHz

Test mode: 802.11n(H40)


Lowest channel

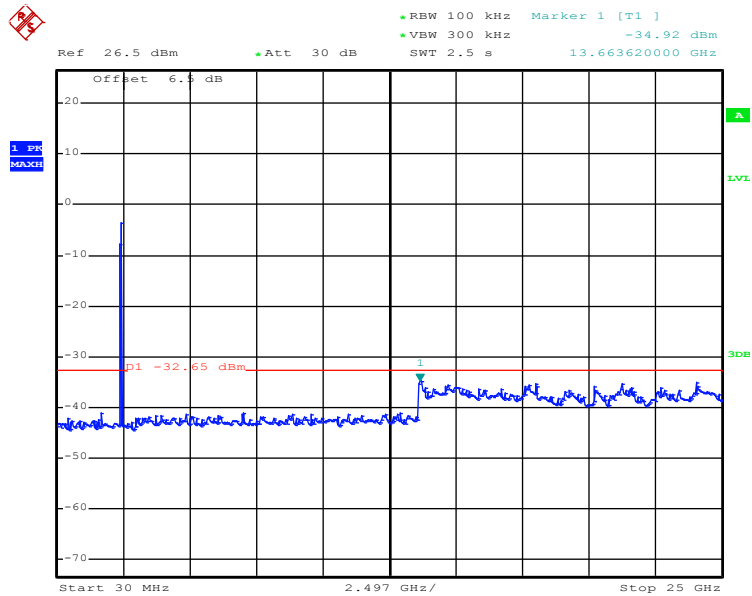

Date: 20.MAY.2016 14:38:04


30MHz~25GHz

Middle channel

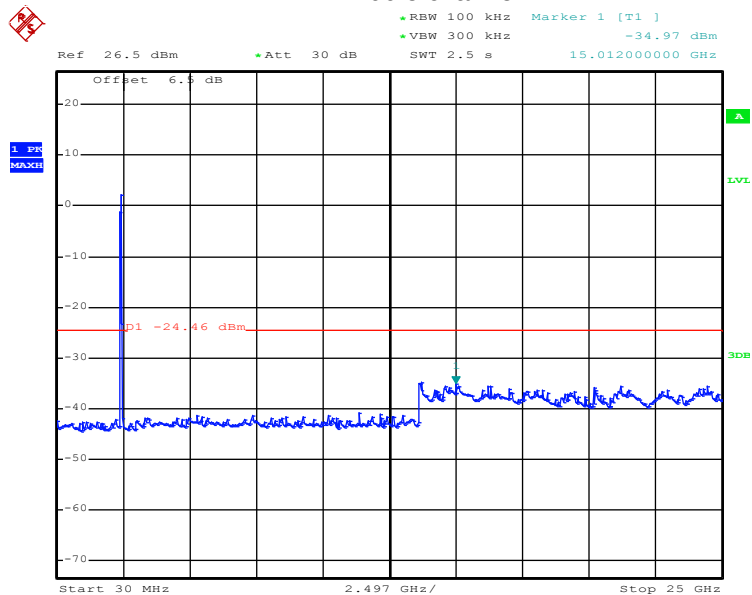

Date: 20.MAY.2016 14:38:51

30MHz~25GHz


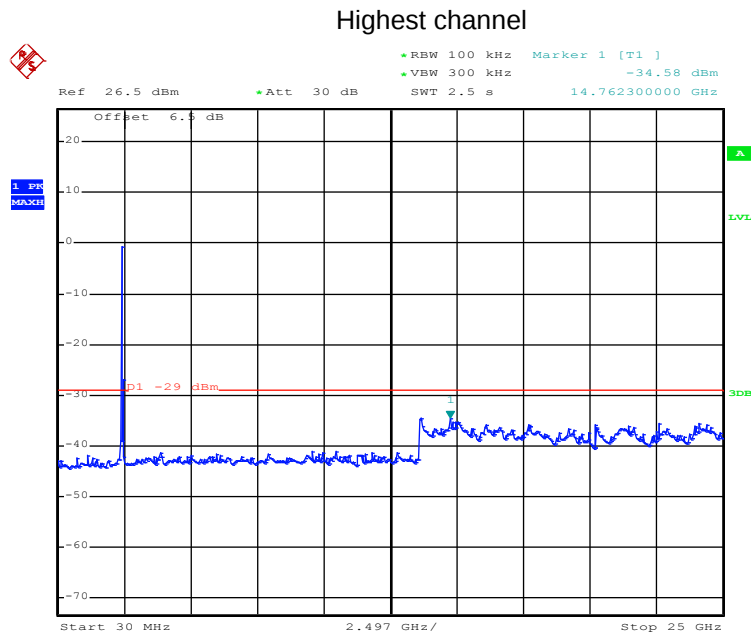


Date: 20.MAY.2016 14:39:40

30MHz~25GHz

6.7.2 Radiated Emission Method


Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
TestFrequencyRange:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	30MHz-88MHz		40.0		Quasi-peak Value
	88MHz-216MHz		43.5		Quasi-peak Value
	216MHz-960MHz		46.0		Quasi-peak Value
	960MHz-1GHz		54.0		Quasi-peak Value
	Above 1GHz		54.0		Average Value
			74.0		Peak Value
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8m (below 1GHz)/1.5m (above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees todetermine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, whichwas mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatablewas turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and SpecifiedBandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limitspecified, then testing could be stopped and the peak values of the EUT wouldbe reported. Otherwise the emissions that did not have 10dB margin would bere-tested one by one using peak, quasi-peak or average method as specified andthen reported in a data sheet.				

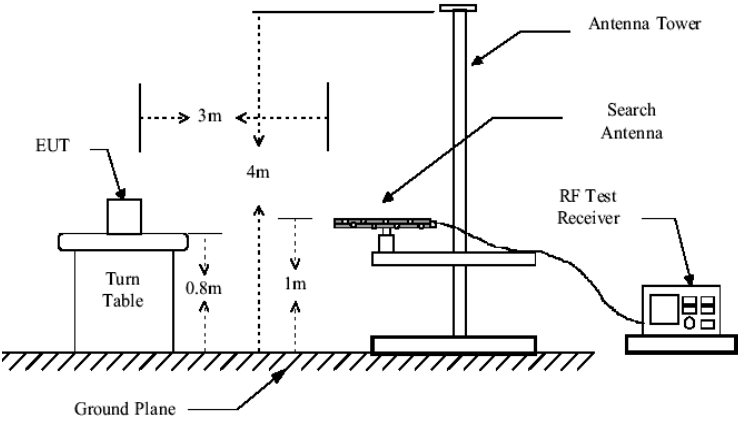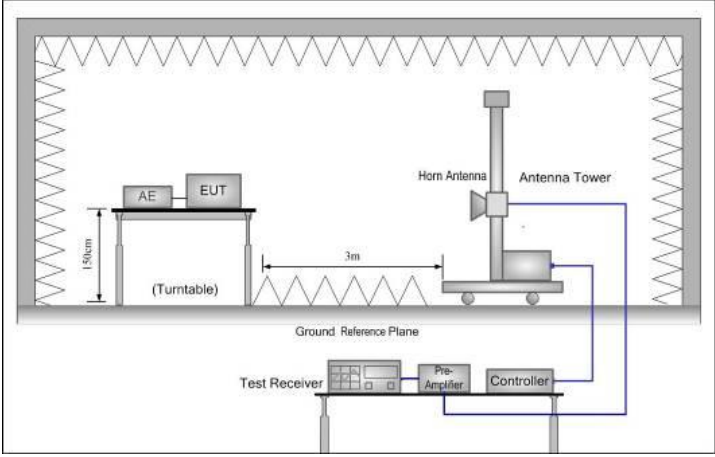Test setup:	Below 1GHz  Above 1GHz 
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case. 2. 9 kHz to 30MHz is too low, so only shows the data of above 30MHz in this report.

MIMO TX mode

Below 1GHz


Horizontal:

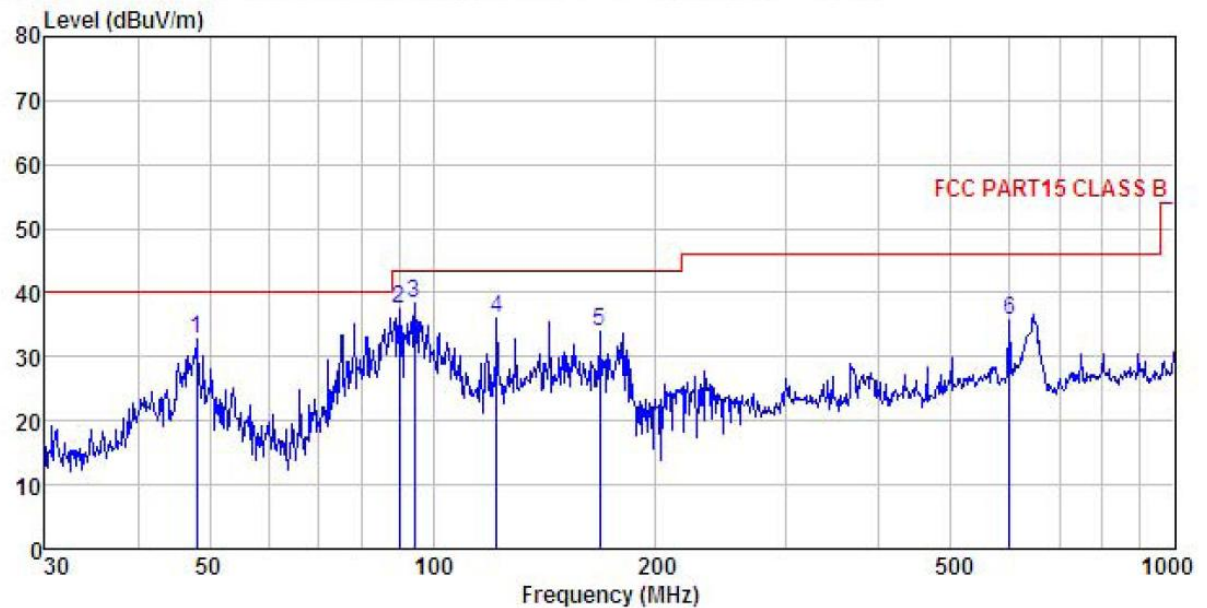

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M3G) HORIZONTAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : TX mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	ReadAntenna	Cable	Preamp	Limit	Over	
	Level	Factor	Loss	Factor	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB
1	47.994	45.20	16.10	1.27	29.84	32.73	40.00 -7.27 QP
2	90.220	56.82	8.20	2.03	29.57	37.48	43.50 -6.02 QP
3	94.428	57.48	8.56	2.01	29.55	38.50	43.50 -5.00 QP
4	121.976	51.34	11.92	2.19	29.38	36.07	43.50 -7.43 QP
5	167.824	50.69	9.82	2.64	29.07	34.08	43.50 -9.42 QP
6	599.321	42.39	18.48	3.94	28.94	35.87	46.00 -10.13 QP

Vertical:

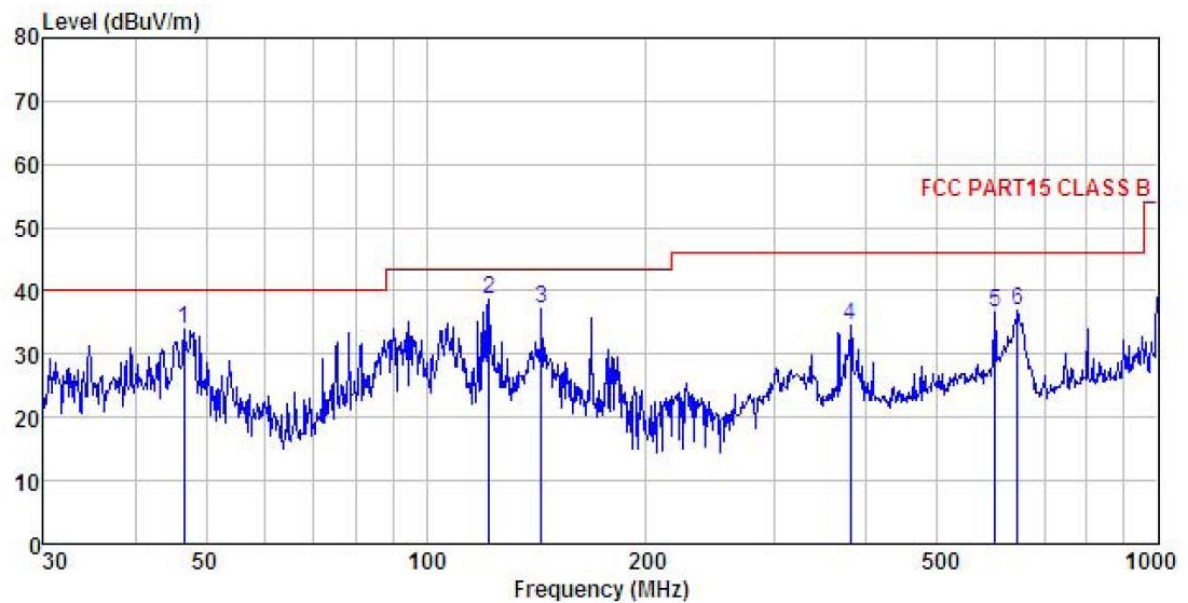

Site : 3m chamber
 Condition : FCC PART15 CLASS B 3m VULB9163(30M3G) VERTICAL
 Pro : 5014
 EUT : Broadband Digital Transmission System
 Model : Lima
 Test mode : TX mode
 Power Rating : AC120V/60Hz
 Environment : Temp:25.5°C Humi:55%
 Test Engineer: MT
 REMARK :

	Freq	ReadAntenna	Cable	Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	46.666	45.57	16.83	1.28	29.85	33.83	40.00	-6.17 QP
2	121.976	54.03	11.92	2.19	29.38	38.76	43.50	-4.74 QP
3	143.830	52.52	11.34	2.44	29.25	37.05	43.50	-6.45 QP
4	379.914	44.97	15.22	3.09	28.69	34.59	46.00	-11.41 QP
5	599.321	43.03	18.48	3.94	28.94	36.51	46.00	-9.49 QP
6	642.861	42.95	18.75	3.87	28.80	36.77	46.00	-9.23 QP

Above 1GHz

Test mode: 802.11b			Test channel: Lowest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4824.00	49.87	36.12	10.60	40.22	56.37	74.00	-17.63	Vertical
4824.00	49.44	36.12	10.60	40.22	55.94	74.00	-18.06	Horizontal
Test mode: 802.11b			Test channel: Lowest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4824.00	43.01	36.12	10.60	40.22	49.51	54.00	-4.49	Vertical
4824.00	42.18	36.12	10.60	40.22	48.68	54.00	-5.32	Horizontal

Test mode: 802.11b			Test channel: Middle			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	48.71	36.32	10.64	40.15	55.52	74.00	-18.48	Vertical
4874.00	47.56	36.32	10.64	40.15	54.37	74.00	-19.63	Horizontal
Test mode: 802.11b			Test channel: Middle			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	42.07	36.32	10.64	40.15	48.88	54.00	-5.12	Vertical
4874.00	41.75	36.32	10.64	40.15	48.56	54.00	-5.44	Horizontal

Test mode: 802.11b			Test channel: Highest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	49.89	36.58	10.70	40.08	57.09	74.00	-16.91	Vertical
4924.00	47.78	36.58	10.70	40.08	54.98	74.00	-19.02	Horizontal
Test mode: 802.11b			Test channel: Highest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	43.27	36.58	10.70	40.08	50.47	54.00	-3.53	Vertical
4924.00	45.66	36.58	10.70	40.08	52.86	54.00	-1.14	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode: 802.11g			Test channel: Lowest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4824.00	50.02	36.12	10.60	40.22	56.52	74.00	-17.48	Vertical
4824.00	49.68	36.12	10.60	40.22	56.18	74.00	-17.82	Horizontal
Test mode: 802.11g			Test channel: Lowest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4824.00	42.17	36.12	10.60	40.22	48.67	54.00	-5.33	Vertical
4824.00	42.03	36.12	10.60	40.22	48.53	54.00	-5.47	Horizontal

Test mode: 802.11g			Test channel: Middle			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	48.54	36.32	10.64	40.15	55.35	74.00	-18.65	Vertical
4874.00	48.12	36.32	10.64	40.15	54.93	74.00	-19.07	Horizontal
Test mode: 802.11g			Test channel: Middle			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	42.27	36.32	10.64	40.15	49.08	54.00	-4.92	Vertical
4874.00	42.18	36.32	10.64	40.15	48.99	54.00	-5.01	Horizontal

Test mode: 802.11g			Test channel: Highest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	49.62	36.58	10.70	40.08	56.82	74.00	-17.18	Vertical
4924.00	48.81	36.58	10.70	40.08	56.01	74.00	-17.99	Horizontal
Test mode: 802.11g			Test channel: Highest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	42.23	36.58	10.70	40.08	49.43	54.00	-4.57	Vertical
4924.00	44.71	36.58	10.70	40.08	51.91	54.00	-2.09	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode: 802.11n(H20)			Test channel: Lowest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	LimitLine (dBuV/m)	Over Limit (dB)	Polar.
4824.00	49.81	36.12	10.60	40.22	56.31	74.00	-17.69	Vertical
4824.00	50.12	36.12	10.60	40.22	56.62	74.00	-17.38	Horizontal
Test mode: 802.11n(H20)			Test channel: Lowest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4824.00	42.27	36.12	10.60	40.22	48.77	54.00	-5.23	Vertical
4824.00	41.87	36.12	10.60	40.22	48.37	54.00	-5.63	Horizontal

Test mode: 802.11n(H20)			Test channel: Middle			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	49.27	36.32	10.64	40.15	56.08	74.00	-17.92	Vertical
4874.00	48.57	36.32	10.64	40.15	55.38	74.00	-18.62	Horizontal
Test mode: 802.11n(H20)			Test channel: Middle			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	43.04	36.32	10.64	40.15	49.85	54.00	-4.15	Vertical
4874.00	42.13	36.32	10.64	40.15	48.94	54.00	-5.06	Horizontal

Test mode: 802.11n(H20)			Test channel: Highest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	50.14	36.58	10.70	40.08	57.34	74.00	-16.66	Vertical
4924.00	49.63	36.58	10.70	40.08	56.83	74.00	-17.17	Horizontal
Test mode: 802.11n(H20)			Test channel: Highest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4924.00	41.28	36.58	10.70	40.08	48.48	54.00	-5.52	Vertical
4924.00	43.34	36.58	10.70	40.08	50.54	54.00	-3.46	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode: 802.11n(H40)			Test channel: Lowest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4844.00	48.75	36.19	10.61	40.19	55.36	74.00	-18.64	Vertical
4844.00	50.26	36.19	10.61	40.19	56.87	74.00	-17.13	Horizontal
Test mode: 802.11n(H40)			Test channel: Lowest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4844.00	41.28	36.19	10.61	40.19	47.89	54.00	-6.11	Vertical
4844.00	42.03	36.19	10.61	40.19	48.64	54.00	-5.36	Horizontal

Test mode: 802.11n(H40)			Test channel: Middle			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	49.81	36.25	10.64	40.17	56.53	74.00	-17.47	Vertical
4874.00	49.04	36.25	10.64	40.17	55.76	74.00	-18.24	Horizontal
Test mode: 802.11n(H40)			Test channel: Middle			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4874.00	42.27	36.25	10.64	40.17	48.99	54.00	-5.01	Vertical
4874.00	42.15	36.25	10.64	40.17	48.87	54.00	-5.13	Horizontal

Test mode: 802.11n(H40)			Test channel: Highest			Remark: Peak		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4904.00	49.83	36.51	10.69	40.10	56.93	74.00	-17.07	Vertical
4904.00	49.72	36.51	10.69	40.10	56.82	74.00	-17.18	Horizontal
Test mode: 802.11n(H40)			Test channel: Highest			Remark: Average		
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polar.
4904.00	42.28	36.51	10.69	40.10	49.38	54.00	-4.62	Vertical
4904.00	43.91	36.51	10.69	40.10	51.01	54.00	-2.99	Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

TCB**GRANT OF EQUIPMENT
AUTHORIZATION****TCB**

Certification
Issued Under the Authority of the
Federal Communications Commission
By:

Nemko North America, INC.
303 River Road
Ottawa, Ontario, K1V 1H2
Canada

Date of Grant: 10/27/2016
Application Dated: 10/27/2016

8devices
Gedimino 47
Kaunas, 44242
Lithuania

Attention: Jonas Sabaliauskas , Director

NOT TRANSFERABLE

EQUIPMENT AUTHORIZATION is hereby issued to the named GRANTEE, and is VALID ONLY for the equipment identified hereon for use under the Commission's Rules and Regulations listed below.

FCC IDENTIFIER: Z9W-CM4

Name of Grantee: 8devices

Equipment Class: Digital Transmission System

Notes: Broadband Digital Transmission System

Modular Type: Limited Single Modular

<u>Grant Notes</u>	<u>FCC Rule Parts</u>	<u>Frequency Range (MHZ)</u>	<u>Output Watts</u>	<u>Frequency Tolerance</u>	<u>Emission Designator</u>
MO	15C	2412.0 - 2462.0	0.1811		
MO	15C	2422.0 - 2452.0	0.175		

Limited Single Modular Approval. Power output listed is conducted. Approval is limited to OEM installation only. Compliance of this device in all final host configurations is the responsibility of the Grantee. This modular can only be used for mobile and fixed applications, with a host antenna circuit trace layout design in strict compliance with the OEM instructions provided. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other transmitter. OEM integrators must be provided with host antenna circuit trace layout design, antenna installation instructions, and labeling requirements for finished products. OEM integrators and End-users must be provided with transmitter operation conditions for satisfying RF exposure compliance.

MO: This Multiple Input Multiple Output (MIMO) device was evaluated for multiple transmitted signals as indicated in the filing.