

FCC Test Report

FCC ID : 2AEIM-1509516
Equipment : Rear Endpoint
Brand Name : Tesla
Model Name : 1509516
Applicant : Tesla Motors, Inc.
3500 Deer Creek Road Palo Alto, California US 94304
United States Of America
Manufacturer : Tesla Motors, Inc.
3500 Deer Creek Road Palo Alto, California US 94304
United States Of America
Standard : 47 CFR FCC Part 15.247

The product was received on Oct. 28, 2019, and testing was started from Oct. 29, 2019 and completed on Oct. 30, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

1.1 Information.....5

1.2 Testing Applied Standards7

1.3 Testing Location Information7

1.4 Measurement Uncertainty8

2 TEST CONFIGURATION OF EUT.....9

2.1 Test Condition9

2.2 Test Channel Mode9

2.3 The Worst Case Measurement Configuration.....10

2.4 Support Equipment.....11

2.5 Test Setup Diagram12

3 TRANSMITTER TEST RESULT13

3.1 AC Power-line Conducted Emissions13

3.2 DTS Bandwidth.....15

3.3 Maximum Conducted Output Power16

3.4 Power Spectral Density18

3.5 Emissions in Non-restricted Frequency Bands19

3.6 Emissions in Restricted Frequency Bands.....20

4 TEST EQUIPMENT AND CALIBRATION DATA.....24

APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS

APPENDIX B. TEST RESULTS OF DTS BANDWIDTH

APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER

APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY

APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS

APPENDIX G. TEST PHOTOS

PHOTOGRAPHS OF EUT V01



History of this test report

Report No.	Version	Description	Issued Date
FR902513AL	01	Initial issue of report	Dec. 10, 2019



Summary of Test Result

Report Clause	Ref.Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and explanations:
None

Reviewed by: Sam Tsai

Report Producer: Yunha Liou

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number
2400-2483.5	LE	2402-2480	0-39 [40]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	BT-LE(1Mbps)	1.0	1TX

Note:

- ♦ Bluetooth LE uses a GFSK (1Mbps) modulation for DSSS.
- ♦ BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	1	-	-	PCB	I-PEX	6.5

Note 1: The EUT has one antenna.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)


Ant. 1 (port 1) could transmit/receive.

1.1.3 EUT Information

Operational Condition	
EUT Power Type	DC Power Supply
EUT Function	<input checked="" type="checkbox"/> Point-to-multipoint <input type="checkbox"/> Point-to-point
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device)
	Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems)
	Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:



1.1.4 Mode Test Duty Cycle

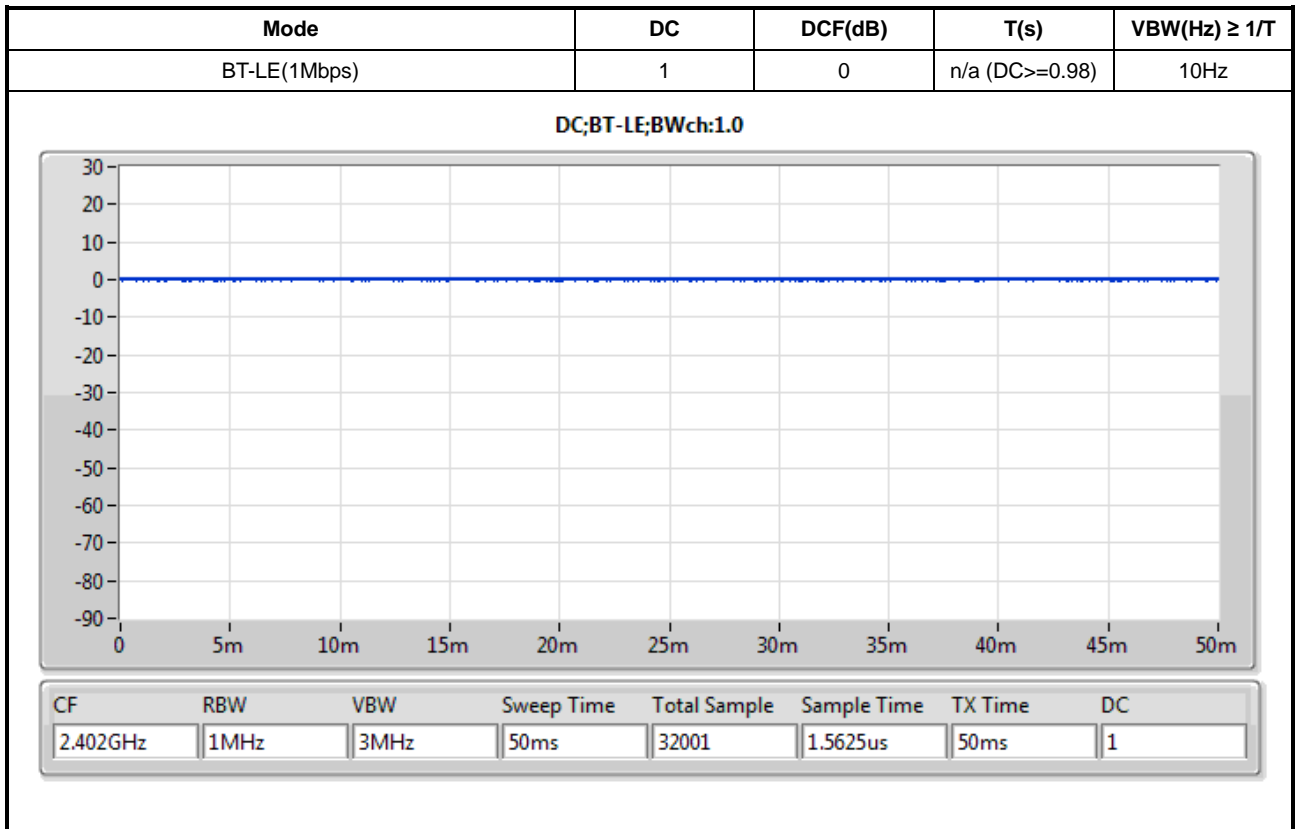

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013
- ◆ KDB 558074 D01 v05r02
- ◆ KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location			
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.			
<input type="checkbox"/>	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.)	
		TEL : 886-3-656-9065	FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.			

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Edward	22.5~24.8°C / 68.2~72.3%	Oct/29/2019
RF Conducted	TH06-HY	Jerry	21.4~23.3°C / 65~69%	Oct/29/2019
Radiated	03CH03-HY	Patrick	23.5~24.8°C / 53.2~54.8%	Oct/30/2019



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.54 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	1.6 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Condition

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	120V

2.2 Test Channel Mode




Test Software Version	BTool v1.41.11
-----------------------	----------------

Mode	Power Setting
BT-LE(1Mbps)	-
2402MHz	0xC
2440MHz	0xC
2480MHz	0xC

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	Continuously Transmits
1	DC power supply Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	Continuously Transmits		
1	DC power supply Mode		
Operating Mode > 1GHz	Continuously Transmits		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT	V		

2.4 Support Equipment



Reminder: Regarding to more detail and other information, please refer to user manual.

Support Equipment – AC Conduction/ Radiated Emission				
No.	Equipment	Brand Name	Model Name	FCC ID
1	DC Power Supply	GW	GPC-6030D	-

Support Equipment – RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	HP	-	-
2	Adapter for NB	HP	-	-
3	DC Power Supply	GW	GPS-3030DD	-
4	Fixture	-	-	-

Note: Support equipment No.1 . No.2 and No.4 were provided by customer.

2.5 Test Setup Diagram

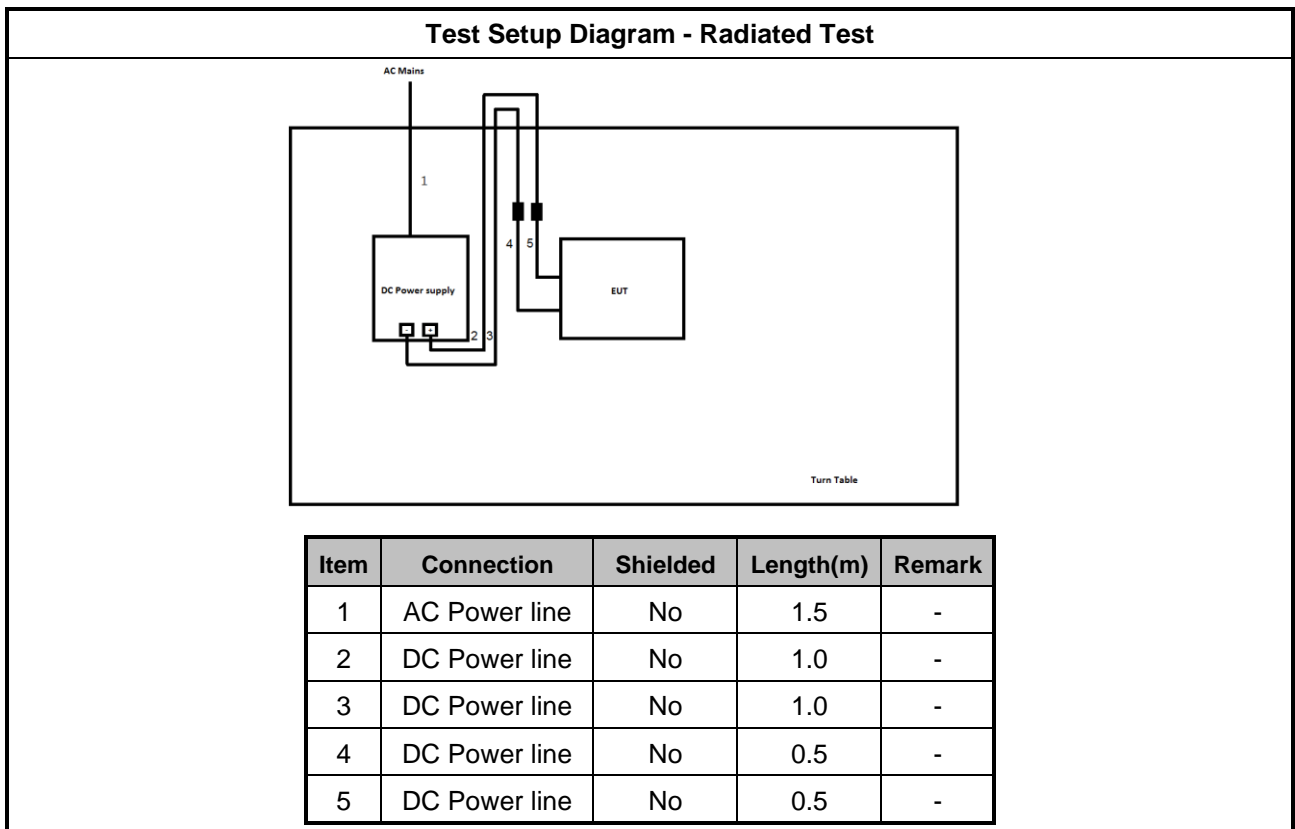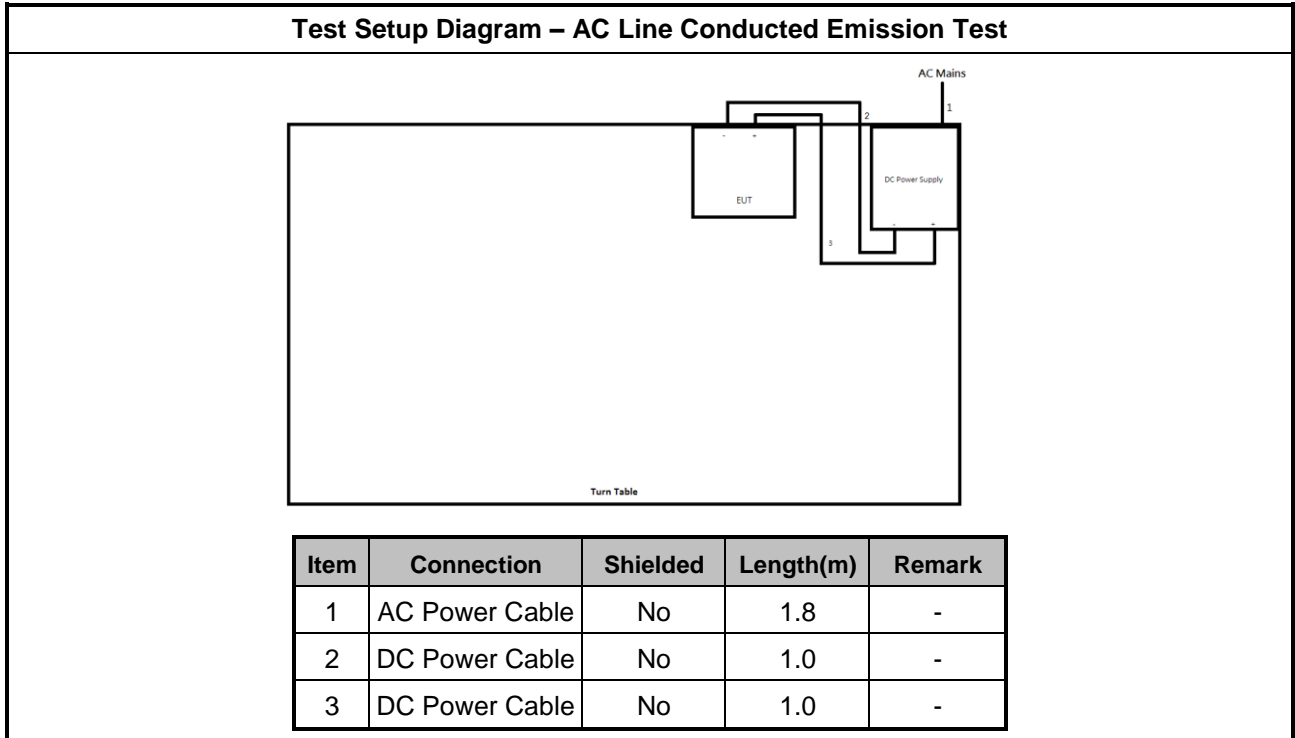

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 6.2 foray power-line conducted emissions.

3.1.4 Test Setup

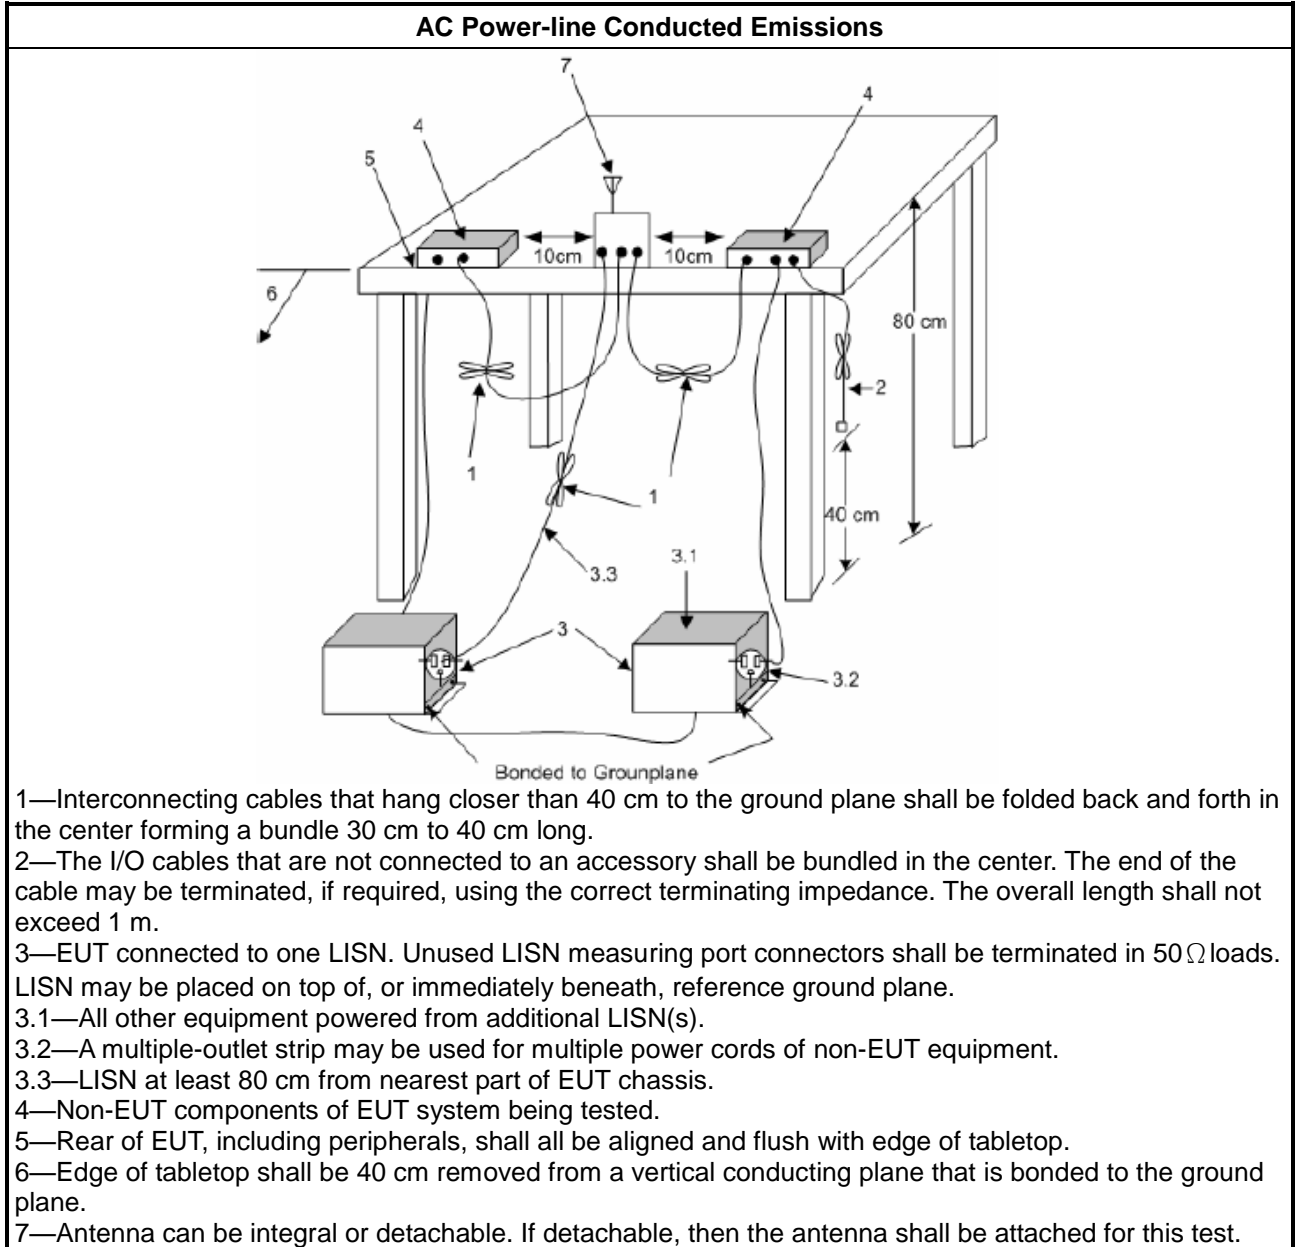

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<ul style="list-style-type: none"> ▪ 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<ul style="list-style-type: none"> ▪ For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.2 (11.8 of ANSI C63.10) DTS bandwidth measurement.
<input type="checkbox"/> Refer as RSS-Gen, clause 6.7 for occupied bandwidth testing.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

3.2.4 Test Setup

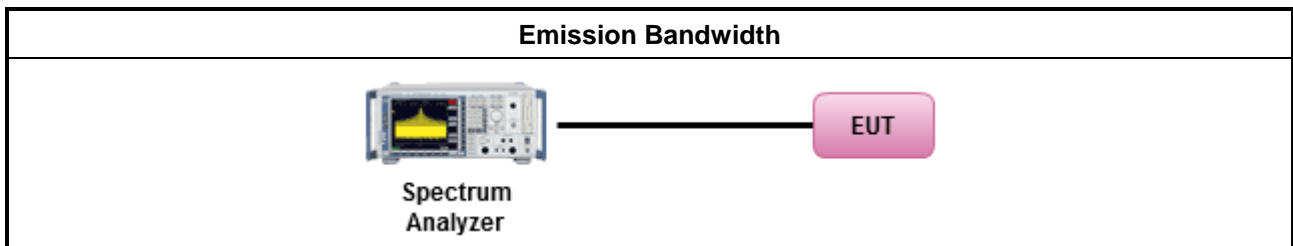

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	<ul style="list-style-type: none"> ▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS):
	<ul style="list-style-type: none"> - Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:	
	<ul style="list-style-type: none"> ▪ 2400-2483.5 MHz Band
	<ul style="list-style-type: none"> ▪ Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	<ul style="list-style-type: none"> ▪ Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	<ul style="list-style-type: none"> ▪ Smart antenna system (SAS)
	<ul style="list-style-type: none"> - Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<ul style="list-style-type: none"> - Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<ul style="list-style-type: none"> - Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
<ul style="list-style-type: none"> ▪ Maximum Peak Conducted Output Power 	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
<ul style="list-style-type: none"> ▪ Maximum Average Conducted Output Power 	
<input type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
<input checked="" type="checkbox"/>	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
<ul style="list-style-type: none"> ▪ For conducted measurement. 	
<ul style="list-style-type: none"> ▪ If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. 	
<ul style="list-style-type: none"> ▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$ 	

3.3.4 Test Setup

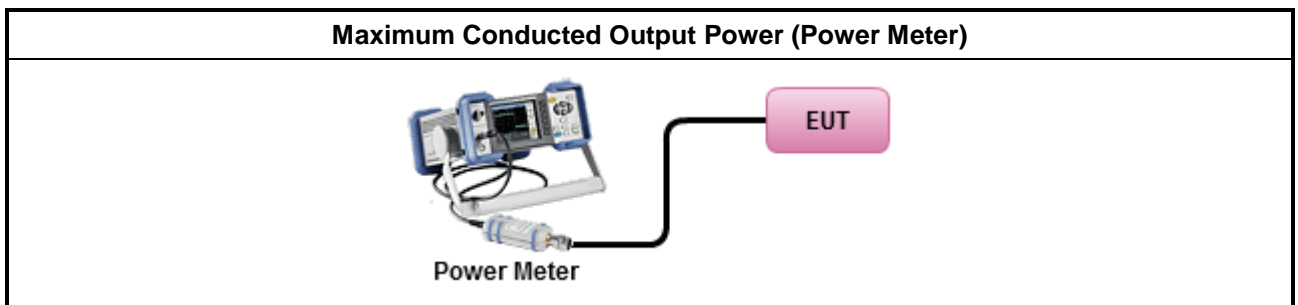

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit
<ul style="list-style-type: none"> Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
<input checked="" type="checkbox"/> Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Method PKPSD.
<ul style="list-style-type: none"> For conducted measurement. <ul style="list-style-type: none"> If The EUT supports multiple transmit chains using options given below: <ul style="list-style-type: none"> Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.

3.4.4 Test Setup

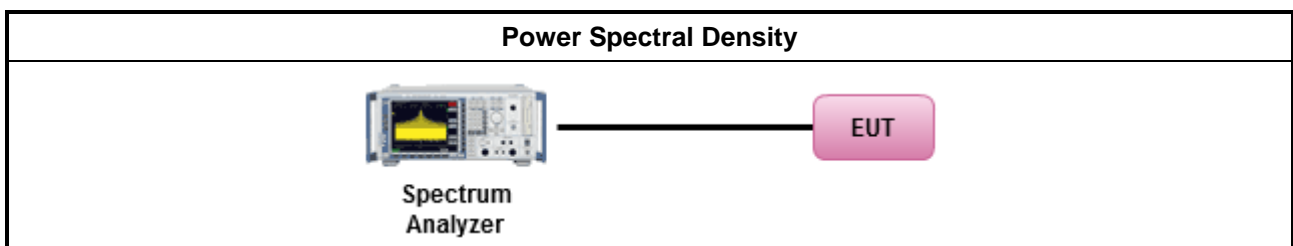

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average level.


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
<ul style="list-style-type: none"> Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.

3.5.4 Test Setup

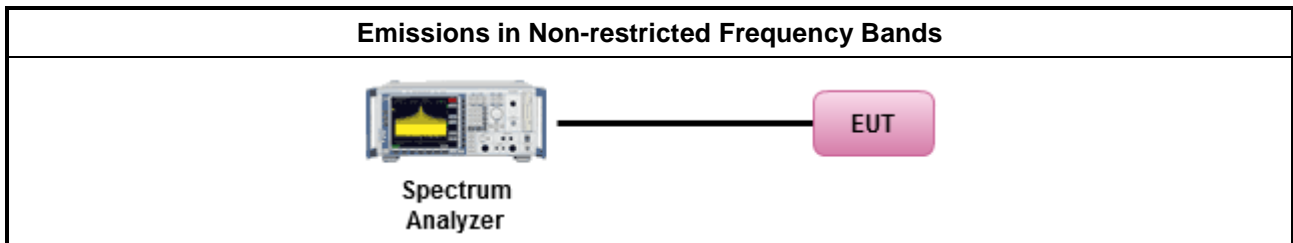

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
	<ul style="list-style-type: none"> ▪ The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
	<ul style="list-style-type: none"> ▪ Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
	<ul style="list-style-type: none"> ▪ For the transmitter unwanted emissions shall be measured using following options below:
	<ul style="list-style-type: none"> ▪ Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.
	<ul style="list-style-type: none"> ▪ For the transmitter band-edge emissions shall be measured using following options below:
	<ul style="list-style-type: none"> ▪ Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	<ul style="list-style-type: none"> ▪ Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements.
	<ul style="list-style-type: none"> ▪ Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels.
	<ul style="list-style-type: none"> ▪ Use the following spectrum analyzer settings:
	<ul style="list-style-type: none"> ▪ Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	<ul style="list-style-type: none"> ▪ Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
	<ul style="list-style-type: none"> ▪ KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.
	<ul style="list-style-type: none"> ▪ Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	<ul style="list-style-type: none"> ▪ Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

3.6.4 Test Setup

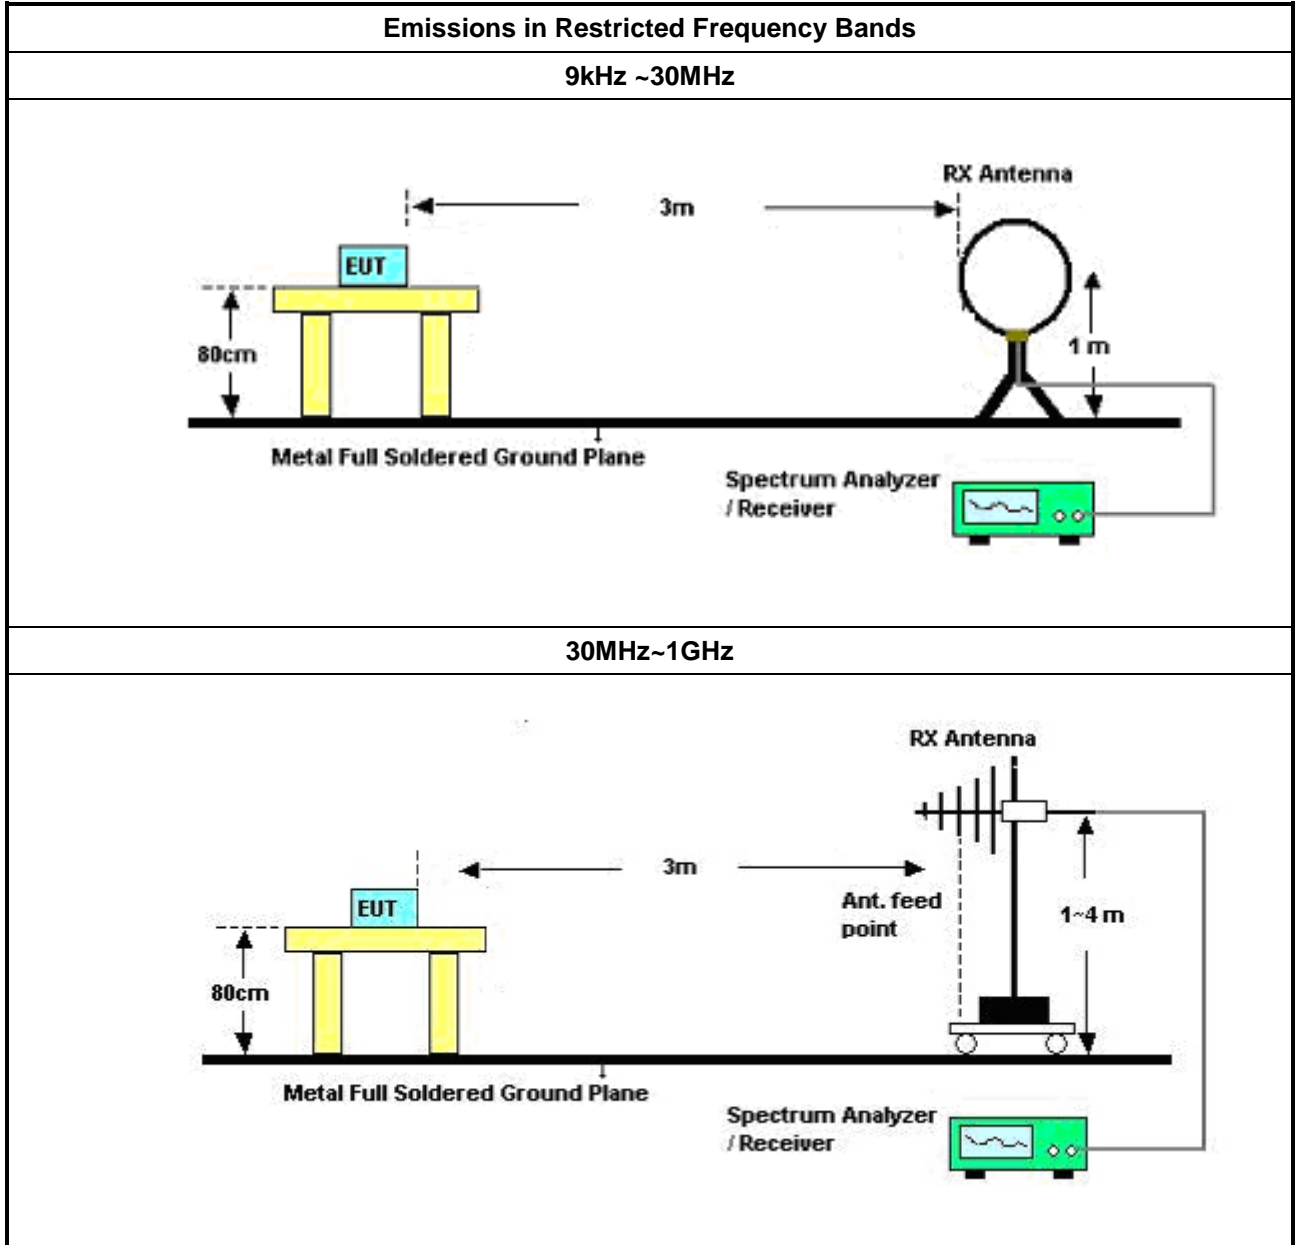

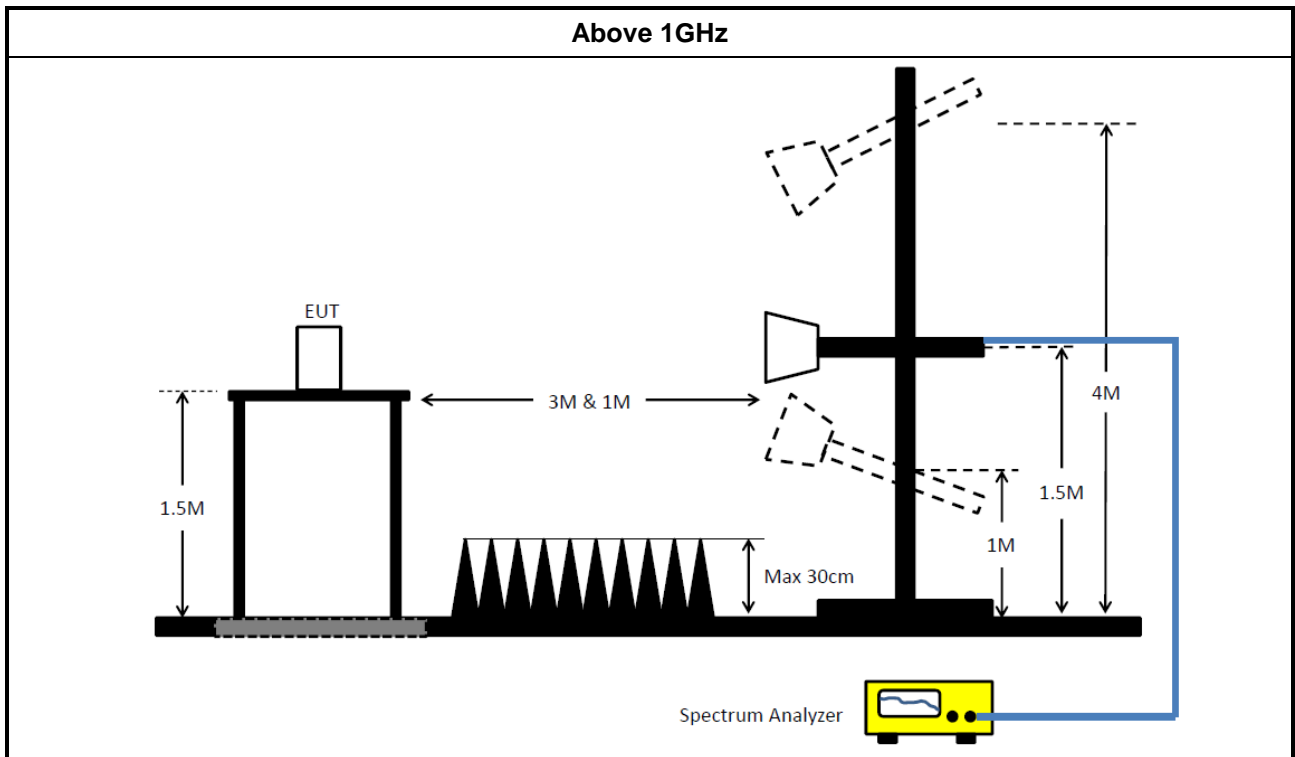

3.6.5 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	09/Apr/2019	08/Apr/2020
LISN	R&S	ENV216	101295	9kHz ~ 30MHz	08/Nov/2018	07/Nov/2019
RF Cable-CON	MTJ	RG142	CB002-CO	9kHz ~ 200MHz	12/Sep/2019	11/Sep/2020
AC POWER	APC	AFC-11005G	F310050055	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561-F	9561-F041	9 kHz ~ 30 MHz	24/Sep/2019	23/Sep/2020

NCR : Non-Calibration Require

Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	10Hz~40GHz	13/Mar/2019	12/Mar/2020
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	19/Feb/2019	18/Feb/2020
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	19/Feb/2019	18/Feb/2020
Cable 0.2m	HUBER	MY10710/4	RF Cable - 01	30MHz ~18G	10/Jan/2019	09/Jan/2020
Cable 0.2m	HUBER	MY10711/4	RF Cable - 02	30MHz ~18G	10/Jan/2019	09/Jan/2020
Cable 0.5m	HUBER	MY39470/4	RF Cable - 29	30MHz ~18G	10/Jan/2019	09/Jan/2020
SMB100A Signal Generator	R&S	SMB100A03	181147	100kHz~40GHz	12/Nov/2018	10/Nov/2020

**Instrument for Radiated Test**


Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	30/Aug/2019	29/Aug/2020
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	1GHz ~ 18GHz 3m	30/Aug/2019	29/Aug/2020
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	22/Apr/2019	21/Apr/2020
EMI Test Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	09/Apr/2019	08/Apr/2020
Bilog Antenna with 5dB Pad	ETS	3142B & MTJ6102-05	00022055	26 MHz - 3 GHz	19/Nov/2018	18/Nov/2019
Microwave System Preamplifier	KEYSIGHT	83017A	MY53270196	1GHz ~ 26.5GHz	09/Sep/2019	08/Sep/2020
Signal Analyzer	R&S	FSV40	101500	10Hz ~ 40GHz	15/Aug/2019	14/Aug/2020
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	22/Mar/2019	21/Mar/2020
RF CABLE 6m	HUBER+SUHNER	SUOFLEX 104	SN 805801/4	1GHz ~ 40GHz	21/Mar/2019	20/Mar/2020
RF CABLE	HUBER+SUHNER	SUOFLEX 104	802378/4	1 GHz ~ 18 GHz	04/Jul/2019	03/Jul/2020
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170339	18GHz ~ 40GHz	19/Apr/ 2019	20/Apr/2020
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1531	1GHz ~ 18GHz	09/Mar/ 2019	08/Mar/2020
Loop Antenna	TESEQ	HLA 6120	31244	9k-30MHz	15/Mar/2019	14/Mar/2020
Preamplifier	MITEQ	TTA1840-35-HG	1864481	18GHz ~ 40GHz	05/Aug/2019	04/Aug/2020



AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	Adapter Mode		

29/10/2019

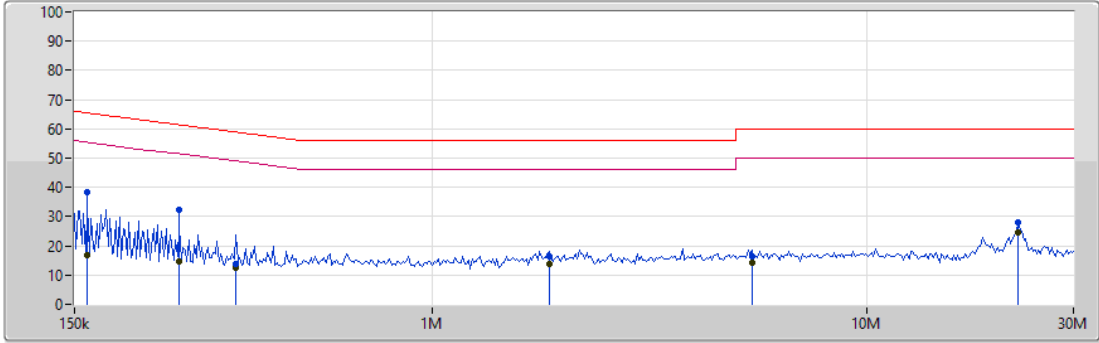


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	160.82k	38.54	65.43	-26.89	19.58	Neutral	-	18.96	9.60	0.11	9.87
AV	160.82k	16.92	55.43	-38.51	19.58	Neutral	-	-2.66	9.60	0.11	9.87
QP	261.871k	32.26	61.37	-29.11	19.58	Neutral	-	12.68	9.59	0.12	9.87
AV	261.871k	14.81	51.37	-36.56	19.58	Neutral	-	-4.77	9.59	0.12	9.87
QP	352.963k	13.74	58.89	-45.15	19.59	Neutral	-	-5.85	9.59	0.12	9.88
AV	352.963k	12.47	48.89	-36.42	19.59	Neutral	-	-7.12	9.59	0.12	9.88
QP	1.86M	16.22	56.00	-39.78	19.64	Neutral	-	-3.42	9.61	0.14	9.89
AV	1.86M	13.74	46.00	-32.26	19.64	Neutral	-	-5.90	9.61	0.14	9.89
QP	5.446M	16.44	60.00	-43.56	19.73	Neutral	-	-3.29	9.63	0.21	9.89
AV	5.446M	14.40	50.00	-35.60	19.73	Neutral	-	-5.33	9.63	0.21	9.89
QP	22.374M	28.18	60.00	-31.82	19.97	Neutral	-	8.21	9.68	0.39	9.90
AV	22.374M	24.73	50.00	-25.27	19.97	Neutral	"Worst"	4.76	9.68	0.39	9.90

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Adapter Mode		

29/10/2019

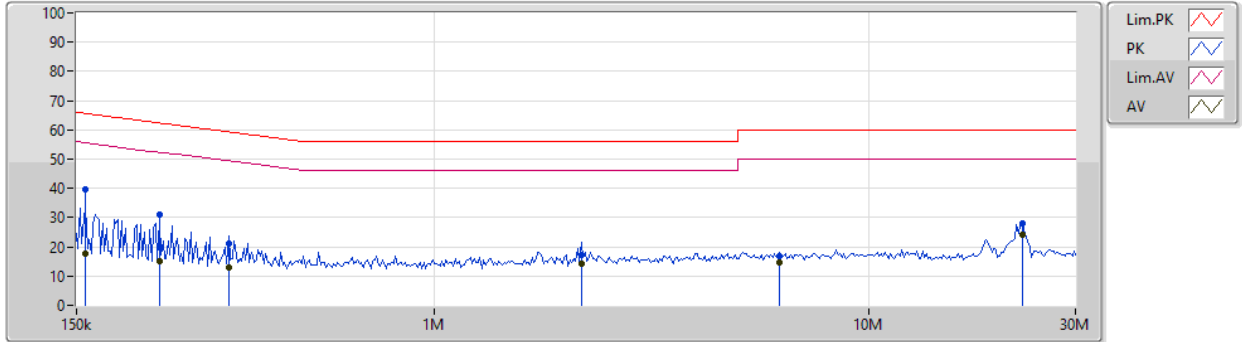

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)
QP	157.652k	39.50	65.58	-26.08	19.58	Line	-	19.92	9.60	0.11	9.87
AV	157.652k	17.52	55.58	-38.06	19.58	Line	-	-2.06	9.60	0.11	9.87
QP	232.398k	31.10	62.37	-31.27	19.59	Line	-	11.51	9.60	0.12	9.87
AV	232.398k	15.15	52.37	-37.22	19.59	Line	-	-4.44	9.60	0.12	9.87
QP	335.832k	21.12	59.31	-38.19	19.59	Line	-	1.53	9.59	0.12	9.88
AV	335.832k	12.82	49.31	-36.49	19.59	Line	-	-6.77	9.59	0.12	9.88
QP	2.18M	17.13	56.00	-38.87	19.66	Line	-	-2.53	9.62	0.15	9.89
AV	2.18M	14.34	46.00	-31.66	19.66	Line	-	-5.32	9.62	0.15	9.89
QP	6.26M	16.72	60.00	-43.28	19.76	Line	-	-3.04	9.65	0.22	9.89
AV	6.26M	14.63	50.00	-35.37	19.76	Line	-	-5.13	9.65	0.22	9.89
QP	22.598M	27.81	60.00	-32.19	19.89	Line	-	7.92	9.60	0.39	9.90
AV	22.598M	24.00	50.00	-26.00	19.89	Line	"Worst"	4.11	9.60	0.39	9.90



Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	726.25k	1.069M	1M07F1D	690k	1.041M



Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;



Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	690k	1.041M
2440MHz	Pass	500k	700k	1.051M
2480MHz	Pass	500k	726.25k	1.069M

Port X-N dB = Port X 6dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;

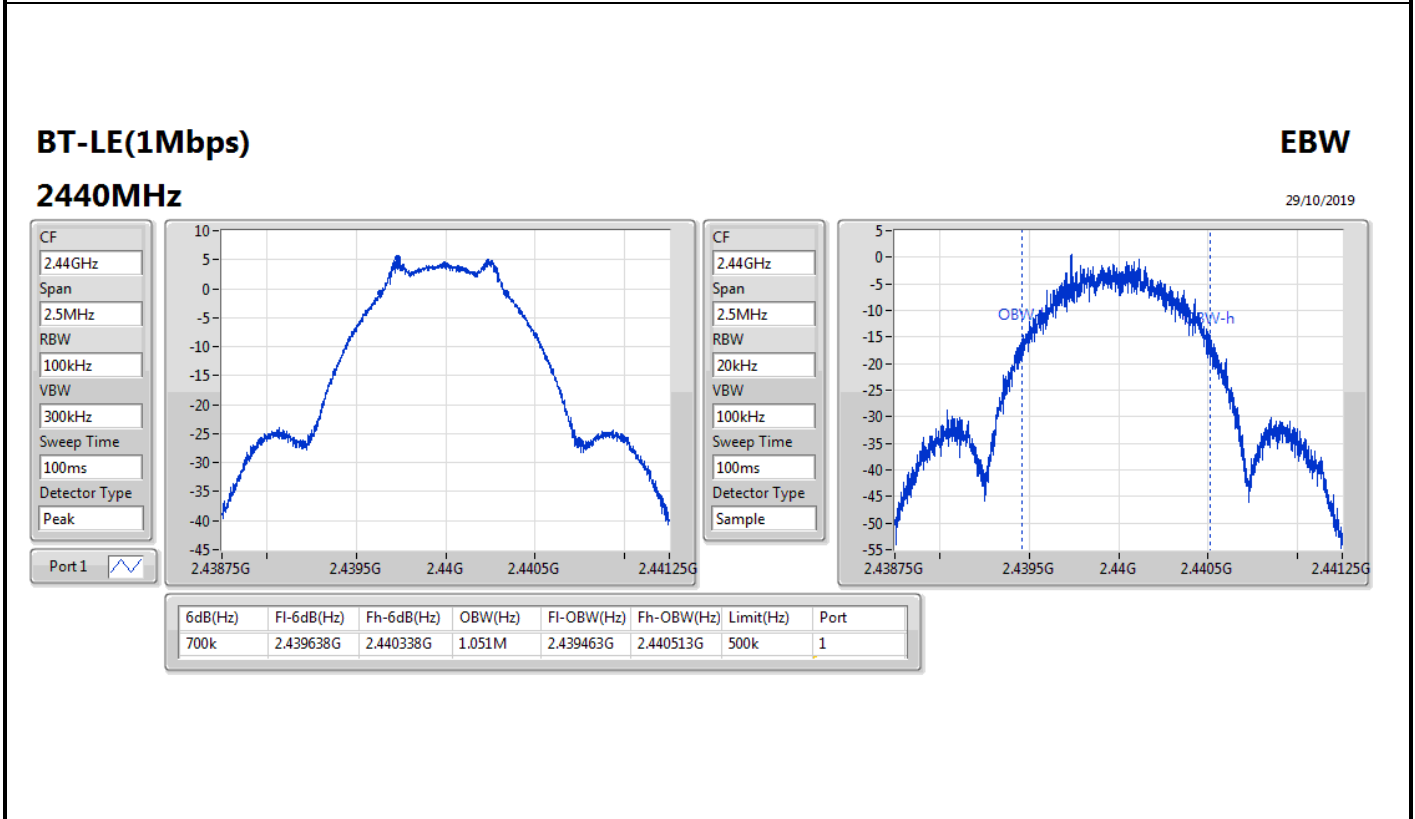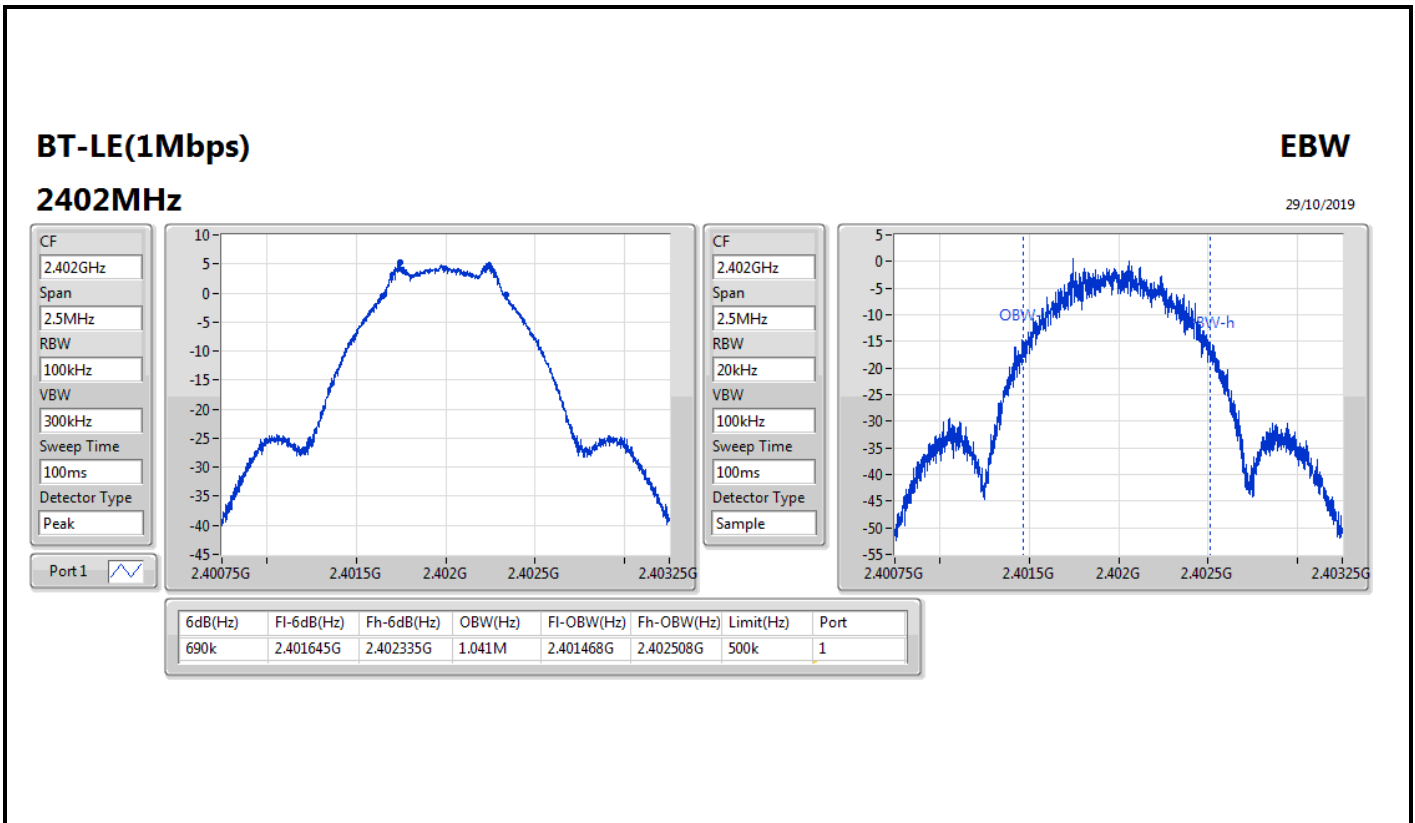


BT-LE(1Mbps)


2480MHz

29/10/2019

CF
2.48GHz
Span
2.5MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak

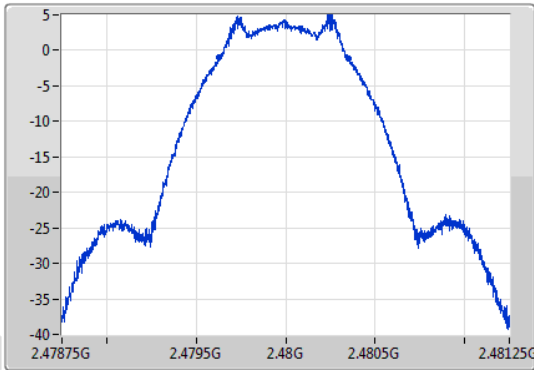

CF
2.48GHz
Span
2.5MHz
RBW
20kHz
VBW
100kHz
Sweep Time
100ms
Detector Type
Sample

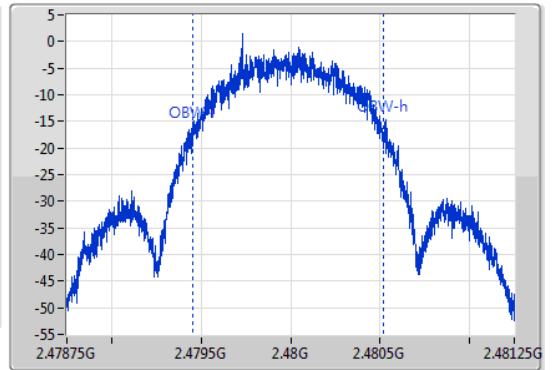

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
726.25k	2.479629G	2.480355G	1.069M	2.479453G	2.480522G	500k	1



Summary

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	5.51	0.00356



Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	6.50	5.51	29.50
2440MHz	Pass	6.50	5.36	29.50
2480MHz	Pass	6.50	5.14	29.50

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-8.60

RBW=3 kHz.






Result

Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	6.50	-8.60	7.50
2440MHz	Pass	6.50	-10.28	7.50
2480MHz	Pass	6.50	-10.37	7.50

DG = Directional Gain; RBW=3 kHz;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

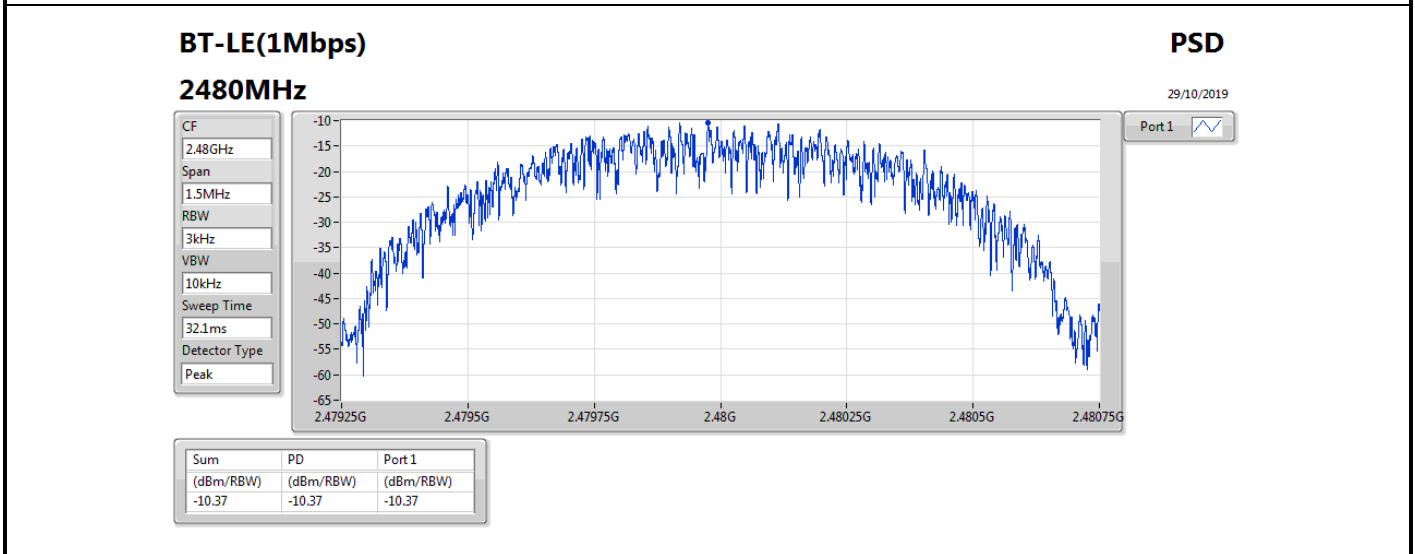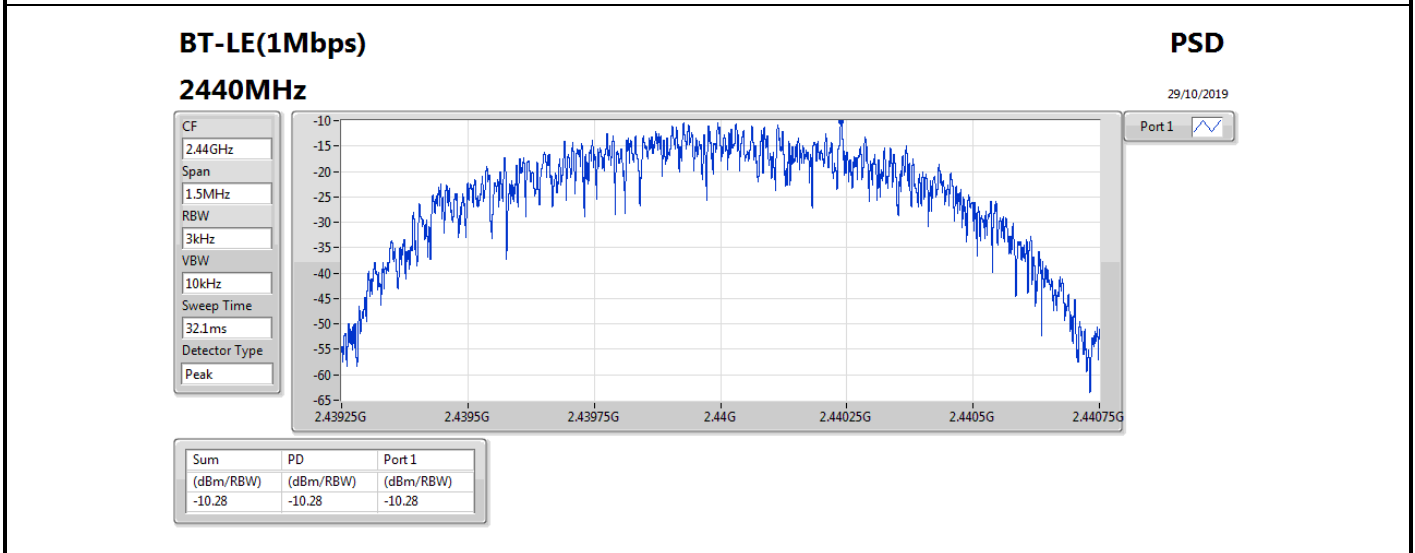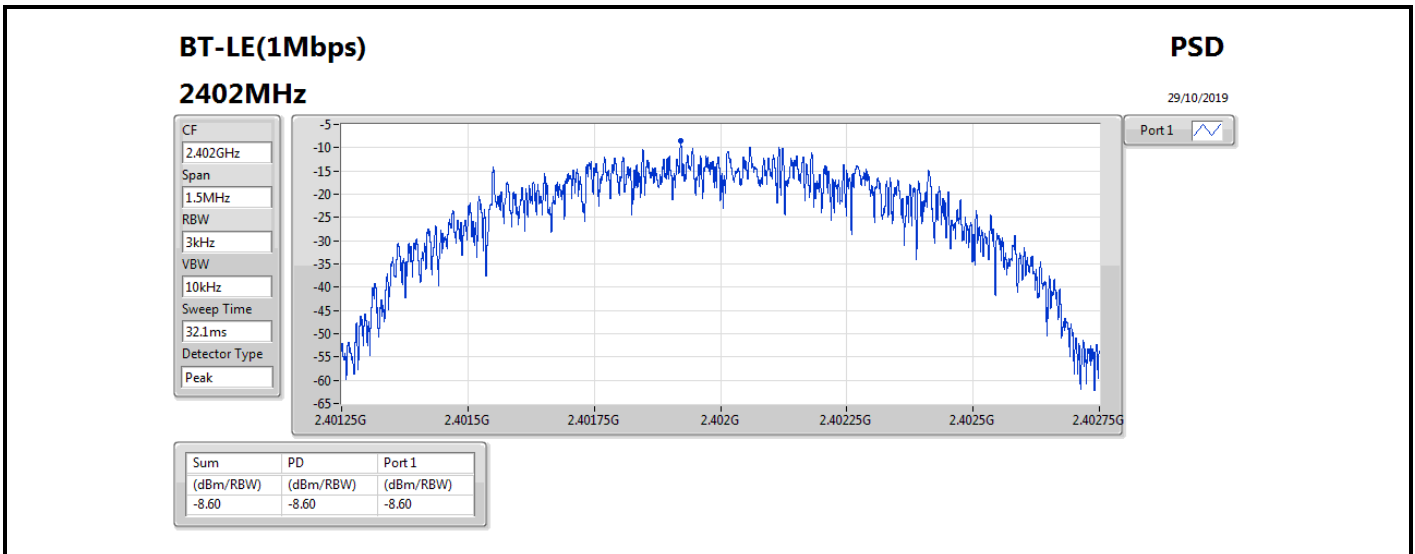





Summary


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	2.44025G	4.46	-25.54	304.98M	-54.52	2.39999G	-53.01	2.48548G	-52.99	23.25513G	-40.95	1



Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-	-	-
2402MHz	Pass	2.44025G	4.46	-25.54	2.398G	-54.31	2.39999G	-43.67	2.48355G	-52.40	22.00839G	-42.31	1
2440MHz	Pass	2.44025G	4.46	-25.54	304.98M	-54.52	2.39999G	-53.01	2.48548G	-52.99	23.25513G	-40.95	1
2480MHz	Pass	2.44025G	4.46	-25.54	310.02M	-53.62	2.39946G	-53.15	2.48464G	-51.12	17.53081G	-41.64	1

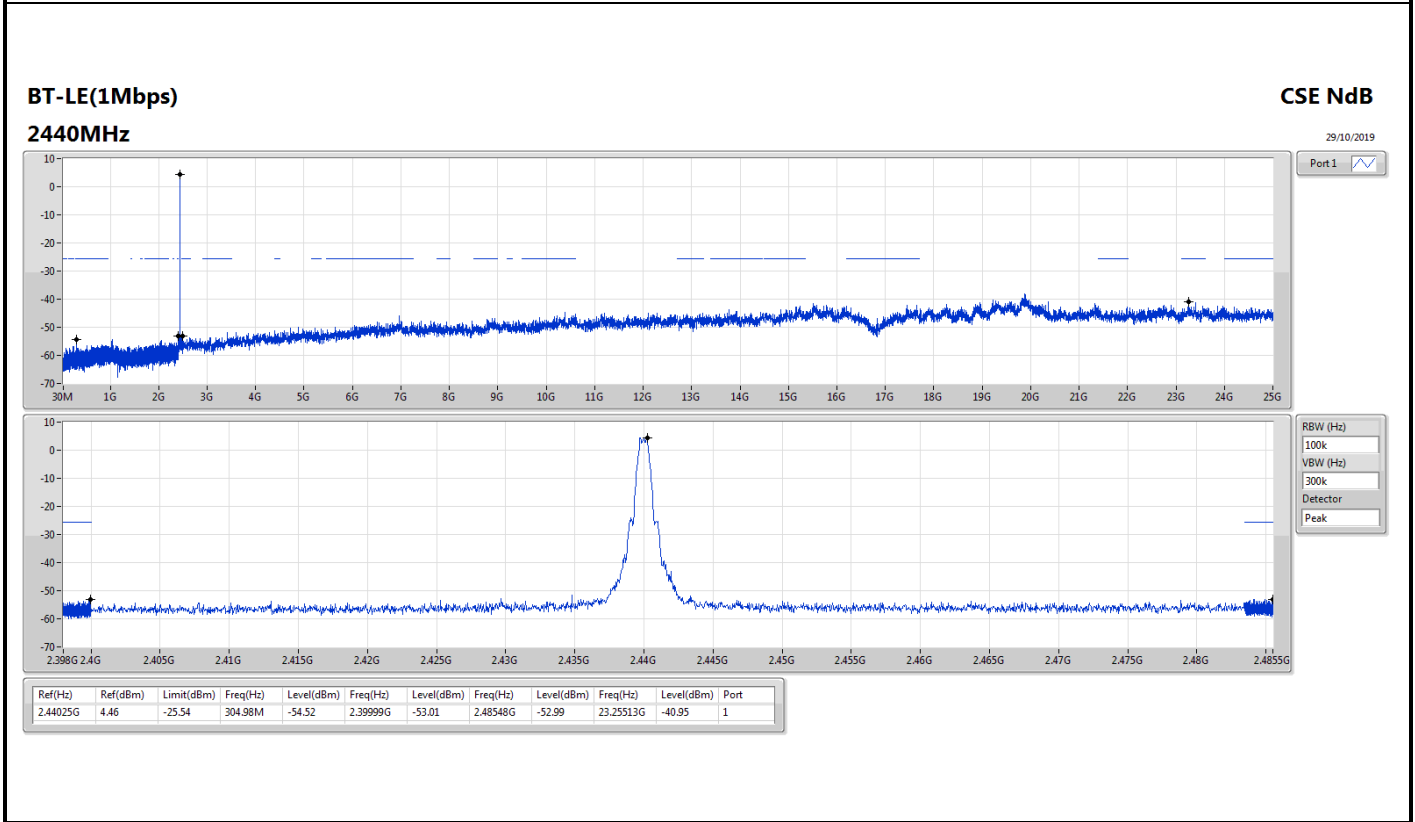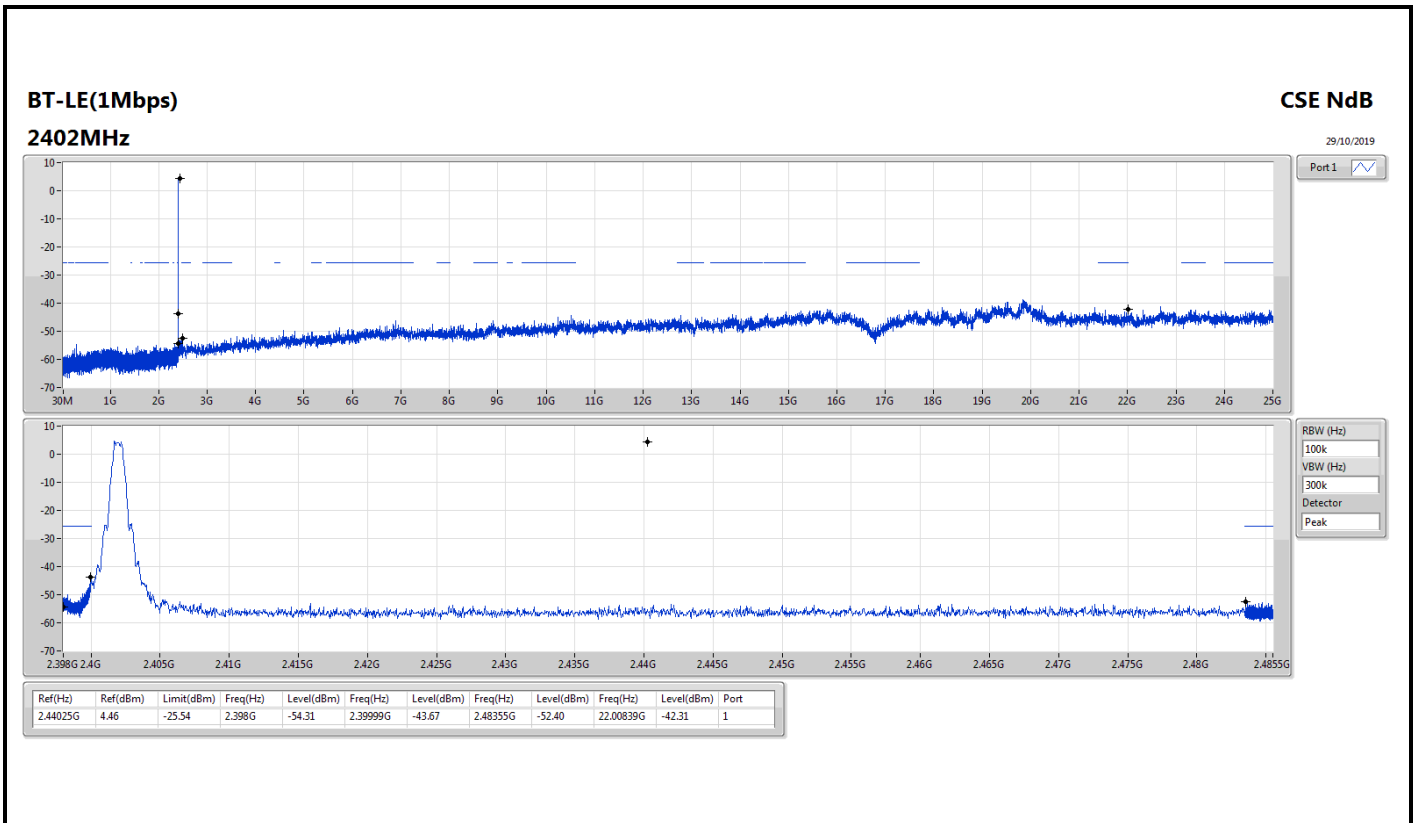

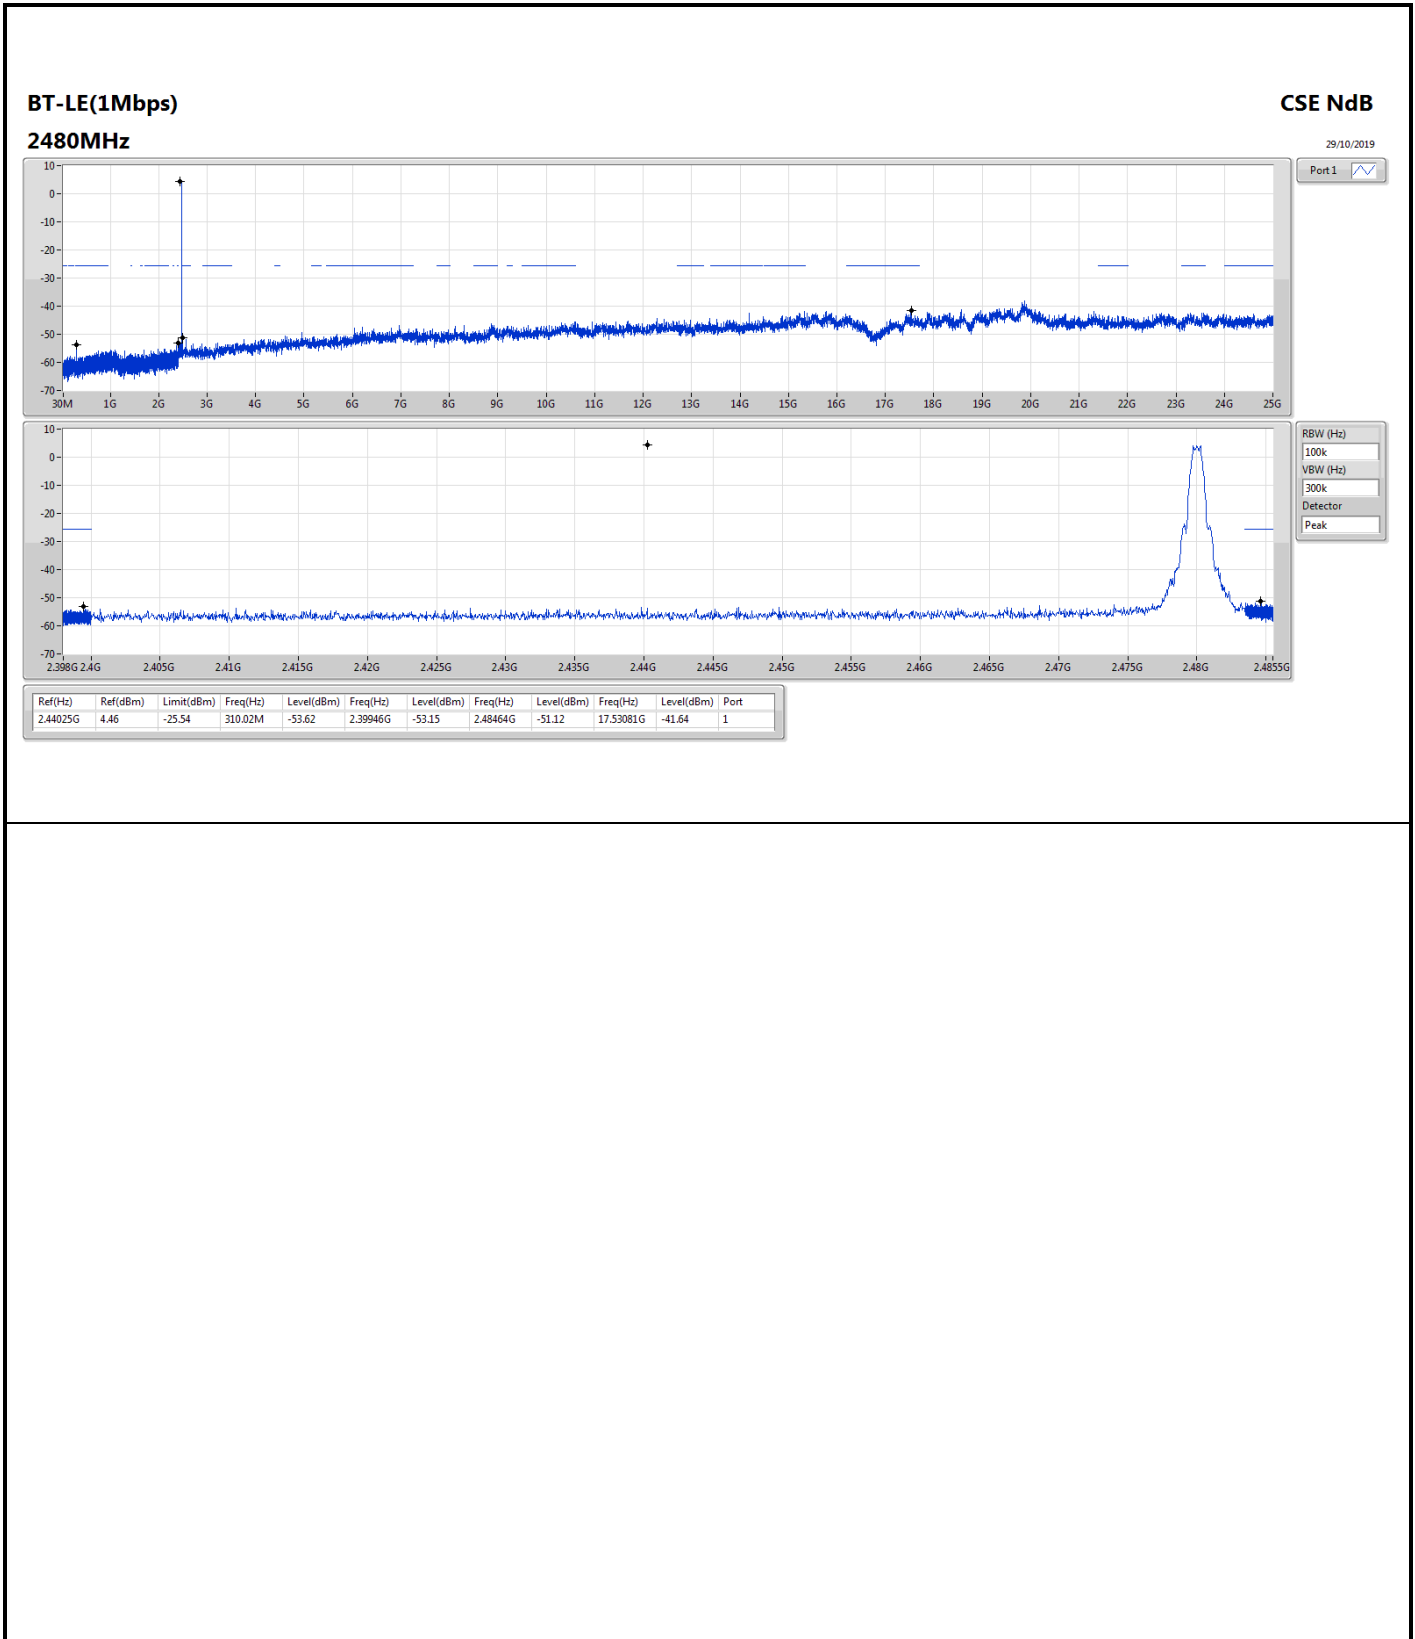



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	PK	47.46M	32.12	40.00	-7.88	3	Vertical	360	1.00	-




Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-
2440MHz_DC power supply	Pass	PK	47.46M	32.12	40.00	-7.88	3	Vertical	360	1.00	-
2440MHz_DC power supply	Pass	PK	90.14M	24.20	43.50	-19.30	3	Vertical	360	1.00	-
2440MHz_DC power supply	Pass	PK	171.62M	20.13	43.50	-23.37	3	Vertical	360	1.00	-
2440MHz_DC power supply	Pass	PK	635.28M	28.54	46.00	-17.46	3	Vertical	360	1.00	-
2440MHz_DC power supply	Pass	PK	738.1M	30.19	46.00	-15.81	3	Vertical	360	1.00	-
2440MHz_DC power supply	Pass	PK	860.32M	30.53	46.00	-15.47	3	Vertical	360	1.00	-
2440MHz_DC power supply	Pass	PK	47.46M	26.35	40.00	-13.65	3	Horizontal	0	1.00	-
2440MHz_DC power supply	Pass	PK	119.24M	19.22	43.50	-24.28	3	Horizontal	0	1.00	-
2440MHz_DC power supply	Pass	PK	167.74M	18.54	43.50	-24.96	3	Horizontal	0	1.00	-
2440MHz_DC power supply	Pass	PK	433.52M	26.10	46.00	-19.90	3	Horizontal	0	1.00	-
2440MHz_DC power supply	Pass	PK	592.6M	28.68	46.00	-17.32	3	Horizontal	0	1.00	-
2440MHz_DC power supply	Pass	PK	703.18M	29.68	46.00	-16.32	3	Horizontal	0	1.00	-

BT-LE(1Mbps)

30/10/2019

2440MHz_DC power supply

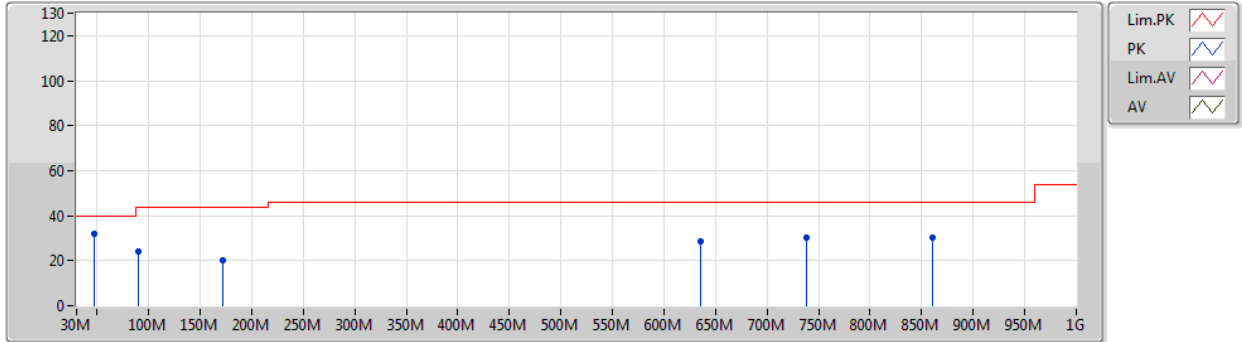


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	47.46M	32.12	40.00	-7.88	44.51	3	Vertical	360	1.00	-	14.11	1.02	27.52
PK	90.14M	24.20	43.50	-19.30	36.34	3	Vertical	360	1.00	-	13.84	1.43	27.41
PK	171.62M	20.13	43.50	-23.37	30.53	3	Vertical	360	1.00	-	14.65	2.03	27.08
PK	635.28M	28.54	46.00	-17.46	28.24	3	Vertical	360	1.00	-	24.25	4.15	28.10
PK	738.1M	30.19	46.00	-15.81	28.98	3	Vertical	360	1.00	-	24.78	4.47	28.04
PK	860.32M	30.53	46.00	-15.47	27.90	3	Vertical	360	1.00	-	25.43	4.89	27.69

BT-LE(1Mbps)

30/10/2019

2440MHz_DC power supply

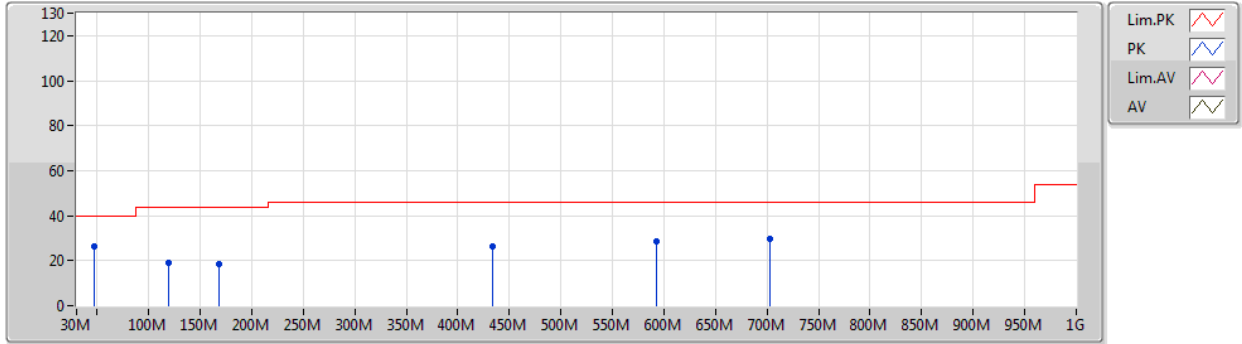

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
PK	47.46M	26.35	40.00	-13.65	38.74	3	Horizontal	0	1.00	-	14.11	1.02	27.52
PK	119.24M	19.22	43.50	-24.28	27.65	3	Horizontal	0	1.00	-	17.21	1.67	27.31
PK	167.74M	18.54	43.50	-24.96	28.86	3	Horizontal	0	1.00	-	14.78	2.00	27.10
PK	433.52M	26.10	46.00	-19.90	28.52	3	Horizontal	0	1.00	-	21.83	3.32	27.57
PK	592.6M	28.68	46.00	-17.32	29.09	3	Horizontal	0	1.00	-	23.60	4.04	28.05
PK	703.18M	29.68	46.00	-16.32	29.25	3	Horizontal	0	1.00	-	24.10	4.37	28.04



Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	2.4844G	47.14	54.00	-6.86	3	Vertical	206	1.74	-



Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
BT-LE(1Mbps)	-	-	-	-	-	-	-	-	-	-	-
2402MHz_TX	Pass	AV	2.3534G	46.88	54.00	-7.12	3	Vertical	66	2.74	-
2402MHz_TX	Pass	AV	2.402G	89.23	Inf	-Inf	3	Vertical	66	2.74	-
2402MHz_TX	Pass	PK	2.3674G	58.96	74.00	-15.04	3	Vertical	66	2.74	-
2402MHz_TX	Pass	PK	2.4018G	90.29	Inf	-Inf	3	Vertical	66	2.74	-
2402MHz_TX	Pass	AV	2.352G	46.89	54.00	-7.11	3	Horizontal	0	1.44	-
2402MHz_TX	Pass	AV	2.402G	97.77	Inf	-Inf	3	Horizontal	0	1.44	-
2402MHz_TX	Pass	PK	2.3536G	59.57	74.00	-14.43	3	Horizontal	0	1.44	-
2402MHz_TX	Pass	PK	2.4018G	98.72	Inf	-Inf	3	Horizontal	0	1.44	-
2402MHz_TX	Pass	AV	4.8037G	42.14	54.00	-11.86	3	Vertical	120	2.38	-
2402MHz_TX	Pass	PK	4.80334G	50.05	74.00	-23.95	3	Vertical	120	2.38	-
2402MHz_TX	Pass	AV	4.80394G	44.18	54.00	-9.82	3	Horizontal	210	2.13	-
2402MHz_TX	Pass	PK	4.80352G	51.03	74.00	-22.97	3	Horizontal	210	2.13	-
2440MHz_TX	Pass	AV	2.34G	46.73	54.00	-7.27	3	Vertical	206	1.74	-
2440MHz_TX	Pass	AV	2.44G	81.04	Inf	-Inf	3	Vertical	206	1.74	-
2440MHz_TX	Pass	AV	2.4844G	47.14	54.00	-6.86	3	Vertical	206	1.74	-
2440MHz_TX	Pass	PK	2.3856G	58.97	74.00	-15.03	3	Vertical	206	1.74	-
2440MHz_TX	Pass	PK	2.44G	82.39	Inf	-Inf	3	Vertical	206	1.74	-
2440MHz_TX	Pass	PK	2.494G	59.35	74.00	-14.65	3	Vertical	206	1.74	-
2440MHz_TX	Pass	AV	2.34G	46.73	54.00	-7.27	3	Horizontal	0	1.04	-
2440MHz_TX	Pass	AV	2.44G	93.45	Inf	-Inf	3	Horizontal	0	1.04	-
2440MHz_TX	Pass	AV	2.4844G	47.14	54.00	-6.86	3	Horizontal	0	1.04	-
2440MHz_TX	Pass	PK	2.3748G	59.37	74.00	-14.63	3	Horizontal	0	1.04	-
2440MHz_TX	Pass	PK	2.4404G	94.55	Inf	-Inf	3	Horizontal	0	1.04	-
2440MHz_TX	Pass	PK	2.4844G	59.22	74.00	-14.78	3	Horizontal	0	1.04	-
2440MHz_TX	Pass	AV	4.87988G	40.29	54.00	-13.71	3	Vertical	120	2.42	-
2440MHz_TX	Pass	AV	7.32402G	38.86	54.00	-15.14	3	Vertical	360	1.69	-
2440MHz_TX	Pass	PK	4.87952G	49.80	74.00	-24.20	3	Vertical	120	2.42	-
2440MHz_TX	Pass	PK	7.33116G	52.78	74.00	-21.22	3	Vertical	360	1.69	-
2440MHz_TX	Pass	AV	4.87994G	45.25	54.00	-8.75	3	Horizontal	172	2.22	-
2440MHz_TX	Pass	AV	7.30542G	38.87	54.00	-15.13	3	Horizontal	313	1.69	-
2440MHz_TX	Pass	PK	4.88048G	52.28	74.00	-21.72	3	Horizontal	172	2.22	-
2440MHz_TX	Pass	PK	7.32612G	52.20	74.00	-21.80	3	Horizontal	313	1.69	-
2480MHz_TX	Pass	AV	2.48G	82.54	Inf	-Inf	3	Vertical	100	2.06	-
2480MHz_TX	Pass	AV	2.4842G	47.14	54.00	-6.86	3	Vertical	100	2.06	-
2480MHz_TX	Pass	PK	2.4798G	83.88	Inf	-Inf	3	Vertical	100	2.06	-
2480MHz_TX	Pass	PK	2.4904G	58.98	74.00	-15.02	3	Vertical	100	2.06	-
2480MHz_TX	Pass	AV	2.48G	90.12	Inf	-Inf	3	Horizontal	28	1.16	-
2480MHz_TX	Pass	AV	2.4842G	47.14	54.00	-6.86	3	Horizontal	28	1.16	-
2480MHz_TX	Pass	PK	2.4802G	91.26	Inf	-Inf	3	Horizontal	28	1.16	-
2480MHz_TX	Pass	PK	2.4978G	59.57	74.00	-14.43	3	Horizontal	28	1.16	-
2480MHz_TX	Pass	AV	4.96012G	39.30	54.00	-14.70	3	Vertical	132	2.92	-
2480MHz_TX	Pass	AV	7.43934G	38.35	54.00	-15.65	3	Vertical	57	1.50	-
2480MHz_TX	Pass	PK	4.96036G	48.93	74.00	-25.07	3	Vertical	132	2.92	-
2480MHz_TX	Pass	PK	7.44498G	50.96	74.00	-23.04	3	Vertical	57	1.50	-
2480MHz_TX	Pass	AV	4.95988G	45.32	54.00	-8.68	3	Horizontal	173	2.18	-
2480MHz_TX	Pass	AV	7.44936G	38.32	54.00	-15.68	3	Horizontal	305	1.48	-
2480MHz_TX	Pass	PK	4.9603G	52.55	74.00	-21.45	3	Horizontal	173	2.18	-



RSE TX above 1GHz


Appendix F.2

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2480MHz_TX	Pass	PK	7.4394G	51.02	74.00	-22.98	3	Horizontal	305	1.48	-

BT-LE(1Mbps)

30/10/2019

2402MHz_TX

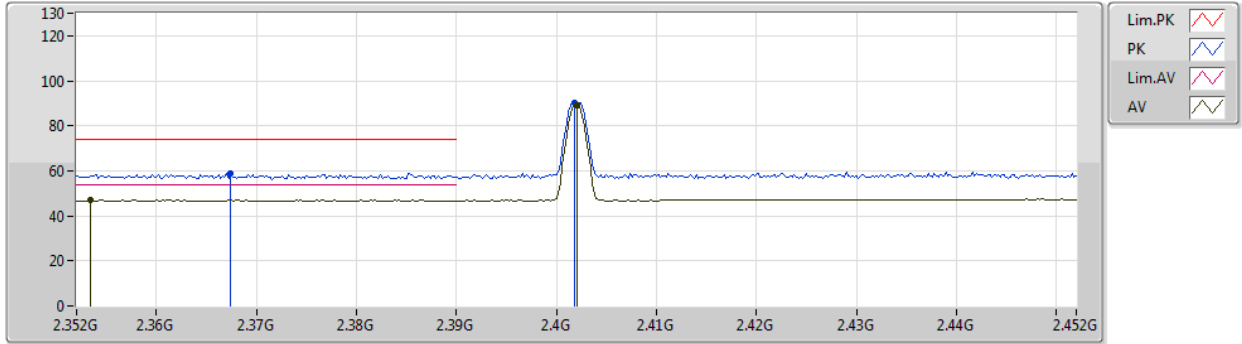


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	2.3534G	46.88	54.00	-7.12	15.23	3	Vertical	66	2.74	-	27.69	3.96	-
AV	2.402G	89.23	Inf	-Inf	57.72	3	Vertical	66	2.74	-	27.50	4.01	-
PK	2.3674G	58.96	74.00	-15.04	27.35	3	Vertical	66	2.74	-	27.63	3.98	-
PK	2.4018G	90.29	Inf	-Inf	58.78	3	Vertical	66	2.74	-	27.50	4.01	-

BT-LE(1Mbps)

30/10/2019

2402MHz_TX

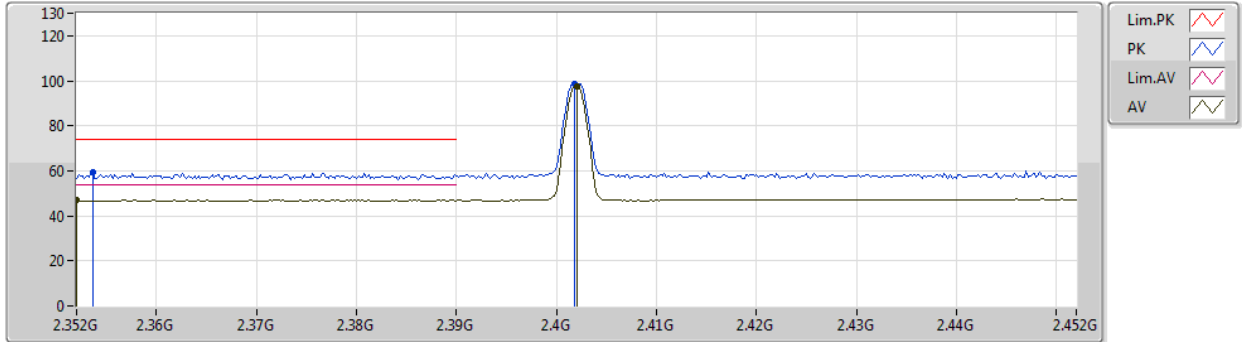


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	2.352G	46.89	54.00	-7.11	15.24	3	Horizontal	0	1.44	-	27.69	3.96	-
AV	2.402G	97.77	Inf	-Inf	66.26	3	Horizontal	0	1.44	-	27.50	4.01	-
PK	2.3536G	59.57	74.00	-14.43	27.92	3	Horizontal	0	1.44	-	27.69	3.96	-
PK	2.4018G	98.72	Inf	-Inf	67.21	3	Horizontal	0	1.44	-	27.50	4.01	-



BT-LE(1Mbps)

30/10/2019

2402MHz_TX

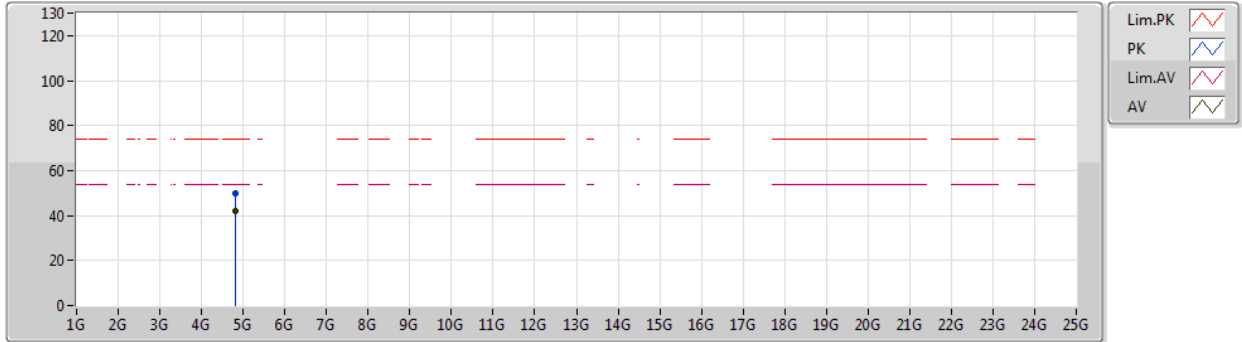


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	4.8037G	42.14	54.00	-11.86	34.67	3	Vertical	120	2.38	-	31.10	5.78	29.41
PK	4.80334G	50.05	74.00	-23.95	42.58	3	Vertical	120	2.38	-	31.10	5.78	29.41



BT-LE(1Mbps)

30/10/2019

2402MHz_TX

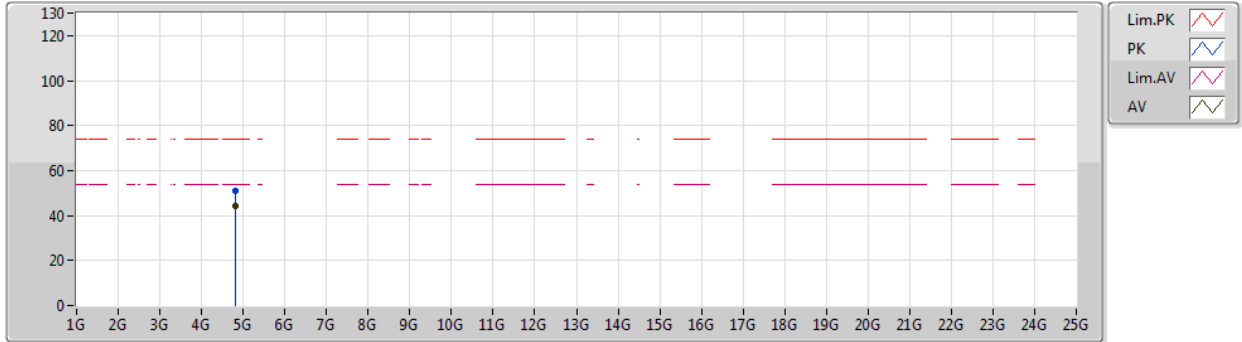


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	4.80394G	44.18	54.00	-9.82	36.71	3	Horizontal	210	2.13	-	31.10	5.78	29.41
PK	4.80352G	51.03	74.00	-22.97	43.56	3	Horizontal	210	2.13	-	31.10	5.78	29.41



BT-LE(1Mbps)

30/10/2019

2440MHz_TX

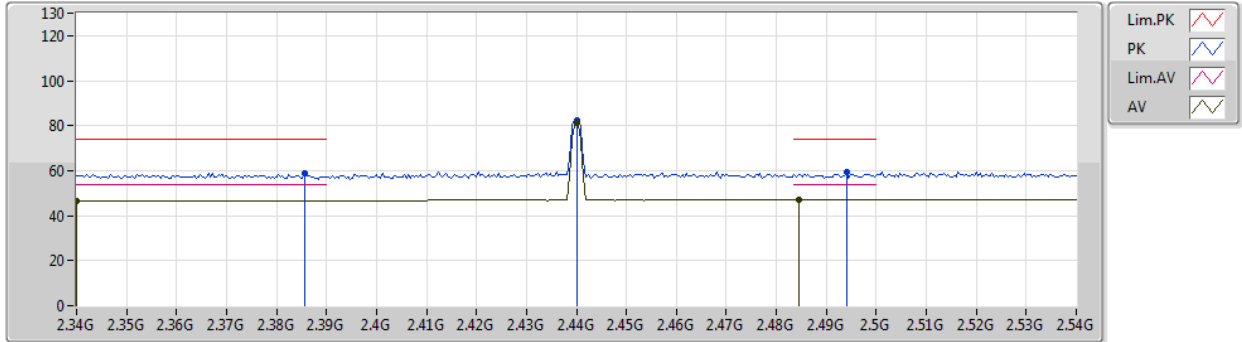


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	2.34G	46.73	54.00	-7.27	15.04	3	Vertical	206	1.74	-	27.74	3.95	-
AV	2.44G	81.04	Inf	-Inf	49.58	3	Vertical	206	1.74	-	27.42	4.04	-
AV	2.4844G	47.14	54.00	-6.86	15.72	3	Vertical	206	1.74	-	27.33	4.09	-
PK	2.3856G	58.97	74.00	-15.03	27.42	3	Vertical	206	1.74	-	27.56	3.99	-
PK	2.44G	82.39	Inf	-Inf	50.93	3	Vertical	206	1.74	-	27.42	4.04	-
PK	2.494G	59.35	74.00	-14.65	27.95	3	Vertical	206	1.74	-	27.31	4.09	-

BT-LE(1Mbps)

30/10/2019

2440MHz_TX

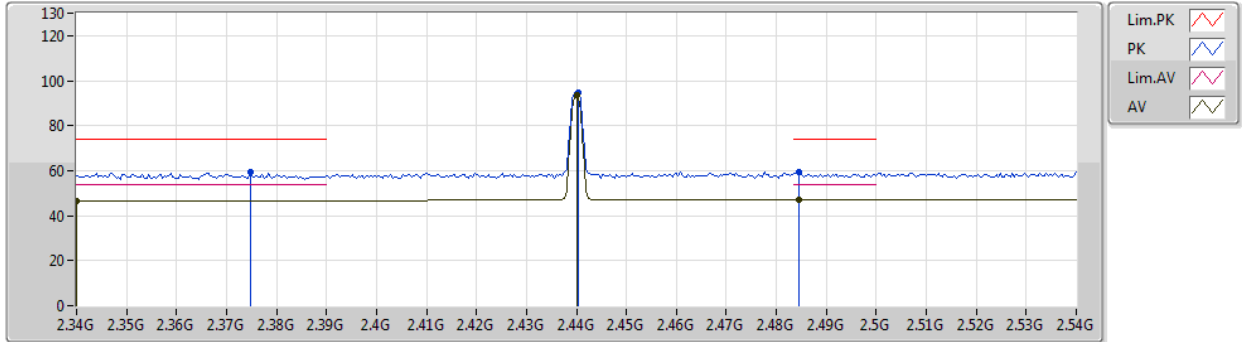


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	2.34G	46.73	54.00	-7.27	15.04	3	Horizontal	0	1.04	-	27.74	3.95	-
AV	2.44G	93.45	Inf	-Inf	61.99	3	Horizontal	0	1.04	-	27.42	4.04	-
AV	2.4844G	47.14	54.00	-6.86	15.72	3	Horizontal	0	1.04	-	27.33	4.09	-
PK	2.3748G	59.37	74.00	-14.63	27.79	3	Horizontal	0	1.04	-	27.60	3.98	-
PK	2.4404G	94.55	Inf	-Inf	63.09	3	Horizontal	0	1.04	-	27.42	4.04	-
PK	2.4844G	59.22	74.00	-14.78	27.80	3	Horizontal	0	1.04	-	27.33	4.09	-

BT-LE(1Mbps)

30/10/2019

2440MHz_TX

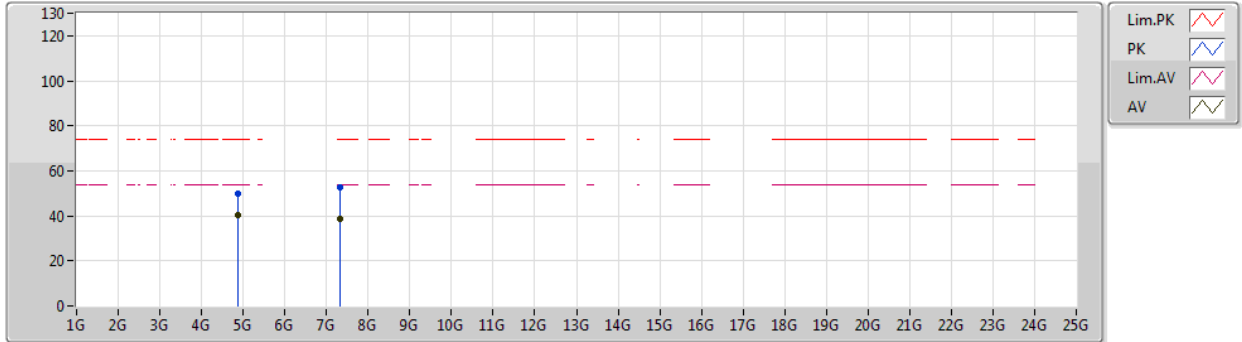


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	4.87988G	40.29	54.00	-13.71	32.66	3	Vertical	120	2.42	-	31.18	5.83	29.38
AV	7.32402G	38.86	54.00	-15.14	25.50	3	Vertical	360	1.69	-	36.28	7.45	30.37
PK	4.87952G	49.80	74.00	-24.20	42.17	3	Vertical	120	2.42	-	31.18	5.83	29.38
PK	7.33116G	52.78	74.00	-21.22	39.44	3	Vertical	360	1.69	-	36.27	7.44	30.37

BT-LE(1Mbps)

30/10/2019

2440MHz_TX

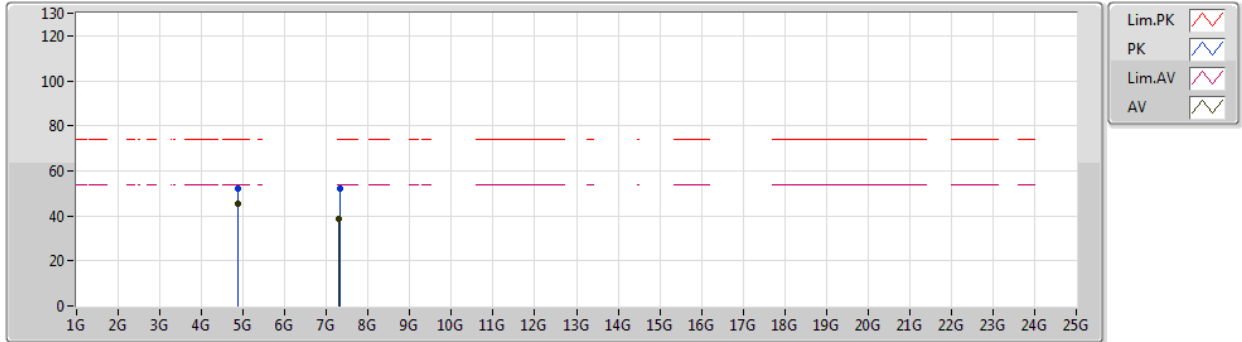


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	4.87994G	45.25	54.00	-8.75	37.62	3	Horizontal	172	2.22	-	31.18	5.83	29.38
AV	7.30542G	38.87	54.00	-15.13	25.44	3	Horizontal	313	1.69	-	36.29	7.49	30.35
PK	4.88048G	52.28	74.00	-21.72	44.64	3	Horizontal	172	2.22	-	31.18	5.83	29.37
PK	7.32612G	52.20	74.00	-21.80	38.85	3	Horizontal	313	1.69	-	36.27	7.45	30.37

BT-LE(1Mbps)

30/10/2019

2480MHz_TX

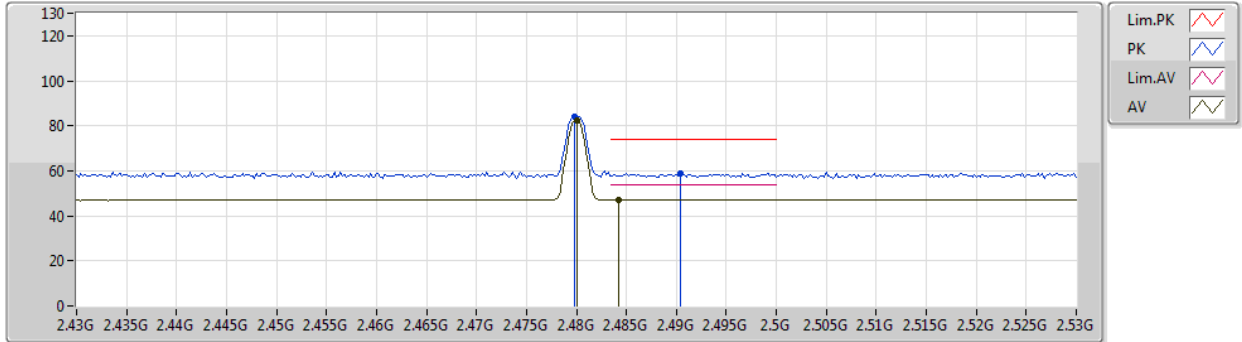


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	82.54	Inf	-Inf	51.12	3	Vertical	100	2.06	-	27.34	4.08	-
AV	2.4842G	47.14	54.00	-6.86	15.72	3	Vertical	100	2.06	-	27.33	4.09	-
PK	2.4798G	83.88	Inf	-Inf	52.46	3	Vertical	100	2.06	-	27.34	4.08	-
PK	2.4904G	58.98	74.00	-15.02	27.57	3	Vertical	100	2.06	-	27.32	4.09	-

BT-LE(1Mbps)

30/10/2019

2480MHz_TX

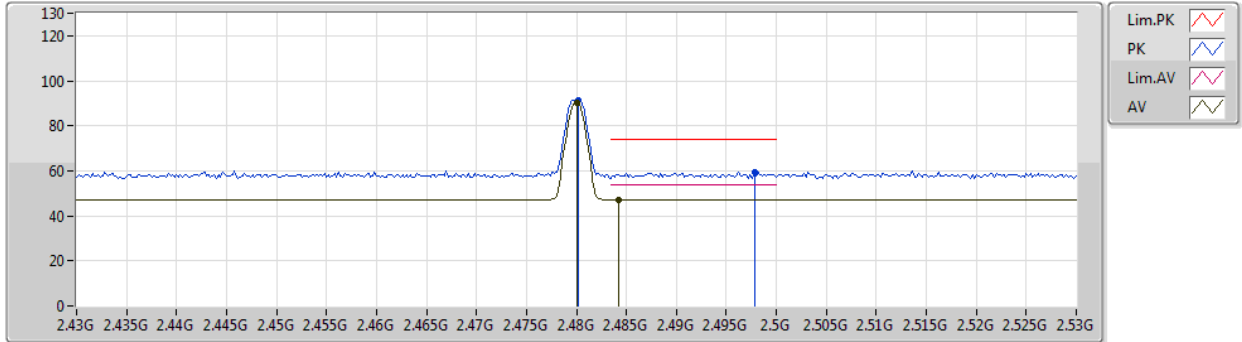


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	2.48G	90.12	Inf	-Inf	58.70	3	Horizontal	28	1.16	-	27.34	4.08	-
AV	2.4842G	47.14	54.00	-6.86	15.72	3	Horizontal	28	1.16	-	27.33	4.09	-
PK	2.4802G	91.26	Inf	-Inf	59.84	3	Horizontal	28	1.16	-	27.34	4.08	-
PK	2.4978G	59.57	74.00	-14.43	28.17	3	Horizontal	28	1.16	-	27.30	4.10	-



BT-LE(1Mbps)

30/10/2019

2480MHz_TX

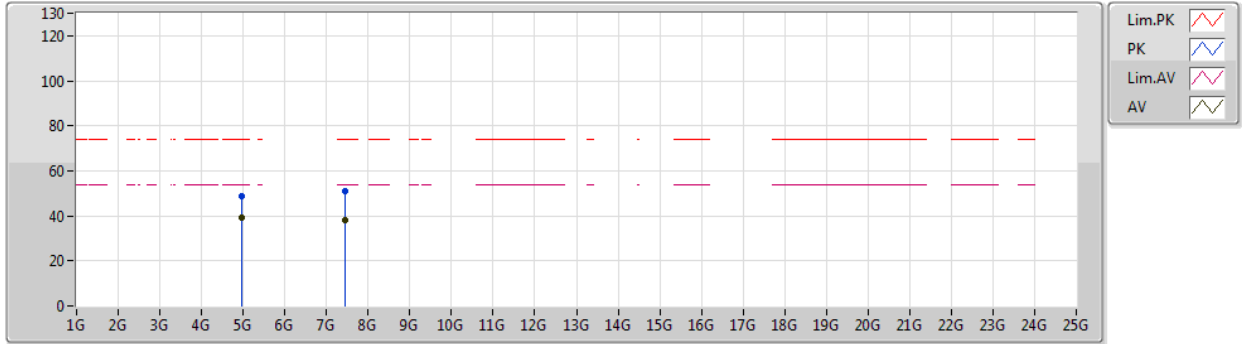


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	4.96012G	39.30	54.00	-14.70	31.37	3	Vertical	132	2.92	-	31.38	5.89	29.34
AV	7.43934G	38.35	54.00	-15.65	25.34	3	Vertical	57	1.50	-	36.24	7.24	30.47
PK	4.96036G	48.93	74.00	-25.07	41.00	3	Vertical	132	2.92	-	31.38	5.89	29.34
PK	7.44498G	50.96	74.00	-23.04	37.96	3	Vertical	57	1.50	-	36.24	7.23	30.47

BT-LE(1Mbps)

30/10/2019

2480MHz_TX

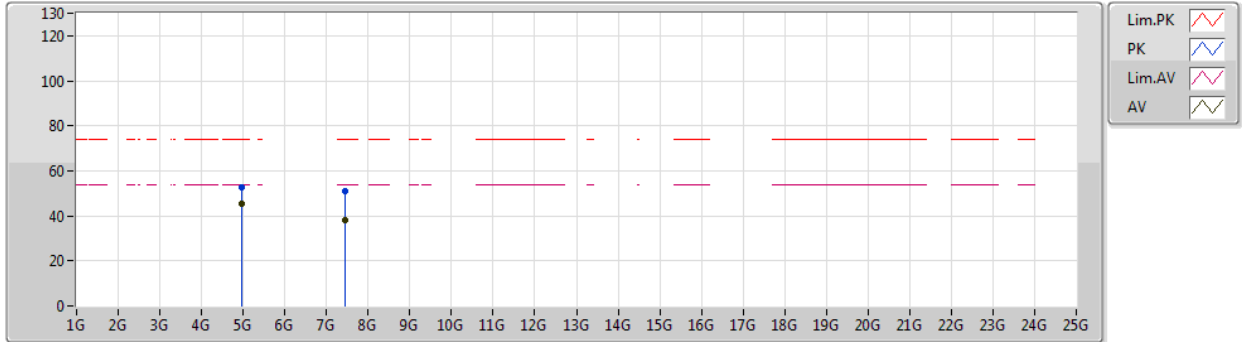

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB)	CL (dB)	PA (dB)
AV	4.95988G	45.32	54.00	-8.68	37.39	3	Horizontal	173	2.18	-	31.38	5.89	29.34
AV	7.44936G	38.32	54.00	-15.68	25.33	3	Horizontal	305	1.48	-	36.25	7.22	30.48
PK	4.9603G	52.55	74.00	-21.45	44.62	3	Horizontal	173	2.18	-	31.38	5.89	29.34
PK	7.4394G	51.02	74.00	-22.98	38.01	3	Horizontal	305	1.48	-	36.24	7.24	30.47