



FCC PART 15, SUBPART F
ISED C RSS-220, ISSUE 1, JULY 2018



TEST REPORT

For

Tesla Motors, Inc.

3500 Deer Creek Road, Palo Alto, CA 94304, USA

FCC ID: 2AEIM-1614291
IC: 20098-1614291

Report Type: Original Report	Product Type: Automotive Part
Prepared By: Christian McCaig Test Engineer	
Report Number: R2009181-247 Rev A	
Report Date: 2021-01-13	
Reviewed By: Simon Ma RF Supervisor	
<p>Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: +1 (408) 732-9162, Fax: +1 (408) 732-9164</p>	



Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”

TABLE OF CONTENTS

1 General Description.....	5
1.1 Product Description for Equipment Under Test (EUT)	5
1.2 Mechanical Description of EUT	5
1.3 Objective.....	5
1.4 Related Submittal(s)/Grant(s)	5
1.5 Test Methodology	5
1.6 Measurement Uncertainty	6
1.7 Test Facility Registrations	6
1.8 Test Facility Accreditations	6
2 System Test Configuration.....	9
2.1 Justification	9
2.2 EUT Exercise Software.....	9
2.3 Equipment Modifications.....	10
2.4 Remote Support Equipment.....	10
2.5 Local Support Equipment	10
2.6 Interface Ports and Cabling.....	10
3 Summary of Test Results	11
4 FCC §15.203 & ISEDC RSS-220 §5.1(b), RSS-Gen §6.8 - Antenna Requirements.....	12
4.1 Applicable Standards	12
4.2 Antenna Description	12
5 FCC §2.1091, §1.1310(d) (3) & ISEDC RSS-102 - RF Exposure.....	13
5.1 Applicable Standards	13
5.2 MPE Prediction.....	14
5.3 MPE Results for the FCC	14
5.4 RF Exposure Evaluation Exemption for IC	15
6 FCC §15.209, §15.519(c), (d) & ISEDC RSS-220 §3.4, §5.3.1(d), (e), RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions	16
6.1 Applicable Standards	16
6.2 Test Setup	19
6.3 Measurement Procedure.....	19
6.4 Corrected Amplitude and Margin Calculation	19
6.5 Test Equipment List and Details.....	21
6.6 Test Environmental Conditions	21
6.7 Test Results below 960 MHz.....	22
6.8 Test Results above 960 MHz.....	23
7 FCC §15.519(e), §15.521(e) & ISEDC RSS-220 §5.3.1(g) - Peak Fundamental Emission.....	52
7.1 Applicable Standards	52
7.2 Measurement Procedure.....	52
7.3 Test Equipment List and Details.....	53
7.4 Test Environmental Conditions	53
7.5 Test Results.....	54
8 FCC §15.503(d), §15.519(b) & ISEDC RSS-220 §5.1(a), RSS-Gen §6.7 -Emission Bandwidth.....	65
8.1 Applicable Standards	65
8.2 Measurement Procedure.....	65
8.3 Test Equipment List and Details.....	66
8.4 Test Environmental Conditions	66
8.5 Test Results.....	66
9 FCC §15.519(a) (1) & ISEDC RSS-220 §5.3.1(b) - Cease Transmission.....	73
9.1 Applicable Standards	73
9.2 Measurement Procedure.....	73
9.3 Test Equipment List and Details.....	73

9.4 Test Environmental Conditions 73

9.5 Test Results..... 74

6 Annex A (Normative) - Test Setup Photographs 75

7 Annex B (Normative) - EUT External Photographs..... 76

8 Annex C (Normative) - EUT Internal Photographs 77

9 Annex D (Normative) - A2LA Electrical Testing Certificate..... 78

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2009181-519	Original Report	2020-12-21
Rev A	R2009181-519	Adding reference for the test mode description in Section 2.2.	2021-01-13

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test report was prepared on behalf of *Tesla Motors, Inc.*, and their product model: 1614291, *FCC ID: 2AEIM-1614291; IC: 20098-1614291* or the “EUT” as referred to in this report. The EUT is an automotive part (B Pillar Endpoint) with Ultra Wide-band (UWB) operating in 6489.6-7987.2 MHz, Bluetooth Low Energy and NFC capabilities.

UWB Subclass as specified by RSS-220 §3.2: Hand-held Communication Devices.

The radio terminal has data port.

1.2 Mechanical Description of EUT

1614291 measures approximately 50.8 cm (Length) x 25.4 cm (Width) x 20 cm (High), and weighs approximately 0.9kg.

The data gathered are from two production samples provided by Tesla Motors, Inc., AL720248000049 and AL720248000090.

1.3 Objective

This report was prepared on behalf of *Tesla Motors, Inc.*, in accordance with Part 2, Subpart J, and Part 15, Subpart and F of the Federal Communication Commission’s rules and ISEDC RSS-220 Issue 1, July 2018.

The objective was to determine compliance with FCC Part 15.519 and ISEDC RSS-220 rules for Peak Fundamental Emission, Antenna Requirements, UWB Bandwidth, Average Radiated Emissions, Radiated Spurious Emissions and Ceasing Transmission requirements.

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment Class: DTS with FCC ID: 2AEIM-1614291; IC: 20098-1614291

FCC Part 15, Subpart C, Equipment Class: DXX with FCC ID: 2AEIM-1614291; IC: 20098-1614291

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 393761 D01 UWB FAQ v02: Ultra-Wideband (UWB) Devices Frequently Asked Questions.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48dB
Unwanted Emissions, conducted	±1.57dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2 ° C
Humidity	±5 %
DC and low frequency voltages	±1.0 %
Time	±2 %
Duty Cycle	±3 %

1.7 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R.

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2005 by A2LA (Test Laboratory Accreditation Certificate Number 3297.01), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2005 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report.

BACL's ISO/IEC 17025:2005 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.02) to certify

- For the USA (Federal Communications Commission):
 - 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
 - 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
 - 3- All Telephone Terminal Equipment within FCC Scope C.
- For the Canada (Industry Canada):
 - 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
 - 2 All Scope 2-Licensed Personal Mobile Radio Services;
 - 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
 - 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
 - 5 All Scope 5-Licensed Fixed Microwave Radio Services
 - 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.
- For Singapore (Info-Communications Development Authority (IDA)):
 - 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
 2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2
- For the Hong Kong Special Administrative Region:
 - 1 All Radio Equipment, per KHCA 10XX-series Specifications;
 - 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
 - 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.
- For Japan:
 - 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
 - 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)

- for Televisions (ver. 6.1)
- for Computers (ver. 6.0)
- for Displays (ver. 6.0)
- for Imaging Equipment (ver. 2.0)
- for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISEDC) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

2.2 EUT Exercise Software

Python scripts were provided by Tesla Motors, Inc., and was verified to be compliant with the standard requirements being tested against. The following channel frequencies were selected for testing. All the modes were measured for fundamental field strength, and the corresponding power settings used are listed below.

Radio	Frequency (MHz)	Mode	Power Setting
UWB	6489.6 MHz (Channel 5)	0	4
		4	1.75
		8	0.75
		9	2.5
		13	1.5
		14	2.25
	6988.8 MHz (Channel 6)	0	5.75
		4	4.25
		8	3.75
		9	4.75
		13	4.25
		14	4.75
	7987.2 MHz (Channel 9)	0	5.75
		4	4.25
		8	3.75
		9	4.75
		13	4.25
		14	4.75

Please refer to the Operational Description for detailed description of the test modes.

2.3 Equipment Modifications

None

2.4 Remote Support Equipment

Manufacturer	Description	Model	S/N
HP	Laptop	Zbook Studio G3	00329-00000-00003-AA284
PJRC	Teensy	Teensy-LC	M26M6VFT1N1SJCRFKCJ

2.5 Local Support Equipment

Manufacturer	Description	Model	S/N
Volteq	DC Power Supply	HY5003D	160402343

2.6 Interface Ports and Cabling

Cable Description	Length (m)	To	From
Power Cables	< 1 m	EUT	DC Power Supply
RF Cable	1 m	EUT	PSA
USB Type A to Micro USB Type B Cable	< 1 m	PC	Teensy
RS-232 Cable	< 1 m	Teensy	EUT

3 Summary of Test Results

Results reported relate only to the product tested.

FCC and ISEDC Rules	Description of Test	Results
FCC §15.203 ISEDC RSS-220 §5.1(b), ISEDC RSS-Gen §6.8	Antenna Requirement	Compliant
FCC §15.207 ISEDC RSS-Gen §8.8	AC Line Conducted Emissions	N/A ¹
FCC §2.1091, §1.1310(d) (3) ISEDC RSS-102	RF Exposure	Compliant
FCC §2.1053, §15.205, §15.209, §15.519(c) ISEDC RSS-220 §3.4, 5.3.1(c) ISEDC RSS-Gen §8.9 & §8.10	Radiated Spurious Emissions	Compliant
FCC §15.503(d), §15.519(b) ISEDC RSS-220 §5.1(a) ISEDC RSS-Gen §6.7	Emission Bandwidth	Compliant
FCC §15.519(e) ISEDC RSS-220 §5.3.1(g)	Peak Fundamental Emission	Compliant
FCC §15.519(c), §15.519(d) ISEDC RSS-220 §5.3.1(d), §5.3.1(e)	Average Radiated Emissions	Compliant
FCC §15.519(a)(1) ISEDC RSS-220 §5.3.1(b)	Cease Transmission	Compliant

Note¹: Device is powered by car battery.

4 FCC §15.203 & ISEDC RSS-220 §5.1(b), RSS-Gen §6.8 - Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

According to ISEDC RSS-Gen §6.8: Transmitter Antenna

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

4.2 Antenna Description

External/Internal/Integral	Maximum Antenna Gain (dBi)	Antenna Type
Integral	5.37	Chip Antenna

The antenna is factory-installed and is not modifiable by users.
The antenna gain is information provided by the customer.

5 FCC §2.1091, §1.1310(d) (3) & ISEDC RSS-102 - RF Exposure

5.1 Applicable Standards

As per FCC §1.1310(d) (3), At operating frequencies above 6 GHz, the MPE limits listed in Table 1 in paragraph (e)(1) of this section shall be used in all cases to evaluate the environmental impact of human exposure to RF radiation as specified in §1.1307(b) of this part.

TABLE 1 TO §1.1310(E)(1)—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*(100)	≤6
3.0-30	1842/f	4.89/f	*(900/f ²)	<6
30-300	61.4	0.163	1.0	<6
300-1,500			f/300	<6
1,500-100,000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	<30
1.34-30	824/f	2.19/f	*(180/f ²)	<30
30-300	27.5	0.073	0.2	<30
300-1,500			f/1500	<30
1,500-100,000			1.0	<30

f = frequency in MHz. * = Plane-wave equivalent power density.

According to ISED RSS-102 Issue 5 §2.5.2, Exemption Limits for Routine Evaluation- RF Exposure Evaluation,

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);

- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

5.3 MPE Results for the FCC

UWB Standalone

Maximum output power at antenna input terminal (dBm): -47.25

Maximum output power at antenna input terminal (mW): 0.000019

Prediction distance (cm): 20

Prediction frequency (MHz): 6988.8

Maximum Antenna Gain, typical (dBi): 5.37

Maximum Antenna Gain (numeric): 3.44

Power density of prediction frequency at 20 cm (mW/cm²): 0.00000001

FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²): 1.0

The device is compliant with the FCC requirement MPE limit for uncontrolled exposure. The maximum power density at the distance of 20 cm is 0.00000001 mW/cm². Limit is 1.0 mW/cm².

Worst Case Co-location MPE Calculation: UWB, BLE and NFC

Radio	Max Conducted Power (dBm)	Evaluated Distance (cm)	Worst-Case Exposure Level	Limit	Worst-Case Ratios	Sum of Ratios	Limit
Worst Case							
BLE	2.64	20	0.000765 mW/cm ²	1.0 mW/cm ²	0.0765%	0.08%	100%
UWB	-47.25	20	0.00000001 mW/cm ²	1.0 mW/cm ²	0.000001%		
NFC	-22.41	20	0.000001 mW/cm ²	0.979 mW/cm ²	0.0001%		

5.4 RF Exposure Evaluation Exemption for IC

The conducted output power of this device is -47.25 dBm, which is less than the exemption threshold, i.e., 5 W. Therefore, the RF exposure evaluation is exempt.

6 FCC §15.209, §15.519(c), (d) & ISEDC RSS-220 §3.4, §5.3.1(d), (e), RSS-Gen §8.9, §8.10 - Spurious Radiated Emissions

6.1 Applicable Standards

As per FCC §15.519(c), the radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209

As per FCC §15.35(b): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As Per FCC §15.205(a) and RSS-Gen except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3332 – 3339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3345.8 – 3358	23.6 – 24.0
12.29 – 12.293	240 – 285	3600 – 4400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per ISEDC RSS-Gen §8.9, except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in the table below. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

General Field Strength Limits at Frequencies above 30 MHz

Frequency (MHz)	Field Strength ($\mu\text{v}/\text{m}$ at 3 meters)
30-88	100
88-216	150
216-960	200
Above 960	500

As per ISEDC RSS-220 §5.3.1(c), Radiated emissions at or below 960 MHz from a device shall not exceed the limits in section 3.4

As per ISEDC RSS-220 §3.4, Radiated emissions at or below 960 MHz for all subclasses of UWB device shall not exceed the following limits. Measurements of radiated emissions at and below 960 MHz are to be made using a CISPR quasi-peak detector. CISPR measurement bandwidth specifications are to be used

Radiated Emissions at or below 960 MHz			
Frequency (MHz)	Field Strength (Microvolts/m)	Measurement Distance (Metres)	E.i.r.p. (dBmW)
0.009-0.490	2,400/F (F in kHz)	300	10 log (17.28 / F ²) (F in kHz)
0.490-1.705	24,000/F (F in kHz)	30	10 log (17.28 / F ²) (F in kHz)
1.705-30	30	30	-45.7
30-88	100	3	-55.2
88-216	150	3	-51.7
216-960	200	3	-49.2

According to FCC §15.519(c): (c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

According to ISEDC RSS-220 §5.3.1(d): Radiated emissions above 960 MHz from a device shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz.

Frequency	EIRP
960-1610 MHz	-75.3 dBm
1.61-4.75 GHz	-70.0 dBm
4.75-10.6 GHz	-41.3 dBm
Above 10.6 GHz	-61.3 dBm

According to FCC §15.519(c): (d) In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency in MHz	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

According to ISEDC RSS-220 §5.3.1(e): In addition to the limits specified in paragraph (d) of this section, radiated emissions shall not exceed the following average limits when measured using a resolution bandwidth greater than or equal to 1 kHz. The measurements shall demonstrate compliance with the stated limits at whatever resolution bandwidth is used.

Frequency	e.i.r.p. in a Resolution Bandwidth of no less than 1 kHz
1164-1240 MHz	-85.3 dBm
1559-1610 MHz	-85.3 dBm

6.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart F and ISEDC RSS-220 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

6.3 Measurement Procedure

The EUT host, and all support equipment power cords were connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For radiated testing the EUT was set 1 meter away from the testing antenna, which was varied from 1-4 meter, and the EUT was placed on a turntable, which was 0.8 meter and 1.5 meter above the ground plane for below and above 960 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 960 MHz:

$$\text{RBW} = 100 \text{ kHz} / \text{VBW} = 300 \text{ kHz} / \text{Sweep} = \text{Auto}$$

Above 960 MHz:

The measurements were based on ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices section 10.3: Radiated measurement procedure above 960MHz.

6.4 Corrected Amplitude and Margin Calculation

For emissions below 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Correction Factor to the S.A. Reading. The basic equation is as follows:

$$\text{CA} = \text{S.A. Reading} + \text{Correction Factor}$$

For example, a corrected amplitude of 40.3 dBuV/m = S.A. Reading (32.5 dBuV) + Correction Factor (7.8 dB/m)

The Correction Factor is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) together. This calculation is done in the measurement software, and reported in the test result section. The basic equation is as follows:

$$\text{Correction Factor} = \text{AF} + \text{CL} + \text{Atten} - \text{Ga}$$

For emission above 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100044	2020-10-26	2 years
Rhode & Schwarz	Spectrum Analyzer	FSV40	1321.3008K39 -101203-UW	2020-02-06	1 year
Rhode & Schwarz	Spectrum Analyzer	FSQ26	200749	2019-11-07	2 years
Agilent	Spectrum Analyzer	E4446A	MY48250238	2019-06-26	18 months
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
Sunol Sciences	Biconilog Antenna	JB3	A020106-2	2019-11-20	2 years
ETS Lindgren	Horn Antenna w/ built in Preamplifier	3117 PA	203557	2020-06-20	2 years
Wisewave	Antenna, Horn	ARH-2823-02	10555-01	2020-02-05	2 years
Wisewave	Antenna, Horn	ARH-2823-02	10555-02	2020-02-05	2 years
MDP Digital	Times Microwave LMR 400 UltraFex Coaxial Cable 35'	LMR400UF	BACL1904161	2020-05-20	1 year
-	SMA cable1	-	-	Each time ¹	N/A
-	SMA cable2	-	-	Each time ¹	N/A
IW Microwave	157 Series Cable Armored with 2.92mm Male Plugs on Both Sides	KPS-1571AN- 2400	DC 1922	2020-06-06	1 year
IW Microwave	157 Series 2.92 SM (x2) Armored 33 ft. Cable	KPS-1571AN- 3960-KPS	DC 1917	2020-02-28	1 year
HP	Pre Amplifier	8447D	2443A04374	2020-08-17	1 year
AH Systems	Preamplifier	PAM 1840 VH	170	2020-11-09	1 year
Agilent	Preamplifier	8449B OPT HO2	3008A0113	2020-04-15	1 year
Agilent	Preamplifier	8449B	3147A00400	2020-02-27	1 year
Vasona	Test software	V6.0 build 11	10400213	N/R	N/R

Note¹: cables included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

6.6 Test Environmental Conditions


Temperature:	20-22 °C
Relative Humidity:	42-50 %
ATM Pressure:	102.7 kPa

The testing was performed by Christian McCaig from 2020-11-18 and 2020-12-18 in 5m 3.

6.7 Test Results below 960 MHz

Worst case configuration: middle channel 6988.8 MHz, Mode 0

30 MHz – 1 GHz Worst case measured at 3 meters

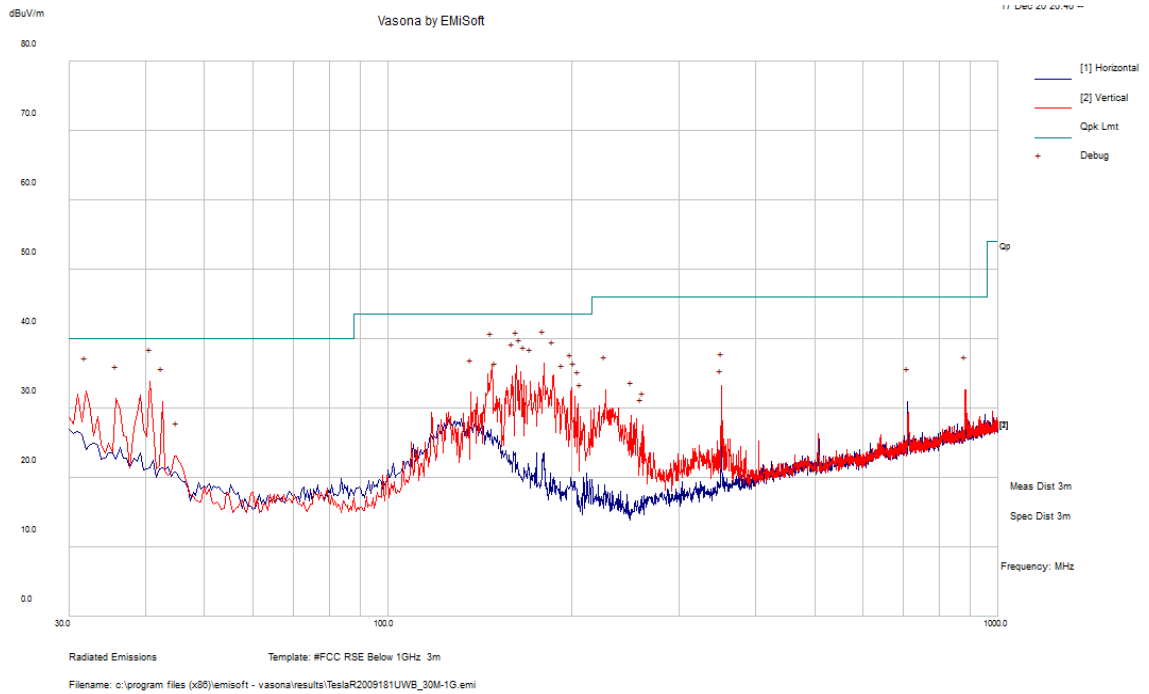

Freq. (MHz)	S.A. Reading (dBμV)	Corr. Factor (dB/m)	Corrected Amp. (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Comment
40.3265	26.26	-10.15	16.11	281	V	230	40	-23.89	QP
180.012	39.27	-11.94	27.33	127	V	308	43.5	-16.17	QP
162.4635	37.35	-11.01	26.34	100	V	202	43.5	-17.16	QP
147.7125	35.57	-10.86	24.71	107	V	196	43.5	-18.79	QP
31.685	24.42	-3.45	20.97	272	H	72	40	-19.03	QP
164.6178	32.06	-11.15	20.91	105	V	17	43.5	-22.59	QP

6.8 Test Results above 960 MHz

Note: Measurements were performed at 3m distance.


Average Radiated Fundamental Field Strength

Channel Number	Channel Frequency (MHz)	Mode	PSA Reading (dB μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Pre Amp Gain (dB)	Corrected Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5	6489.6	0	44.06	35.6	11.7	38.12	53.24	-42.06	-41.3	-0.76
		4	43.99	35.6	11.7	38.12	53.17	-42.13	-41.3	-0.83
		8	44.24	35.6	11.7	38.12	53.42	-41.88	-41.3	-0.58
		9	44.03	35.6	11.7	38.12	53.21	-42.09	-41.3	-0.79
		13	44.09	35.6	11.7	38.12	53.27	-42.03	-41.3	-0.73
		14	44.23	35.6	11.7	38.12	53.41	-41.89	-41.3	-0.59
6	6988.8	0	42.66	35.7	13.03	38.21	53.17	-42.13	-41.3	-0.83
		4	43.07	35.7	12.86	38.21	53.42	-41.88	-41.3	-0.58
		8	42.85	35.7	12.86	38.21	53.20	-42.1	-41.3	-0.8
		9	42.75	35.7	12.86	38.21	53.11	-42.19	-41.3	-0.89
		13	42.82	35.7	12.86	38.21	53.17	-42.13	-41.3	-0.83
		14	42.72	35.7	12.86	38.21	53.07	-42.23	-41.3	-0.93
9	7987.2	0	40.77	35.9	15.16	38.91	52.92	-42.38	-41.3	-1.08
		4	41.20	35.9	15.16	38.91	53.35	-41.95	-41.3	-0.65
		8	41.23	35.9	15.16	38.91	53.38	-41.92	-41.3	-0.62
		9	43.29	35.9	15.16	38.91	53.09	-42.21	-41.3	-0.91
		13	43.42	35.9	15.16	38.91	53.22	-42.08	-41.3	-0.78
		14	43.56	35.9	15.16	38.91	53.36	-41.94	-41.3	-0.64

Please refer to the following plots.


Channel 5 (6489.6 MHz), Fundamental Average Measurements

Mode 0

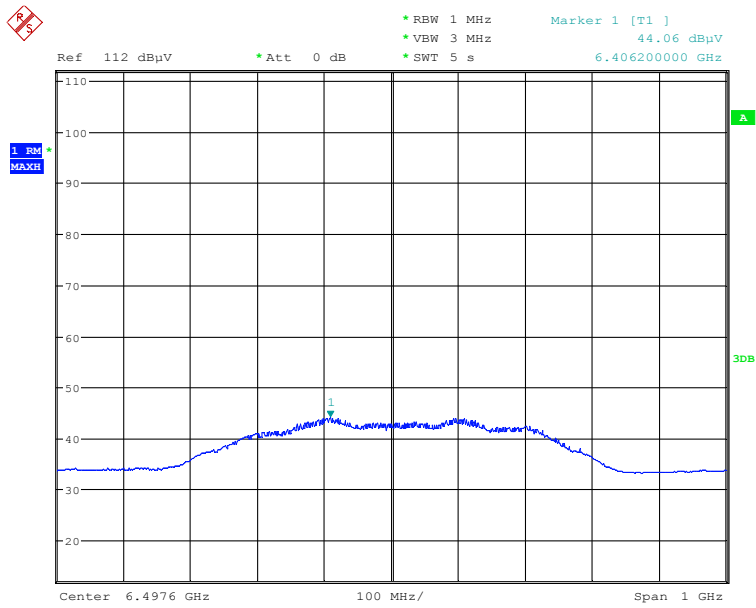


Date: 3.DEC.2020 15:21:01

Mode 4

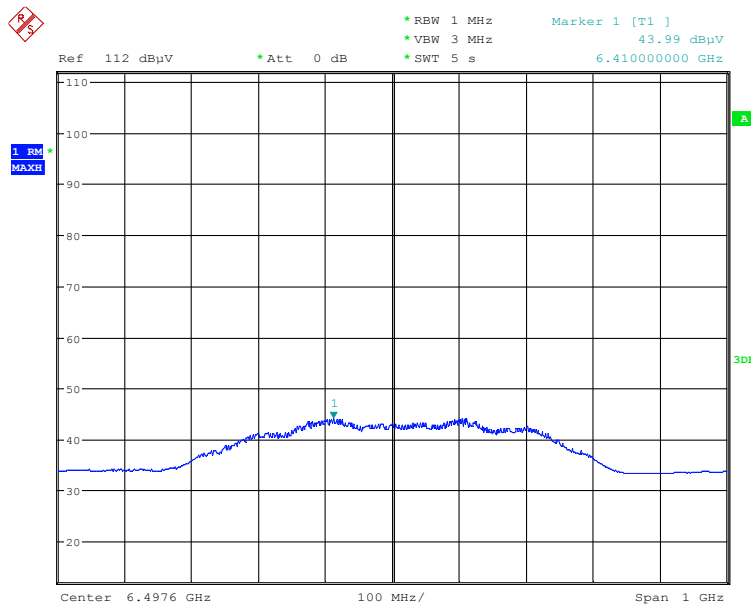


Date: 3.DEC.2020 15:28:05

Mode 8

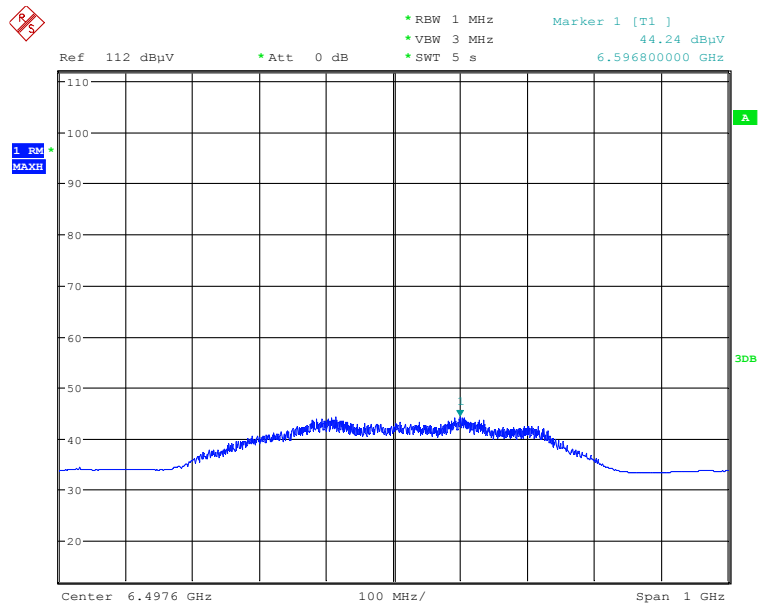


Date: 3.DEC.2020 15:45:45

Mode 9

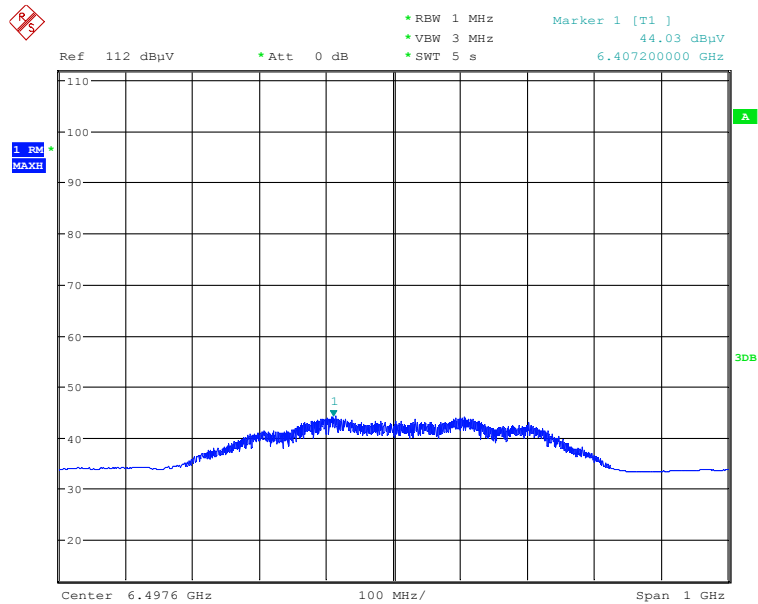


Date: 3.DEC.2020 15:50:43

Mode 13

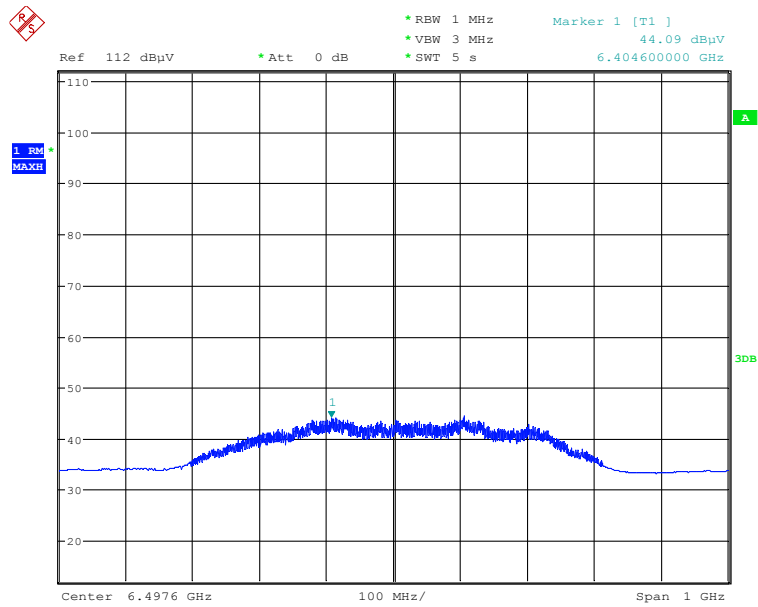

Date: 3.DEC.2020 15:57:15


Mode 14

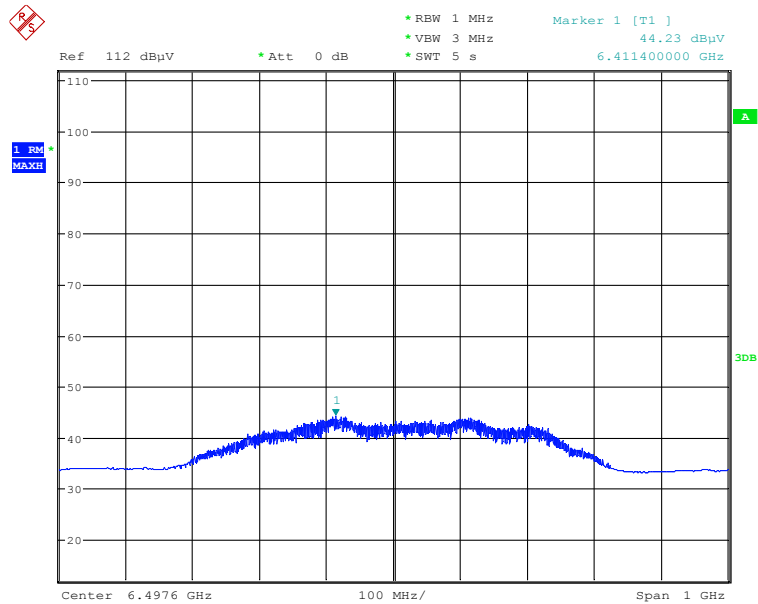

Date: 3.DEC.2020 16:02:59


Channel 6 (6988.8MHz), Fundamental Average Measurements

Mode 0

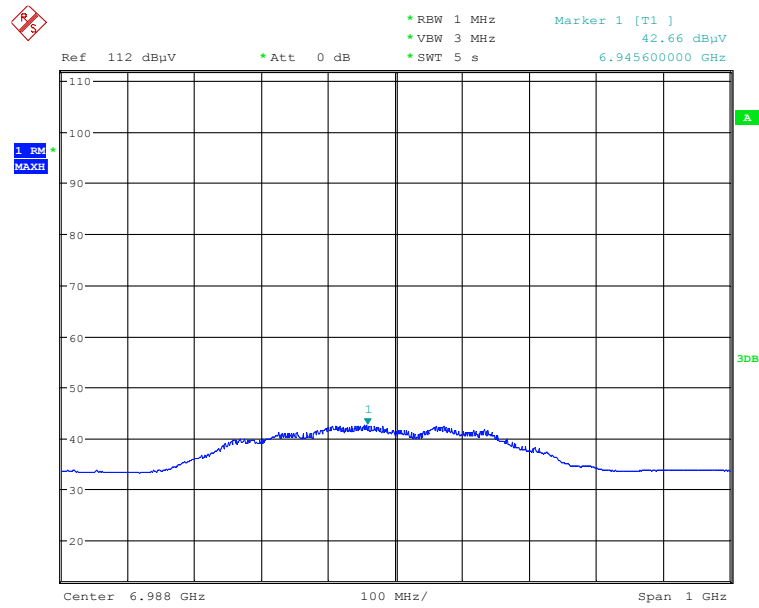


Date: 8.DEC.2020 10:18:00

Mode 4

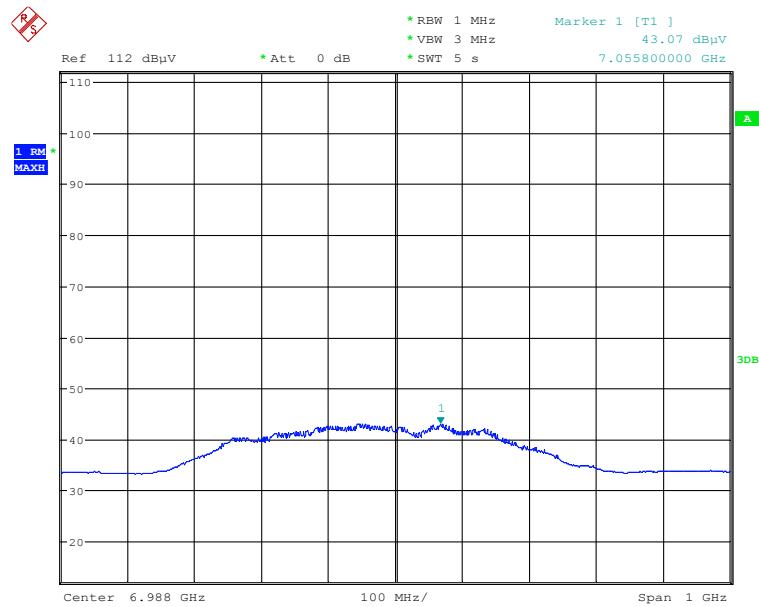


Date: 8.DEC.2020 10:21:39

Mode 8

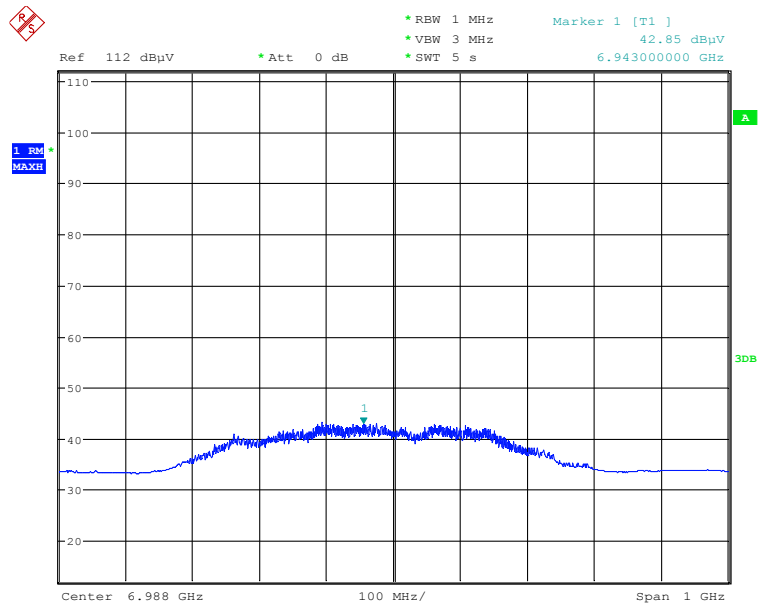


Date: 8.DEC.2020 10:24:34

Mode 9

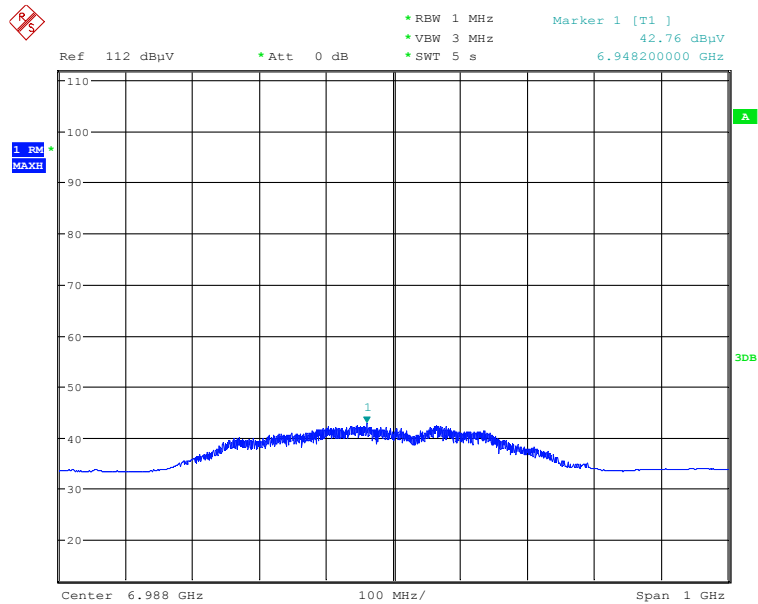


Date: 8.DEC.2020 10:31:38

Mode 13

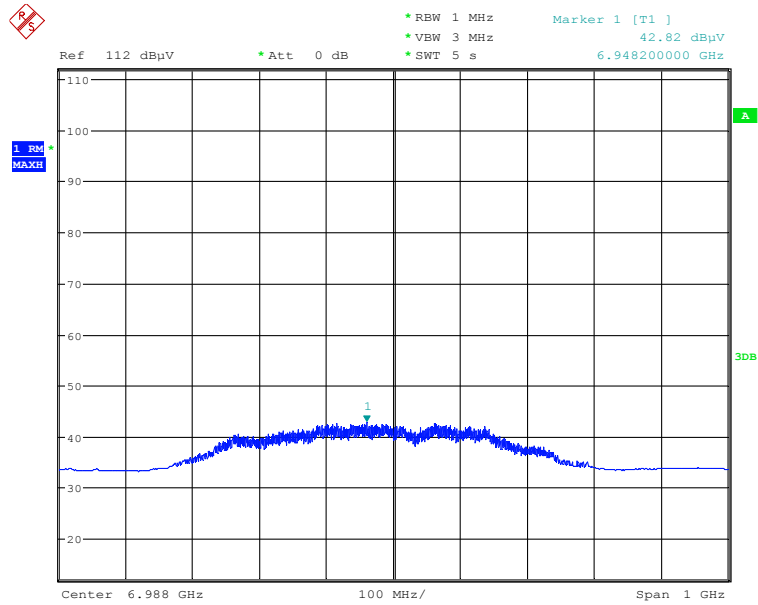

Date: 8.DEC.2020 10:35:04


Mode 14

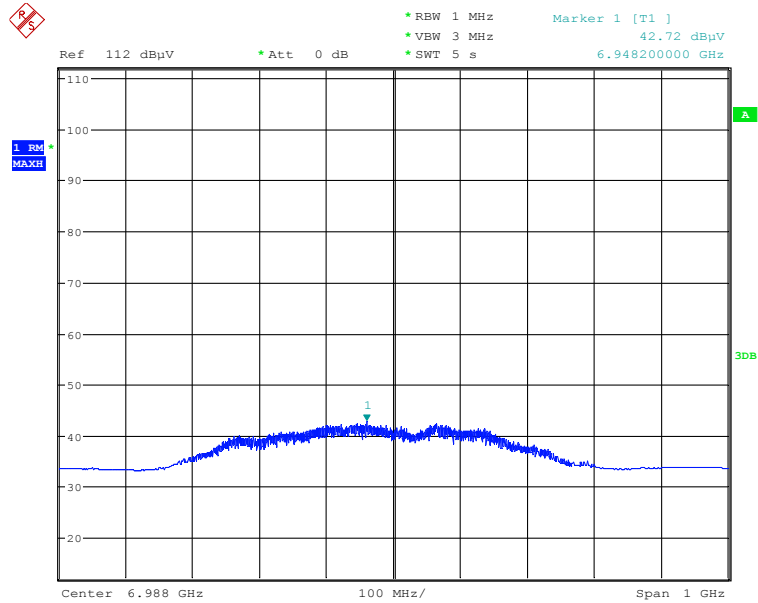

Date: 8.DEC.2020 10:39:43


Channel 9 (7987.2MHz), Fundamental Average Measurements

Mode 0

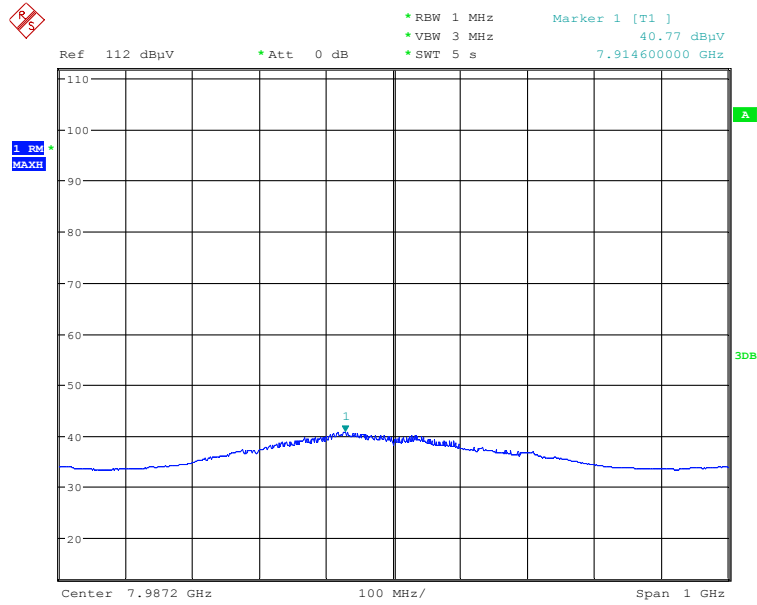


Date: 8.DEC.2020 09:38:24

Mode 4

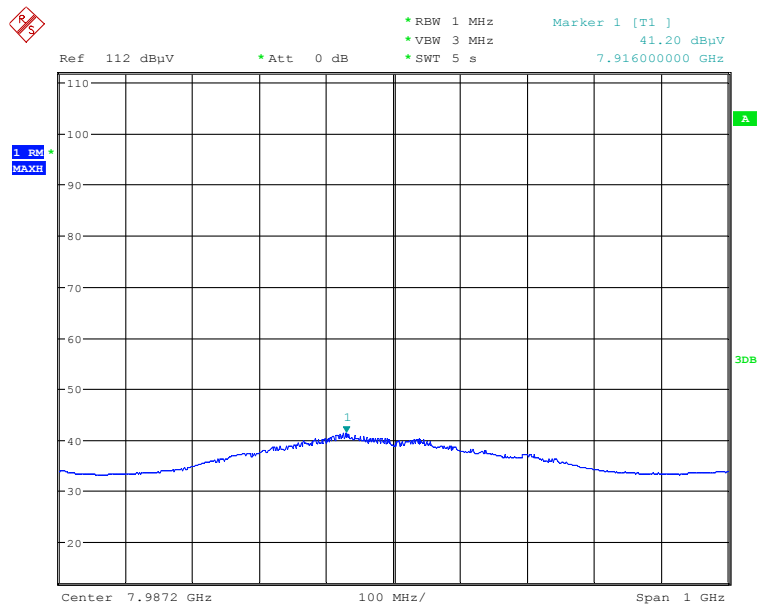


Date: 8.DEC.2020 09:44:55

Mode 8

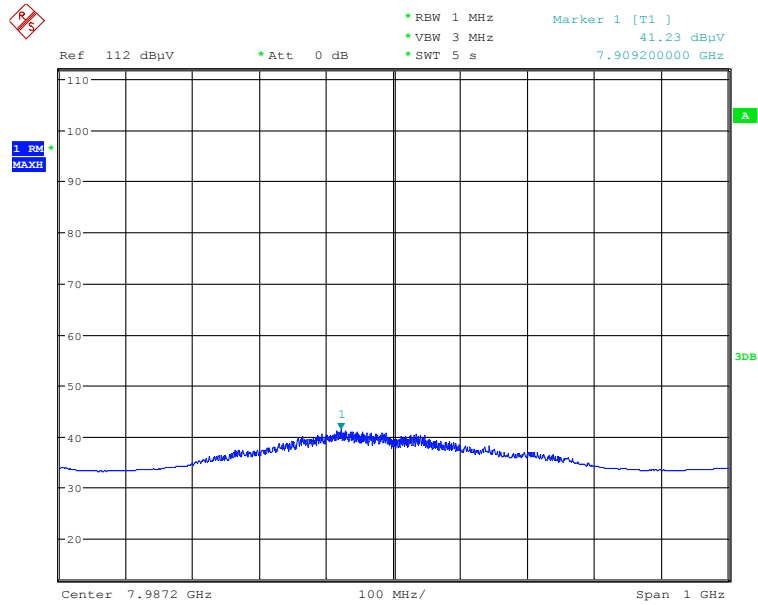


Date: 8.DEC.2020 09:51:33

Mode 9

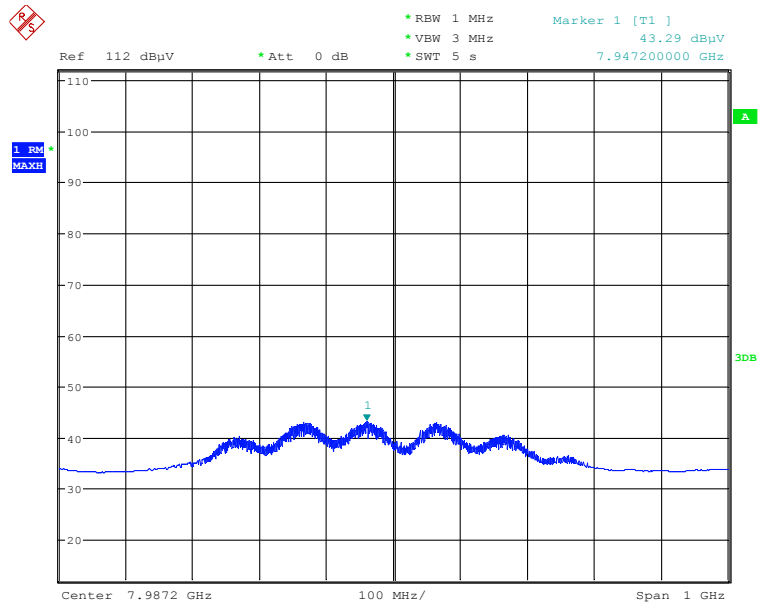


Date: 3.DEC.2020 16:36:58

Mode 13

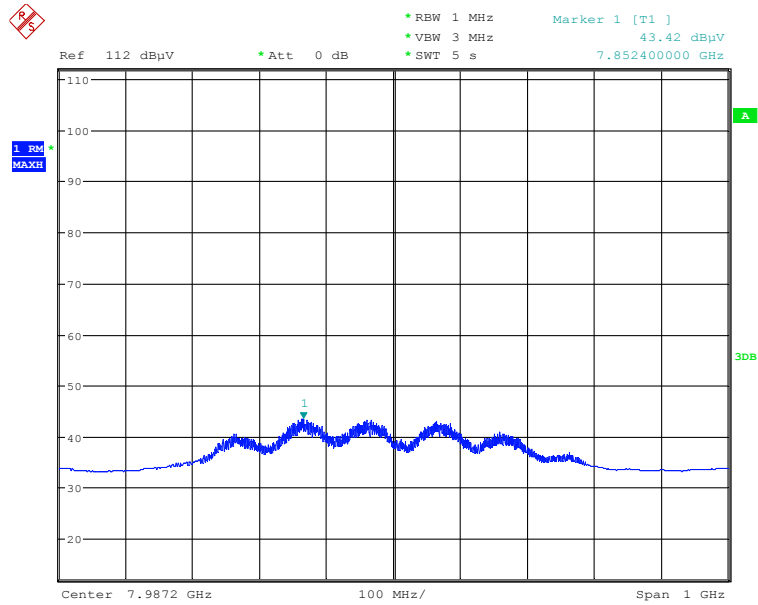

Date: 3.DEC.2020 16:33:13

Mode 14

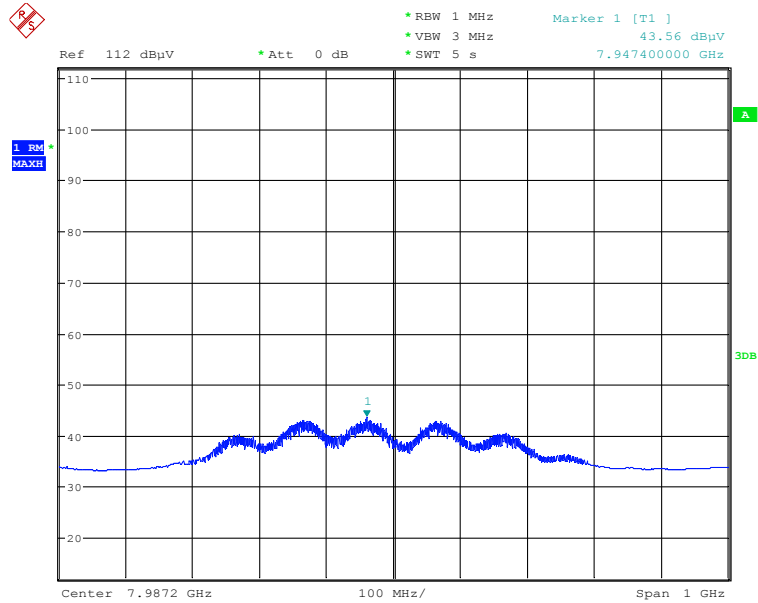

Date: 3.DEC.2020 16:28:49

Average Radiated Spurious Emissions: 960 MHz-26.5 GHz

Note: Measurement was performed at 1m distance. The stricter IC limit was used to demonstrate compliance.

Note: For Spurious Emissions testing, pre-scan was performed for all modes, and Mode 0 was selected to demonstrate compliance as the worst case configuration.


Note: For Spurious Emissions in 960MHz to 2GHz range, “Baseline” scans were performed to show that displayed “failing” emissions in screenshots are from the support equipment, i.e., laptop, Teensy, and the connection in between, but not from the EUT. “Baseline” scans were performed with the laptop on and Teensy plugged in, EUT was powered off.

Note: In radiated measurement screenshots from 960MHz to 26.5GHz, shown emissions account for equipment factors to show corrected values compared to applicable limits.


Note: According to ANSI C63.10 Section 10.3.9, measured field strength in dBµV/m was converted to EIRP in dBm to compare with the limit. The equation below was used,

$$EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} - 95.3$$

960 MHz-2 GHz H-Pol Baseline

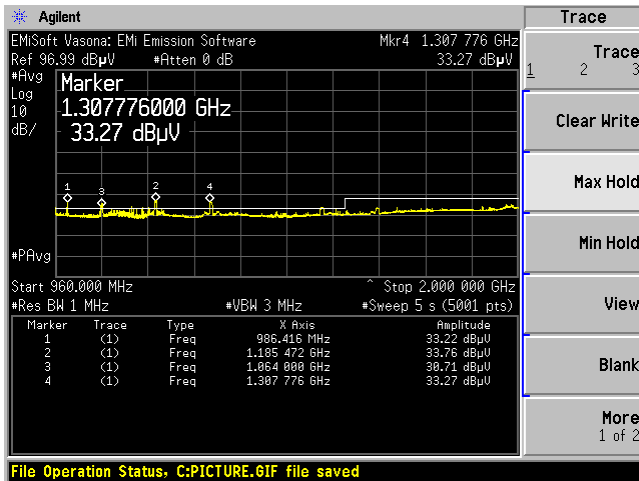

960 MHz-2 GHz V-Pol Baseline

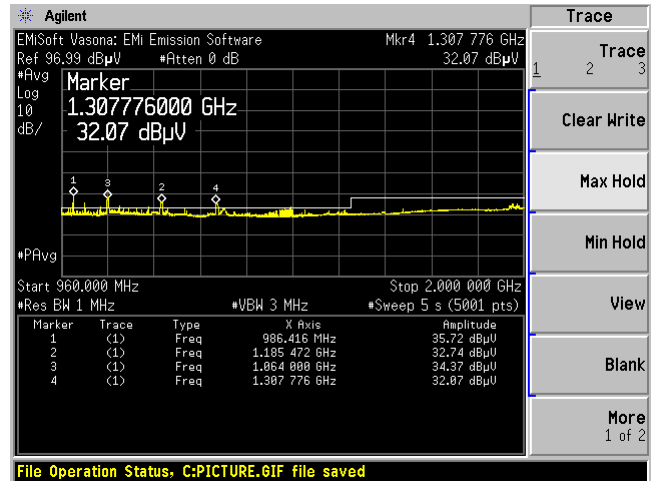


Channel 5 (6489.6 MHz), Mode 0


Measured Emission Frequency (GHz)	Antenna Pol (H/V)	Field Strength (dBµV/m at 1m)	Corrected Average Field Strength (dBµV/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
12.98	V	39.04	29.50	-65.8	-61.3	-4.50
12.98	H	39.24	29.70	-65.6	-61.3	-4.30
25.302	V	39.67	30.13	-65.17	-61.3	-3.87
25.302	H	39.71	30.17	-65.13	-61.3	-3.83

Please refer to the following plots.


960 MHz-2 GHz H-Pol

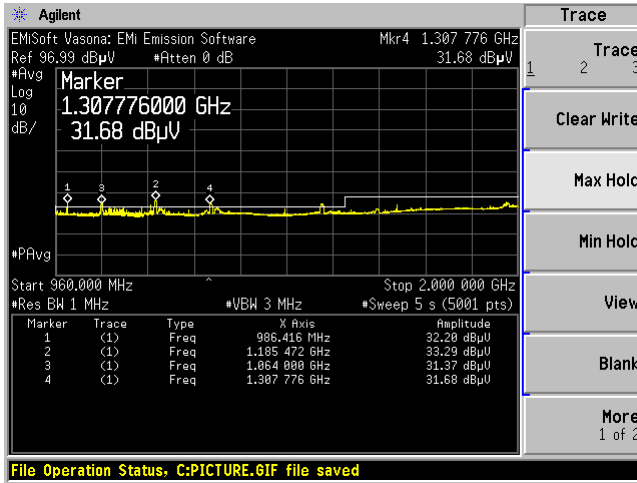


960 MHz-2 GHz V-Pol

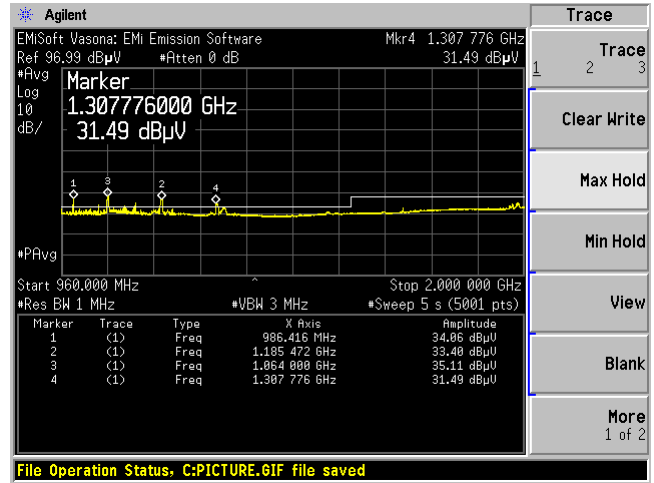


2 GHz-18 GHz H-Pol

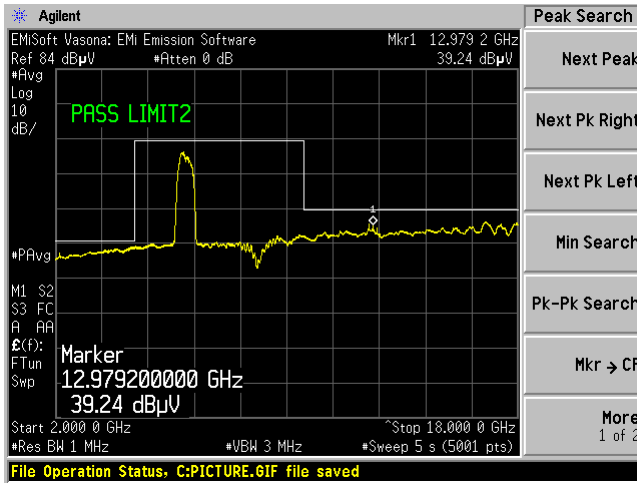


2 GHz-18 GHz V-Pol

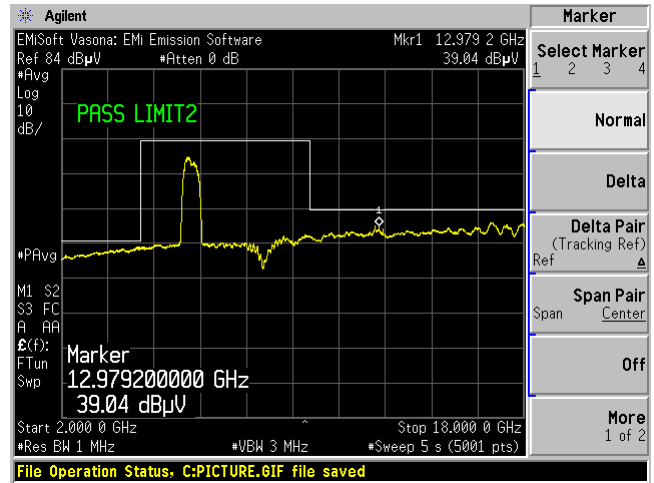

18 GHz-26.5 GHz H-Pol

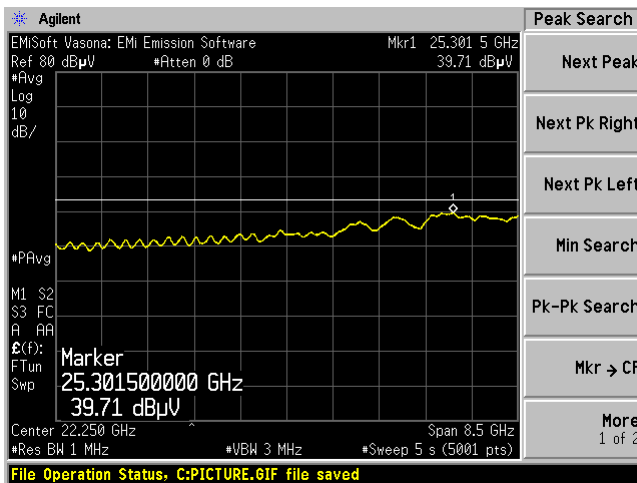

18 GHz-26.5 GHz V-Pol

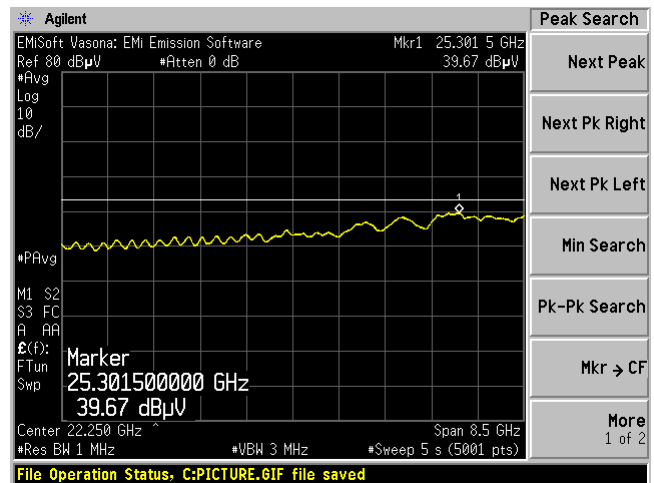


Channel 6 (6988.8 MHz), Mode 0


Measured Emission Frequency (GHz)	Antenna Pol (H/V)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
13.98	V	40.20	30.66	-64.64	-61.3	-3.34
13.98	H	38.31	28.77	-66.53	-61.3	-5.23
25.302	V	39.65	30.11	-65.19	-61.3	-3.89
25.302	H	39.73	30.19	-65.11	-61.3	-3.81

Please refer to the following plots.


960 MHz-2 GHz H-Pol

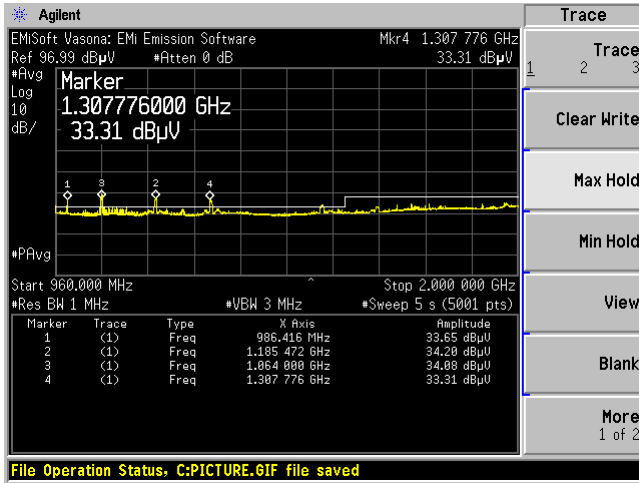


960 MHz-2 GHz V-Pol

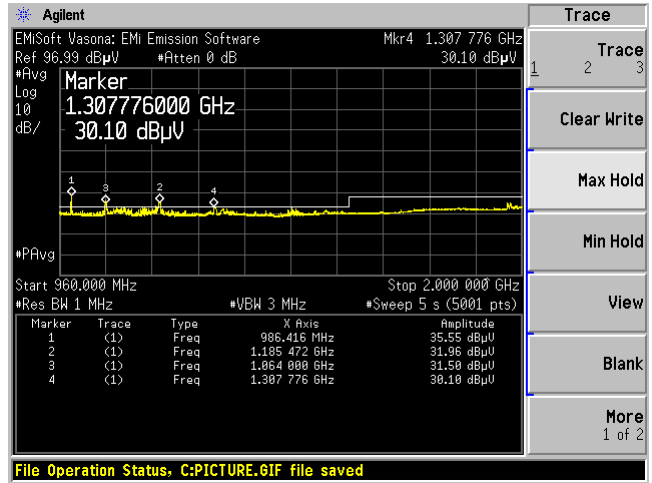


2 GHz-18 GHz H-Pol

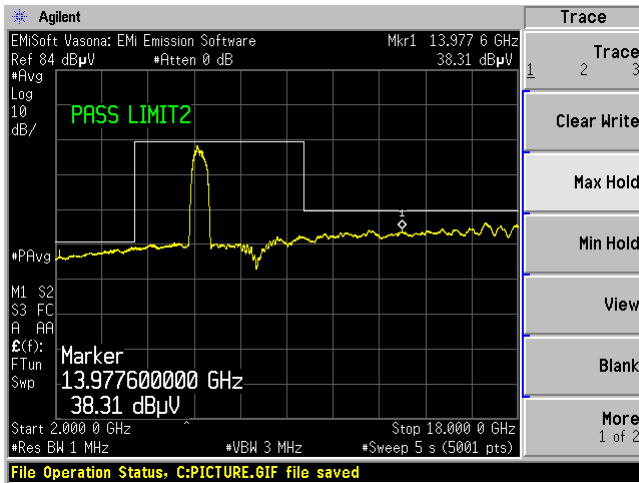


2 GHz-18 GHz V-Pol

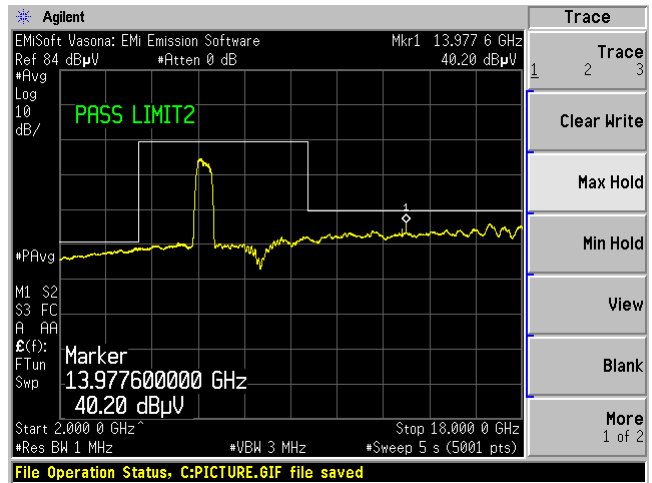

18 GHz-26.5 GHz H-Pol

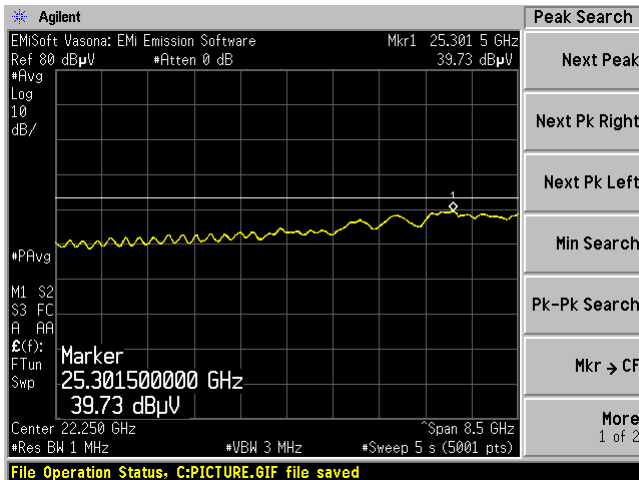

18 GHz-26.5 GHz V-Pol

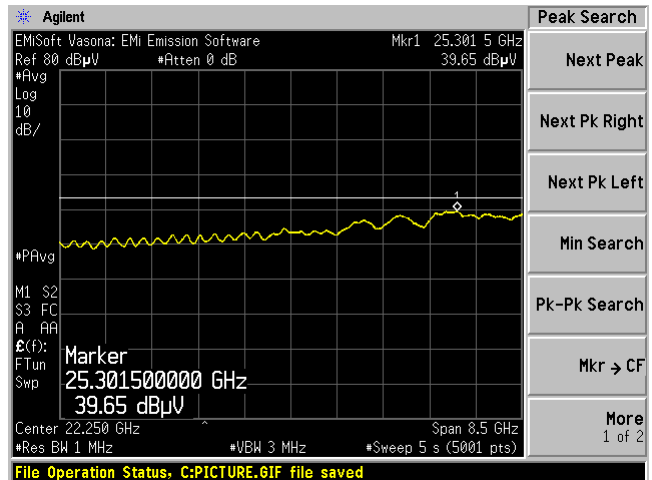


Channel 9 (7987.2 MHz), Mode 0


Measured Emission Frequency (GHz)	Antenna Pol (H/V)	Field Strength (dB μ V/m at 1m)	Corrected Average Field Strength (dB μ V/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
13.98	V	38.41	28.87	-66.43	-61.3	-5.13
13.98	H	37.75	28.21	-67.09	-61.3	-5.79
25.302	V	39.71	30.17	-65.13	-61.3	-3.83
25.302	H	39.78	30.24	-65.06	-61.3	-3.76

Please refer to the following plots.


960 MHz-2 GHz H-Pol

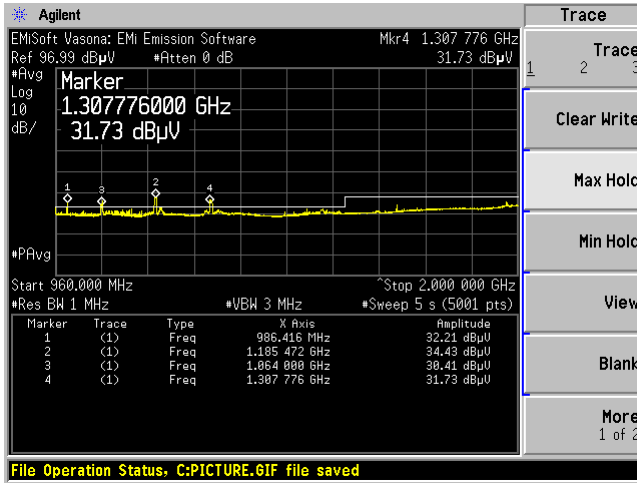


960 MHz-2 GHz V-Pol

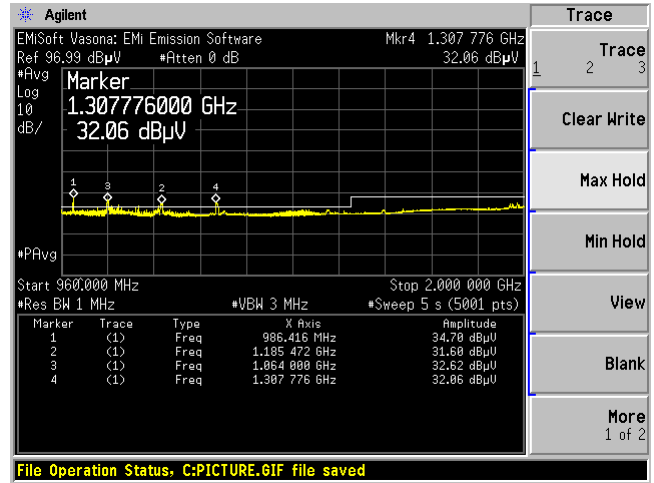


2 GHz-18 GHz H-Pol

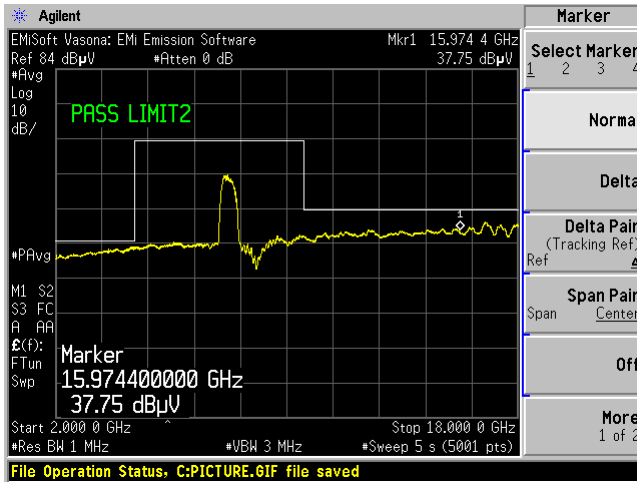


2 GHz-18 GHz V-Pol

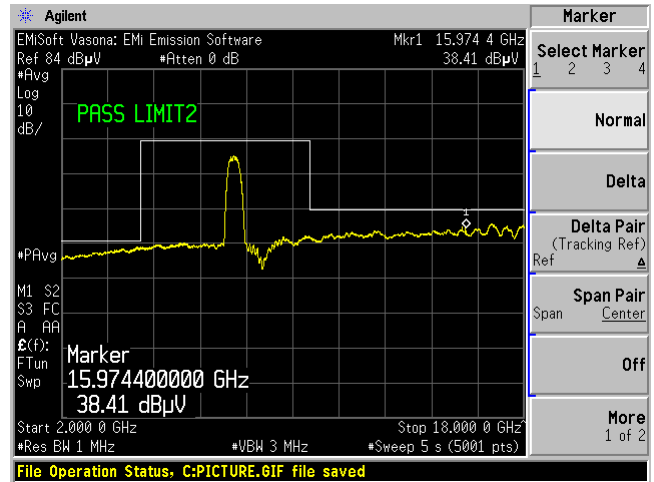

18GHz-26.5GHz H-Pol

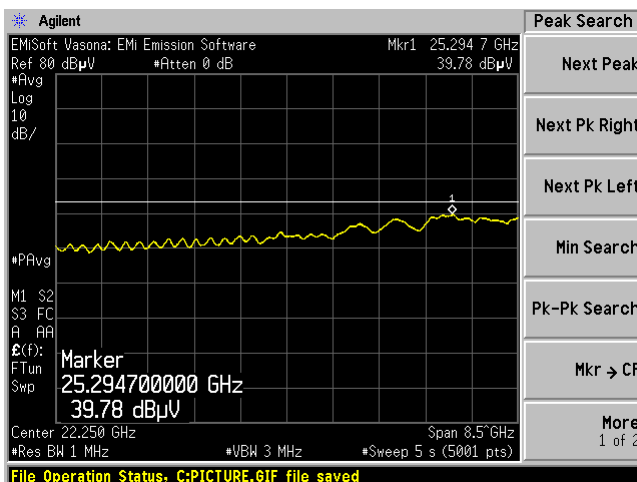

18GHz-26.5GHz V-Pol

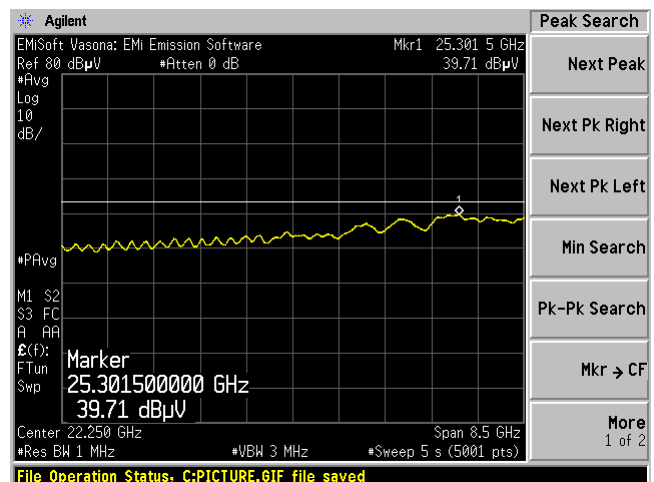

Average Radiated Spurious Emissions: 26.5-40 GHz

Note: Measurement was performed at 1m distance. The stricter IC limit was used to demonstrate compliance.


Note: For Spurious Emissions testing, pre-scan was performed for all modes, and Mode 0 was selected to demonstrate compliance as the worst case configuration.

Note: In radiated measurement screenshots from 26.5GHz to 40GHz, shown emissions do not account for equipment factors. In this case, highest emission was chosen and corrected value was calculated given equipment factors in order to compare to limit.

Channel 5 (6489.6 MHz), Mode 0


Measured Emission Frequency (GHz)	PSA Reading (dBμV)	Antenna Pol (H/V)	Antenna Factor (dB)	Cable Loss (dB)	Pre Amp Gain (dB)	Field Strength (dBμV/m at 1m)	Corrected Average Field Strength (dBμV/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
36.84	29.29	H	40.26	8.92	35.266	43.204	33.66	-61.64	-61.3	-0.34
36.84	29.21	V	40.26	8.92	35.266	43.124	33.58	-61.72	-61.3	-0.42

26.5-40 GHz H-Pol

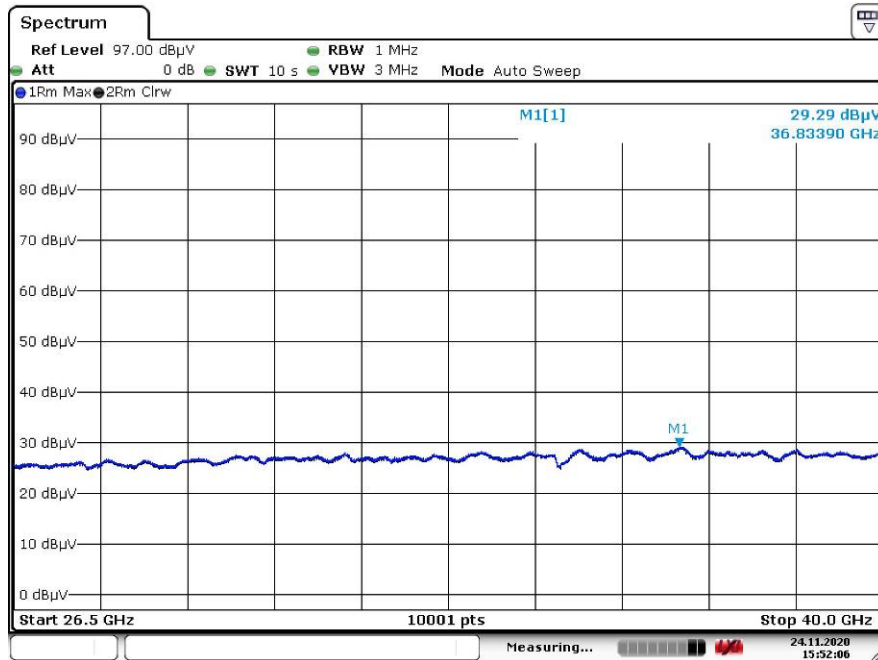

Date: 24.NOV.2020 15:52:06

26.5-40 GHz V-Pol

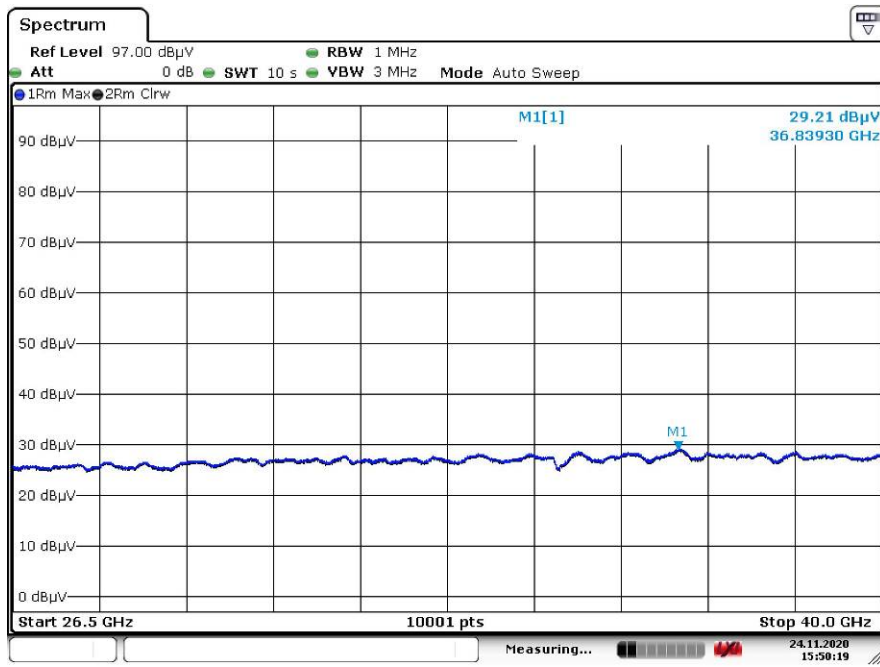


Date: 24.NOV.2020 15:50:19

Channel 6 (6988.8 MHz), Mode 0


Measured Emission Frequency (GHz)	PSA Reading (dBμV)	Antenna Pol (H/V)	Antenna Factor (dB)	Cable Loss (dB)	Pre Amp Gain (dB)	Field Strength (dBμV/m at 1m)	Corrected Average Field Strength (dBμV/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
36.85	29.22	H	40.26	8.92	35.266	43.134	33.59	-61.71	-61.3	-0.41
36.88	29.30	V	40.26	8.92	35.266	43.214	33.67	-61.63	-61.3	-0.33

26.5-40 GHz H-Pol

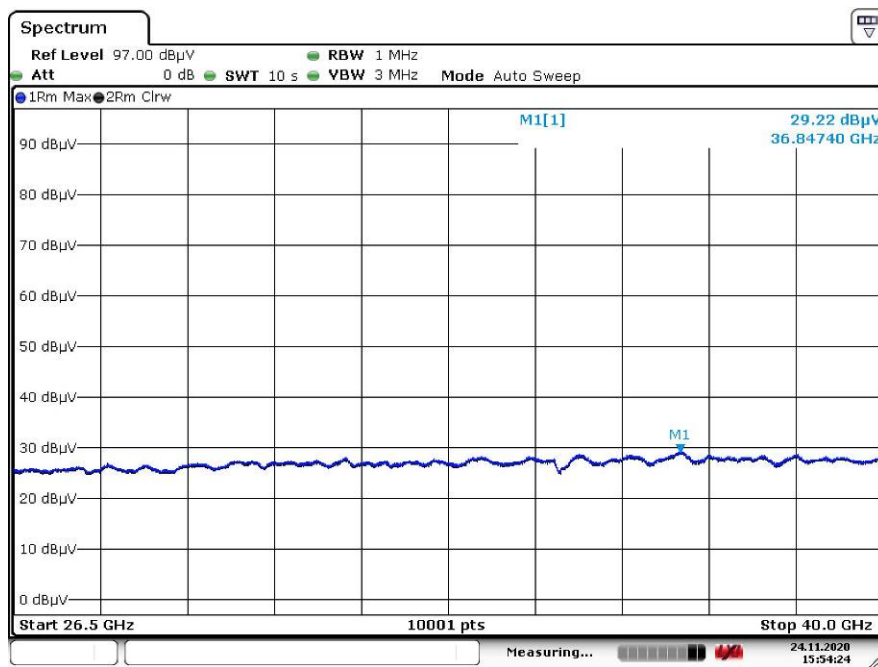

Date: 24.NOV.2020 15:54:24

26.5-40 GHz V-Pol

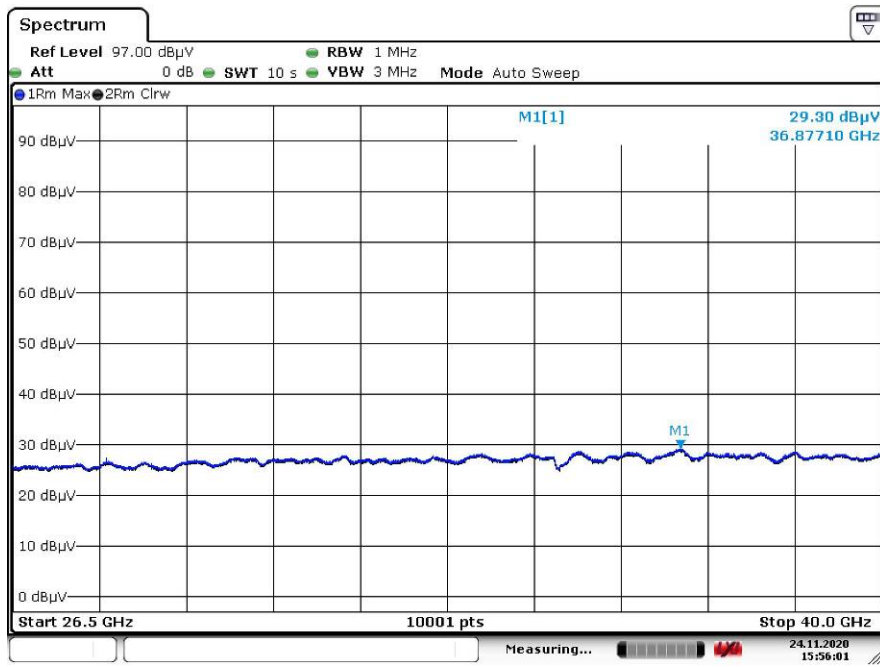


Date: 24.NOV.2020 15:56:02

Channel 9 (7987.2 MHz), Mode 0


Measured Emission Frequency (GHz)	PSA Reading (dBμV)	Antenna Pol (H/V)	Antenna Factor (dB)	Cable Loss (dB)	Pre Amp Gain (dB)	Field Strength (dBμV/m at 1m)	Corrected Average Field Strength (dBμV/m at 3m)	EIRP (dBm)	Limit (dBm)	Margin (dB)
36.84	29.31	H	40.26	8.92	35.266	43.224	33.68	-61.62	-61.3	-0.32
36.84	29.23	V	40.26	8.92	35.266	43.144	33.60	-61.70	-61.3	-0.40

26.5-40 GHz H-Pol

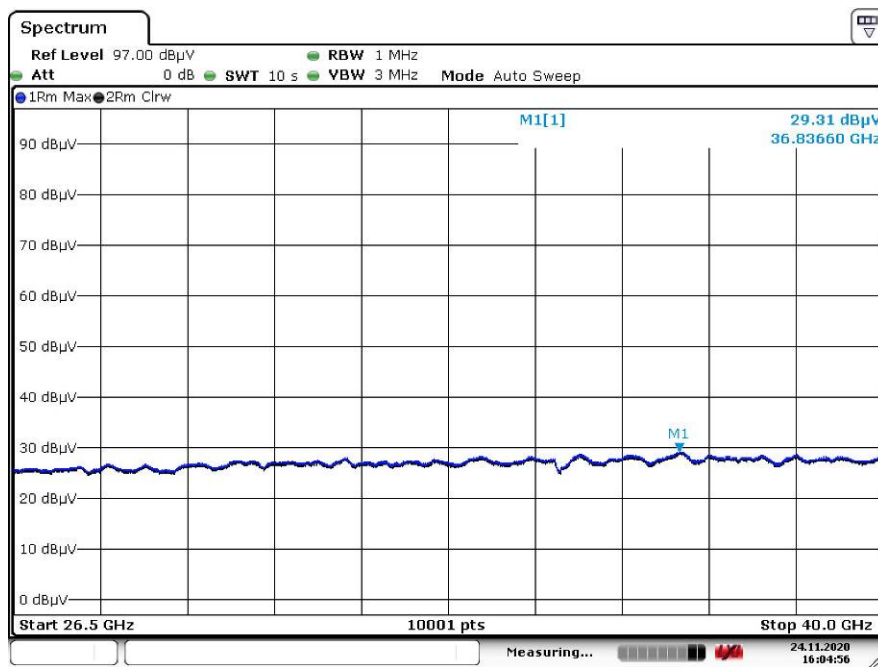

Date: 24.NOV.2020 16:04:56

26.5-40 GHz V-Pol

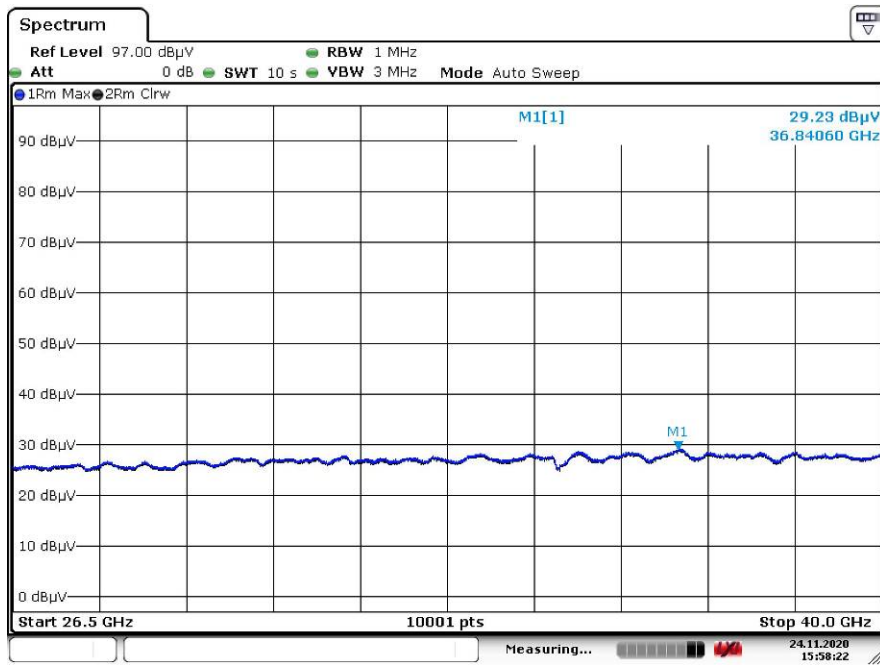

Date: 24.NOV.2020 15:58:23

Additional Radiated Average Spurious Emissions with RBW of 1 kHz

Note: For Spurious Emissions testing, pre-scan was performed for all modes, and Mode 0 was selected to demonstrate compliance as the worst case configuration.

Note: "Baseline" scans were performed for the 1164 MHz to 1240 MHz frequency span, to show that displayed "failing" emissions in screenshots are from the support equipment, i.e., laptop, Teensy, and the connection in between, but not from the EUT. "Baseline" scans were performed with the laptop on and Teensy plugged in, EUT was powered off.

Note: In radiated measurement screenshots from 1164 MHz to 1240 MHz and 1559 MHz to 1610 MHz, shown emissions account for equipment factors to show corrected values compared to applicable limits.

Note: According to ANSI C63.10 Section 10.3.9, measured field strength in dB μ V/m was converted to EIRP in dBm to compare with the limit. The equation below was used,

$$\text{EIRP (dBm)} = E \text{ (dB}\mu\text{V/m)} - 95.3$$


Mode 0

Channel	Frequency Range (MHz)	Antenna Pol. (H/V)	Highest Emission Frequency (MHz)	Highest Emission (dB μ V/m at 1 meter)	Corrected Value (dB μ V/m at 3 meters)	EIRP (dBm)	Limit (dBm)	Margin (dB)
5	1164-1240	H	1200	16.91	7.37	-87.93	-85.3	-2.63
		V	1176	16.02	6.48	-88.82	-85.3	-3.52
	1559-1610	H	1595	17.32	7.78	-87.52	-85.3	-2.22
		V	1560	15.27	5.73	-89.57	-85.3	-4.27
6	1164-1240	H	1191	15.40	5.86	-89.44	-85.3	-4.14
		V	1241	15.82	6.28	-89.02	-85.3	-3.72
	1559-1610	H	1598	17.11	7.57	-87.73	-85.3	-2.43
		V	1560	15.94	6.4	-88.9	-85.3	-3.6
9	1164-1240	H	1190	14.25	4.71	-90.59	-85.3	-5.29
		V	1172	16.92	7.38	-87.92	-85.3	-2.62
	1559-1610	H	1560	17.80	8.26	-87.04	-85.3	-1.74
		V	1560	17.07	7.53	-87.77	-85.3	-2.47


Channel 5

1164 MHz-1240 MHz


Transmitting Scan H-Pol

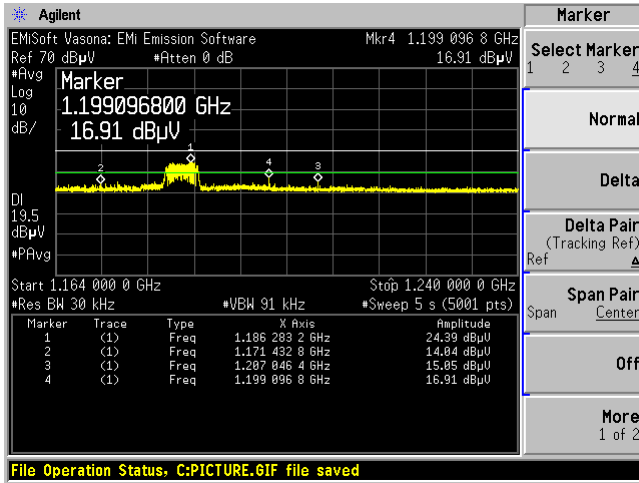


Baseline Scan H-Pol

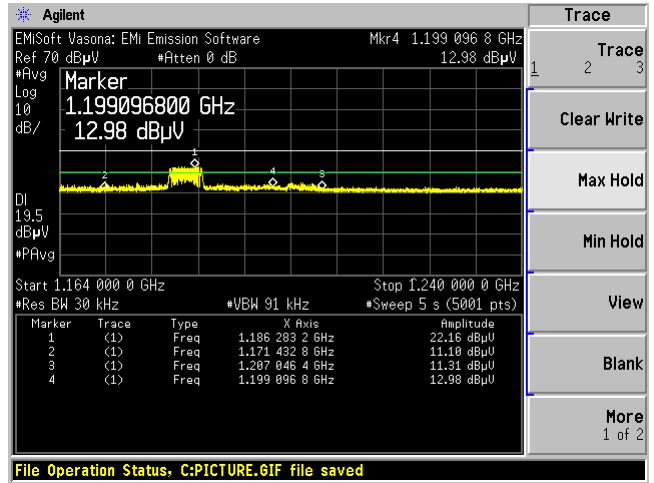

Transmitting Scan V-Pol

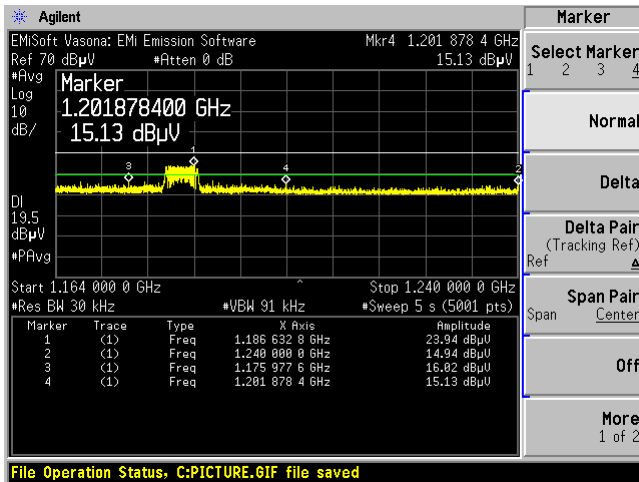



Baseline Scan V-Pol

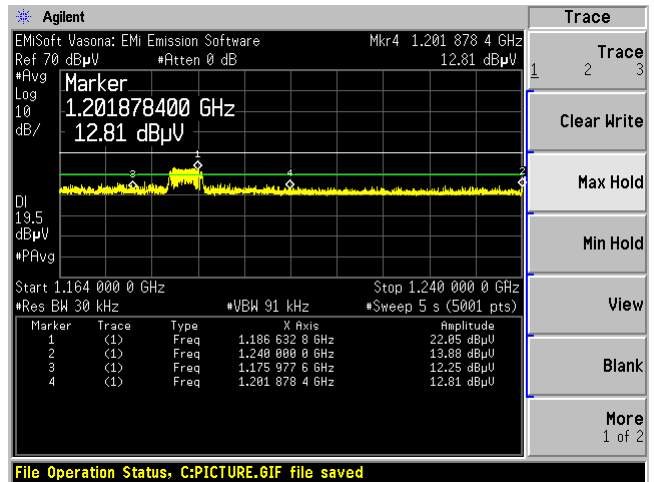

1559 MHz-1610 MHz

H-Pol


V-Pol

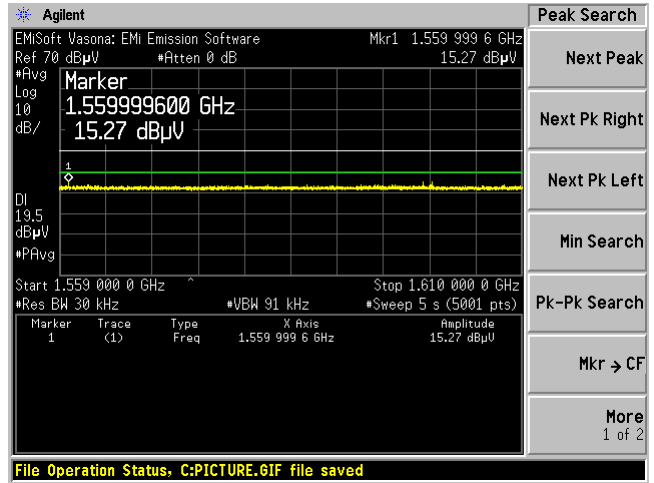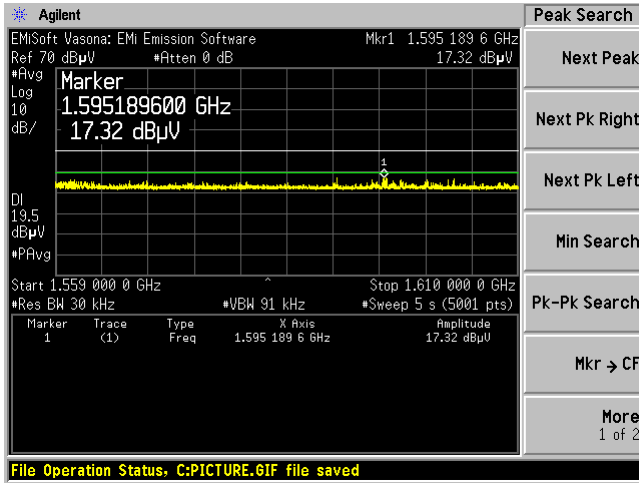


Channel 6

1164 MHz-1240 MHz


Transmitting Scan H-Pol

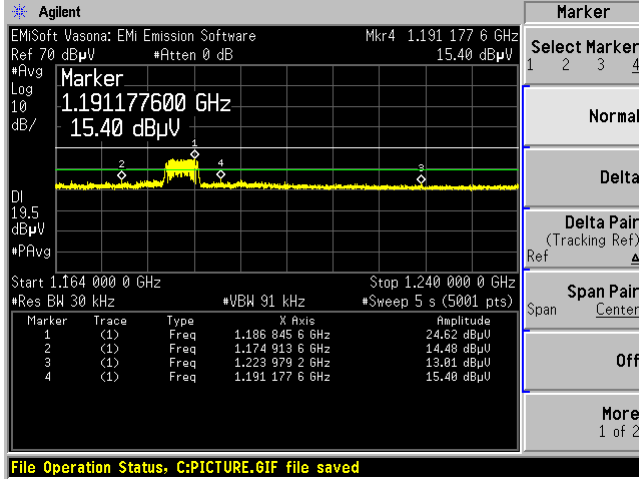


Baseline Scan H-Pol

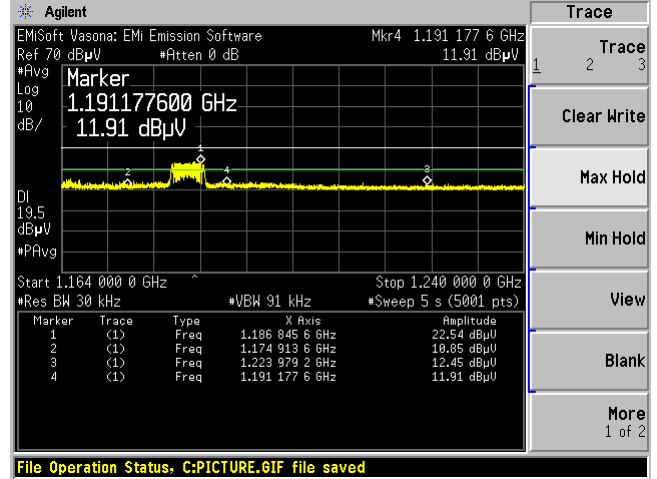

Transmitting Scan V-Pol

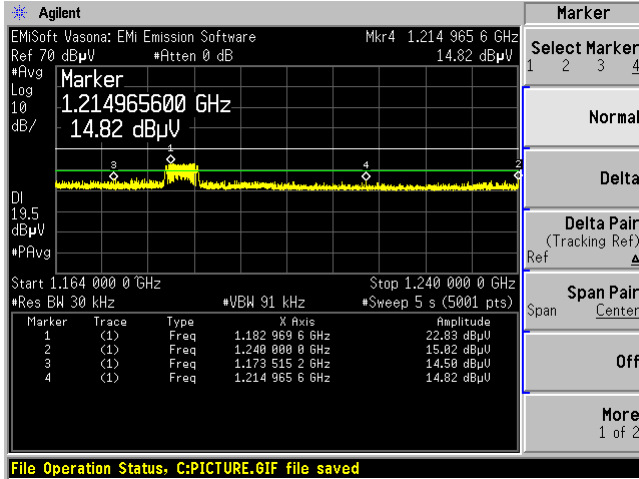



Baseline Scan V-Pol

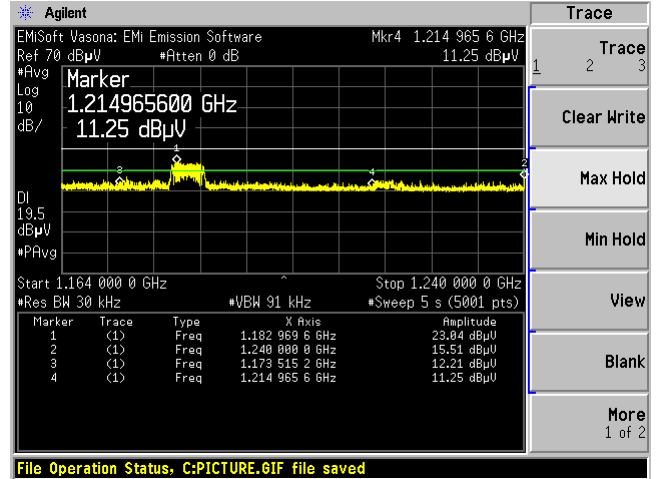

1559 MHz-1610 MHz

H-Pol


V-Pol

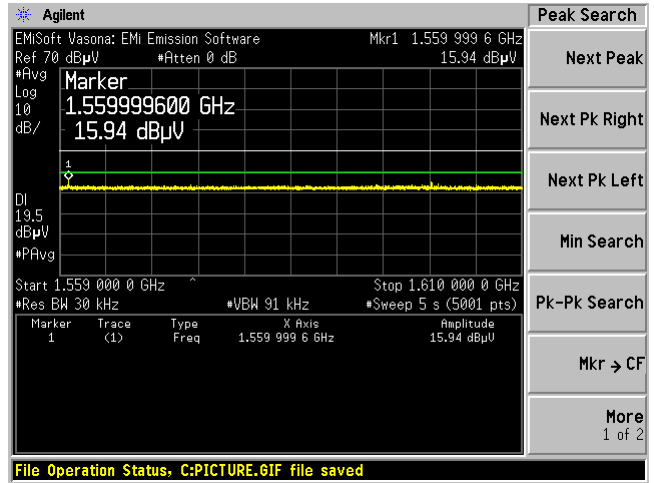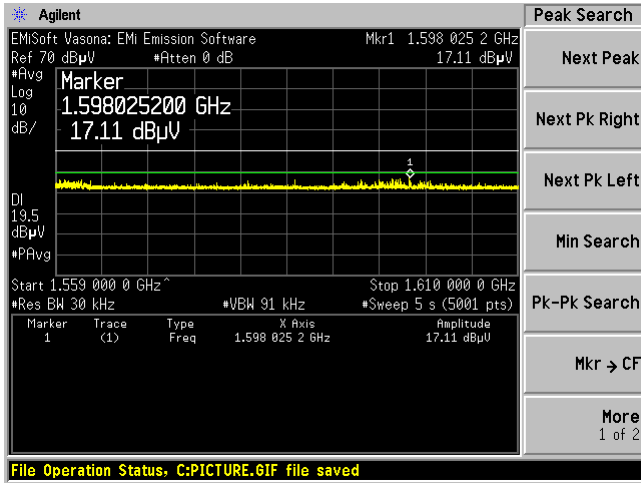


Channel 9

1164 MHz-1240 MHz


Transmitting Scan H-Pol

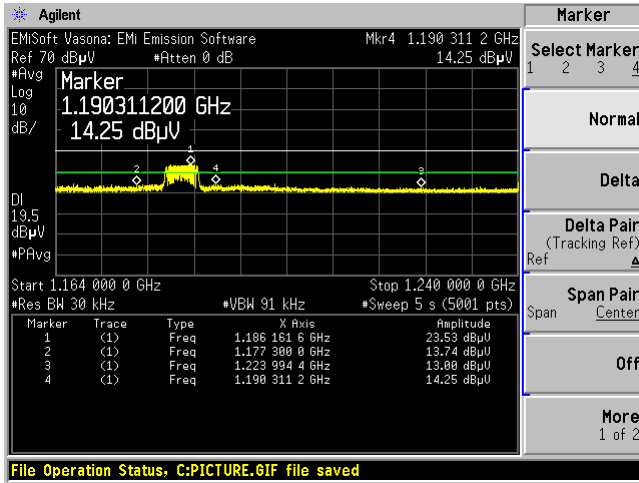


Baseline Scan H-Pol

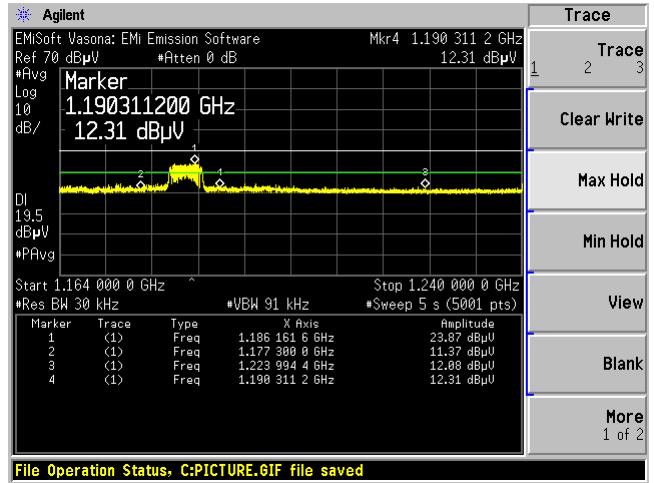

Transmitting Scan V-Pol

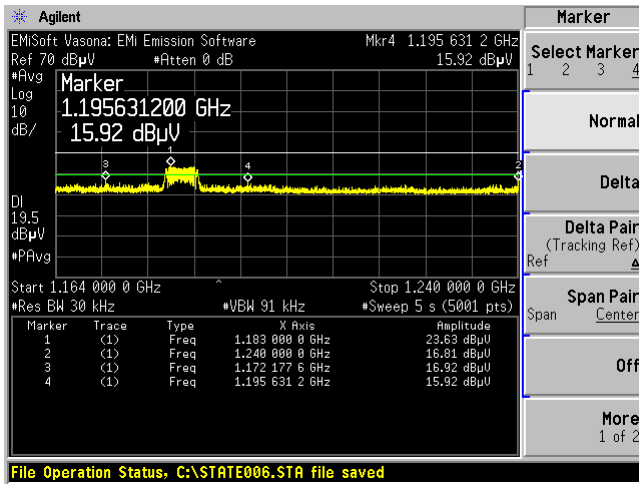



Baseline Scan V-Pol

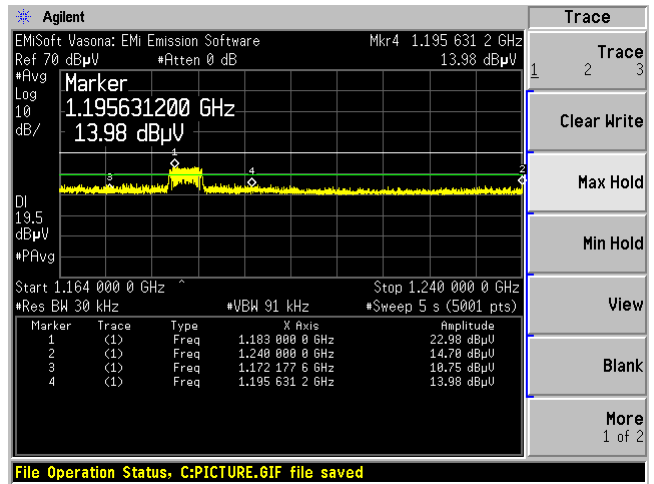

1559 MHz-1610 MHz

H-Pol

V-Pol

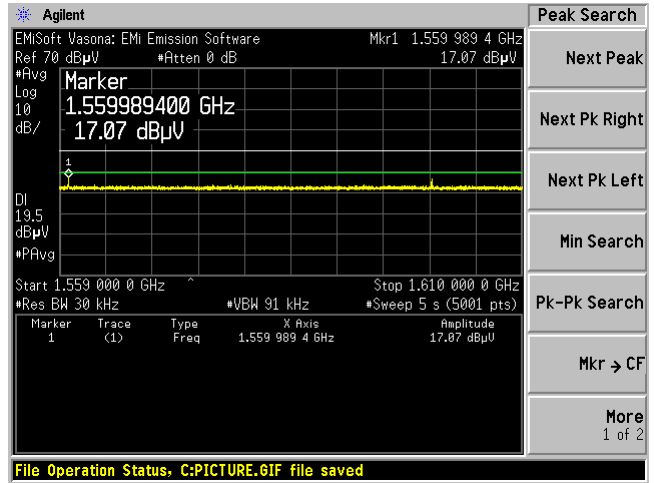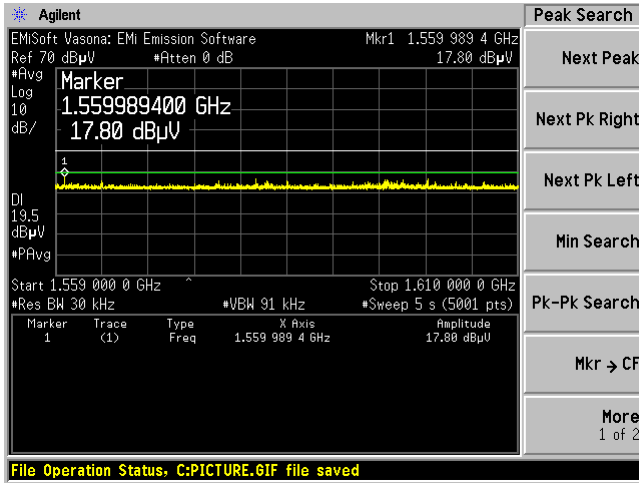

7 FCC §15.519(e), §15.521(e) & ISEDC RSS-220 §5.3.1(g) - Peak Fundamental Emission

7.1 Applicable Standards

According to FCC §15.519(e): There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP. It is acceptable to employ a different resolution bandwidth, and a correspondingly different peak emission limit, following the procedures described in §15.521.

According to FCC §15.521(e): The frequency at which the highest radiated emission occurs, f_M , must be contained within the UWB bandwidth.

According to ISEDC RSS-220 §5.3.1(g): The peak level of the transmissions shall not exceed the peak equivalent of the average limit contained within any 50 MHz bandwidth, as defined in section 4 of the Annex

According to ISEDC RSS-220 Annex 4(c): Peak measurements shall be made in addition to average measurements. Transmissions shall not exceed 0 dBm e.i.r.p. in any 50 MHz bandwidth when the average limit is -41.3 dBm/MHz.

According to FCC §15.521(g): When a peak measurement is required, it is acceptable to use a resolution bandwidth other than the 50 MHz specified in this subpart. This resolution bandwidth shall not be lower than 1 MHz or greater than 50 MHz, and the measurement shall be centered on the frequency at which the highest radiated emission occurs, f_M . If a resolution bandwidth other than 50 MHz is employed, the peak EIRP limit shall be $20 \log (RBW/50)$ dBm where RBW is the resolution bandwidth in megahertz that is employed. This may be converted to a peak field strength level at 3 meters using $E(\text{dBuV/m}) = P(\text{dBm EIRP}) + 95.2$. If RBW is greater than 3 MHz, the application for certification filed with the Commission must contain a detailed description of the test procedure, calibration of the test setup, and the instrumentation employed in the testing.

7.2 Measurement Procedure

The measurements were based on ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices section 10.3: Radiated measurement procedure above 960MHz.

7.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Rhode & Schwarz	Spectrum Analyzer	FSQ26	200749	2019-11-07	2 years
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
ETS Lindgren	Horn Antenna	3117	00218973	2019-02-13	2 years
Agilent	Preamplifier	8449B OPT HO2	3008A0113	2020-04-15	1 year
Agilent	Preamplifier	8449B	3147A00400	2020-02-27	1 year
-	SMA cable	-	-	Each time ¹	N/A
Insulated Wire Corp.	157 Series 2.92 SM (x2) Armored 33 ft. Cable	KPS-1571AN- 3960-KPS	DC 1917	2020-02-28	1 year

Note¹: cables included in the test set-up will be checked each time before testing.

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

7.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Christian McCaig from 2020-11-18 and 2020-12-10 in 5m3.

7.5 Test Results

Channel Number	Channel Frequency (MHz)	Mode	PSA Reading (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Pre Amp Gain (dB)	Corrected Field Strength (dBμV/m at 3m)	Limit ¹ (dBμV/m at 3m)	Margin (dB)
5	6489.6	0	77.74	35.6	11.7	38.12	86.92	87.24	-0.32
		4	70.65	35.6	11.7	38.12	79.83	87.24	-7.41
		8	73.25	35.6	11.7	38.12	82.43	87.24	-4.81
		9	74.98	35.6	11.7	38.12	84.16	87.24	-3.08
		13	74.35	35.6	11.7	38.12	83.53	87.24	-3.71
		14	75.06	35.6	11.7	38.12	84.24	87.24	-3.00
6	6988.8	0	76.47	35.7	13.03	38.21	86.98	87.24	-0.26
		4	69.38	35.7	12.86	38.21	79.73	87.24	-7.51
		8	71.94	35.7	12.86	38.21	82.29	87.24	-4.95
		9	73.49	35.7	12.86	38.21	83.84	87.24	-3.40
		13	72.13	35.7	12.86	38.21	82.48	87.24	-4.76
		14	73.58	35.7	12.86	38.21	83.93	87.24	-3.31
9	7987.2	0	73.62	35.9	15.16	38.91	85.77	87.24	-1.47
		4	66.69	35.9	15.16	38.91	78.84	87.24	-8.40
		8	69.96	35.9	15.16	38.91	82.11	87.24	-5.13
		9	73.60	35.9	15.16	38.91	83.40	87.24	-3.85
		13	73.62	35.9	15.16	38.91	83.42	87.24	-3.83
		14	74.41	35.9	15.16	38.91	84.21	87.24	-3.04

Note¹: Radiated Peak limit determined using a 20 MHz measurement BW. (i.e. $20 \cdot \log(20/50) = -7.96$ dB), then adding 95.2 dB for field strength at 3 meters as instructed to in FCC §15.521(g)


Channel Number	Channel Frequency (MHz)	Mode	f_M (MHz)	Range of UWB BW ² (MHz)	Result
5	6489.6	0	6498	6224.2-6771.8	Pass
		4	6598	6302.6-6893.4	Pass
		8	6614	6333.9-6894.1	Pass
		9	6489	6207.3-6770.7	Pass
		13	6614	6318.8-6909.2	Pass
		14	6493	6220.2-6765.8	Pass
6	6988.8	0	6981	6706.5-7255.5	Pass
		4	6970	6697.6-7242.4	Pass
		8	7048	6776.4-7319.6	Pass
		9	6985	6712.0-7258.0	Pass
		13	7051	6781.0-7321.0	Pass
		14	6990	6722.1-7257.9	Pass
9	7987.2	0	7996	7731.7-8260.3	Pass
		4	7973	7688.3-8257.7	Pass
		8	7925	7638.3-8211.7	Pass
		9	7857	7583.2-8130.8	Pass
		13	7863	7588.0-8138.0	Pass
		14	7854	7588.5-8199.5	Pass

Note²: please refer to Section 8.5 of this report for the UWB bandwidth measurement result.

Please refer to the following plots.


Channel 5 (6489.6 MHz), Fundamental Peak Measurements

Mode 0

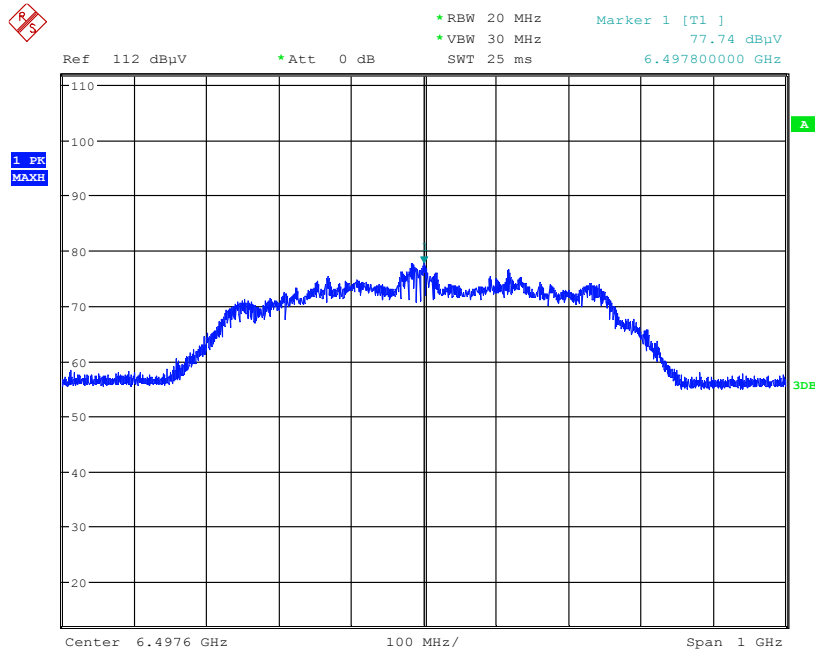


Date: 3.DEC.2020 15:19:57

Mode 4

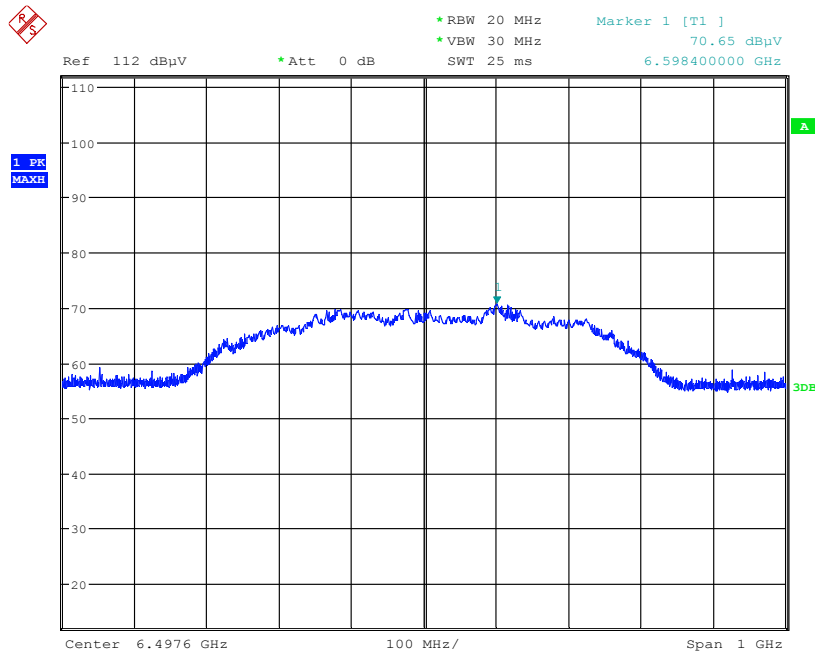


Date: 3.DEC.2020 15:29:02

Mode 8

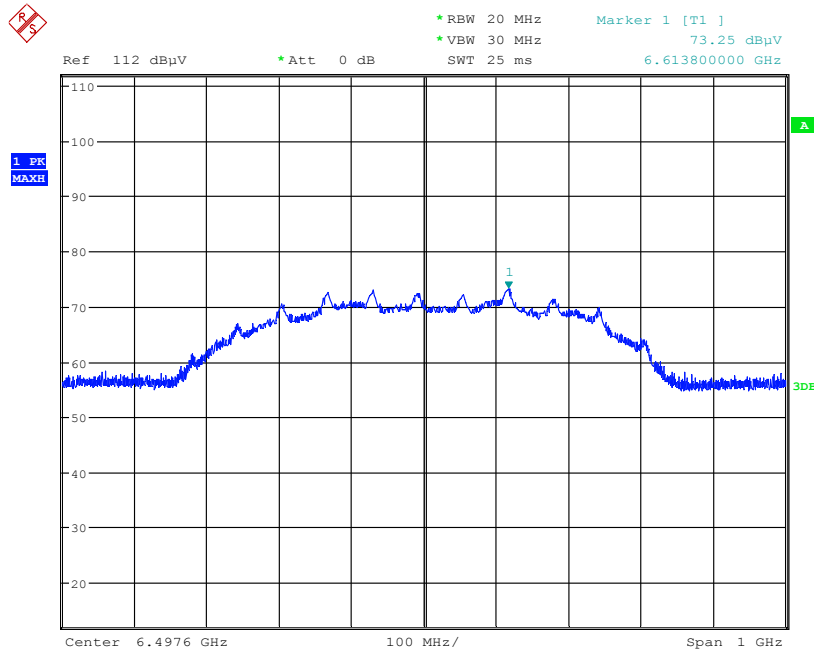


Date: 3.DEC.2020 15:46:43

Mode 9

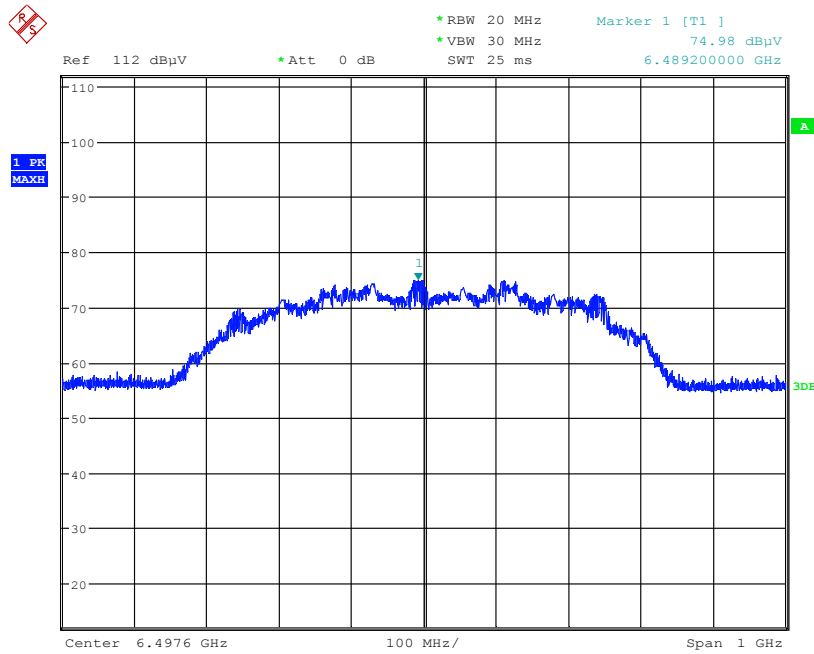


Date: 3.DEC.2020 16:00:28

Mode 13

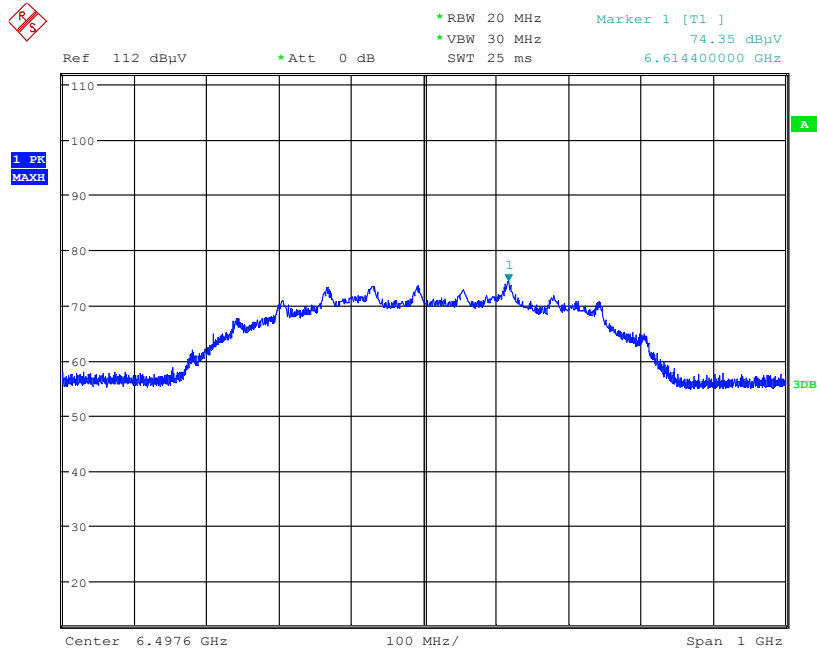

Date: 3.DEC.2020 15:58:27


Mode 14

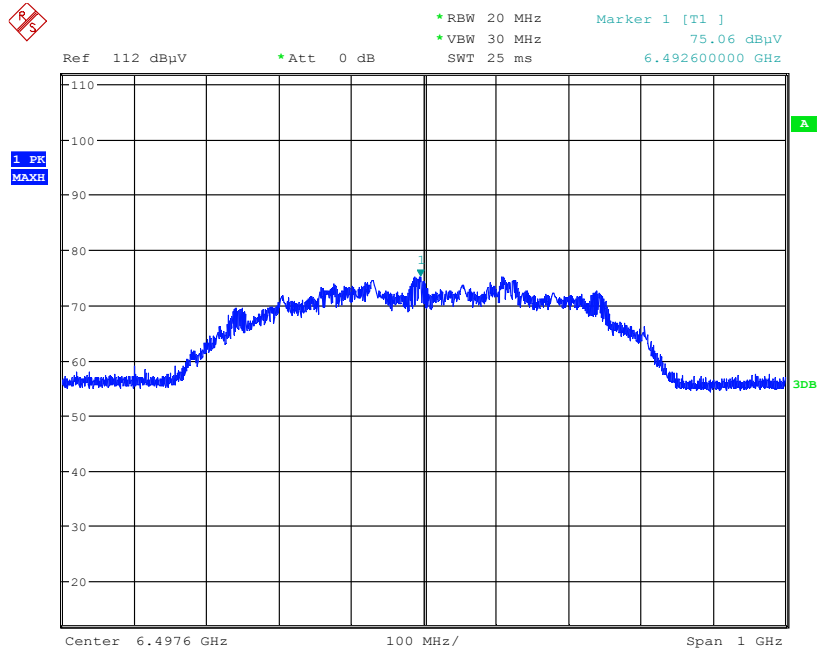

Date: 3.DEC.2020 16:03:41


Channel 6 (6988.8MHz), Fundamental Peak Measurements

Mode 0

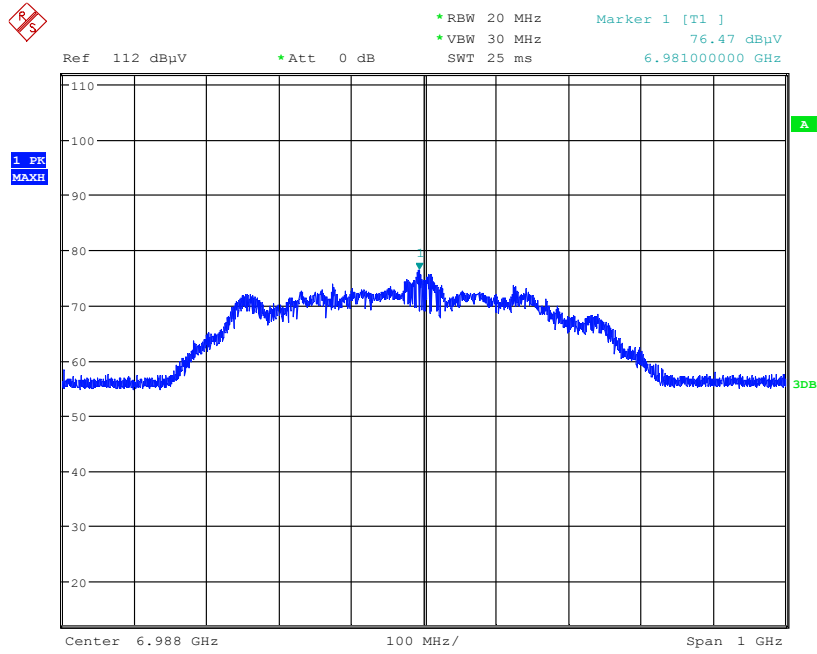


Date: 8.DEC.2020 10:18:52

Mode 4

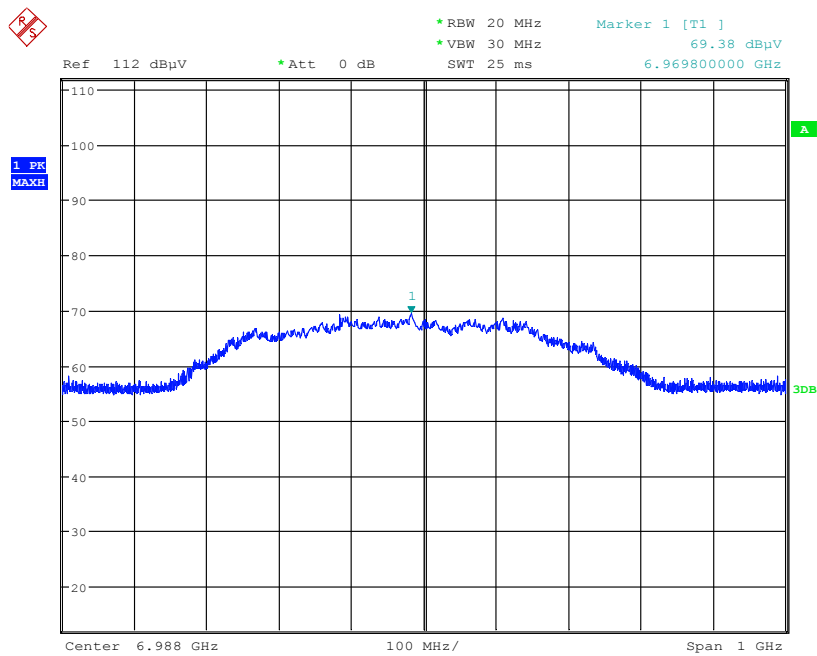


Date: 8.DEC.2020 10:22:24

Mode 8

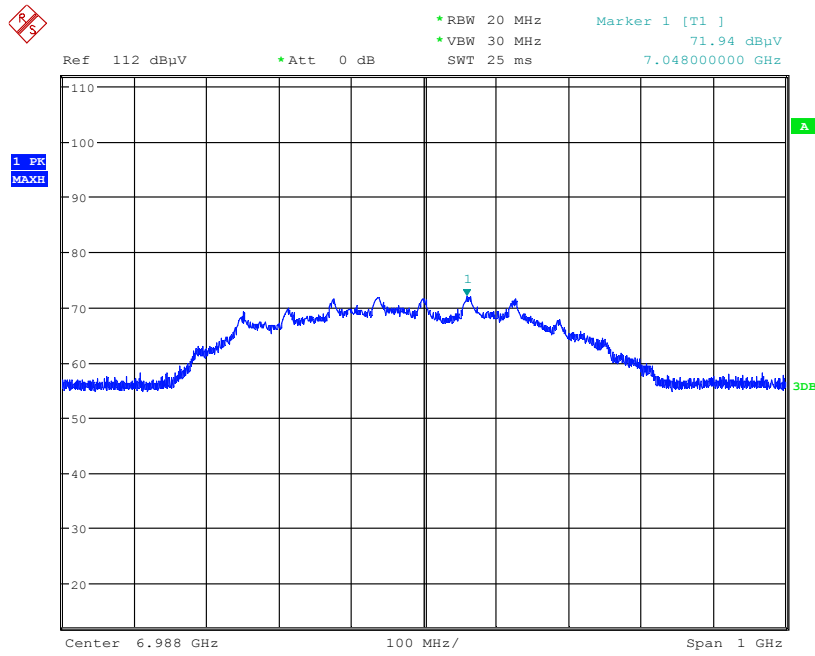


Date: 8.DEC.2020 10:25:23

Mode 9

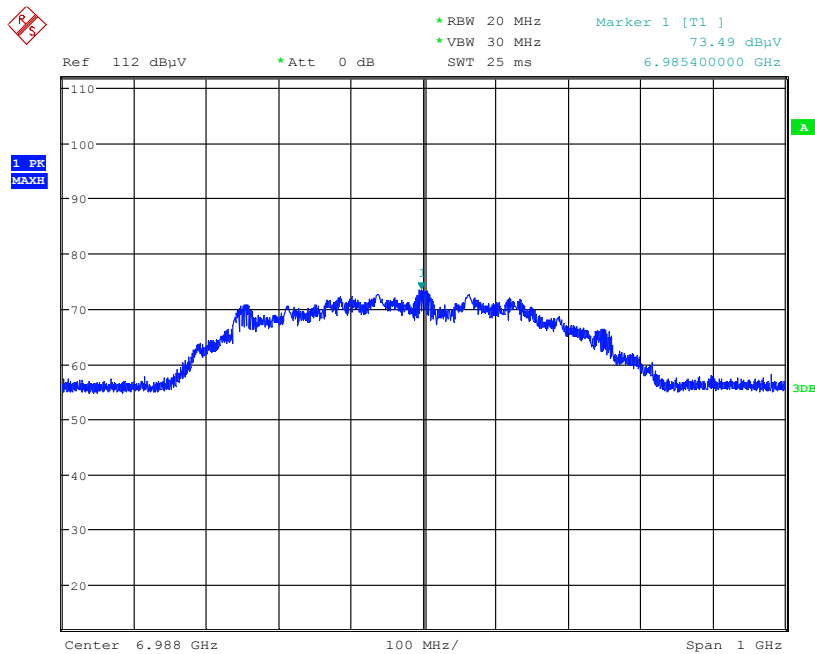


Date: 8.DEC.2020 10:32:19

Mode 13

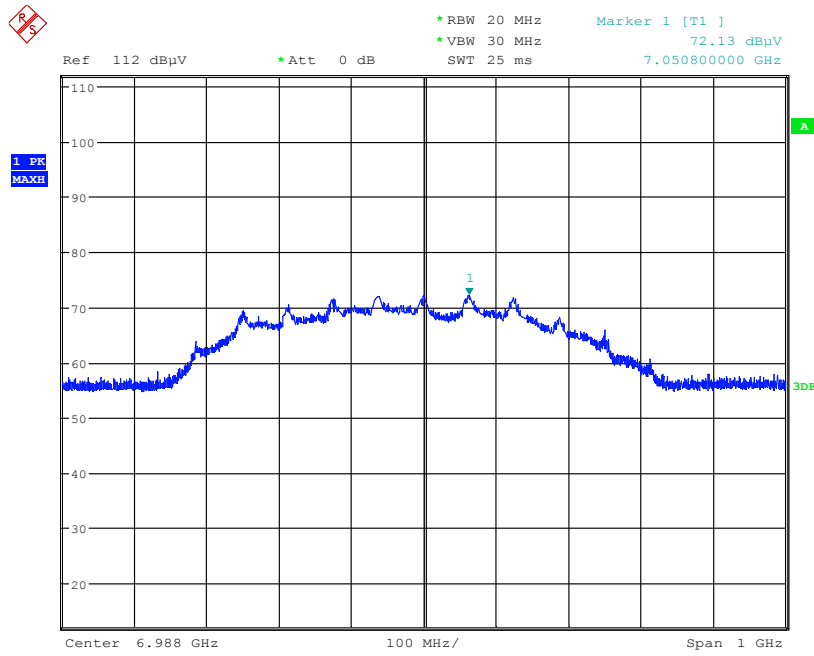

Date: 8.DEC.2020 10:35:47


Mode 14

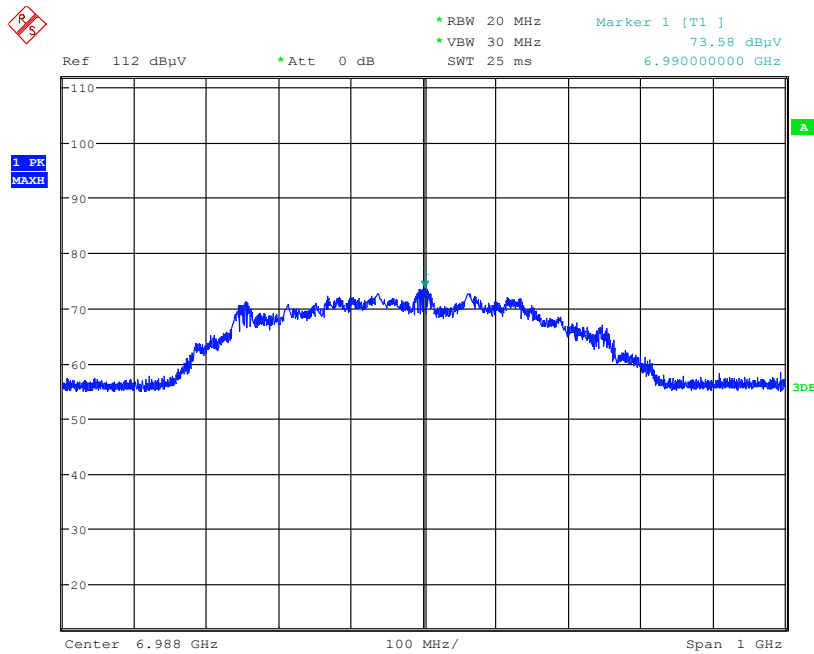

Date: 8.DEC.2020 10:40:42


Channel 9 (7987.2 MHz), Fundamental Peak Measurements

Mode 0

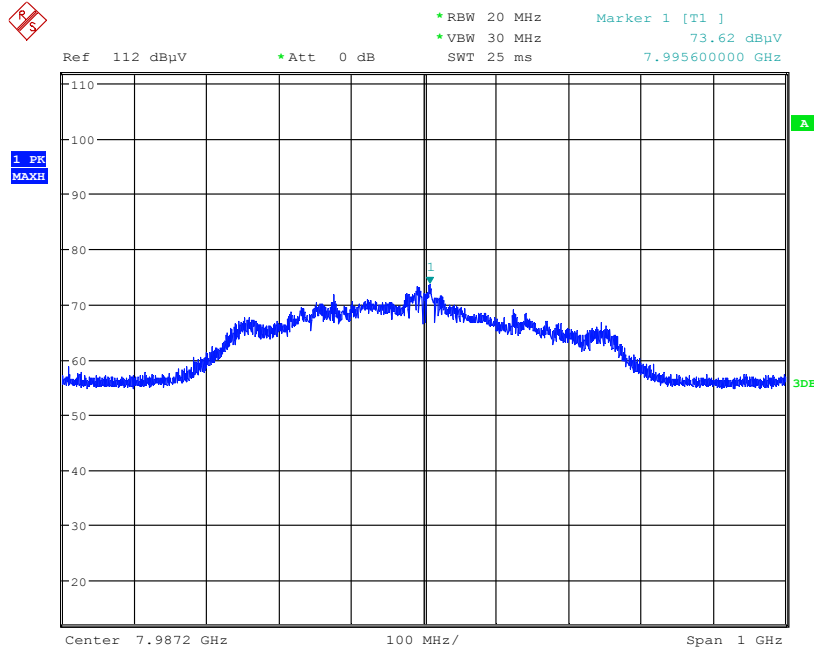


Date: 8.DEC.2020 09:39:27

Mode 4

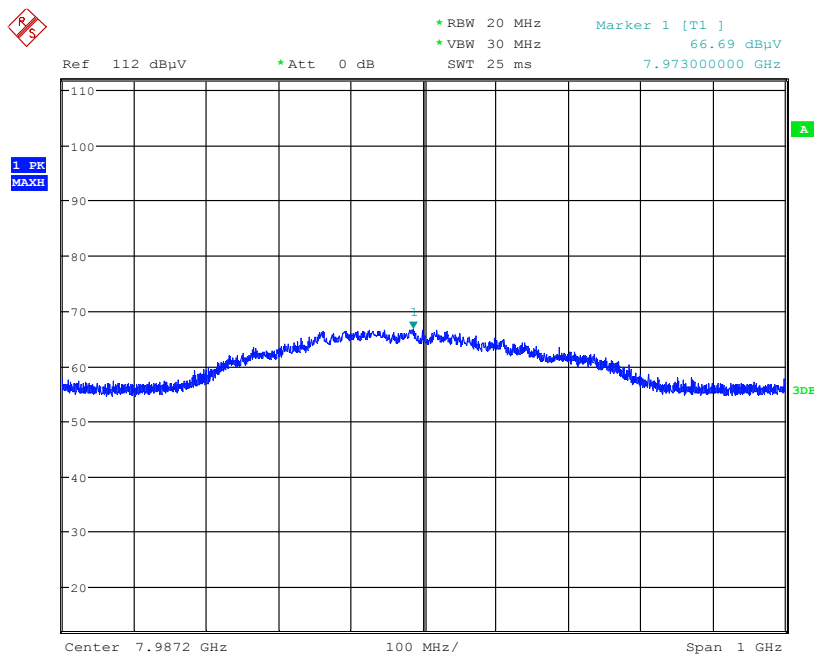


Date: 8.DEC.2020 09:45:41

Mode 8

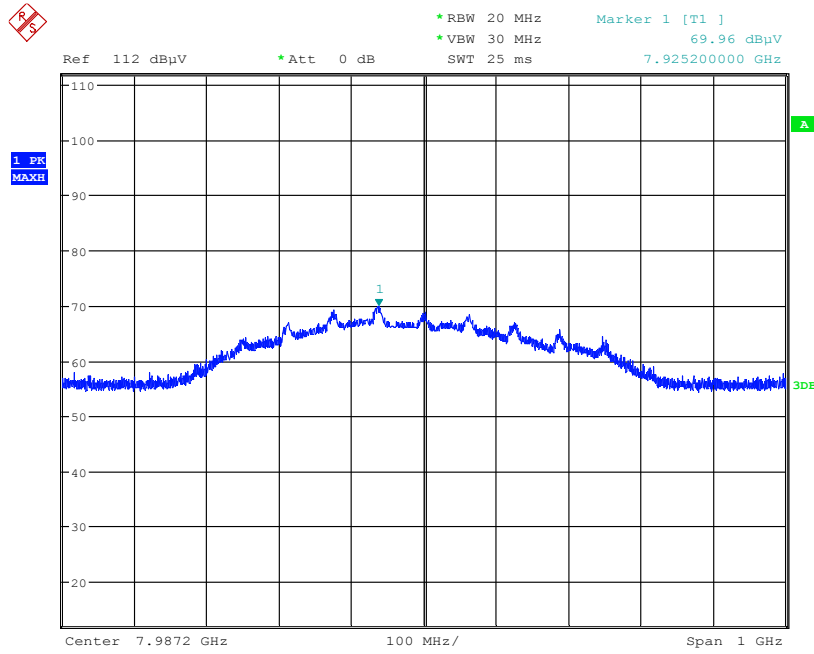


Date: 8.DEC.2020 09:52:23

Mode 9

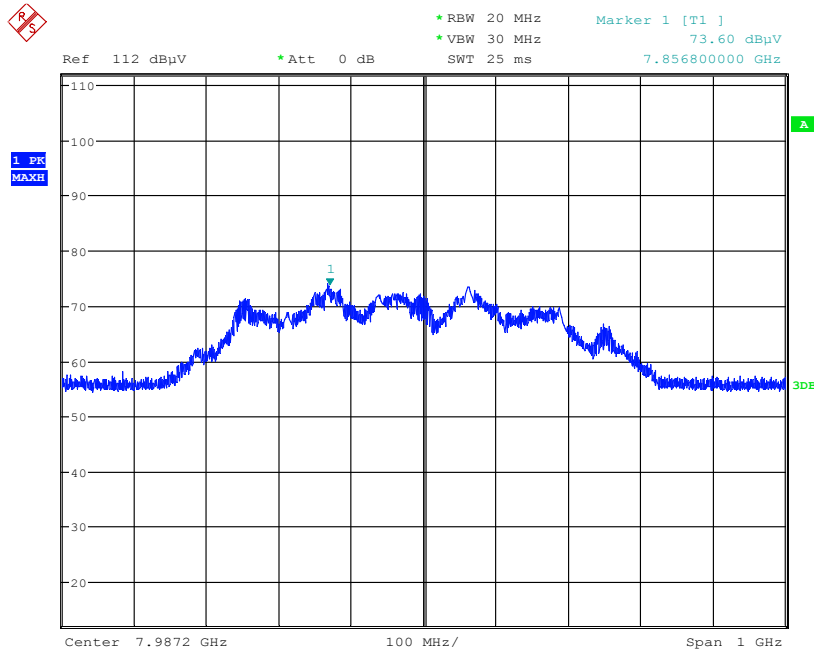


Date: 3.DEC.2020 16:37:37

Mode 13

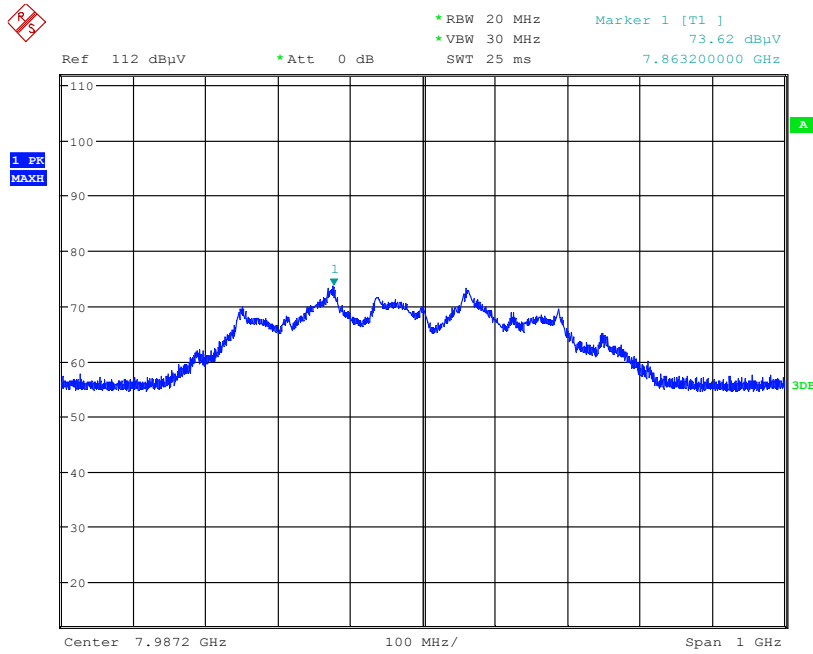

Date: 3.DEC.2020 16:33:59

Mode 14

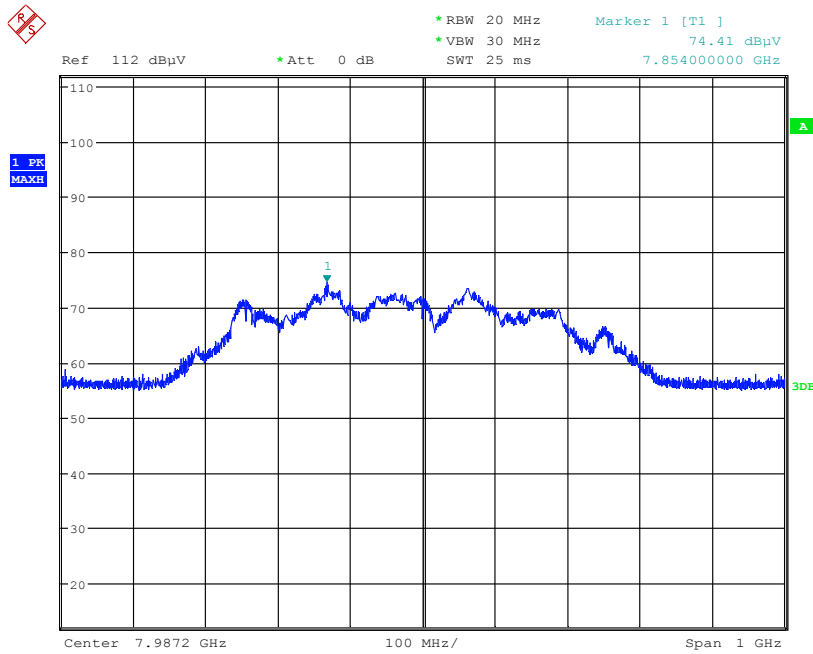

Date: 3.DEC.2020 16:30:10

8 FCC §15.503(d), §15.519(b) & ISEDC RSS-220 §5.1(a), RSS-Gen §6.7 -Emission Bandwidth

8.1 Applicable Standards

According to ECFR §15.503(a), For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna.

According to ECFR §15.519(b) and ISEDC RSS-220 §5.1(a), the UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

According to ECFR §15.503(b) and ISEDC RSS-220 §5.1(a), An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

According to ISEDC RSS-Gen§6.7, The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

8.2 Measurement Procedure

The UWB bandwidth measurements were based on ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices section 10.1: Evaluation of -10dB bandwidth.

8.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4446A	US44300386	2019-08-24	18 months
Sunol Sciences	System Controller	SC99V	011003-1	N/R	N/A
ETS Lindgren	Horn Antenna	3117	00218973	2019-02-13	2 years
Agilent	Preamplifier	8449B OPT HO2	3008A0113	2020-04-15	1 year
-	SMA cable	-	-	Each time ¹	N/A
Insulated Wire Corp.	157 Series 2.92 SM (x2) Armored 33 ft. Cable	KPS- 1571AN- 3960-KPS	DC 1917	2020-02-28	1 year

Note¹: cables included in the test set-up will be checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

8.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Christian McCaig on 2020-12-10 in 5m3.

8.5 Test Results


10 dB Bandwidth

Channel	Frequency (MHz)	Mode	10 dB BW (MHz)	10 dB BW limit (MHz)	10 dB BW within 3100MHz-10600MHz
5	6489.6	0	547.63	>500	Pass
		4	590.73	>500	Pass
		8	560.17	>500	Pass
		9	563.37	>500	Pass
		13	590.47	>500	Pass
		14	545.54	>500	Pass
6	6988.8	0	549.03	>500	Pass
		4	544.81	>500	Pass
		8	543.20	>500	Pass
		9	545.93	>500	Pass
		13	540.01	>500	Pass
		14	535.79	>500	Pass
9	7987.2	0	528.65	>500	Pass
		4	569.32	>500	Pass
		8	573.42	>500	Pass
		9	547.51	>500	Pass
		13	549.95	>500	Pass
		14	531.02	>500	Pass


Please refer to the following plots.

Channel 5 (6489.6 MHz), 10dB Bandwidth


Mode 0

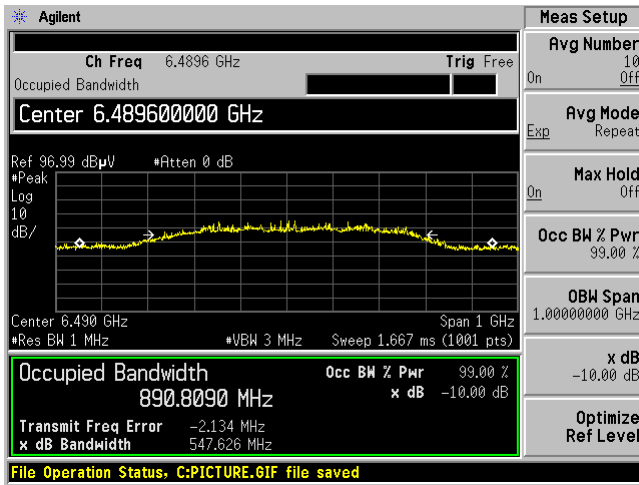


Mode 4

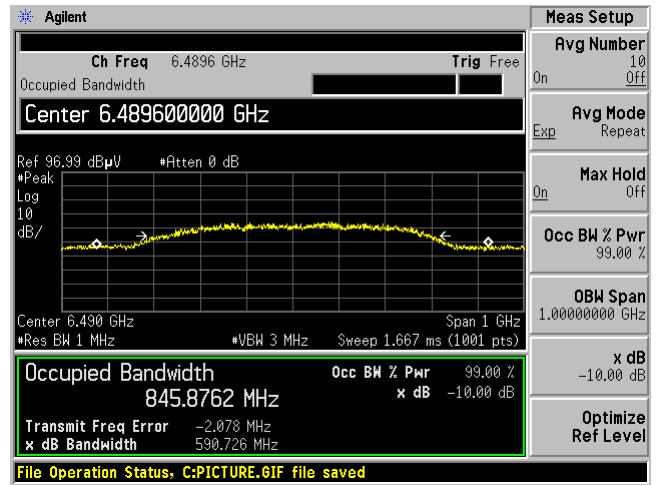


Mode 8

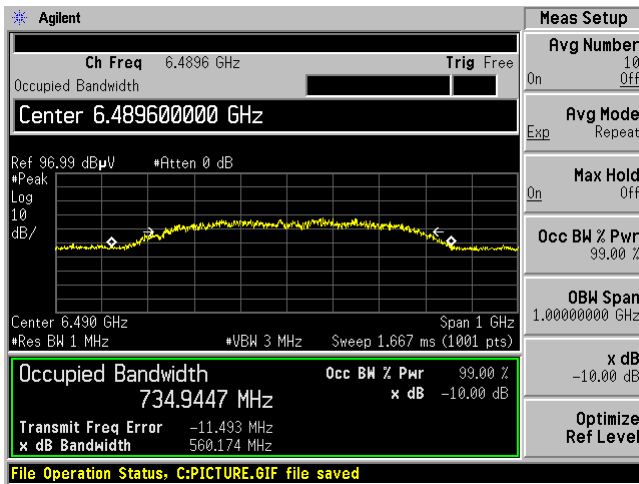


Mode 9

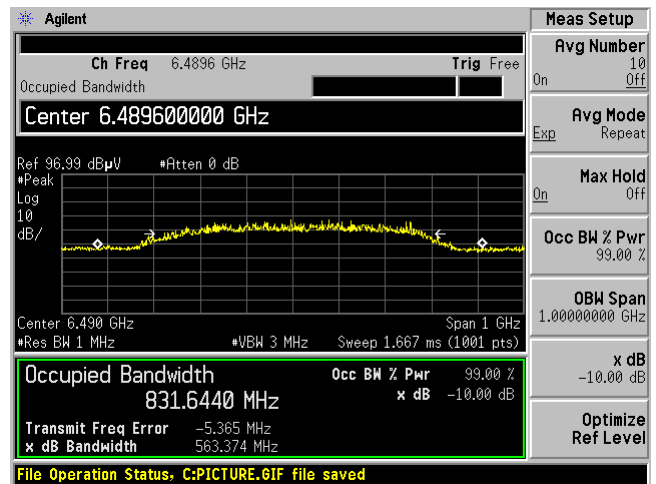

Mode 13

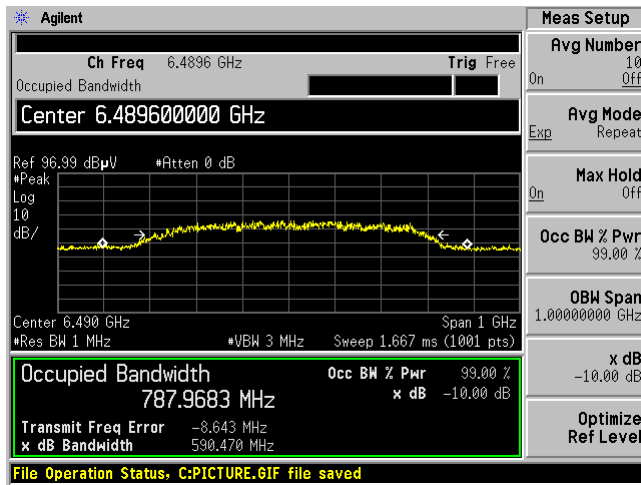


Mode 14

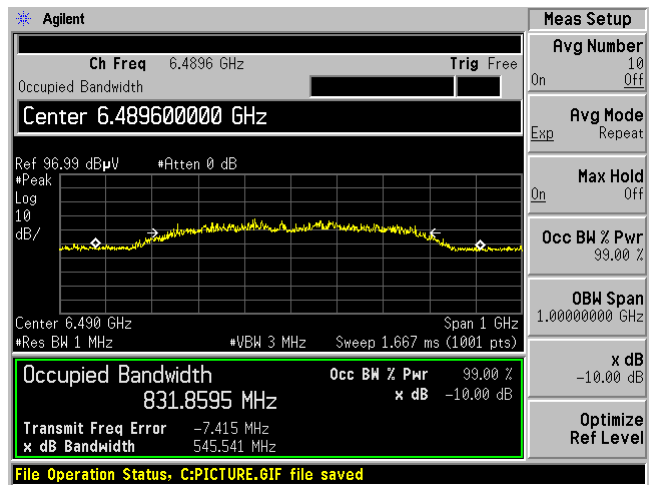


Channel 6 (6988.8 MHz), 10dB Bandwidth


Mode 0

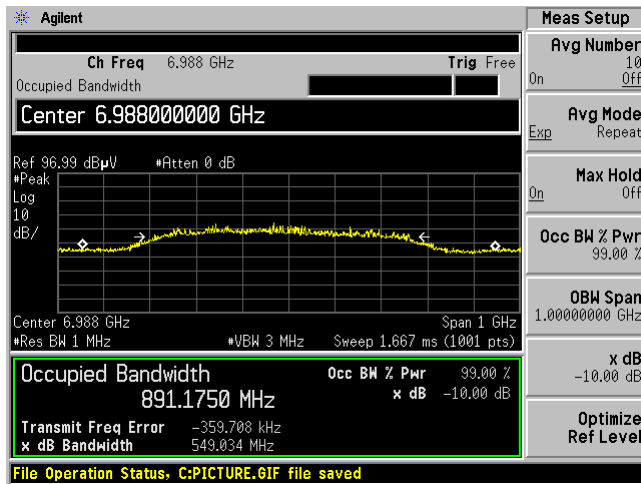


Mode 4

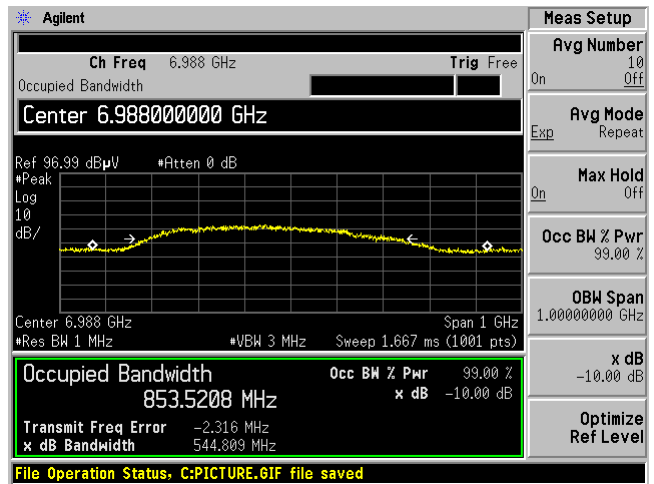


Mode 8

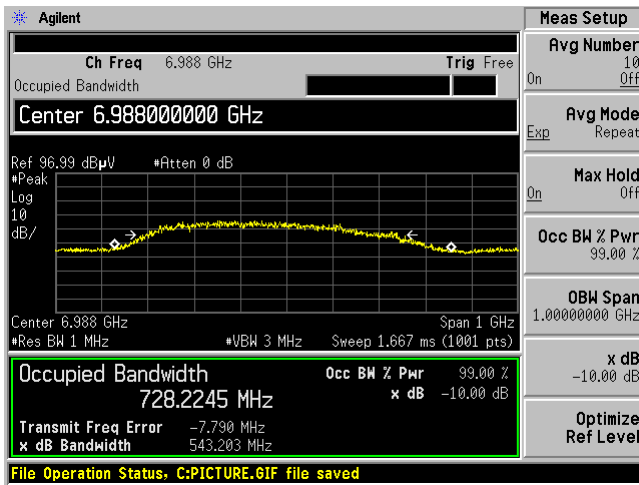


Mode 9

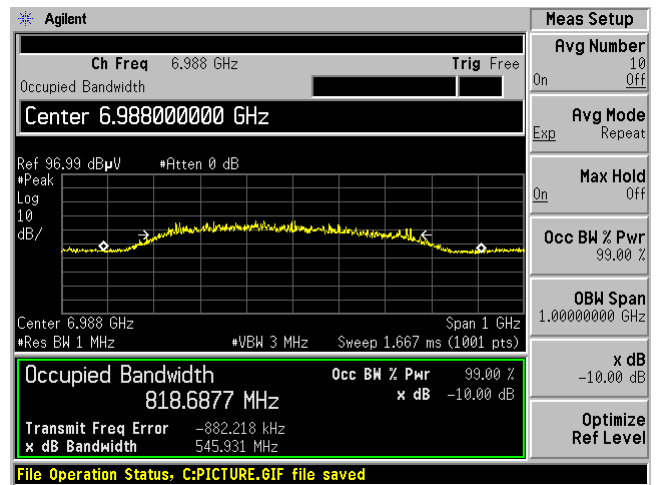

Mode 13

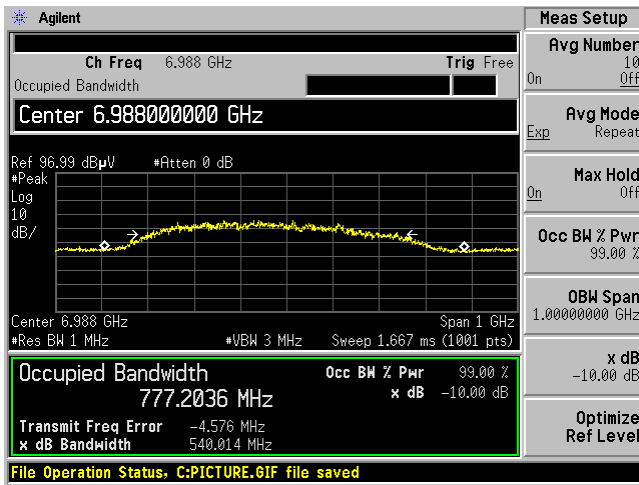


Mode 14

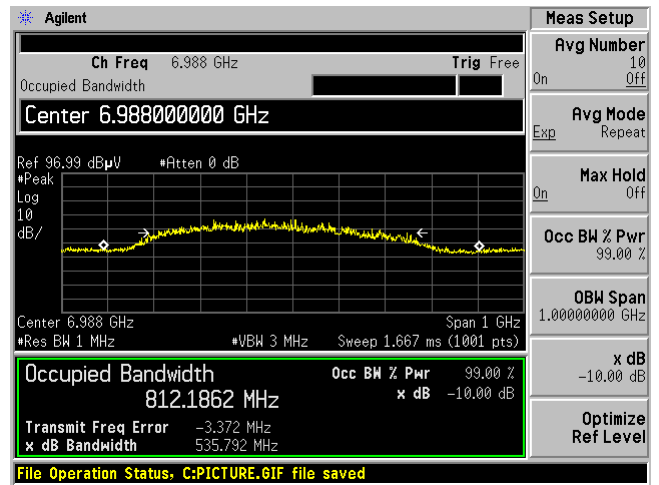


Channel 9 (7987.2 MHz), 10dB Bandwidth


Mode 0

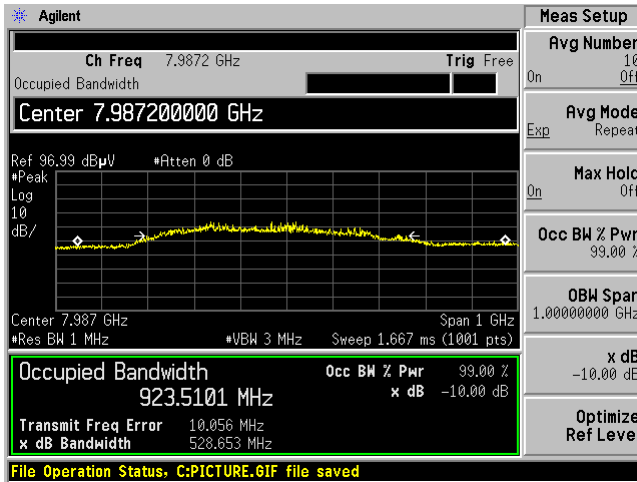


Mode 4

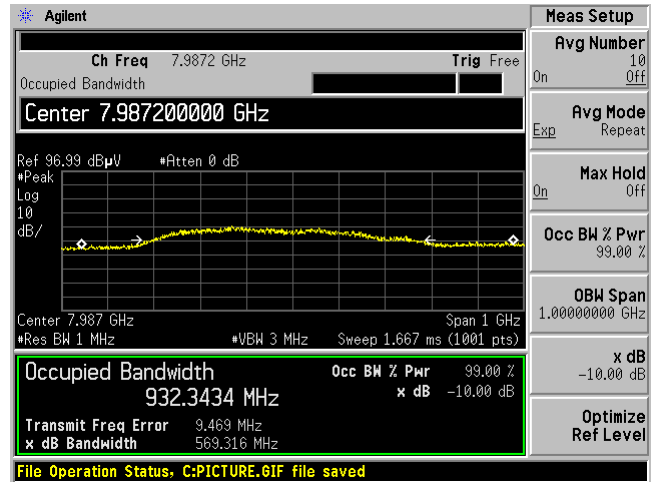

Mode 8


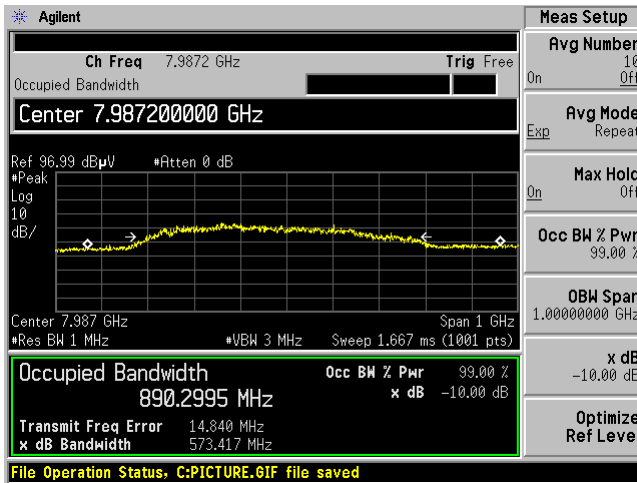


Mode 9

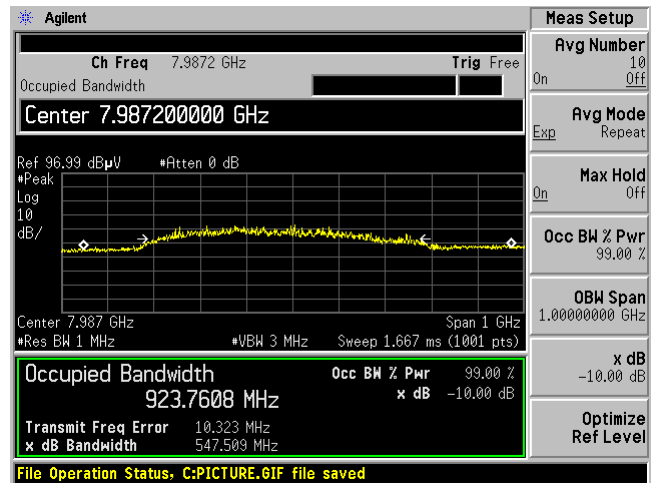

Mode 13

Mode 14

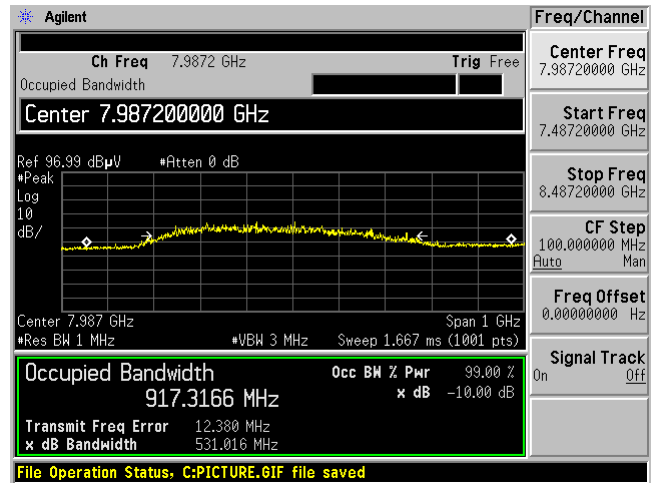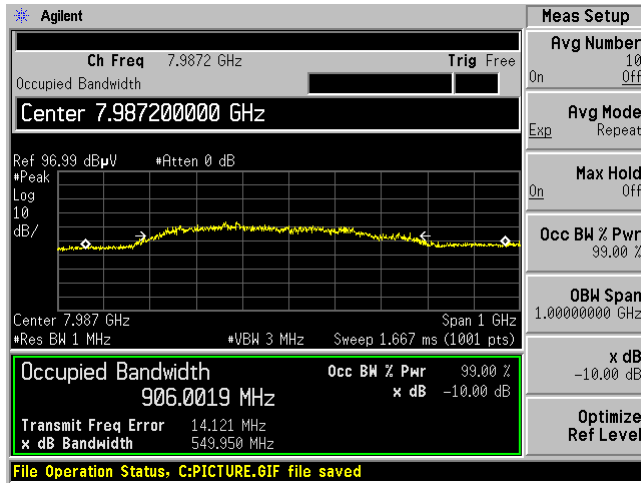

9 FCC §15.519(a) (1) & ISEDC RSS-220 §5.3.1(b) - Cease Transmission

9.1 Applicable Standards

According to FCC §15.519(a)(1) and RSS-220 §5.3.1(b): A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

9.2 Measurement Procedure

A support UWB radio device was paired with the EUT for this testing. Transmission was monitored over a 20 second period. Both EUT and support equipment were switched on and paired for UWB ranging from the transmission off state. The support equipment was then powered off, and the transmission time from EUT was monitored and recorded. The first marker marks the time the support equipment was switched off, and the second marker marks the time the EUT stopped transmission.

9.3 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Agilent	Spectrum Analyzer	E4446A	MY48250238	2019-06-26	18 months
ETS Lindgren	Horn Antenna	3117	00218973	2019-02-13	2 years

Statement of Traceability: BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with A2LA Policy P102 (dated 02 October 2018) "A2LA Policy on Metrological Traceability".


9.4 Test Environmental Conditions

Temperature:	23° C
Relative Humidity:	42 %
ATM Pressure:	102.7 KPa

The testing was performed by Christian McCaig on 2020-12-17 in 5m chamber 3.

9.5 Test Results

Transmission Time (Seconds)	Limit (Seconds)
0.6	< 10

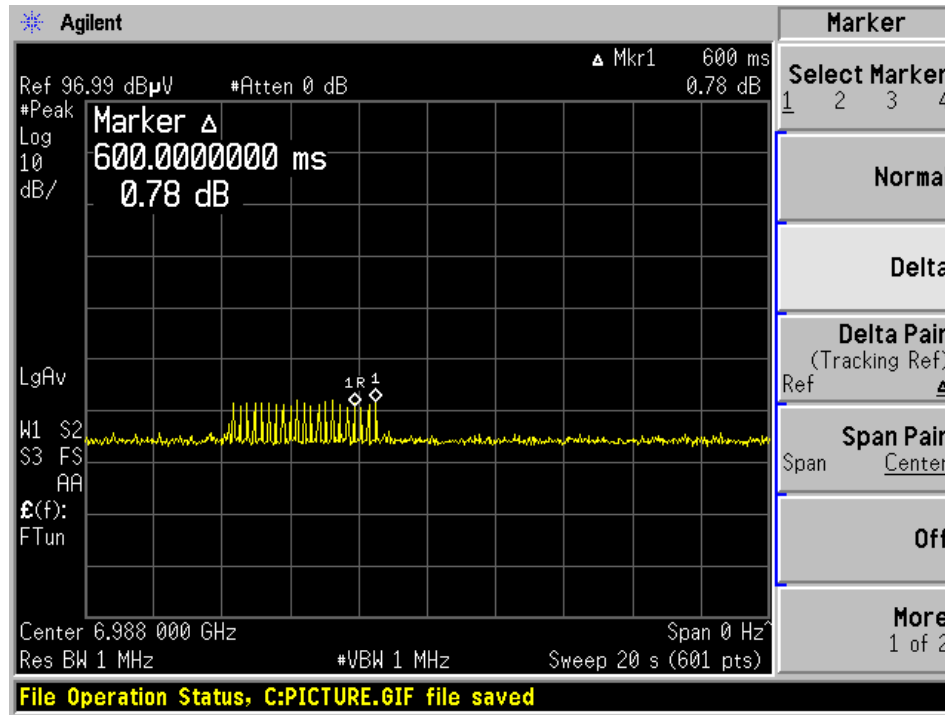

Note: The cease of transmission function operates the same way on all channels of this device. Therefore, only channel 6 was selected for testing.

6 Annex A (Normative) - Test Setup Photographs

Please refer to the attachment

7 Annex B (Normative) - EUT External Photographs

Please refer to the attachment

8 Annex C (Normative) - EUT Internal Photographs

Please refer to the attachment

9 Annex D (Normative) - A2LA Electrical Testing Certificate



Accredited Laboratory

A2LA has accredited

BAY AREA COMPLIANCE LABORATORIES CORP.

Sunnyvale, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This laboratory also meets A2LA R222 - *Specific Requirements EPA ENERGY STAR Accreditation Program*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 2nd day of October 2018.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3297.02
Valid to February 28, 2021
Revised December 04, 2020

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

Please follow the web link below for a full ISO 17025 scope

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---