



# FCC RADIO TEST REPORT

FCC ID : 2AEIM-1735511  
Equipment : Universal Wall Connector  
Brand Name : Tesla  
Model Name : 1734412-XX-Y

Note: For internal purposes, the X will be the style code and Y will be the revision. X and Y can be any from 0~9 or A~Z

Applicant : Tesla, Inc.  
3500 DEER CREEK ROAD PALO ALTO, CA 94304  
Manufacturer : Tesla, Inc.  
3500 DEER CREEK ROAD PALO ALTO, CA 94304  
Standard : FCC Part 15 Subpart C §15.225

The product was received on Jul. 18, 2023 and testing was performed from Jul. 24, 2023 to Jul. 25, 2023. We, Sporton International (USA) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International (USA) Inc., the test report shall not be reproduced except in full.

Approved by: Abi Lin

**Sporton International (USA) Inc.**  
1175 Montague Expressway, Milpitas, CA 95035



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1. General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Modification of EUT .....	5
1.3 Testing Location .....	5
1.4 Applicable Standards.....	5
<b>2. Test Configuration of Equipment Under Test.....</b>	<b>6</b>
2.1 Descriptions of Test Mode.....	6
2.2 Connection Diagram of Test System.....	6
2.3 Table for Supporting Units.....	7
2.4 EUT Operation Test Setup .....	7
<b>3. Test Results .....</b>	<b>8</b>
3.1 AC Power Line Conducted Emissions Measurement .....	8
3.2 20dB and 99% OBW Spectrum Bandwidth Measurement.....	10
3.3 Frequency Stability Measurement .....	11
3.4 Field Strength of Fundamental Emissions and Mask Measurement.....	12
3.5 Radiated Emissions Measurement .....	14
3.6 Antenna Requirements.....	17
<b>4. List of Measuring Equipment .....</b>	<b>18</b>
<b>5. Measurement Uncertainty.....</b>	<b>19</b>
<b>Appendix A. Test Results of Conducted Emission Test</b>	
<b>Appendix B. Test Results of Near Field Test Items</b>	
B1. Test Result of 20dB Spectrum Bandwidth	
B2. Test Result of Frequency Stability	
<b>Appendix C. Test Results of Radiated Test Items</b>	
C1. Test Result of Field Strength of Fundamental Emissions	
C2. Results of Radiated Emissions (9 kHz~30MHz)	
C3. Results of Radiated Emissions (30MHz~1GHz)	
<b>Appendix D. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FR230315009B	01	Initial issue of report	Aug. 08, 2023
FR230315009B	02	Revise Equipment name and Model Name This report is an updated version, replacing the report issued on Aug. 08, 2023.	Oct. 05, 2023

## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.207	AC Power Line Conducted Emissions	Pass	15.59 dB under the limit at 0.72 MHz
3.2	15.215(c)	20dB Spectrum Bandwidth	Pass	-
	2.1049	99% OBW Spectrum Bandwidth	Reporting only	-
3.3	15.225(e)	Frequency Stability	Pass	-
3.4	15.225(a)(b)(c)	Field Strength of Fundamental Emissions	Pass	Max level 34.10 dB $\mu$ V/m at 13.56 MHz
3.5	15.225(d) 15.209	Radiated Spurious Emissions	Pass	1.36 dB under the limit at 40.67MHz
3.6	15.203	Antenna Requirements	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1. General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
<b>General Specs</b>	Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n, NFC, and UHF
<b>Antenna Type</b>	WLAN: PCB Antenna Bluetooth-LE: PCB Antenna NFC: Loop Antenna UHF: PCB Antenna

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

## 1.2 Modification of EUT

No modifications made to the EUT during the testing.

## 1.3 Testing Location

<b>Test Site</b>	Sporton International (USA) Inc.		
<b>Test Site Location</b>	1175 Montague Expressway, Milpitas, CA 95035 TEL : 408 9043300		
<b>Test Site No.</b>	<b>Sporton Site No.</b>		
	TH01-CA	CO01-CA	03CH01-CA
<b>Test Engineer</b>	Liliana Gonzalez	Jin Peng	Fu Chen
<b>Temperature</b>	24~24.1°C	19~22°C	21.2~23.5°C
<b>Relative Humidity</b>	48~48.3%	39~41%	40.1~45.2%

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: US1250

## 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.225
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2. Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

Investigation has been done on all the possible configurations.


The following table is a list of the test modes shown in this test report.

Test Items	
AC Power Line Conducted Emissions	Field Strength of Fundamental Emissions
20dB Spectrum Bandwidth	Frequency Stability
Radiated Emissions 9kHz~30MHz	Radiated Emissions 30MHz~1GHz

The EUT pre-scanned in reader mode with NFC tag (NFC type A) and without reading tag. Based on the highest field strength of fundamental and spurious emissions, the worst case type (type A) was recorded in this report.

Test Cases	
<b>AC Conducted Emission</b>	Mode 1 : NFC Tx with card + AC power

### 2.2 Connection Diagram of Test System

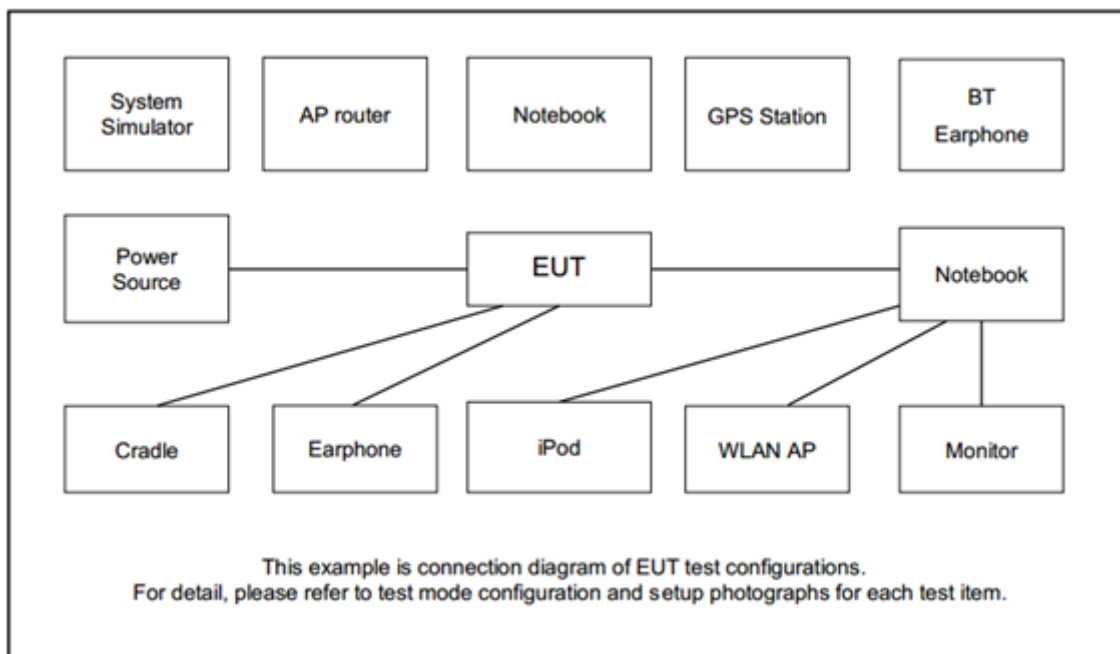



### 2.3 Table for Supporting Units

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	NFC Type A Card	N/A	N/A	N/A	N/A	N/A

### 2.4 EUT Operation Test Setup

The EUT is programmed to be in continuously transmitting mode.

The ancillary equipment, NFC card, is used to make the EUT (NFC) continuously transmitting signal (Power Level: Default) at 13.56MHz and is placed around 0 cm gap to the EUT.



### 3. Test Results

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

For terminal test result, the testing follows FCC KDB 174176.

##### 3.1.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.



### 3.1.4 Test setup

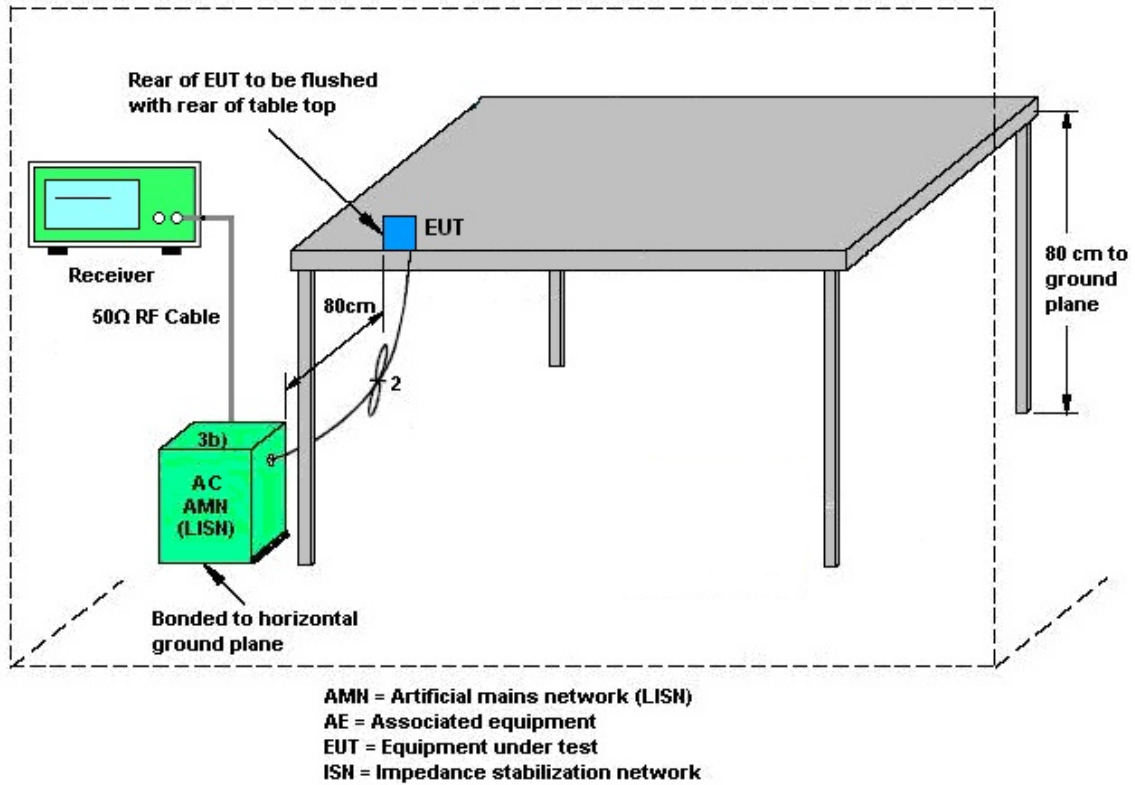

### 3.1.5 Test Result of AC Conducted Emission

Please refer to Appendix A.

**Note:**

(1) with antenna

Remark: 13.560MHz is the NFC RF fundamental signal.

(2) with dummy load

Remark: Only the fundamental NFC signal needs to be retested per C63.4.

## 3.2 20dB and 99% OBW Spectrum Bandwidth Measurement

### 3.2.1 Limit

Intentional radiators must be designed to ensure that the 20 dB and 99% emission bandwidth in the specific band 13.553~13.567 MHz.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max Hold Mode.
2. The resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
3. Measured the spectrum width with power higher than 20 dB below carrier.
4. Measured the 99% OBW.

### 3.2.4 Test Setup

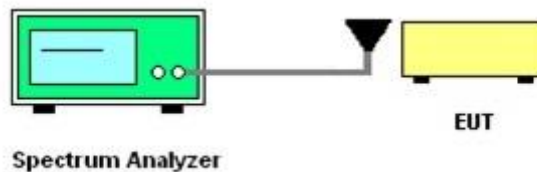

### 3.2.5 Test Result of Near Field Test Items

Please refer to Appendix B.

### 3.3 Frequency Stability Measurement

#### 3.3.1 Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% (100ppm) of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed by using a new battery.


#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The spectrum analyzer connected via a receive antenna placed near the EUT.
2. EUT has transmitted signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire emissions bandwidth.
4. Set RBW = 1 kHz, VBW = 3 kHz with peak detector and maxhold settings.
5. The  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 100$ ppm.
6. Extreme temperature rule is -20°C~50°C.

#### 3.3.4 Test Setup

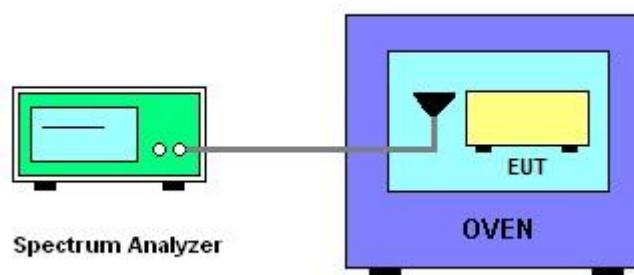

#### 3.3.5 Test Result of Near Field Test Items

Please refer to Appendix B.



### 3.4 Field Strength of Fundamental Emissions and Mask Measurement

#### 3.4.1 Limit

Rules and specifications	FCC CFR 47 Part 15 section 15.225			
Description	Compliance with the spectrum mask is tested with RBW set to 9kHz.			
Freq. of Emission (MHz)	Field Strength ( $\mu\text{V/m}$ ) at 30m	Field Strength (dB $\mu\text{V/m}$ ) at 30m	Field Strength (dB $\mu\text{V/m}$ ) at 10m	Field Strength (dB $\mu\text{V/m}$ ) at 3m
1.705~13.110	30	29.5	48.58	69.5
13.110~13.410	106	40.5	59.58	80.5
13.410~13.553	334	50.5	69.58	90.5
13.553~13.567	15848	84.0	103.08	124.0
13.567~13.710	334	50.5	69.58	90.5
13.710~14.010	106	40.5	59.58	80.5
14.010~30.000	30	29.5	48.58	69.5

**Remark:**

1. The field strength test result is in 3m test distance, follow test rules the test data use distance extrapolation factor and reported in this report at 30m test result.
2. Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)

#### 3.4.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

### 3.4.3 Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT is placed on the top of the turntable 0.8 meter above ground. The phase center of the loop receiving antenna mounted antenna tower is placed 3 meters far away from the turntable.
  2. Power on the EUT and all the supporting units. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
  3. The height of the receiving antenna is fixed at one meter above ground to find the maximum emissions field strength.
  4. For Fundamental emissions, use the receiver to measure QP reading.
  5. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
  6. Compliance with the spectrum mask is tested with RBW set to 9 kHz.
- Note: Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m).

### 3.4.4 Test Setup

For radiated test below 30MHz

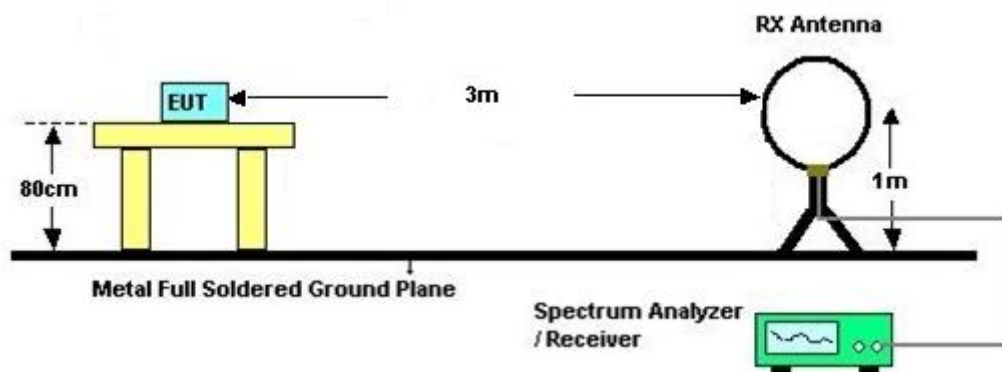

### 3.4.5 Test Result of Field Strength of Fundamental Emissions and Mask

Please refer to Appendix C.

### 3.5 Radiated Emissions Measurement

#### 3.5.1 Limit

The field strength of any emissions which appear outside of 13.110 ~14.010MHz band shall not exceed the general radiated emissions limits.

Frequencies (MHz)	Field Strength (μV/m)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.5.3 Measuring Instrument Setting

The following table is the setting of receiver:

Receiver Parameter	Setting
Attenuation	Auto
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak


**Note:** The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz and 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

### 3.5.4 Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT is placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower is placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable is rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna is varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower is scanned (from 1 M to 4 M) and then the turntable is rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
7. In case the emission is lower than 30 MHz, loop antenna has to be used for measurement and the recorded data shall be QP measured by receiver.
8. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.

### 3.5.5 Test Setup

For radiated test below 30MHz

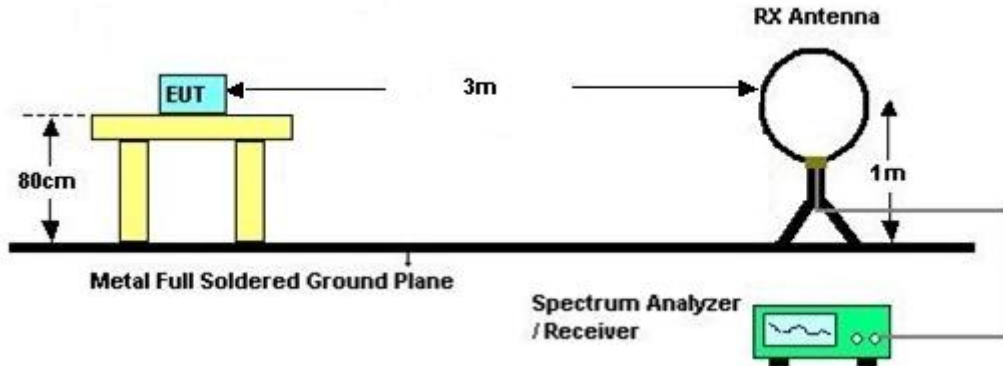

For radiated test above 30MHz

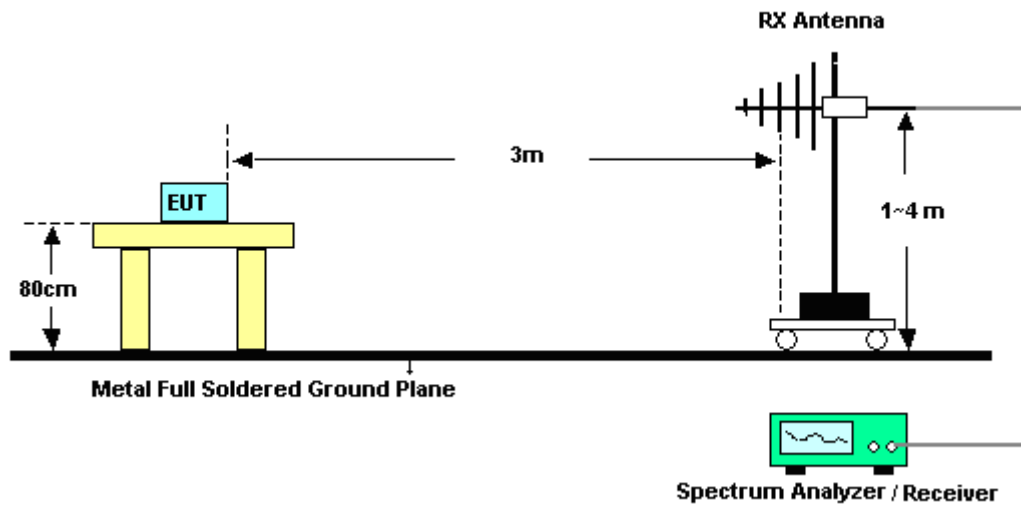

### 3.5.6 Test Result of Radiated Emissions Measurement

Please refer to Appendix C.

**Remark:** There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.





## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



### 4. List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	6111D	54683	30MHz~1GHz	Nov. 01, 2022	Jul. 24, 2023	Oct. 31, 2023	Radiation (03CH01-CA)
Loop Antenna	R&S	HFH2-Z2E	100840	9kHz~30MHz	Jun. 29, 2023	Jul. 24, 2023	Jun. 28, 2024	Radiation (03CH01-CA)
Preamplifier	SONOMA	310N	372241	9kHz~1GHz	May 03, 2023	Jul. 24, 2023	May 02, 2024	Radiation (03CH01-CA)
EMI Test Receiver	R&S	ESU26	100049	20Hz~26.5GHz	May 02, 2023	Jul. 24, 2023	May 01, 2024	Radiation (03CH01-CA)
RF Cable	HUBER+SUHNER	SUCOFLEX 102	8015932/2, 8015762/2, 804938/2	N/A	Mar. 06, 2023	Jul. 24, 2023	Mar. 05, 2024	Radiation (03CH01-CA)
Filter	Wainwright	WHK20/1000C7/40SS	SN1	20MHz High Pass Filter	Jun. 05, 2023	Jul. 24, 2023	Jun. 04, 2024	Radiation (03CH01-CA)
Hygrometer	TESTO	608-H1	45141354	N/A	Jul. 27, 2022	Jul. 24, 2023	Jul. 26, 2023	Radiation (03CH01-CA)
Controller	Chaintek	EM-1000	060881	Control Turn Table & Antenna Mast	N/A	Jul. 24, 2023	N/A	Radiation (03CH01-CA)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jul. 24, 2023	N/A	Radiation (03CH01-CA)
Test Software	Audix E3	E6.2009-8-24d	PK-002093	N/A	N/A	Jul. 24, 2023	N/A	Radiation (03CH01-CA)
LISN	TESEQ	NNB51	47407	N/A	May 16, 2023	Jul. 24, 2023	May 15, 2024	Conduction (CO01-CA)
EMI Test Receiver	R&S	ESR7	102177	9kHz~7GHz	May 23, 2023	Jul. 24, 2023	May 22, 2024	Conduction (CO01-CA)
Pulse limiter with 10dB attenuation	R&S	VTSD 9561-F N	9561-F-N00412	N/A	Jun. 05, 2023	Jul. 24, 2023	Jun. 04, 2024	Conduction (CO01-CA)
Test Software	R&S	EMC32 V10.30.0	N/A	N/A	N/A	Jul. 24, 2023	N/A	Conduction (CO01-CA)
Hygrometer	Testo	608-H1	45142602	N/A	Sep. 12, 2022	Jul. 24, 2023~ Jul. 25, 2023	Sep. 11, 2023	Near Field (TH01-CA)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101545	10Hz-40GHz	May 03, 2023	Jul. 24, 2023~ Jul. 25, 2023	May 02, 2024	Near Field (TH01-CA)
Temperature & Humidity Chamber	ESPEC	SH-642	93012171	N/A	Sep. 06, 2022	Jul. 24, 2023~ Jul. 25, 2023	Sep. 05, 2023	Near Field (TH01-CA)
AC Power Source	AC Power Corp.	AFC-11003F	F319020053	Output: 5~300V	N/A	Jul. 24, 2023~ Jul. 25, 2023	N/A	Near Field (TH01-CA)



## 5. Measurement Uncertainty

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.7 dB
---	--------

### Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.7 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.6 dB
---	--------




## **Appendix A. Test Results of Conducted Emission Test**

# EUT Information

Test Site Location : CO01-CA  
 Power 220Vac/60Hz  
 Project 230515009  
 Mode 1

Full Spectrum

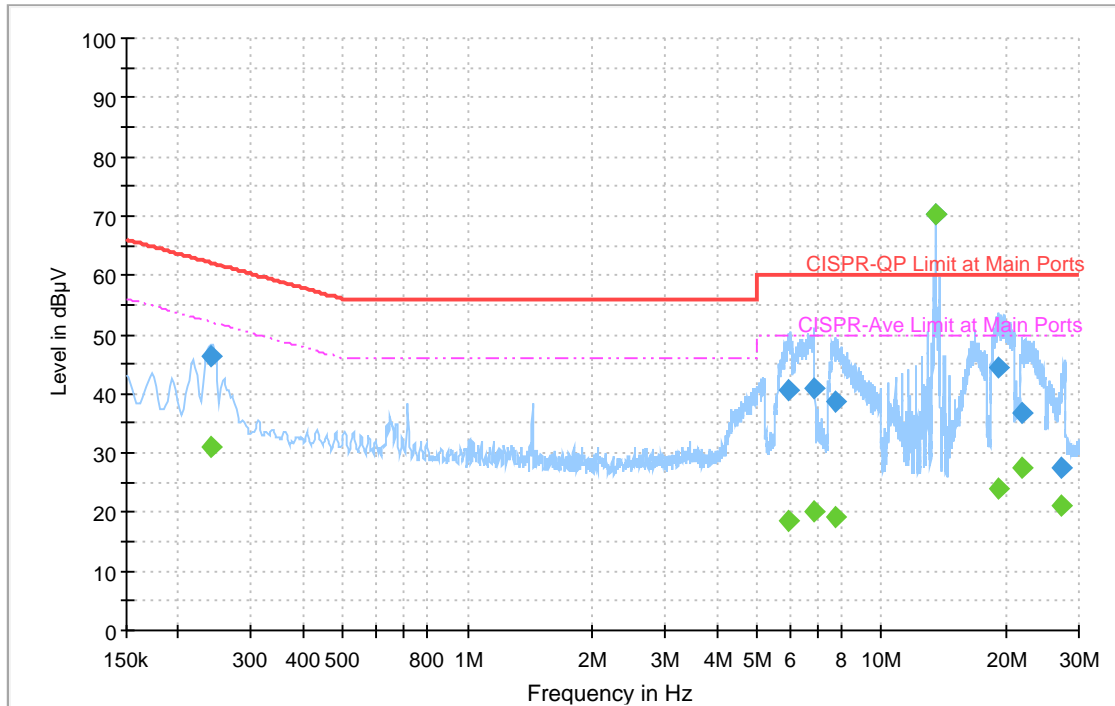


## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.240360	46.18	---	62.08	15.90	L1	OFF	20.3
0.240360	---	30.97	52.08	21.11	L1	OFF	20.3
5.982819	40.58	---	60.00	19.42	L1	OFF	20.4
5.982819	---	18.62	50.00	31.38	L1	OFF	20.4
6.840942	40.91	---	60.00	19.09	L1	OFF	20.4
6.840942	---	20.06	50.00	29.94	L1	OFF	20.4
7.717641	38.74	---	60.00	21.26	L1	OFF	20.4
7.717641	---	19.02	50.00	30.98	L1	OFF	20.4
13.560000	70.43	---	60.00	-10.43	L1	OFF	20.5
13.560000	---	70.27	50.00	-20.27	L1	OFF	20.5
19.144932	44.31	---	60.00	15.69	L1	OFF	20.6
19.144932	---	24.02	50.00	25.98	L1	OFF	20.6
21.902424	36.73	---	60.00	23.27	L1	OFF	20.6
21.902424	---	27.42	50.00	22.58	L1	OFF	20.6
27.120000	27.40	---	60.00	32.60	L1	OFF	20.7
27.120000	---	21.16	50.00	28.84	L1	OFF	20.7

# EUT Information

Site: CO01-CA  
 Power: 220Vac/60Hz  
 Project: 230515009  
 1

Full Spectrum

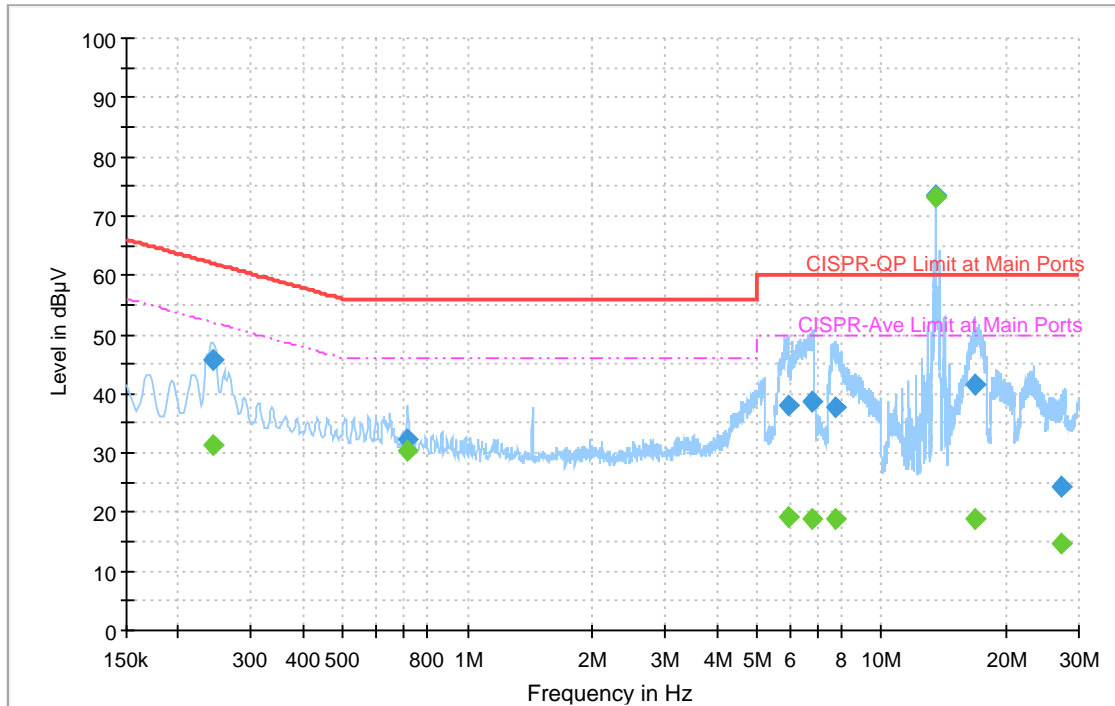


## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.241449	45.81	---	62.05	16.24	N	OFF	20.3
0.241449	---	31.40	52.05	20.65	N	OFF	20.3
0.717495	32.16	---	56.00	23.84	N	OFF	20.3
0.717495	---	30.41	46.00	15.59	N	OFF	20.3
5.933400	38.16	---	60.00	21.84	N	OFF	20.4
5.933400	---	19.04	50.00	30.96	N	OFF	20.4
6.766863	38.58	---	60.00	21.42	N	OFF	20.4
6.766863	---	18.82	50.00	31.18	N	OFF	20.4
7.712169	37.62	---	60.00	22.38	N	OFF	20.4
7.712169	---	18.73	50.00	31.27	N	OFF	20.4
13.560000	73.39	---	60.00	-13.39	N	OFF	20.5
13.560000	---	73.25	50.00	-23.25	N	OFF	20.5
16.793268	41.58	---	60.00	18.42	N	OFF	20.6
16.793268	---	18.92	50.00	31.08	N	OFF	20.6
27.120000	24.33	---	60.00	35.67	N	OFF	20.7
27.120000	---	14.56	50.00	35.44	N	OFF	20.7

# EUT Information

Test Site Location : CO01-CA  
 Power : 220Vac/60Hz  
 Project : 230515009  
 Mode : 2\_with terminal sample

Full Spectrum

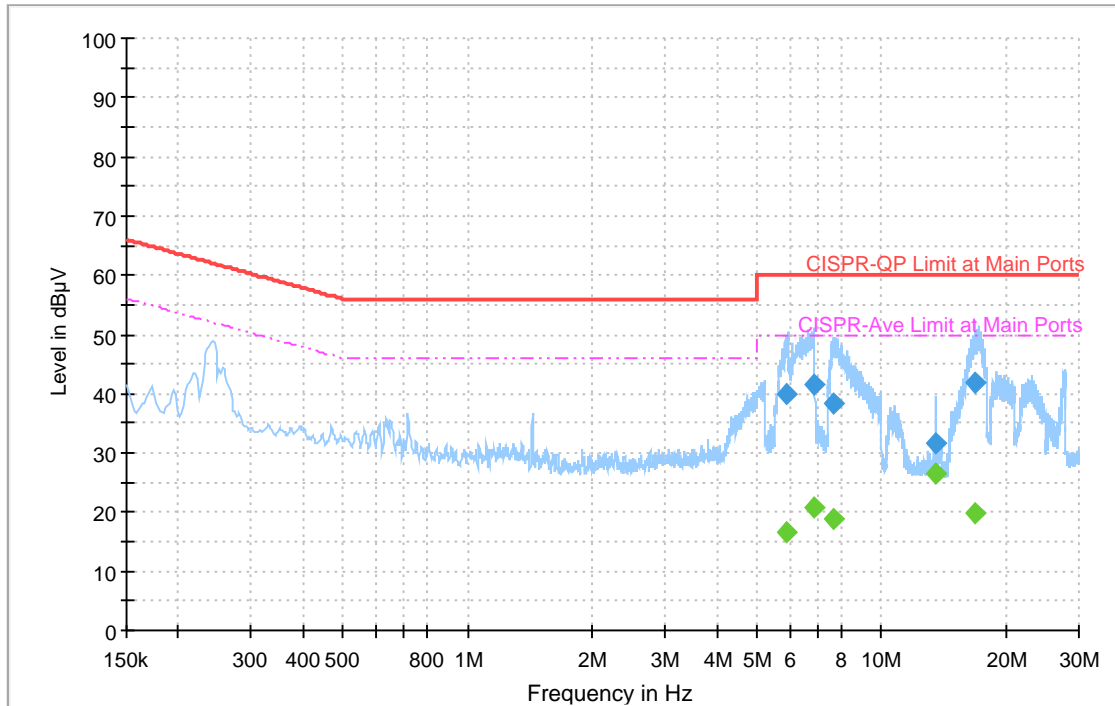


## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
5.881227	39.98	---	60.00	20.02	L1	OFF	20.4
5.881227	---	16.63	50.00	33.37	L1	OFF	20.4
6.842121	41.60	---	60.00	18.40	L1	OFF	20.4
6.842121	---	20.73	50.00	29.27	L1	OFF	20.4
7.691217	38.35	---	60.00	21.65	L1	OFF	20.4
7.691217	---	18.78	50.00	31.22	L1	OFF	20.4
13.560405	31.78	---	60.00	28.22	L1	OFF	20.5
13.560405	---	26.38	50.00	23.62	L1	OFF	20.5
16.790964	41.84	---	60.00	18.16	L1	OFF	20.6
16.790964	---	19.67	50.00	30.33	L1	OFF	20.6

# EUT Information

Site: CO01-CA  
 Power: 220Vac/60Hz  
 Project: 230515009  
 2\_with terminal sample

Full Spectrum

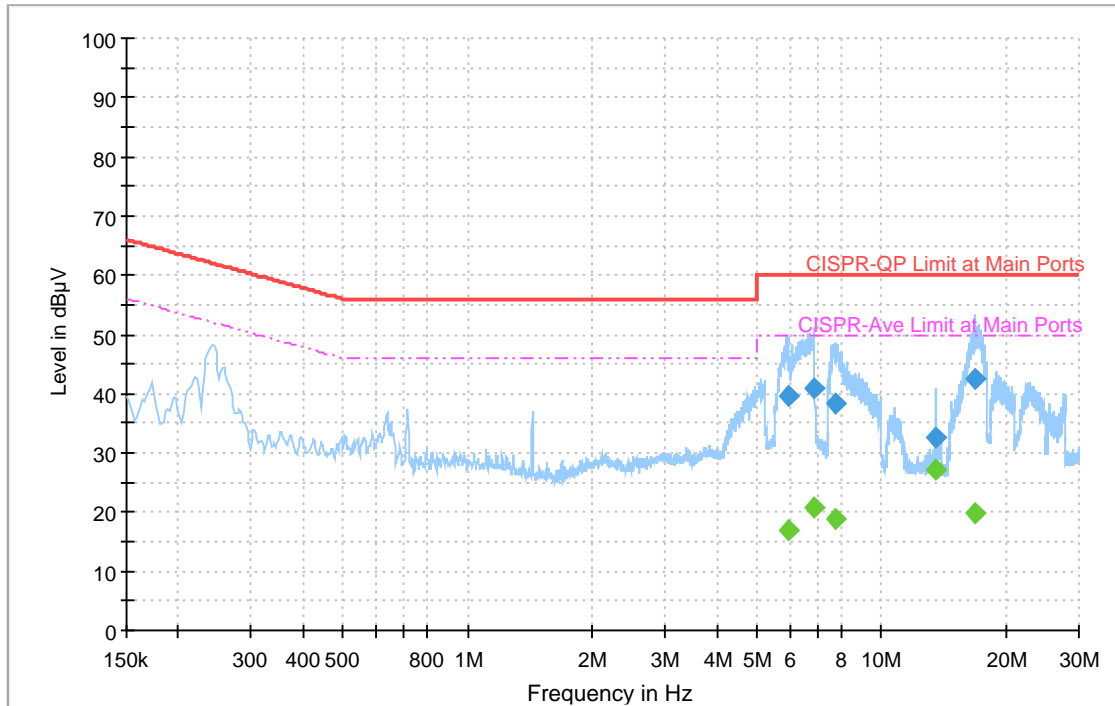

## Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
5.931285	39.49	---	60.00	20.51	N	OFF	20.4
5.931285	---	16.79	50.00	33.21	N	OFF	20.4
6.841140	40.79	---	60.00	19.21	N	OFF	20.4
6.841140	---	20.73	50.00	29.27	N	OFF	20.4
7.715913	38.30	---	60.00	21.70	N	OFF	20.4
7.715913	---	18.85	50.00	31.15	N	OFF	20.4
13.560585	32.59	---	60.00	27.41	N	OFF	20.5
13.560585	---	27.05	50.00	22.95	N	OFF	20.5
16.791000	42.61	---	60.00	17.39	N	OFF	20.6
16.791000	---	19.91	50.00	30.09	N	OFF	20.6





## Appendix B. Test Results of Near Field Test Items

### B1. Test Result of 20dB Spectrum Bandwidth

Test mode	NFC Tx	Test Frequency (MHz)	13.56																																																								
<table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>13.55998 MHz</td> <td>-12.17 dBm</td> <td>ndB down</td> <td>3.636 kHz</td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td>13.557982 MHz</td> <td>-32.03 dBm</td> <td>ndB</td> <td>20.00 dB</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td>13.561618 MHz</td> <td>-32.18 dBm</td> <td>Q factor</td> <td>3729.0</td> </tr> </tbody> </table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		13.55998 MHz	-12.17 dBm	ndB down	3.636 kHz	T1	1		13.557982 MHz	-32.03 dBm	ndB	20.00 dB	T2	1		13.561618 MHz	-32.18 dBm	Q factor	3729.0	<table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>13.55998 MHz</td> <td>-12.18 dBm</td> <td></td> <td></td> </tr> <tr> <td>T1</td> <td>1</td> <td></td> <td>13.5533267 MHz</td> <td>-34.63 dBm</td> <td>Occ Bw</td> <td>13.466533467 kHz</td> </tr> <tr> <td>T2</td> <td>1</td> <td></td> <td>13.5667932 MHz</td> <td>-34.27 dBm</td> <td></td> <td></td> </tr> </tbody> </table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		13.55998 MHz	-12.18 dBm			T1	1		13.5533267 MHz	-34.63 dBm	Occ Bw	13.466533467 kHz	T2	1		13.5667932 MHz	-34.27 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																					
M1	1		13.55998 MHz	-12.17 dBm	ndB down	3.636 kHz																																																					
T1	1		13.557982 MHz	-32.03 dBm	ndB	20.00 dB																																																					
T2	1		13.561618 MHz	-32.18 dBm	Q factor	3729.0																																																					
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																																					
M1	1		13.55998 MHz	-12.18 dBm																																																							
T1	1		13.5533267 MHz	-34.63 dBm	Occ Bw	13.466533467 kHz																																																					
T2	1		13.5667932 MHz	-34.27 dBm																																																							
<b>20dB Bandwidth (kHz)</b>	3.636	<b>99% OccupiedBW(kHz)</b>	13.466																																																								
<b>Frequency range (MHz)</b>	$f_L > 13.553$	13.55798	<b>Test Result</b>																																																								
	$f_H < 13.567$	13.56161	<b>Complies</b>																																																								

**Remark:** Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.



B2. Test Result of Frequency Stability

Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
187	13.560020	<b>-20</b>	<b>0</b>	13.560000
220	13.560000		<b>2</b>	13.560000
253	13.560020		<b>5</b>	13.560000
			<b>10</b>	13.560000
		<b>-10</b>	<b>0</b>	13.559960
			<b>2</b>	13.559980
			<b>5</b>	13.560000
			<b>10</b>	13.560000
		<b>0</b>	<b>0</b>	13.559980
			<b>2</b>	13.560000
			<b>5</b>	13.560000
			<b>10</b>	13.560020
		<b>10</b>	<b>0</b>	13.560000
			<b>2</b>	13.560020
			<b>5</b>	13.560020
			<b>10</b>	13.560020
		<b>20</b>	<b>0</b>	13.560000
			<b>2</b>	13.560000
			<b>5</b>	13.560000
			<b>10</b>	13.560000
		<b>30</b>	<b>0</b>	13.560000
			<b>2</b>	13.560000
			<b>5</b>	13.559980
			<b>10</b>	13.559980
		<b>40</b>	<b>0</b>	13.560000
			<b>2</b>	13.559980
			<b>5</b>	13.559980
			<b>10</b>	13.559980





Voltage vs. Frequency Stability		Temperature vs. Frequency Stability		
Voltage (Vac)	Measurement Frequency (MHz)	Temperature (°C)	Time	Measurement Frequency (MHz)
		50	0	13.560000
			2	13.560000
			5	13.559980
			10	13.559980
<b>Max.Deviation (MHz)</b>	0.0002	<b>Max.Deviation (MHz)</b>		0.000020
<b>Max.Deviation (ppm)</b>	1.474926	<b>Max.Deviation (ppm)</b>		1.474926
<b>Limit</b>	<b>FS &lt; ±100 ppm</b>	<b>Limit</b>		<b>FS &lt; ±100 ppm</b>
<b>Test Result</b>	<b>PASS</b>	<b>Test Result</b>		<b>PASS</b>



## Appendix C. Test Results of Radiated Test Items

### C1. Test Result of Field Strength of Fundamental Emissions

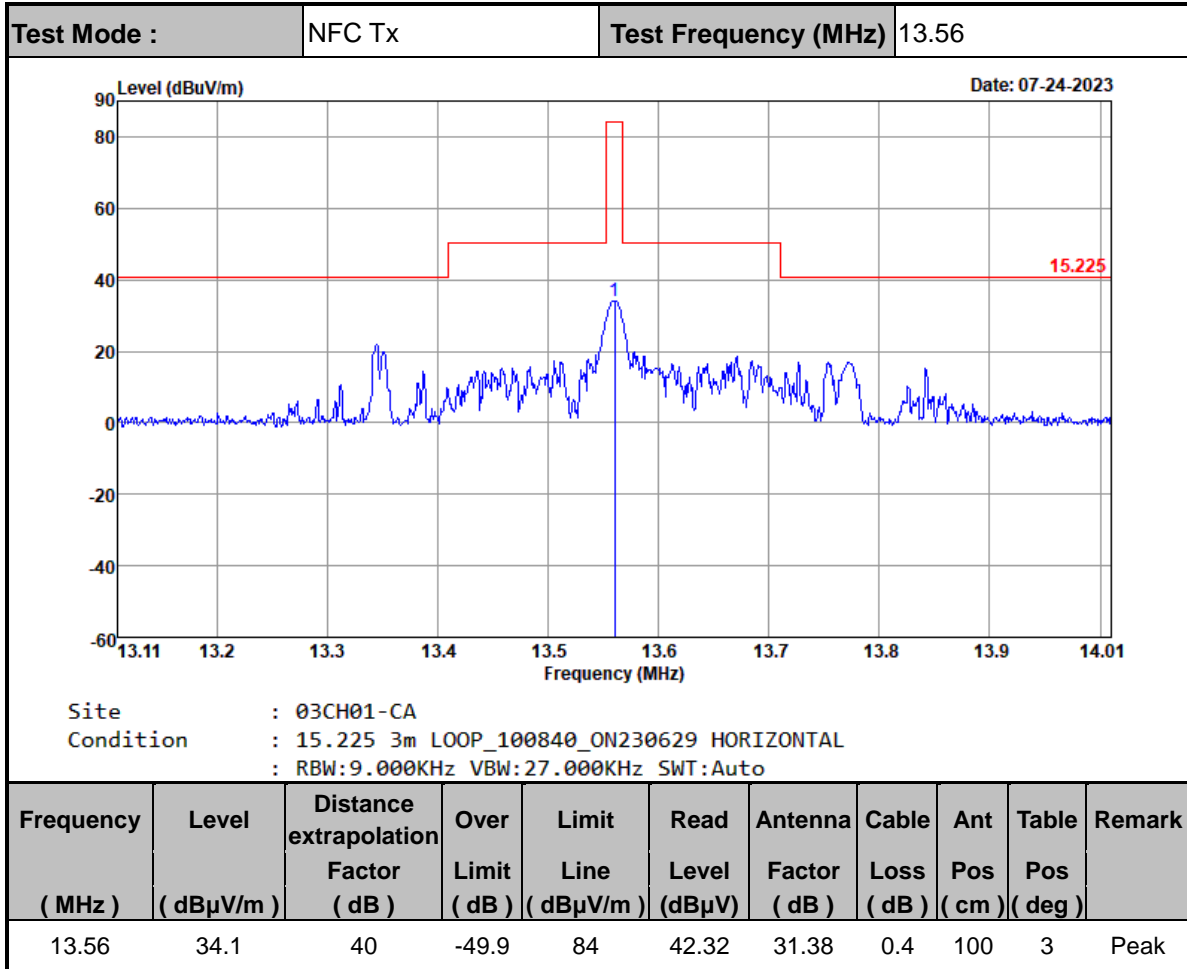

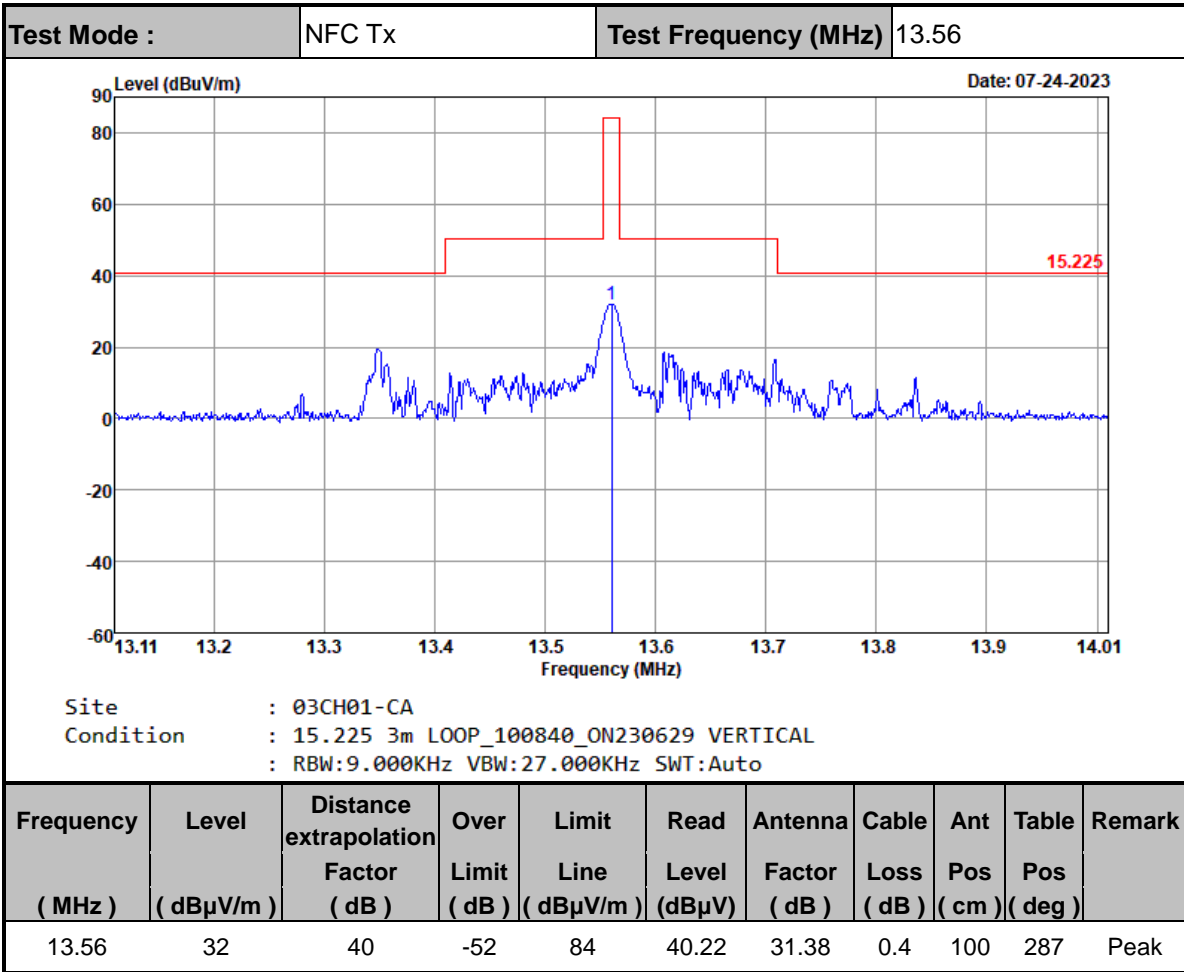


**Note :**

1. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
2. Level = Antenna Factor + Cable Loss + Read Level - Distance extrapolation factor.

**C2. Results of Radiated Spurious Emissions (9 kHz~30MHz)**


<b>Test Mode :</b>	NFC Tx	<b>Polarization :</b>	Horizontal
--------------------	--------	-----------------------	------------

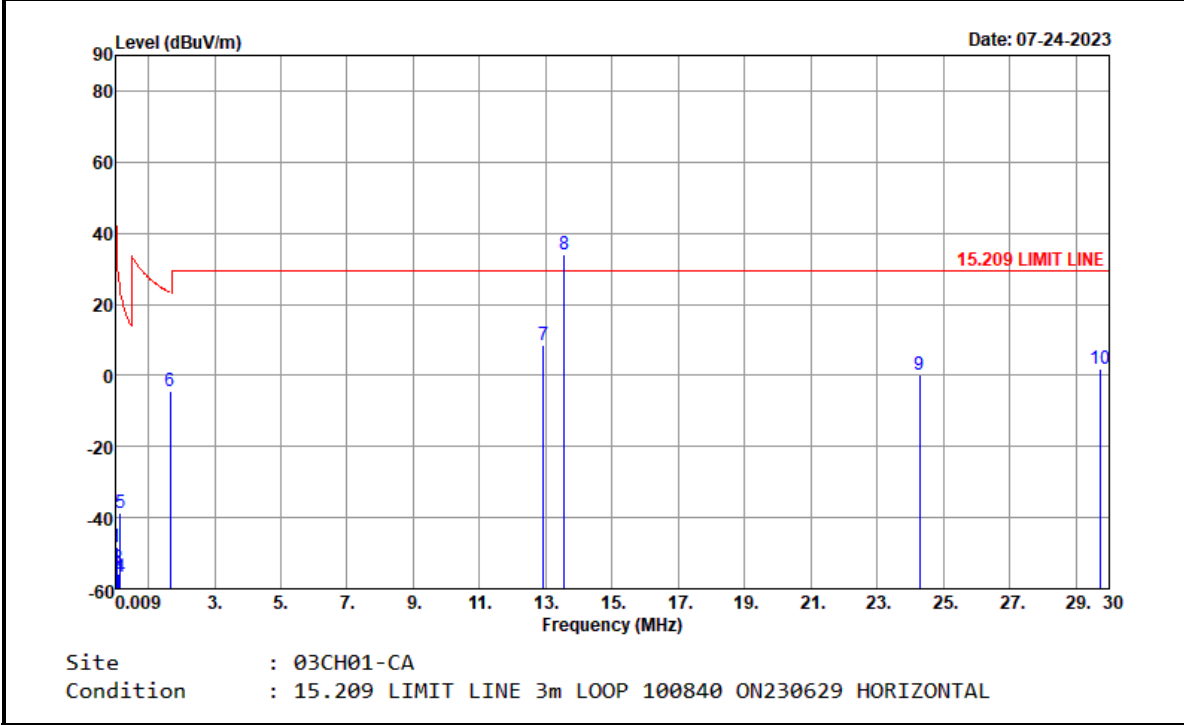

Frequency ( MHz )	Level ( dBμV/m )	Distance extrapolation Factor ( dB )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level (dBμV)	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.03562	-48.16	80	-84.73	36.57	1.05	30.76	0.03	-	-	Peak
0.07113	-54.36	80	-84.92	30.56	-4.38	29.98	0.04	-	-	Peak
0.0961	-56.01	80	-83.96	27.95	-6.06	30.01	0.04	-	-	Peak
0.14564	-56.54	80	-80.88	24.34	-6.47	29.89	0.04	-	-	Peak
0.15782	-38.8	80	-62.44	23.64	11.27	29.89	0.04	-	-	Peak
1.654	-4.22	40	-27.45	23.23	5.31	30.36	0.11	-	-	Peak
12.928	8.67	40	-20.83	29.5	17	31.28	0.39	-	-	Peak
13.56	33.95	40	4.45	29.5	42.17	31.38	0.4	-	-	Peak
24.289	0.1	40	-29.4	29.5	6.9	32.57	0.63	-	-	Peak
29.715	2	40	-27.5	29.5	8.08	33.22	0.7	-	-	Peak



Test Mode :	NFC Tx	Polarization :	Vertical
-------------	--------	----------------	----------

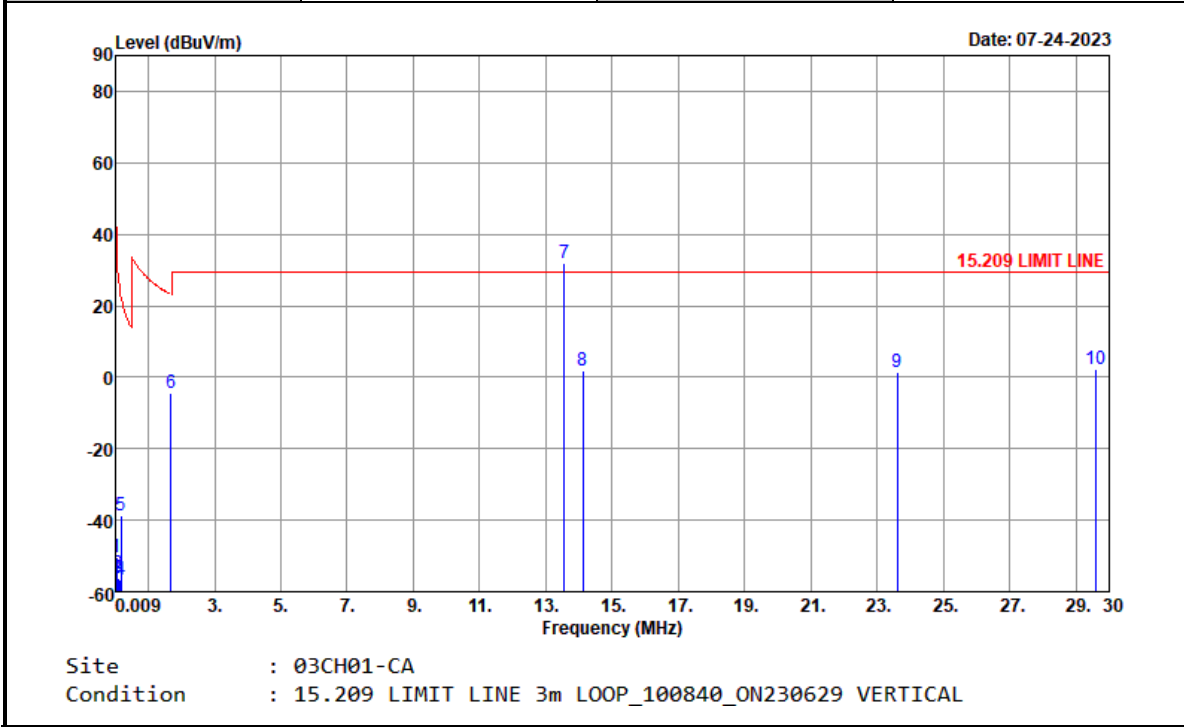

Frequency ( MHz )	Level ( dBμV/m )	Distance extrapolation Factor ( dB )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
0.03552	-50.32	80	-86.92	36.6	-1.11	30.76	0.03	-	-	Peak
0.06747	-54.91	80	-85.93	31.02	-4.99	30.04	0.04	-	-	Peak
0.09038	-56.33	80	-84.81	28.48	-6.58	30.21	0.04	-	-	Peak
0.1478	-56.54	80	-80.75	24.21	-6.47	29.89	0.04	-	-	Peak
0.17652	-38.88	80	-61.55	22.67	11.18	29.9	0.04	-	-	Peak
1.684	-4.54	40	-27.62	23.08	4.99	30.36	0.11	-	-	Peak
13.56	31.87	40	2.37	29.5	40.09	31.38	0.4	-	-	Peak
14.12	1.93	40	-27.57	29.5	10.06	31.46	0.41	-	-	Peak
23.605	1.47	40	-28.03	29.5	8.42	32.43	0.62	-	-	Peak
29.59	2.26	40	-27.24	29.5	8.35	33.21	0.7	-	-	Peak


**Note :**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
3. Level = Antenna Factor + Cable Loss + Read Level - Distance extrapolation factor.
4. 13.56 MHz is fundamental signal which can be ignored



**C3. Results of Radiated Spurious Emissions (30MHz~1GHz)**

<b>Test Mode :</b>	NFC Tx	<b>Polarization :</b>	Horizontal
--------------------	--------	-----------------------	------------

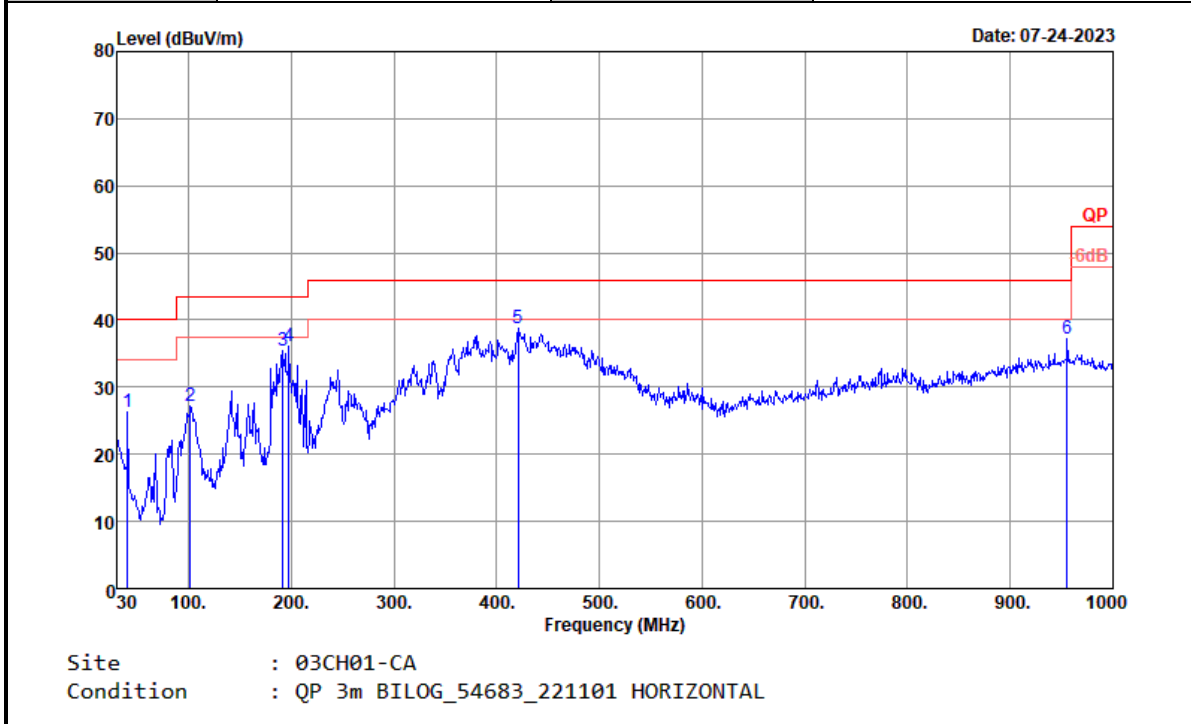


Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
40.67	26.23	-13.77	40	37.98	19.17	1.24	32.16	-	-	Peak
101.78	27.21	-16.29	43.5	41.13	16.36	1.92	32.2	-	-	Peak
191.99	35.41	-8.09	43.5	50.22	14.9	2.47	32.18	-	-	Peak
197.81	36.13	-7.37	43.5	50.81	15	2.49	32.17	-	-	Peak
420.91	38.72	-7.28	46	44.76	22.74	3.54	32.32	-	-	Peak
955.38	37.27	-8.73	46	30.41	31.31	6.31	30.76	-	-	Peak





<b>Test Mode :</b>	NFC Tx	<b>Polarization :</b>	Vertical
--------------------	--------	-----------------------	----------

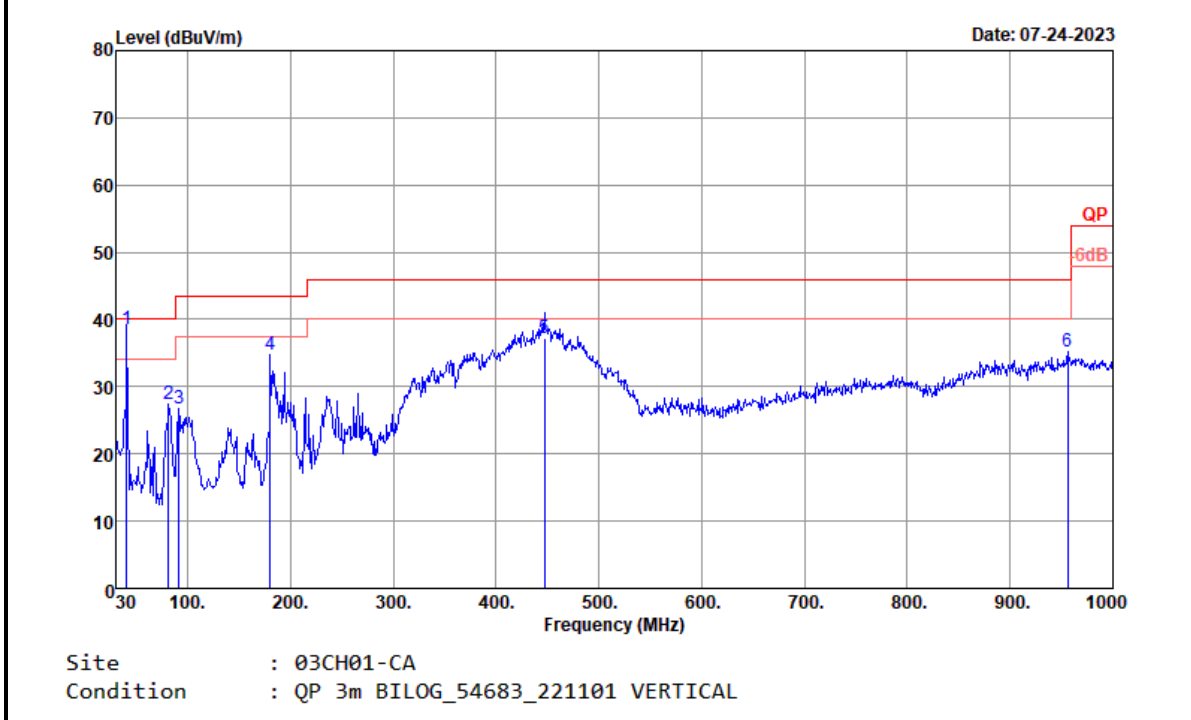

Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Remark
40.67	38.64	-1.36	40	50.39	19.17	1.24	32.16	100	251	QP
81.41	27.35	-12.65	40	44.01	13.84	1.67	32.17	-	-	Peak
91.11	26.82	-16.68	43.5	42.56	14.71	1.75	32.2	-	-	Peak
180.35	34.82	-8.68	43.5	49.54	15	2.43	32.15	-	-	Peak
447.1	37.21	-8.79	46	42.89	22.94	3.66	32.28	100	310	QP
956.35	35.1	-10.9	46	28.2	31.33	6.32	30.75	-	-	Peak

**Note:**

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Emission level (dBμV/m) = 20 log Emission level (μV/m).
3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor= Level.
4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.