

## FCC TEST REPORT

For

Shenzhen Aodelan Technology Co., Ltd.

CC2500+RFX2401C\_S\_RF7

Test Model: RF7

Additional Model No.:N/A

Prepared for : Shenzhen Aodelan Technology Co., Ltd.  
Address : 4/F, Building 1, Jinhua Ind Park, Langkou Ind Area Dalang Sub-dist,  
Longhua New Dist, Shenzhen, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an  
District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : June 18, 2019  
Number of tested samples : 1  
Serial number : Prototype  
Date of Test : June 18, 2019~ June 28, 2019  
Date of Report : July 05, 2019

## FCC TEST REPORT FCC CFR 47 PART 15 C (15.247)

**Report Reference No.** ..... : **LCS190604030AEA**

Date of Issue ..... : July 05, 2019

**Testing Laboratory Name**..... : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure ..... : Full application of Harmonised standards   
Partial application of Harmonised standards   
Other standard testing method

**Applicant's Name**..... : **Shenzhen Aodelan Technology Co., Ltd.**

Address ..... : 4/F, Building 1, Jinhua Ind Park, Langkou Ind Area Dalang Sub-dist,  
Longhua New Dist, Shenzhen, China

### Test Specification

Standard..... : FCC CFR 47 PART 15 C(15.247)

**Test Report Form No.** ..... : LCSEMC-1.0

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF ..... : Dated 2011-03

### Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**EUT Description.** ..... : CC2500+RFX2401C\_S\_RF7

Trade Mark..... : **AODELAN**

Model/ Type reference ..... : RF7

Ratings ..... : DC 3.0V by 2\*AAA  
Or DC 3.6V(maximum) by DC regulator

Result ..... : **Positive**

**Compiled by:**

*Peter Xiao*

Peter Xiao/Administrators

**Supervised by:**

*Aking Jin*

Aking Jin /Technique principal

**Approved by:**

*Gavin Liang*

Gavin Liang/ Manager

### FCC -- TEST REPORT

<b>Test Report No. :</b> LCS190604030AEA	<u>July 05, 2019</u> Date of issue
--	---------------------------------------

Type / Model.....	: RF7
EUT.....	: CC2500+RFX2401C_S_RF7

<b>Applicant.....</b>	<b>: Shenzhen Aodelan Technology Co., Ltd.</b>
Address.....	: 4/F, Building 1, Jinhua Ind Park, Langkou Ind Area Dalang Sub-dist, Longhua New Dist, Shenzhen, China
Telephone.....	: /
Fax.....	: /

<b>Manufacturer.....</b>	<b>: Shenzhen Aodelan Technology Co., Ltd.</b>
Address.....	: 4/F, Building 1, Jinhua Ind Park, Langkou Ind Area Dalang Sub-dist, Longhua New Dist, Shenzhen, China
Telephone.....	: /
Fax.....	: /

<b>Factory.....</b>	<b>: Shenzhen Fudasi Technology Co., Ltd.</b>
Address.....	: Floor 3-4, Factory Building B, Shengde Industrial Park, Hekeng Industrial Area, Langkou Community, Dalang Sub-district, Bao'an District, Shenzhen, Guangdong, China
Telephone.....	: /
Fax.....	: /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

### Revision History

Revision	Issue Date	Revisions	Revised By
000	July 05, 2019	Initial Issue	Gavin Liang

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
1.1. DESCRIPTION OF DEVICE (EUT) .....	6
1.2. HOST SYSTEM CONFIGURATION LIST AND DETAILS .....	7
1.3. EXTERNAL I/O CABLE .....	7
1.4. DESCRIPTION OF TEST FACILITY .....	7
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	7
1.6. MEASUREMENT UNCERTAINTY .....	7
1.7. DESCRIPTION OF TEST MODES .....	8
1.8. FREQUENCY OF CHANNELS .....	8
<b>2. TEST METHODOLOGY .....</b>	<b>9</b>
2.1. EUT CONFIGURATION .....	9
2.2. EUT EXERCISE .....	9
2.3. GENERAL TEST PROCEDURES .....	9
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>10</b>
3.1. JUSTIFICATION .....	10
3.2. EUT EXERCISE SOFTWARE.....	10
3.3. SPECIAL ACCESSORIES .....	10
3.4. BLOCK DIAGRAM/SCHEMATICS.....	10
3.5. EQUIPMENT MODIFICATIONS .....	10
3.6. TEST SETUP.....	10
<b>4. SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>5. TEST RESULT .....</b>	<b>12</b>
5.1. ON TIME AND DUTY CYCLE .....	12
5.2. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT.....	14
5.3. POWER SPECTRAL DENSITY MEASUREMENT .....	16
5.4. 6 DB AND 99% SPECTRUM BANDWIDTH MEASUREMENT .....	18
5.5. RADIATED EMISSIONS MEASUREMENT.....	20
5.6. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST.....	29
5.7. AC POWER LINE CONDUCTED EMISSIONS (NOT APPLICABLE).....	32
5.8. BAND-EDGE MEASUREMENTS FOR RADIATED EMISSIONS .....	34
5.9. ANTENNA REQUIREMENTS.....	40
<b>6. LIST OF MEASURING EQUIPMENTS .....</b>	<b>42</b>
<b>7. TEST SETUP PHOTOGRAPHS OF EUT.....</b>	<b>43</b>
<b>8. EXTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>43</b>
<b>9. INTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>43</b>

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : CC2500+RFX2401C\_S\_RF7  
Test Model : RF7  
Additional Model No. : N/A  
Model Declaration : N/A  
Power Supply : DC 3.0V by 2\*AAA  
Or DC 3.6V(maximum )by DC regulator  
Hardware Version : A0  
Software Version : 1.0

#### SRD

Frequency Range : 2404-2480 MHz  
Modulation Type : MSK  
Channel Number : 77 Channel (2404 MHz, 2405 MHz, .....2479 MHz, 2480 MHz)  
Channel Spacing : 1MHz  
Antenna Description : PCB Antenna, 2.8dBi (Max.)

## 1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
HUIZHOU TECHLONG Co., LTD	Adapter	TBA0050500055 VU	--	SDOC
SHENZHEN Aodelan Technology Co., LTD	Wireless Flash Trigger	E2	--	SDOC

## 1.3. External I/O Cable

I/O Port Description	Quantity	Cable
---	---	---

## 1.4. Description of Test Facility

FCC Registration Number is 254912.  
 Industry Canada Registration Number is 9642A-1.  
 EMSD Registration Number is ARCB0108.  
 UL Registration Number is 100571-492.  
 TUV SUD Registration Number is SCN1081.  
 TUV RH Registration Number is UA 50296516-001.  
 NVLAP Accreditation Code is 600167-0.  
 FCC Designation Number is CN5024  
 CAB identifier: CN0071

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

## 1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±3.80dB	(1)
	26.5GHz~40GHz	±3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	±1.63dB	(1)
Power disturbance	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7. Description of Test Modes

The EUT has been tested under operating condition.

This test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was the mode and channel with the highest output power that was determined to be TX.

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be SRD mode(LCH).

Pre-test AC conducted emission at charge from adapter mode, recorded worst case.

Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worst case.

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

## 1.8. Frequency of Channels

Mainly, will have below Channels:

Frequency Band	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
2404~2480MHz	1	2404.000212	5	2427.001431
	2	2412.000636	6	2447.002491
	3	2417.000901	7	2454.002862
	4	2422.001166	8	2479.337538

Others channel:

Frequency Band	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
2404~2480MHz	<b>1</b>	<b>2404</b>	38	2441
	2	2405	--	--
	3	2406	--	--
	--	--	75	2478
	--	--	76	2479
	<b>37</b>	<b>2440</b>	<b>77</b>	<b>2480</b>



## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 15.247 Meas Guidance v05r02. Guidance are required to be used for this kind of RSS-247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of RSS-247 Issue 2 and RSS-Gen Issue 5.

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013.

### 3. SYSTEM TEST CONFIGURATION

#### 3.1. Justification

The system was configured for testing in a continuous transmits condition. The duty cycle is 100% and the average correction factor is 0.

The EUT After the power is switched on, By manually operating the keys, and the Signal continuous transmission.

#### 3.2. EUT Exercise Software

N/A

#### 3.3. Special Accessories

N/A

#### 3.4. Block Diagram/Schematics

Please refer to the related document

#### 3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6. Test Setup

Please refer to the test setup photo.

## 4. SUMMARY OF TEST RESULTS

Applied Standard: RSS-247 Issue 2 / RSS-Gen Issue 5			
ISED Rules	Description of Test	Result	Remark
/	On Time and Duty Cycle	Compliant	Note 1
§15.247(b)	Maximum Conducted Output Power	Compliant	Note 1
§15.247(e)	Power Spectral Density	Compliant	Note 1
§15.247(a)(2)	6dB Bandwidth	Compliant	Note 1
§15.247(a)	Occupied Bandwidth	Compliant	Note 1
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant	Note 1
§15.205	Emissions at Restricted Band	Compliant	Note 1
§15.207(a)	AC Conducted Emissions	Compliant	Note 1
§15.203	Antenna Requirements	Compliant	Note 1
§15.247(i), §2.1091	RF Exposure	Compliant	Note 2

**Remark:**

1. Note 1 – Test results inside test report;
2. Note 2 – Test results in other test report (RF Exposure Evaluation);

## 5. TEST RESULT

### 5.1. On Time and Duty Cycle

#### 5.1.1. Standard Applicable

None; for reporting purpose only.


#### 5.1.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of the spectrum analyzer.

#### 5.1.3. Test Procedures

1. Set the center frequency of the spectrum analyzer to the transmitting frequency;
2. Set the span=0MHz, RBW=8MHz, VBW=50MHz, Sweep time=5ms;
3. Detector = peak;
4. Trace mode = Single hold.

#### 5.1.4. Test Setup Layout

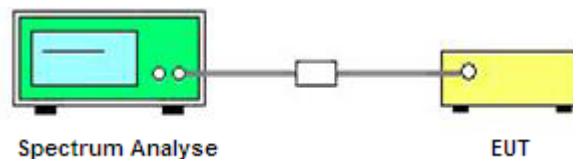


#### 5.1.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.1.6. Test result

Mode	On Time B (ms)	Period (ms)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (KHz)
MSK	5.0	5.0	1	100	0	0.01

On Time and Duty Cycle

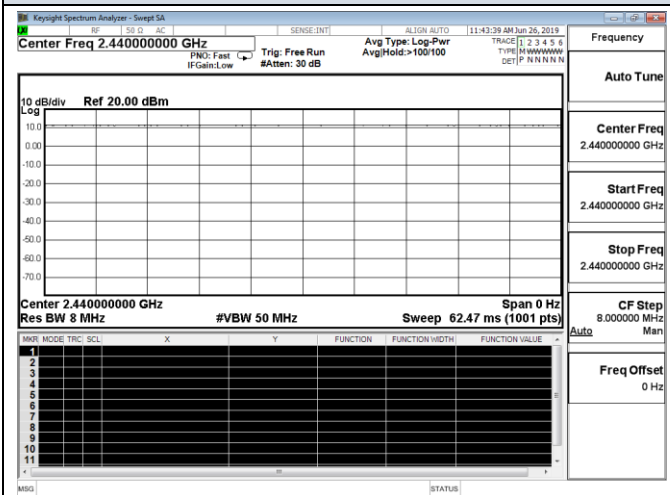

Channel 37 / 2440 MHz

## 5.2. Maximum Conducted Output Power Measurement

### 5.2.1. Standard Applicable

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

### 5.2.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of the spectrum analyzer.

### 5.2.3. Test Procedures


The transmitter output (antenna port) was connected to the spectrum analyzer.

According to KDB558074 D01 15.247 Meas Guidance v05r02 Measurement Guidance Section 9.1 Maximum peak conducted output power 9.1.1.

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### 5.2.4. Test Setup Layout

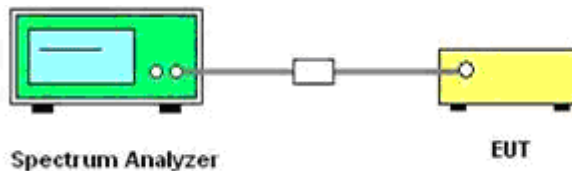

### 5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



### 5.2.6. Test Result of Maximum Conducted Output Power

Channel	Frequency (MHz)	Measured Maximum Peak Power (dBm)	Limits (dBm)	Verdict
1	2404	14.689	30	PASS
37	2440	13.087		
77	2480	14.240		

**Remark:**


1. Test results including cable loss;
2. Please refer to following plots;

Maximum Peak Output Power

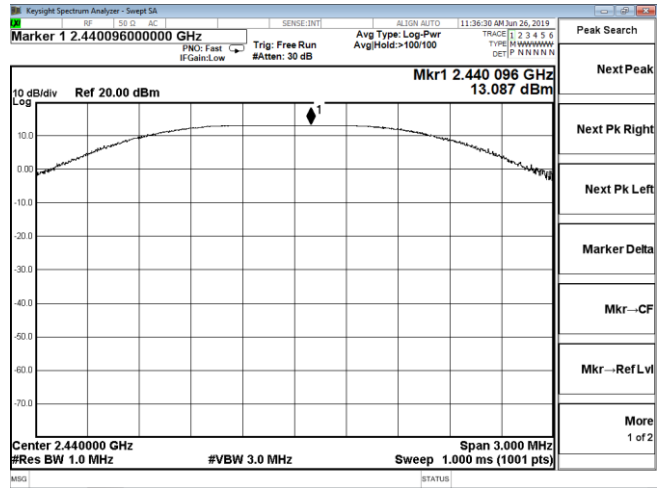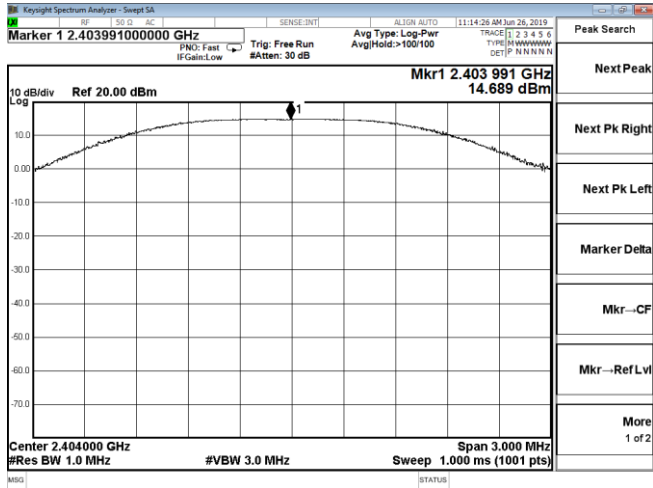

Channel 1 / 2404 MHz

Channel 37 / 2440 MHz

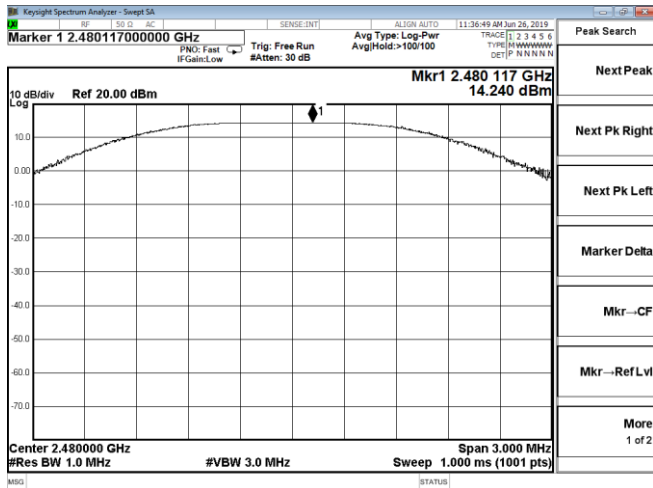

Channel 77 / 2480 MHz

## 5.3. Power Spectral Density Measurement

### 5.3.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### 5.3.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

### 5.3.3. Test Procedures

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 3 kHz.
4. Set the VBW  $\geq 3 \times$  RBW
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
12. The resulting peak PSD level must be 8 dBm.

### 5.3.4. Test Setup Layout

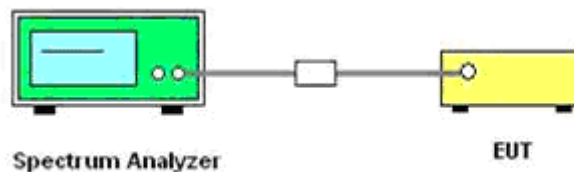

### 5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 5.3.6. Test Result of Power Spectral Density

PASS


Remark:

1. Test results including cable loss;
2. Please refer to following plots;




Channel	Frequency (MHz)	Peak Power Spectral Density (dBm)	Limits (dBm)	Verdict
1	2404	7.708	8	PASS
37	2440	7.317		
77	2480	7.875		

Peak Power Spectral Density

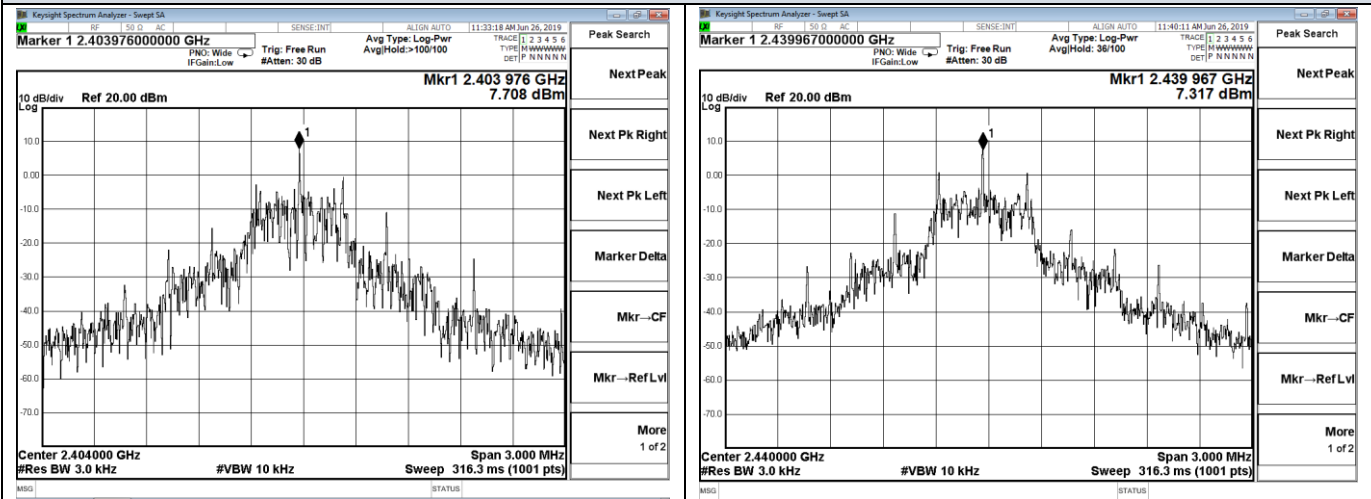

Channel 1 / 2404 MHz

Channel 37 / 2440 MHz

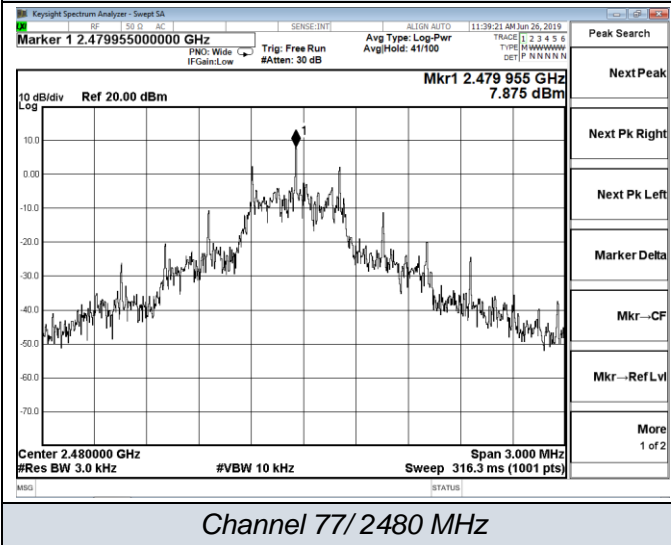

Channel 77 / 2480 MHz

## 5.4. 6 dB and 99% Spectrum Bandwidth Measurement

### 5.4.1. Standard Applicable

According to section §15.247(a) (2): The minimum 6 dB bandwidth shall be 500 kHz.

### 5.4.2. Measuring Instruments and Setting


Please refer to equipment list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

### 5.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to KDB558074 D01 15.247 Meas Guidance v05r02.
3. Measured the spectrum width with power higher than 6dB below carrier.

### 5.4.4. Test Setup Layout

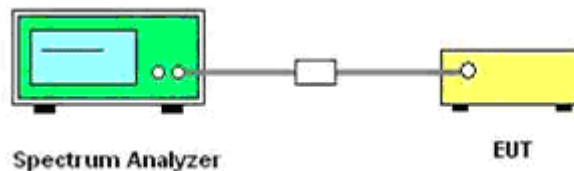

### 5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



### 5.4.6. Test Result of 6dB and 99% Spectrum Bandwidth

Channel	Frequency (MHz)	6dB Bandwidth (KHz)	99% Bandwidth (KHz)	Limits (KHz)	Verdict
1	2404	572.0	1270.5	≥500	PASS
37	2440	559.9	1224.6		
77	2480	561.8	1240.9		

#### Remark:


1. Test results including cable loss;
2. Please refer to following plots;

6dB and 99% Bandwidth

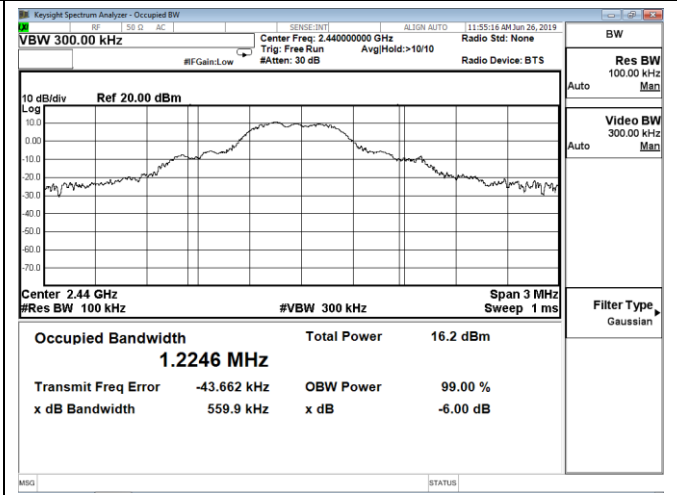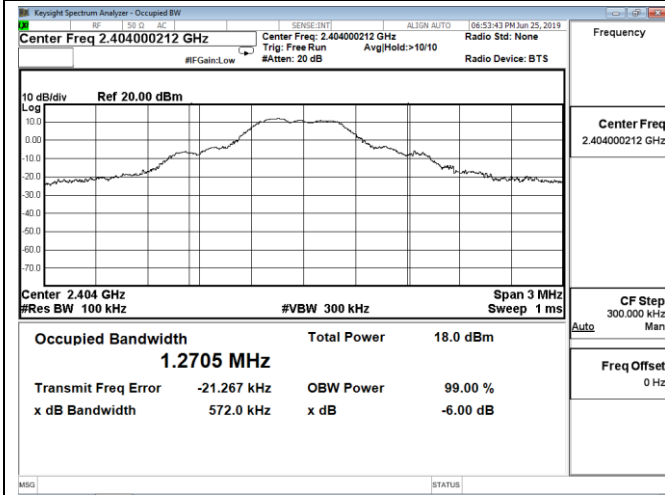

Channel 1 / 2404 MHz

Channel 37 / 2440 MHz

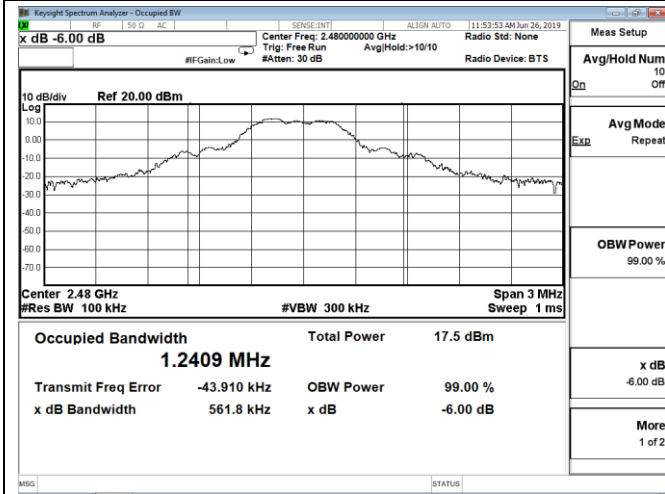

Channel 77 / 2480 MHz

## 5.5. Radiated Emissions Measurement

### 5.5.1. Standard Applicable

According to §15.209/ §15.205 or RSS-247§5.5/RSS-Gen: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen Issue 5 is not required.

In case the emission fall within the restricted band specified on RSS-Gen Issue 5, then the RSS-Gen Issue 5 limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 5.5.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>th</sup> carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

### 5.5.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.

##### Premeasurement:


- The antenna is moved spherical over the EUT in different polarizations of the antenna.

##### Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.



5.5.4. Test Setup Layout

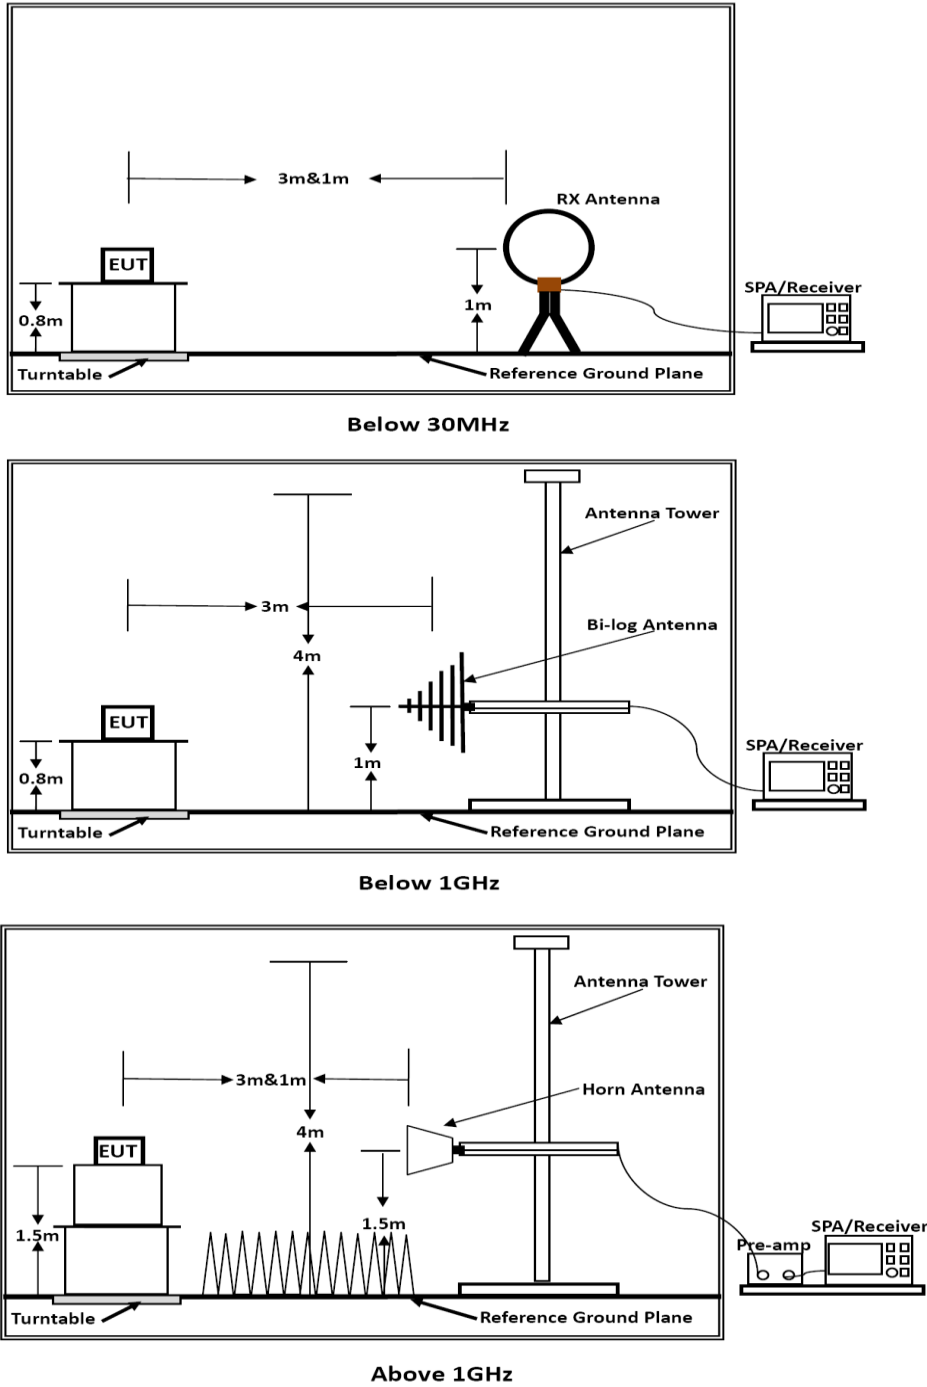

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log(\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);  
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9 KHz~30MHz)

Temperature	24.6°C	Humidity	54.7%
Test Engineer	Diamond Lu	Configurations	MSK

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.5.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24.6°C	Humidity	54.7%
Test Engineer	Diamond Lu	Configurations	MSK

Vertical

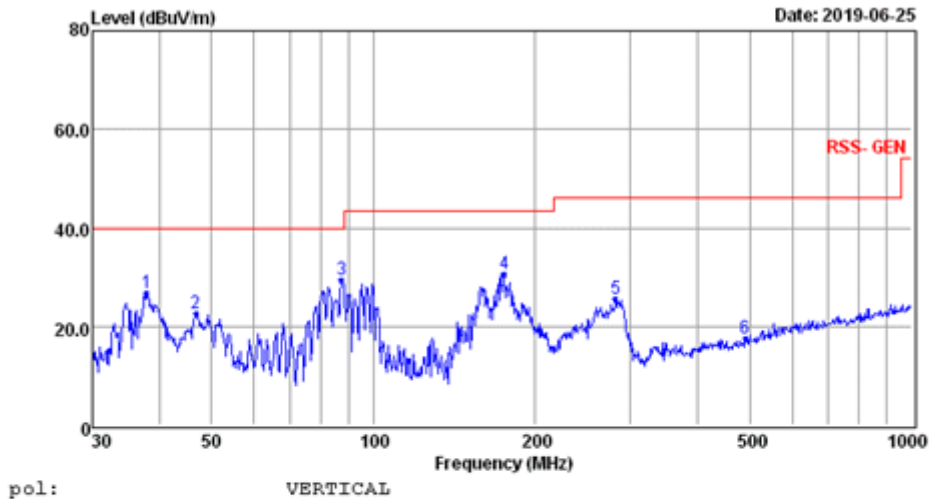

pol:

VERTICAL


	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	37.94	13.46	0.38	13.05	26.89	40.00	-13.11	Peak
2	46.83	8.77	0.35	13.44	22.56	40.00	-17.44	Peak
3	87.42	17.99	0.47	11.08	29.54	40.00	-10.46	Peak
4	175.04	20.51	0.73	9.33	30.57	43.50	-12.93	Peak
5	281.99	11.76	1.06	12.71	25.53	46.00	-20.47	Peak
6	490.74	-0.14	1.32	16.34	17.52	46.00	-28.48	Peak

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that are 20db below the official limit are not reported

Horizontal

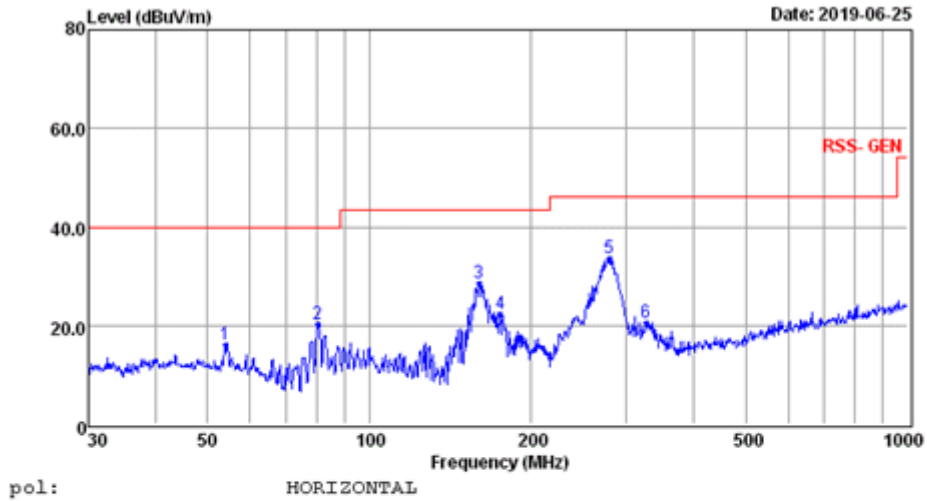

pol:

HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	54.07	2.59	0.46	13.06	16.11	40.00	-23.89	QP
2	80.08	10.93	0.65	8.57	20.15	40.00	-19.85	QP
3	159.78	19.28	0.75	8.66	28.69	43.50	-14.81	QP
4	175.04	12.25	0.73	9.33	22.31	43.50	-21.19	QP
5	279.04	19.91	1.01	12.64	33.56	46.00	-12.44	QP
6	326.74	5.78	1.04	13.60	20.42	46.00	-25.58	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report.
- 2). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3). Corrected Reading: Antenna Factor + Cable Loss + Read Level = Level.

## 5.5.8. Results for Radiated Emissions (Above 1GHz)

## Channel 1 / 2404 MHz

Freq. MHz	Reading dBuV	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4808.5	52.19	33.06	35.04	3.94	54.15	74.00	-19.85	Peak	Horizontal
4808.5	38.20	33.06	35.04	3.94	40.16	54.00	-13.84	Average	Horizontal
7212.4	52.32	33.16	35.06	3.96	54.38	74.00	-19.62	Peak	Horizontal
7212.4	40.31	33.16	35.06	3.96	42.37	54.00	-11.63	Average	Horizontal
4808.5	52.41	33.06	35.04	3.94	54.37	74.00	-19.63	Peak	Vertical
4808.5	39.22	33.06	35.04	3.94	41.18	54.00	-12.82	Average	Vertical
7212.4	54.62	33.16	35.06	3.96	56.68	74.00	-17.32	Peak	Vertical
7212.4	39.75	33.16	35.06	3.96	41.81	54.00	-12.19	Average	Vertical

## Channel 37 / 2440 MHz

Freq. MHz	Reading dBuV	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4880.7	50.50	33.16	35.15	3.96	52.47	74.00	-21.53	Peak	Horizontal
4880.7	39.36	33.16	35.15	3.96	41.33	54.00	-12.67	Average	Horizontal
7320.4	52.76	33.26	35.17	3.98	54.83	74.00	-19.17	Peak	Horizontal
7320.4	41.54	33.26	35.17	3.98	43.61	54.00	-10.39	Average	Horizontal
4880.7	49.71	33.16	35.15	3.96	51.68	74.00	-22.32	Peak	Vertical
4880.7	35.68	33.16	35.15	3.96	37.65	54.00	-16.35	Average	Vertical
7320.4	53.75	33.26	35.17	3.98	55.82	74.00	-18.18	Peak	Vertical
7320.4	41.06	33.26	35.17	3.98	43.13	54.00	-10.87	Average	Vertical

## Channel 77/ 2480 MHz

Freq. MHz	Reading dBuV	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.7	50.47	33.26	35.14	3.98	52.57	74.00	-21.43	Peak	Horizontal
4960.7	40.10	33.26	35.14	3.98	42.20	54.00	-11.80	Average	Horizontal
7440.6	49.87	33.36	35.16	4.00	52.07	74.00	-21.93	Peak	Horizontal
7440.6	38.39	33.36	35.16	4.00	40.59	54.00	-13.41	Average	Horizontal
4960.7	51.02	33.26	35.14	3.98	53.12	74.00	-20.88	Peak	Vertical
4960.7	37.01	33.26	35.14	3.98	39.11	54.00	-14.89	Average	Vertical
7440.6	53.54	33.36	35.16	4.00	55.74	74.00	-18.26	Peak	Vertical
7440.6	36.59	33.36	35.16	4.00	38.79	54.00	-15.21	Average	Vertical

## Notes:

- 1). Measuring frequencies from 9 KHz~10<sup>th</sup> harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9 KHz~10<sup>th</sup> harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
- 3). Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 4). Measured radiated emission used 900-930 MHz band filter in order to avoid spectrum overload.

## 5). Results of Radiated Emissions= Reading + Ant. Fac- Pre. Fac + Cab. Loss- Limit

## 5.6. Conducted Spurious Emissions and Band Edges Test

## 5.6.1. Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

## 5.6.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

## 5.6.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 KHz to 10 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

## 5.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.



## 5.6.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.6.6. Test Results of Conducted Spurious Emissions

Temperature	23.8°C	Humidity	53.7%
Test Engineer	Diamond Lu	Configurations	MSK



RF Conducted Spurious Emissions  
Channel 1 / 2404 MHz

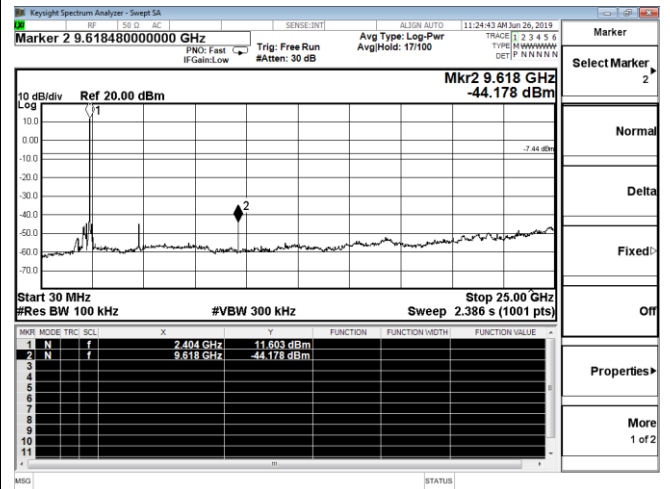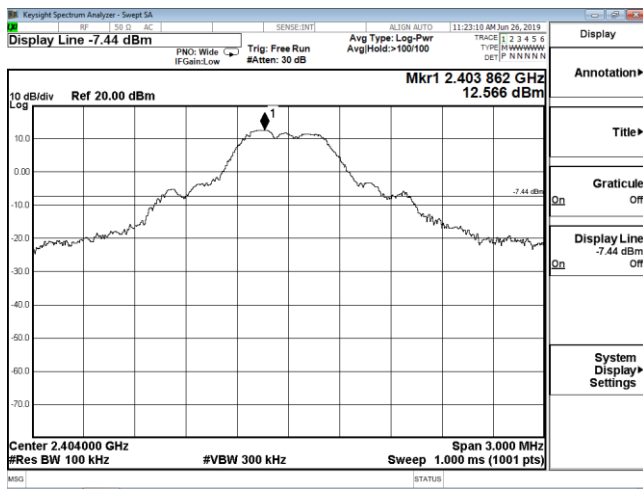

2402.0 MHz – 2405.0 MHz

30 MHz – 25 GHz



Channel 37 / 2440 MHz

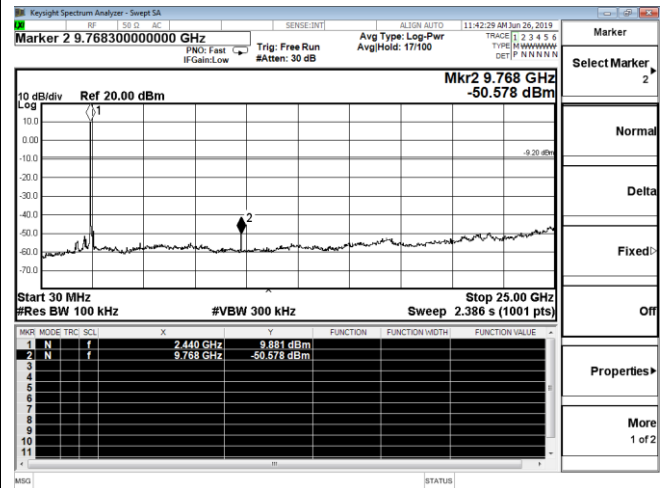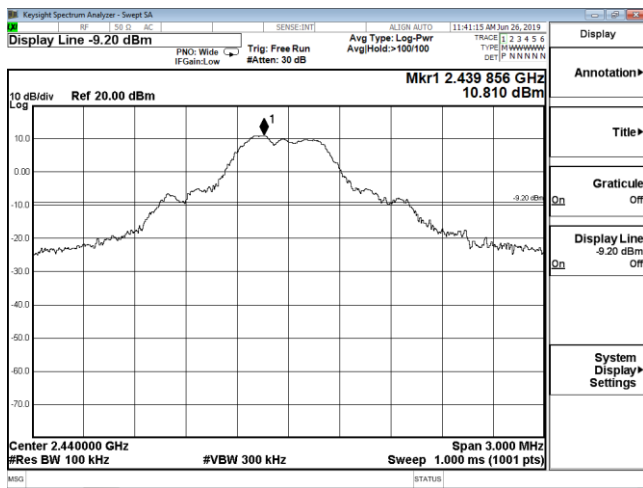

2439 MHz – 2442 MHz

30 MHz – 25 GHz


Channel 77 / 2480 MHz

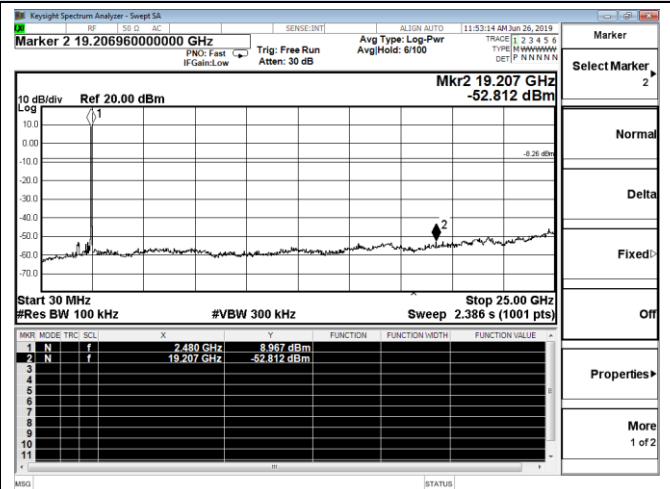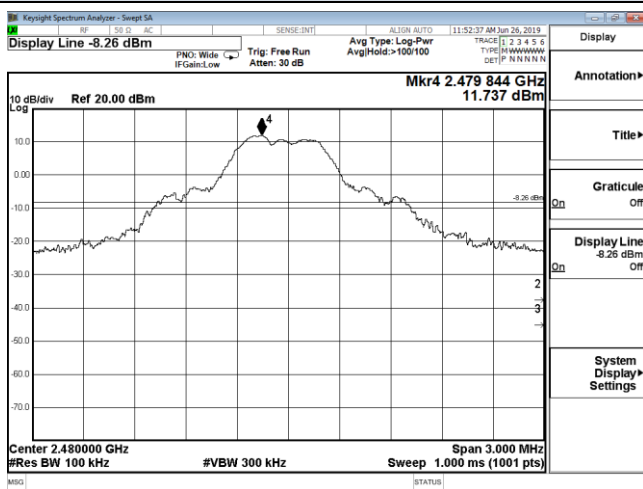


2478 MHz – 2481 MHz

30 MHz – 25 GHz

Band-edge measurements for conducted emissions

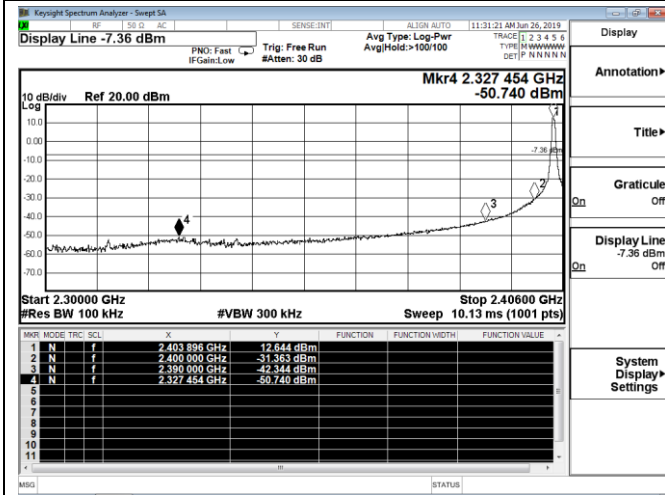

Channel 1 / 2404 MHz

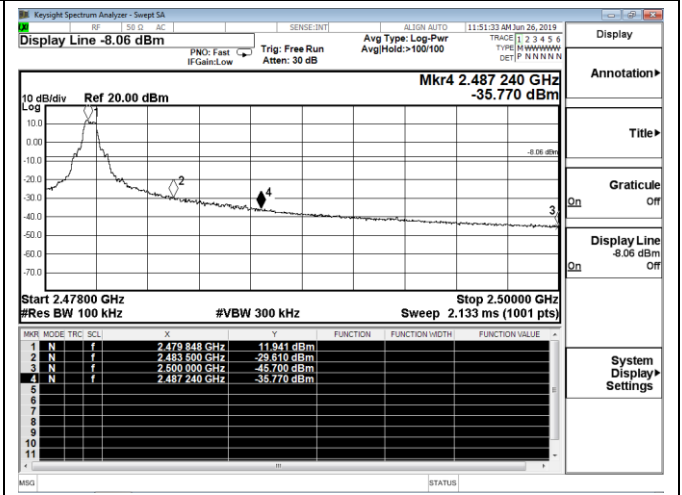

Channel 77 / 2480 MHz

## 5.7. AC Power Line Conducted Emissions


### 5.7.1 Standard Applicable

According to §15.247 (d) or RSS-Gen § 8.8: For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with the logarithm of the frequency

### 5.7.2 Block Diagram of Test Setup

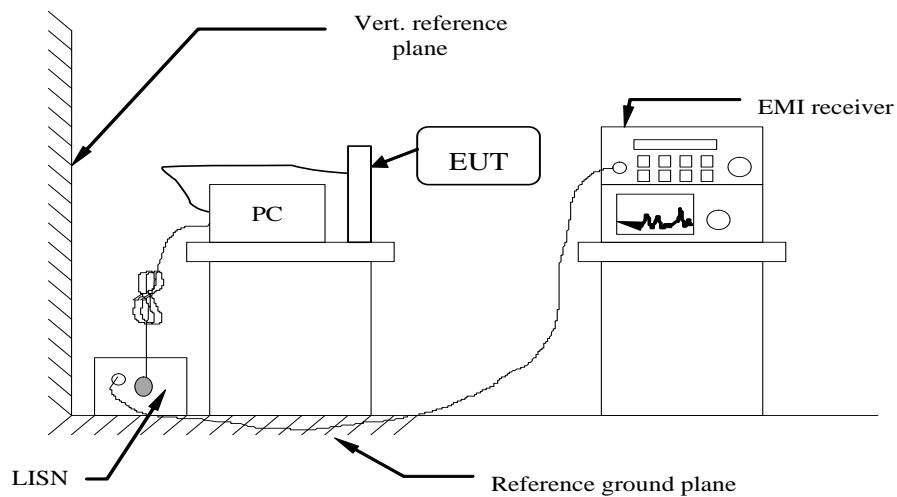

### 5.7.3 Test Results


PASS

The test data please refer to following page.



**AC Conducted Emission of powered by charge power PC mode @ AC 120V/60Hz (worst case)**

Line

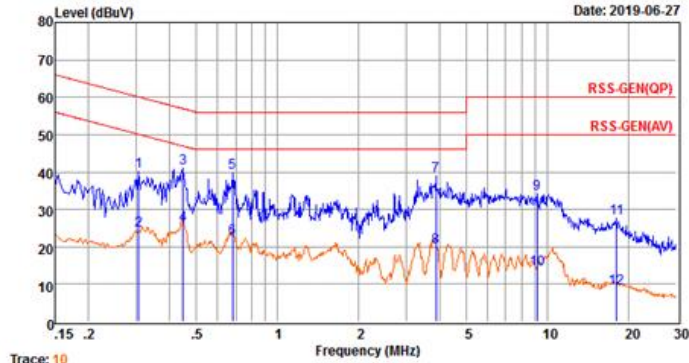


Trace: 10  
Pol: LINE

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark	
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB		
1	0.31	20.43	9.63	0.03	10.00	40.09	60.06	-19.97	QP
2	0.31	4.81	9.63	0.03	10.00	24.47	50.06	-25.59	Average
3	0.45	21.24	9.62	0.04	10.00	40.90	56.93	-16.03	QP
4	0.45	6.26	9.62	0.04	10.00	25.92	46.93	-21.01	Average
5	0.68	20.12	9.64	0.04	10.00	39.80	56.00	-16.20	QP
6	0.68	2.52	9.64	0.04	10.00	22.20	46.00	-23.80	Average
7	3.86	19.38	9.65	0.06	10.00	39.09	56.00	-16.91	QP
8	3.86	0.30	9.65	0.06	10.00	20.01	46.00	-25.99	Average
9	9.16	14.43	9.69	0.08	10.00	34.20	60.00	-25.80	QP
10	9.16	-5.76	9.69	0.08	10.00	14.01	50.00	-35.99	Average
11	18.04	7.82	9.74	0.11	10.00	27.67	60.00	-32.33	QP
12	18.04	-10.87	9.74	0.11	10.00	8.98	50.00	-41.02	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.  
2. The emission levels that are 20dB below the official limit are not reported.

Neutral

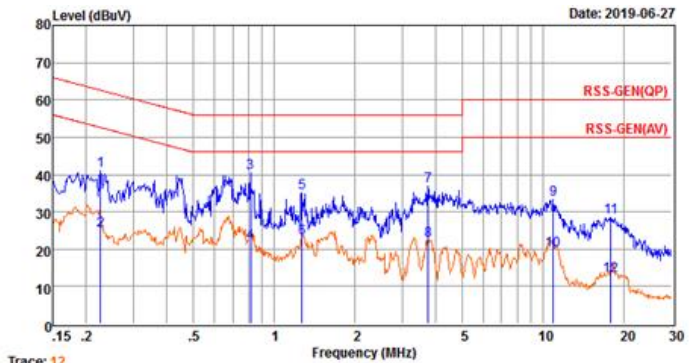

Trace: 12  
Pol: NEUTRAL

Freq	Reading	LISNFac	CabLos	Aux2Fac	Measured	Limit	Over	Remark	
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB		
1	0.23	21.37	9.59	0.03	10.00	40.99	62.61	-21.62	QP
2	0.23	5.25	9.59	0.03	10.00	24.87	52.61	-27.74	Average
3	0.82	20.77	9.63	0.04	10.00	40.44	56.00	-15.56	QP
4	0.82	2.03	9.63	0.04	10.00	21.70	46.00	-24.30	Average
5	1.27	15.28	9.63	0.05	10.00	34.96	56.00	-21.04	QP
6	1.27	3.13	9.63	0.05	10.00	22.81	46.00	-23.19	Average
7	3.74	17.03	9.65	0.06	10.00	36.74	56.00	-19.26	QP
8	3.74	2.49	9.65	0.06	10.00	22.20	46.00	-23.80	Average
9	10.90	13.38	9.72	0.08	10.00	33.18	60.00	-26.82	QP
10	10.91	-0.18	9.72	0.08	10.00	19.62	50.00	-30.38	Average
11	17.85	8.51	9.80	0.11	10.00	28.42	60.00	-31.58	QP
12	17.85	-7.23	9.80	0.11	10.00	12.68	50.00	-37.32	Average

Remarks: 1. Measured = Reading + LISNFac + Cable Loss + Aux2 Fac.  
2. The emission levels that are 20dB below the official limit are not reported.


\*\*\*Note: Pre-scan all modes and recorded the worst case results in this report

## 5.8. Band-edge Measurements for Radiated Emissions

### 5.8.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.8.2. Test Setup Layout

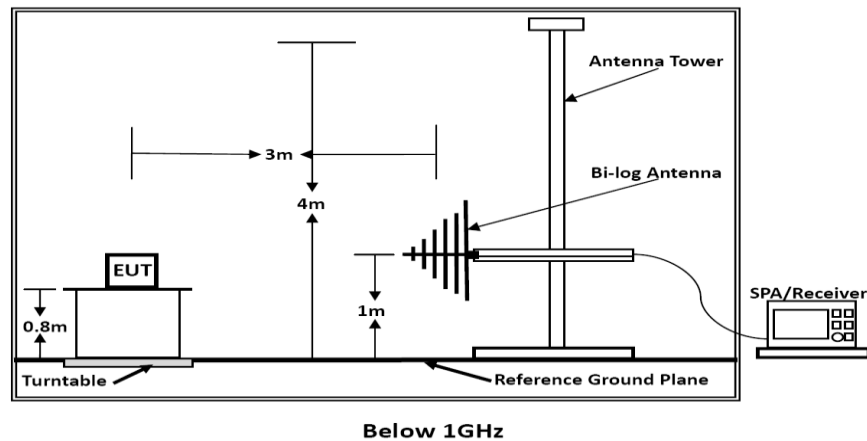

### 5.8.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

### 5.8.4. Test Procedures

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

**Final measurement:**

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.

--- The final measurement will be done with QP detector with an EMI receiver.


--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

5.8.5 Test Results

PASS

Channel 1 / 2404 MHz

Horizontal

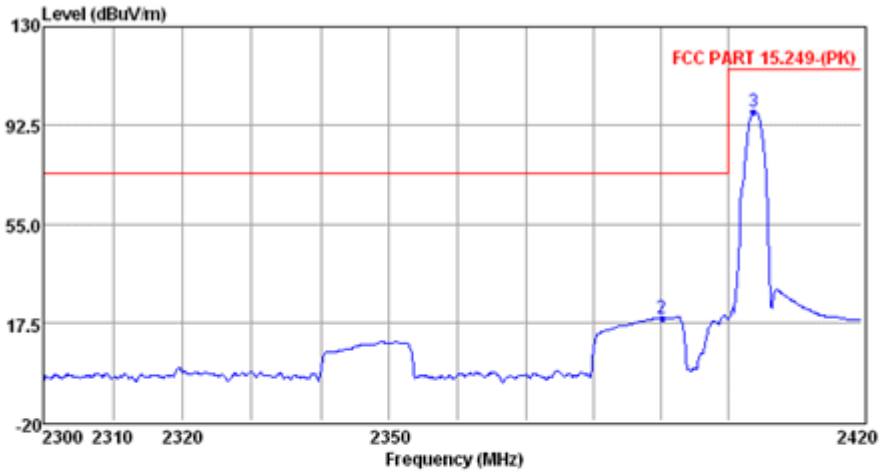


pol:

HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	8.32	3.22	28.16	-3.48	74.00	-77.48	Peak
2	2390.16	31.34	3.08	27.90	19.18	74.00	-54.82	Peak
3	2403.81	109.86	3.10	27.86	97.68	114.00	-16.32	Peak

- Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

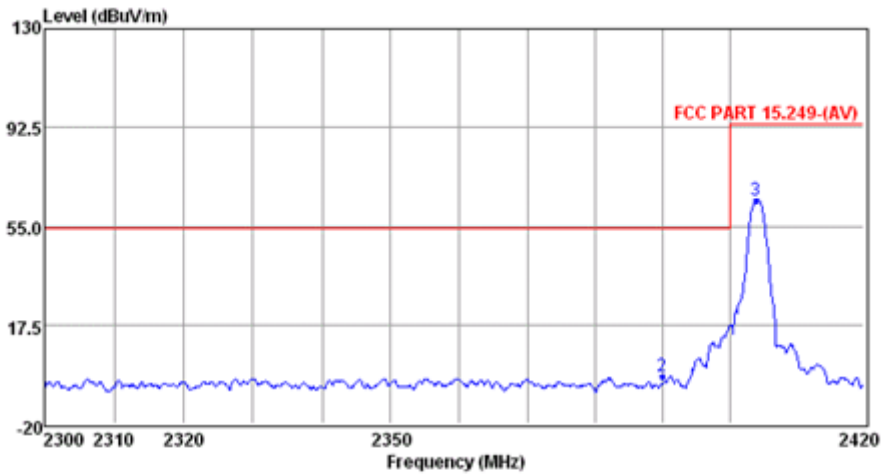


pol:

HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	6.69	3.22	28.16	-5.11	54.00	-59.11	Peak
2	2390.00	10.00	3.08	27.90	-2.16	54.00	-56.16	Peak
3	2403.93	77.07	3.10	27.86	64.89	94.00	-29.11	Peak

- Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

Vertical

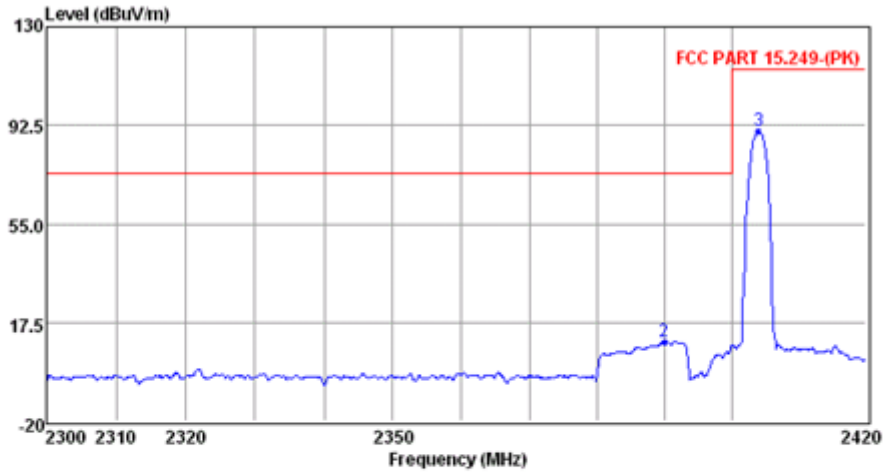


pol:

VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	8.66	3.22	27.80	-3.50	74.00	-77.50	Peak
2	2390.00	22.57	3.08	27.64	10.15	74.00	-63.85	Peak
3	2404.05	102.64	3.10	27.62	90.22	114.00	-23.78	Peak

- Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

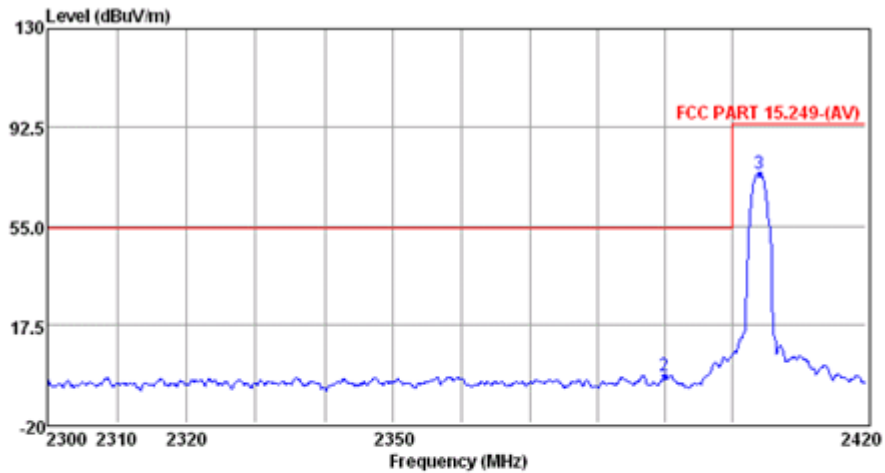

pol:


VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2300.00	7.79	3.22	27.80	-4.37	54.00	-58.37	Average
2	2390.00	10.37	3.08	27.64	-2.05	54.00	-56.05	Average
3	2404.18	87.17	3.10	27.62	74.75	94.00	-19.25	Average

- Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

Channel 77 / 2480 MHz

Horizontal

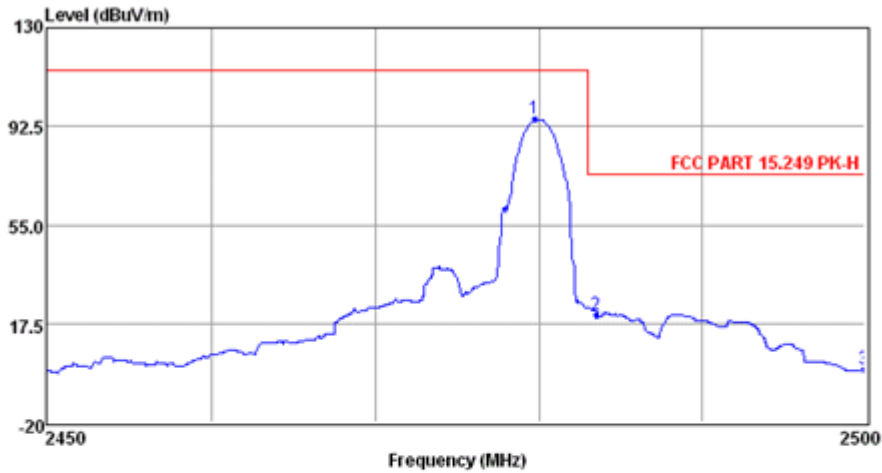


pol:

VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2479.73	107.74	3.12	27.59	95.34	114.00	-18.66	Peak
2	2483.50	33.13	3.23	27.59	20.84	74.00	-53.16	Peak
3	2500.00	12.19	3.36	27.58	0.03	74.00	-73.97	Peak

- Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

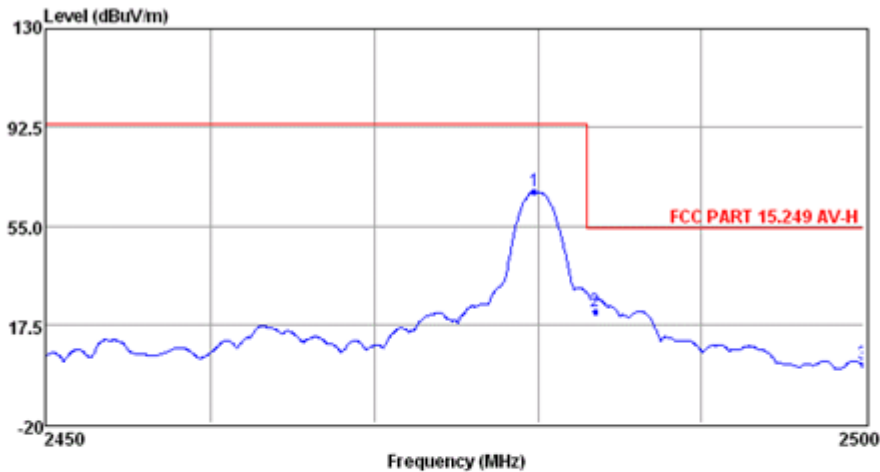


pol:

HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2479.78	74.40	3.12	27.65	68.07	94.00	-25.93	Average
2	2483.50	28.72	3.23	27.64	22.49	54.00	-31.51	Average
3	2500.00	8.44	3.36	27.60	2.30	54.00	-51.70	Average

- Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported


Vertical

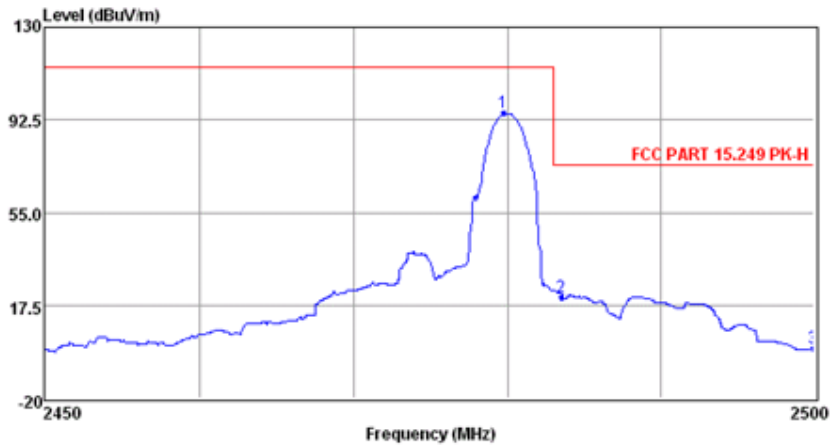

pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2479.73	107.74	3.12	27.59	95.34	114.00	-18.66	Peak
2	2483.50	33.13	3.23	27.59	20.84	74.00	-53.16	Peak
3	2500.00	12.19	3.36	27.58	0.03	74.00	-73.97	Peak

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

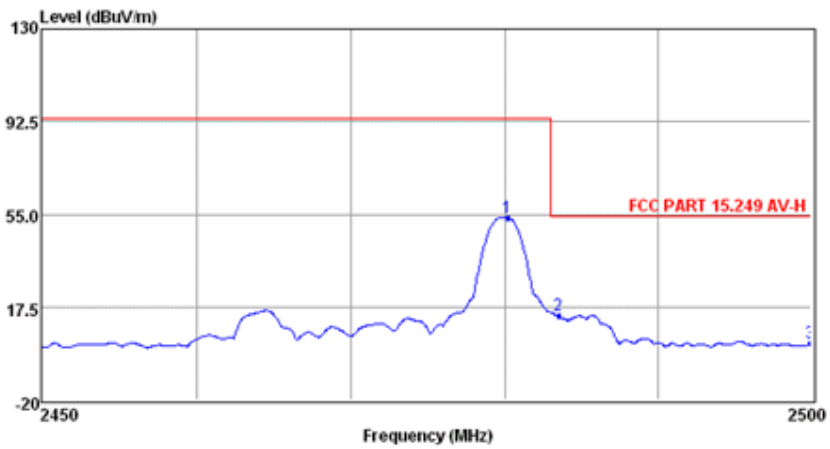

pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	2480.18	60.03	3.12	27.59	53.64	94.00	-40.36	Average
2	2483.50	20.32	3.23	27.59	14.04	54.00	-39.96	Average
3	2500.00	8.85	3.36	27.58	2.69	54.00	-51.31	Average

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report.
- 2). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 3). Corrected Reading: Antenna Factor + Cable Loss + Read Level = Level.

## 5.9. Antenna Requirements

### 5.9.1 Standard Applicable

According to RSS-Gen Issue 5,

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

### 5.9.2 Antenna Connected Construction

#### 5.9.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 5.9.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting 2.8dBi, and the antenna is an PCB antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.\

#### 5.9.2.3. Results: Compliance.

### Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for DTS devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

### Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep Time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.



**Limits**

FCC	ISED
Antenna Gain	
6 dBi	

Tnom	Vnom	lowest channel 2404MHz	middle channel 2440 MHz	highest channel 2480 MHz
Conducted power [dBm] Measured with MSK modulation		14.689	13.087	14.240
Radiated power [dBm] Measured with MSK modulation		17.477	15.879	17.025
Gain [dBi] Calculated		2.788	2.792	2.785
Measurement uncertainty			± 1.6 dB (cond.) / ± 3.8 dB (rad.)	

## 6. LIST OF MEASURING EQUIPMENTS

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Power Meter	R&S	NRVS	100444	2019-06-11	2020-06-10
2	Power Sensor	R&S	NRV-Z81	100458	2019-06-11	2020-06-10
3	Power Sensor	R&S	NRV-Z32	10057	2019-06-11	2020-06-10
4	Test Software	Tonscend	JS1120-2	/	N/A	N/A
5	RF Control Unit	Tonscend	JS0806-2	N/A	2019-06-11	2020-06-10
6	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2019-06-11	2020-06-10
7	DC Power Supply	Agilent	E3642A	N/A	2018-11-15	2019-11-14
8	EMI Test Software	AUDIX	E3	/	N/A	N/A
9	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2019-06-12	2020-06-11
10	Positioning Controller	MF	MF-7082	N/A	2019-06-12	2020-06-11
11	Active Loop Antenna	SCHWARZBEC K	FMZB 1519B	00005	2018-07-26	2019-07-25
12	By-log Antenna	SCHWARZBEC K	VULB9163	9163-470	2018-07-26	2019-07-25
13	Horn Antenna	SCHWARZBEC K	BBHA 9120D	9120D-1925	2018-07-02	2019-07-01
14	Broadband Horn Antenna	SCHWARZBEC K	BBHA 9170	791	2018-09-20	2019-09-19
15	Broadband Preamplifier	SCHWARZBEC K	BBV 9719	9719-025	2018-09-20	2019-09-19
16	EMI Test Receiver	R&S	ESR 7	101181	2019-06-12	2020-06-11
17	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2018-11-15	2019-11-14
18	AMPLIFIER	QuieTek	QTK	CHM/0809065	2018-11-15	2019-11-14
19	RF Cable-R03m	Jye Bao	RG142	CB021	2019-06-12	2020-06-11
20	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	2019-06-12	2020-06-11
21	6dB Attenuator	/	100W/6dB	1172040	2019-06-11	2020-06-10
22	3dB Attenuator	/	2N-3dB	/	2019-06-11	2020-06-10
23	EMI Test Receiver	R&S	ESPI	101840	2019-06-11	2020-06-10
24	Artificial Mains	R&S	ENV216	101288	2019-06-12	2020-06-11
25	10dB Attenuator	SCHWARZBEC K	MTS-IMP-136	261115-001-0032	2019-06-11	2020-06-10

Note: All equipment is calibrated through CHINA CEPREI LABORATORY and GUANGZHOU LISAI CALIBRATION AND TEST CO., LTD.

## **7. TEST SETUP PHOTOGRAPHS OF EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **8. EXTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for External Photos of the EUT.

## **9. INTERIOR PHOTOGRAPHS OF THE EUT**

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----