



# MPE TEST REPORT

**Report Reference No.**..... : **TRE1707022802** R/C.....: 93063

**FCC ID**..... : **2AEKCPM790LU1**

**Applicant's name**..... : **ZTE TRUNKING TECHNOLOGY CORPORATION**

**Address**..... : 4/F, R&D Building 1, ZTE Industrial Park, LiuXian Rd., Xili, Nanshan District, Shenzhen, China

**Manufacturer**..... : ZTE TRUNKING TECHNOLOGY CORPORATION

**Address**..... : 4/F, R&D Building 1, ZTE Industrial Park, LiuXian Rd., Xili, Nanshan District, Shenzhen, China

**Test item description** ..... : **DIGITAL MOBILE RADIO**

**Trade Mark** ..... : ZTE

**Model/Type reference**..... : PM790L U(1)

**Listed Model(s)** ..... : -


**Standard** ..... : **FCC Per 47 CFR 2.1091(b); KDB447498 v05r02**


**Date of receipt of test sample**..... : July 26, 2017


**Date of testing**..... : July 27, 2017 - Aug. 23, 2017

**Date of issue**..... : Aug. 23, 2017

**Result**..... : **PASS**

Compiled by  
( position+printed name+signature)...: File administrators Shayne Zhu 

Supervised by  
( position+printed name+signature)...: Project Engineer Jerry Wang 

Approved by  
( position+printed name+signature)...: RF Manager Hans Hu 

**Testing Laboratory Name** ..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**

**Address**..... : Bldg3, Hongfa Hi-tech Industrial Park, Genyu Road, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

## Contents

<b>1.</b>	<b><u>SUMMARY</u></b>	<b>3</b>
1.1.	Client Information	3
1.2.	Report version	3
1.3.	Product Description	4
1.4.	Test frequency list	5
1.5.	EUT operation mode	6
1.6.	EUT configuration	6
1.7.	Modifications	6
<b>2.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>7</b>
2.1.	Address of the test laboratory	7
2.2.	Environmental conditions	7
2.3.	Statement of the measurement uncertainty	7
2.4.	Equipments Used during the Test	7
<b>3.</b>	<b><u>METHOD OF MEASUREMENT</u></b>	<b>8</b>
3.1.	Applicable Standard	8
3.2.	Limit	9
3.3.	Calculating the Safe Distance	9
3.4.	Antenna Information	10
3.5.	Measurement Procedure	10
3.6.	Test Results	11
3.7.	Conclusion	12
3.8.	Test Setup Photos of the EUT	13

## 1. SUMMARY

### 1.1. Client Information

Applicant:	ZTE TRUNKING TECHNOLOGY CORPORATION
Address:	4/F, R&D Building 1, ZTE Industrial Park, LiuXian Rd., Xili, Nanshan District, Shenzhen, China
Manufacturer:	ZTE TRUNKING TECHNOLOGY CORPORATION
Address:	4/F, R&D Building 1, ZTE Industrial Park, LiuXian Rd., Xili, Nanshan District, Shenzhen, China

### 1.2. Report version

Version No.	Date of issue	Description
00	Aug. 23, 2017	Original

### 1.3. Product Description

Name of EUT:	DIGITAL MOBILE RADIO	
Trade mark:	ZTE	
Model/Type reference:	PM790L U(1)	
Listed mode(s):	-	
Power supply:	DC 13.6V	
Battery information:	-	
Charger information:	-	
Adapter information:	-	
Operation Frequency Range:	From 400MHz to 470MHz	
Rated Output Power:	<input checked="" type="checkbox"/> High Power	45W (46.53dBm)
	<input checked="" type="checkbox"/> Mid Power	25W (43.98dBm)
	<input checked="" type="checkbox"/> Low Power	5W (36.98dBm)
Modulation Type:	Analog:	FM
	Digital:	4FSK
Digital Type:	DMR	
Channel Separation:	Analog:	<input checked="" type="checkbox"/> 12.5kHz
	Digital Voice:	<input checked="" type="checkbox"/> 12.5kHz <input type="checkbox"/> 6.25kHz
Emission Designator:	Analog Voice:	<input checked="" type="checkbox"/> 12.5kHz Channel Separation: 9K94F3E
	Digital Voice& Data:	<input checked="" type="checkbox"/> 12.5kHz Channel Separation: 7K99FXW
	Digital Data:	<input checked="" type="checkbox"/> 12.5kHz Channel Separation: 7K99FXD
Support data rate:	9.6kbps	
Antenna Type:	External	
Maximum Transmitter Power:	Digital	45.29W for 12.5kHz Channel Separation
	Analog	44.26W for 12.5kHz Channel Separation

Note:

- 1)The product has the same digital working characters when operating in both two digitized voice/data mode. So only one set of test results for digital modulation modes are provided in this test report.
- 2)This equipment is capable of supporting a minimum data rate of 4800 bits per second per 6.25 kHz of channel bandwidth. DMR interphone's bandwidth is 12.5 kHz, and it has a double time slot, one is the speech time slot, one is the data time slot, just language sequence is satisfied with 4800 bps/6.25 kHz BW.

#### 1.4. Test frequency list

Mode	Modulation	Operation Frequency Range	Test Frequency (MHz)	
Analog	FM	400MHz~470MHz	CH <sub>L</sub>	406.1125
			CH <sub>M1</sub>	419.9875
			CH <sub>M2</sub>	421.0125
			CH <sub>M3</sub>	450.0125
			CH <sub>H</sub>	469.9875
Digital	4FSK	400MHz~470MHz	CH <sub>L</sub>	406.1125
			CH <sub>M1</sub>	419.9875
			CH <sub>M2</sub>	421.0125
			CH <sub>M3</sub>	450.0125
			CH <sub>H</sub>	469.9875

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above listed frequency for testing.

## 1.5. EUT operation mode

Test mode	Transmitting	Power level	Digital	Analog
		High	12.5kHz	12.5kHz
TX1	√	√	√	
TX2	√			√

√: is operation mode.

## 1.6. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

●	Power Cable	Length (m) :	>3.00
		Shield :	Unshielded
		Detachable :	Undetachable
○	Multimeter	Manufacturer :	/
		Model No. :	/

## 1.7. Modifications

No modifications were implemented to meet testing criteria.

## 2. TEST ENVIRONMENT

### 2.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2014) and CISPR Publication 22.

### 2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

### 2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

### 2.4. Equipments Used during the Test

Name of Equipment	Manufacturer	Model	Serial Number	Last Cal.
Field Probe	ETS-LINDGREN	HI-6005	00064170	2016/11/13
Field Meter	AR	FM 5004	300239	2016/11/13

The calibration interval was one year.

### **3. Method of measurement**

#### **3.1. Applicable Standard**

According to FCC Part 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to FCC Part 1.1310 and FCC Part 2.1091 RF exposure is calculated.

IEEE Std C95.1: 2005: "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz".

FCC OET Bulletin 65, Edition 97-01: "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields".

FCC Supplement C to OET Bulletin 65, Edition 01-01: "Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emission".

IEEE Std C95.3: 2002: "IEEE Recommended Practice for Measurements and Computations of Radio Frequency Electromagnetic Fields with Respect to Human Exposure to Such Fields, 100 kHz – 300 GHz",

KDB447498 v05r02: Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies



### 3.2. Limit

FCC Part 1.1310(e):

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f=frequency in MHz

\*=Plane-wave equivalent power density

### 3.3. Calculating the Safe Distance

Before starting EME measurements, we calculated the safe distance,  $R_{safe}$  using the following formula:

$$R_{safe} = \sqrt{\frac{P_{max} \cdot G_n \cdot \eta}{4\pi \cdot S}}$$

$G_n$ : antenna gain (numeric)( EUT antenna gain=3.5dBi)

$P_{max}$ : maximum power input to the antenna (W)

S: power density limit (W/m<sup>2</sup>) respectively

$\eta$ : duty cycle (decimal number), for these measurements  $\eta = 0.5$

The results of  $R_{safe}$  calculations:

FCC Part 2.1091:

RF Field Strength Limits for Occupational/Controlled Exposure

TX1				
Test Frequency (MHz)	Max Output Power (W)	Antenna Gain (Numeric)	Power Density (mW/cm <sup>2</sup> )	Safe Distance (m)
406.1125	54.00	2.2387	1.3537	0.60
419.9875	54.00	2.2387	1.4000	0.59
421.0125	54.00	2.2387	1.4034	0.59
450.0125	54.00	2.2387	1.5000	0.57
469.9875	54.00	2.2387	1.5666	0.55

TX2				
Test Frequency (MHz)	Max Output Power (W)	Antenna Gain (Numeric)	Power Density (mW/cm <sup>2</sup> )	Safe Distance (m)
406.1125	54.00	2.2387	1.3537	0.60
419.9875	54.00	2.2387	1.4000	0.59
421.0125	54.00	2.2387	1.4034	0.59
450.0125	54.00	2.2387	1.5000	0.57
469.9875	54.00	2.2387	1.5666	0.55

Note: Max Output Power (W) = Rated Output Power (W) + 20% \* Rated Output Power (W) = 45 + 9 = 54W

### 3.4. Antenna Information

Model and Frequency:	TQC-400BII	400MHz-410MHz
	TQC-400FC	400MHz-420MHz
	TQC-400FC	420MHz-440MHz
	TQC-400FC	440MHz-460MHz
	TQC-400FC	450MHz-470MHz
Antenna Type:	External (Whip Antenna)	
Antenna Gain:	3.5dBi	

### 3.5. Measurement Procedure

1. Polarization of the EUT's antenna was vertical, which is its polarization in actual use.
2. The EUT at the chosen modulation was set to transmit at the chosen frequency at maximum RF power and at 50% duty cycle (50% duty cycle is simulated either by lowering the radio's power by 3dB or by using a 3 dB pad on the output of the radio). During preliminary measurements, we set the distance between the power density probe and the investigated EUT's antenna equal to the average calculated R<sub>safe</sub> applicable either for controlled or uncontrolled environments.
3. Power density measurements were taken at different heights of the probe from the ground (0.1 to 2 meters) while rotating versus azimuth (from 0° to 360°) the antenna.
4. The azimuth between the probe and the antenna position corresponding to the highest MPE level was chosen as the "worst case" position for the final measurements.
5. For the final measurements, we adjusted the distance between the test probe and the tested antenna to the real safe distance, R<sub>real</sub>, such that the measured highest power density in the "worst case" position was the same or slightly less than the test limit.
6. The measurement results of final measurements conducted at the chosen azimuth and different heights of the probe above the ground.
7. Average values of power density were calculated for the imaginary whole human body (0.1–2.0 m), for the lower part of the body (0.1–0.9 m) and for the upper part of the body (1.0–2.0 m).

### 3.6. Test Results

EME Data:

Measuring Antenna Height (cm)	FCC Part 2.1091			
	Controlled RF Exposure(mW/cm <sup>2</sup> )			
	3.5dBi Antenna 60cm	3.5dBi Antenna 70cm	3.5dBi Antenna 80cm	3.5dBi Antenna 90cm
10	0.1	0.06	0.03	0.02
20	0.24	0.16	0.09	0.06
30	0.44	0.33	0.32	0.24
40	0.66	0.57	0.49	0.4
50	0.82	0.73	0.64	0.57
60	0.96	0.82	0.73	0.62
70	1.13	0.96	0.87	0.73
80	1.22	1.09	0.93	0.84
90	1.33	1.23	1.1	0.93
100	1.19	1.12	0.94	0.83
110	1.06	0.92	0.83	0.74
120	0.89	0.8	0.72	0.62
130	0.75	0.65	0.57	0.47
140	0.62	0.52	0.44	0.39
150	0.5	0.4	0.32	0.22
160	0.33	0.25	0.26	0.12
170	0.22	0.13	0.17	0.07
180	0.16	0.1	0.07	0.05
190	0.09	0.06	0.04	0.04
200	0.05	0.03	0.02	0.03

## EME for Body Parts:

Part of the body/averaging points (m)	FCC Part 2.1091
	Controlled RF Exposure
	3.5dBi Antenna 60cm (mW/cm <sup>2</sup> )
Whole body (0.1 to 2.0)	1.30
Lower body (0.1 to 0.9)	1.33
Upper body (1.0 to 2.0)	1.22


**3.7. Conclusion**

The User Manual shall include RF radiation safety warnings and the following:

Antenna	Safe Distance, $R_{safe}$ , (cm)
	FCC Part 2.1091
	Controlled RF Exposure
TQC-400BII(400MHz-410MHz/G:3.5dBi) TQC-400FC(400MHz-420MHz/G:3.5dBi) TQC-400FC(420MHz-440MHz/G:3.5dBi) TQC-400FC(440MHz-460MHz/G:3.5dBi) TQC-400FC(450MHz-470MHz/G:3.5dBi)	60

### 3.8. Test Setup Photos of the EUT


TQC-400BII(400MHz-410MHz):

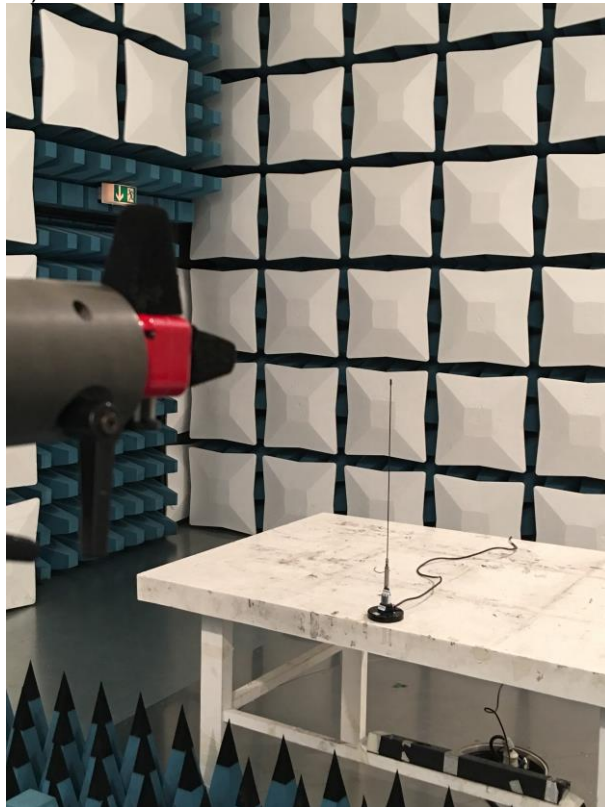

TQC-400FC(400MHz-420MHz):




TQC-400FC(420MHz-440MHz):

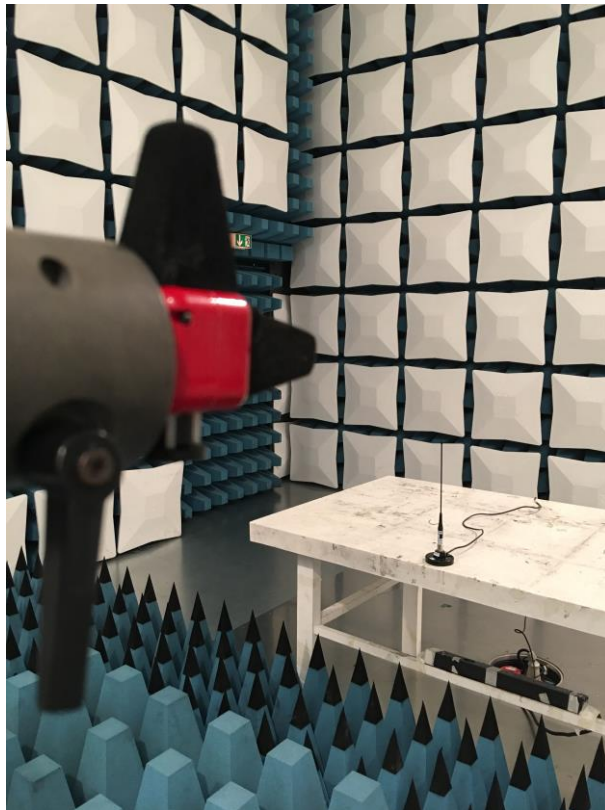

TQC-400FC(440MHz-460MHz):



TQC-400FC(450MHz-470MHz):

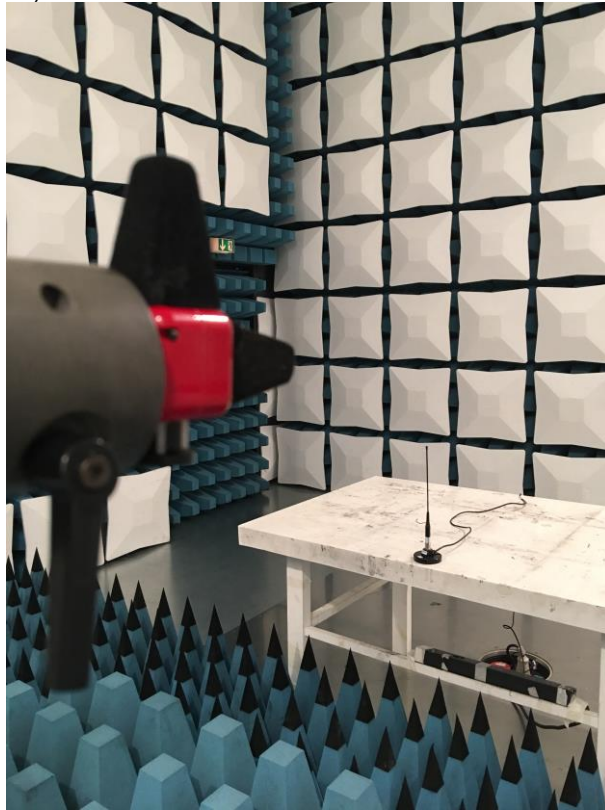

-----End of Report-----