


正面 红色实框为裁剪线, 虚框为对折线

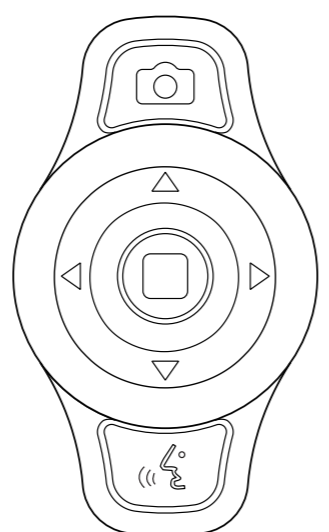


LIVALL
Redefine Your Safety

BR80
Bling Remote Controller
Quick Start Guide

www.livall.com


I .Description

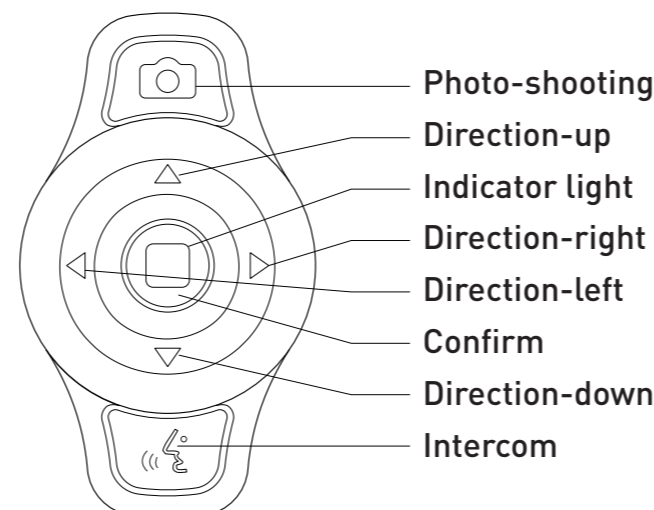

-1-


II .Instructions

Installation

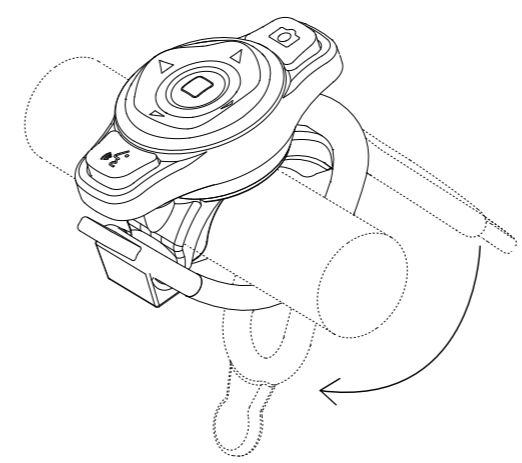

-2-

Battery Replacement

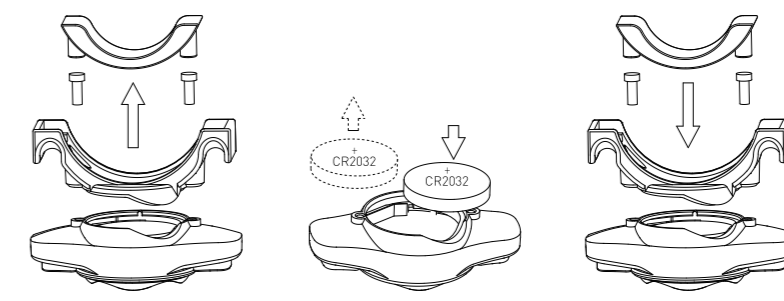

III .Technical Specifications

Battery capacity : 220 mAh Battery life : 500 H
 Application : All bicycles Standby duration : 2 Year
 Temperature : Storage Temperature: -20°C ~45°C.
 Temperature for use : 0°C~40°C.

-3-

反面 红色实框为裁剪线, 虚框为对折线

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

-4-

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause undesired operation.

-5-

Use the Bling remote controller in the environment with the temperature between 0°C and 40°C , otherwise, it may damage your Bling remote controller. It can be operating under 2000m.

Hereby, (LIVALL Tech Co., Ltd.) declare that the radio equipment type (Bling remotecontroller) is compliance with Directive 2014/53/EU. **CE**

Caution:

For Battery: Risk of explosion battery is replaced by an incorrect type, dispose of used batteries according to the instructions.

-6-

Antenna gain: 0dBi
 Operating Frequency Range(s): 2402MHz-2480MHz
 The maximum RF Output Power: -5.48dBm

We LIVALL Tech Co., Ltd. declare that the full Declaration of Conformity is available on the Internet at <http://www.livall.com/tech/product.html>

-7-

注: 成品展开尺寸240*50mm, 对折后尺寸60*50mm

技术要求:

1. 材质: 157g铜版纸
2. 成品展开尺寸: 240*50mm, 对折尺寸: 60*50mm
3. 图档尺寸: 实际尺寸 = 1:2
4. 印刷: 双面黑色印刷
5. 表面印刷内容参见电子文档, 要求字迹清晰, 无毛边、断线等不良。

RANGE	>0~6	>6~30	>30~80	>80~180	>180~315	>315~500	>500	ANGLE	LIVALL
TOLERANCE	‘ 0.05	‘ 0.10	‘ 0.15	‘ 0.20	‘ 0.25	‘ 0.30	‘ 0.35	‘ 1~	
		单位: 毫米mm		REV: 1.3		文件名称:		物料编码:	页码
MASS:		MATERIAL:		SCALE:		BR80快速指南			
设计: 张清伟		复核:		审核:		图纸编号: BR80-A09-03		适用范围: BR80	