



REPORT No. : SZ15030115W01

FCC RF TEST REPORT

APPLICANT : DongGuan Bostar Plastic Hardware Product Co.,LTD

PRODUCT NAME : Bluetooth selfie stick

MODEL NAME : BSD-01

TRADE NAME : N/A

BRAND NAME : N/A

FCC ID : 2AEKMBS01

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2015-04-24



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	5
1. TECHNICAL INFORMATION	6
1.1. EQUIPMENT UNDER TEST (EUT) DESCRIPTION	6
1.2. TEST STANDARDS AND RESULTS	7
1.2.1. TEST ENVIRONMENT CONDITIONS	7
2. 47 CFR PART 15C REQUIREMENTS	8
2.1. ANTENNA REQUIREMENT	8
2.1.1. APPLICABLE STANDARD	8
2.1.2. RESULT: COMPLIANT	8
2.2. NUMBER OF HOPPING FREQUENCY	8
2.2.1. REQUIREMENT	8
2.2.2. TEST DESCRIPTION	8
2.2.3. TEST PROCEDURE	9
2.2.4. TEST RESULT	9
2.3. PEAK OUTPUT POWER	11
2.3.1. REQUIREMENT	11
2.3.2. TEST DESCRIPTION	11
2.3.3. TEST RESULT	11
2.3.3.1. GFSK MODE	12
2.4. 20dB BANDWIDTH	13
2.4.1. DEFINITION	13
2.4.2. TEST DESCRIPTION	13
2.4.3. TEST PROCEDURE	13
2.4.4. TEST RESULT	14
2.4.4.1. GFSK MODE	14
2.5. CARRIED FREQUENCY SEPARATION	16
2.5.1. DEFINITION	16
2.5.2. TEST DESCRIPTION	16
2.5.3. TEST PROCEDURE	16
2.5.4. TEST RESULT	17
2.6. TIME OF OCCUPANCY (DWELL TIME)	18



2.6.1. REQUIREMENT	18
2.6.2. TEST DESCRIPTION	18
2.6.3. TEST PROCEDURE	18
2.6.4. TEST RESULT	19
2.6.4.1. GFSK MODE	19
2.7. CONDUCTED SPURIOUS EMISSIONS	23
2.7.1. REQUIREMENT	23
2.7.2. TEST DESCRIPTION	23
2.7.3. TEST PROCEDURE	23
2.7.4. TEST RESULT	24
2.7.4.1. GFSK MODE	24
2.8. RESTRICTED FREQUENCY BANDS	29
2.8.1. REQUIREMENT	29
2.8.2. TEST DESCRIPTION	29
2.8.3. TEST PROCEDURE	30
2.8.4. TEST RESULT	30
2.8.4.1. GFSK MODE	31
2.9. CONDUCTED EMISSION	34
2.9.1. REQUIREMENT	34
2.9.2. TEST DESCRIPTION	34
2.9.3. TEST RESULT	35
2.10. RADIATED EMISSION	37
2.10.1. REQUIREMENT	37
2.10.2. TEST DESCRIPTION	37
2.10.3. TEST PROCEDURE	40
2.10.4. TEST RESULT	40
2.10.4.1. GFSK MODE:	41
2.11. RF EXPOSURE EVALUATION	47
3. GENERAL INFORMATION	48
1.1 IDENTIFICATION OF THE RESPONSIBLE TESTING LABORATORY	48
1.2 IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION	48
1.3 FACILITIES AND ACCREDITATIONS	48
1.4 TEST EQUIPMENTS UTILIZED	49
1.4.1 CONDUCTED TEST EQUIPMENTS	49
1.4.2 CONDUCTED EMISSION TEST EQUIPMENTS	49
1.4.3 RADIATED TEST EQUIPMENTS	50



REPORT No. : SZ15030115W01

1.4.4	CLIMATE CHAMBER.....	50
1.4.5	VIBRATION TABLE.....	50
1.4.6	ANECHOIC CHAMBER	51

Change History

Issue	Date	Reason for change
1.0	2015-04-24	First edition



REPORT No. : SZ15030115W01

Test Report Declaration

Applicant	DongGuan Bostar Plastic Hardware Product Co.,LTD
Applicant Address	NO.39 DaDong Road, DaZhouCun 1st Industrial Zone, QiaoTou Town, DongGuan, Guangdong, China
Product Name	Bluetooth selfie stick
Model Name	BSD-01
Brand Name	N/A
HW Version	BSD01-V1.2
SW Version	V1.0
Test Standards	47 CFR Part 15 Subpart C
Test Date	2015-04-03 to 2015-04-17
Test Result	PASS

Tested by : Shen Senping
Shen Senping

Reviewed by : Qiu Xiaojun
Qiu Xiaojun

Approved by : Zeng Dexin
Zeng Dexin



1. Technical Information

Note: Provide by applicant.

1.1. Equipment under Test (EUT) Description

Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz); The frequency block is 2400MHz to 2483.5MHz.
Modulation Type:	Bluetooth: FHSS GFSK(1Mbps)
Bluetooth Version:	3.0 without EDR
Antenna Type:	PCB Antenna
Antenna Gain:	3 dBi

NOTE:

The EUT is a Bluetooth selfie stick, it operate at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-13 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Result
1	15.203	Antenna Requirement	<u>PASS</u>
2	15.247(a)	Number of Hopping Frequency	<u>PASS</u>
3	15.247(b)	Peak Output Power	<u>PASS</u>
4	15.247(a)	20dB Bandwidth	<u>PASS</u>
5	15.247(a)	Carrier Frequency Separation	<u>PASS</u>
6	15.247(a)	Time of Occupancy (Dwell time)	<u>PASS</u>
7	15.247(d)	Conducted Spurious Emission	<u>PASS</u>
8	15.247(d)	Restricted Frequency Bands	<u>PASS</u>
9	15.207	Conducted Emission	<u>PASS</u>
10	15.209 15.247(d)	Radiated Emission	<u>PASS</u>
11	15.247(i),1.1307& 2.1093	RF exposure evaluation	<u>PASS</u>

NOTE: The tests were performed according to the method of measurements prescribed in DA-00-705, ANSI C63.4-2003 and ANSI C63.10-2009.

1.2.1. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106



2. 47 CFR Part 15C Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2. Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2. Number of Hopping Frequency

2.2.1. Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2. Test Description

A. Test Setup:

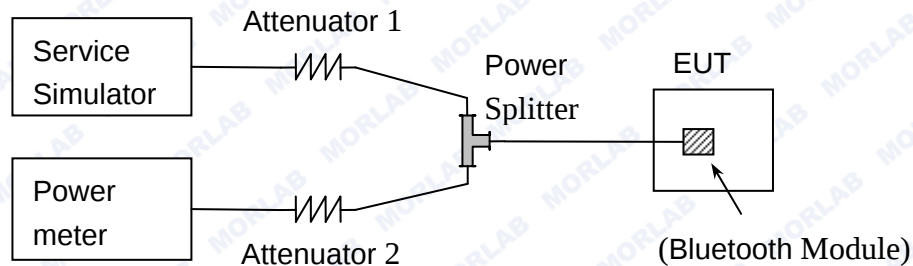

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.2.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

2.2.4. Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.




REPORT No. : SZ15030115W01

A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS

B. Test Plots:

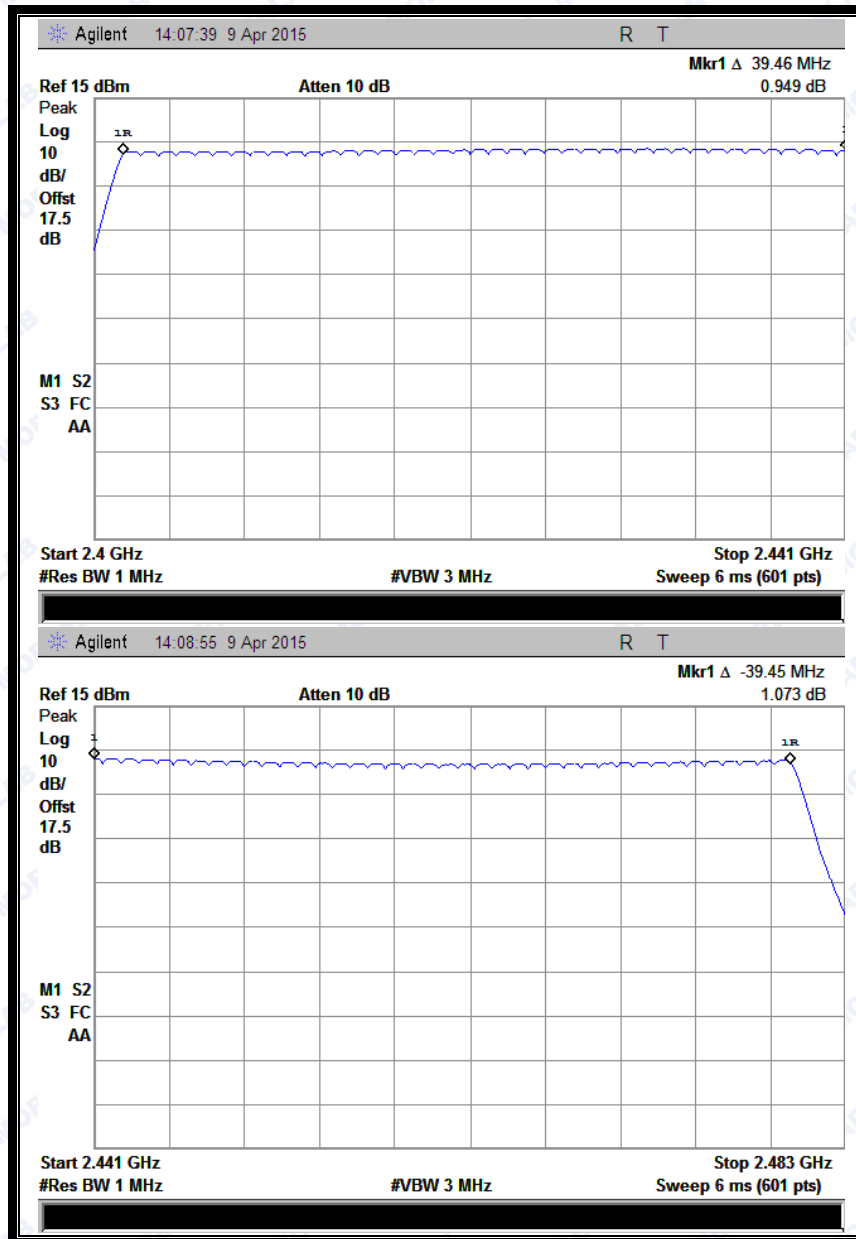

(Plot A: GFSK)


2.3. Peak Output Power

2.3.1. Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2. Test Description

A. Test Setup:

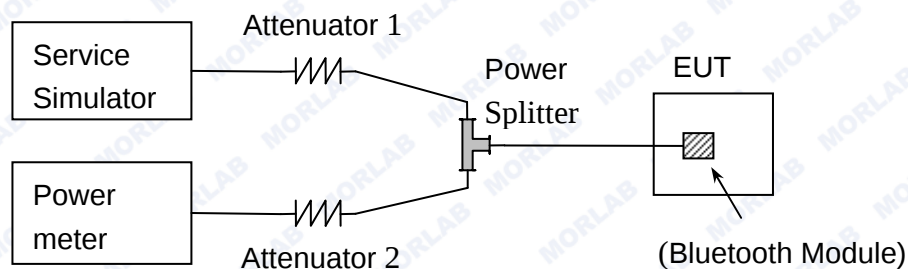

The Bluetooth Module of the EUT is coupled to the Power meter and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.3.3. Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module. The lowest, middle and highest channel were tested by Power meter.



2.3.3.1. GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	2.805	0.001908	30	1	PASS
39	2441	3.078	0.002031			PASS
78	2480	2.677	0.001850			PASS


2.4. 20dB Bandwidth

2.4.1. Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2. Test Description

A. Test Setup:

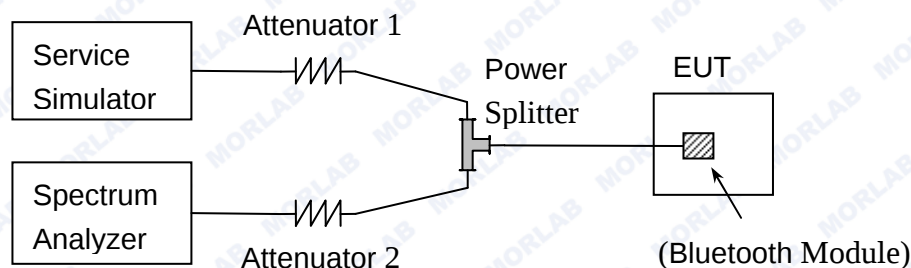

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.4.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW



Sweep = auto

Detector function = peak

Trace = max hold

2.4.4. Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.

2.4.4.1. GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.045	Plot A
39	2441	1.048	Plot B
78	2480	1.029	Plot C


B. Test Plots:

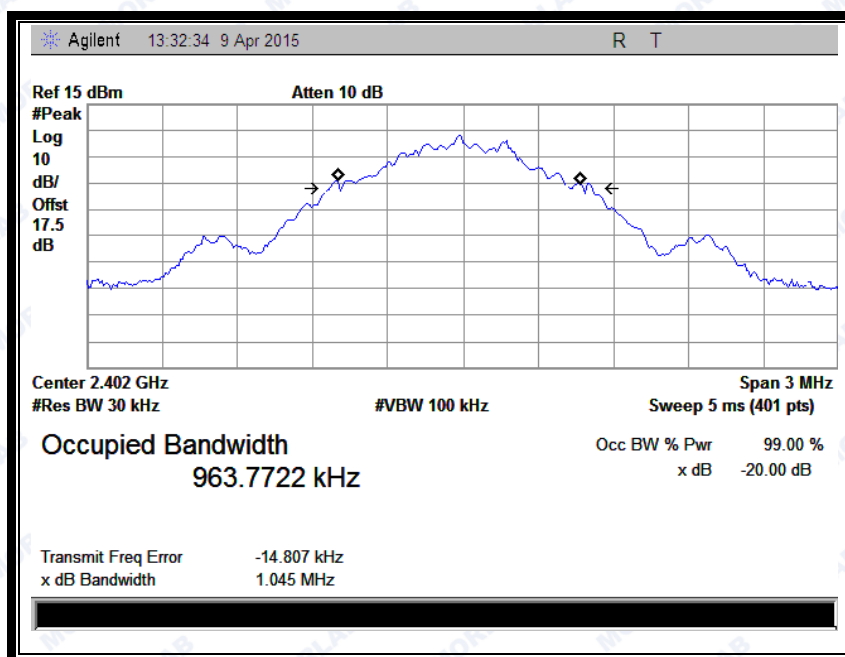


(Plot A: Channel = 2402 @ GFSK)



REPORT No. : SZ15030115W01

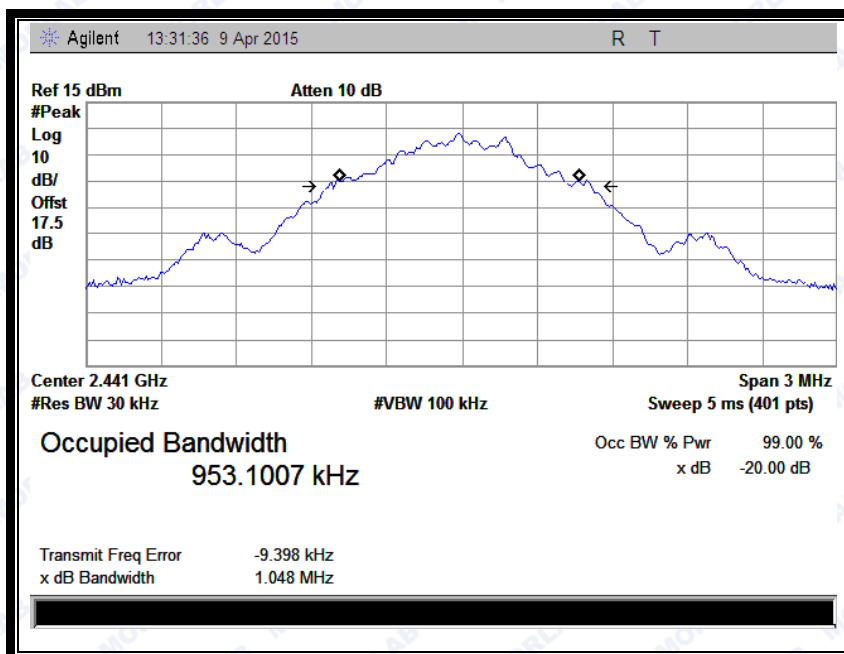

(Plot B: Channel = 2441 @ GFSK)

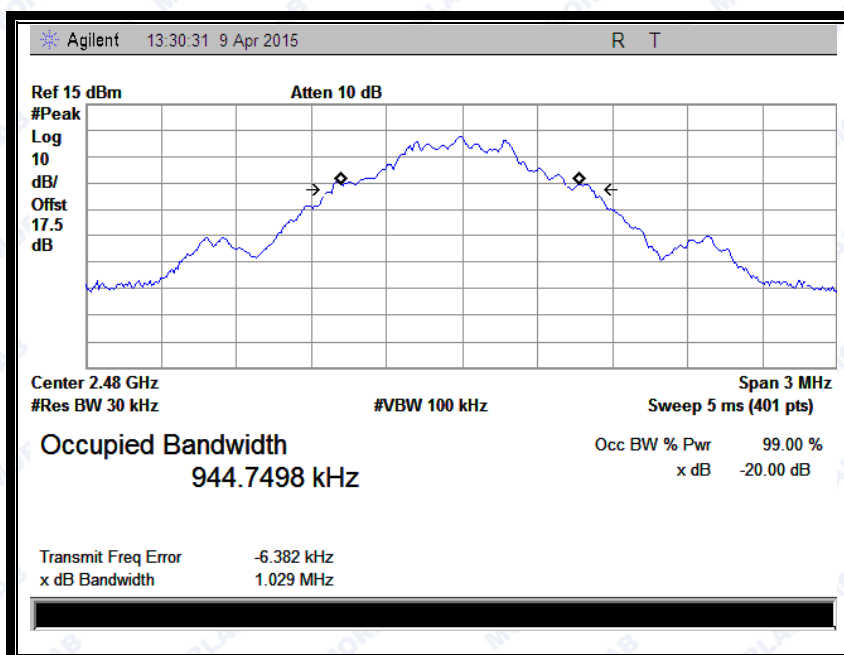

(Plot C: Channel = 2480 @ GFSK)


2.5. Carried Frequency Separation

2.5.1. Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2. Test Description

A. Test Setup:

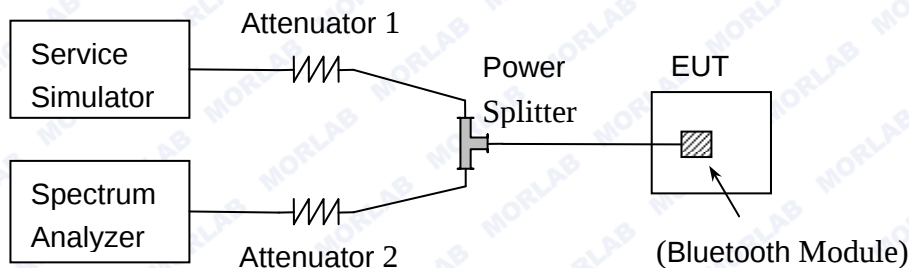

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.5.3. Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW



Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

2.5.4. Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 0), whichever is greater. So, the verdict is PASSING

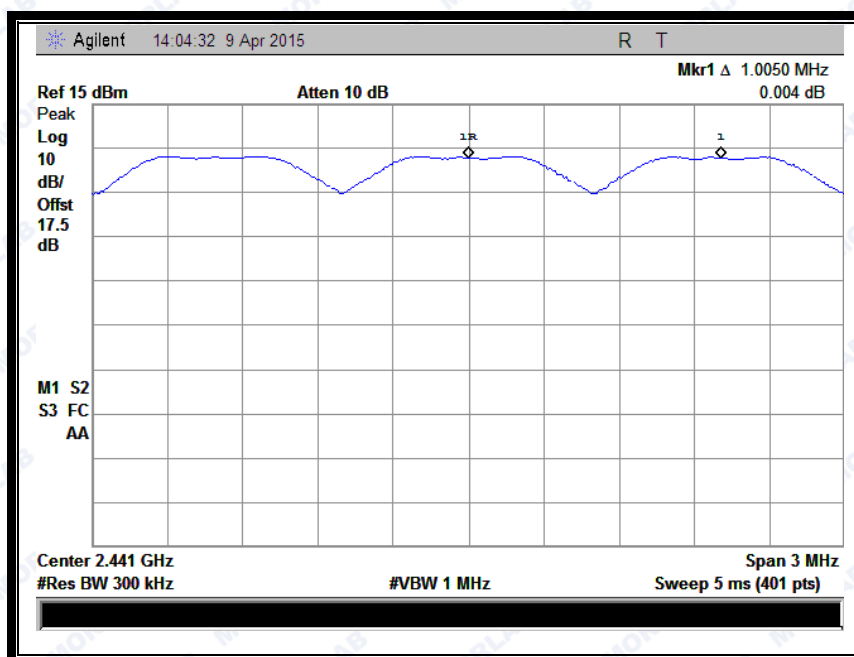

(Plot A: GFSK)


2.6. Time of Occupancy (Dwell time)

2.6.1. Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2. Test Description

A. Test Setup:

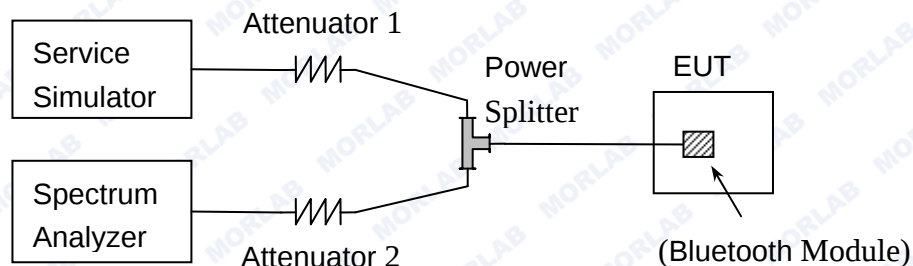

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.6.3. Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The



The average time of occupancy in the specified 31.6 second period (79 channel * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.

2.6.4.1. GFSK Mode

DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Refer to Plot	Average Time of Occupancy (sec)	Limit (sec)	Verdict
DH1	0.383	32	Plot A	0.123	0.4	PASS
DH3	1.683	19	Plot B	0.320		PASS
DH5	2.933	10	Plot C	0.293		PASS

Agilent 13:59:22 9 Apr 2015 R T

Ref 15 dBm Atten 10 dB Mkr1 Δ 383.3 μ s
-0.331 dB


Peak Log 10 dB/Offst 17.5 dB

W1 S2
S3 FS
AA


Center 2.441 GHz Res BW 300 kHz Span 0 Hz
#VBW 1 MHz Sweep 10 ms (601 pts)



REPORT No. : SZ15030115W01

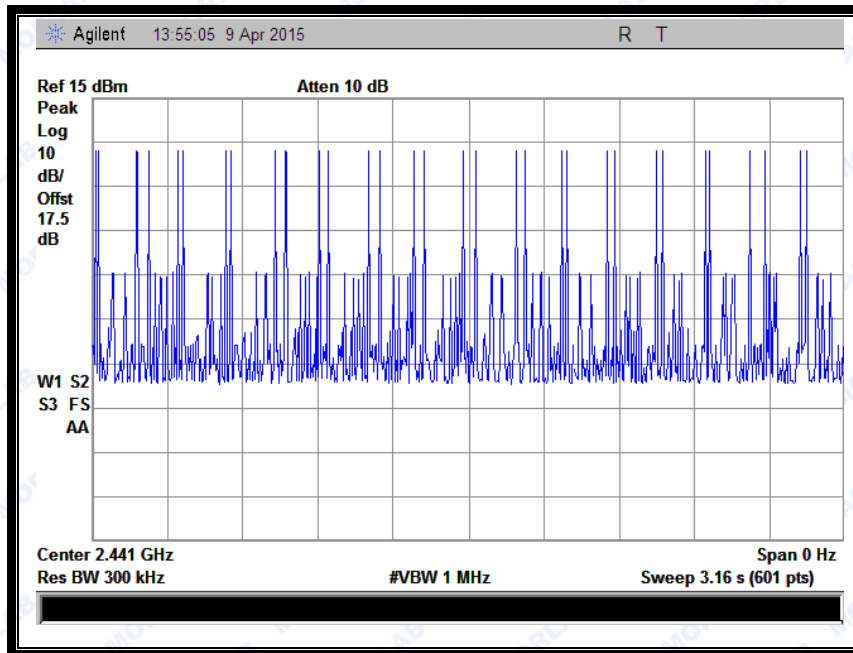


(Plot A: DH1 @ GFSK)

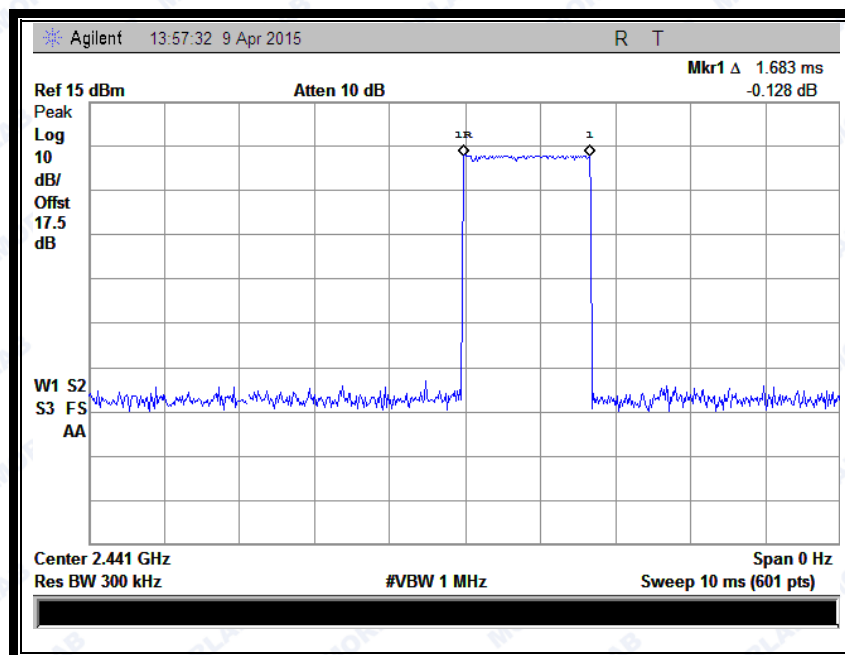




REPORT No. : SZ15030115W01

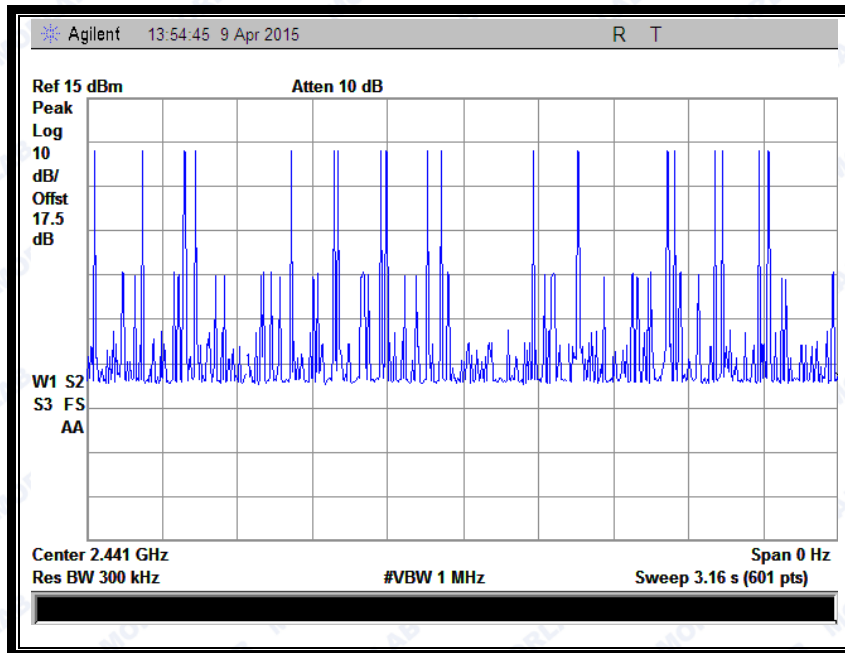


(Plot B: DH3 @ GFSK)

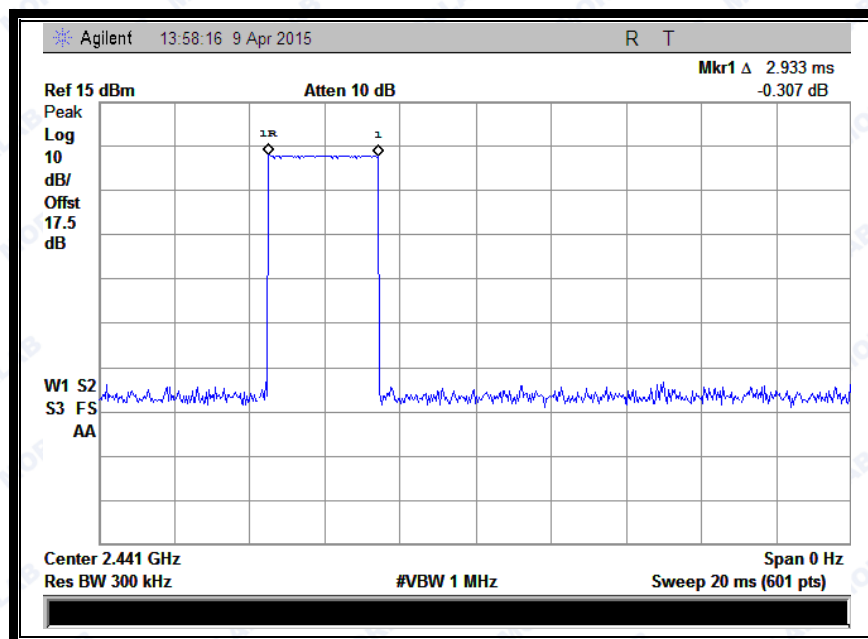



REPORT No. : SZ15030115W01

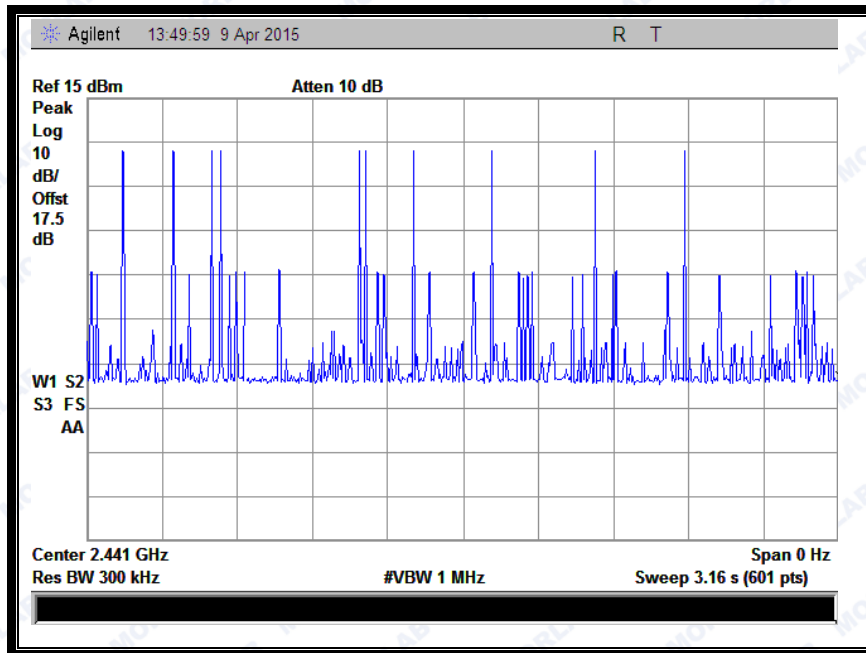

(Plot C: DH5 @ GFSK)


2.7. Conducted Spurious Emissions

2.7.1. Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2. Test Description

A. Test Setup:

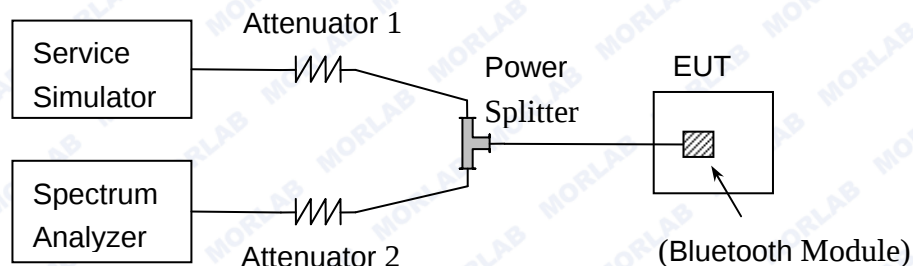

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.7.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions



(e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.7.4. Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.7.4.1. GFSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-39.33	Plot A.1	2.362	-17.638	PASS
39	2441	-42.69	Plot B.1	3.052	-16.948	PASS
78	2480	-44.54	Plot C.1	1.734	-18.266	PASS

B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

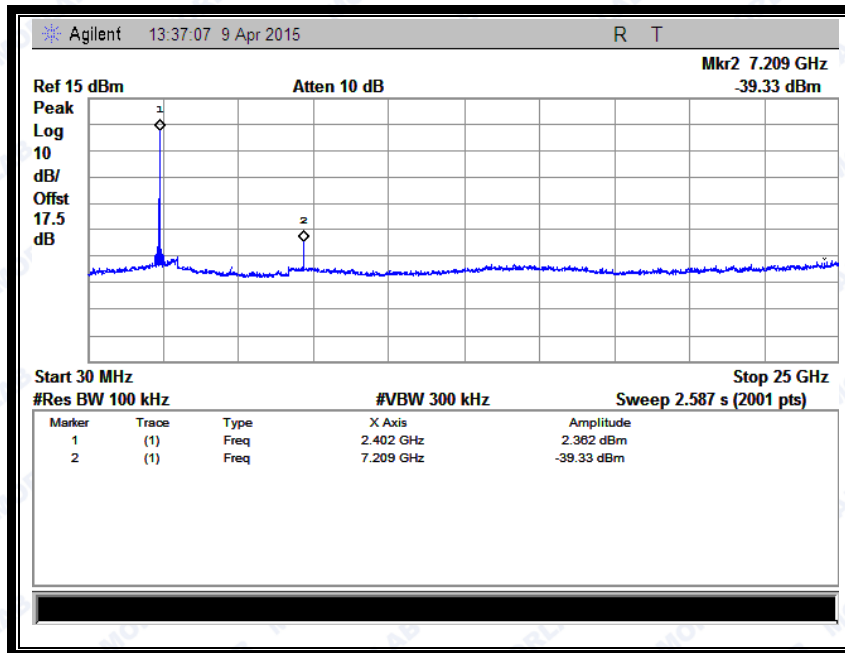


(Plot A.1: Channel = 0, 30MHz to 25GHz @ GFSK Mode)

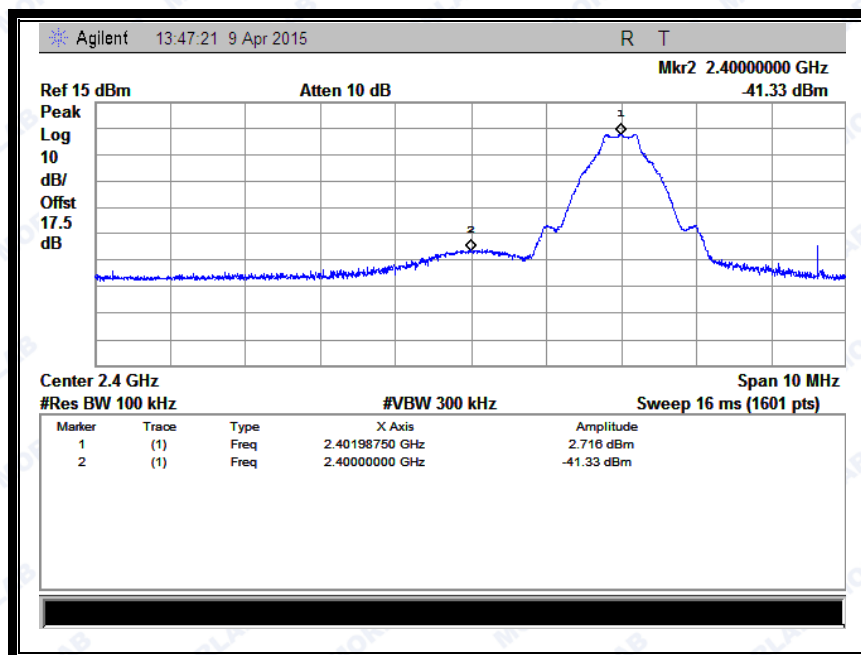


(Channel = 0, Band edge @ GFSK Mode)




REPORT No. : SZ15030115W01

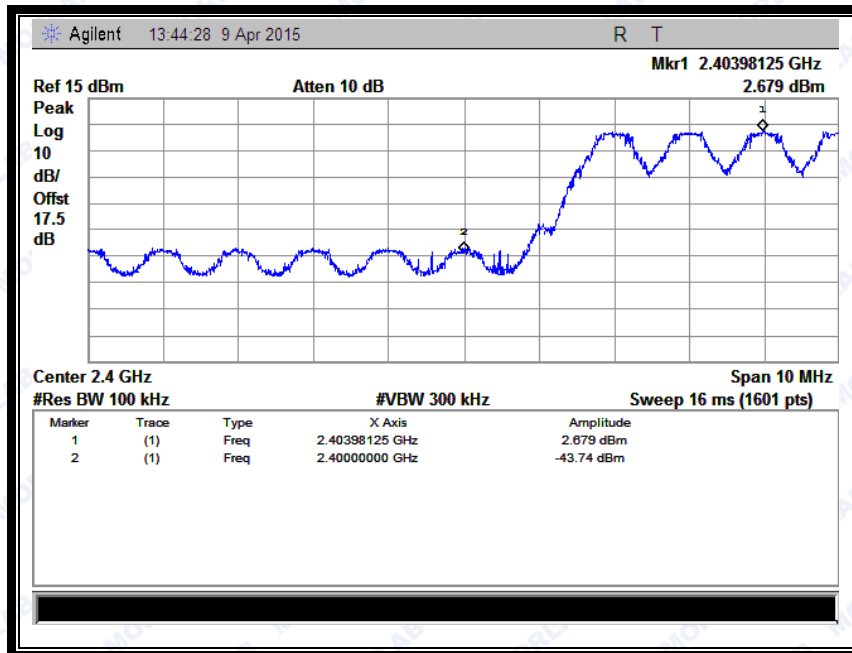


(Channel = 0, Band edge with hopping on @ GFSK Mode)

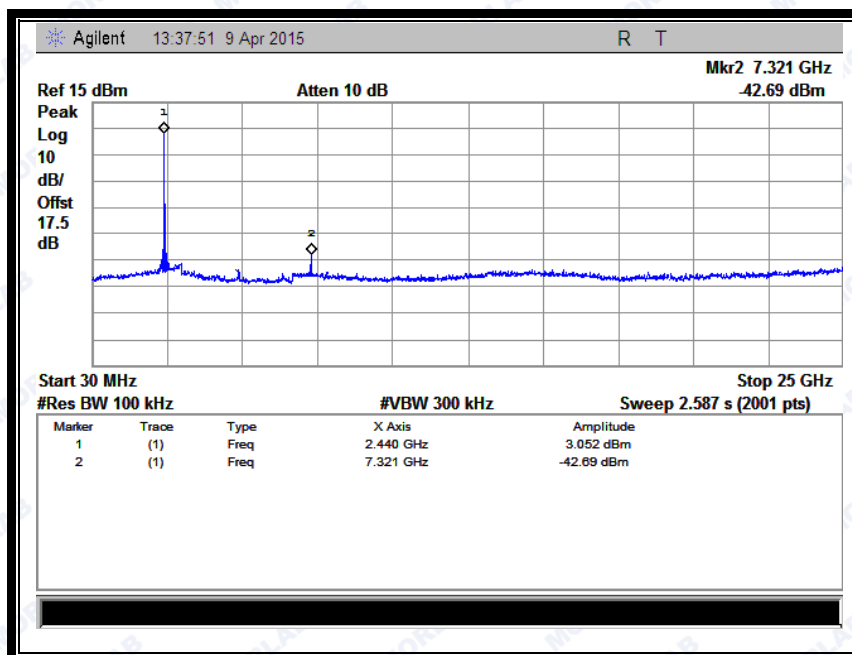

(Plot B.1: Channel = 39, 30MHz to 25GHz @ GFSK Mode)

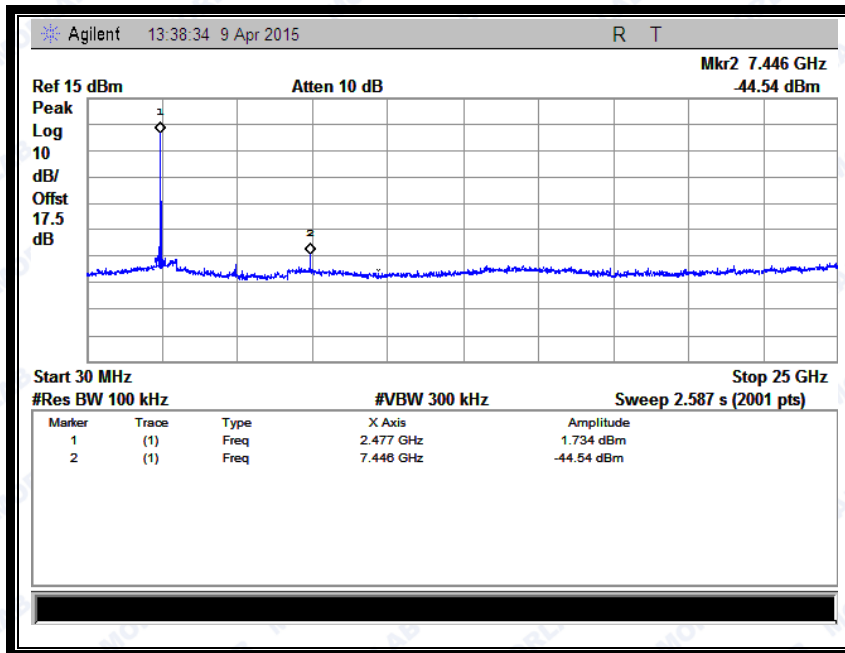


(Plot C.1: Channel = 78, 30MHz to 25GHz @ GFSK Mode)

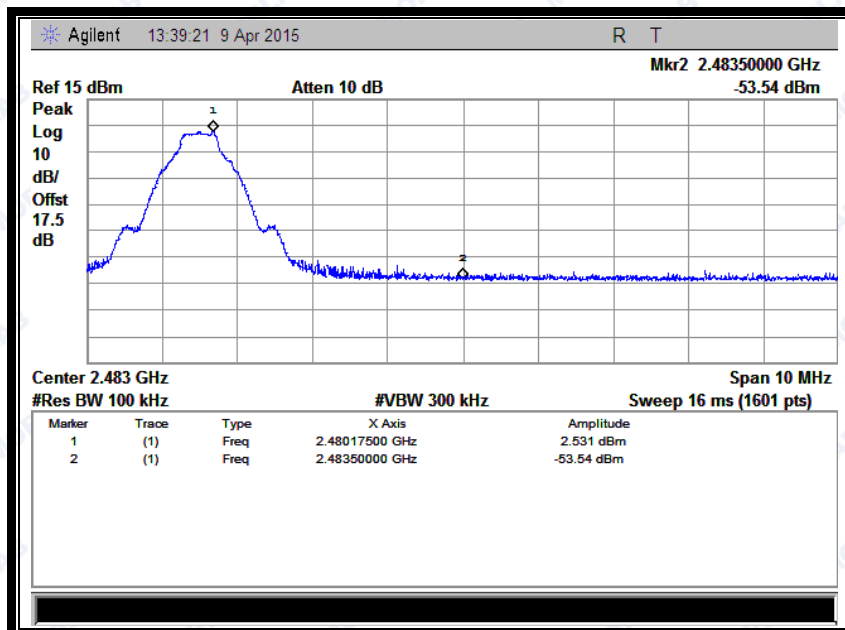

(Channel = 78, Band edge @ GFSK Mode)



REPORT No. : SZ15030115W01

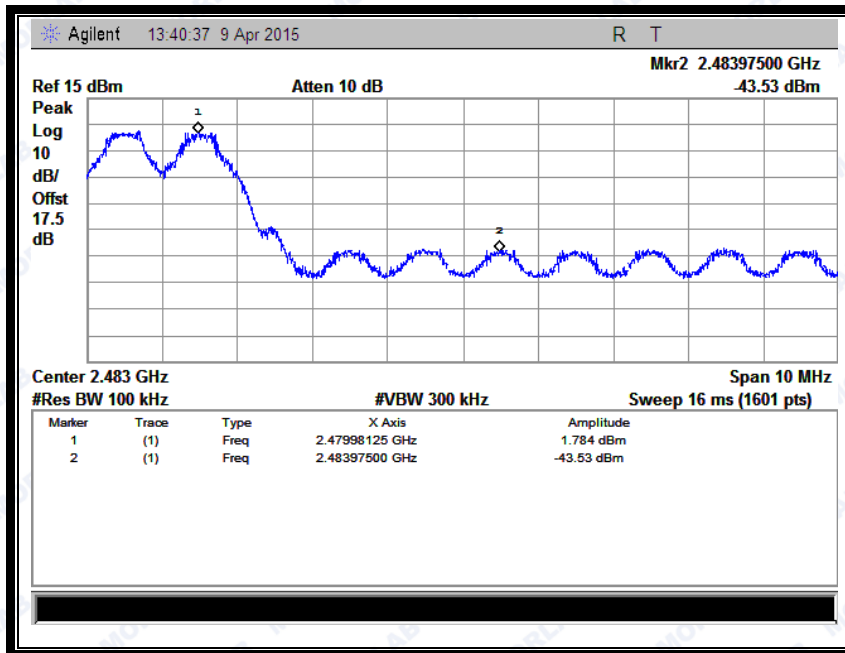

(Channel = 78, Band edge with hopping on @ GFSK Mode)


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

A. Test Setup:

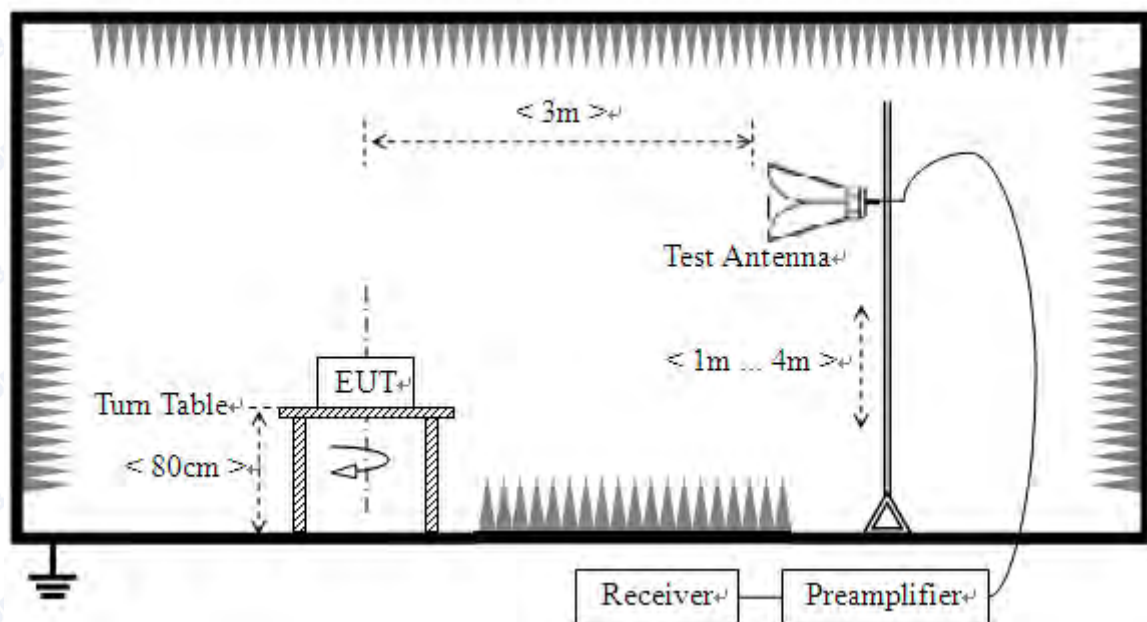

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.



For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

B. Equipments List:

Please reference ANNEX A(1.4).

2.8.3. Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.8.4. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$E [\text{dB}\mu\text{V/m}] = \text{UR} + \text{AT} + \text{AFactor} [\text{dB}]; \text{AT} = \text{LCable loss} [\text{dB}] - \text{Gpreamp} [\text{dB}]$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.




2.8.4.1. GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2374.62	PK	44.96	-33.63	32.56	43.89	74	Pass
0	2371.50	AV	34.30	-33.63	32.56	33.23	54	Pass
78	2489.11	PK	45.44	-33.18	32.5	44.76	74	Pass
78	2483.50	AV	35.95	-33.18	32.5	35.27	54	Pass


B. Test Plots:

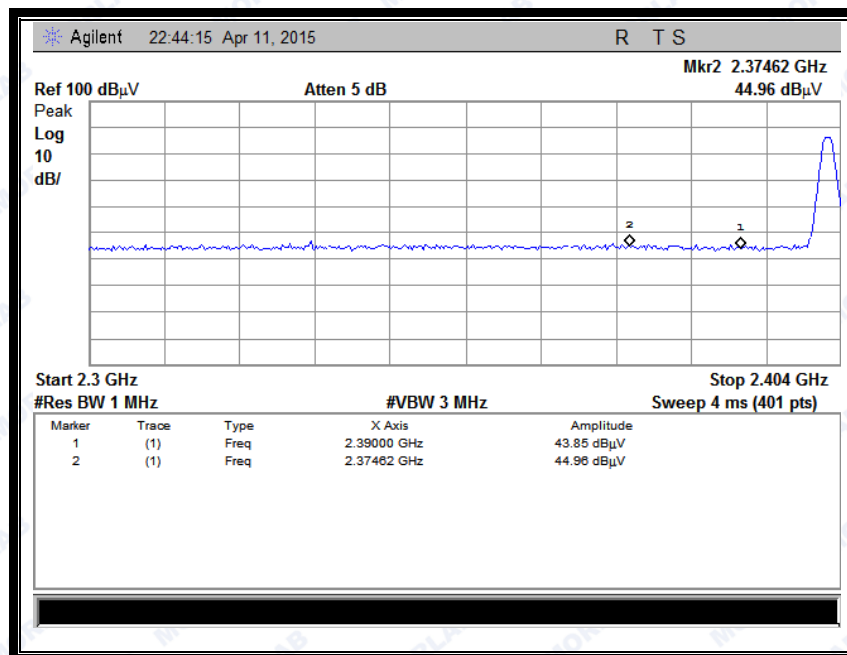


(Plot A1:Channel = 0 PEAK @ GFSK)



REPORT No. : SZ15030115W01

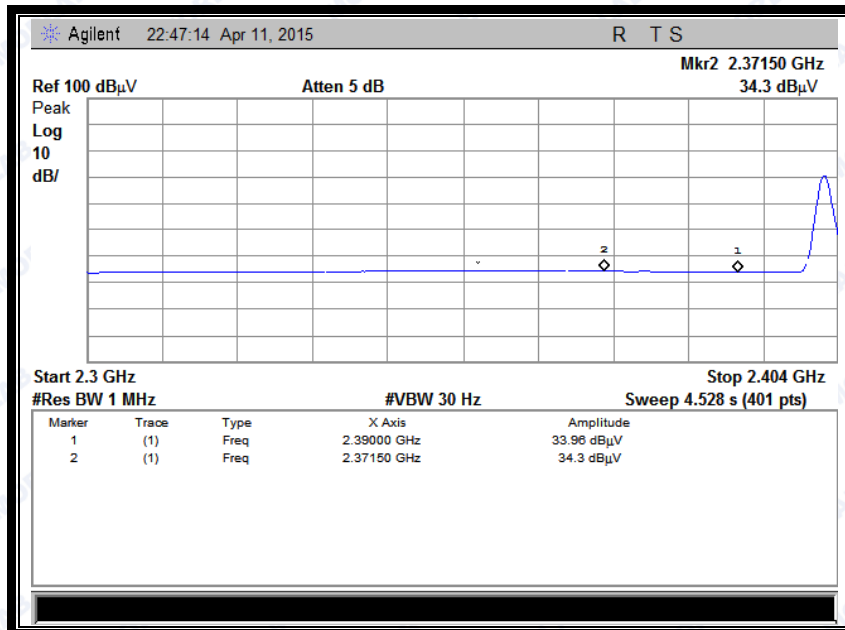


(Plot A2:Channel = 0 AVERAGE @ GFSK)

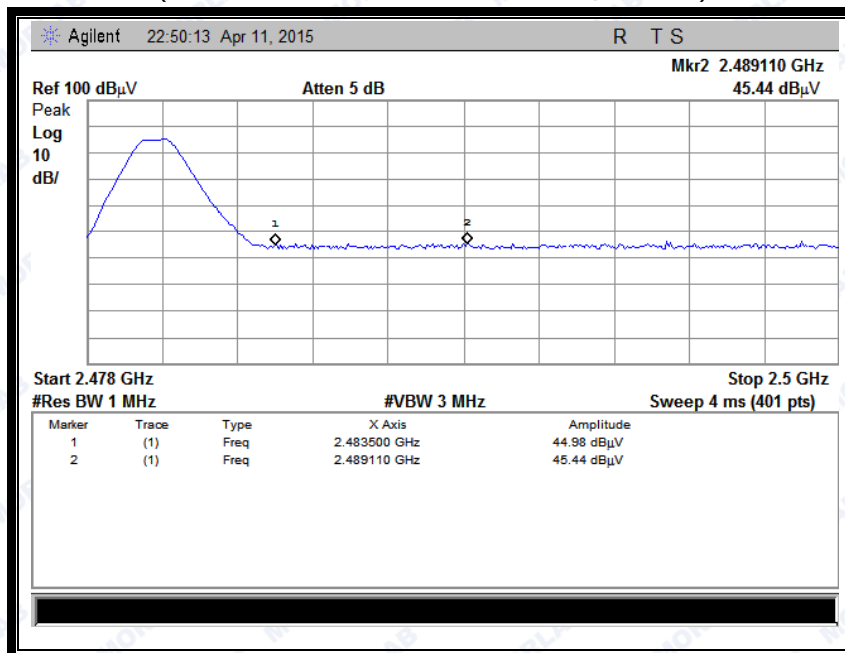

(Plot B1:Channel = 78 PEAK @ GFSK)



REPORT No. : SZ15030115W01

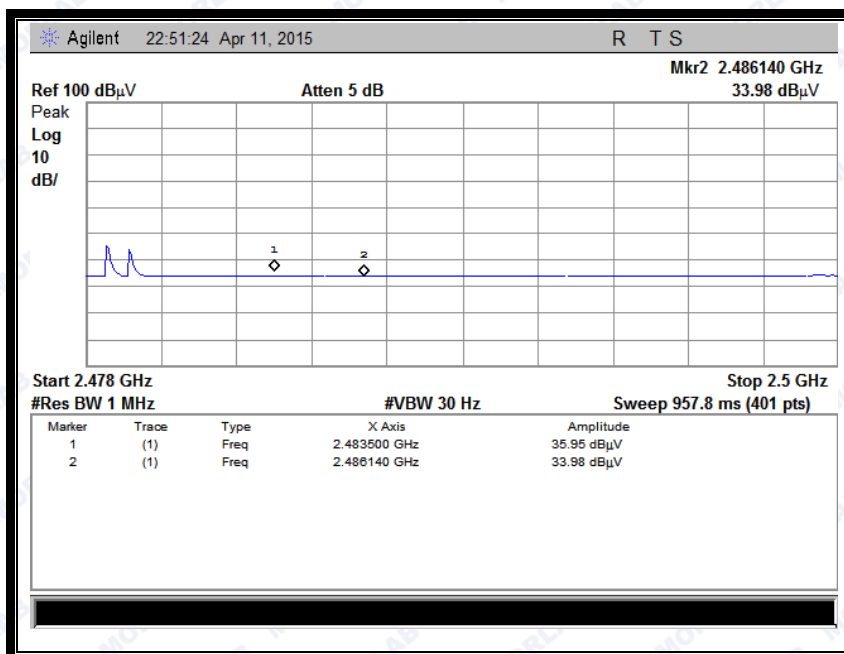

(Plot B2: Channel = 78 AVERAGE @ GFSK)

2.9. Conducted Emission

2.9.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.9.2. Test Description

A. Test Setup:

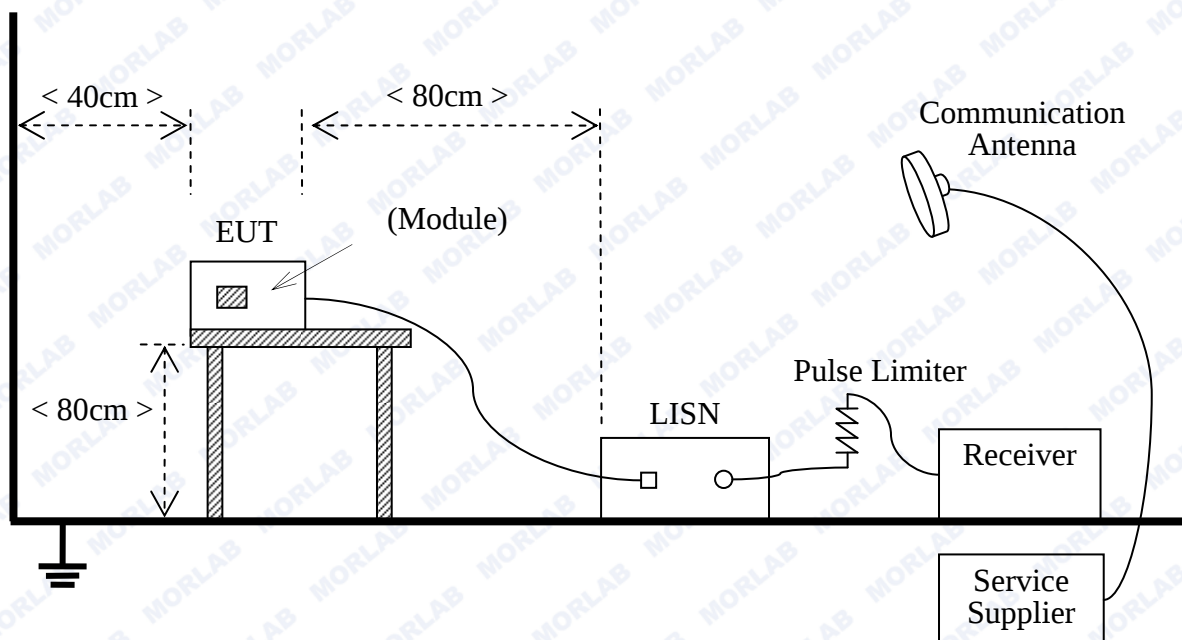



The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2009

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).

2.9.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

C. Test setup:

The EUT configuration of the emission tests is EUT + Link.

D. Test Plots:



(Plot A: L Phase)



(Plot B: N Phase)



2.10. Radiated Emission

2.10.1. Requirement

According to FCC section 15.247(d) and RSS-A8.5, radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2. Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

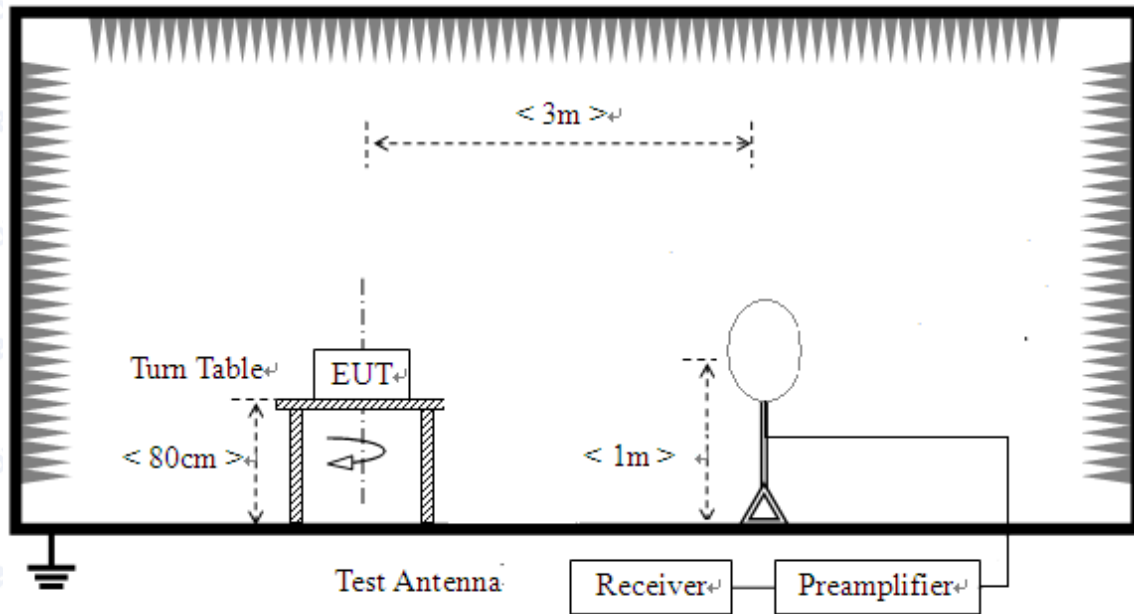

2) For radiated emissions from 30MHz to 1GHz

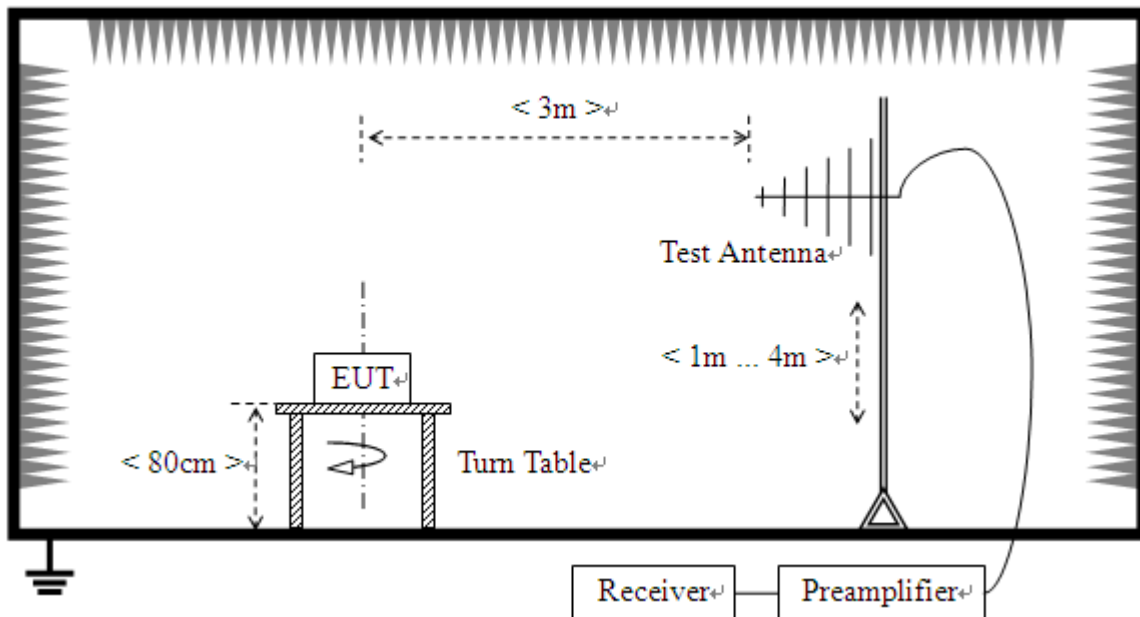

3) For radiated emissions above 1GHz

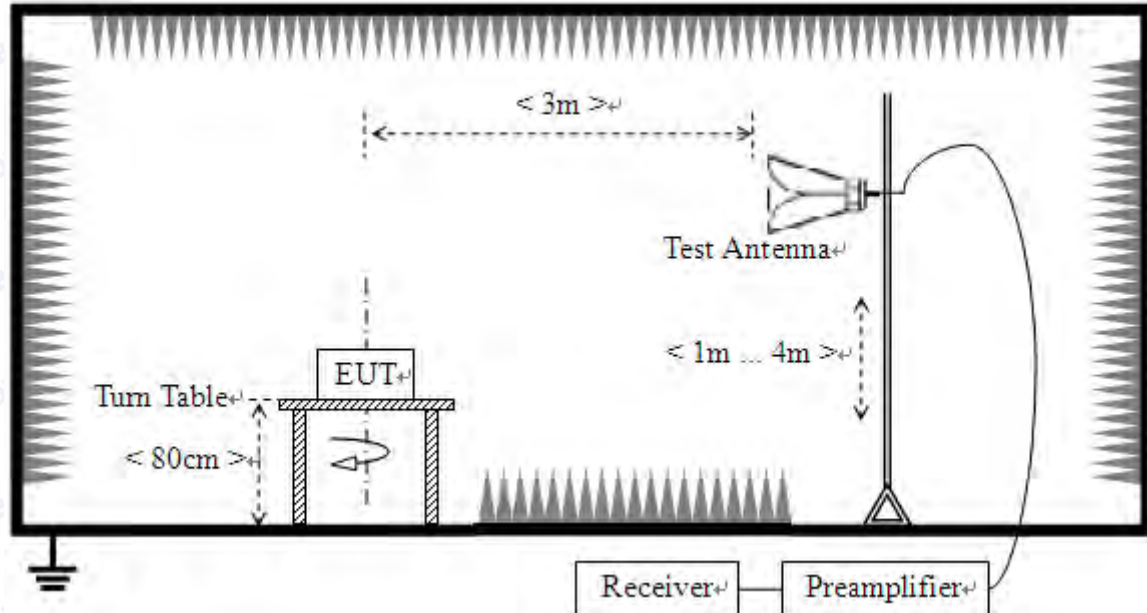

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**B. Equipments List:**

Please reference ANNEX A(1.4).

2.10.3. Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4. Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.


**2.10.4.1. GFSK Mode:****A. Test Plots for the Whole Measurement Frequency Range:**

Plots for Channel = 0

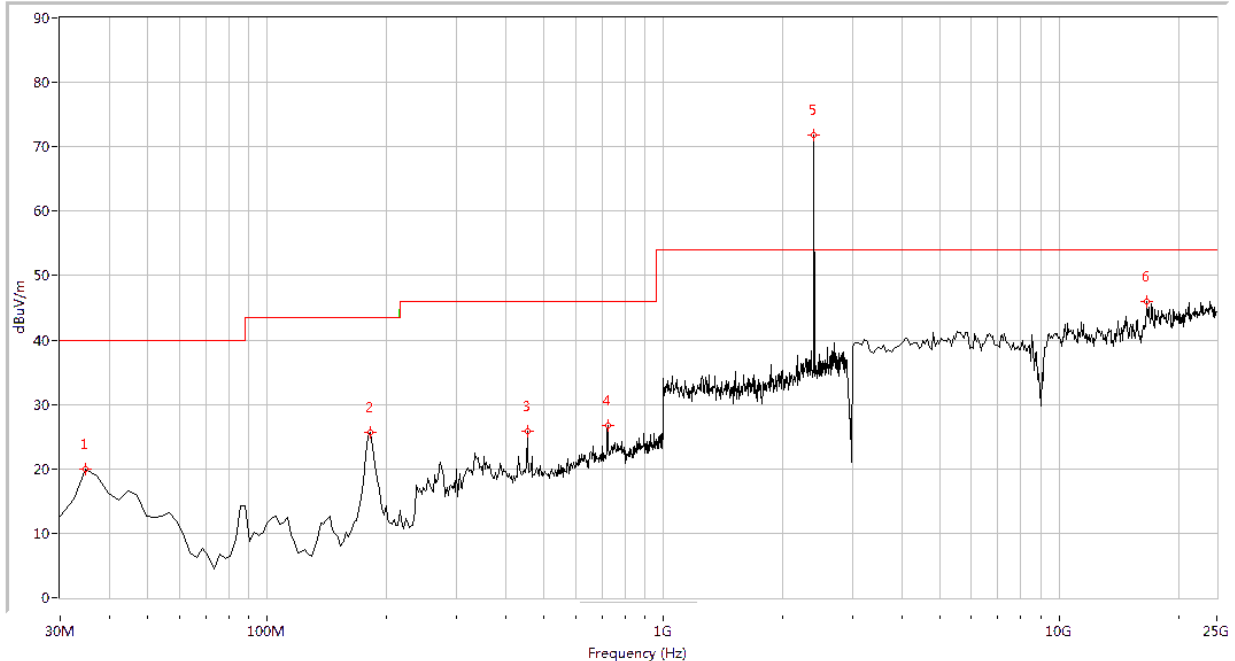

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
34.838	19.89	N.A	N.A	N.A	40.0	N.A	Horizontal	PASS
182.394	25.66	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
453.317	25.77	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
724.239	26.71	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2402.000	71.87	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
16660.848	46.02	N.A	N.A	54.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 0)

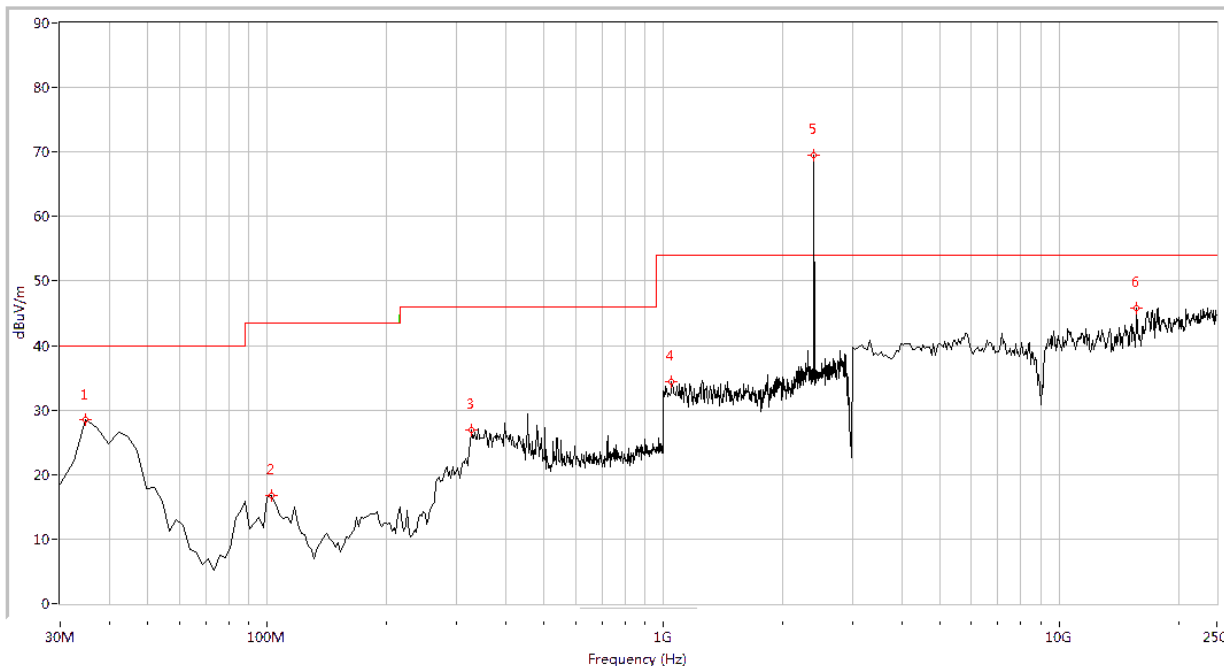


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
34.838	28.44	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
102.569	16.83	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
327.531	26.89	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
1049.875	34.35	N.A	N.A	54.0	N.A	54.0	Vertical	PASS
2402.000	69.43	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
15673.317	45.88	N.A	N.A	54.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 0)




Plot for Channel = 39

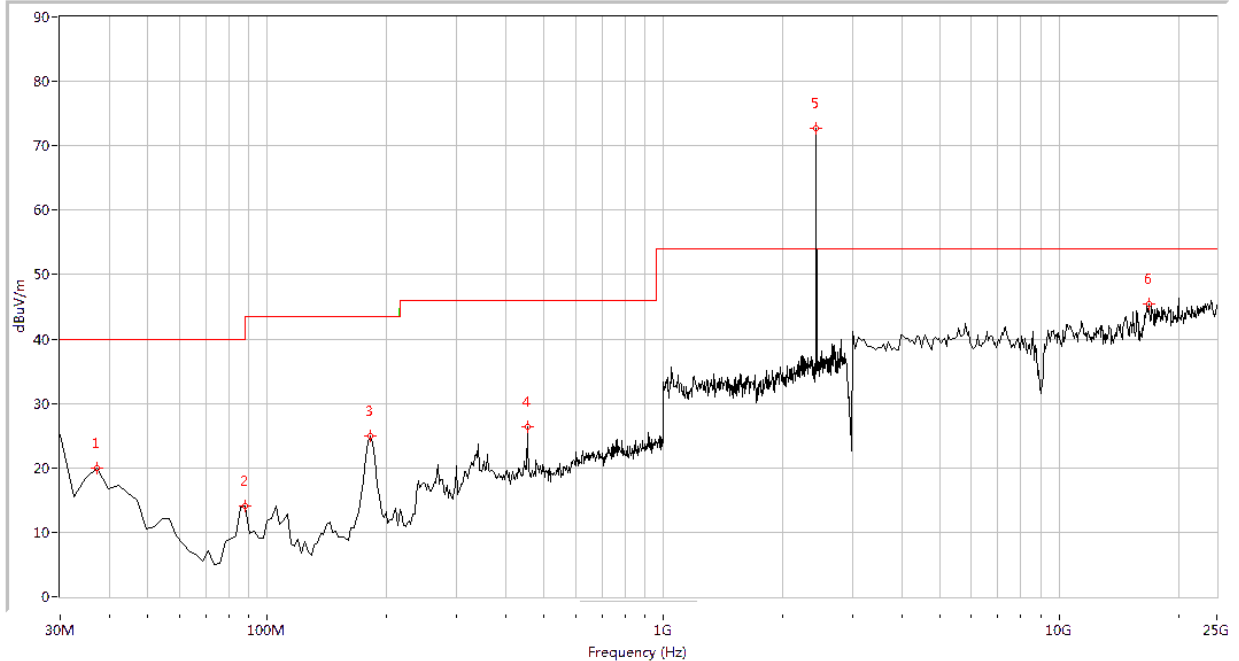

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
37.257	19.95	N.A	N.A	N.A	40.0	N.A	Horizontal	PASS
88.055	14.04	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
182.394	24.88	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
453.317	26.33	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
2441.000	72.77	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
16825.436	45.47	N.A	N.A	54.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 39)

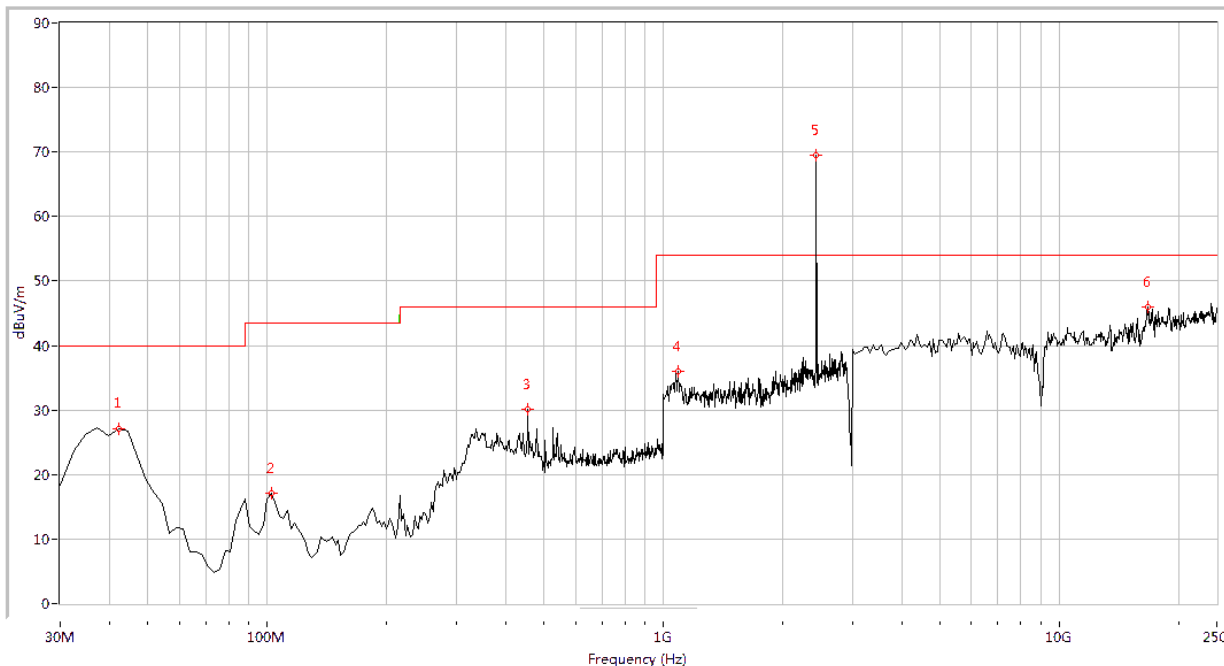


Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
42.095	27.14	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
102.569	17.09	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
455.736	30.18	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
1089.776	35.92	N.A	N.A	54.0	N.A	54.0	Vertical	PASS
2441.000	69.56	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
16770.574	45.90	N.A	N.A	54.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 39)




REPORT No. : SZ15030115W01

Plot for Channel = 78

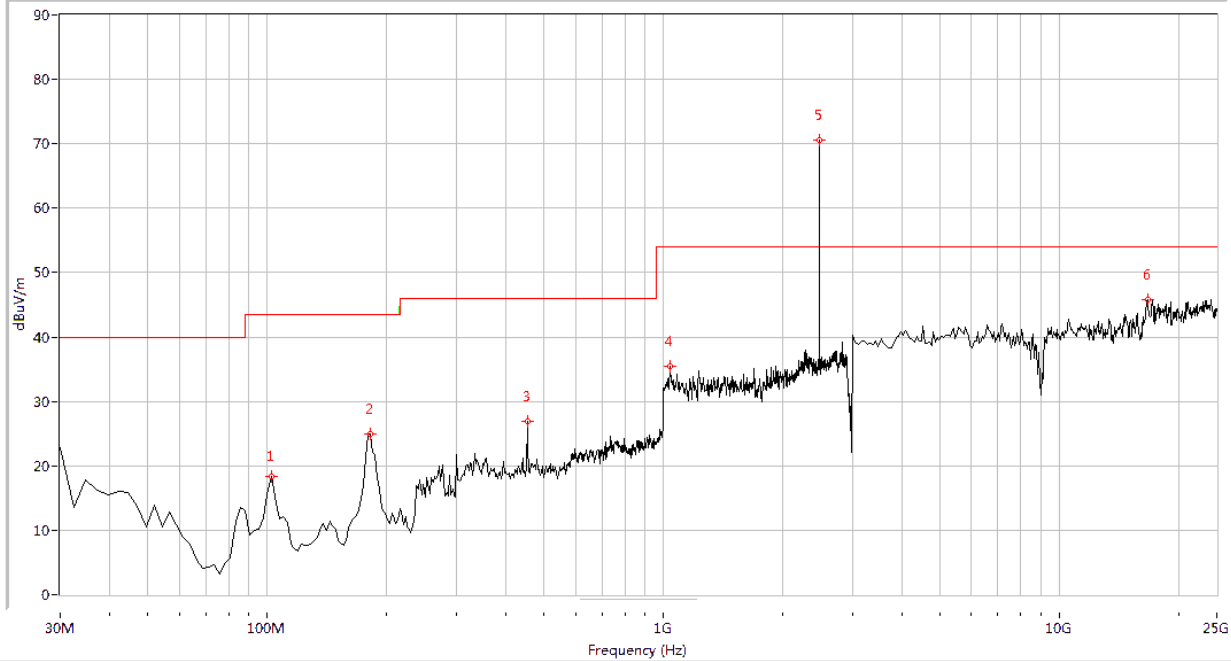

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
102.569	18.38	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
182.394	24.88	N.A	N.A	N.A	43.5	N.A	Horizontal	PASS
453.317	26.85	N.A	N.A	N.A	46.0	N.A	Horizontal	PASS
1039.900	35.55	N.A	N.A	54.0	N.A	54.0	Horizontal	PASS
2480.000	70.51	N.A	N.A	N.A	N.A	N.A	Horizontal	N.A
16715.711	45.76	N.A	N.A	54.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 78)

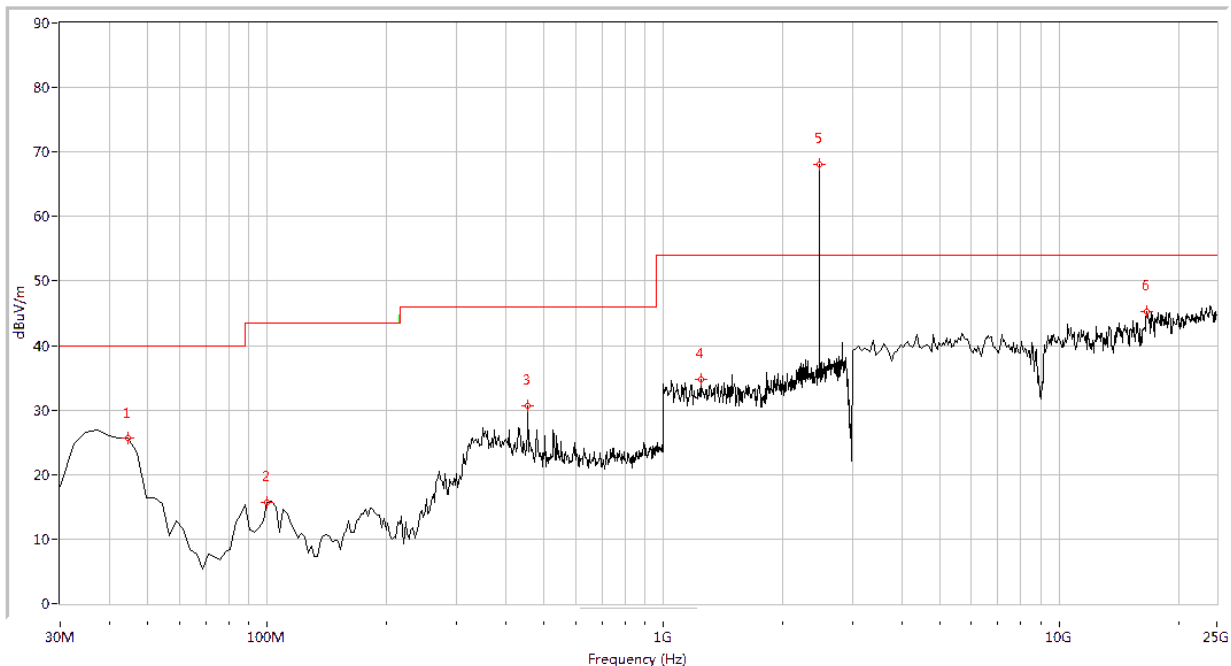

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
44.514	25.70	N.A	N.A	N.A	40.0	N.A	Vertical	PASS
100.150	15.62	N.A	N.A	N.A	43.5	N.A	Vertical	PASS
455.736	30.73	N.A	N.A	N.A	46.0	N.A	Vertical	PASS
1244.389	34.82	N.A	N.A	54.0	N.A	54.0	Vertical	PASS
2480.000	68.05	N.A	N.A	N.A	N.A	N.A	Vertical	N.A
16605.985	45.19	N.A	N.A	54.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 78)



2.11. RF exposure evaluation

According to § 1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of Commission's guideline.

According to 447498 D01 General RF Exposure Guidance v05, exclusion threshold values at selected frequencies and distances table as following.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	
MHz	30	35	40	45	50	mm
150	232	271	310	349	387	SAR Test Exclusion Threshold (mW)
300	164	192	219	246	274	
450	134	157	179	201	224	
835	98	115	131	148	164	
900	95	111	126	142	158	
1500	73	86	98	110	122	
1900	65	76	87	98	109	
2450	57	67	77	86	96	
3600	47	55	63	71	79	
5200	39	46	53	59	66	
5400	39	45	52	58	65	
5800	37	44	50	56	62	

Routine SAR evaluation refers to the specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evolution is not required, the portable transmitters with output power greater than the applicable low threshold SAR evolution to qualify for TCB approval.

Result:

This is portable device and the Max conducted peak output power is 3.078dBm, the maximum gain of antenna is 3dBi, the maximum output power is 3.078dBm (2.0314213mW). which is lower than the exclusion threshold 10mW, at frequency 2450MHz, and distance is 5mm.

The SAR measurement is not required.



3. General Information

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2009, ANSI C63.4 2009 and CISPR Publication 22; the FCC registration number is 695796.

The IC registration number is 7183A-2.



REPORT No. : SZ15030115W01

1.4 Test Equipments Utilized

1.4.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	System Simulator	6K00006210	MT8852B	Anritsu	2015.02.26	2016.02.25
2	Spectrum Analyzer	MY45101810	E4407B	Agilent	2015.02.26	2016.02.25
3	Power Splitter	NW521	1506A	Weinschel	2015.02.26	2016.02.25
4	Attenuator 1	(n.a.)	10dB	Resnet	2015.02.26	2016.02.25
5	Attenuator 2	(n.a.)	3dB	Resnet	2015.02.26	2016.02.25
6	EXA Signal Analyzer	MY51440152	N9010A	Agilent	2015.02.26	2016.02.25
7	RF cable	CB01	RF01	Morlab	N/A	N/A
8	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
9	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.4.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2015.02.26	2016.02.25
2	LISN	812744	NSLK 8127	Schwarzbeck	2015.02.26	2016.02.25
3	Service Supplier	100448	CMU200	R&S	2015.02.26	2016.02.25
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2015.02.26	2016.02.25
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A



1.4.3 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	100448	CMU200	R&S	2015.02.26	2016.02.25
2	Receiver	US44210471	E7405A	Agilent	2015.02.26	2016.02.25
3	Test Antenna - Bi-Log	9163-274	9m*6m*6m	Albatross	2015.02.26	2016.02.25
4	Test Antenna - Horn	9120D-963	VULB 9163	Schwarzbeck	2015.02.26	2016.02.25
5	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2015.02.26	2016.02.25
6	Test Antenna - Loop	1519-022	HL050S7	R&S	2015.02.26	2016.02.25
7	Reject Filter	(n.a.)	BRM50702	Micro-Tronics	2015.02.26	2016.02.25
8	Coaxial cable (N male)	CB02	EMC02	Morlab	N/A	N/A
9	Coaxial cable (N male)	CB03	EMC03	Morlab	N/A	N/A

1.4.4 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2015.02.26	2016.02.25

1.4.5 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2015.02.26	2016.02.25



REPORT No. : SZ15030115W01

1.4.6 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Albatross	2015.02.26	2016.02.25

***** END OF REPORT *****