



### MPE TEST REPORT

### FCC Per 47 CFR 2.1091(b)

Report Reference No.....: CTL1504200914-WM

Compiled by

( position+printed name+signature)...: File administrators Jennifer NI

Name of the organization performing the tests

Test Engineer Jacky Chen

( position+printed name+signature)...:

Approved by

( position+printed name+signature)...: Manager Tracy Qi

Date of issue.....: Apr. 29, 2015

Test Laboratory Name .....: Shenzhen CTL Testing Technology Co., Ltd.

Address.....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Applicant's name.....: JadooTV Inc.

Address.....: 5653 Stoneridge Drive, #119, Pleasanton CA 94588 USA

#### Test specification:

Standard .....: FCC Per 47 CFR 2.1091(b)

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

#### Shenzhen CTL Testing Technology Co., Ltd.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....: Jadoo4

FCC ID.....: 2AELC15E420B

Trade Mark .....: N/A

Model/Type reference.....: Jadoo4

Work frequency .....: 802.11b/g/n(20MHz): 2412~2462MHz

802.11n(40MHz): 2422~2452MHz

Type of modulation .....: 802.11b DSSS, 802.11g/n: OFDM

Data Rate.....: 802.11b: 1/2/5.5/11 Mbps

802.11g: 6/9/12/18/24/36/48/54 Mbps

802.11n: up to150 Mbps

Antenna Gain .....: 2dBi

Antenna type .....: Internal

Result.....: Positive

# Test Report

<b>Test Report No. :</b>	<b>CTL1504200914-WM</b>	Apr. 29, 2015
		Date of issue

Equipment under Test : Jadoo4

Model /Type : Jadoo4


**Applicant** : **JadooTV Inc.**

Address : 5653 Stoneridge Drive, #119, Pleasanton CA 94588 USA

**Manufacturer** : **JadooTV Inc.**


Address : 5653 Stoneridge Drive, #119, Pleasanton CA 94588 USA

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

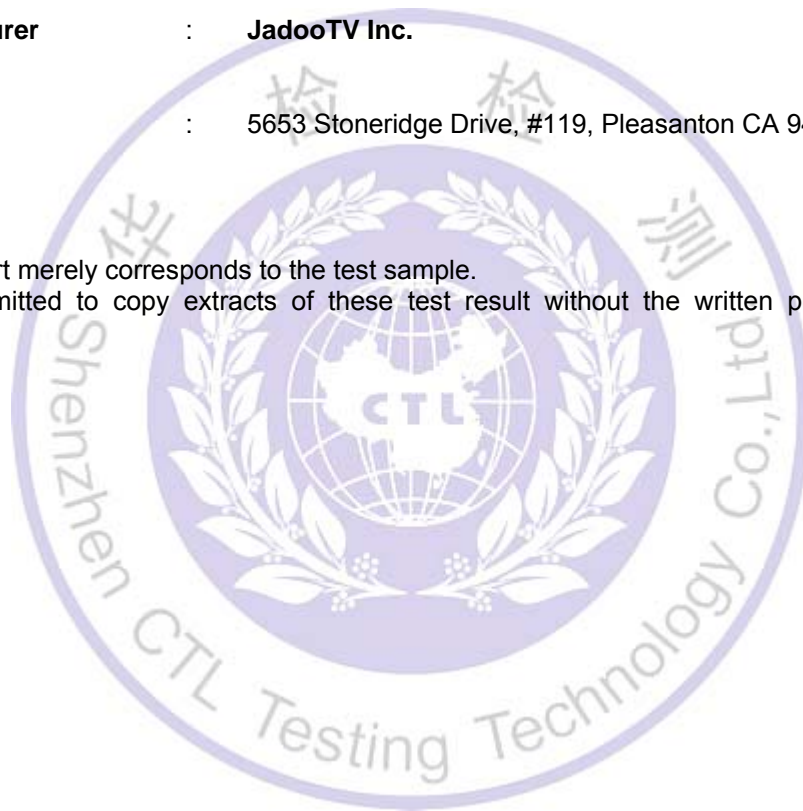

## Content

<b>1.</b>	<b>SUMMARY .....</b>	<b>4</b>
1.1.	EUT configuration	4
1.2.	Equipment Under Test	4
1.3.	Description of the test mode	4
1.4.	NOTE	5
<b>2.</b>	<b>TEST ENVIRONMENT .....</b>	<b>6</b>
2.1.	Address of the test laboratory	6
2.2.	Environmental conditions	6
2.3.	Statement of the measurement uncertainty	6
<b>3.</b>	<b>METHOD OF MEASUREMENT .....</b>	<b>7</b>

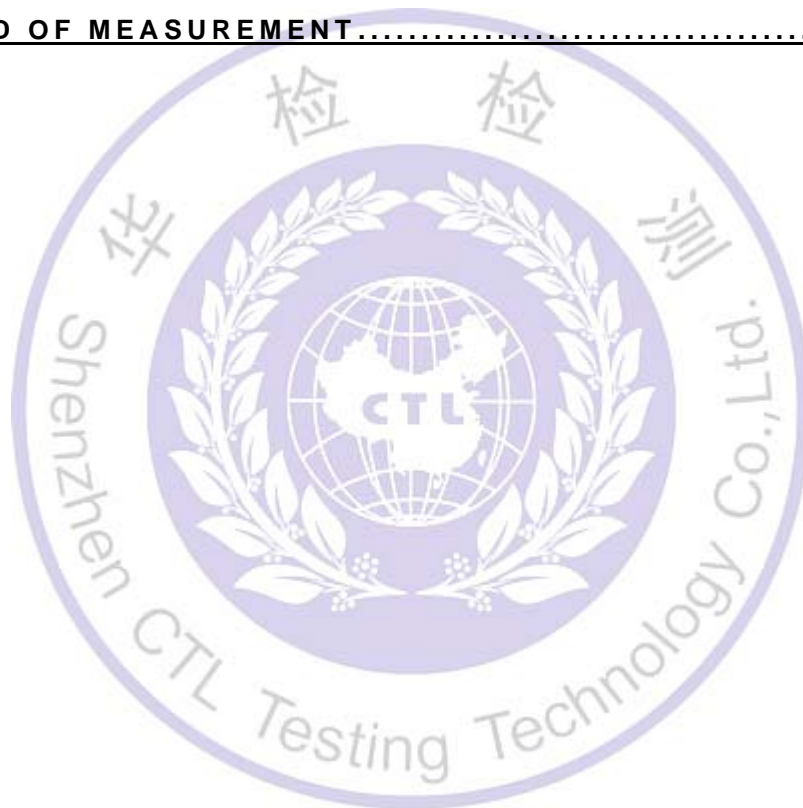

# 1. SUMMARY

## 1.1. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer

- - supplied by the lab

- AC adapter

Manufacturer: I.T.E

Model: FJ-SW1260502000DU

- AC adapter

Manufacturer: I.T.E

Model: FJ-SW1260502000DN

## 1.2. Equipment Under Test

### Power supply system utilised

Power supply voltage

:  120V / 60 Hz       115V / 60Hz  
 12 V DC       24 V DC  
 Other (specified in blank below)

## 1.3. Description of the test mode

IEEE 802.11b/g/n(HT20): Thirteen channels are provided to the EUT, but only eleven channels used for USA.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432		
6	2437		
7	2442		

IEEE 802.11n (HT40): Nine channels are provided to the EUT, but only seven channels used for USA.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
3	2422	8	2447
4	2427	9	2452
5	2432		
6	2437		
7	2442		

#### 1.4. NOTE


The EUT is a Enjoy TV, The functions of the EUT listed as below:

	Test Standards	Reference Report
WLAN 802.11b/g, 802.11n	FCC Part 15 Subpart C (Section15.247)	CTL1504200914-WF
	FCC Per 47 CFR 2.1091(b)	CTL1504200914-WM

The frequency bands used in this EUT are listed as follows

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
802.11b	√	-	-	-
802.11g	√	-	-	-
802.11n(20MHz)	√	-	-	-
802.11n(40MHz)	√	-	-	-

Modulation Mode	TX Function
802.11b	1 TX
802.11g	1 TX
802.11n(20MHz)	1 TX
802.11n(40MHz)	1 TX

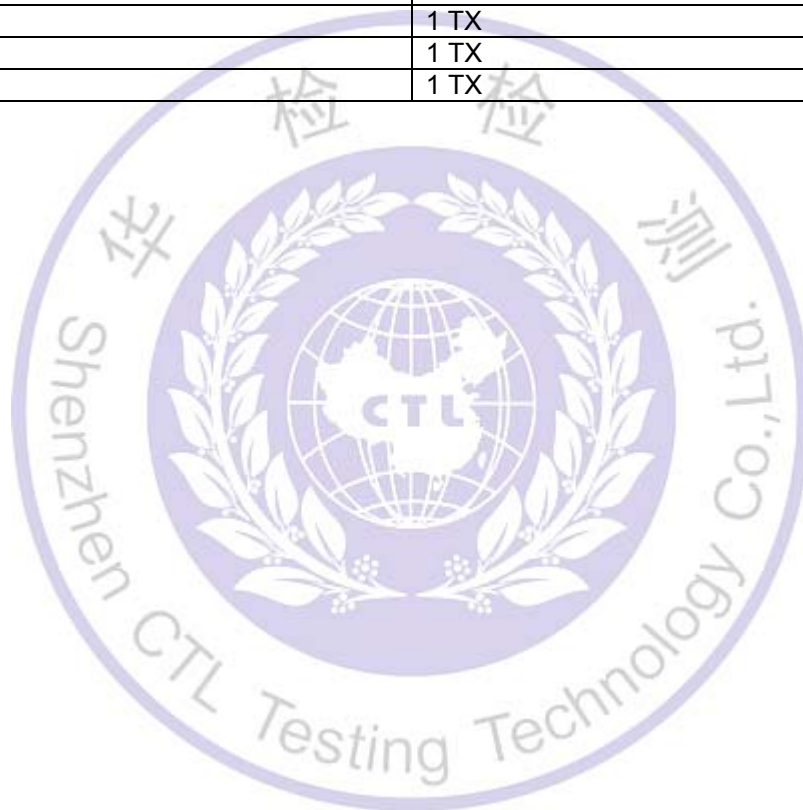

## **2. TEST ENVIRONMENT**

### **2.1. Address of the test laboratory**

Shenzhen CTL Testing Technology Co., Ltd.  
Floor 1-A, Baisha Technology Park, No.3011, Shahehexi Road, Nanshan District, Shenzhen, China 518055

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2009) and CISPR Publication 22.

### **2.2. Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

### **2.3. Statement of the measurement uncertainty**

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

<b>Test</b>	<b>Range</b>	<b>Measurement Uncertainty</b>	<b>Notes</b>
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.22dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. Method of measurement

#### 3.1. Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

#### 3.2. Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
<b>Limits for Occupational/Controlled Exposure</b>				
0.3 – 3.0	614	1.63	(100) *	6
3.0 – 30	1842/f	4.89/f	(900/f)*	6
30 – 300	61.4	0.163	1.0	6
300 – 1500	/	/	f/300	6
1500 – 100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
<b>Limits for Occupational/Controlled Exposure</b>				
0.3 – 3.0	614	1.63	(100) *	30
3.0 – 30	824/f	2.19/f	(180/f)*	30
30 – 300	27.5	0.073	0.2	30
300 – 1500	/	/	f/1500	30
1500 – 100,000	/	/	1.0	30

F=frequency in MHz

\*=Plane-wave equivalent power density

#### 3.3. Manufacturing tolerance

<b>802.11b (Peak)</b>			
Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	15.0	15.0	15.0
Tolerance ±(dB)	1.0	1.0	1.0
<b>802.11g (Peak)</b>			
Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	13.0	13.0	13.0
Tolerance ±(dB)	1.0	1.0	1.0
<b>802.11n(20MHz) (Peak)</b>			
Channel	Channel 1	Channel 6	Channel 11
Target (dBm)	13.0	13.0	13.0
Tolerance ±(dB)	1.0	1.0	1.0
<b>802.11n(40MHz) (Peak)</b>			
Channel	Channel 3	Channel 6	Channel 9
Target (dBm)	11.0	11.0	11.0
Tolerance ±(dB)	1.0	1.0	1.0

### 3.4. MPE Calculation Method

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \frac{PG}{4\pi R^2}$$

Where: S=power density

P=power input to antenna

G=power gain of the antenna in the direction of interest relative to an isotropic radiator

R=distance to the center of radiation of the antenna

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna is 2.0 dBi, the RF power density can be obtained.

## TEST RESULTS

#### For 802.11 b

Test Frequency (MHz)	Minimum Separation Distance (cm)	Peak Output Power (dBm)	Peak Output Power (mW)	Target Power (dBm)	Antenna Gain (Nemeric)	Power Density Limit (mW/cm <sup>2</sup> )	Power Density At 20 cm (mW/cm <sup>2</sup> )	Test Results
2412	20.00	15.17	32.89	15.0±1.0	1.5849	1.000	0.0126	Pass
2437	20.00	15.08	32.21	15.0±1.0	1.5849	1.000	0.0126	Pass
2462	20.00	15.31	33.96	15.0±1.0	1.5849	1.000	0.0126	Pass

#### For 802.11 g

Test Frequency (MHz)	Minimum Separation Distance (cm)	Peak Output Power (dBm)	Peak Output Power (mW)	Target Power (dBm)	Antenna Gain (Nemeric)	Power Density Limit (mW/cm <sup>2</sup> )	Power Density At 20 cm (mW/cm <sup>2</sup> )	Test Results
2412	20.00	13.04	20.14	13.0±1.0	1.5849	1.000	0.0079	Pass
2437	20.00	13.21	20.94	13.0±1.0	1.5849	1.000	0.0079	Pass
2462	20.00	12.95	19.72	13.0±1.0	1.5849	1.000	0.0079	Pass

#### For 802.11 n (20MHz)

Test Frequency (MHz)	Minimum Separation Distance (cm)	Peak Output Power (dBm)	Peak Output Power (mW)	Target Power (dBm)	Antenna Gain (Nemeric)	Power Density Limit (mW/cm <sup>2</sup> )	Power Density At 20 cm (mW/cm <sup>2</sup> )	Test Results
2412	20.00	12.29	19.32	13.0±1.0	1.5849	1.000	0.0079	Pass
2437	20.00	12.07	20.00	13.0±1.0	1.5849	1.000	0.0079	Pass
2462	20.00	12.46	19.72	13.0±1.0	1.5849	1.000	0.0079	Pass

#### For 802.11 n (40MHz)

Test Frequency (MHz)	Minimum Separation Distance (cm)	Peak Output Power (dBm)	Peak Output Power (mW)	Target Power (dBm)	Antenna Gain (Nemeric)	Power Density Limit (mW/cm <sup>2</sup> )	Power Density At 20 cm (mW/cm <sup>2</sup> )	Test Results
2422	20.00	10.94	12.42	11.0±1.0	1.5849	1.000	0.0050	Pass
2437	20.00	10.17	10.40	11.0±1.0	1.5849	1.000	0.0050	Pass
2452	20.00	10.53	11.30	11.0±1.0	1.5849	1.000	0.0050	Pass

## 4. Conclusion

The measurement results comply with the FCC Limit per 47 CFR 2.1091 (b) for the controlled RF Exposure.

.....**End of Report**.....