



FCC RADIO TEST REPORT

FCC ID : 2AEM4-401217
Equipment : eero PoE 6
Brand Name : eero
Model Name : T010001
Applicant : eero LLC
660 3rd Street,4th Floor,San
Francisco,CA 94107-(415)738-7972
Manufacturer : LUXSHARE-ICT(VIETNAM) LIMITED
Lot E, Quang Chau industry park, Quang
Chau village,Viet Yen district,Bac Giang
province,Viet Nam
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 17, 2022 and testing was performed from May 25, 2022 to Jun. 30, 2022. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	14
3.3 Power Spectral Density Measurement	15
3.4 Conducted Band Edges and Spurious Emission Measurement	18
3.5 Radiated Band Edges and Spurious Emission Measurement	22
3.6 AC Conducted Emission Measurement.....	26
3.7 Antenna Requirements.....	28
4 List of Measuring Equipment	29
5 Uncertainty of Evaluation.....	31
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR251805G	01	Initial issue of report	Jul. 21, 2022
FR251805G	02	Revise Product Feature and section 3.5.3 some content of descriptions	Jul. 27, 2022



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	1.11 dB under the limit at 2483.520 MHz
3.6	15.207	AC Conducted Emission	Pass	1.05 dB under the limit at 0.389 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
2. The measurement uncertainty please refer to this report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: **Abi Lin**

Report Producer: **Josie Hsu**



1 General Description

1.1 Product Feature of Equipment Under Test

Bluetooth-LE, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax and Zigbee.

Product Feature		
Antenna Type	WLAN: <Ant. 1>: Stamping PIFA <Ant. 2>: Stamping PIFA	
	Bluetooth: FPC Dipole Zigbee: FPC Dipole	
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	4.10

Remark: The EUT's information above is declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY (TAF Code: 3786)
Remark	The Conducted test item subcontracted to Sporton International Inc. Wensan Laboratory

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz) radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in four orthogonal axis (X: flat, X: ceiling-mount, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X: flat plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	250kbps / O-QPSK
	Mode 1: Zigbee Tx CH11_2405 MHz
	Mode 2: Zigbee Tx CH17_2435 MHz
	Mode 3: Zigbee Tx CH25_2475 MHz
	Mode 4: Zigbee Tx CH26_2480 MHz
Radiated Test Cases	Mode 1: Zigbee Tx CH11_2405 MHz
	Mode 2: Zigbee Tx CH17_2435 MHz
	Mode 3: Zigbee Tx CH25_2475 MHz
	Mode 4: Zigbee Tx CH26_2480 MHz
	Mode 1: WLAN (2.4GHz) Link + LAN1 Link + LAN2 Link + RJ45 Cable (Charging from POE Adapter)
AC Conducted Emission	Mode 2: Bluetooth – LE Link + LAN1 Link + LAN2 Link + RJ45 Cable (Charging from POE Adapter)
	Mode 3: Zigbee Link + LAN1 Link + LAN2 Link + RJ45 Cable (Charging from POE Adapter)
	Remark: The worst case of conducted emission is mode 1; only the test data of it was reported.

2.3 Connection Diagram of Test System

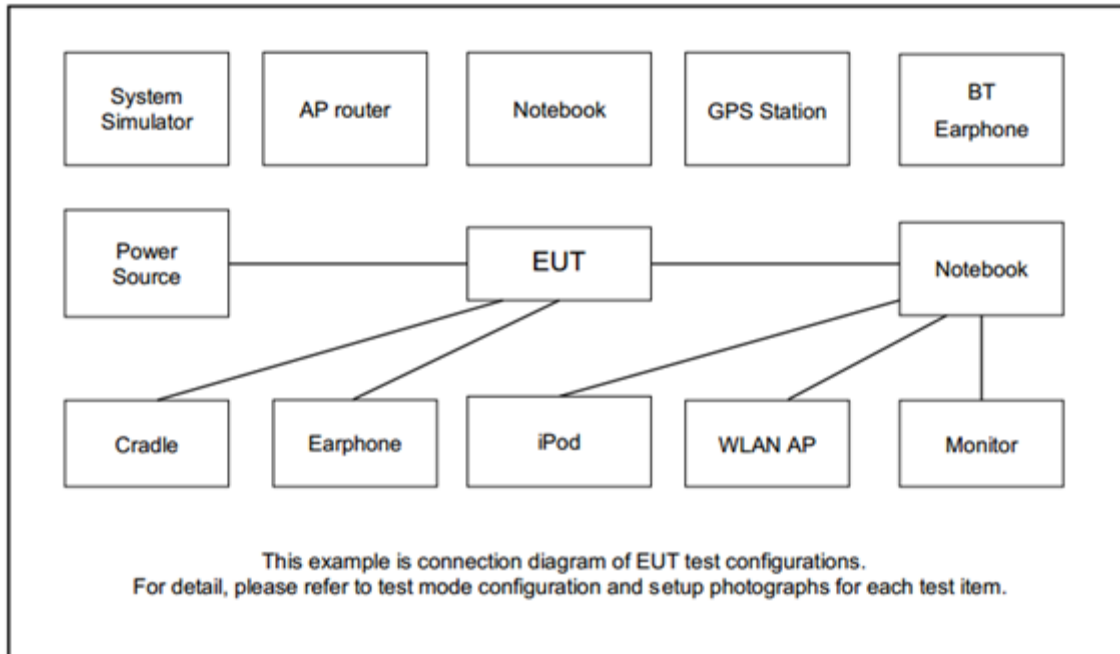

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	POE Adapter	N/A	POE- BTI-7556NT8	N/A	N/A	N/A
2.	Smart Things Button	N/A	IM6001-BTP01	N/A	N/A	N/A
3.	RJ45 cable	N/A	N/A	N/A	N/A	N/A
4.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	Notebook	Dell	E3340	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

The RF test items, utility “Qorvo BT_BZT Test” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

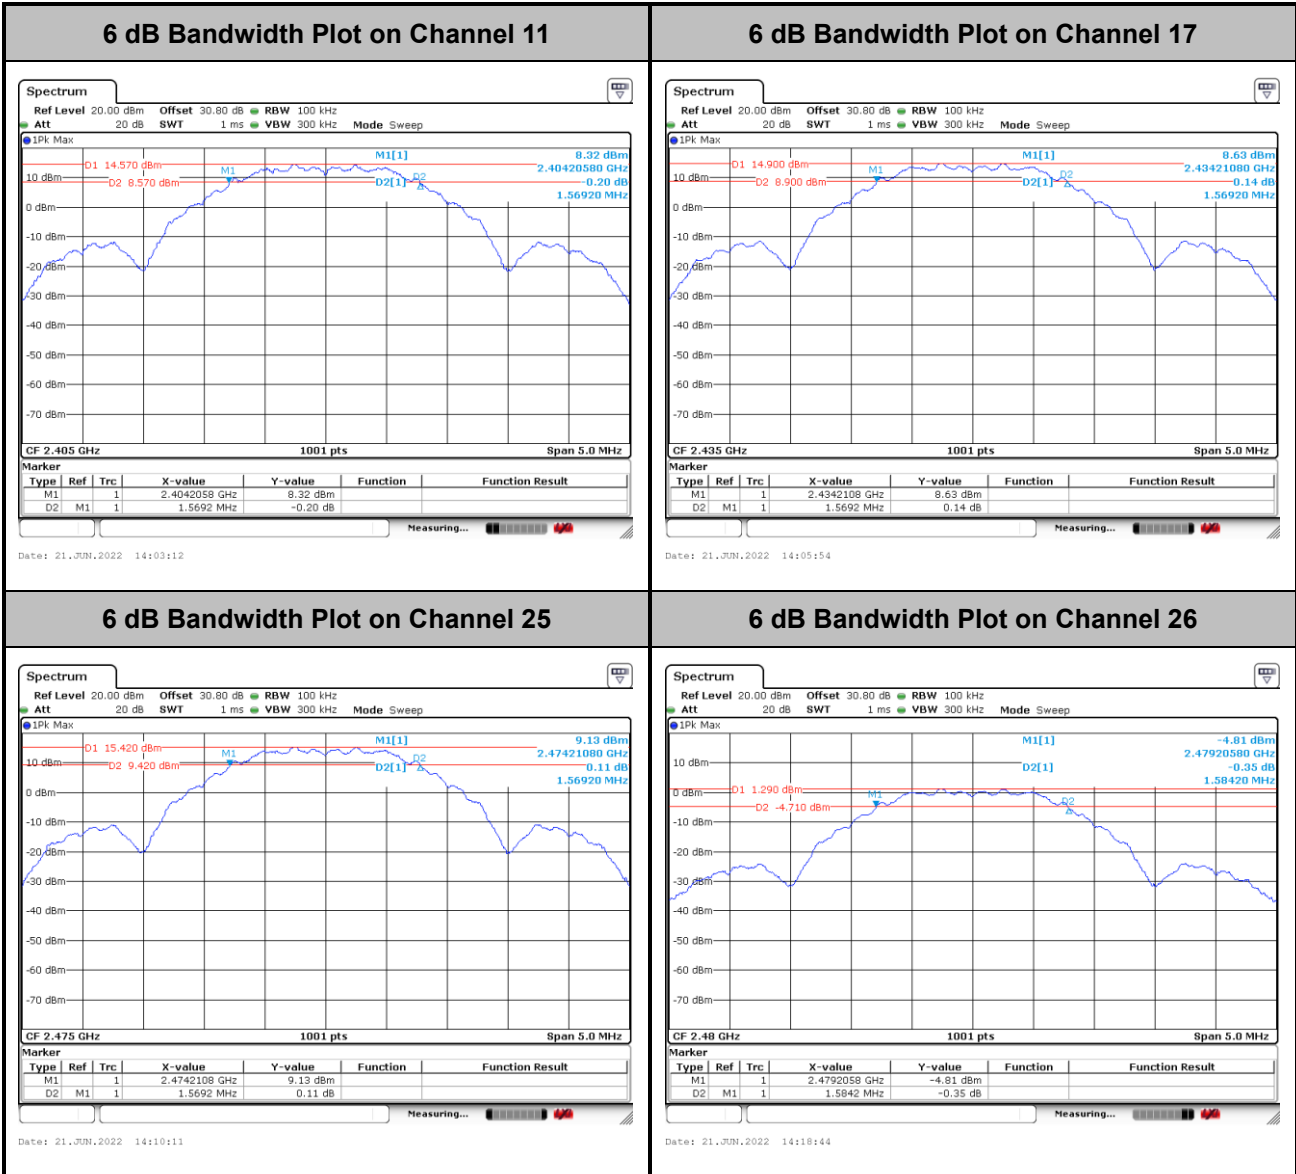



3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

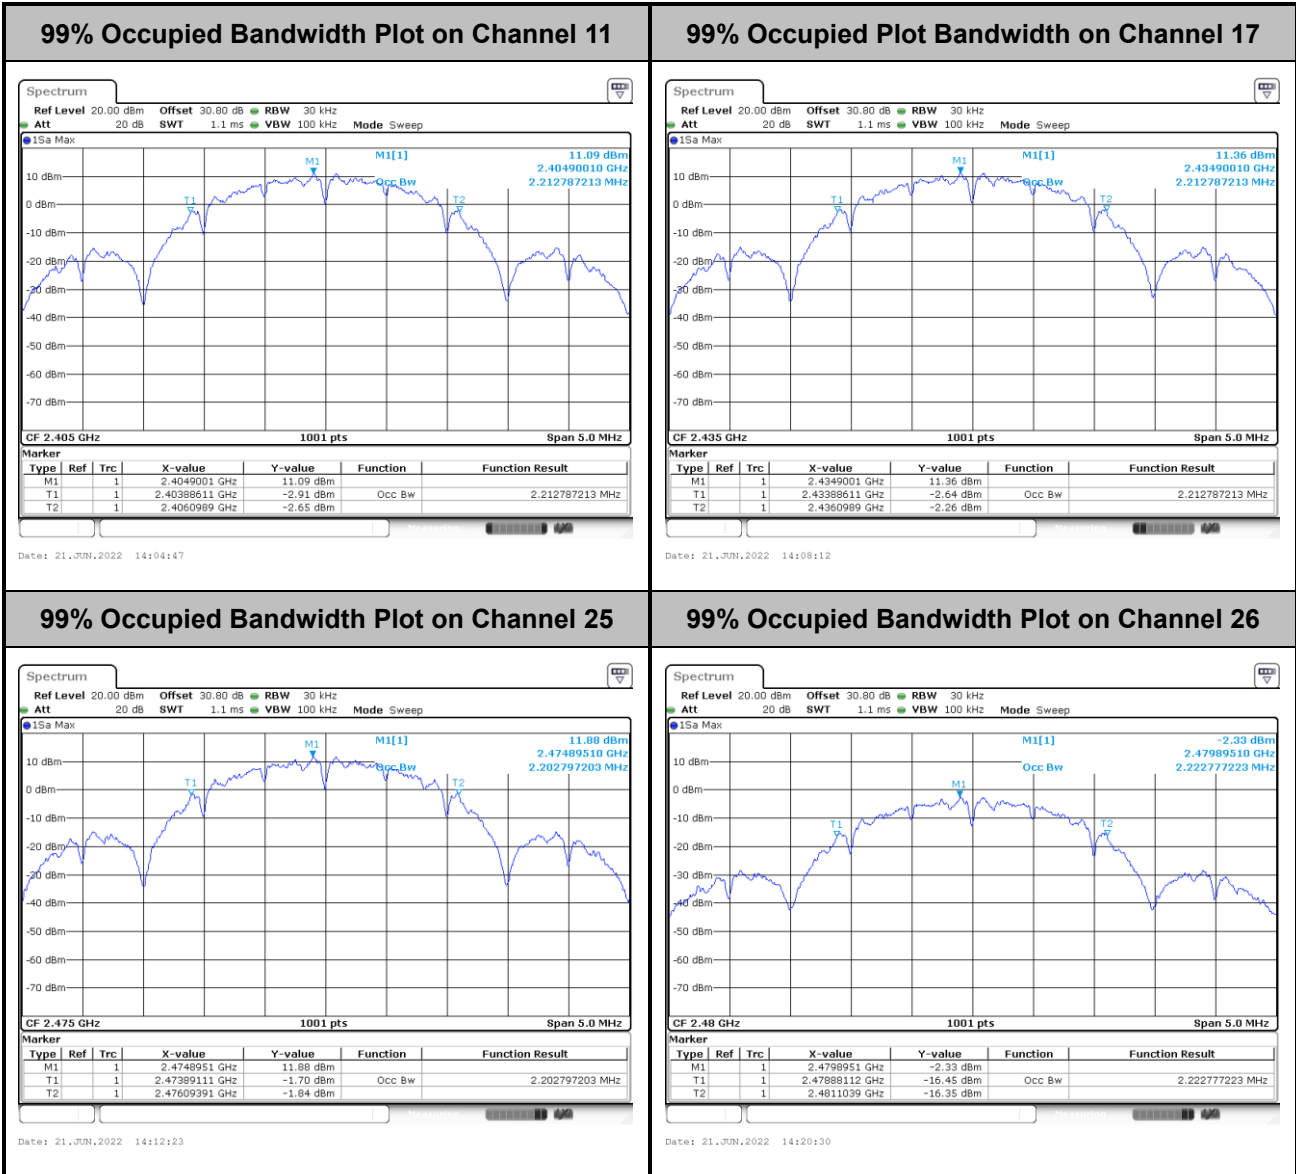

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator.
4. The path loss is compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

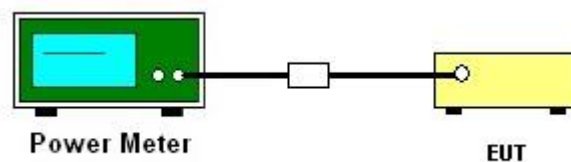

3.2.5 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup




3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

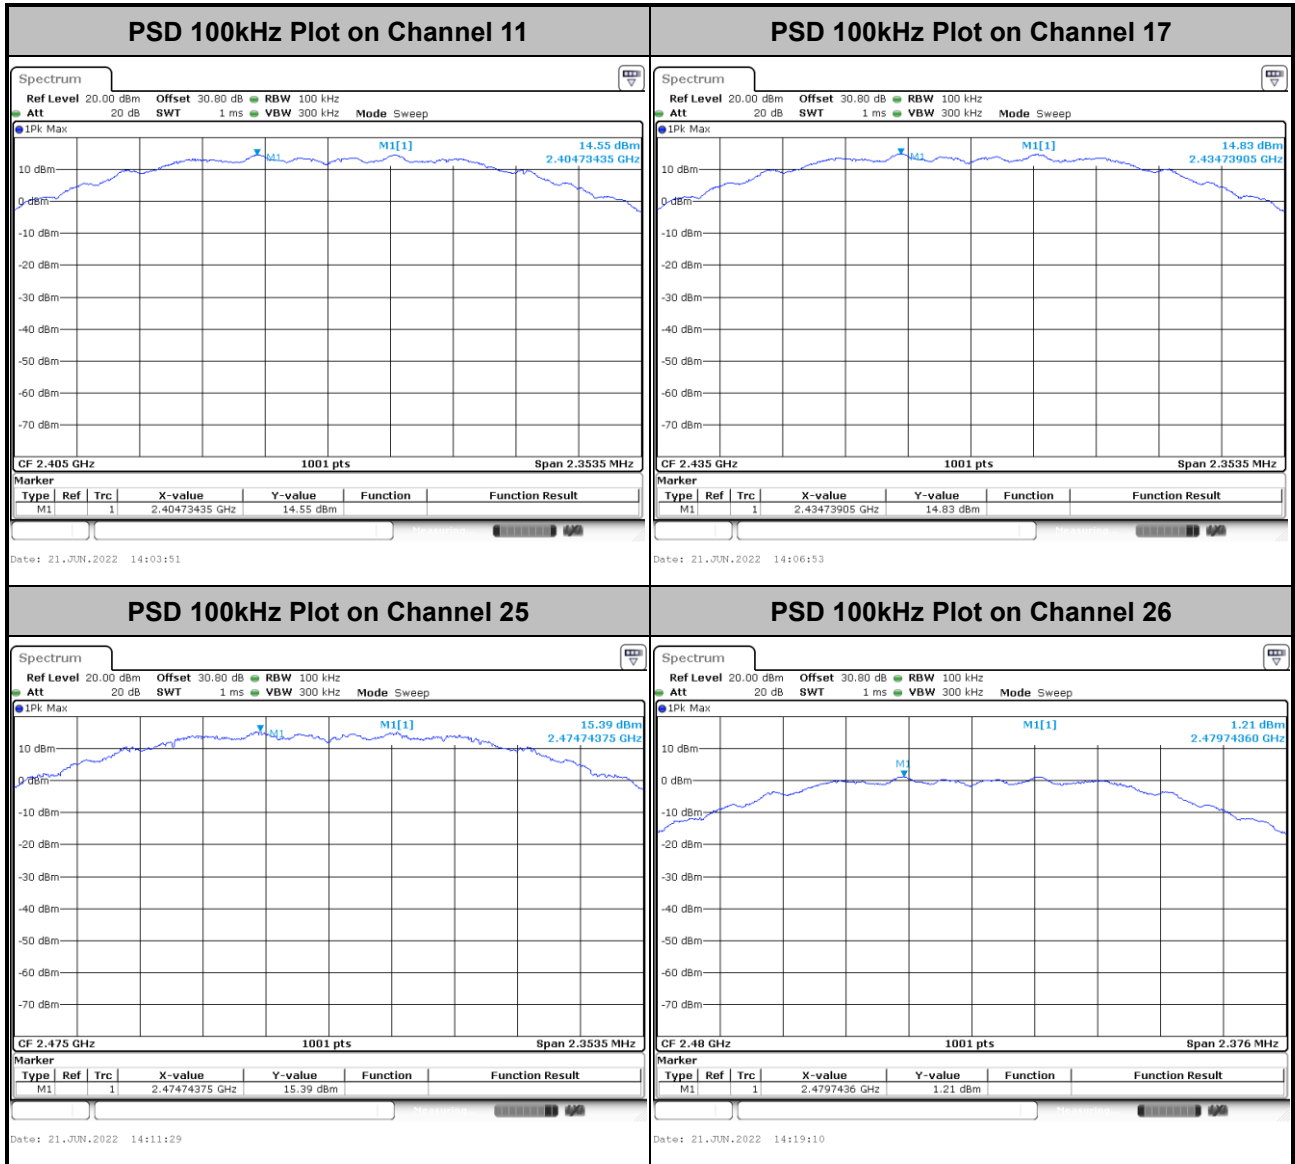



3.3.7 Test Result of Power Spectral Density Plots (3kHz)

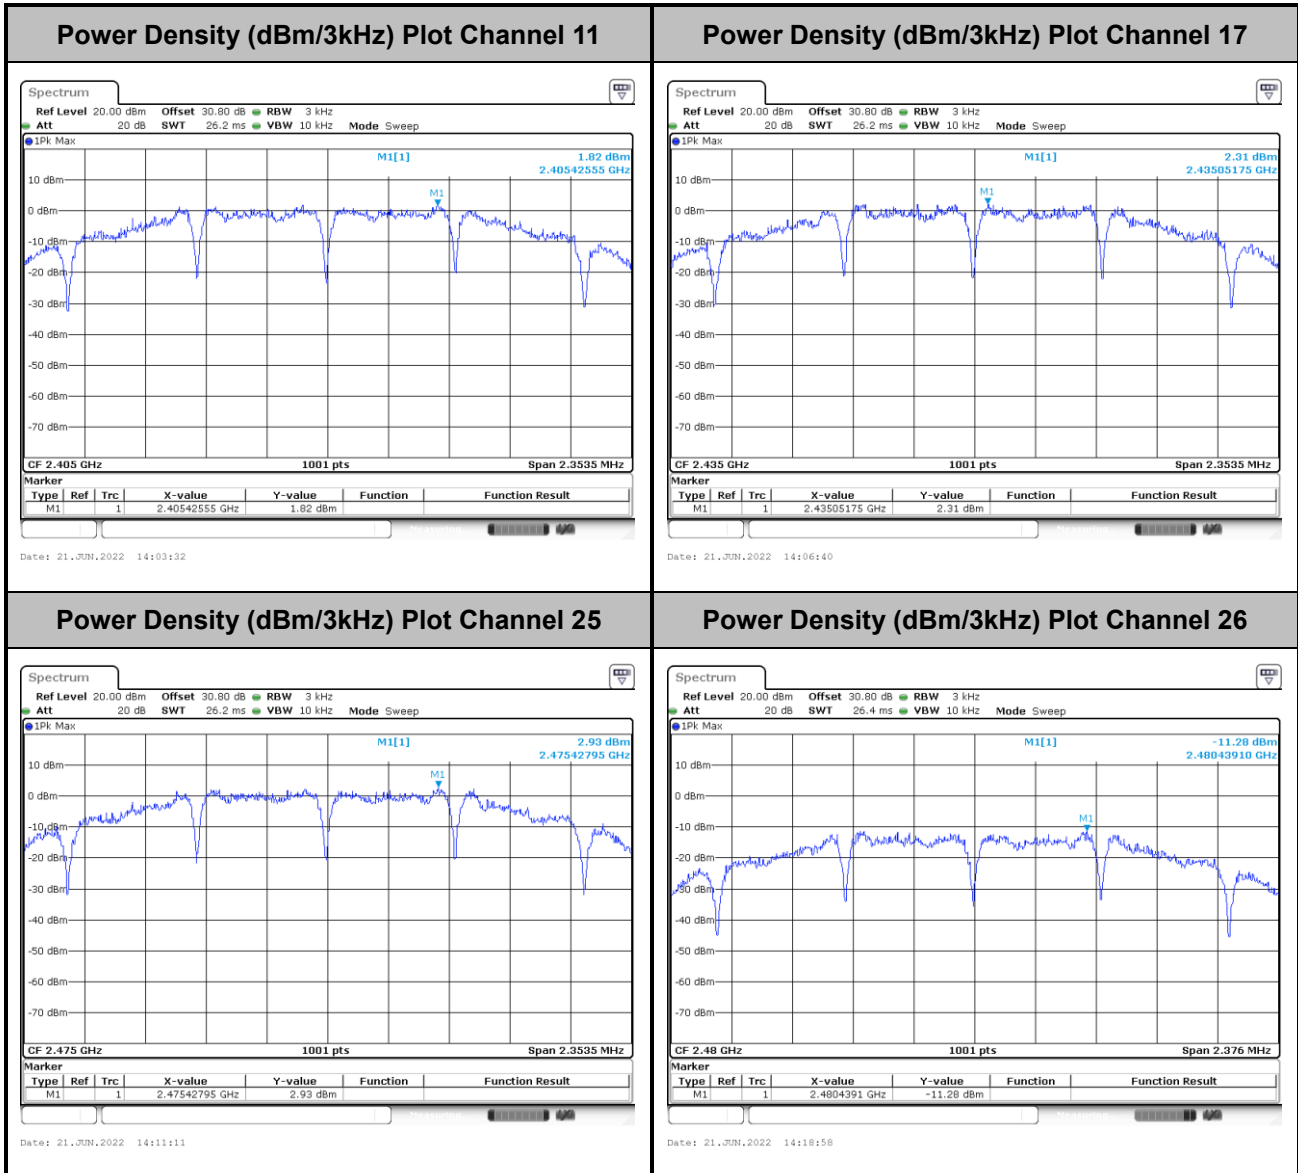

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure



1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

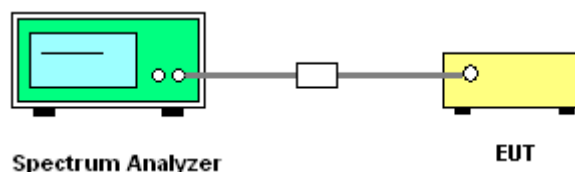





3.4.5 Test Result of Conducted Band Edges Plots

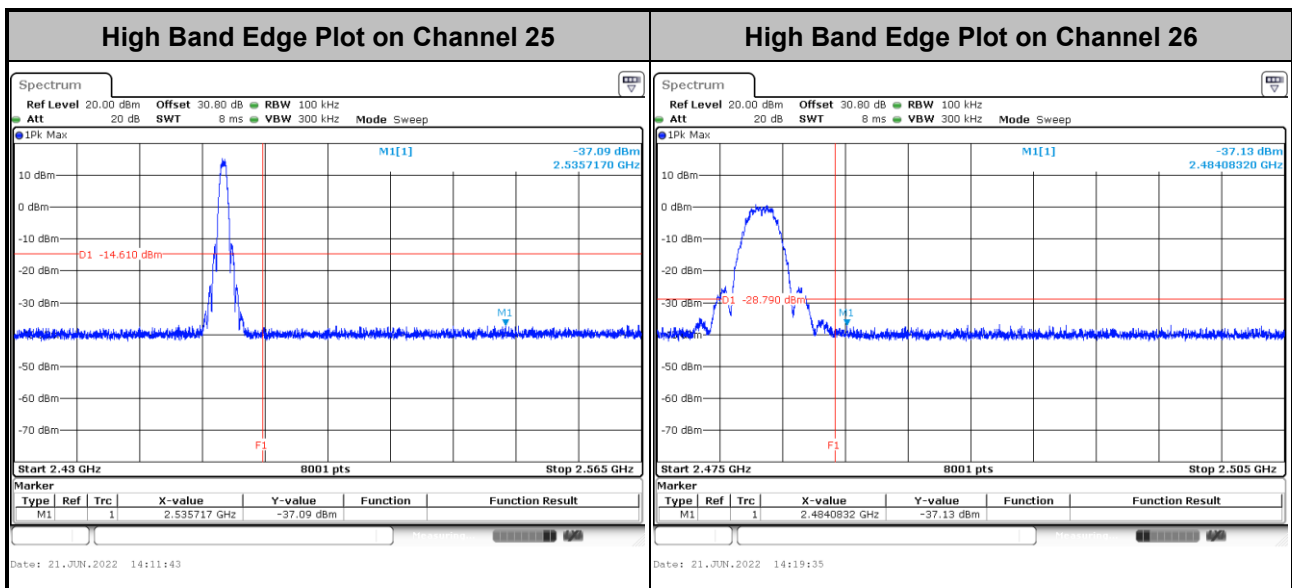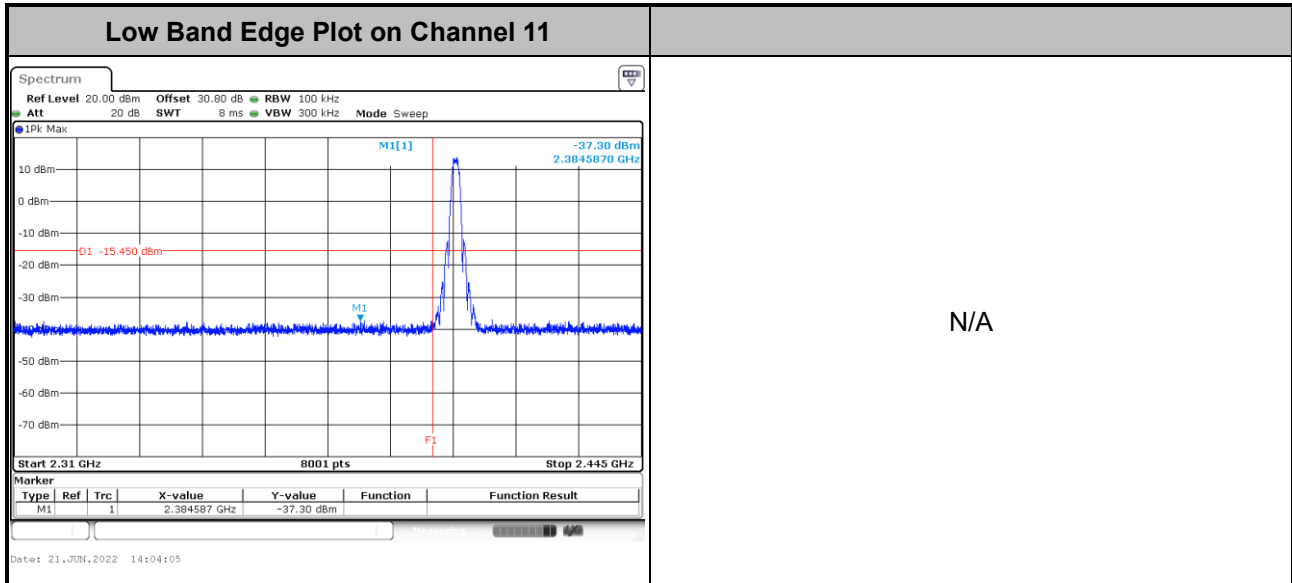



3.4.6 Test Result of Conducted Spurious Emission Plots

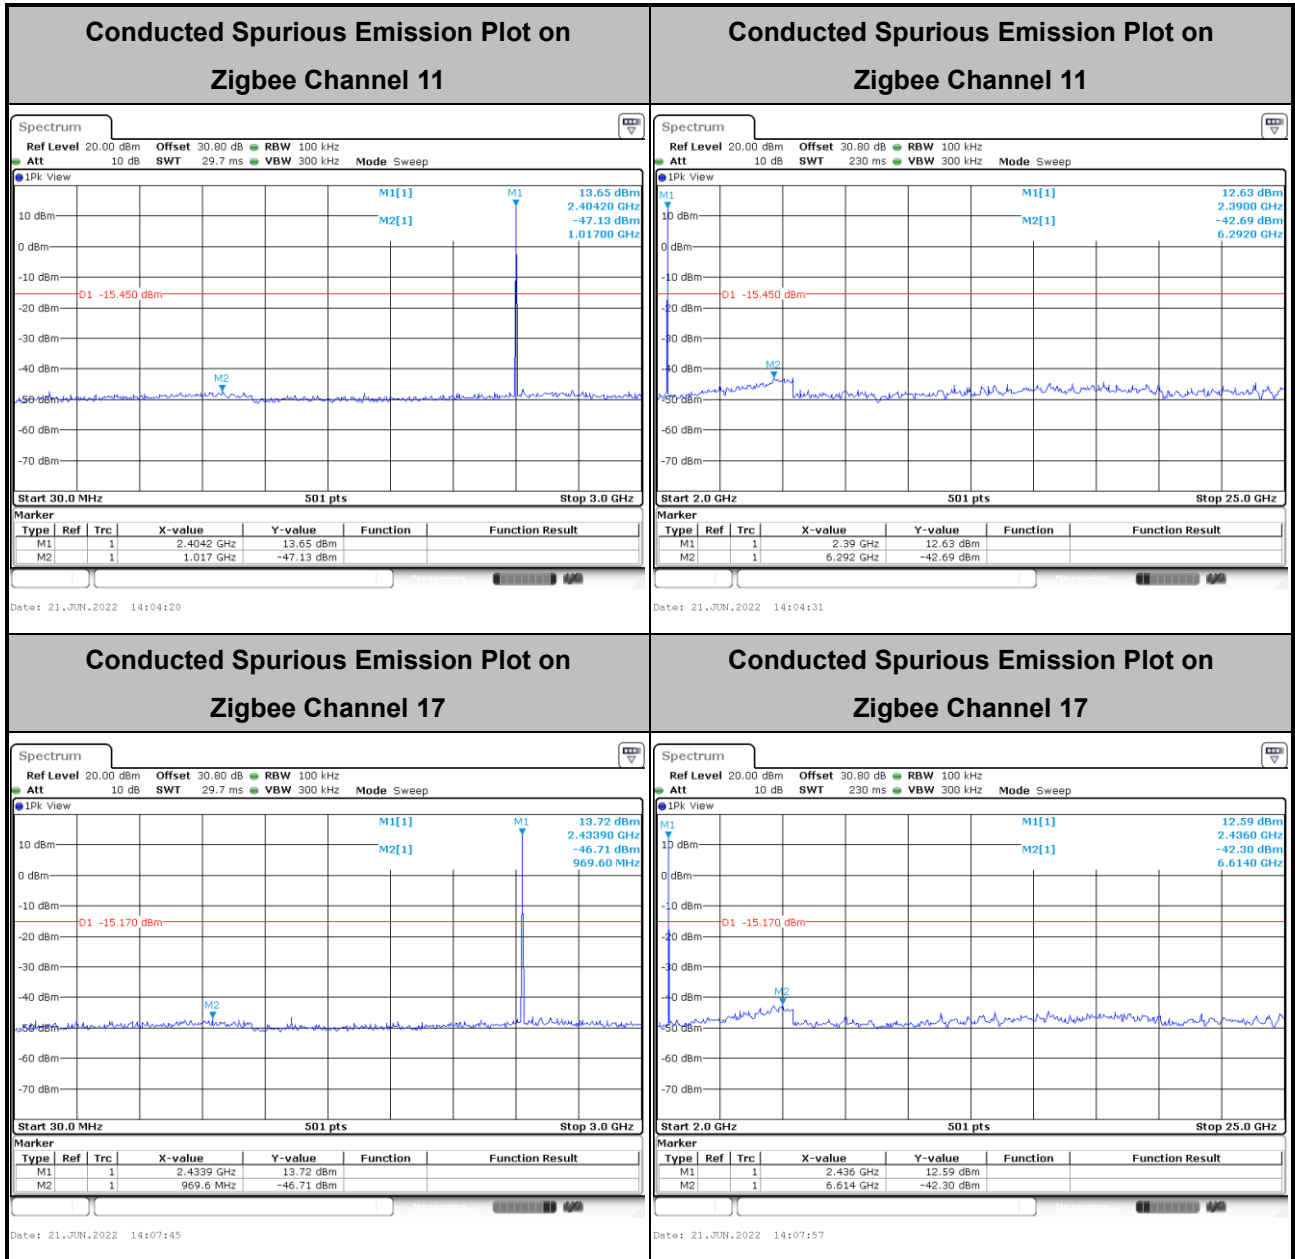

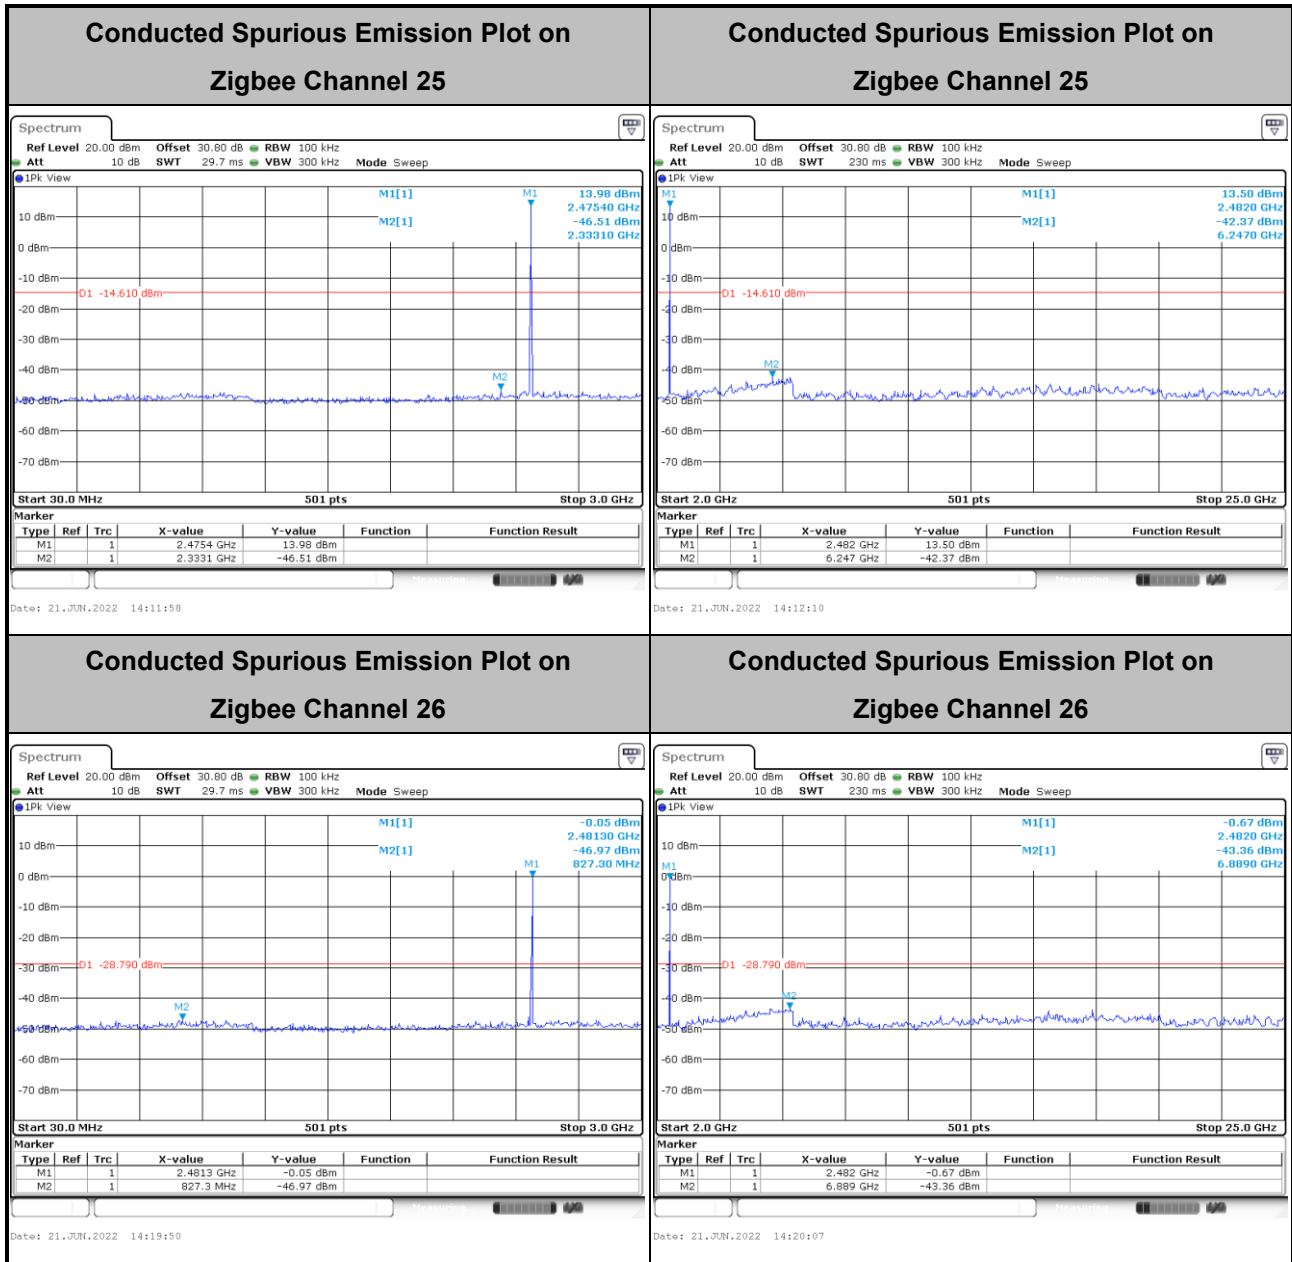



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT was placed at distance 3 meter from measurement antenna which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0degree to 360 degree to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6dB margin against QP limit line, the position is marked as "-".
7. Radiated testing above 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0 degree to 360 degree to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6dB margin against average limit line, the position is marked as "-".
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

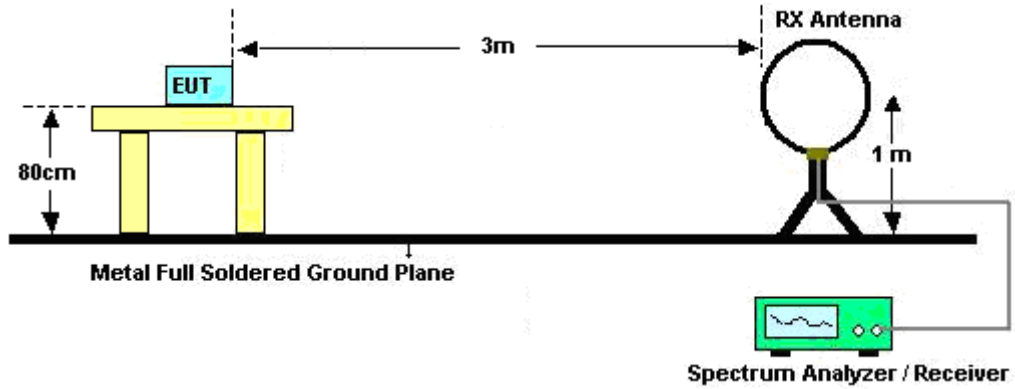


For radiated test from 30MHz to 1GHz

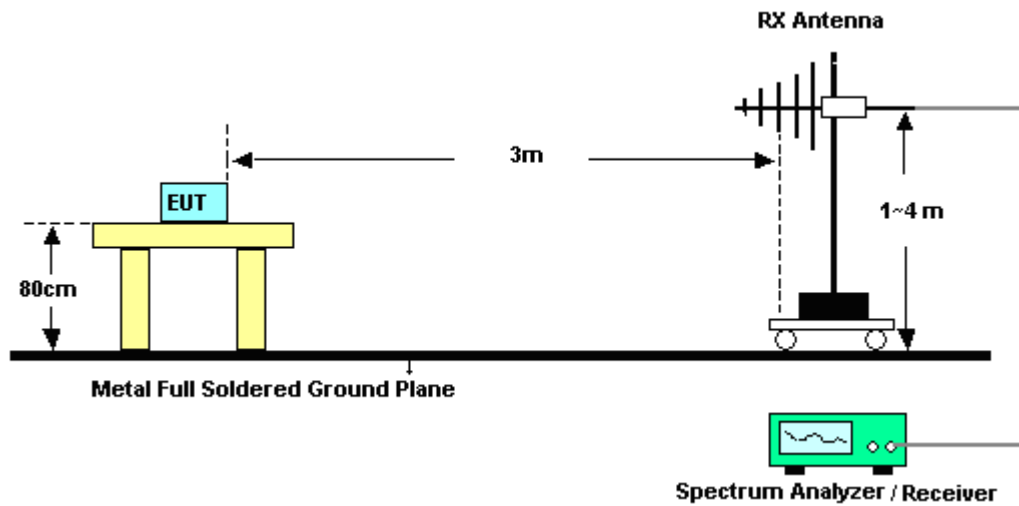

For radiated test from 1GHz to 18GHz

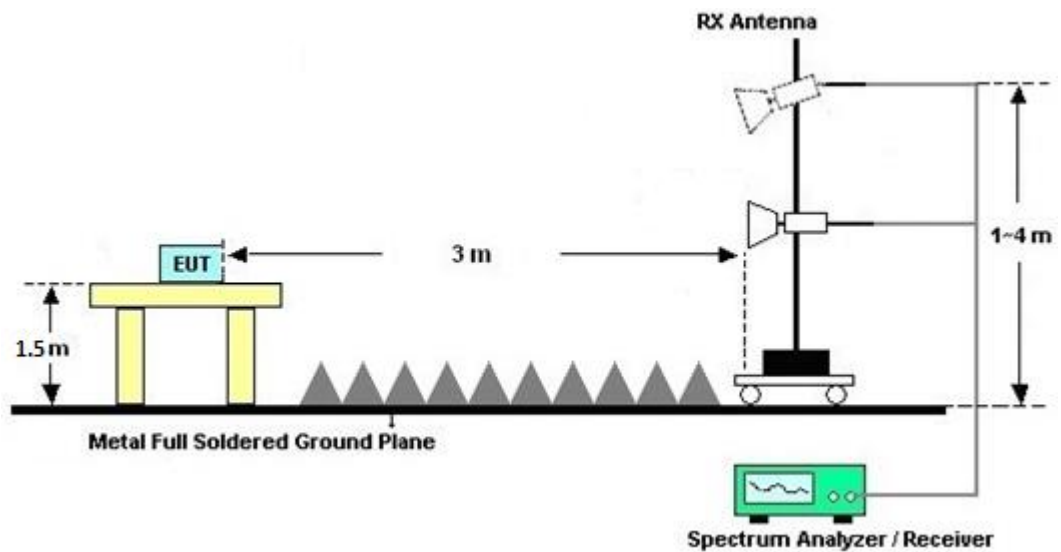

For radiated test above 18GHz

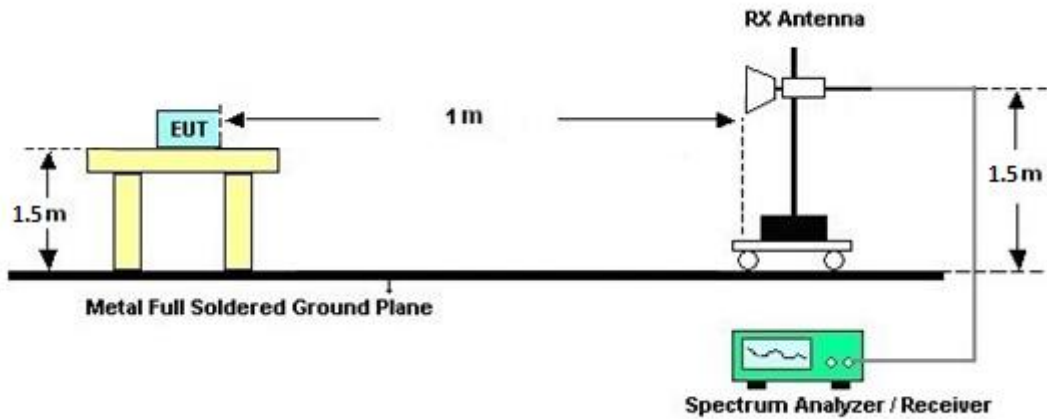

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

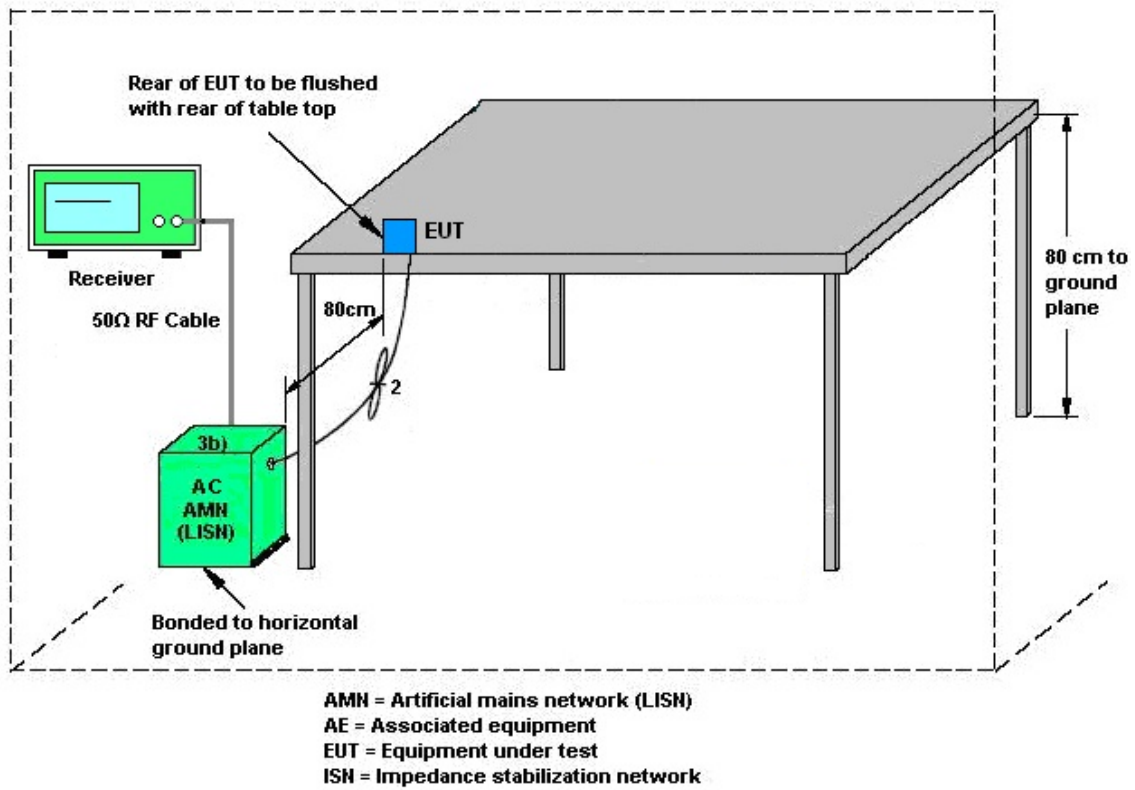

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 24, 2022	May 25, 2022 ~ Jun. 24, 2022	Apr. 23, 2023	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Dec. 03, 2021	May 25, 2022 ~ Jun. 24, 2022	Dec. 02, 2022	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz~40GHz	Nov. 30, 2021	May 25, 2022 ~ Jun. 24, 2022	Nov. 29, 2022	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 07, 2022	May 25, 2022 ~ Jun. 24, 2022	Jan. 06, 2023	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101800-30-10P	1590075	1GHz~18GHz	Apr. 21, 2022	May 25, 2022 ~ Jun. 24, 2022	Apr. 20, 2023	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 04, 2021	May 25, 2022 ~ Jun. 24, 2022	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Oct. 04, 2021	May 25, 2022 ~ Jun. 24, 2022	Oct. 03, 2022	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Jul. 23, 2021	May 25, 2022 ~ Jun. 24, 2022	Jul. 22, 2022	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Jul. 22, 2021	May 25, 2022 ~ Jun. 24, 2022	Jul. 21, 2022	Radiation (03CH07-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100472	20Hz~26.5GHz	Feb. 09, 2022	May 25, 2022 ~ Jun. 24, 2022	Feb. 08, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY15682/4	30MHz to 18GHz	Feb. 23, 2022	May 25, 2022 ~ Jun. 24, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4	9kHz to 18GHz	Feb. 23, 2022	May 25, 2022 ~ Jun. 24, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4	9kHz to 18GHz	Feb. 23, 2022	May 25, 2022 ~ Jun. 24, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 17, 2021	May 25, 2022 ~ Jun. 24, 2022	Sep. 16, 2022	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 23, 2022	May 25, 2022 ~ Jun. 24, 2022	Feb. 22, 2023	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 14, 2022	May 25, 2022 ~ Jun. 24, 2022	Apr. 13, 2023	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	May 25, 2022 ~ Jun. 24, 2022	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	May 25, 2022 ~ Jun. 24, 2022	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	May 25, 2022 ~ Jun. 24, 2022	N/A	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	May 25, 2022 ~ Jun. 24, 2022	N/A	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	May 25, 2022 ~ Jun. 24, 2022	N/A	Radiation (03CH07-HY)
Hygrometer	TECEPEL	TR-32	HE17XB2495	N/A	Mar. 07, 2022	May 25, 2022 ~ Jun. 24, 2022	Mar. 06, 2023	Radiation (03CH07-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 16, 2021	Jun. 13, 2022~ Jun. 21, 2022	Nov. 15, 2022	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO 12 (NO:113)	10MHz~6GHz	Dec. 16, 2021	Jun. 13, 2022~ Jun. 21, 2022	Dec. 15, 2022	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 30, 2021	Jun. 13, 2022~ Jun. 21, 2022	Aug. 29, 2022	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jun. 30, 2022	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 01, 2021	Jun. 30, 2022	Nov. 30, 2022	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 17, 2021	Jun. 30, 2022	Nov. 16, 2022	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 03, 2021	Jun. 30, 2022	Dec. 02, 2022	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Jun. 30, 2022	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 28, 2021	Jun. 30, 2022	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 30, 2021	Jun. 30, 2022	Dec. 29, 2022	Conduction (CO05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.0 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Mina Liu	Temperature:	21~25	°C
Test Date:	2022/6/13~2022/6/21	Relative Humidity:	51~54	%

TEST RESULTS DATA **6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250K	1	11	2405	2.213	1.569	0.50	Pass
Zigbee	250K	1	17	2435	2.213	1.569	0.50	Pass
Zigbee	250K	1	25	2475	2.203	1.569	0.50	Pass
Zigbee	250K	1	26	2480	2.223	1.584	0.50	Pass

TEST RESULTS DATA **Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250K	1	11	2405	17.50	30.00	4.10	21.60	36.00	Pass
Zigbee	250K	1	17	2435	17.70	30.00	4.10	21.80	36.00	Pass
Zigbee	250K	1	25	2475	18.20	30.00	4.10	22.30	36.00	Pass
Zigbee	250K	1	26	2480	4.10	30.00	4.10	8.20	36.00	Pass

TEST RESULTS DATA **Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250K	1	11	2405	14.55	1.82	4.10	8.00	Pass
Zigbee	250K	1	17	2435	14.83	2.31	4.10	8.00	Pass
Zigbee	250K	1	25	2475	15.39	2.93	4.10	8.00	Pass
Zigbee	250K	1	26	2480	1.21	-11.28	4.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~26°C
		Relative Humidity :	45~55%

EUT Information

Report NO : 251805
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

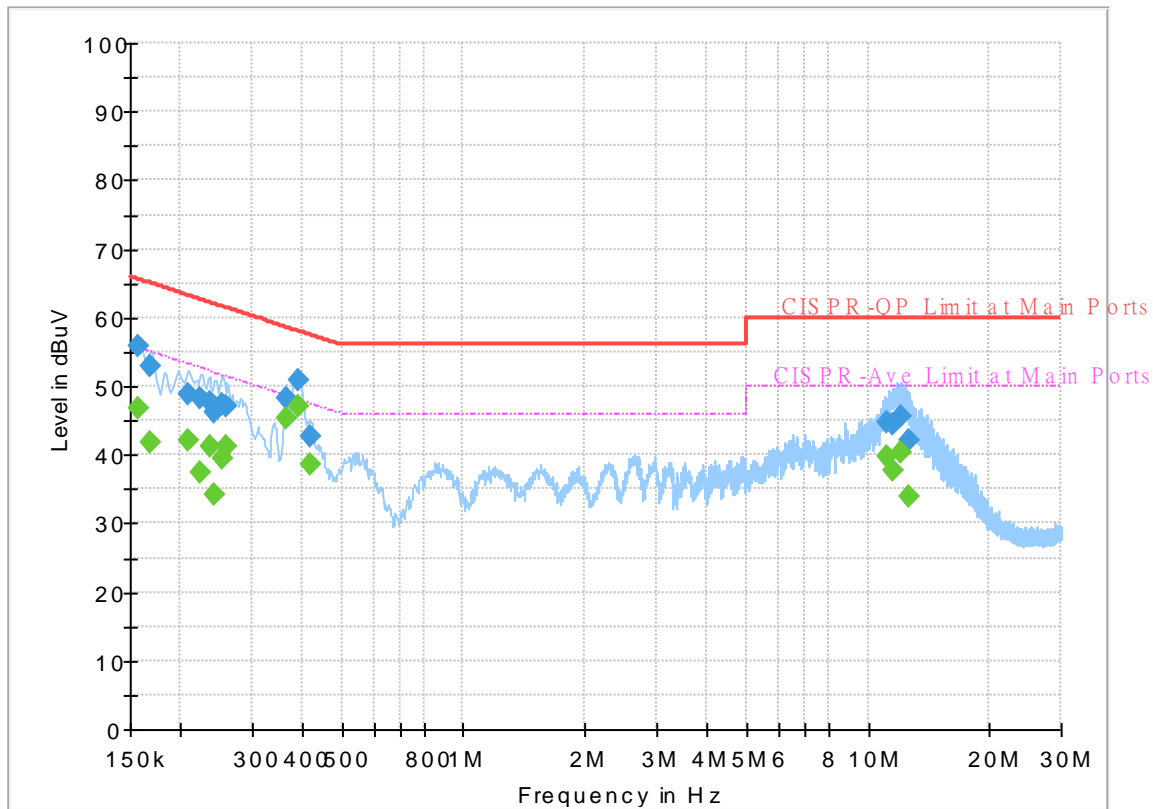

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.156750	---	46.86	55.63	8.77	L1	OFF	19.6
0.156750	55.79	---	65.63	9.84	L1	OFF	19.6
0.168000	---	41.78	55.06	13.28	L1	OFF	19.6
0.168000	52.80	---	65.06	12.26	L1	OFF	19.6
0.208500	---	42.05	53.27	11.22	L1	OFF	19.6
0.208500	48.94	---	63.27	14.33	L1	OFF	19.6
0.224250	---	37.48	52.66	15.18	L1	OFF	19.6
0.224250	48.13	---	62.66	14.53	L1	OFF	19.6
0.235500	---	41.21	52.25	11.04	L1	OFF	19.6
0.235500	47.75	---	62.25	14.50	L1	OFF	19.6
0.242250	---	34.28	52.02	17.74	L1	OFF	19.6
0.242250	46.14	---	62.02	15.88	L1	OFF	19.6
0.253500	---	39.52	51.64	12.12	L1	OFF	19.6
0.253500	47.38	---	61.64	14.26	L1	OFF	19.6
0.260250	---	41.35	51.42	10.07	L1	OFF	19.6
0.260250	47.09	---	61.42	14.33	L1	OFF	19.6
0.366000	---	45.44	48.59	3.15	L1	OFF	19.6
0.366000	48.13	---	58.59	10.46	L1	OFF	19.6
0.388500	---	47.05	48.10	1.05	L1	OFF	19.6
0.388500	50.78	---	58.10	7.32	L1	OFF	19.6
0.417750	---	38.74	47.49	8.75	L1	OFF	19.6

0.417750	42.63	---	57.49	14.86	L1	OFF	19.6
11.130000	---	39.73	50.00	10.27	L1	OFF	19.8
11.130000	44.66	---	60.00	15.34	L1	OFF	19.8
11.472000	---	37.83	50.00	12.17	L1	OFF	19.8
11.472000	44.42	---	60.00	15.58	L1	OFF	19.8
12.061500	---	40.38	50.00	9.62	L1	OFF	19.8
12.061500	45.58	---	60.00	14.42	L1	OFF	19.8
12.612750	---	34.06	50.00	15.94	L1	OFF	19.8
12.612750	42.18	---	60.00	17.82	L1	OFF	19.8

EUT Information

Report NO : 251805
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

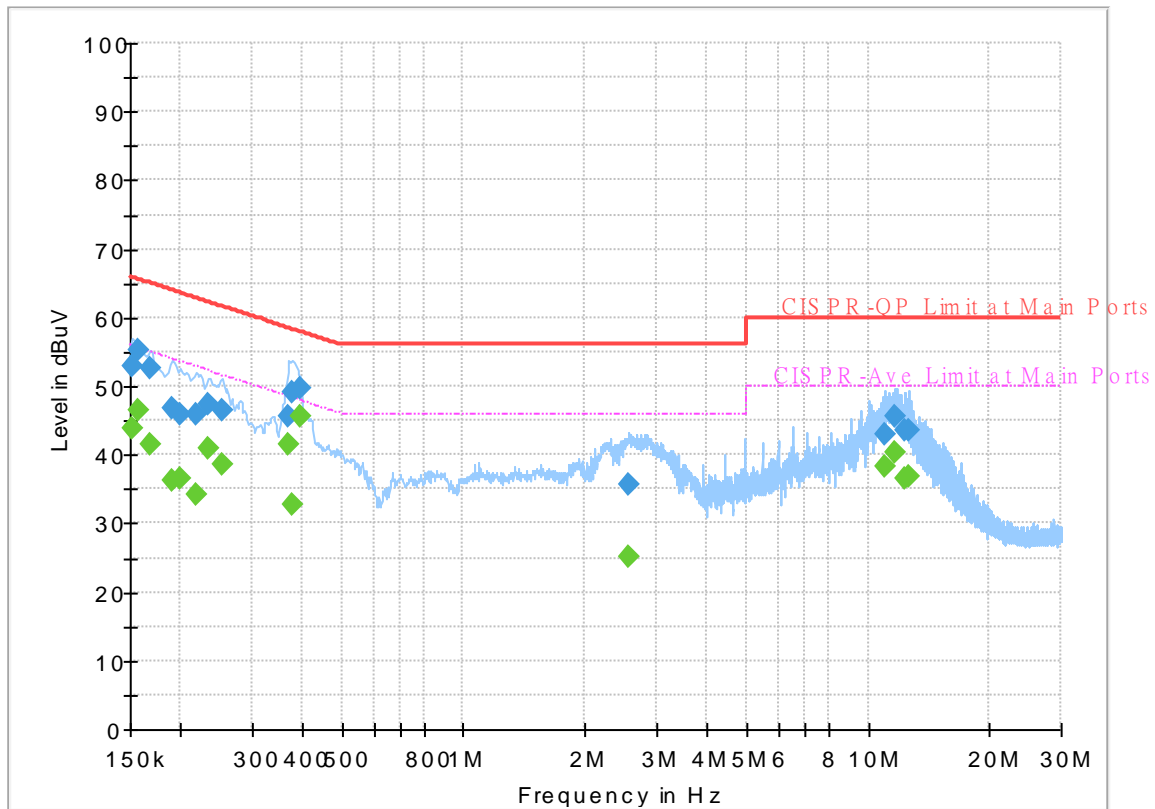

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	43.93	55.88	11.95	N	OFF	19.6
0.152250	53.00	---	65.88	12.88	N	OFF	19.6
0.156750	---	46.57	55.63	9.06	N	OFF	19.6
0.156750	55.32	---	65.63	10.31	N	OFF	19.6
0.168000	---	41.51	55.06	13.55	N	OFF	19.6
0.168000	52.58	---	65.06	12.48	N	OFF	19.6
0.190500	---	36.39	54.02	17.63	N	OFF	19.6
0.190500	46.81	---	64.02	17.21	N	OFF	19.6
0.199500	---	36.62	53.63	17.01	N	OFF	19.6
0.199500	46.02	---	63.63	17.61	N	OFF	19.6
0.217500	---	34.32	52.91	18.59	N	OFF	19.6
0.217500	45.91	---	62.91	17.00	N	OFF	19.6
0.233250	---	40.87	52.33	11.46	N	OFF	19.6
0.233250	47.24	---	62.33	15.09	N	OFF	19.6
0.253500	---	38.73	51.64	12.91	N	OFF	19.6
0.253500	46.52	---	61.64	15.12	N	OFF	19.6
0.368250	---	41.63	48.54	6.91	N	OFF	19.6
0.368250	45.63	---	58.54	12.91	N	OFF	19.6
0.379500	---	32.82	48.29	15.47	N	OFF	19.6
0.379500	49.19	---	58.29	9.10	N	OFF	19.6
0.393000	---	45.56	48.00	2.44	N	OFF	19.6

0.393000	49.81	---	58.00	8.19	N	OFF	19.6
2.557500	---	25.13	46.00	20.87	N	OFF	19.6
2.557500	35.81	---	56.00	20.19	N	OFF	19.6
11.022000	---	38.39	50.00	11.61	N	OFF	19.8
11.022000	42.99	---	60.00	17.01	N	OFF	19.8
11.699250	---	40.25	50.00	9.75	N	OFF	19.8
11.699250	45.57	---	60.00	14.43	N	OFF	19.8
12.284250	---	36.52	50.00	13.48	N	OFF	19.8
12.284250	43.68	---	60.00	16.32	N	OFF	19.8
12.610500	---	36.76	50.00	13.24	N	OFF	19.8
12.610500	43.50	---	60.00	16.50	N	OFF	19.8



Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	23.6~27.5°C
		Relative Humidity :	55.6~61.8%



2.4GHz 2400~2483.5MHz

Zigbee (Band Edge @ 3m)

Zigbee	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
Zigbee CH 11 2405MHz		2371.635	54.64	-19.36	74	40.26	31.4	18.39	35.41	146	17	P	H	
		2372.265	45.2	-8.8	54	30.82	31.4	18.39	35.41	146	17	A	H	
	*	2405	115.36	-	-	100.85	31.44	18.49	35.42	146	17	P	H	
	*	2405	113.64	-	-	99.13	31.44	18.49	35.42	146	17	A	H	
													H	
													H	
			2321.235	53.21	-20.79	74	38.85	31.52	18.23	35.39	340	139	P	V
			2373.84	43.18	-10.82	54	28.79	31.4	18.4	35.41	340	139	A	V
	*		2405	110.23	-	-	95.72	31.44	18.49	35.42	340	139	P	V
	*		2405	108.59	-	-	94.08	31.44	18.49	35.42	340	139	A	V
													V	
													V	
Zigbee CH 17 2435MHz		2369.78	53.38	-20.62	74	39	31.4	18.39	35.41	165	37	P	H	
		2371.32	43.37	-10.63	54	28.99	31.4	18.39	35.41	165	37	A	H	
	*	2435	115.38	-	-	100.6	31.68	18.53	35.43	165	37	P	H	
	*	2435	113.6	-	-	98.82	31.68	18.53	35.43	165	37	A	H	
			2483.5	54.64	-19.36	74	39.42	32.07	18.6	35.45	165	37	P	H
			2498.88	44.34	-9.66	54	28.98	32.19	18.63	35.46	165	37	A	H
			2376.5	53.21	-20.79	74	38.82	31.4	18.4	35.41	367	0	P	V
			2389.8	42.67	-11.33	54	28.24	31.4	18.45	35.42	367	0	A	V
	*		2435	108.76	-	-	93.98	31.68	18.53	35.43	367	0	P	V
	*		2435	107.02	-	-	92.24	31.68	18.53	35.43	367	0	A	V
			2493	53.59	-20.41	74	38.3	32.14	18.61	35.46	367	0	P	V
			2499.02	43.59	-10.41	54	28.23	32.19	18.63	35.46	367	0	A	V



Zigbee CH 25 2475MHz	*	2475	117.45	-	-	102.32	32	18.58	35.45	352	51	P	H
	*	2475	115.76	-	-	100.63	32	18.58	35.45	352	51	A	H
		2489.24	55.61	-18.39	74	40.34	32.11	18.61	35.45	352	51	P	H
		2483.56	45.57	-8.43	54	30.35	32.07	18.6	35.45	352	51	A	H
													H
													H
	*	2475	111.69	-	-	96.56	32	18.58	35.45	400	137	P	V
	*	2475	110.02	-	-	94.89	32	18.58	35.45	400	137	A	V
		2493.48	54.59	-19.41	74	39.28	32.15	18.62	35.46	400	137	P	V
		2483.52	44.08	-9.92	54	28.86	32.07	18.6	35.45	400	137	A	V
													V
													V
Zigbee CH 26 2480MHz	*	2480	102.13	-	-	86.94	32.04	18.6	35.45	137	67	P	H
	*	2480	100.47	-	-	85.28	32.04	18.6	35.45	137	67	A	H
		2483.52	59.96	-14.04	74	44.74	32.07	18.6	35.45	137	67	P	H
		2483.52	52.89	-1.11	54	37.67	32.07	18.6	35.45	137	67	A	H
													H
													H
	*	2480	99.24	-	-	84.05	32.04	18.6	35.45	352	312	P	V
	*	2480	97.55	-	-	82.36	32.04	18.6	35.45	352	312	A	V
		2483.64	57.6	-16.4	74	42.38	32.07	18.6	35.45	352	312	P	V
		2483.52	50.62	-3.38	54	35.4	32.07	18.6	35.45	352	312	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
Zigbee (Harmonic @ 3m)

Zigbee	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
Zigbee CH 11 2405MHz		4810	42.61	-31.39	74	54.87	34.02	12.71	58.99	-	-	P	H	
		7215	47.06	-26.94	74	53.96	35.43	15.09	57.42	-	-	P	H	
		9620	52.06	-21.94	74	57.47	36.6	17.42	59.43	-	-	P	H	
		12025	52.3	-21.7	74	50.51	38.75	19.24	56.2	100	74	P	H	
		12025	45.19	-8.81	54	43.4	38.75	19.24	56.2	100	74	A	H	
		14430	48.85	-25.15	74	45.31	39.46	21.62	57.54	-	-	P	H	
		14490	47.58	-26.42	74	43.87	39.58	21.65	57.52	-	-	P	H	
		16200	48.48	-25.52	74	40.68	41.2	22.72	56.12	-	-	P	H	
		16200	37.4	-16.6	54	29.6	41.2	22.72	56.12	-	-	A	H	
		17715	51.29	-22.71	74	41.41	41.51	23.55	55.18	-	-	P	H	
		17715	40.57	-13.43	54	30.69	41.51	23.55	55.18	-	-	A	H	
														H
			4810	42.6	-31.4	74	54.86	34.02	12.71	58.99	-	-	P	V
			7215	50.16	-23.84	74	57.06	35.43	15.09	57.42	-	-	P	V
			9620	54.68	-19.32	74	60.09	36.6	17.42	59.43	-	-	P	V
			12025	55.72	-18.28	74	53.93	38.75	19.24	56.2	340	0	P	V
			12025	50.11	-3.89	54	48.32	38.75	19.24	56.2	340	0	A	V
			14430	53.04	-20.96	74	49.5	39.46	21.62	57.54	-	-	P	V
			14490	47.49	-26.51	74	43.78	39.58	21.65	57.52	-	-	P	V
			15855	48.95	-25.05	74	41.86	40.81	22.51	56.23	-	-	P	V
			15855	38.36	-15.64	54	31.27	40.81	22.51	56.23	-	-	A	V
			17865	51.2	-22.8	74	41.2	41.47	23.64	55.11	-	-	P	V
			17865	40.27	-13.73	54	30.27	41.47	23.64	55.11	-	-	A	V
														V



Zigbee	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Zigbee CH 17 2435MHz		4870	44.26	-29.74	74	56.34	34.06	12.74	58.88	-	-	P	H
		7305	49.67	-24.33	74	56.5	35.62	15.04	57.49	320	298	P	H
		7305	43.93	-10.07	54	50.76	35.62	15.04	57.49	320	298	A	H
		9740	50.77	-23.23	74	56.09	36.68	17.36	59.36	-	-	P	H
		12175	52.91	-21.09	74	51.04	38.83	19.41	56.37	302	28	P	H
		12175	46.24	-7.76	54	44.37	38.83	19.41	56.37	302	28	A	H
		14499	47.8	-26.2	74	44.06	39.6	21.66	57.52	-	-	P	H
		14610	47.15	-26.85	74	43.46	39.51	21.73	57.55	-	-	P	H
		15705	49.21	-24.79	74	42.85	40.42	22.41	56.47	-	-	P	H
		15705	38.16	-15.84	54	31.8	40.42	22.41	56.47	-	-	A	H
		17700	50.39	-23.61	74	40.53	41.5	23.55	55.19	-	-	P	H
		17700	40.62	-13.38	54	30.76	41.5	23.55	55.19	-	-	A	H
		4870	44.85	-29.15	74	56.93	34.06	12.74	58.88	-	-	P	V
		7305	53.16	-20.84	74	59.99	35.62	15.04	57.49	317	220	P	V
		7305	47.32	-6.68	54	54.15	35.62	15.04	57.49	317	220	A	V
		9740	54.04	-19.96	74	59.36	36.68	17.36	59.36	-	-	P	V
		12175	56.03	-17.97	74	54.16	38.83	19.41	56.37	318	5	P	V
		12175	50.46	-3.54	54	48.59	38.83	19.41	56.37	318	5	A	V
		14475	48.34	-25.66	74	44.67	39.55	21.65	57.53	-	-	P	V
		14475	37.88	-16.12	54	34.21	39.55	21.65	57.53	-	-	A	V
		14610	53.31	-20.69	74	49.62	39.51	21.73	57.55	-	-	P	V
		15855	49.05	-24.95	74	41.96	40.81	22.51	56.23	-	-	P	V
		15855	38.29	-15.71	54	31.2	40.81	22.51	56.23	-	-	A	V
		17850	51.1	-22.9	74	41.1	41.5	23.62	55.12	-	-	P	V
	17850	40.35	-13.65	54	30.35	41.5	23.62	55.12	-	-	A	V	



Zigbee	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Zigbee CH 25 2475MHz		4950	44.28	-29.72	74	56.1	34.1	12.81	58.73	-	-	P	H
		7425	50.58	-23.42	74	57.3	35.85	15.01	57.58	331	299	P	H
		7425	45.2	-8.8	54	51.92	35.85	15.01	57.58	331	299	A	H
		9900	53.19	-20.81	74	57.96	37	17.48	59.25	-	-	P	H
		12375	53.95	-20.05	74	51.97	38.95	19.62	56.59	293	28	P	H
		12375	47.73	-6.27	54	45.75	38.95	19.62	56.59	293	28	A	H
		14475	48.13	-25.87	74	44.46	39.55	21.65	57.53	-	-	P	H
		14475	37.93	-16.07	54	34.26	39.55	21.65	57.53	-	-	A	H
		14850	47.73	-26.27	74	43.77	39.7	21.88	57.62	-	-	P	H
		15840	49.34	-24.66	74	42.31	40.78	22.5	56.25	-	-	P	H
		15840	38.22	-15.78	54	31.19	40.78	22.5	56.25	-	-	A	H
		17775	50.68	-23.32	74	40.67	41.57	23.59	55.15	-	-	P	H
		17775	40.67	-13.33	54	30.66	41.57	23.59	55.15	-	-	A	H
		4950	43.61	-30.39	74	55.43	34.1	12.81	58.73	-	-	P	V
		7425	53.17	-20.83	74	59.89	35.85	15.01	57.58	271	180	P	V
		7425	48.13	-5.87	54	54.85	35.85	15.01	57.58	271	180	A	V
		9900	55.55	-18.45	74	60.32	37	17.48	59.25	-	-	P	V
		12375	58.18	-15.82	74	56.2	38.95	19.62	56.59	327	190	P	V
		12375	52.8	-1.2	54	50.82	38.95	19.62	56.59	327	190	A	V
		14499	48.9	-25.1	74	45.16	39.6	21.66	57.52	-	-	P	V
		14499	37.99	-16.01	54	34.25	39.6	21.66	57.52	-	-	A	V
		14850	52.8	-21.2	74	48.84	39.7	21.88	57.62	-	-	P	V
		16140	48.36	-25.64	74	40.56	41.2	22.68	56.08	-	-	P	V
		16140	38.89	-15.11	54	31.09	41.2	22.68	56.08	-	-	A	V
	17790	51.54	-22.46	74	41.5	41.59	23.6	55.15	-	-	P	V	
	17790	40.54	-13.46	54	30.5	41.59	23.6	55.15	-	-	A	V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 												



Zigbee	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
Zigbee CH 26 2480MHz		4960	40.71	-33.29	74	52.5	34.1	12.82	58.71	-	-	P	H	
		7440	41.2	-32.8	74	47.94	35.82	15.03	57.59	-	-	P	H	
		14490	47.43	-26.57	74	43.72	39.58	21.65	57.52	-	-	P	H	
		15855	48.69	-25.31	74	41.6	40.81	22.51	56.23	-	-	P	H	
		15855	38.36	-15.64	54	31.27	40.81	22.51	56.23	-	-	A	H	
		17805	51.23	-22.77	74	41.18	41.59	23.6	55.14	-	-	P	H	
		17805	40.5	-13.5	54	30.45	41.59	23.6	55.14	-	-	A	H	
														H
														H
														H
														H
														H
														H
			4960	40.11	-33.89	74	51.9	34.1	12.82	58.71	-	-	P	V
			7440	41.16	-32.84	74	47.9	35.82	15.03	57.59	-	-	P	V
			14499	47.59	-26.41	74	43.85	39.6	21.66	57.52	-	-	P	V
			15840	48.61	-25.39	74	41.58	40.78	22.5	56.25	-	-	P	V
			15840	38.12	-15.88	54	31.09	40.78	22.5	56.25	-	-	A	V
			17730	50.83	-23.17	74	40.91	41.53	23.56	55.17	-	-	P	V
			17730	40.53	-13.47	54	30.61	41.53	23.56	55.17	-	-	A	V
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. The emission level close to 18GHz is checked that the average emission level is noise floor only. 													



Emission after 18GHz

2.4GHz Zigbee (SHF)

Zigbee	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
2.4GHz Zigbee SHF		24531	37.68	-36.32	74	47.69	38.7	9.07	57.78	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24944	37.34	-36.66	74	46.56	38.95	9.27	57.44	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Emission below 1GHz

2.4GHz Zigbee (LF)

Zigbee	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz Zigbee LF		58.35	26.55	-13.45	40	43.47	11.83	1.29	30.04	-	-	P	H	
		125.04	31.79	-11.71	43.5	42.26	17.52	1.94	29.93	-	-	P	H	
		208.47	33.3	-10.2	43.5	45.61	14.97	2.54	29.82	-	-	P	H	
		500.2	31.82	-14.18	46	33.9	23.82	3.88	29.78	-	-	P	H	
		729.1	35.77	-10.23	46	33.64	26.89	4.72	29.48	-	-	P	H	
		952.4	34.44	-11.56	46	27.09	30.43	5.56	28.64	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30.81	30.6	-9.4	40	35.74	23.97	1	30.11	100	13	Q	V
			57.54	31.46	-8.54	40	48.21	12.01	1.28	30.04	100	185	Q	V
			125.04	33.42	-10.08	43.5	43.89	17.52	1.94	29.93	-	-	P	V
			729.1	37.14	-8.86	46	35.01	26.89	4.72	29.48	-	-	P	V
			947.5	33.32	-12.68	46	26.34	30.1	5.54	28.66	-	-	P	V
			954.5	34.08	-11.92	46	26.63	30.52	5.57	28.64	-	-	P	V
														V
														V
													V	
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is "PASS".



Appendix D. Radiated Spurious Emission Plots





Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	23.6~27.5°C
		Relative Humidity :	55.6~61.8%

Note symbol





-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz
Zigbee (Band Edge @ 3m)

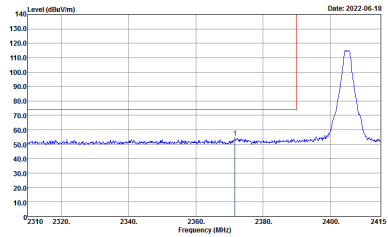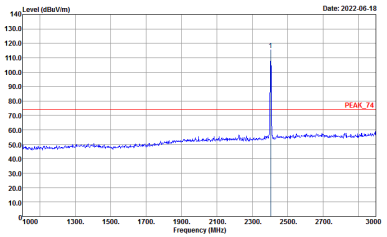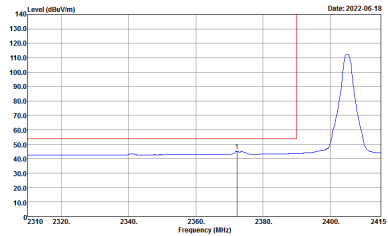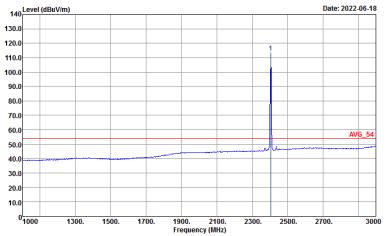Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH11 2405MHz	
	Horizontal	Fundamental
Peak	 <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>	 <p>Site Condition : 03CH07-HY : PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>
Avg.	 <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWFAuto</p>	 <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWFAuto</p>

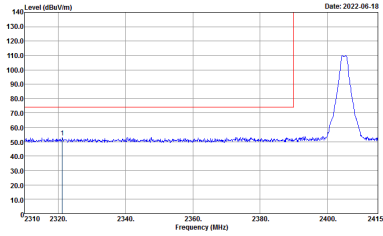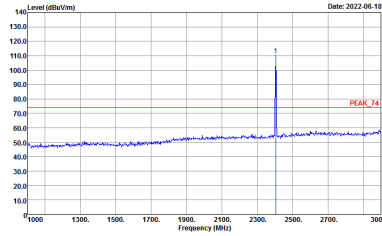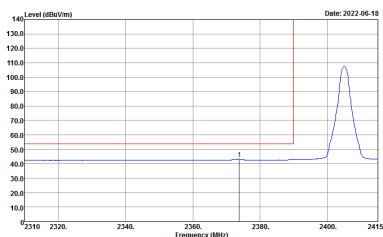
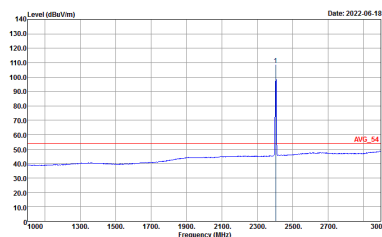


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH11 2405MHz	
	Vertical	Fundamental
Peak	 <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>	 <p>Site Condition : 03CH07-HY : PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>
Avg	 <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWFAuto</p>	 <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWFAuto</p>



Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH17 2435MHz - L	
	Horizontal	Fundamental
Peak	<p>Date: 2022-06-18</p> <p>Site : 03CH07-HY Condition : PEAK_BE_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Date: 2022-06-18</p> <p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Date: 2022-06-18</p> <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Date: 2022-06-18</p> <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>

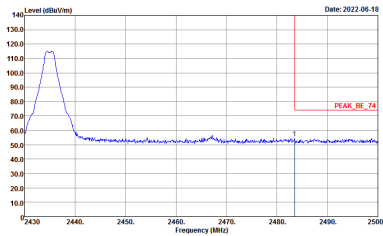
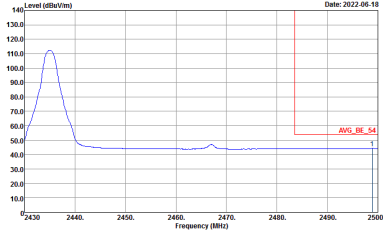


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH17 2435MHz - R	
	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:2000.000kHz SWT:Auto</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Left blank</p>







Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH17 2435MHz - L	
	Vertical	Fundamental
Peak	<p>Date: 2022-06-18</p> <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Date: 2022-06-18</p> <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Date: 2022-06-18</p> <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Date: 2022-06-18</p> <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>



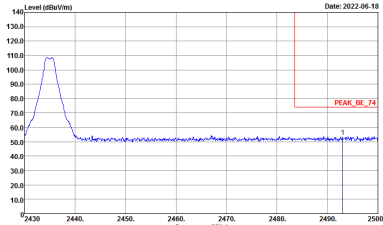
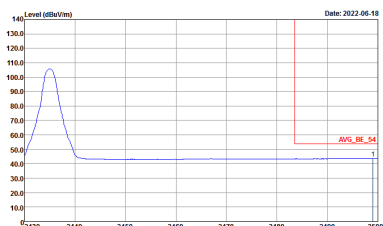


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH17 2435MHz - R	
	Vertical	Fundamental
<p>Peak</p>	 <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00070962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00070962 VERTICAL : RBW:1000.000kHz VBW:0.0100kHz SWT:Auto</p>	<p>Left blank</p>

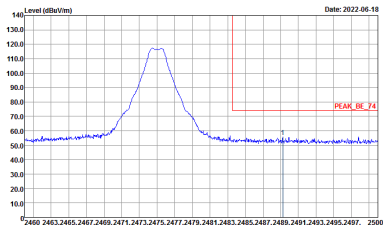
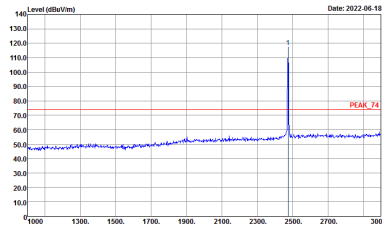
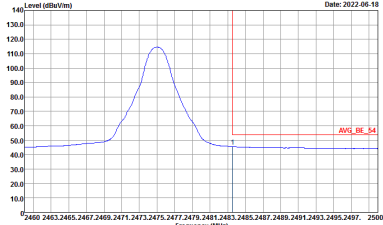
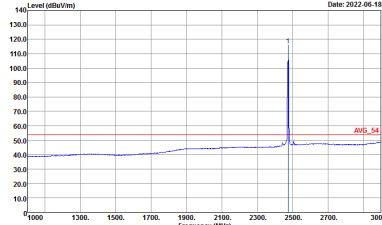


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH25 2475MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>	 <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>
Avg.	 <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWFAuto</p>	 <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWFAuto</p>

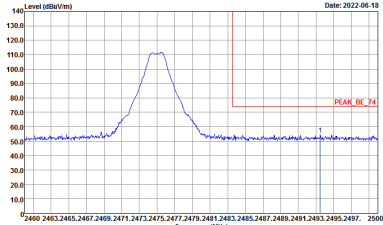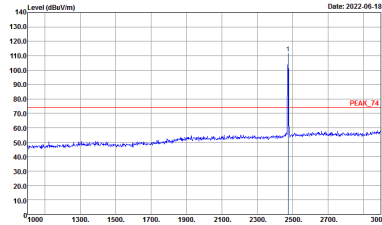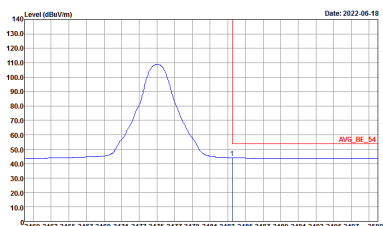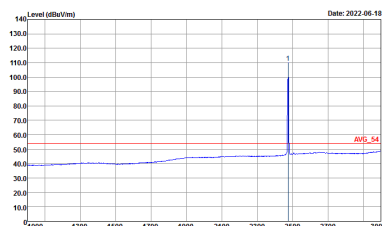

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
Zigbee CH25 2475MHz		
Vertical		Fundamental
Peak	 <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	 <p>Site Condition : 03CH07-HY : PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>
Avg.	 <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWF:Auto</p>	 <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWF:Auto</p>

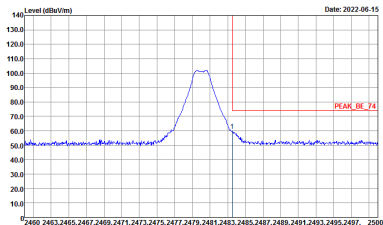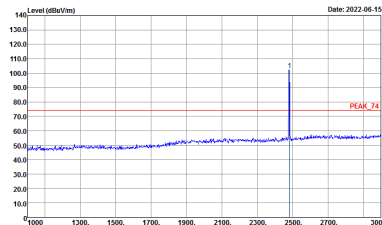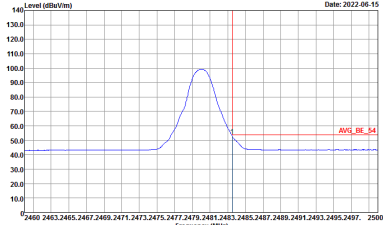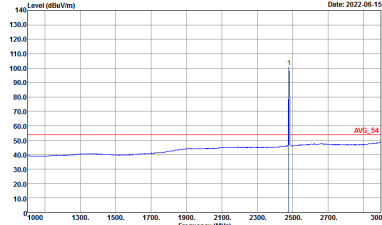

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
Zigbee CH26 2480MHz		
Horizontal		Fundamental
Peak	 <p>Date: 2022-06-15</p> <p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>	 <p>Date: 2022-06-15</p> <p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>
Avg.	 <p>Date: 2022-06-15</p> <p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWFAuto</p>	 <p>Date: 2022-06-15</p> <p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWFAuto</p>



Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH26 2480MHz	
	Vertical	Fundamental
Peak	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWFAuto</p>
Avg.	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWFAuto</p>	<p>Site : 03CH07-HY Condition : AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWFAuto</p>



2.4GHz 2400~2483.5MHz
Zigbee (Harmonic @ 3m)

Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH11 2405MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH17 2435MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 VERTICAL</p>



Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH25 2475MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 3m HF_ANT_00075962 VERTICAL</p>



Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH26 2480MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_24 3m HF_ANT_00075962 VERTICAL</p>



Emission above 18GHz
2.4GHz Zigbee (SHF @ 1m)

Zigbee	2.4GHz 2400~2483.5MHz	
	Zigbee SHF	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH07-HY Condition : PEAK_74 1m SHF-EHF_5170251 HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : PEAK_74 1m SHF-EHF_5170251 VERTICAL</p>



Emission below 1GHz
2.4GHz Zigbee (LF)

Zigbee	2.4GHz 2400~2483.5MHz	
	Zigbee LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6) HORIZONTAL</p>	<p>Site : 03CH07-HY Condition : QP 3m LF-ANT-35419(6) VERTICAL</p>



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Zigbee	100.00	-	-	10Hz

