


VERTICAL RESULT

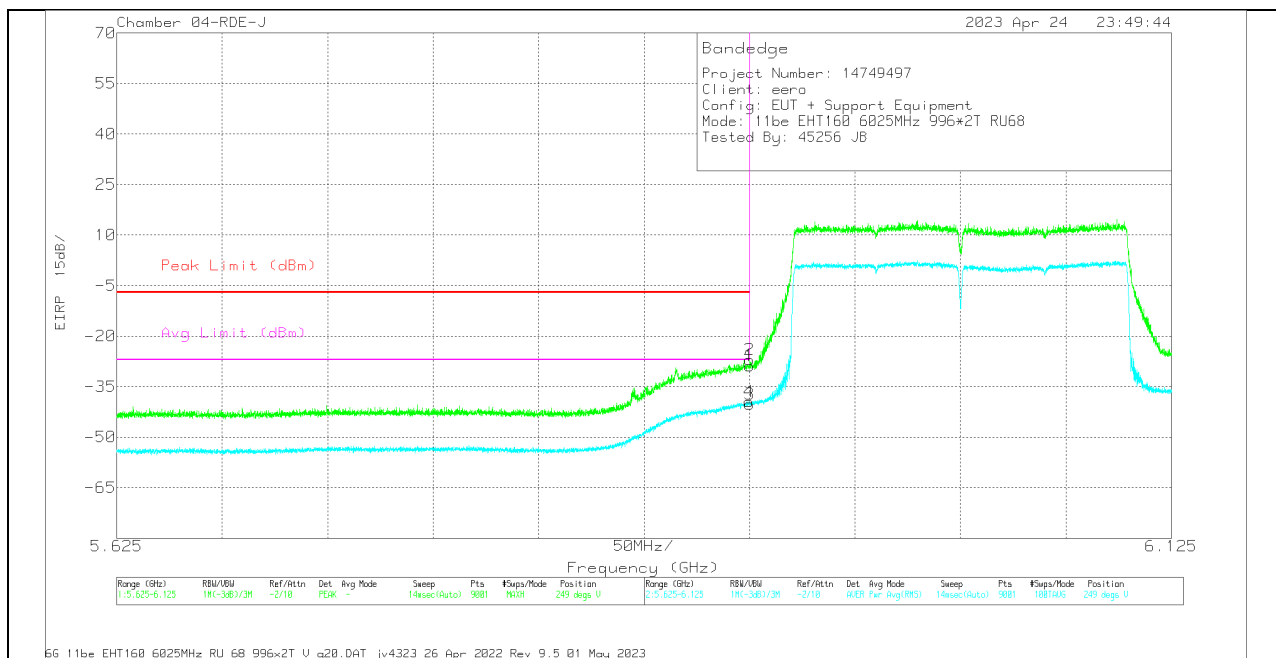

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Amp/Cb/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-62.05	Pk	35	-13.5	11.8	-28.75	-7	-21.75	-	-	249	145	V
2	5924.947	-60.26	Pk	35	-13.5	11.8	-26.96	-7	-19.96	-	-	249	145	V
3	5925	-73.57	RMS	35	-13.5	11.8	-40.27	-	-	-27	-13.27	249	145	V
4	5924.836	-72.68	RMS	35	-13.5	11.8	-39.38	-	-	-27	-12.38	249	145	V

Pk - Peak detector
RMS - RMS detection

4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 2x 996-Tones, RU 68

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

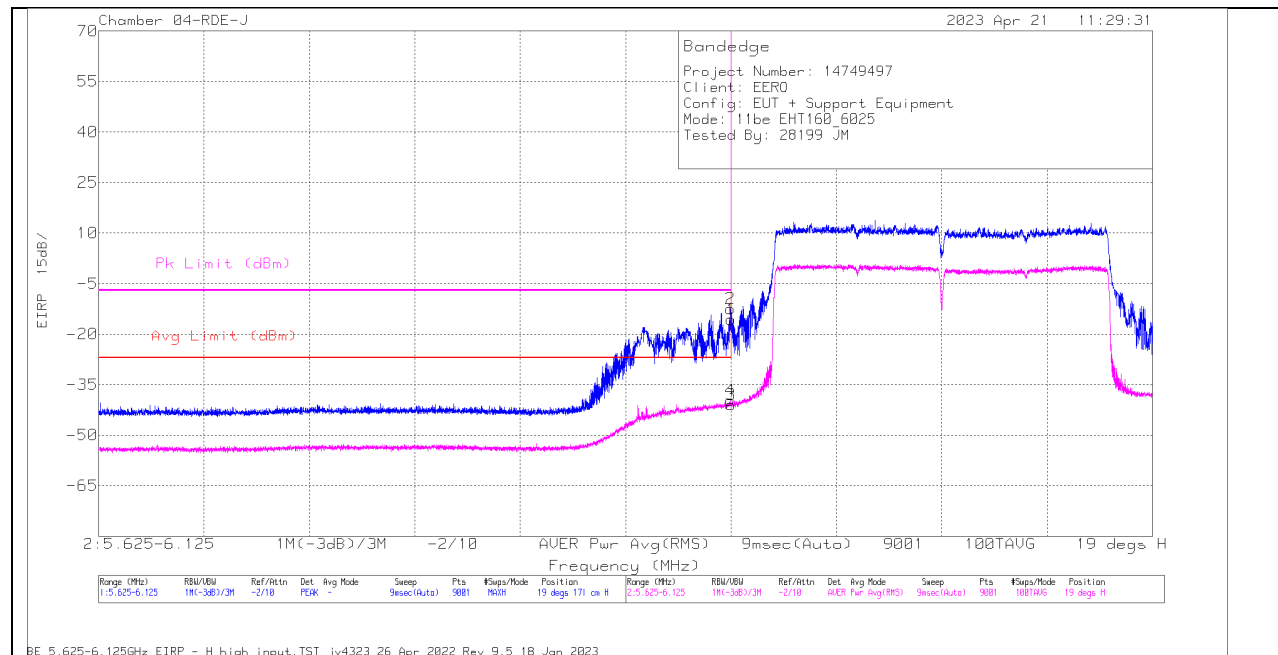


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-48.88	Pk	35	-13.5	11.8	-15.58	-	-	-7	-8.58	19	171	H
2	5924.669	-45.76	Pk	35	-13.5	11.8	-12.46	-	-	-7	-5.46	19	171	H
3	5925	-74.21	RMS	35	-13.5	11.8	-40.91	-27	-13.91	-	-	19	171	H
4	5924.725	-72.92	RMS	35	-13.5	11.8	-39.62	-27	-12.62	-	-	19	171	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

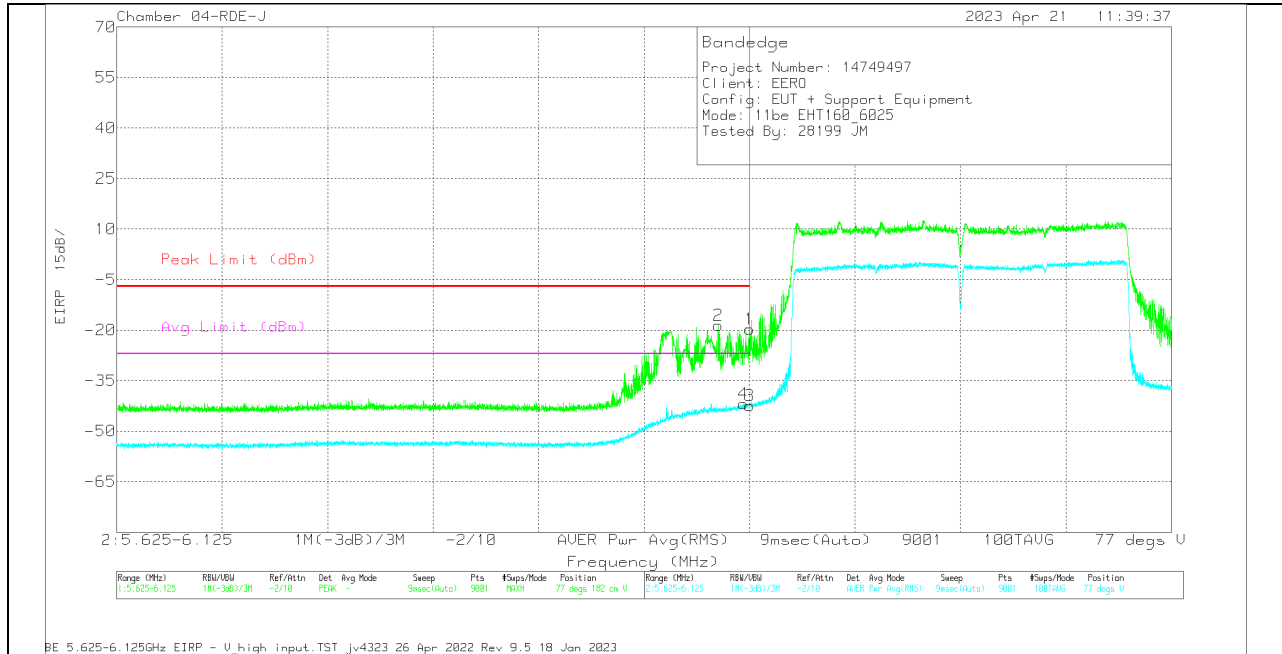



Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-53.01	Pk	35	-13.5	11.8	-19.71	-7	-12.71	-	-	77	182	V
2	5910.113	-51.6	Pk	34.9	-13.7	11.8	-18.6	-7	-11.6	-	-	77	182	V
3	5925	-75.75	RMS	35	-13.5	11.8	-42.45	-	-	-27	-15.45	77	182	V
4	5921.947	-75.16	RMS	35	-13.5	11.8	-41.86	-	-	-27	-14.86	77	182	V

Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW

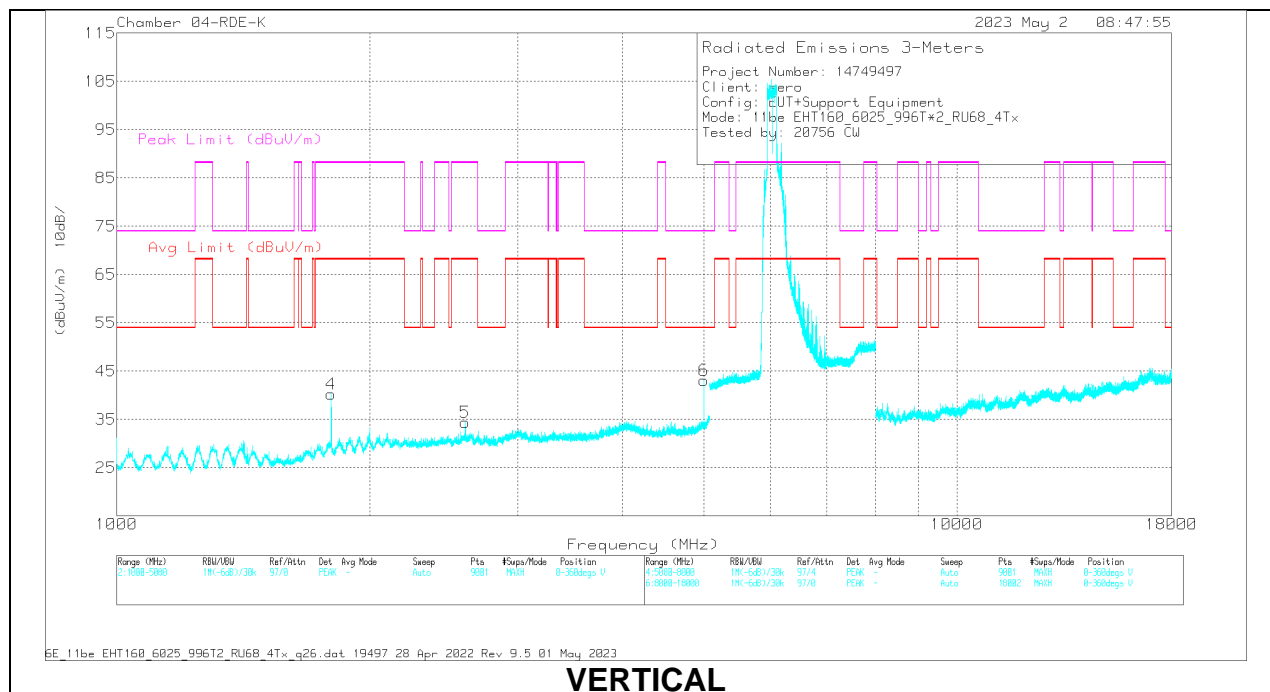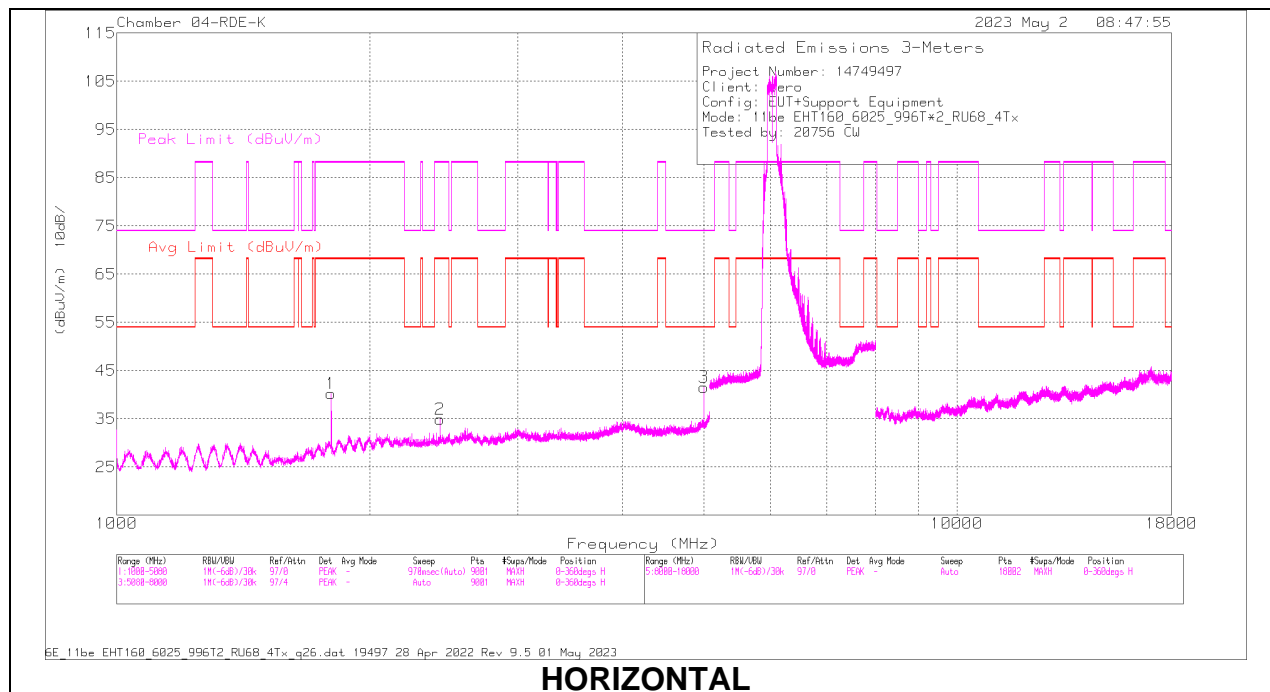

RADIATED EMISSIONS


	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.03	60.57	PK-U	30.2	-45.8	44.97	-	-	88.2	-43.23	184	209	H
	1800.074	54.57	ADR	30.2	-45.8	38.97	68.2	-29.23	-	-	184	209	H
2	2427.634	54.58	PK-U	31.9	-44.4	42.08	-	-	88.2	-46.12	219	227	H
	2427.422	43.08	ADR	31.9	-44.4	30.58	68.2	-37.62	-	-	219	227	H
3	* 4999.959	53.44	PK-U	33.8	-39	48.24	-	-	74	-25.76	207	292	H
	* 5000.061	47.87	ADR	33.8	-39	42.67	54	-11.33	-	-	207	292	H
4	1799.623	62.38	PK-U	30.2	-45.8	46.78	-	-	88.2	-41.42	200	249	V
	1800.015	57.32	ADR	30.2	-45.8	41.72	68.2	-26.48	-	-	200	249	V
5	2599.696	54.7	PK-U	32.2	-43.9	43	-	-	88.2	-45.2	193	208	V
	2600.108	44.44	ADR	32.2	-43.9	32.74	68.2	-35.46	-	-	193	208	V
6	* 4999.981	53.74	PK-U	33.8	-39	48.54	-	-	74	-25.46	178	149	V
	* 5000.006	48.29	ADR	33.8	-39	43.09	54	-10.91	-	-	178	149	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID

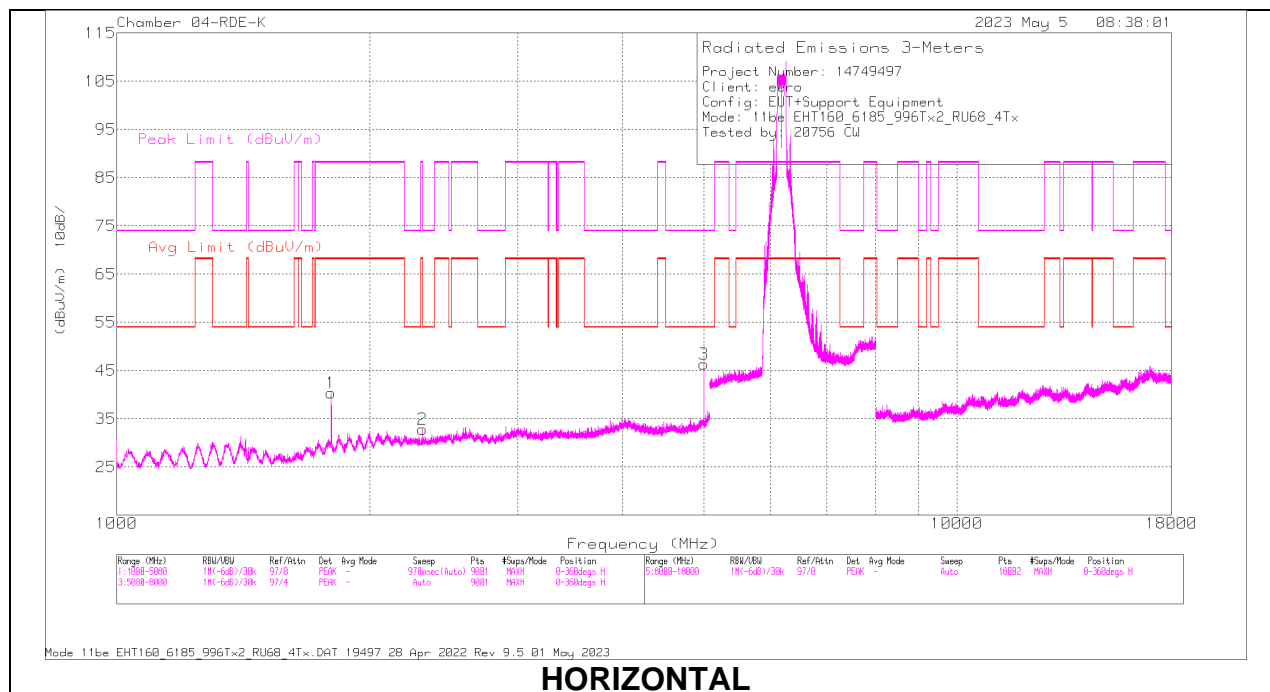

HORIZONTAL

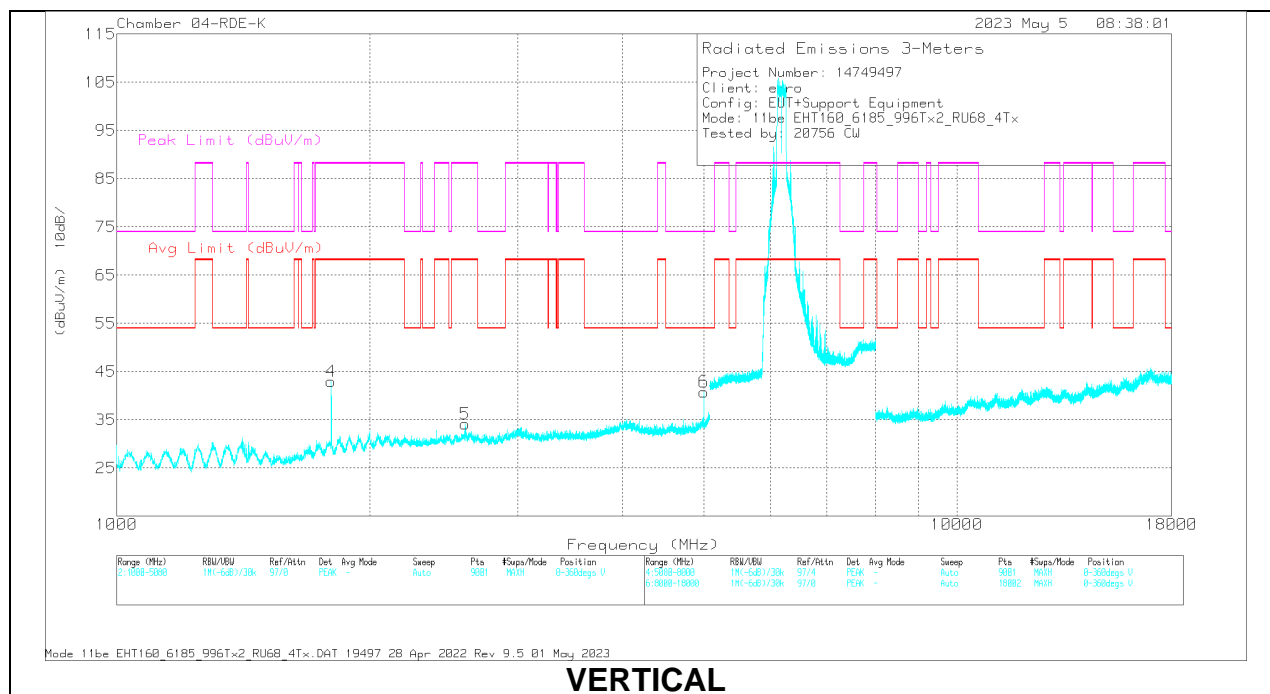

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1799.945	59.65	PK-U	30.2	-45.8	44.05	-	-	88.2	-44.15	157	165	H
	1799.973	52.53	ADR	30.2	-45.8	36.93	68.2	-31.27	-	-	157	165	H
2	* 2312.453	54.71	PK-U	31.4	-44.8	41.31	-	-	74	-32.69	83	273	H
	* 2312.342	43.18	ADR	31.4	-44.8	29.78	54	-24.22	-	-	83	273	H
3	* 5000.117	54.69	PK-U	33.8	-39	49.49	-	-	74	-24.51	201	174	H
	* 5000.01	49.63	ADR	33.8	-39	44.43	54	-9.57	-	-	201	174	H
4	1800.023	61.66	PK-U	30.2	-45.8	46.06	-	-	88.2	-42.14	196	292	V
	1800.05	55.93	ADR	30.2	-45.8	40.33	68.2	-27.87	-	-	196	292	V
5	2600.108	55.33	PK-U	32.2	-43.9	43.63	-	-	88.2	-44.57	262	229	V
	2599.867	45.09	ADR	32.2	-43.9	33.39	68.2	-34.81	-	-	262	229	V
6	* 4999.962	52.59	PK-U	33.8	-39	47.39	-	-	74	-26.61	180	150	V
	* 5000.01	45.97	ADR	33.8	-39	40.77	54	-13.23	-	-	180	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH

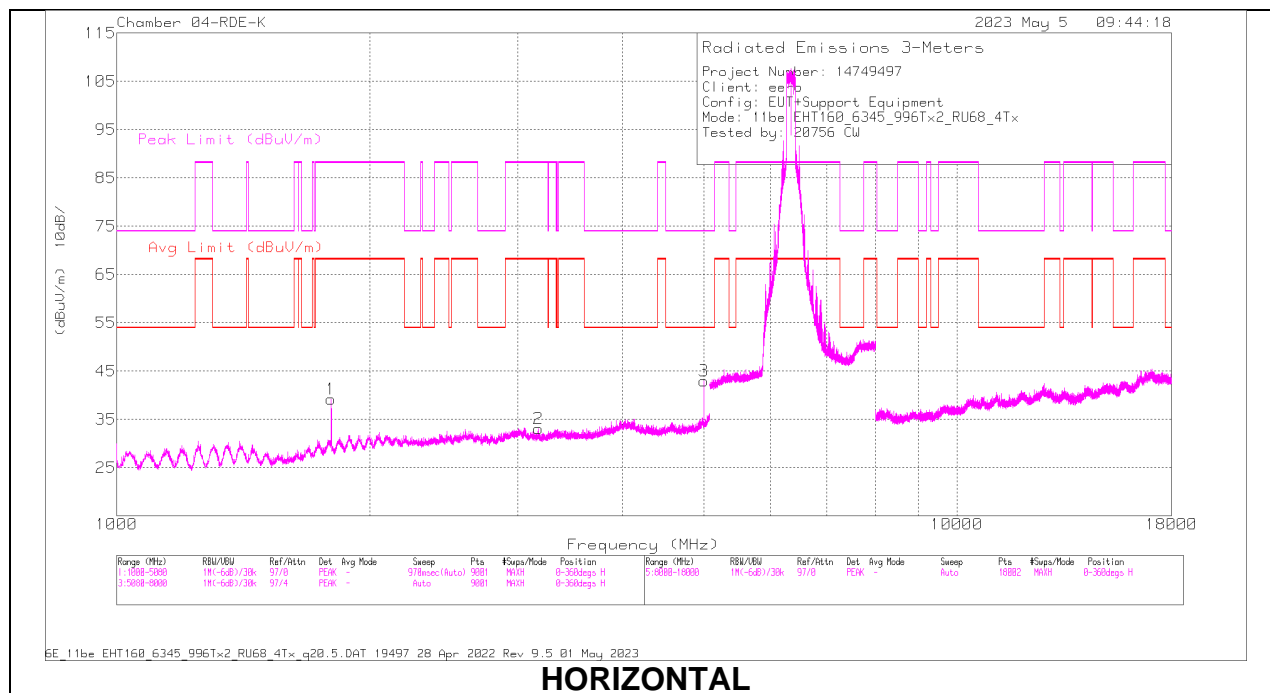

HORIZONTAL

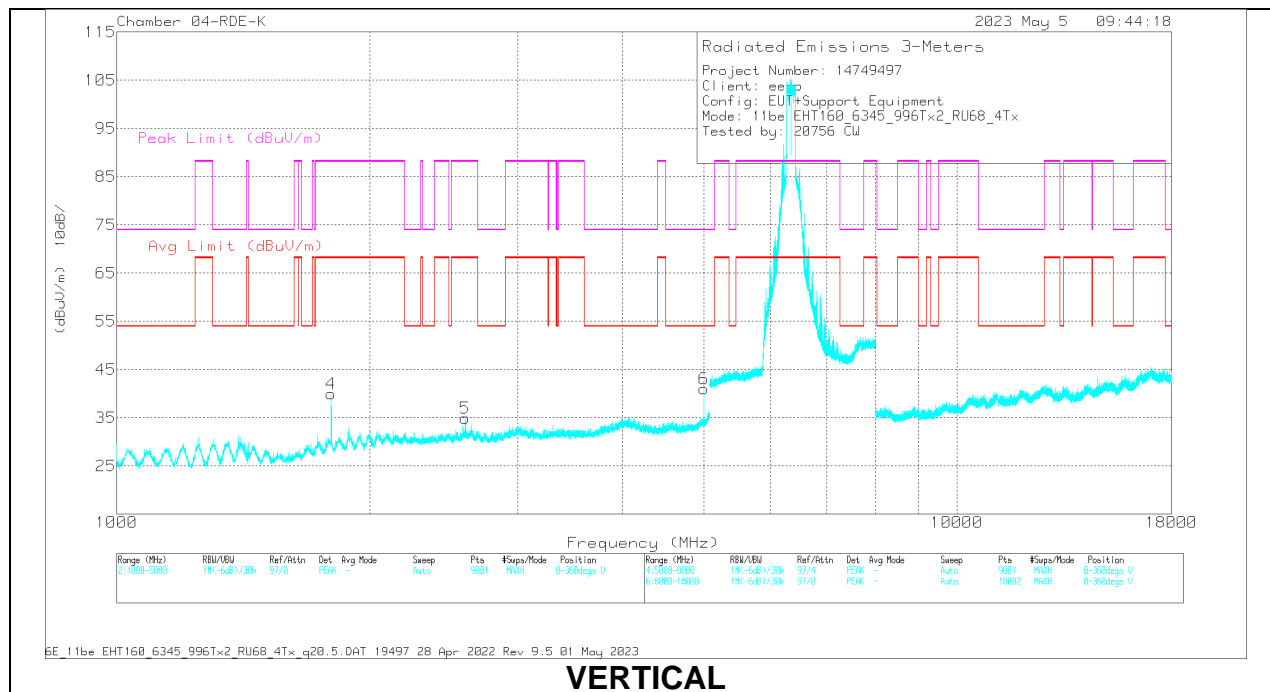

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.217	59.71	PK-U	30.2	-45.8	44.11	-	-	88.2	-44.09	163	197	H
	1800.051	52.73	ADR	30.2	-45.8	37.13	68.2	-31.07	-	-	163	197	H
	3175.074	50.55	PK-U	32.9	-41.8	41.65	-	-	88.2	-46.55	99	134	H
2	3175.076	39.2	ADR	32.9	-41.8	30.3	68.2	-37.9	-	-	99	134	H
	* 4999.865	54.27	PK-U	33.8	-39.1	48.97	-	-	74	-25.03	203	173	H
	* 5000.007	49.11	ADR	33.8	-39	43.91	54	-10.09	-	-	203	173	H
4	1799.911	61.5	PK-U	30.2	-45.8	45.9	-	-	88.2	-42.3	176	228	V
	1799.94	55.72	ADR	30.2	-45.8	40.12	68.2	-28.08	-	-	176	228	V
	2600.158	56.02	PK-U	32.2	-43.9	44.32	-	-	88.2	-43.88	271	311	V
5	2599.902	45.31	ADR	32.2	-43.9	33.61	68.2	-34.59	-	-	271	311	V
	* 4999.982	53.11	PK-U	33.8	-39	47.91	-	-	74	-26.09	181	102	V
	* 5000.061	46.31	ADR	33.8	-39	41.11	54	-12.89	-	-	181	102	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.9. TX ABOVE 1 GHz 802.11be EHT320 MODE IN THE UNII-5 BAND

1TX Antenna 5 OFDMA MODE: 4x996-Tones, RU 69

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

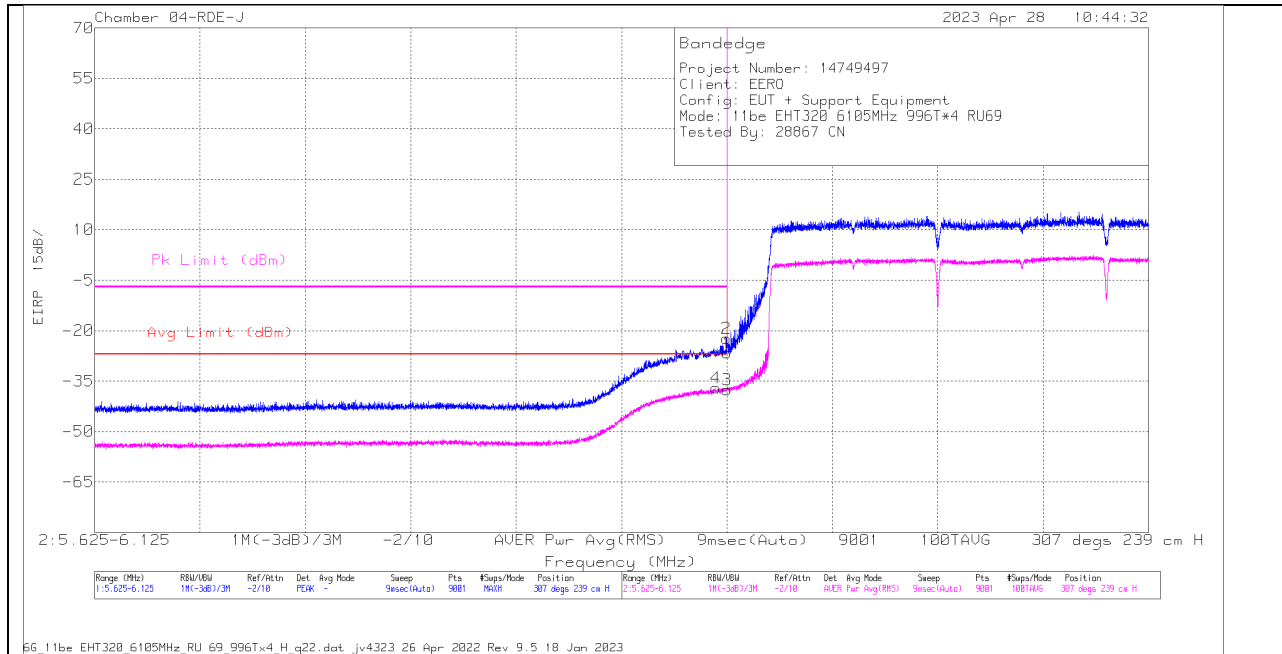


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-59.84	Pk	35	-13.5	11.8	-26.54	-	-	-7	-19.54	307	239	H
2	5924.669	-55.56	Pk	35	-13.5	11.8	-22.26	-	-	-7	-15.26	307	239	H
3	5925	-70.92	RMS	35	-13.5	11.8	-37.62	-27	-10.62	-	-	307	239	H
4	5919.725	-70.21	RMS	35	-13.6	11.8	-37.01	-27	-10.01	-	-	307	239	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

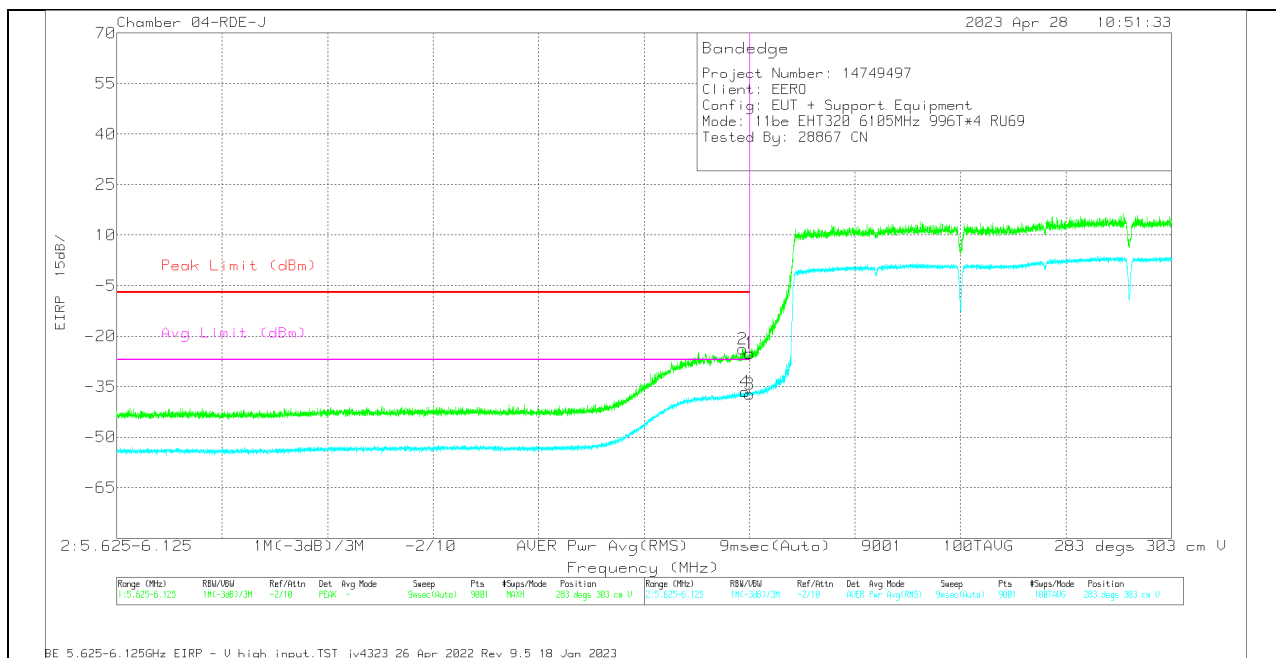

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Amp/Cb/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-58.41	Pk	35	-13.5	11.8	-25.11	-7	-18.11	-	-	283	303	V
2	5921.669	-57.12	Pk	35	-13.5	11.8	-23.82	-7	-16.82	-	-	283	303	V
3	5925	-70.46	RMS	35	-13.5	11.8	-37.16	-	-	-27	-10.16	283	303	V
4	5923.002	-69.84	RMS	35	-13.5	11.8	-36.54	-	-	-27	-9.54	283	303	V

Pk - Peak detector
RMS - RMS detection

2TX Antenna 5 + Antenna 8 OFDMA MODE: 4x996-Tones, RU 69

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

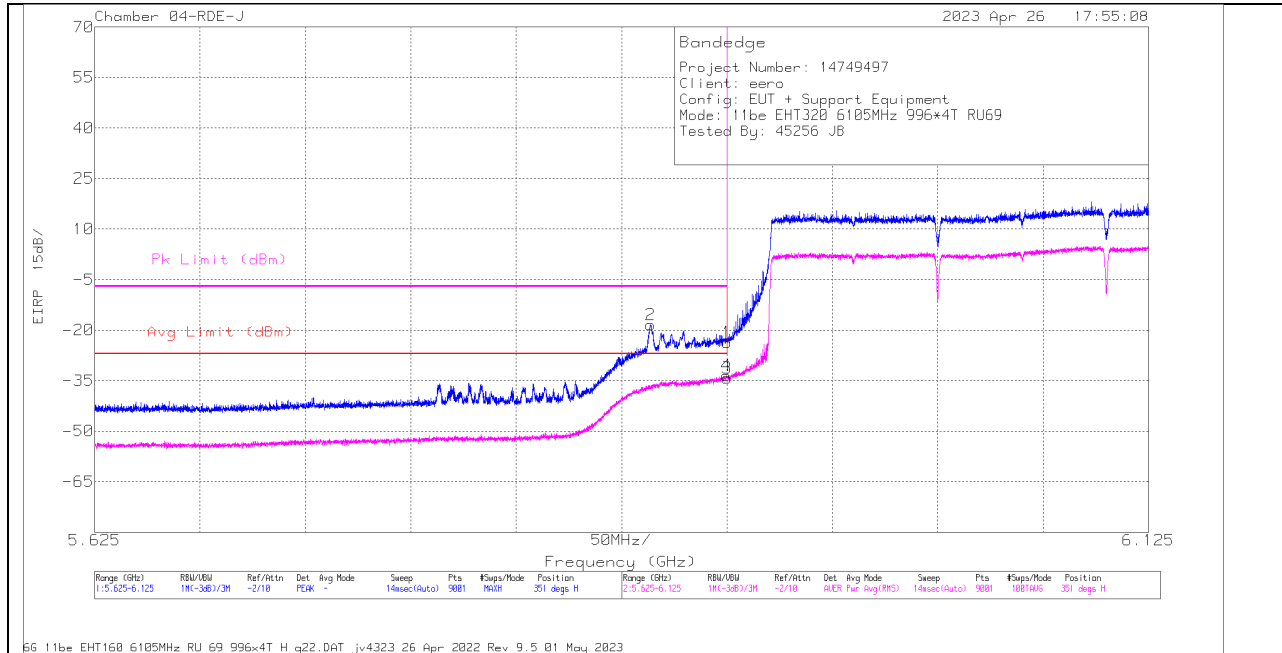


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	222741 ACF(dB) -3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-56.87	Pk	35	-13.5	11.8	-23.57	-	-	-7	-16.57	351	137	H
2	5888.78	-51.46	Pk	34.9	-13.6	11.8	-18.36	-	-	-7	-11.36	351	137	H
3	5925	-67.58	RMS	35	-13.5	11.8	-34.28	-27	-7.28	-	-	351	137	H
4	5924.669	-66.86	RMS	35	-13.5	11.8	-33.56	-27	-6.56	-	-	351	137	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

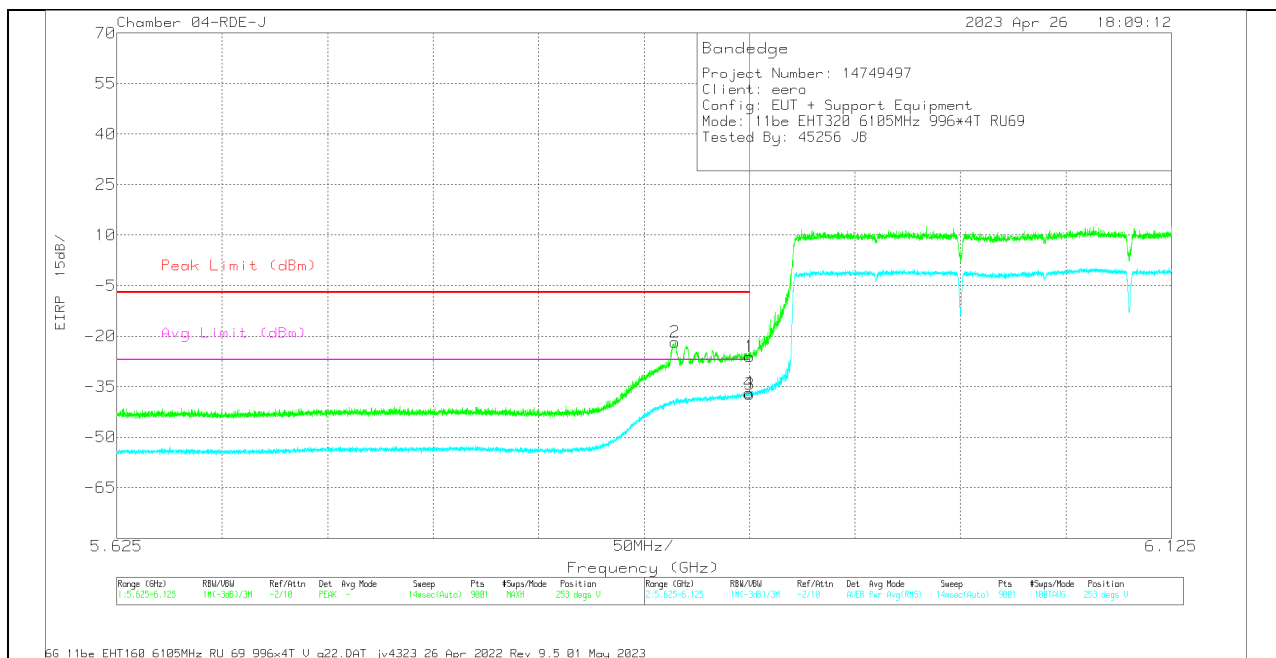

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Amp/Cb/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-59.35	Pk	35	-13.5	11.8	-26.05	-7	-19.05	-	-	253	162	V
2	5889.669	-54.84	Pk	34.9	-13.6	11.8	-21.74	-7	-14.74	-	-	253	162	V
3	5925	-70.55	RMS	35	-13.5	11.8	-37.25	-	-	-27	-10.25	253	162	V
4	5924.614	-70.07	RMS	35	-13.5	11.8	-36.77	-	-	-27	-9.77	253	162	V

Pk - Peak detector
RMS - RMS detection

4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 4x996-Tones, RU 69

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

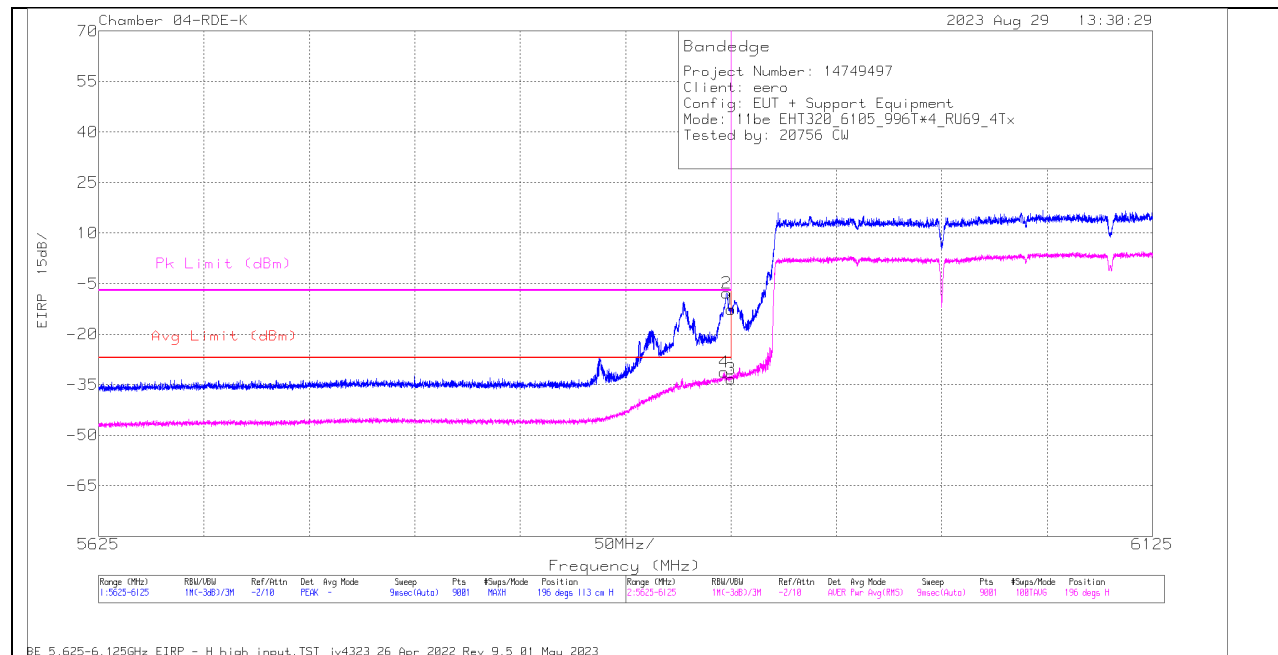


Trace Markers

Marker	Frequency (MHz)	Marker Reading (dBm)	Det	223083 ACF (dB) 3mHz	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Avg Limit (dBm)	RMS Margin (dB)	Pk Limit (dBm)	Pk Margin (dB)	Altitude (Degs)	Height (cm)	Polarity
1	5825	-53.61	Pk	34.9	-5.8	11.8	-12.61	-	-	-7	-5.61	196	113	H
2	5822.947	-48.68	Pk	34.9	-5.8	11.8	-7.78	-	-	-7	-7.78	196	113	H
3	5825	-74.24	RMS	34.9	-5.8	11.8	-33.34	-27	-6.34	-	-	196	113	H
4	5821.891	-72.09	RMS	34.9	-5.8	11.8	-31.19	-27	-4.19	-	-	196	113	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

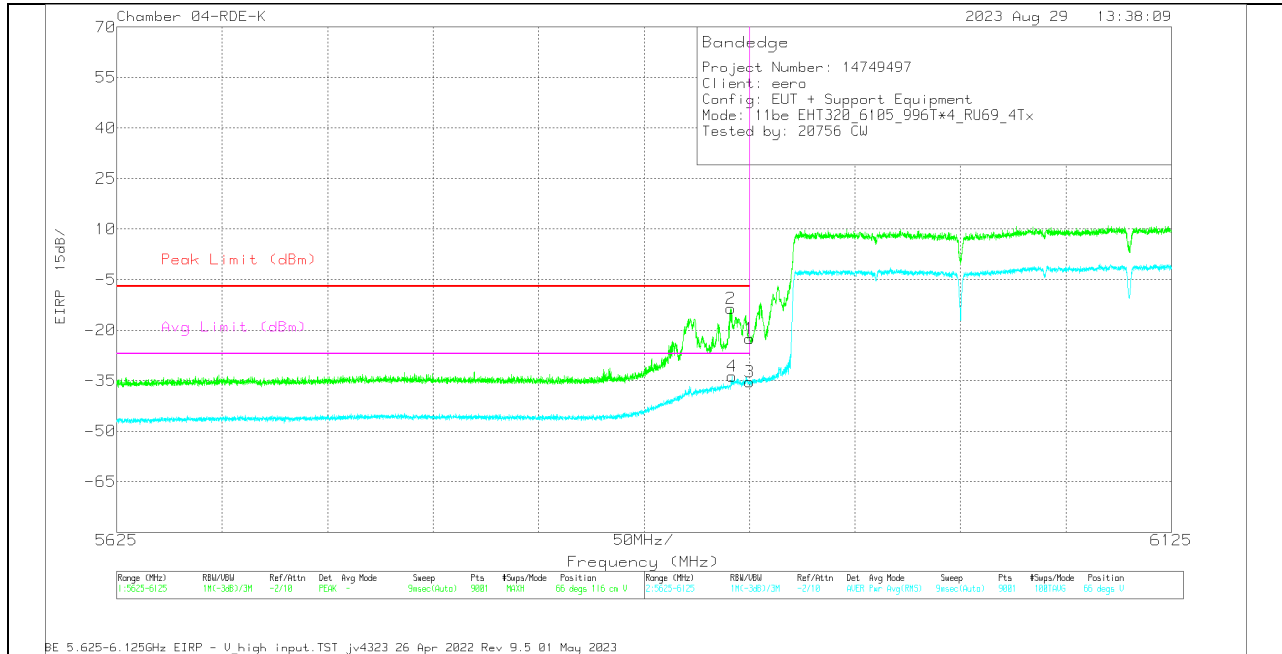


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223683 ACF (dB) 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5925	-63.37	PK	34.9	-5.8	11.8	-22.47	-7	-15.47	-	-	66	116	V
2	5916.058	-54.29	PK	34.9	-5.9	11.8	-13.49	-7	-6.49	-	-	66	116	V
3	5925	-76.22	RMS	34.9	-5.8	11.8	-35.32	-	-	-27	-8.32	66	116	V
4	5916.725	-74.62	RMS	34.9	-5.8	11.8	-33.72	-	-	-27	-6.72	66	116	V


PK - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW

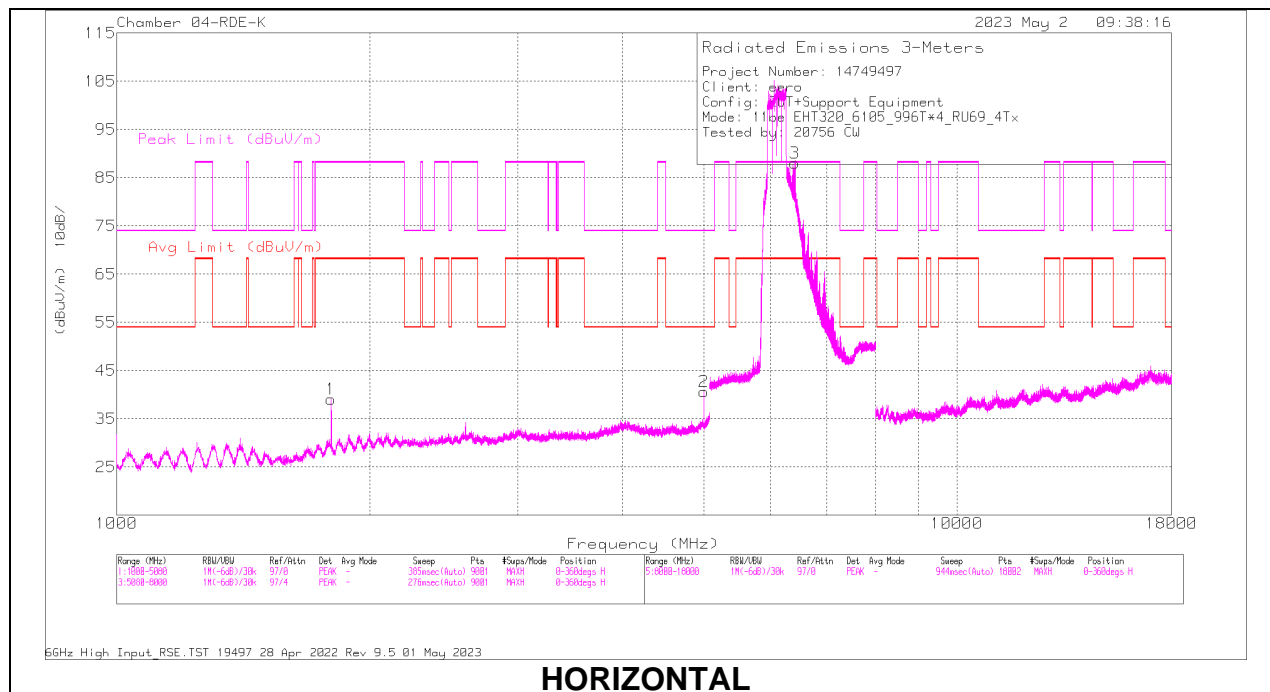

HORIZONTAL

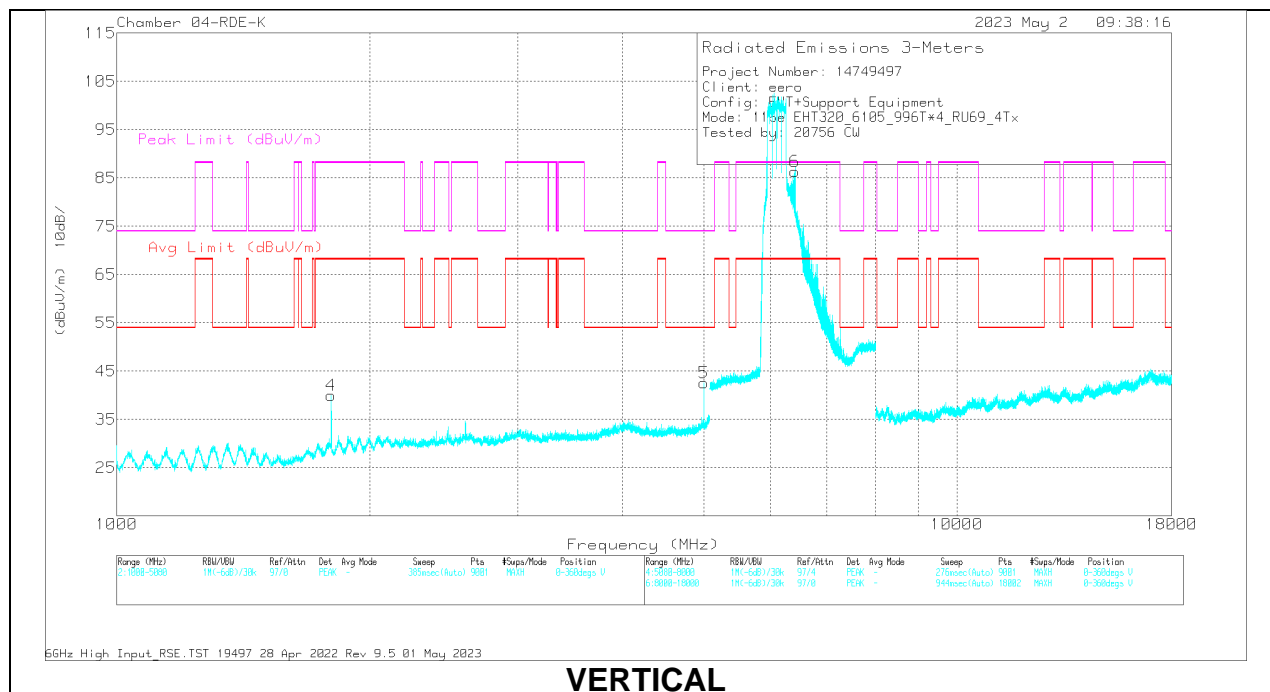

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.106	60.62	PK-U	30.2	-45.8	45.02	-	-	88.2	-43.18	168	178	H
	1799.949	54.67	ADR	30.2	-45.8	39.07	68.2	-29.13	-	-	168	178	H
2	2602.219	53.25	PK-U	32.3	-43.9	41.65	-	-	88.2	-46.55	173	267	H
	2600.036	42.6	ADR	32.2	-43.9	30.9	68.2	-37.3	-	-	173	267	H
3	* 5000.049	52.67	PK-U	33.8	-39	47.47	-	-	74	-26.53	231	112	H
	* 5000.059	46.18	ADR	33.8	-39	40.98	54	-13.02	-	-	231	112	H
4	1800.211	60.93	PK-U	30.2	-45.8	45.33	-	-	88.2	-42.87	198	379	V
	1800.045	55.47	ADR	30.2	-45.8	39.87	68.2	-28.33	-	-	198	379	V
5	2599.676	54.78	PK-U	32.2	-43.9	43.08	-	-	88.2	-45.12	207	218	V
	2600.102	44.83	ADR	32.2	-43.9	33.13	68.2	-35.07	-	-	207	218	V
6	* 5000.017	53.73	PK-U	33.8	-39	48.53	-	-	74	-25.47	176	148	V
	* 4999.967	48.33	ADR	33.8	-39	43.13	54	-10.87	-	-	176	148	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH

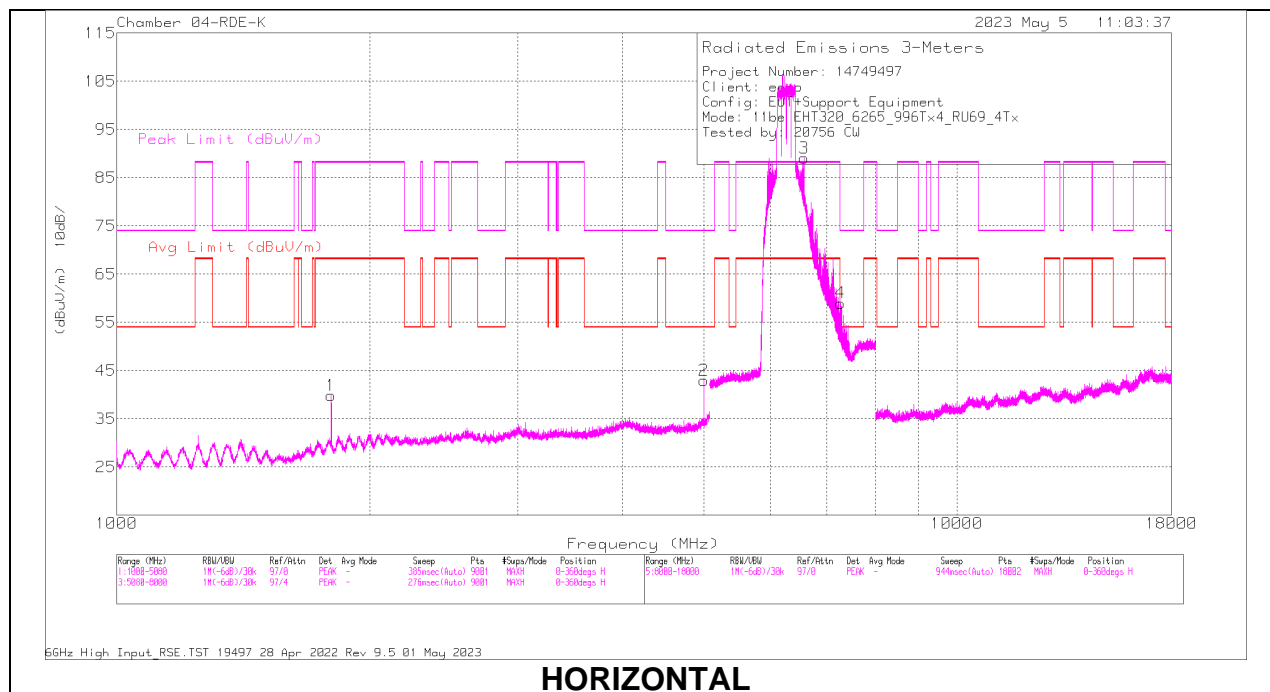

HORIZONTAL

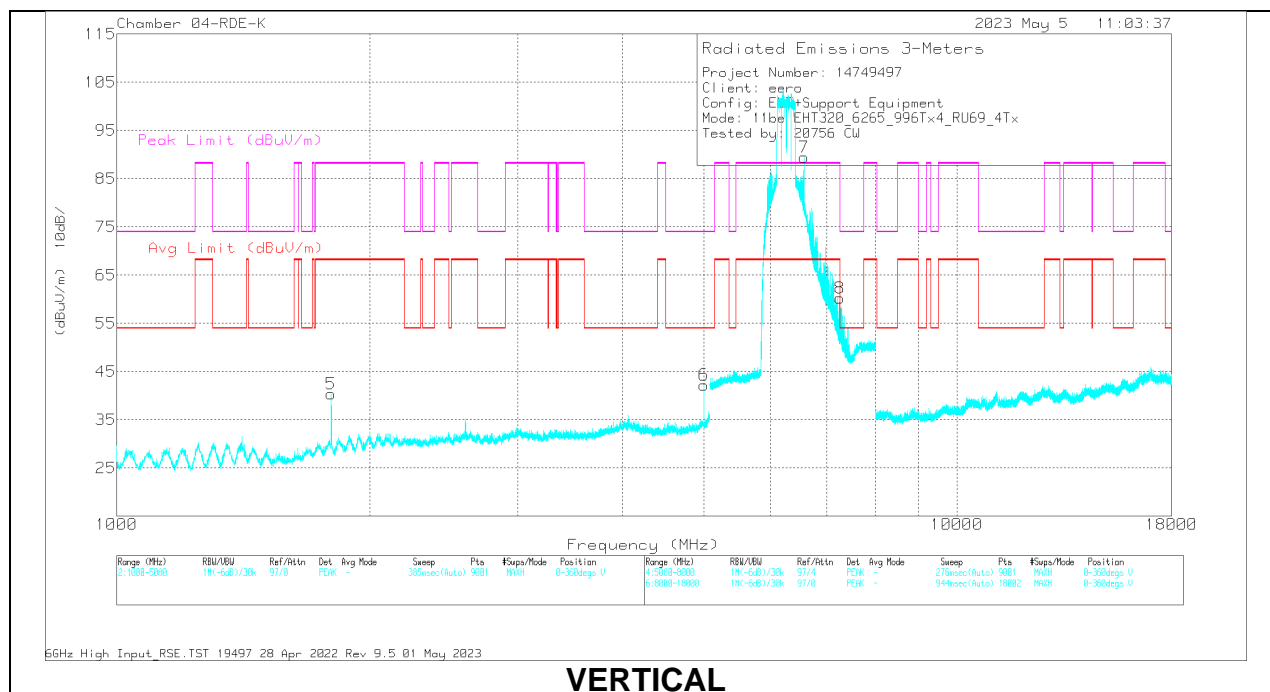

VERTICAL

RADIATED EMISSIONS

	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.007	58.91	PK-U	30.2	-45.8	43.31	-	-	88.2	-44.89	161	211	H
	1799.939	51.47	ADR	30.2	-45.8	35.87	68.2	-32.33	-	-	161	211	H
2	3065.453	51.49	PK-U	32.7	-42.1	42.09	-	-	88.2	-46.11	225	253	H
	3065.472	39.95	ADR	32.7	-42.1	30.55	68.2	-37.65	-	-	225	253	H
3	* 5000.093	54.81	PK-U	33.8	-39	49.61	-	-	74	-24.39	208	321	H
	* 4999.987	49.06	ADR	33.8	-39	43.86	54	-10.14	-	-	208	321	H
4	1800.08	60.6	PK-U	30.2	-45.8	45	-	-	88.2	-43.2	176	188	V
	1800.049	53.95	ADR	30.2	-45.8	38.35	68.2	-29.85	-	-	176	188	V
5	2599.932	54.84	PK-U	32.2	-43.9	43.14	-	-	88.2	-45.06	194	234	V
	2599.875	45.06	ADR	32.2	-43.9	33.36	68.2	-34.84	-	-	194	234	V
6	* 4999.924	53.36	PK-U	33.8	-39	48.16	-	-	74	-25.84	178	150	V
	* 5000.008	47.21	ADR	33.8	-39	42.01	54	-11.99	-	-	178	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak



ADR - U-NII AD primary method, RMS average

10.1.10. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE UNII-6 BAND

4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 242-Tones, RU 61

HARMONICS AND SPURIOUS EMISSIONS

LOW

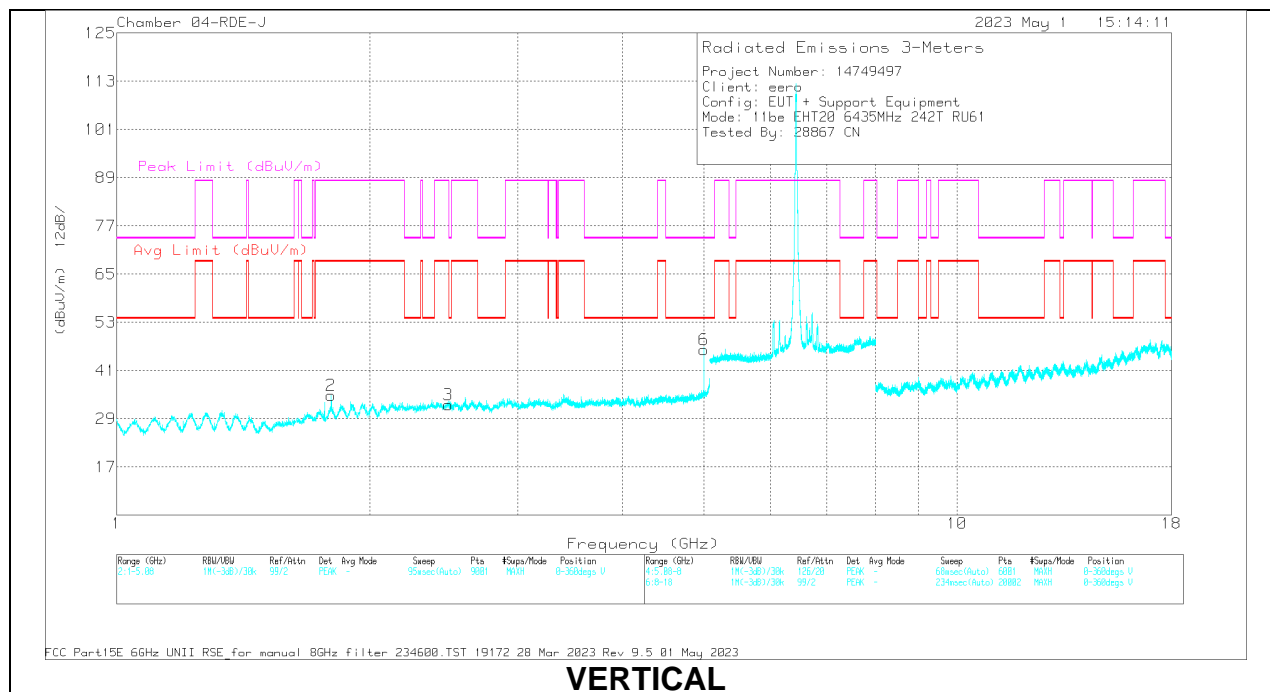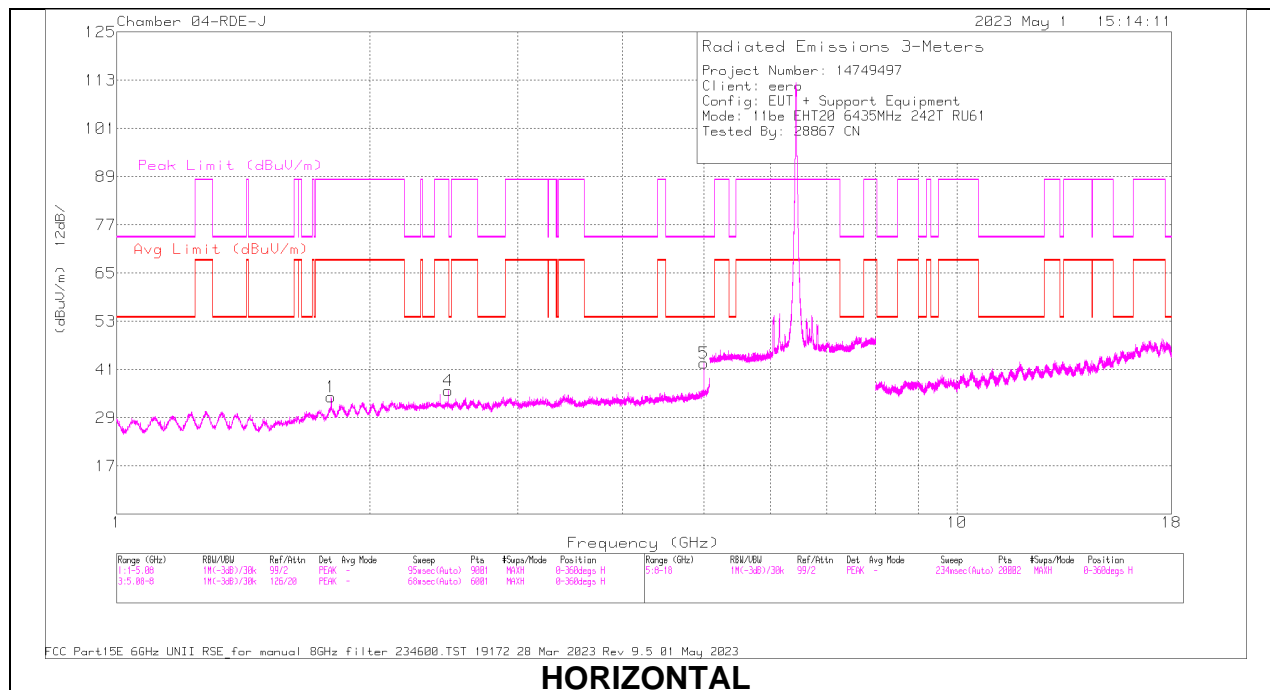

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.799715	56.85	PK-U	30.5	-43.9	43.45	-	-	88.2	-44.75	323	150	H
	1.800082	47.51	ADR	30.5	-43.9	34.11	68.2	-34.09	-	-	323	150	H
4	2.481008	56.31	PK-U	32.2	-45	43.51	-	-	88.2	-44.69	306	111	H
	2.480434	44.6	ADR	32.2	-45	31.8	68.2	-36.4	-	-	306	111	H
5	* 4.999634	57.86	PK-U	34.2	-43.1	48.96	-	-	74	-25.04	350	120	H
	* 4.999978	50.97	ADR	34.2	-43.1	42.07	54	-11.93	-	-	350	120	H
2	1.799866	57.24	PK-U	30.5	-43.9	43.84	-	-	88.2	-44.36	203	237	V
	1.799958	48.67	ADR	30.5	-43.9	35.27	68.2	-32.93	-	-	203	237	V
3	2.480162	58.92	PK-U	32.2	-45	46.12	-	-	88.2	-42.08	15	222	V
	2.480161	44.83	ADR	32.2	-45	32.03	68.2	-36.17	-	-	15	222	V
6	* 5.000173	60.74	PK-U	34.2	-43.1	51.84	-	-	74	-22.16	335	171	V
	* 5.000001	56.54	ADR	34.2	-43.1	47.64	54	-6.36	-	-	335	171	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID

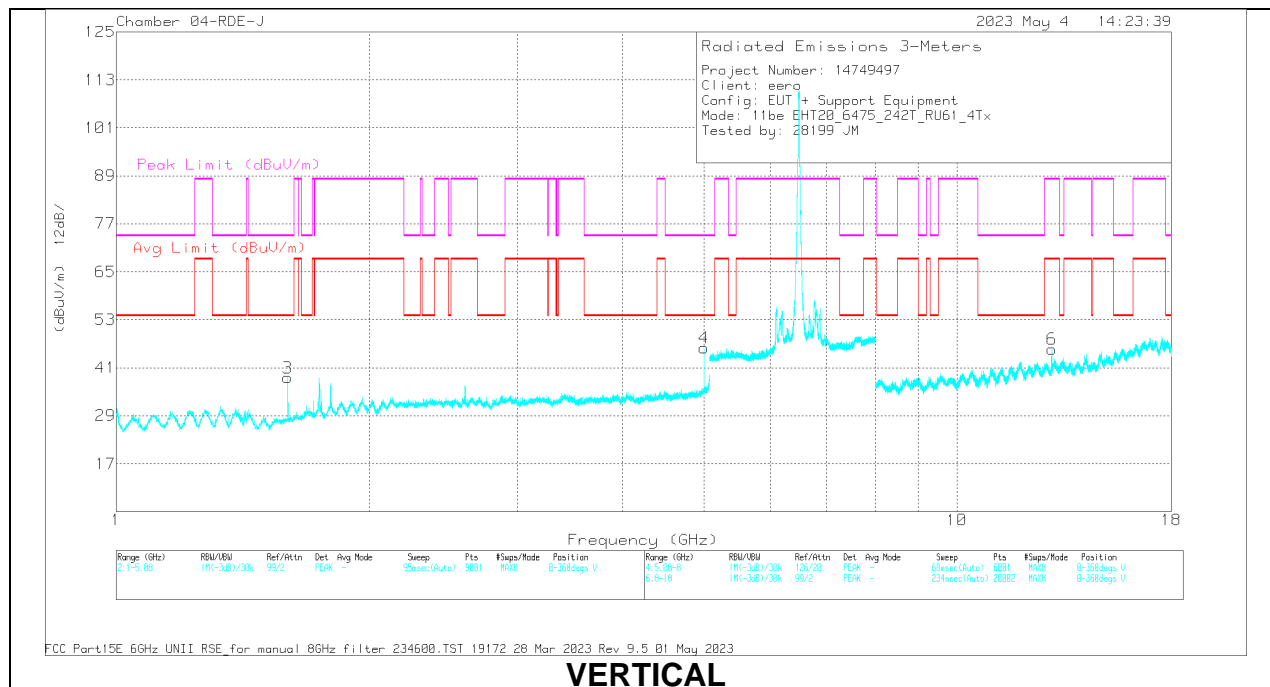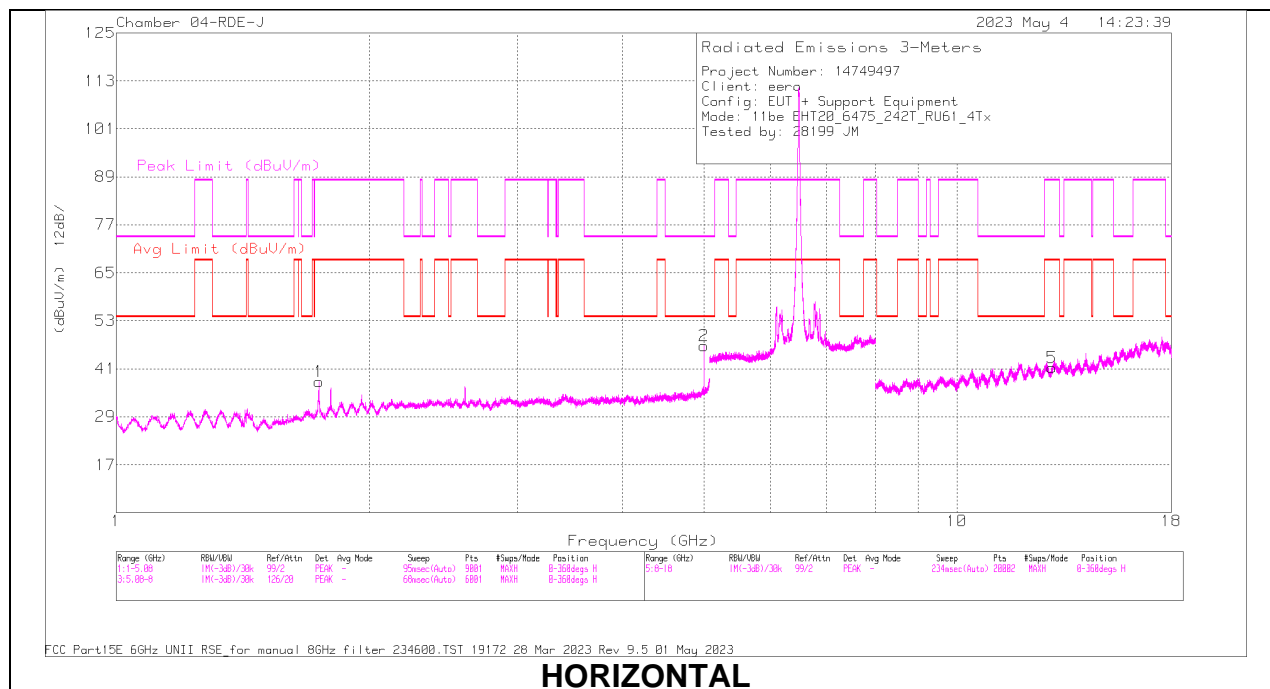

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	22741 ACF(dB) - 3mH	Amp/Cbl (dB)	234600 8GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.740498	58.67	PK-U	30	-43.3	-	45.37	-	-	88.2	-42.83	177	380	H
	1.741284	43.04	ADR	30	-43.3	-	29.74	68.2	-38.46	-	-	177	380	H
2	* 5.000004	61.32	PK-U	34.2	-43.1	-	52.42	-	-	74	-21.58	348	149	H
	* 5.000039	57.12	ADR	34.2	-43.1	-	48.22	54	-5.78	-	-	348	149	H
3	* 1.600055	61.88	PK-U	27.8	-43.1	-	46.58	-	-	74	-27.42	92	170	V
	* 1.600274	42.2	ADR	27.8	-43.1	-	26.9	54	-27.1	-	-	92	170	V
4	* 4.999901	60.24	PK-U	34.2	-43.1	-	51.34	-	-	74	-22.66	325	195	V
	* 5.000004	55.33	ADR	34.2	-43.1	-	46.43	54	-7.57	-	-	325	195	V
5	12.972151	50.47	PK-U	38.9	-37.1	.9	53.17	-	-	88.2	-35.03	202	203	H
	12.971336	39.16	ADR	38.9	-37.1	.9	41.86	68.2	-26.34	-	-	202	203	H
6	12.967152	50.35	PK-U	38.9	-37.2	.9	52.95	-	-	88.2	-35.25	167	105	V
	12.968967	38.06	ADR	38.9	-37.1	.9	40.76	68.2	-27.44	-	-	167	105	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH

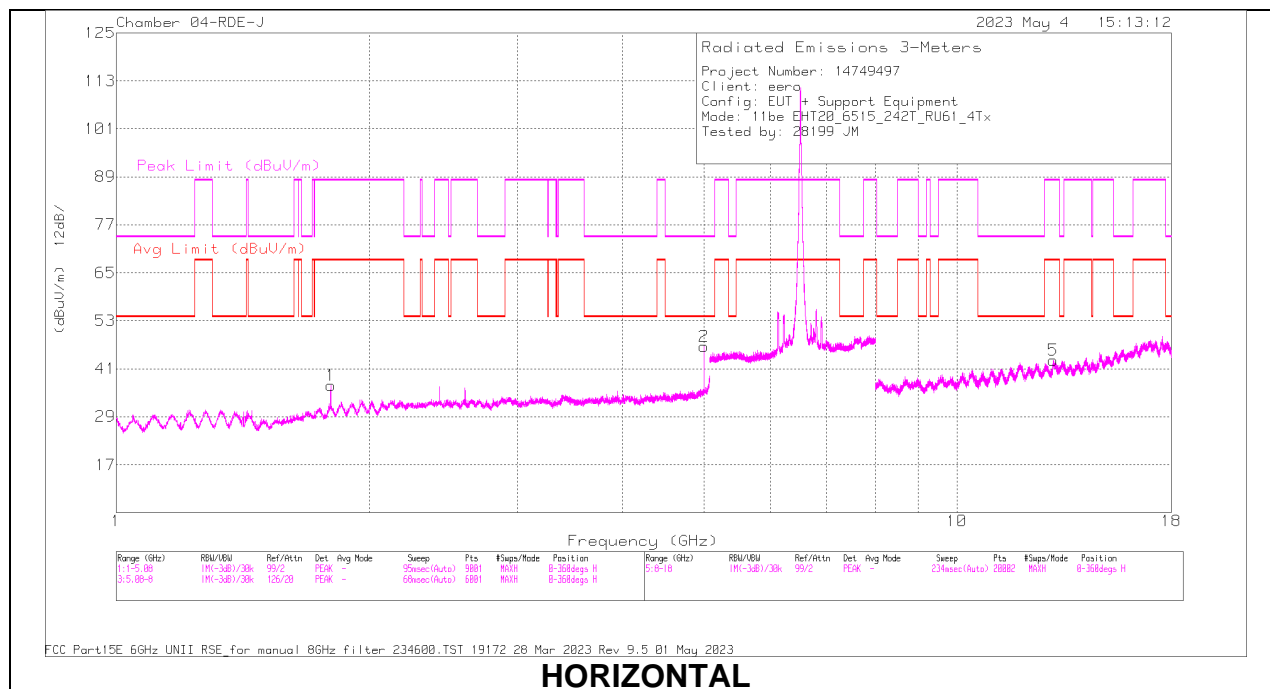

HORIZONTAL

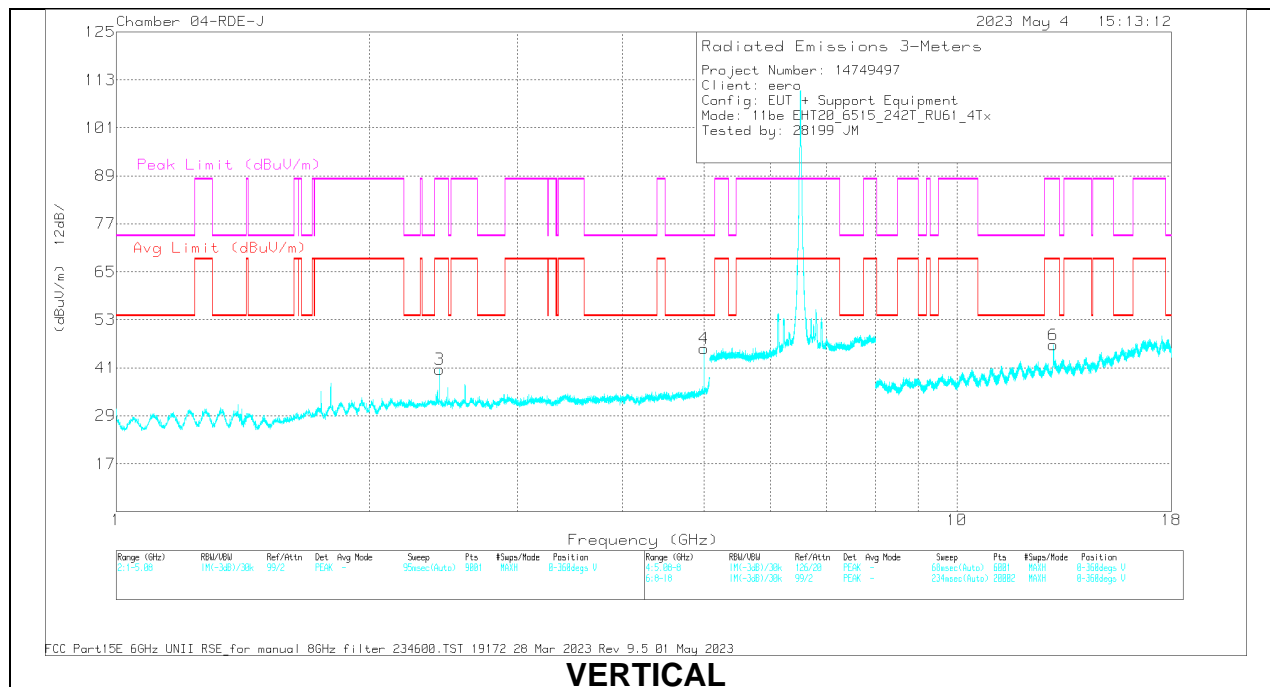

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	22741 ACF(dB) - 3mH	Amp/Cbl (dB)	234600 8GHz HPF (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.800396	56.71	PK-U	30.5	-43.9	-	43.31	-	-	88.2	-44.89	313	141	H
	1.799965	48.49	ADR	30.5	-43.9	-	35.09	68.2	-33.11	-	-	313	141	H
2	* 5.000184	61.22	PK-U	34.2	-43.1	-	52.32	-	-	74	-21.68	346	133	H
	* 5.000063	57.2	ADR	34.2	-43.1	-	48.3	54	-5.7	-	-	346	133	H
3	2.422032	56.4	PK-U	32	-45.4	-	43	-	-	88.2	-45.2	172	224	V
	2.423955	44.92	ADR	32.1	-45.2	-	31.82	68.2	-36.38	-	-	172	224	V
4	* 5.000194	60.31	PK-U	34.2	-43.1	-	51.41	-	-	74	-22.59	328	215	V
	* 5.000022	55.53	ADR	34.2	-43.1	-	46.63	54	-7.37	-	-	328	215	V
5	13.027379	50.34	PK-U	38.8	-37.2	.9	52.84	-	-	88.2	-35.36	199	233	H
	13.03647	39.11	ADR	38.8	-37.2	.9	41.61	68.2	-26.59	-	-	199	233	H
6	13.026285	50.77	PK-U	38.8	-37.2	.9	53.27	-	-	88.2	-34.93	211	260	V
	13.028723	39.26	ADR	38.8	-37.2	.9	41.76	68.2	-26.44	-	-	211	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak



ADR - U-NII AD primary method, RMS average

10.1.11. TX ABOVE 1 GHz 802.11be EHT40 MODE IN THE UNII-6 BAND

4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 484-Tones, RU 65

HARMONICS AND SPURIOUS EMISSIONS

LOW

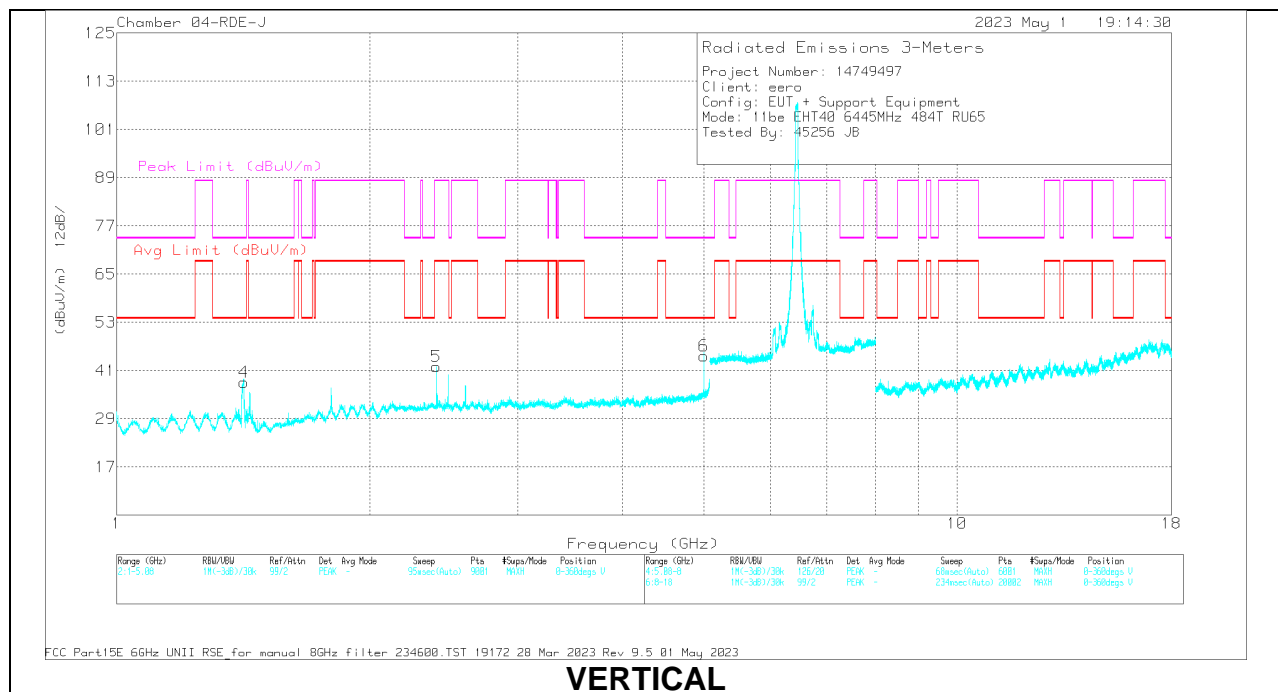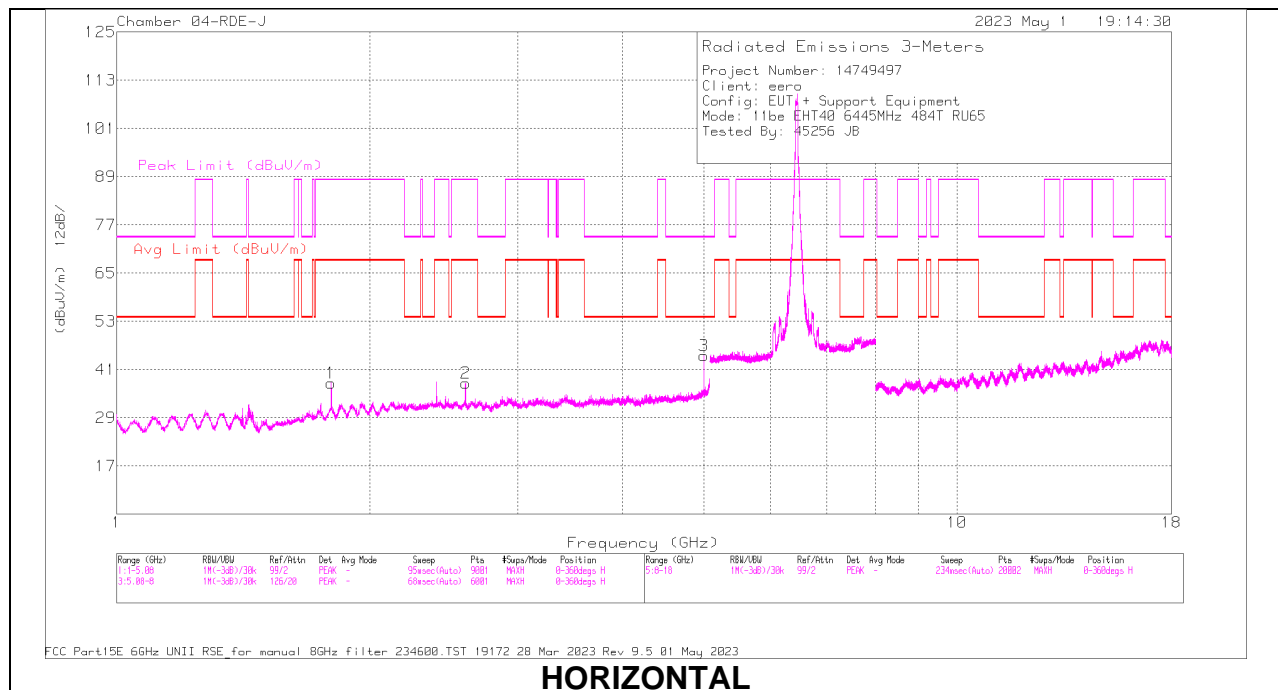

RADIATED EMISSIONS



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.800843	57.99	PK-U	30.5	-43.9	44.59	-	-	88.2	-43.61	329	156	H
	1.799971	50.85	ADR	30.5	-43.9	37.45	68.2	-30.75	-	-	329	156	H
2	2.599391	58.66	PK-U	32.3	-45.5	45.46	-	-	88.2	-42.74	339	139	H
	2.600014	50.25	ADR	32.3	-45.5	37.05	68.2	-31.15	-	-	339	139	H
3	* 4.999833	58.84	PK-U	34.2	-43.1	49.94	-	-	74	-24.06	352	111	H
	* 5.000076	52.46	ADR	34.2	-43.1	43.56	54	-10.44	-	-	352	111	H
4	* 1.419717	66.88	PK-U	28	-41.8	53.08	-	-	74	-20.92	3	227	V
	* 1.417394	44.65	ADR	28	-41.9	30.75	54	-23.25	-	-	3	227	V
5	2.402126	60.65	PK-U	32	-45.3	47.35	-	-	88.2	-40.85	334	156	V
	2.402218	45.34	ADR	32	-45.3	32.04	68.2	-36.16	-	-	334	156	V
6	* 4.99984	59.73	PK-U	34.2	-43.1	50.83	-	-	74	-23.17	339	204	V
	* 5.000058	54.62	ADR	34.2	-43.1	45.72	54	-8.28	-	-	339	204	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH STRADDLE

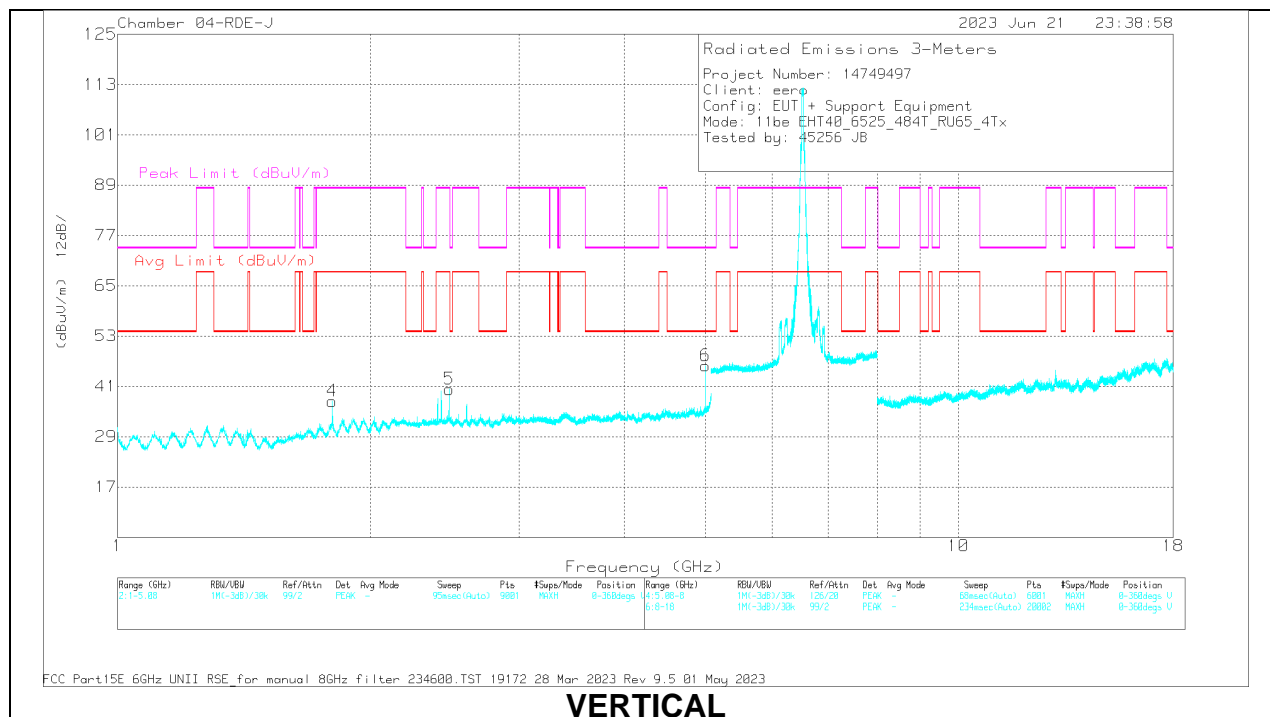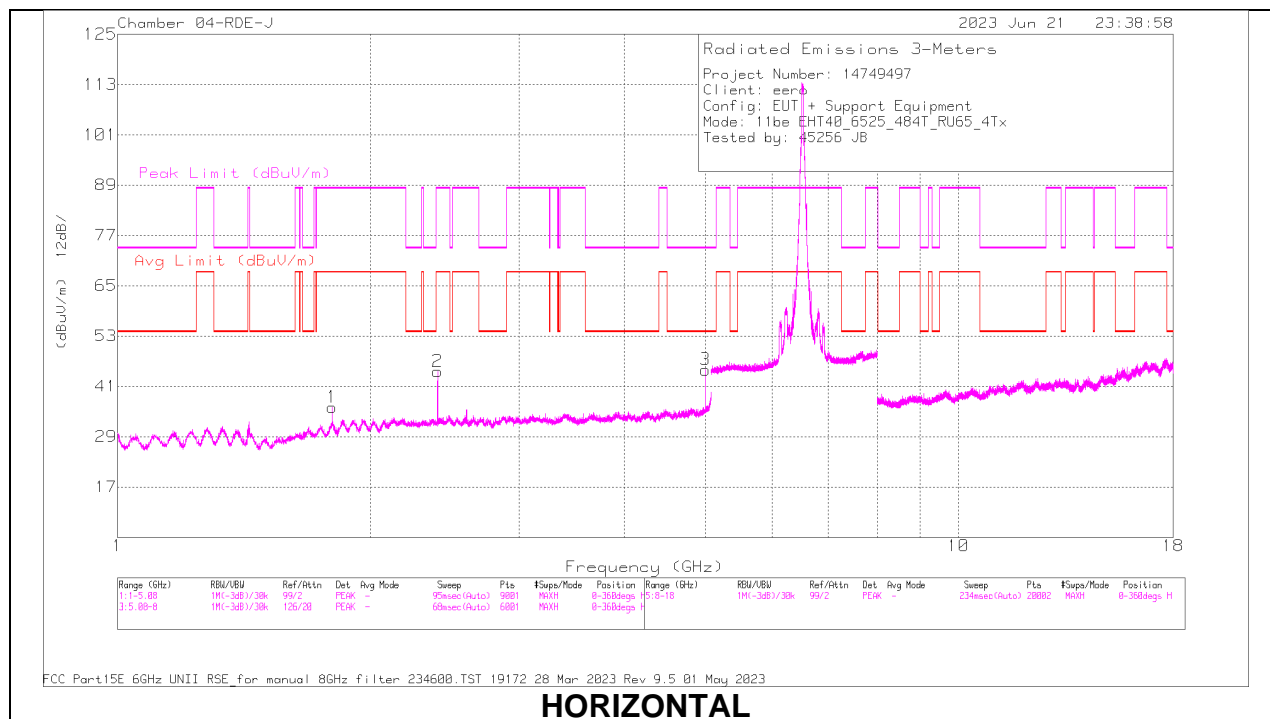

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.799798	60.63	PK-U	30.5	-46.5	44.63	-	-	88.2	-43.57	13	295	H
	1.799948	52.31	ADR	30.5	-46.5	36.31	68.2	-31.89	-	-	13	295	H
2	2.401722	59.11	PK-U	32	-46.6	44.51	-	-	88.2	-43.69	357	277	H
	2.402012	46.01	ADR	32	-46.6	31.41	68.2	-36.79	-	-	357	277	H
3	* 4.999981	59.8	PK-U	34.2	-43.5	50.5	-	-	74	-23.5	56	155	H
	* 4.999979	54.51	ADR	34.2	-43.5	45.21	54	-8.79	-	-	56	155	H
4	1.800071	61.11	PK-U	30.5	-46.5	45.11	-	-	88.2	-43.09	13	198	V
	1.800029	52.97	ADR	30.5	-46.5	36.97	68.2	-31.23	-	-	13	198	V
5	2.481402	57.76	PK-U	32.2	-46.2	43.76	-	-	88.2	-44.44	12	382	V
	2.480427	46.11	ADR	32.2	-46.2	32.11	68.2	-36.09	-	-	12	382	V
6	* 5.000152	60.34	PK-U	34.2	-43.5	51.04	-	-	74	-22.96	47	188	V
	* 5.000055	55.32	ADR	34.2	-43.5	46.02	54	-7.98	-	-	47	188	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak



ADR - U-NII AD primary method, RMS average

10.1.12. TX ABOVE 1 GHz 802.11be EHT80 MODE IN THE UNII-6 BAND

4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 996-Tones, RU 67

HARMONICS AND SPURIOUS EMISSIONS

MID

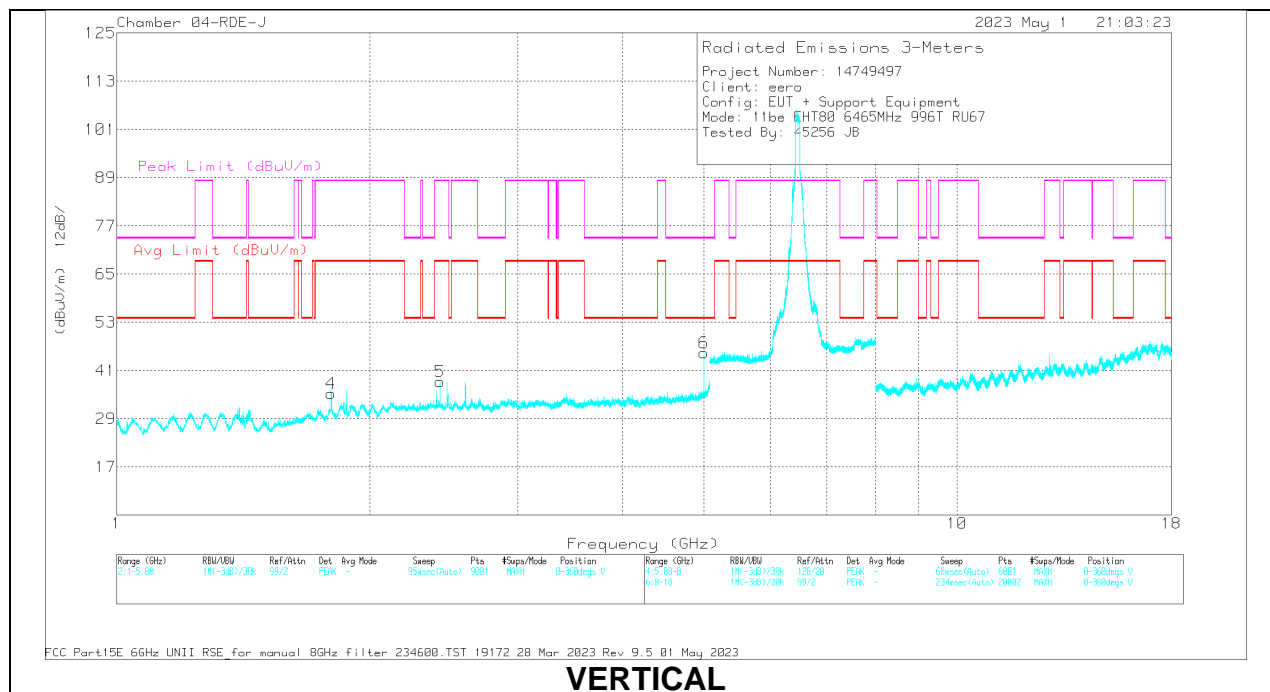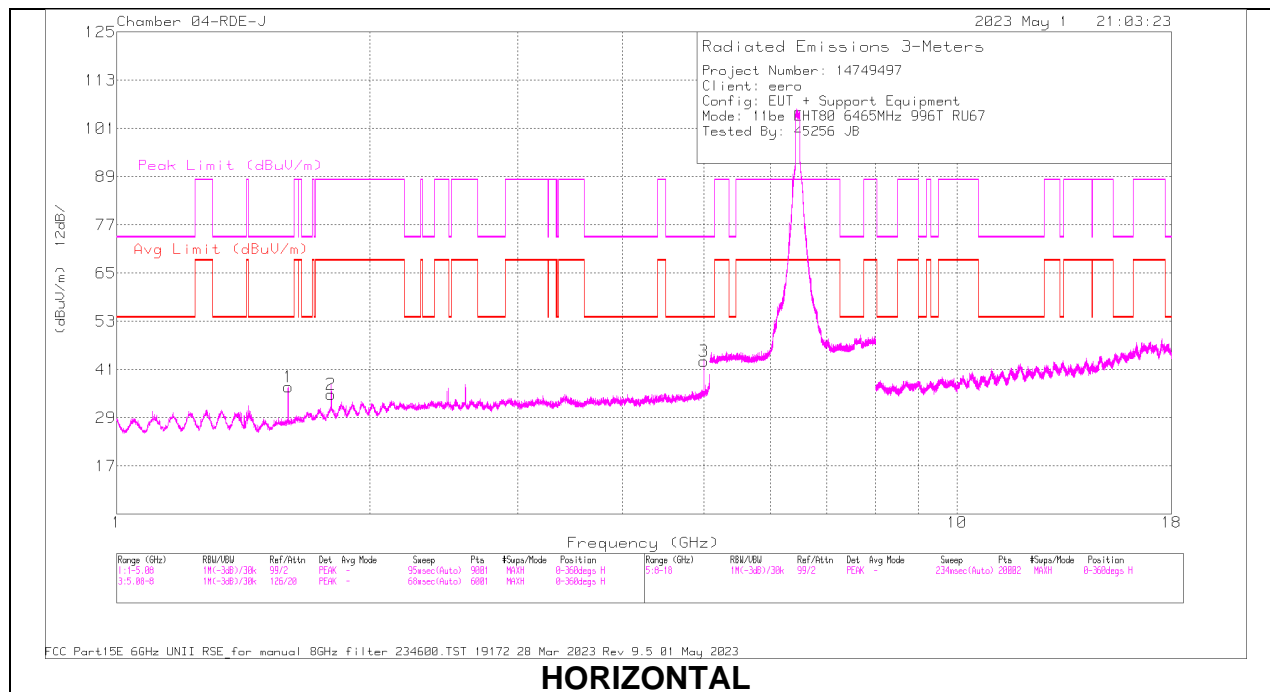

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.599961	65.08	PK-U	27.8	-43.1	49.78	-	-	74	-24.22	30	190	H
	* 1.600434	45.19	ADR	27.8	-43.1	29.89	54	-24.11	-	-	30	190	H
2	1.799902	57.33	PK-U	30.5	-43.9	43.93	-	-	88.2	-44.27	58	192	H
	1.799939	48.25	ADR	30.5	-43.9	34.85	68.2	-33.35	-	-	58	192	H
3	* 4.999973	57.98	PK-U	34.2	-43.1	49.08	-	-	74	-24.92	349	126	H
	* 5.000059	51.09	ADR	34.2	-43.1	42.19	54	-11.81	-	-	349	126	H
4	1.800098	57.69	PK-U	30.5	-43.9	44.29	-	-	88.2	-43.91	339	175	V
	1.800026	49.66	ADR	30.5	-43.9	36.26	68.2	-31.94	-	-	339	175	V
5	2.425945	57.15	PK-U	32.1	-45.1	44.15	-	-	88.2	-44.05	278	115	V
	2.425367	45	ADR	32.1	-45.1	32	68.2	-36.2	-	-	278	115	V
6	* 5	59.34	PK-U	34.2	-43.1	50.44	-	-	74	-23.56	341	182	V
	* 5.000086	54.18	ADR	34.2	-43.1	45.28	54	-8.72	-	-	341	182	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.1.13. TX ABOVE 1 GHz 802.11be EHT160 MODE IN THE UNII-6 BAND
4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 2x 996-Tones, RU 68

HARMONICS AND SPURIOUS EMISSIONS

STRADDLE

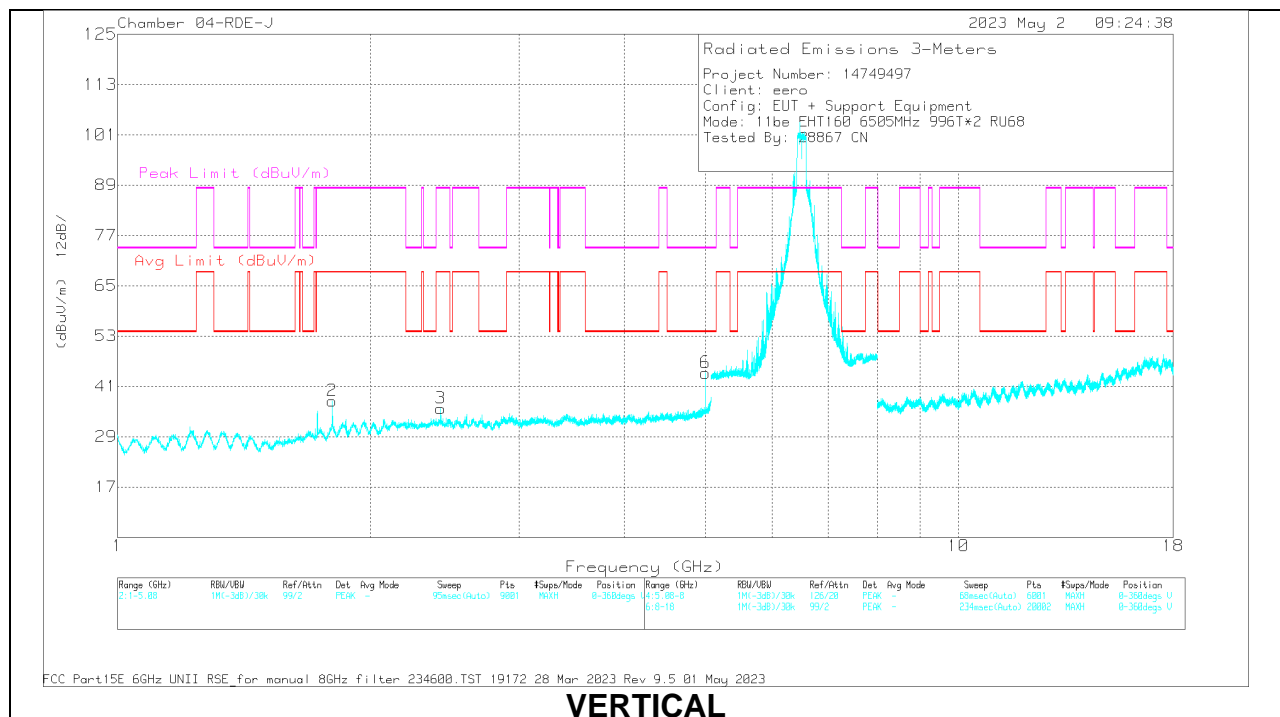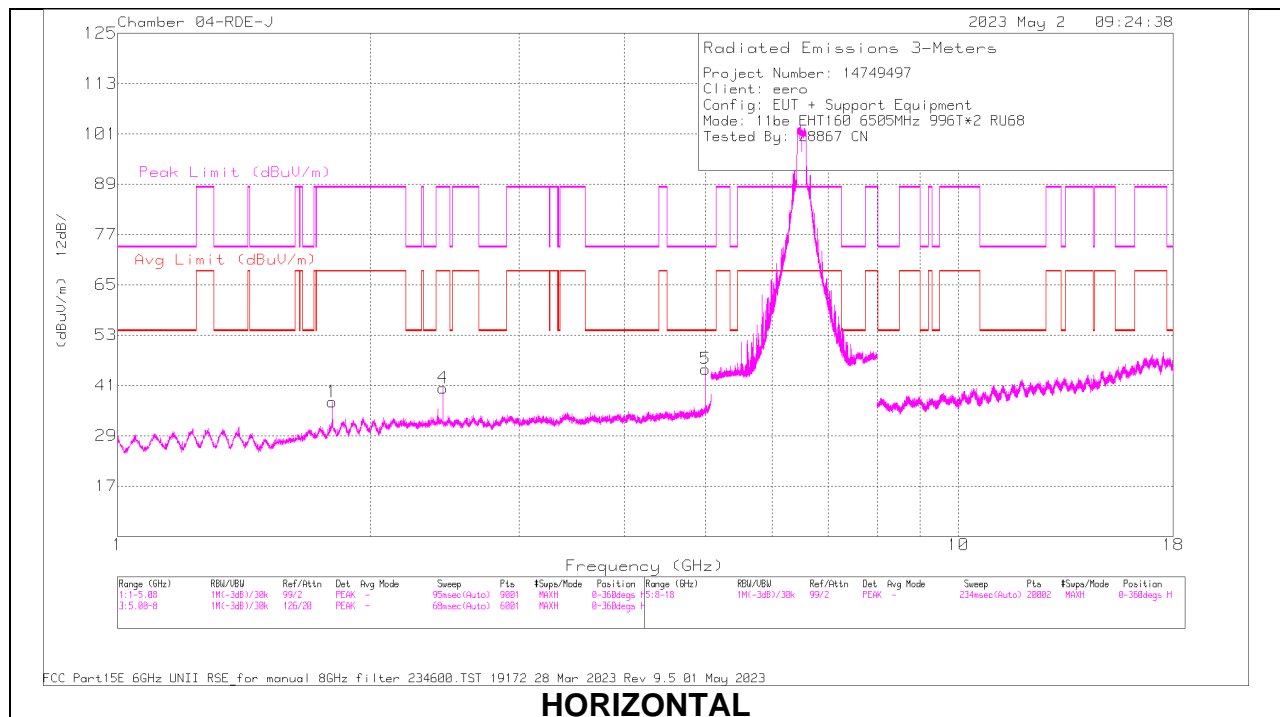

RADIATED EMISSIONS

Markers	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.798464	53.56	PK-U	30.5	-43.7	40.36	-	-	88.2	-47.84	92	229	H
	1.796598	42.12	ADR	30.5	-43.5	29.12	68.2	-39.08	-	-	92	229	H
4	2.43648	55.96	PK-U	32.1	-45.2	42.86	-	-	88.2	-45.34	105	308	H
	2.434785	44.49	ADR	32.1	-45.2	31.39	68.2	-36.81	-	-	105	308	H
5	* 5.000079	59.5	PK-U	34.2	-43.1	50.6	-	-	74	-23.4	30	103	H
	* 5.000043	54.01	ADR	34.2	-43.1	45.11	54	-8.89	-	-	30	103	H
2	1.800079	57.52	PK-U	30.5	-43.9	44.12	-	-	88.2	-44.08	322	144	V
	1.800056	48.21	ADR	30.5	-43.9	34.81	68.2	-33.39	-	-	322	144	V
3	2.422302	56.29	PK-U	32	-45.3	42.99	-	-	88.2	-45.21	88	263	V
	2.42081	44.74	ADR	32	-45.4	31.34	68.2	-36.86	-	-	88	263	V
6	* 5.000074	58.05	PK-U	34.2	-43.1	49.15	-	-	74	-24.85	8	211	V
	* 5.000026	51.73	ADR	34.2	-43.1	42.83	54	-11.17	-	-	8	211	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.1.14. TX ABOVE 1 GHz 802.11be EHT320 MODE IN THE UNII-6 BAND
4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 4x996-Tones, RU 69

HARMONICS AND SPURIOUS EMISSIONS

STRADDLE

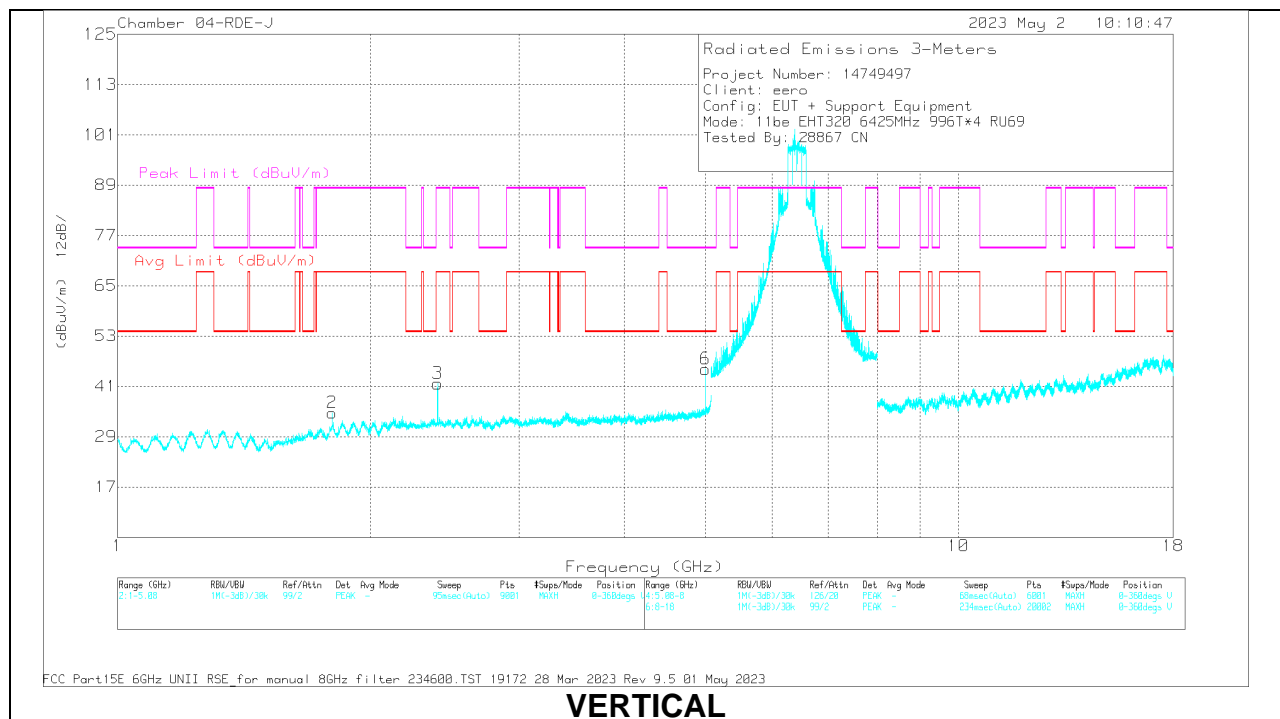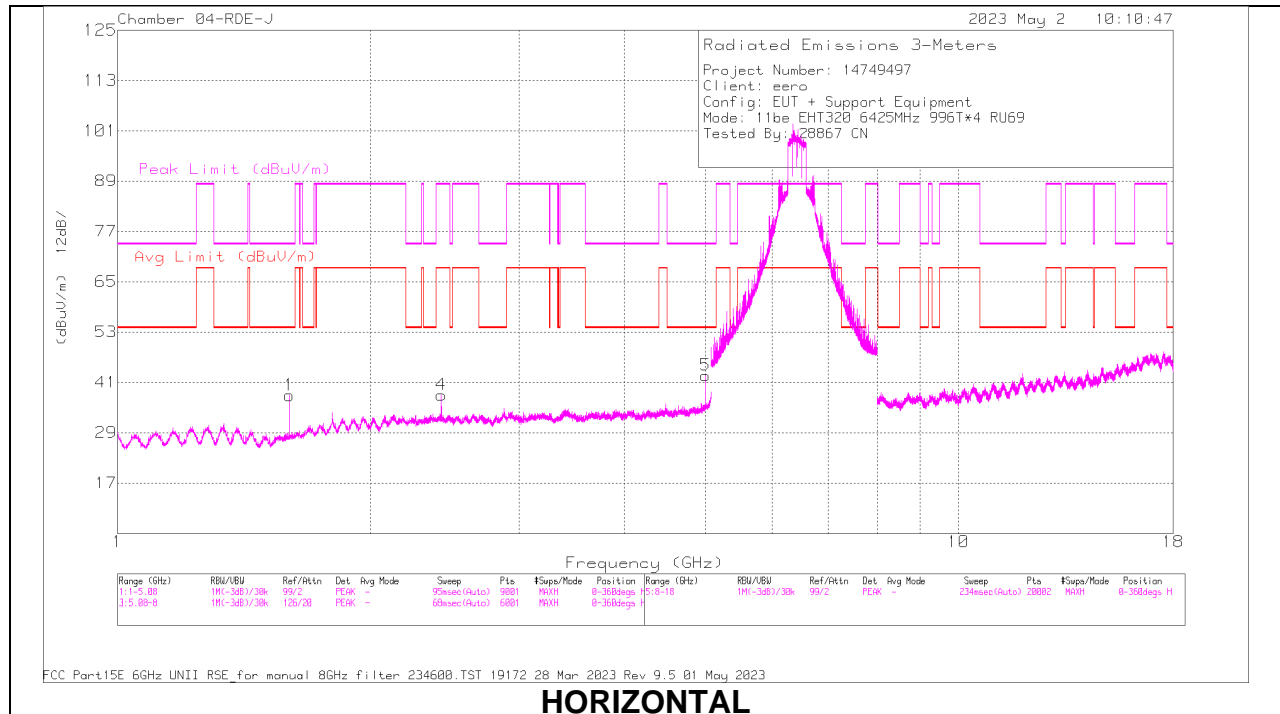

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.602717	55.81	PK-U	27.9	-43	40.71	-	-	74	-33.29	353	177	H
	* 1.602186	44.21	ADR	27.9	-43.1	29.01	54	-24.99	-	-	353	177	H
4	2.42647	57.57	PK-U	32.1	-45.1	44.57	-	-	88.2	-43.63	36	321	H
	2.425079	46.1	ADR	32.1	-45.1	33.1	68.2	-35.1	-	-	36	321	H
5	* 5.000077	58.18	PK-U	34.2	-43.1	49.28	-	-	74	-24.72	8	355	H
	* 5.000018	51.65	ADR	34.2	-43.1	42.75	54	-11.25	-	-	8	355	H
2	1.799882	56.19	PK-U	30.5	-43.9	42.79	-	-	88.2	-45.41	330	174	V
	1.80011	46.58	ADR	30.5	-43.9	33.18	68.2	-35.02	-	-	330	174	V
3	2.402026	57.17	PK-U	32	-45.3	43.87	-	-	88.2	-44.33	302	113	V
	2.401434	44.51	ADR	32	-45.3	31.21	68.2	-36.99	-	-	302	113	V
6	* 4.999974	60.24	PK-U	34.2	-43.1	51.34	-	-	74	-22.66	337	180	V
	* 5.00002	55.28	ADR	34.2	-43.1	46.38	54	-7.62	-	-	337	180	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.15. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE UNII-7 BAND


4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 242-Tones, RU 61

HARMONICS AND SPURIOUS EMISSIONS

LOW

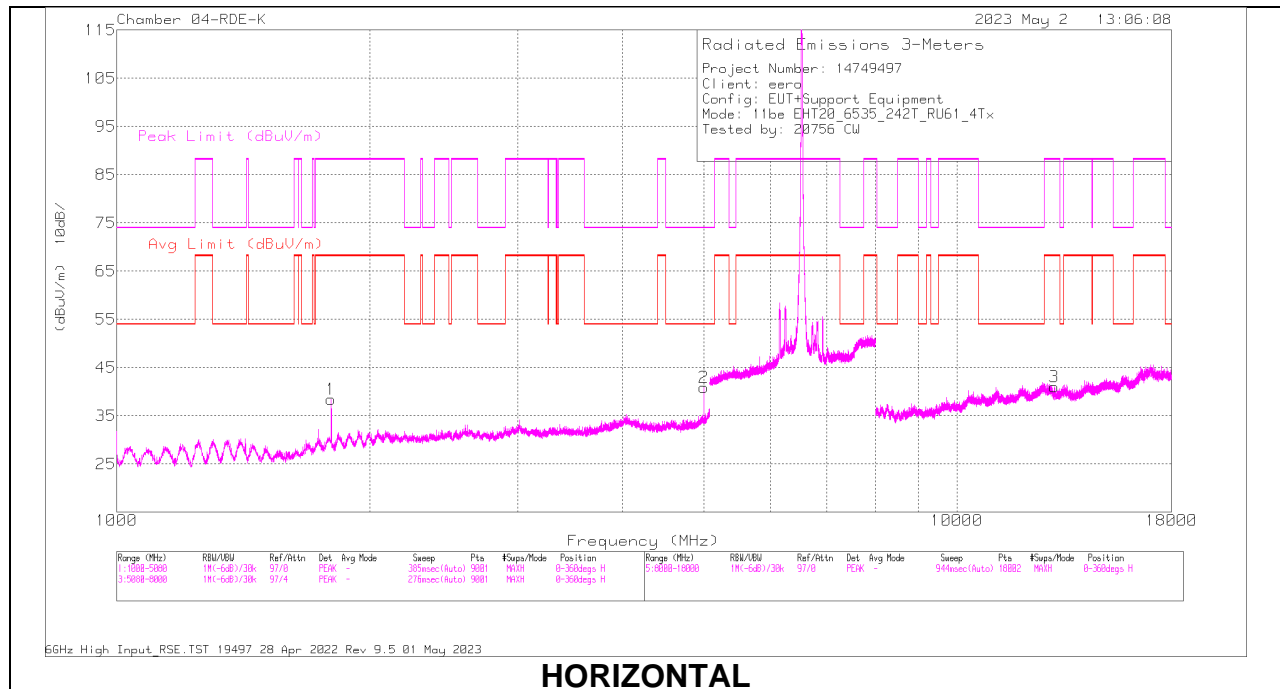

HORIZONTAL

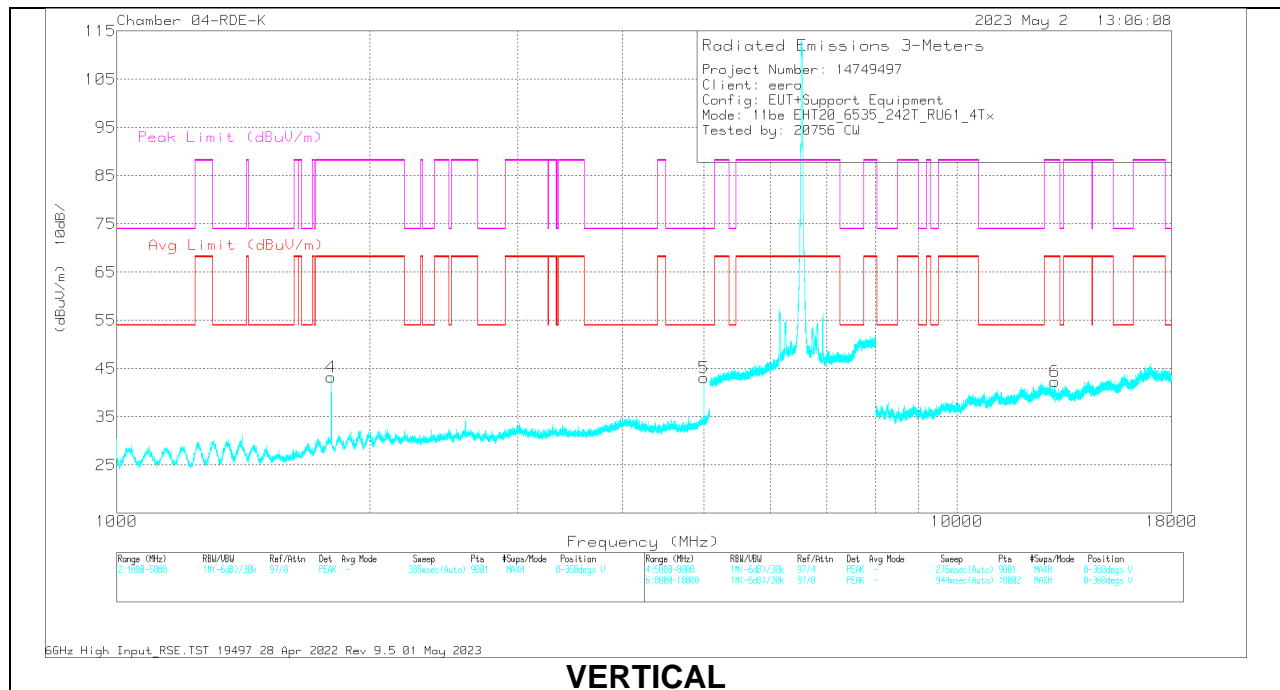

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1799.832	61.04	PK-U	30.2	-45.8	45.44	-	-	88.2	-42.76	185	198	H
	1799.917	54.65	ADR	30.2	-45.8	39.05	68.2	-29.15	-	-	185	198	H
2	* 4999.949	53.07	PK-U	33.8	-39	47.87	-	-	74	-26.13	230	243	H
	* 5000.057	46.98	ADR	33.8	-39	41.78	54	-12.22	-	-	230	243	H
4	1799.949	62.66	PK-U	30.2	-45.8	47.06	-	-	88.2	-41.14	190	145	V
	1799.986	57.56	ADR	30.2	-45.8	41.96	68.2	-26.24	-	-	190	145	V
5	* 5000.058	54.08	PK-U	33.8	-39	48.88	-	-	74	-25.12	174	192	V
	* 4999.983	48.82	ADR	33.8	-39	43.62	54	-10.38	-	-	174	192	V
3	13063.789	44.78	PK-U	39.2	-34.1	49.88	-	-	88.2	-38.32	49	208	H
	13063.508	33.55	ADR	39.2	-34.1	38.65	68.2	-29.55	-	-	49	208	H
6	13072.977	45.78	PK-U	39.2	-34.1	50.88	-	-	88.2	-37.32	42	327	V
	13072.664	34.53	ADR	39.2	-34.1	39.63	68.2	-28.57	-	-	42	327	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID

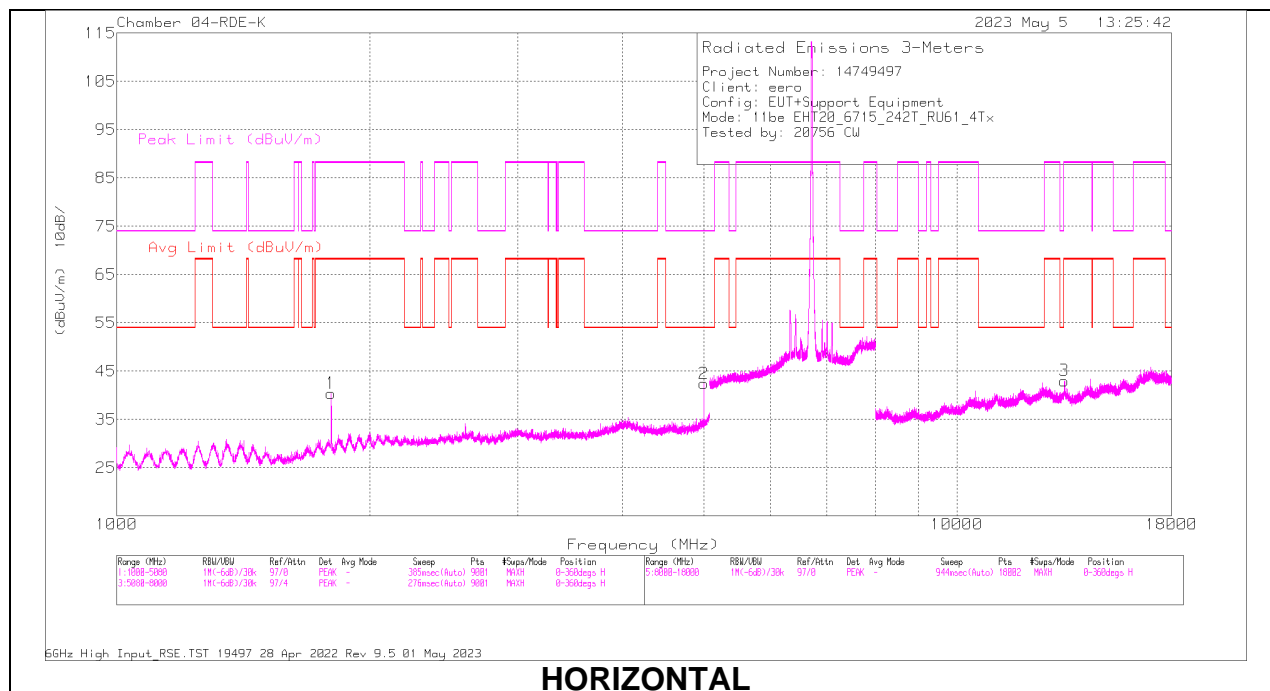

HORIZONTAL

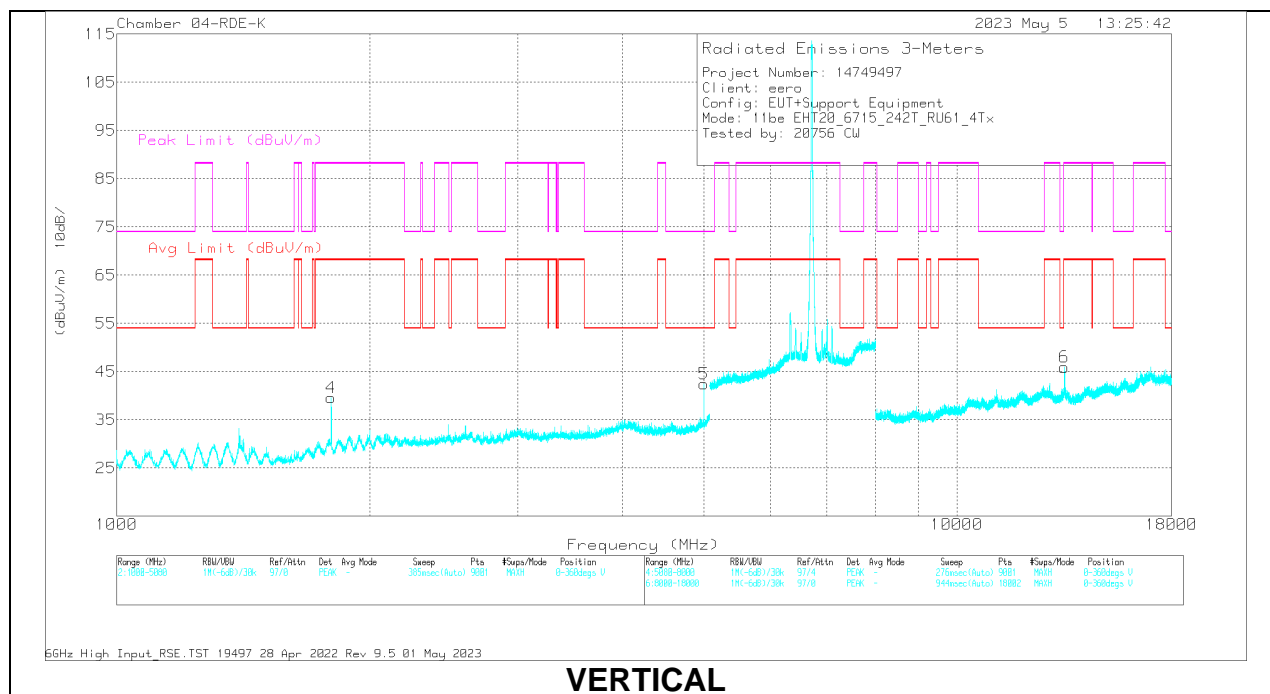

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.058	61.11	PK-U	30.2	-45.8	45.51	-	-	88.2	-42.69	175	188	H
	1799.906	55.4	ADR	30.2	-45.8	39.8	68.2	-28.4	-	-	175	188	H
2	* 5000.16	54.73	PK-U	33.8	-39	49.53	-	-	74	-24.47	206	320	H
	* 4999.992	49.43	ADR	33.8	-39	44.23	54	-9.77	-	-	206	320	H
4	1799.994	61.4	PK-U	30.2	-45.8	45.8	-	-	88.2	-42.4	185	216	V
	1800.066	55.75	ADR	30.2	-45.8	40.15	68.2	-28.05	-	-	185	216	V
5	* 5000.142	53.96	PK-U	33.8	-39	48.76	-	-	74	-25.24	178	162	V
	* 4999.994	48.22	ADR	33.8	-39	43.02	54	-10.98	-	-	178	162	V
3	13426.234	50.08	PK-U	39.1	-34.6	54.58	-	-	88.2	-33.62	96	170	H
	13429.037	38.2	ADR	39.1	-34.7	42.6	68.2	-25.6	-	-	96	170	H
6	13427.398	51.48	PK-U	39.1	-34.7	55.88	-	-	88.2	-32.32	15	209	V
	13429.113	39.17	ADR	39.1	-34.7	43.57	68.2	-24.63	-	-	15	209	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

H STRADDLE

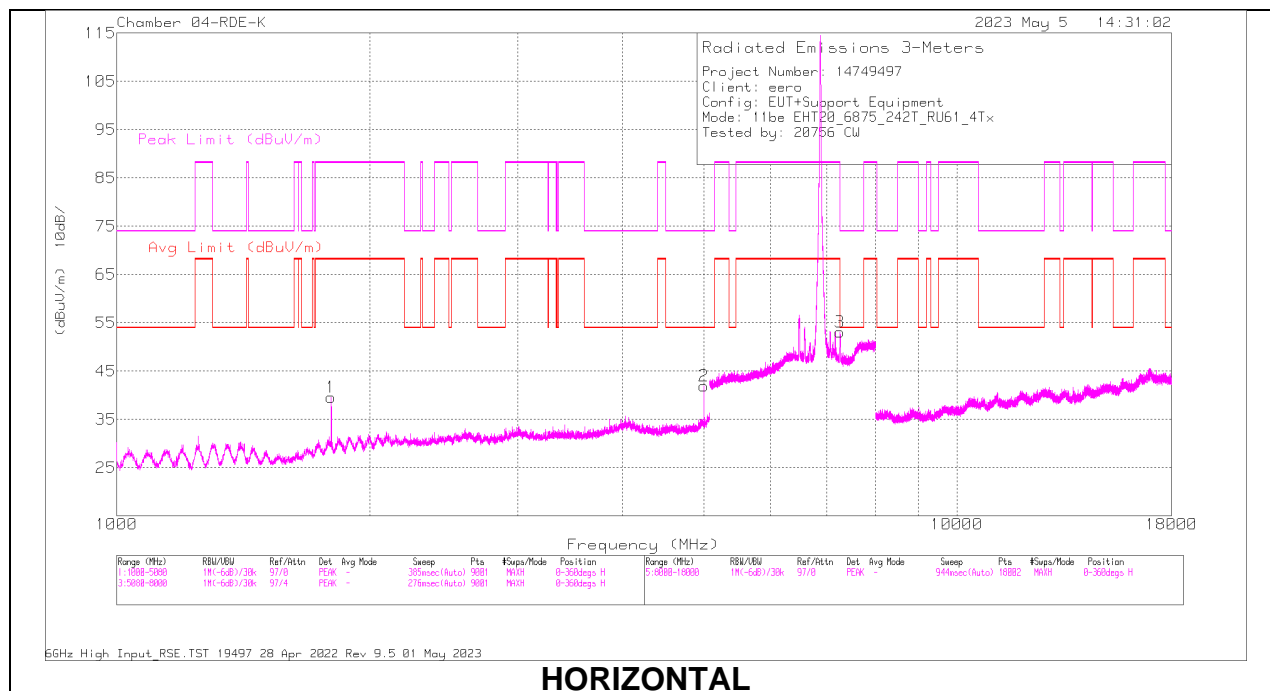

HORIZONTAL

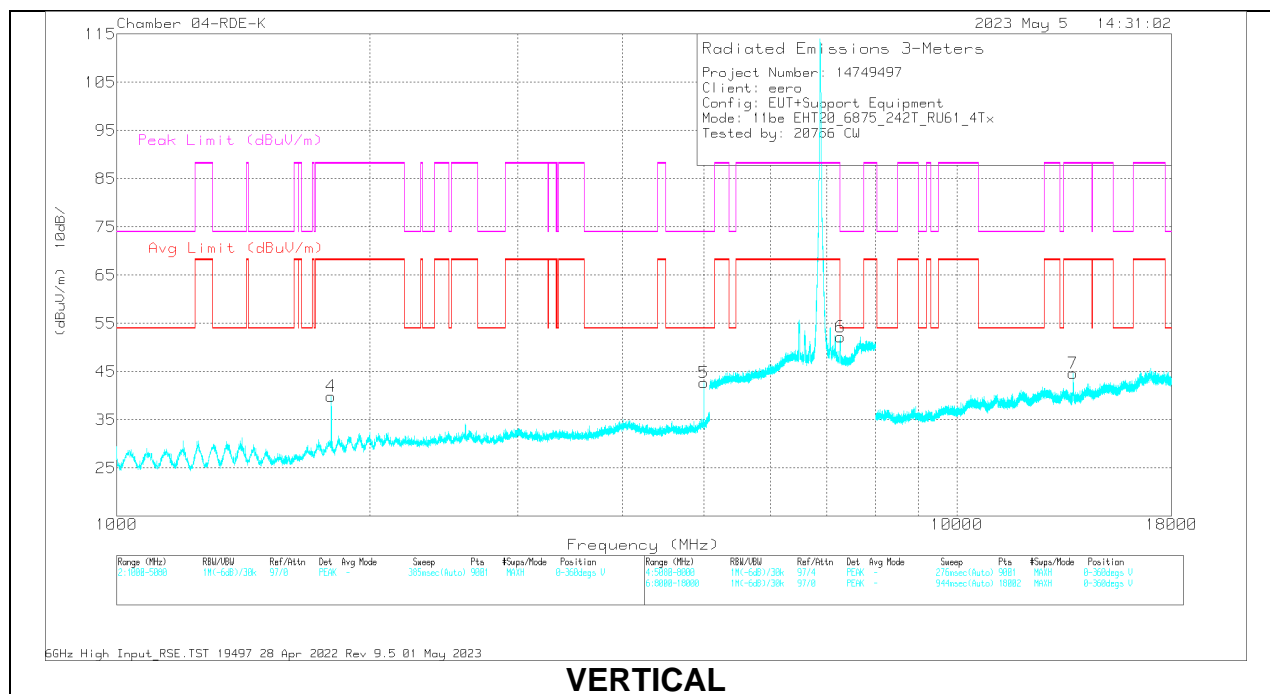

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.012	60.75	PK-U	30.2	-45.8	45.15	-	-	88.2	-43.05	177	178	H
	1800.041	55.38	ADR	30.2	-45.8	39.78	68.2	-28.42	-	-	177	178	H
2	* 4999.907	55.18	PK-U	33.8	-39	49.98	-	-	74	-24.02	200	320	H
	* 5000.039	49.04	ADR	33.8	-39	43.84	54	-10.16	-	-	200	320	H
5	* 4999.918	54.1	PK-U	33.8	-39	48.9	-	-	74	-25.1	179	158	V
	* 4999.977	48.57	ADR	33.8	-39	43.37	54	-10.63	-	-	179	158	V
3	* 7253.747	32.47	PK-U	35.7	-5	63.17	-	-	74	-10.83	41	105	H
	* 7255.268	20.7	ADR	35.7	-4.9	51.5	54	-2.5	-	-	41	105	H
6	* 7263.81	31.13	PK-U	35.7	-4.7	62.13	-	-	74	-11.87	137	192	V
	* 7266.102	19.5	ADR	35.7	-4.7	50.5	54	-3.5	-	-	137	192	V
7	13751.145	47.99	PK-U	38.8	-34.5	52.29	-	-	88.2	-35.91	8	213	V
	13751.093	36.08	ADR	38.8	-34.5	40.38	68.2	-27.82	-	-	8	213	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.1.16. TX ABOVE 1 GHz 802.11be EHT40 MODE IN THE UNII-7 BAND
4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 484-Tones, RU 65

HARMONICS AND SPURIOUS EMISSIONS

LOW

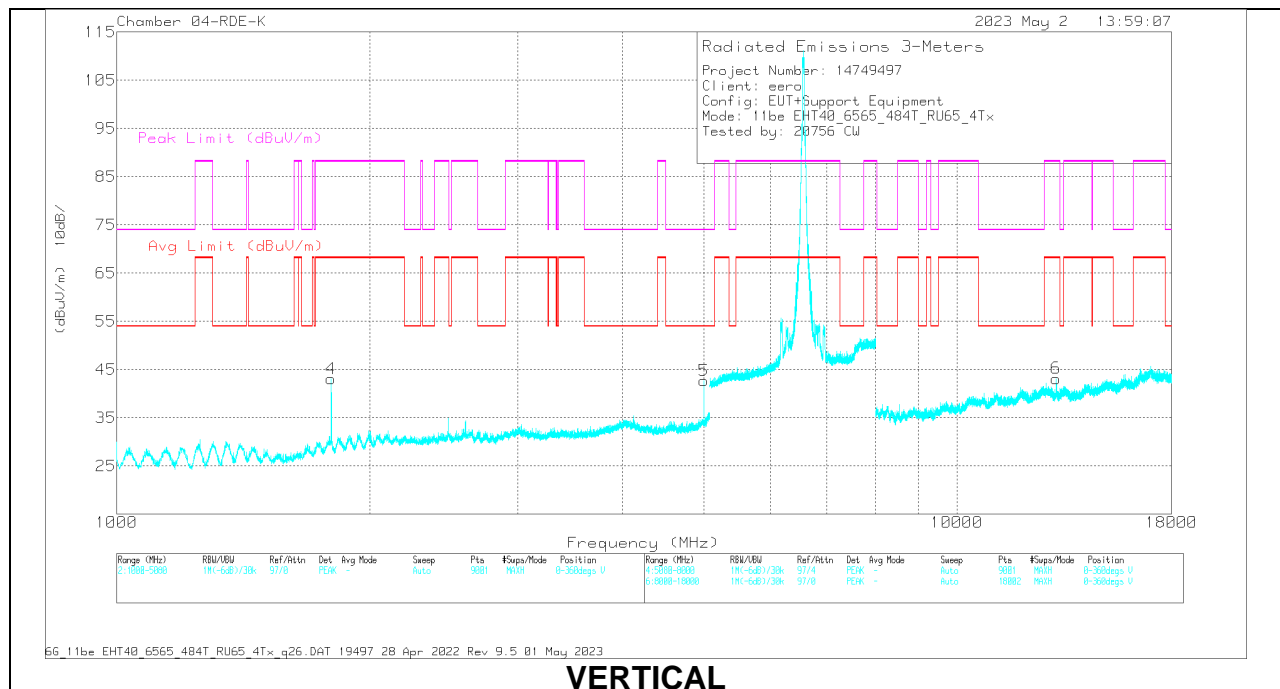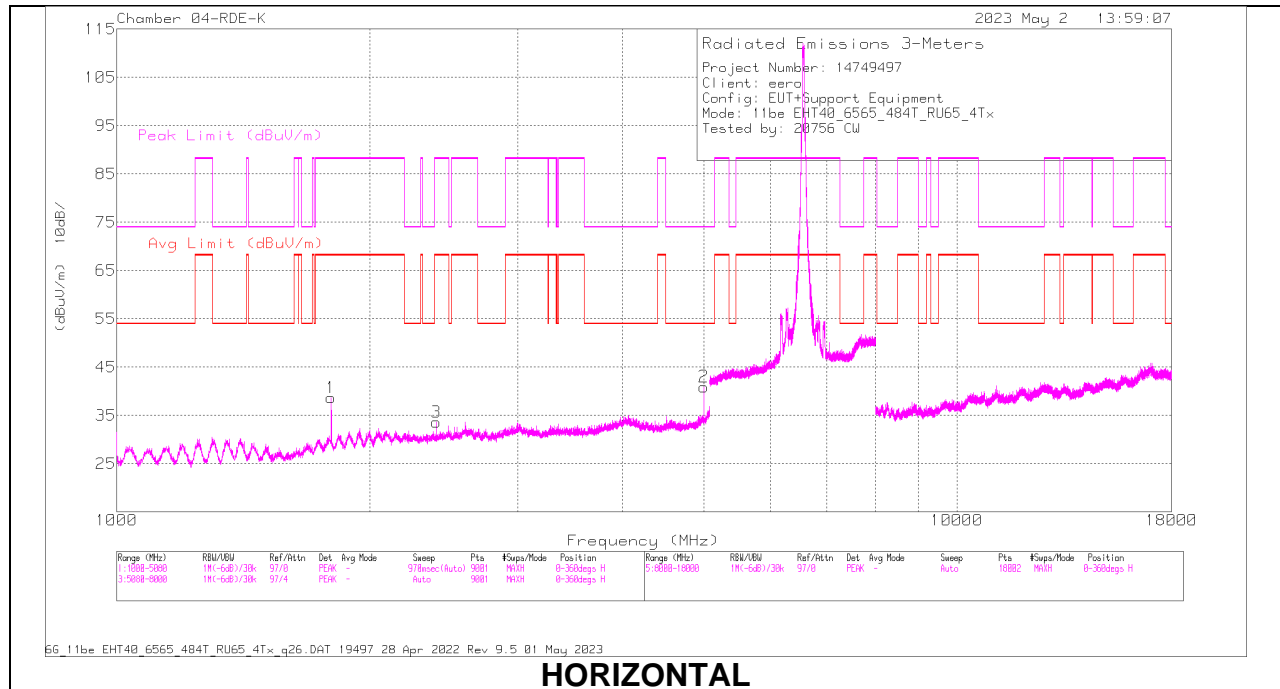

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.417	61.65	PK-U	30.2	-45.8	46.05	-	-	88.2	-42.15	181	196	H
	1800.044	55	ADR	30.2	-45.8	39.4	68.2	-28.8	-	-	181	196	H
2	* 5000.073	54.32	PK-U	33.8	-39	49.12	-	-	74	-24.88	207	127	H
	* 5000.026	47.24	ADR	33.8	-39	42.04	54	-11.96	-	-	207	127	H
3	2400.039	54.48	PK-U	31.9	-44.6	41.78	-	-	88.2	-46.42	165	183	H
	2397.354	42.86	ADR	31.8	-44.7	29.96	68.2	-38.24	-	-	165	183	H
4	1800.134	61.6	PK-U	30.2	-45.8	46	-	-	88.2	-42.2	198	273	V
	1799.867	56.16	ADR	30.2	-45.8	40.56	68.2	-27.64	-	-	198	273	V
5	* 5000.143	54.46	PK-U	33.8	-39	49.26	-	-	74	-24.74	174	114	V
	* 4999.977	48.68	ADR	33.8	-39	43.48	54	-10.52	-	-	174	114	V
6	13128.254	45.26	PK-U	39.1	-34.4	49.96	-	-	88.2	-38.24	44	279	V
	13126.833	34.02	ADR	39.1	-34.4	38.72	68.2	-29.48	-	-	44	279	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID

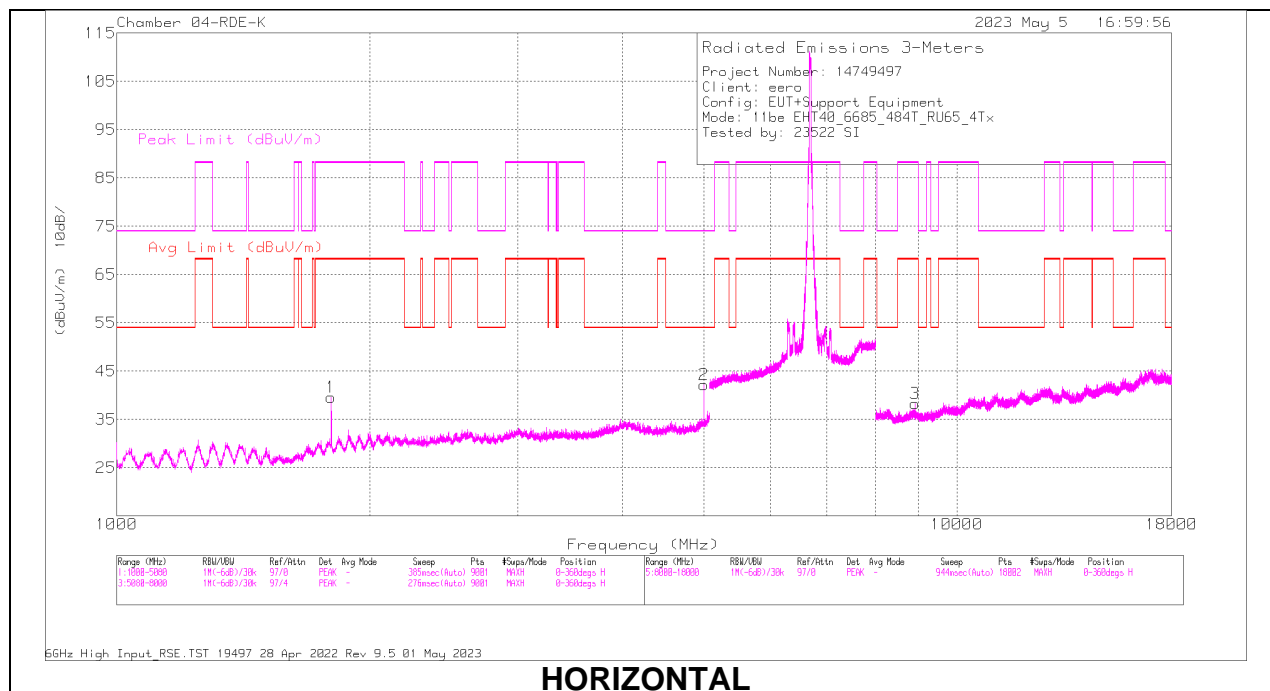

HORIZONTAL

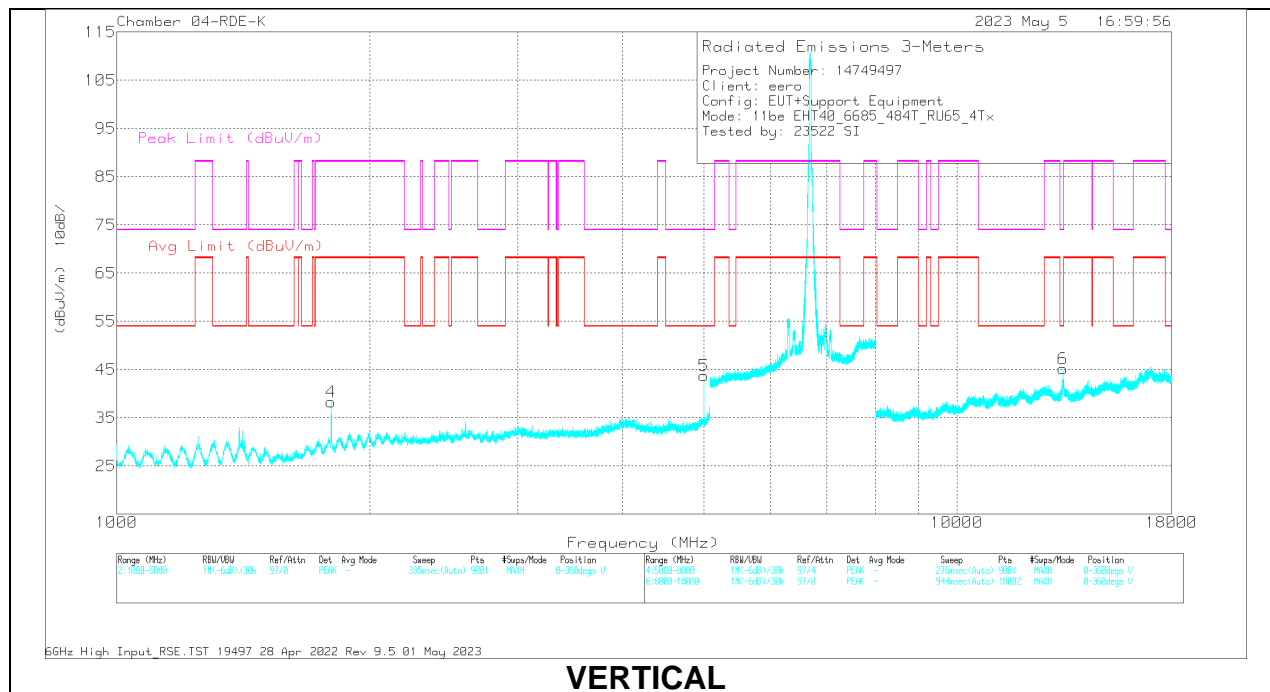

VERTICAL

RADIATED EMISSIONS


Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Filtr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1800.078	61.12	PK-U	30.2	-45.8	45.52	-	-	88.2	-42.68	169	198	H
1800.017	55.56	ADR	30.2	-45.8	39.96	68.2	-28.24	-	-	169	198	H
* 4999.95	54.39	PK-U	33.8	-39	49.19	-	-	74	-24.81	199	301	H
* 5000.039	48.72	ADR	33.8	-39	43.52	54	-10.48	-	-	199	301	H
1800.141	63.18	PK-U	30.2	-45.8	47.58	-	-	88.2	-40.62	185	235	V
1799.975	58.6	ADR	30.2	-45.8	43	68.2	-25.2	-	-	185	235	V
* 5000.007	55.04	PK-U	33.8	-39	49.84	-	-	74	-24.16	165	124	V
* 5000.019	49.99	ADR	33.8	-39	44.79	54	-9.21	-	-	165	124	V
8913.401	47.69	PK-U	36	-36.8	46.89	-	-	88.2	-41.31	86	165	H
8913.276	37.71	ADR	36	-36.8	36.91	68.2	-31.29	-	-	86	165	H
* 13380.107	49.23	PK-U	39.2	-34.8	53.63	-	-	74	-20.37	9	125	V
* 13377.432	37.12	ADR	39.2	-34.8	41.52	54	-12.48	-	-	9	125	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH

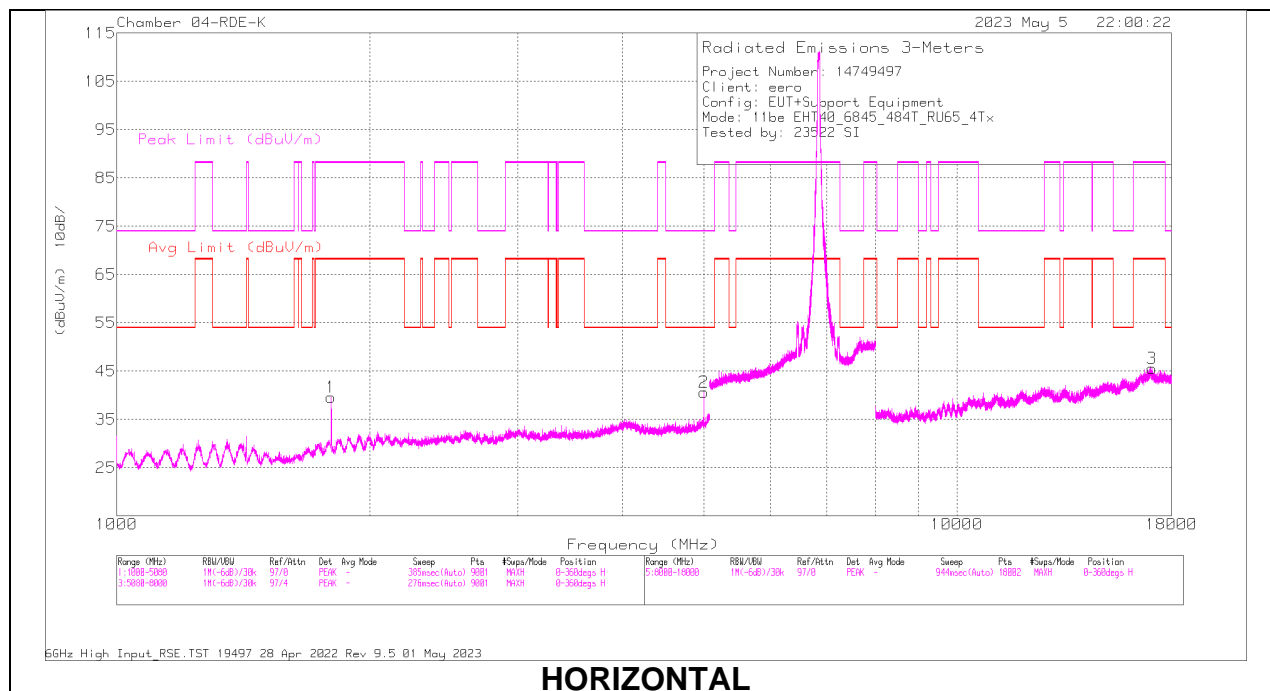

HORIZONTAL

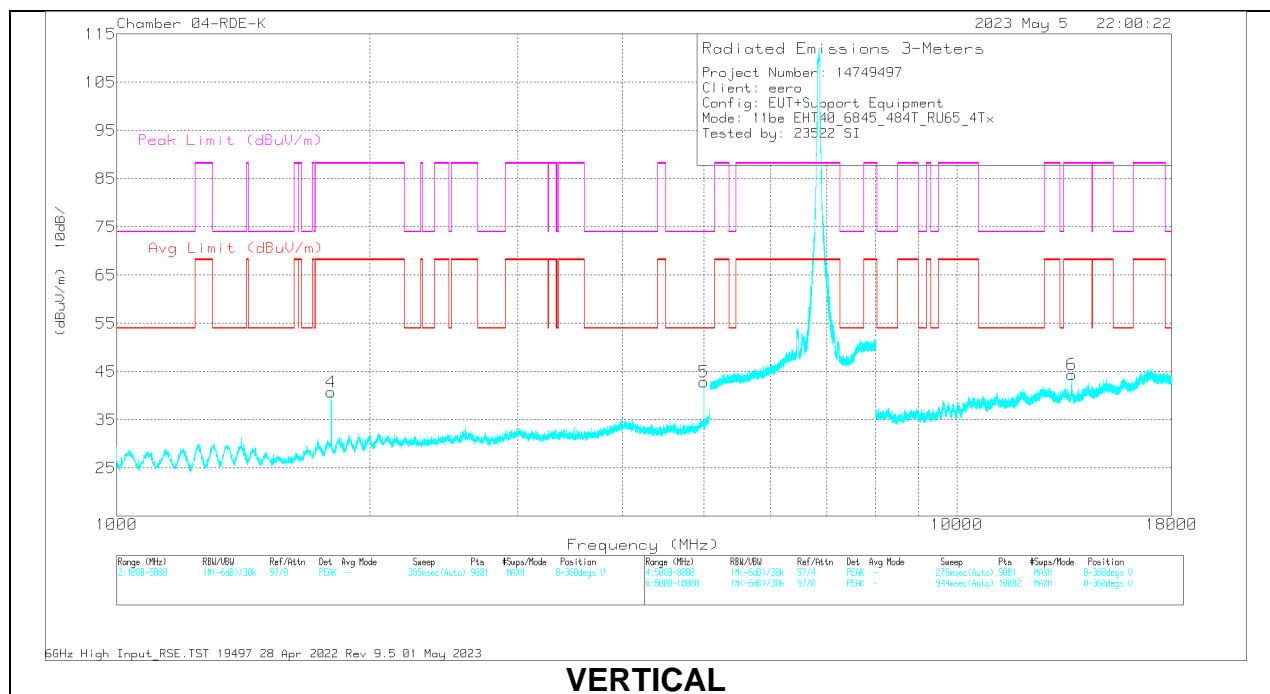

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1799.989	61.18	PK-U	30.2	-45.8	45.58	-	-	88.2	-42.62	162	141	H
	1800.035	54.64	ADR	30.2	-45.8	39.04	68.2	-29.16	-	-	162	141	H
2	* 5000.037	53.64	PK-U	33.8	-39	48.44	-	-	74	-25.56	153	271	H
	* 5000.003	47.84	ADR	33.8	-39	42.64	54	-11.36	-	-	153	271	H
4	1800.146	61.87	PK-U	30.2	-45.8	46.27	-	-	88.2	-41.93	185	234	V
	1800.033	56.28	ADR	30.2	-45.8	40.68	68.2	-27.52	-	-	185	234	V
5	* 4999.985	55.19	PK-U	33.8	-39	49.99	-	-	74	-24.01	168	110	V
	* 5000.008	50.17	ADR	33.8	-39	44.97	54	-9.03	-	-	168	110	V
3	17067.671	44.58	PK-U	41.5	-32.5	53.58	-	-	88.2	-34.62	214	324	H
	17068.22	33.31	ADR	41.5	-32.5	42.31	68.2	-25.89	-	-	214	324	H
6	13692.028	49.77	PK-U	38.8	-34.6	53.97	-	-	88.2	-34.23	11	112	V
	13689.902	36.52	ADR	38.8	-34.6	40.72	68.2	-27.48	-	-	11	112	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak



ADR - U-NII AD primary method, RMS average

10.1.17. TX ABOVE 1 GHz 802.11be EHT80 MODE IN THE UNII-7 BAND

4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 996-Tones, RU 67

HARMONICS AND SPURIOUS EMISSIONS

LOW STRADDLE

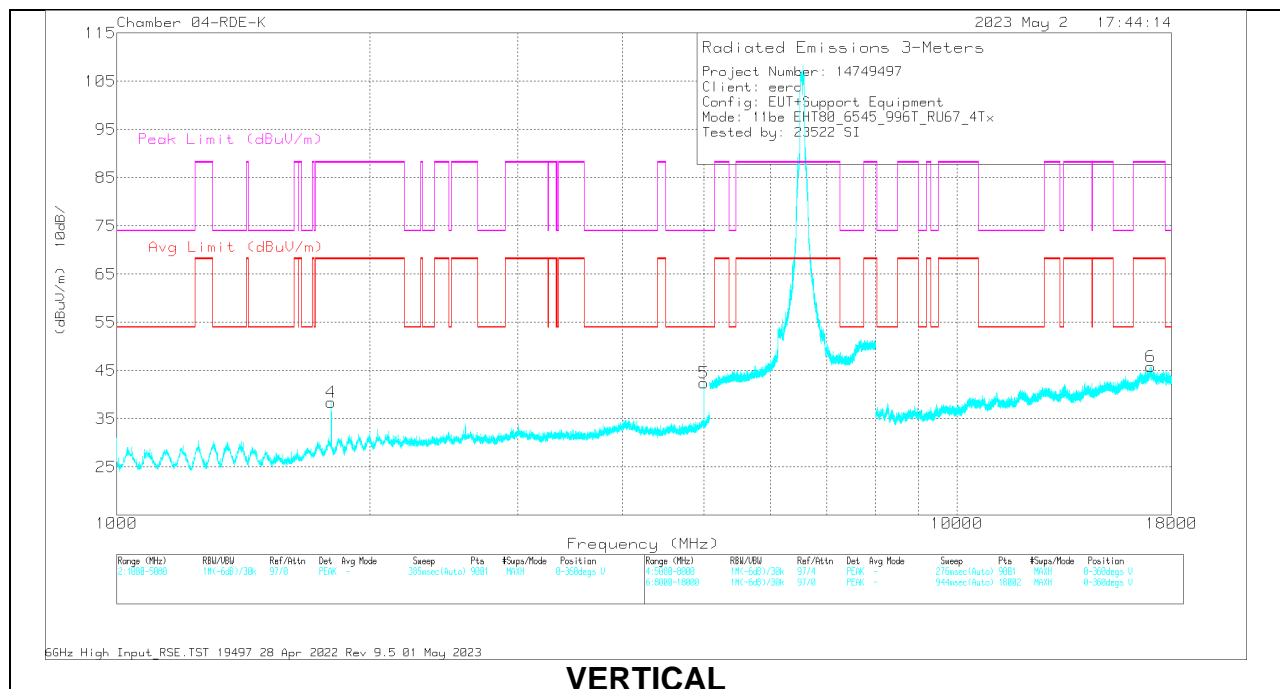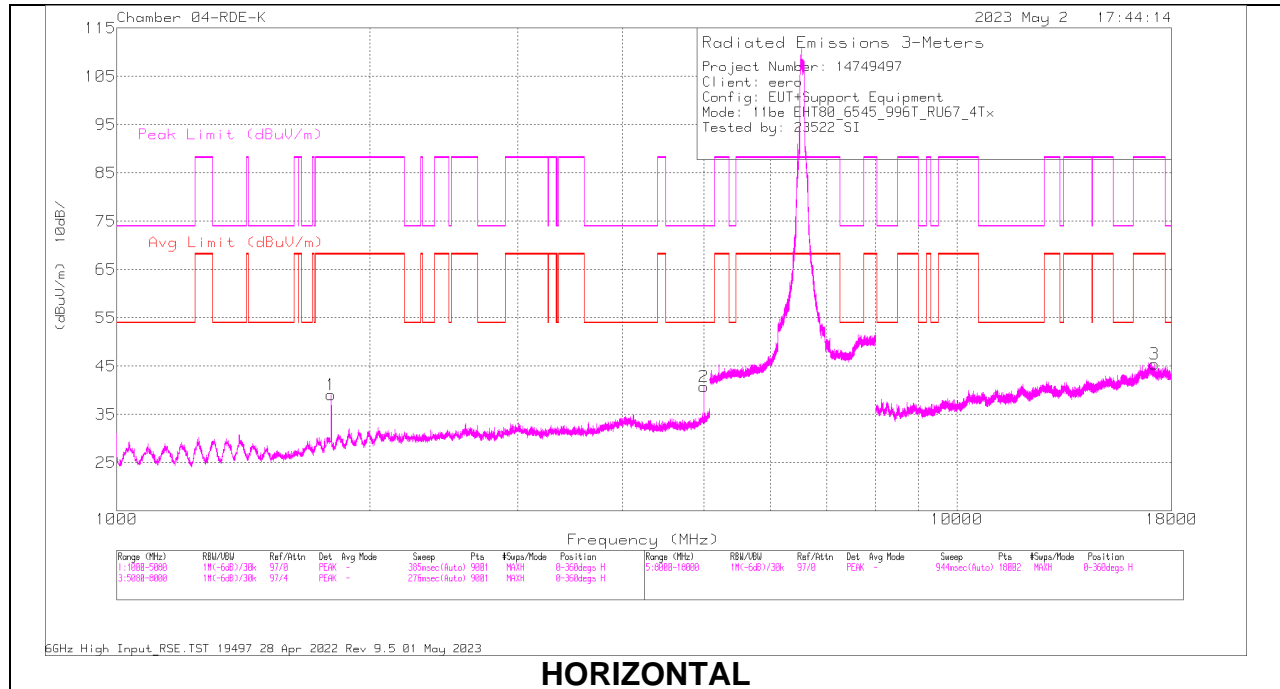

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.121	61.27	PK-U	30.2	-45.8	45.67	-	-	88.2	-42.53	168	226	H
	1799.991	55.38	ADR	30.2	-45.8	39.78	68.2	-28.42	-	-	168	226	H
2	* 4999.986	52.7	PK-U	33.8	-39	47.5	-	-	74	-26.5	231	129	H
	* 5000.099	45.94	ADR	33.8	-39	40.74	54	-13.26	-	-	231	129	H
4	1799.775	62.91	PK-U	30.2	-45.8	47.31	-	-	88.2	-40.89	196	232	V
	1800.025	58.14	ADR	30.2	-45.8	42.54	68.2	-25.66	-	-	196	232	V
5	* 4999.962	53.98	PK-U	33.8	-39	48.78	-	-	74	-25.22	177	136	V
	* 5000.003	48.51	ADR	33.8	-39	43.31	54	-10.69	-	-	177	136	V
3	17178.172	43.8	PK-U	41.2	-31.6	53.4	-	-	88.2	-34.8	57	228	H
	17179.737	32.33	ADR	41.2	-31.6	41.93	68.2	-26.27	-	-	57	228	H
6	16994.135	45.16	PK-U	41.6	-32.2	54.56	-	-	88.2	-33.64	226	162	V
	16997.612	32.97	ADR	41.6	-32.1	42.47	68.2	-25.73	-	-	226	162	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID

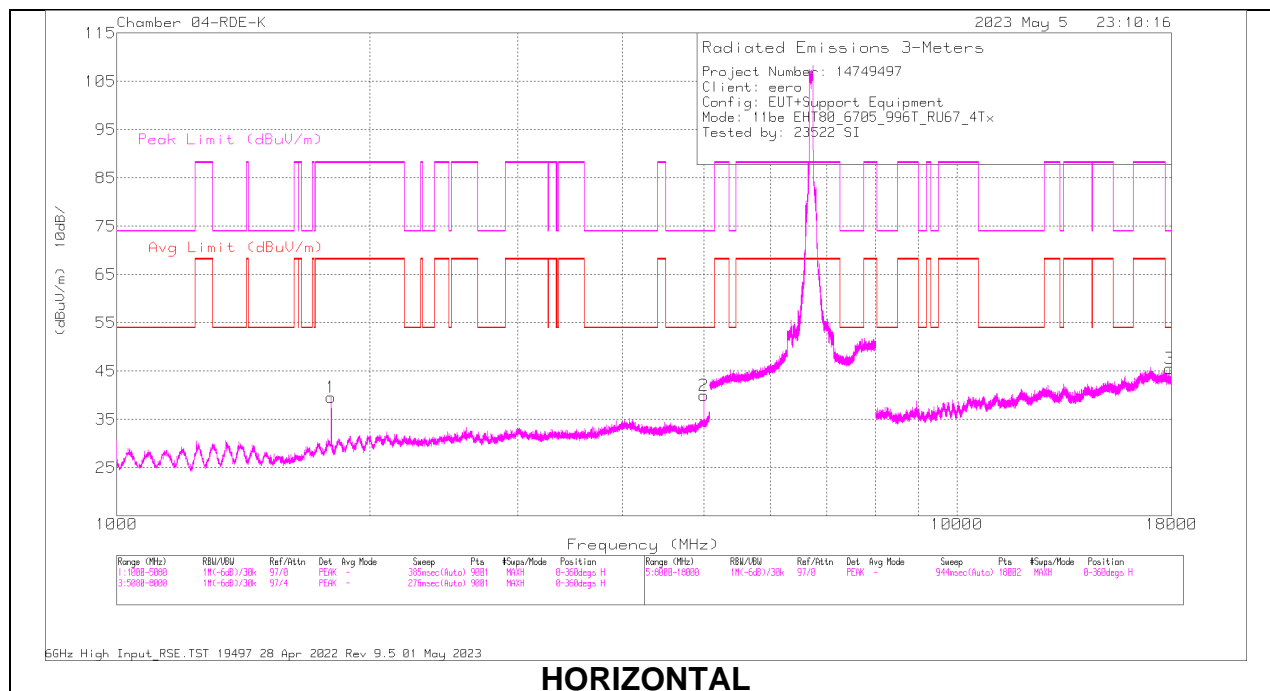

HORIZONTAL

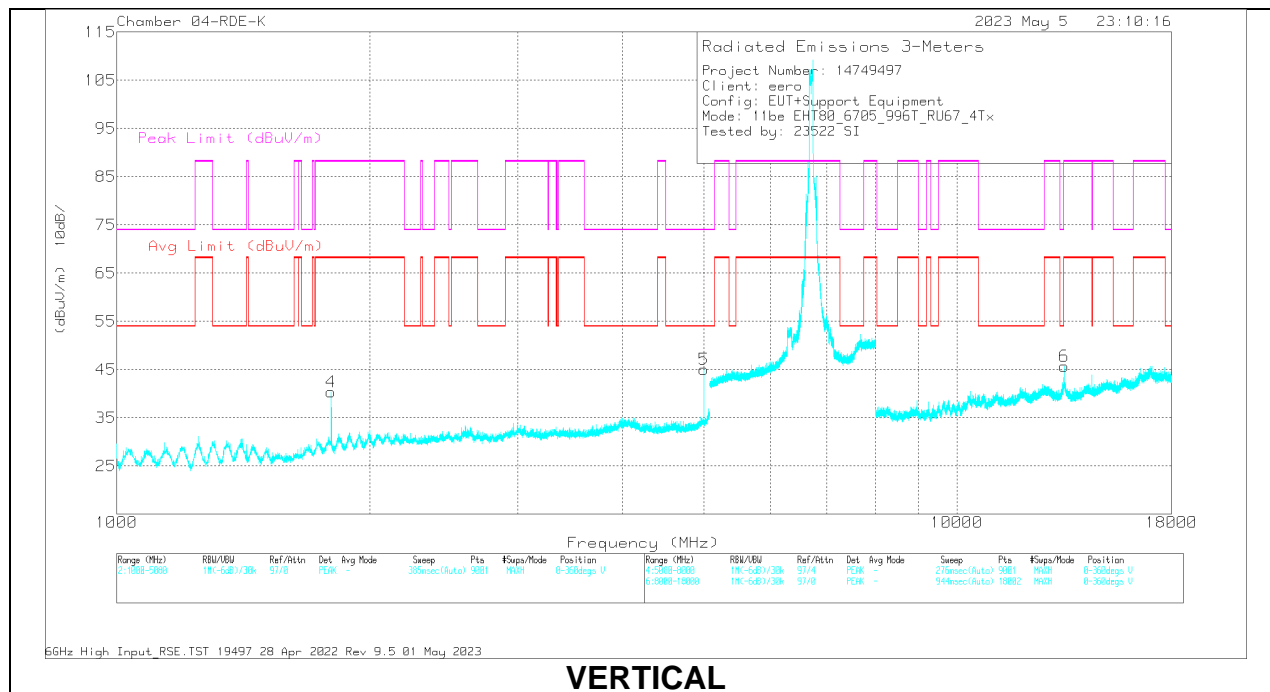

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.155	61.4	PK-U	30.2	-45.8	45.8	-	-	88.2	-42.4	166	173	H
	1800.043	54.91	ADR	30.2	-45.8	39.31	68.2	-28.89	-	-	166	173	H
2	* 4999.884	53.48	PK-U	33.8	-39.1	48.18	-	-	74	-25.82	186	359	H
	* 5000.019	47.39	ADR	33.8	-39	42.19	54	-11.81	-	-	186	359	H
4	1799.768	62.02	PK-U	30.2	-45.8	46.42	-	-	88.2	-41.78	186	240	V
	1799.991	56.82	ADR	30.2	-45.8	41.22	68.2	-26.98	-	-	186	240	V
5	* 4999.942	55	PK-U	33.8	-39	49.8	-	-	74	-24.2	165	112	V
	* 5000.059	50.2	ADR	33.8	-39	45	54	-9	-	-	165	112	V
3	* 17913.007	43.47	PK-U	40.6	-31	53.07	-	-	74	-20.93	352	273	H
	* 17910.572	31.89	ADR	40.6	-31.1	41.39	54	-12.61	-	-	352	273	H
6	13420.491	47.41	PK-U	39.1	-34.6	51.91	-	-	88.2	-36.29	0	163	V
	13420.369	35.41	ADR	39.1	-34.6	39.91	68.2	-28.29	-	-	0	163	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH STRADDLE

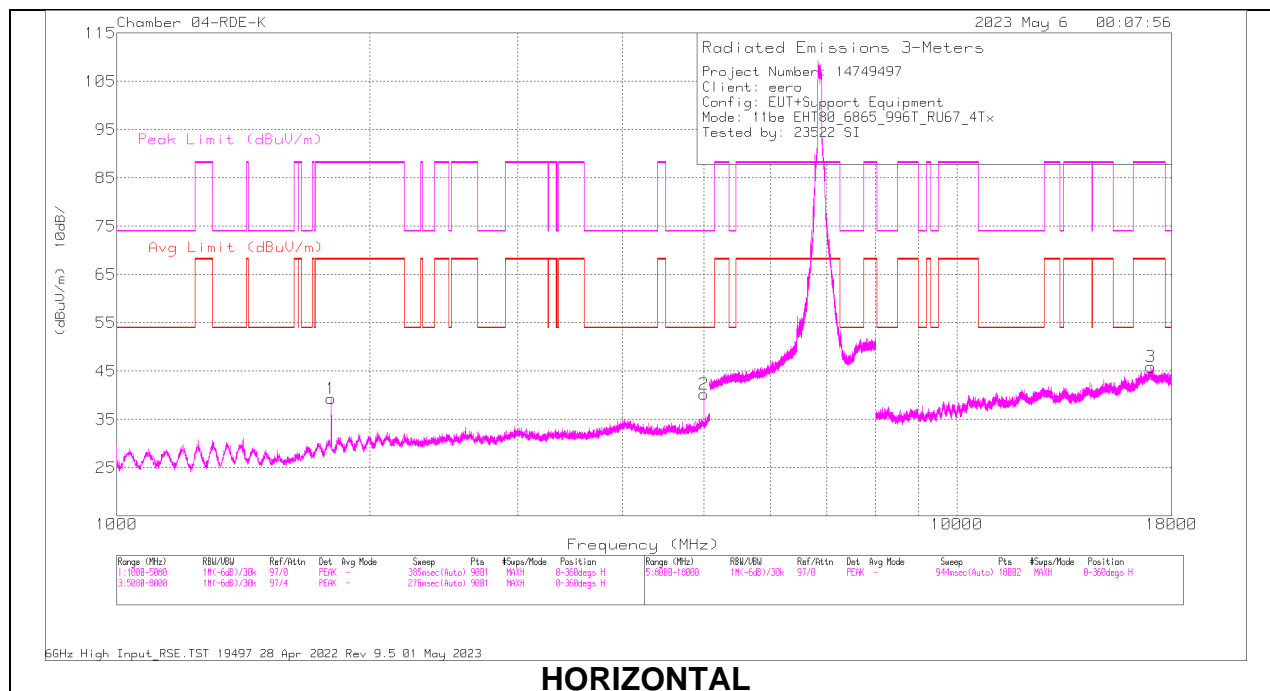

HORIZONTAL

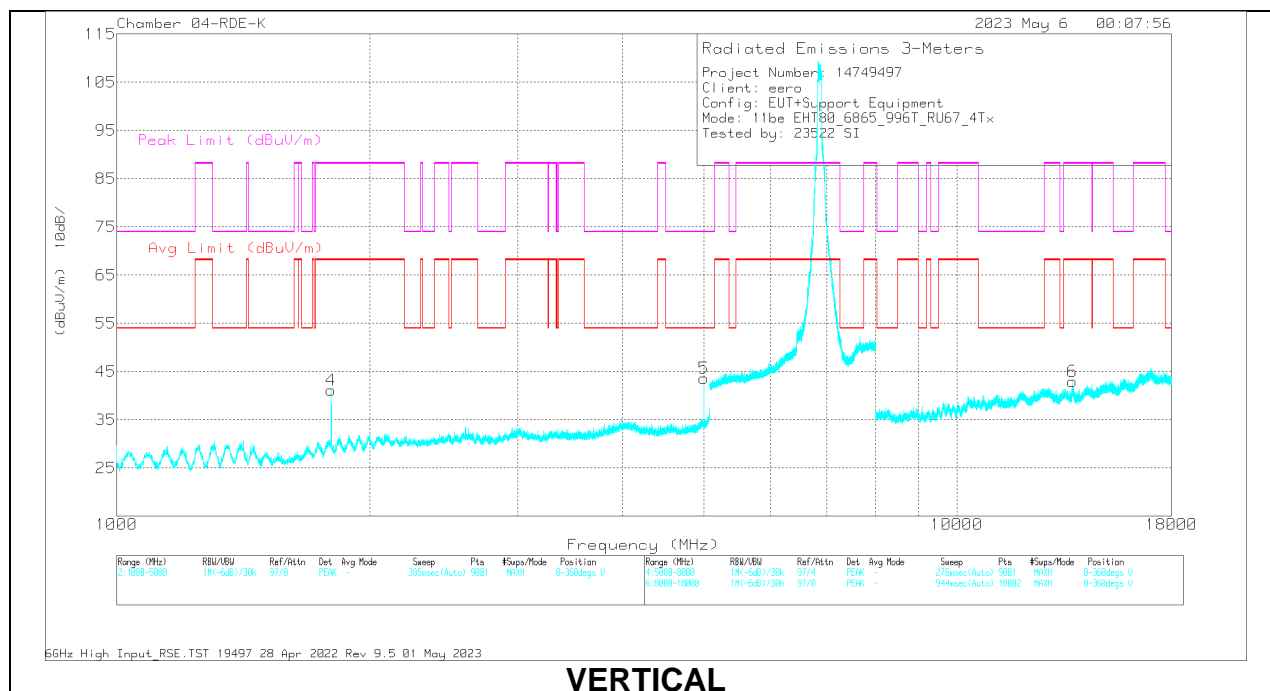

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.491	61.08	PK-U	30.2	-45.8	45.48	-	-	88.2	-42.72	166	215	H
	1799.948	55.06	ADR	30.2	-45.8	39.46	68.2	-28.74	-	-	166	215	H
2	* 5000.076	53.05	PK-U	33.8	-39	47.85	-	-	74	-26.15	186	338	H
	* 5000.011	46.94	ADR	33.8	-39	41.74	54	-12.26	-	-	186	338	H
4	1800.231	62.5	PK-U	30.2	-45.8	46.9	-	-	88.2	-41.3	185	233	V
	1800.057	57.63	ADR	30.2	-45.8	42.03	68.2	-26.17	-	-	185	233	V
5	* 4999.882	55.1	PK-U	33.8	-39.1	49.8	-	-	74	-24.2	167	109	V
	* 5000.015	50.03	ADR	33.8	-39	44.83	54	-9.17	-	-	167	109	V
3	16995.528	45.35	PK-U	41.6	-32.2	54.75	-	-	88.2	-33.45	98	393	H
	16995.955	33.21	ADR	41.6	-32.2	42.61	68.2	-25.59	-	-	98	393	H
6	13720.709	46.53	PK-U	38.8	-34	51.33	-	-	88.2	-36.87	356	132	V
	13722.09	34.93	ADR	38.8	-34.1	39.63	68.2	-28.57	-	-	356	132	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.1.18. TX ABOVE 1 GHz 802.11be EHT160 MODE IN THE UNII-7 BAND
4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 2x 996-Tones, RU 68

HARMONICS AND SPURIOUS EMISSIONS

MID

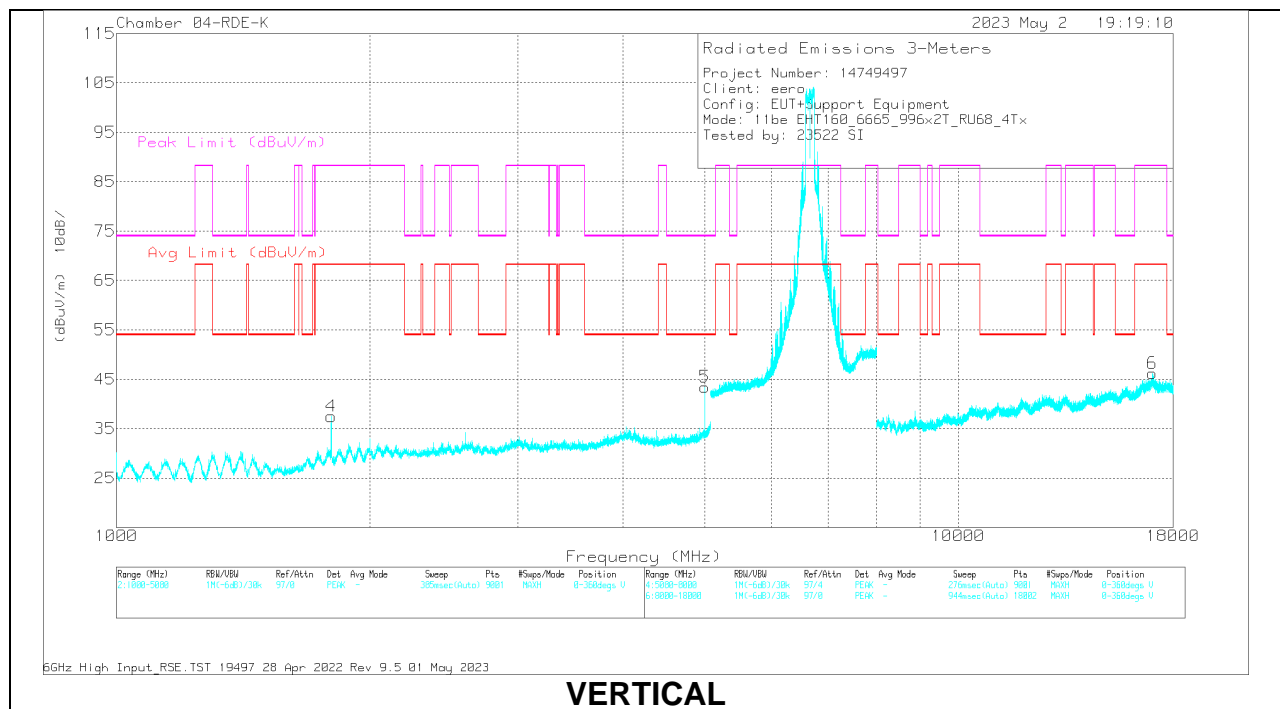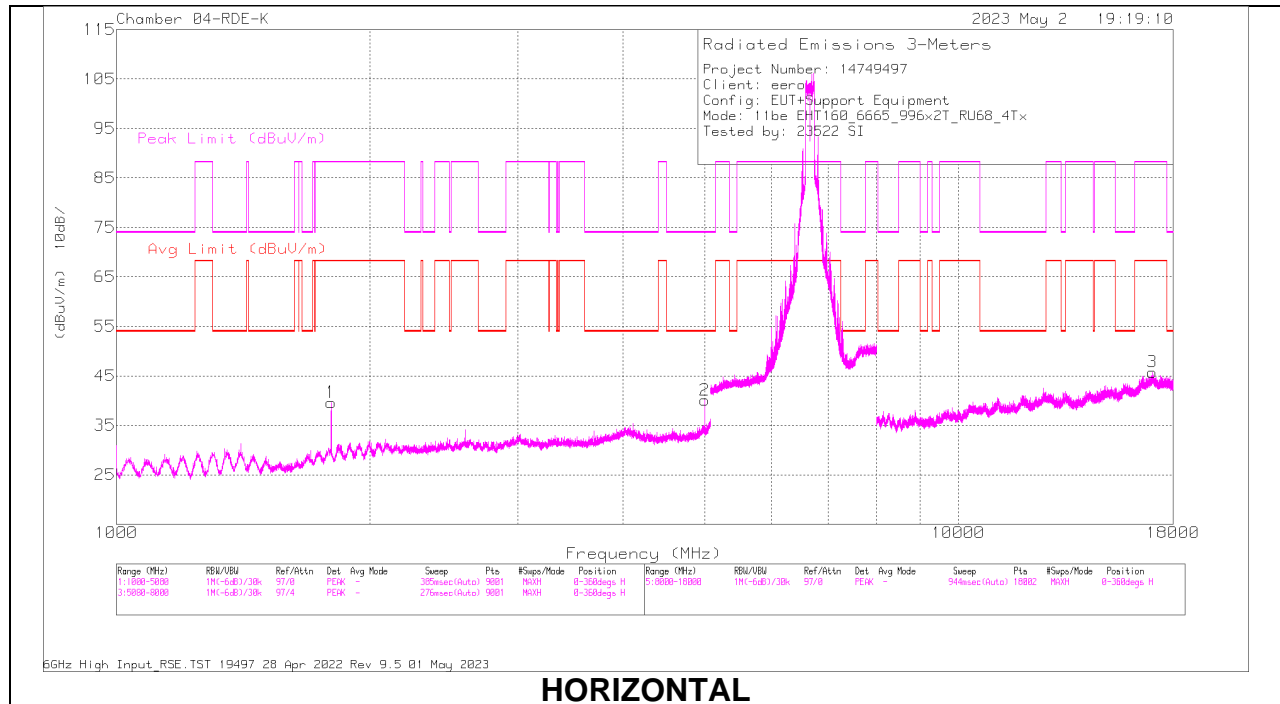

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.146	61.05	PK-U	30.2	-45.8	45.45	-	-	88.2	-42.75	170	193	H
	1799.999	55.28	ADR	30.2	-45.8	39.68	68.2	-28.52	-	-	170	193	H
2	* 5000.033	54.15	PK-U	33.8	-39	48.95	-	-	74	-25.05	226	256	H
	* 5000.017	48.55	ADR	33.8	-39	43.35	54	-10.65	-	-	226	256	H
4	1799.977	61.15	PK-U	30.2	-45.8	45.55	-	-	88.2	-42.65	193	234	V
	1800.049	55.62	ADR	30.2	-45.8	40.02	68.2	-28.18	-	-	193	234	V
5	* 4999.885	53.98	PK-U	33.8	-39.1	48.68	-	-	74	-25.32	176	137	V
	* 5000.039	48.85	ADR	33.8	-39	43.65	54	-10.35	-	-	176	137	V
3	17000.774	44.89	PK-U	41.6	-32.1	54.39	-	-	88.2	-33.81	123	395	H
	17000.573	33.24	ADR	41.6	-32.1	42.74	68.2	-25.46	-	-	123	395	H
6	17003.272	44.57	PK-U	41.6	-32.1	54.07	-	-	88.2	-34.13	15	175	V
	17002.8	33.48	ADR	41.6	-32.1	42.98	68.2	-25.22	-	-	15	175	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH STRADDLE

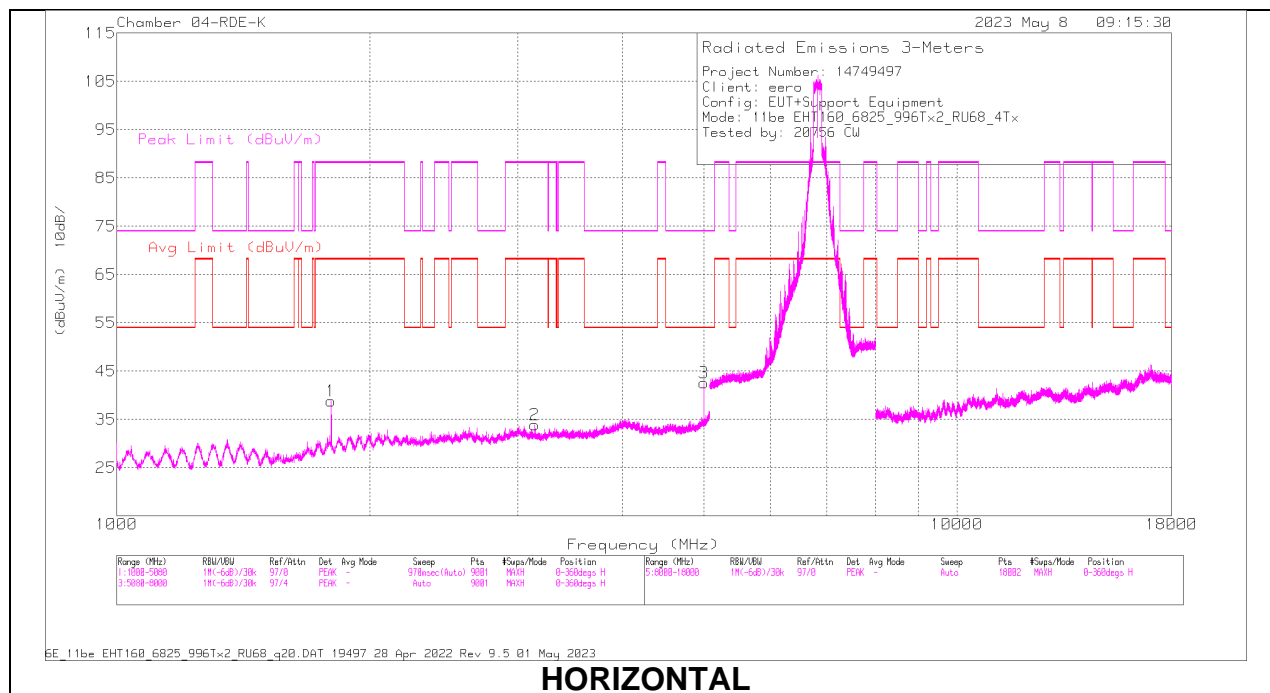

HORIZONTAL

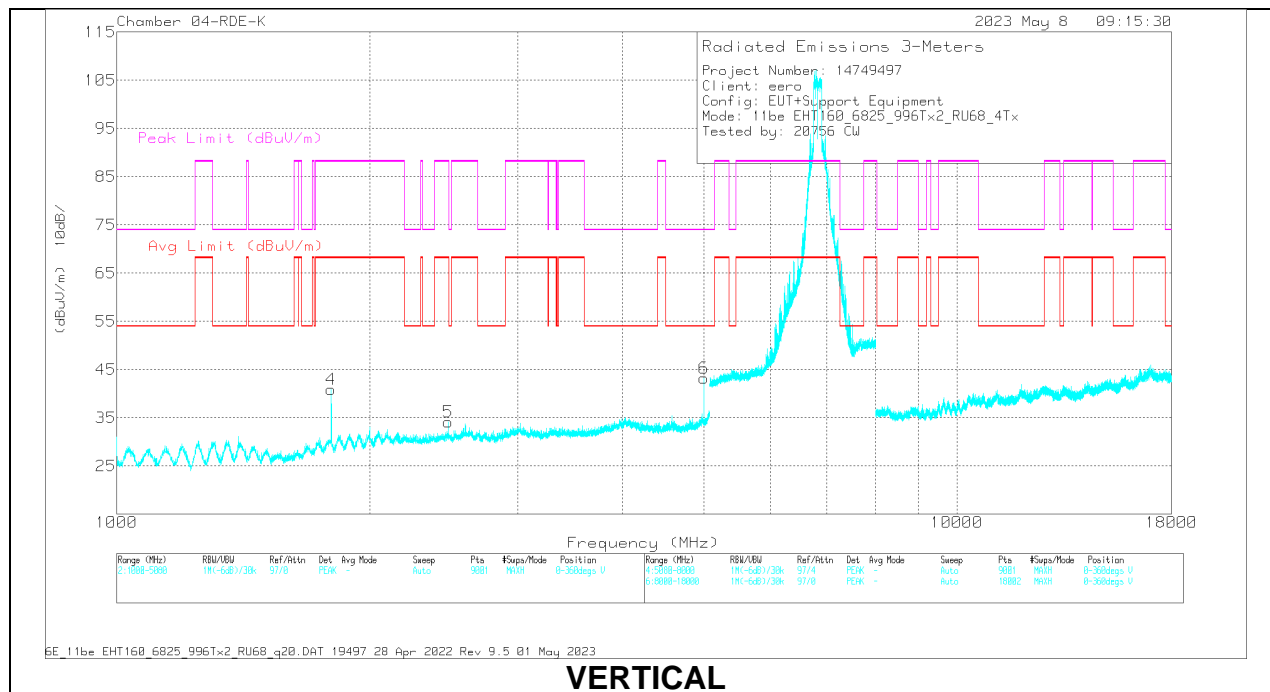

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1800.01	55.48	PK-U	30.2	-45.8	39.88	-	-	88.2	-48.32	182	261	H
	1799.905	47.15	ADR	30.2	-45.8	31.55	68.2	-36.65	-	-	182	261	H
2	3145.69	50.56	PK-U	32.9	-42	41.46	-	-	88.2	-46.74	4	195	H
	3145.508	39.33	ADR	32.9	-42	30.23	68.2	-37.97	-	-	4	195	H
3	* 5000.189	51.4	PK-U	33.8	-39	46.2	-	-	74	-27.8	4	101	H
	* 5000.106	39.43	ADR	33.8	-39	34.23	54	-19.77	-	-	4	101	H
4	1799.843	61.23	PK-U	30.2	-45.8	45.63	-	-	88.2	-42.57	194	240	V
	1799.974	55.47	ADR	30.2	-45.8	39.87	68.2	-28.33	-	-	194	240	V
5	2480.015	53.94	PK-U	32.2	-44.1	42.04	-	-	88.2	-46.16	305	126	V
	2480.159	41.74	ADR	32.2	-44.2	29.74	68.2	-38.46	-	-	305	126	V
6	* 4999.936	54.13	PK-U	33.8	-39	48.93	-	-	74	-25.07	176	123	V
	* 5000.051	48.27	ADR	33.8	-39	43.07	54	-10.93	-	-	176	123	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

10.1.19. TX ABOVE 1 GHz 802.11be EHT320 MODE IN THE UNII-7 BAND
4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 2x 996-Tones, RU 69

HARMONICS AND SPURIOUS EMISSIONS

LOW STRADDLE

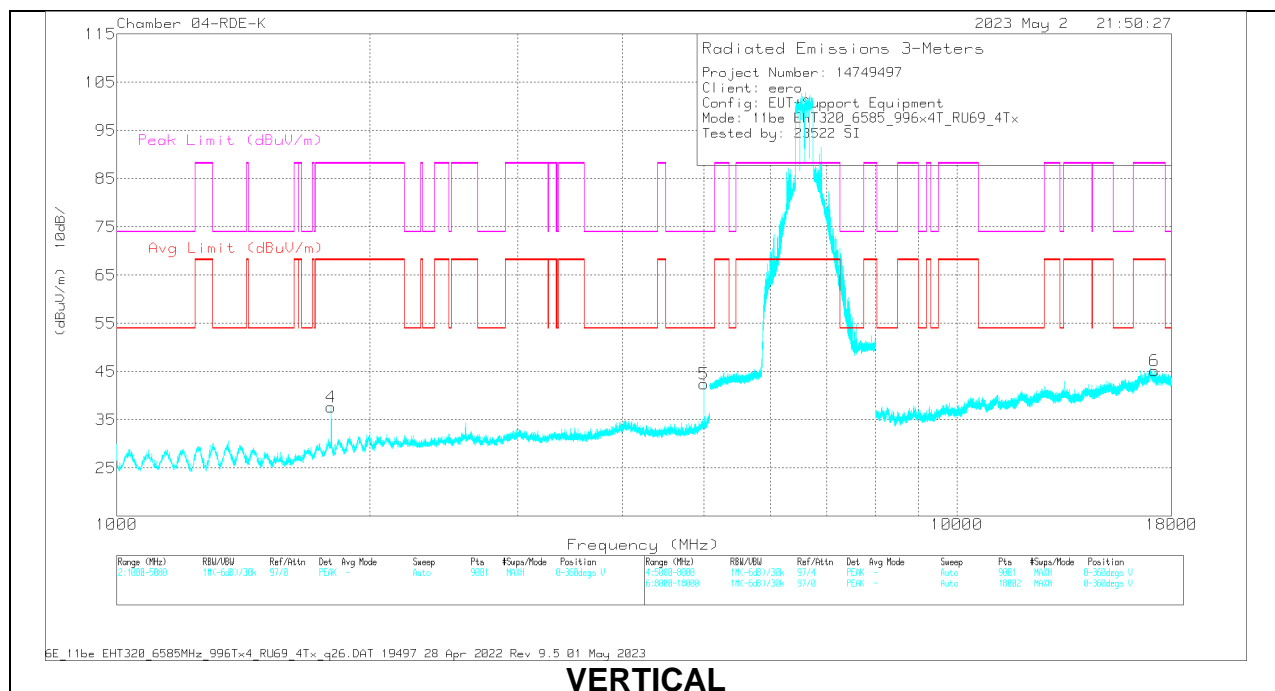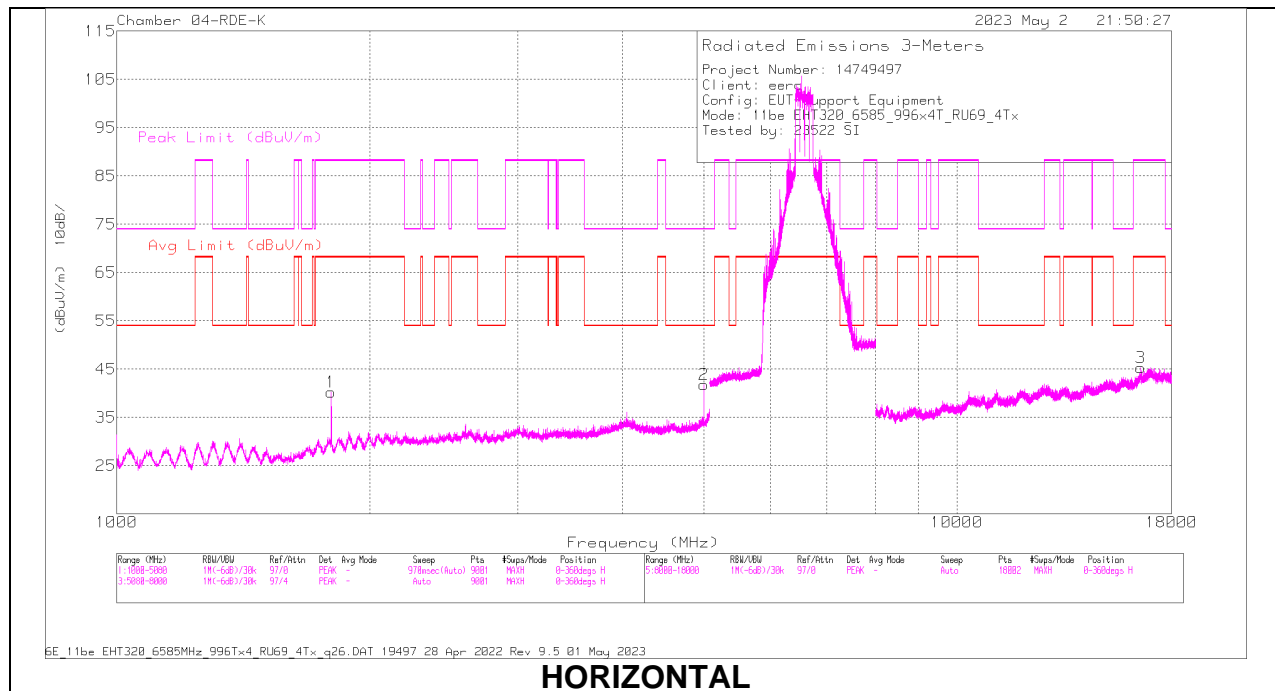

RADIATED EMISSIONS


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1799.517	61.15	PK-U	30.2	-45.8	45.55	-	-	88.2	-42.65	182	194	H
	1799.915	55.11	ADR	30.2	-45.8	39.51	68.2	-28.69	-	-	182	194	H
2	* 5000.008	53.1	PK-U	33.8	-39	47.9	-	-	74	-26.1	230	231	H
	* 5000.037	47.19	ADR	33.8	-39	41.99	54	-12.01	-	-	230	231	H
4	1800.055	61.45	PK-U	30.2	-45.8	45.85	-	-	88.2	-42.35	196	241	V
	1799.96	56.08	ADR	30.2	-45.8	40.48	68.2	-27.72	-	-	196	241	V
5	* 4999.999	54.05	PK-U	33.8	-39	48.85	-	-	74	-25.15	175	124	V
	* 4999.986	48.51	ADR	33.8	-39	43.31	54	-10.69	-	-	175	124	V
3	16557.336	45.41	PK-U	41.1	-32.7	53.81	-	-	88.2	-34.39	177	299	H
	16557.014	33.41	ADR	41.1	-32.7	41.81	68.2	-26.39	-	-	177	299	H
6	17177.928	43.7	PK-U	41.2	-31.6	53.3	-	-	88.2	-34.9	21	153	V
	17175.958	32.17	ADR	41.2	-31.7	41.67	68.2	-26.53	-	-	21	153	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH STRADDLE

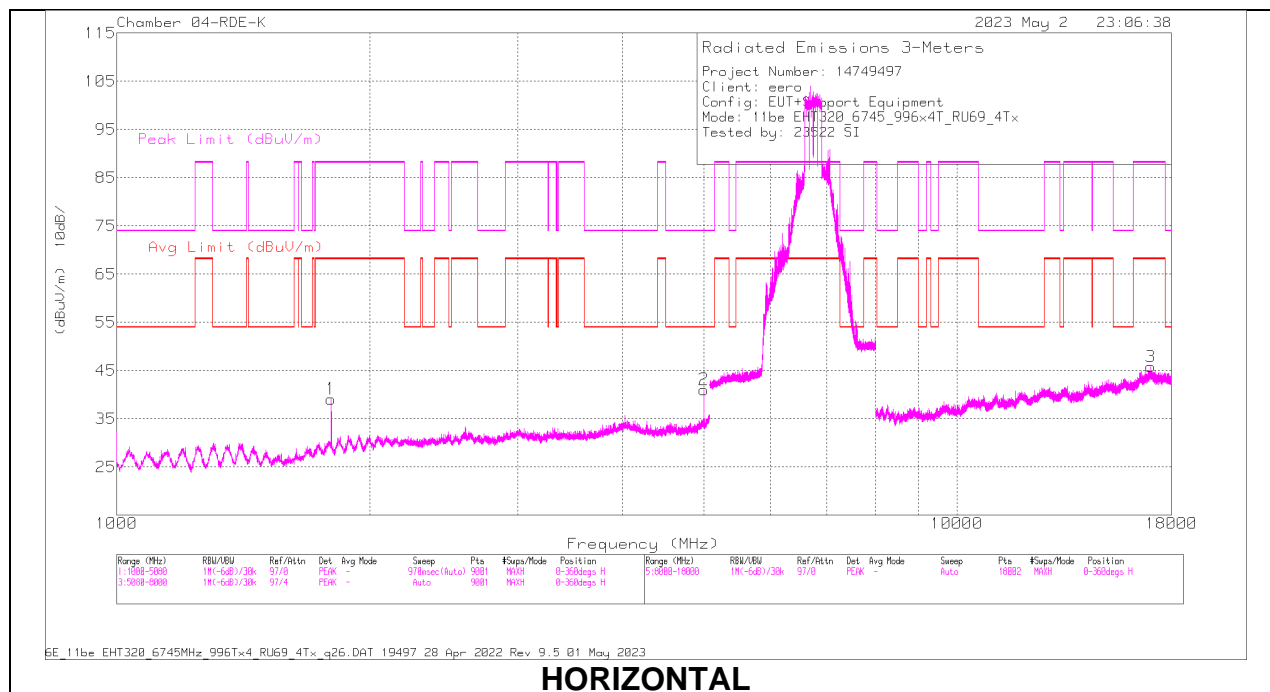

HORIZONTAL

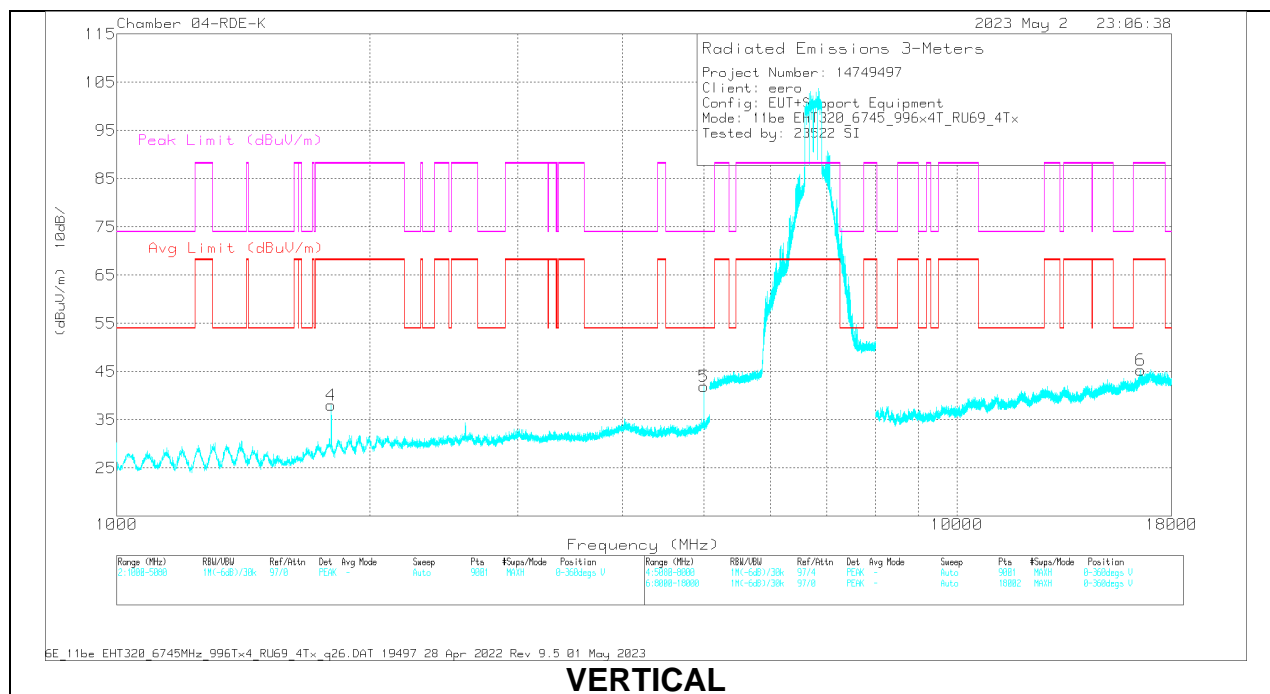

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1799.832	60.79	PK-U	30.2	-45.8	45.19	-	-	88.2	-43.01	180	198	H
	1799.99	54.9	ADR	30.2	-45.8	39.3	68.2	-28.9	-	-	180	198	H
2	* 5000.152	53.6	PK-U	33.8	-39	48.4	-	-	74	-25.6	196	293	H
	* 5000	48.14	ADR	33.8	-39	42.94	54	-11.06	-	-	196	293	H
4	1800.482	61.61	PK-U	30.2	-45.8	46.01	-	-	88.2	-42.19	193	279	V
	1799.893	56.24	ADR	30.2	-45.8	40.64	68.2	-27.56	-	-	193	279	V
5	* 4999.954	53.81	PK-U	33.8	-39	48.61	-	-	74	-25.39	176	195	V
	* 4999.99	48.43	ADR	33.8	-39	43.23	54	-10.77	-	-	176	195	V
3	17001.014	44.99	PK-U	41.6	-32.1	54.49	-	-	88.2	-33.71	268	189	H
	17002.664	33.02	ADR	41.6	-32.1	42.52	68.2	-25.68	-	-	268	189	H
6	16552.035	46.12	PK-U	41.1	-32.7	54.52	-	-	88.2	-33.68	11	377	V
	16552.368	33.7	ADR	41.1	-32.7	42.1	68.2	-26.1	-	-	11	377	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.20. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE UNII-8 BAND

1TX Antenna 5 OFDMA MODE: 242-Tones, RU 61

BANDEDGE (7095 CHANNEL)

HORIZONTAL RESULT

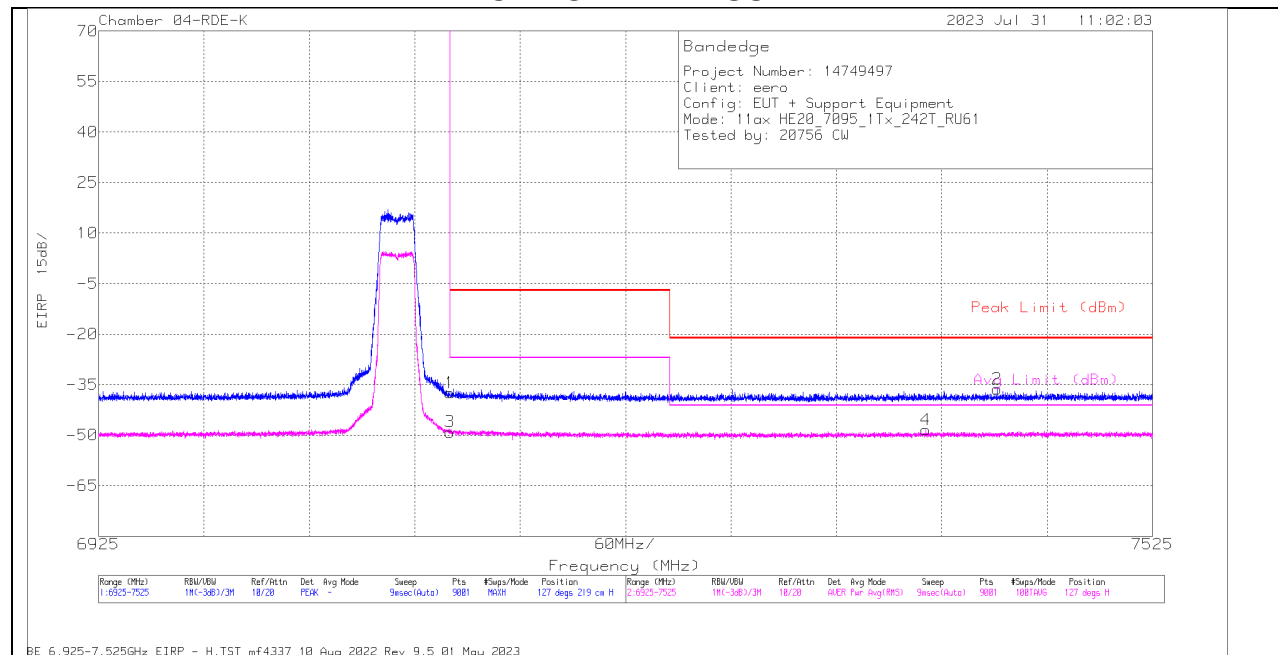


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-56.91	Pk	35.7	-28	11.8	-37.41	-7	-30.41	-	-	127	219	H
2	* 7436.469	-56.36	Pk	35.7	-27.4	11.8	-36.26	-21.2	-15.06	-	-	127	219	H
3	7125	-68.55	RMS	35.7	-28	11.8	-49.05	-	-	-27	-22.05	127	219	H
4	* 7395.869	-68.43	RMS	35.7	-27.5	11.8	-48.43	-	-	-41.2	-7.23	127	219	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

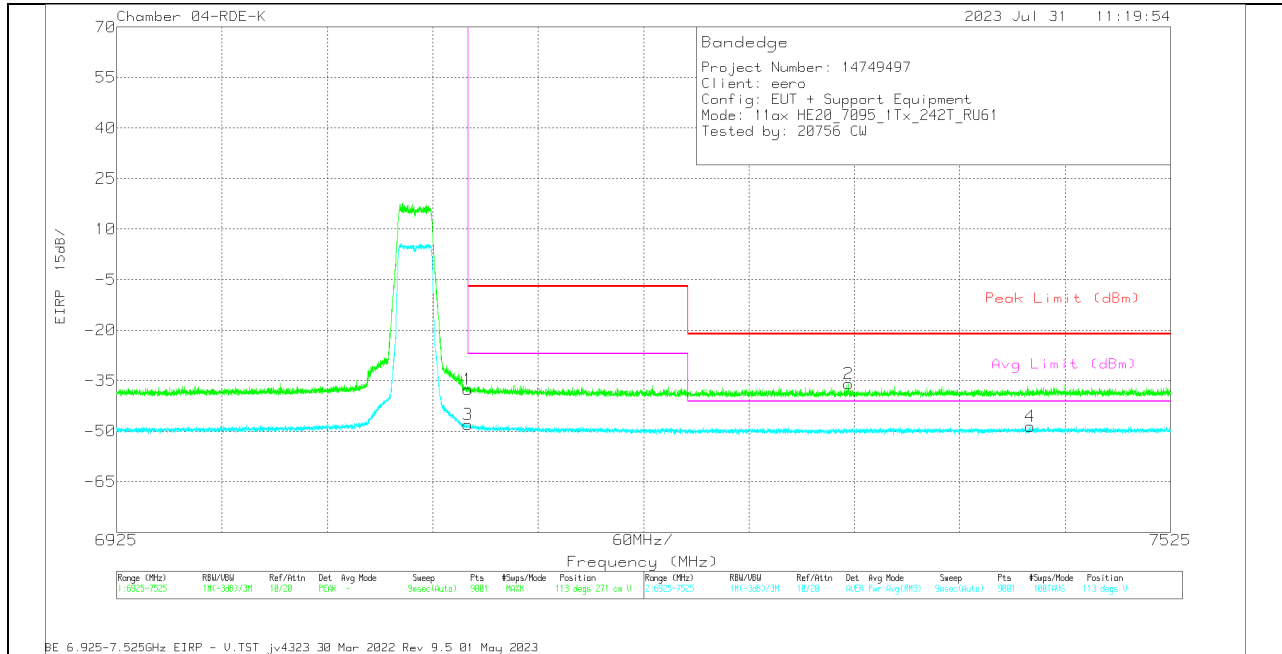






Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	CbI/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-57.06	Pk	35.7	-28	11.8	-37.56	-7	-30.56	-	-	113	271	V
2	* 7341.602	-55.72	Pk	35.7	-27.7	11.8	-35.92	-21.2	-14.72	-	-	113	271	V
3	7125	-67.51	RMS	35.7	-28	11.8	-48.01	-	-	-27	-21.01	113	271	V
4	* 7445.003	-68.68	RMS	35.7	-27.4	11.8	-48.58	-	-	-41.2	-7.38	113	271	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

**1TX Antenna 5 OFDMA MODE: 242-Tones, RU 61
BANDEDGE (HIGH CHANNEL)**

HORIZONTAL RESULT

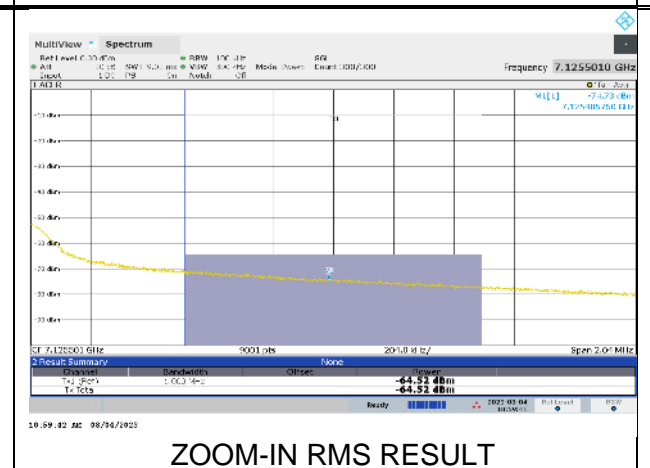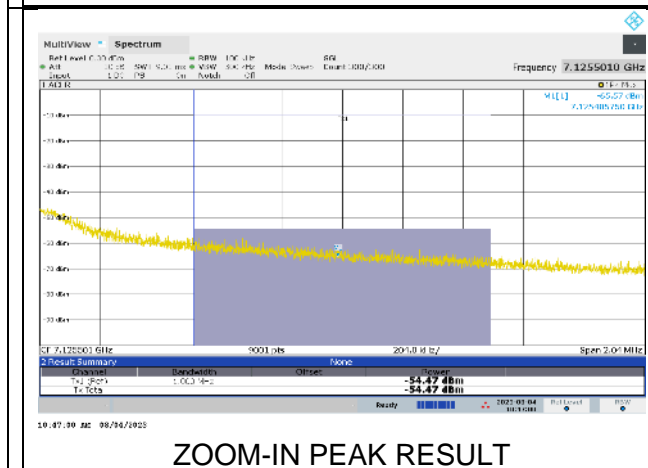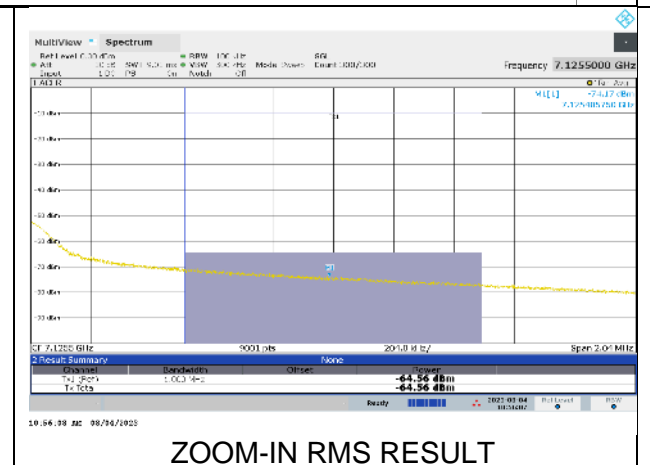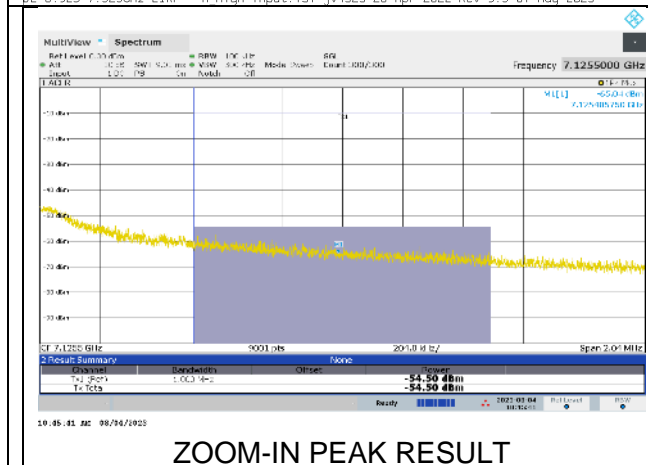
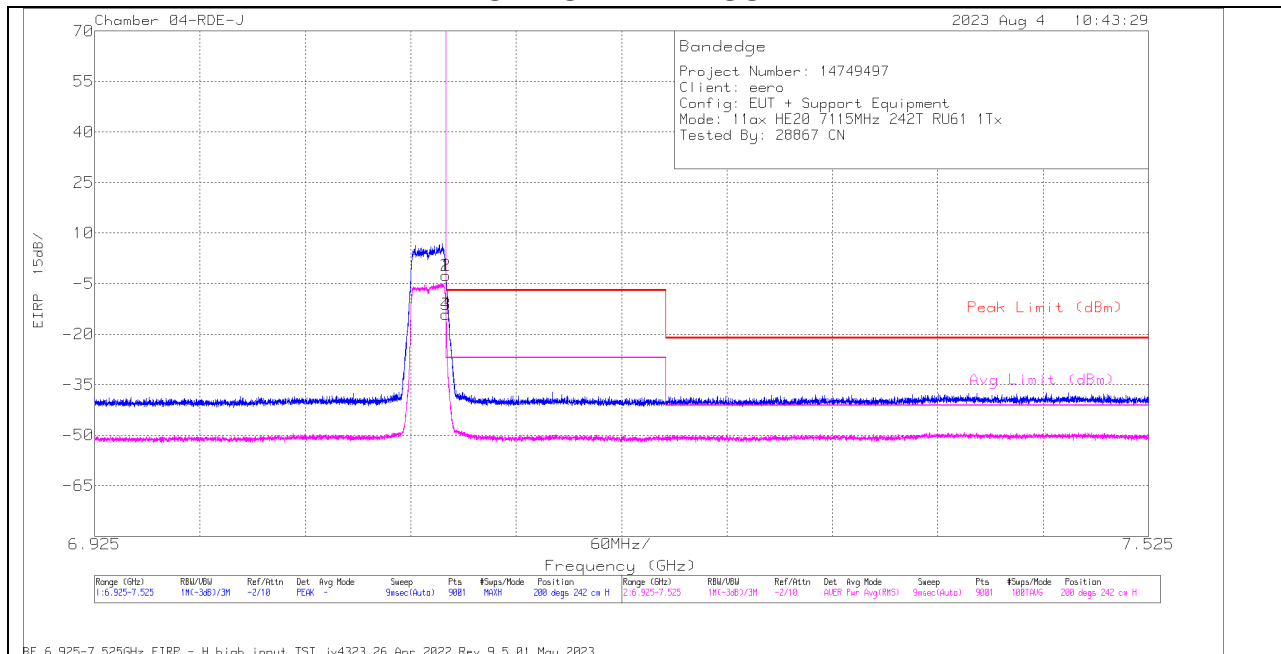


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.1255	-54.50	Pk	35.8	-11.9	11.8	-18.80	-7	-11.80	-	-	200	242	H
2	7.125501	-54.47	Pk	35.8	-11.9	11.8	-18.77	-7	-11.77	-	-	200	242	H
3	7.1255	-64.56	RMS	35.8	-11.9	11.8	-28.86	-	-	-27	-1.86	200	242	H
4	7.125501	-64.52	RMS	35.8	-11.9	11.8	-28.82	-	-	-27	-1.82	200	242	H

Pk - Peak detector
RMS - RMS detection


VERTICAL RESULT

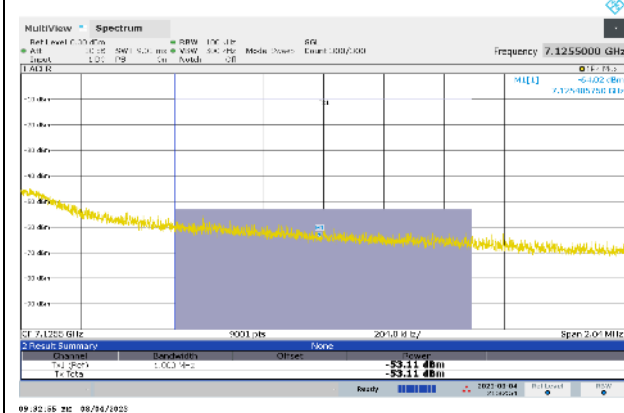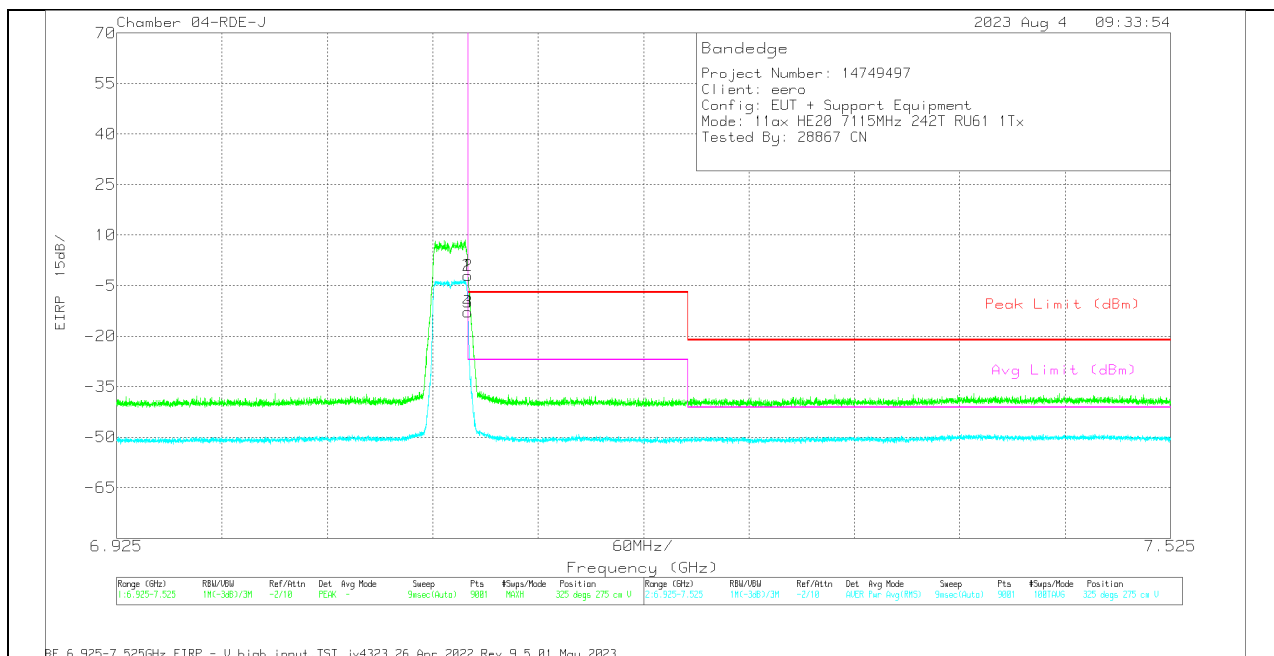


ZOOM-IN PEAK RESULT

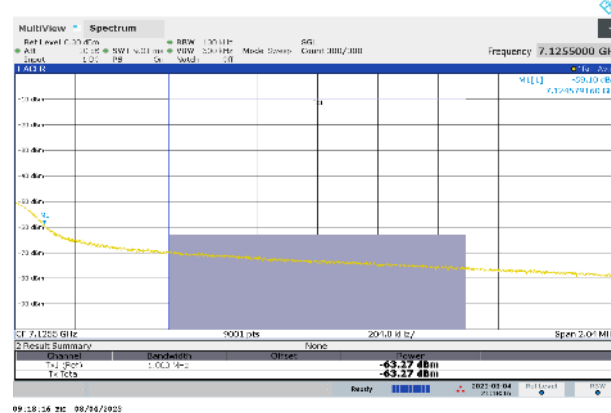

ZOOM-IN RMS RESULT

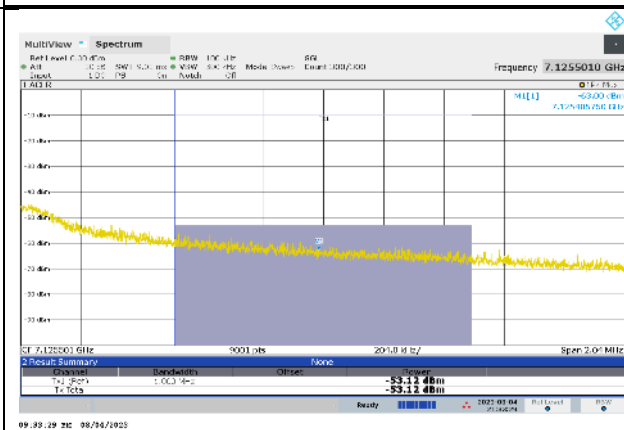

ZOOM-IN PEAK RESULT

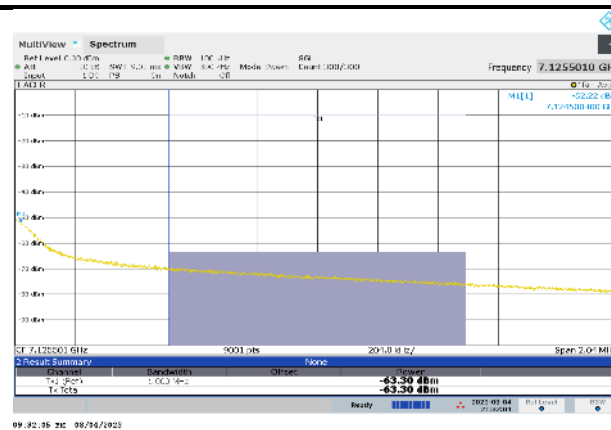

ZOOM-IN RMS RESULT

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.1255	-53.11	Pk	35.8	-11.9	11.8	-17.41	-7	-10.41	-	-	325	275	V
2	7.125501	-53.12	Pk	35.8	-11.9	11.8	-17.42	-7	-10.42	-	-	325	275	V
3	7.1255	-63.27	RMS	35.8	-11.9	11.8	-27.57	-	-	-27	-0.57	325	275	V
4	7.125501	-63.30	RMS	35.8	-11.9	11.8	-27.60	-	-	-27	-0.60	325	275	V

Pk - Peak detector
RMS - RMS detection

2TX Antenna 5 + Antenna 8 OFDMA MODE: 242-Tones, RU 61

BANDEDGE (7095 CHANNEL)

HORIZONTAL RESULT

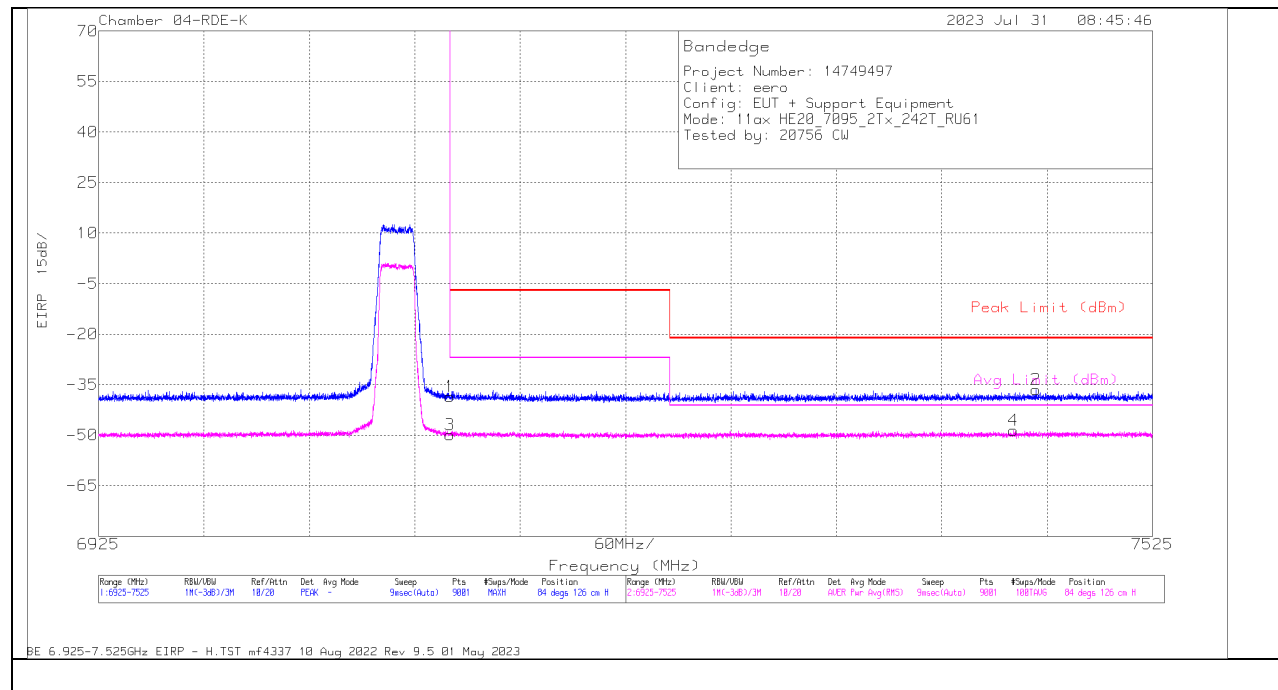


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-57.99	Pk	35.7	-28	11.8	-38.49	-7	-31.49	-	-	84	126	H
2	* 7458.803	-56.58	Pk	35.7	-27.4	11.8	-36.48	-21.2	-15.28	-	-	84	126	H
3	7125	-69.42	RMS	35.7	-28	11.8	-49.92	-	-	-27	-22.92	84	126	H
4	* 7446.003	-68.67	RMS	35.7	-27.4	11.8	-48.57	-	-	-41.2	-7.37	84	126	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

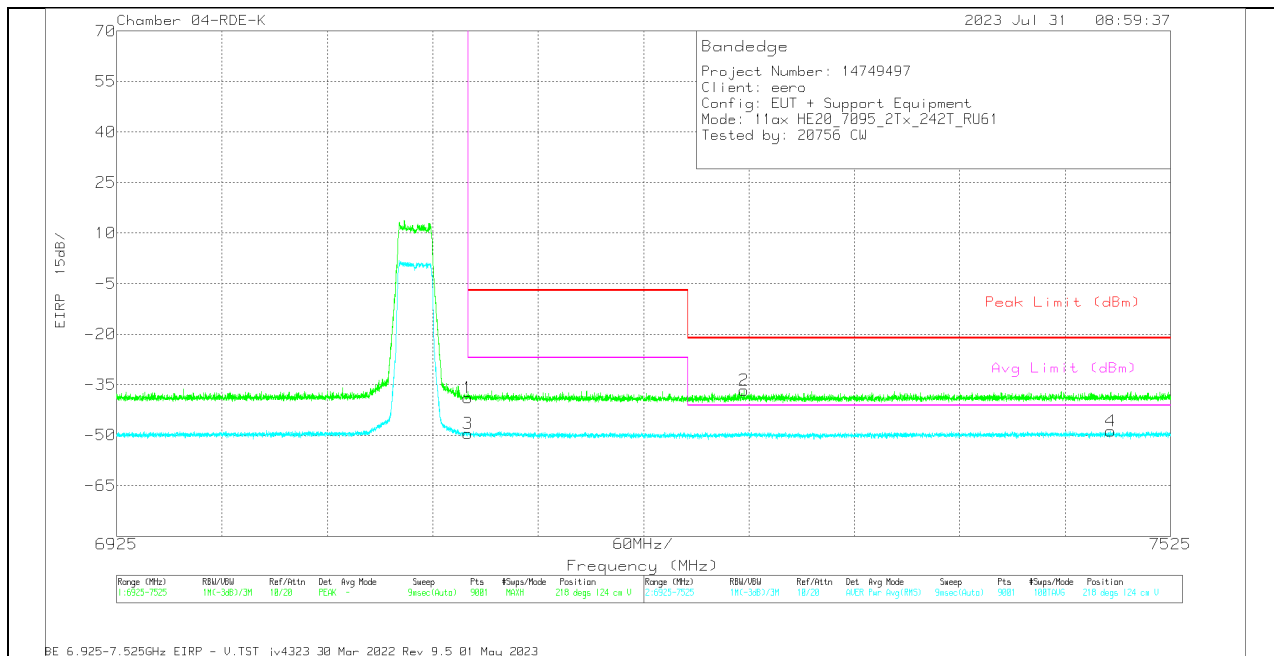


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-58.48	Pk	35.7	-28	11.8	-38.98	-7	-31.98	-	-	218	124	V
2	* 7282.268	-56.26	Pk	35.7	-27.9	11.8	-36.66	-21.2	-15.46	-	-	218	124	V
3	7125	-68.95	RMS	35.7	-28	11.8	-49.45	-	-	-27	-22.45	218	124	V
4	* 7490.936	-68.81	RMS	35.7	-27.5	11.8	-48.81	-	-	-41.2	-7.61	218	124	V

Pk - Peak detector
RMS - RMS detection

2TX Antenna 5 + Antenna 8 OFDMA MODE: 242-Tones, RU 61

BANDEDGE (HIGH CHANNEL)


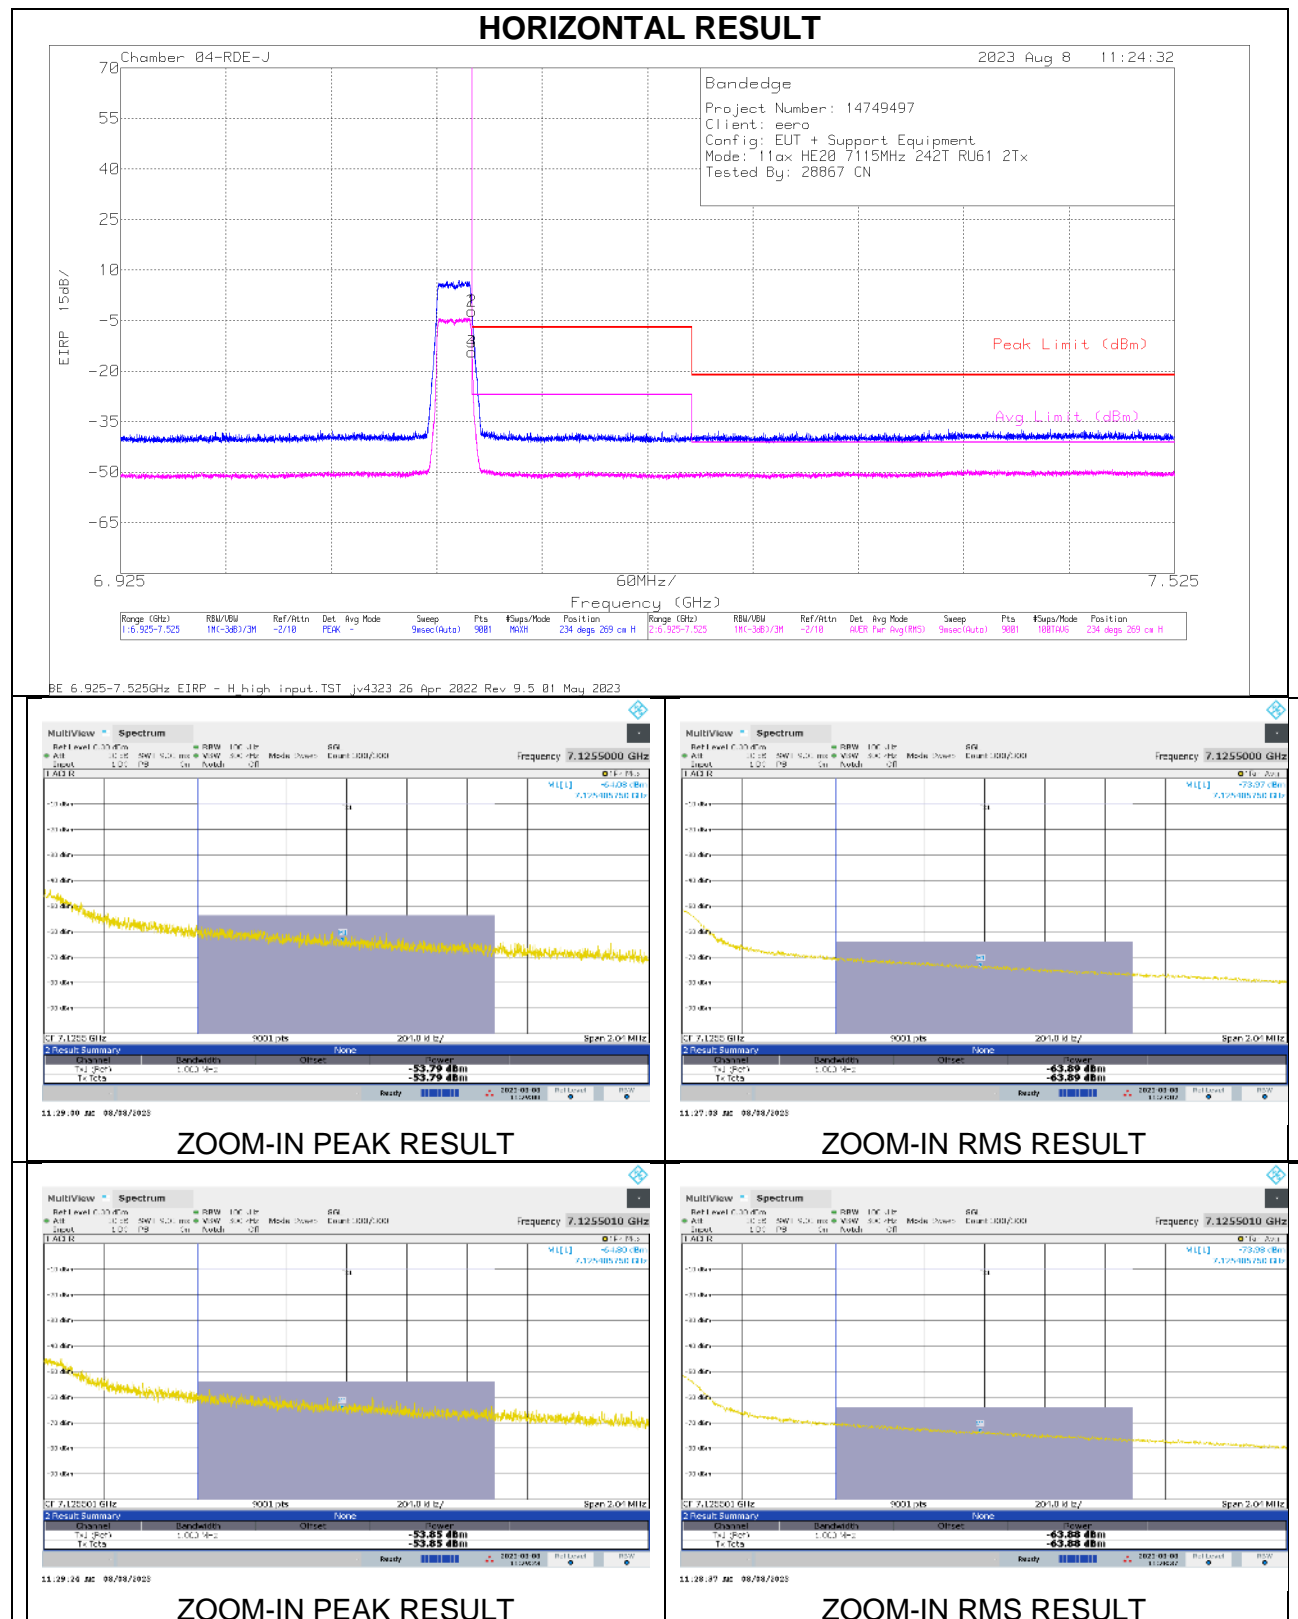


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.1255	-53.79	Pk	35.8	-11.9	11.8	-18.09	-7	-11.09	-	-	234	269	H
2	7.125501	-53.85	Pk	35.8	-11.9	11.8	-18.15	-7	-11.15	-	-	234	269	H
3	7.1255	-63.89	RMS	35.8	-11.9	11.8	-28.19	-	-	-27	-1.19	234	269	H
4	7.125501	-63.88	RMS	35.8	-11.9	11.8	-28.18	-	-	-27	-1.18	234	269	H

Pk - Peak detector
RMS - RMS detection


VERTICAL RESULT

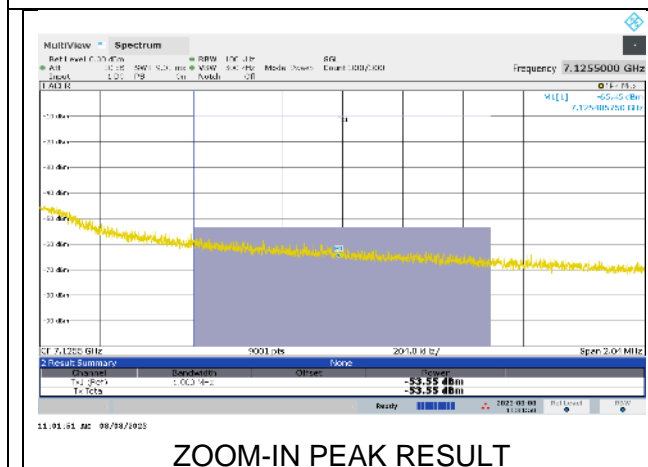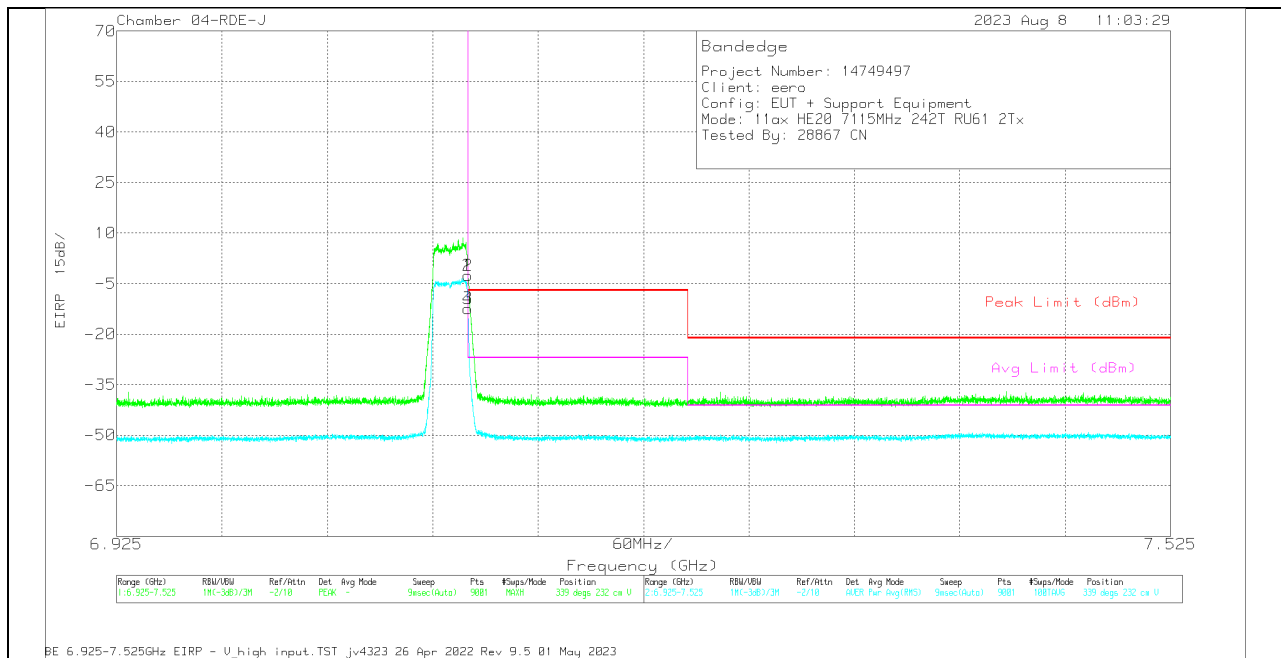


ZOOM-IN PEAK RESULT

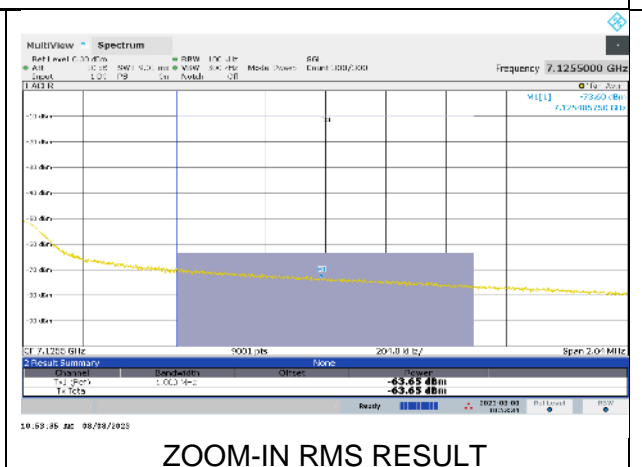

ZOOM-IN RMS RESULT

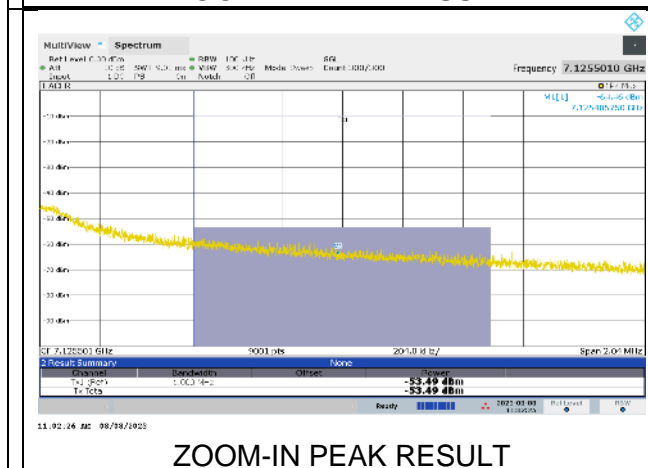

ZOOM-IN PEAK RESULT

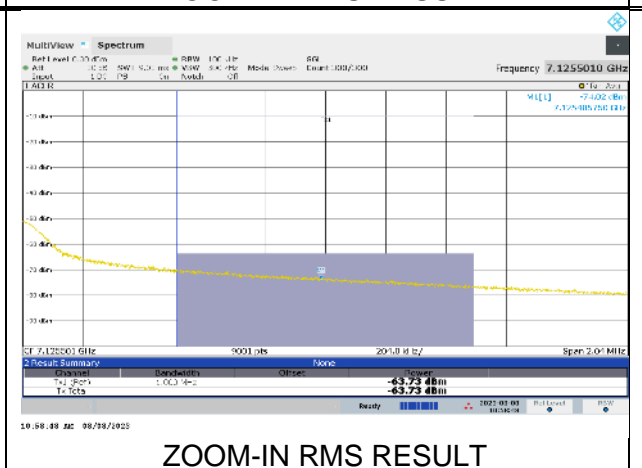

ZOOM-IN RMS RESULT

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.1255	-53.55	Pk	35.8	-11.9	11.8	-17.85	-7	-10.85	-	-	339	232	V
2	7.125501	-53.49	Pk	35.8	-11.9	11.8	-17.79	-7	-10.79	-	-	339	232	V
3	7.1255	-63.65	RMS	35.8	-11.9	11.8	-27.95	-	-	-27	-0.95	339	232	V
4	7.125501	-63.73	RMS	35.8	-11.9	11.8	-28.03	-	-	-27	-1.03	339	232	V

Pk - Peak detector
RMS - RMS detection

4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 242-Tones, RU 61

BANDEDGE (7095 CHANNEL)

HORIZONTAL RESULT

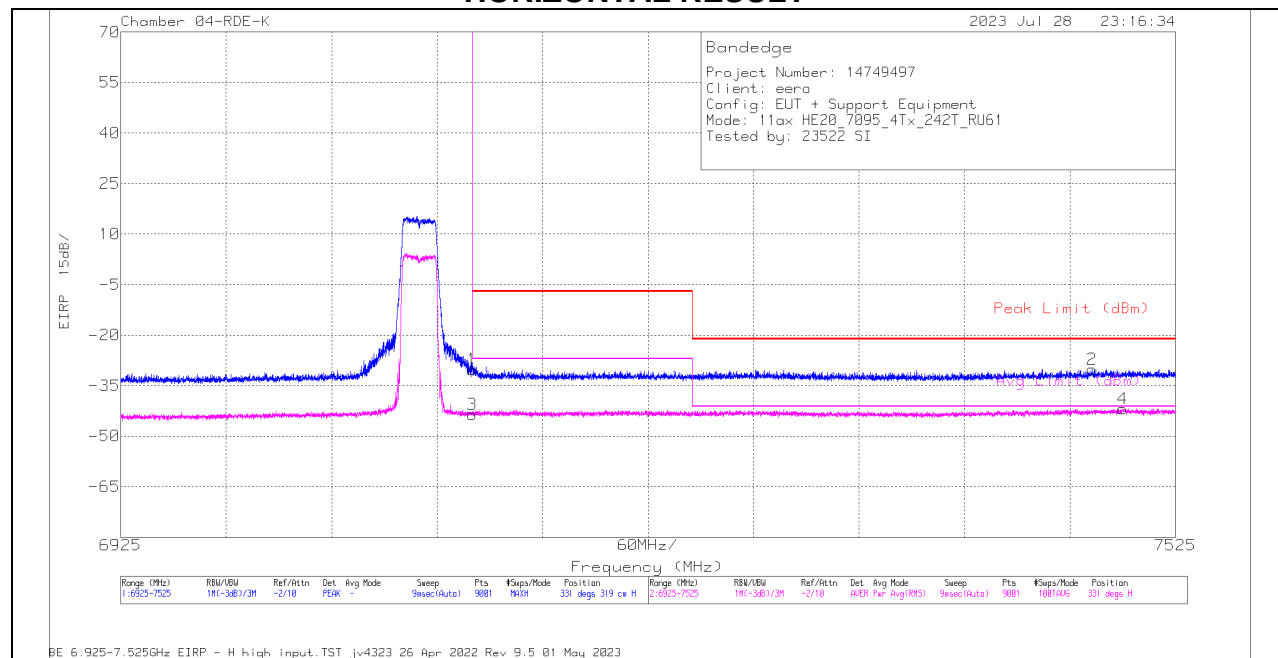


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-73.01	Pk	35.7	-4.7	11.8	-30.21	-7	-23.21	-	-	331	319	H
2	* 7477.469	-73.48	Pk	35.7	-4.1	11.8	-30.08	-21.2	-8.88	-	-	331	319	H
3	7125	-86.27	RMS	35.7	-4.7	11.8	-43.47	-	-	-27	-16.47	331	319	H
4	* 7494.87	-85.45	RMS	35.7	-3.9	11.8	-41.85	-	-	-41.2	-65	331	319	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

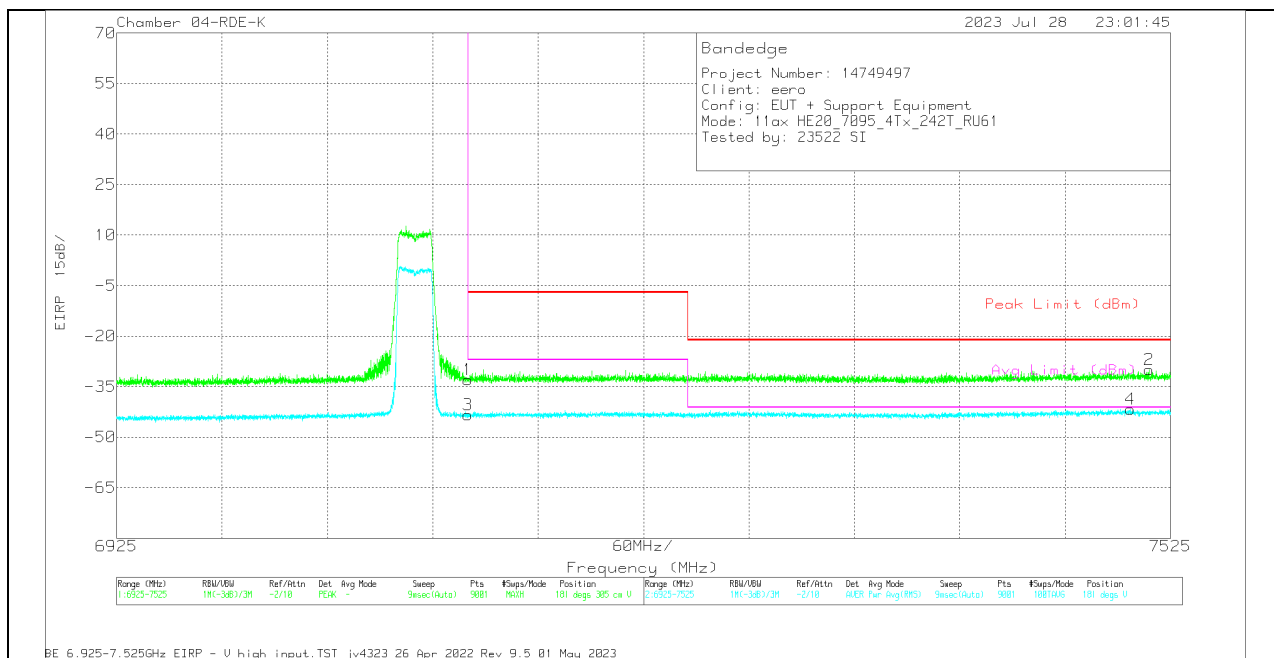

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-75.7	PK	35.7	-4.7	11.8	-32.9	-7	-25.9	-	-	181	305	V
2	* 7512.736	-73.38	PK	35.7	-4	11.8	-29.88	-21.2	-8.68	-	-	181	305	V
3	7125	-86.22	RMS	35.7	-4.7	11.8	-43.42	-	-	-27	-16.42	181	305	V
4	* 7502.136	-85.17	RMS	35.7	-4	11.8	-41.67	-	-	-41.2	-4.7	181	305	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band






PK - Peak detector

RMS - RMS detection

4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 242-Tones, RU 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

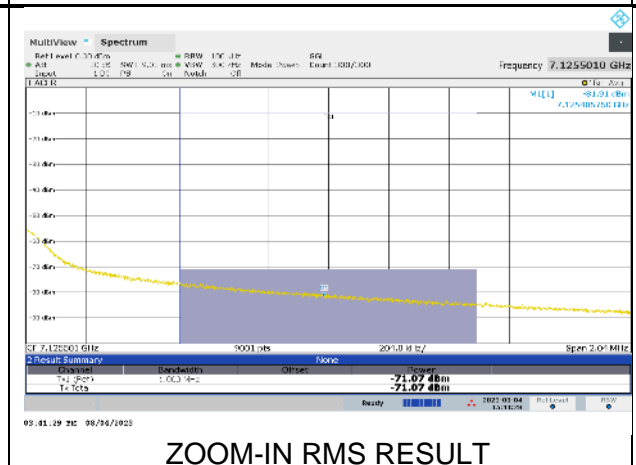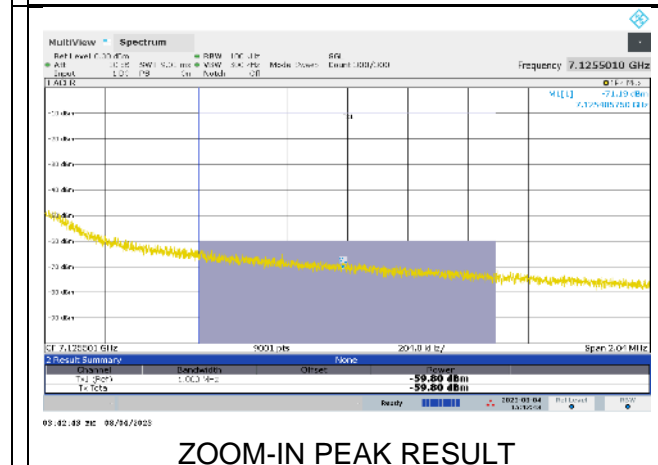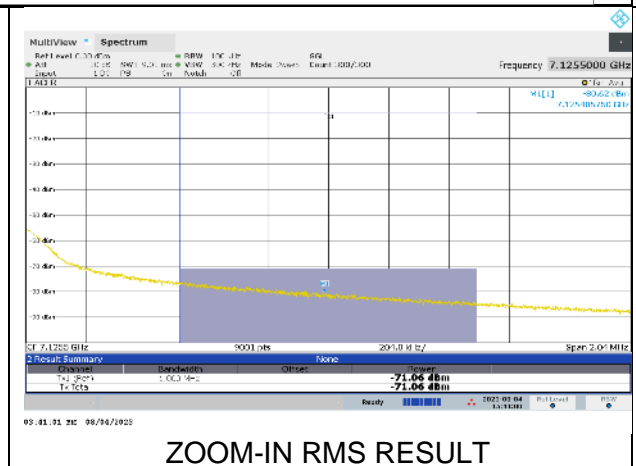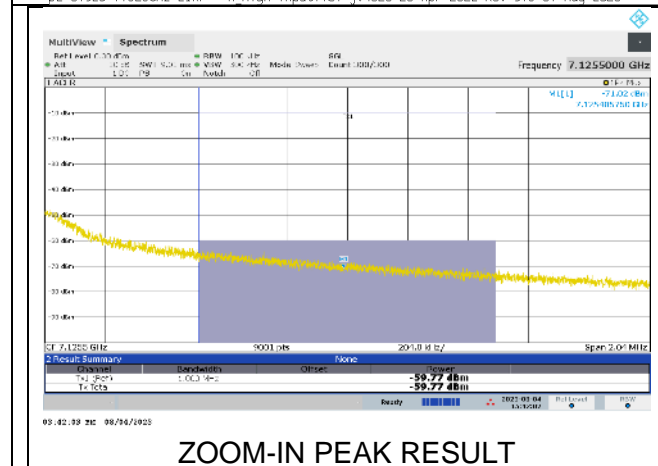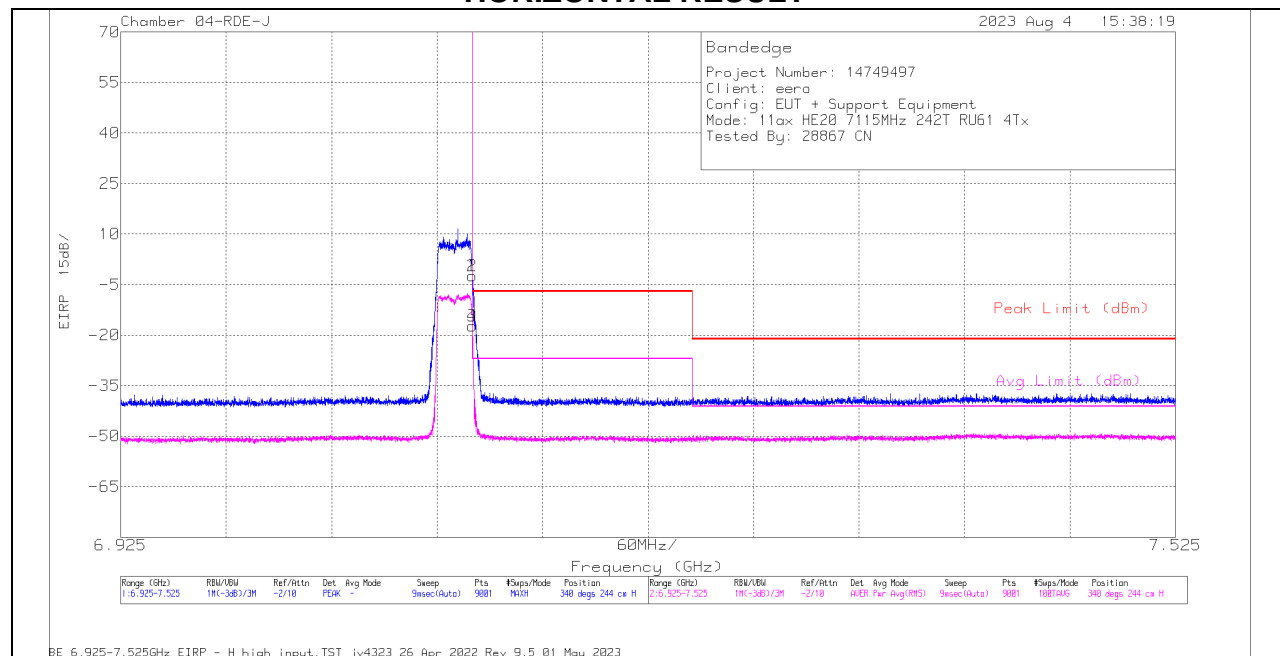


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.1255	-59.77	Pk	35.8	-11.9	11.8	-24.07	-7	-17.07	-	-	340	244	H
2	7.125501	-59.80	Pk	35.8	-11.9	11.8	-24.10	-7	-17.10	-	-	340	244	H
3	7.1255	-71.06	RMS	35.8	-11.9	11.8	-35.36	-	-	-27	-8.36	340	244	H
4	7.125501	-71.01	RMS	35.8	-11.9	11.8	-35.31	-	-	-27	-8.31	340	244	H

Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

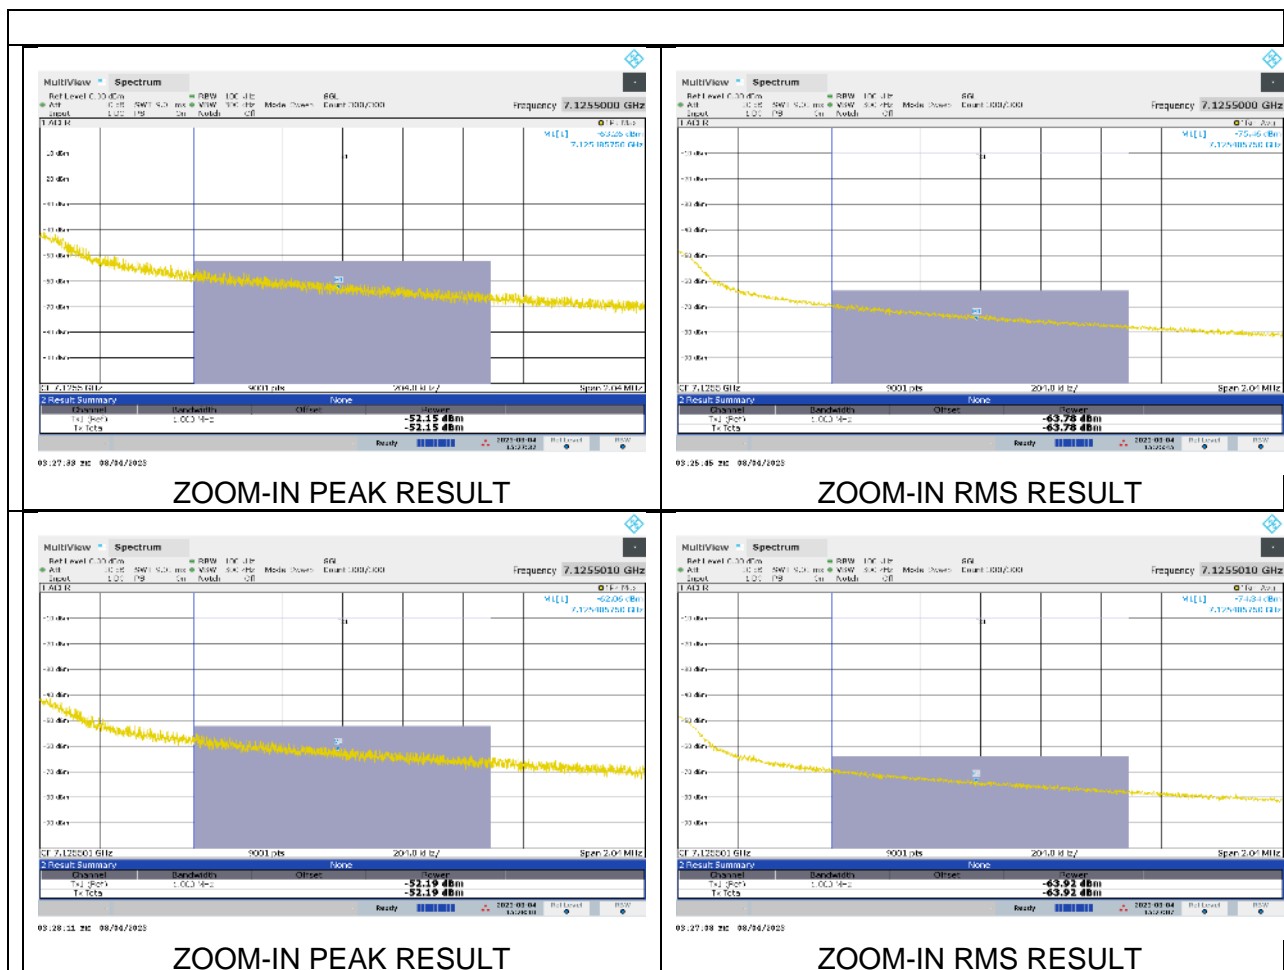

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.1255	-52.15	Pk	35.8	-11.9	11.8	-16.45	-7	-9.45	-	-	340	244	V
2	7.125501	-52.19	Pk	35.8	-11.9	11.8	-16.49	-7	-9.49	-	-	340	244	V
3	7.1255	-63.78	RMS	35.8	-11.9	11.8	-28.08	-	-	-27	-1.08	340	244	V
4	7.125501	-63.92	RMS	35.8	-11.9	11.8	-28.22	-	-	-27	-1.22	340	244	V


Pk - Peak detector
RMS - RMS detection

10.1.21. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE UNII-8 BAND

1TX Antenna 5 OFDMA MODE: 242-Tones, RU 61

BANDEDGE (7095 CHANNEL)

HORIZONTAL RESULT

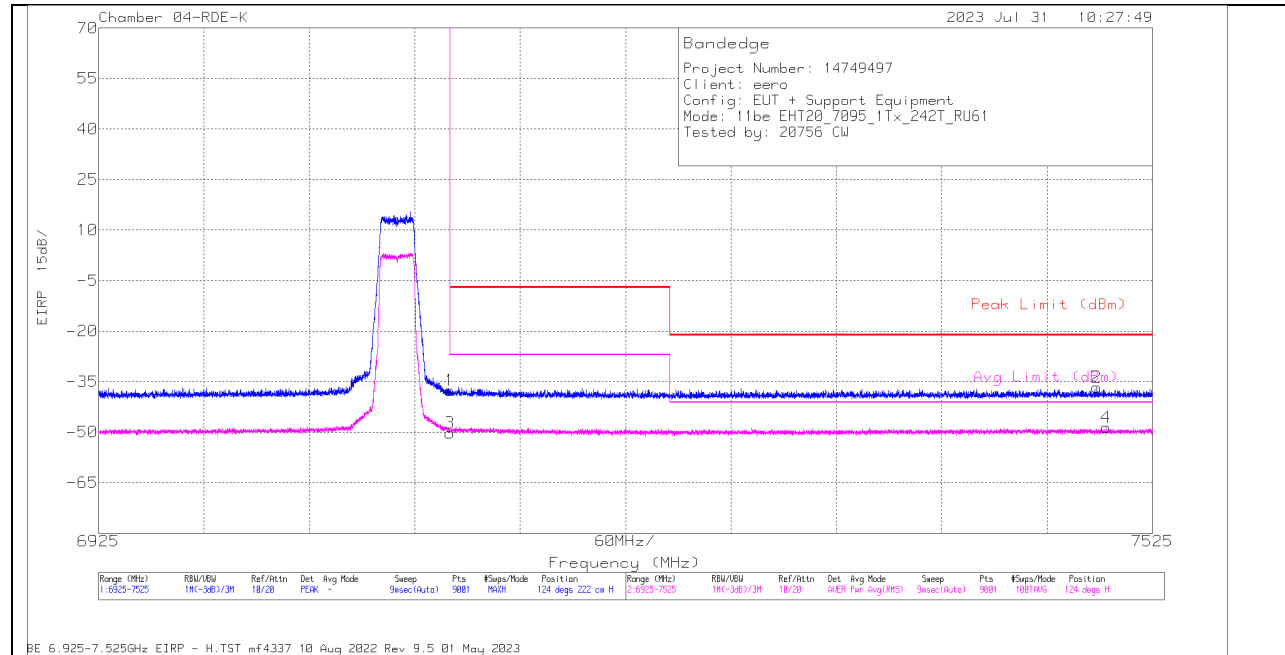


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-57.17	Pk	35.7	-28	11.8	-37.67	-7	-30.67	-	-	124	222	H
2	* 7493.336	-56.61	Pk	35.7	-27.5	11.8	-36.61	-21.2	-15.41	-	-	124	222	H
3	7125	-69.72	RMS	35.7	-28	11.8	-50.22	-	-	-27	-23.22	124	222	H
4	* 7498.736	-68.66	RMS	35.7	-27.5	11.8	-48.66	-	-	-41.2	-7.46	124	222	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

VERTICAL RESULT

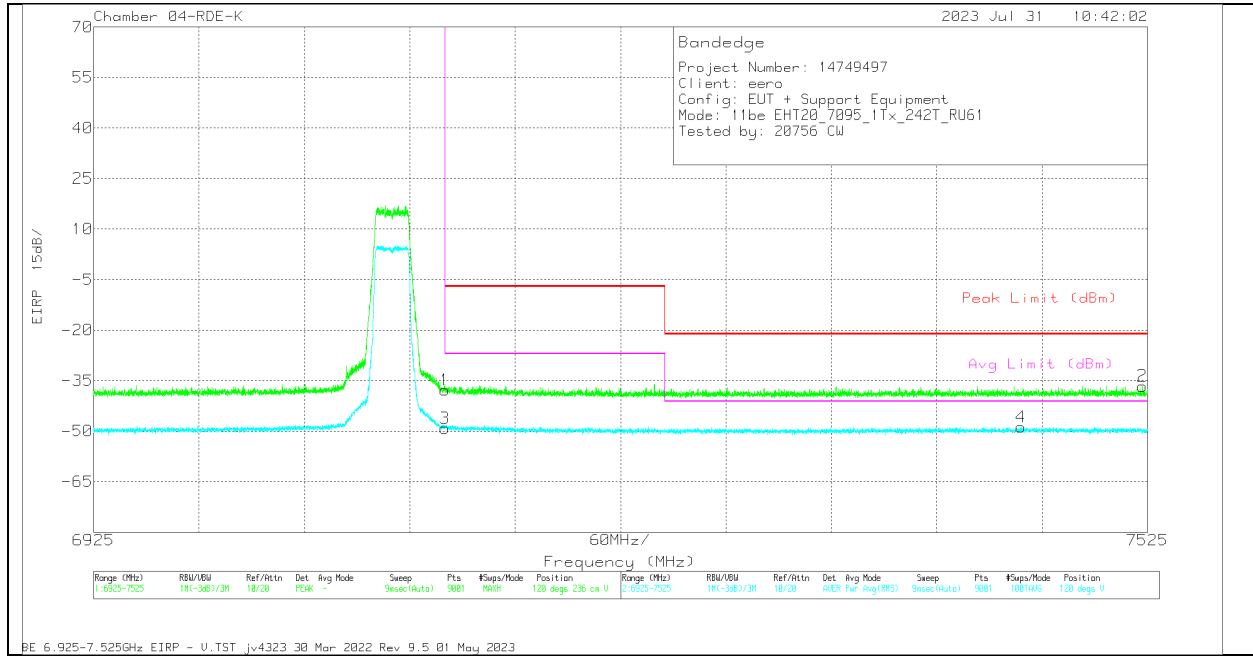

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-57.21	Pk	35.7	-28	11.8	-37.71	-7	-30.71	-	-	120	236	V
2	* 7522.27	-56.57	Pk	35.7	-27.5	11.8	-36.57	-21.2	-15.37	-	-	120	236	V
3	7125	-68.66	RMS	35.7	-28	11.8	-49.16	-	-	-27	-22.16	120	236	V
4	* 7453.003	-68.92	RMS	35.7	-27.3	11.8	-48.72	-	-	-41.2	-7.52	120	236	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
Pk - Peak detector
RMS - RMS detection

HORIZONTAL RESULT





Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.1255	-54.51	Pk	35.8	-11.9	11.8	-18.81	-7	-11.81	-	-	201	261	H
2	7.125501	-54.49	Pk	35.8	-11.9	11.8	-18.79	-7	-11.79	-	-	201	261	H
3	7.1255	-64.74	RMS	35.8	-11.9	11.8	-29.04	-	-	-27	-2.04	201	261	H
4	7.125501	-67.76	RMS	35.8	-11.9	11.8	-29.06	-	-	-27	-2.06	201	261	H

Pk - Peak detector
RMS - RMS detection


VERTICAL RESULT

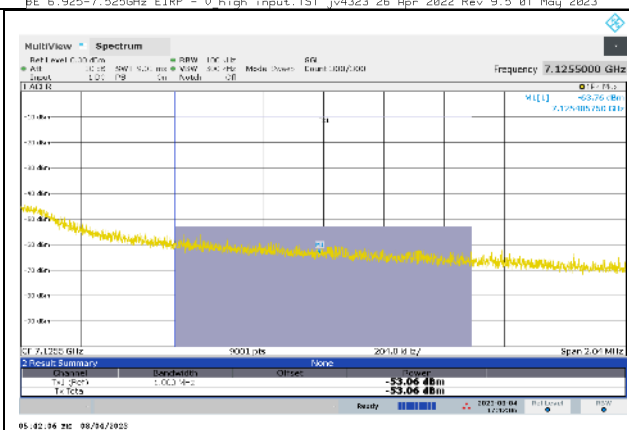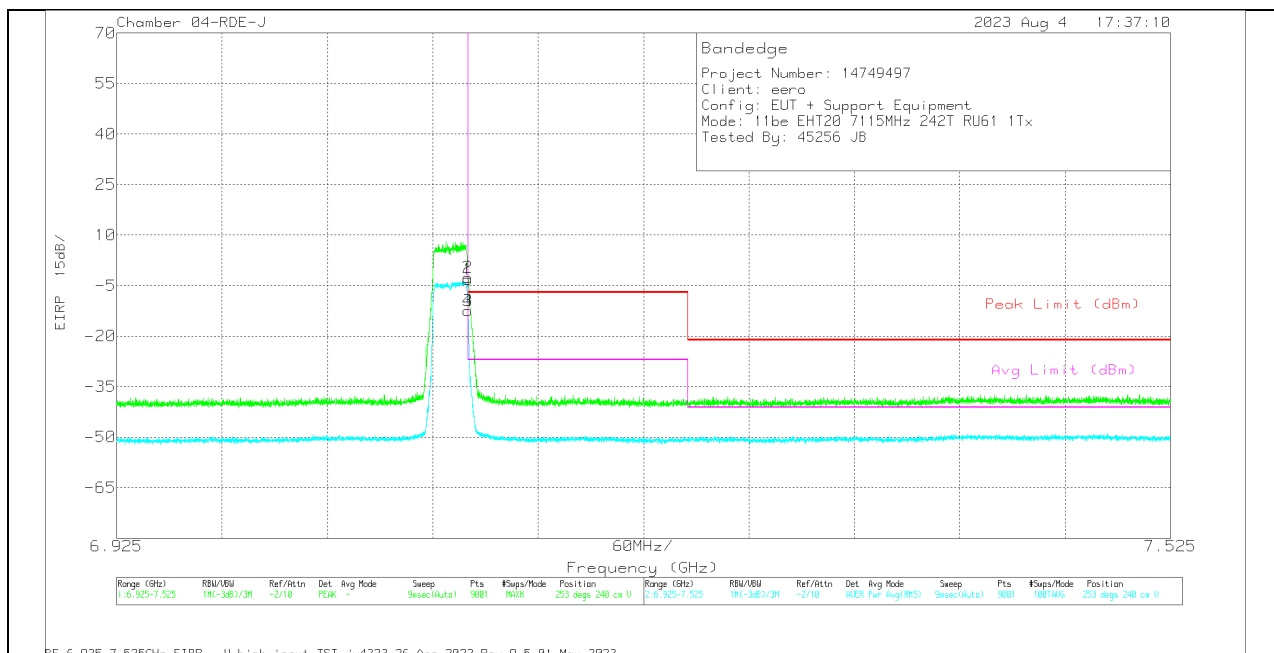


ZOOM-IN PEAK RESULT



ZOOM-IN RMS RESULT

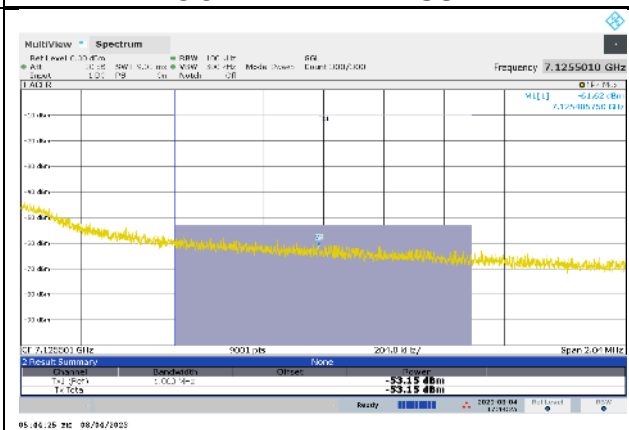

ZOOM-IN PEAK RESULT

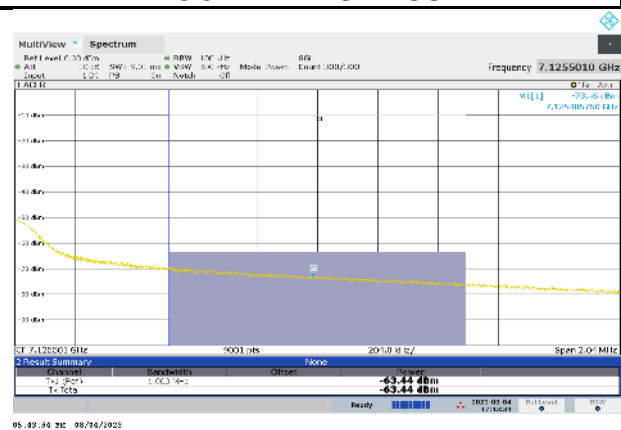

ZOOM-IN RMS RESULT

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.1255	-53.06	Pk	35.8	-11.9	11.8	-17.36	-7	-10.36	-	-	253	240	V
2	7.125501	-53.15	Pk	35.8	-11.9	11.8	-17.45	-7	-10.45	-	-	253	240	V
3	7.1255	-63.38	RMS	35.8	-11.9	11.8	-27.68	-	-	-27	-0.68	253	240	V
4	7.125501	-63.44	RMS	35.8	-11.9	11.8	-27.74	-	-	-27	-0.74	253	240	V

Pk - Peak detector
RMS - RMS detection

2TX Antenna 5 + Antenna 8 OFDMA MODE: 242-Tones, RU 61

BANDEDGE (7095 CHANNEL)

HORIZONTAL RESULT

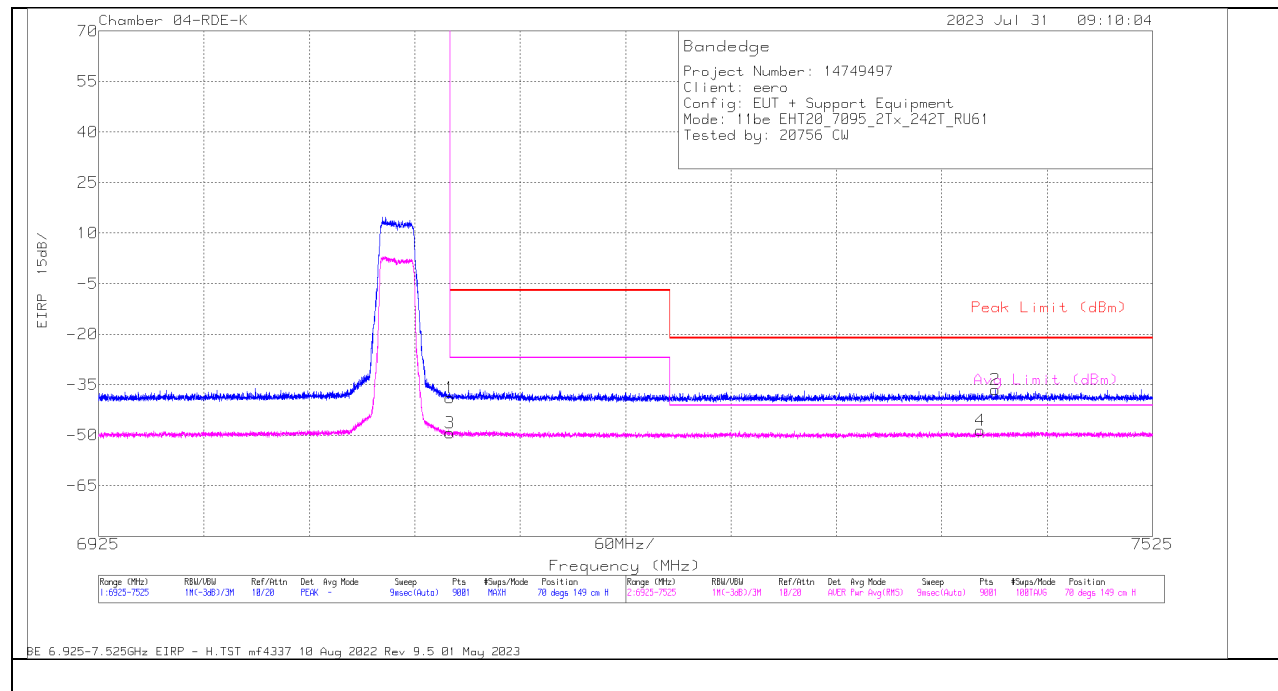


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-58.45	Pk	35.7	-28	11.8	-38.95	-7	-31.95	-	-	70	149	H
2	* 7435.603	-56.61	Pk	35.7	-27.4	11.8	-36.51	-21.2	-15.31	-	-	70	149	H
3	7125	-68.77	RMS	35.7	-28	11.8	-49.27	-	-	-27	-22.27	70	149	H
4	* 7427.003	-68.61	RMS	35.7	-27.5	11.8	-48.61	-	-	-41.2	-7.41	70	149	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
PK - Peak detector
RMS - RMS detection

VERTICAL RESULT

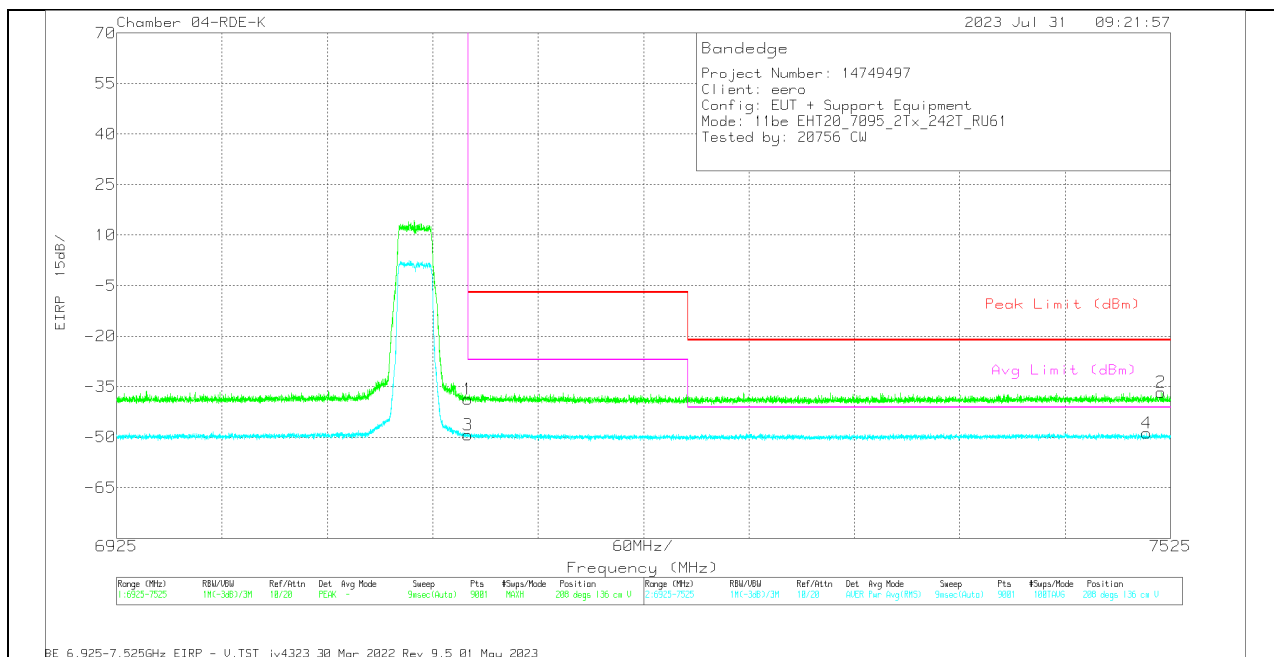

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-58.29	Pk	35.7	-28	11.8	-38.79	-7	-31.79	-	-	208	136	V
2	* 7519.803	-56.76	Pk	35.7	-27.4	11.8	-36.66	-21.2	-15.46	-	-	208	136	V
3	7125	-68.75	RMS	35.7	-28	11.8	-49.25	-	-	-27	-22.25	208	136	V
4	* 7511.47	-68.8	RMS	35.7	-27.4	11.8	-48.7	-	-	-41.2	-7.5	208	136	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

2TX Antenna 5 + Antenna 8 OFDMA MODE: 242-Tones, RU 61

BANDEGE (HIGH CHANNEL)

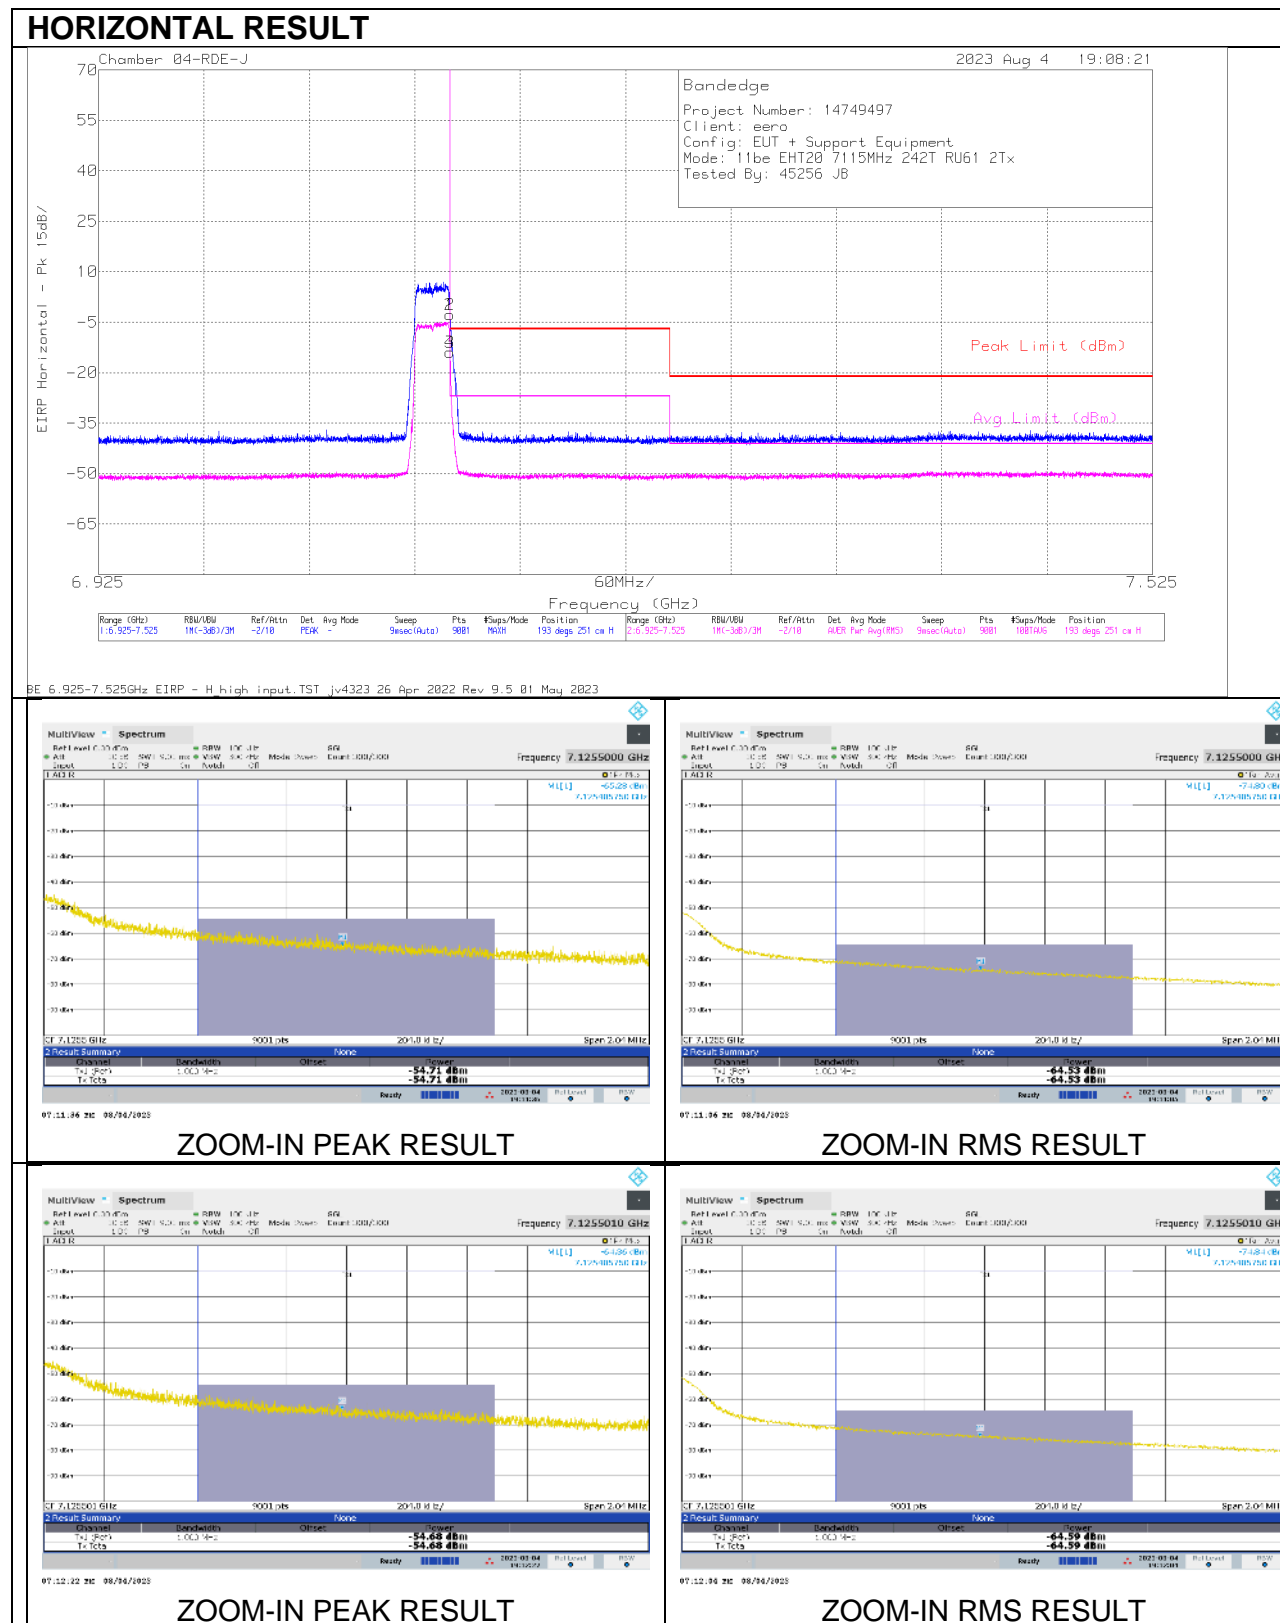

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	7.1255	-54.71	Pk	35.8	-11.9	11.8	-19.01	-7	-12.01	-	-	193	251	H
2	7.125501	-54.68	Pk	35.8	-11.9	11.8	-18.98	-7	-11.98	-	-	193	251	H
3	7.1255	-64.53	RMS	35.8	-11.9	11.8	-28.83	-	-	-27	-1.83	193	251	H
4	7.125501	-64.59	RMS	35.8	-11.9	11.8	-28.89	-	-	-27	-1.89	193	251	H

Pk - Peak detector
RMS - RMS detection

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.125	-51.85	Pk	35.8	-11.9	11.8	-16.15	-7	-9.15	-	-	338	244	V
2	7.125001	-52.78	Pk	35.8	-11.9	11.8	-17.08	-7	-10.08	-	-	338	244	V
3	7.125	-62.90	RMS	35.8	-11.9	11.8	-27.20	-	-	-27	-0.20	338	244	V
4	7.125001	-62.90	RMS	35.8	-11.9	11.8	-27.20	-	-	-27	-0.20	338	244	V

Pk - Peak detector
RMS - RMS detection

BANEDGE (7095 CHANNEL)

Chamber 04-RDE-K

2023 Jul 28 23:42:36

Bandedge

Project Number: 14749497

Client: eero

Config: EUT + Support Equipment

Mode: 11be EHT20_7095_4Tx_242T_RU61

Tested by: 23522 SI

EIRP 15dB/

Peak Limit (dBm)

6925 60MHz/ 7525

Frequency (MHz)


Range (MHz)	RBW/BBW	Ref/Attn	Det. Avg Mode	Sweep	Pls	#Seps/Mode	Position	Range (MHz)	RBW/BBW	Ref/Attn	Det. Avg Mode	Sweep	Pls	#Seps/Mode	Position
6.925-7525	1W-3dB/3M	-2/10	FSK	Auto	3001	1W/1	240 degs 225 cm	6.925-7525	1W-3dB/3M	-2/10	AWG Par Avg (RMS)	Auto	3001	100/100	240 degs H

BE 6.925-7.525GHz EIRP - H high Input.TST [v4323 26 Apr 2022 Rev 9.5 01 May 2023]

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	220803 acf (dB) 3ms1	CN(Amp (dB)	Conversion Factor (dB)	Corrected Reading (dB)	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-73.45	PK	35.7	-4.7	11.8	-32.65	-2	-25.65	-	-	248	225	H
2	* 7497.27	-73.65	PK	35.7	-4	11.8	-30.15	-17.1	-8.95	-	-	248	225	H
3	7125	-86.64	RMS	35.7	-4.7	11.8	-43.84	-	-	-27	-16.84	248	225	H
4	* 7495.803	-85.34	RMS	35.7	-4	11.8	-41.84	-	-	-41.2	-6.4	248	225	H

Page 680 of 771

VERTICAL RESULT

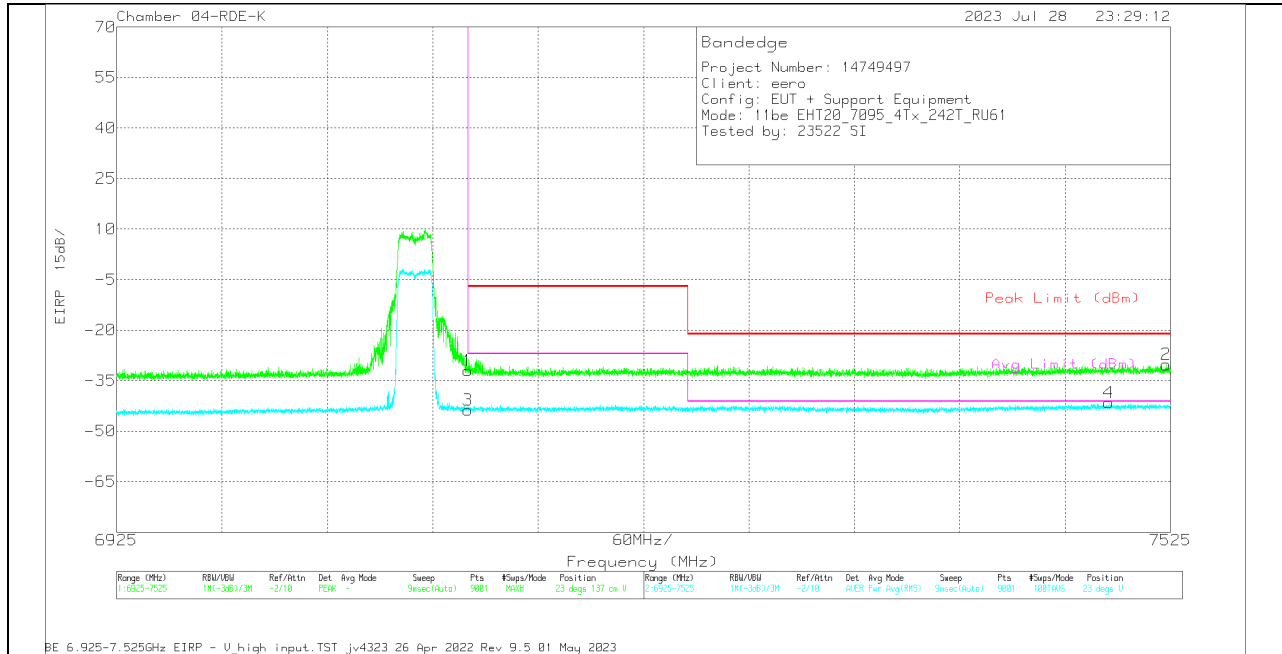

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	22083 ACF (dB) 3mHz	Cb/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7125	-74.86	PK	35.7	-4.7	11.8	-32.08	-7	-25.08	-	-	23	137	V
2	* 7522.603	-73.83	PK	35.7	-3.9	11.8	-30.23	-21.2	-9.03	-	-	23	137	V
3	7125	-86.53	RMS	35.7	-4.7	11.8	-43.73	-	-	-27	-16.73	23	137	V
4	* 7489.869	-85.03	RMS	35.7	-4	11.8	-41.53	-	-	-41.2	-33	23	137	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band






PK - Peak detector

RMS - RMS detection

4TX Antenna 5 + Antenna 8 + Antenna 3 + Antenna 10 OFDMA MODE: 242-Tones, RU 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

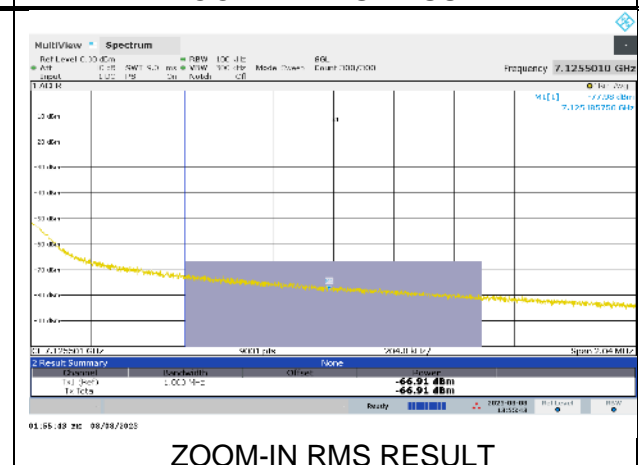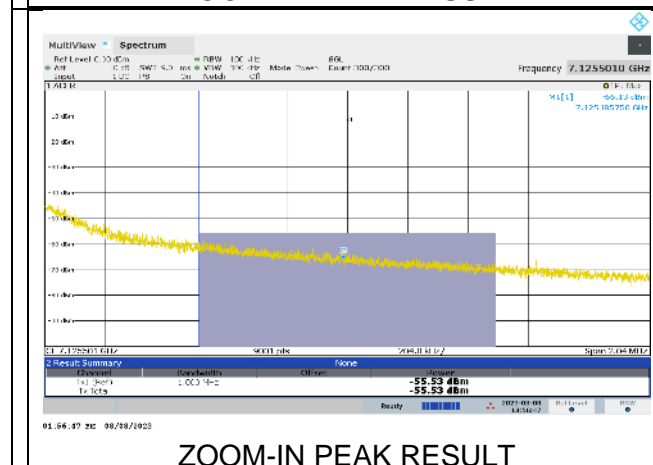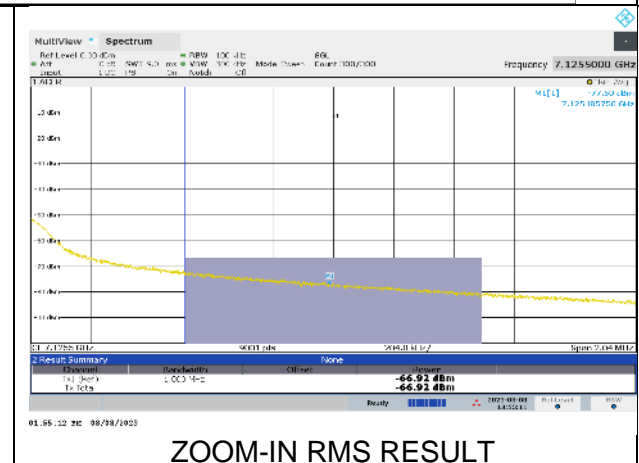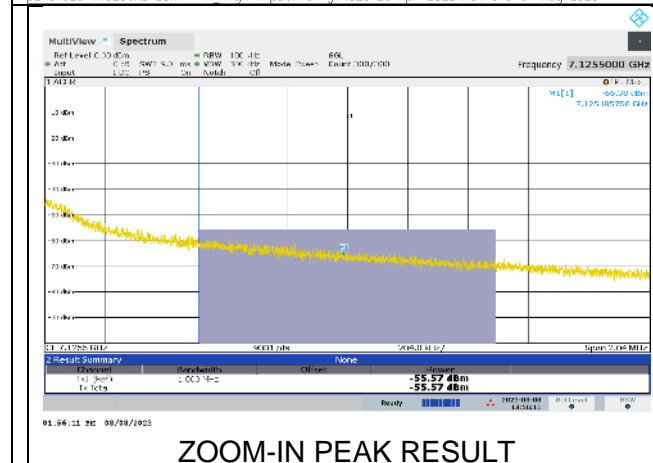
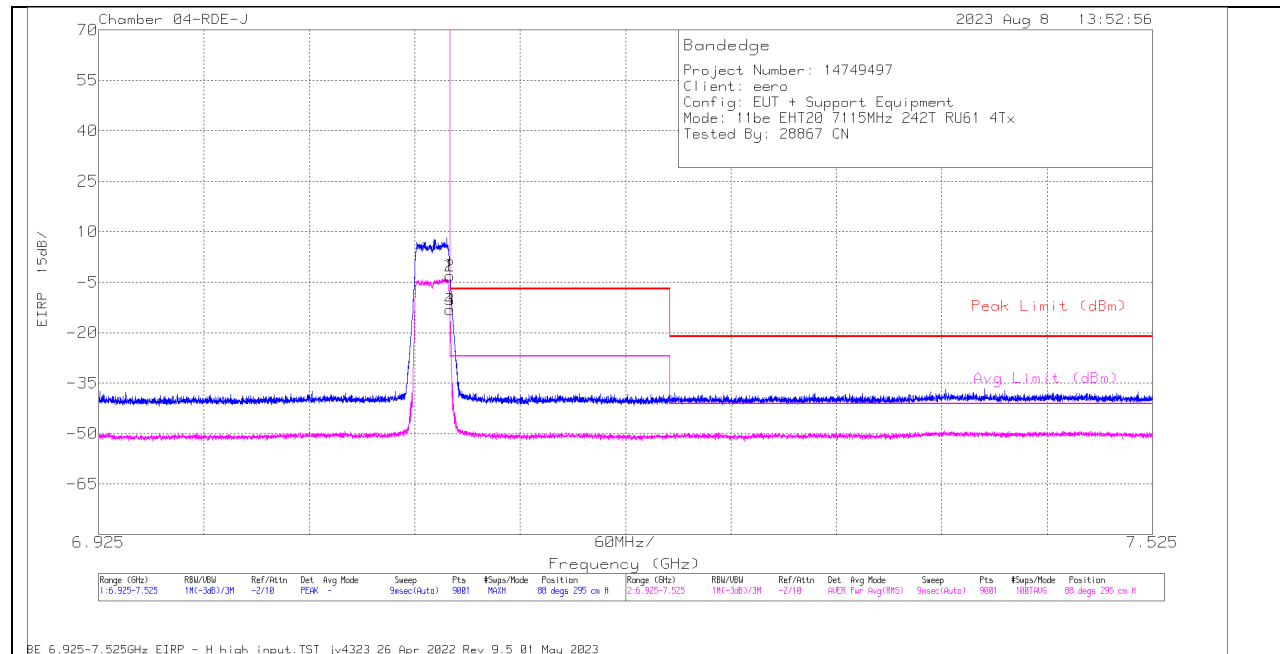


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	7.1255	-55.57	Pk	35.8	-11.9	11.8	-19.87	-7	-12.87	-	-	88	295	H
2	7.125501	-55.53	Pk	35.8	-11.9	11.8	-19.83	-7	-12.83	-	-	88	295	H
3	7.1255	-66.92	RMS	35.8	-11.9	11.8	-24.22	-	-	-27	-4.22	88	295	H
4	7.125501	-66.91	RMS	35.8	-11.9	11.8	-24.21	-	-	-27	-4.21	88	295	H

Pk - Peak detector
RMS - RMS detection


VERTICAL RESULT

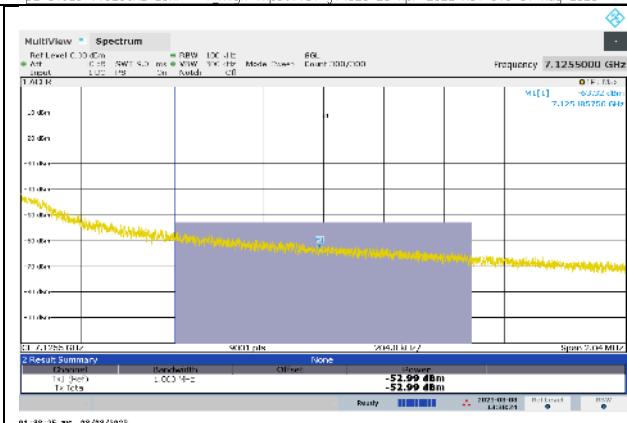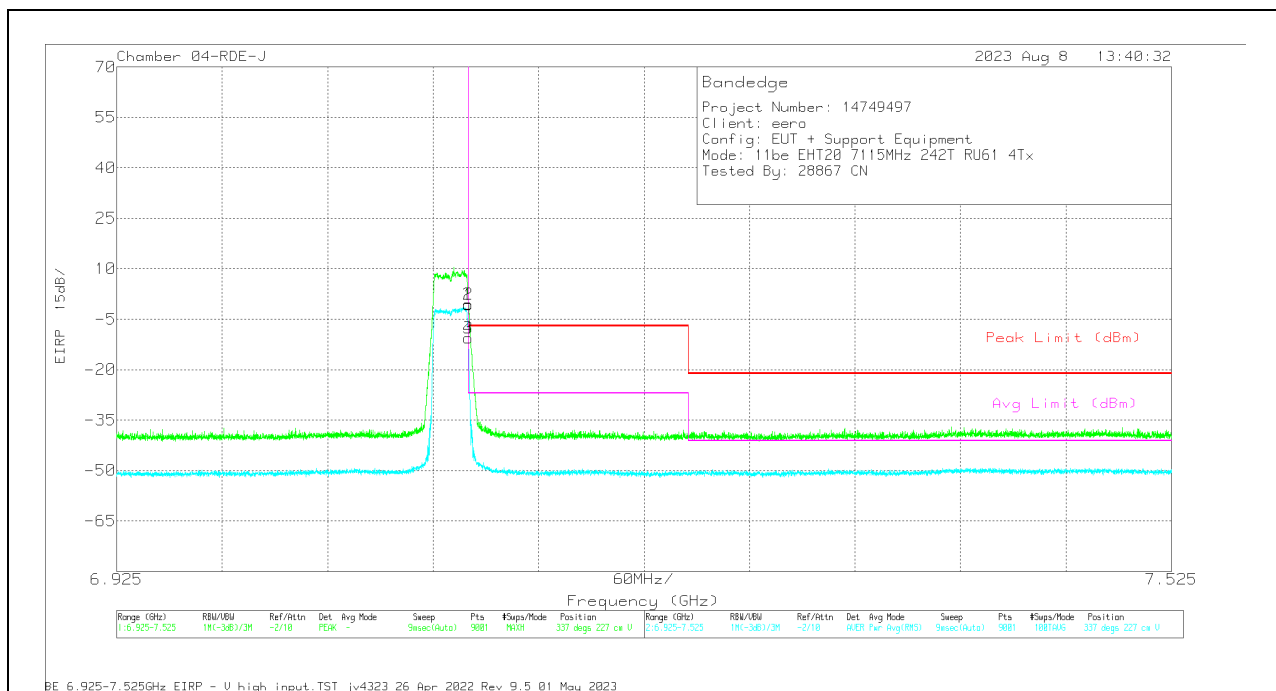


ZOOM-IN PEAK RESULT



ZOOM-IN RMS RESULT

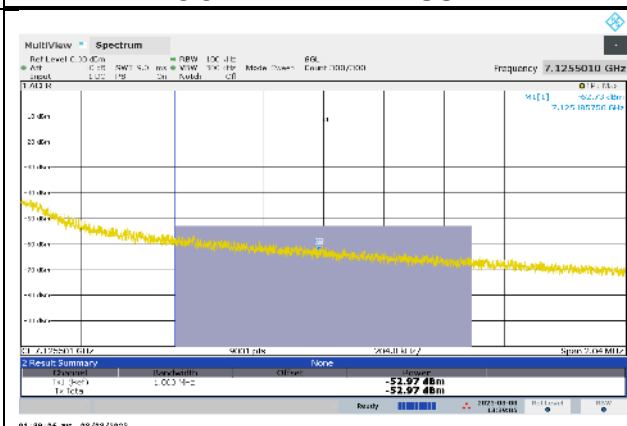

ZOOM-IN PEAK RESULT

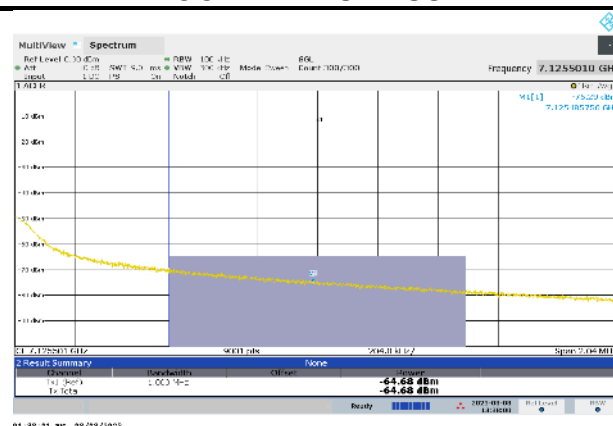

ZOOM-IN RMS RESULT



Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Conversion Factor (dB)	Corrected Reading EIRP	Peak Limit (dBm)	PK Margin (dB)	Avg Limit (dBm)	RMS Margin (dB)	Azimuth (Degr)	Height (cm)	Polarity
1	7.1255	-52.99	Pk	35.8	-11.9	11.8	-17.29	-7	-10.29	-	-	337	227	V
2	7.125501	-52.97	Pk	35.8	-11.9	11.8	-17.27	-7	-10.27	-	-	337	227	V
3	7.1255	-64.61	RMS	35.8	-11.9	11.8	-21.91	-	-	-27	-1.91	337	227	V
4	7.125501	-64.68	RMS	35.8	-11.9	11.8	-28.98	-	-	-27	-1.98	337	227	V

Pk - Peak detector
RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW

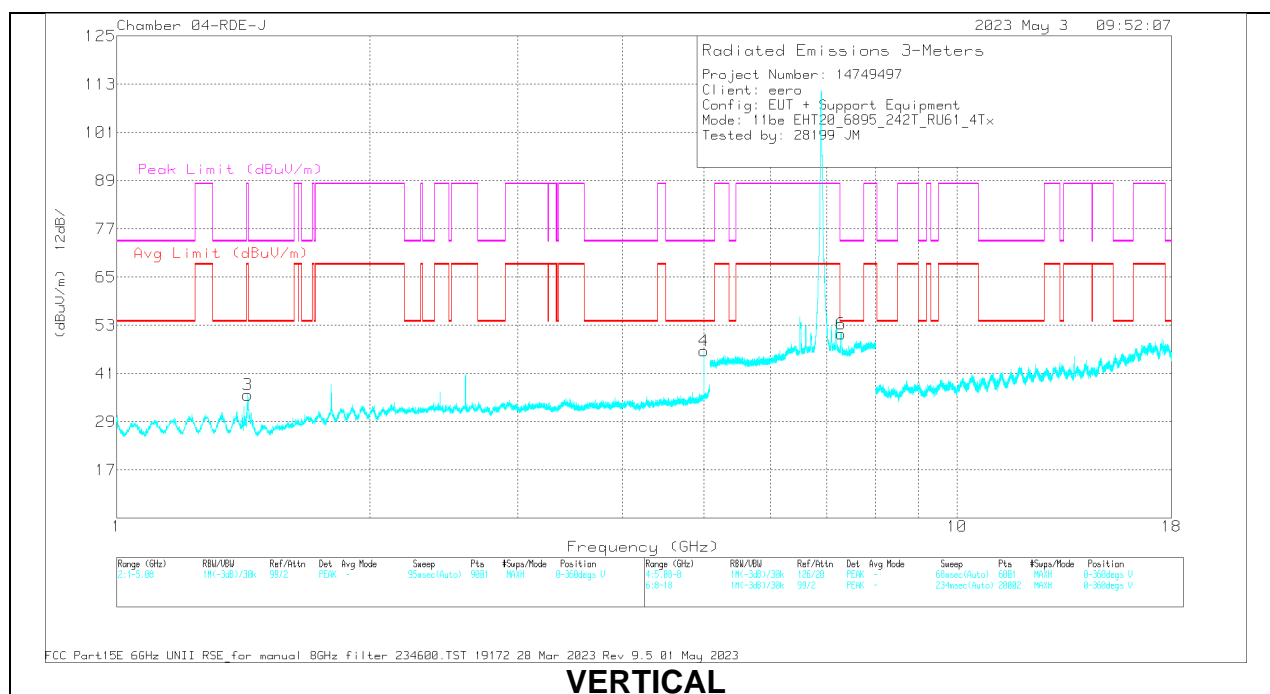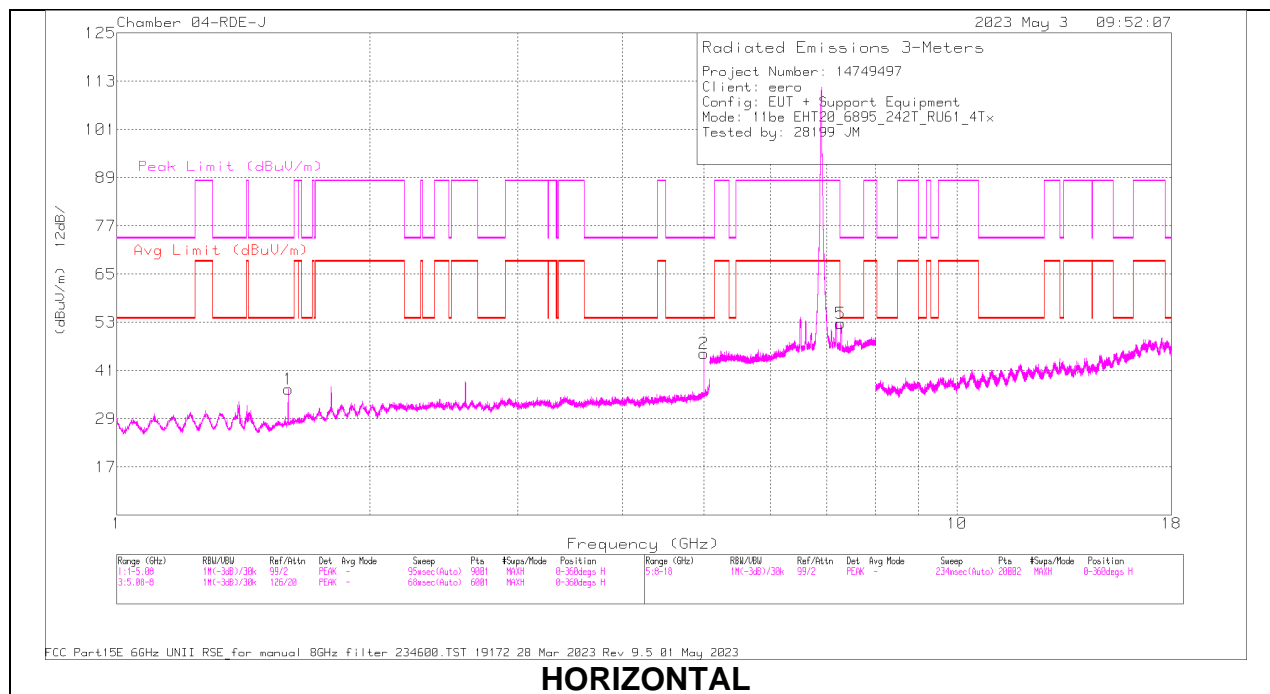

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cb/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.600024	60.02	PK-U	27.8	-43.1	44.72	-	-	74	-29.28	302	130	H
	* 1.600378	42.6	ADR	27.8	-43.1	27.3	54	-26.7	-	-	302	130	H
2	* 5.000187	59.85	PK-U	34.2	-43.1	50.95	-	-	74	-23.05	10	262	H
	* 5.000082	54.77	ADR	34.2	-43.1	45.87	54	-8.13	-	-	10	262	H
3	1.431834	64.94	PK-U	27.9	-41.8	51.04	-	-	88.2	-37.16	335	294	V
	1.431982	42.21	ADR	27.9	-41.8	28.31	68.2	-39.89	-	-	335	294	V
4	* 5.000155	59.37	PK-U	34.2	-43.1	50.47	-	-	74	-23.53	337	184	V
	* 5.000042	53.87	ADR	34.2	-43.1	44.97	54	-9.03	-	-	337	184	V
5	* 7.274878	57.33	PK-U	35.8	-31.1	62.03	-	-	74	-11.97	197	135	H
	* 7.274808	45.77	ADR	35.8	-31.1	50.47	54	-3.53	-	-	197	135	H
6	* 7.285269	55.32	PK-U	35.8	-31.1	60.02	-	-	74	-13.98	52	226	V
	* 7.286708	43.48	ADR	35.8	-31.1	48.18	54	-5.82	-	-	52	226	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID

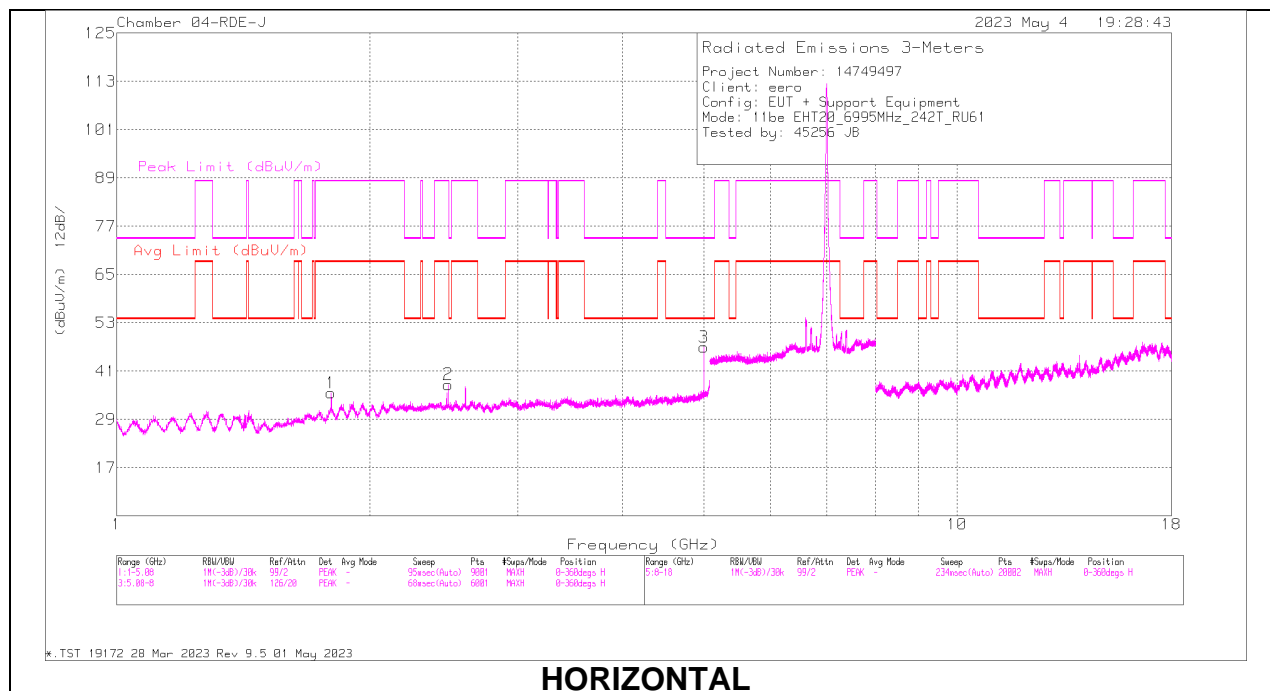

HORIZONTAL

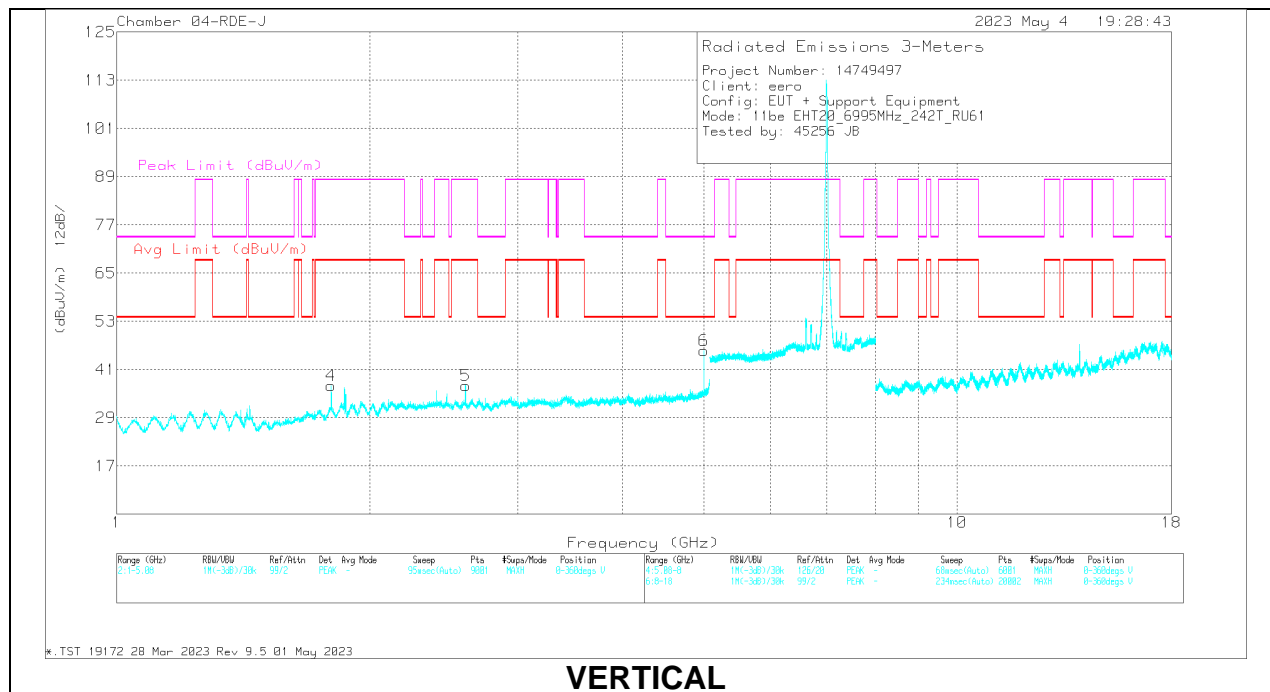

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Fitr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.799612	57.84	PK-U	30.5	-43.9	44.44	-	-	88.2	-43.76	325	223	H
	1.799906	50.26	ADR	30.5	-43.9	36.86	68.2	-31.34	-	-	325	223	H
2	2.47965	58.59	PK-U	32.2	-45	45.79	-	-	88.2	-42.41	31	242	H
	2.479122	44.69	ADR	32.2	-45.1	31.79	68.2	-36.41	-	-	31	242	H
3	* 5.000056	61.29	PK-U	34.2	-43.1	52.39	-	-	74	-21.61	348	119	H
	* 5.000034	57.03	ADR	34.2	-43.1	48.13	54	-5.87	-	-	348	119	H
4	1.80026	58.56	PK-U	30.5	-43.9	45.16	-	-	88.2	-43.04	314	175	V
	1.800026	51.03	ADR	30.5	-43.9	37.63	68.2	-30.57	-	-	314	175	V
5	2.600015	58.93	PK-U	32.3	-45.5	45.73	-	-	88.2	-42.47	347	200	V
	2.599943	50.11	ADR	32.3	-45.5	36.91	68.2	-31.29	-	-	347	200	V
6	* 5.000058	60.34	PK-U	34.2	-43.1	51.44	-	-	74	-22.56	325	190	V
	* 5.000133	55.08	ADR	34.2	-43.1	46.18	54	-7.82	-	-	325	190	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

CH 7095

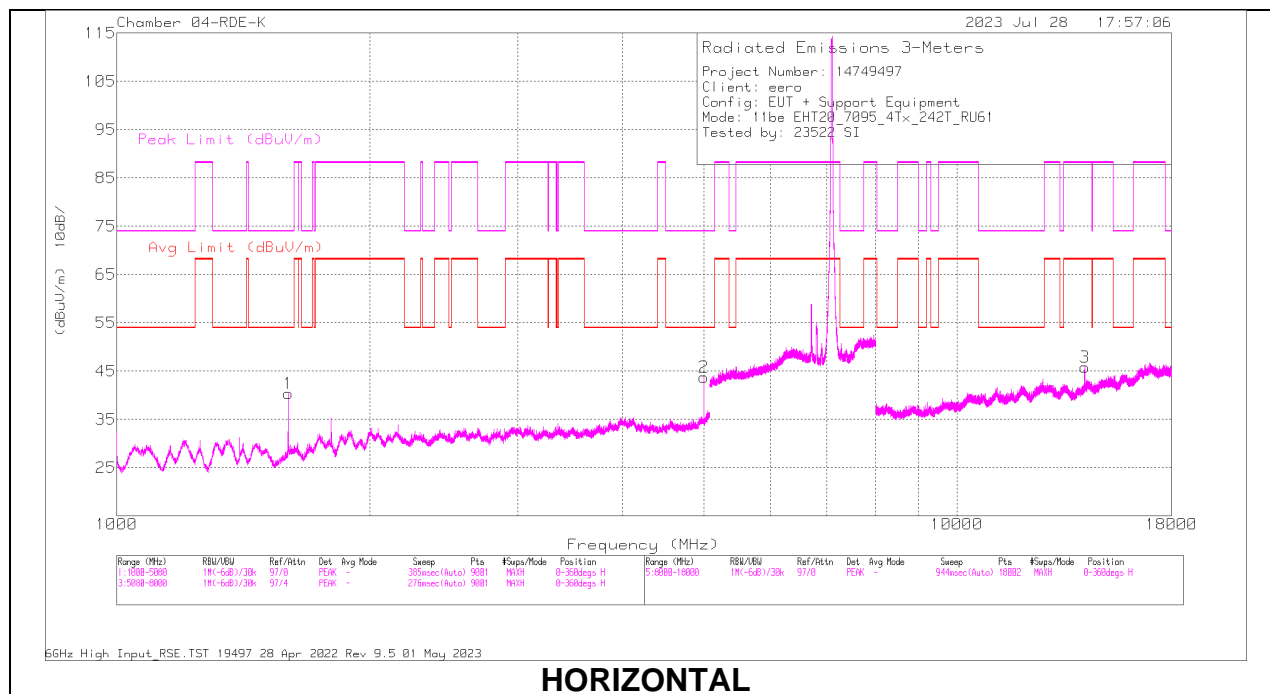

HORIZONTAL

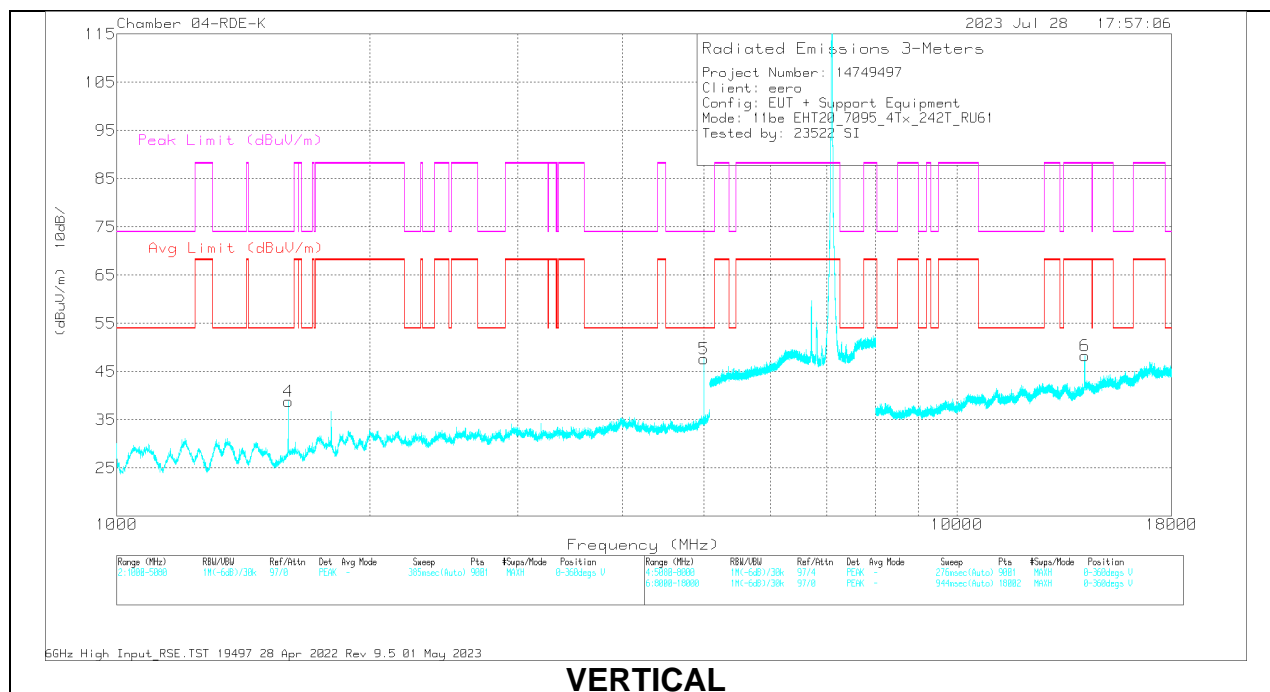

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1600.037	66.1	PK-U	28	-45.4	48.7	-	-	74	-25.3	163	208	H
	* 1600.021	61.33	ADR	28	-45.4	43.93	54	-10.07	-	-	163	208	H
2	* 5000.054	54.87	PK-U	33.8	-38.5	50.17	-	-	74	-23.83	206	139	H
	* 5000.05	50.13	ADR	33.8	-38.5	45.43	54	-8.57	-	-	206	139	H
4	* 1600.08	62.72	PK-U	28	-45.4	45.32	-	-	74	-28.68	201	109	V
	* 1600.011	55.8	ADR	28	-45.4	38.4	54	-15.6	-	-	201	109	V
5	* 5000.198	55.94	PK-U	33.8	-38.5	51.24	-	-	74	-22.76	170	130	V
	* 5000.088	51.56	ADR	33.8	-38.5	46.86	54	-7.14	-	-	170	130	V
3	14194.663	48.75	PK-U	39.3	-34.1	53.95	-	-	88.2	-34.25	70	209	H
	14191.746	37.42	ADR	39.3	-34.1	42.62	68.2	-25.58	-	-	70	209	H
6	14191.265	50.53	PK-U	39.3	-34.2	55.63	-	-	88.2	-32.57	350	116	V
	14189.677	38.84	ADR	39.3	-34.2	43.94	68.2	-24.26	-	-	350	116	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average