


VERTICAL RESULT

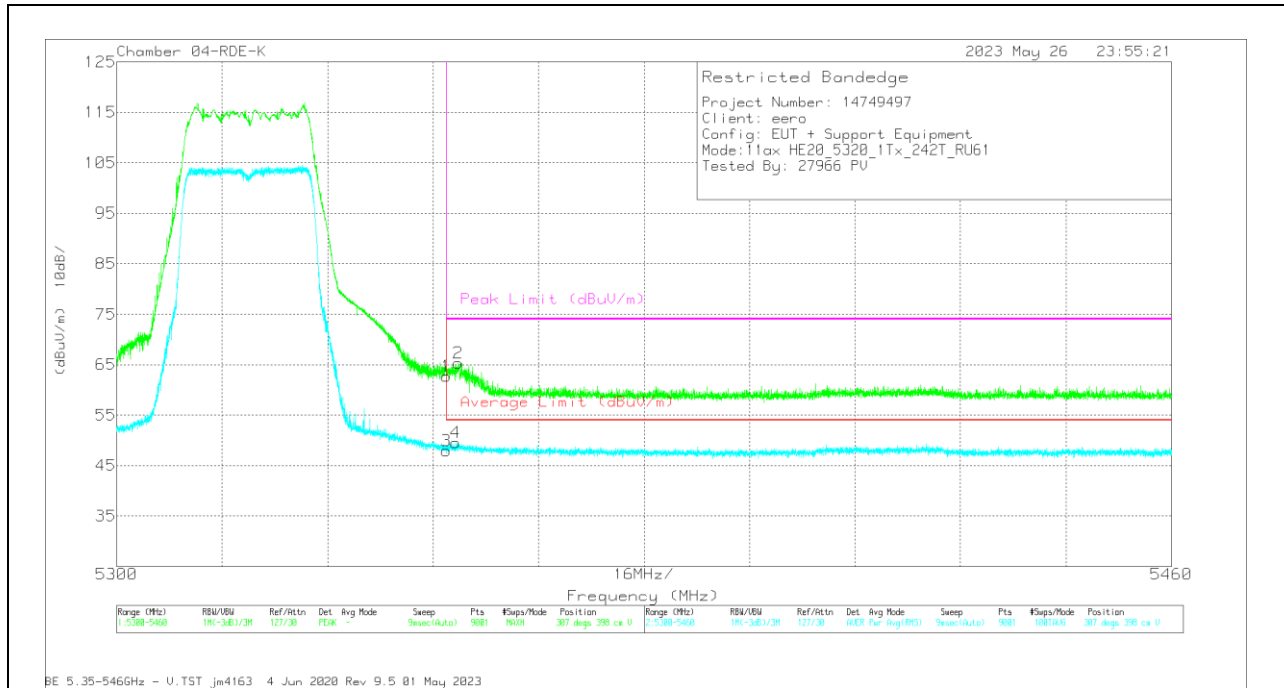

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	CbI/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	58.17	Pk	34.5	-30	62.67	-	-	74	-11.33	307	398	V
2	* 5351.823	60.63	Pk	34.5	-29.8	65.33	-	-	74	-8.67	307	398	V
3	* 5350	43.45	RMS	34.5	-30	47.95	54	-6.05	-	-	307	398	V
4	* 5351.414	44.93	RMS	34.5	-29.9	49.53	54	-4.47	-	-	307	398	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

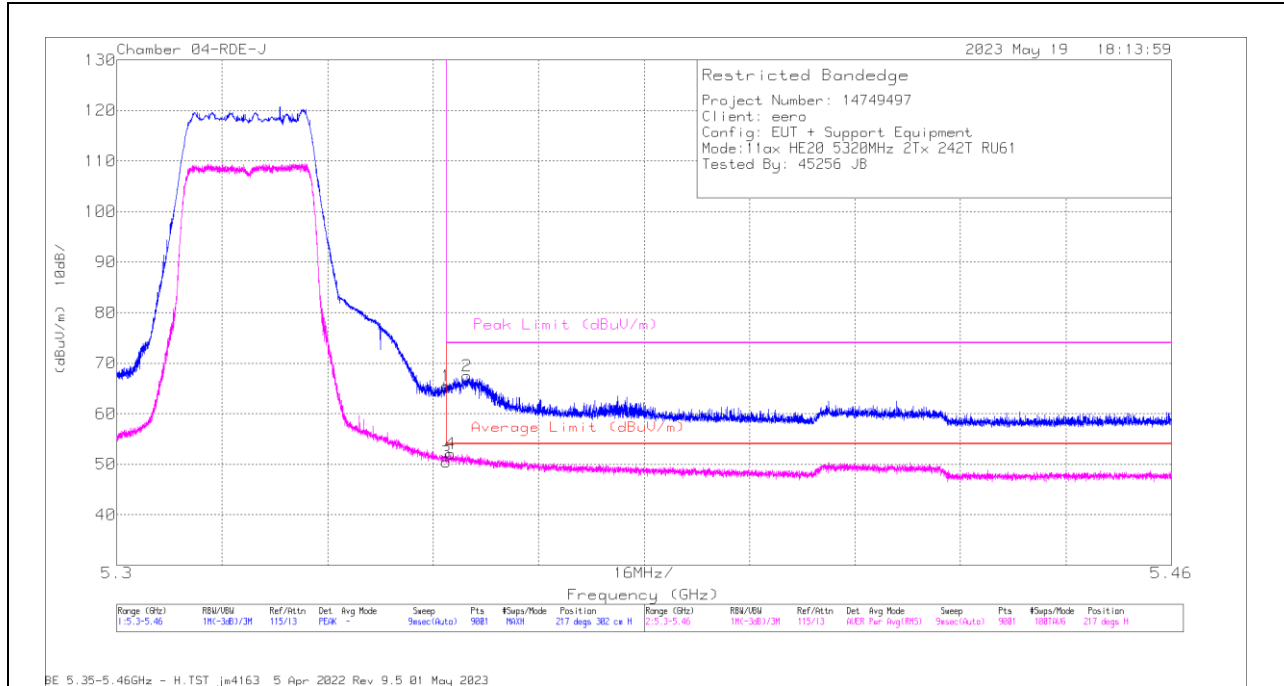


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.24	Pk	35	-13.8	65.44	-	-	74	-8.56	217	302	H
2	* 5.353138	46.24	Pk	35	-13.8	67.44	-	-	74	-6.56	217	302	H
3	* 5.35	28.65	RMS	35	-13.8	49.85	54	-4.15	-	-	217	302	H
4	* 5.350667	30.29	RMS	35	-13.8	51.49	54	-2.51	-	-	217	302	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

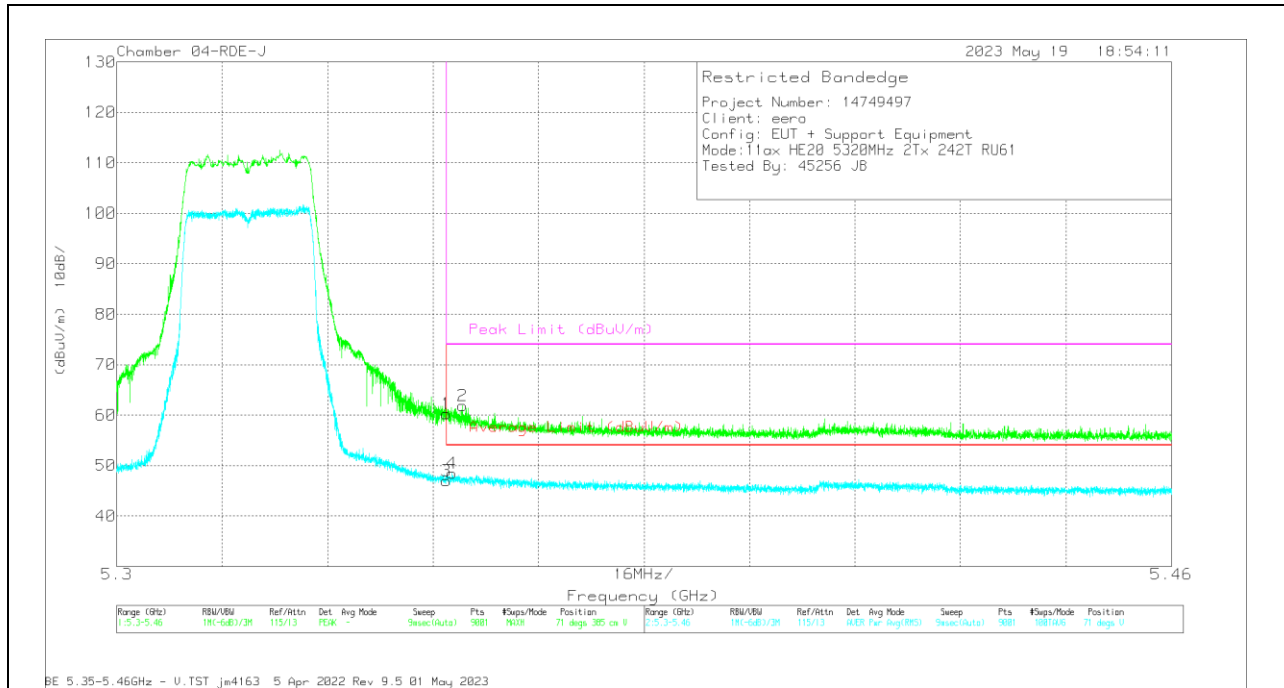

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	39.04	Pk	35	-13.8	60.24	-	-	74	-13.76	71	385	V
2	* 5.352445	40.67	Pk	35	-13.8	61.87	-	-	74	-12.13	71	385	V
3	* 5.35	25.8	RMS	35	-13.8	47	54	-7	-	-	71	385	V
4	* 5.350881	27.29	RMS	35	-13.8	48.49	54	-5.51	-	-	71	385	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

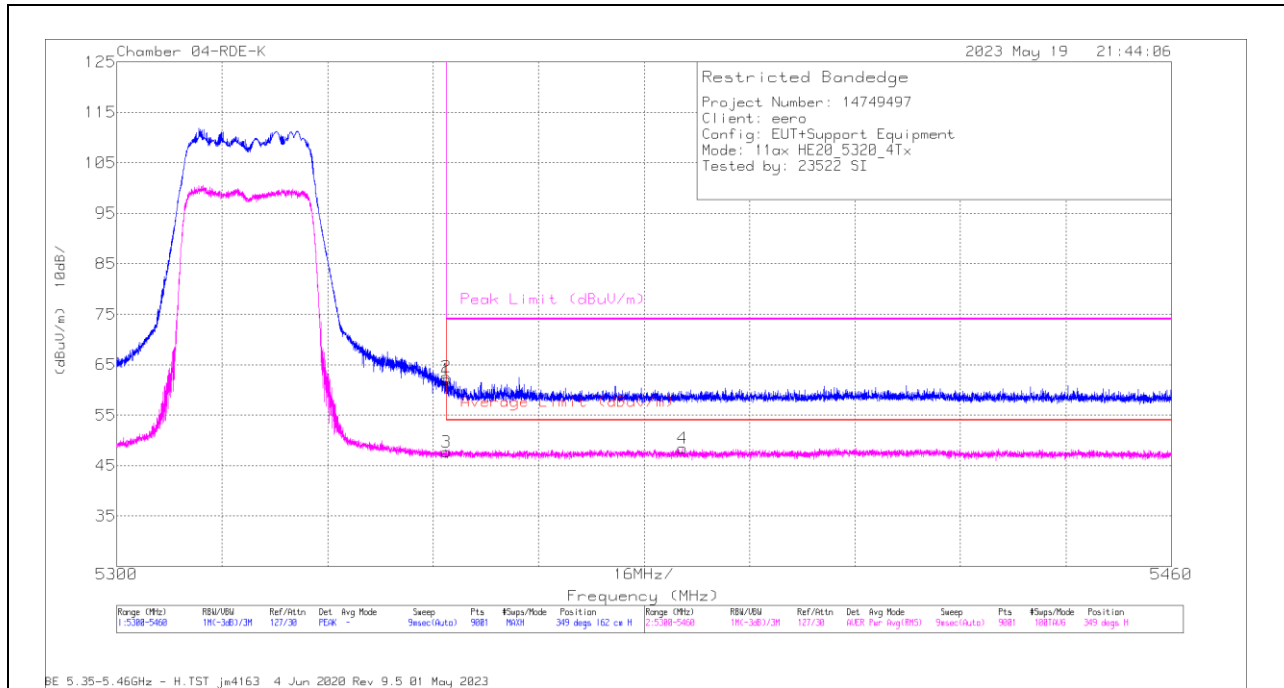


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	57.59	Pk	34.5	-30	62.09	-	-	74	-11.91	349	162	H
2	* 5350.027	58.08	Pk	34.5	-30	62.58	-	-	74	-11.42	349	162	H
3	* 5350	43.14	RMS	34.5	-30	47.64	54	-6.36	-	-	349	162	H
4	* 5385.85	43.96	RMS	34.5	-30	48.46	54	-5.54	-	-	349	162	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

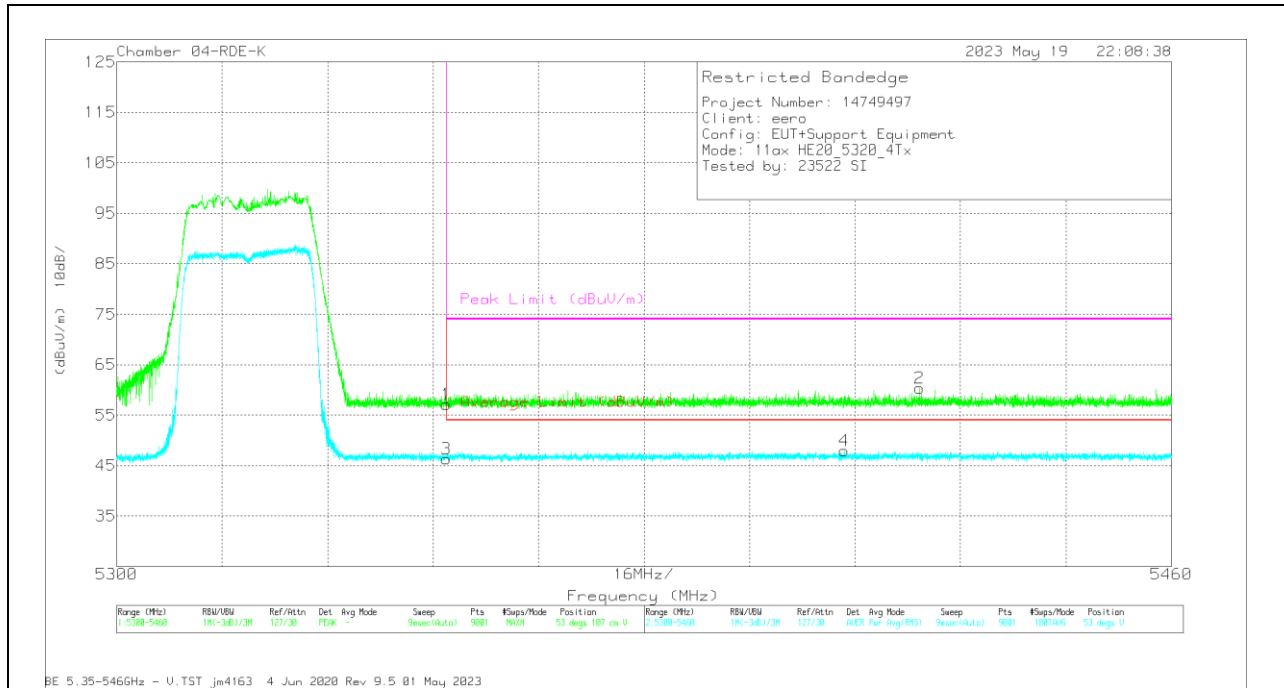

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	52.6	Pk	34.5	-30	57.1	-	-	74	-16.9	53	107	V
2	* 5421.797	55.62	Pk	34.6	-29.9	60.32	-	-	74	-13.68	53	107	V
3	* 5350	41.79	RMS	34.5	-30	46.29	54	-7.71	-	-	53	107	V
4	* 5410.33	43.34	RMS	34.6	-30	47.94	54	-6.06	-	-	53	107	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.1.2. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE 5.3GHz BAND

1TX Antenna 6 OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

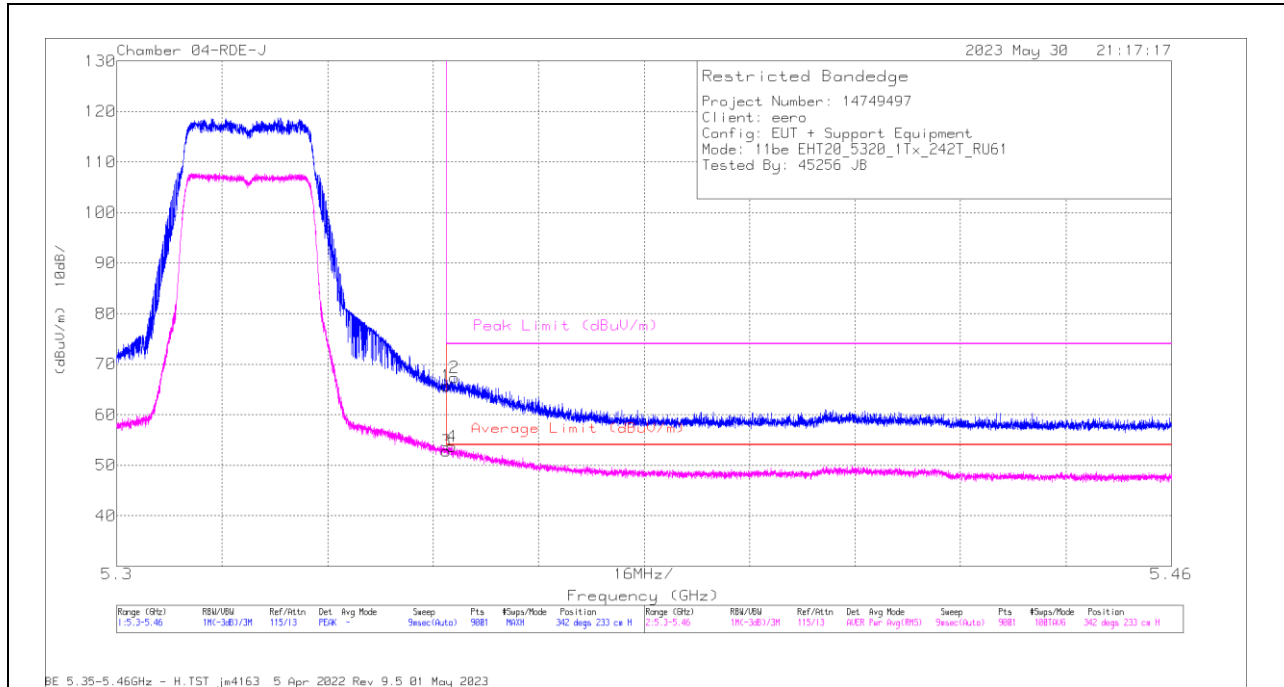

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.17	Pk	35	-13.4	65.77	-	-	74	-8.23	342	233	H
2	* 5.351218	45.79	Pk	35	-13.4	67.39	-	-	74	-6.61	342	233	H
3	* 5.35	30.58	RMS	35	-13.4	52.18	54	-1.82	-	-	342	233	H
4	* 5.350845	31.46	RMS	35	-13.4	53.06	54	-94	-	-	342	233	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

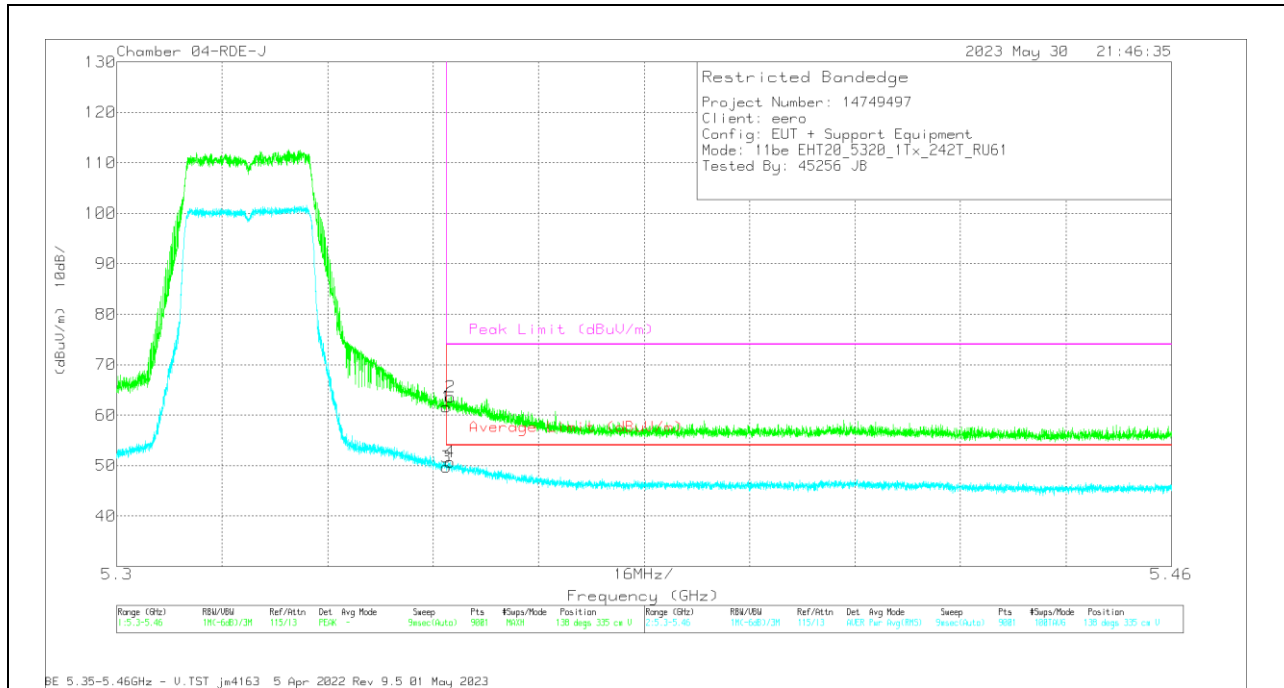

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.01	Pk	35	-13.4	61.61	-	-	74	-12.39	138	335	V
2	* 5.350632	42.06	Pk	35	-13.4	63.66	-	-	74	-10.34	138	335	V
3	* 5.35	28.16	RMS	35	-13.4	49.76	54	-4.24	-	-	138	335	V
4	* 5.350561	29.07	RMS	35	-13.4	50.67	54	-3.33	-	-	138	335	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

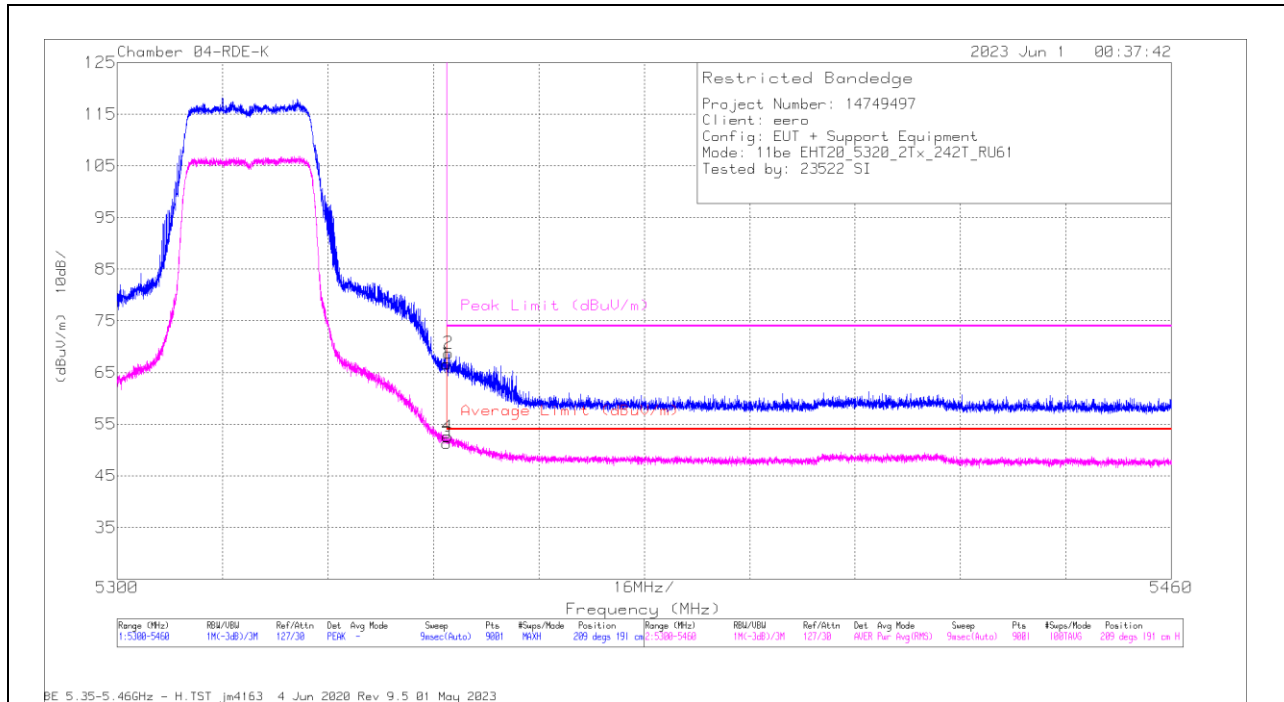


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	62.19	Pk	34.5	-30	66.69	-	-	74	-7.31	209	191	H
2	* 5350.33	64.25	Pk	34.5	-30	68.75	-	-	74	-5.25	209	191	H
3	* 5350	46.84	RMS	34.5	-30	51.34	54	-2.66	-	-	209	191	H
4	* 5350.152	48.13	RMS	34.5	-30	52.63	54	-1.37	-	-	209	191	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

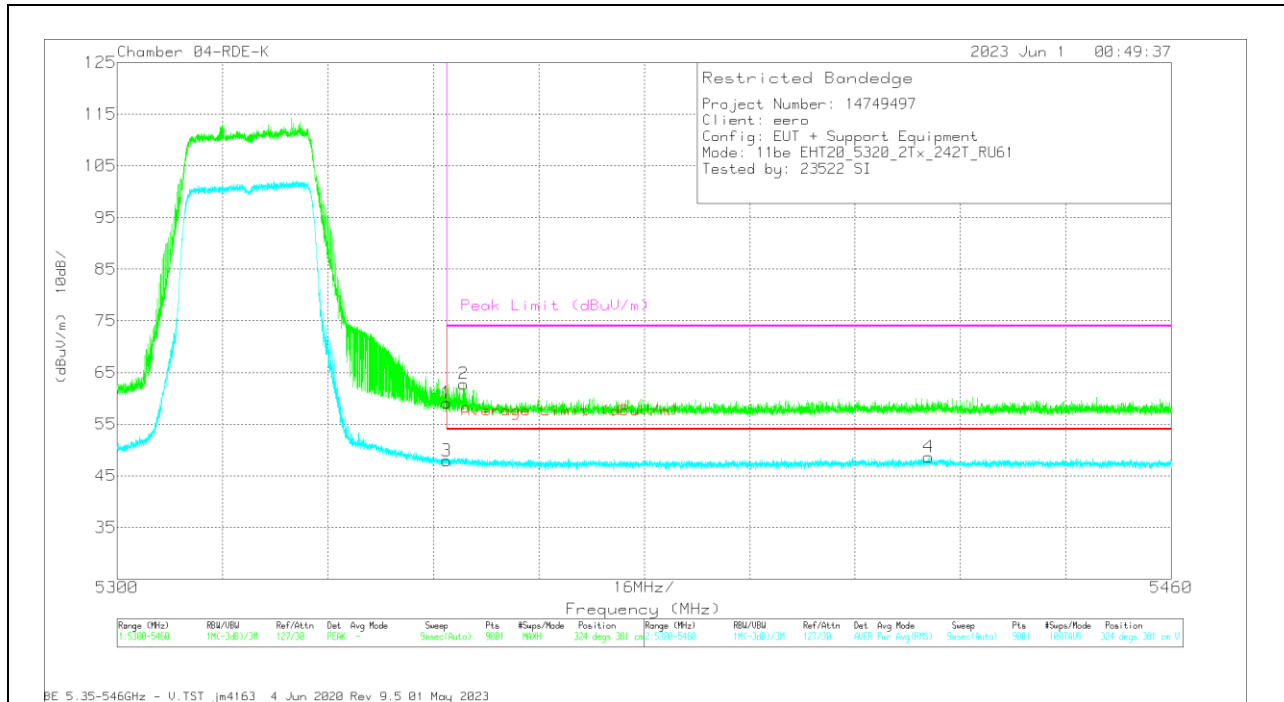

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	CbI/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	54.61	Pk	34.5	-30	59.11	-	-	74	-14.89	324	381	V
2	* 5352.57	58.2	Pk	34.5	-29.9	62.8	-	-	74	-11.2	324	381	V
3	* 5350	43.39	RMS	34.5	-30	47.89	54	-6.11	-	-	324	381	V
4	* 5423.166	43.95	RMS	34.6	-29.9	48.65	54	-5.35	-	-	324	381	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

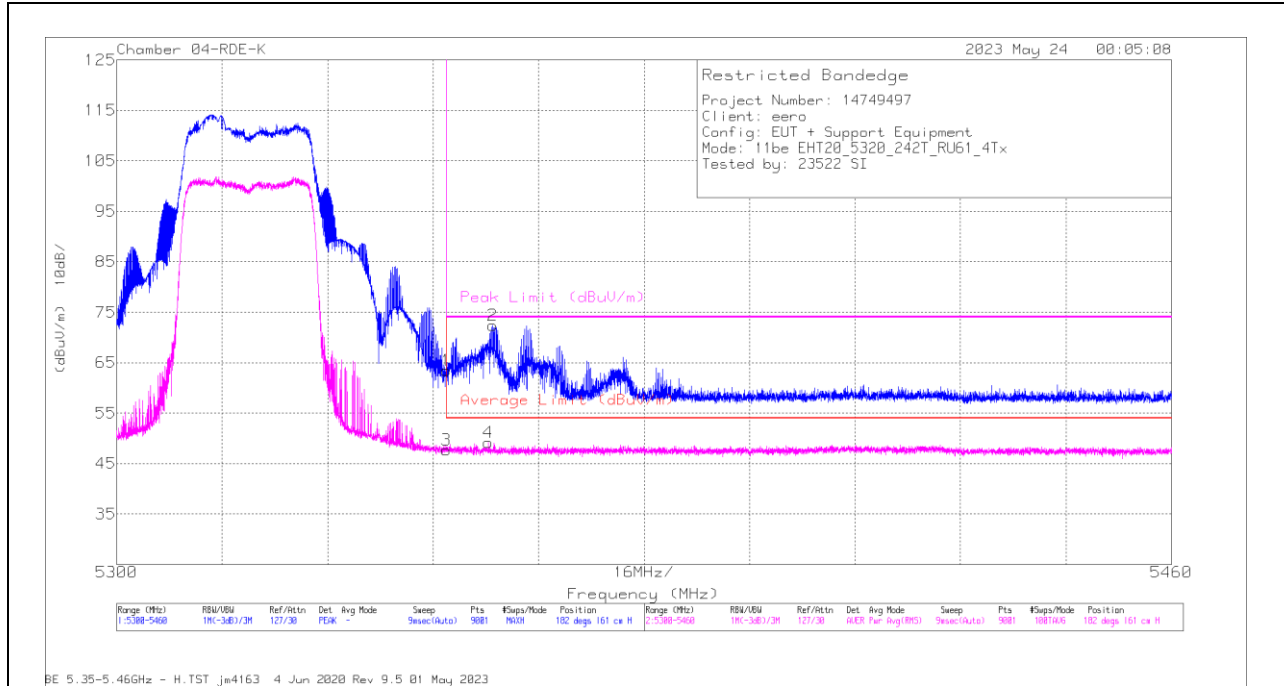


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	58.95	Pk	34.5	-30	63.45	-	-	74	-10.55	182	161	H
2	* 5357.05	67.93	Pk	34.5	-30	72.43	-	-	74	-1.57	182	161	H
3	* 5350	43.14	RMS	34.5	-30	47.64	54	-6.36	-	-	182	161	H
4	* 5356.338	44.62	RMS	34.5	-30	49.12	54	-4.88	-	-	182	161	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

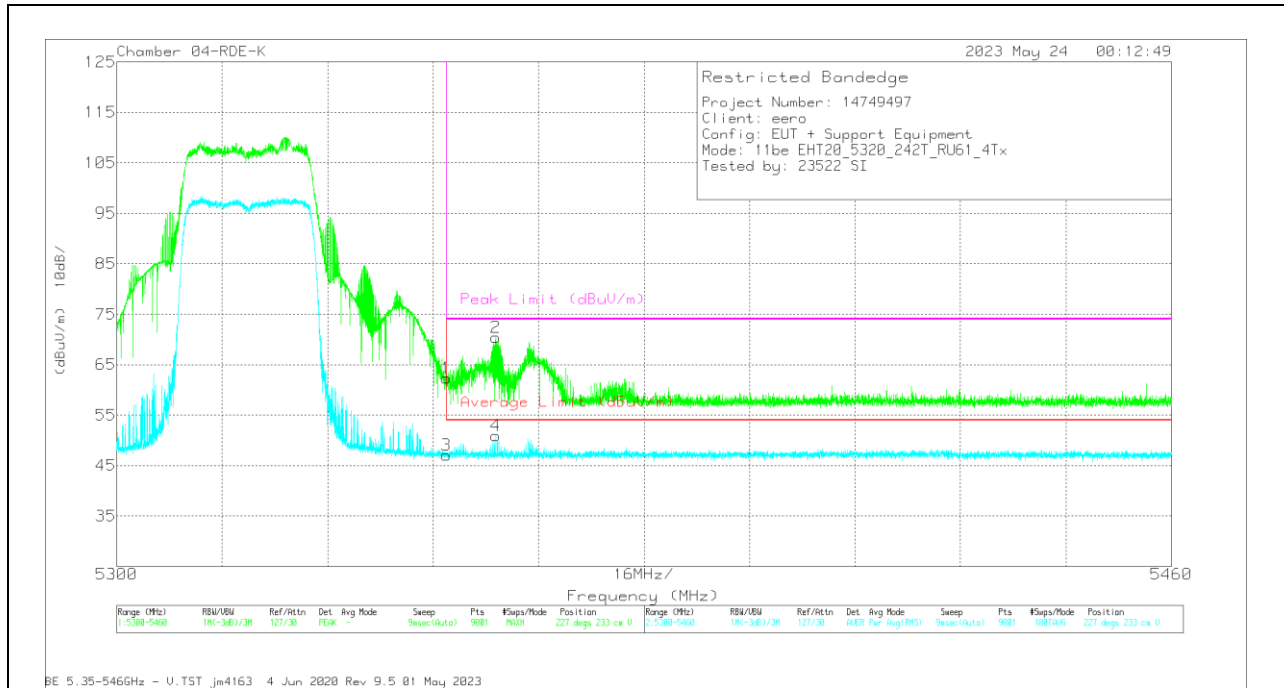


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	57.86	Pk	34.5	-30	62.36	-	-	74	-11.64	227	233	V
2	* 5357.494	65.88	Pk	34.5	-30	70.38	-	-	74	-3.62	227	233	V
3	* 5350	42.54	RMS	34.5	-30	47.04	54	-6.96	-	-	227	233	V
4	* 5357.512	46.44	RMS	34.5	-30	50.94	54	-3.06	-	-	227	233	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

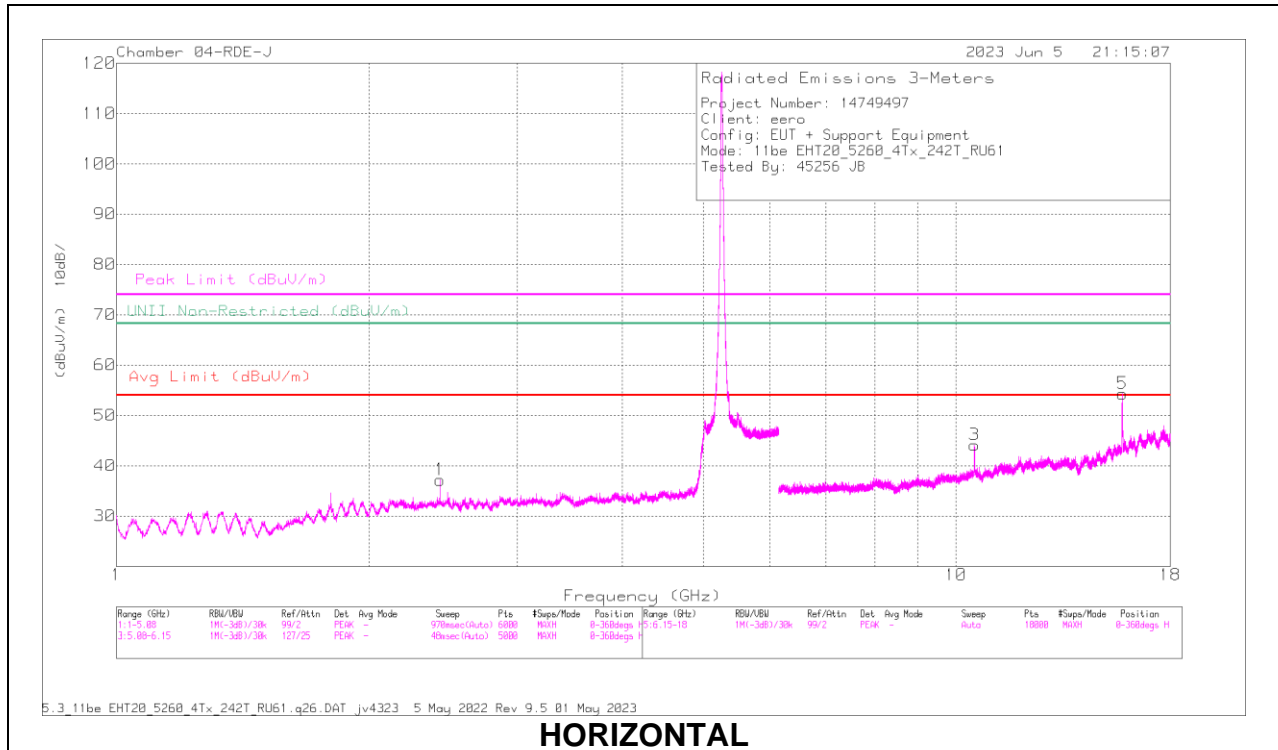

HORIZONTAL

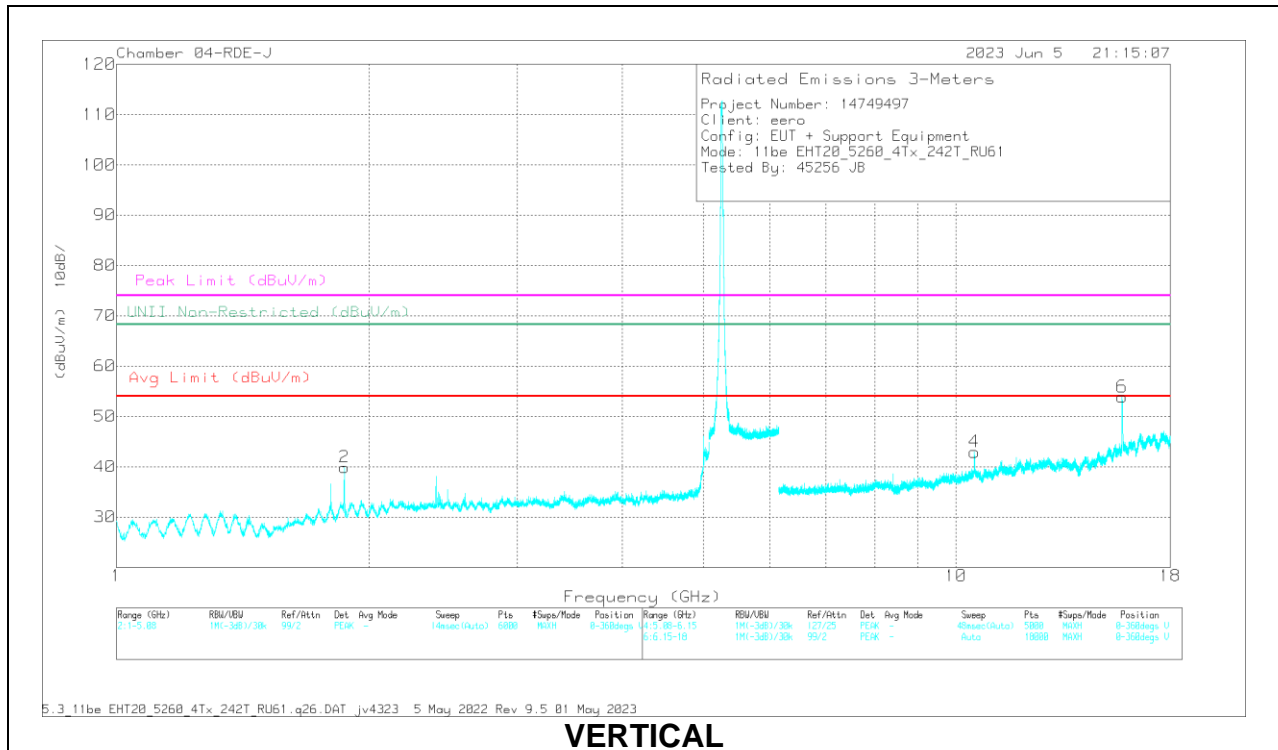

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.430664	58.02	PK-U	32.1	-46.4	43.72	-	-	-	-	68.2	-24.48	93	272	H
2	1.867009	69.58	PK-U	30.8	-46.6	53.78	-	-	-	-	68.2	-14.42	67	346	V
3	10.517506	57.35	PK-U	37.5	-40.5	54.35	-	-	-	-	68.2	-13.85	349	231	H
5	* 15.781505	62.77	PK-U	40.9	-40.6	63.07	-	-	74	-10.93	-	-	183	210	H
	* 15.784219	50.33	ADR	40.9	-40.6	50.63	54	-3.37	-	-	-	-	183	210	H
4	10.51656	57.79	PK-U	37.5	-40.6	54.69	-	-	-	-	68.2	-13.51	340	151	V
6	* 15.774571	64.78	PK-U	40.9	-40.6	65.08	-	-	74	-8.92	-	-	166	103	V
	* 15.774779	52.15	ADR	40.9	-40.5	52.55	54	-1.45	-	-	-	-	166	103	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

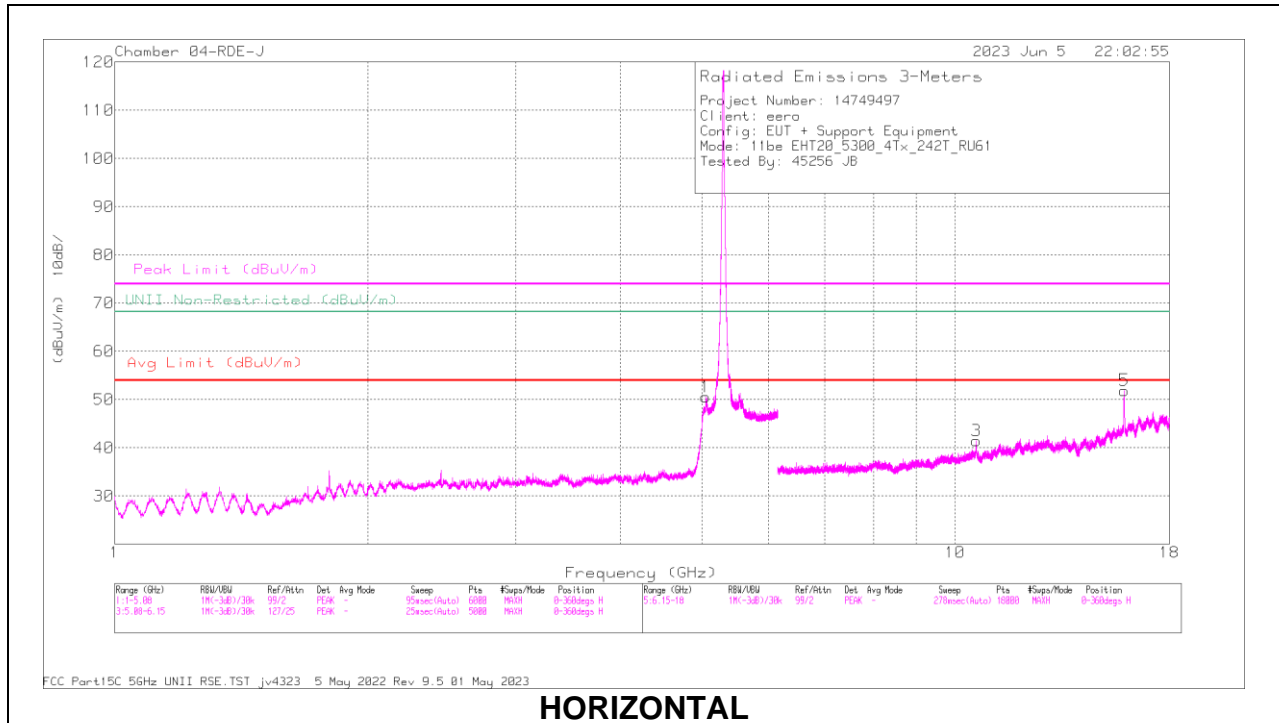

HORIZONTAL

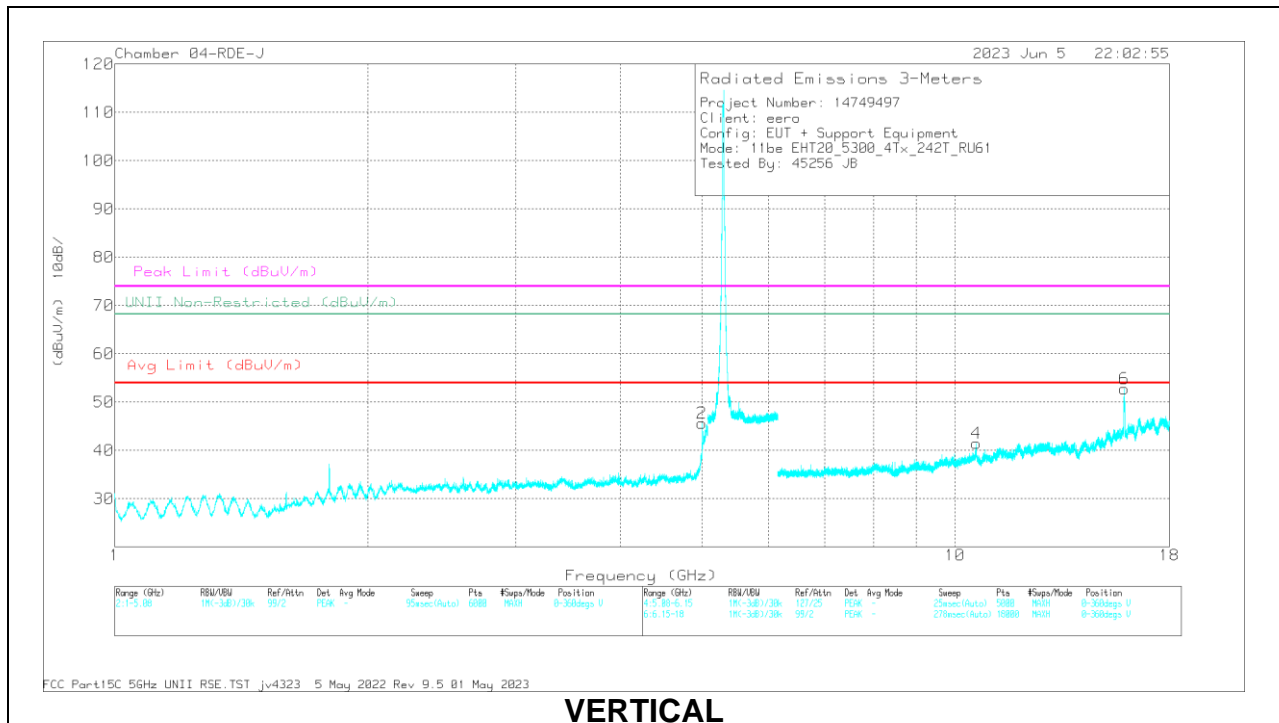


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.053387	70.52	PK-U	34.3	-42.6	62.22	-	-	74	-11.78	-	-	17	224	H
	* 5.05224	57.89	ADR	34.3	-42.6	49.59	54	-4.41	-	-	-	-	17	224	H
2	* 5.000184	62.09	PK-U	34.2	-43.5	52.79	-	-	74	-21.21	-	-	329	161	V
	* 4.999983	56.77	ADR	34.2	-43.5	47.47	54	-6.53	-	-	-	-	329	161	V
3	10.597607	56	PK-U	37.5	-40.2	53.3	-	-	-	-	68.2	-14.9	1	104	H
5	* 15.900571	64.44	PK-U	41.1	-39.1	66.44	-	-	74	-7.56	-	-	185	106	H
	* 15.900303	51.15	ADR	41.1	-39.1	53.15	54	-8.5	-	-	-	-	185	106	H
4	* 10.605307	55.74	PK-U	37.5	-40.2	53.04	-	-	74	-20.96	-	-	348	115	V
	* 10.60503	43.25	ADR	37.5	-40.2	40.55	54	-13.45	-	-	-	-	348	115	V
6	* 15.900457	65.52	PK-U	41.1	-39.1	67.52	-	-	74	-6.48	-	-	176	107	V
	* 15.900737	51.19	ADR	41.1	-39.1	53.19	54	-8.1	-	-	-	-	176	107	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

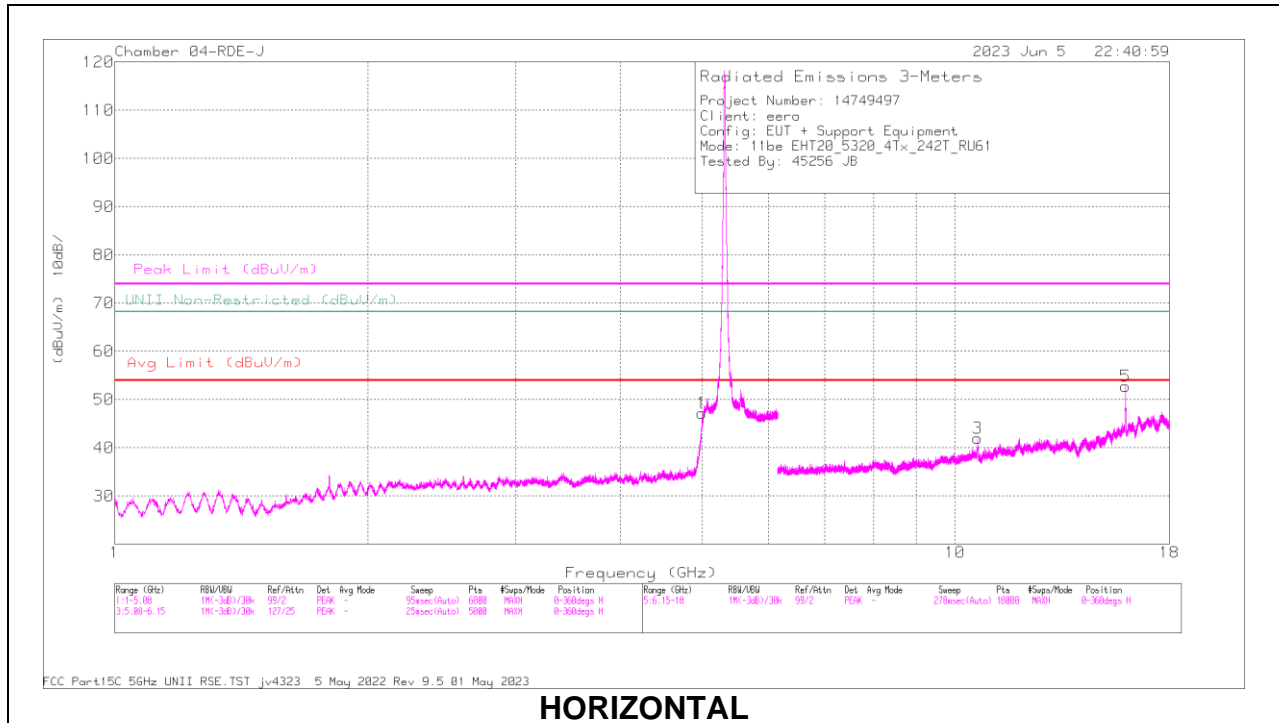

HORIZONTAL

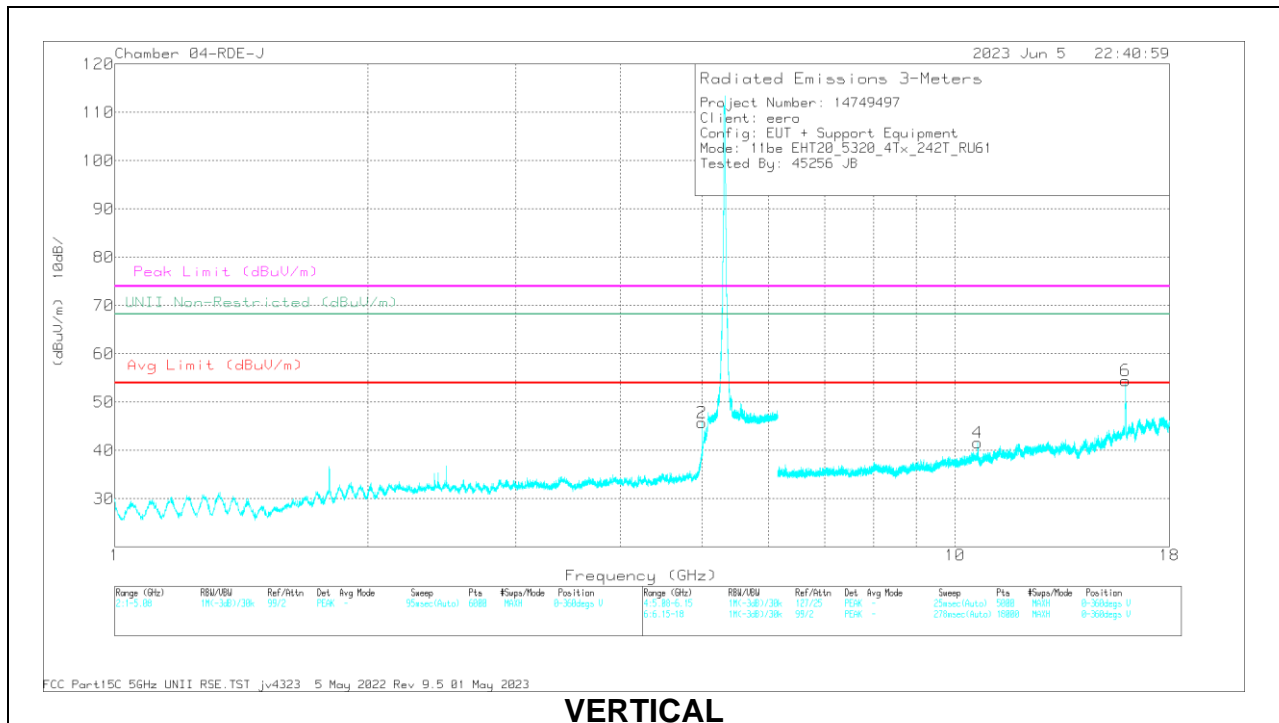

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.000094	66.98	PK-U	34.2	-43.5	57.68	-	-	74	-16.32	-	-	15	257	H
	* 5.000015	57.67	ADR	34.2	-43.5	48.37	54	-5.63	-	-	-	-	15	257	H
2	* 5.000231	61.24	PK-U	34.2	-43.5	51.94	-	-	74	-22.06	-	-	336	153	V
	* 5.000104	54.95	ADR	34.2	-43.5	45.65	54	-8.35	-	-	-	-	336	153	V
3	* 10.637566	56.39	PK-U	37.5	-40.1	53.79	-	-	74	-20.21	-	-	38	210	H
	* 10.637822	44.68	ADR	37.5	-40.1	42.08	54	-11.92	-	-	-	-	38	210	H
5	* 15.953394	63.5	PK-U	41.2	-40	64.7	-	-	74	-9.3	-	-	185	112	H
	* 15.956212	51.1	ADR	41.2	-40	52.3	54	-1.7	-	-	-	-	185	112	H
4	* 10.642637	55.02	PK-U	37.6	-40.1	52.52	-	-	74	-21.48	-	-	346	139	V
	* 10.641579	42.89	ADR	37.5	-40	40.39	54	-13.61	-	-	-	-	346	139	V
6	* 15.961547	66.24	PK-U	41.2	-40	67.44	-	-	74	-6.56	-	-	176	124	V
	* 15.958824	51.65	ADR	41.2	-39.9	52.95	54	-1.05	-	-	-	-	176	124	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.3. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.3GHz BAND

1TX Antenna 6 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

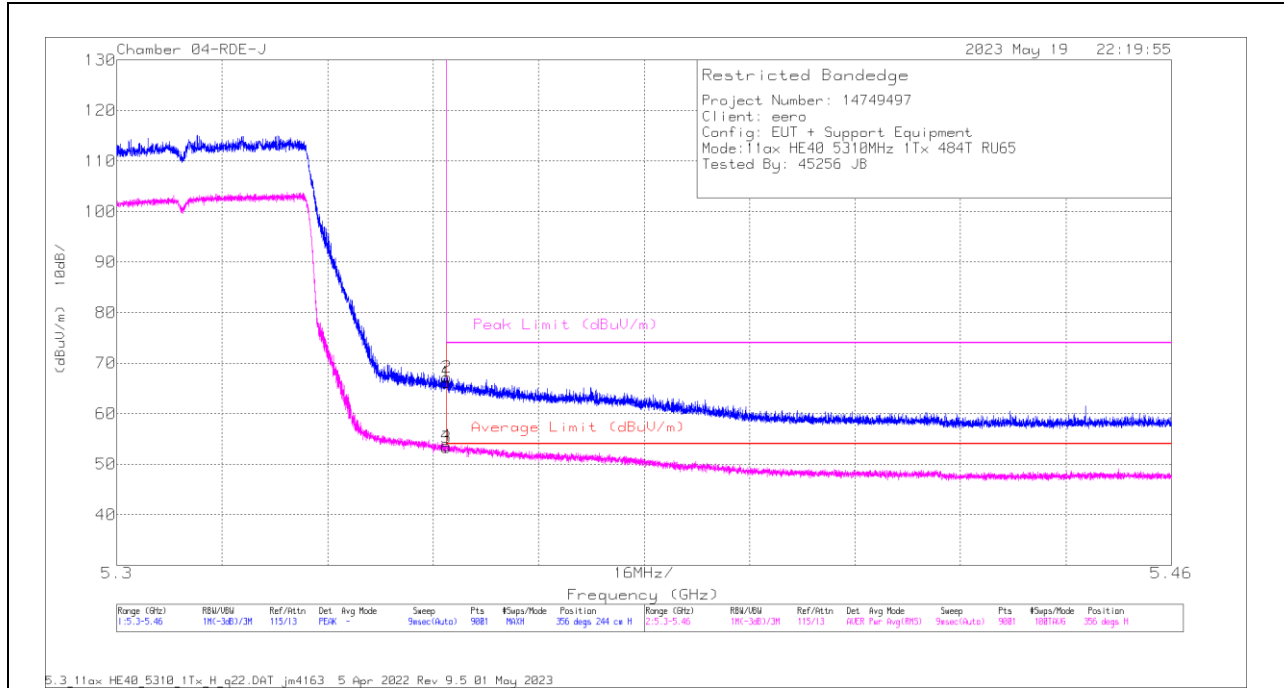

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB)	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	45.03	PK	35	-13.8	66.23	-	-	74	-7.77	356	244	H
2	* 5.350134	46.04	PK	35	-13.8	67.24	-	-	74	-6.76	356	244	H
3	* 5.35	31.56	RMS	35	-13.8	52.76	54	-1.24	-	-	356	244	H
4	* 5.350027	31.94	RMS	35	-13.8	53.14	54	-.86	-	-	356	244	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

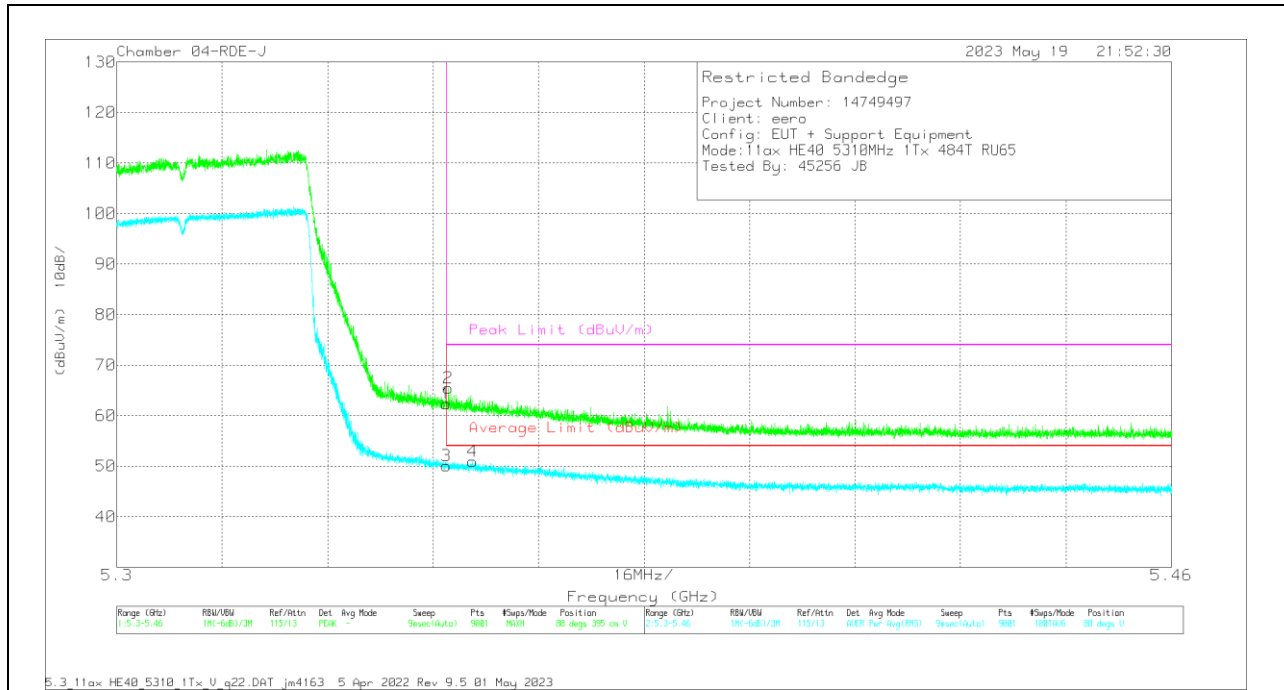

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.14	Pk	35	-13.8	62.34	-	-	74	-11.66	88	395	V
2	* 5.350258	44.3	Pk	35	-13.8	65.5	-	-	74	-8.5	88	395	V
3	* 5.35	28.92	RMS	35	-13.8	50.12	54	-3.88	-	-	88	395	V
4	* 5.35401	29.7	RMS	35	-13.8	50.9	54	-3.1	-	-	88	395	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

RMS - RMS detection

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

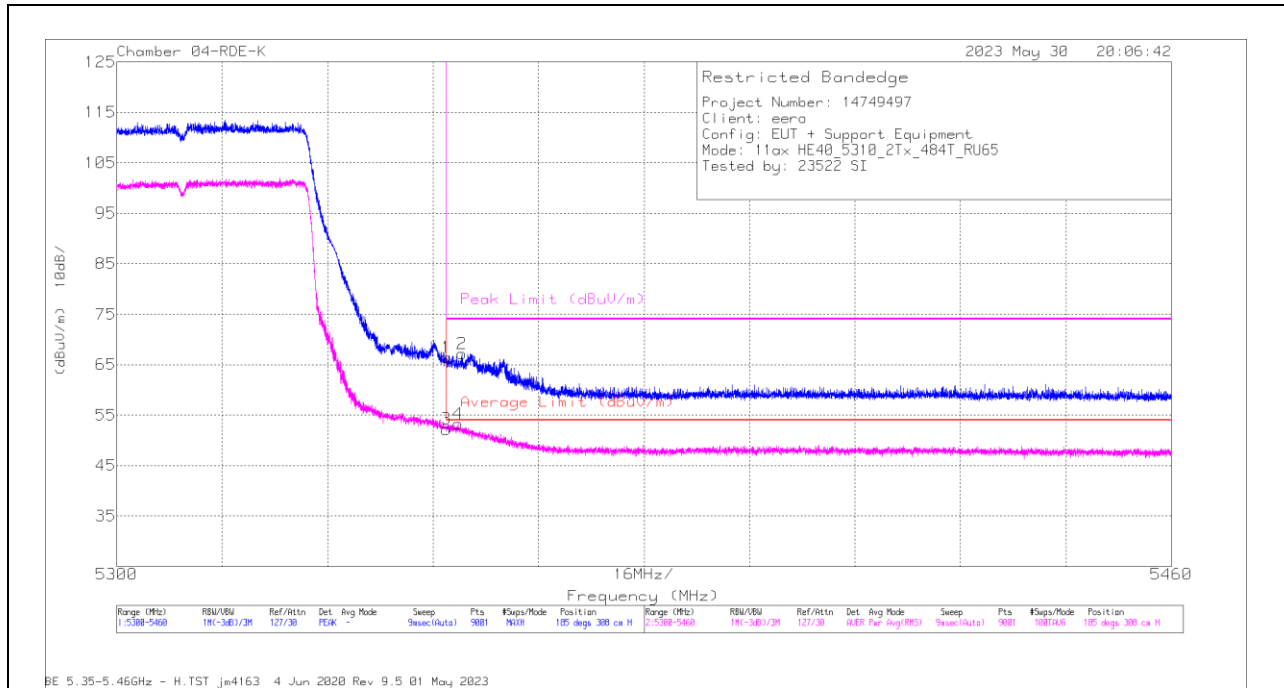

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	61.89	Pk	34.5	-30	66.39	-	-	74	-7.61	185	308	H
2	* 5352.41	62.46	Pk	34.5	-29.8	67.16	-	-	74	-6.84	185	308	H
3	* 5350	47.72	RMS	34.5	-30	52.22	54	-1.78	-	-	185	308	H
4	* 5351.787	48.62	RMS	34.5	-29.8	53.32	54	-0.68	-	-	185	308	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

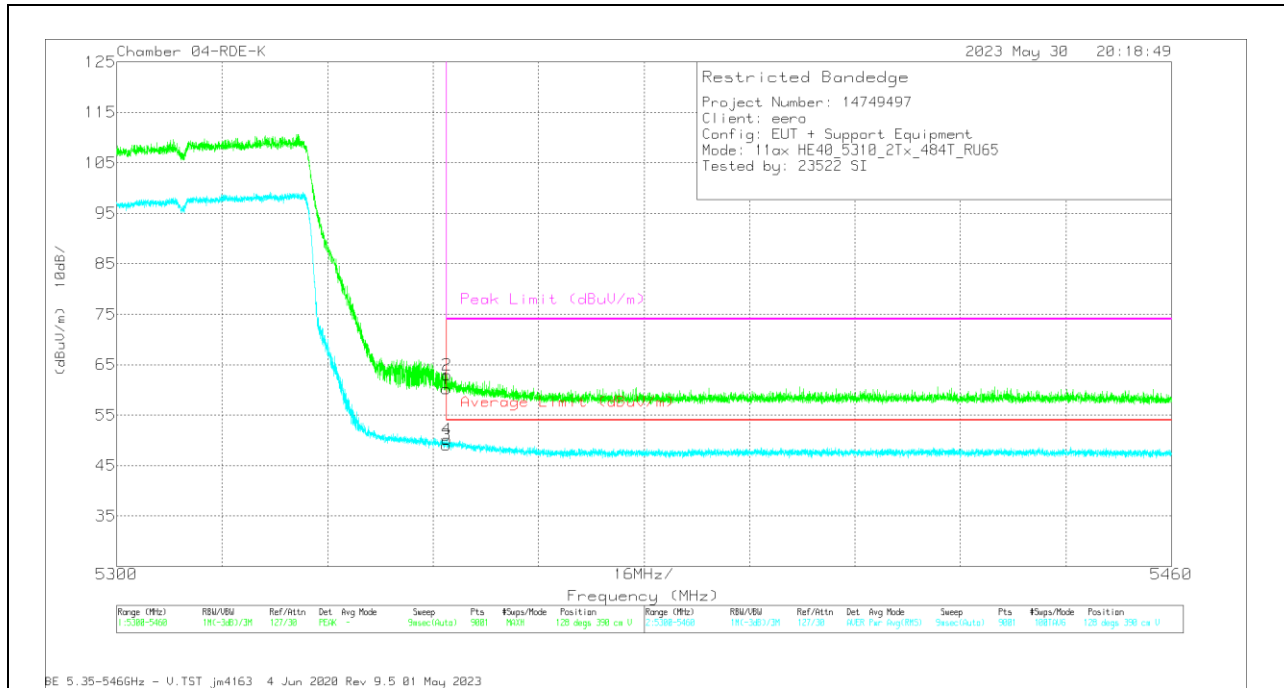

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	55.71	Pk	34.5	-30	60.21	-	-	74	-13.79	128	390	V
2	* 5350.098	58.5	Pk	34.5	-30	63	-	-	74	-11	128	390	V
3	* 5350	44.55	RMS	34.5	-30	49.05	54	-4.95	-	-	128	390	V
4	* 5350.134	45.67	RMS	34.5	-30	50.17	54	-3.83	-	-	128	390	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

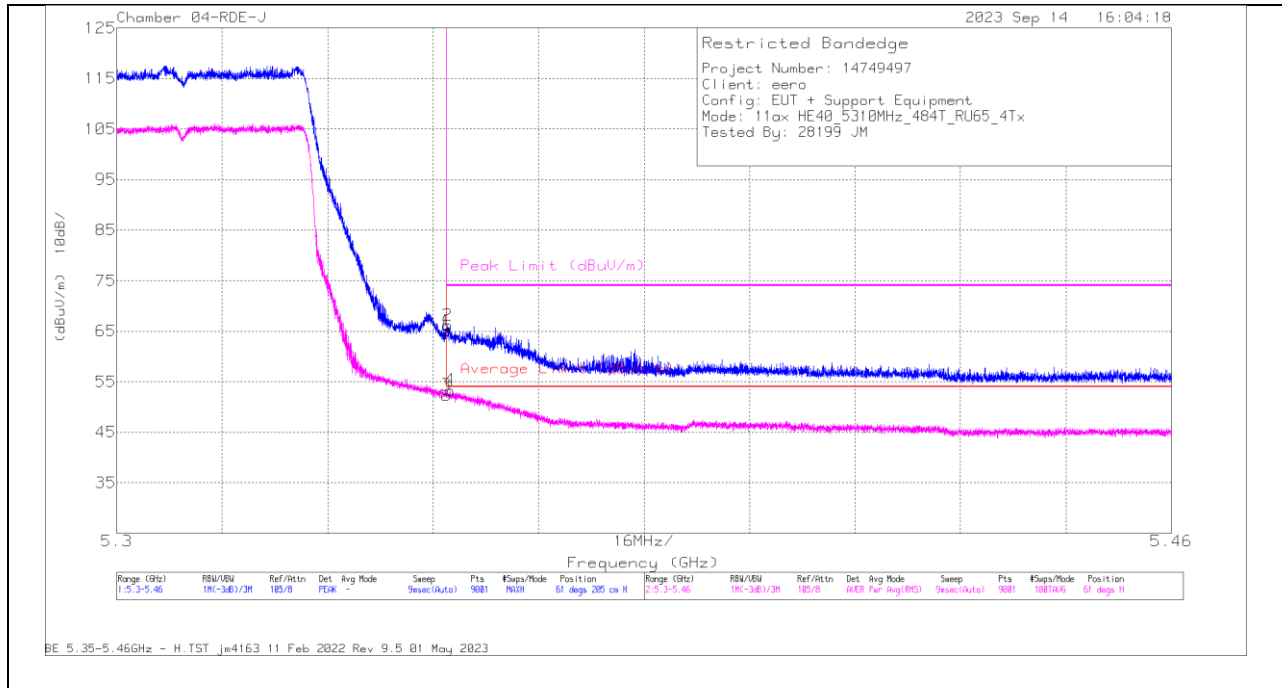

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	43.45	Pk	35	-13.4	65.05	-	-	74	-8.95	61	205	H
2	* 5.35017	44.57	Pk	35	-13.4	66.17	-	-	74	-7.83	61	205	H
3	* 5.35	30.74	RMS	35	-13.4	52.34	54	-1.66	-	-	61	205	H
4	* 5.350543	31.73	RMS	35	-13.4	53.33	54	-.67	-	-	61	205	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

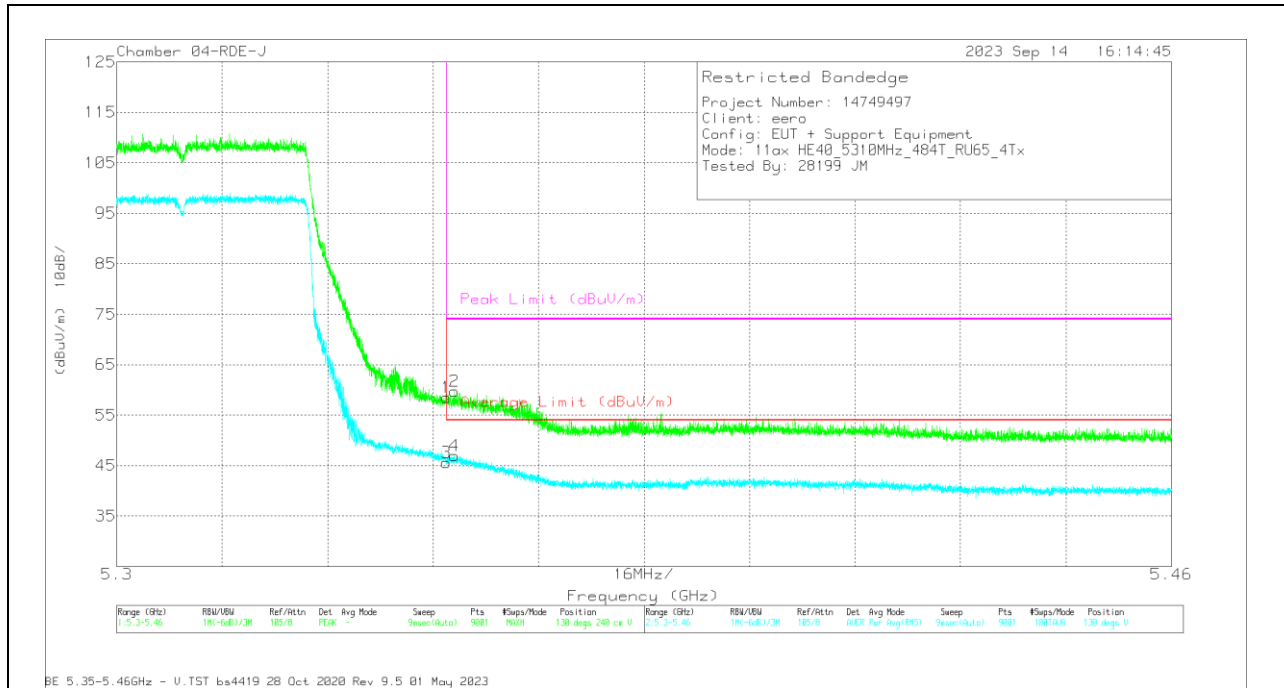

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	36.88	PK	35	-13.4	58.48	-	-	74	-15.52	130	240	V
2	* 5.351201	38.16	PK	35	-13.4	59.76	-	-	74	-14.24	130	240	V
3	* 5.35	24.03	RMS	35	-13.4	45.63	54	-8.37	-	-	130	240	V
4	* 5.351236	25.37	RMS	35	-13.4	46.97	54	-7.03	-	-	130	240	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.1.4. TX ABOVE 1 GHz 802.11be EHT40 MODE IN THE 5.3GHz BAND

1TX Antenna 6 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

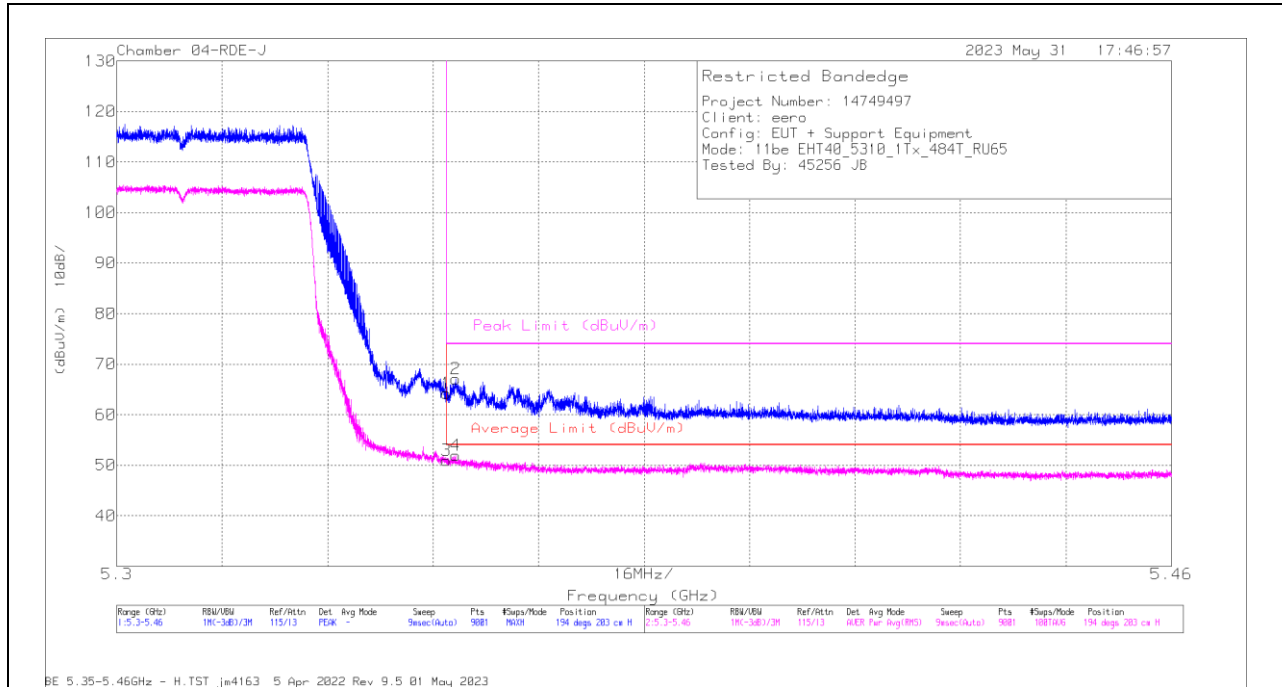

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	42.68	Pk	35	-13.4	64.28	-	-	74	-9.72	194	203	H
2	* 5.35145	45.47	Pk	35	-13.4	67.07	-	-	74	-6.93	194	203	H
3	* 5.35	29.38	RMS	35	-13.4	50.98	54	-3.02	-	-	194	203	H
4	* 5.351378	30.32	RMS	35	-13.4	51.92	54	-2.08	-	-	194	203	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

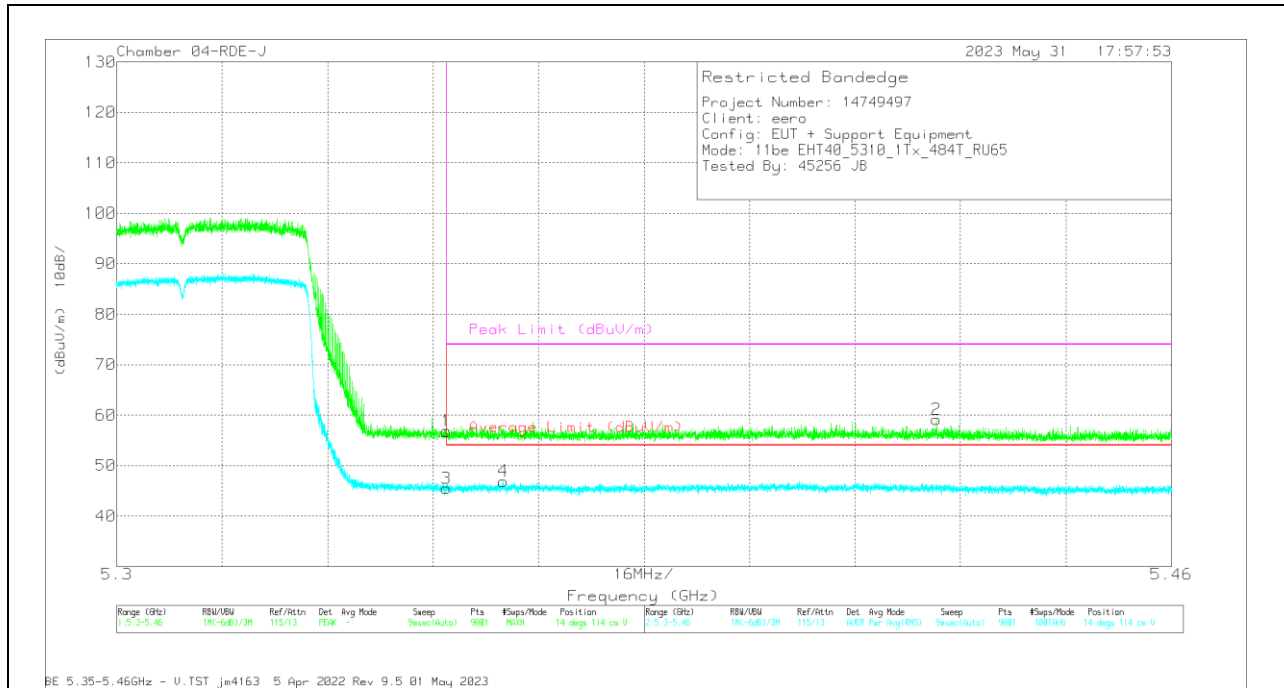

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	35.25	Pk	35	-13.4	56.85	-	-	74	-17.15	14	114	V
2	* 5.424375	37.42	Pk	35	-13.3	59.12	-	-	74	-14.88	14	114	V
3	* 5.35	23.87	RMS	35	-13.4	45.47	54	-8.53	-	-	14	114	V
4	* 5.35865	25.31	RMS	35	-13.4	46.91	54	-7.09	-	-	14	114	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

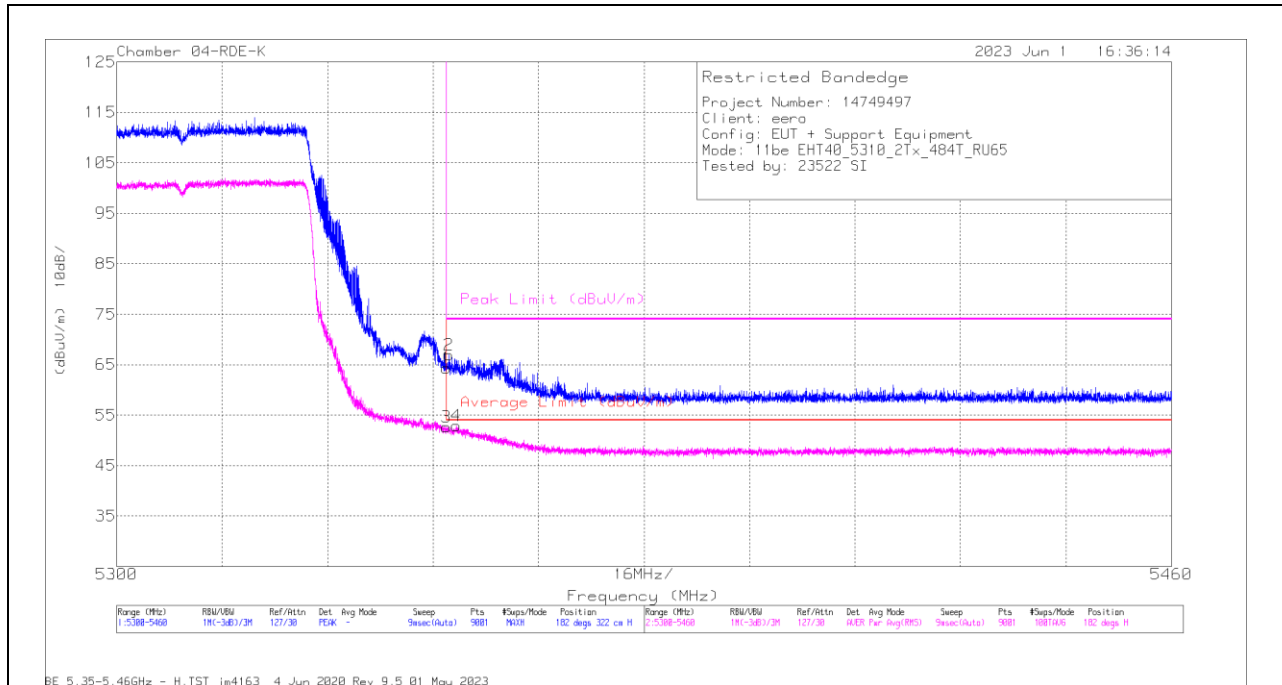

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	59.86	Pk	34.5	-30	64.36	-	-	74	-9.64	182	322	H
2	* 5350.365	62.45	Pk	34.5	-30	66.95	-	-	74	-7.05	182	322	H
3	* 5350	48.1	RMS	34.5	-30	52.6	54	-1.4	-	-	182	322	H
4	* 5351.556	48.22	RMS	34.5	-29.8	52.92	54	-1.08	-	-	182	322	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

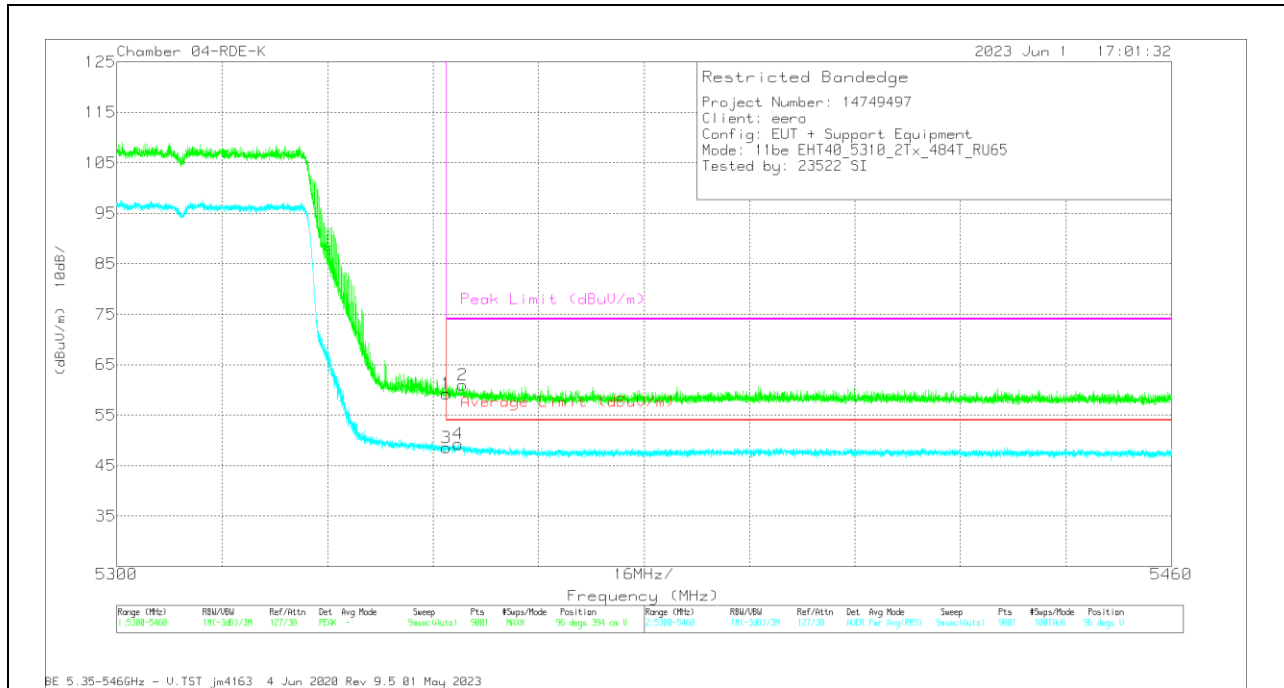

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	54.73	Pk	34.5	-30	59.23	-	-	74	-14.77	96	394	V
2	* 5352.463	56.24	Pk	34.5	-29.8	60.94	-	-	74	-13.06	96	394	V
3	* 5350	44.07	RMS	34.5	-30	48.57	54	-5.43	-	-	96	394	V
4	* 5351.841	44.54	RMS	34.5	-29.8	49.24	54	-4.76	-	-	96	394	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

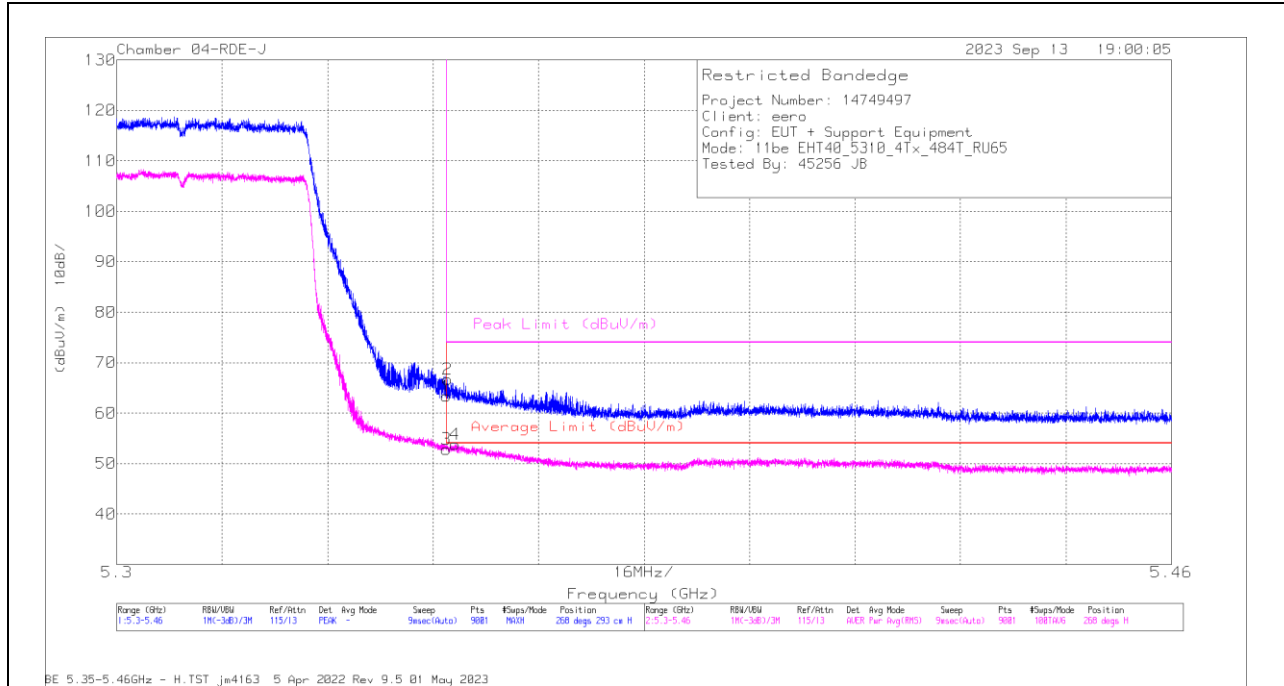


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dBm)	CNI/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.82	Pk	35	-13.4	0	63.42	-	-	74	-10.58	268	293	H
2	* 5.350152	45.12	Pk	35	-13.4	0	66.72	-	-	74	-7.28	268	293	H
3	* 5.35	30.68	RMS	35	-13.4	.59	52.87	54	-1.13	-	-	268	293	H
4	* 5.351325	31.61	RMS	35	-13.4	.59	53.8	54	-2	-	-	268	293	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

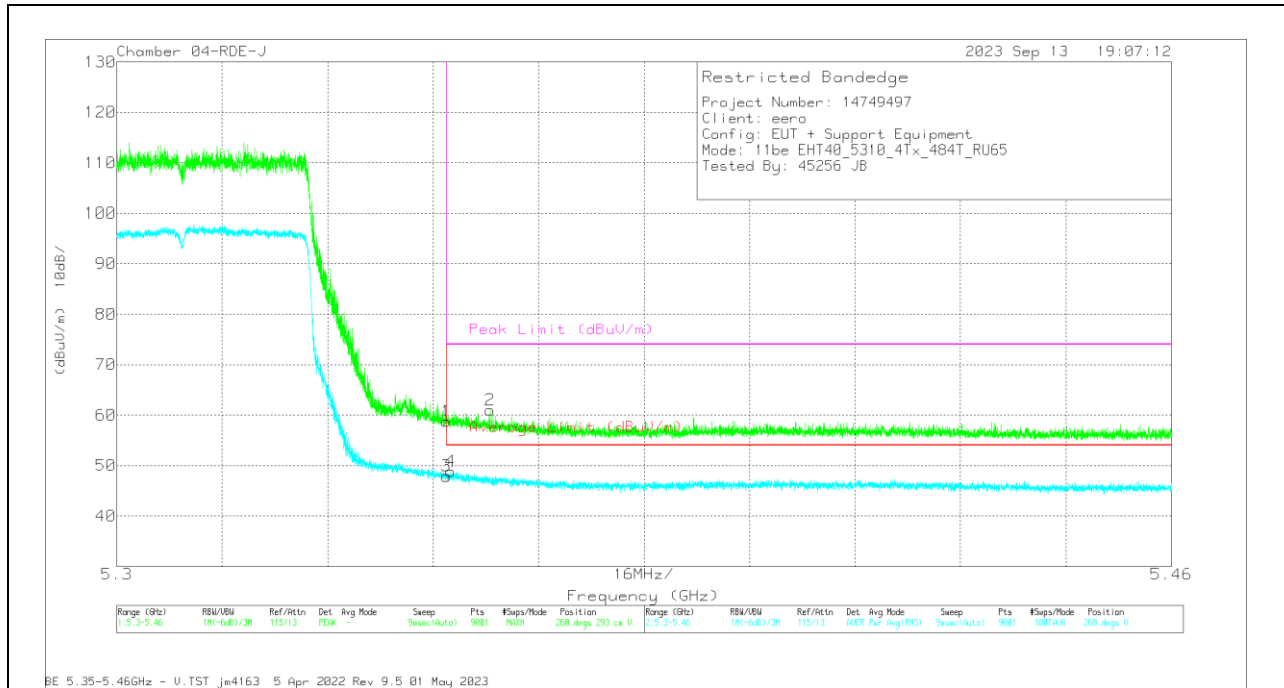


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.16	Pk	35	-13.4	58.76	-	-	74	-15.24	268	293	V
2	* 5.356676	39.37	Pk	35	-13.4	60.97	-	-	74	-13.03	268	293	V
3	* 5.35	26.31	RMS	35	-13.4	47.91	54	-6.09	-	-	268	293	V
4	* 5.35065	27.26	RMS	35	-13.4	48.86	54	-5.14	-	-	268	293	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

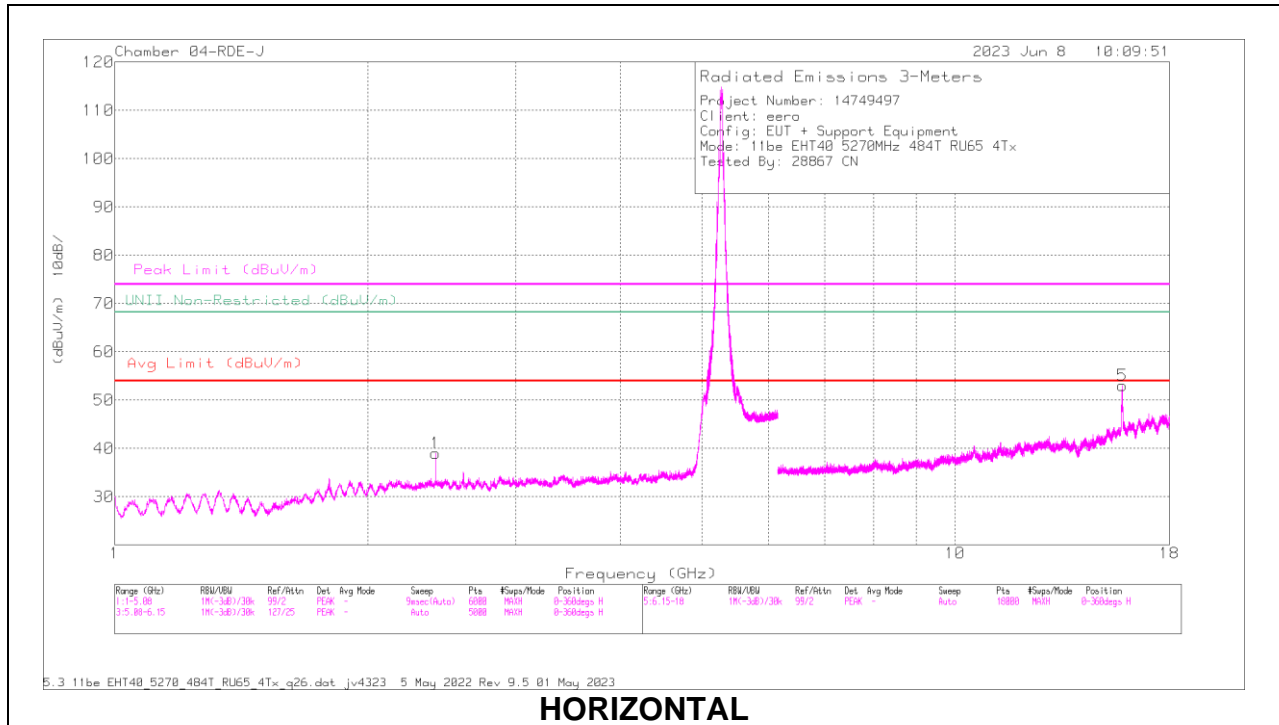

HORIZONTAL

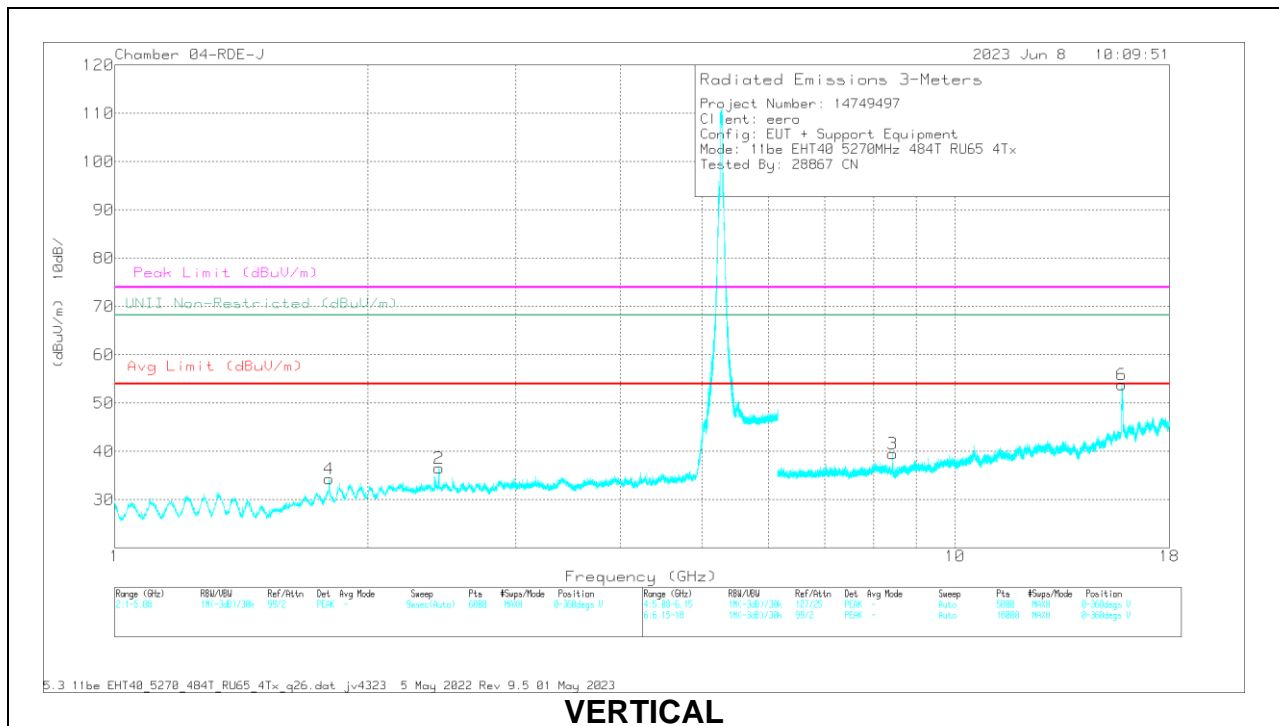


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.413003	59.42	PK-U	32	-46.4	45.02	-	-	-	-	68.2	-23.18	76	307	H
2	2.429878	58.01	PK-U	32.1	-46.5	43.61	-	-	-	-	68.2	-24.59	278	396	V
4	1.800141	61.44	PK-U	30.5	-46.5	45.44	-	-	-	-	68.2	-22.76	11	200	V
5	* 15.81374	64.33	PK-U	41	-40.3	65.03	-	-	74	-8.97	-	-	183	104	H
	* 15.81181	51.63	ADR	41	-40.1	52.53	54	-1.47	-	-	-	-	183	104	H
3	* 8.431845	52.96	PK-U	35.7	-40.9	47.76	-	-	74	-26.24	-	-	353	161	V
	* 8.431936	43.38	ADR	35.7	-40.9	38.18	54	-15.82	-	-	-	-	353	161	V
6	* 15.808708	62.89	PK-U	41	-40.3	63.59	-	-	74	-10.41	-	-	176	112	V
	* 15.808799	50.53	ADR	41	-40.3	51.23	54	-2.77	-	-	-	-	176	112	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

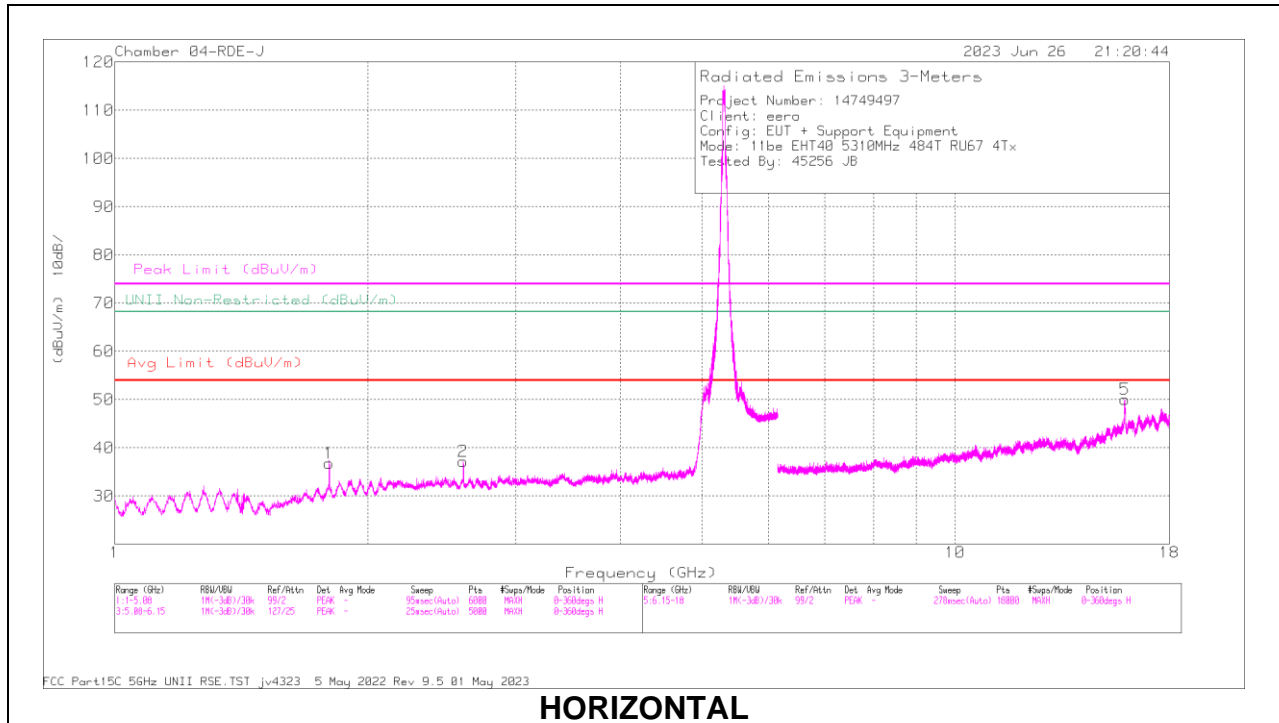

HORIZONTAL

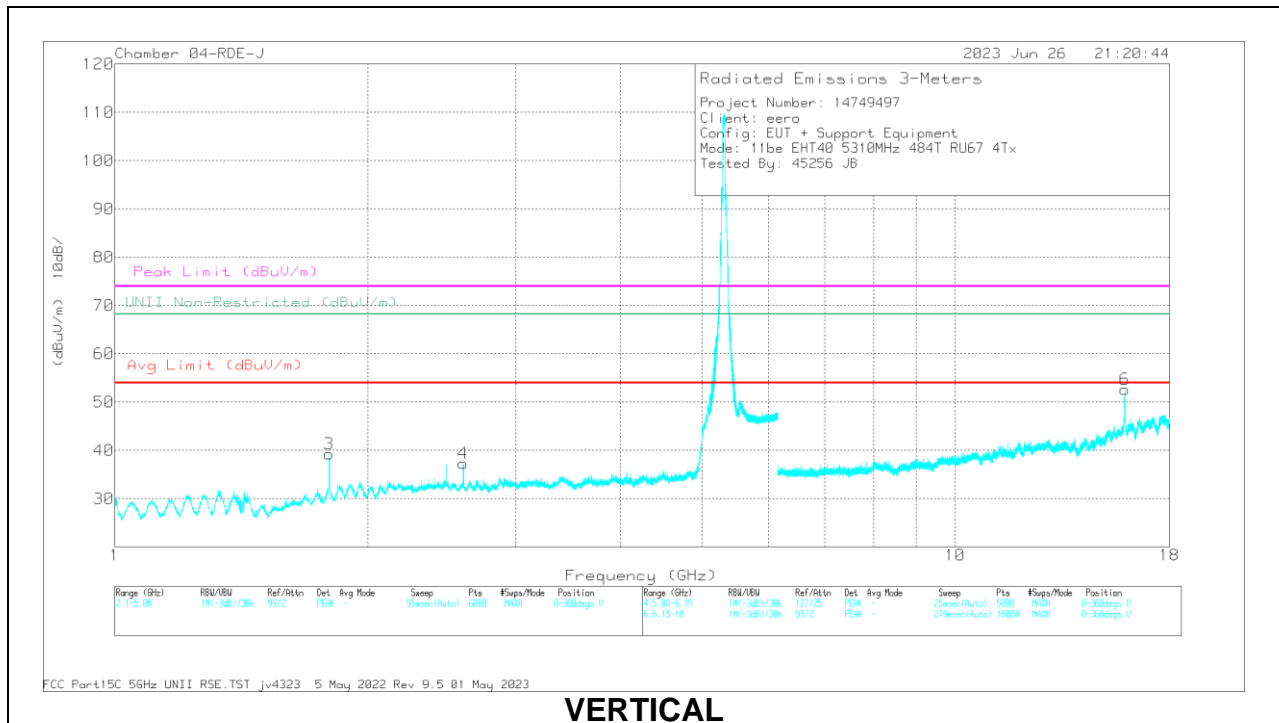

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.799931	61.43	PK-U	30.5	-46.5	45.43	-	-	-	-	68.2	-22.77	9	223	H
2	2.599975	59.58	PK-U	32.3	-46.6	45.28	-	-	-	-	68.2	-22.92	48	128	H
3	1.799836	61.62	PK-U	30.5	-46.5	45.62	-	-	-	-	68.2	-22.58	17	103	V
4	2.599671	59.95	PK-U	32.3	-46.6	45.65	-	-	-	-	68.2	-22.55	59	181	V
5	* 15.9388	61.47	PK-U	41.2	-40	62.67	-	-	74	-11.33	-	-	210	214	H
	* 15.937594	48.51	ADR	41.2	-39.9	49.81	54	-4.19	-	-	-	-	210	214	H
6	* 15.932128	65.74	PK-U	41.2	-39.7	67.24	-	-	74	-6.76	-	-	220	180	V
	* 15.931775	52.19	ADR	41.1	-39.7	53.59	54	-4.1	-	-	-	-	220	180	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.5. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.3GHz BAND

1TX Antenna 6 OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

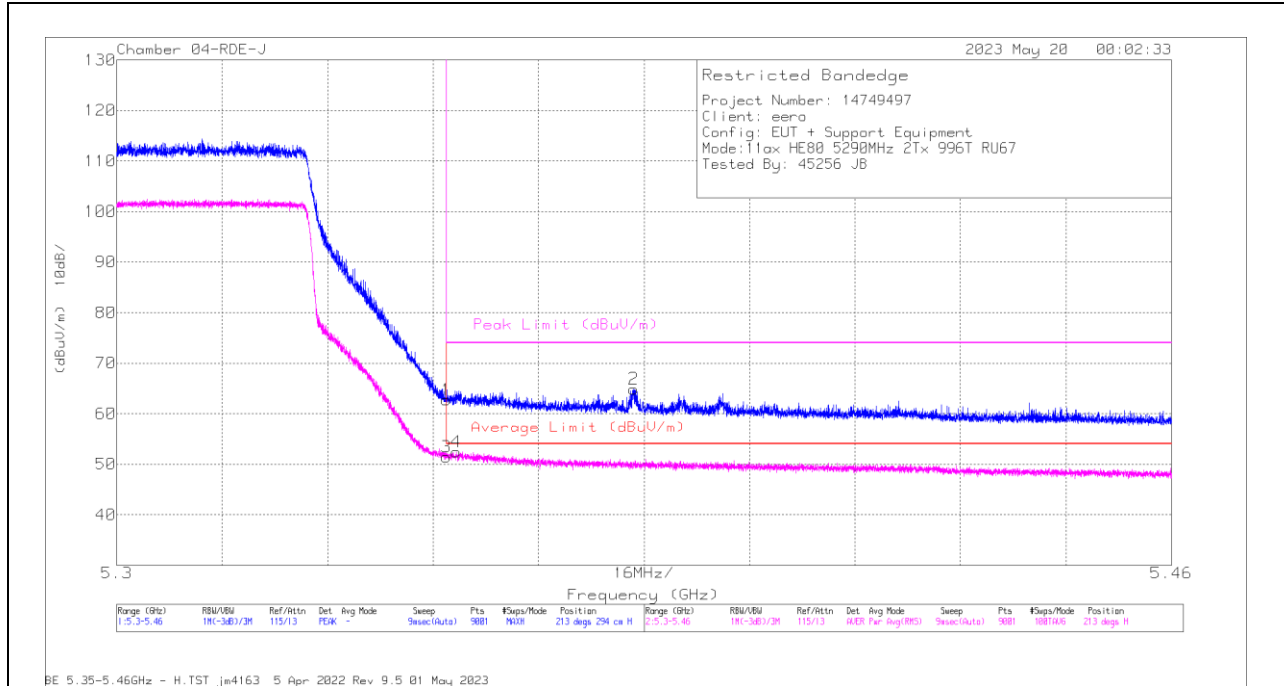


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.53	Pk	35	-13.8	62.73	-	-	74	-11.27	213	294	H
2	* 5.378437	43.91	Pk	35	-14	64.91	-	-	74	-9.09	213	294	H
3	* 5.35	29.69	RMS	35	-13.8	50.89	54	-3.11	-	-	213	294	H
4	* 5.351556	30.64	RMS	35	-13.8	51.84	54	-2.16	-	-	213	294	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

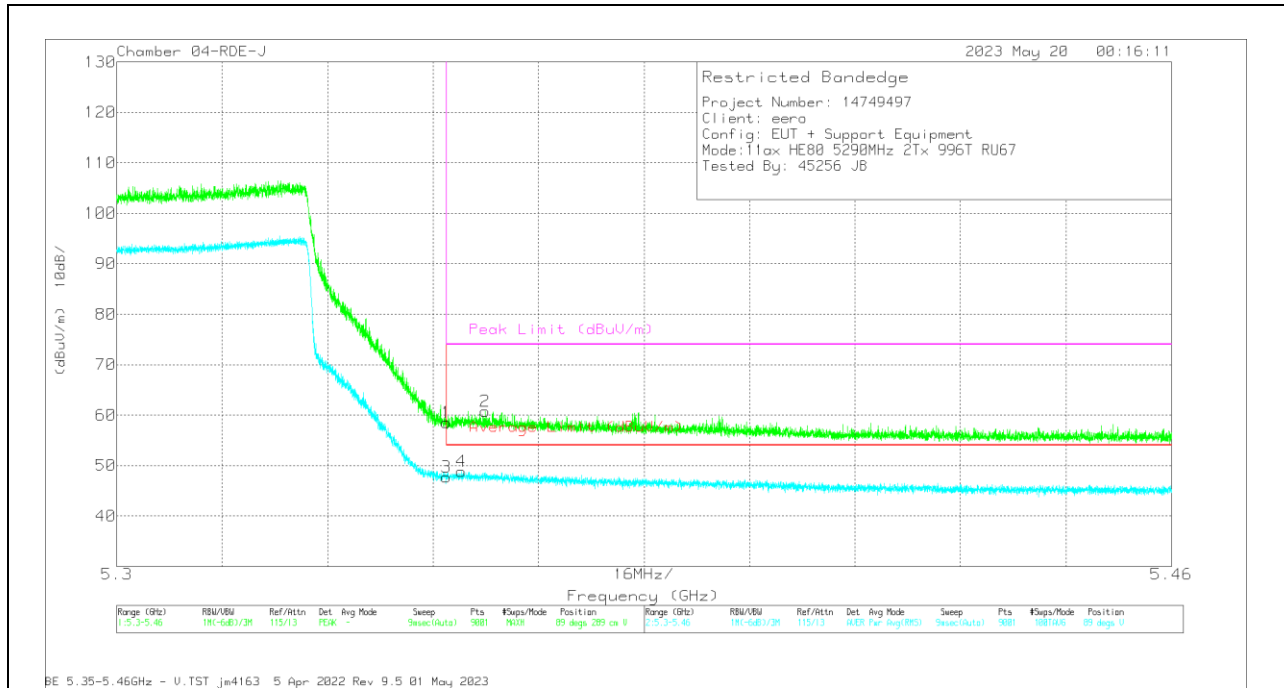

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.37	Pk	35	-13.8	58.57	-	-	74	-15.43	89	289	V
2	* 5.355894	39.54	Pk	35	-13.8	60.74	-	-	74	-13.26	89	289	V
3	* 5.35	26.48	RMS	35	-13.8	47.68	54	-6.32	-	-	89	289	V
4	* 5.352303	27.63	RMS	35	-13.8	48.83	54	-5.17	-	-	89	289	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

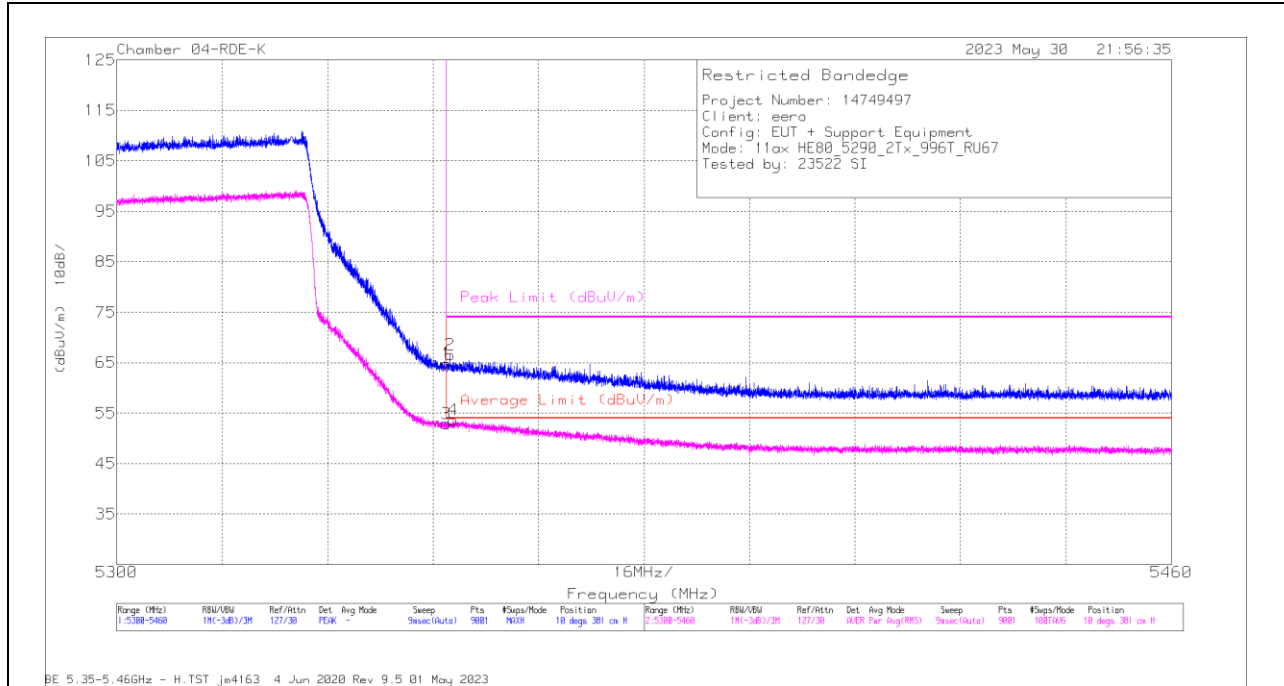

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	60.27	Pk	34.5	-30	64.77	-	-	74	-9.23	10	381	H
2	* 5350.596	62	Pk	34.5	-29.9	66.6	-	-	74	-7.4	10	381	H
3	* 5350	48.35	RMS	34.5	-30	52.85	54	-1.15	-	-	10	381	H
4	* 5351.023	49.03	RMS	34.5	-29.9	53.63	54	-.37	-	-	10	381	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

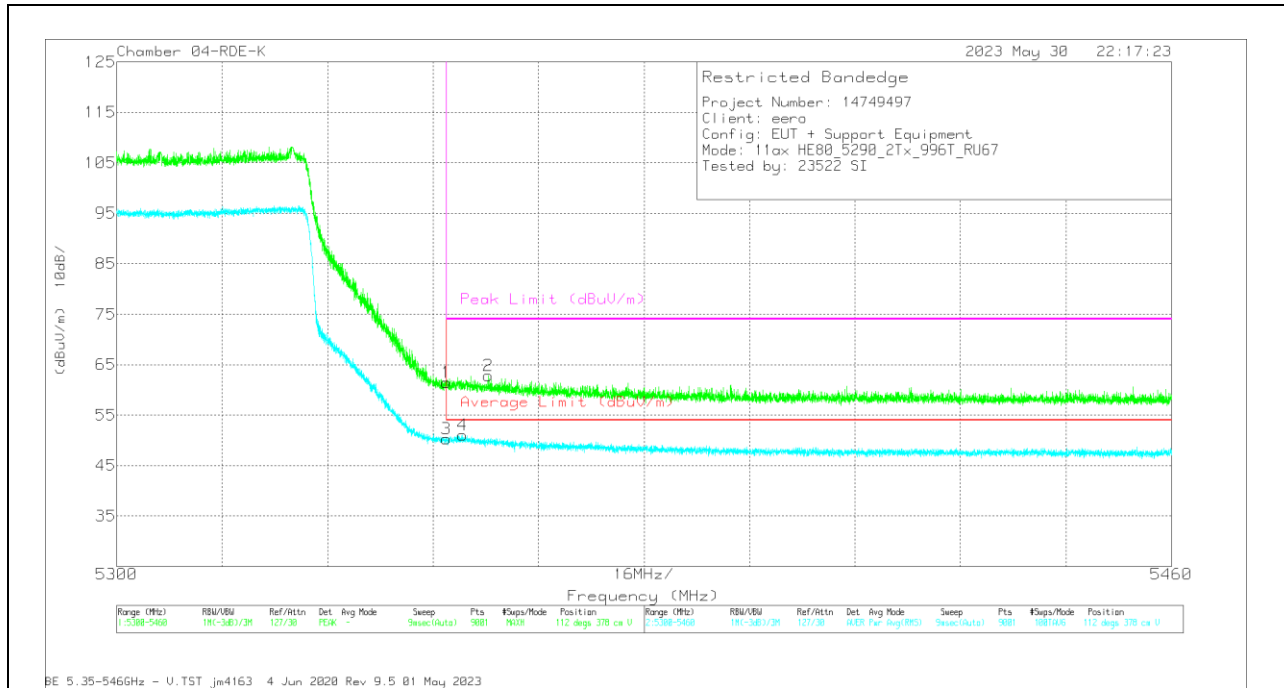

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	57	Pk	34.5	-30	61.5	-	-	74	-12.5	112	378	V
2	* 5356.374	58.36	Pk	34.5	-30	62.86	-	-	74	-11.14	112	378	V
3	* 5350	45.83	RMS	34.5	-30	50.33	54	-3.67	-	-	112	378	V
4	* 5352.463	46.33	RMS	34.5	-29.8	51.03	54	-2.97	-	-	112	378	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

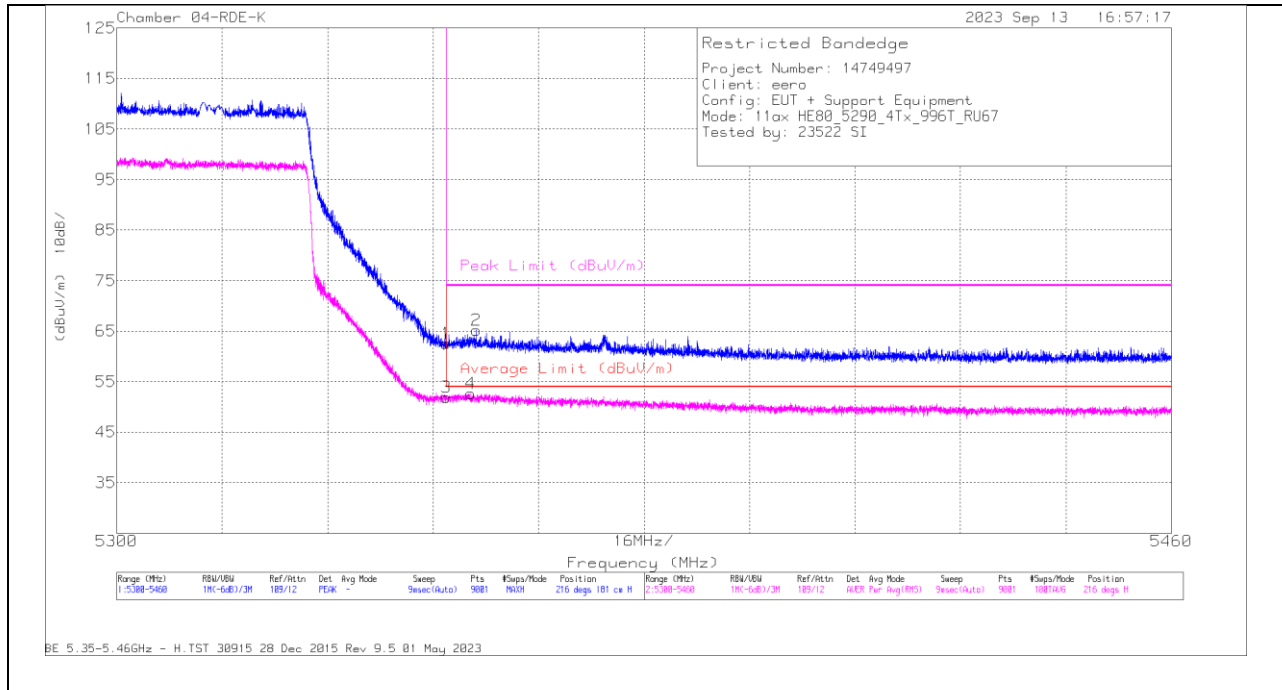


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	34.85	PK	34.5	-6.8	62.55	-	-	74	-11.45	216	181	H
2	* 5354.561	37.59	PK	34.5	-6.9	65.19	-	-	74	-8.81	216	181	H
3	* 5350	24.16	RMS	34.5	-6.8	51.86	54	-2.14	-	-	216	181	H
4	* 5353.725	25	RMS	34.5	-6.9	52.6	54	-1.4	-	-	216	181	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

VERTICAL RESULT

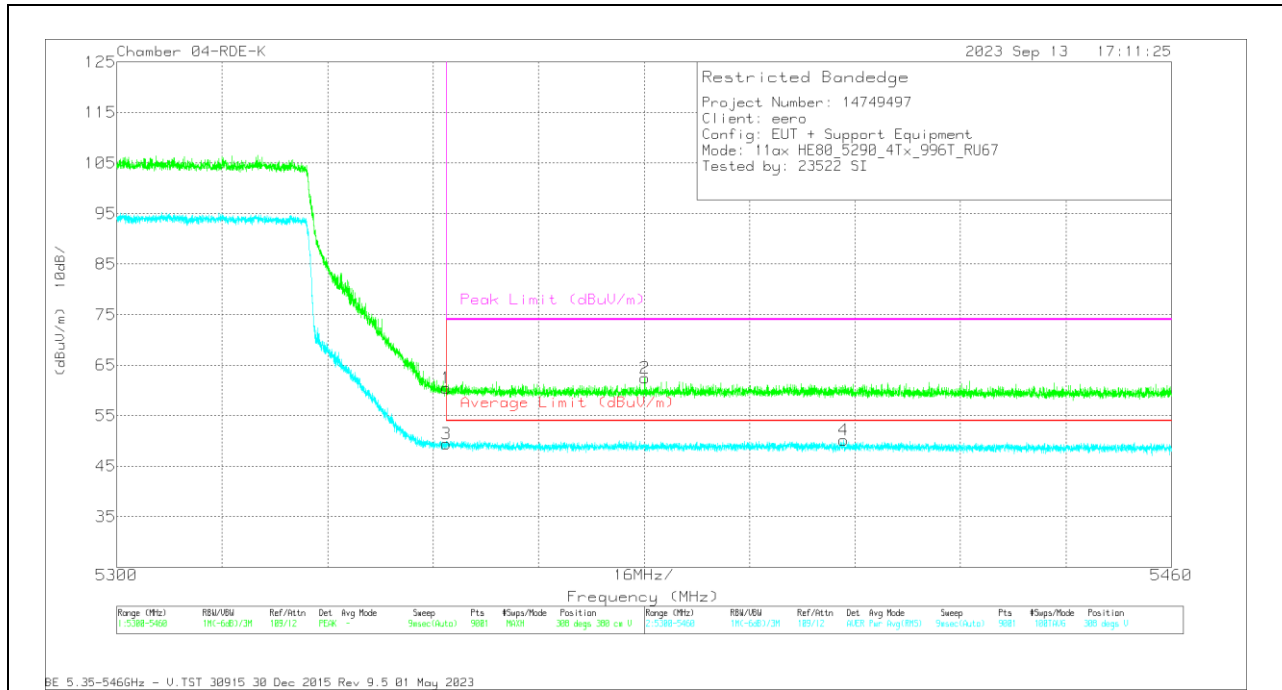

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	32.78	Pk	34.5	-6.8	60.48	-	-	74	-13.52	308	380	V
2	* 5380.09	34.75	Pk	34.5	-6.8	62.45	-	-	74	-11.55	308	380	V
3	* 5350	21.74	RMS	34.5	-6.8	49.44	54	-4.56	-	-	308	380	V
4	* 5410.241	22.22	RMS	34.6	-6.7	50.12	54	-3.88	-	-	308	380	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


RMS - RMS detection

10.1.6. TX ABOVE 1 GHz 802.11be EHT80 MODE IN THE 5.3GHz BAND

1TX Antenna 6 OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

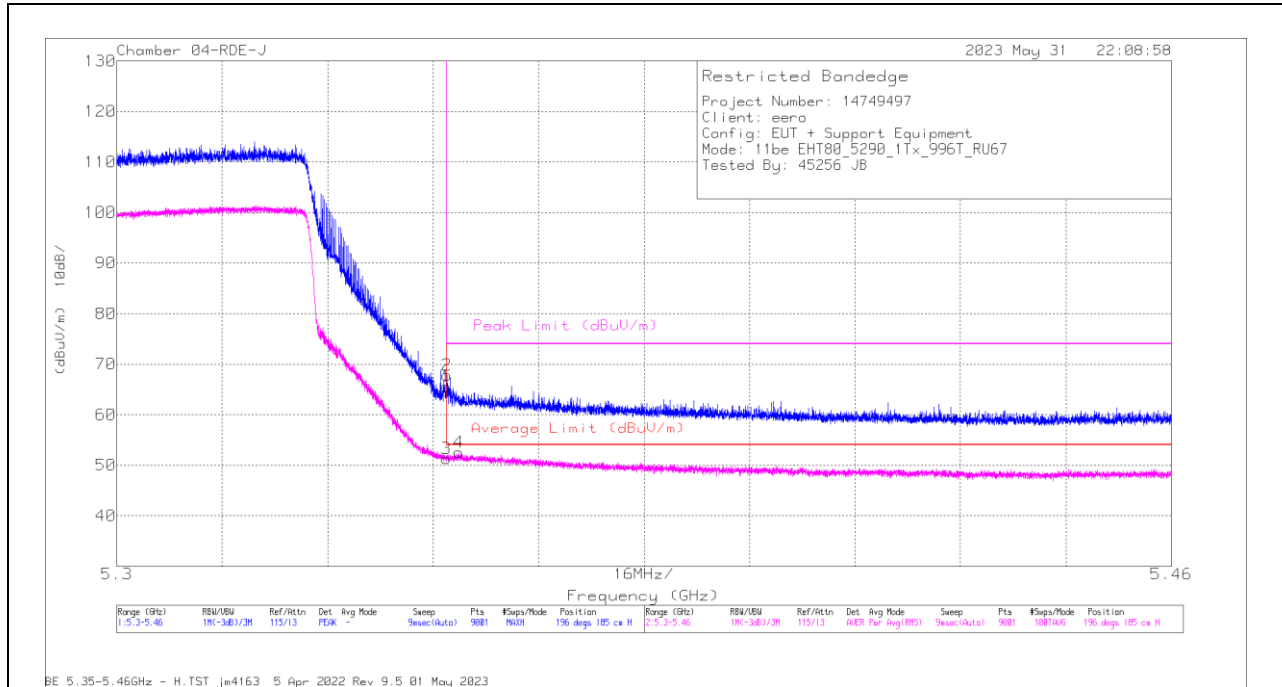

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	44.01	Pk	35	-13.4	65.61	-	-	74	-8.39	196	185	H
2	* 5.350081	46.19	Pk	35	-13.4	67.79	-	-	74	-6.21	196	185	H
3	* 5.35	29.76	RMS	35	-13.4	51.36	54	-2.64	-	-	196	185	H
4	* 5.351894	30.83	RMS	35	-13.3	52.53	54	-1.47	-	-	196	185	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

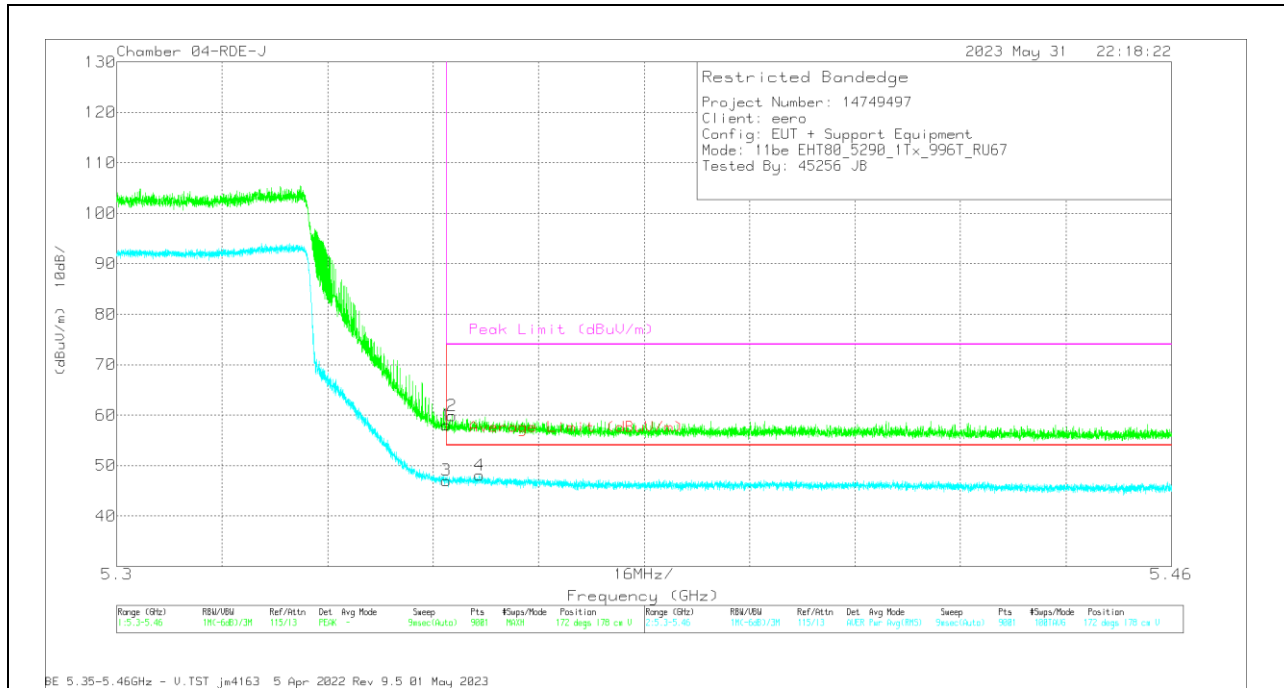

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	36.47	Pk	35	-13.4	58.07	-	-	74	-15.93	172	178	V
2	* 5.350881	38.32	Pk	35	-13.4	59.92	-	-	74	-14.08	172	178	V
3	* 5.35	25.44	RMS	35	-13.4	47.04	54	-6.96	-	-	172	178	V
4	* 5.355005	26.34	RMS	35	-13.3	48.04	54	-5.96	-	-	172	178	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

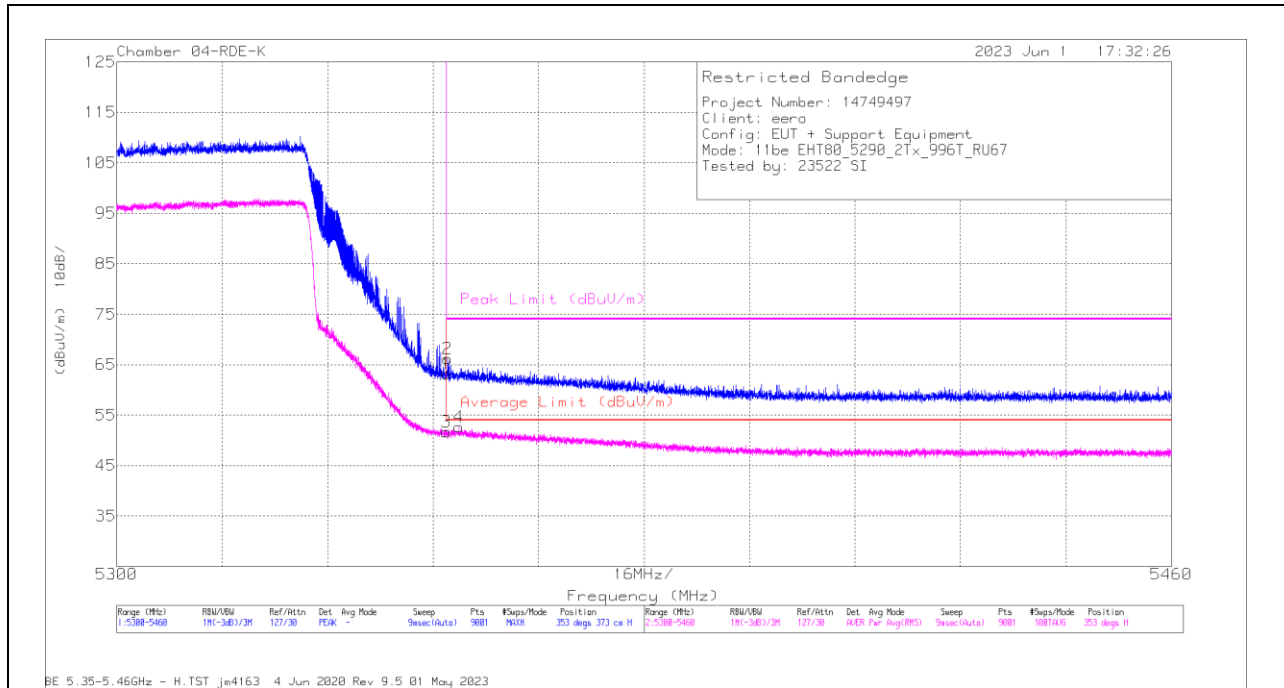

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	58.72	Pk	34.5	-30	63.22	-	-	74	-10.78	353	373	H
2	* 5350.205	61.64	Pk	34.5	-30	66.14	-	-	74	-7.86	353	373	H
3	* 5350	47.1	RMS	34.5	-30	51.6	54	-2.4	-	-	353	373	H
4	* 5351.876	47.96	RMS	34.5	-29.8	52.66	54	-1.34	-	-	353	373	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

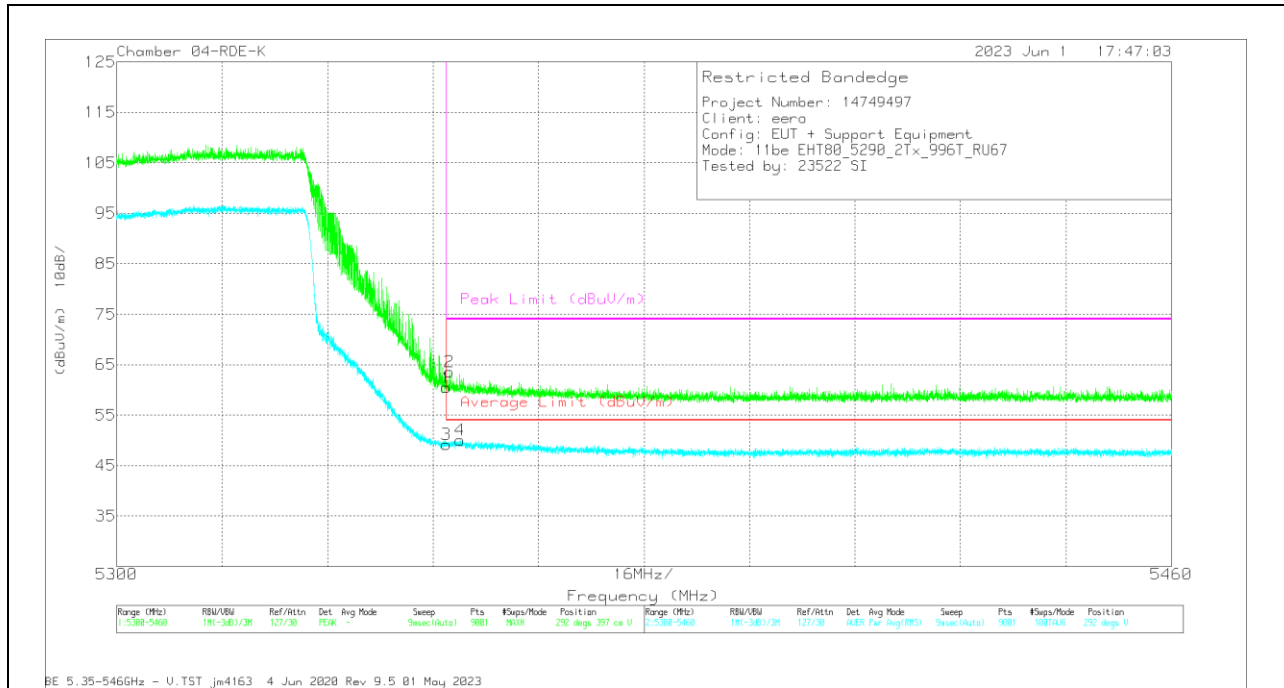

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	55.95	Pk	34.5	-30	60.45	-	-	74	-13.55	292	397	V
2	* 5350.507	58.97	Pk	34.5	-29.9	63.57	-	-	74	-10.43	292	397	V
3	* 5350	44.63	RMS	34.5	-30	49.13	54	-4.87	-	-	292	397	V
4	* 5352.072	45.29	RMS	34.5	-29.8	49.99	54	-4.01	-	-	292	397	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (MID CHANNEL)

HORIZONTAL RESULT

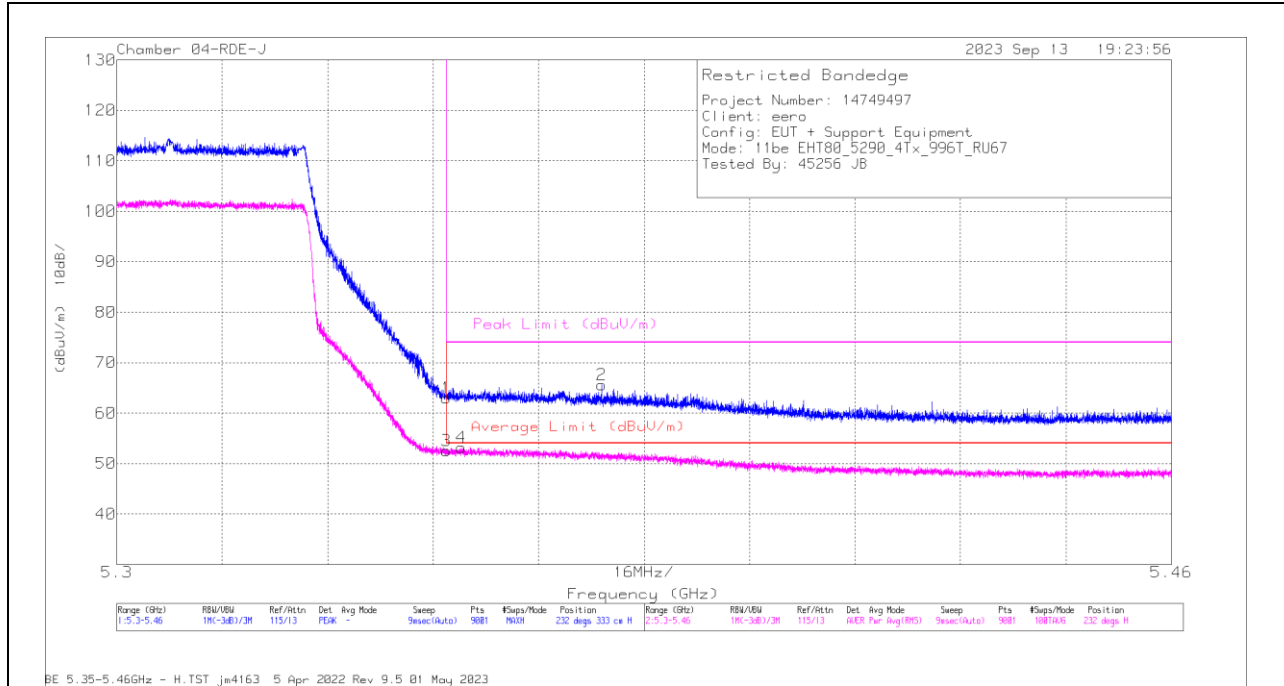


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dBm)	CNI/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.35	Pk	35	-13.4	0	62.95	-	-	74	-11.05	232	333	H
2	* 5.373548	44.33	Pk	35	-13.7	0	65.63	-	-	74	-8.37	232	333	H
3	* 5.35	30.94	RMS	35	-13.4	0	52.54	54	-1.46	-	-	232	333	H
4	* 5.35225	31.49	RMS	35	-13.3	0	53.19	54	-1.81	-	-	232	333	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

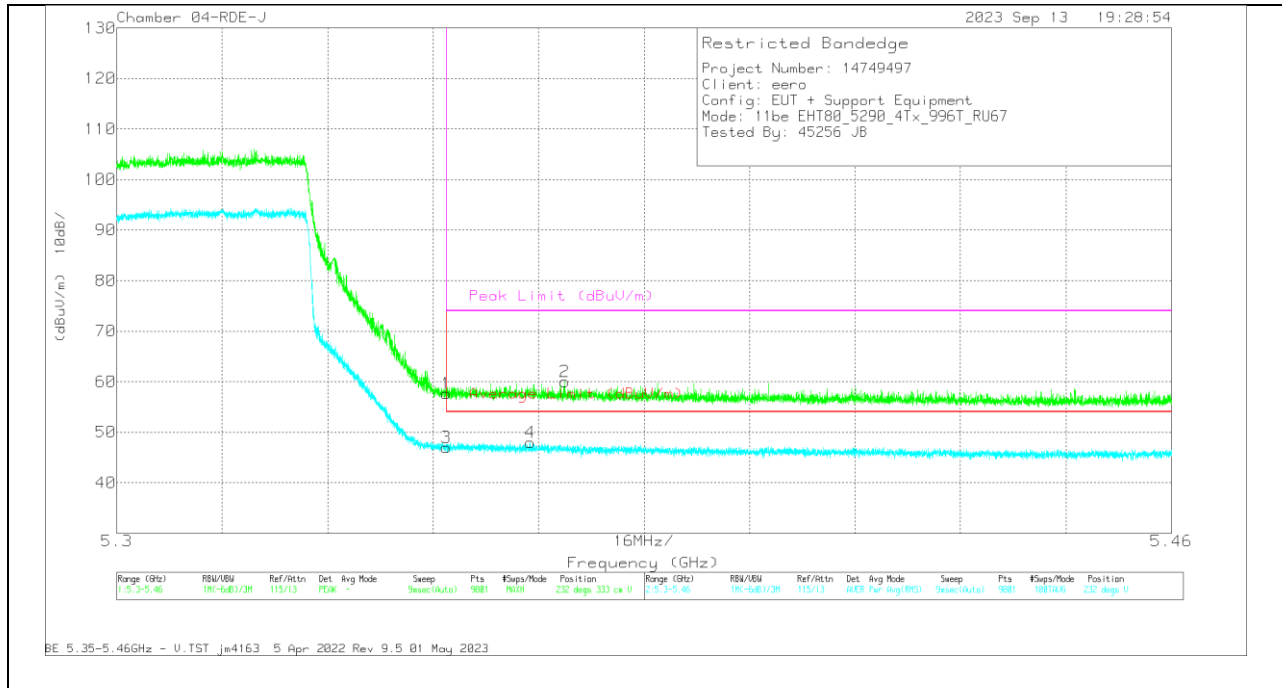


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	36.04	PK	35	-13.4	57.64	-	-	74	-16.36	232	333	V
2	* 5.36793	38.53	PK	35	-13.5	60.03	-	-	74	-13.97	232	333	V
3	* 5.35	25.36	RMS	35	-13.4	46.96	54	-7.04	-	-	232	333	V
4	* 5.362703	26.31	RMS	35	-13.3	48.01	54	-5.99	-	-	232	333	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

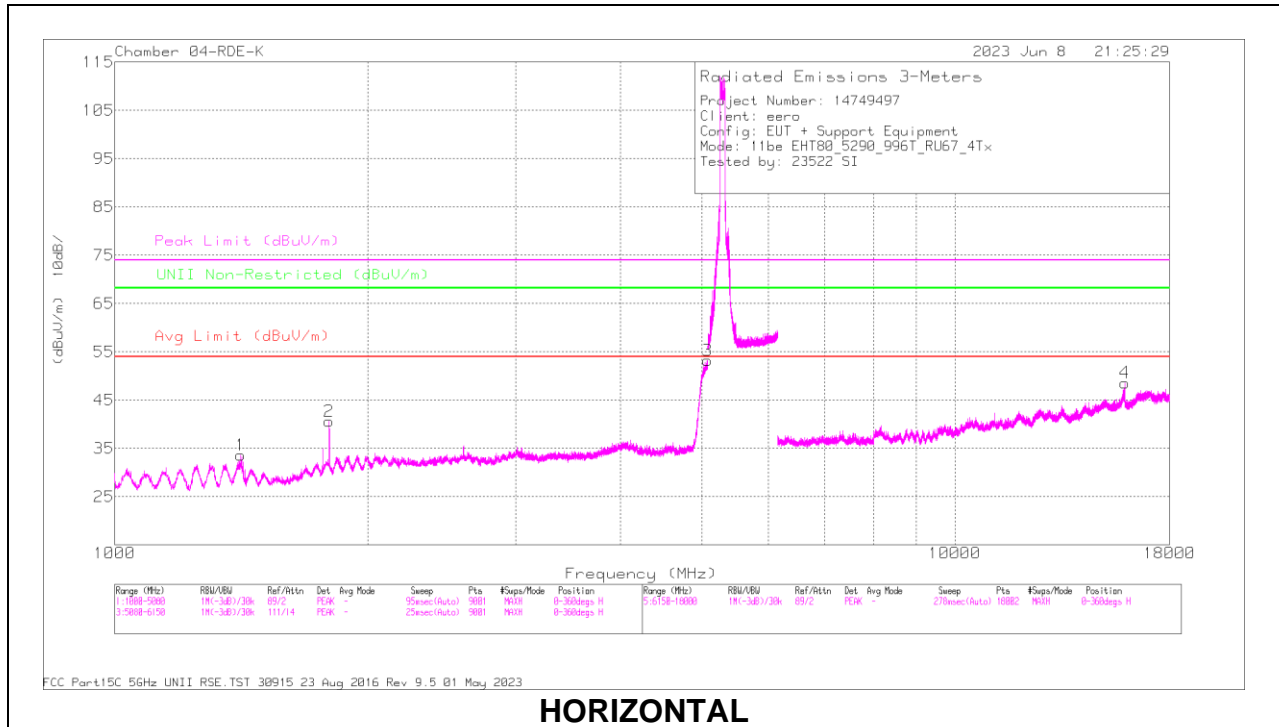

HORIZONTAL

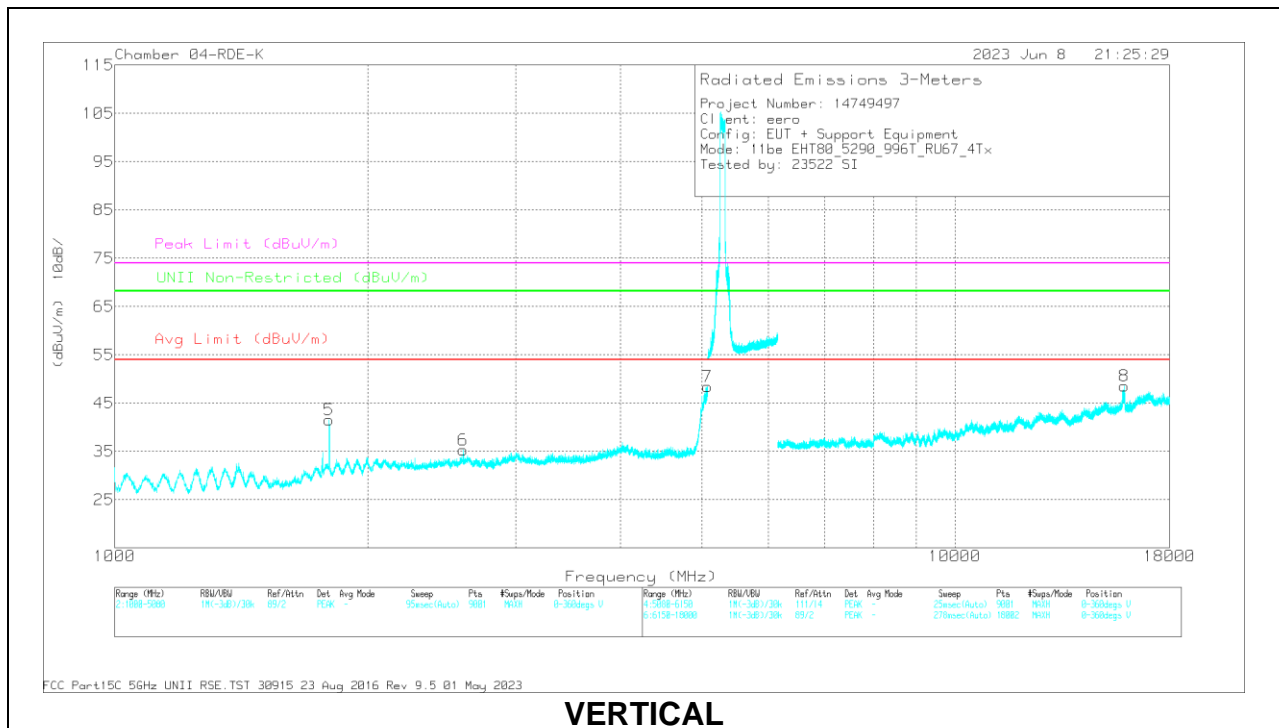

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1408.821	64.4	PK-U	28.7	-45.5	47.6	-	-	74	-26.4	-	-	226	182	H
	* 1408.404	46.77	ADR	28.7	-45.5	29.97	54	-24.03	-	-	-	-	226	182	H
2	1799.915	62.57	PK-U	30.2	-45.1	47.67	-	-	-	-	68.2	-20.53	166	240	H
3	* 5077.617	73.6	PK-U	33.9	-36.7	70.8	-	-	74	-3.2	-	-	227	234	H
	* 5074.686	55.37	ADR	33.9	-36.9	52.37	54	-1.63	-	-	-	-	227	234	H
5	1799.589	62.65	PK-U	30.2	-45.1	47.75	-	-	-	-	68.2	-20.45	157	103	V
6	2599.283	56.5	PK-U	32.2	-43.5	45.2	-	-	-	-	68.2	-23	279	273	V
7	* 5075.965	70	PK-U	33.9	-36.8	67.1	-	-	74	-6.9	-	-	314	265	V
	* 5075.287	51.91	ADR	33.9	-36.9	48.91	54	-5.09	-	-	-	-	314	265	V
4	* 15921.479	46.73	PK-U	40.2	-32.2	54.73	-	-	74	-19.27	-	-	261	384	H
	* 15921.501	35.04	ADR	40.2	-32.2	43.04	54	-10.96	-	-	-	-	261	384	H
8	* 15910.268	46.59	PK-U	40.2	-32.3	54.49	-	-	74	-19.51	-	-	11	280	V
	* 15909.755	35.21	ADR	40.2	-32.3	43.11	54	-10.89	-	-	-	-	11	280	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.7. TX ABOVE 1 GHz 802.11ax HE160 MODE IN THE 5.3GHz BAND

1TX Antenna 6 OFDMA MODE: 2x 996-Tones, Index S68

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

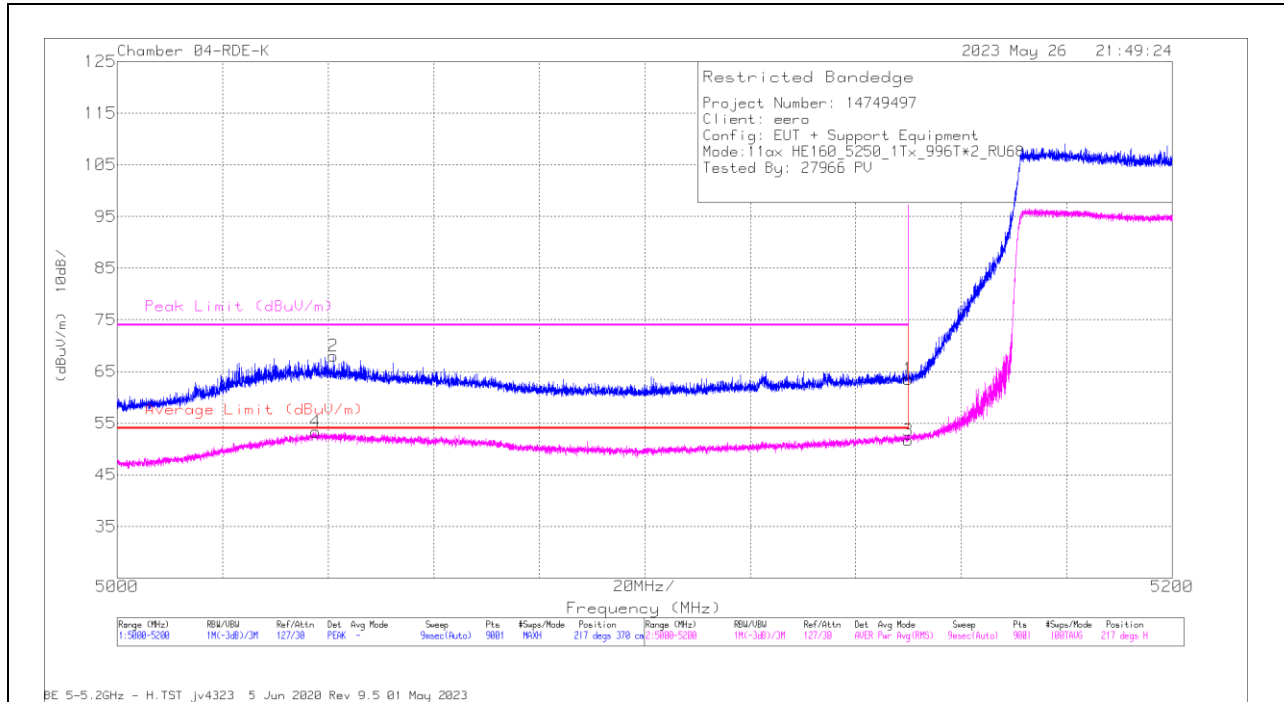

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBUV/m)	Average Limit (dBUV/m)	Margin (dB)	Peak Limit (dBUV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	59.55	Pk	34.1	-30.1	63.55	-	-	74	-10.45	217	370	H
2	* 5040.955	64.39	Pk	33.9	-30.3	67.99	-	-	74	-6.01	217	370	H
3	* 5150	47.66	RMS	34.1	-30.1	51.66	54	-2.34	-	-	217	370	H
4	* 5037.622	49.71	RMS	33.9	-30.3	53.31	54	-0.69	-	-	217	370	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

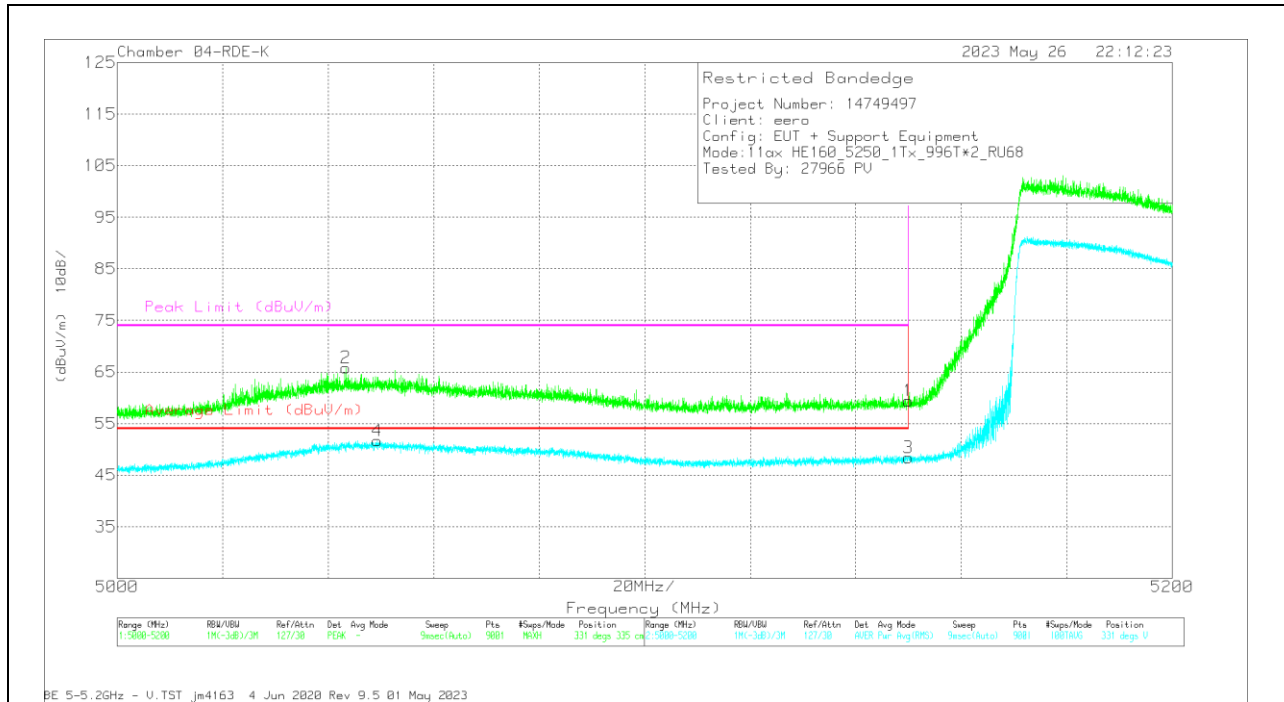


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	55.41	Pk	34.1	-30.1	59.41	-	-	74	-14.59	331	335	V
2	* 5043.333	62.1	Pk	33.9	-30.2	65.8	-	-	74	-8.2	331	335	V
3	* 5150	44.39	RMS	34.1	-30.1	48.39	54	-5.61	-	-	331	335	V
4	* 5049.311	48.04	RMS	33.9	-30.3	51.64	54	-2.36	-	-	331	335	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

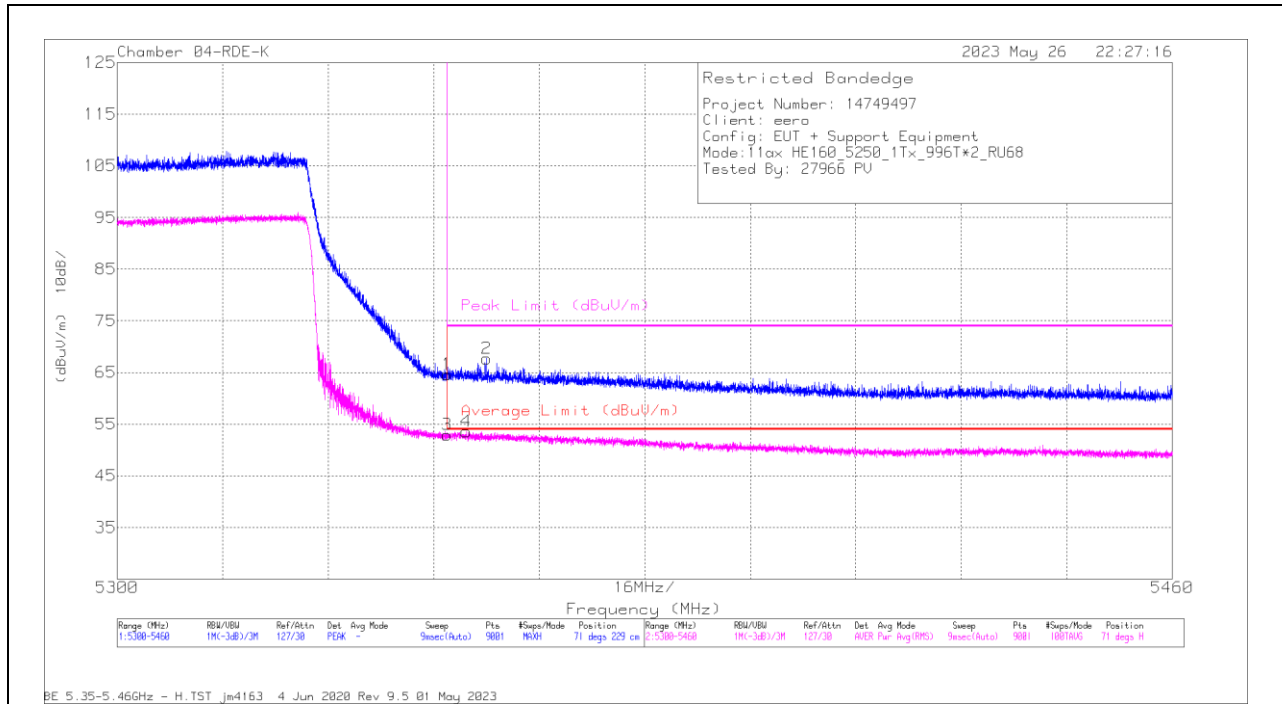


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	60.11	Pk	34.5	-30	64.61	-	-	74	-9.39	71	229	H
2	* 5356.036	63.19	Pk	34.5	-30	67.69	-	-	74	-6.31	71	229	H
3	* 5350	48.43	RMS	34.5	-30	52.93	54	-1.07	-	-	71	229	H
4	* 5352.925	48.97	RMS	34.5	-29.9	53.57	54	-0.43	-	-	71	229	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

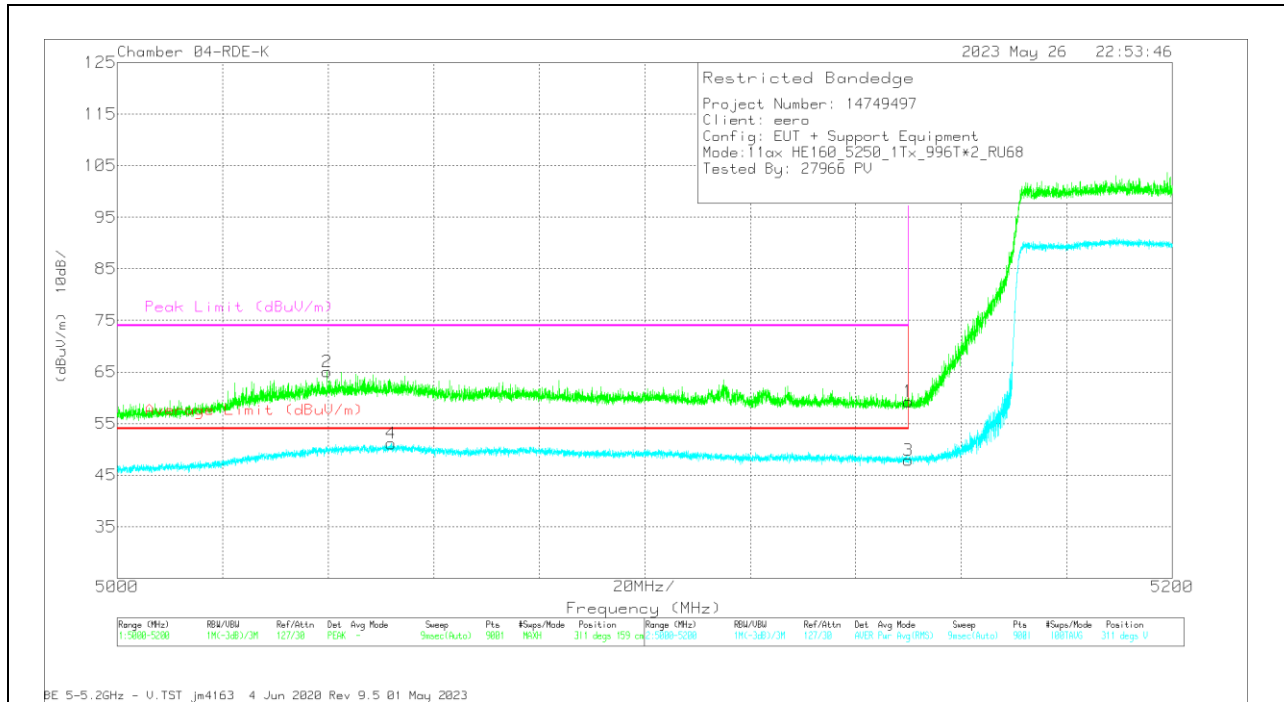

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	55.26	Pk	34.1	-30.1	59.26	-	-	74	-14.74	311	159	V
2	* 5039.8	61.44	Pk	33.9	-30.3	65.04	-	-	74	-8.96	311	159	V
3	* 5150	43.86	RMS	34.1	-30.1	47.86	54	-6.14	-	-	311	159	V
4	* 5051.888	47.42	RMS	33.9	-30.2	51.12	54	-2.88	-	-	311	159	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 2x 996-Tones, Index S68

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

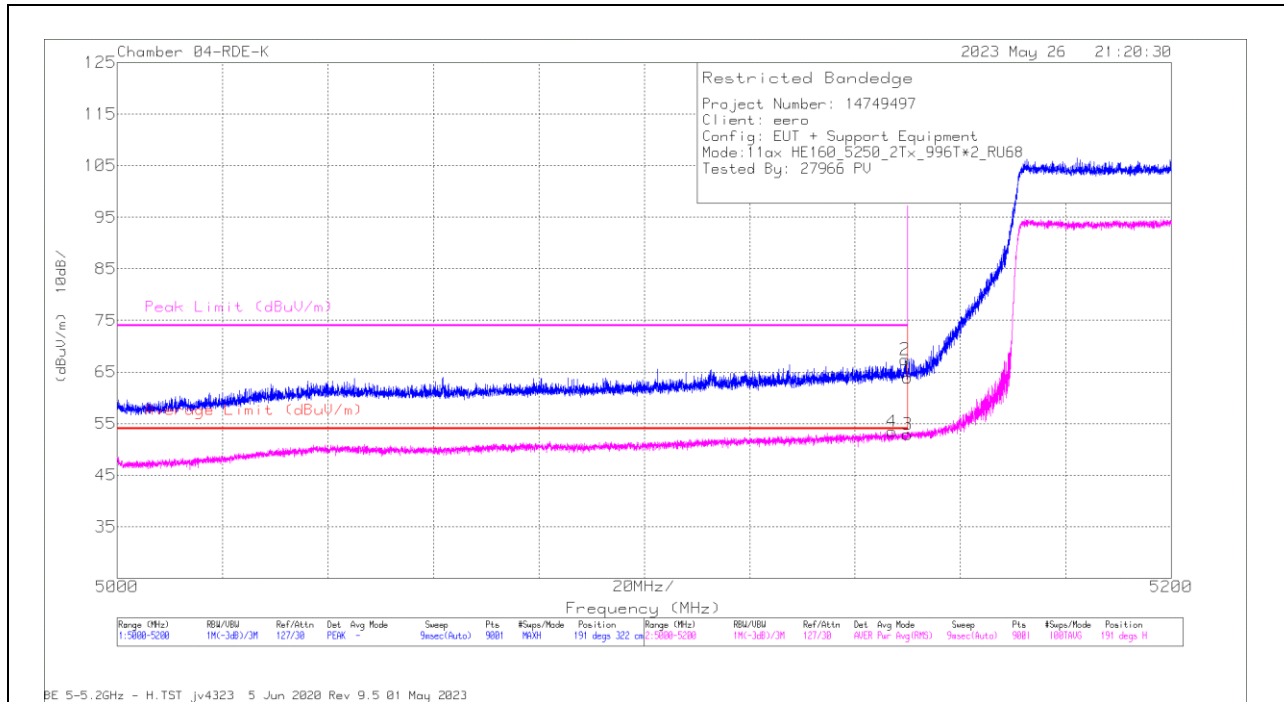


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	59.92	Pk	34.1	-30.1	63.92	-	-	74	-10.08	191	322	H
2	* 5149.465	63.5	Pk	34.1	-30.2	67.4	-	-	74	-6.6	191	322	H
3	* 5150	48.92	RMS	34.1	-30.1	52.92	54	-1.08	-	-	191	322	H
4	* 5146.976	49.78	RMS	34	-30.3	53.48	54	-52	-	-	191	322	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

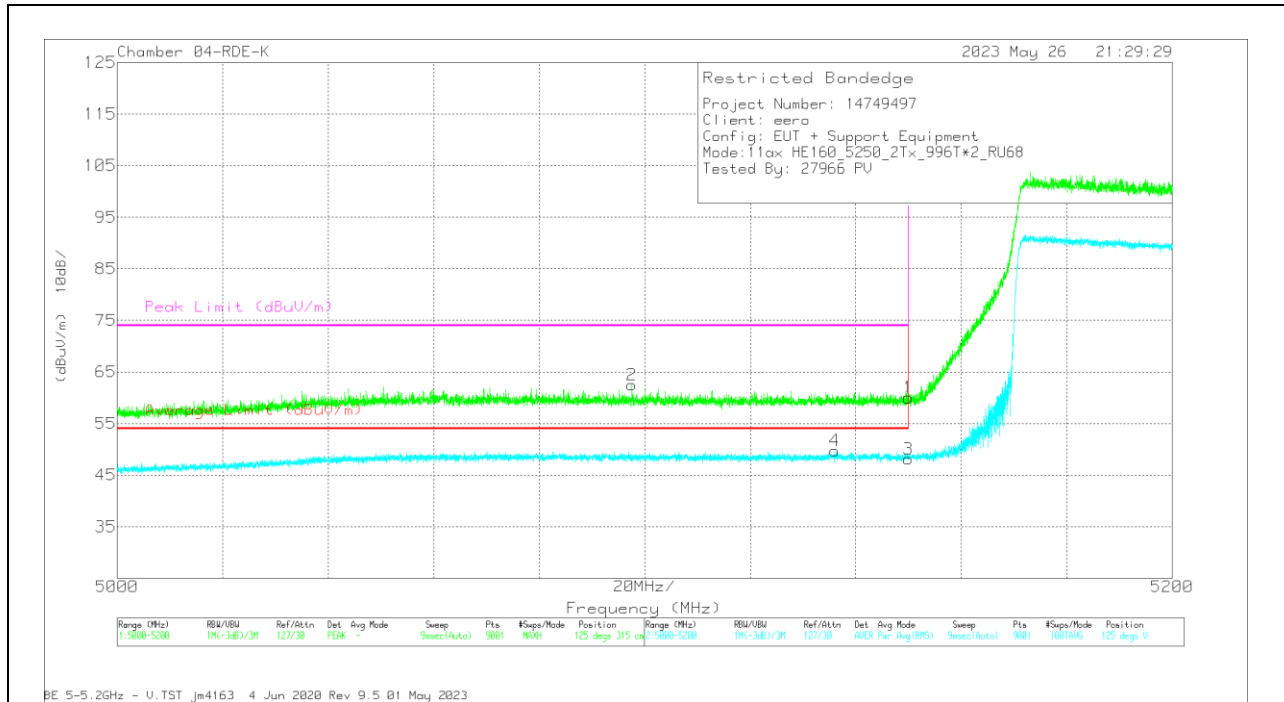


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	56.01	Pk	34.1	-30.1	60.01	-	-	74	-13.99	125	315	V
2	* 5097.532	58.79	Pk	33.9	-30.2	62.49	-	-	74	-11.51	125	315	V
3	* 5150	44.13	RMS	34.1	-30.1	48.13	54	-5.87	-	-	125	315	V
4	* 5135.999	45.93	RMS	34	-30.2	49.73	54	-4.27	-	-	125	315	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

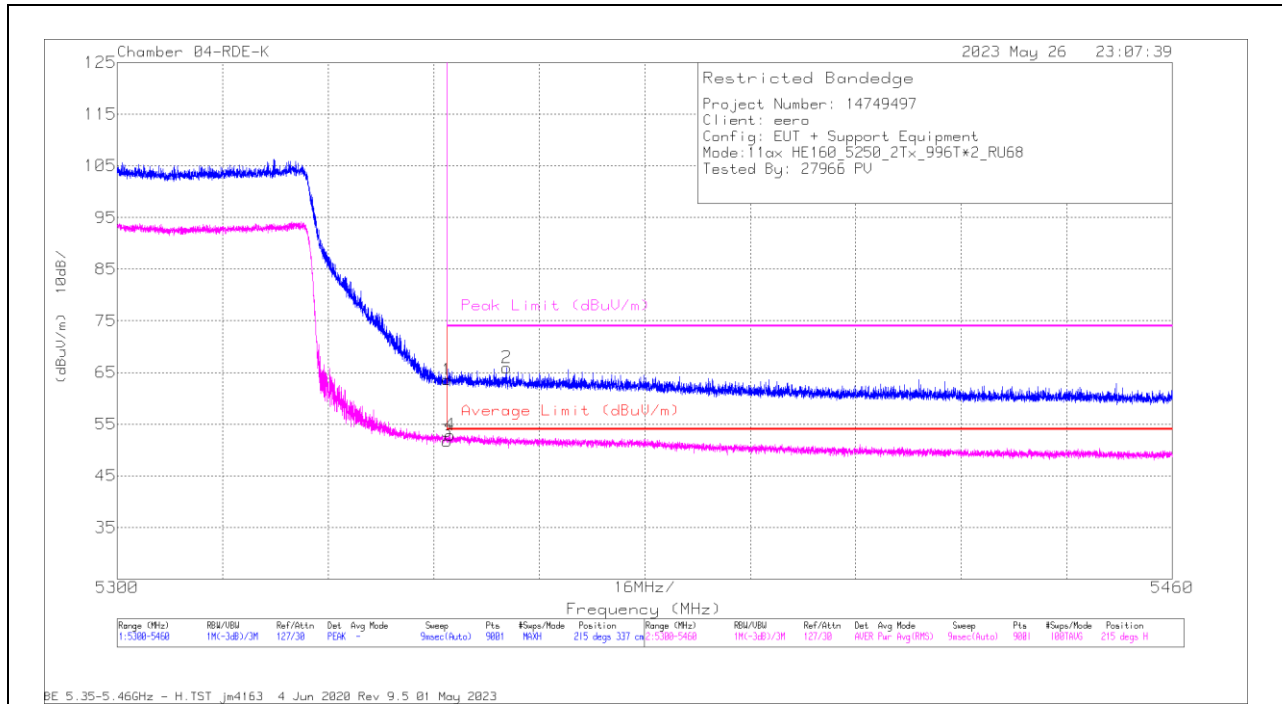


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	59.08	Pk	34.5	-30	63.58	-	-	74	-10.42	215	337	H
2	* 5359.041	61.43	Pk	34.5	-30	65.93	-	-	74	-8.07	215	337	H
3	* 5350	47.17	RMS	34.5	-30	51.67	54	-2.33	-	-	215	337	H
4	* 5350.507	48.3	RMS	34.5	-29.9	52.9	54	-1.1	-	-	215	337	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

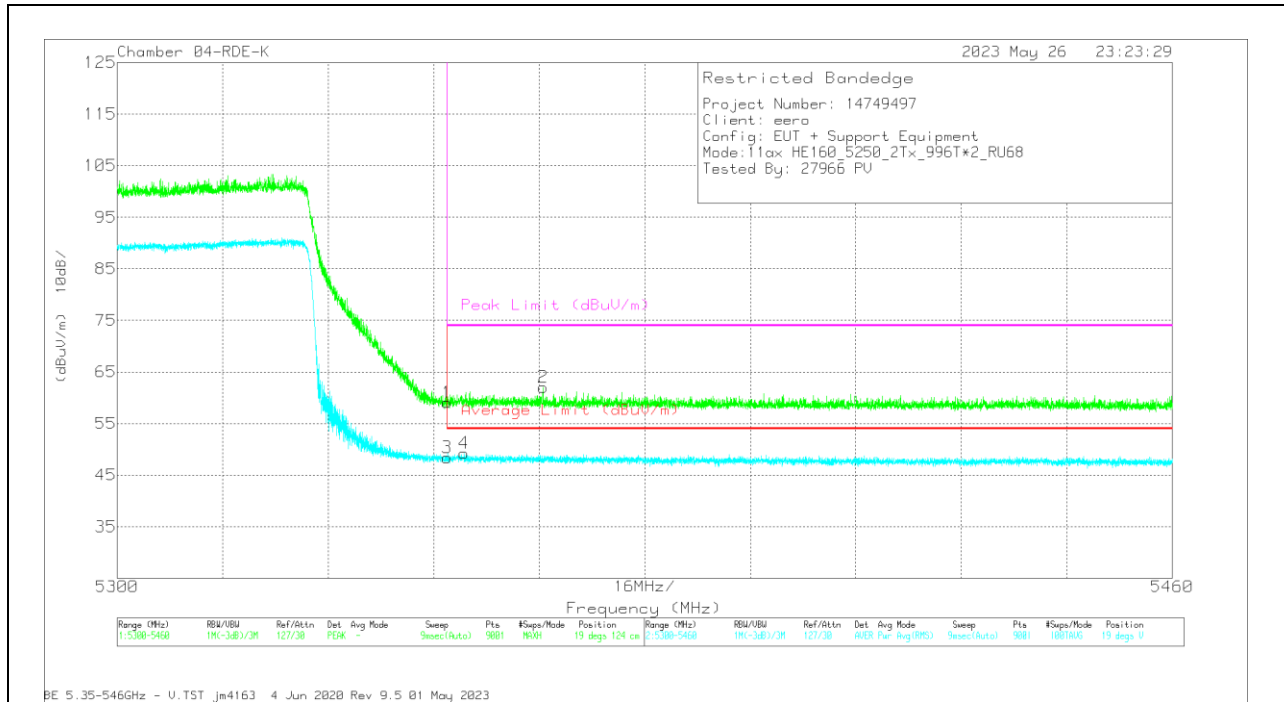

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	54.57	Pk	34.5	-30	59.07	-	-	74	-14.93	19	124	V
2	* 5364.587	57.55	Pk	34.5	-30	62.05	-	-	74	-11.95	19	124	V
3	* 5350	43.9	RMS	34.5	-30	48.4	54	-5.6	-	-	19	124	V
4	* 5352.623	44.63	RMS	34.5	-29.9	49.23	54	-4.77	-	-	19	124	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 2x 996-Tones, Index S68

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

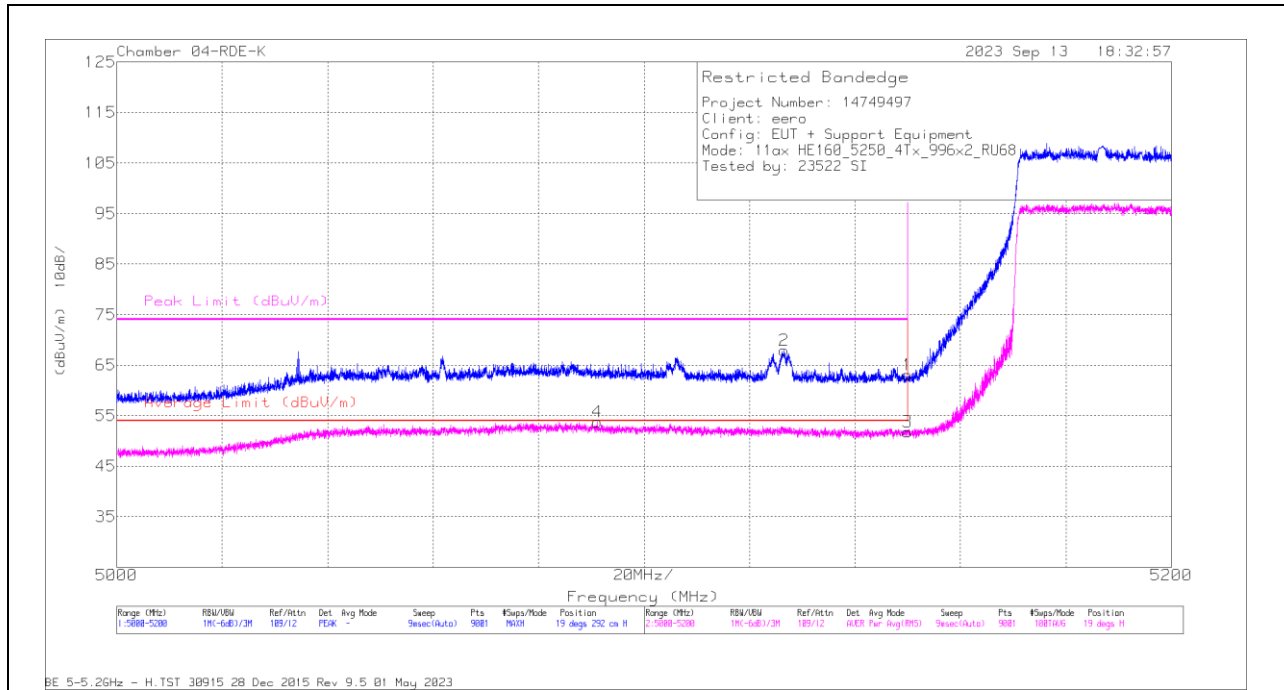

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	36.32	PK	34.1	-7.3	63.12	-	-	74	-10.88	19	292	H
2	* 5126.599	41.01	PK	34	-7.1	67.91	-	-	74	-6.09	19	292	H
3	* 5150	24.93	RMS	34.1	-7.3	51.73	54	-2.27	-	-	19	292	H
4	* 5091.088	27.31	RMS	33.9	-7.4	53.81	54	-19	-	-	19	292	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection