


VERTICAL RESULT

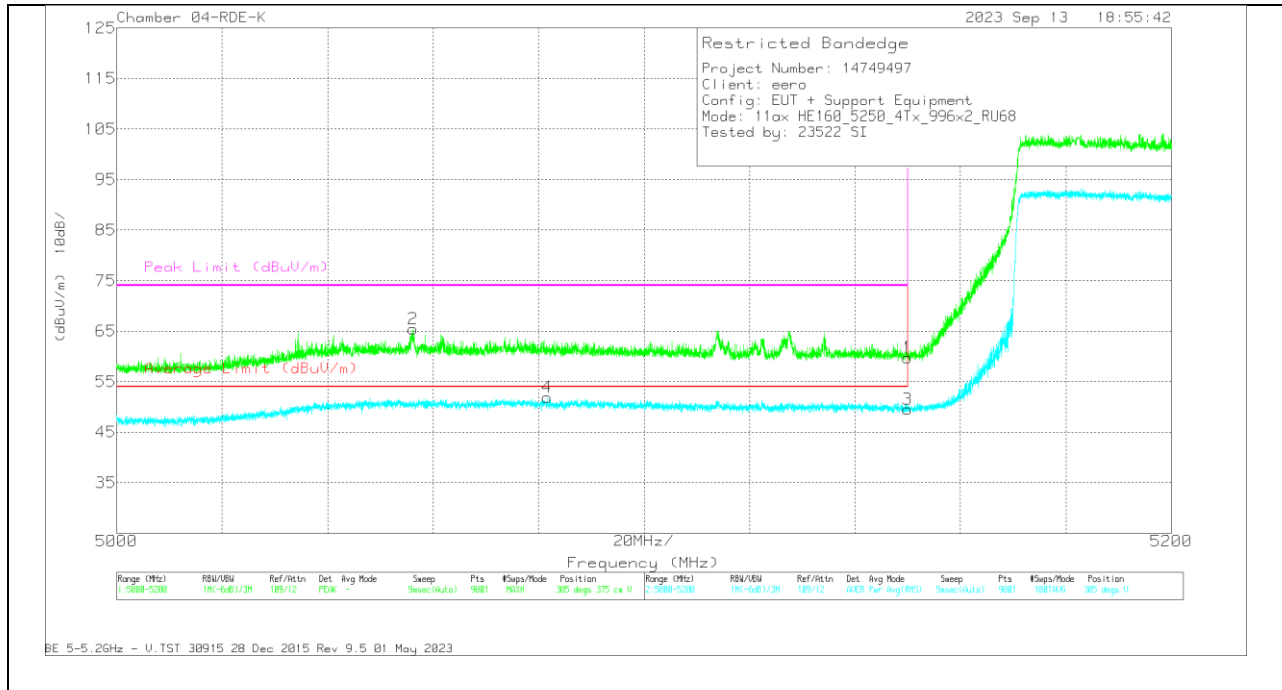


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	32.99	Pk	34.1	-7.3	59.79	-	-	74	-14.21	305	375	V
2	* 5056.222	38.95	Pk	33.9	-7.4	65.45	-	-	74	-8.55	305	375	V
3	* 5150	22.8	RMS	34.1	-7.3	49.6	54	-4.4	-	-	305	375	V
4	* 5081.599	25.41	RMS	33.9	-7.4	51.91	54	-2.09	-	-	305	375	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

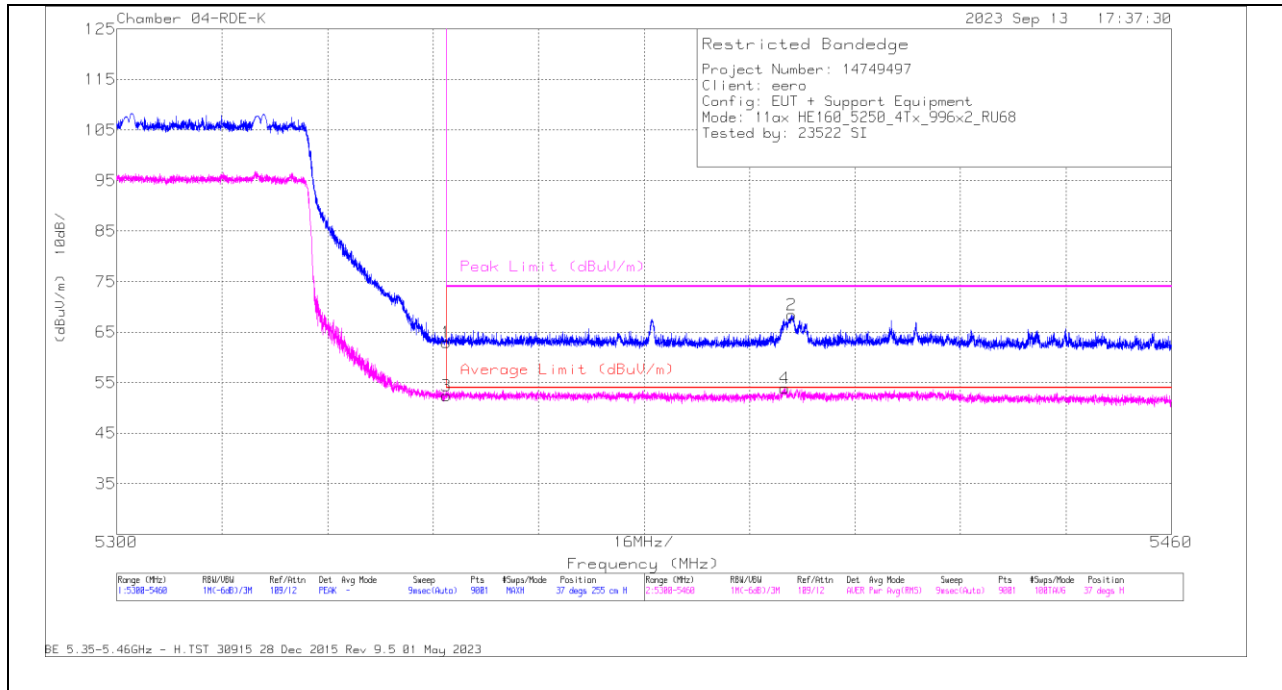


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	35.22	Pk	34.5	-6.8	62.92	-	-	74	-11.08	37	255	H
2	* 5402.348	40.37	Pk	34.6	-6.5	68.47	-	-	74	-5.53	37	255	H
3	* 5350	24.74	RMS	34.5	-6.8	52.44	54	-1.56	-	-	37	255	H
4	* 5401.335	25.89	RMS	34.6	-6.6	53.89	54	-1.11	-	-	37	255	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

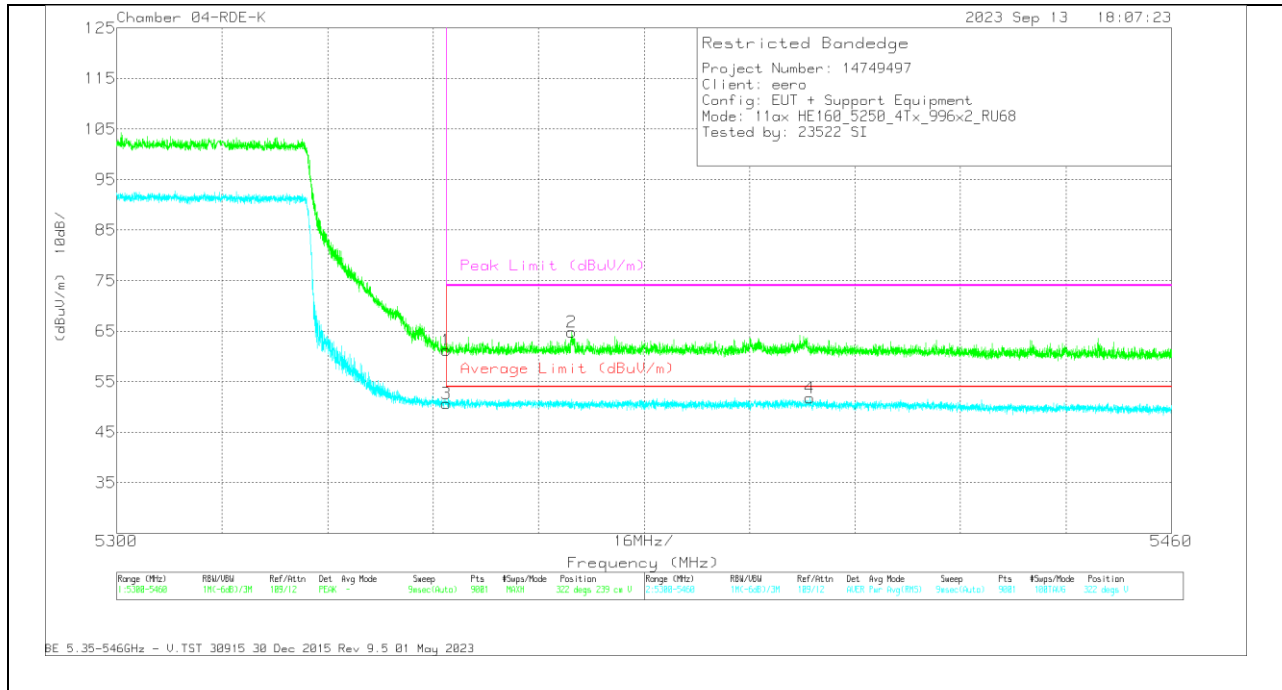

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	33.48	Pk	34.5	-6.8	61.18	-	-	74	-12.82	322	239	V
2	* 5369.014	37.17	Pk	34.5	-6.9	64.77	-	-	74	-9.23	322	239	V
3	* 5350	22.96	RMS	34.5	-6.8	50.66	54	-3.34	-	-	322	239	V
4	* 5405.175	23.81	RMS	34.6	-6.6	51.81	54	-2.19	-	-	322	239	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

10.1.8. TX ABOVE 1 GHz 802.11be EHT160 MODE IN THE 5.3GHz BAND

1TX Antenna 6 OFDMA MODE: 2x 996-Tones, Index S68

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

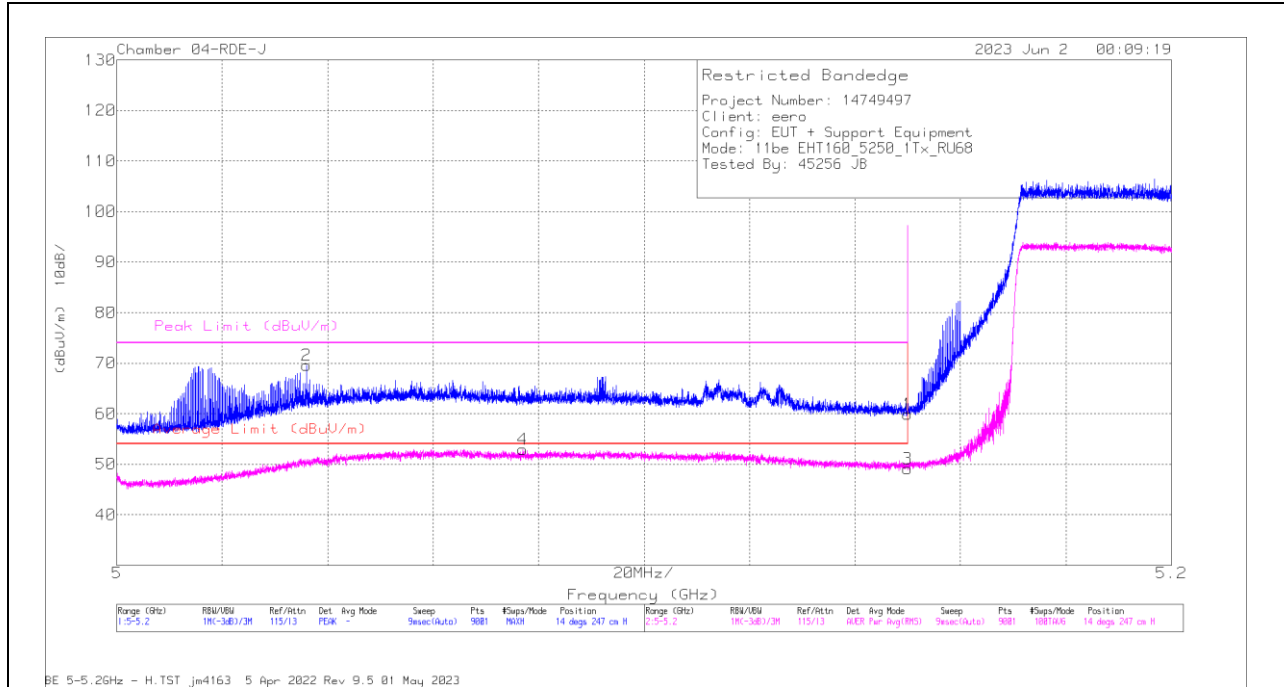

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	39.36	Pk	34.6	-14.1	59.86	-	-	74	-14.14	14	247	H
2	* 5.036022	49.08	Pk	34.3	-13.8	69.58	-	-	74	-4.42	14	247	H
3	* 5.15	28.61	RMS	34.6	-14.1	49.11	54	-4.89	-	-	14	247	H
4	* 5.077044	32.42	RMS	34.4	-13.9	52.92	54	-1.08	-	-	14	247	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

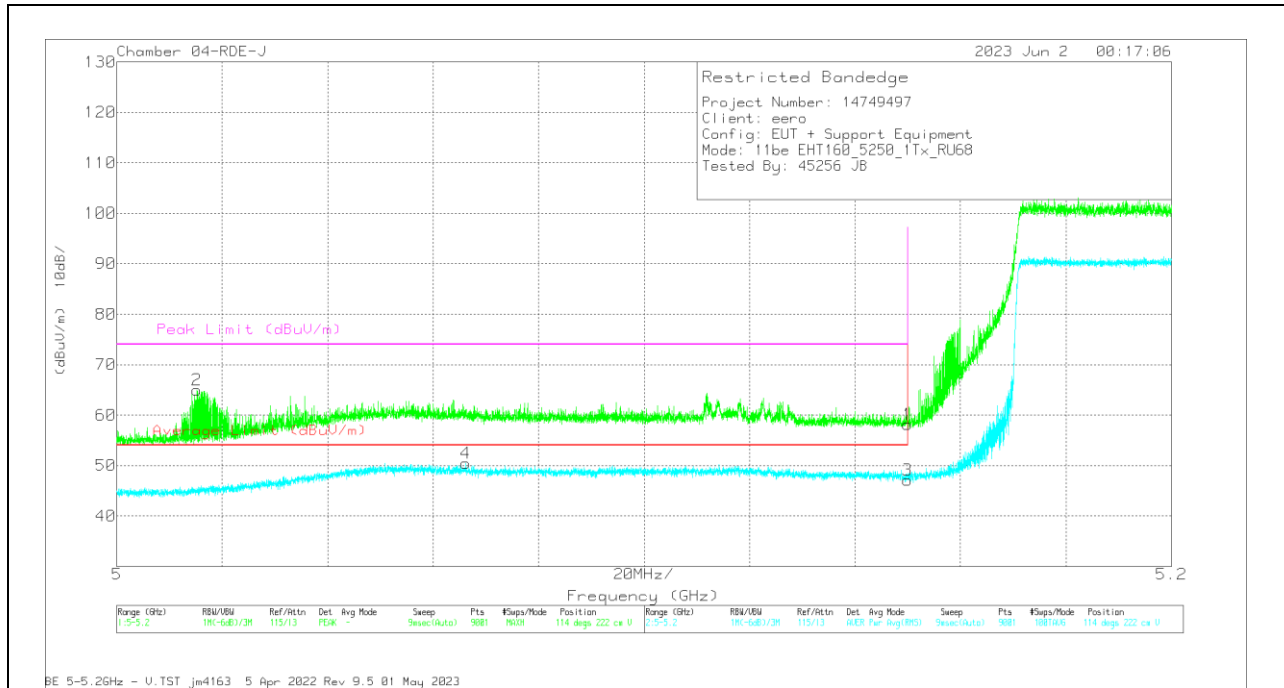


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	37.66	Pk	34.6	-14.1	58.16	-	-	74	-15.84	114	222	V
2	* 5.015155	44.78	Pk	34.2	-14	64.98	-	-	74	-9.02	114	222	V
3	* 5.15	26.64	RMS	34.6	-14.1	47.14	54	-6.86	-	-	114	222	V
4	* 5.066177	29.83	RMS	34.3	-13.7	50.43	54	-3.57	-	-	114	222	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

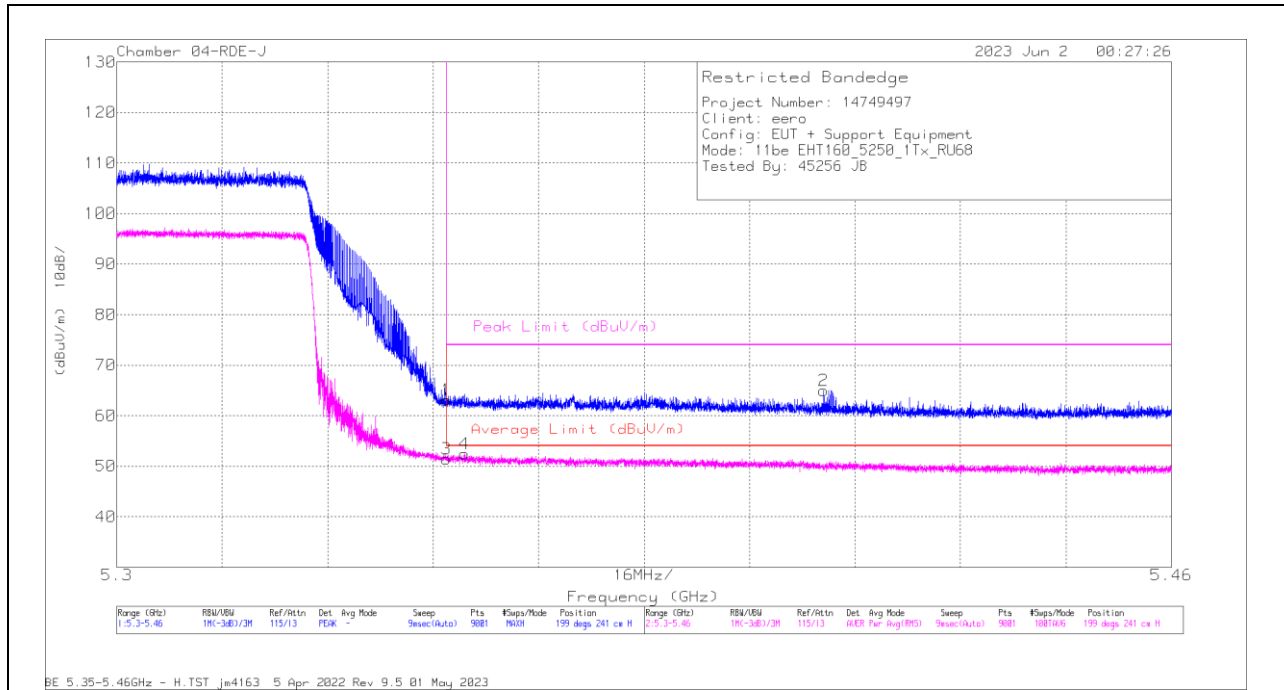

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	41.54	Pk	35	-13.4	63.14	-	-	74	-10.86	199	241	H
2	* 5.407219	43.38	Pk	35	-13.4	64.98	-	-	74	-9.02	199	241	H
3	* 5.35	29.81	RMS	35	-13.4	51.41	54	-2.59	-	-	199	241	H
4	* 5.352712	30.84	RMS	35	-13.4	52.44	54	-1.56	-	-	199	241	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

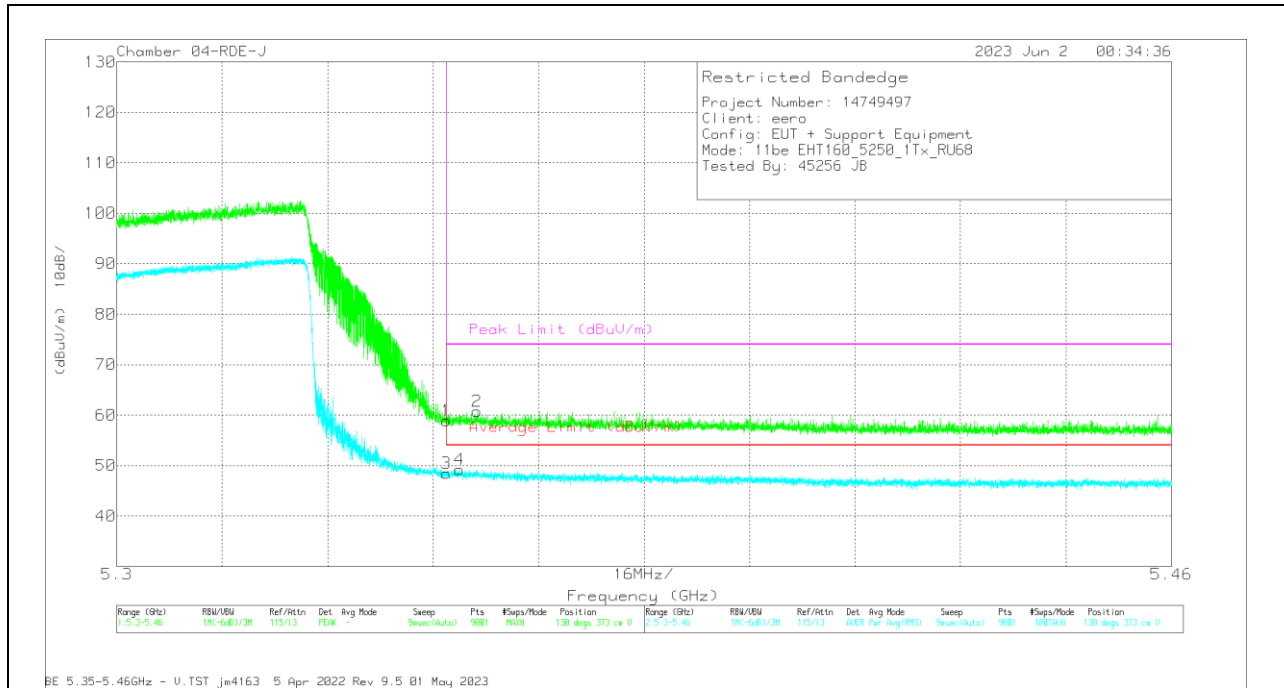

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	37.29	Pk	35	-13.4	58.89	-	-	74	-15.11	130	373	V
2	* 5.354632	39.09	Pk	35	-13.3	60.79	-	-	74	-13.21	130	373	V
3	* 5.35	26.87	RMS	35	-13.4	48.47	54	-5.53	-	-	130	373	V
4	* 5.351965	27.5	RMS	35	-13.3	49.2	54	-4.8	-	-	130	373	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 2x 996-Tones, Index S68

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

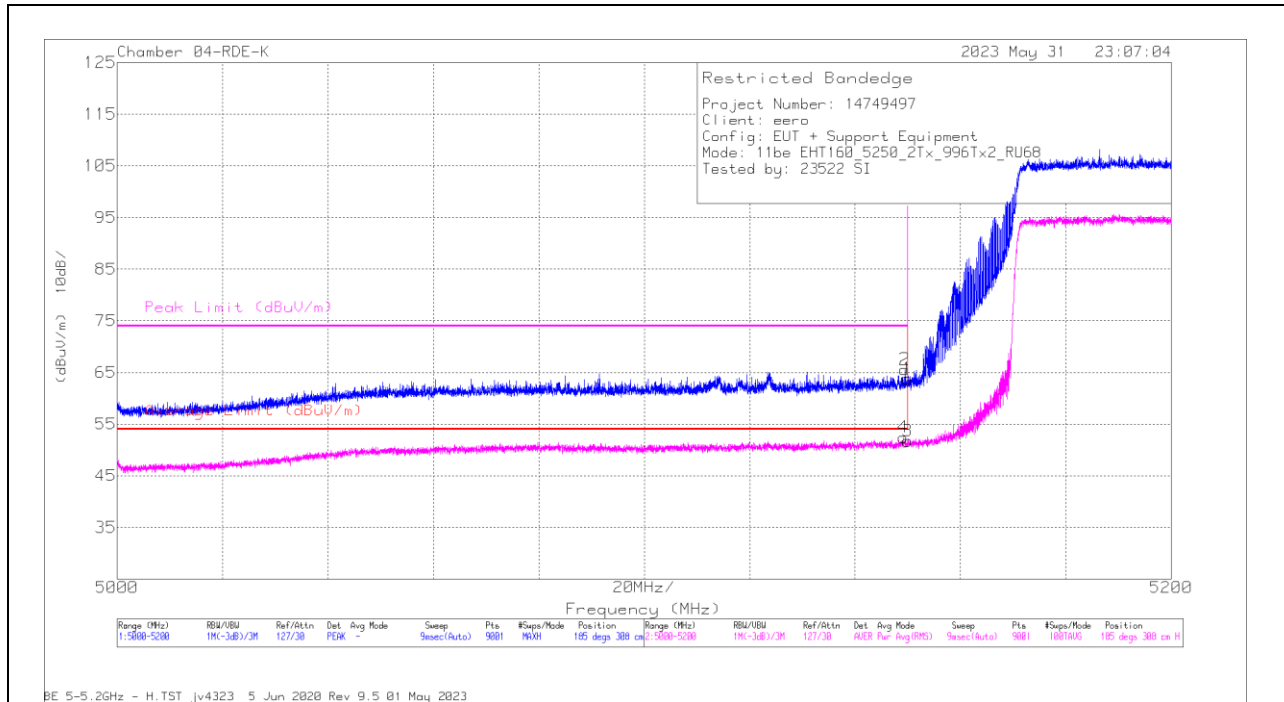


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	59.81	Pk	34.1	-30.1	63.81	-	-	74	-10.19	185	308	H
2	* 5149.421	61.66	Pk	34.1	-30.2	65.56	-	-	74	-8.44	185	308	H
3	* 5150	47.74	RMS	34.1	-30.1	51.74	54	-2.26	-	-	185	308	H
4	* 5149.132	48.55	RMS	34.1	-30.2	52.45	54	-1.55	-	-	185	308	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

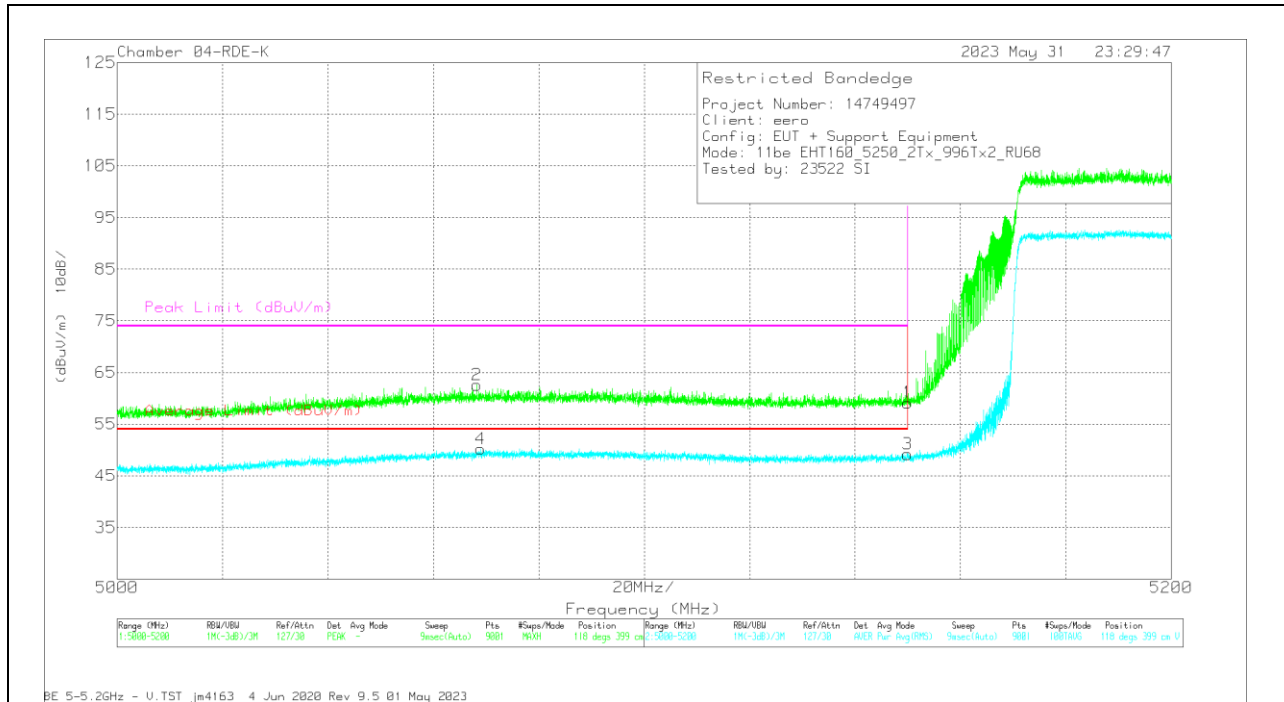


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5150	55.14	Pk	34.1	-30.1	59.14	-	-	74	-14.86	118	399	V
2	* 5068.266	58.98	Pk	33.9	-30.3	62.58	-	-	74	-11.42	118	399	V
3	* 5150	45.18	RMS	34.1	-30.1	49.18	54	-4.82	-	-	118	399	V
4	* 5068.933	46.6	RMS	33.9	-30.3	50.2	54	-3.8	-	-	118	399	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

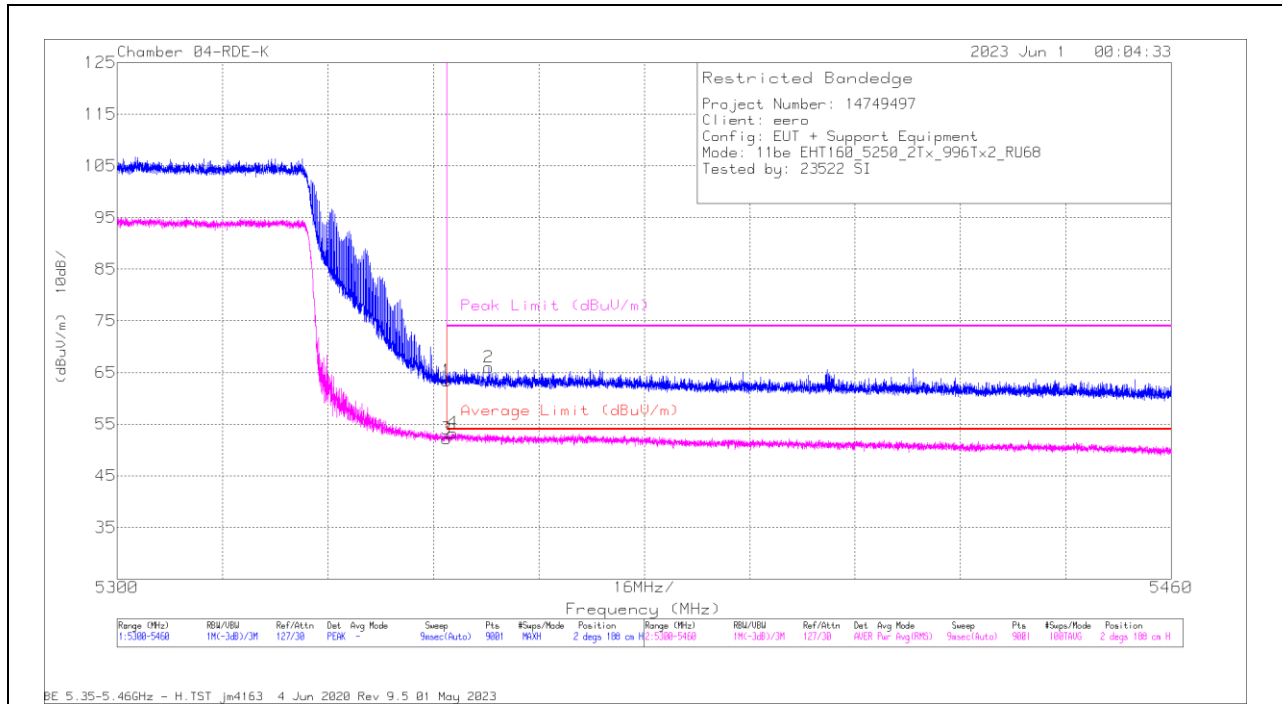


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	58.91	Pk	34.5	-30	63.41	-	-	74	-10.59	2	188	H
2	* 5356.392	61.48	Pk	34.5	-30	65.98	-	-	74	-8.02	2	188	H
3	* 5350	47.69	RMS	34.5	-30	52.19	54	-1.81	-	-	2	188	H
4	* 5350.916	48.68	RMS	34.5	-29.9	53.28	54	-0.72	-	-	2	188	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

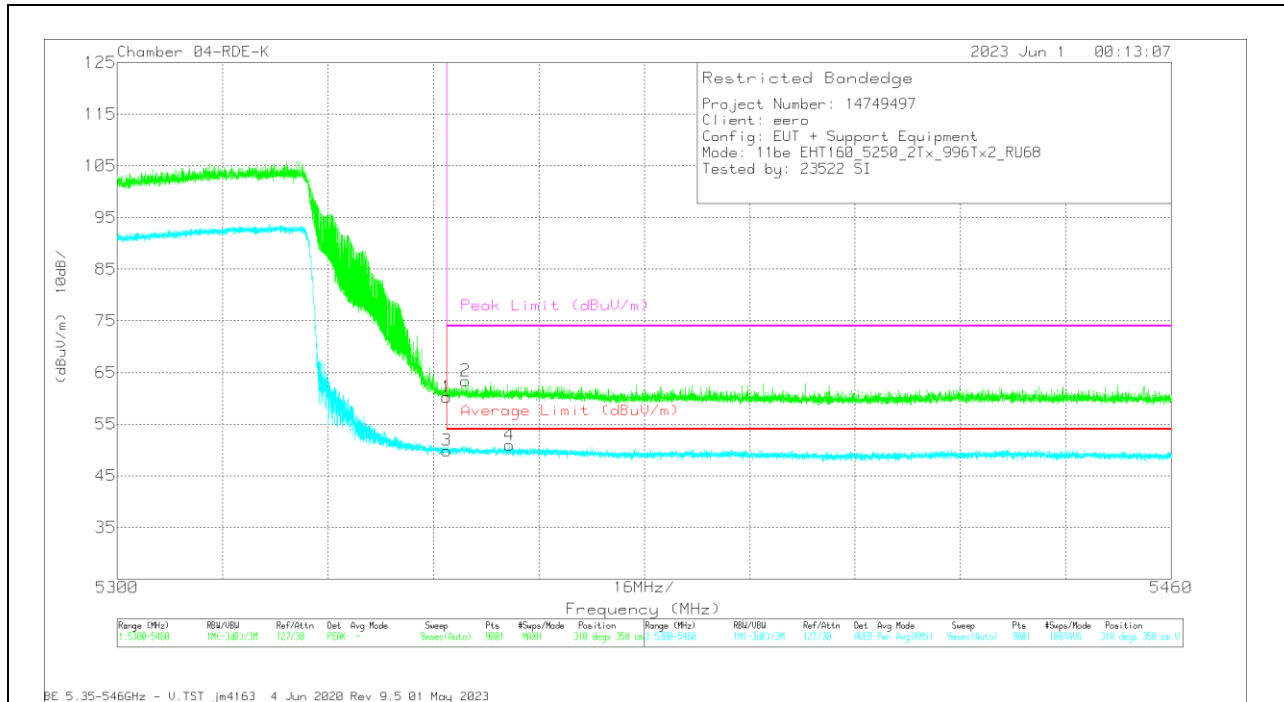

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5350	55.76	Pk	34.5	-30	60.26	-	-	74	-13.74	310	358	V
2	* 5352.854	58.8	Pk	34.5	-29.9	63.4	-	-	74	-10.6	310	358	V
3	* 5350	45.39	RMS	34.5	-30	49.89	54	-4.11	-	-	310	358	V
4	* 5359.556	46.56	RMS	34.5	-30.1	50.96	54	-3.04	-	-	310	358	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 2x 996-Tones, Index S68

BANDEDGE (MID CHANNEL LOW EDGE)

HORIZONTAL RESULT

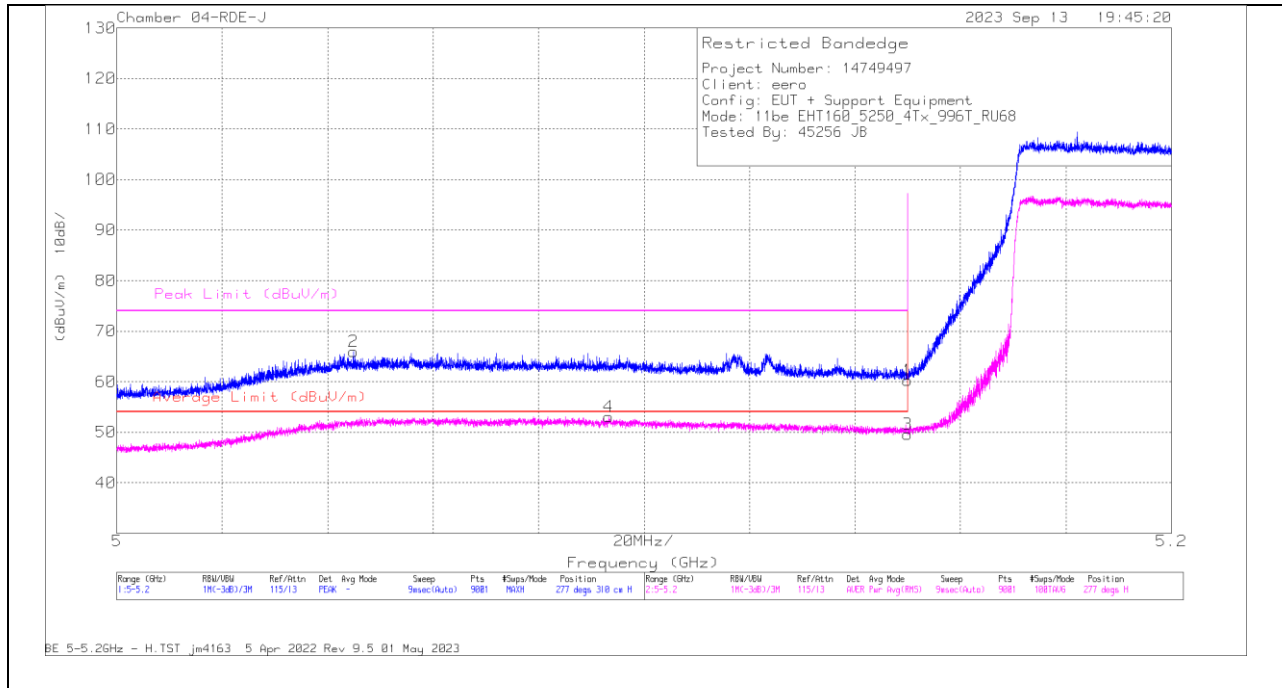


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dBm)	CNI/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	39.78	Pk	34.6	-14.1	0	60.28	-	-	74	-13.72	277	310	H
2	* 5.044866	45.39	Pk	34.3	-13.7	0	65.99	-	-	74	-8.01	277	310	H
3	* 5.15	29.03	RMS	34.6	-14.1	0	49.53	54	-4.47	-	-	277	310	H
4	* 5.093244	32.6	RMS	34.4	-13.9	0	53.1	54	-9	-	-	277	310	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

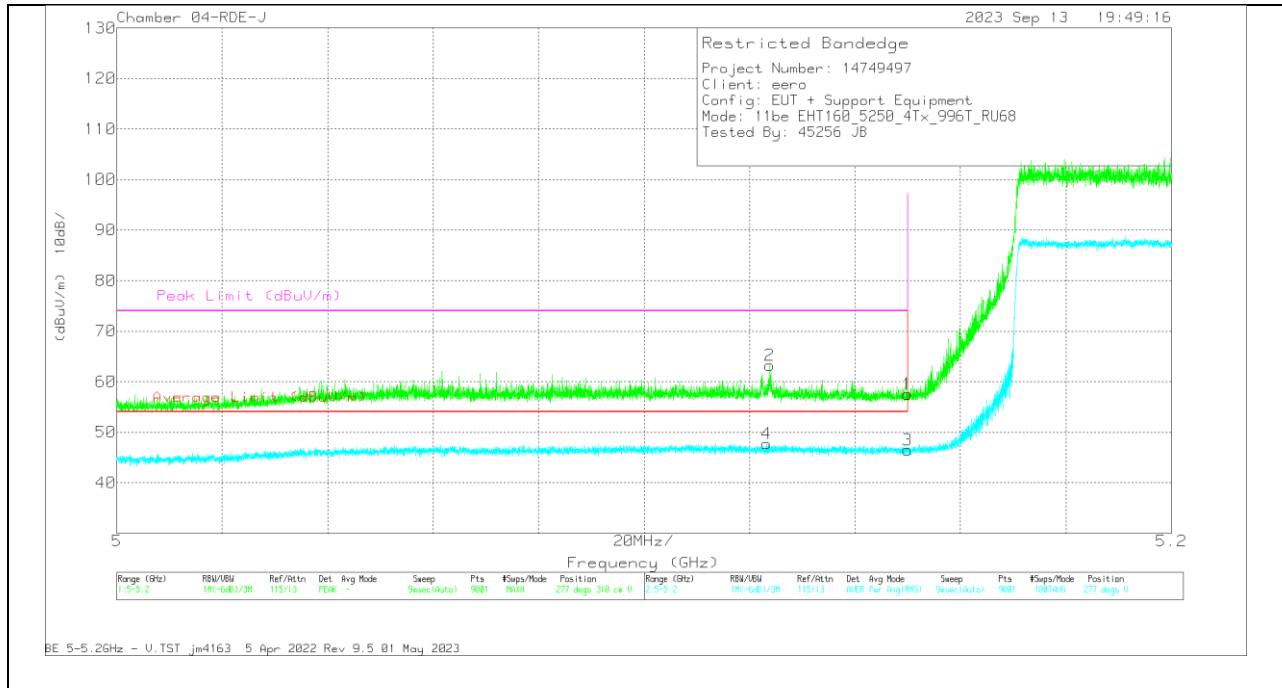


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.15	37	Pk	34.6	-14.1	57.5	-	-	74	-16.5	277	310	V
2	* 5.123821	42.49	Pk	34.5	-13.7	63.29	-	-	74	-10.71	277	310	V
3	* 5.15	25.98	RMS	34.6	-14.1	46.48	54	-7.52	-	-	277	310	V
4	* 5.123243	27.02	RMS	34.5	-13.8	47.72	54	-6.28	-	-	277	310	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (MID CHANNEL HIGH EDGE)

HORIZONTAL RESULT

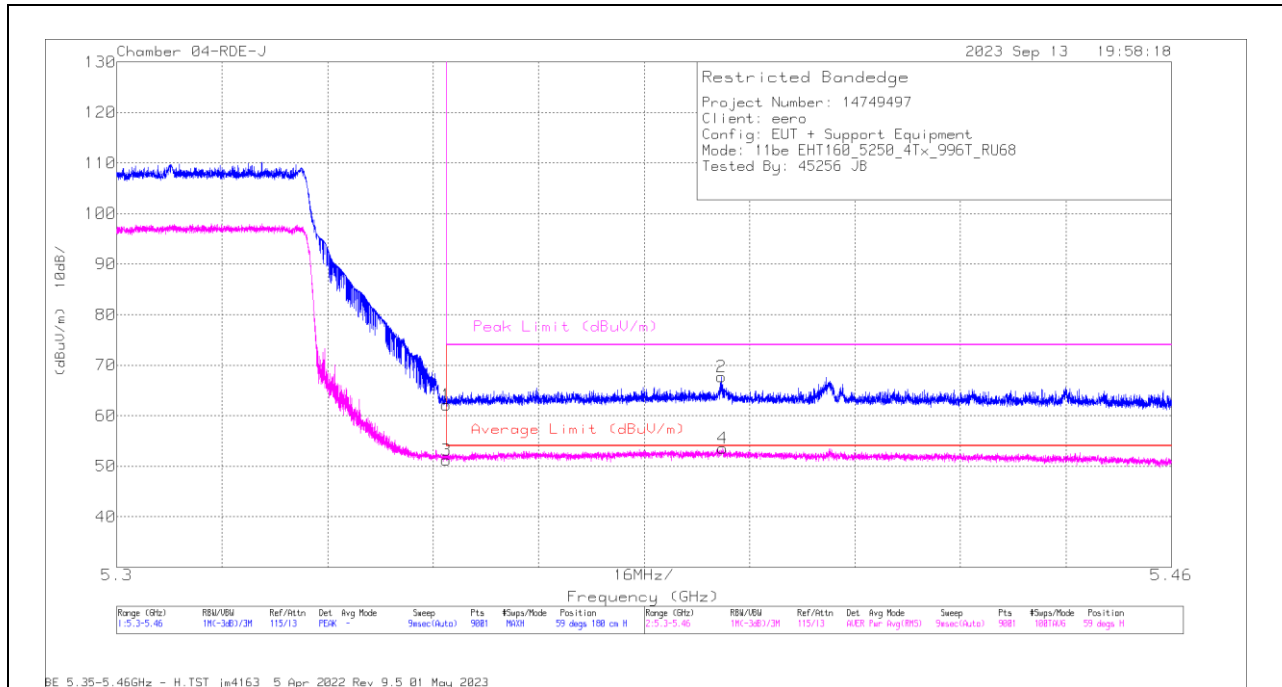

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dBm)	Cd/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	40.56	Pk	35	-13.4	0	62.16	-	-	74	-11.84	59	180	H
2	* 5.391717	46.26	Pk	35	-13.5	0	67.76	-	-	74	-6.24	59	180	H
3	* 5.35	29.65	RMS	35	-13.4	0	51.25	54	-2.75	-	-	59	180	H
4	* 5.391966	32	RMS	35	-13.5	0	53.5	54	-1.5	-	-	59	180	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

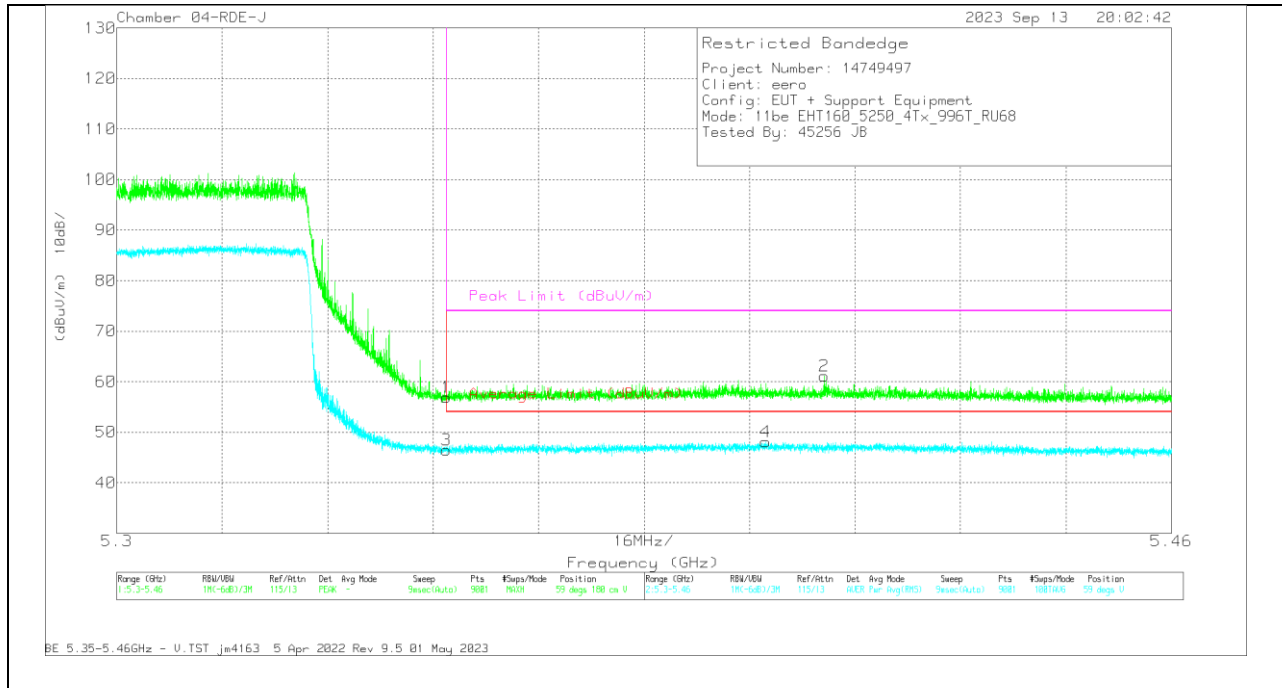


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.35	35.28	PK	35	-13.4	56.88	-	-	74	-17.12	59	180	V
2	* 5.407308	39.58	PK	35	-13.4	61.18	-	-	74	-12.82	59	180	V
3	* 5.35	24.88	RMS	35	-13.4	46.48	54	-7.52	-	-	59	180	V
4	* 5.398437	26.39	RMS	35	-13.3	48.09	54	-5.91	-	-	59	180	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

MID CHANNEL

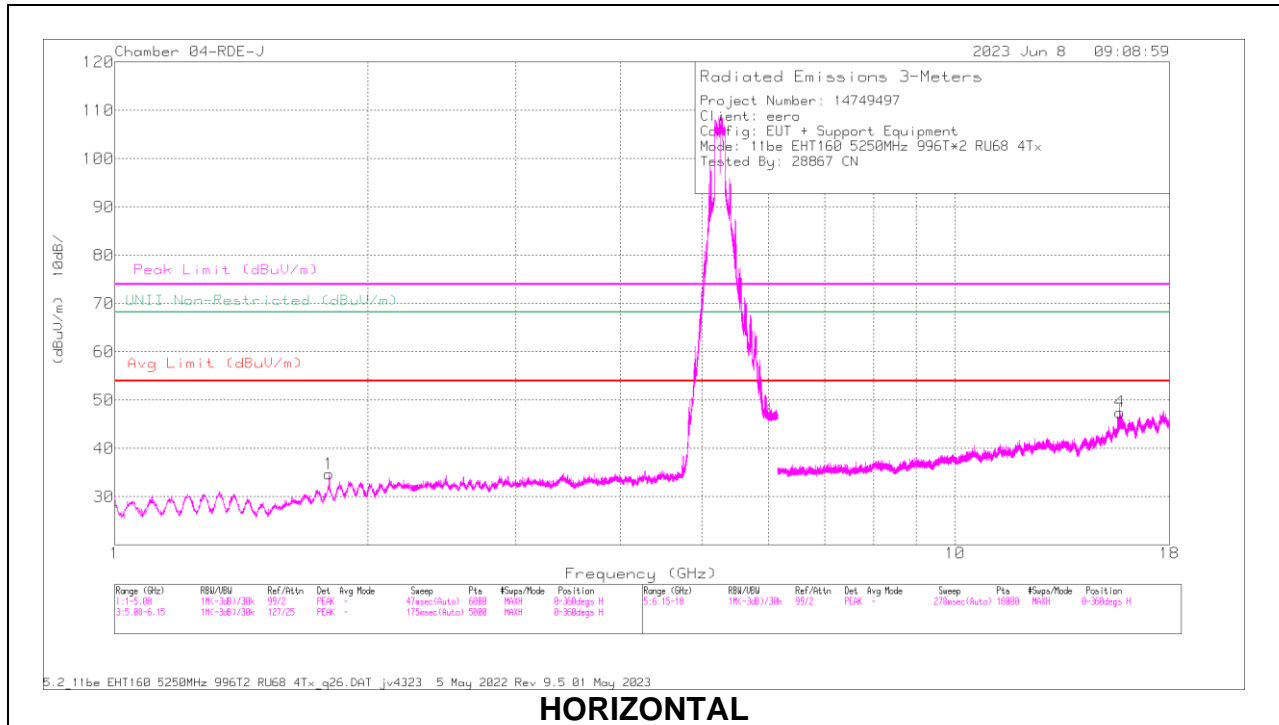

HORIZONTAL

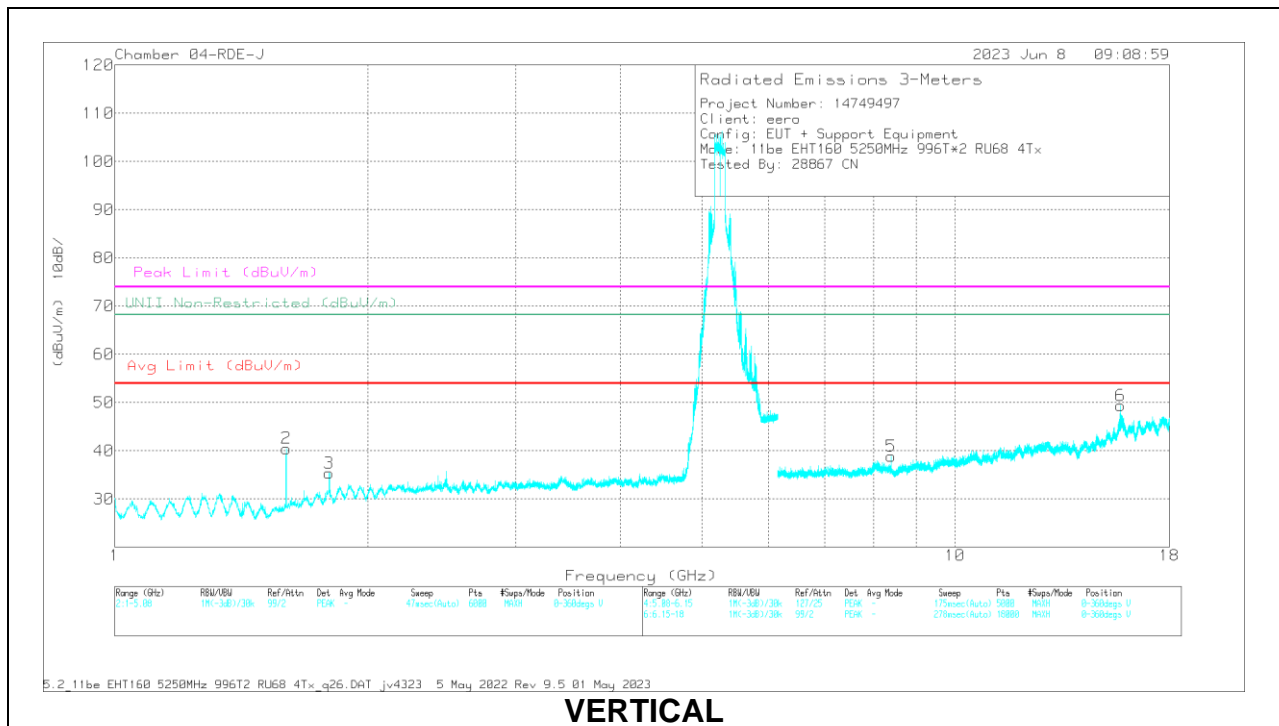

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.799786	60.63	PK-U	30.5	-46.5	44.63	-	-	-	-	68.2	-23.57	29	209	H
2	* 1.600037	66.9	PK-U	27.8	-47	47.7	-	-	74	-26.3	-	-	11	191	V
	* 1.599897	47.71	ADR	27.8	-47	28.51	54	-25.49	-	-	-	-	11	191	V
3	1.80024	61.1	PK-U	30.5	-46.5	45.1	-	-	-	-	68.2	-23.1	54	195	V
4	* 15.699983	54.65	PK-U	40.8	-40.5	54.95	-	-	74	-19.05	-	-	176	148	H
	* 15.699792	42.46	ADR	40.8	-40.5	42.76	54	-11.24	-	-	-	-	176	148	H
5	* 8.400046	53.9	PK-U	35.8	-40.9	48.8	-	-	74	-25.2	-	-	351	158	V
	* 8.39997	44.48	ADR	35.8	-40.9	39.38	54	-14.62	-	-	-	-	351	158	V
6	* 15.742656	57.54	PK-U	40.9	-40.9	57.54	-	-	74	-16.46	-	-	156	190	V
	* 15.743071	45.24	ADR	40.9	-40.9	45.24	54	-8.76	-	-	-	-	156	190	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

10.1.9. TX ABOVE 1 GHz 802.11ax HE20 MODE IN THE 5.6GHz BAND

1TX Antenna 6 OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

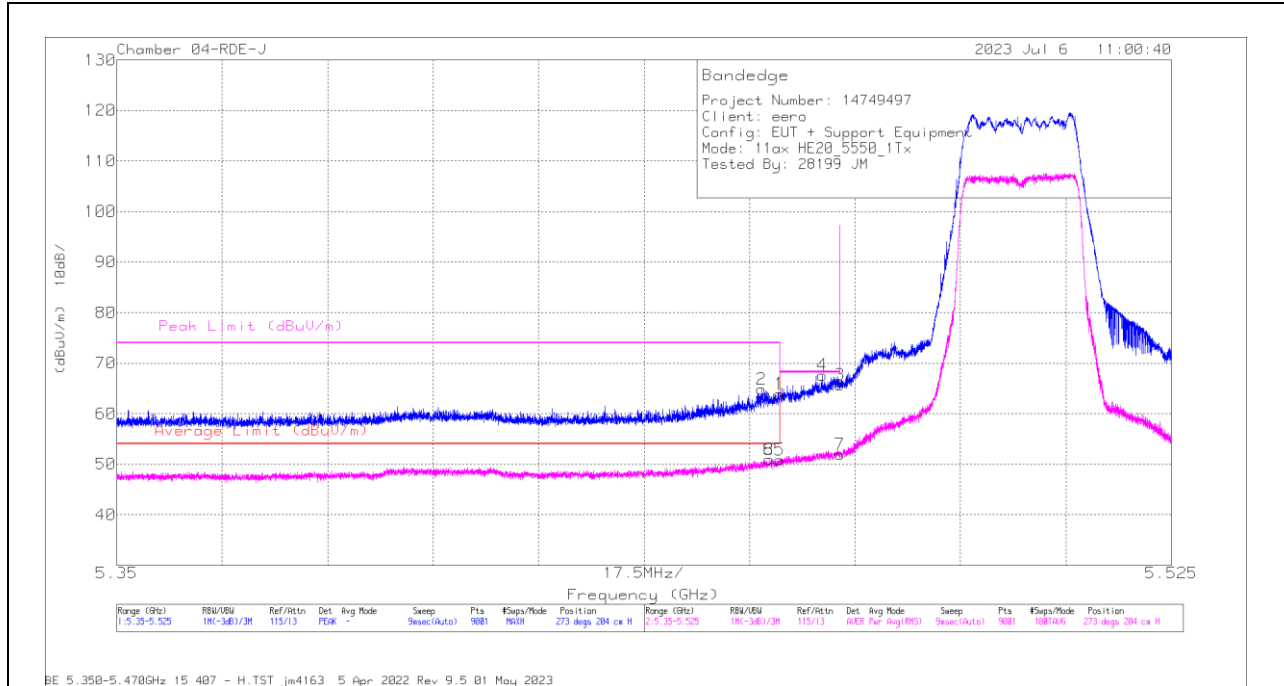


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.52	PK	34.9	-13.5	63.92	-	-	68.2	-4.28	273	204	H
2	* 5.457039	43.45	PK	34.9	-13.5	64.85	-	-	74	-9.15	273	204	H
3	5.47	44.4	PK	34.8	-13.5	65.7	-	-	68.2	-2.5	273	204	H
4	5.467072	46.24	PK	34.9	-13.5	67.64	-	-	68.2	-5.6	273	204	H
5	* 5.46	29.48	RMS	34.9	-13.5	50.88	54	-3.12	-	-	273	204	H
6	* 5.458264	29.7	RMS	34.9	-13.6	51	54	-3	-	-	273	204	H
7	5.47	30.67	RMS	34.8	-13.5	51.97	-	-	-	-	273	204	H
8	* 5.458264	29.7	RMS	34.9	-13.6	51	54	-3	-	-	273	204	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

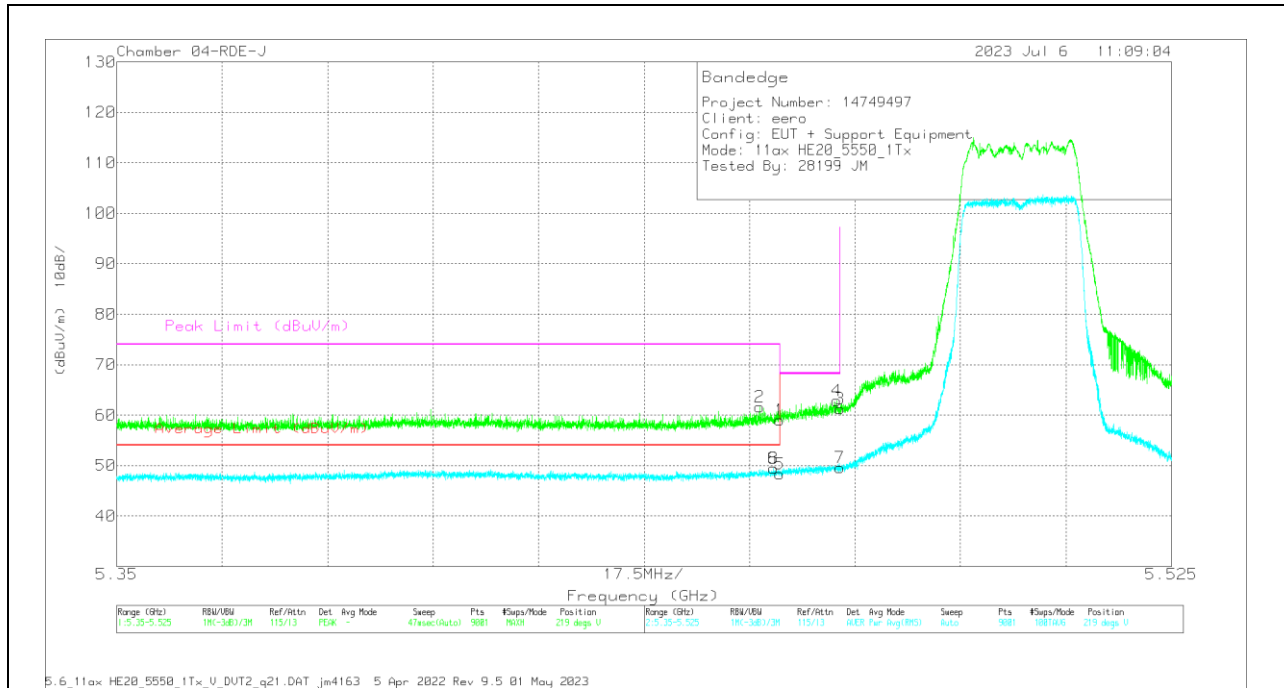


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.46	37.66	Pk	34.9	-13.5	0	59.06	-	-	68.2	-9.14	219	239	V
2	5.456631	40.26	Pk	34.9	-13.5	0	61.66	-	-	74	-12.34	219	239	V
3	5.47	39.99	Pk	34.8	-13.5	0	61.29	-	-	68.2	-6.91	219	239	V
4	5.469425	41.5	Pk	34.8	-13.4	0	62.9	-	-	68.2	-5.3	219	239	V
5	5.46	26.4	RMS	34.9	-13.5	.59	48.39	54	-5.61	-	-	219	239	V
6	5.458964	27.58	RMS	34.9	-13.6	.59	49.47	54	-4.53	-	-	219	239	V
7	5.47	27.73	RMS	34.8	-13.5	.59	49.62	-	-	-	-	219	239	V
8	5.458964	27.58	RMS	34.9	-13.6	.59	49.47	54	-4.53	-	-	219	239	V

Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

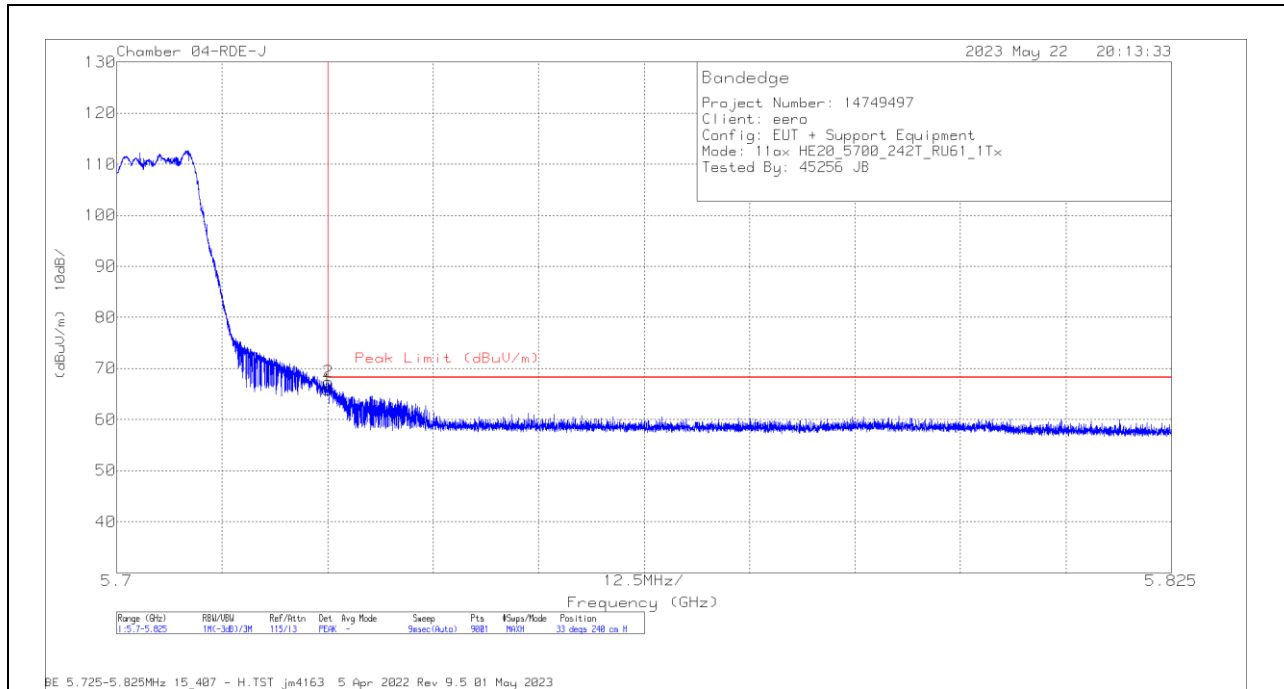


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.54	Pk	34.7	-13.4	65.84	68.2	-2.36	33	240	H
2	5.725111	46.08	Pk	34.7	-13.4	67.38	68.2	-.82	33	240	H

Pk - Peak detector

VERTICAL RESULT

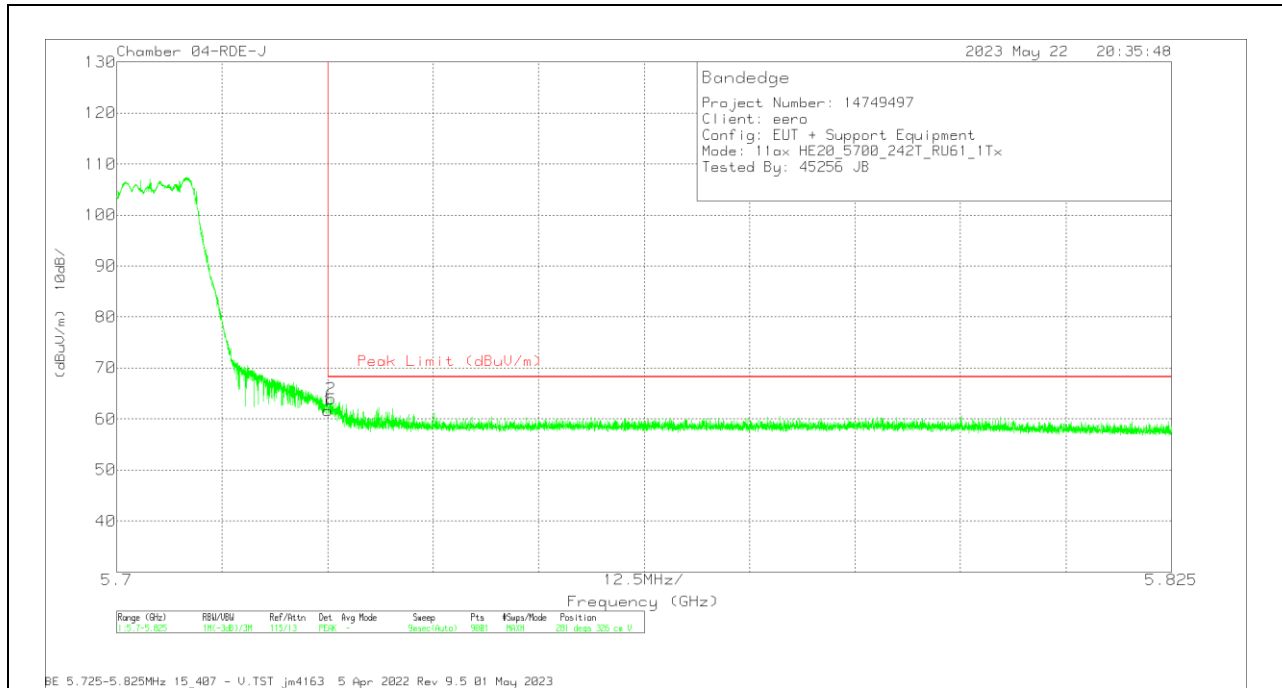

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.31	Pk	34.7	-13.4	61.61	68.2	-6.59	281	326	V
2	5.725361	42.69	Pk	34.7	-13.4	63.99	68.2	-4.21	281	326	V

Pk - Peak detector

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

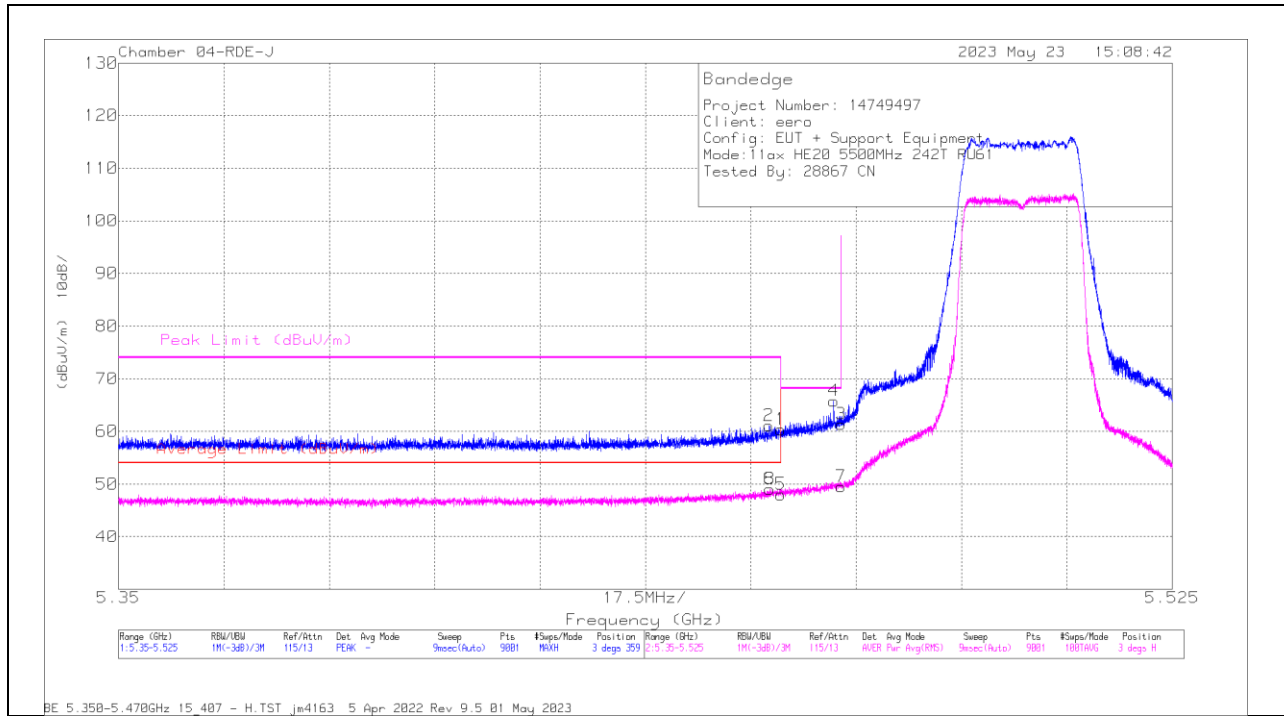

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.54	Pk	34.9	-14.1	60.34	-	-	68.2	-7.86	3	359	H
2	* 5.457992	40.32	Pk	34.9	-14.1	61.12	-	-	74	-12.88	3	359	H
3	5.47	40.67	Pk	34.8	-14.1	61.37	-	-	68.2	-6.83	3	359	H
4	5.468783	45.1	Pk	34.8	-14.1	65.8	-	-	68.2	-2.4	3	359	H
5	* 5.46	27.21	RMS	34.9	-14.1	48.01	54	-5.99	-	-	3	359	H
6	* 5.458148	28.27	RMS	34.9	-14.1	49.07	54	-4.93	-	-	3	359	H
7	5.47	28.82	RMS	34.8	-14.1	49.52	-	-	-	-	3	359	H
8	* 5.458148	28.27	RMS	34.9	-14.1	49.07	54	-4.93	-	-	3	359	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

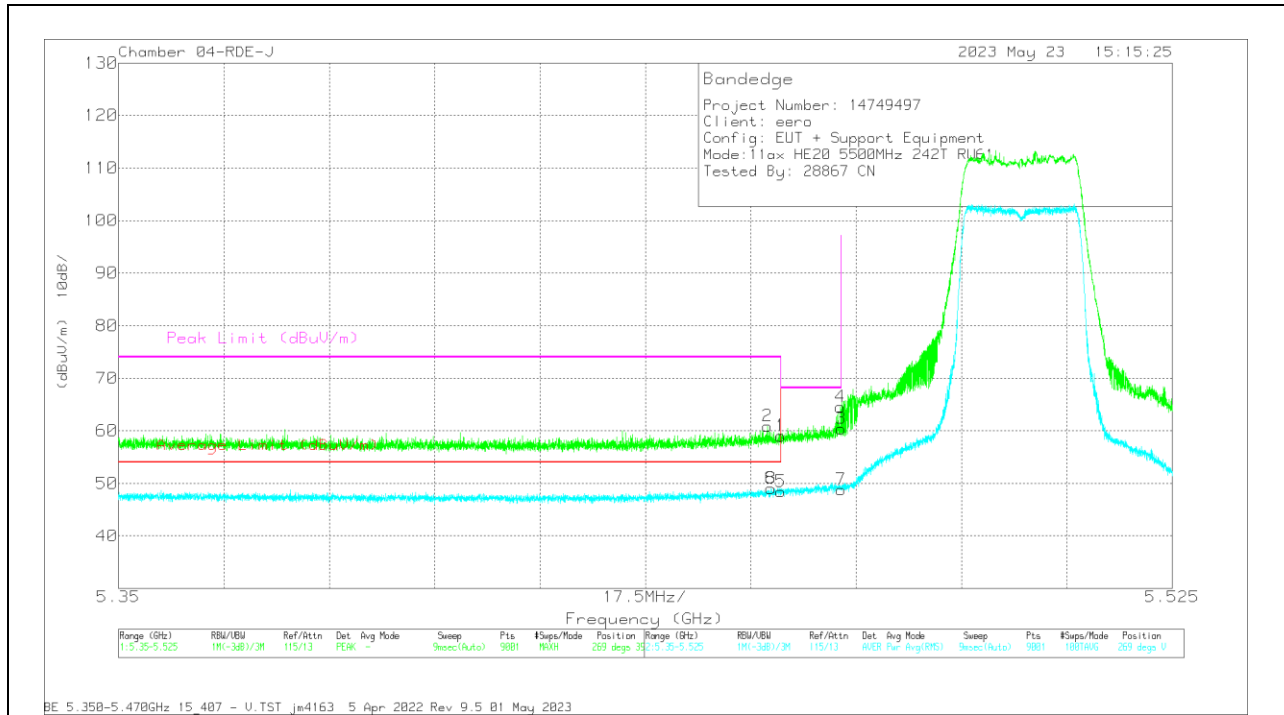


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.21	Pk	34.9	-14.1	59.01	-	-	68.2	-9.19	269	395	V
2	* 5.457798	40.1	Pk	34.9	-14.1	60.9	-	-	74	-13.1	269	395	V
3	5.47	39.72	Pk	34.8	-14.1	60.42	-	-	68.2	-7.78	269	395	V
4	5.469892	43.81	Pk	34.8	-14.1	64.51	-	-	68.2	-3.69	269	395	V
5	* 5.46	27.03	RMS	34.9	-14.1	47.83	54	-6.17	-	-	269	395	V
6	* 5.458342	27.67	RMS	34.9	-14.1	48.47	54	-5.53	-	-	269	395	V
7	5.47	27.49	RMS	34.8	-14.1	48.19	-	-	-	-	269	395	V
8	* 5.458342	27.67	RMS	34.9	-14.1	48.47	54	-5.53	-	-	269	395	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

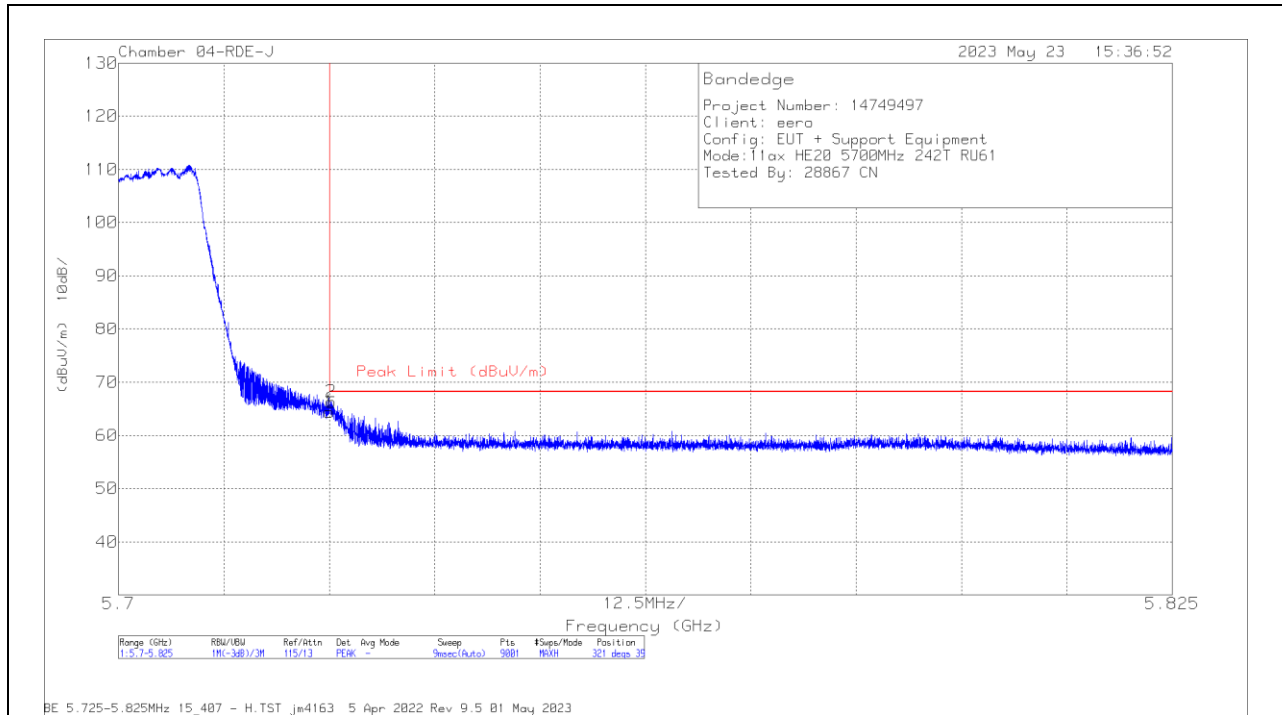


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.09	Pk	34.7	-13.4	64.39	68.2	-3.81	321	393	H
2	5.725209	45.01	Pk	34.7	-13.4	66.31	68.2	-1.89	321	393	H

Pk - Peak detector

VERTICAL RESULT

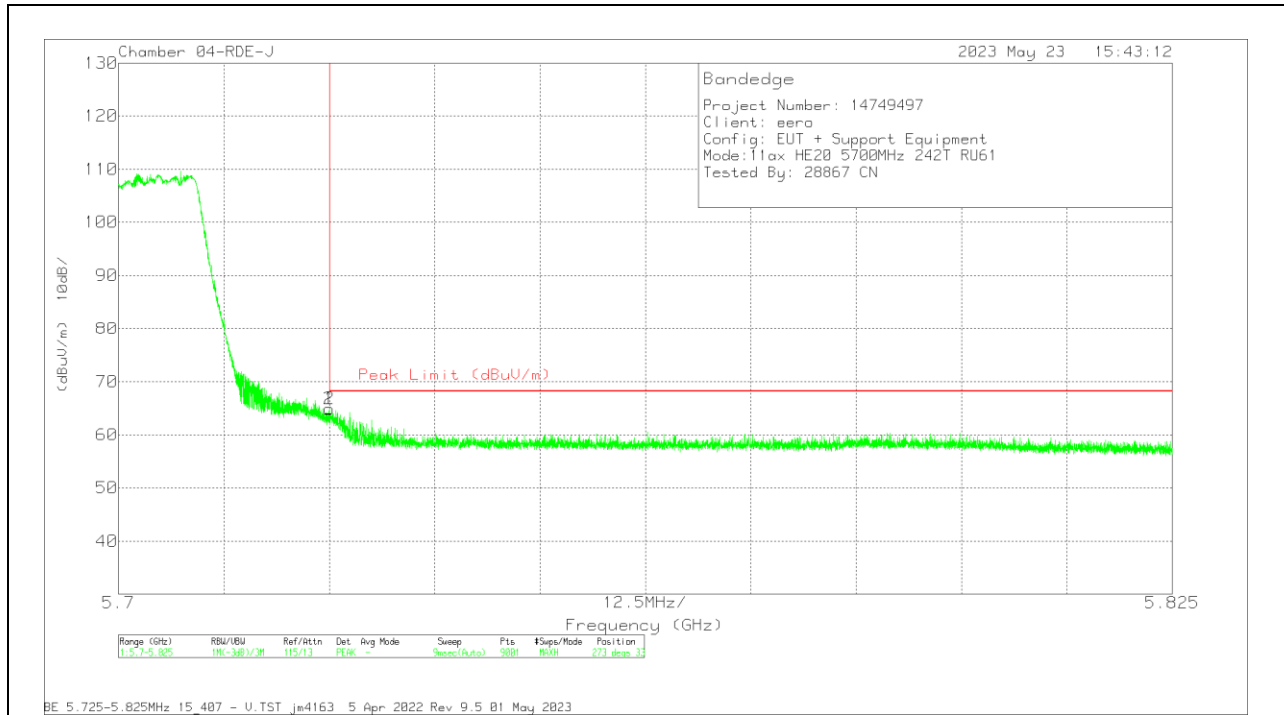

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.59	Pk	34.7	-13.4	64.89	68.2	-3.31	273	331	V
2	5.725	43.6	Pk	34.7	-13.4	64.9	68.2	-3.3	273	331	V

Pk - Peak detector

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

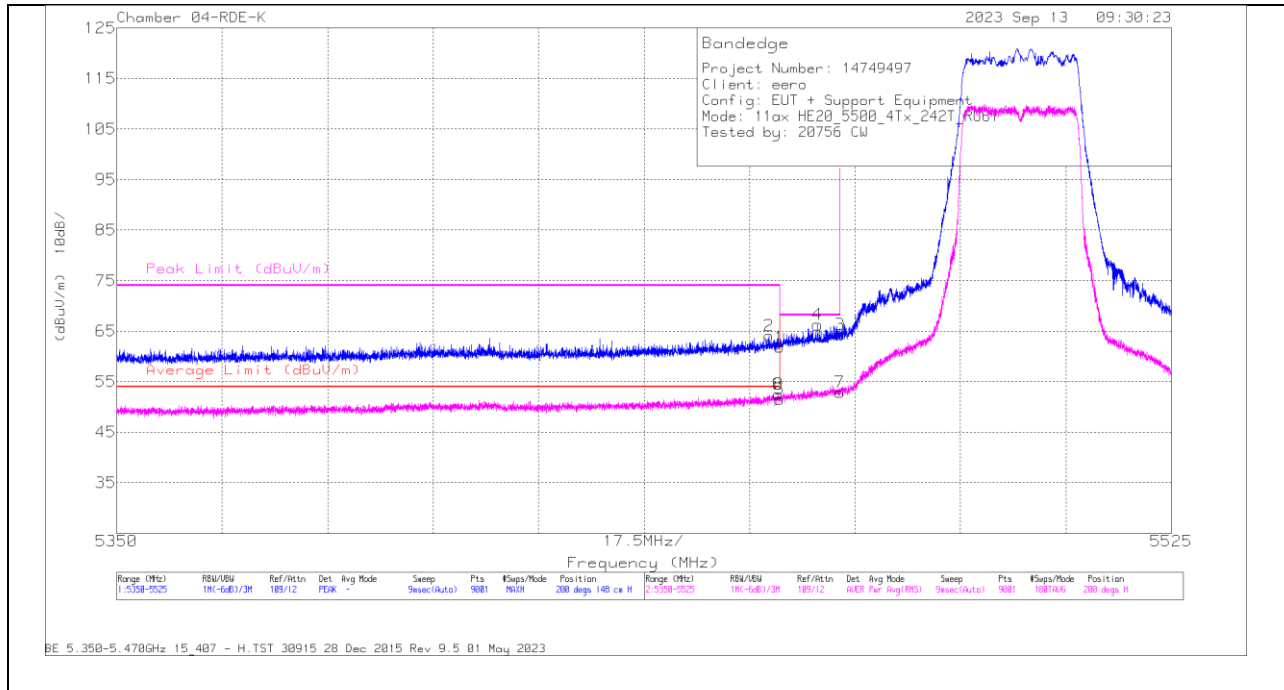


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	33.97	Pk	34.6	-6.7	61.87	-	-	68.2	-6.33	200	148	H
2	* 5458.225	36.2	Pk	34.6	-6.7	64.1	-	-	74	-9.9	200	148	H
3	5470	36.42	Pk	34.6	-6.7	64.32	-	-	68.2	-3.88	200	148	H
4	5466.295	38.25	Pk	34.6	-6.6	66.25	-	-	68.2	-1.95	200	148	H
5	* 5460	23.65	RMS	34.6	-6.7	51.55	54	-2.45	-	-	200	148	H
6	* 5459.781	24.58	RMS	34.6	-6.7	52.48	54	-1.52	-	-	200	148	H
7	5470	24.95	RMS	34.6	-6.7	52.85	-	-	-	-	200	148	H
8	* 5459.781	24.58	RMS	34.6	-6.7	52.48	54	-1.52	-	-	200	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

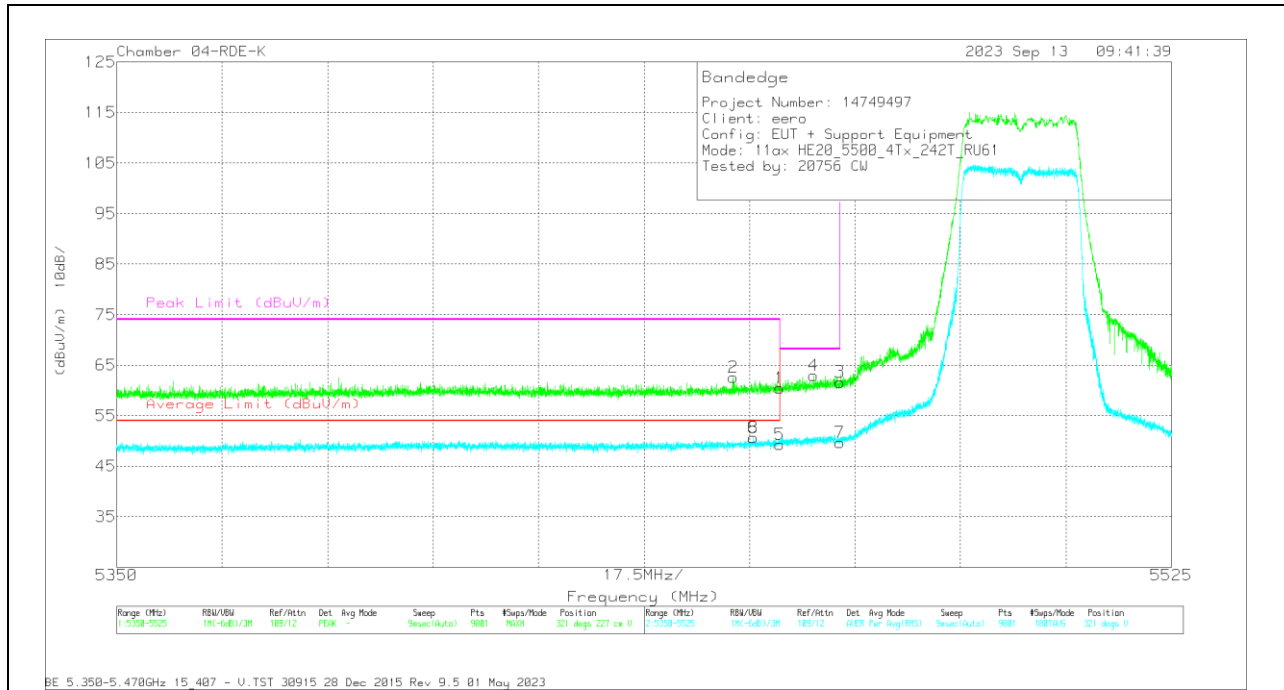

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	32.53	Pk	34.6	-6.7	60.43	-	-	68.2	-7.77	321	227	V
2	* 5452.275	34.78	Pk	34.6	-6.8	62.58	-	-	74	-11.42	321	227	V
3	5470	33.75	Pk	34.6	-6.7	61.65	-	-	68.2	-6.55	321	227	V
4	5465.595	34.91	Pk	34.6	-6.6	62.91	-	-	68.2	-5.29	321	227	V
5	* 5460	21.38	RMS	34.6	-6.7	49.28	54	-4.72	-	-	321	227	V
6	* 5455.62	22.84	RMS	34.6	-6.8	50.64	54	-3.36	-	-	321	227	V
7	5470	21.73	RMS	34.6	-6.7	49.63	-	-	-	-	321	227	V
8	* 5455.62	22.84	RMS	34.6	-6.8	50.64	54	-3.36	-	-	321	227	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

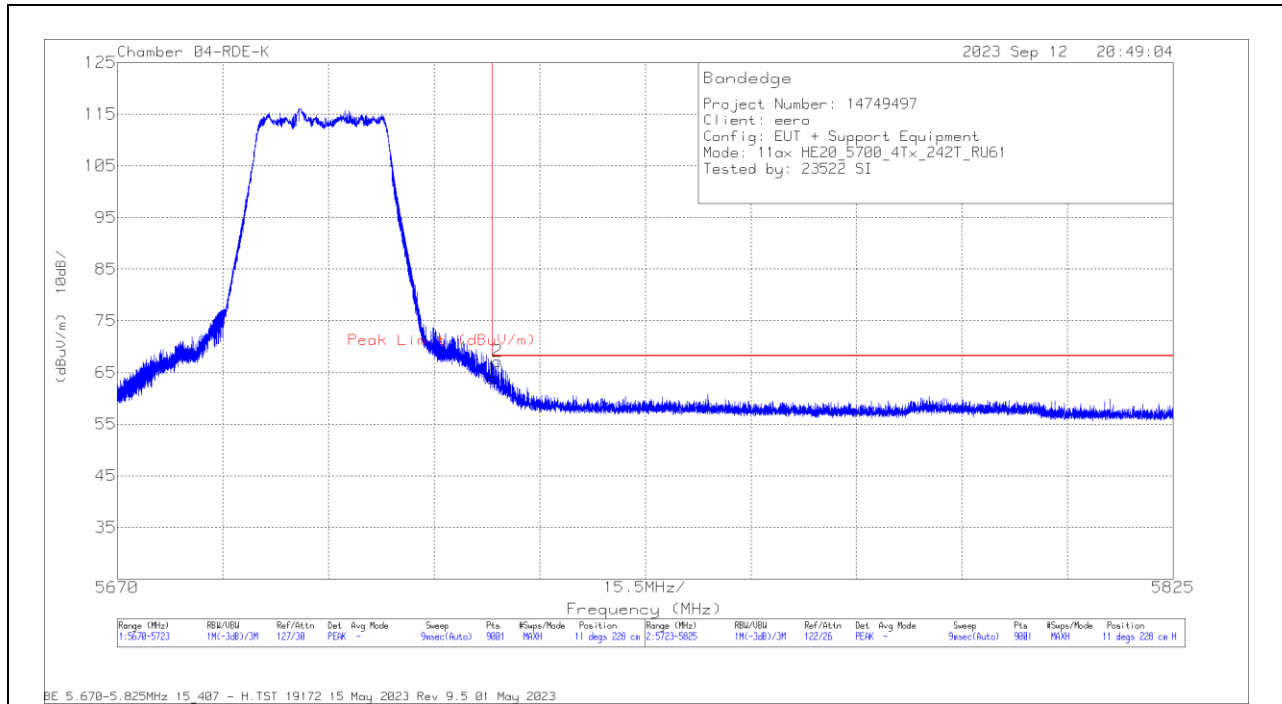


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	58.52	Pk	34.7	-29.4	63.82	68.2	-4.38	11	228	H
2	5725.822	61.74	Pk	34.7	-29.3	67.14	68.2	-1.06	11	228	H

Pk - Peak detector

VERTICAL RESULT

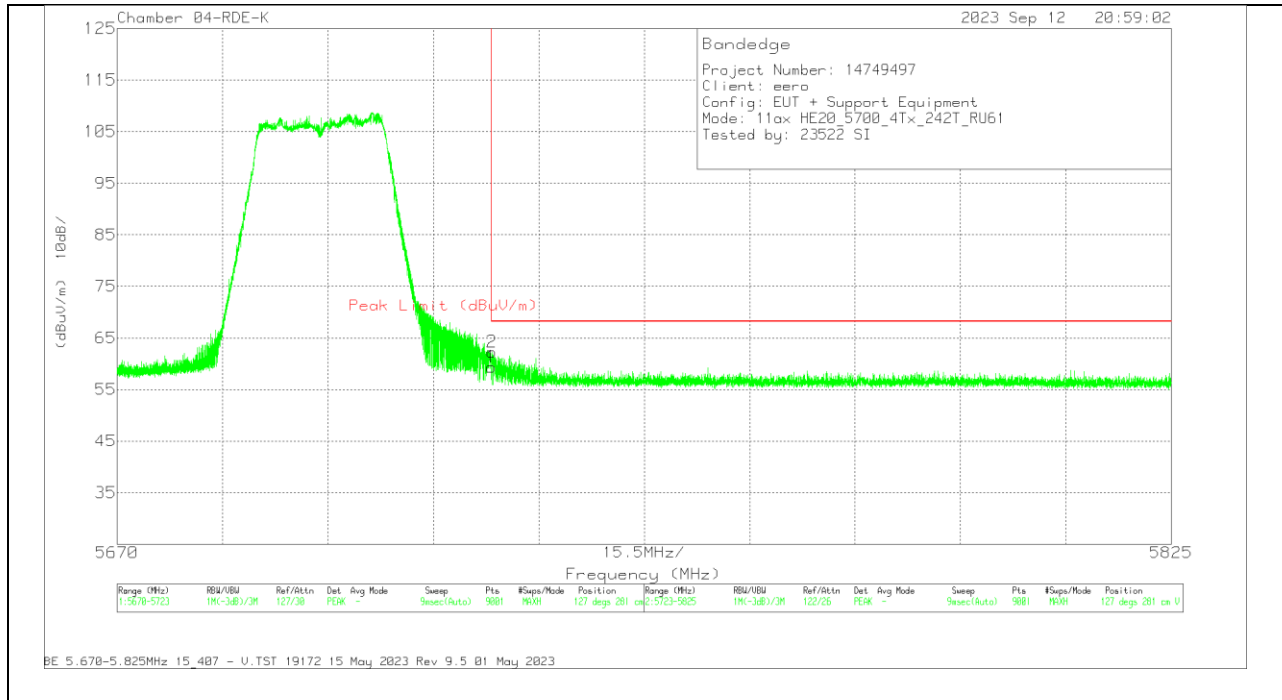

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	54.06	Pk	34.7	-29.4	59.36	68.2	-8.84	127	281	V
2	5725.108	56.97	Pk	34.7	-29.4	62.27	68.2	-5.93	127	281	V


Pk - Peak detector

10.1.10. TX ABOVE 1 GHz 802.11be EHT20 MODE IN THE 5.6GHz BAND

1TX Antenna 6 OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

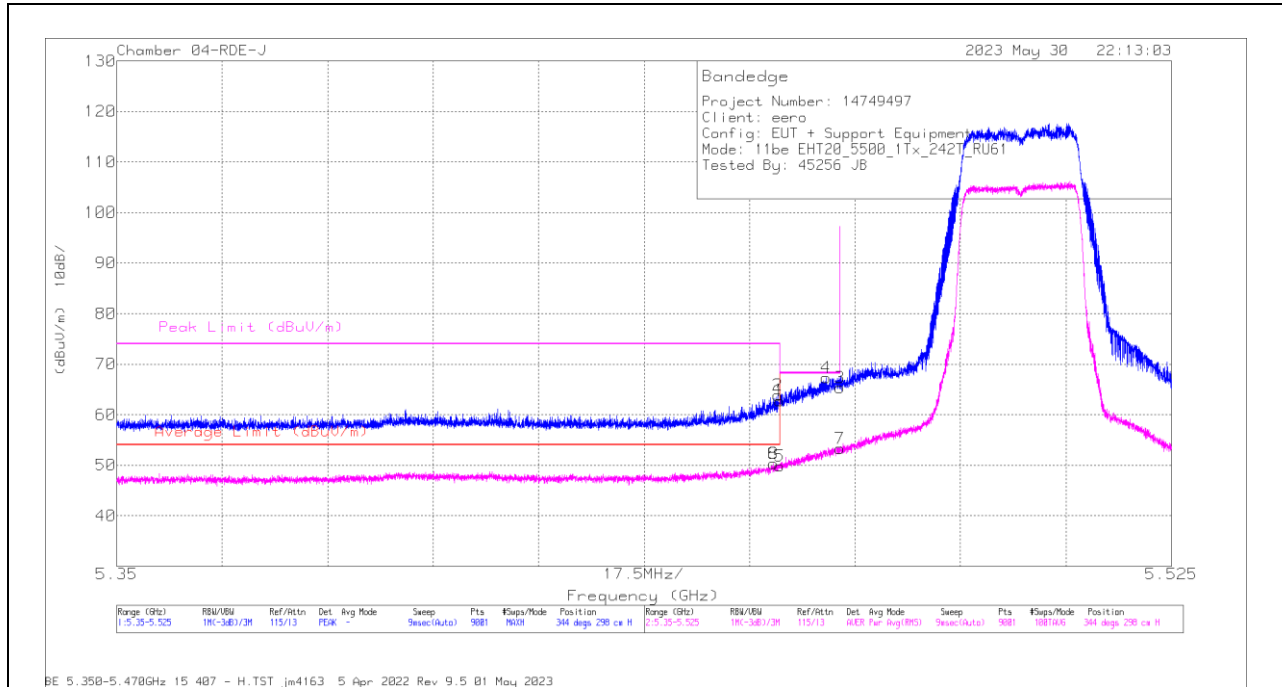

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	CbI/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.3	Pk	34.9	-13.5	62.7	-	-	68.2	-5.5	344	298	H
2	* 5.459684	42.49	Pk	34.9	-13.5	63.89	-	-	74	-10.11	344	298	H
3	5.47	44.06	Pk	34.8	-13.5	65.36	-	-	68.2	-2.84	344	298	H
4	5.467675	45.91	Pk	34.9	-13.5	67.31	-	-	68.2	-0.89	344	298	H
5	* 5.46	28.45	RMS	34.9	-13.5	49.85	54	-4.15	-	-	344	298	H
6	* 5.458964	28.98	RMS	34.9	-13.6	50.28	54	-3.72	-	-	344	298	H
7	5.47	32.03	RMS	34.8	-13.5	53.33	-	-	-	-	344	298	H
8	* 5.458964	28.98	RMS	34.9	-13.6	50.28	54	-3.72	-	-	344	298	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

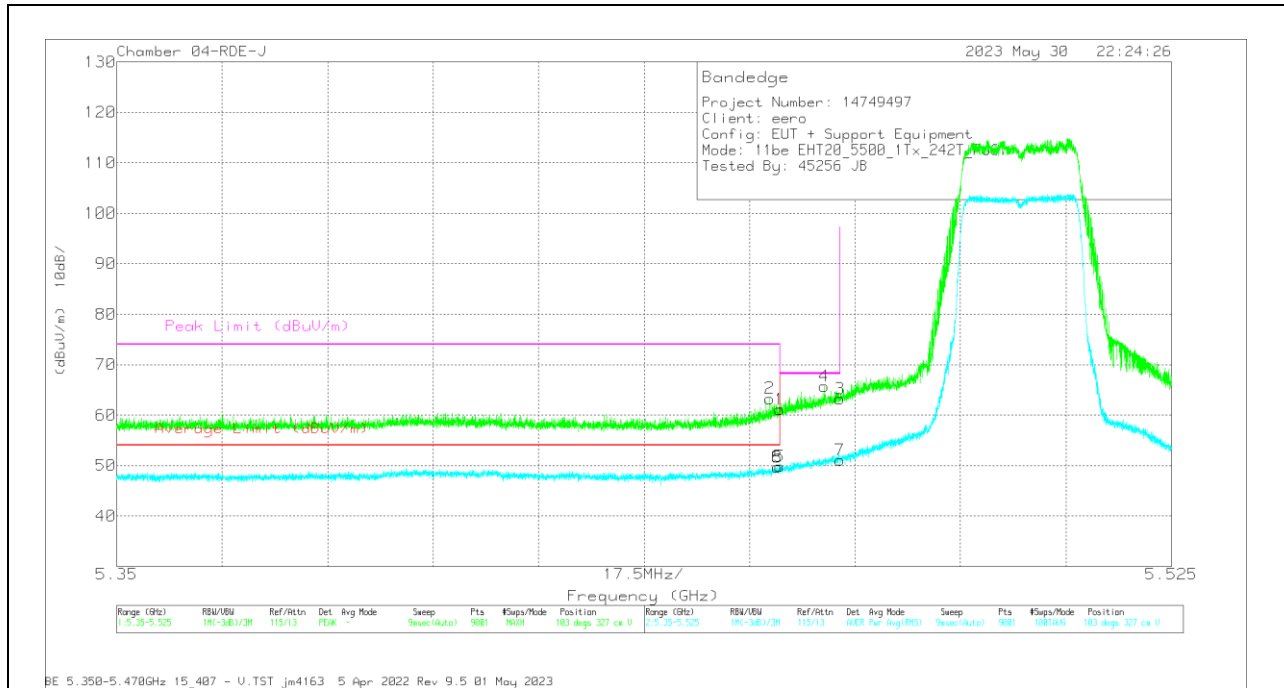


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.72	Pk	34.9	-13.5	61.12	-	-	68.2	-7.08	103	327	V
2	* 5.458361	42	Pk	34.9	-13.6	63.3	-	-	74	-10.7	103	327	V
3	5.47	41.89	Pk	34.8	-13.5	63.19	-	-	68.2	-5.01	103	327	V
4	5.467383	44.3	Pk	34.9	-13.5	65.7	-	-	68.2	-2.5	103	327	V
5	* 5.46	27.88	RMS	34.9	-13.5	49.28	54	-4.72	-	-	103	327	V
6	* 5.459567	27.73	RMS	34.9	-13.5	49.13	54	-4.87	-	-	103	327	V
7	5.47	29.15	RMS	34.8	-13.5	50.45	-	-	-	-	103	327	V
8	* 5.459567	27.73	RMS	34.9	-13.5	49.13	54	-4.87	-	-	103	327	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

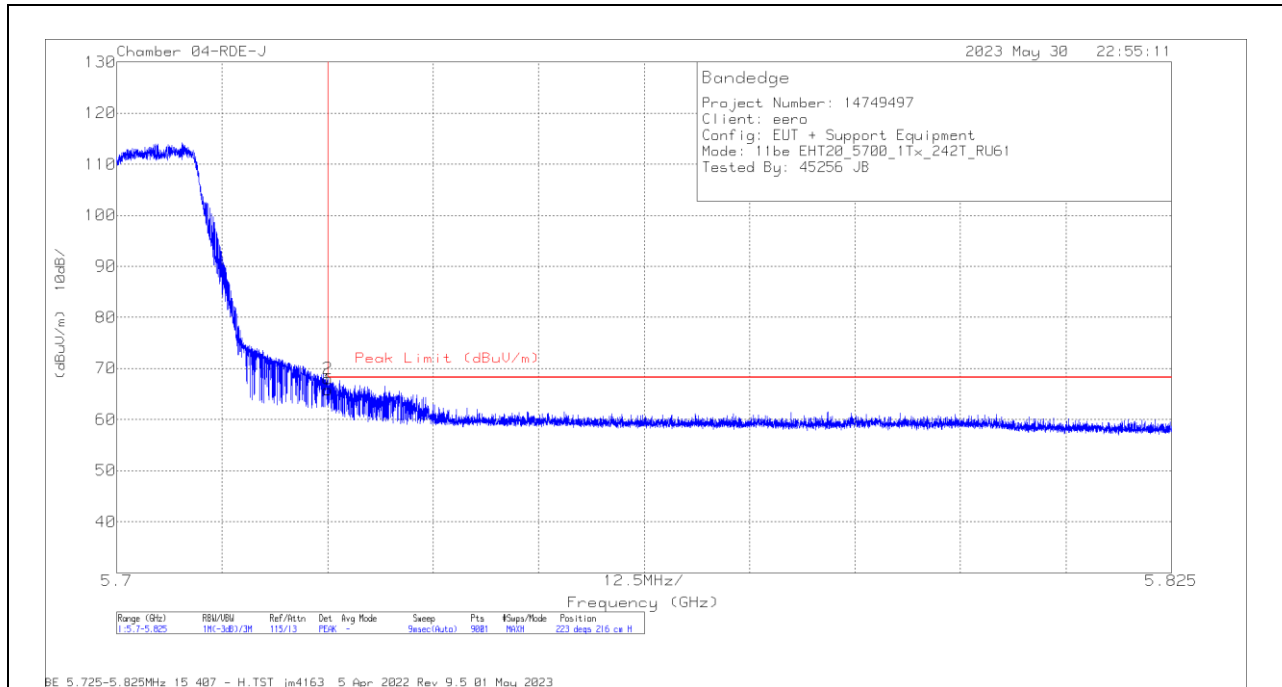


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.17	Pk	34.7	-13.1	65.77	68.2	-2.43	223	216	H
2	5.725028	46.39	Pk	34.7	-13.1	67.99	68.2	-.21	223	216	H

Pk - Peak detector

VERTICAL RESULT

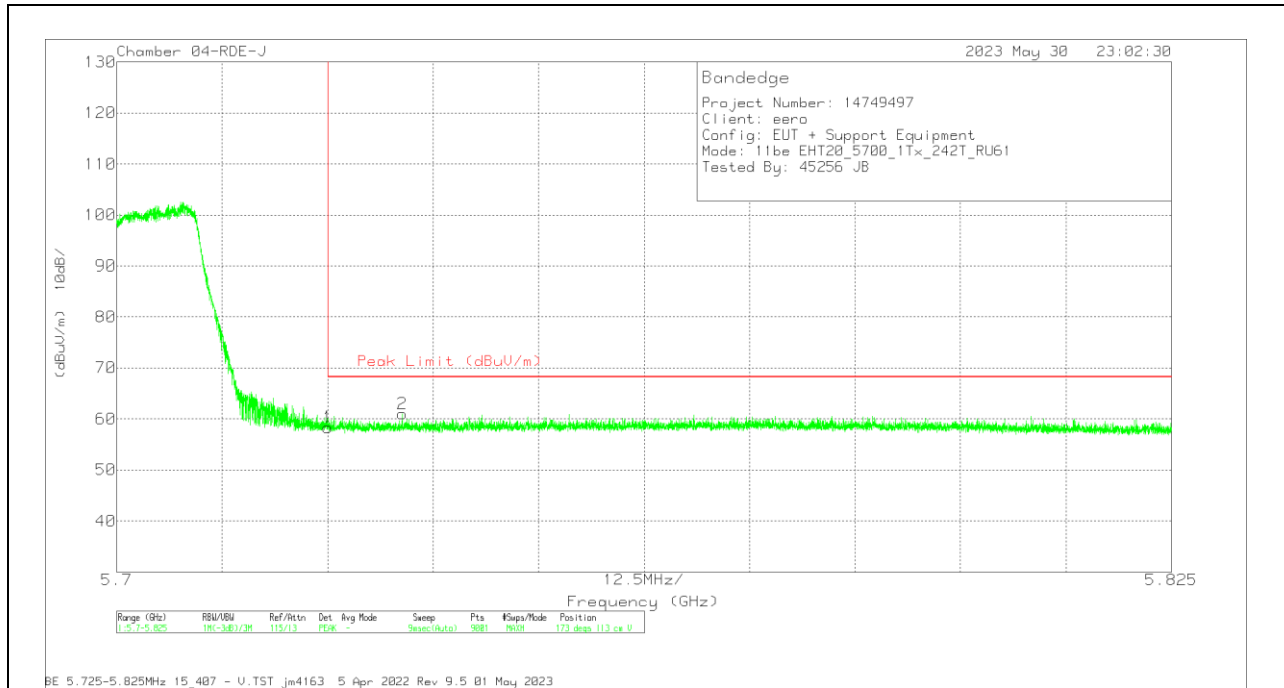

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.77	Pk	34.7	-13.1	58.37	68.2	-9.83	173	113	V
2	5.733875	39.36	Pk	34.7	-13.1	60.96	68.2	-7.24	173	113	V

Pk - Peak detector

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

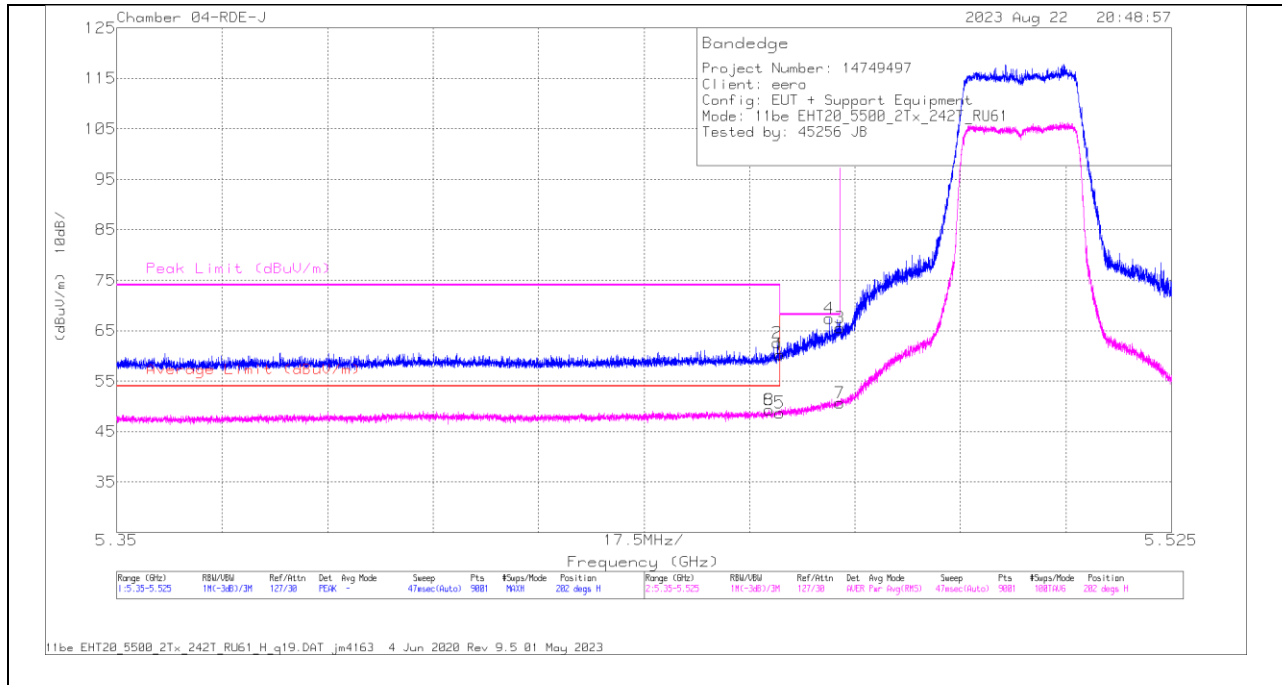


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	55.43	Pk	34.6	-29.8	60.23	-	-	68.2	-7.97	202	148	H
2	* 5.459586	57.79	Pk	34.6	-29.8	62.59	-	-	74	-11.41	202	148	H
3	5.47	60.89	Pk	34.6	-29.9	65.59	-	-	68.2	-2.61	202	148	H
4	5.46822	62.61	Pk	34.6	-29.8	67.41	-	-	68.2	-0.79	202	148	H
5	* 5.46	43.94	RMS	34.6	-29.8	48.74	54	-5.26	-	-	202	148	H
6	* 5.458245	44.55	RMS	34.6	-29.9	49.25	54	-4.75	-	-	202	148	H
7	5.47	45.96	RMS	34.6	-29.9	50.66	-	-	-	-	202	148	H
8	* 5.458245	44.55	RMS	34.6	-29.9	49.25	54	-4.75	-	-	202	148	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

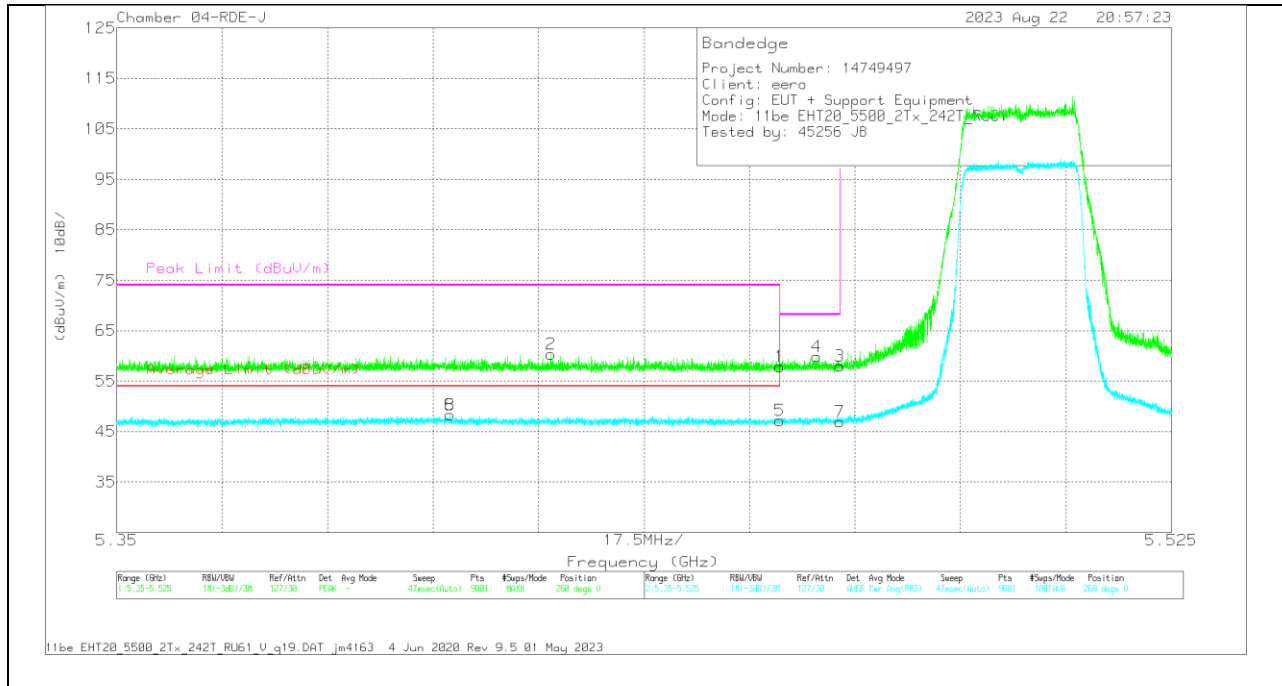

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	53.09	Pk	34.6	-29.8	57.89	-	-	68.2	-10.31	260	319	V
2	* 5.422021	55.67	Pk	34.6	-29.9	60.37	-	-	74	-13.63	260	319	V
3	5.47	53.25	Pk	34.6	-29.9	57.95	-	-	68.2	-10.25	260	319	V
4	5.46612	55.06	Pk	34.6	-29.8	59.86	-	-	68.2	-8.34	260	319	V
5	* 5.46	42.35	RMS	34.6	-29.8	47.15	54	-6.85	-	-	260	319	V
6	* 5.405318	43.55	RMS	34.6	-29.9	48.25	54	-5.75	-	-	260	319	V
7	5.47	42.18	RMS	34.6	-29.9	46.88	-	-	-	-	260	319	V
8	* 5.405318	43.55	RMS	34.6	-29.9	48.25	54	-5.75	-	-	260	319	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

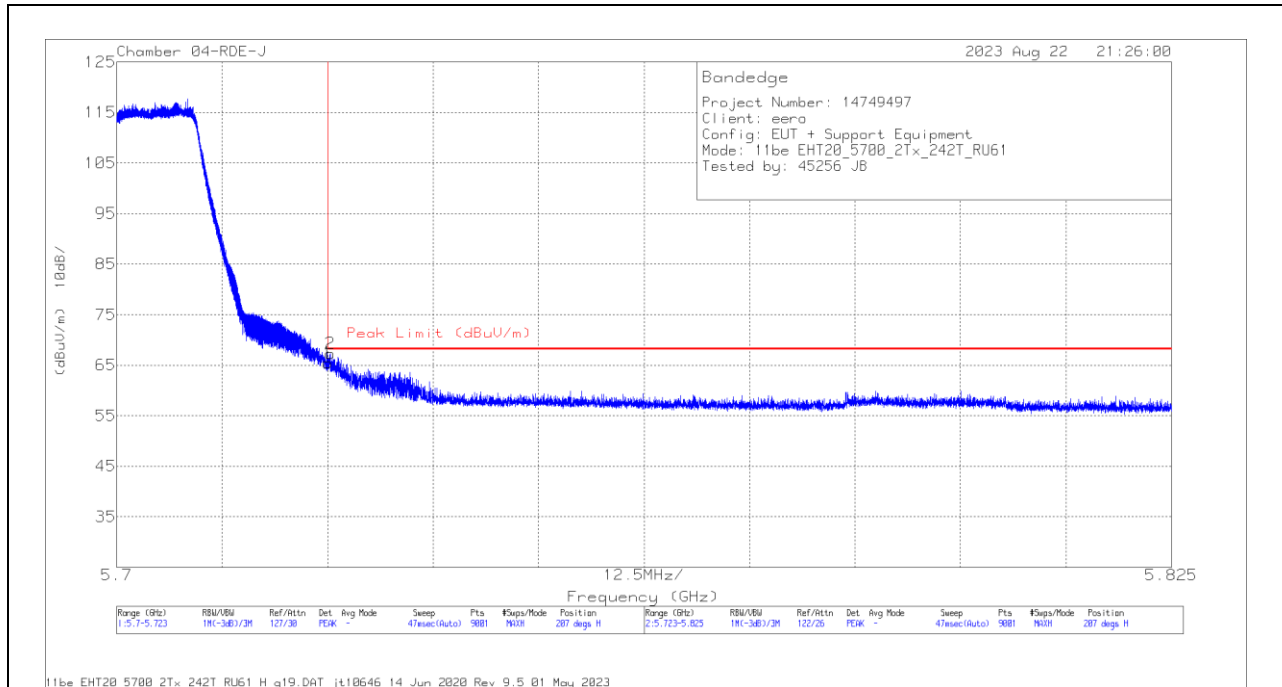


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	60.18	Pk	34.7	-29.4	65.48	68.2	-2.72	207	234	H
2	5.725335	62.02	Pk	34.7	-29.4	67.32	68.2	-0.88	207	234	H

Pk - Peak detector

VERTICAL RESULT

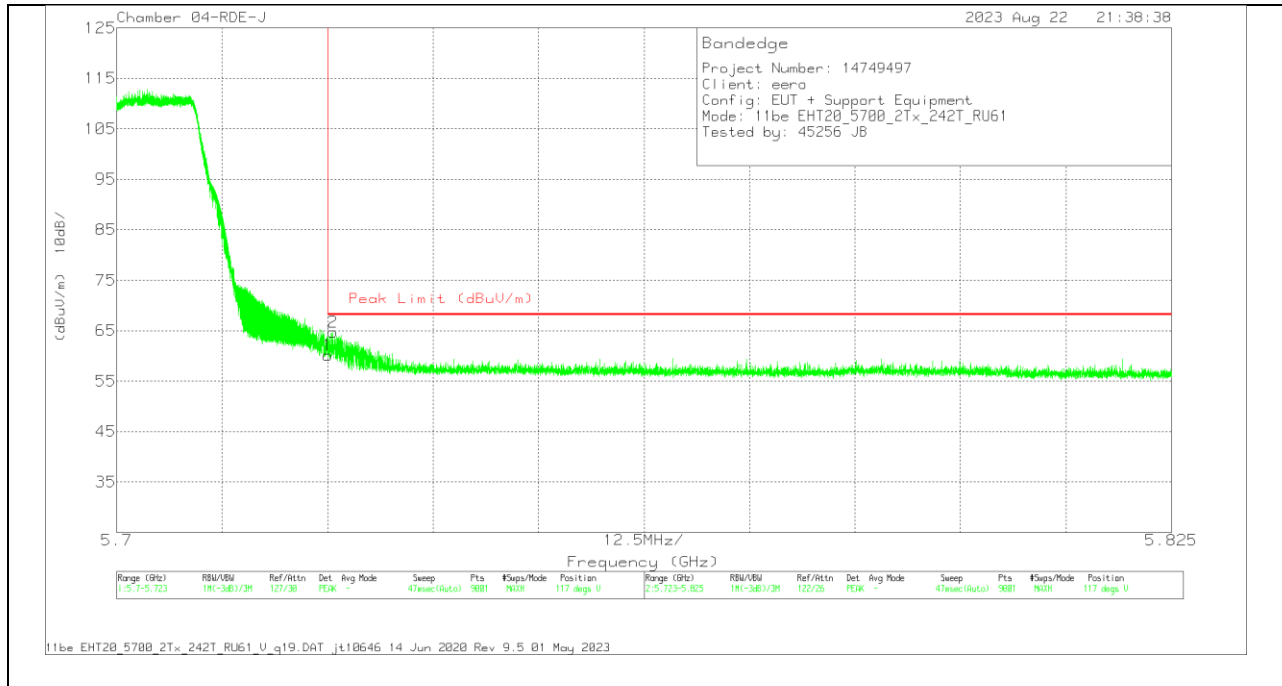

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	54.75	Pk	34.7	-29.4	60.05	68.2	-8.15	117	383	V
2	5.725595	59.3	Pk	34.7	-29.3	64.7	68.2	-3.5	117	383	V

Pk - Peak detector

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 242-Tones, RU Index 61

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

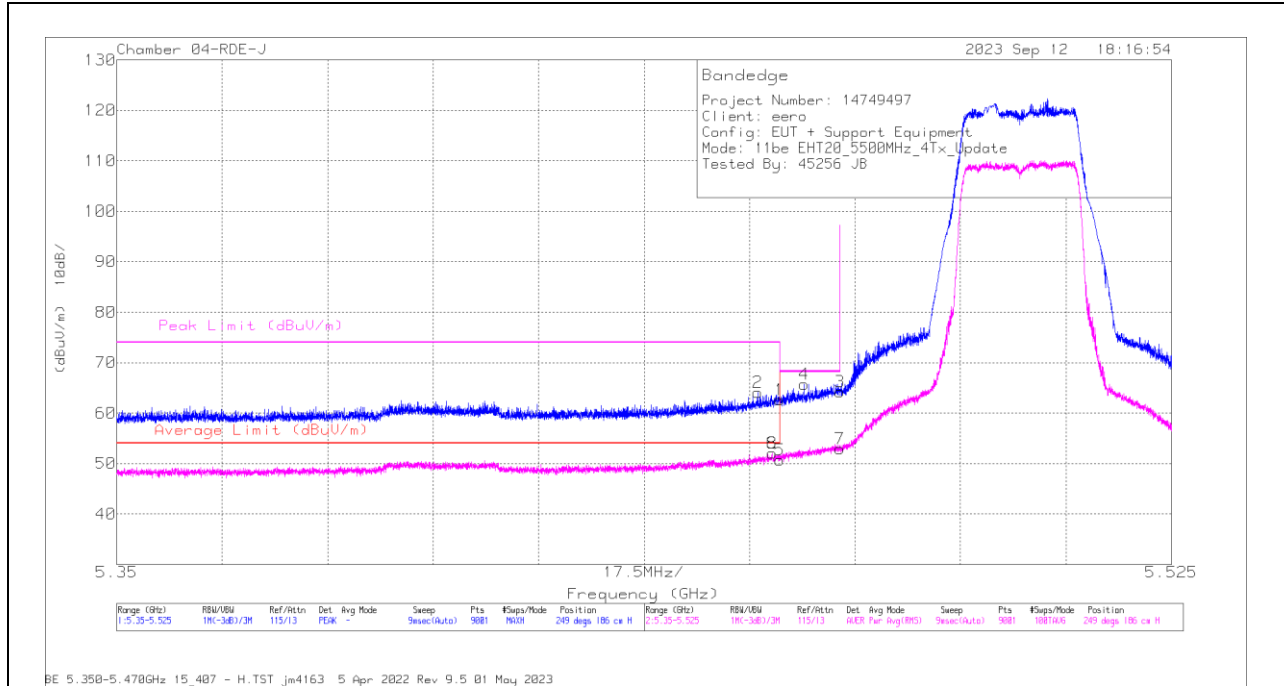

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.17	Pk	34.9	-13.5	62.57	-	-	68.2	-5.63	249	186	H
2	* 5.456359	42.75	Pk	34.9	-13.6	64.05	-	-	74	-9.95	249	186	H
3	5.47	42.99	Pk	34.8	-13.5	64.29	-	-	68.2	-3.91	249	186	H
4	5.464059	44.36	Pk	34.9	-13.5	65.76	-	-	68.2	-2.44	249	186	H
5	* 5.46	29.35	RMS	34.9	-13.5	50.75	54	-3.25	-	-	249	186	H
6	* 5.45877	30.77	RMS	34.9	-13.6	52.07	54	-1.93	-	-	249	186	H
7	5.47	31.65	RMS	34.8	-13.5	52.95	-	-	-	-	249	186	H
8	* 5.45877	30.77	RMS	34.9	-13.6	52.07	54	-1.93	-	-	249	186	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

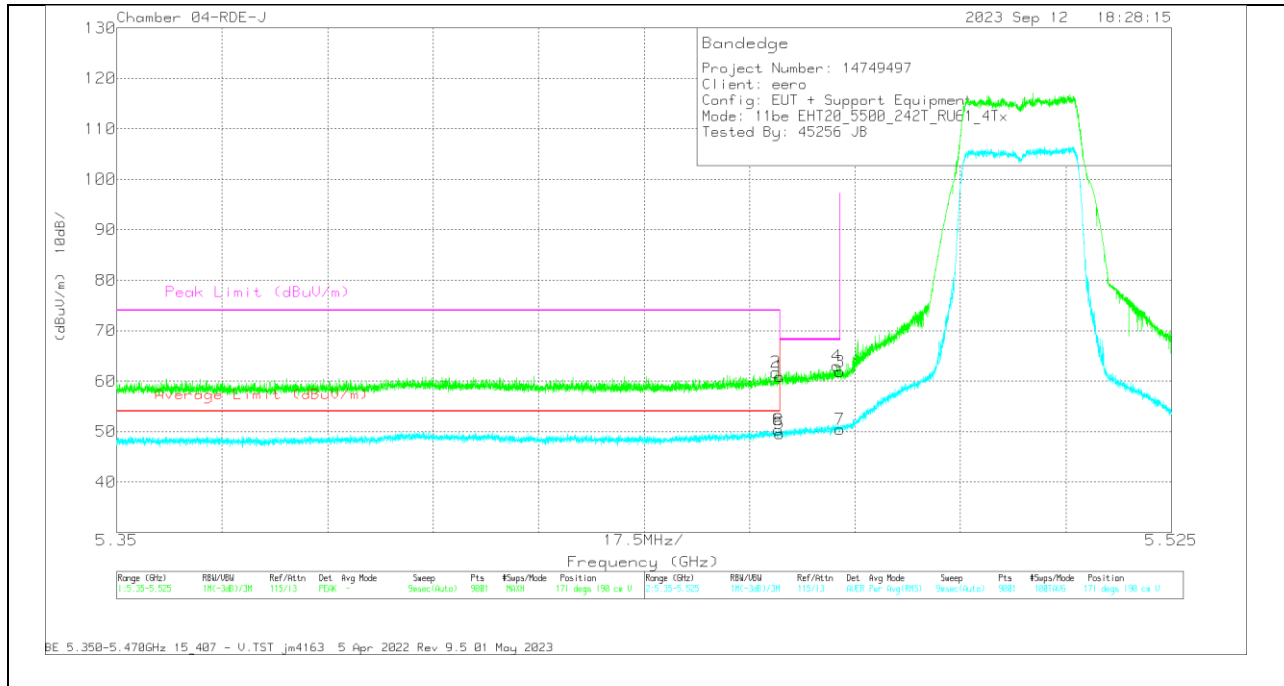

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dBm)	Cbl/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.52	Pk	34.9	-13.5	0	60.92	-	-	68.2	-7.28	171	190	V
2	* 5.459431	40.39	Pk	34.9	-13.6	0	61.69	-	-	74	-12.31	171	190	V
3	* 5.47	40.62	Pk	34.8	-13.5	0	61.92	-	-	68.2	-6.28	171	190	V
4	5.469483	41.55	Pk	34.8	-13.4	0	62.95	-	-	68.2	-5.25	171	190	V
5	* 5.46	27.64	RMS	34.9	-13.5	.59	49.63	54	-4.37	-	-	171	190	V
6	* 5.4598	28.37	RMS	34.9	-13.5	.59	50.36	54	-3.64	-	-	171	190	V
7	* 5.47	28.61	RMS	34.8	-13.5	.59	50.5	-	-	-	-	171	190	V
8	* 5.4598	28.37	RMS	34.9	-13.5	.59	50.36	54	-3.64	-	-	171	190	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

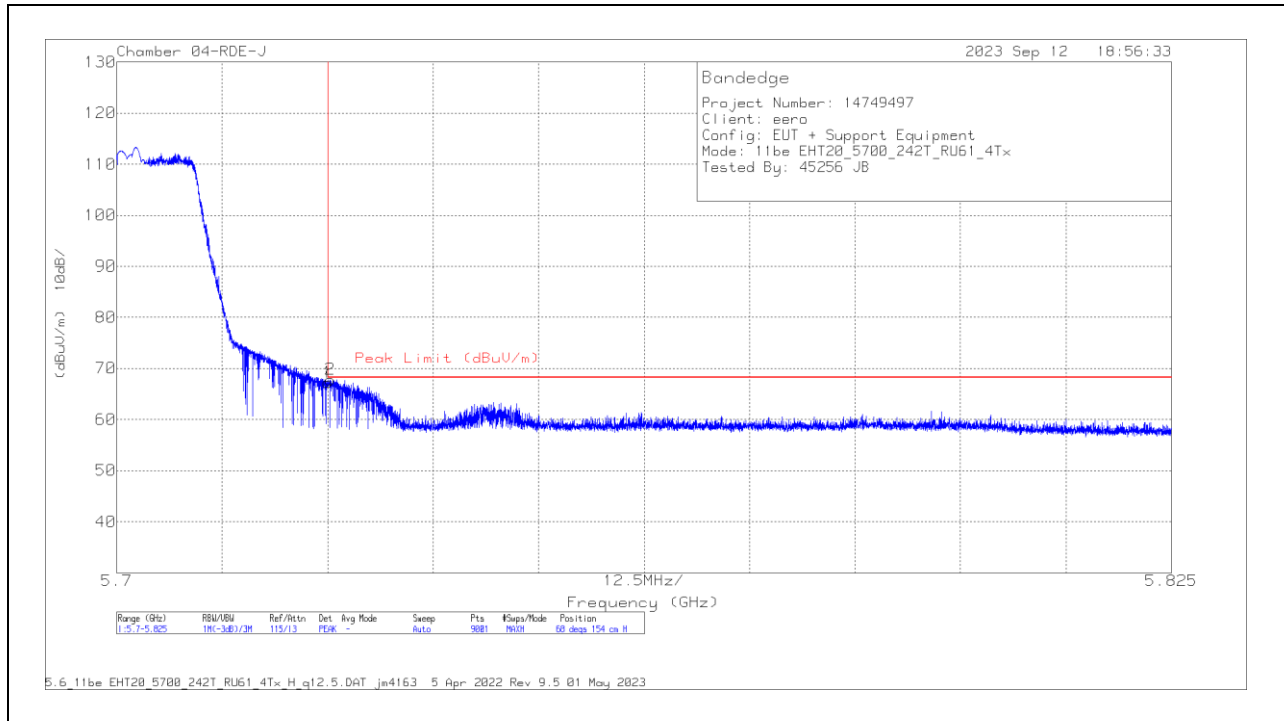


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	45.72	Pk	34.7	-13.1	67.32	68.2	-.88	68	154	H
2	5.725347	46.23	Pk	34.7	-13.1	67.83	68.2	-.37	68	154	H

Pk - Peak detector

VERTICAL RESULT

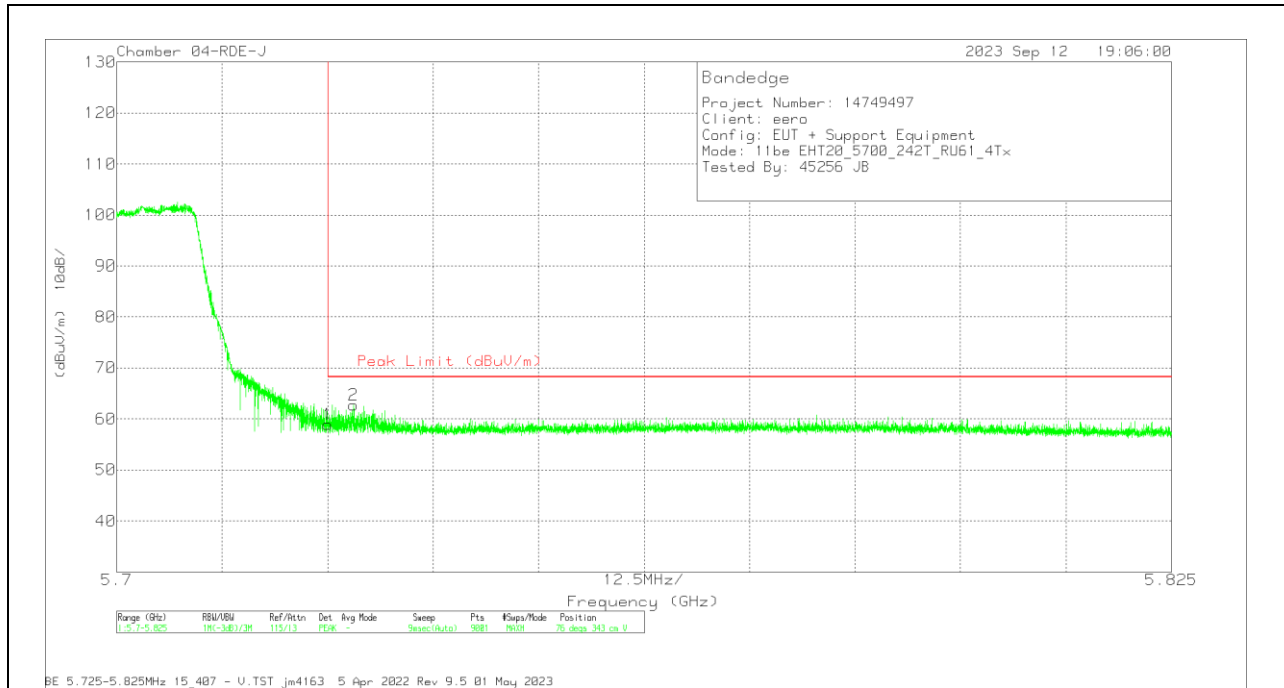


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	37.33	Pk	34.7	-13.1	58.93	68.2	-9.27	76	343	V
2	5.728084	41.16	Pk	34.7	-13.1	62.76	68.2	-5.44	76	343	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

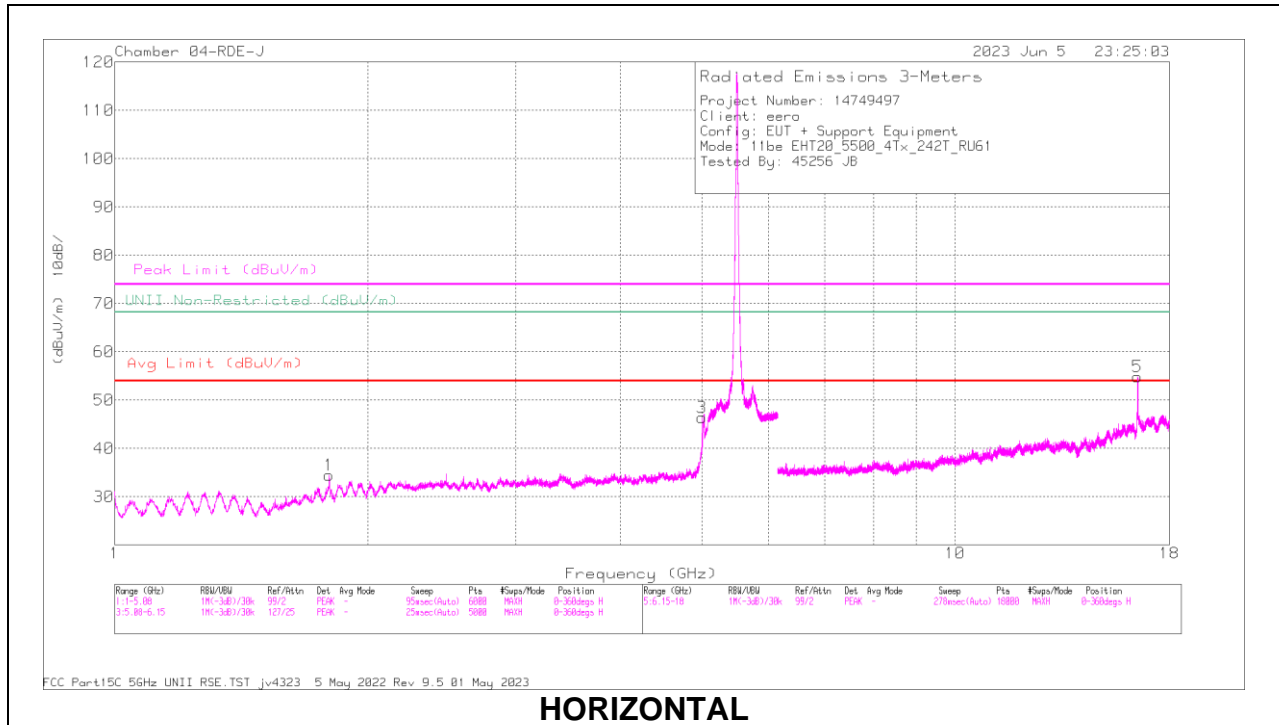

HORIZONTAL

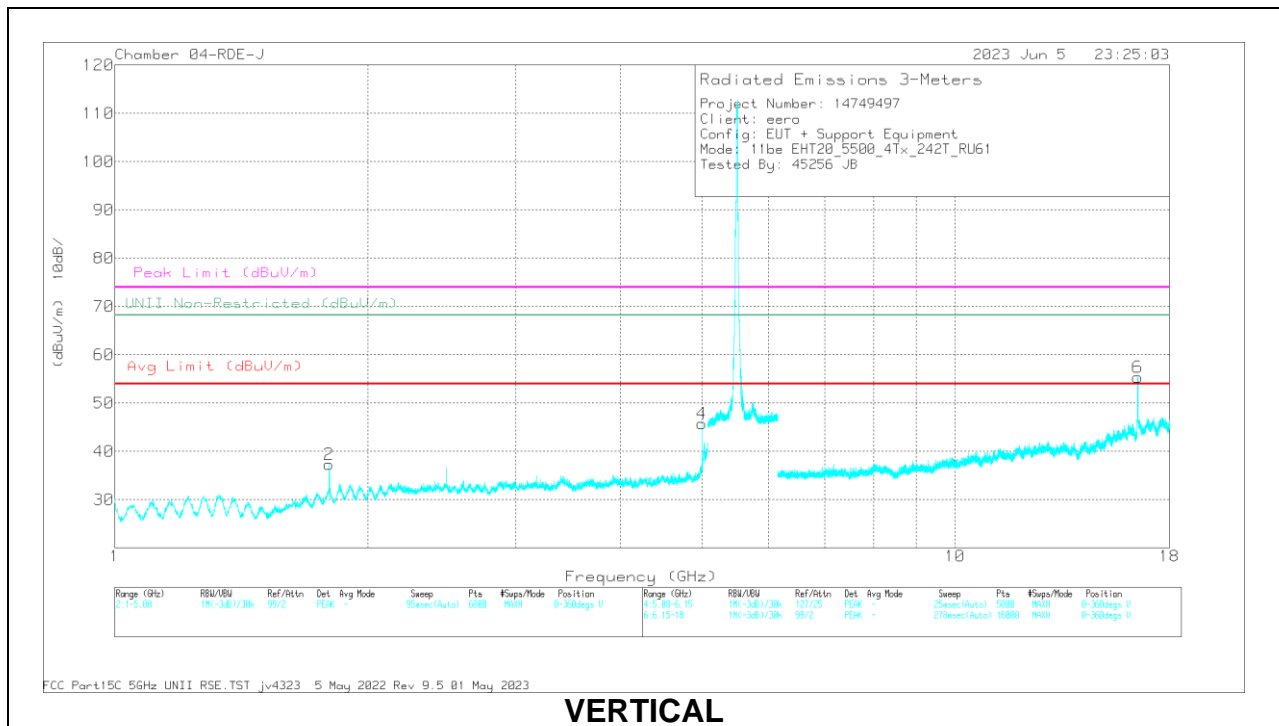

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.799575	59.98	PK-U	30.5	-46.5	43.98	-	-	-	-	68.2	-24.22	221	200	H
3	* 4.999765	63.35	PK-U	34.2	-43.5	54.05	-	-	74	-19.95	-	-	15	222	H
	* 5.000101	54.93	ADR	34.2	-43.5	45.63	54	-8.37	-	-	-	-	15	222	H
2	1.800041	60.76	PK-U	30.5	-46.5	44.76	-	-	-	-	68.2	-23.44	316	162	V
4	* 5.000062	60.73	PK-U	34.2	-43.5	51.43	-	-	74	-22.57	-	-	330	144	V
	* 5.000014	55.91	ADR	34.2	-43.5	46.61	54	-7.39	-	-	-	-	330	144	V
5	16.50079	65.09	PK-U	41.9	-39	67.99	-	-	-	-	68.2	-21	141	192	H
6	16.500832	64.99	PK-U	41.9	-39	67.89	-	-	-	-	68.2	-31	165	111	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

MID CHANNEL

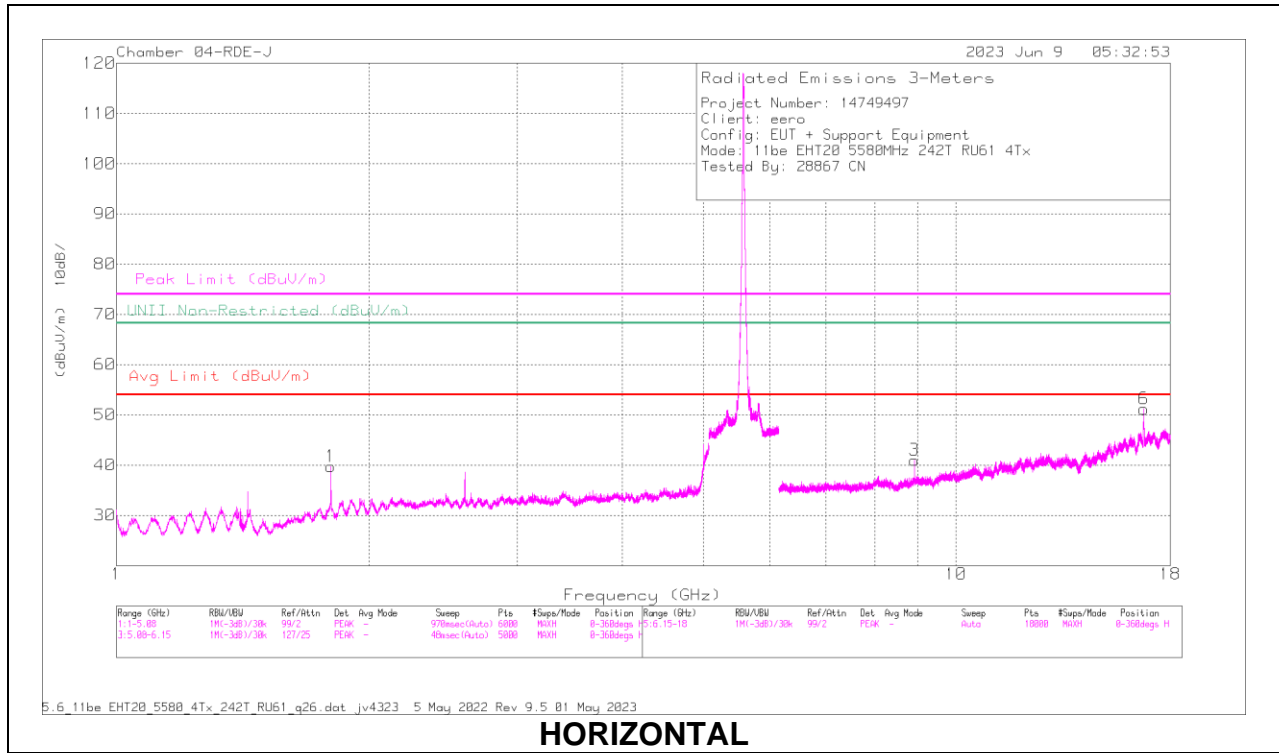

HORIZONTAL

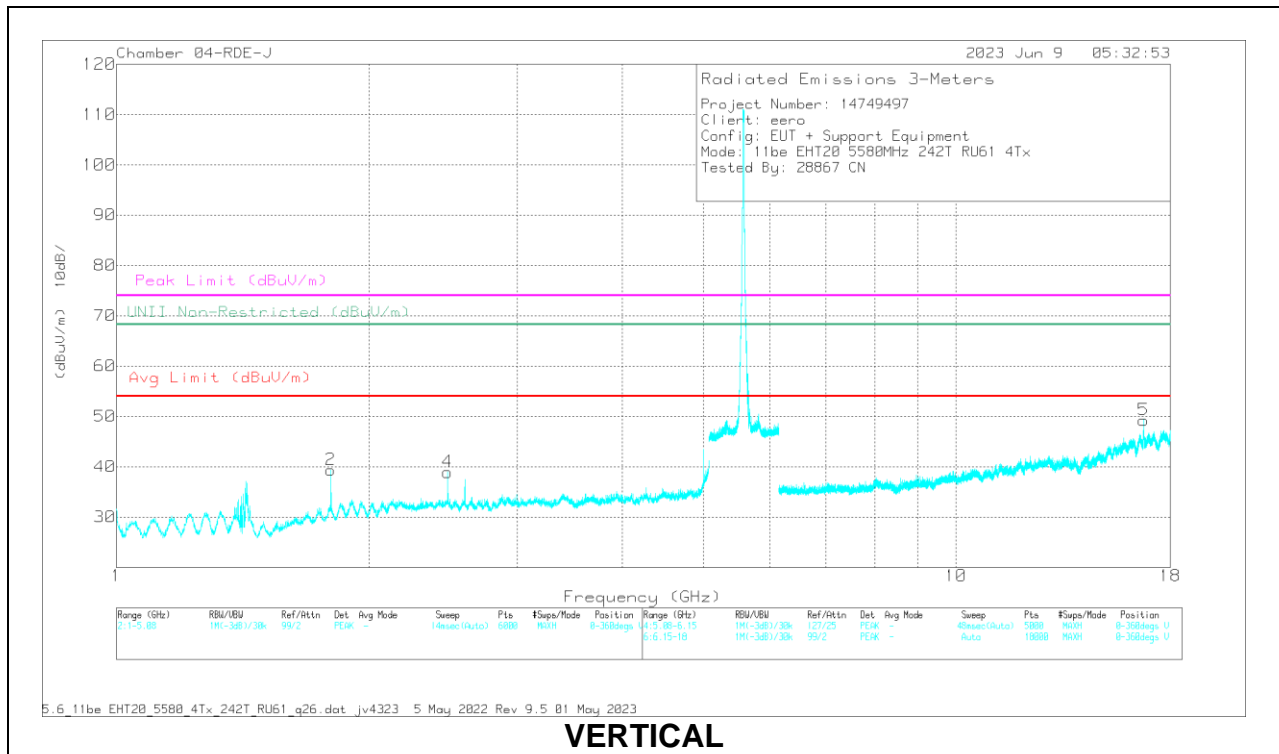


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.800045	62.3	PK-U	30.5	-46.5	46.3	-	-	-	-	68.2	-21.9	325	195	H
2	1.80031	62.1	PK-U	30.5	-46.5	46.1	-	-	-	-	68.2	-22.1	307	106	V
4	2.479824	59.2	PK-U	32.2	-46.2	45.2	-	-	-	-	68.2	-23	283	189	V
3	8.927923	54.41	PK-U	36.1	-41.2	49.31	-	-	-	-	68.2	-18.89	122	219	H
6	16.739447	61.25	PK-U	42.3	-40.3	63.25	-	-	-	-	68.2	-4.95	210	198	H
5	16.728277	59.43	PK-U	42.3	-40.2	61.53	-	-	-	-	68.2	-6.67	196	188	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

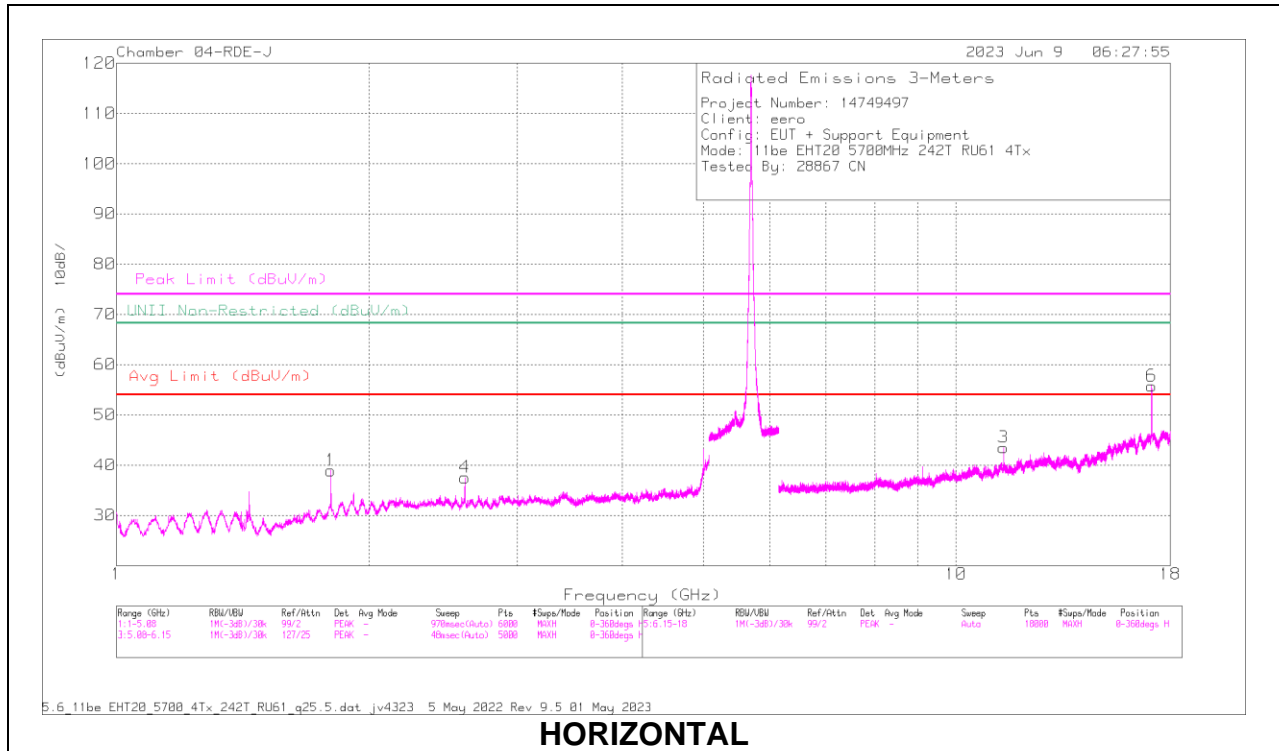

HORIZONTAL

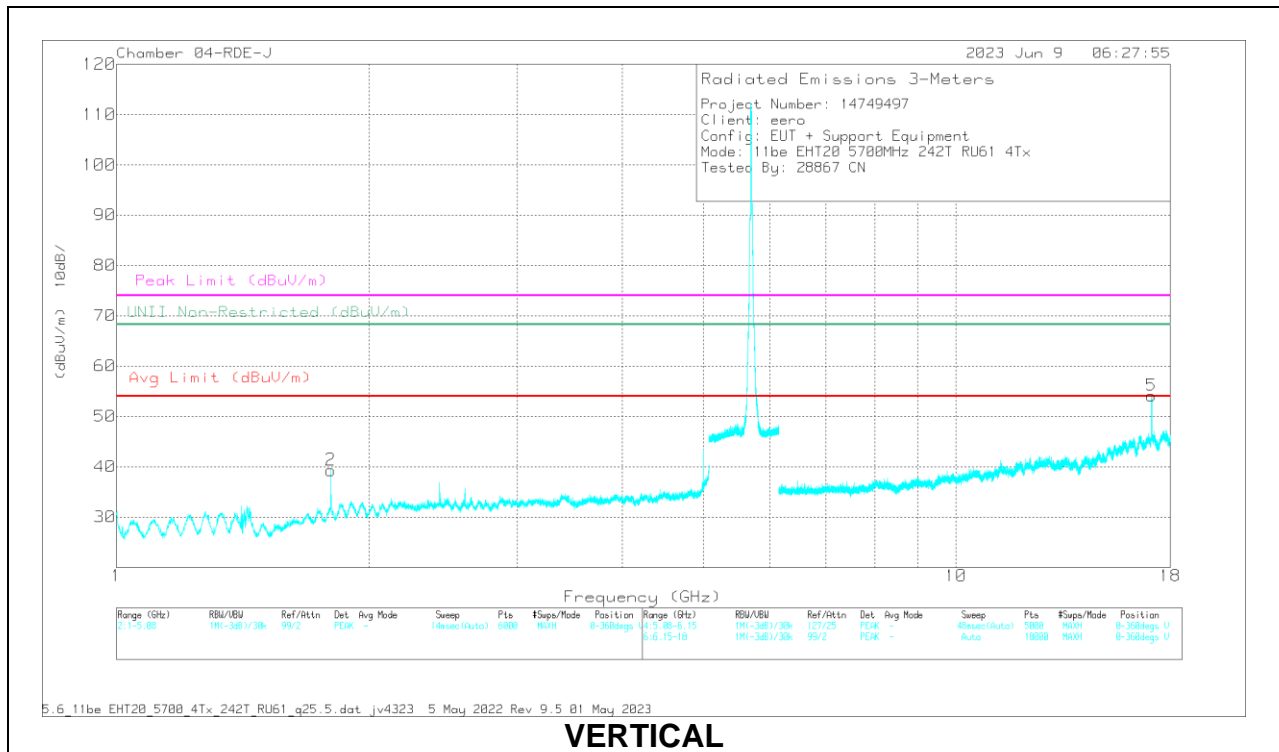


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.799641	61.51	PK-U	30.5	-46.5	45.51	-	-	-	-	68.2	-22.69	324	199	H
4	2.599636	60.16	PK-U	32.3	-46.6	45.86	-	-	-	-	68.2	-22.34	47	151	H
2	1.799883	61.64	PK-U	30.5	-46.5	45.64	-	-	-	-	68.2	-22.56	309	172	V
3	* 11.393563	54.66	PK-U	38.1	-41.1	51.66	-	-	74	-22.34	-	-	169	243	H
	* 11.394271	42.66	ADR	38.1	-41.1	39.66	54	-14.34	-	-	-	-	169	243	H
6	17.10301	53.15	PK-U	42.1	-39.2	56.05	-	-	-	-	68.2	-12.15	195	101	H
5	17.100451	52.79	PK-U	42.2	-39.4	55.59	-	-	-	-	68.2	-12.61	176	197	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 144

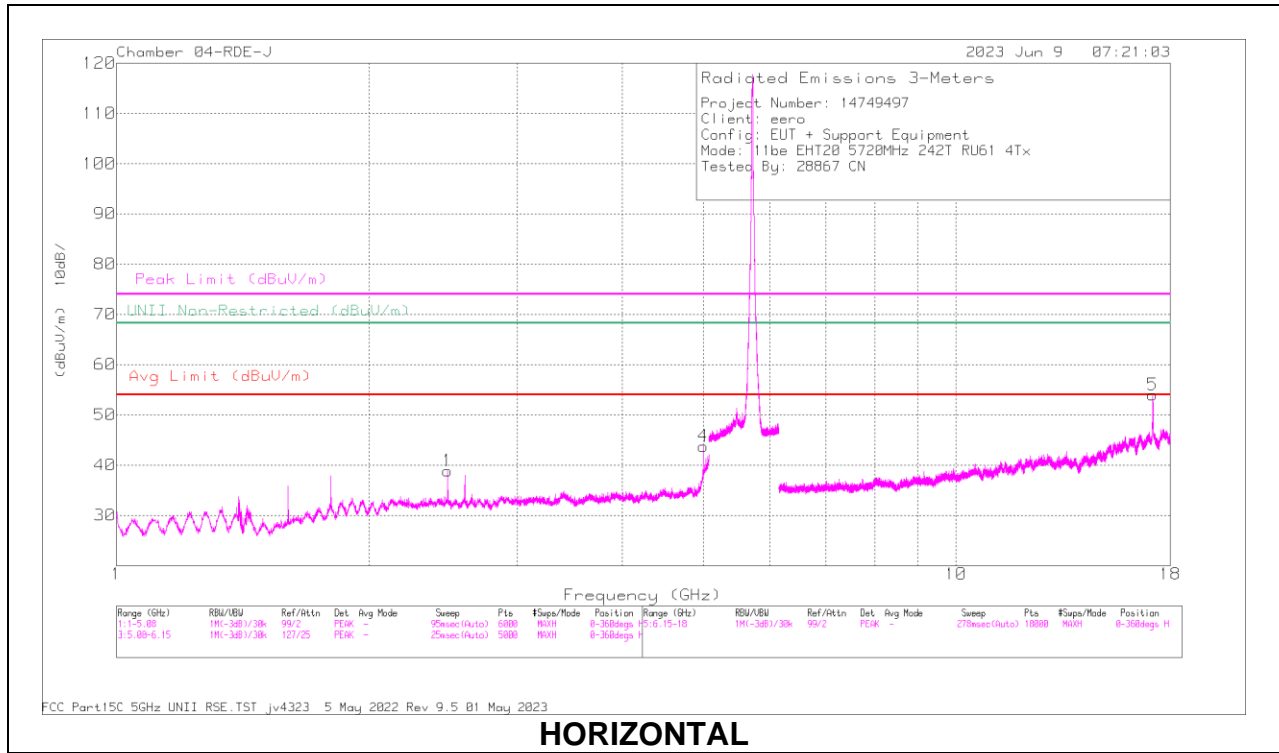

HORIZONTAL

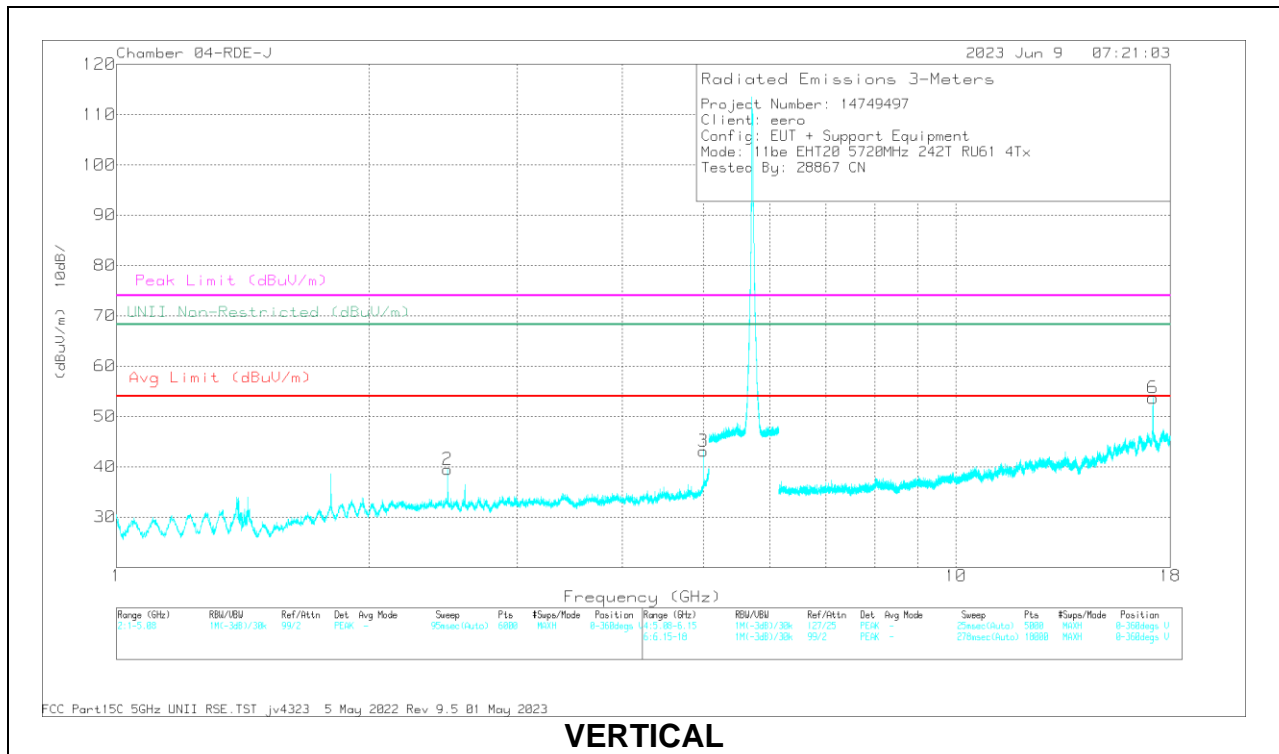

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.47963	57.96	PK-U	32.2	-46.2	43.96	-	-	-	-	68.2	-24.24	121	211	H
4	* 5.00009	60.02	PK-U	34.2	-43.5	50.72	-	-	74	-23.28	-	-	344	126	H
	* 5.00006	52.59	ADR	34.2	-43.5	43.29	54	-10.71	-	-	-	-	344	126	H
2	2.480176	59.04	PK-U	32.2	-46.2	45.04	-	-	-	-	68.2	-23.16	56	354	V
3	* 5.0001	59.28	PK-U	34.2	-43.5	49.98	-	-	74	-24.02	-	-	341	179	V
	* 5.00006	53.76	ADR	34.2	-43.5	44.46	54	-9.54	-	-	-	-	341	179	V
5	17.146824	63.77	PK-U	42.1	-39	66.87	-	-	-	-	68.2	-1.33	145	101	H
6	17.159456	60.07	PK-U	42.1	-39	63.17	-	-	-	-	68.2	-5.03	162	193	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.11. TX ABOVE 1 GHz 802.11ax HE40 MODE IN THE 5.6GHz BAND

1TX Antenna 6 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

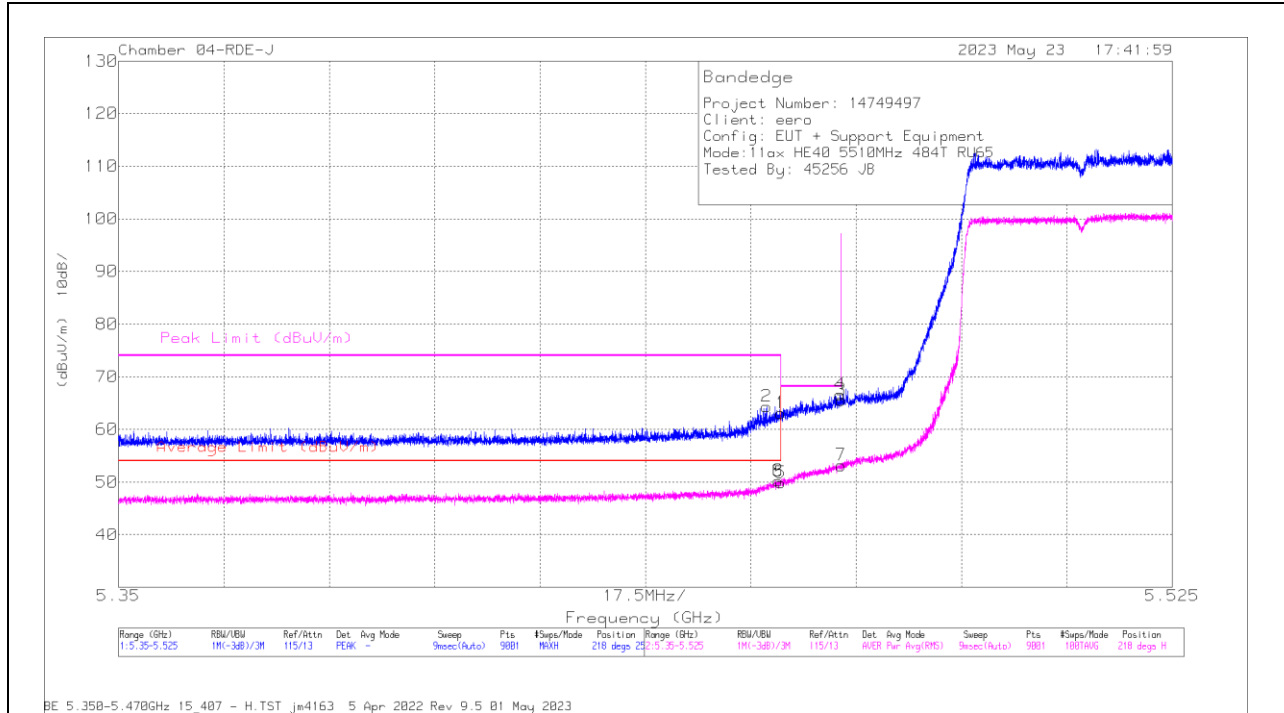


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.29	Pk	34.9	-14.1	63.09	-	-	68.2	-5.11	218	252	H
2	* 5.457623	43.55	Pk	34.9	-14.1	64.35	-	-	74	-9.65	218	252	H
3	5.47	44.89	Pk	34.8	-14.1	65.59	-	-	68.2	-2.61	218	252	H
4	5.469833	45.88	Pk	34.8	-14.1	66.58	-	-	68.2	-1.62	218	252	H
5	* 5.46	29.06	RMS	34.9	-14.1	49.86	54	-4.14	-	-	218	252	H
6	* 5.459548	29.43	RMS	34.9	-14.1	50.23	54	-3.77	-	-	218	252	H
7	5.47	32.45	RMS	34.8	-14.1	53.15	-	-	-	-	218	252	H
8	* 5.459548	29.43	RMS	34.9	-14.1	50.23	54	-3.77	-	-	218	252	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

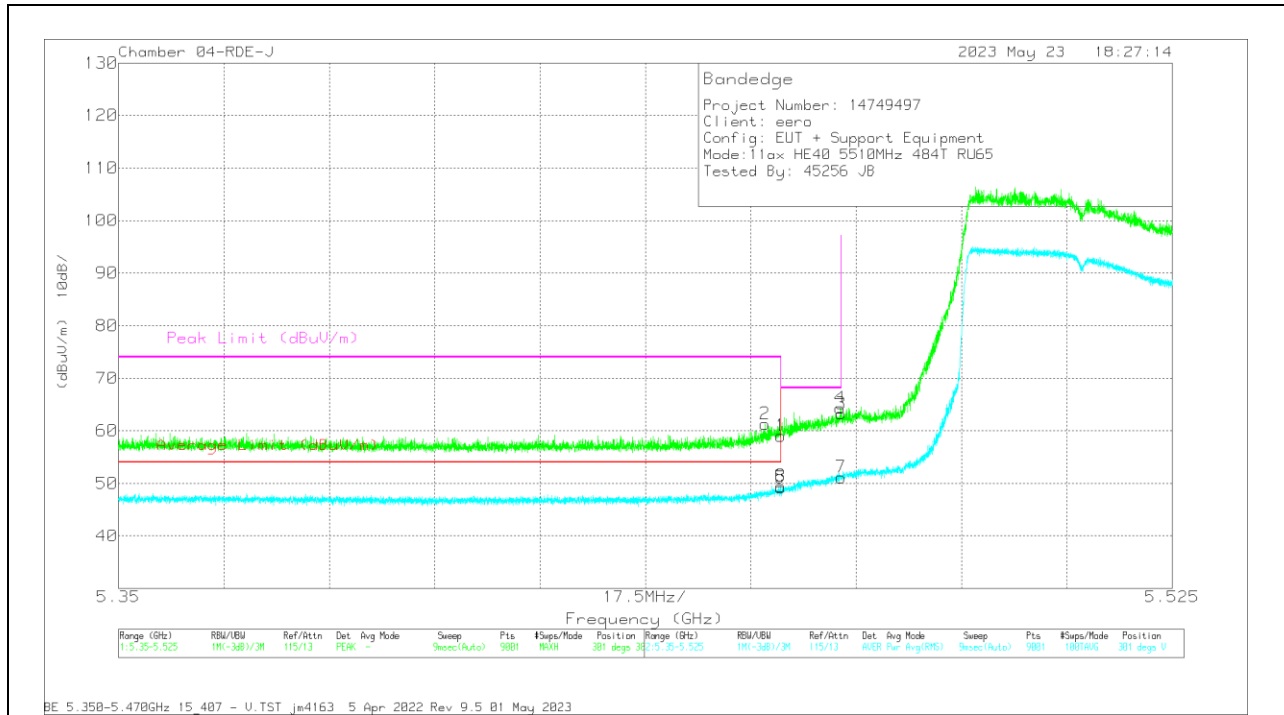


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.23	Pk	34.9	-14.1	59.03	-	-	68.2	-9.17	301	384	V
2	* 5.457389	40.49	Pk	34.9	-14.1	61.29	-	-	74	-12.71	301	384	V
3	5.47	42.53	Pk	34.8	-14.1	63.23	-	-	68.2	-4.97	301	384	V
4	5.469853	43.67	Pk	34.8	-14.1	64.37	-	-	68.2	-3.83	301	384	V
5	* 5.46	27.77	RMS	34.9	-14.1	48.57	54	-5.43	-	-	301	384	V
6	* 5.459995	28.07	RMS	34.9	-14.1	48.87	54	-5.13	-	-	301	384	V
7	5.47	29.83	RMS	34.8	-14.1	50.53	-	-	-	-	301	384	V
8	* 5.459995	28.07	RMS	34.9	-14.1	48.87	54	-5.13	-	-	301	384	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

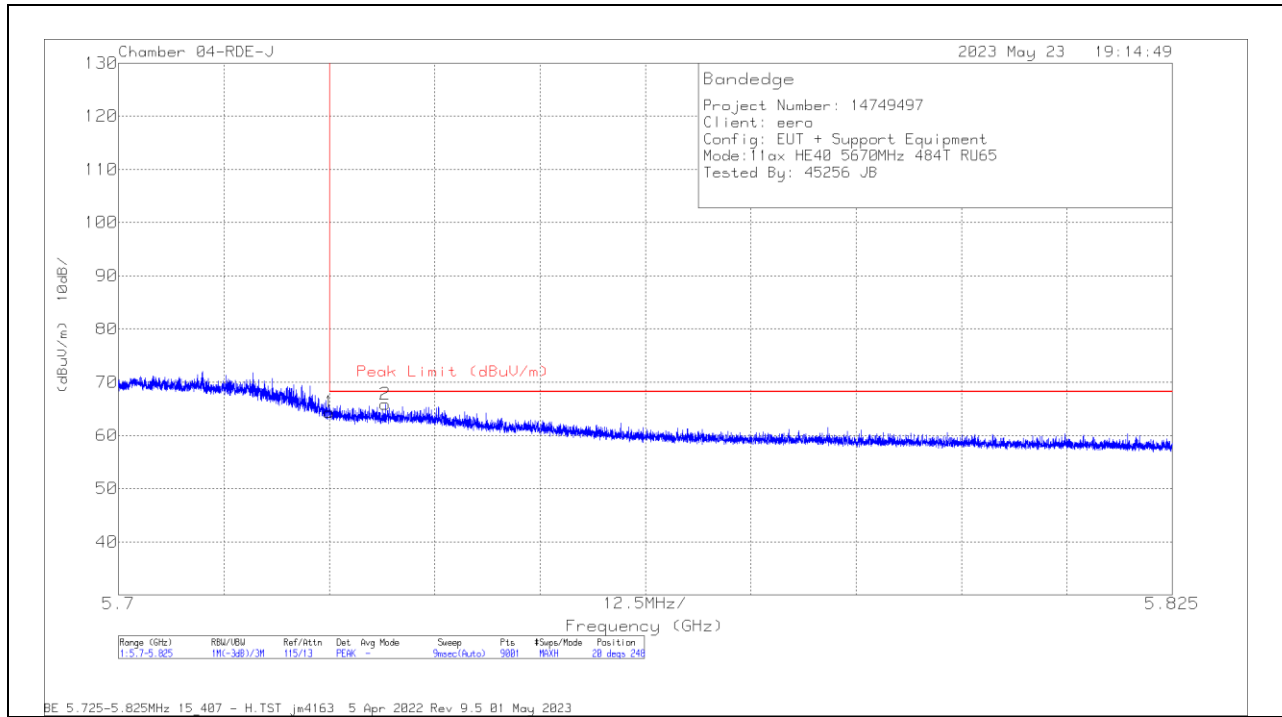


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.02	Pk	34.7	-13.4	64.32	68.2	-3.88	20	248	H
2	5.731639	44.57	Pk	34.7	-13.4	65.87	68.2	-2.33	20	248	H

Pk - Peak detector

VERTICAL RESULT

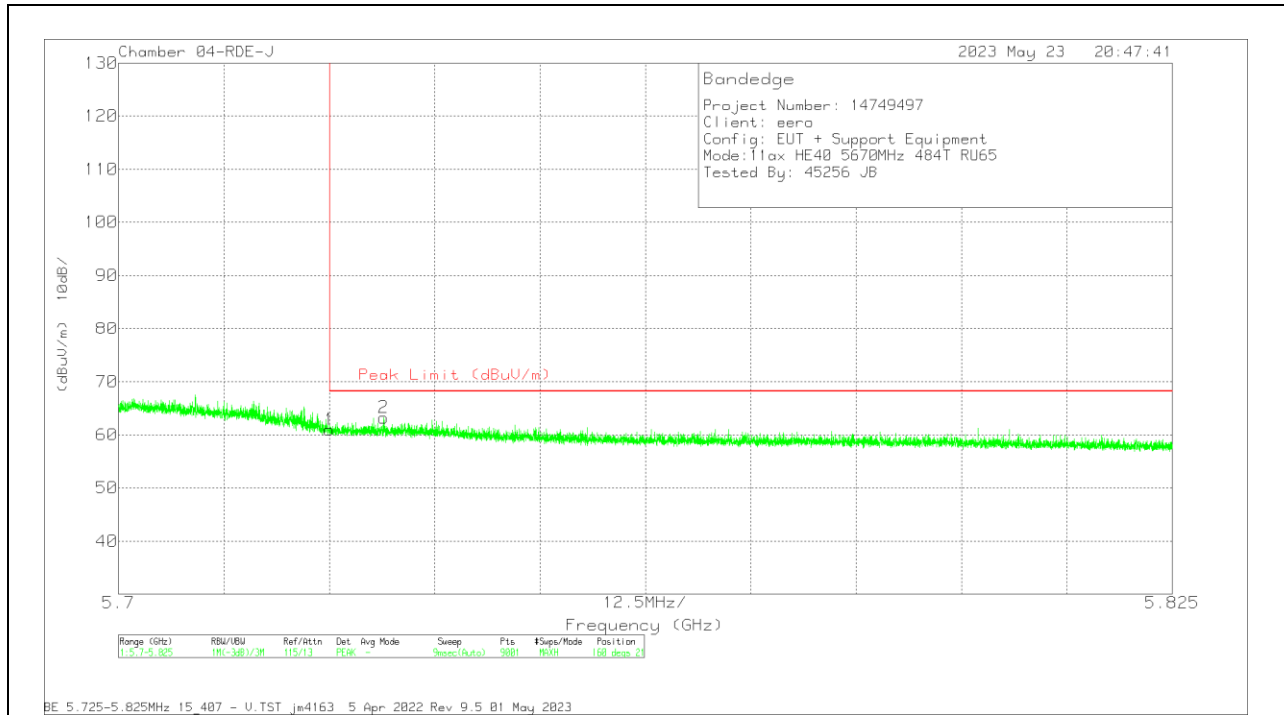

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.67	Pk	34.7	-13.4	60.97	68.2	-7.23	160	216	V
2	5.731459	41.93	Pk	34.7	-13.4	63.23	68.2	-4.97	160	216	V

Pk - Peak detector

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

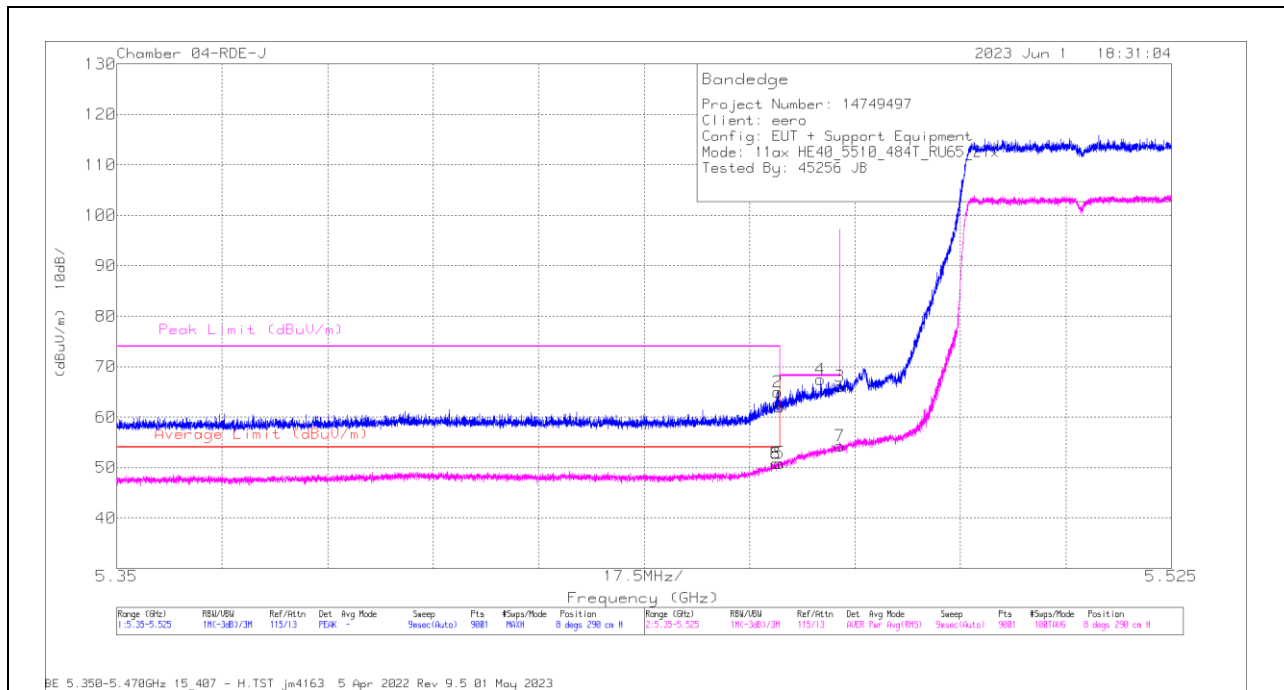

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	40.64	Pk	34.9	-13.5	62.04	-	-	68.2	-6.16	8	290	H
2	* 5.459703	43.54	Pk	34.9	-13.5	64.94	-	-	74	-9.06	8	290	H
3	5.47	44.79	Pk	34.8	-13.5	66.09	-	-	68.2	-2.11	8	290	H
4	5.4668	46.07	Pk	34.9	-13.5	67.47	-	-	68.2	-7.3	8	290	H
5	* 5.46	29.48	RMS	34.9	-13.5	50.88	54	-3.12	-	-	8	290	H
6	* 5.459431	29.57	RMS	34.9	-13.6	50.87	54	-3.13	-	-	8	290	H
7	5.47	33.01	RMS	34.8	-13.5	54.31	-	-	-	-	8	290	H
8	* 5.459431	29.57	RMS	34.9	-13.6	50.87	54	-3.13	-	-	8	290	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

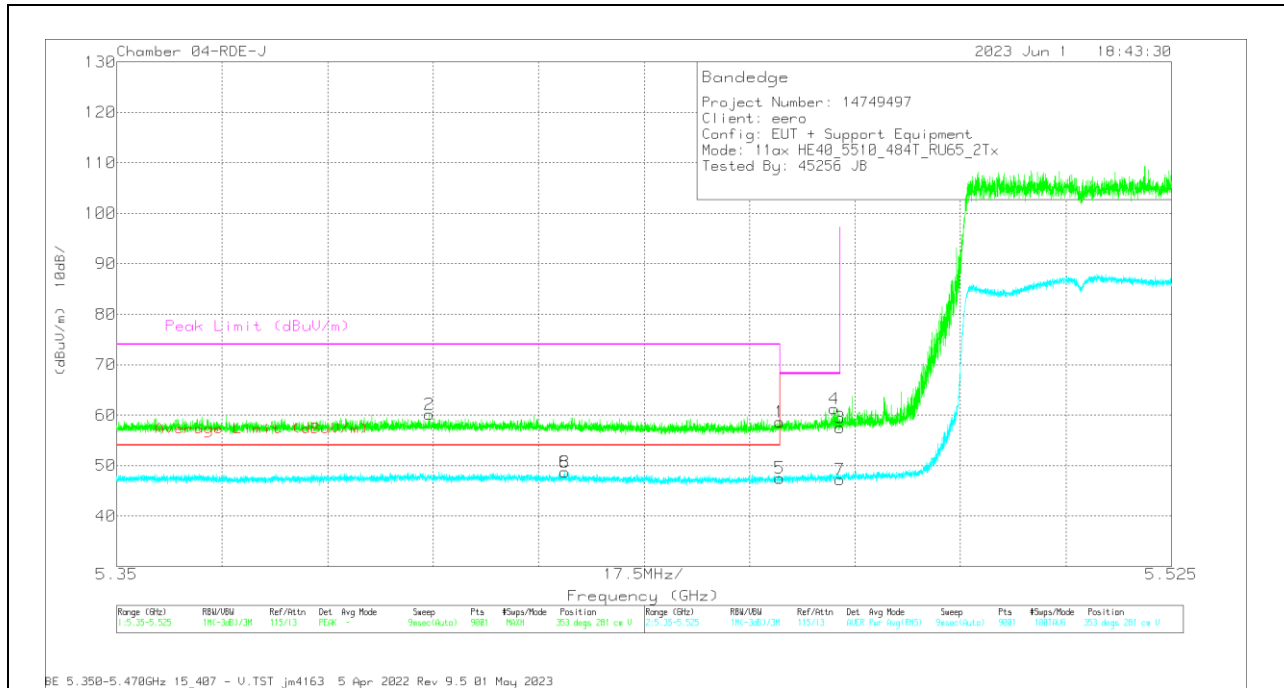


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.26	Pk	34.9	-13.5	58.66	-	-	68.2	-9.54	353	281	V
2	* 5.401915	38.47	Pk	35	-13.3	60.17	-	-	74	-13.83	353	281	V
3	5.47	36.2	Pk	34.8	-13.5	57.5	-	-	68.2	-10.7	353	281	V
4	5.469036	39.82	Pk	34.8	-13.4	61.22	-	-	68.2	-6.98	353	281	V
5	* 5.46	25.54	RMS	34.9	-13.5	46.94	54	-7.06	-	-	353	281	V
6	* 5.424296	26.39	RMS	35	-13.3	48.09	54	-5.91	-	-	353	281	V
7	5.47	25.34	RMS	34.8	-13.5	46.64	-	-	-	-	353	281	V
8	* 5.424296	26.39	RMS	35	-13.3	48.09	54	-5.91	-	-	353	281	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

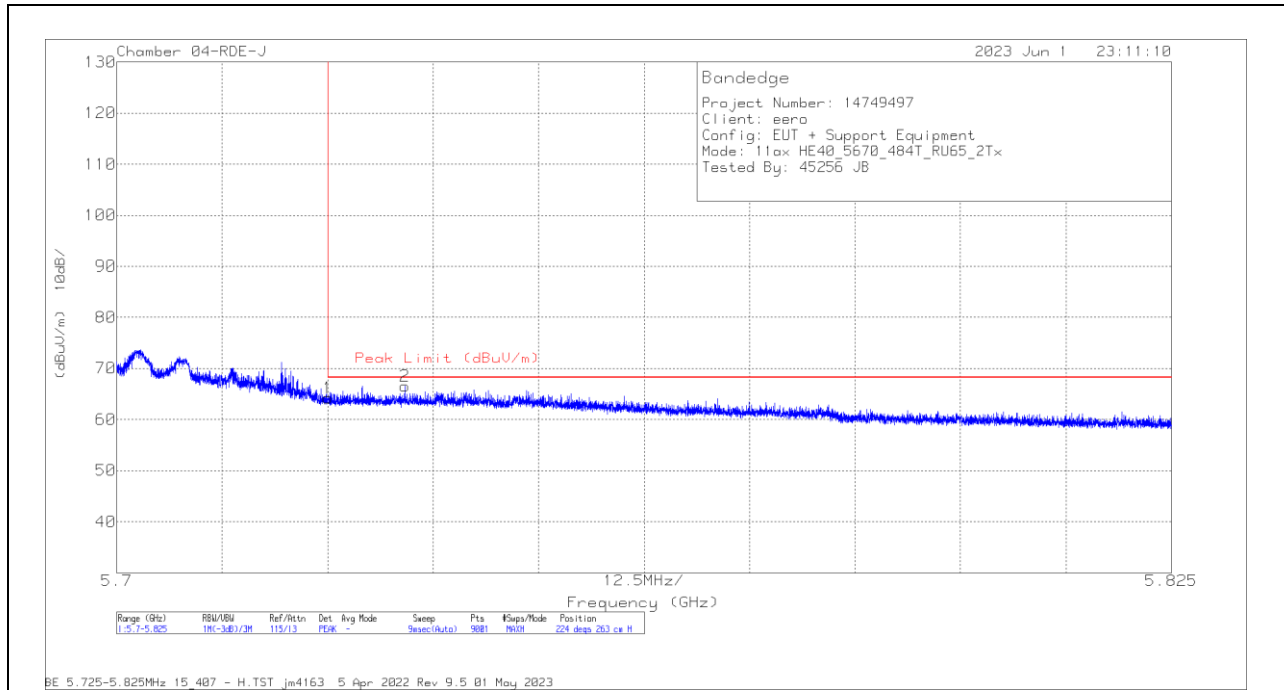


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.6	Pk	34.7	-13.1	64.2	68.2	-4	224	263	H
2	5.734125	44.99	Pk	34.7	-13.1	66.59	68.2	-1.61	224	263	H

Pk - Peak detector

VERTICAL RESULT

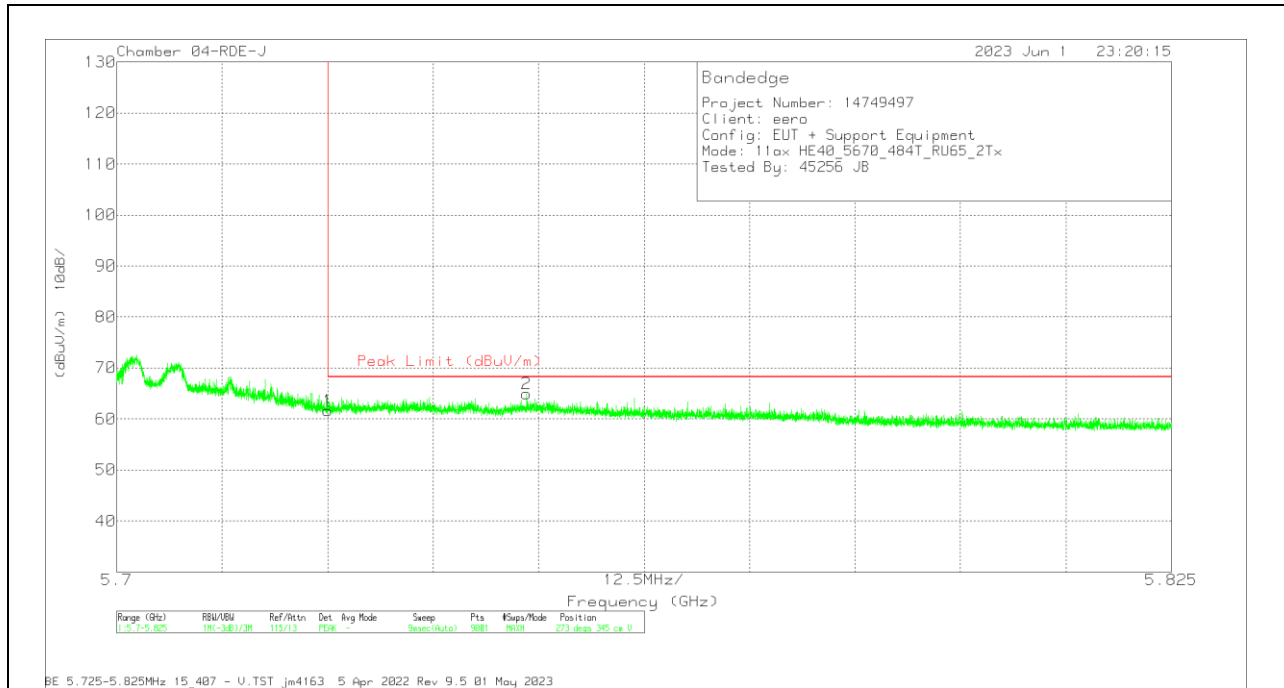

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	CbI/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	40.02	Pk	34.7	-13.1	61.62	68.2	-6.58	273	345	V
2	5.748584	43.29	Pk	34.7	-13.1	64.89	68.2	-3.31	273	345	V

Pk - Peak detector

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

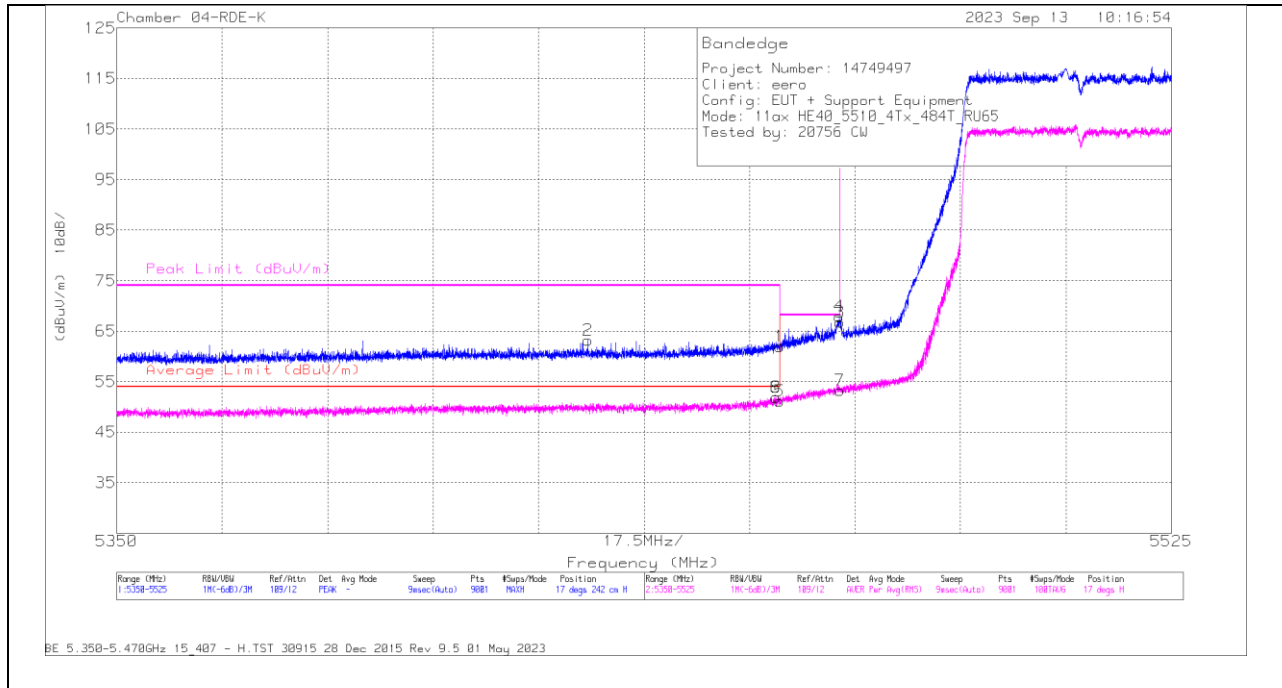

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	34.07	Pk	34.6	-6.7	61.97	-	-	68.2	-6.23	17	242	H
2	* 5428.184	35.42	Pk	34.6	-6.8	63.22	-	-	74	-10.78	17	242	H
3	5470	38.93	Pk	34.6	-6.7	66.83	-	-	68.2	-1.37	17	242	H
4	5469.892	40.02	Pk	34.6	-6.7	67.92	-	-	68.2	-0.28	17	242	H
5	* 5460	23.23	RMS	34.6	-6.7	51.13	54	-2.87	-	-	17	242	H
6	* 5459.373	24.04	RMS	34.6	-6.7	51.94	54	-2.06	-	-	17	242	H
7	5470	25.42	RMS	34.6	-6.7	53.32	-	-	-	-	17	242	H
8	* 5459.373	24.04	RMS	34.6	-6.7	51.94	54	-2.06	-	-	17	242	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection