


VERTICAL RESULT

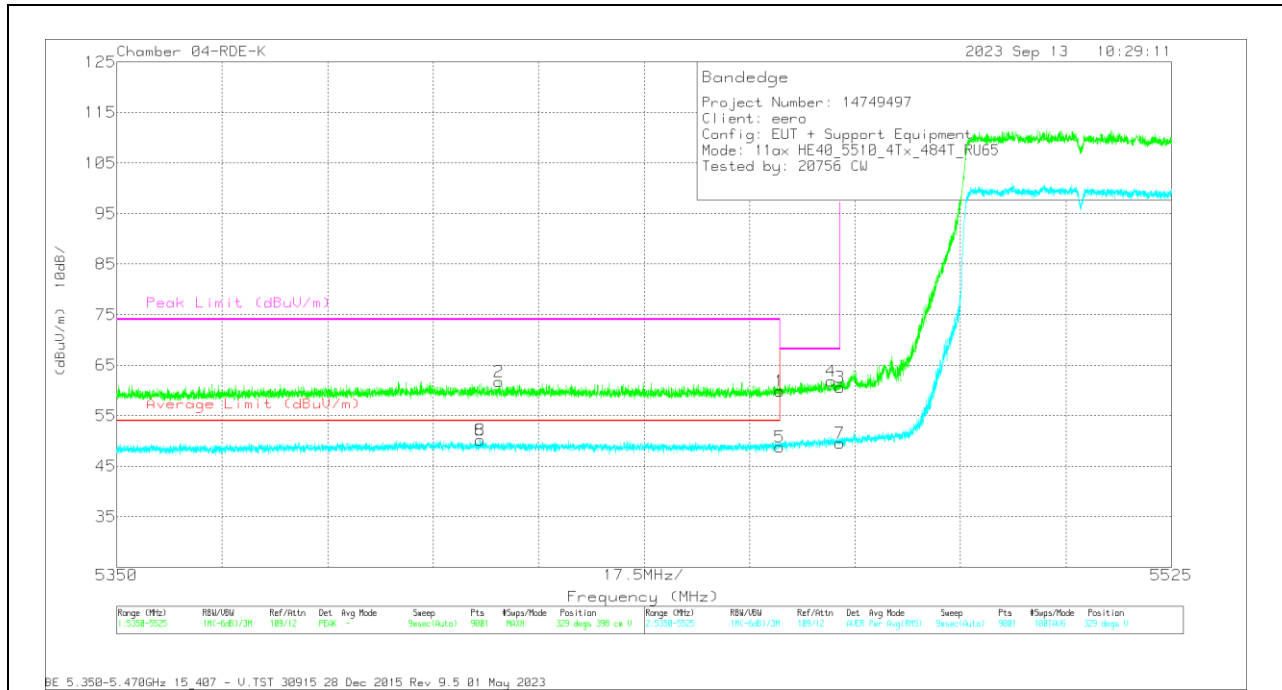

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	31.95	Pk	34.6	-6.7	59.85	-	-	68.2	-8.35	329	398	V
2	* 5413.465	33.86	Pk	34.6	-6.7	61.76	-	-	7.4	-12.24	329	398	V
3	5470	32.66	Pk	34.6	-6.7	60.56	-	-	68.2	-7.64	329	398	V
4	5468.531	33.85	Pk	34.6	-6.6	61.85	-	-	68.2	-6.35	329	398	V
5	* 5460	20.93	RMS	34.6	-6.7	48.83	54	-5.17	-	-	329	398	V
6	* 5410.315	22.25	RMS	34.6	-6.7	50.15	54	-3.85	-	-	329	398	V
7	5470	21.67	RMS	34.6	-6.7	49.57	-	-	-	-	329	398	V
8	* 5410.315	22.25	RMS	34.6	-6.7	50.15	54	-3.85	-	-	329	398	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

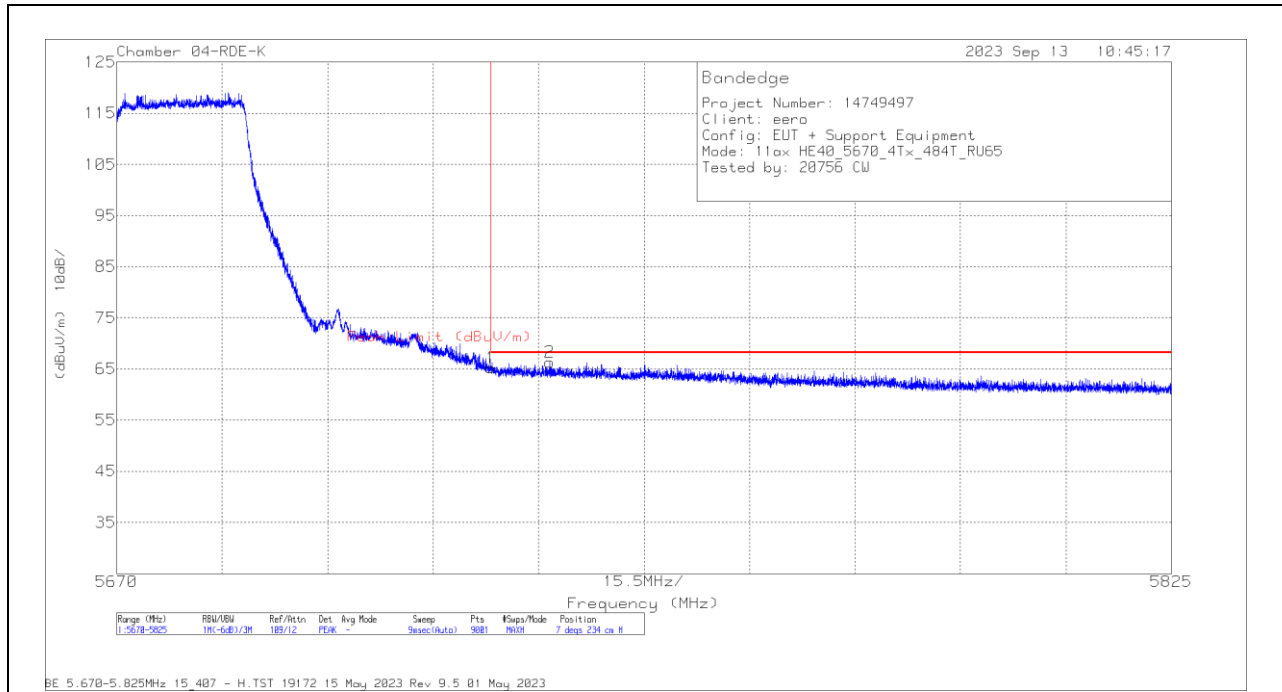


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	36.58	Pk	34.7	-6	65.28	68.2	-2.92	7	234	H
2	5733.67	37.58	Pk	34.7	-5.9	66.38	68.2	-1.82	7	234	H

Pk - Peak detector

VERTICAL RESULT

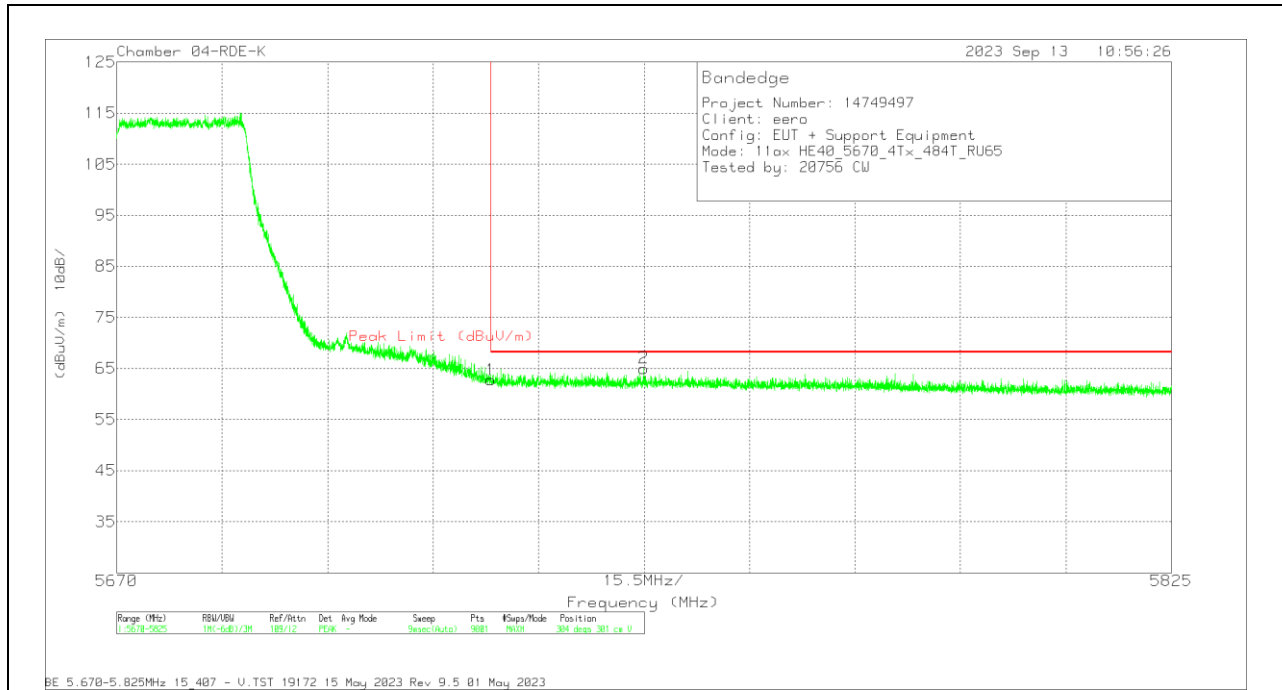

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	34.06	Pk	34.7	-6	62.76	68.2	-5.44	304	301	V
2	5747.43	36.24	Pk	34.7	-5.9	65.04	68.2	-3.16	304	301	V


Pk - Peak detector

10.1.12. TX ABOVE 1 GHz 802.11be EHT40 MODE IN THE 5.6GHz BAND

1TX Antenna 6 OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

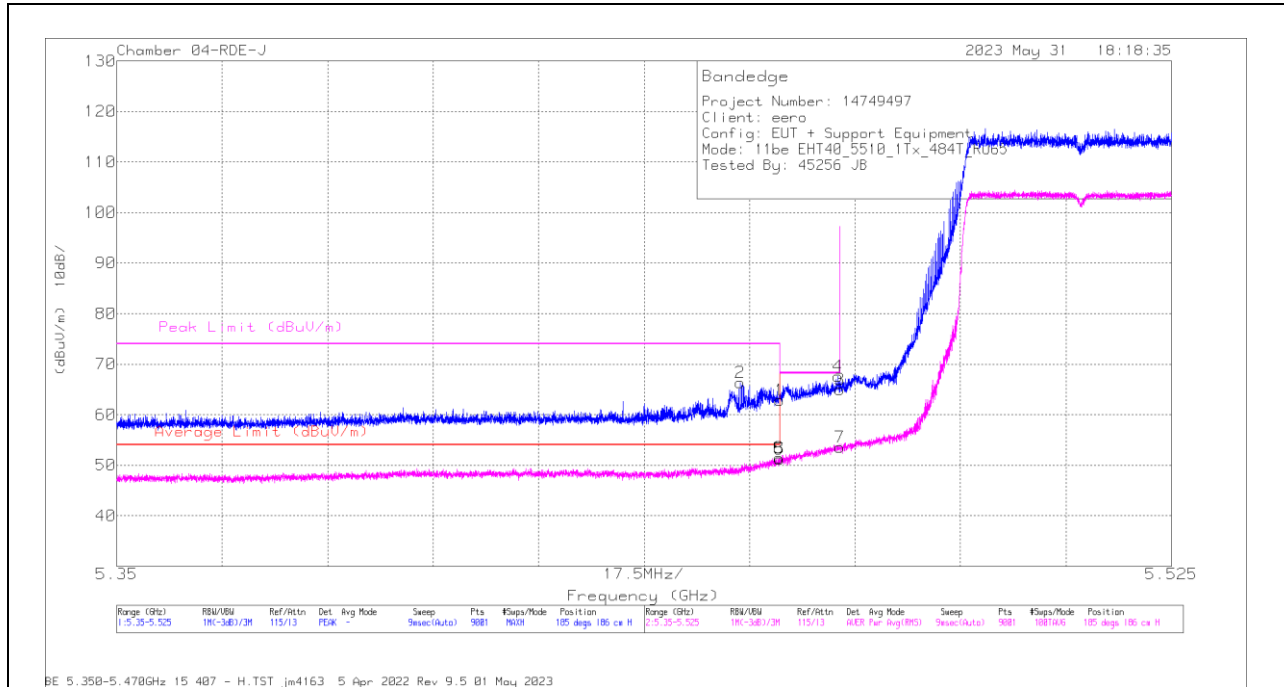

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.5	Pk	34.9	-13.5	62.9	-	-	68.2	-5.3	185	186	H
2	* 5.453481	45.11	Pk	34.9	-13.7	66.31	-	-	74	-7.69	185	186	H
3	5.47	43.68	Pk	34.8	-13.5	64.98	-	-	68.2	-3.22	185	186	H
4	5.469717	46.23	Pk	34.8	-13.5	67.53	-	-	68.2	-6.7	185	186	H
5	* 5.46	29.76	RMS	34.9	-13.5	51.16	54	-2.84	-	-	185	186	H
6	* 5.459897	30.08	RMS	34.9	-13.5	51.48	54	-2.52	-	-	185	186	H
7	5.47	32.28	RMS	34.8	-13.5	53.58	-	-	-	-	185	186	H
8	* 5.459897	30.08	RMS	34.9	-13.5	51.48	54	-2.52	-	-	185	186	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

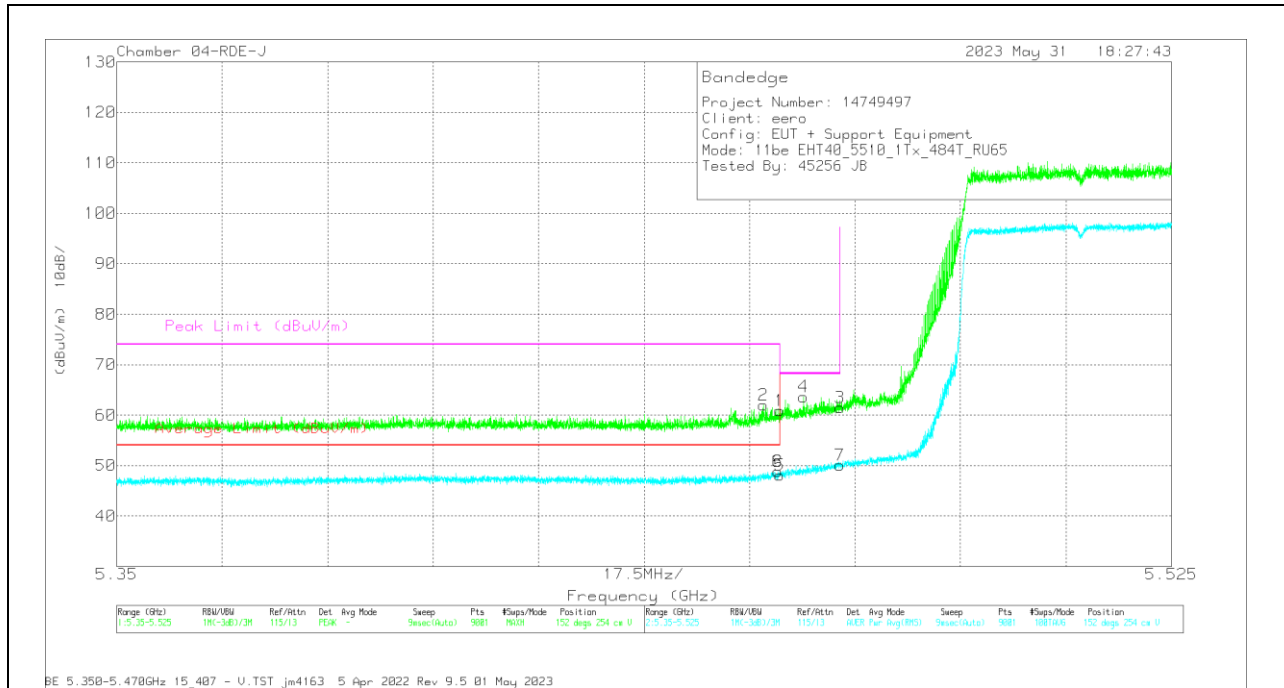


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.44	Pk	34.9	-13.5	60.84	-	-	68.2	-7.36	152	254	V
2	* 5.457253	40.65	Pk	34.9	-13.5	62.05	-	-	74	-11.95	152	254	V
3	5.47	40.19	Pk	34.8	-13.5	61.49	-	-	68.2	-6.71	152	254	V
4	5.463981	42.27	Pk	34.9	-13.5	63.67	-	-	68.2	-4.53	152	254	V
5	* 5.46	26.68	RMS	34.9	-13.5	48.08	54	-5.92	-	-	152	254	V
6	* 5.459722	27.39	RMS	34.9	-13.5	48.79	54	-5.21	-	-	152	254	V
7	5.47	28.8	RMS	34.8	-13.5	50.1	-	-	-	-	152	254	V
8	* 5.459722	27.39	RMS	34.9	-13.5	48.79	54	-5.21	-	-	152	254	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

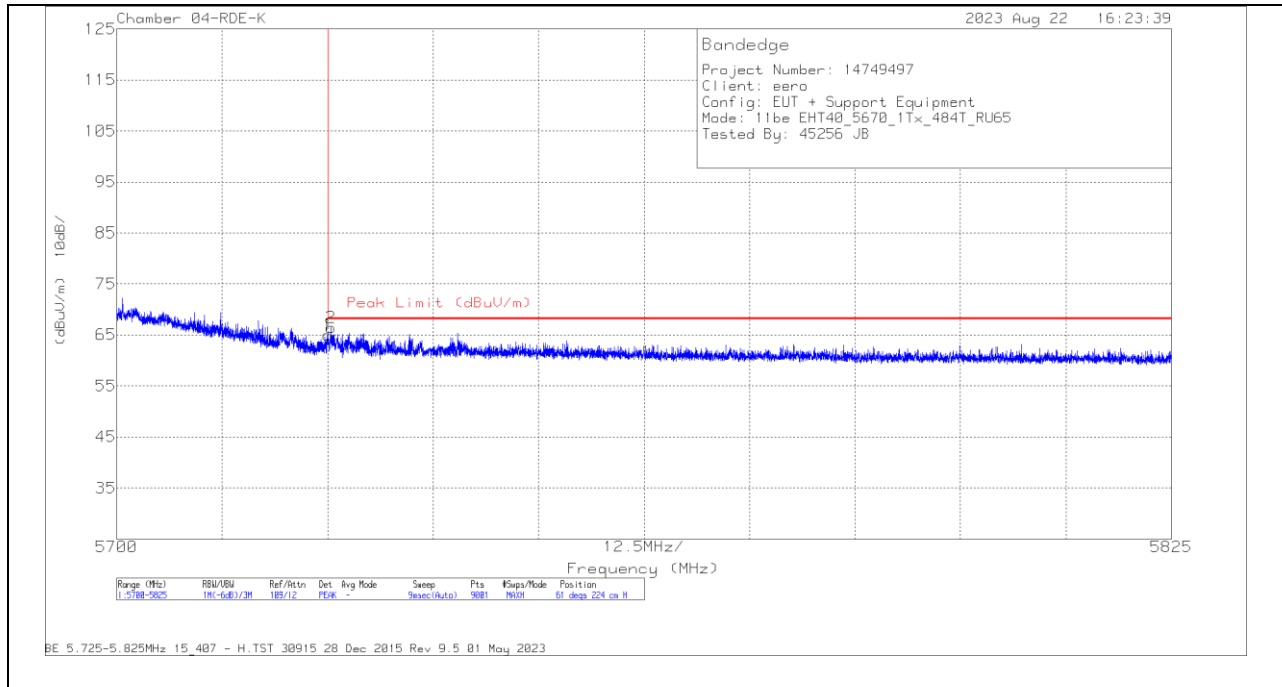


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	36.34	Pk	34.7	-6	65.04	68.2	-3.16	61	224	H
2	5725.417	37.75	Pk	34.7	-6	66.45	68.2	-1.75	61	224	H

Pk - Peak detector

VERTICAL RESULT

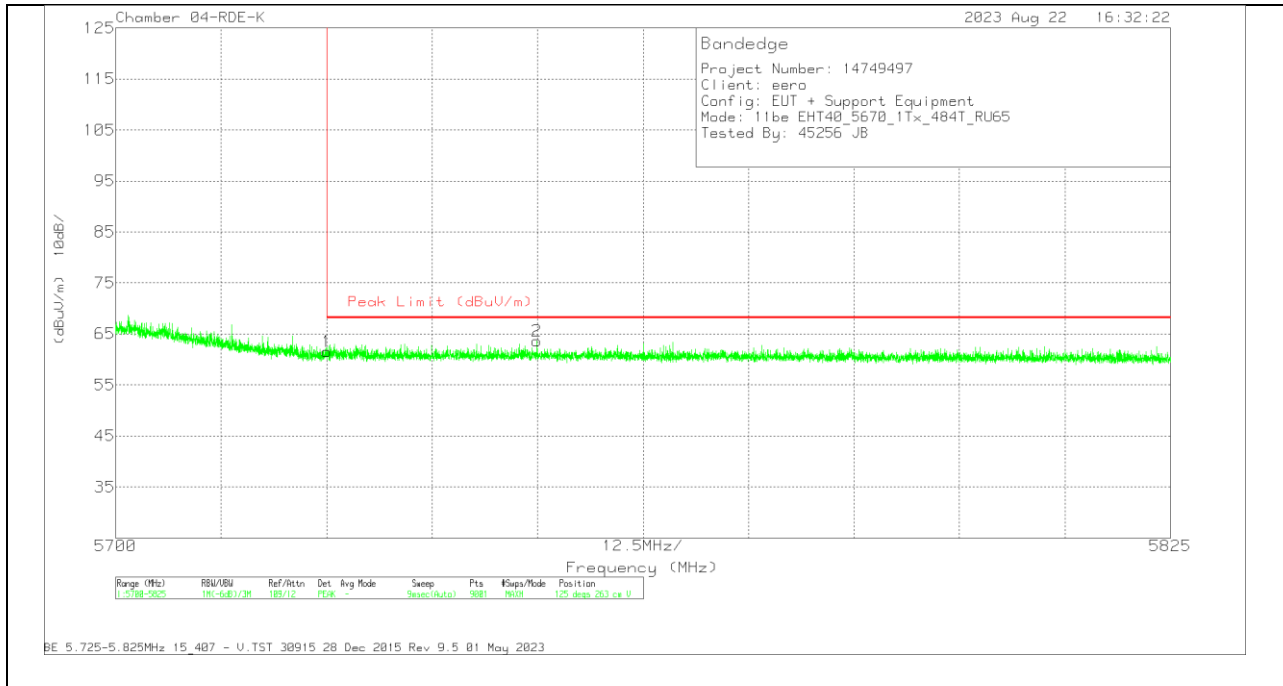

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	32.82	Pk	34.7	-6	61.52	68.2	-6.68	125	263	V
2	5749.917	34.85	Pk	34.7	-5.9	63.65	68.2	-4.55	125	263	V

Pk - Peak detector

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

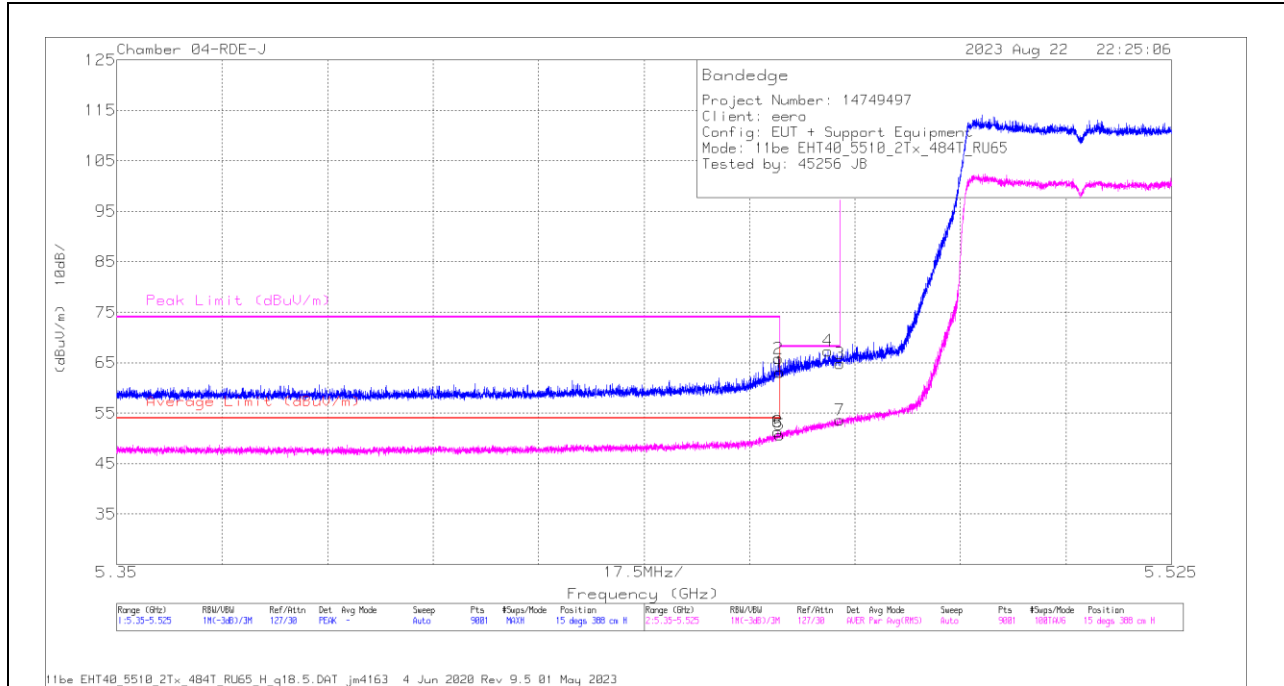

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	58.25	Pk	34.6	-29.8	63.05	-	-	68.2	-5.15	15	388	H
2	* 5.459839	61.06	Pk	34.6	-29.8	65.86	-	-	74	-8.14	15	388	H
3	5.47	60.17	Pk	34.6	-29.9	64.87	-	-	68.2	-3.33	15	388	H
4	5.468006	62.56	Pk	34.6	-29.8	67.36	-	-	68.2	-0.84	15	388	H
5	* 5.46	45.84	RMS	34.6	-29.8	50.64	54	-3.36	-	-	15	388	H
6	* 5.459684	46.46	RMS	34.6	-29.8	51.26	54	-2.74	-	-	15	388	H
7	5.47	49	RMS	34.6	-29.9	53.7	-	-	-	-	15	388	H
8	* 5.459684	46.46	RMS	34.6	-29.8	51.26	54	-2.74	-	-	15	388	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

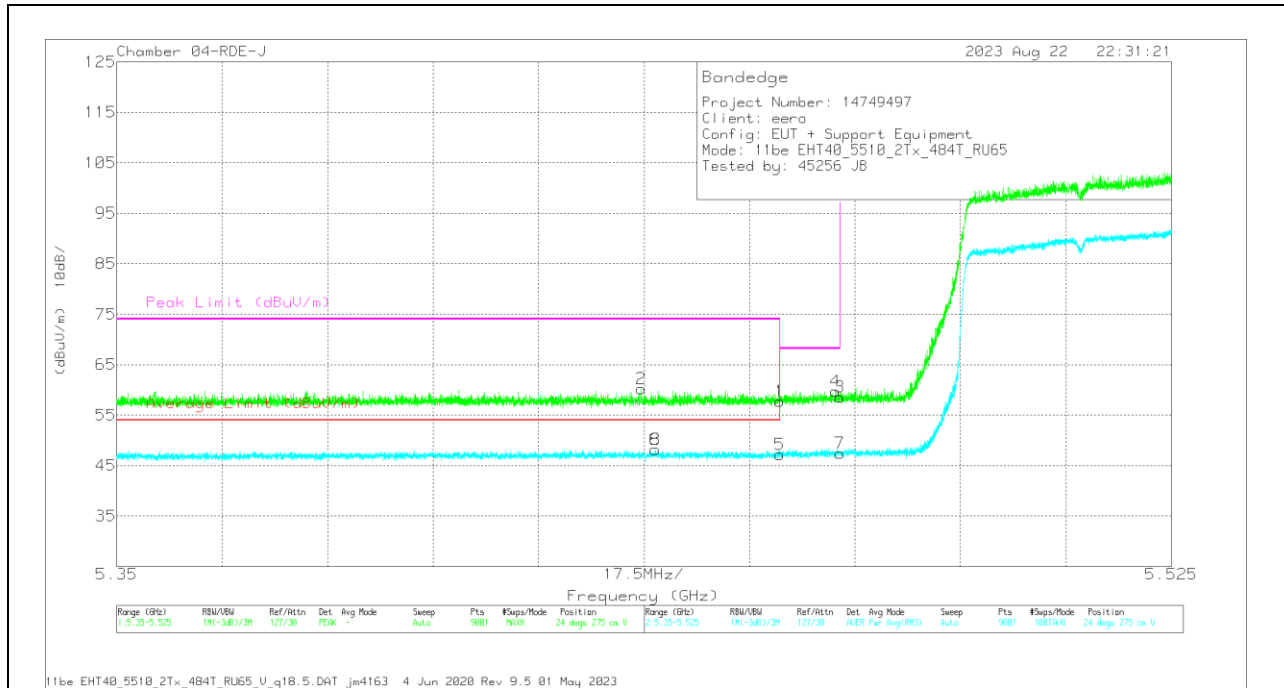

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3MHz	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	52.99	PK	34.6	-29.8	57.79	-	-	68.2	-10.41	24	275	V
2	* 5.436992	55.57	PK	34.6	-29.9	60.27	-	-	74	-13.73	24	275	V
3	5.47	53.88	PK	34.6	-29.9	58.58	-	-	68.2	-9.62	24	275	V
4	5.469308	54.99	PK	34.6	-29.9	59.69	-	-	68.2	-8.51	24	275	V
5	* 5.46	42.36	RMS	34.6	-29.8	47.16	54	-6.84	-	-	24	275	V
6	* 5.439365	43.38	RMS	34.6	-29.8	48.18	54	-5.82	-	-	24	275	V
7	5.47	42.73	RMS	34.6	-29.9	47.43	-	-	-	-	24	275	V
8	* 5.439365	43.38	RMS	34.6	-29.8	48.18	54	-5.82	-	-	24	275	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

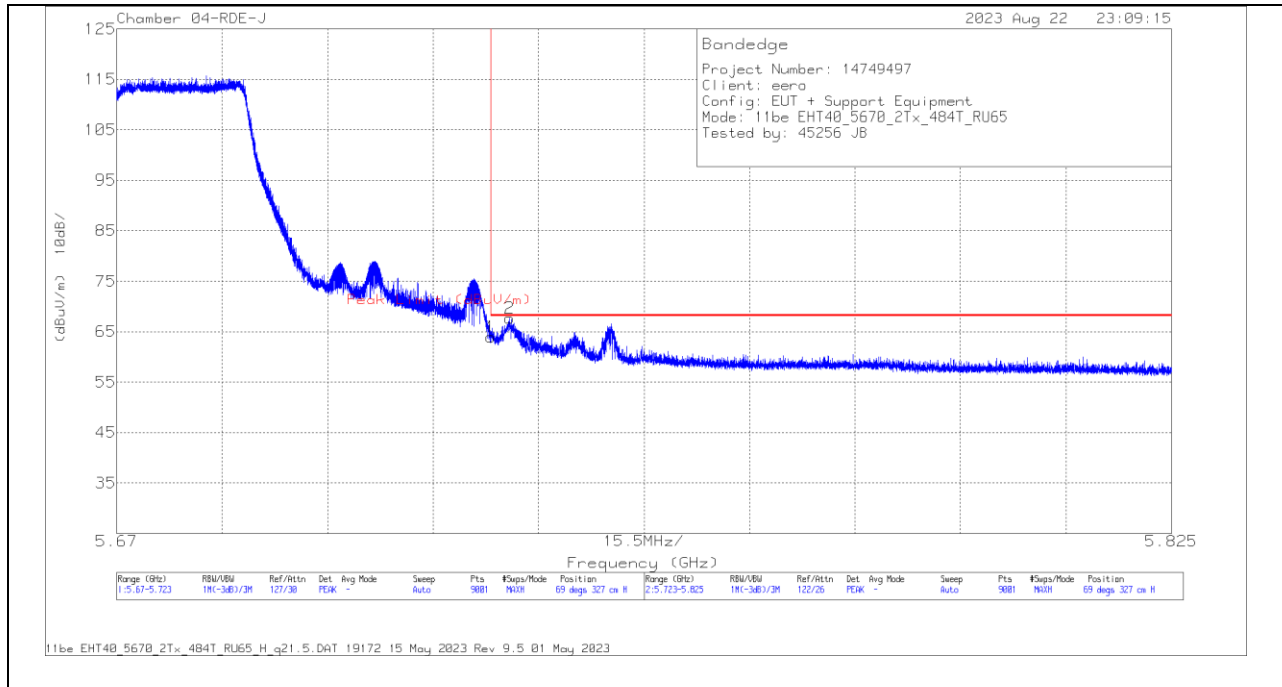


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	58.6	Pk	34.7	-29.4	63.9	68.2	-4.3	69	327	H
2	5.727703	62.36	Pk	34.7	-29.4	67.66	68.2	-5.4	69	327	H

Pk - Peak detector

VERTICAL RESULT

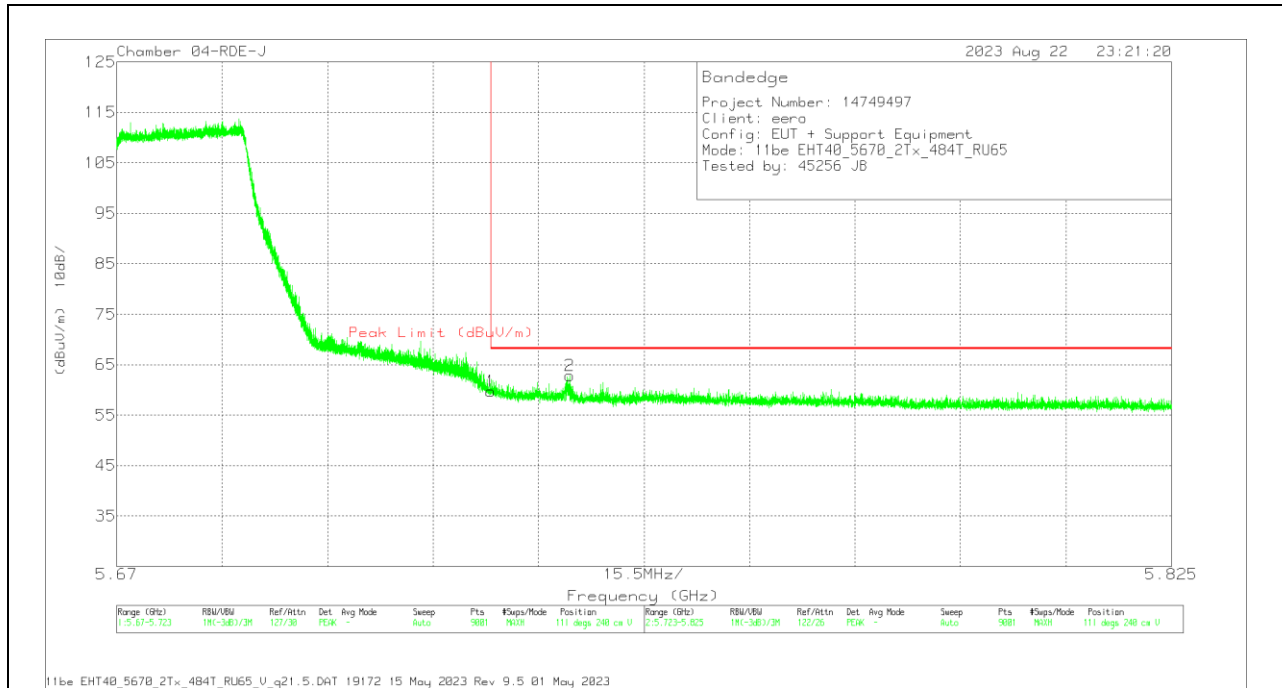

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	54.38	Pk	34.7	-29.4	59.68	68.2	-8.52	111	240	V
2	5.736588	57.53	Pk	34.7	-29.4	62.83	68.2	-5.37	111	240	V

Pk - Peak detector

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 484-Tones, RU Index 65

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

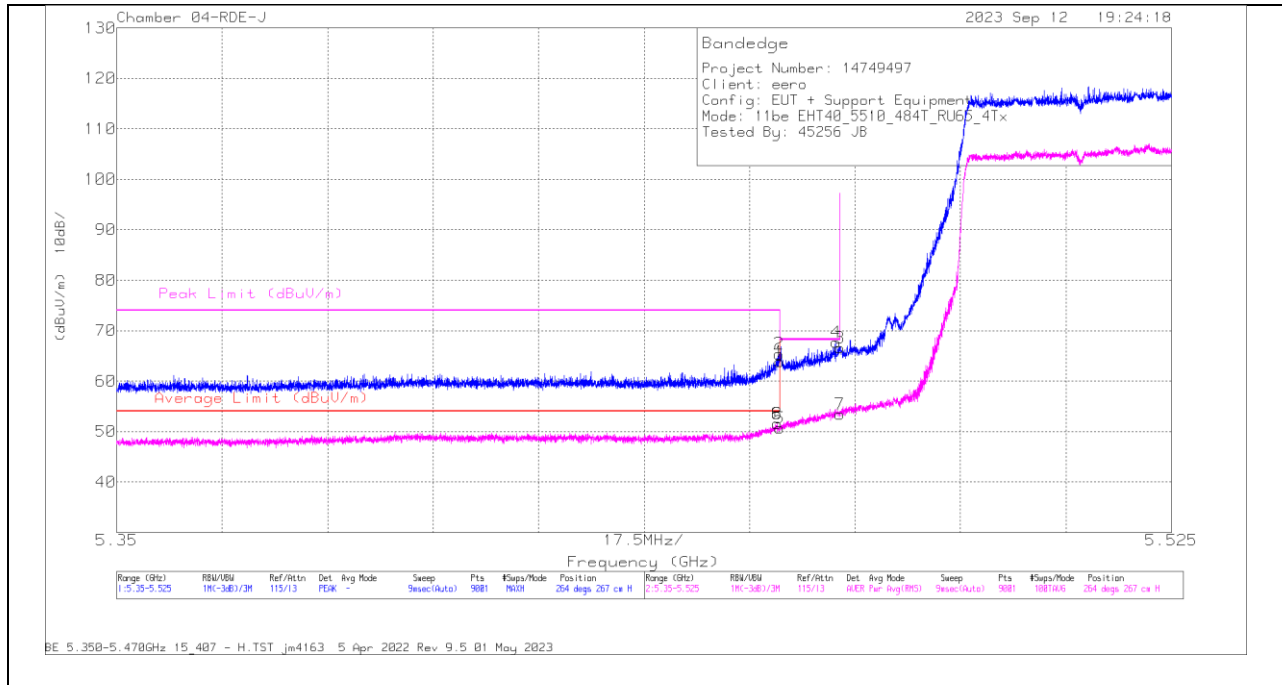


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.48	Pk	34.9	-13.5	63.88	-	-	68.2	-4.32	264	267	H
2	* 5.459859	44.01	Pk	34.9	-13.5	65.41	-	-	74	-8.59	264	267	H
3	5.47	45.24	Pk	34.8	-13.5	66.54	-	-	68.2	-1.66	264	267	H
4	5.469367	46.26	Pk	34.8	-13.4	67.66	-	-	68.2	-0.54	264	267	H
5	* 5.46	29.29	RMS	34.9	-13.5	50.69	54	-3.31	-	-	264	267	H
6	* 5.459567	30.2	RMS	34.9	-13.5	51.6	54	-2.4	-	-	264	267	H
7	5.47	32.14	RMS	34.8	-13.5	53.44	-	-	-	-	264	267	H
8	* 5.459567	30.2	RMS	34.9	-13.5	51.6	54	-2.4	-	-	264	267	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

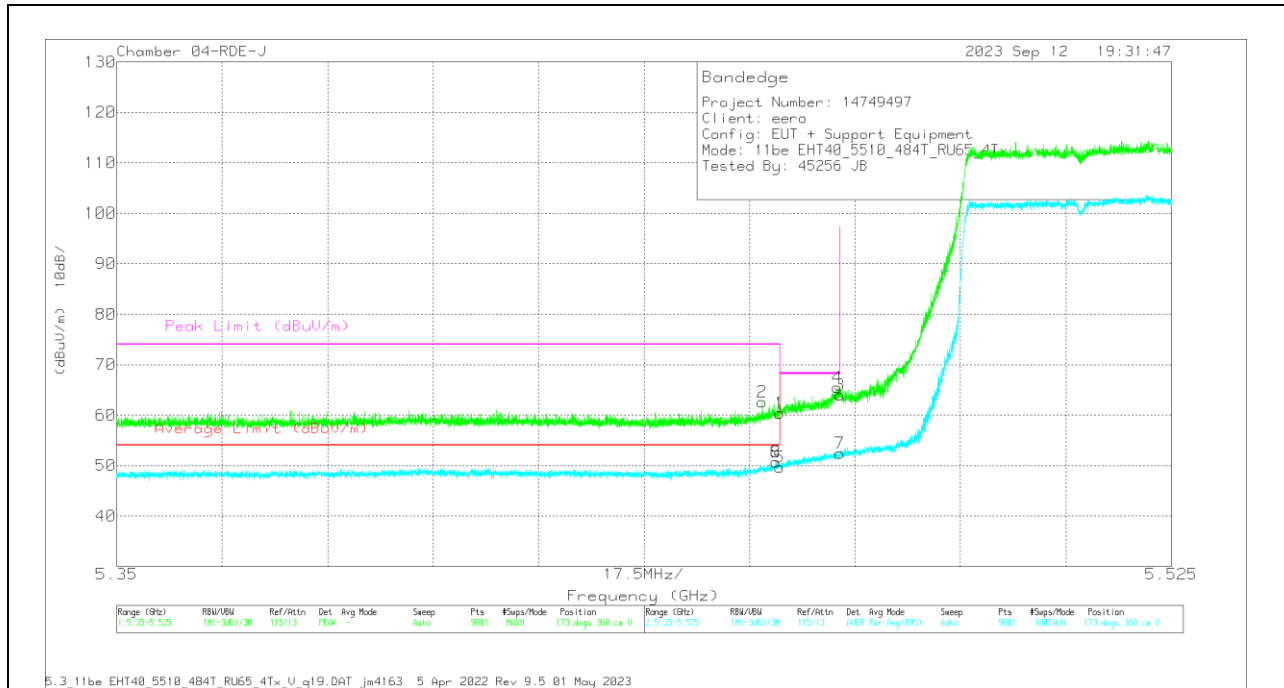


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dBm)	Cbl/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.01	Pk	34.9	-13.5	0	60.41	-	-	68.2	-7.79	173	360	V
2	* 5.457136	41.18	Pk	34.9	-13.5	0	62.58	-	-	74	-11.42	173	360	V
3	5.47	42.71	Pk	34.8	-13.5	0	64.01	-	-	68.2	-4.19	173	360	V
4	5.469581	44.12	Pk	34.8	-13.5	0	65.42	-	-	68.2	-2.78	173	360	V
5	* 5.46	27.69	RMS	34.9	-13.5	.59	49.68	54	-4.32	-	-	173	360	V
6	* 5.459431	28.78	RMS	34.9	-13.6	.59	50.67	54	-3.33	-	-	173	360	V
7	5.47	30.58	RMS	34.8	-13.5	.59	52.47	-	-	-	-	173	360	V
8	* 5.459431	28.78	RMS	34.9	-13.6	.59	50.67	54	-3.33	-	-	173	360	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

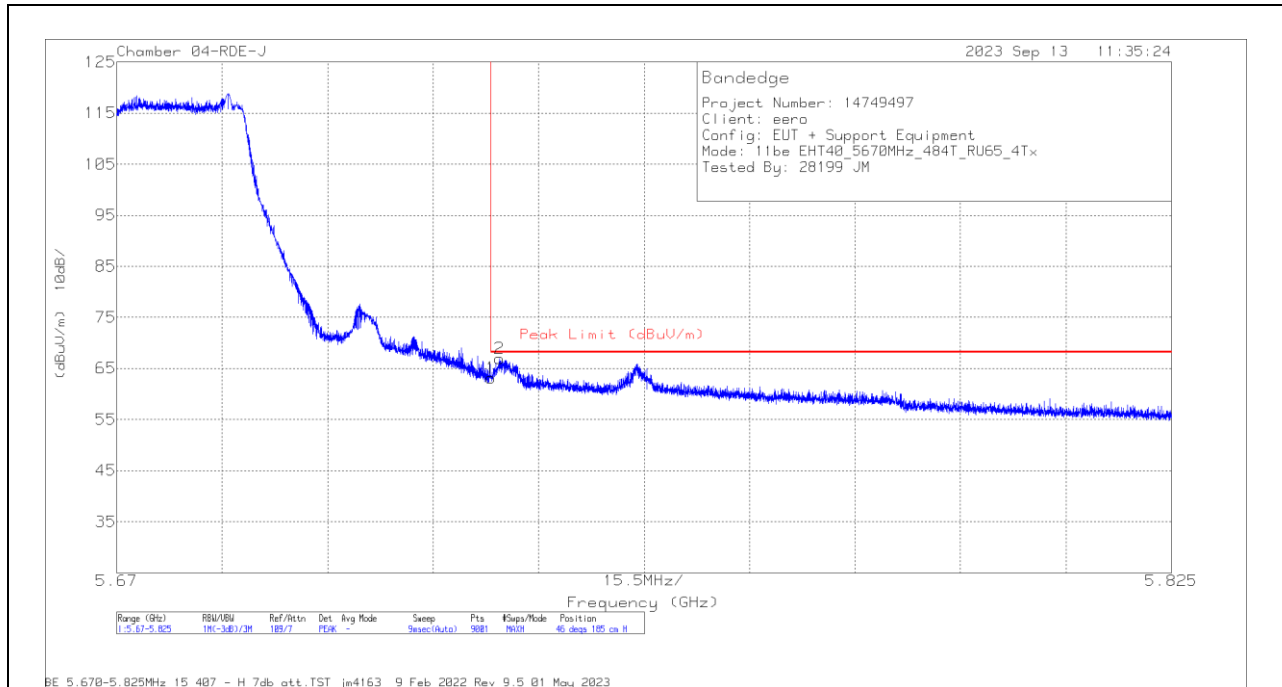


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.58	Pk	34.7	-13.1	63.18	68.2	-5.02	46	185	H
2	5.726299	45.32	Pk	34.7	-13.1	66.92	68.2	-1.28	46	185	H

Pk - Peak detector

VERTICAL RESULT

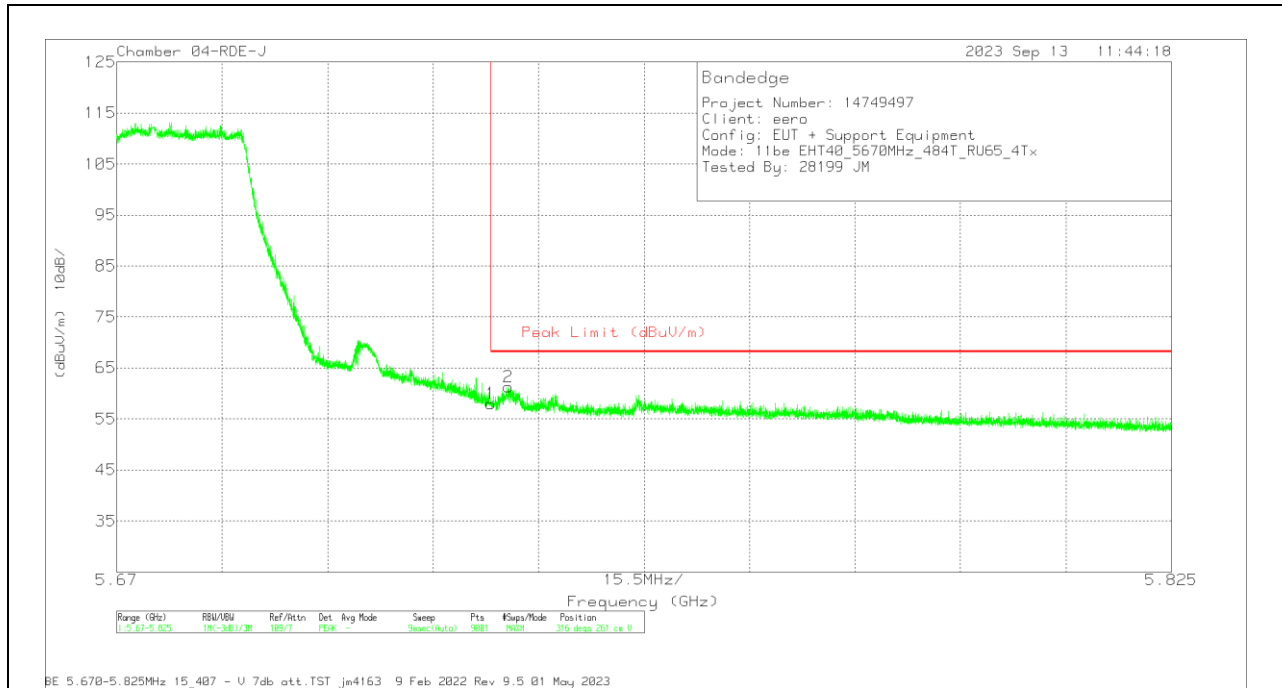


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	36.44	Pk	34.7	-13.1	58.04	68.2	-10.16	316	261	V
2	5.727539	39.74	Pk	34.7	-13.1	61.34	68.2	-6.86	316	261	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

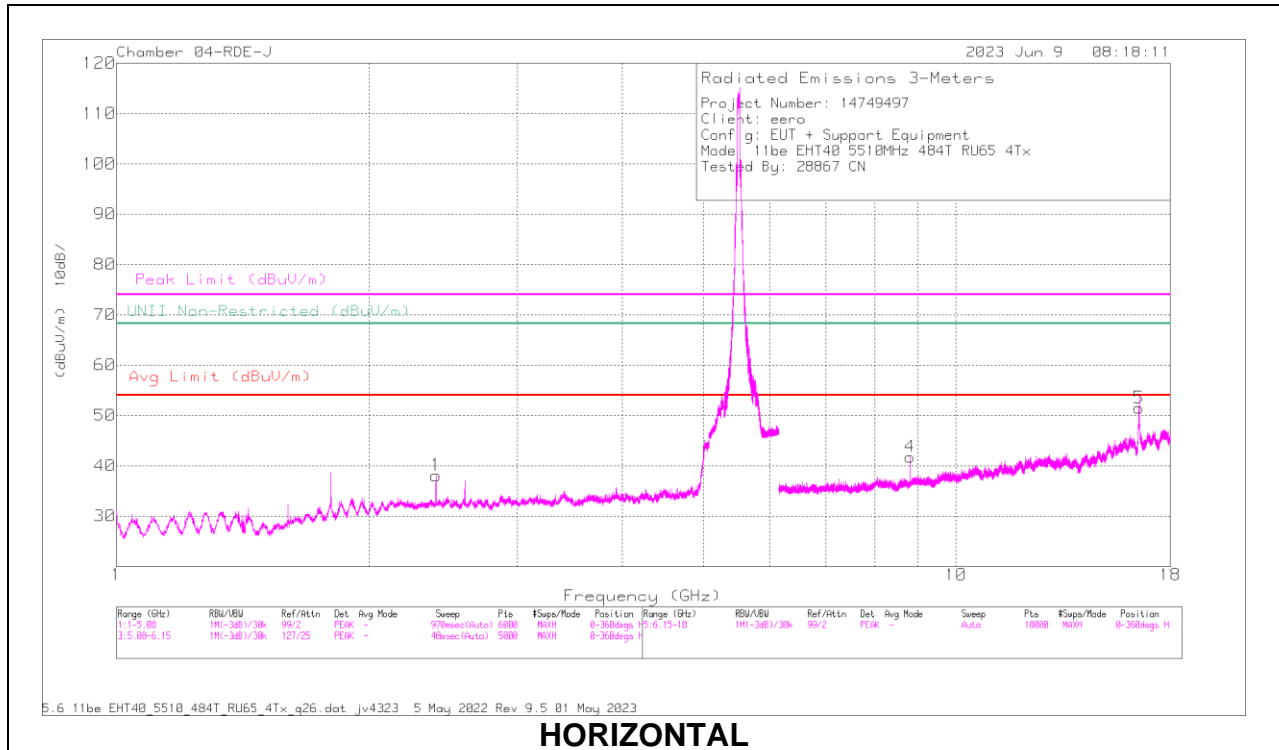

HORIZONTAL

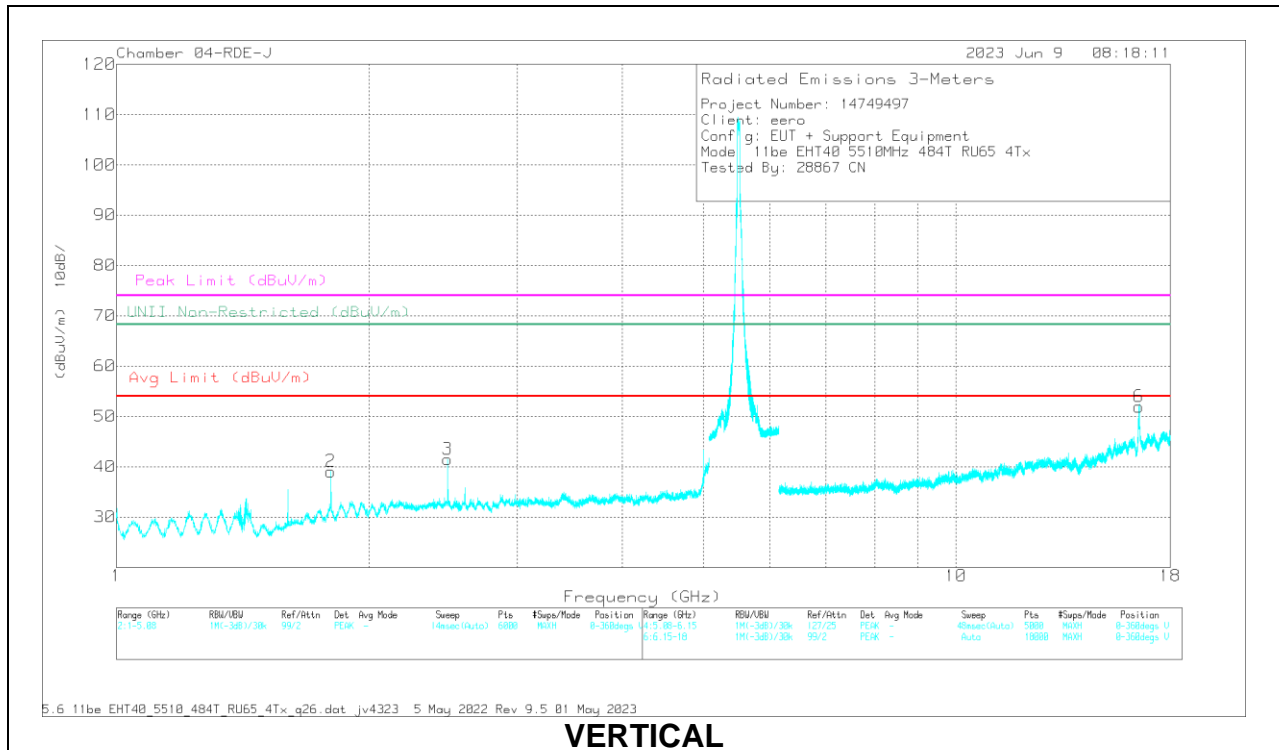


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.402167	58.93	PK-U	32	-46.6	44.33	-	-	-	-	68.2	-23.87	86	109	H
3	2.476844	57.24	PK-U	32.2	-46.2	43.24	-	-	-	-	68.2	-24.96	308	326	V
2	1.799782	61.49	PK-U	30.5	-46.5	45.49	-	-	-	-	68.2	-22.71	24	156	V
4	8.815867	54.18	PK-U	36	-41.2	48.98	-	-	-	-	68.2	-19.22	114	192	H
5	16.532187	60.65	PK-U	42	-38.6	64.05	-	-	-	-	68.2	-4.15	144	126	H
6	16.528432	60.33	PK-U	42	-38.6	63.73	-	-	-	-	68.2	-4.47	199	188	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

MID CHANNEL

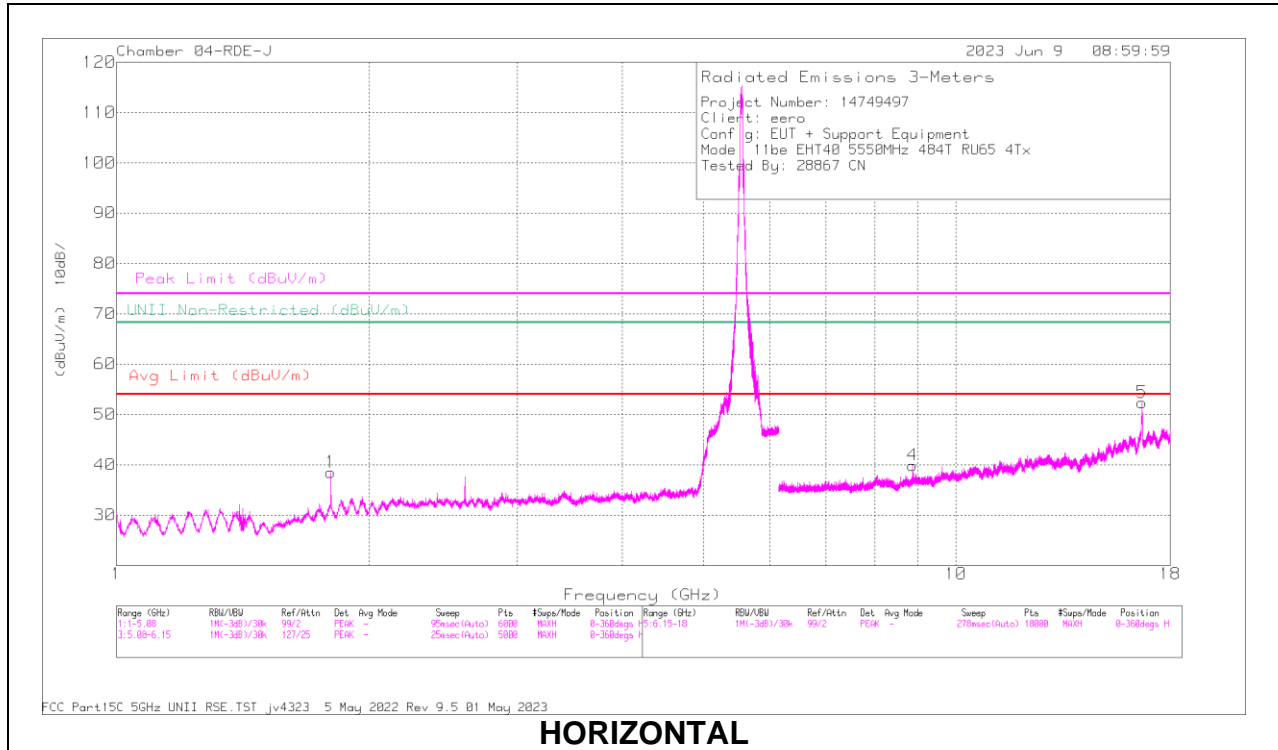

HORIZONTAL

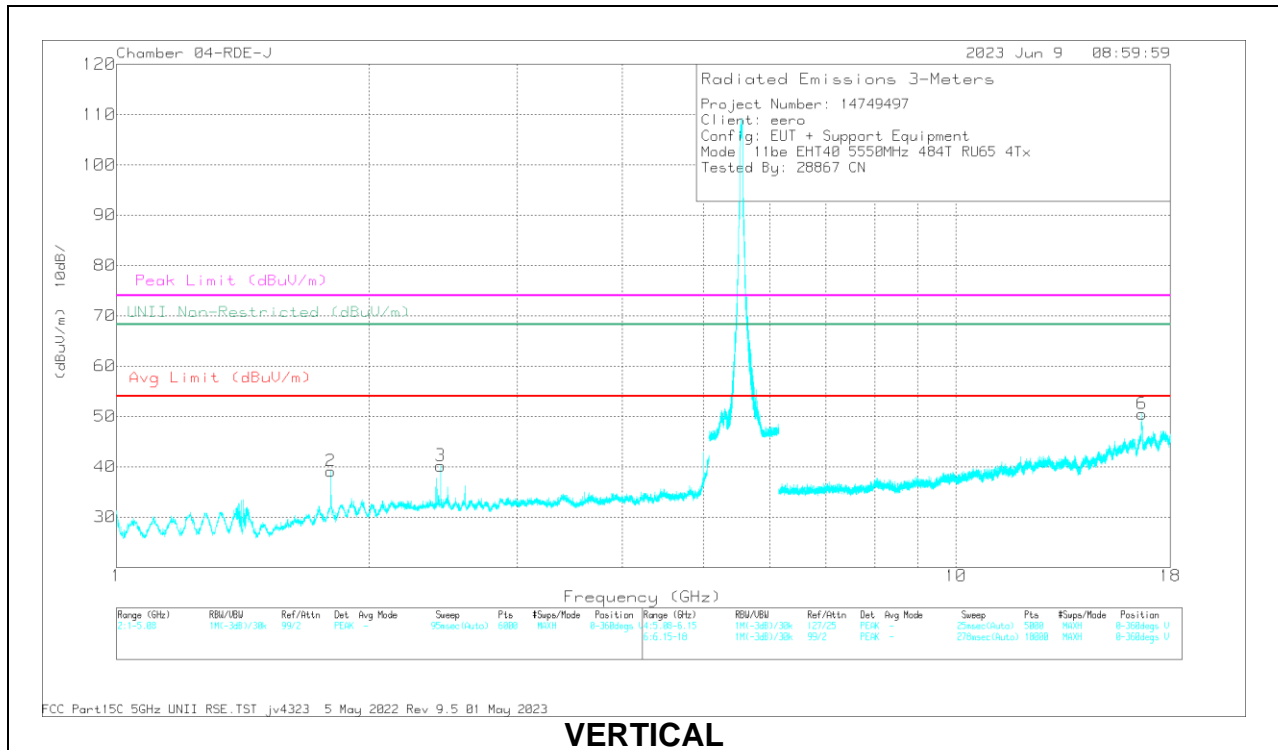

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.799693	61.27	PK-U	30.5	-46.5	45.27	-	-	-	-	68.2	-22.93	323	177	H
2	1.799827	62.1	PK-U	30.5	-46.5	46.1	-	-	-	-	68.2	-22.1	308	159	V
3	2.432374	57.58	PK-U	32.1	-46.4	43.28	-	-	-	-	68.2	-24.92	272	392	V
4	8.880161	53.57	PK-U	36.1	-41.3	48.37	-	-	-	-	68.2	-19.83	90	277	H
5	16.659139	62.34	PK-U	42.2	-40.3	64.24	-	-	-	-	68.2	-3.96	145	117	H
6	16.664924	59.58	PK-U	42.2	-40.2	61.58	-	-	-	-	68.2	-6.62	198	215	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

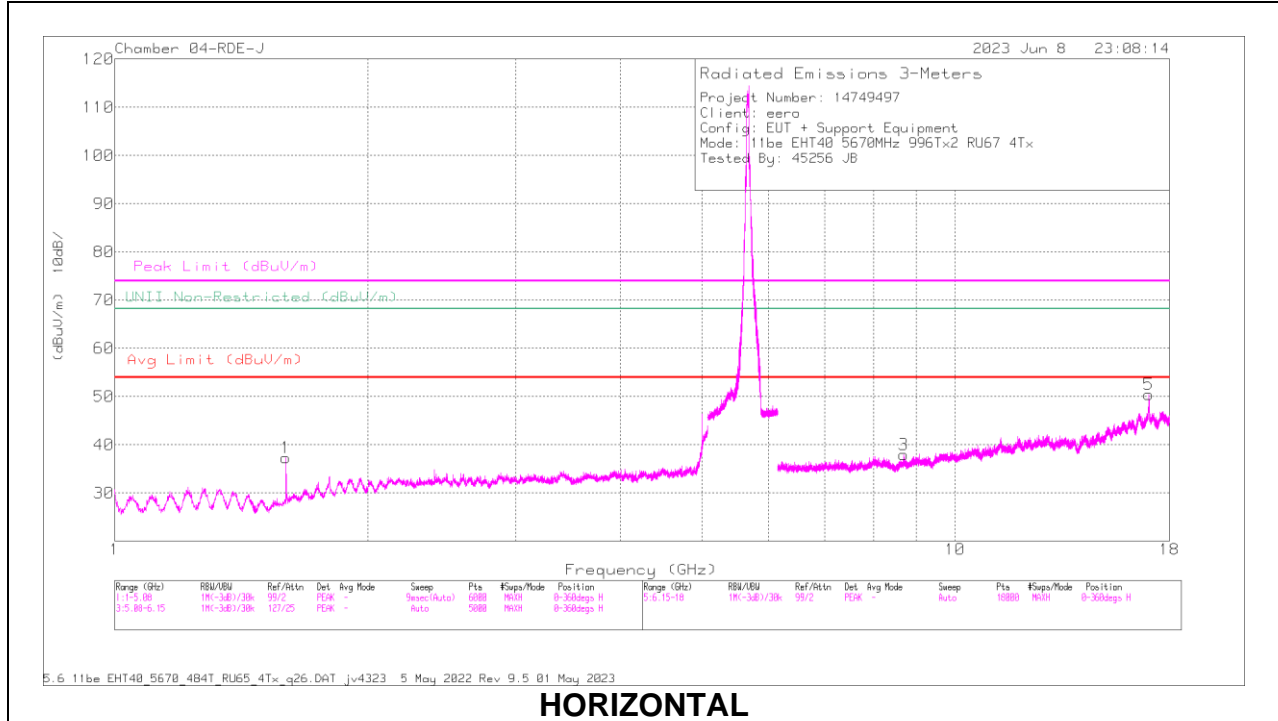

HORIZONTAL

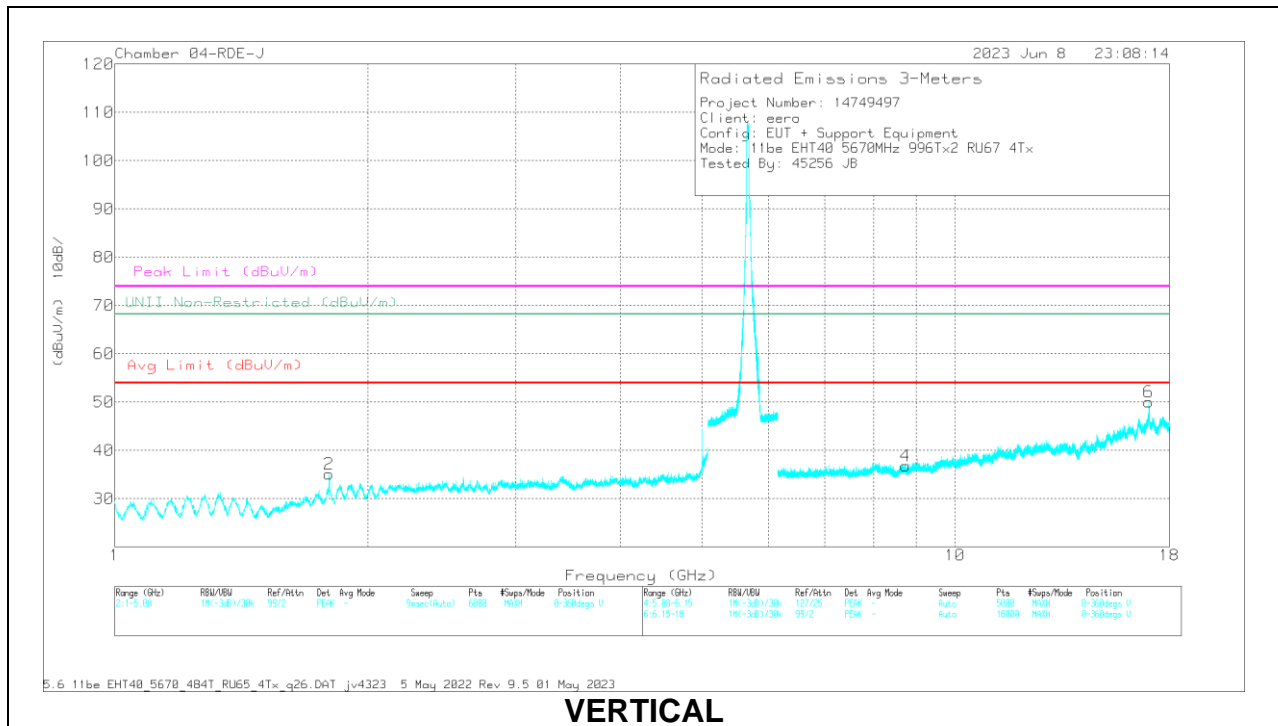


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.599733	61.06	PK-U	27.8	-47	41.86	-	-	74	-32.14	-	-	38	374	H
	* 1.599849	46.7	ADR	27.8	-47	27.5	54	-26.5	-	-	-	-	38	374	H
2	1.800811	60.26	PK-U	30.5	-46.6	44.16	-	-	-	-	68.2	-24.04	316	106	V
3	8.694371	51.75	PK-U	35.9	-40.9	46.75	-	-	-	-	68.2	-21.45	246	113	H
5	17.02292	59.38	PK-U	42.3	-39.6	62.08	-	-	-	-	68.2	-6.12	201	193	H
4	8.734481	52.18	PK-U	36	-40.9	47.28	-	-	-	-	68.2	-20.92	150	335	V
6	17.00844	57.54	PK-U	42.3	-39.5	60.34	-	-	-	-	68.2	-7.86	210	225	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 142

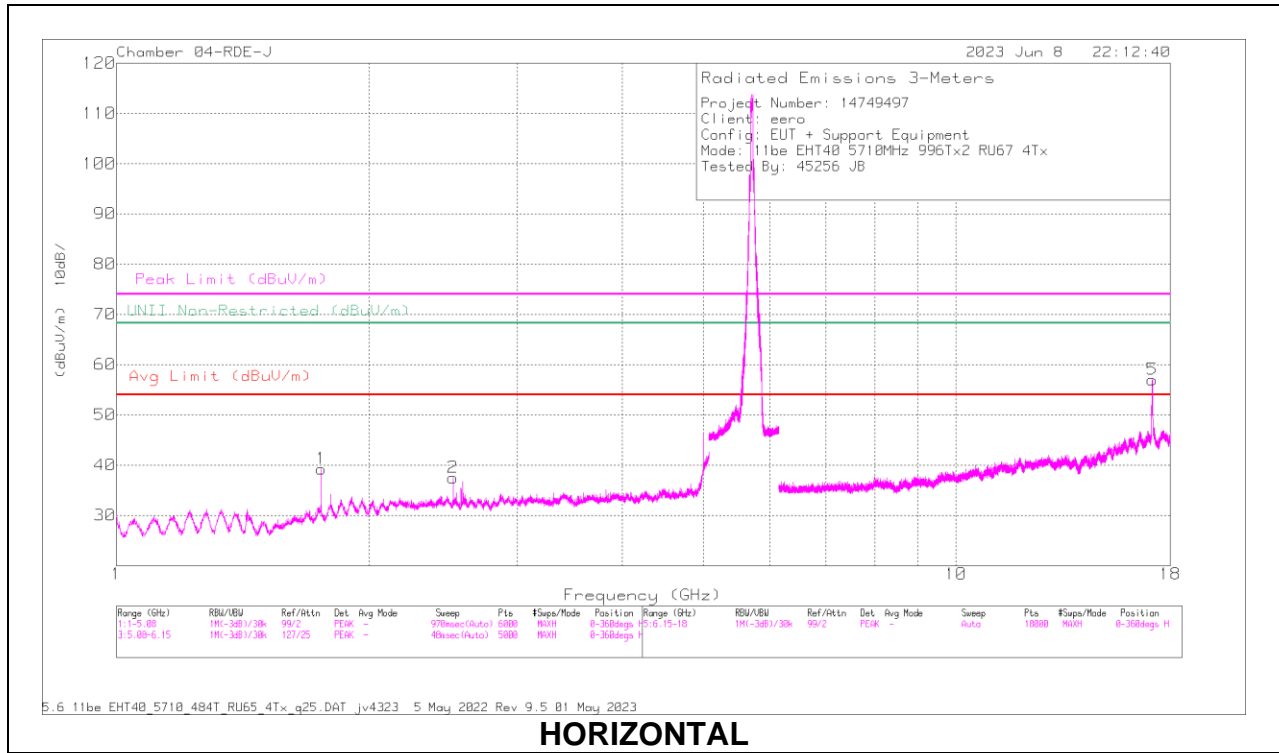

HORIZONTAL

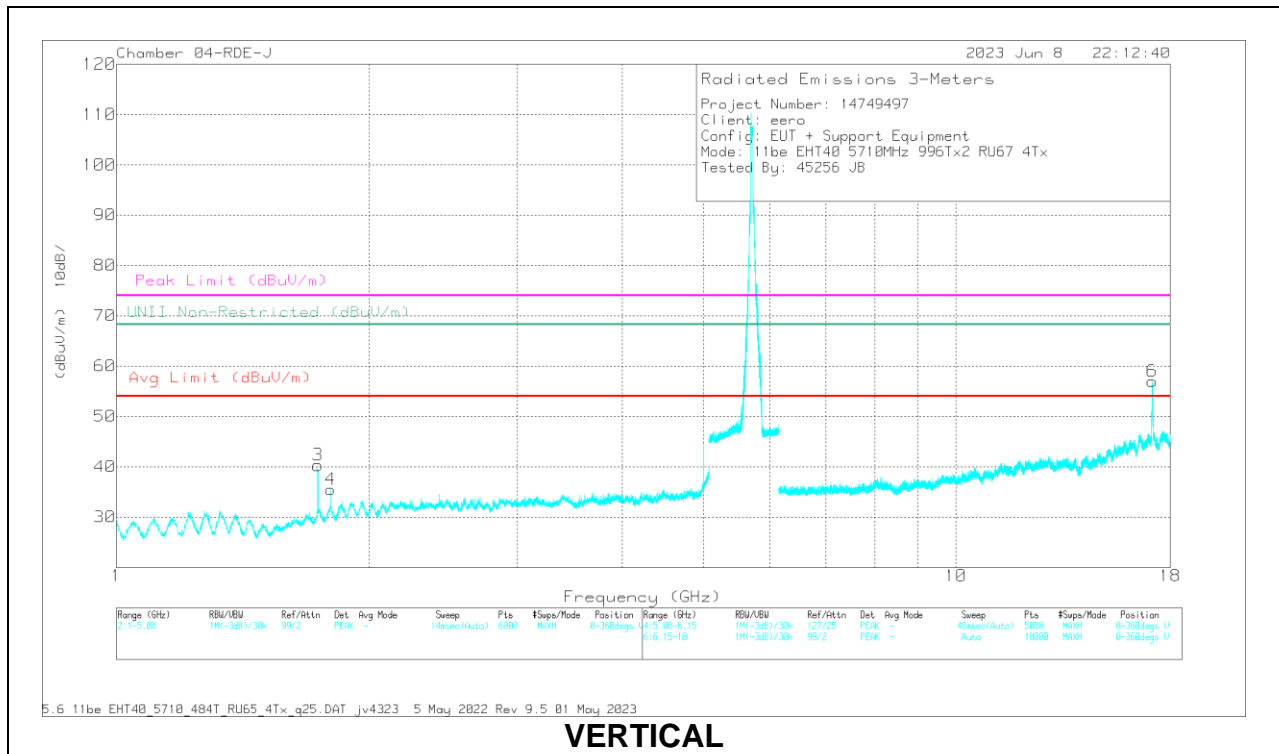

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.751962	57.27	PK-U	30.1	-46.5	40.87	-	-	-	-	68.2	-27.33	87	378	H
2	2.520013	56.72	PK-U	32.3	-46.2	42.82	-	-	-	-	68.2	-25.38	351	108	H
3	1.736708	66.96	PK-U	29.9	-46.6	50.26	-	-	-	-	68.2	-17.94	184	275	V
4	1.799962	61.89	PK-U	30.5	-46.5	45.89	-	-	-	-	68.2	-22.31	25	140	V
5	17.134354	64.93	PK-U	42.1	-39.5	67.53	-	-	-	-	68.2	-.67	221	121	H
6	17.140972	65.15	PK-U	42.1	-39.2	68.05	-	-	-	-	68.2	-.15	148	108	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

PK-U - U-NII: Maximum Peak


ADR - U-NII AD primary method, RMS average

10.1.13. TX ABOVE 1 GHz 802.11ax HE80 MODE IN THE 5.6GHz BAND

1TX Antenna 6 OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

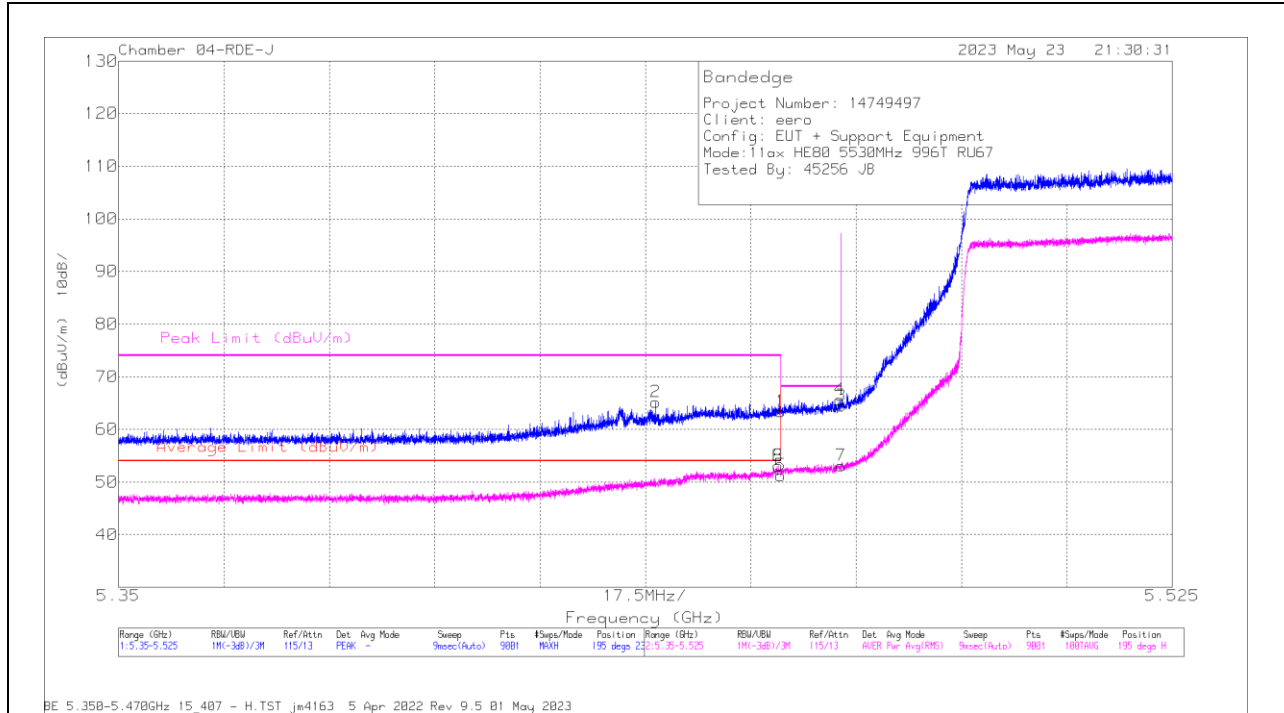


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.57	Pk	34.9	-14.1	63.37	-	-	68.2	-4.83	195	239	H
2	* 5.439209	44.3	Pk	34.9	-14	65.2	-	-	74	-8.8	195	239	H
3	5.47	43.77	Pk	34.8	-14.1	64.47	-	-	68.2	-3.73	195	239	H
4	5.469775	44.94	Pk	34.8	-14.1	65.64	-	-	68.2	-2.56	195	239	H
5	* 5.46	30.46	RMS	34.9	-14.1	51.26	54	-2.74	-	-	195	239	H
6	* 5.459548	32.24	RMS	34.9	-14.1	53.04	54	-.96	-	-	195	239	H
7	5.47	32.42	RMS	34.8	-14.1	53.12	-	-	-	-	195	239	H
8	* 5.459548	32.24	RMS	34.9	-14.1	53.04	54	-.96	-	-	195	239	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

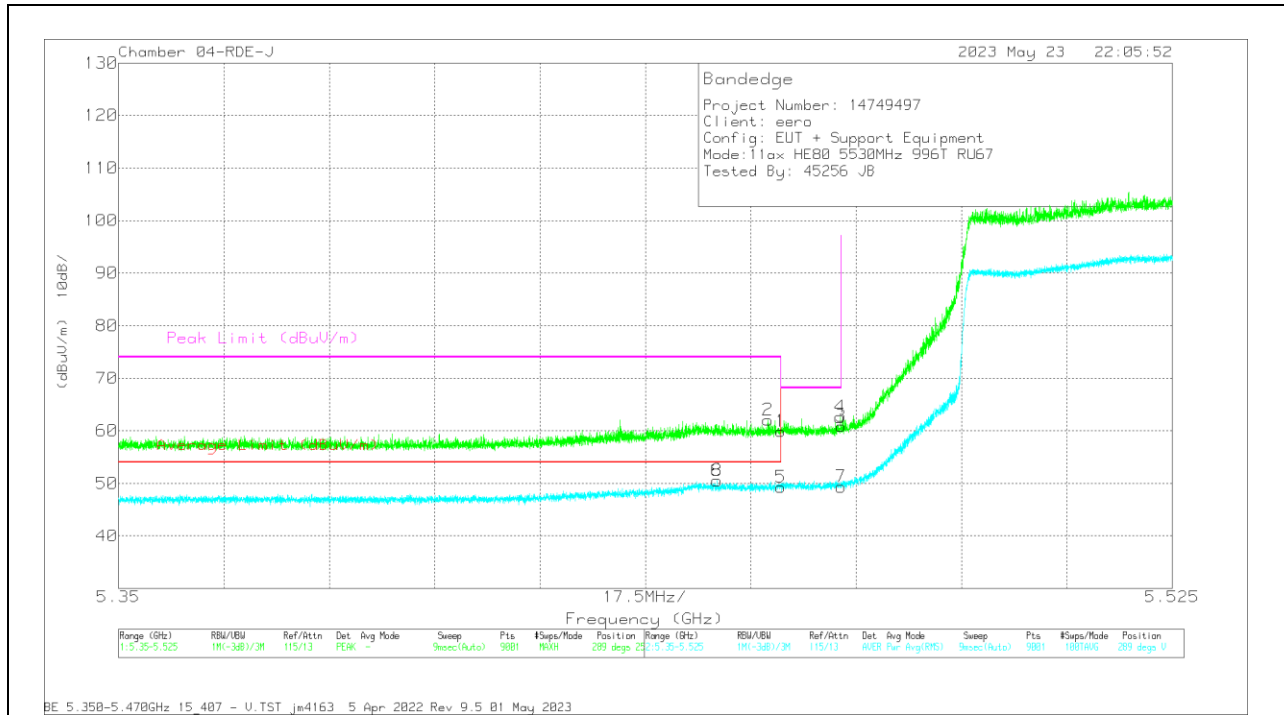


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.12	Pk	34.9	-14.1	59.92	-	-	68.2	-8.28	289	258	V
2	* 5.457856	41.26	Pk	34.9	-14.1	62.06	-	-	74	-11.94	289	258	V
3	5.47	40.15	Pk	34.8	-14.1	60.85	-	-	68.2	-7.35	289	258	V
4	5.469853	41.92	Pk	34.8	-14.1	62.62	-	-	68.2	-5.58	289	258	V
5	* 5.46	27.86	RMS	34.9	-14.1	48.66	54	-5.34	-	-	289	258	V
6	* 5.449398	29.13	RMS	34.9	-14.1	49.93	54	-4.07	-	-	289	258	V
7	5.47	28.06	RMS	34.8	-14.1	48.76	-	-	-	-	289	258	V
8	* 5.449398	29.13	RMS	34.9	-14.1	49.93	54	-4.07	-	-	289	258	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

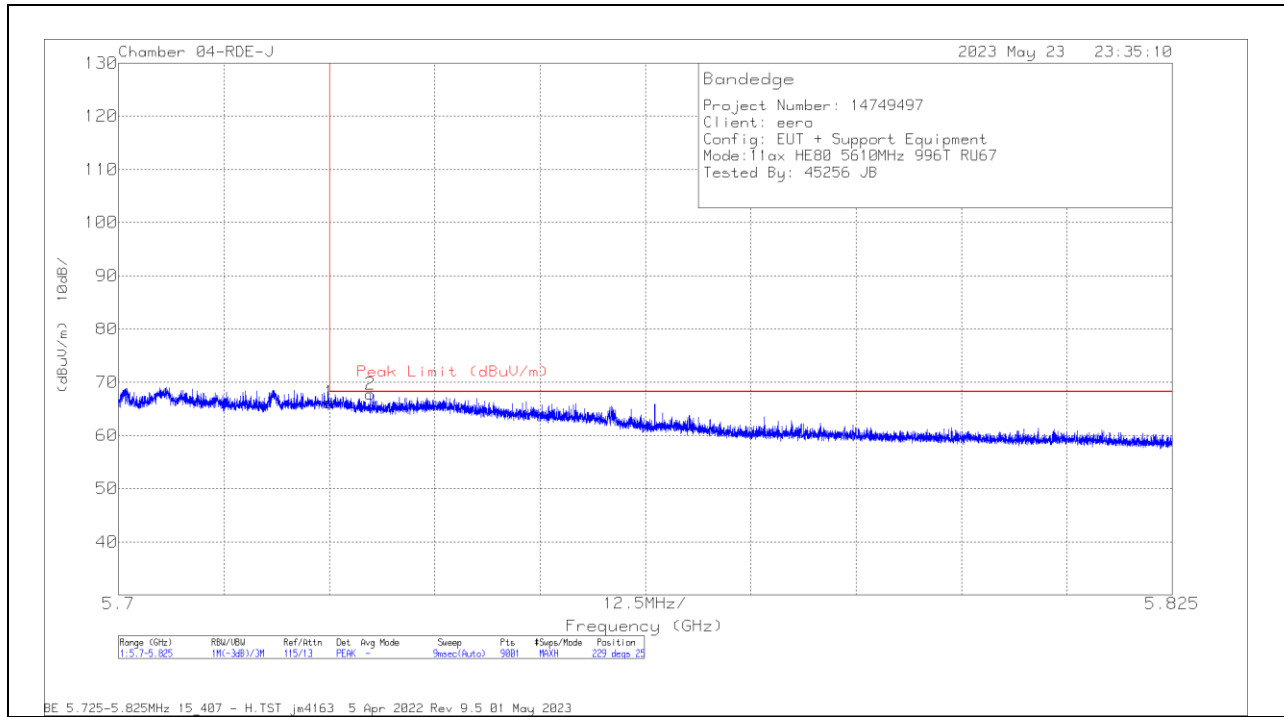


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	44.89	Pk	34.7	-13.4	66.19	68.2	-2.01	229	256	H
2	5.729875	46.46	Pk	34.7	-13.4	67.76	68.2	-.44	229	256	H

Pk - Peak detector

VERTICAL RESULT

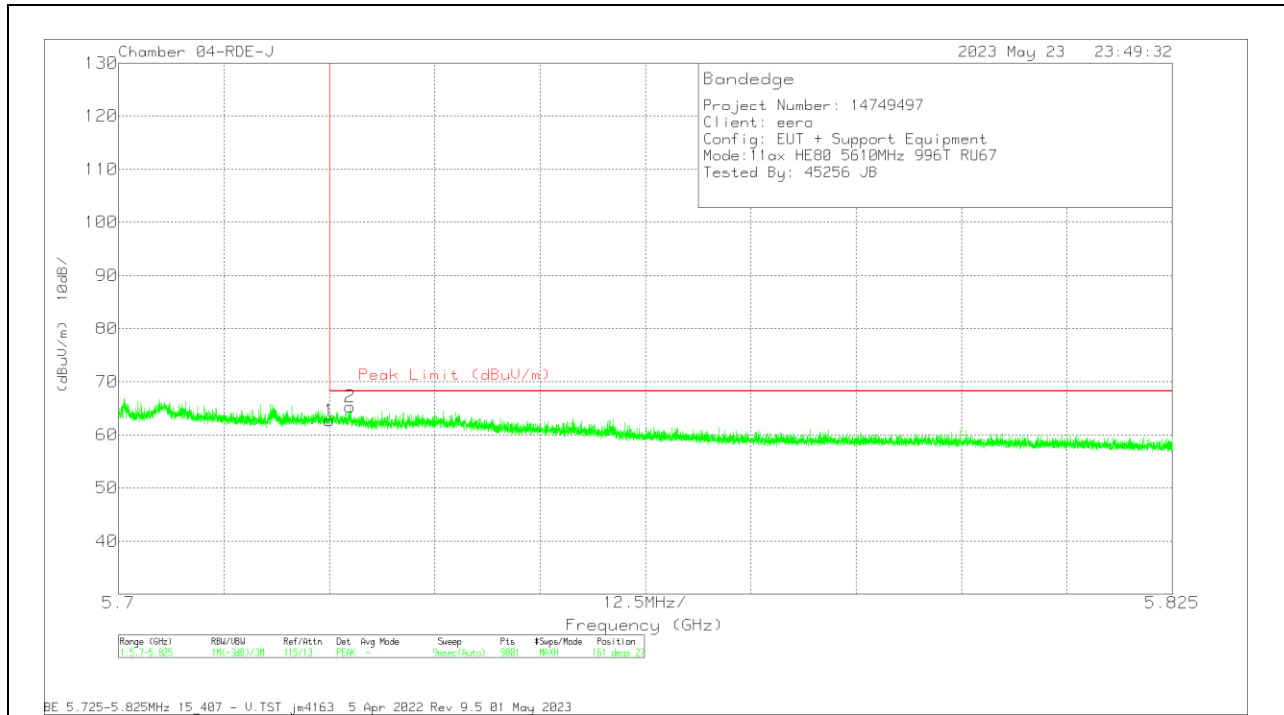

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Amp/Cbl/Pad (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	41.38	Pk	34.7	-13.4	62.68	68.2	-5.52	161	275	V
2	5.727459	43.98	Pk	34.7	-13.4	65.28	68.2	-2.92	161	275	V

Pk - Peak detector

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

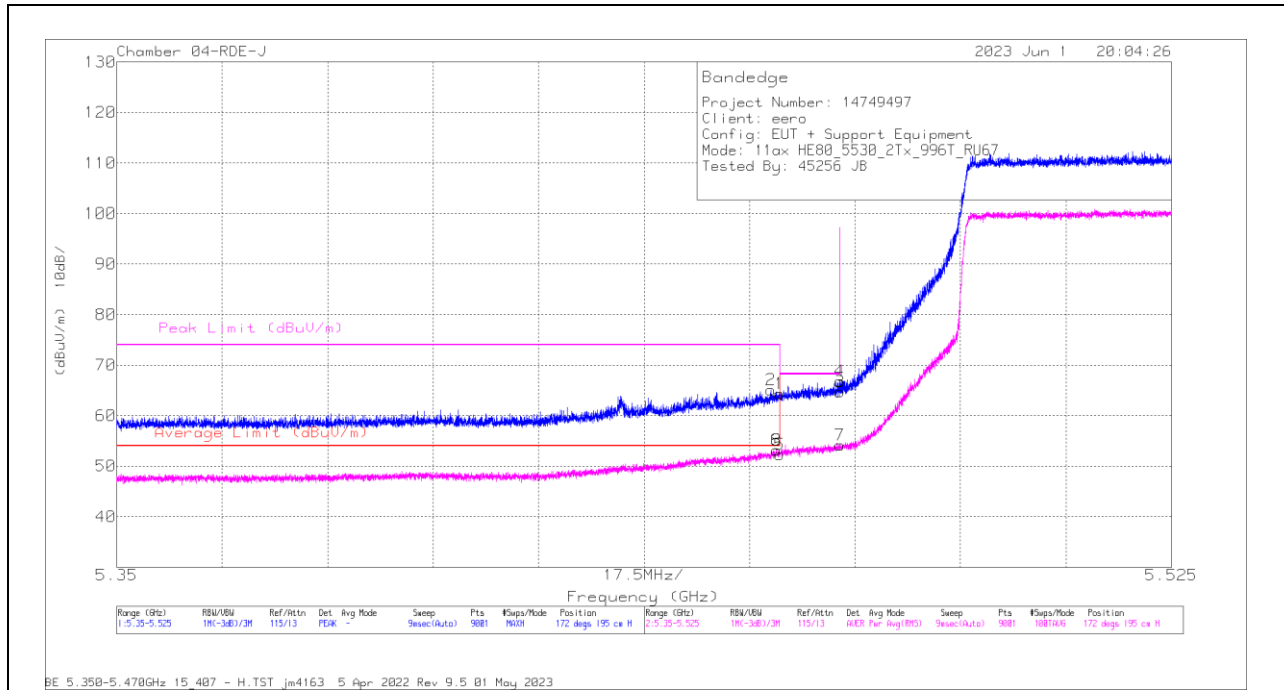

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	43.01	Pk	34.9	-13.5	64.41	-	-	68.2	-3.79	172	195	H
2	* 5.458575	43.84	Pk	34.9	-13.6	65.14	-	-	74	-8.86	172	195	H
3	5.47	43.45	Pk	34.8	-13.5	64.75	-	-	68.2	-3.45	172	195	H
4	5.46995	45.52	Pk	34.8	-13.5	66.82	-	-	68.2	-1.38	172	195	H
5	* 5.46	30.87	RMS	34.9	-13.5	52.27	54	-1.73	-	-	172	195	H
6	* 5.459489	31.92	RMS	34.9	-13.6	53.22	54	-0.78	-	-	172	195	H
7	5.47	32.93	RMS	34.8	-13.5	54.23	-	-	-	-	172	195	H
8	* 5.459489	31.92	RMS	34.9	-13.6	53.22	54	-0.78	-	-	172	195	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

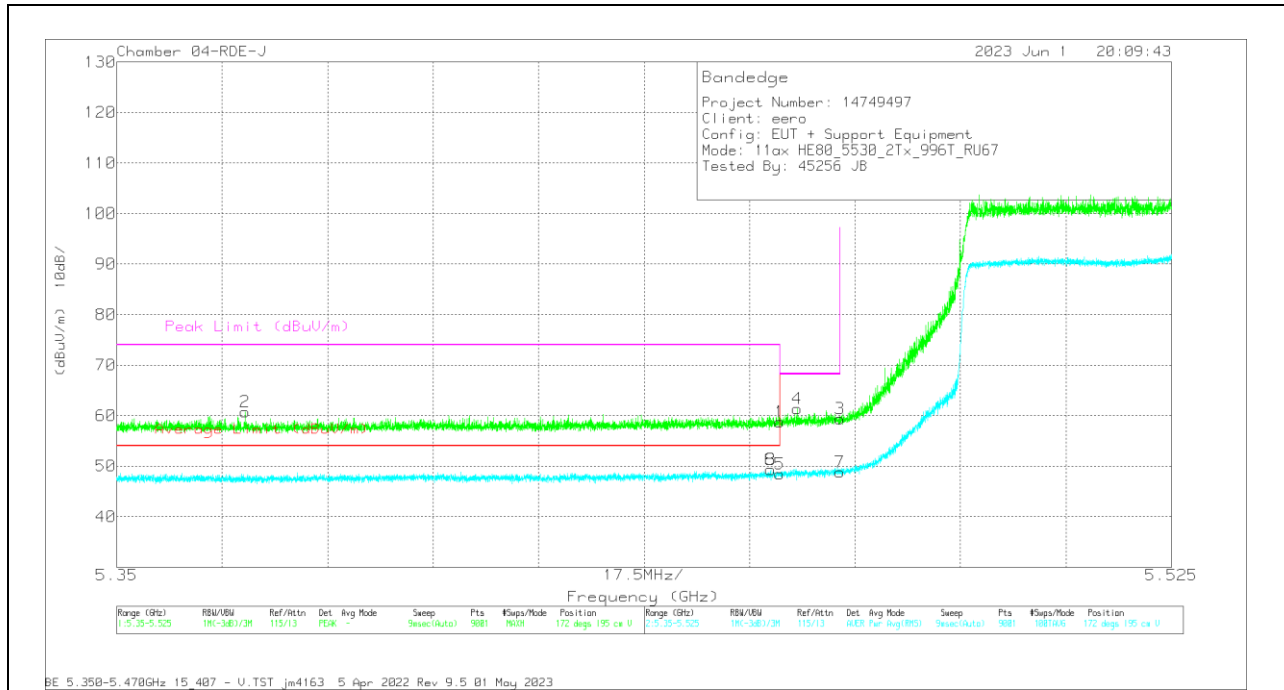


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	37.31	Pk	34.9	-13.5	58.71	-	-	68.2	-9.49	172	195	V
2	* 5.371291	39.34	Pk	35	-13.6	60.74	-	-	74	-13.26	172	195	V
3	5.47	38.06	Pk	34.8	-13.5	59.36	-	-	68.2	-8.84	172	195	V
4	5.462911	40.01	Pk	34.9	-13.5	61.41	-	-	68.2	-6.79	172	195	V
5	* 5.46	26.43	RMS	34.9	-13.5	47.83	54	-6.17	-	-	172	195	V
6	* 5.458498	27.45	RMS	34.9	-13.6	48.75	54	-5.25	-	-	172	195	V
7	5.47	27	RMS	34.8	-13.5	48.3	-	-	-	-	172	195	V
8	* 5.458498	27.45	RMS	34.9	-13.6	48.75	54	-5.25	-	-	172	195	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

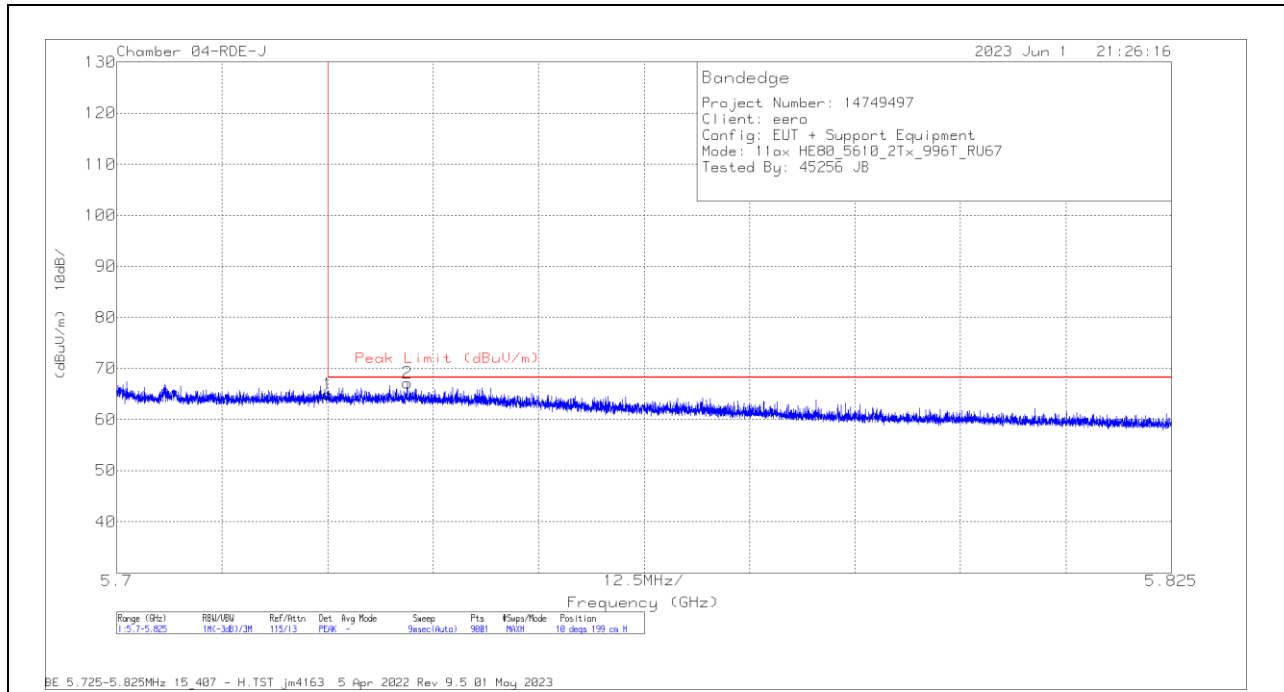


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	43.36	Pk	34.7	-13.1	64.96	68.2	-3.24	10	199	H
2	5.734473	45.56	Pk	34.7	-13.1	67.16	68.2	-1.04	10	199	H

Pk - Peak detector

VERTICAL RESULT

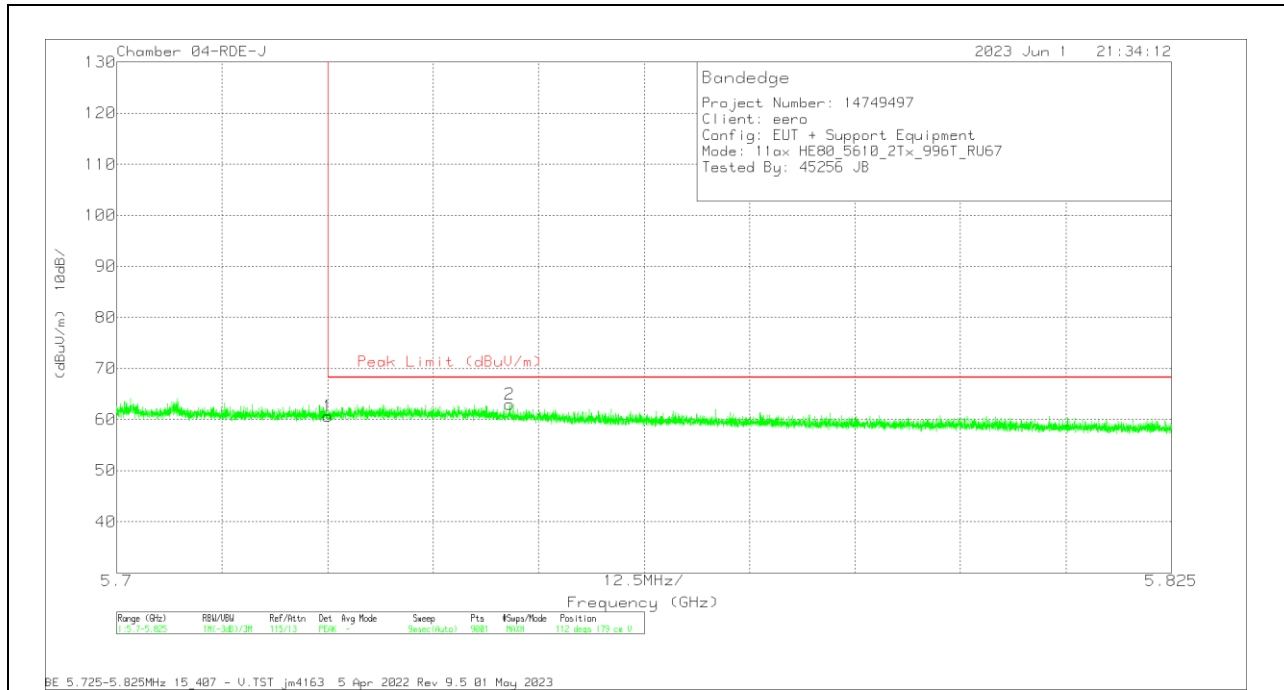

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.06	PK	34.7	-13.1	60.66	68.2	-7.54	112	179	V
2	5.746598	41.39	PK	34.7	-13.1	62.99	68.2	-5.21	112	179	V

Pk - Peak detector

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

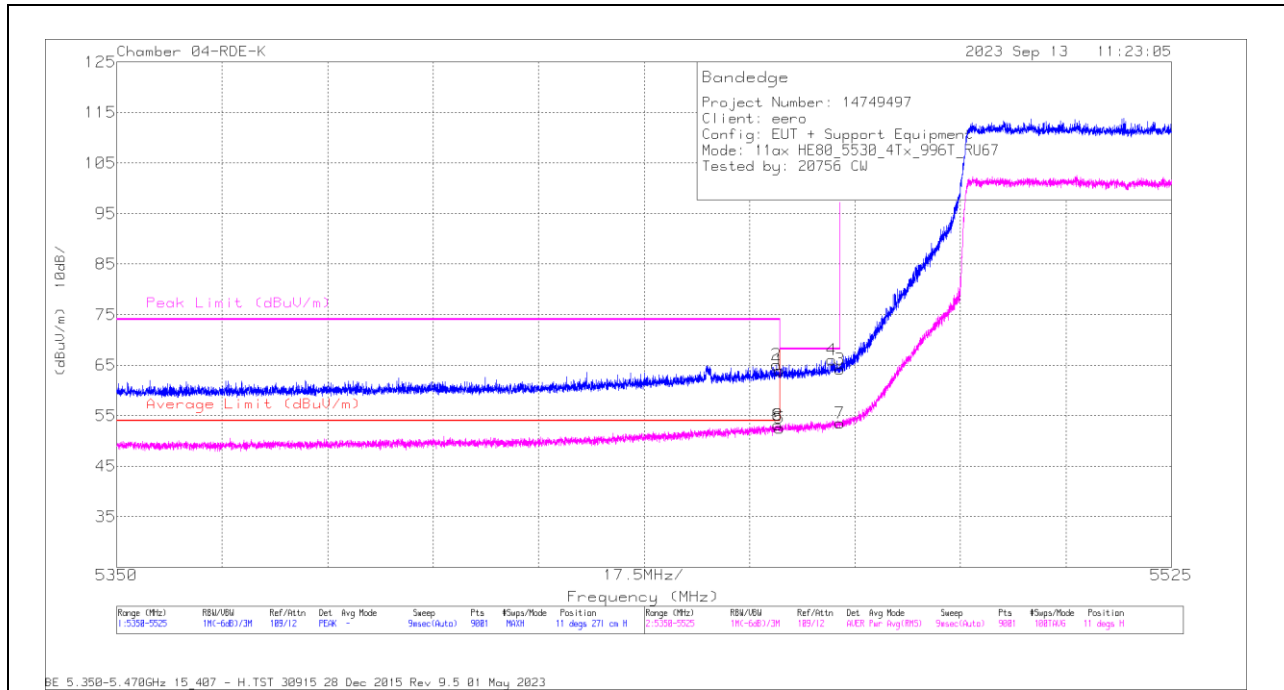


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	36.1	Pk	34.6	-6.7	64	-	-	68.2	-4.2	11	271	H
2	* 5459.489	37.11	Pk	34.6	-6.7	65.01	-	-	74	-8.99	11	271	H
3	5470	36.33	Pk	34.6	-6.7	64.23	-	-	68.2	-3.97	11	271	H
4	5468.647	38.07	Pk	34.6	-6.6	66.07	-	-	68.2	-2.13	11	271	H
5	* 5460	24.67	RMS	34.6	-6.7	52.57	54	-1.43	-	-	11	271	H
6	* 5459.684	25.26	RMS	34.6	-6.7	53.16	54	-0.84	-	-	11	271	H
7	5470	25.6	RMS	34.6	-6.7	53.5	-	-	-	-	11	271	H
8	* 5459.684	25.26	RMS	34.6	-6.7	53.16	54	-0.84	-	-	11	271	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

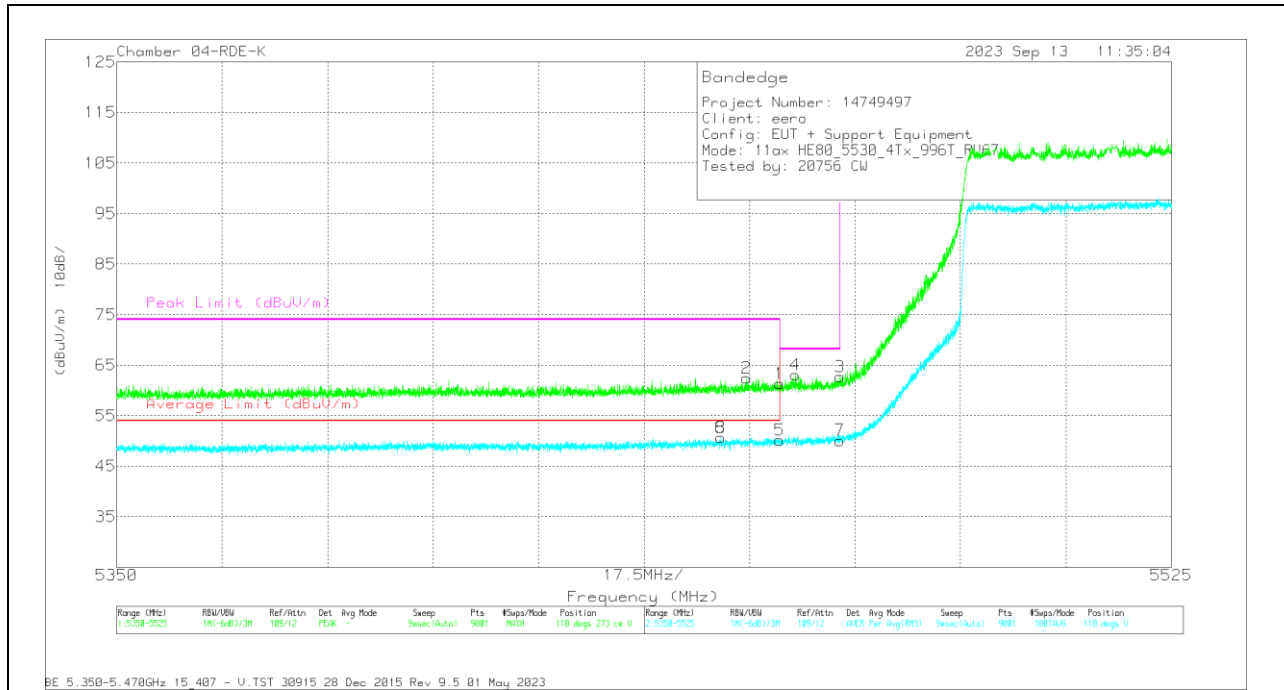

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	33.46	Pk	34.6	-6.7	61.36	-	-	68.2	-6.84	110	273	V
2	* 5454.473	34.71	Pk	34.6	-6.8	62.51	-	-	74	-11.49	110	273	V
3	5470	34.78	Pk	34.6	-6.7	62.68	-	-	68.2	-5.52	110	273	V
4	5462.639	35.16	Pk	34.6	-6.7	63.06	-	-	68.2	-5.14	110	273	V
5	* 5460	22.28	RMS	34.6	-6.7	50.18	54	-3.82	-	-	110	273	V
6	* 5450.273	22.88	RMS	34.6	-6.8	50.68	54	-3.32	-	-	110	273	V
7	5470	22.2	RMS	34.6	-6.7	50.1	-	-	-	-	110	273	V
8	* 5450.273	22.88	RMS	34.6	-6.8	50.68	54	-3.32	-	-	110	273	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

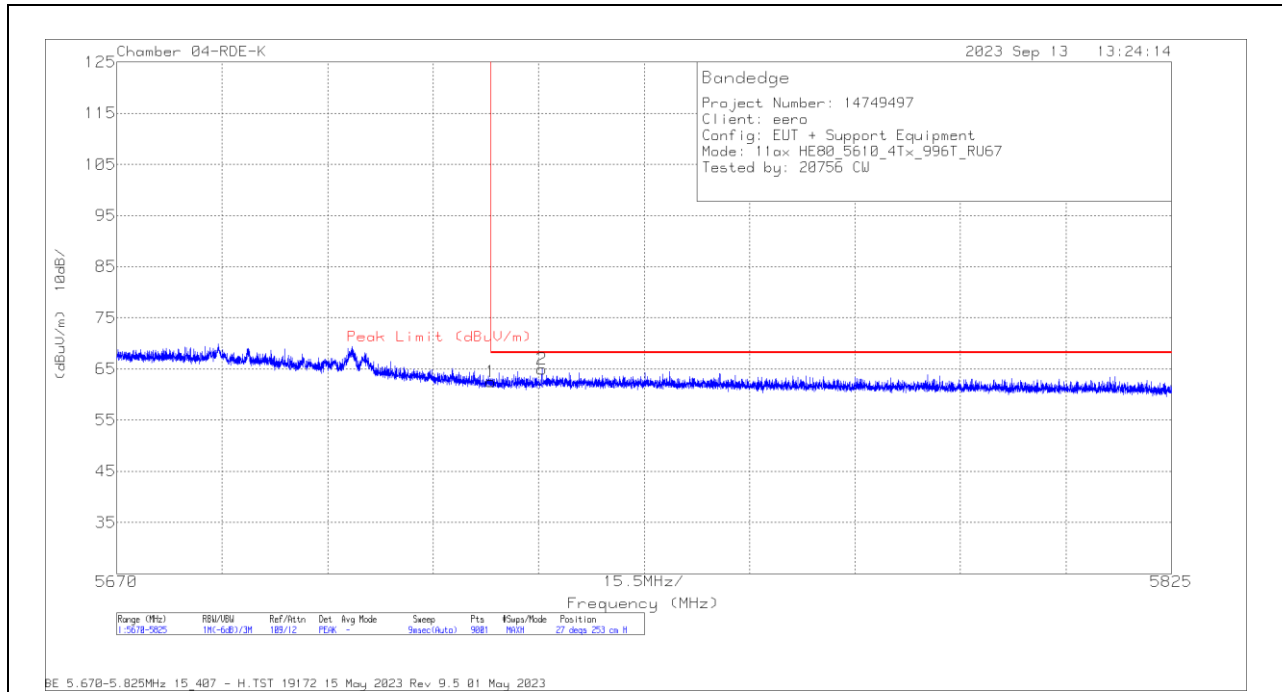


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	33.82	Pk	34.7	-6	62.52	68.2	-5.68	27	253	H
2	5732.481	36.31	Pk	34.7	-6	65.01	68.2	-3.19	27	253	H

Pk - Peak detector

VERTICAL RESULT

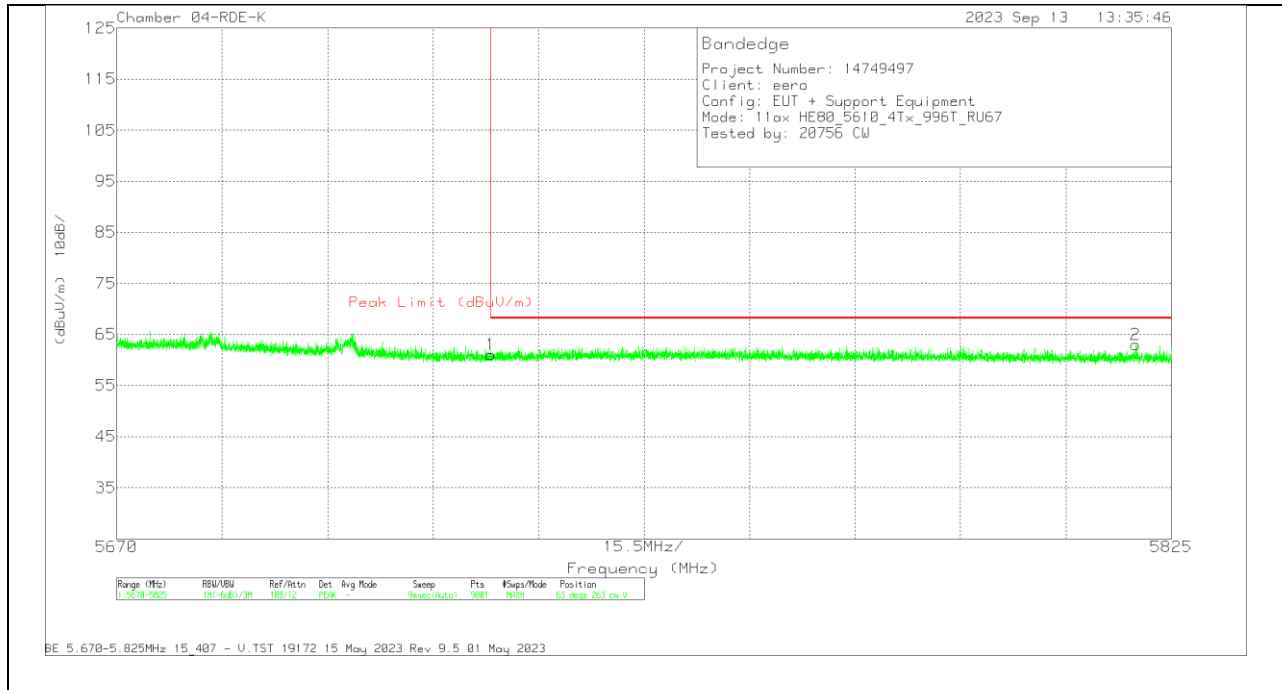

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	32.39	Pk	34.7	-6	61.09	68.2	-7.11	63	263	V
2	5819.728	33.96	Pk	34.8	-5.8	62.96	68.2	-5.24	63	263	V


Pk - Peak detector

10.1.14. TX ABOVE 1 GHz 802.11be EHT80 MODE IN THE 5.6GHz BAND

1TX Antenna 6 OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

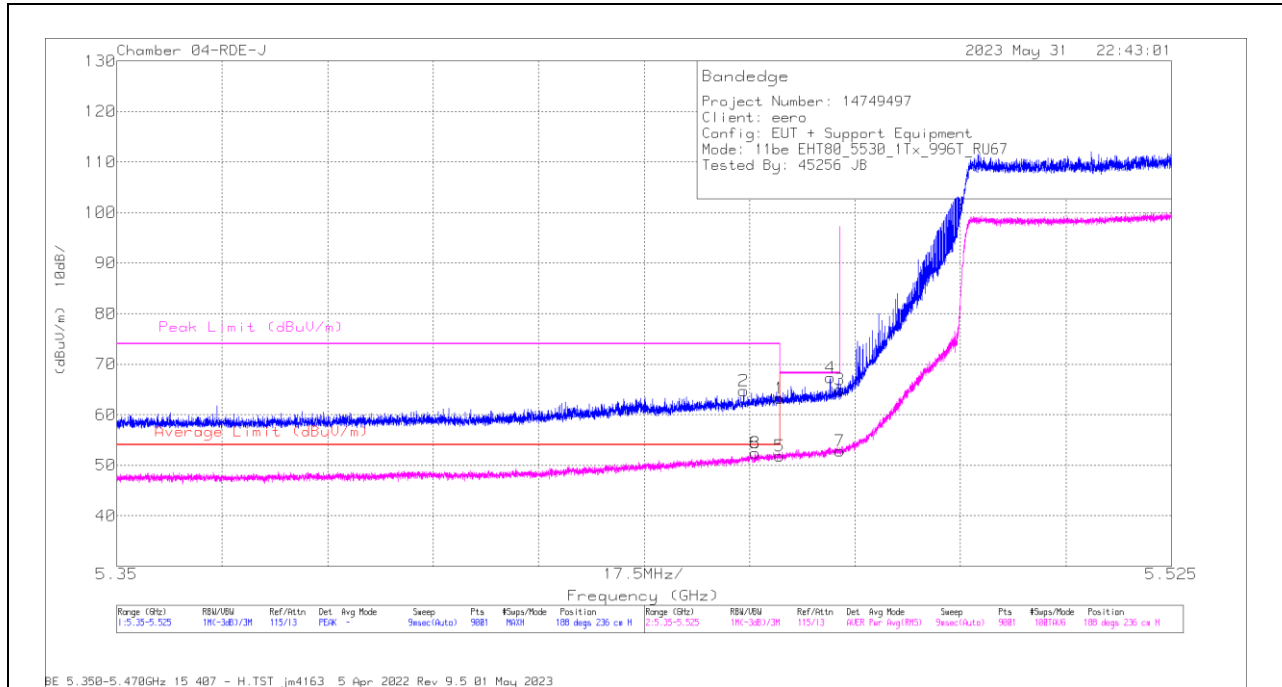

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	41.88	Pk	34.9	-13.5	63.28	-	-	68.2	-4.92	188	236	H
2	* 5.454025	43.38	Pk	34.9	-13.6	64.68	-	-	74	-9.32	188	236	H
3	5.47	43.64	Pk	34.8	-13.5	64.94	-	-	68.2	-3.26	188	236	H
4	5.468395	46.09	Pk	34.8	-13.5	67.39	-	-	68.2	-8.1	188	236	H
5	* 5.46	30.41	RMS	34.9	-13.5	51.81	54	-2.19	-	-	188	236	H
6	* 5.45597	31.17	RMS	34.9	-13.6	52.47	54	-1.53	-	-	188	236	H
7	5.47	31.55	RMS	34.8	-13.5	52.85	-	-	-	-	188	236	H
8	* 5.45597	31.17	RMS	34.9	-13.6	52.47	54	-1.53	-	-	188	236	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

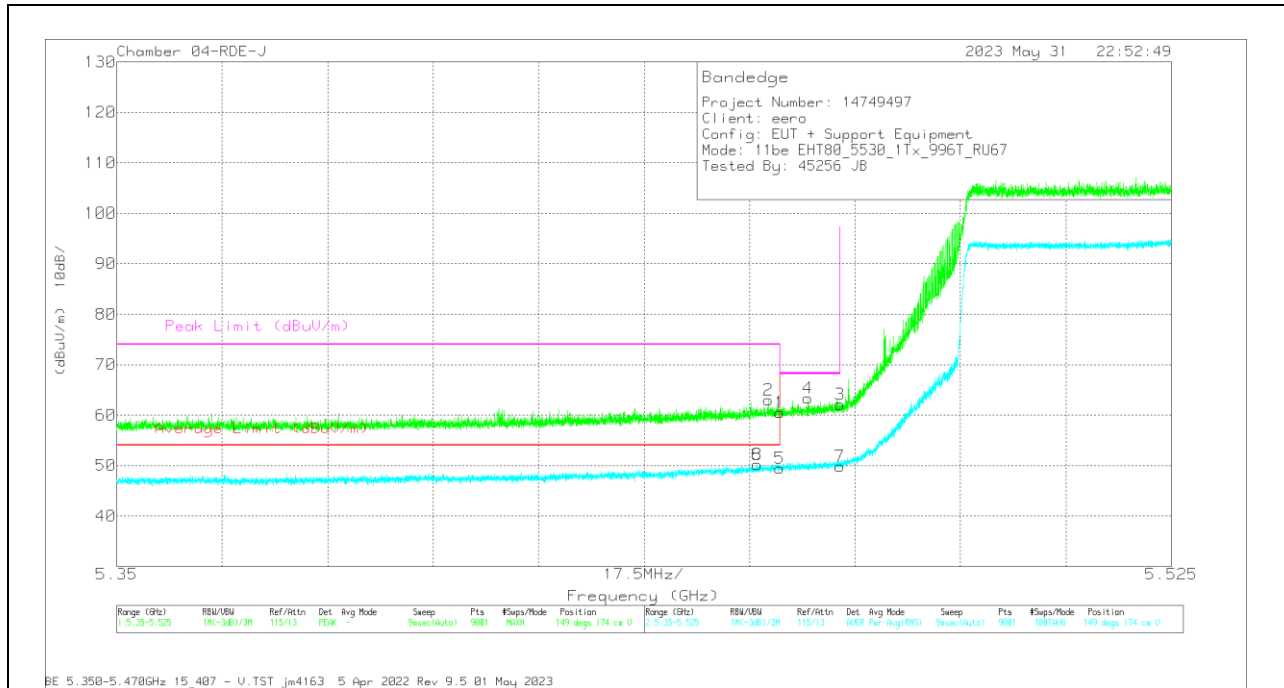


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	39.1	Pk	34.9	-13.5	60.5	-	-	68.2	-7.7	149	174	V
2	* 5.458089	41.72	Pk	34.9	-13.6	63.02	-	-	74	-10.98	149	174	V
3	5.47	40.81	Pk	34.8	-13.5	62.11	-	-	68.2	-6.09	149	174	V
4	5.4647	41.97	Pk	34.9	-13.5	63.37	-	-	68.2	-4.83	149	174	V
5	* 5.46	28.01	RMS	34.9	-13.5	49.41	54	-4.59	-	-	149	174	V
6	* 5.456242	28.88	RMS	34.9	-13.6	50.18	54	-3.82	-	-	149	174	V
7	5.47	28.54	RMS	34.8	-13.5	49.84	-	-	-	-	149	174	V
8	* 5.456242	28.88	RMS	34.9	-13.6	50.18	54	-3.82	-	-	149	174	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

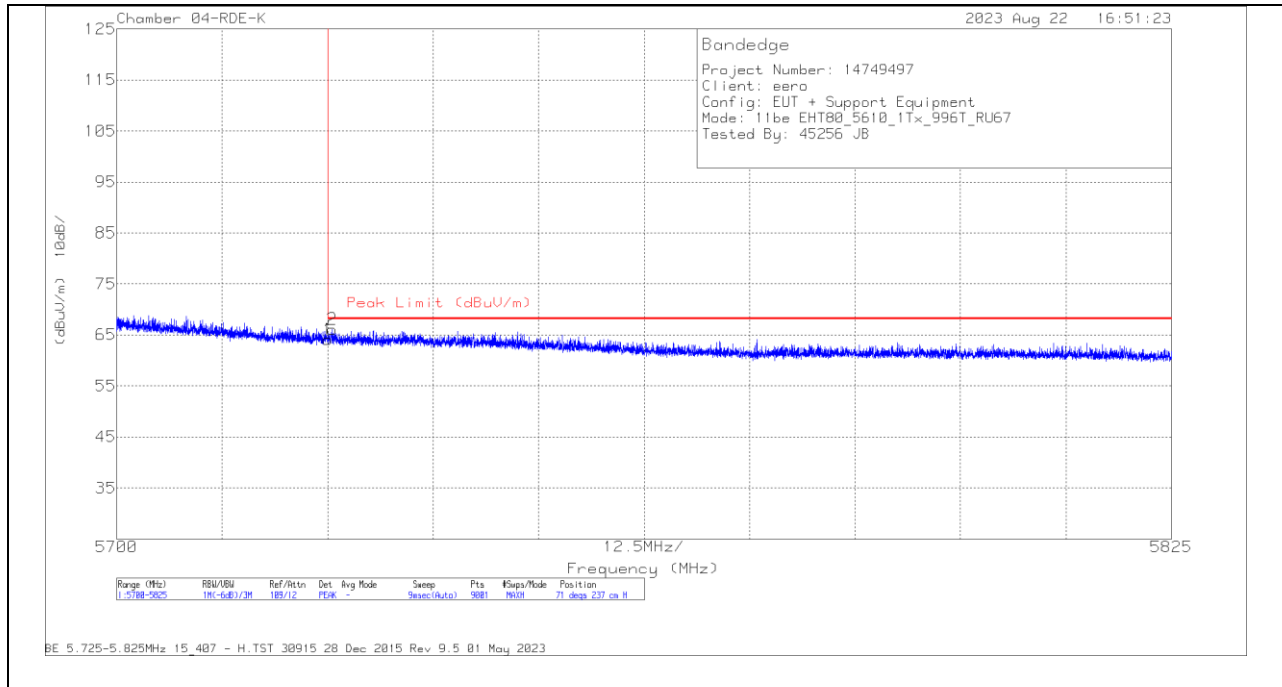


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	35.41	Pk	34.7	-6	64.11	68.2	-4.09	71	237	H
2	5725.556	37.54	Pk	34.7	-6.1	66.14	68.2	-2.06	71	237	H

Pk - Peak detector

VERTICAL RESULT

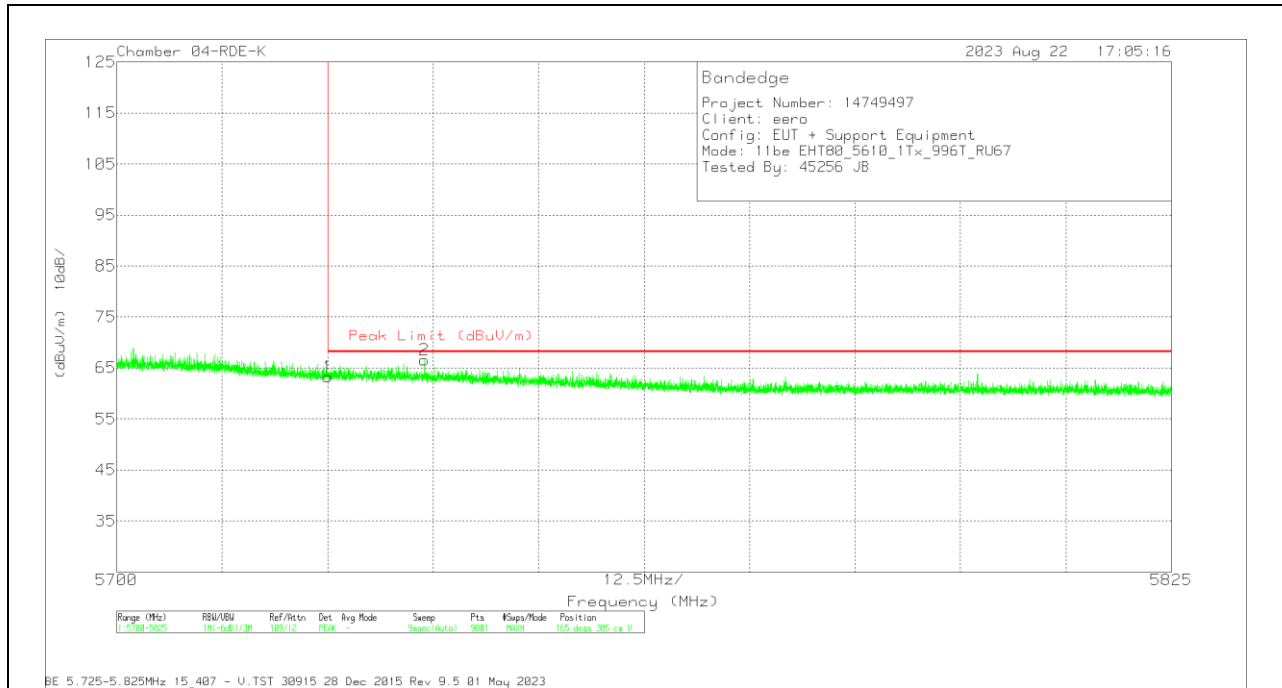

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	34.55	Pk	34.7	-6	63.25	68.2	-4.95	165	385	V
2	5736.473	37.73	Pk	34.7	-5.9	66.53	68.2	-1.67	165	385	V

Pk - Peak detector

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

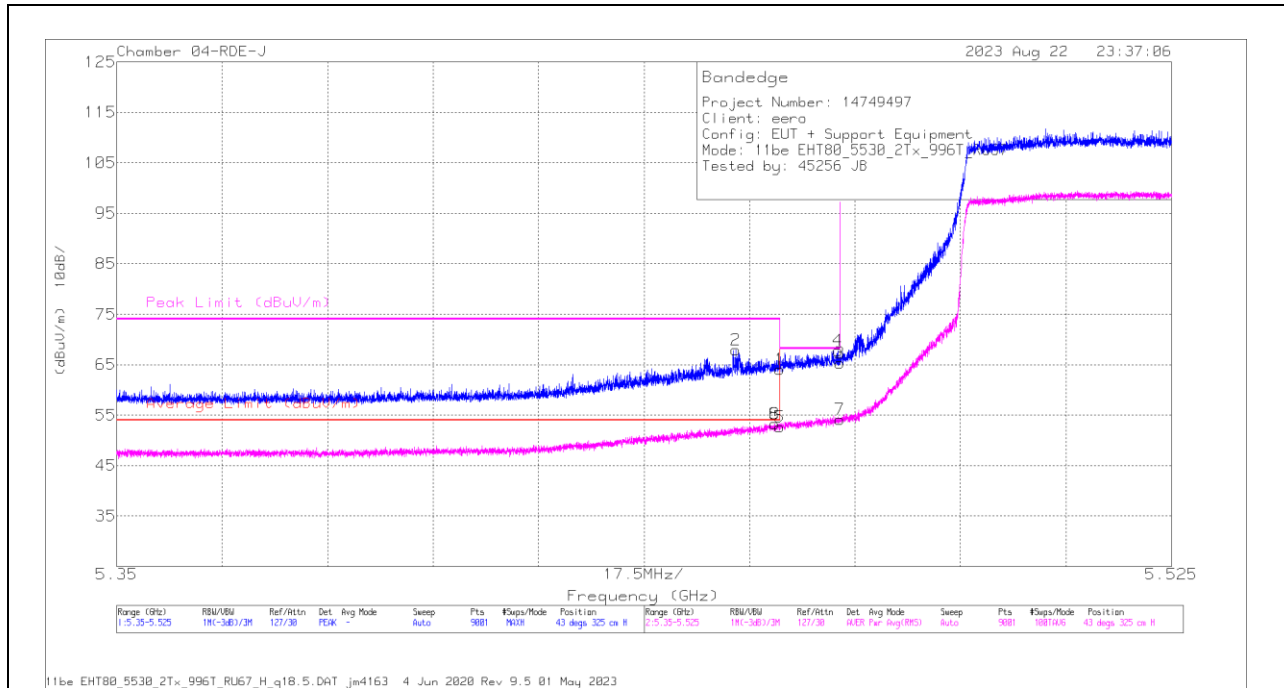

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	59.26	Pk	34.6	-29.8	64.06	-	-	68.2	-4.14	43	325	H
2	* 5.452742	63.21	Pk	34.6	-29.9	67.91	-	-	74	-6.09	43	325	H
3	5.47	60.63	Pk	34.6	-29.9	65.33	-	-	68.2	-2.87	43	325	H
4	5.469639	63.05	Pk	34.6	-29.9	67.75	-	-	68.2	-4.45	43	325	H
5	* 5.46	47.8	RMS	34.6	-29.8	52.6	54	-1.4	-	-	43	325	H
6	* 5.459217	48.59	RMS	34.6	-29.9	53.29	54	-7.1	-	-	43	325	H
7	5.47	49.44	RMS	34.6	-29.9	54.14	-	-	-	-	43	325	H
8	* 5.459217	48.59	RMS	34.6	-29.9	53.29	54	-7.1	-	-	43	325	H


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

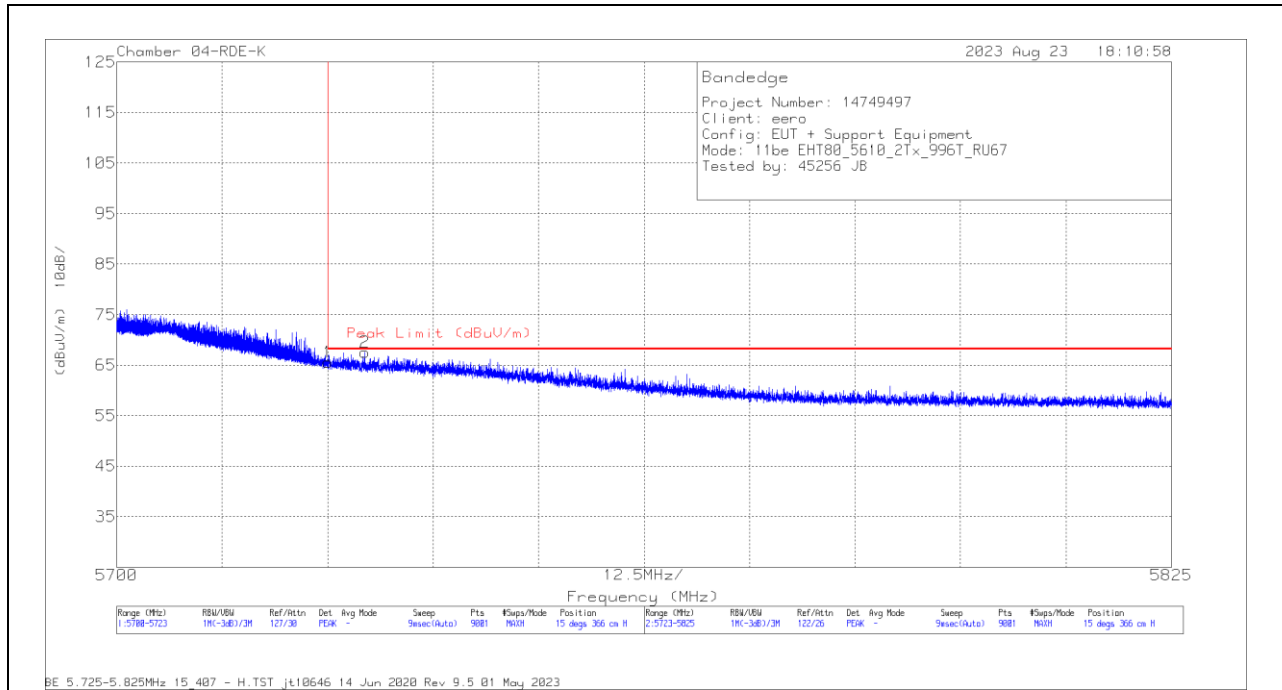


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	60.24	Pk	34.7	-29.4	65.54	68.2	-2.66	15	366	H
2	5729.414	62.13	Pk	34.7	-29.3	67.53	68.2	-0.67	15	366	H

Pk - Peak detector

VERTICAL RESULT

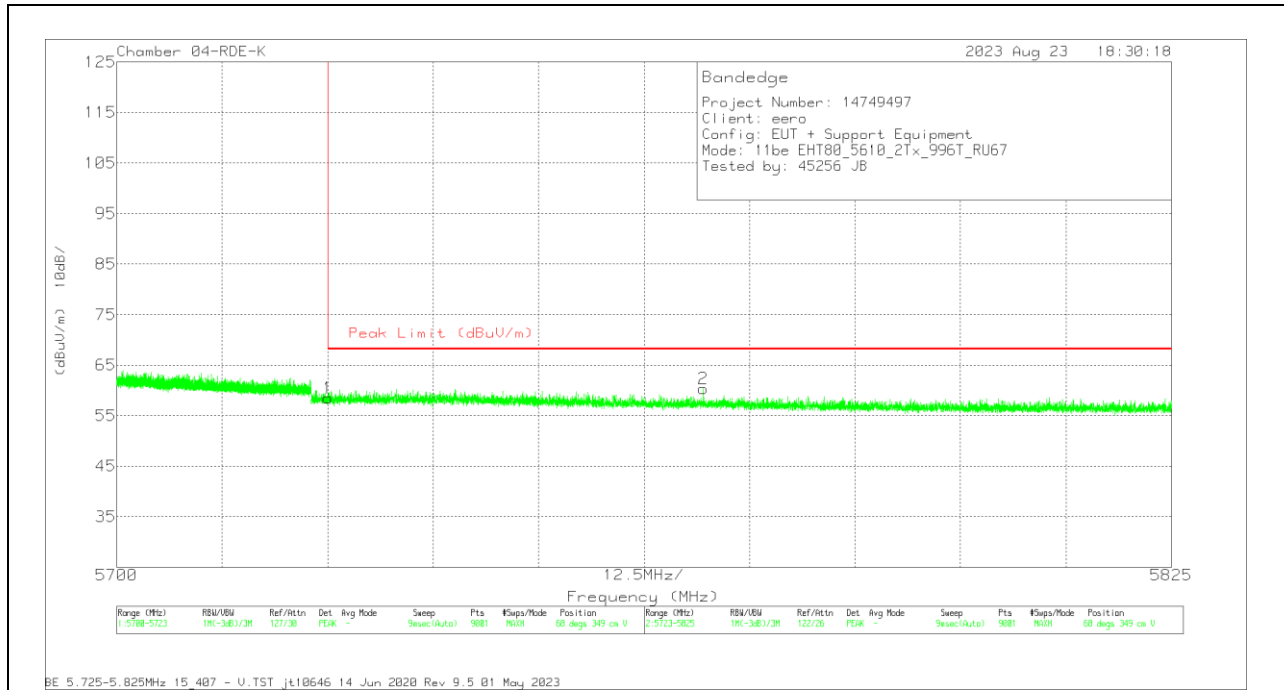

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	53.19	Pk	34.7	-29.4	58.49	68.2	-9.71	68	349	V
2	5769.545	54.92	Pk	34.7	-29.3	60.32	68.2	-7.88	68	349	V

Pk - Peak detector

4TX Antenna 6 + Antenna 4 + Antenna 9 + Antenna 1 CDD OFDMA MODE: 996-Tones, RU Index 67

BANDEDGE (LOW CHANNEL)

HORIZONTAL RESULT

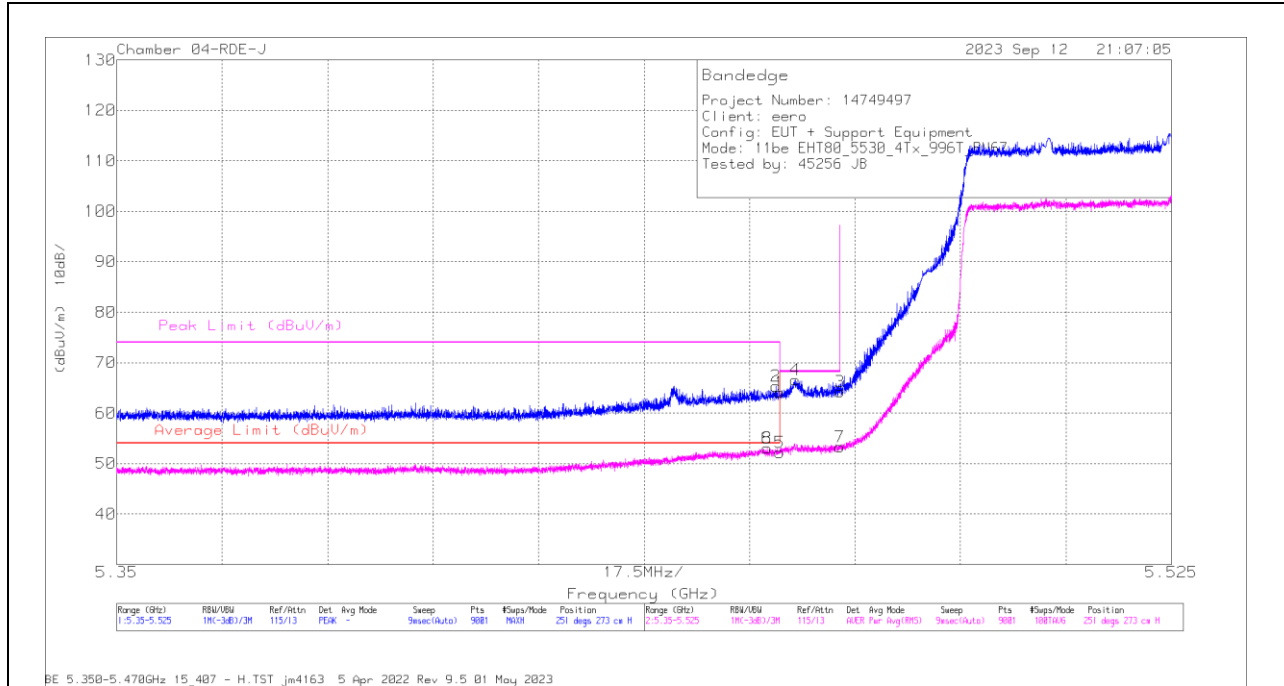

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.68	Pk	34.9	-13.5	64.08	-	-	68.2	-4.12	251	273	H
2	* 5.459353	44.1	Pk	34.9	-13.6	65.4	-	-	74	-8.6	251	273	H
3	5.47	42.89	Pk	34.8	-13.5	64.19	-	-	68.2	-4.01	251	273	H
4	5.4626	45.15	Pk	34.9	-13.5	66.55	-	-	68.2	-1.65	251	273	H
5	* 5.46	30.76	RMS	34.9	-13.5	52.16	54	-1.84	-	-	251	273	H
6	* 5.457914	31.81	RMS	34.9	-13.6	53.11	54	-0.89	-	-	251	273	H
7	5.47	32	RMS	34.8	-13.5	53.3	-	-	-	-	251	273	H
8	* 5.457914	31.81	RMS	34.9	-13.6	53.11	54	-0.89	-	-	251	273	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

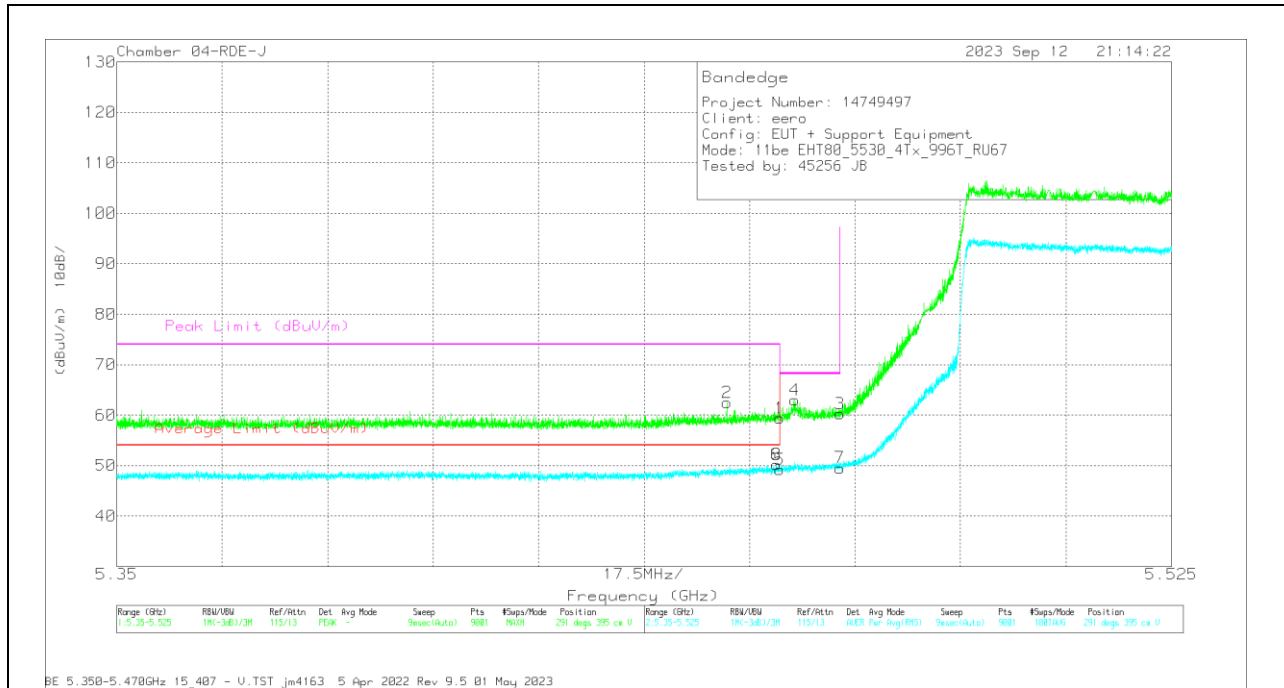


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dBm)	Cbl/Amp (dB)	DCCF (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.02	PK	34.9	-13.5	0	59.42	-	-	68.2	-8.78	291	395	V
2	* 5.451284	41.16	PK	34.9	-13.6	0	62.46	-	-	74	-11.54	291	395	V
3	* 5.47	38.96	PK	34.8	-13.5	0	60.26	-	-	68.2	-7.94	291	395	V
4	5.462464	41.58	PK	34.9	-13.5	0	62.98	-	-	68.2	-5.22	291	395	V
5	* 5.46	27.25	RMS	34.9	-13.5	.59	49.24	54	-4.76	-	-	291	395	V
6	* 5.45945	28.35	RMS	34.9	-13.6	.59	50.24	54	-3.76	-	-	291	395	V
7	5.47	27.63	RMS	34.8	-13.5	.59	49.52	-	-	-	-	291	395	V
8	* 5.45945	28.35	RMS	34.9	-13.6	.59	50.24	54	-3.76	-	-	291	395	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK - Peak detector
 RMS - RMS detection

BANDEDGE (HIGH CHANNEL)

HORIZONTAL RESULT

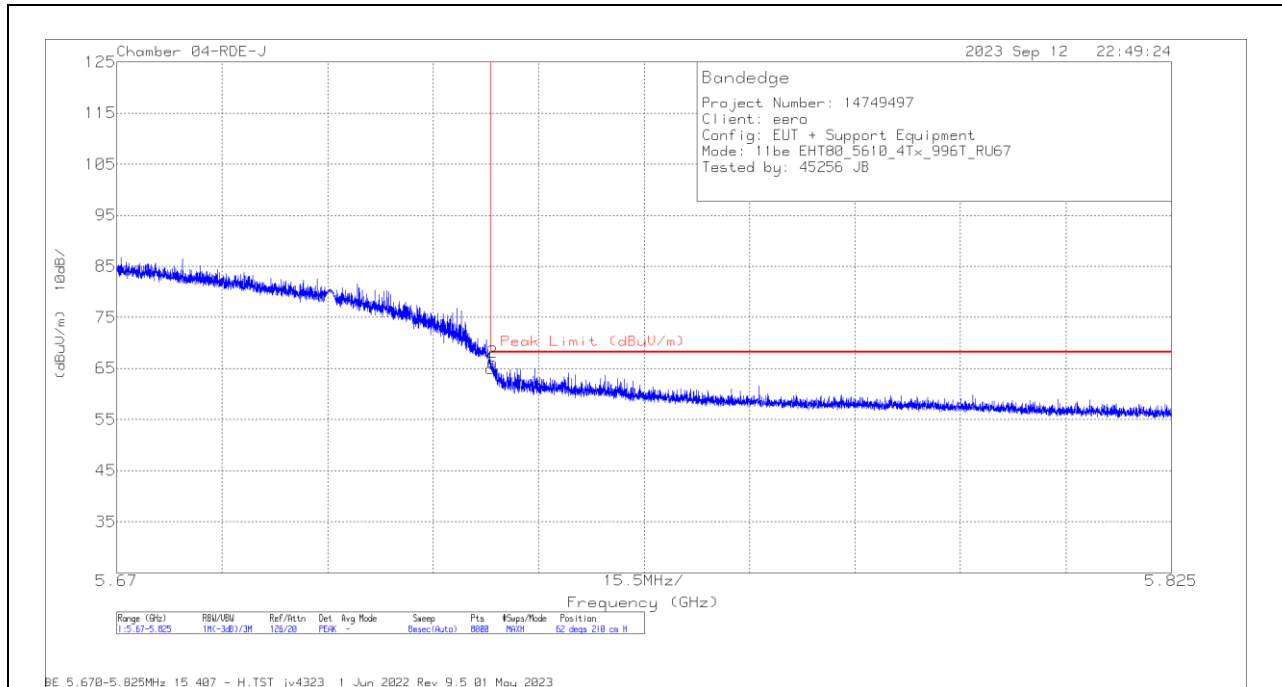


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	64.25	Pk	34.7	-34	64.95	68.2	-3.25	62	210	H
2	5.725244	65.51	Pk	34.7	-34	66.21	68.2	-1.99	62	210	H

Pk - Peak detector

VERTICAL RESULT

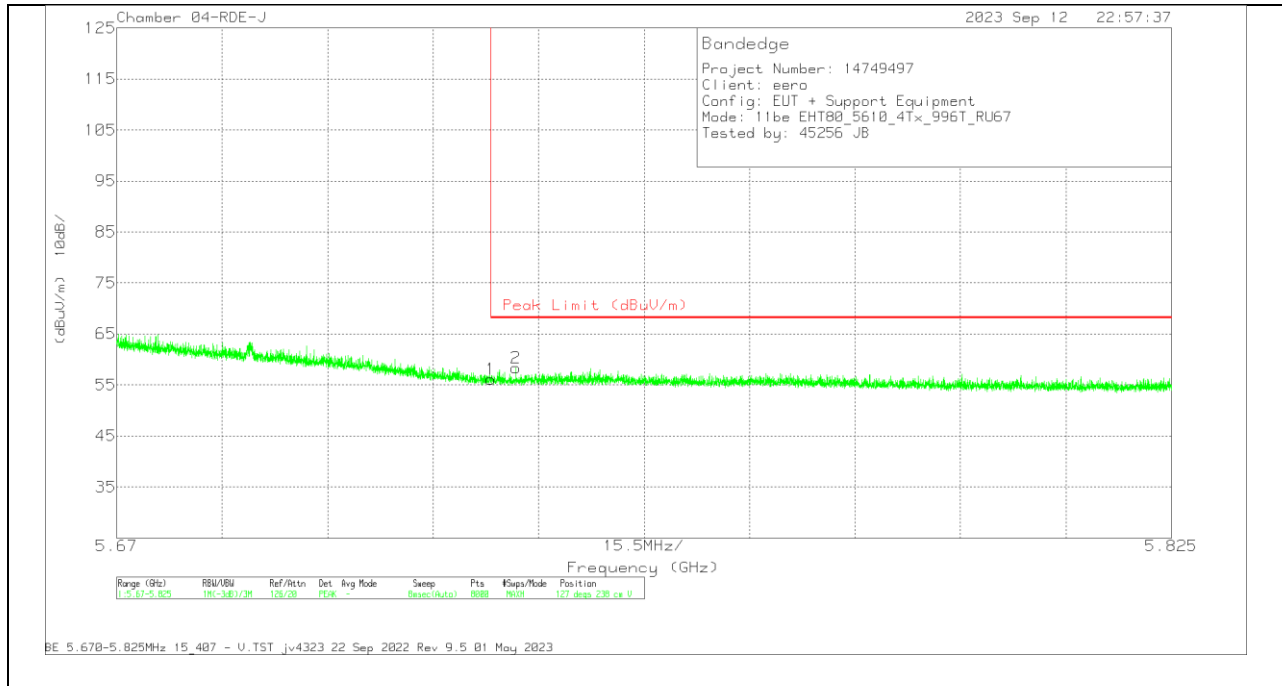


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF 3m (dB/m)	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	55.44	Pk	34.7	-34	56.14	68.2	-12.06	127	238	V
2	5.728654	57.67	Pk	34.7	-34	58.37	68.2	-9.83	127	238	V


Pk - Peak detector

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL

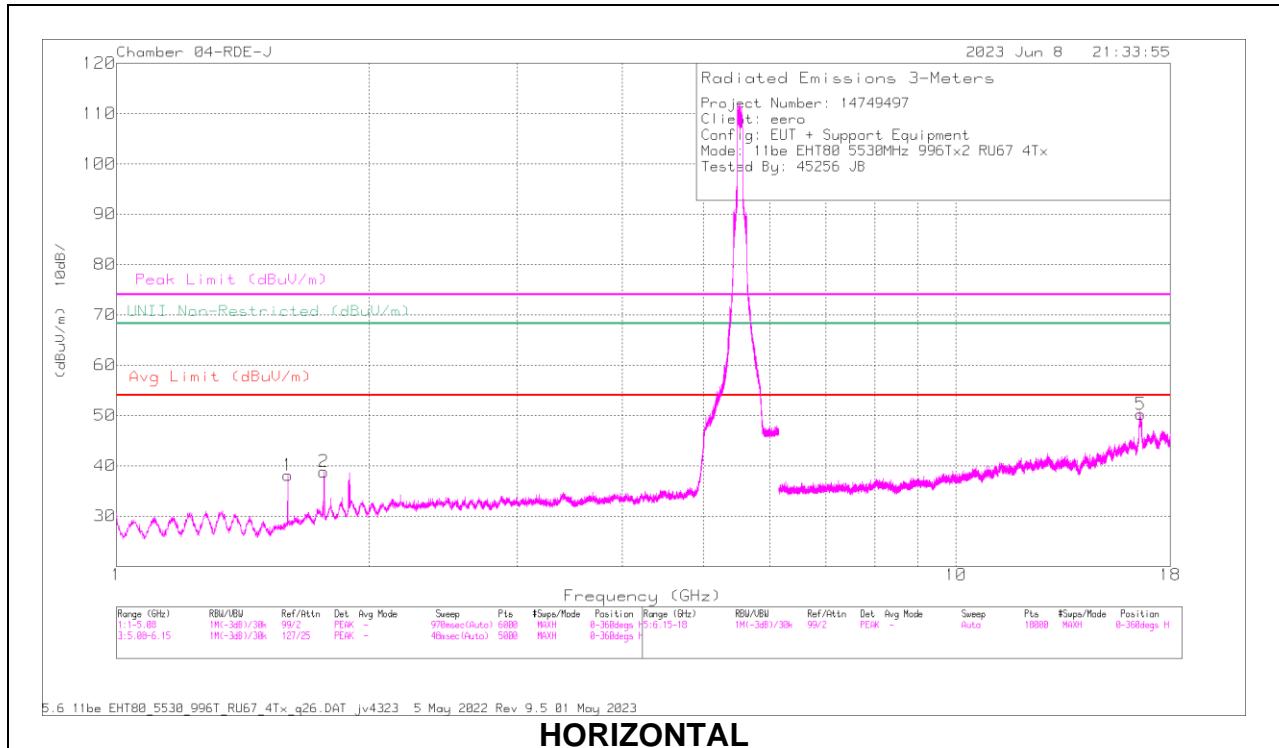

HORIZONTAL

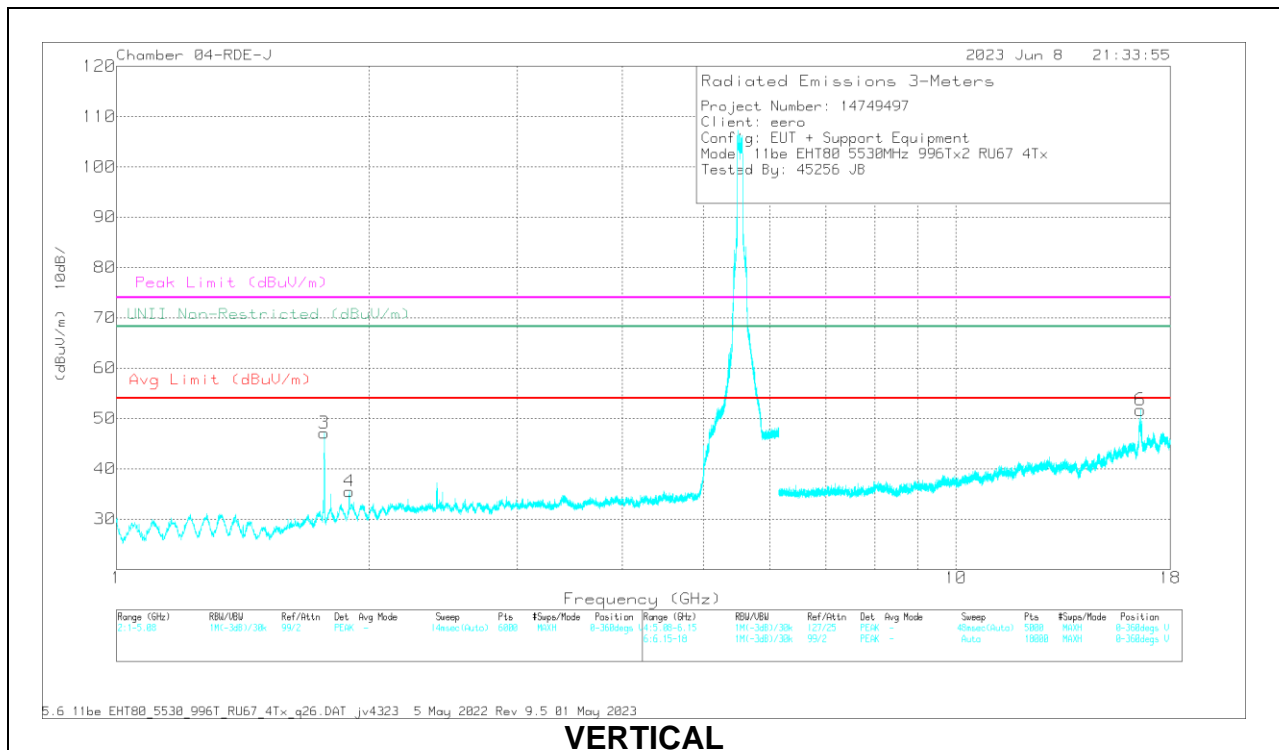

VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.600133	71.14	PK-U	27.8	-47	51.94	-	-	74	-22.06	-	-	40	115	H
	* 1.599411	49.27	ADR	27.8	-46.9	30.17	54	-23.83	-	-	-	-	40	115	H
2	1.762367	57.18	PK-U	30.2	-46.6	40.78	-	-	-	-	68.2	-27.42	349	127	H
3	1.765488	56.15	PK-U	30.3	-46.5	39.95	-	-	-	-	68.2	-28.25	237	389	V
4	1.895255	58.73	PK-U	30.9	-46.6	43.03	-	-	-	-	68.2	-25.17	218	101	V
5	16.541514	59.28	PK-U	42	-38.4	62.88	-	-	-	-	68.2	-5.32	345	206	H
6	16.589501	58.44	PK-U	42.1	-38.8	61.74	-	-	-	-	68.2	-6.46	173	106	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


PK-U - U-NII: Maximum Peak

ADR - U-NII AD primary method, RMS average

HIGH CHANNEL

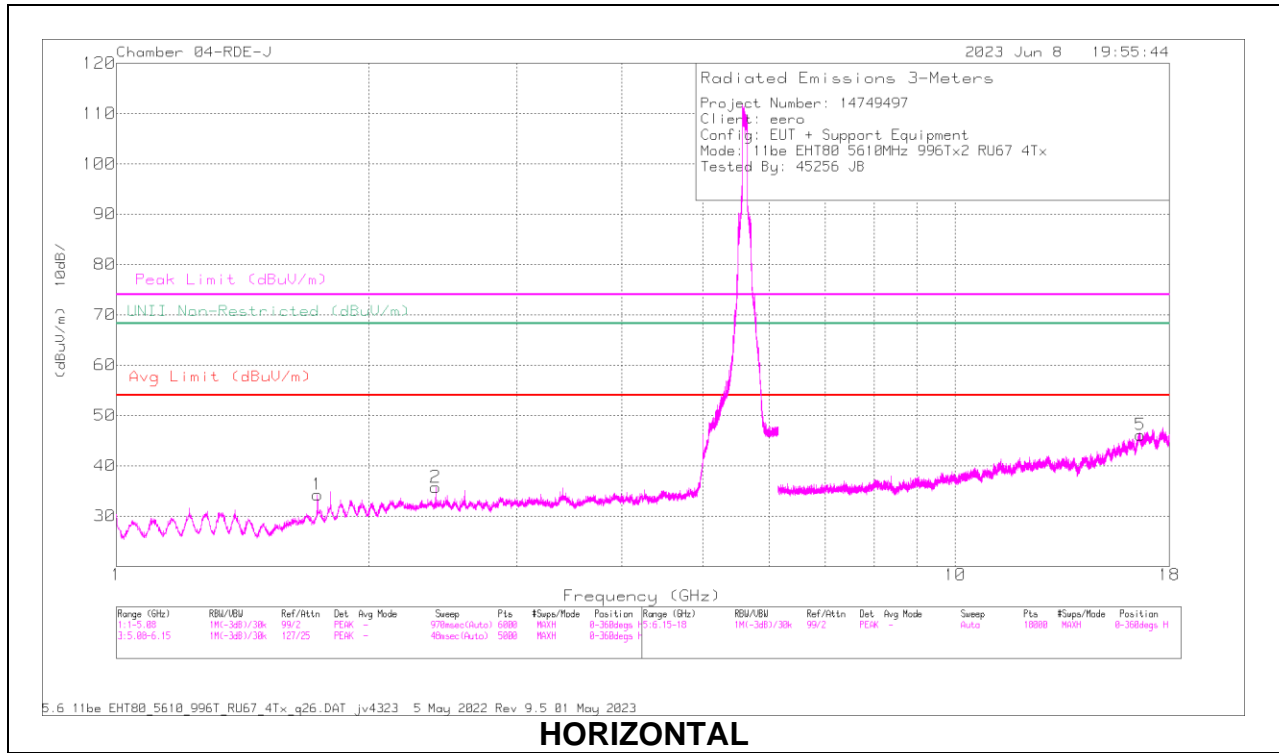

HORIZONTAL

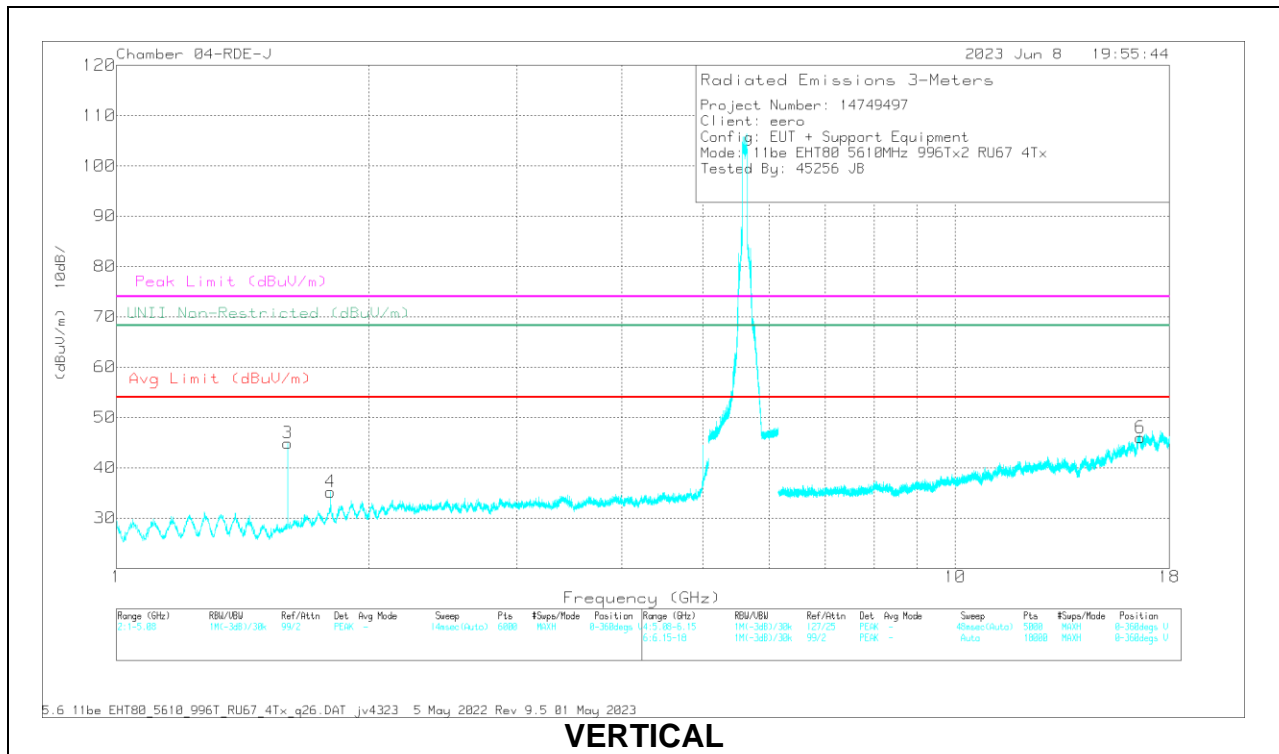


VERTICAL

RADIATED EMISSIONS


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.740259	58.23	PK-U	30	-46.6	41.63	-	-	-	-	68.2	-26.57	139	368	H
2	2.402022	57.97	PK-U	32	-46.6	43.37	-	-	-	-	68.2	-24.83	354	115	H
3	* 1.600026	65.62	PK-U	27.8	-47	46.42	-	-	74	-27.58	-	-	2	142	V
	* 1.599908	46.87	ADR	27.8	-47	27.67	54	-26.33	-	-	-	-	2	142	V
4	1.799907	62.29	PK-U	30.5	-46.5	46.29	-	-	-	-	68.2	-21.91	28	111	V
5	16.620189	52.83	PK-U	42.2	-39.4	55.63	-	-	-	-	68.2	-12.57	20	357	H
6	16.628725	52.75	PK-U	42.2	-39.4	55.55	-	-	-	-	68.2	-12.65	266	321	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

CHANNEL 138

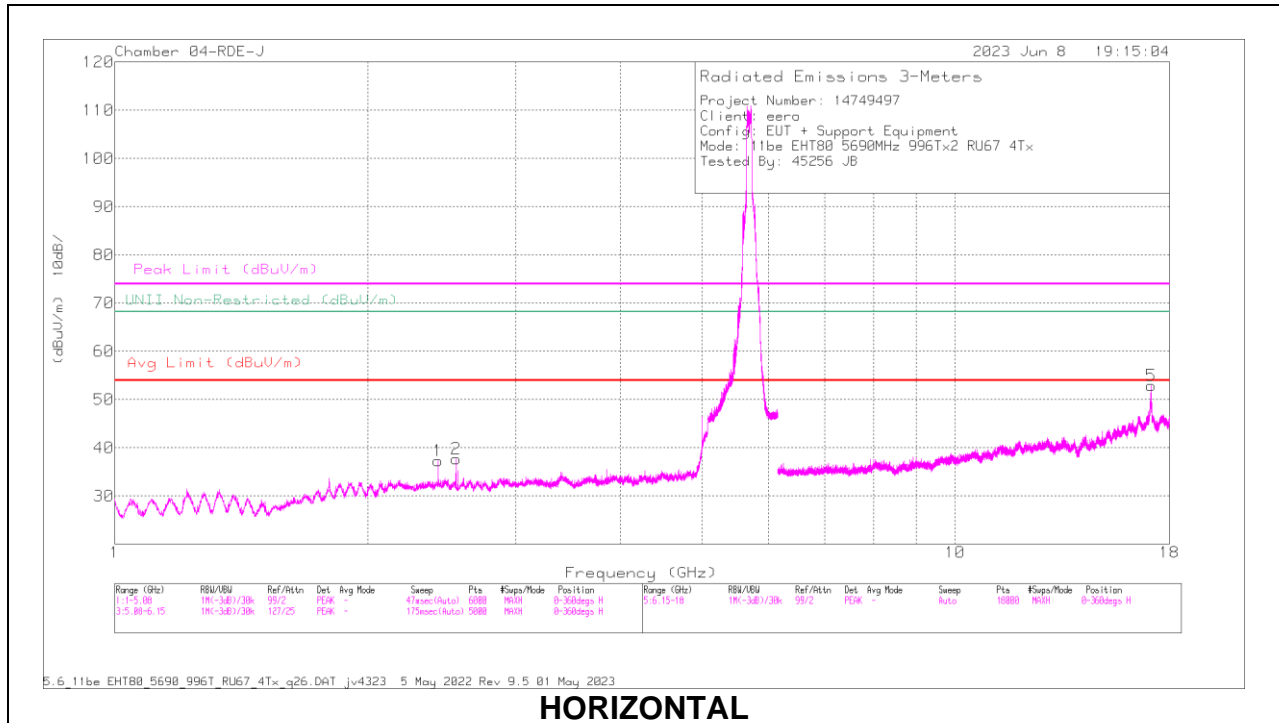

HORIZONTAL

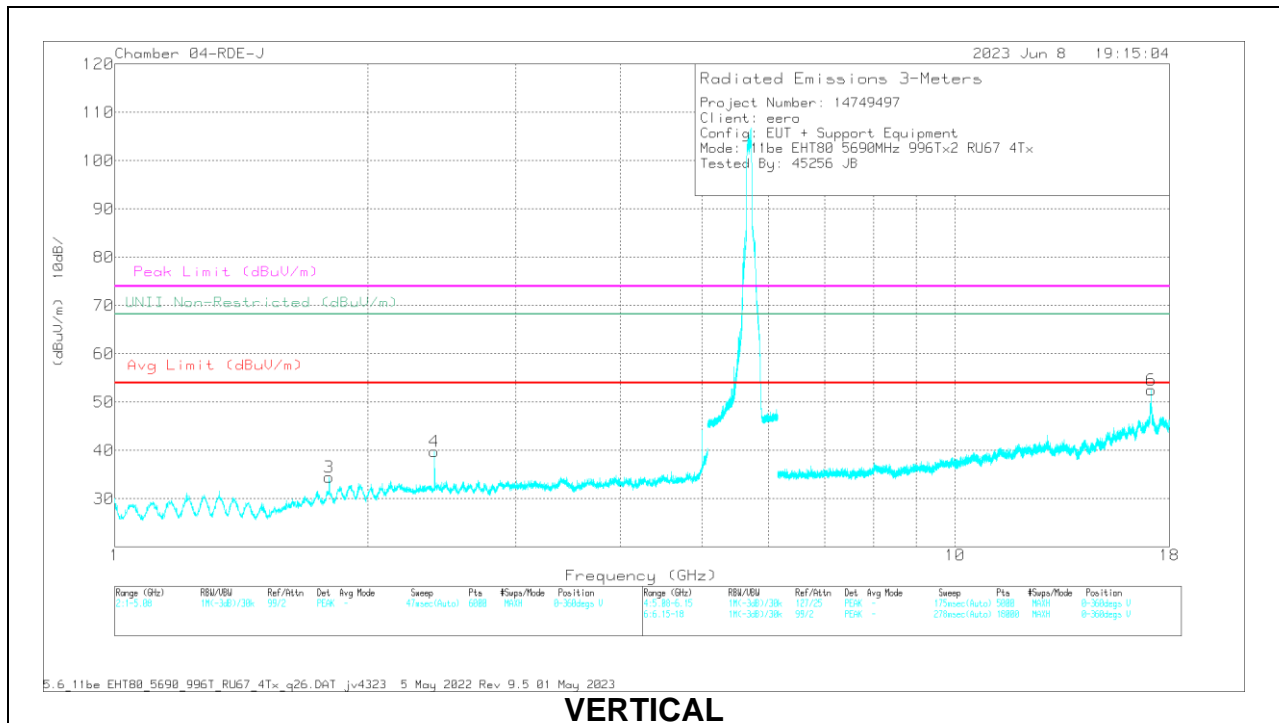

VERTICAL

RADIATED EMISSIONS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	UNII Non-Restricted (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.426077	57.99	PK-U	32.1	-46.5	43.59	-	-	-	-	68.2	-24.61	344	209	H
2	2.548427	57.47	PK-U	32.3	-46.1	43.67	-	-	-	-	68.2	-24.53	34	334	H
3	1.79981	61.68	PK-U	30.5	-46.5	45.68	-	-	-	-	68.2	-22.52	17	136	V
4	2.401553	58.33	PK-U	32	-46.6	43.73	-	-	-	-	68.2	-24.47	4	174	V
5	17.113376	58.27	PK-U	42.1	-39.3	61.07	-	-	-	-	68.2	-7.13	347	167	H
6	17.122604	58.88	PK-U	42.1	-39.4	61.58	-	-	-	-	68.2	-6.62	128	201	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK-U - U-NII: Maximum Peak
 ADR - U-NII AD primary method, RMS average

10.1.15. TX ABOVE 1 GHz 802.11ax HE160 MODE IN THE 5.6GHz BAND

1TX Antenna 6 OFDMA MODE: 2x 996-Tones, Index S68

BANDEDGE (LOW EDGE)

HORIZONTAL RESULT

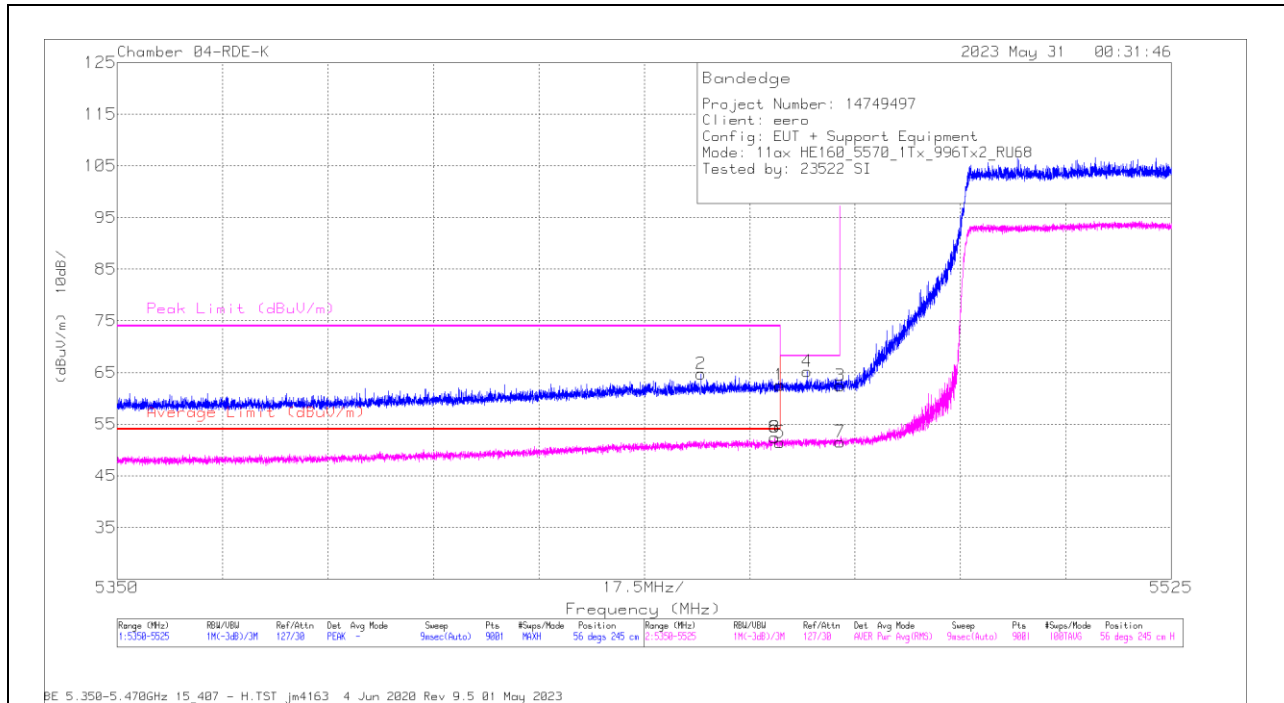


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	57.76	Pk	34.6	-29.8	62.56	-	-	68.2	-5.64	56	245	H
2	* 5446.948	60.06	Pk	34.6	-29.9	64.76	-	-	74	-9.24	56	245	H
3	5470	57.76	Pk	34.6	-29.9	62.46	-	-	68.2	-5.74	56	245	H
4	5464.525	60.4	PK	34.6	-29.8	65.2	-	-	68.2	-3	56	245	H
5	* 5460	46.65	RMS	34.6	-29.8	51.45	54	-2.55	-	-	56	245	H
6	* 5459.159	47.74	RMS	34.6	-29.9	52.44	54	-1.56	-	-	56	245	H
7	5470	46.87	RMS	34.6	-29.9	51.57	-	-	-	-	56	245	H
8	* 5459.159	47.74	RMS	34.6	-29.9	52.44	54	-1.56	-	-	56	245	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

VERTICAL RESULT

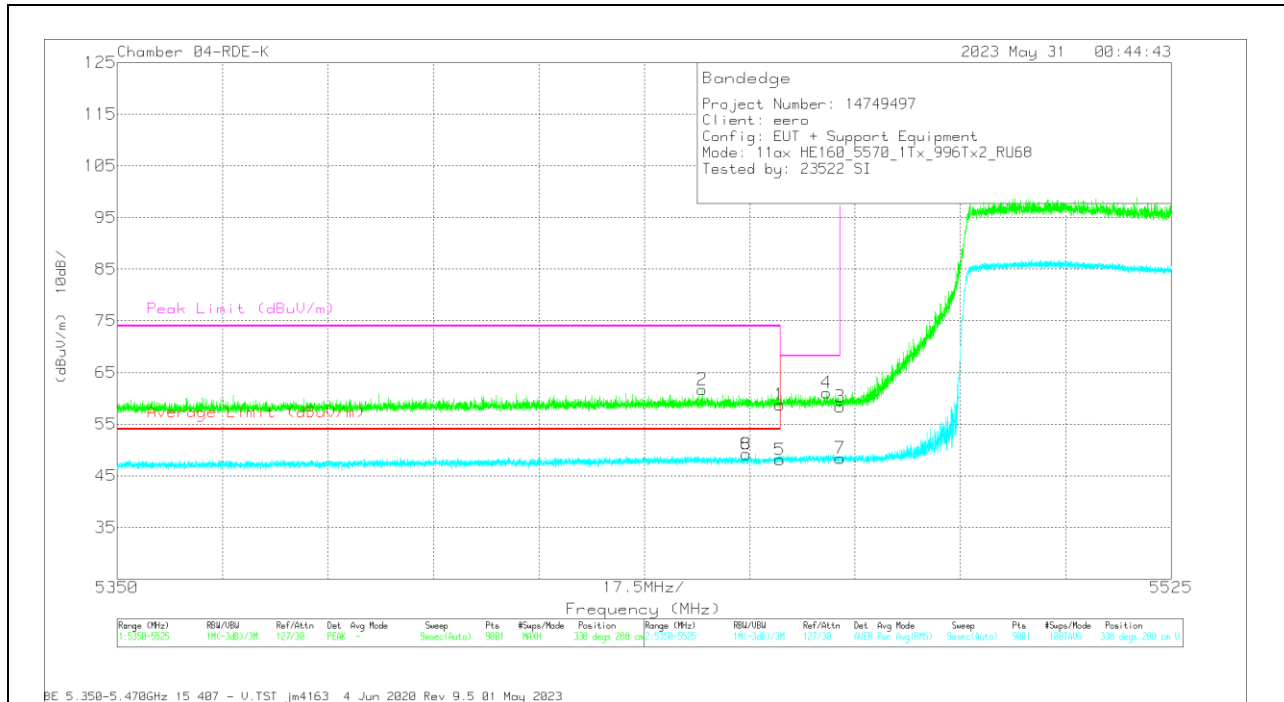


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5460	53.98	Pk	34.6	-29.8	58.78	-	-	68.2	-9.42	338	288	V
2	* 5447.123	56.97	Pk	34.6	-29.9	61.67	-	-	74	-12.33	338	288	V
3	5470	53.68	Pk	34.6	-29.9	58.38	-	-	68.2	-9.82	338	288	V
4	5467.733	56.27	Pk	34.6	-29.8	61.07	-	-	68.2	-7.13	338	288	V
5	* 5460	43.3	RMS	34.6	-29.8	48.1	54	-5.9	-	-	338	288	V
6	* 5454.395	44.49	RMS	34.6	-29.9	49.19	54	-4.81	-	-	338	288	V
7	5470	43.68	RMS	34.6	-29.9	48.38	-	-	-	-	338	288	V
8	* 5454.395	44.49	RMS	34.6	-29.9	49.19	54	-4.81	-	-	338	288	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANEDGE (HIGH EDGE)

HORIZONTAL RESULT

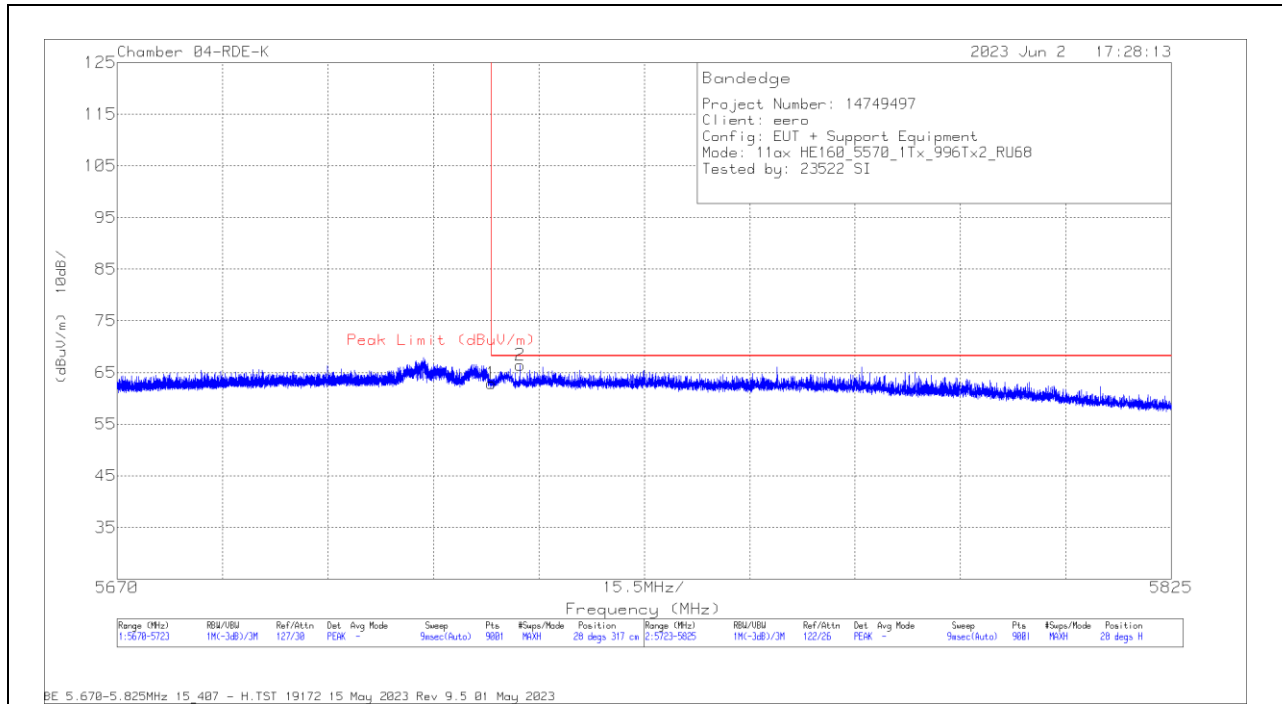


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	57.61	Pk	34.7	-29.4	62.91	68.2	-5.29	28	317	H
2	5729.267	61.04	Pk	34.7	-29.3	66.44	68.2	-1.76	28	317	H

Pk - Peak detector

VERTICAL RESULT

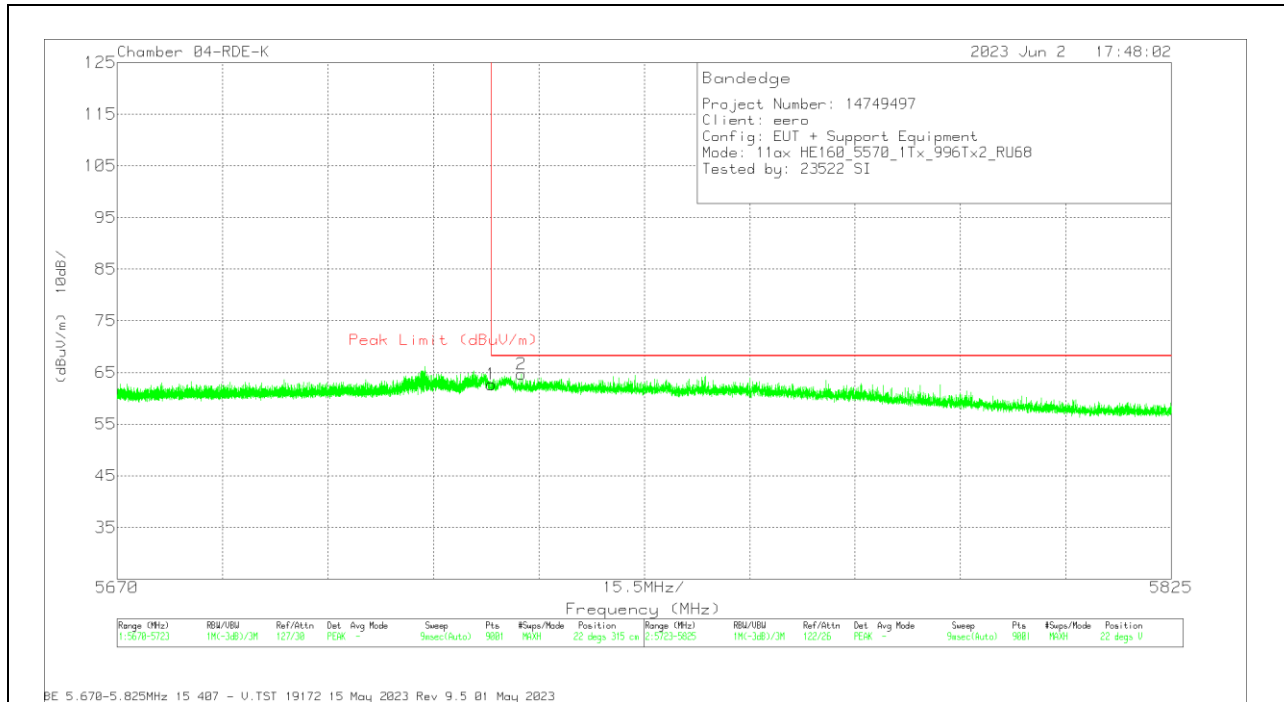

Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	223083 ACF (dB) 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5725	57.41	Pk	34.7	-29.4	62.71	68.2	-5.49	22	315	V
2	5729.437	59.27	Pk	34.7	-29.3	64.67	68.2	-3.53	22	315	V

Pk - Peak detector

2TX Antenna 6 + Antenna 4 CDD OFDMA MODE: 2x 996-Tones, Index S68

BANDEDGE (LOW EDGE)

HORIZONTAL RESULT

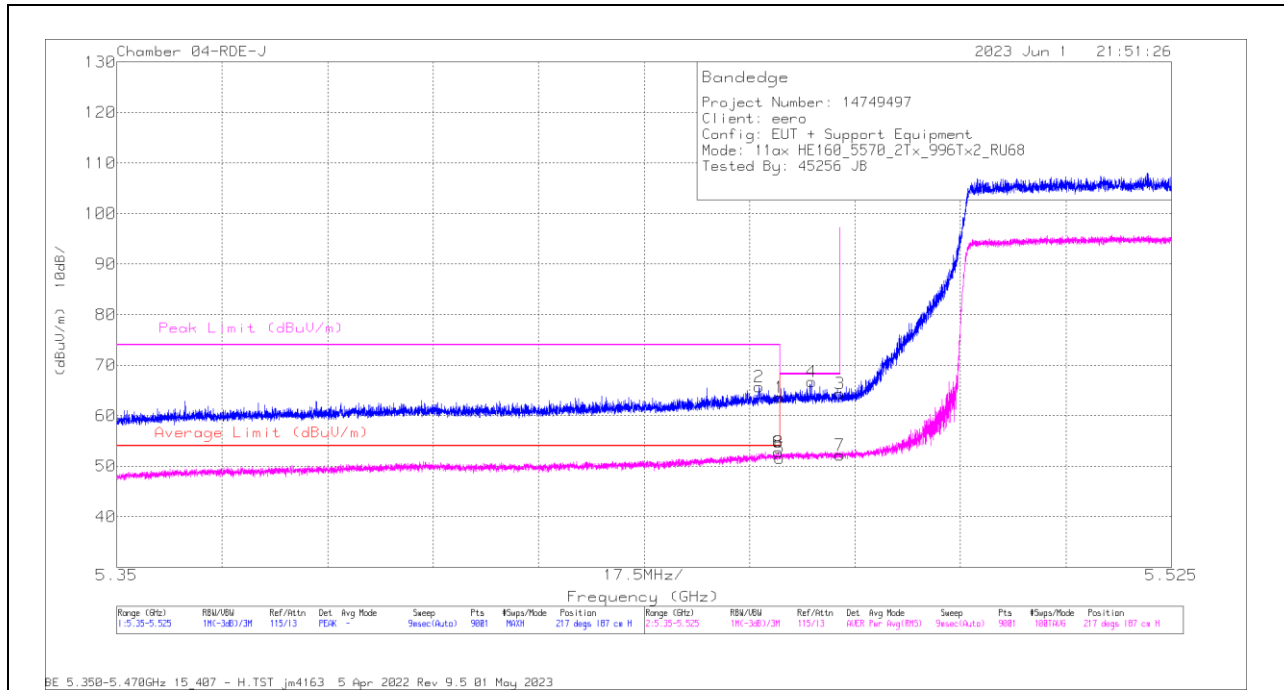

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	42.25	Pk	34.9	-13.5	63.65	-	-	68.2	-4.55	217	187	H
2	* 5.456534	44.33	Pk	34.9	-13.5	65.73	-	-	74	-8.27	217	187	H
3	5.47	43.06	Pk	34.8	-13.5	64.36	-	-	68.2	-3.84	217	187	H
4	5.465322	45.35	Pk	34.9	-13.5	66.75	-	-	68.2	-1.45	217	187	H
5	* 5.46	30.19	RMS	34.9	-13.5	51.59	54	-2.41	-	-	217	187	H
6	* 5.4598	31.44	RMS	34.9	-13.5	52.84	54	-1.16	-	-	217	187	H
7	5.47	30.9	RMS	34.8	-13.5	52.2	-	-	-	-	217	187	H
8	* 5.4598	31.44	RMS	34.9	-13.5	52.84	54	-1.16	-	-	217	187	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL RESULT

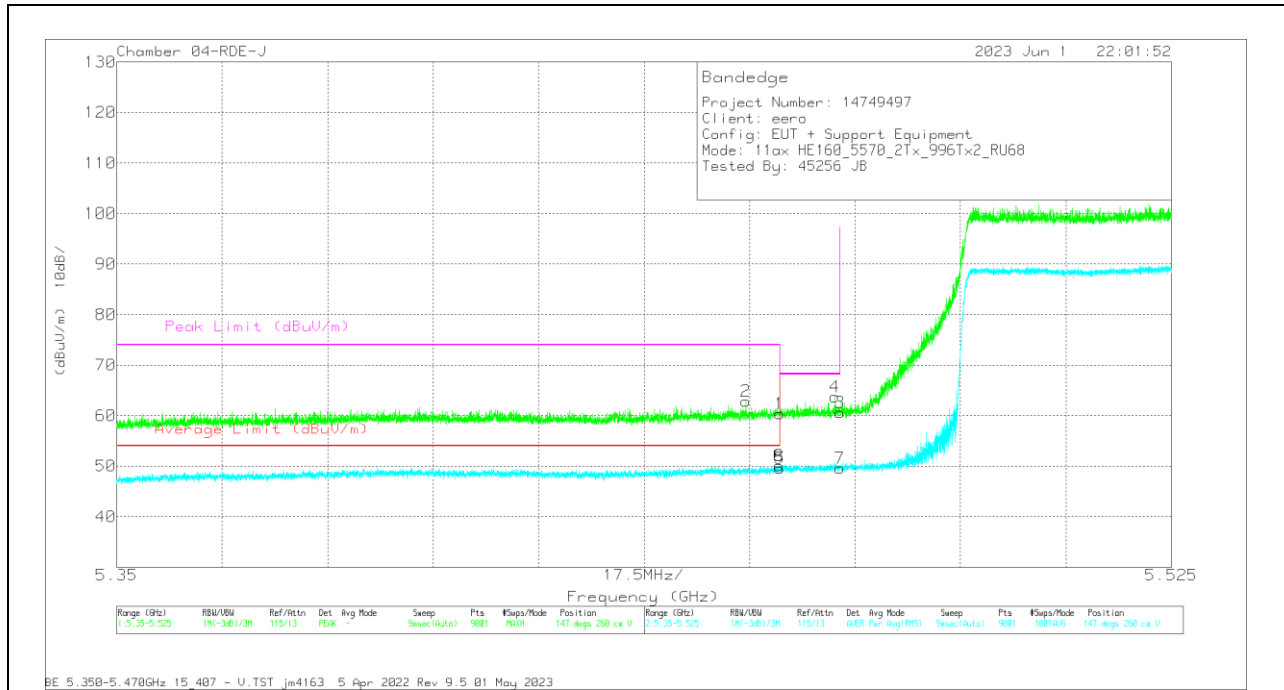


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) -3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 5.46	38.95	Pk	34.9	-13.5	60.35	-	-	68.2	-7.85	147	260	V
2	* 5.454414	41.62	Pk	34.9	-13.6	62.92	-	-	74	-11.08	147	260	V
3	5.47	39.37	Pk	34.8	-13.5	60.67	-	-	68.2	-7.53	147	260	V
4	5.469192	42.39	Pk	34.8	-13.4	63.79	-	-	68.2	-4.41	147	260	V
5	* 5.46	28.21	RMS	34.9	-13.5	49.61	54	-4.39	-	-	147	260	V
6	* 5.459936	28.7	RMS	34.9	-13.5	50.1	54	-3.9	-	-	147	260	V
7	5.47	28.29	RMS	34.8	-13.5	49.59	-	-	-	-	147	260	V
8	* 5.459936	28.7	RMS	34.9	-13.5	50.1	54	-3.9	-	-	147	260	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector
 RMS - RMS detection

BANEDGE (HIGH EDGE)

HORIZONTAL RESULT

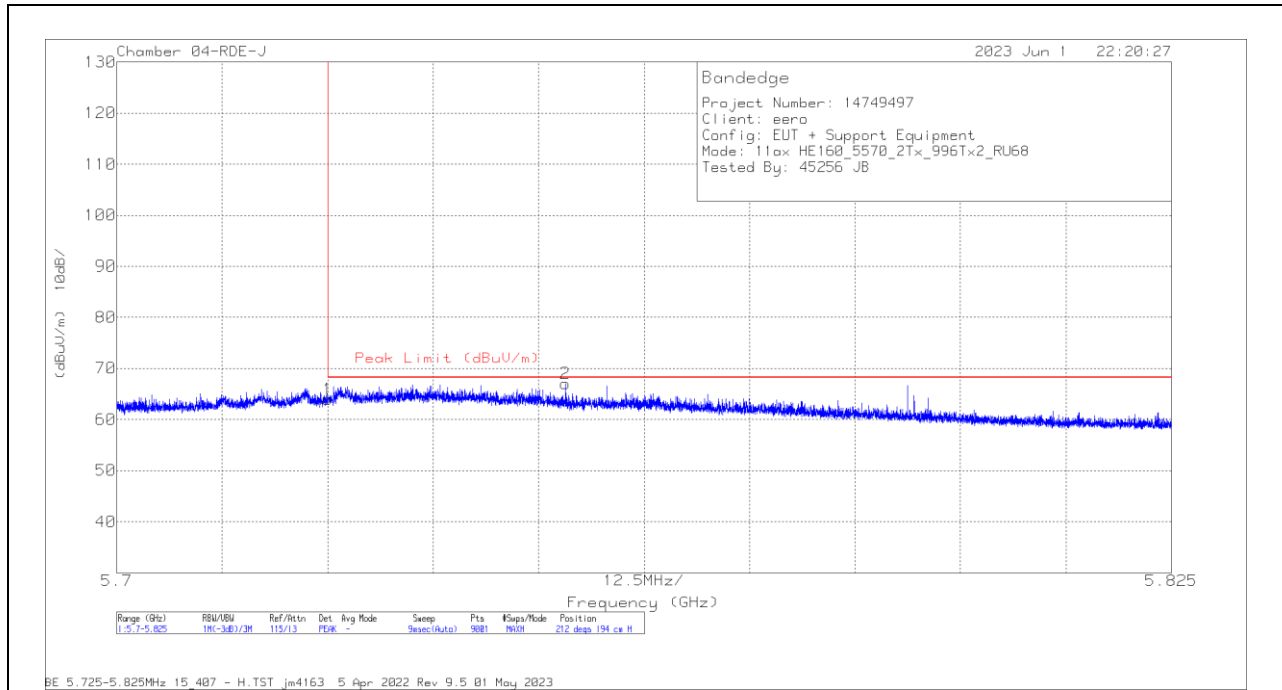


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cbl/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	42.38	Pk	34.7	-13.1	63.98	68.2	-4.22	212	194	H
2	5.753153	45.51	Pk	34.7	-13.2	67.01	68.2	-1.19	212	194	H

Pk - Peak detector

VERTICAL RESULT

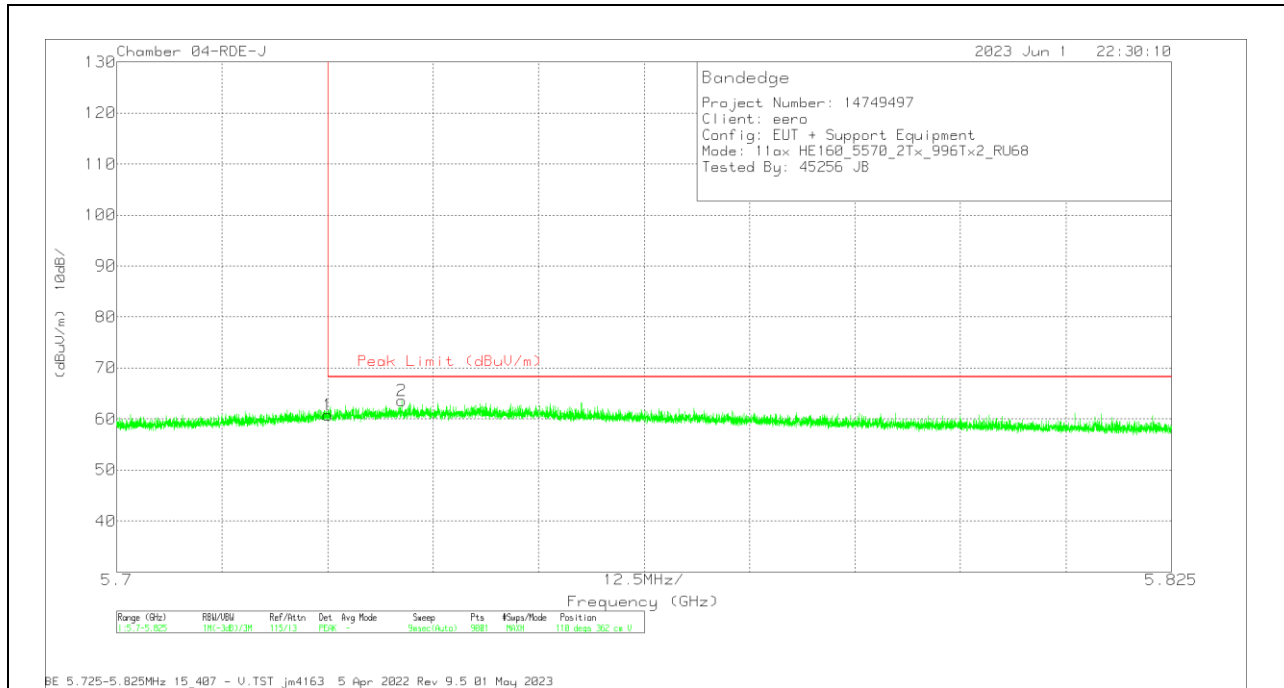

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	222741 ACF(dB) - 3mH	Cb/Amp (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	5.725	39.2	Pk	34.7	-13.1	60.8	68.2	-7.4	110	362	V
2	5.733764	42.03	Pk	34.7	-13.1	63.63	68.2	-4.57	110	362	V

Pk - Peak detector