



Test Report No.: W7L-P22110028RF03



FCC TEST REPORT (PART 27)



Applicant:	Particle Industries, Inc
Address:	325 9th Street, San Francisco, CA 94103, United States Of America

Manufacturer or Supplier:	Particle Industries, Inc
Address:	325 9th Street, San Francisco, CA 94103, United States Of America
Product:	E Series Module
Brand Name:	Particle
Model Name:	E404X
FCC ID:	2AEMI-E404X
Date of tests:	Nov. 22, 2022 ~ Dec. 08, 2022

The tests have been carried out according to the requirements of the following standard:

- FCC Part 27, Subpart C, M ANSI/TIA/EIA-603-D
- FCC Part 2 ANSI/TIA/EIA-603-E ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: Dec. 08, 2022	 Date: Dec. 08, 2022

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	6
1.2 TEST SITE AND INSTRUMENTS	7
2 GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 CONFIGURATION OF SYSTEM UNDER TEST	11
2.3 DESCRIPTION OF SUPPORT UNITS	12
2.4 TEST ITEM AND TEST CONFIGURATION	12
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	18
3 TEST TYPES AND RESULTS	19
3.1 OUTPUT POWER MEASUREMENT	19
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	19
3.1.2 TEST PROCEDURES	19
3.1.3 TEST SETUP	20
3.1.4 TEST RESULTS	21
3.2 FREQUENCY STABILITY MEASUREMENT	39
3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT	39
3.2.2 TEST PROCEDURE	39
3.2.3 TEST SETUP	39
3.2.4 TEST RESULTS	40
3.3 OCCUPIED BANDWIDTH MEASUREMENT	41
3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	41
3.3.2 TEST SETUP	41
3.3.3 TEST PROCEDURES	41
3.3.4 TEST RESULTS	42
3.4 BAND EDGE MEASUREMENT	43
3.4.1 LIMITS OF BAND EDGE MEASUREMENT	43
3.4.2 TEST SETUP	44
3.4.3 TEST PROCEDURES	44
3.4.4 TEST RESULTS	45
3.5 CONDUCTED SPURIOUS EMISSIONS	46
3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	46
3.5.2 TEST PROCEDURE	46
3.5.3 TEST SETUP	46
3.5.4 TEST RESULTS	47
3.6 RADIATED EMISSION MEASUREMENT	48
3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT	48
3.6.2 TEST PROCEDURES	48
3.6.3 DEVIATION FROM TEST STANDARD	48
3.6.4 TEST SETUP	49
3.6.5 TEST RESULTS	51
3.7 PEAK TO AVERAGE RATIO	127
3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT	127
3.7.2 TEST SETUP	127
3.7.3 TEST PROCEDURES	127
3.7.4 TEST RESULTS	128



**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

4 INFORMATION ON THE TESTING LABORATORIES	129
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.	130



Test Report No.: W7L-P22110028RF03

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P22110028RF03	Original release	Dec. 08, 2022

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2		
STANDARD SECTION	TEST TYPE	RESULT
§2.1046	Coducted Output Power	Compliance
§27.50(b)(10) §27.50(c)(10)	Equivalent Radiated Power (Band12) (Band13)	Compliance
§27.50(d)(4) §27.50(h)(2)	Equivalent Isotropically Radiated Power (Band4)	Compliance
§2.1055 §27.54	Frequency Stability	See Note
§2.1049	Occupied Bandwidth	See Note
§2.1051 §27.53(c)(2)(4) §27.53(g) §27.53(h) §27.53(m)(4)(6)	Band Edge Measurements	See Note
§2.1051 §27.53(c)(2)(4) §27.53(g) §27.53(h) §27.53(m)(4)(6)	Conducted Spurious Emissions	See Note
§2.1053 §27.53(c)(2)(4) §27.53(f) §27.53(g) §27.53(h) §27.53(m)(4)(6)	Radiated Spurious Emissions	Compliance
NA	Peak to average ratio	See Note

NOTE: Refer to Module report MDE_UBLOX_2105/MDE_UBLOX_1905_FCC_01, FCC ID: XPYUBX19KM01.



1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Frequency Stability	$\pm 76.97\text{Hz}$
Radiated emissions (9KHz~30MHz)	$\pm 2.68\text{dB}$
Radiated emissions & Radiated Power (30MHz~1GMHz)	$\pm 4.98\text{dB}$
Radiated emissions & Radiated Power (1GMHz ~6GMHz)	$\pm 4.70\text{dB}$
Radiated emissions (6GMHz ~18GMHz)	$\pm 4.60\text{dB}$
Radiated emissions (18GMHz ~40GMHz)	$\pm 4.12\text{dB}$
Conducted emissions	$\pm 4.01\text{dB}$
Occupied Channel Bandwidth	$\pm 43.58\text{KHz}$
Conducted Output power	$\pm 2.06\text{dB}$
Band Edge Measurements	$\pm 4.70\text{dB}$

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Feb. 18,22	Feb. 17,23
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.15,22	May.14,23
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.04,22	Sep.03,23
Bilog Antenna	ETS-LINDGRE N	3143B	00161965	Mar. 06,22	Mar. 05,23
Horn Antenna	ETS-LINDGRE N	3117	00168692	Mar. 06,22	Mar. 05,23
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Aug. 24, 22	Aug. 23, 23
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 15,22	Feb. 14,23
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.12,22	May.11,23
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 21,22	Feb.20,23
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn- CT0001143-121 6	May. 19,20	May. 18,23
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	May. 07,22	May. 06,23
Power Meter	Anritsu	ML2495A	1506002	Feb. 22,22	Feb. 21,23
Power Sensor	Anritsu	MA2411B	1339352	May. 07,22	May. 06,23
Temperature Chamber	ESPEC	SH-242	93000855	May. 12,22	May. 11,23
MXG Analog Microvave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 18,22	Feb. 17,23
Base station R&S CMW500	Rohde&Schwa rz	CMW500	153085	May.12,22	May.11,23
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 24,22	Aug. 23,23

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	E Series Module		
BRAND NAME	Particle		
MODEL NAME	E404X		
NOMINAL VOLTAGE	5.0Vdc(adapter or host equipment) 3.8Vdc (Li-ion, battery)		
MODULATION TECHNOLOGY	LTE	QPSK, 16QAM	
FREQUENCY RANGE	LTE Band 4 Channel Bandwidth: 1.4MHz	1710.7MHz ~ 1754.3MHz	
	LTE Band 4 Channel Bandwidth: 3MHz	1711.5MHz ~ 1753.5MHz	
	LTE Band 4 Channel Bandwidth: 5MHz	1712.5MHz ~ 1752.5MHz	
	LTE Band 4 Channel Bandwidth: 10MHz	1715MHz ~ 1750MHz	
	LTE Band 4 Channel Bandwidth: 15MHz	1717.5MHz ~ 1747.5 MHz	
	LTE Band 4 Channel Bandwidth: 20MHz	1720MHz ~ 1745MHz	
	LTE Band 12 Channel Bandwidth: 1.4MHz	699.7MHz ~ 715.3MHz	
	LTE Band 12 Channel Bandwidth: 3MHz	700.5MHz ~ 714.5MHz	
	LTE Band 12 Channel Bandwidth: 5MHz	701.5MHz ~ 713.5MHz	
	LTE Band 12 Channel Bandwidth: 10MHz	704MHz ~ 711MHz	
	LTE Band 13 Channel Bandwidth: 5MHz	779.5MHz ~ 784.5MHz	
	LTE Band 13 Channel Bandwidth: 10MHz	782MHz	
	EMISSION DESIGNATOR	LTE Band 4 Channel Bandwidth: 1.4MHz	QPSK: 1M13G7D 16QAM: 974KW7D
		LTE Band 4 Channel Bandwidth: 3MHz	QPSK: 1M13G7D 16QAM: 974KW7D
LTE Band 4 Channel Bandwidth: 5MHz		QPSK: 1M13G7D 16QAM: 974KW7D	
LTE Band 4 Channel Bandwidth: 10MHz		QPSK: 1M13G7D 16QAM: 974KW7D	



**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

EMISSION DESIGNATOR	LTE Band 4 Channel Bandwidth: 15MHz	QPSK: 1M13G7D 16QAM: 974KW7D
	LTE Band 4 Channel Bandwidth: 20MHz	QPSK: 1M13G7D 16QAM: 974KW7D
	LTE Band 12 Channel Bandwidth: 1.4MHz	QPSK: 1M14G7D 16QAM: 968KW7D
	LTE Band 12 Channel Bandwidth: 3MHz	QPSK: 1M14G7D 16QAM: 968KW7D
	LTE Band 12 Channel Bandwidth: 5MHz	QPSK: 1M14G7D 16QAM: 968KW7D
	LTE Band 12 Channel Bandwidth: 10MHz	QPSK: 1M14G7D 16QAM: 968KW7D
	LTE Band 13 Channel Bandwidth: 5MHz	QPSK: 1M13G7D 16QAM: 968KW7D
	LTE Band 13 Channel Bandwidth: 10MHz	QPSK: 1M13G7D 16QAM: 968KW7D
MAX. EIRP POWER	LTE Band 4 Channel Bandwidth: 1.4MHz	435.51mW
	LTE Band 4 Channel Bandwidth: 3MHz	433.51mW
	LTE Band 4 Channel Bandwidth: 5MHz	434.51mW
	LTE Band 4 Channel Bandwidth: 10MHz	434.51mW
	LTE Band 4 Channel Bandwidth: 15MHz	437.52mW
	LTE Band 4 Channel Bandwidth: 20MHz	438.53mW
	LTE Band 12 Channel Bandwidth: 1.4MHz	175.79mW
	LTE Band 12 Channel Bandwidth: 3MHz	172.98mW
	LTE Band 12 Channel Bandwidth: 5MHz	172.98mW
	LTE Band 12 Channel Bandwidth: 10MHz	176.20mW
	LTE Band 13 Channel Bandwidth: 5MHz	193.20mW
	LTE Band 13 Channel Bandwidth: 10MHz	193.64mW



**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

ANTENNA TYPE	External Antenna(KIT) with 3.86 gain for LTE4 External Antenna(KIT) with 2.46 gain for LTE12 External Antenna(KIT) with 2.46gain for LTE13 External Antenna(Taoglas) with 3.5gain for LTE4 External Antenna(Taoglas) with 1gain for LTE12 External Antenna(Taoglas) with 1gain for LTE13
HW VERSION	v0.0.4
SW VERSION	V4.0.0
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A
EXTREME TEMPERATURE	-40-75 °C
EXTREME VOLTAGE	3.3V – 4.3V

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX


3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Sample Information:

Sample Number	Description
Sample 1	Main test Sample(U11:TI - bq24195, U12:Richtek -RT5760CHGH6F)
Sample 2	Based on Sample 1 changed U11 to TI - bq24190
Sample 3	Based on Sample 1 changed U12 to TI - TLV62568
Sample 4	Based on Sample 1 changed U12 to MPS - MP1601GTF-Z

Note: Full testing was performed by sample 1, other samples verified the worst case of RSE, Only the worst case data(Sample 1) was reported.

2.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

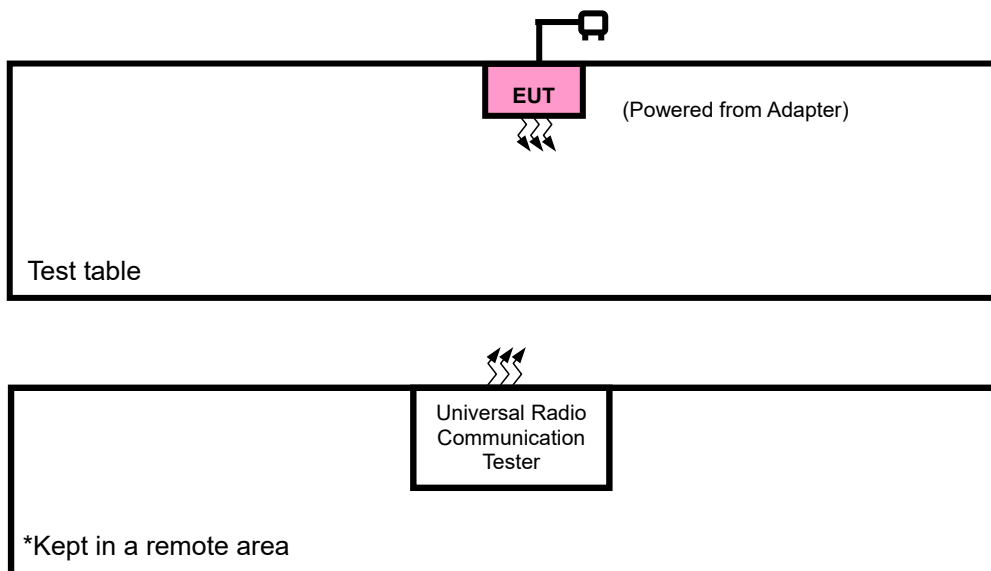



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.8m

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter with LTE link
B	EUT + Battery with LTE link

LTE BAND 4

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	6 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	6 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	6 RB / 0 RB Offset
A	BAND EDGE	19957 to 20393	19957	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
			20393	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965	3MHz	QPSK, 16QAM	1 RB / 5 RB Offset
			20385	3MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19975 to 20375	19975	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
			20375	5MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		20000 to 20350	20000	10MHz	QPSK, 16QAM	1 RB / 5 RB Offset
			20350	10MHz	QPSK, 16QAM	6 RB / 0 RB Offset

A	BAND EDGE	20025 to 20325	20025	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
		20050 to 20300	20325	15MHz	QPSK, 16QAM	1 RB / 5 RB Offset
						6 RB / 0 RB Offset
			20050	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
		20300	20MHz	QPSK, 16QAM	1 RB / 5 RB Offset	
					6 RB / 0 RB Offset	
A	CONDUCTED EMISSION	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	20175	3MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	20175	5MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20175	10MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 12 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
B	FREQUENCY STABILITY	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	6 RB / 0 RB Offset
A	OCCUPIED BANDWIDTH	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	6 RB / 0 RB Offset
A	PEAK TO AVERAGE RATIO	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	6 RB / 0 RB Offset
A	BAND EDGE	23017 to 23173	23017	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			23173	1.4MHz	QPSK, 16QAM	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		23025 to 23165	23025	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			23165	3MHz	QPSK, 16QAM	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		23035 to 23155	23035	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			23155	5MHz	QPSK, 16QAM	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		23060 to 23130	23060	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			23130	10MHz	QPSK, 16QAM	1 RB / 5 RB Offset 6 RB / 0 RB Offset
A	CONDUCTED EMISSION	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23095	3MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: W7L-P22110028RF03

LTE BAND 13 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
B	ERP	23205 to 23255	20025, 20175, 20325	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	FREQUENCY STABILITY	23205 to 23255	20025, 20325	1.4MHz	QPSK	6 RB / 0 RB Offset
		23230	23230	10MHz	QPSK	6 RB / 0 RB Offset
B	PEAK TO AVERAGE RATIO	23205 to 23255	20025, 20175, 20325	5MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM	6 RB / 0 RB Offset
B	OCCUPIED BANDWIDTH	23205 to 23255	20025, 20175, 20325	5MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM	6 RB / 0 RB Offset
B	BAND EDGE	23205 to 23255	23250	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
			23255	5MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
						6 RB / 0 RB Offset
						1 RB / 5 RB Offset
						6 RB / 0 RB Offset
B	CONDCUDED EMISSION	23205 to 23255	20025, 20175, 20325	5MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	23205 to 23255	20025, 20175, 20325	5MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: W7L-P22110028RF03

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP	23deg. C, 70%RH	5.0V By Adapter	Jace Hu
RADIATED EMISSION	23deg. C, 70%RH	5.0V By Adapter	Jace Hu



Test Report No.: W7L-P22110028RF03

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “User stations are limited to 2 watts” and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP

According to the specific rule Part 27.50(b)(10) and 27.50(c)(10) Fixed, mobile, and Portable stations (hand-held devices) transmitting in the 698-746 MHz, 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:


- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



Test Report No.: W7L-P22110028RF03

3.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.4 TEST RESULTS

AVERAGE CONDUCTED OUTPUT POWER (dBm)

LTE Band 4

Band/BW	Modulation	RB Size	RB Offset	Low CH 19957	Mid CH 20175	High CH 20393
				Frequency 1710.7 MHz	Frequency 1732.5 MHz	Frequency 1754.3 MHz
4/ 1.4	QPSK	1	0	22.29	22.47	22.41
		1	5	22.37	22.50	22.43
		3	0	22.26	22.44	22.40
		3	3	22.36	22.52	22.32
		6	0	22.31	22.31	22.35
	16QAM	1	0	22.15	22.41	22.37
		1	5	22.24	22.43	22.42
		3	0	22.27	22.45	22.37
		3	3	22.30	22.53	22.38
		6	0	22.29	22.49	22.36

Band/BW	Modulation	RB Size	RB Offset	Low CH 19965	Mid CH 20175	High CH 20385
				Frequency 1711.5 MHz	Frequency 1732.5 MHz	Frequency 1753.5 MHz
4/ 3	QPSK	1	0	22.24	22.46	22.38
		1	5	22.33	22.51	22.43
		3	0	22.24	22.51	22.40
		3	3	22.33	22.49	22.32
		6	0	22.27	22.32	22.33
	16QAM	1	0	22.18	22.40	22.41
		1	5	22.18	22.47	22.39
		3	0	22.29	22.43	22.37
		3	3	22.32	22.46	22.41
		6	0	22.30	22.43	22.35

Band/BW	Modulation	RB Size	RB Offset	Low CH 19975	Mid CH 20175	High CH 20375
				Frequency 1712.5 MHz	Frequency 1732.5 MHz	Frequency 1752.5 MHz
4/ 5	QPSK	1	0	22.25	22.45	22.42
		1	5	22.36	22.51	22.40
		3	0	22.28	22.47	22.41
		3	3	22.31	22.52	22.35
		6	0	22.24	22.35	22.32
	16QAM	1	0	22.18	22.40	22.40
		1	5	22.18	22.45	22.36
		3	0	22.24	22.45	22.40
		3	3	22.32	22.47	22.38
		6	0	22.27	22.49	22.35

Band/BW	Modulation	RB Size	RB Offset	Low CH 20000	Mid CH 20175	High CH 20350
				Frequency 1715 MHz	Frequency 1732.5 MHz	Frequency 1750 MHz
4/ 10	QPSK	1	0	22.22	22.49	22.38
		1	5	22.37	22.50	22.43
		3	0	22.26	22.44	22.40
		3	3	22.36	22.52	22.32
		6	0	22.29	22.31	22.35
	16QAM	1	0	22.18	22.41	22.37
		1	5	22.20	22.43	22.42
		3	0	22.23	22.46	22.37
		3	3	22.36	22.46	22.42
		6	0	22.32	22.45	22.39

Band/BW	Modulation	RB Size	RB Offset	Low CH 20025	Mid CH 20175	High CH 20325
				Frequency 1717.5 MHz	Frequency 1732.5 MHz	Frequency 1747.5 MHz
4/ 15	QPSK	1	0	22.26	22.50	22.37
		1	5	22.38	22.55	22.41
		3	0	22.31	22.50	22.37
		3	3	22.29	22.47	22.38
		6	0	22.29	22.36	22.31
	16QAM	1	0	22.16	22.43	22.40
		1	5	22.20	22.49	22.41
		3	0	22.23	22.46	22.37
		3	3	22.35	22.48	22.41
		6	0	22.29	22.48	22.37

Band/BW	Modulation	RB Size	RB Offset	Low CH 20050	Mid CH 20175	High CH 20300
				Frequency 1720 MHz	Frequency 1732.5 MHz	Frequency 1745 MHz
4/ 20	QPSK	1	0	22.30	22.53	22.43
		1	5	22.40	22.56	22.45
		3	0	22.32	22.52	22.42
		3	3	22.37	22.54	22.40
		6	0	22.32	22.37	22.37
	16QAM	1	0	22.20	22.48	22.42
		1	5	22.26	22.51	22.44
		3	0	22.31	22.50	22.42
		3	3	22.38	22.54	22.43
		6	0	22.35	22.51	22.41

LTE Band 12

Band/BW	Modulation	RB Size	RB Offset	Low CH 23017	Mid CH 23095	High CH 23173
				Frequency 699.7 MHz	Frequency 707.5 MHz	Frequency 715.3 MHz
12/ 1.4	QPSK	1	0	21.93	21.87	21.80
		1	5	22.05	21.93	21.94
		3	0	21.98	21.79	21.90
		3	3	22.14	22.00	21.91
		6	0	22.05	21.92	21.94
	16QAM	1	0	21.79	21.63	21.68
		1	5	21.89	21.75	21.82
		3	0	21.94	21.78	21.74
		3	3	21.94	21.86	21.85
		6	0	21.93	21.84	21.82

Band/BW	Modulation	RB Size	RB Offset	Low CH 23025	Mid CH 23095	High CH 23165
				Frequency 700.5 MHz	Frequency 707.5 MHz	Frequency 714.5 MHz
12/ 3	QPSK	1	0	21.95	21.89	21.79
		1	5	22.01	21.94	21.94
		3	0	21.97	21.82	21.90
		3	3	22.07	22.00	21.93
		6	0	22.02	21.93	21.88
	16QAM	1	0	21.76	21.69	21.71
		1	5	21.86	21.78	21.80
		3	0	21.90	21.79	21.74
		3	3	21.99	21.81	21.88
		6	0	21.93	21.78	21.85



Test Report No.: W7L-P22110028RF03

Band/BW	Modulation	RB Size	RB Offset	Low CH 23035	Mid CH 23095	High CH 23155
				Frequency 701.5 MHz	Frequency 707.5 MHz	Frequency 713.5 MHz
12/ 5	QPSK	1	0	21.96	21.84	21.80
		1	5	22.06	21.91	21.94
		3	0	22.00	21.82	21.87
		3	3	22.07	22.01	21.94
		6	0	22.00	21.96	21.91
	16QAM	1	0	21.77	21.65	21.71
		1	5	21.83	21.81	21.79
		3	0	21.90	21.77	21.71
		3	3	21.96	21.85	21.84
		6	0	21.93	21.79	21.82

Band/BW	Modulation	RB Size	RB Offset	Low CH 23060	Mid CH 23095	High CH 23130
				Frequency 704 MHz	Frequency 707.5 MHz	Frequency 711 MHz
12/ 10	QPSK	1	0	22.01	21.91	21.85
		1	5	22.08	21.99	21.96
		3	0	22.04	21.87	21.92
		3	3	22.15	22.02	21.99
		6	0	22.06	21.98	21.96
	16QAM	1	0	21.84	21.70	21.73
		1	5	21.91	21.83	21.84
		3	0	21.98	21.83	21.79
		3	3	22.02	21.87	21.90
		6	0	21.99	21.86	21.87



**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

LTE Band 13

Band/BW	Modulation	RB Size	RB Offset	Low CH 23205	Mid CH 23230	High CH 23255
				Frequency 779.5 MHz	Frequency 782.0 MHz	Frequency 784.5 MHz
13/ 5	QPSK	1	0	22.45	22.49	22.48
		1	5	22.54	22.48	22.55
		3	0	22.34	22.31	22.35
		3	3	22.44	22.39	22.41
		6	0	22.44	22.43	22.37
	16QAM	1	0	22.20	22.19	22.21
		1	5	22.31	22.28	22.32
		3	0	22.34	22.32	22.38
		3	3	22.44	22.38	22.45
		6	0	22.46	22.40	22.47

Band/BW	Modulation	RB Size	RB Offset	/	Mid CH 23230	/
				/	Frequency 782.0 MHz	/
13/ 10	QPSK	1	0	/	22.53	/
		1	5	/	22.56	/
		3	0	/	22.37	/
		3	3	/	22.46	/
		6	0	/	22.45	/
	16QAM	1	0	/	22.27	/
		1	5	/	22.34	/
		3	0	/	22.40	/
		3	3	/	22.46	/
		6	0	/	22.48	/



**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

EIRP/ERP

External Antenna (KIT):

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	22.37	3.86	26.23	419.76	1
20175	1732.5	22.52	3.86	26.38	434.51	1
20393	1754.3	22.43	3.86	26.29	425.6	1

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	22.3	3.86	26.16	413.05	1
20175	1732.5	22.53	3.86	26.39	435.51	1
20393	1754.3	22.42	3.86	26.28	424.62	1

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	22.33	3.86	26.19	415.91	1
20175	1732.5	22.51	3.86	26.37	433.51	1
20385	1753.5	22.43	3.86	26.29	425.6	1

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	22.32	3.86	26.18	414.95	1
20175	1732.5	22.47	3.86	26.33	429.54	1
20385	1753.5	22.41	3.86	26.27	423.64	1

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	22.36	3.86	26.22	418.79	1
20175	1732.5	22.52	3.86	26.38	434.51	1
20375	1752.5	22.42	3.86	26.28	424.62	1

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	22.32	3.86	26.18	414.95	1
20175	1732.5	22.49	3.86	26.35	431.52	1
20375	1752.5	22.4	3.86	26.26	422.67	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	22.37	3.86	26.23	419.76	1
20175	1732.5	22.52	3.86	26.38	434.51	1
20350	1750	22.43	3.86	26.29	425.6	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	22.36	3.86	26.22	418.79	1
20175	1732.5	22.46	3.86	26.32	428.55	1
20350	1750	22.42	3.86	26.28	424.62	1

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	22.38	3.86	26.24	420.73	1
20175	1732.5	22.55	3.86	26.41	437.52	1
20325	1747.5	22.41	3.86	26.27	423.64	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	22.35	3.86	26.21	417.83	1
20175	1732.5	22.49	3.86	26.35	431.52	1
20325	1747.5	22.41	3.86	26.27	423.64	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	22.4	3.86	26.26	422.67	1
20175	1732.5	22.56	3.86	26.42	438.53	1
20300	1745	22.45	3.86	26.31	427.56	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	22.38	3.86	26.24	420.73	1
20175	1732.5	22.54	3.86	26.4	436.52	1
20300	1745	22.44	3.86	26.3	426.58	1

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	22.14	2.46	22.45	175.79	3
23095	707.5	22	2.46	22.31	170.22	3
23173	715.3	21.94	2.46	22.25	167.88	3

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	21.94	2.46	22.25	167.88	3
23095	707.5	21.86	2.46	22.17	164.82	3
23173	715.3	21.85	2.46	22.16	164.44	3

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	22.07	2.46	22.38	172.98	3
23095	707.5	22	2.46	22.31	170.22	3
23165	714.5	21.94	2.46	22.25	167.88	3

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	21.99	2.46	22.3	169.82	3
23095	707.5	21.81	2.46	22.12	162.93	3
23165	714.5	21.88	2.46	22.19	165.58	3

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	22.07	2.46	22.38	172.98	3
23095	707.5	22.01	2.46	22.32	170.61	3
23155	713.5	21.94	2.46	22.25	167.88	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	21.96	2.46	22.27	168.66	3
23095	707.5	21.85	2.46	22.16	164.44	3
23155	713.5	21.84	2.46	22.15	164.06	3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	22.15	2.46	22.46	176.20	3
23095	707.5	22.02	2.46	22.33	171	3
23130	711	21.99	2.46	22.3	169.82	3

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	22.02	2.46	22.33	171	3
23095	707.5	21.87	2.46	22.18	165.2	3
23130	711	21.9	2.46	22.21	166.34	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



BUREAU
VERITAS

Test Report No.: W7L-P22110028RF03

LTE BAND 13

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	22.54	2.46	22.85	192.75	3
23230	782	22.49	2.46	22.8	190.55	3
23255	784.5	22.55	2.46	22.86	193.20	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	22.46	2.46	22.77	189.23	3
23230	782	22.4	2.46	22.71	186.64	3
23255	784.5	22.47	2.46	22.78	189.67	3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
-	-	-	-	-	-	-
23230	782	22.56	2.46	22.87	193.64	3
-	-	-	-	-	-	-

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
-	-	-	-	-	-	-
23230	782	22.48	2.46	22.79	190.11	3
-	-	-	-	-	-	-

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

External Antenna (Taoglas):

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	22.37	3.5	25.87	386.37	1
20175	1732.5	22.52	3.5	26.02	399.94	1
20393	1754.3	22.43	3.5	25.93	391.74	1

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	22.3	3.5	25.8	380.19	1
20175	1732.5	22.53	3.5	26.03	400.87	1
20393	1754.3	22.42	3.5	25.92	390.84	1

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	22.33	3.5	25.83	382.82	1
20175	1732.5	22.51	3.5	26.01	399.02	1
20385	1753.5	22.43	3.5	25.93	391.74	1

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	22.32	3.5	25.82	381.94	1
20175	1732.5	22.47	3.5	25.97	395.37	1
20385	1753.5	22.41	3.5	25.91	389.94	1

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	22.36	3.5	25.86	385.48	1
20175	1732.5	22.52	3.5	26.02	399.94	1
20375	1752.5	22.42	3.5	25.92	390.84	1

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	22.32	3.5	25.82	381.94	1
20175	1732.5	22.49	3.5	25.99	397.19	1
20375	1752.5	22.4	3.5	25.9	389.05	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	22.37	3.5	25.87	386.37	1
20175	1732.5	22.52	3.5	26.02	399.94	1
20350	1750	22.43	3.5	25.93	391.74	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	22.36	3.5	25.86	385.48	1
20175	1732.5	22.46	3.5	25.96	394.46	1
20350	1750	22.42	3.5	25.92	390.84	1

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	22.38	3.5	25.88	387.26	1
20175	1732.5	22.55	3.5	26.05	402.72	1
20325	1747.5	22.41	3.5	25.91	389.94	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	22.35	3.5	25.85	384.59	1
20175	1732.5	22.49	3.5	25.99	397.19	1
20325	1747.5	22.41	3.5	25.91	389.94	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	22.4	3.5	25.9	389.05	1
20175	1732.5	22.56	3.5	26.06	403.65	1
20300	1745	22.45	3.5	25.95	393.55	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	22.38	3.5	25.88	387.26	1
20175	1732.5	22.54	3.5	26.04	401.79	1
20300	1745	22.44	3.5	25.94	392.64	1

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	22.14	1	20.99	125.6	3
23095	707.5	22	1	20.85	121.62	3
23173	715.3	21.94	1	20.79	119.95	3

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	21.94	1	20.79	119.95	3
23095	707.5	21.86	1	20.71	117.76	3
23173	715.3	21.85	1	20.7	117.49	3

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	22.07	1	20.92	123.59	3
23095	707.5	22	1	20.85	121.62	3
23165	714.5	21.94	1	20.79	119.95	3

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	21.99	1	20.84	121.34	3
23095	707.5	21.81	1	20.66	116.41	3
23165	714.5	21.88	1	20.73	118.3	3

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	22.07	1	20.92	123.59	3
23095	707.5	22.01	1	20.86	121.9	3
23155	713.5	21.94	1	20.79	119.95	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	21.96	1	20.81	120.5	3
23095	707.5	21.85	1	20.7	117.49	3
23155	713.5	21.84	1	20.69	117.22	3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	22.15	1	21	125.89	3
23095	707.5	22.02	1	20.87	122.18	3
23130	711	21.99	1	20.84	121.34	3

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	22.02	1	20.87	122.18	3
23095	707.5	21.87	1	20.72	118.03	3
23130	711	21.9	1	20.75	118.85	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



BUREAU
VERITAS

Test Report No.: W7L-P22110028RF03

LTE BAND 13

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	22.54	1	21.39	137.72	3
23230	782	22.49	1	21.34	136.14	3
23255	784.5	22.55	1	21.4	138.04	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	22.46	1	21.31	135.21	3
23230	782	22.4	1	21.25	133.35	3
23255	784.5	22.47	1	21.32	135.52	3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
-	-	-	-	-	-	-
23230	782	22.56	1	21.41	138.36	3
-	-	-	-	-	-	-

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
-	-	-	-	-	-	-
23230	782	22.48	1	21.33	135.83	3
-	-	-	-	-	-	-

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

3.2 FREQUENCY STABILITY MEASUREMENT

3.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

3.2.2 TEST PROCEDURE

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

3.2.3 TEST SETUP

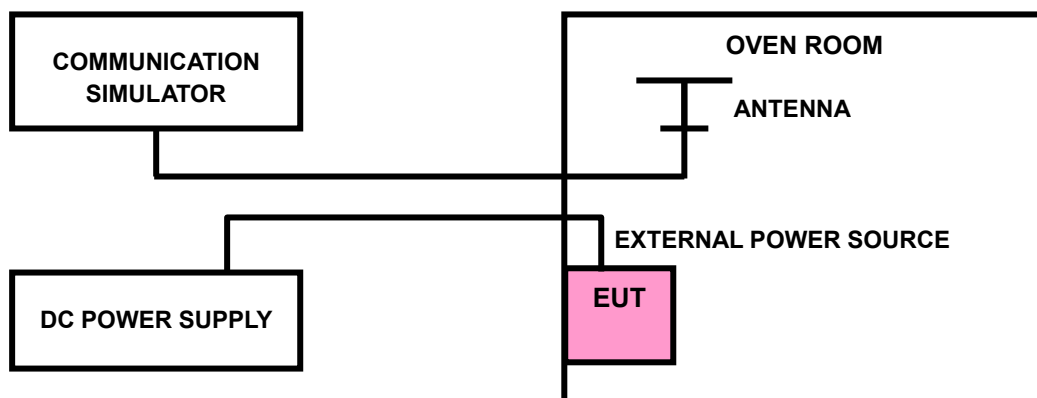



**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

3.2.4 TEST RESULTS


Please Refer to Module report MDE_UBLOX_2105/MDE_UBLOX_1905_FCC_01.

3.3 OCCUPIED BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

3.3.2 TEST SETUP

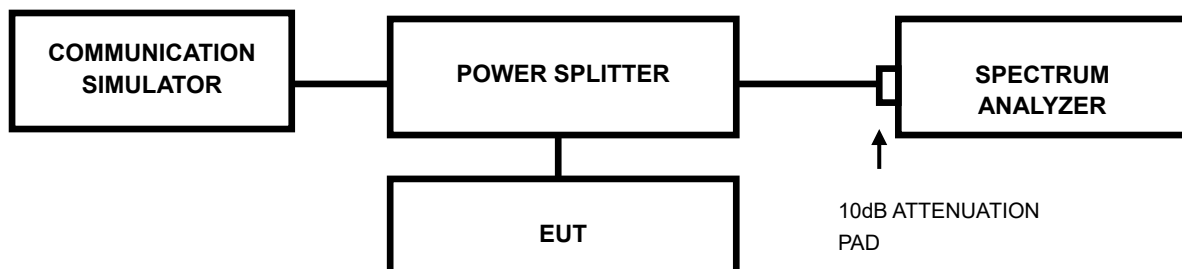

3.3.3 TEST PROCEDURES

- a. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



Test Report No.: W7L-P22110028RF03

3.3.4 TEST RESULTS

Please Refer to Module report MDE_UBLOX_2105/MDE_UBLOX_1905_FCC_01.



3.4 BAND EDGE MEASUREMENT

3.4.1 LIMITS OF BAND EDGE MEASUREMENT


According to FCC 27.53(c) specified that For operations in the 746-758 MHz band and the 776-788 MHz band , the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed. In addition, the power of any unwanted emission in an 6.25kHz bandwidth for all frequencies between 763-775 MHz and 793-806 MHz shall be attenuated below the transmitter power, P(dBW), by at least $65 + 10 \log 10p(P)$, dB, for mobile and portable equipment.

According to FCC 27.53(g) specified that For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

According to FCC 27.53(h) specified that For operations in the 1710-1755 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

According to FCC 27.53(m)(4) specified that For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. For mobile digital stations, in the 1 megahertz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least two percent may be employed.

3.4.2 TEST SETUP

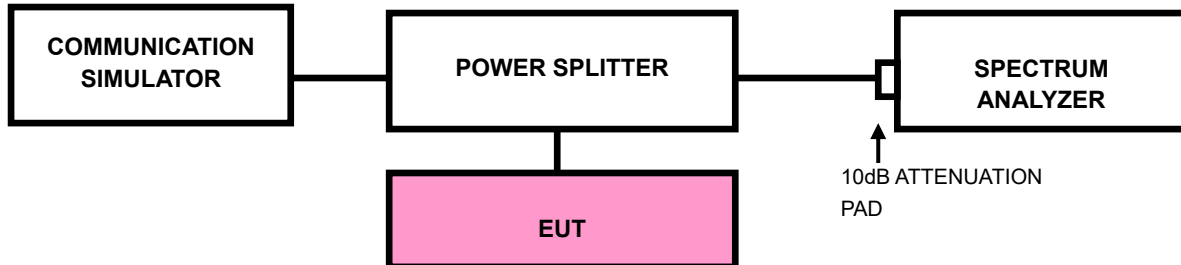

3.4.3 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz.
RBW of the spectrum is 10kHz and VBW of the spectrum is 30kHz (LTE bandwidth for (1.4M/3M/5M/10M/15M/20M)1RB/0RB&1RB/MAXRB).
- c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz.
RBW of the spectrum is $\geq 1\% \cdot \text{EBW}$ kHz and VBW of the spectrum is $3 \cdot \text{RBW}$ kHz.
(LTE bandwidth 1.4M/3M/5M/10M/15M/20MHz).
- d. Record the max trace plot into the test report.



Test Report No.: W7L-P22110028RF03

3.4.4 TEST RESULTS

Please Refer to Module report MDE_UBLOX_2105/MDE_UBLOX_1905_FCC_01.

3.5 CONDUCTED SPURIOUS EMISSIONS

3.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .


For:LTE Band7

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

3.5.2 TEST PROCEDURE

- a. The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 30MHz up to a frequency including its 10th harmonic. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

3.5.3 TEST SETUP

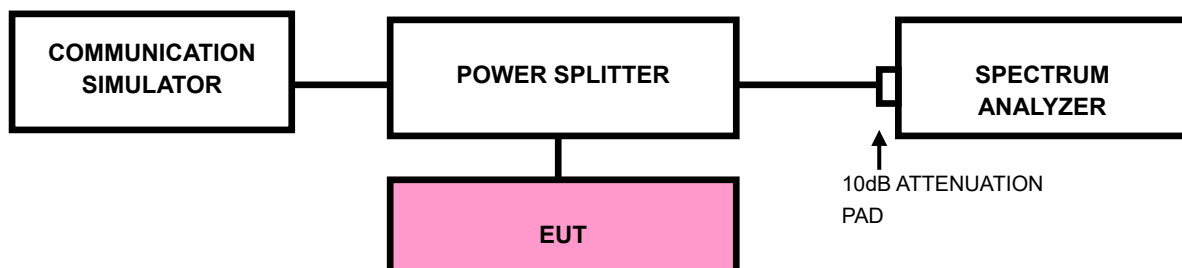



**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

3.5.4 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

Please Refer to Module report MDE_UBLOX_2105/MDE_UBLOX_1905_FCC_01.



3.6 RADIATED EMISSION MEASUREMENT

3.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

For: LTE Band7

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $55 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -25dBm .

3.6.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G.
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.6.3 DEVIATION FROM TEST STANDARD


No deviation

3.6.4 TEST SETUP


< Frequency Range below 30MHz >

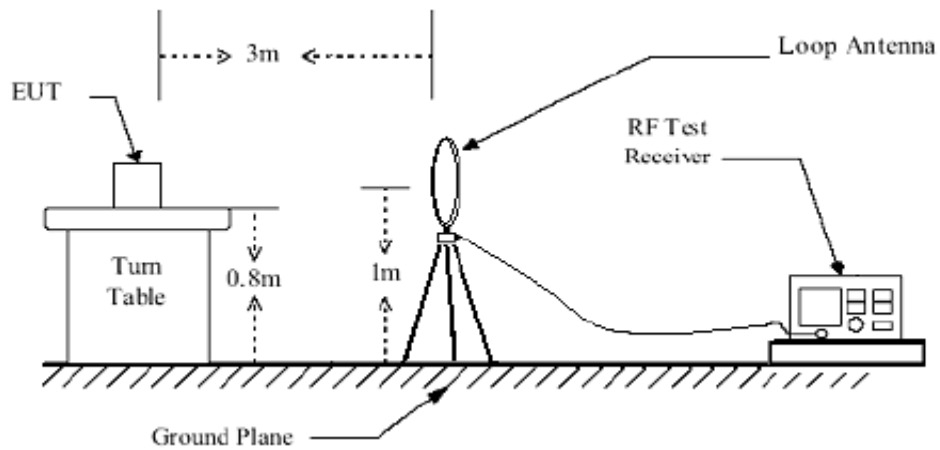

< Frequency Range 30MHz~1GHz >

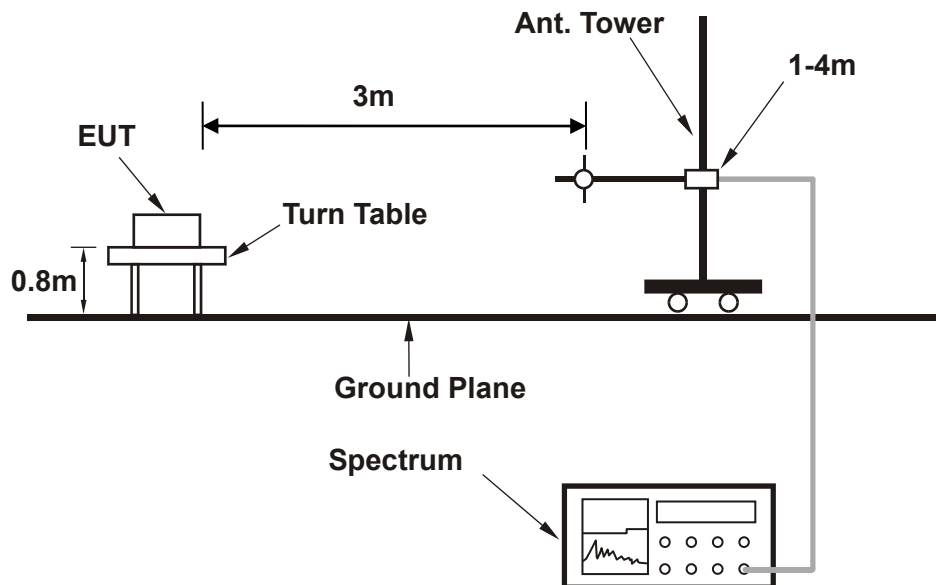

<Frequency Range above 1GHz>

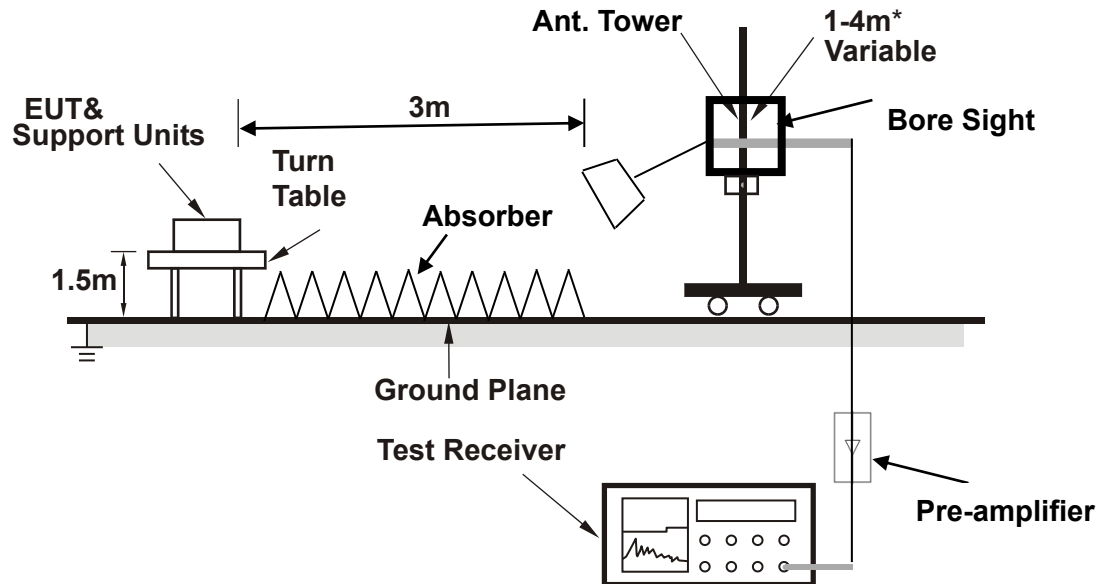

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.6.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA 1(External Antenna (KIT))


30 MHz – 1GHz data:

LTE Band 13

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 23255	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	52.310	-69.84	-52.47	-13.00	-56.84	-17.37	Peak	Horizontal
2	92.080	-64.76	-43.66	-13.00	-51.76	-21.10	Peak	Horizontal
3	164.830	-59.82	-43.70	-13.00	-46.82	-16.12	Peak	Horizontal
4 PP	219.150	-57.04	-41.90	-13.00	-44.04	-15.14	Peak	Horizontal
5	324.880	-57.94	-46.08	-13.00	-44.94	-11.86	Peak	Horizontal
6	501.420	-65.65	-57.46	-13.00	-52.65	-8.19	Peak	Horizontal

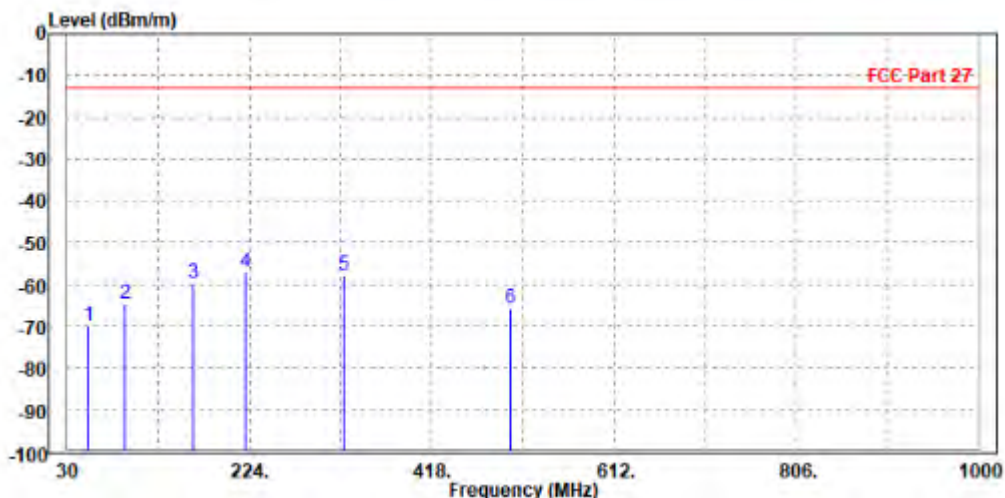




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23255	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	42.610	-67.63	-42.55	-13.00	-54.63	-25.08	Peak	Vertical
2 PP	100.810	-53.84	-47.14	-13.00	-40.84	-6.70	Peak	Vertical
3	164.830	-63.96	-46.75	-13.00	-50.96	-17.21	Peak	Vertical
4	226.910	-67.45	-51.81	-13.00	-54.45	-15.64	Peak	Vertical
5	323.910	-60.70	-50.32	-13.00	-47.70	-10.38	Peak	Vertical
6	520.820	-64.80	-57.12	-13.00	-51.80	-7.68	Peak	Vertical

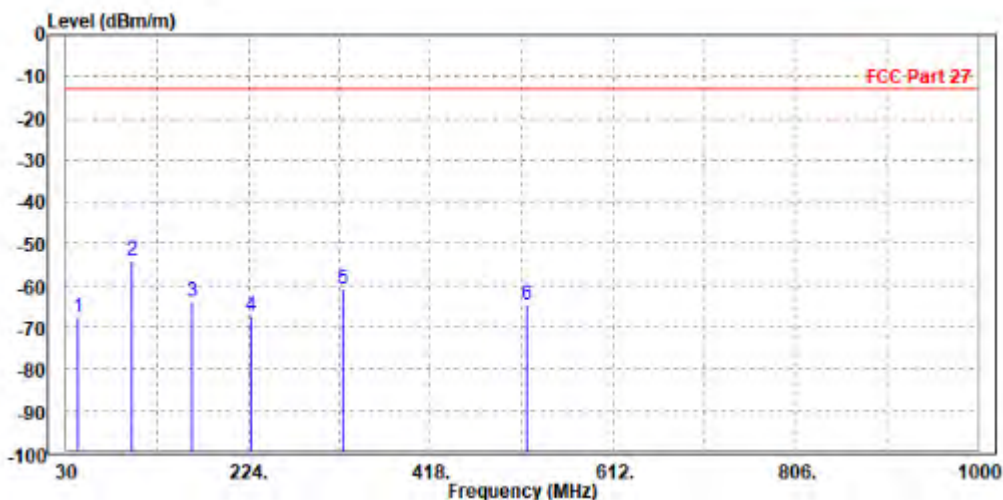



BUREAU VERITAS

Test Report No.: W7L-P22110028RF03

ABOVE 1GHz

Note: For higher frequency, the emission is too low to be detected.


LTE Band 4

CHANNEL BANDWIDTH: 1.4MHz / QPSK

CH 20175

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3470.000	-51.24	-58.52	-13.00	-38.24	7.28	Peak	Horizontal
2	5197.500	-51.26	-61.26	-13.00	-38.26	10.00	Peak	Horizontal

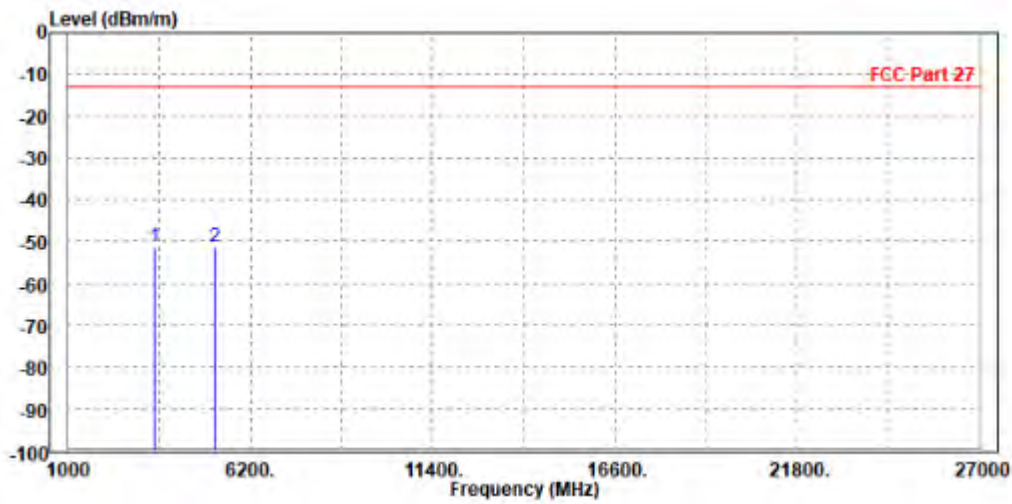




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-52.14	-59.40	-13.00	-39.14	7.26	Peak	Vertical
2 PP	5186.000	-50.26	-60.70	-13.00	-37.26	10.44	Peak	Vertical

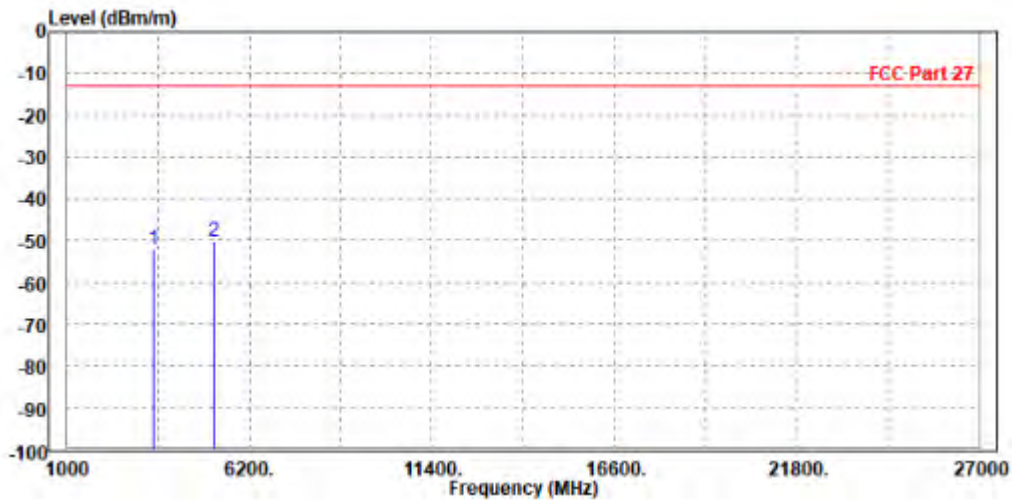




Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-51.76	-59.03	-13.00	-38.76	7.27	Peak	Horizontal
2 PP	5186.000	-50.83	-60.81	-13.00	-37.83	9.98	Peak	Horizontal

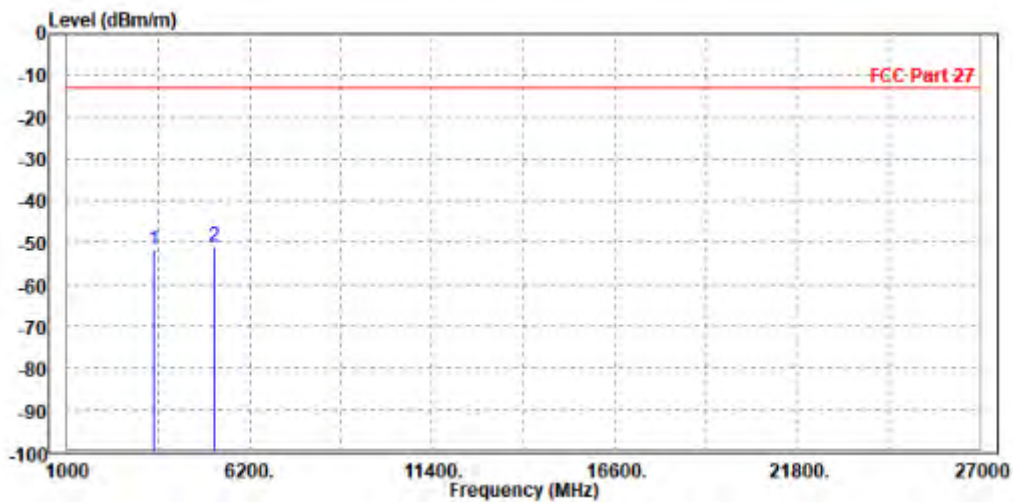




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-50.78	-58.05	-13.00	-37.78	7.27	Peak	Vertical
2 PP	5197.500	-50.44	-60.89	-13.00	-37.44	10.45	Peak	Vertical

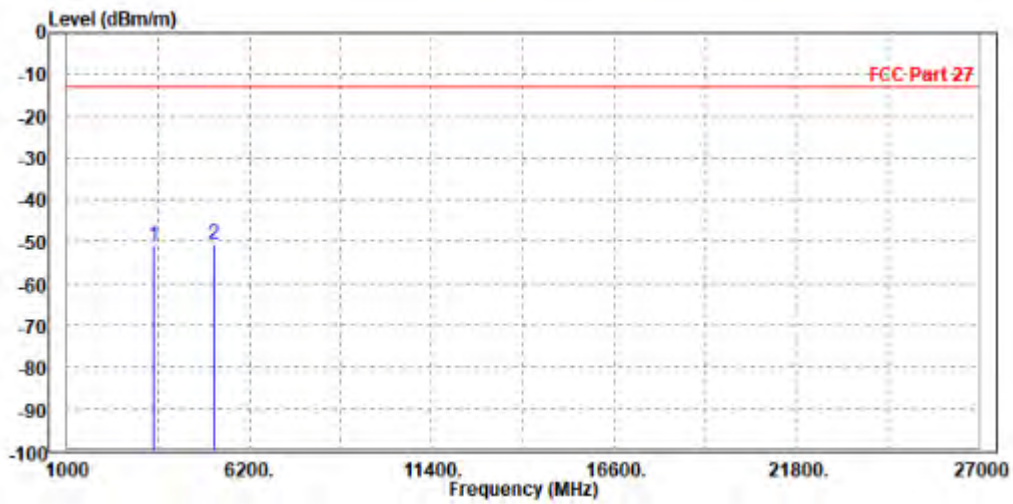




**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-51.64	-58.92	-13.00	-38.64	7.28	Peak	Horizontal
2	PP 5197.500	-50.97	-60.97	-13.00	-37.97	10.00	Peak	Horizontal

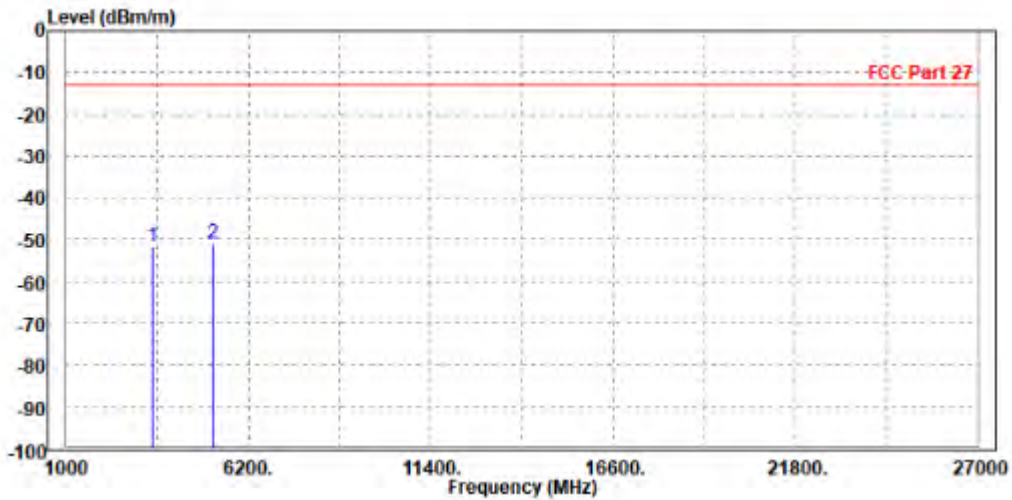




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-51.91	-59.17	-13.00	-38.91	7.26	Peak	Vertical
2 PP	5186.000	-50.04	-60.48	-13.00	-37.04	10.44	Peak	Vertical

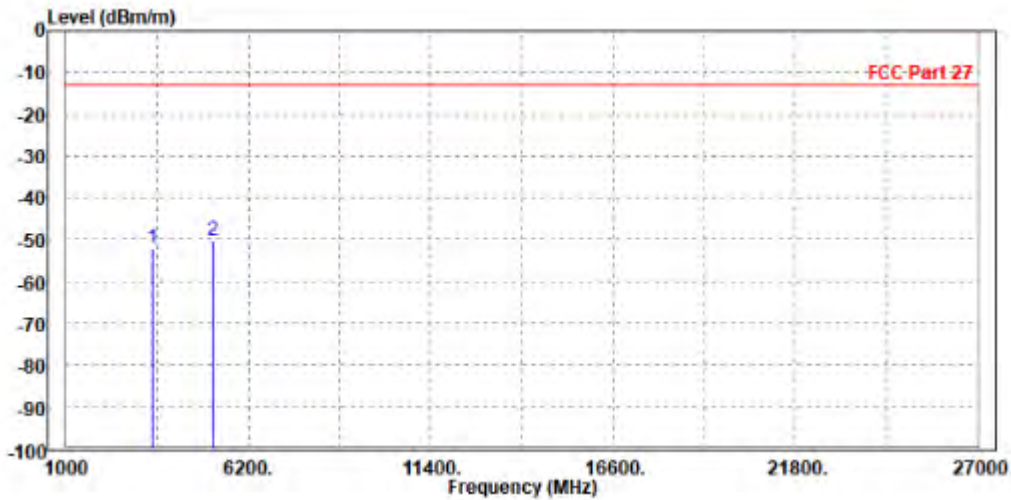




**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-50.48	-57.75	-13.00	-37.48	7.27	Peak	Horizontal
2 PP	5186.000	-49.92	-59.90	-13.00	-36.92	9.98	Peak	Horizontal

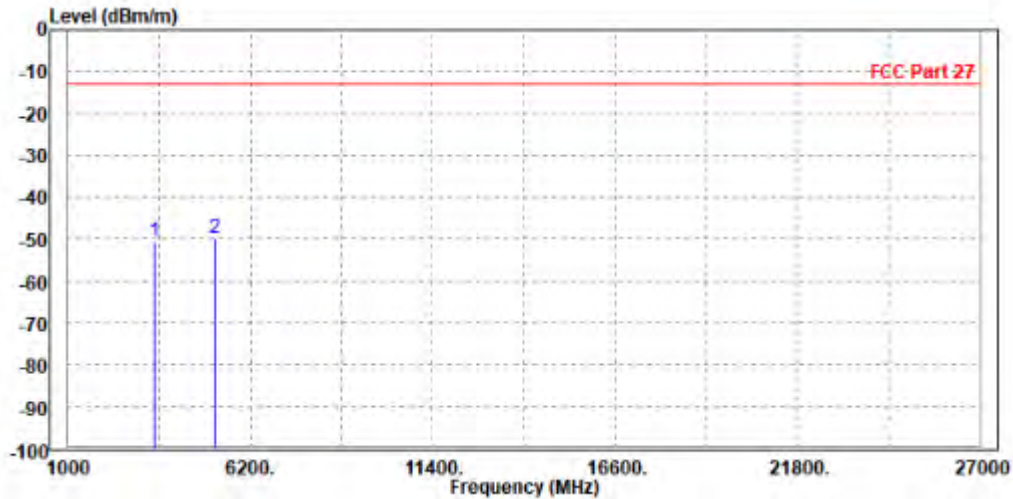




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-50.53	-57.80	-13.00	-37.53	7.27	Peak	Vertical
2 PP	5197.500	-49.76	-60.21	-13.00	-36.76	10.45	Peak	Vertical

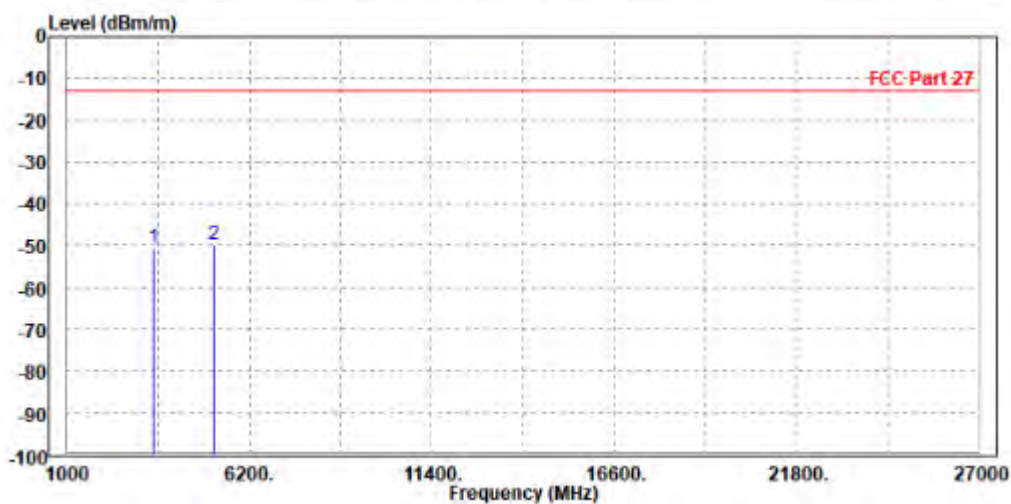



**BUREAU
VERITAS**


Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 15MHz / QPSK

CH20025

MODE	TX channel 20025	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3435.000	-51.72	-58.95	-13.00	-38.72	7.23	Peak	Horizontal
2	PP 5160.000	-49.53	-59.47	-13.00	-36.53	9.94	Peak	Horizontal

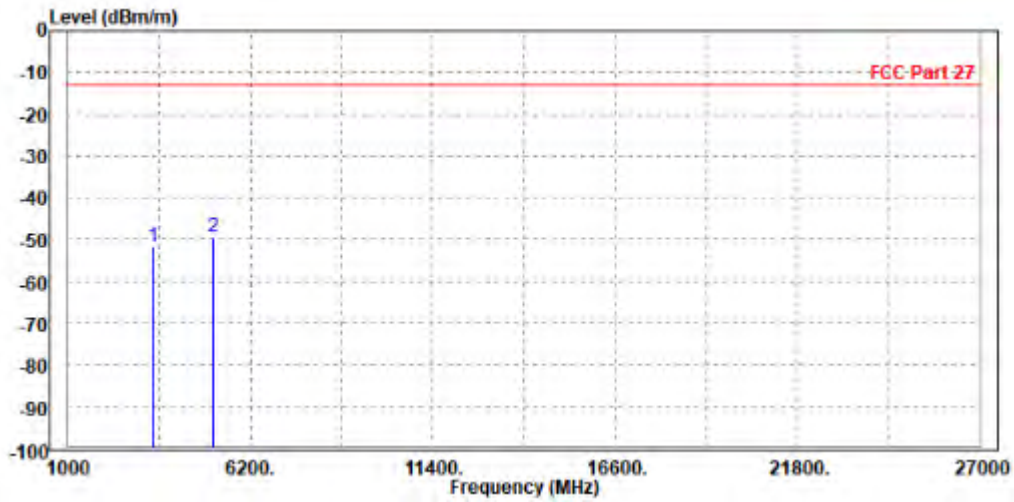




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20025	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3444.000	-51.84	-59.07	-13.00	-38.84	7.23	Peak	Vertical
2 PP	5152.500	-49.25	-59.66	-13.00	-36.25	10.41	Peak	Vertical

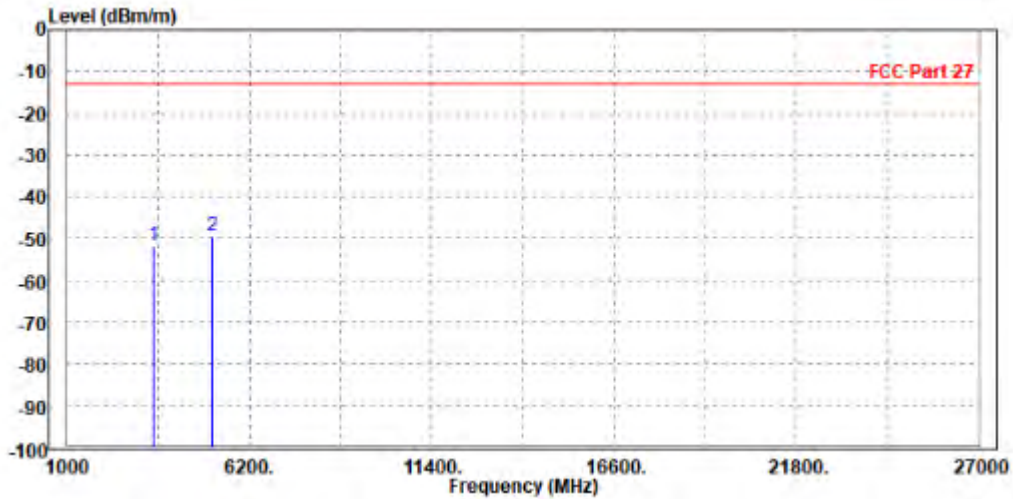




BUREAU VERITAS

Test Report No.: W7L-P22110028RF03

CH20175

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-51.89	-59.16	-13.00	-38.89	7.27	Peak	Horizontal
2 PP	5186.000	-51.04	-61.02	-13.00	-38.04	9.98	Peak	Horizontal

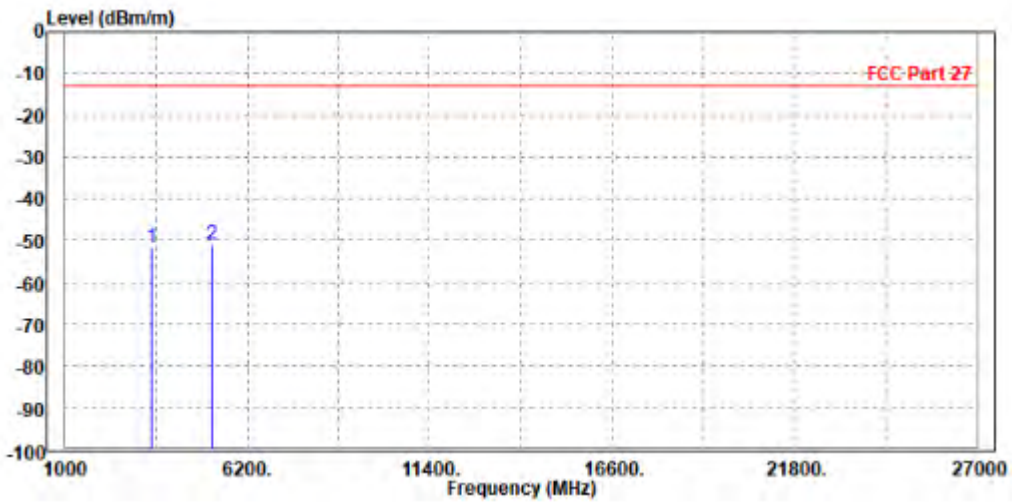




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-51.35	-58.62	-13.00	-38.35	7.27	Peak	Vertical
2	PP 5197.500	-49.45	-59.90	-13.00	-36.45	10.45	Peak	Vertical

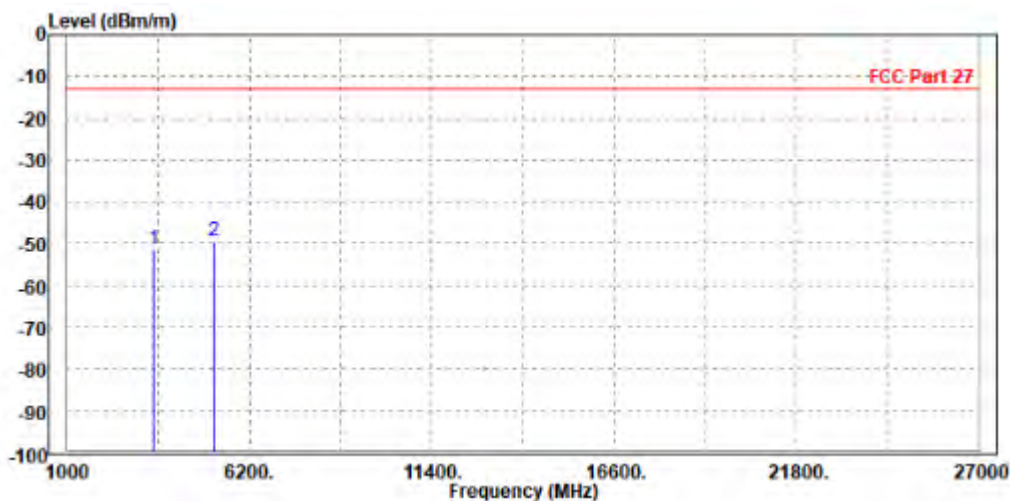




BUREAU VERITAS

Test Report No.: W7L-P22110028RF03

CH20325

MODE	TX channel 20325	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-51.34	-58.66	-13.00	-38.34	7.32	Peak	Horizontal
2 PP	5242.500	-51.28	-61.35	-13.00	-38.28	10.07	Peak	Horizontal

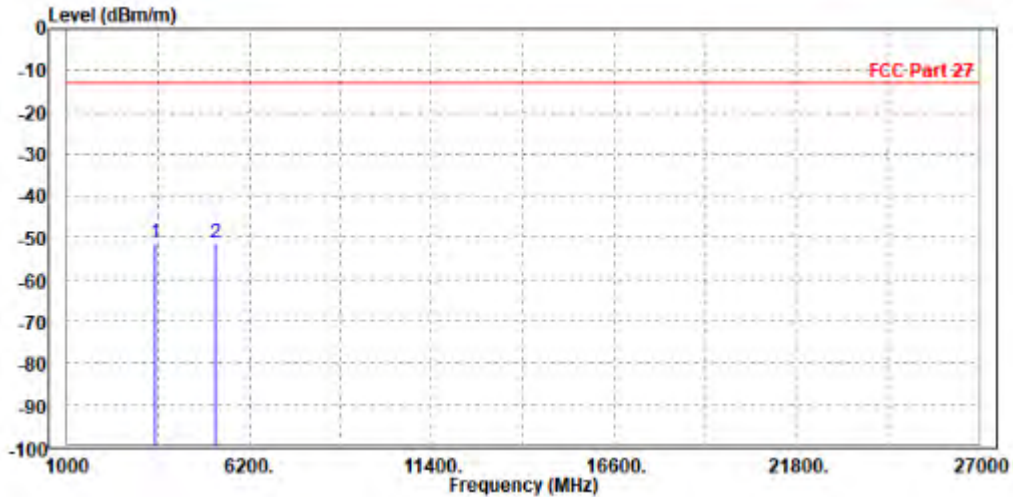




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20325	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	PoI/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3495.000	-51.83	-59.14	-13.00	-38.83	7.31	Peak	Vertical
2 PP	5238.000	-50.67	-61.16	-13.00	-37.67	10.49	Peak	Vertical

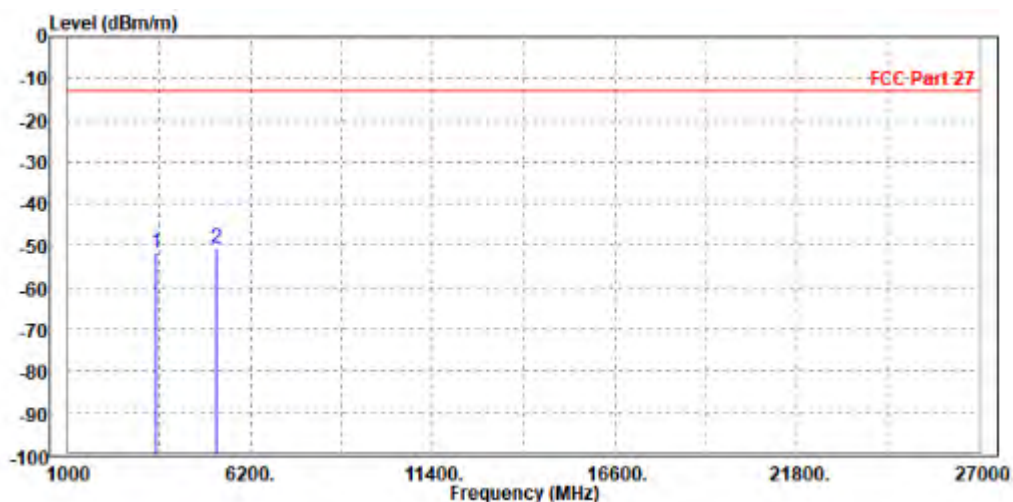




**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3470.000	-50.57	-57.85	-13.00	-37.57	7.28	Peak	Horizontal
2	5197.500	-50.90	-60.90	-13.00	-37.90	10.00	Peak	Horizontal

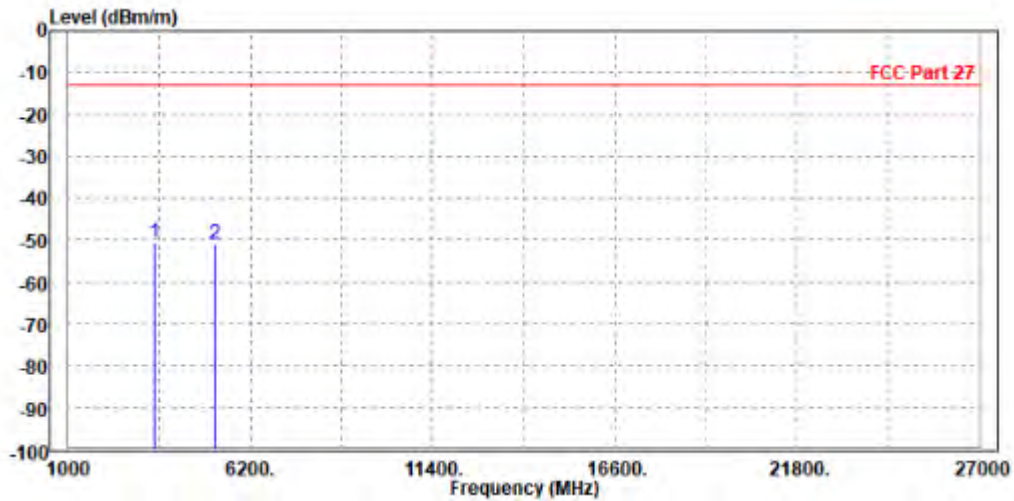




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-51.26	-58.52	-13.00	-38.26	7.26	Peak	Vertical
2 PP	5186.000	-50.41	-60.85	-13.00	-37.41	10.44	Peak	Vertical

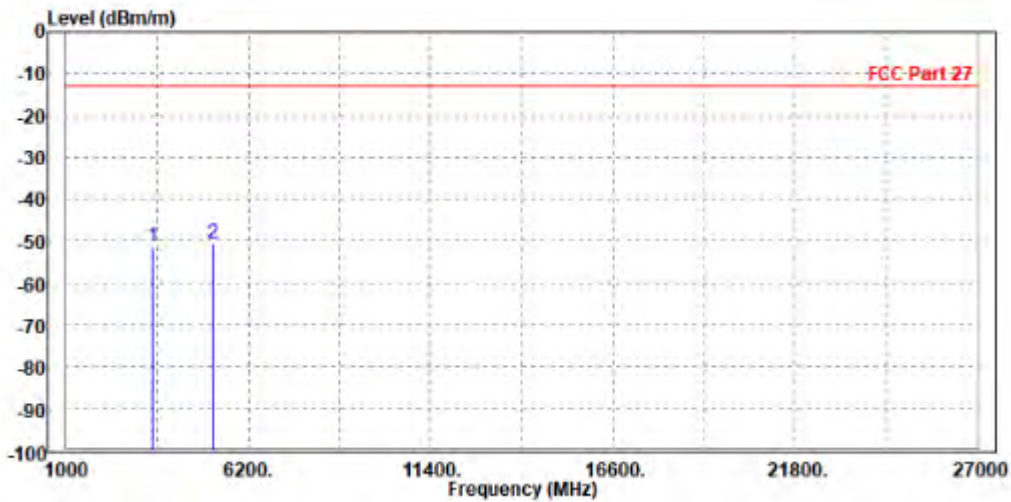




Test Report No.: W7L-P22110028RF03

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	PoI/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-48.55	-47.91	-13.00	-35.55	-0.64	Peak	Horizontal
2	PP 2122.500	-39.59	-43.65	-13.00	-26.59	4.06	Peak	Horizontal

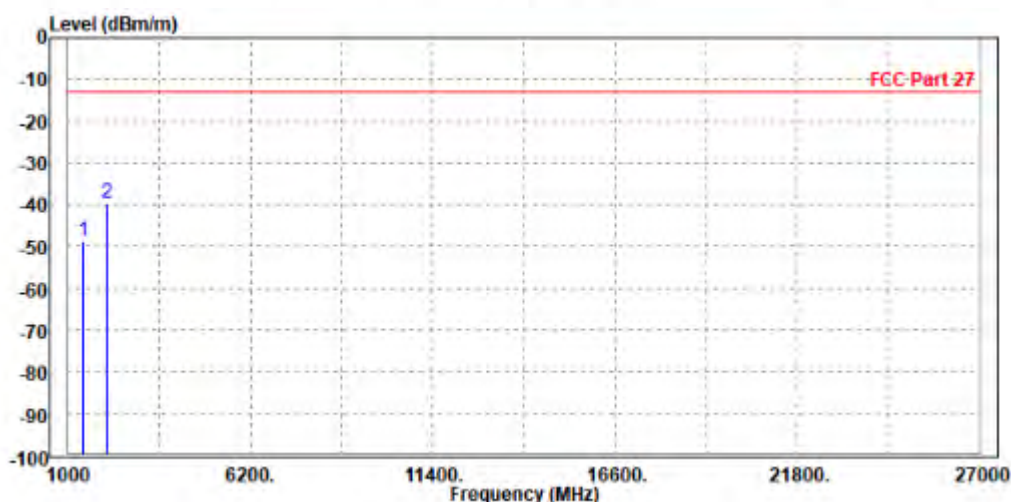




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1415.000	-44.33	-43.92	-13.00	-31.33	-0.41	Peak	Vertical
2	2118.000	-47.34	-51.24	-13.00	-34.34	3.90	Peak	Vertical

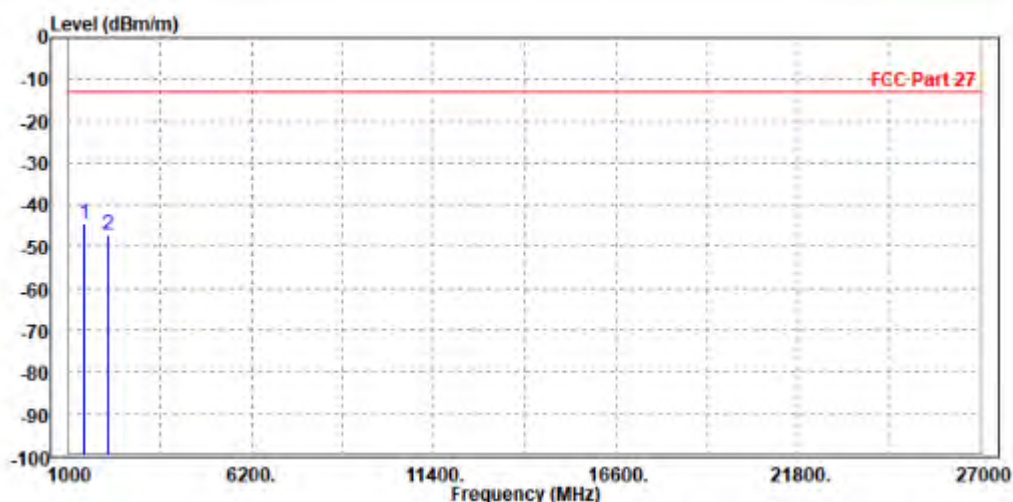



**BUREAU
VERITAS**


Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 3MHz / QPSK

CH23095

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1415.000	-50.40	-49.75	-13.00	-37.40	-0.65	Peak	Horizontal
2 PP	2118.000	-38.92	-42.97	-13.00	-25.92	4.05	Peak	Horizontal

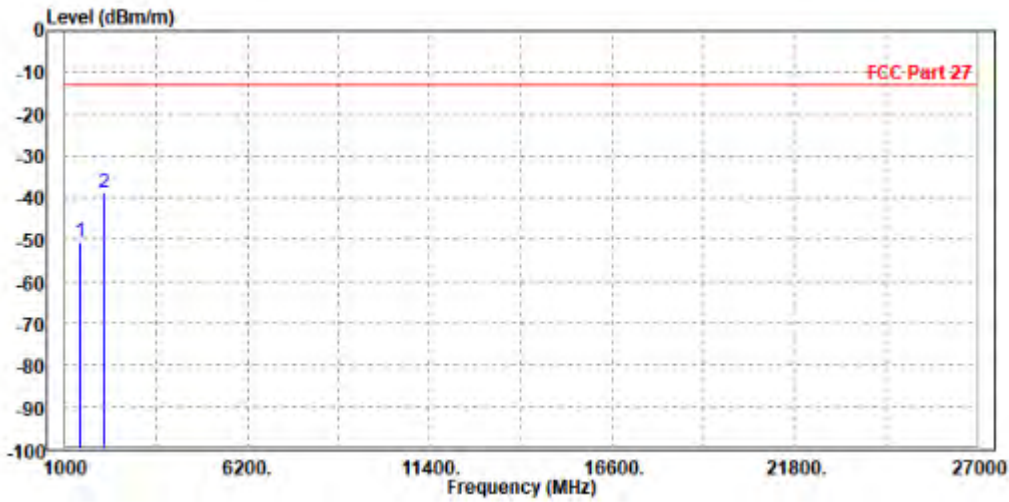




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1416.000	-44.23	-43.83	-13.00	-31.23	-0.40	Peak	Vertical
2	2122.500	-45.17	-49.09	-13.00	-32.17	3.92	Peak	Vertical

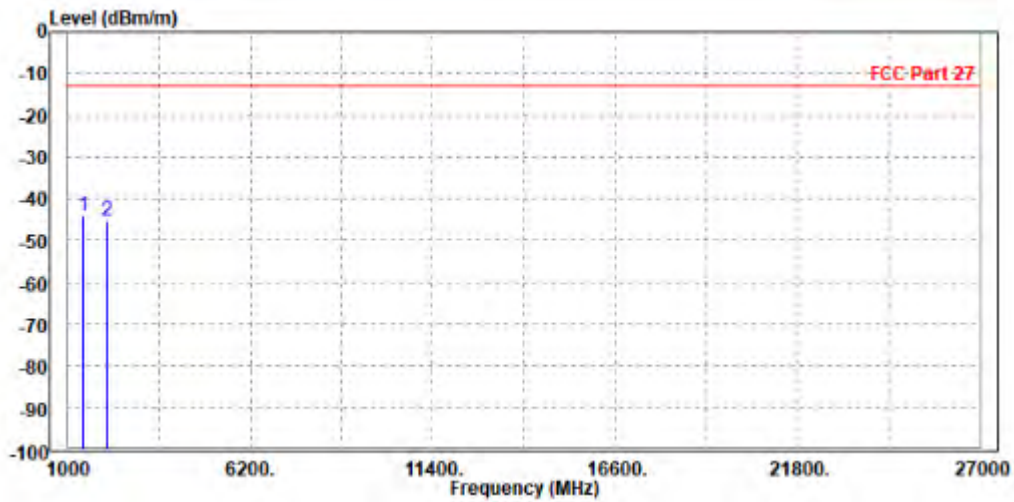




Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 5MHz / QPSK

CH23035

MODE	TX channel 23035	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1403.000	-58.90	-58.22	-13.00	-45.90	-0.68	Peak	Horizontal
2 PP	2092.000	-43.82	-47.77	-13.00	-30.82	3.95	Peak	Horizontal

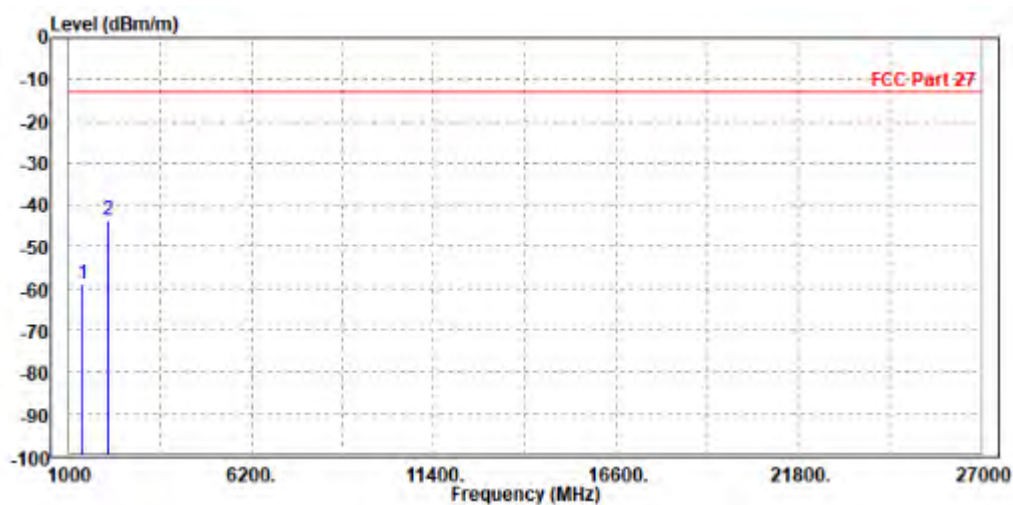




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23035	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-57.52	-57.12	-13.00	-44.52	-0.40	Peak	Vertical
2 PP	2104.500	-48.93	-52.80	-13.00	-35.93	3.87	Peak	Vertical

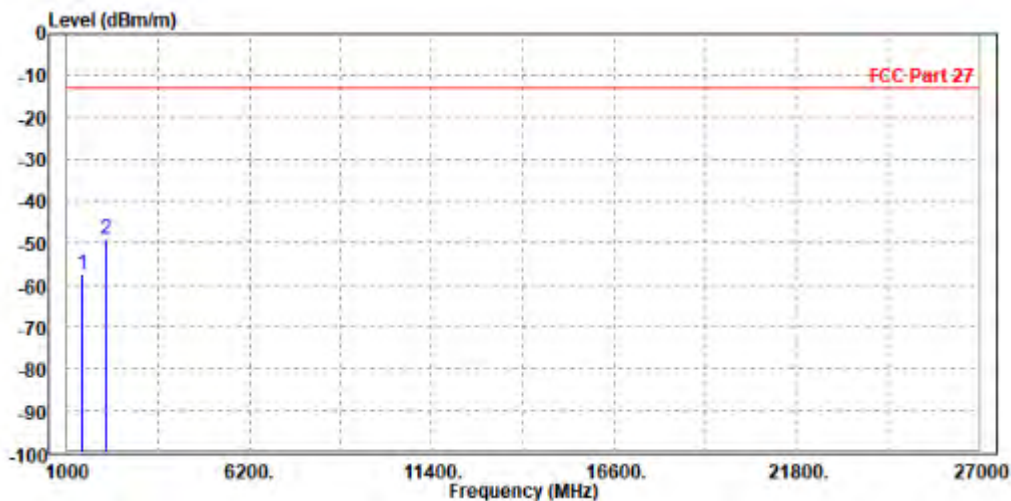




**BUREAU
VERITAS**

Test Report No.: W7L-P22110028RF03

CH23095

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-48.25	-47.61	-13.00	-35.25	-0.64	Peak	Horizontal
2 PP	2122.500	-38.83	-42.89	-13.00	-25.83	4.06	Peak	Horizontal

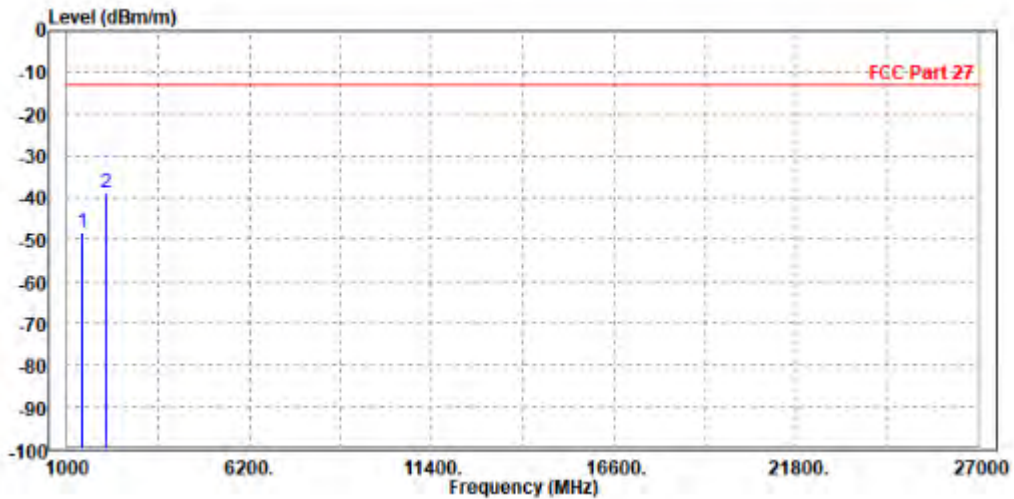




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1415.000	-46.92	-46.51	-13.00	-33.92	-0.41	Peak	Vertical
2 PP	2118.000	-45.12	-49.02	-13.00	-32.12	3.90	Peak	Vertical

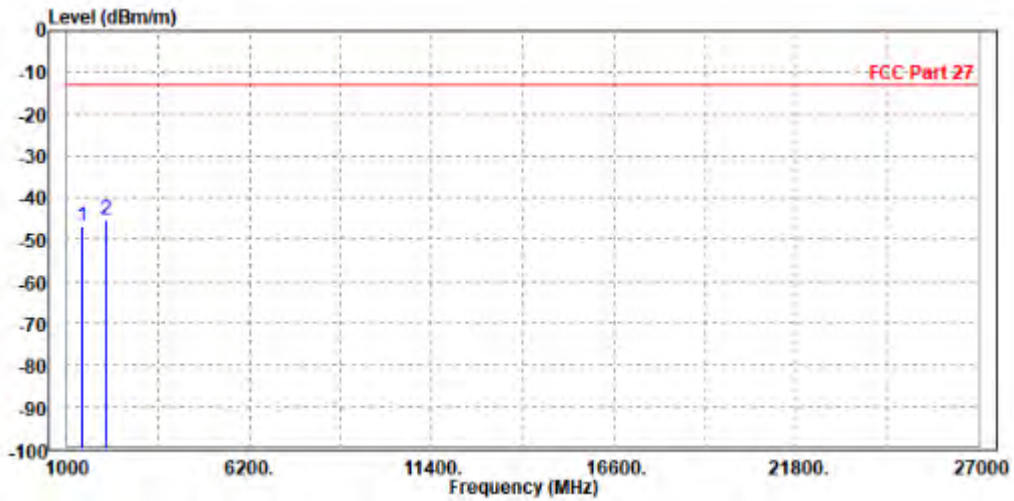




Test Report No.: W7L-P22110028RF03

CH23155

MODE	TX channel 23155	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-46.11	-45.47	-13.00	-33.11	-0.64	Peak	Horizontal
2 PP	2140.500	-37.71	-41.84	-13.00	-24.71	4.13	Peak	Horizontal

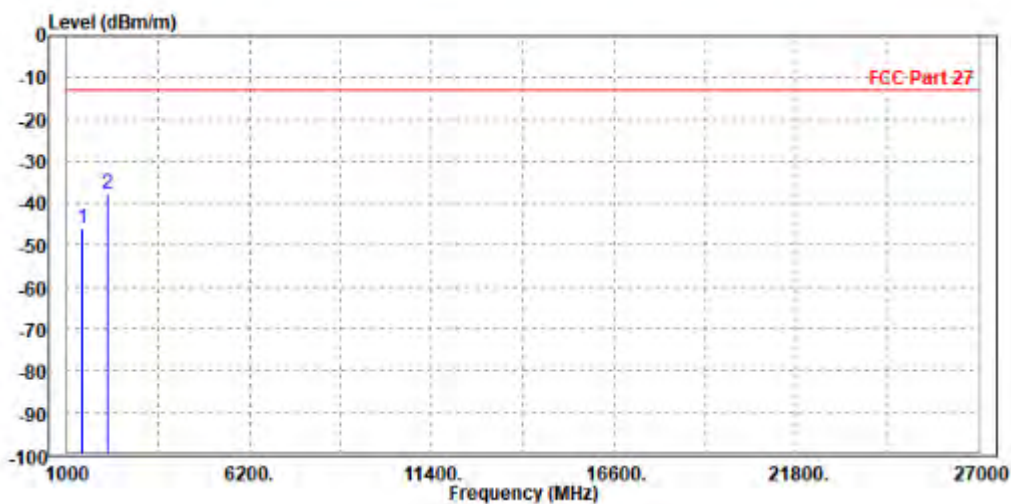




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23155	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1427.000	-43.15	-42.80	-13.00	-30.15	-0.35	Peak	Vertical
2	2144.000	-43.76	-47.73	-13.00	-30.76	3.97	Peak	Vertical

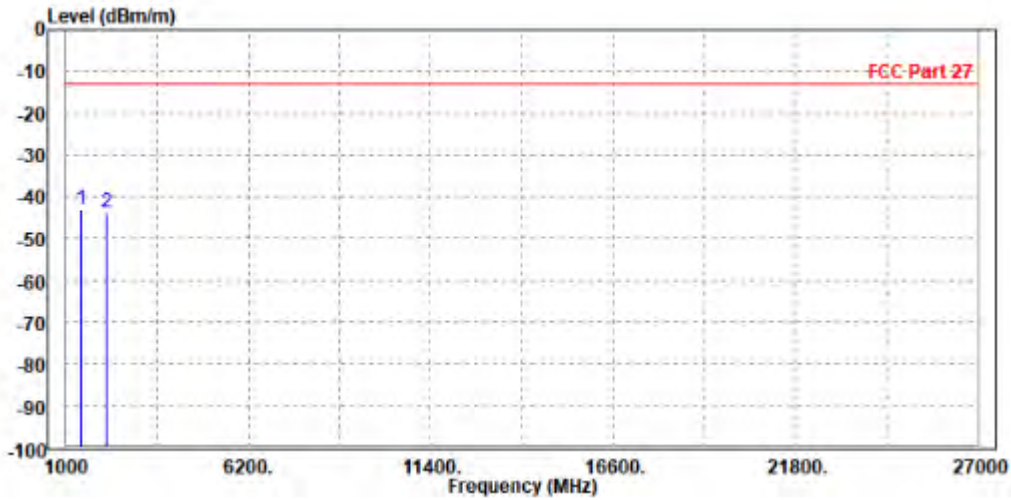




Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-46.06	-45.42	-13.00	-33.06	-0.64	Peak	Horizontal
2 PP	2122.500	-39.29	-43.35	-13.00	-26.29	4.06	Peak	Horizontal

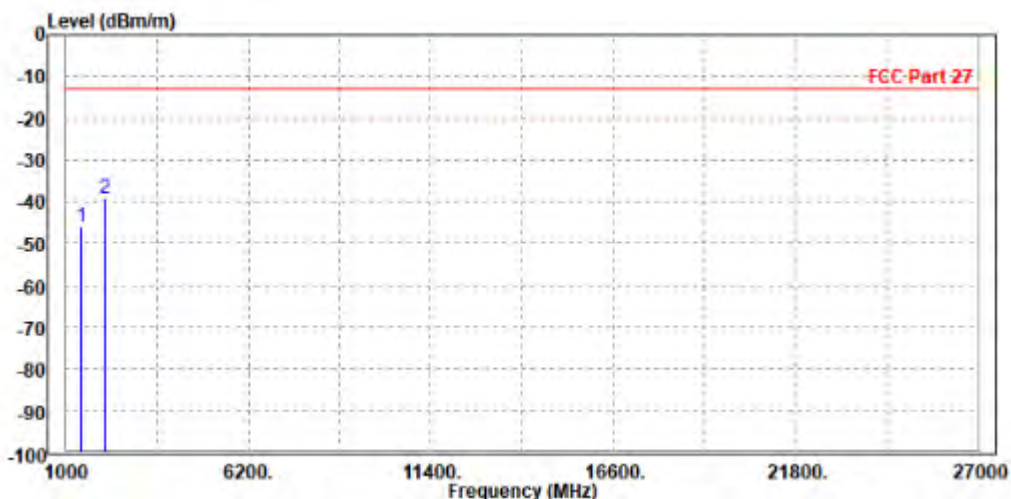




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	Mhz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1415.000	-43.06	-42.65	-13.00	-30.06	-0.41	Peak	Vertical
2	2118.000	-45.12	-49.02	-13.00	-32.12	3.90	Peak	Vertical

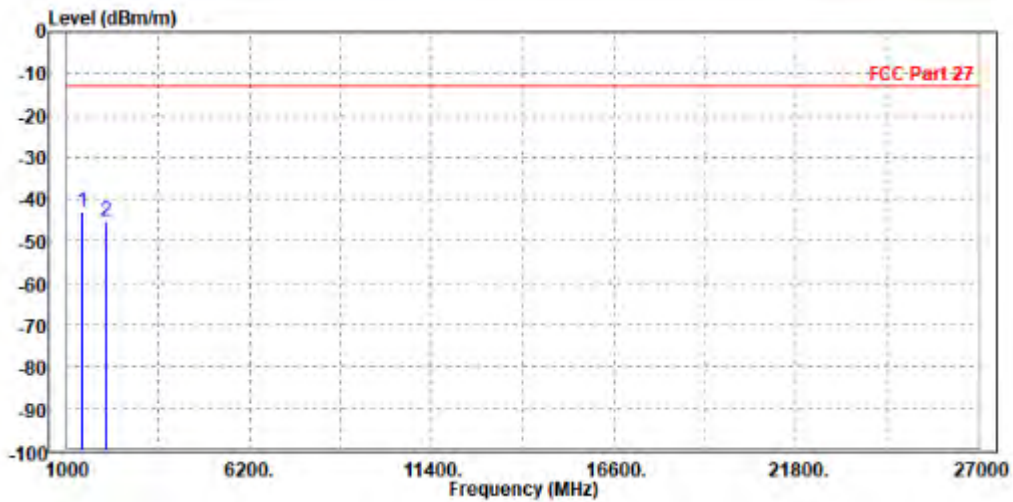



Test Report No.: W7L-P22110028RF03


LTE B13

CHANNEL BANDWIDTH: 5MHz / QPSK

CH23205

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1559.000	-58.98	-59.03	-40.00	-18.98	0.05	Peak	Horizontal
2	2326.000	-53.00	-57.81	-13.00	-40.00	4.81	Peak	Horizontal

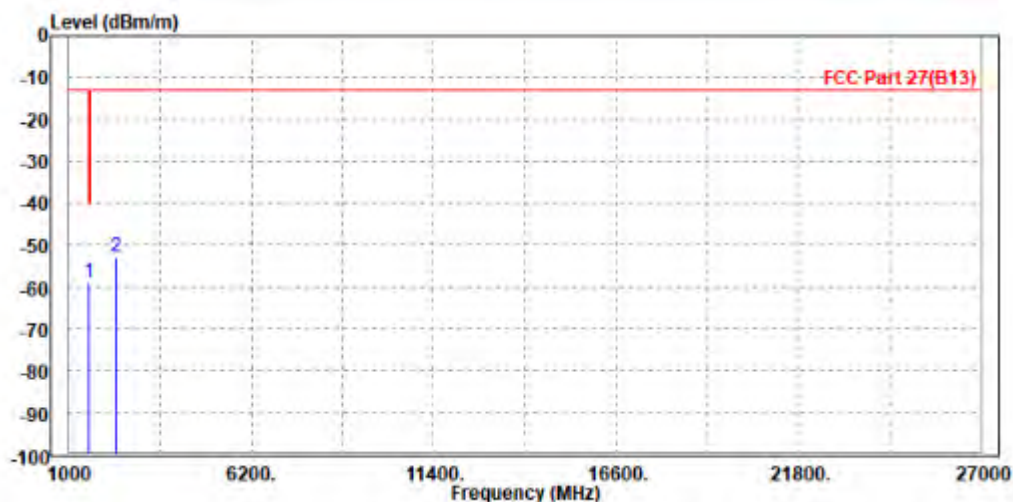




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1572.000	-57.58	-58.07	-40.00	-17.58	0.49	Peak	Vertical
2	2338.500	-53.75	-58.25	-13.00	-40.75	4.50	Peak	Vertical

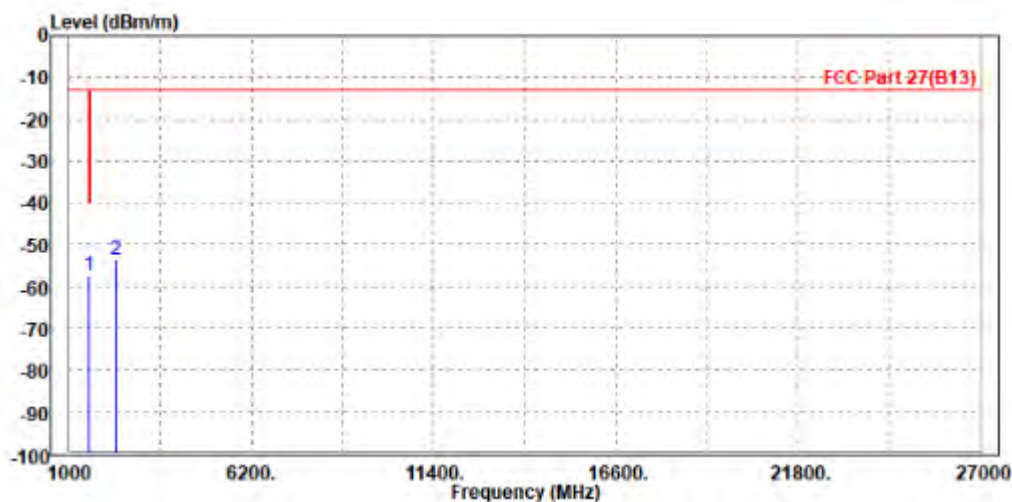




Test Report No.: W7L-P22110028RF03

CH23230

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-56.72	-56.88	-40.00	-16.72	0.16	Peak	Horizontal
2	2346.000	-52.83	-57.71	-13.00	-39.83	4.88	Peak	Horizontal

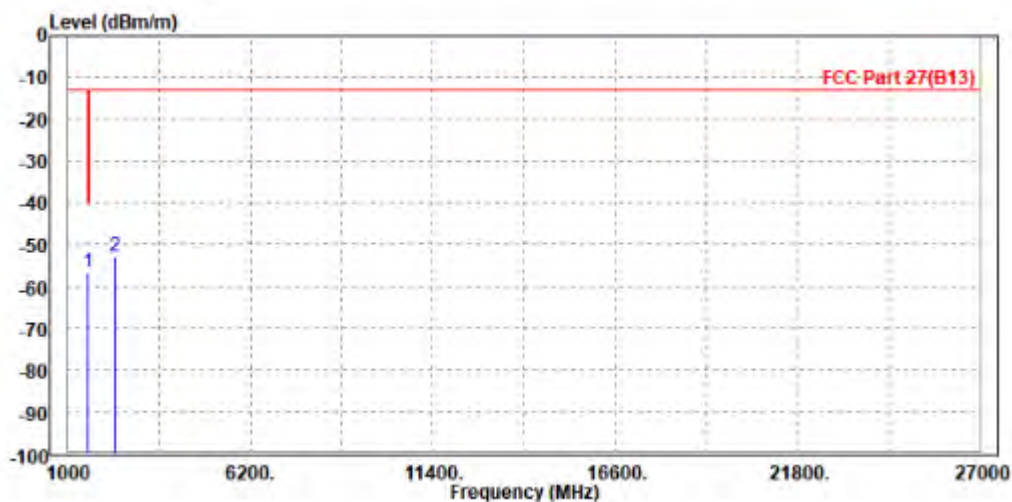




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1564.000	-57.56	-57.99	-40.00	-17.56	0.43	Peak	Vertical
2	2352.000	-53.80	-58.34	-13.00	-40.80	4.54	Peak	Vertical

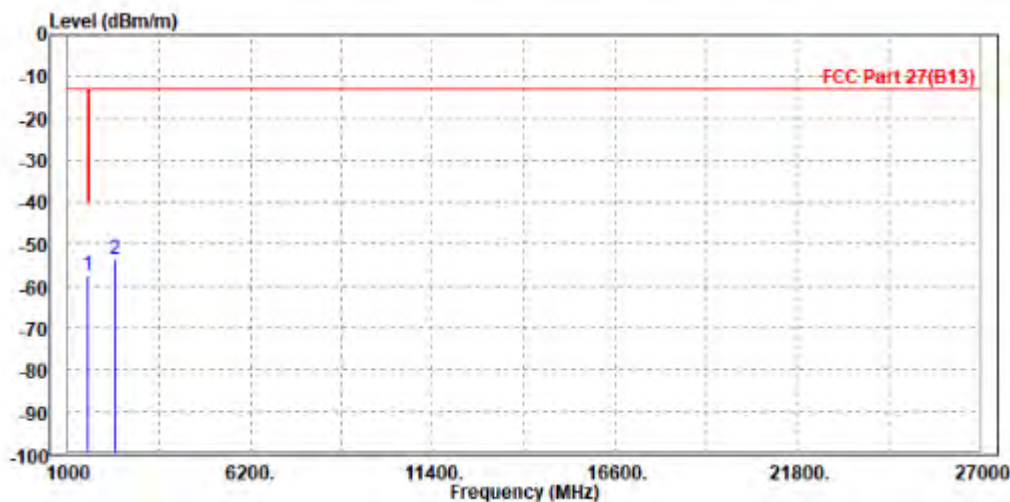




Test Report No.: W7L-P22110028RF03

CH23255

MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-50.05	-50.21	-40.00	-10.05	0.16	Peak	Horizontal
2	2353.500	-53.97	-58.88	-13.00	-40.97	4.91	Peak	Horizontal

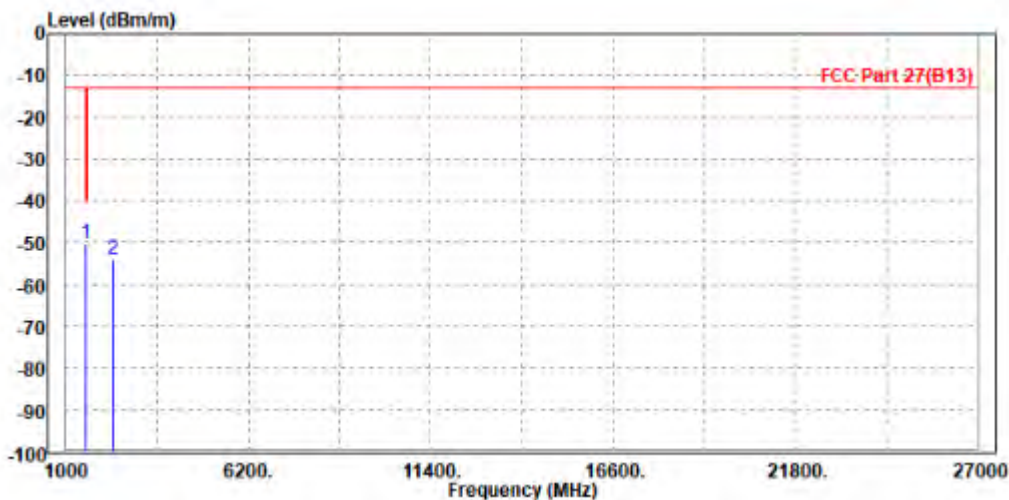




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-51.74	-52.23	-40.00	-11.74	0.49	Peak	Vertical
2	2352.000	-54.09	-58.63	-13.00	-41.09	4.54	Peak	Vertical

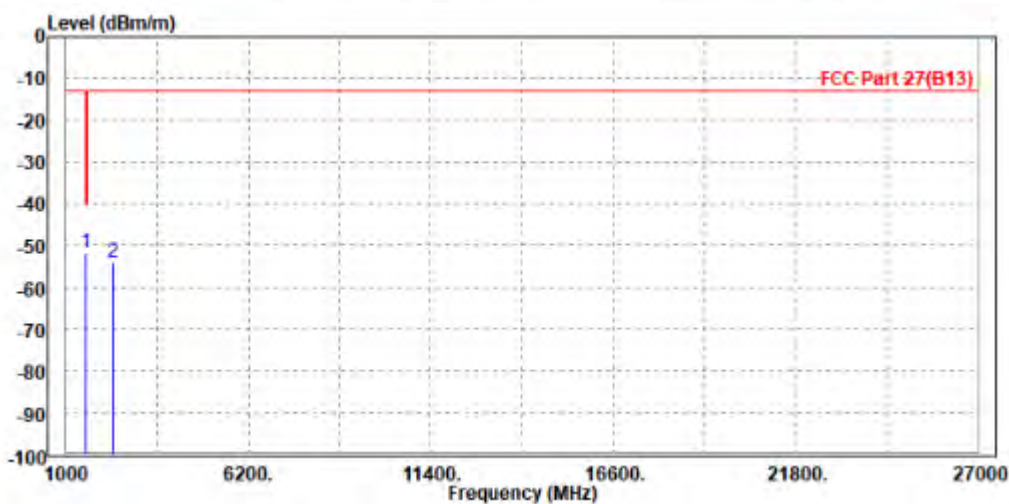




Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 10MHz /QPSK

CH23230

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1564.000	-58.57	-58.67	-40.00	-18.57	0.10	Peak	Horizontal
2	2352.000	-53.42	-58.32	-13.00	-40.42	4.90	Peak	Horizontal

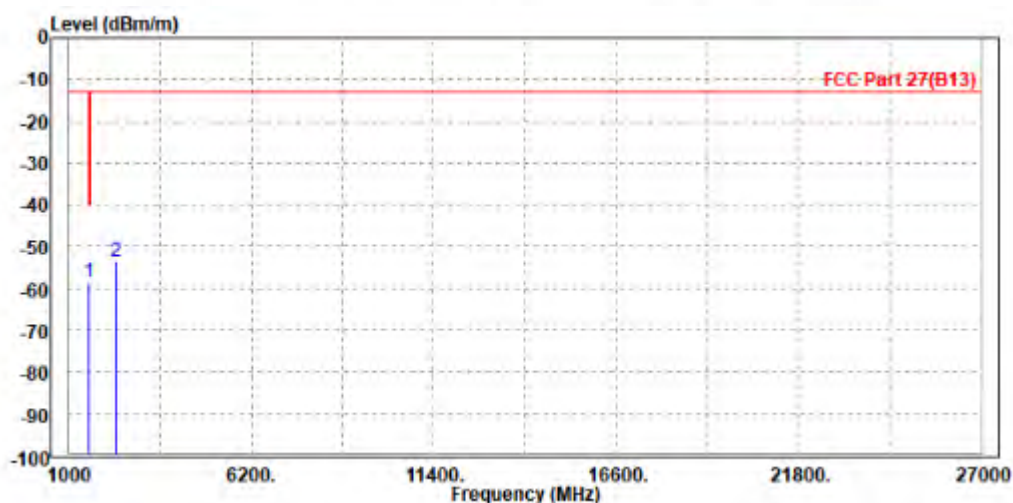




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-57.41	-57.90	-40.00	-17.41	0.49	Peak	Vertical
2	2346.000	-55.06	-59.58	-13.00	-42.06	4.52	Peak	Vertical

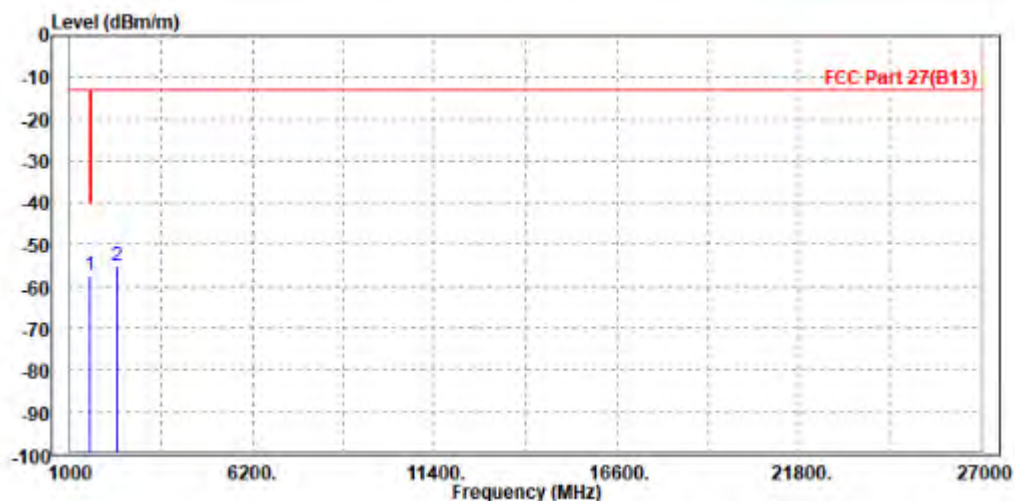



Test Report No.: W7L-P22110028RF03

BELOW 1GHz WORST-CASE DATA 2(External Antenna (Taoglas))


30 MHz – 1GHz data:

LTE Band 13

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 23255	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	52.310	-71.29	-53.92	-13.00	-58.29	-17.37	Peak	Horizontal
2	92.080	-70.20	-49.10	-13.00	-57.20	-21.10	Peak	Horizontal
3	126.030	-64.41	-43.34	-13.00	-51.41	-21.07	Peak	Horizontal
4	164.830	-61.92	-45.80	-13.00	-48.92	-16.12	Peak	Horizontal
5 PP	221.090	-56.46	-41.55	-13.00	-43.46	-14.91	Peak	Horizontal
6	307.420	-59.43	-47.15	-13.00	-46.43	-12.28	Peak	Horizontal

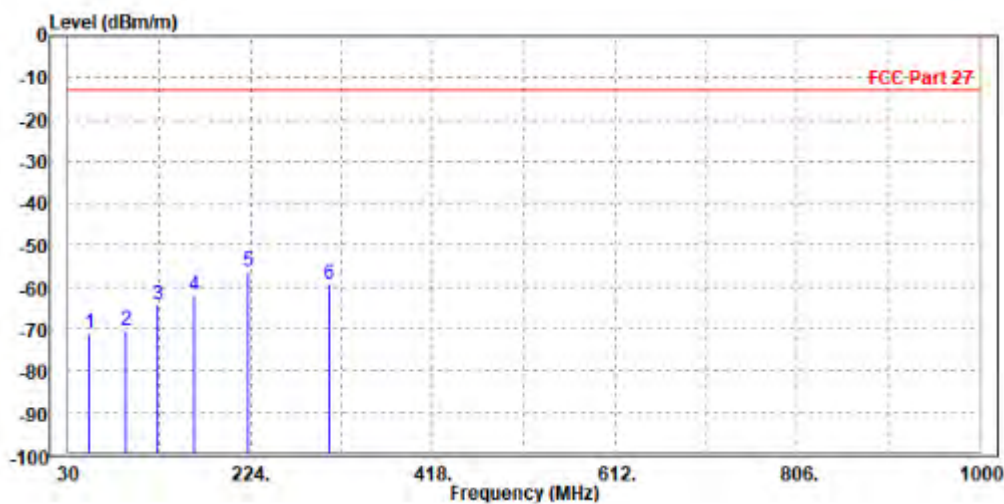




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23255	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	34.850	-69.68	-49.11	-13.00	-56.68	-20.57	Peak	Vertical
2 PP	101.780	-54.43	-47.32	-13.00	-41.43	-7.11	Peak	Vertical
3	163.860	-64.35	-47.22	-13.00	-51.35	-17.13	Peak	Vertical
4	208.480	-68.86	-51.59	-13.00	-55.86	-17.27	Peak	Vertical
5	322.940	-62.81	-52.41	-13.00	-49.81	-10.40	Peak	Vertical
6	520.820	-66.03	-58.35	-13.00	-53.03	-7.68	Peak	Vertical

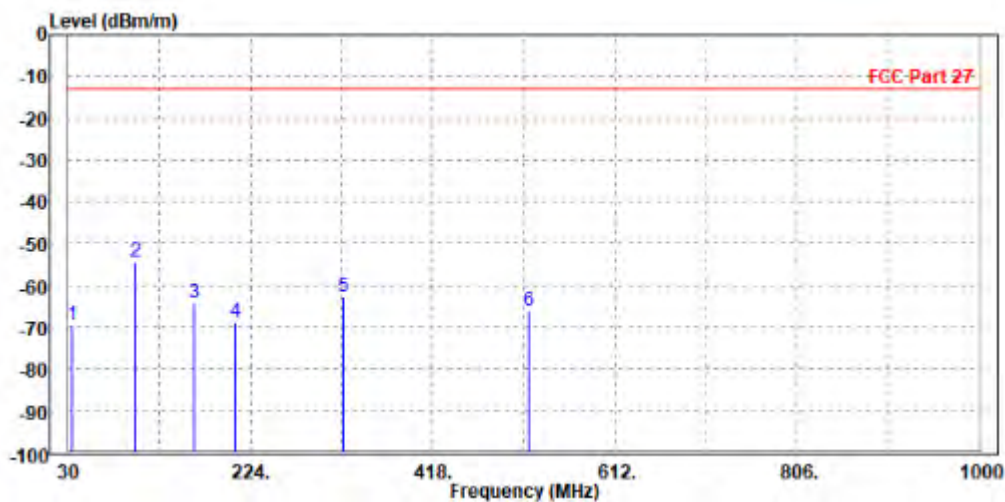



BUREAU
VERITAS

Test Report No.: W7L-P22110028RF03

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

LTE Band 4

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-52.46	-59.74	-13.00	-39.46	7.28	Peak	Horizontal
2 PP	5197.500	-51.05	-61.05	-13.00	-38.05	10.00	Peak	Horizontal

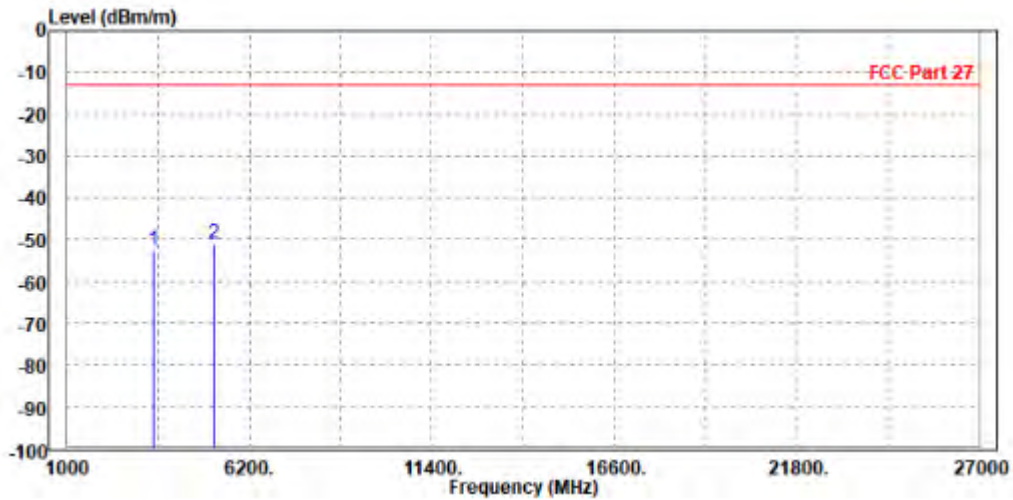




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-51.92	-59.18	-13.00	-38.92	7.26	Peak	Vertical
2 PP	5186.000	-49.33	-59.77	-13.00	-36.33	10.44	Peak	Vertical

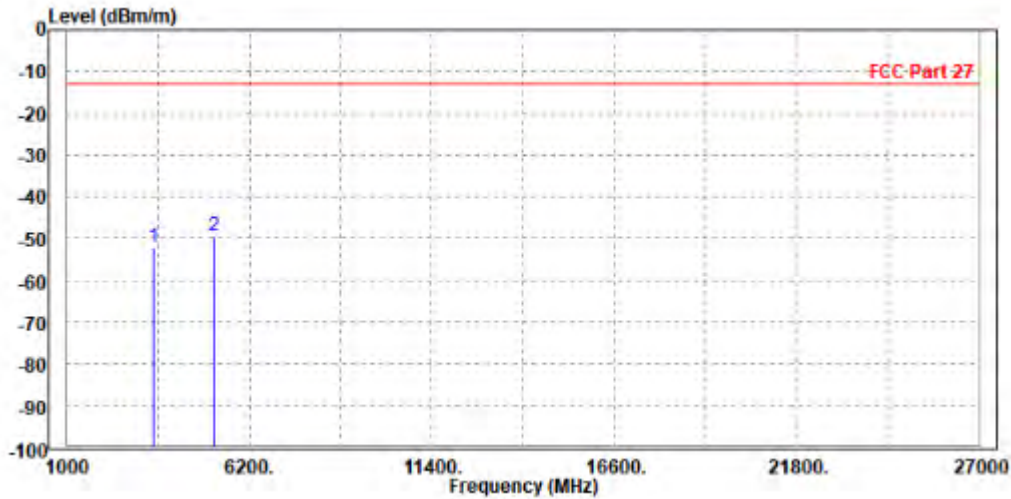




BUREAU VERITAS

Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-50.90	-58.18	-13.00	-37.90	7.28	Peak	Horizontal
2	PP 5197.500	-50.08	-60.08	-13.00	-37.08	10.00	Peak	Horizontal

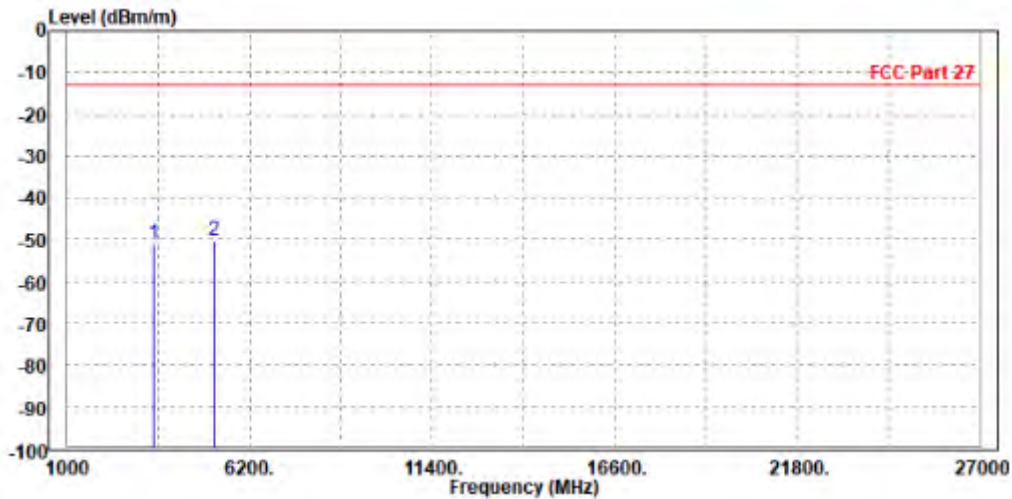




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3314.000	-51.48	-58.51	-13.00	-38.48	7.03	Peak	Vertical
2 PP	5197.500	-49.65	-60.10	-13.00	-36.65	10.45	Peak	Vertical

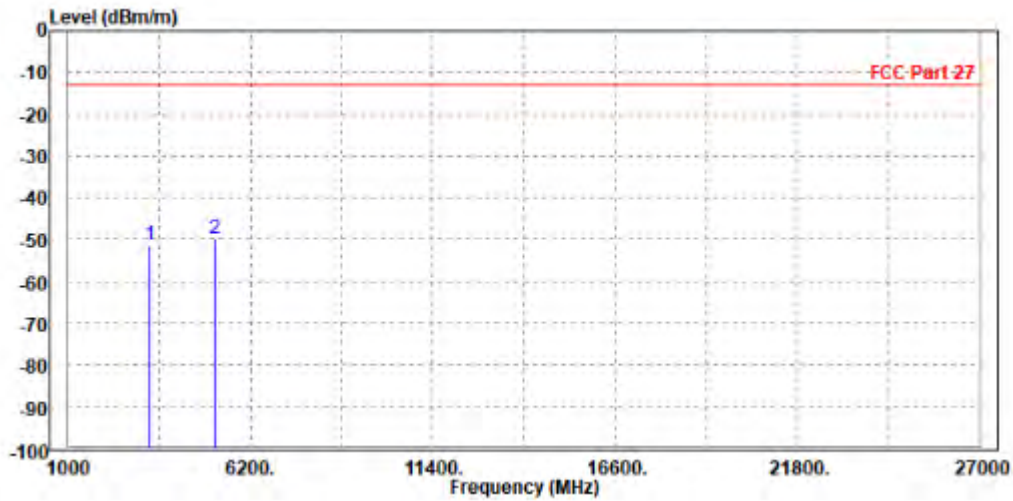




BUREAU VERITAS

Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-52.36	-59.63	-13.00	-39.36	7.27	Peak	Horizontal
2	PP 5186.000	-51.02	-61.00	-13.00	-38.02	9.98	Peak	Horizontal

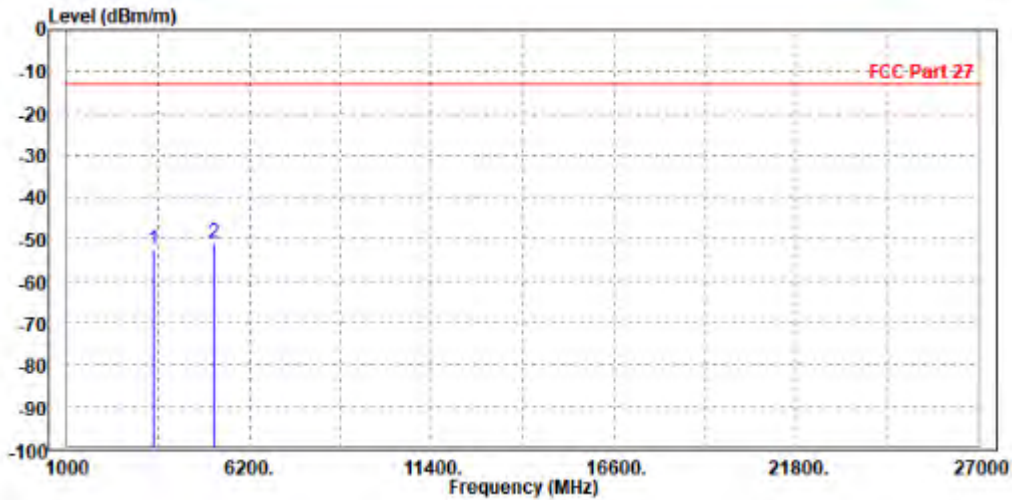




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-50.42	-57.69	-13.00	-37.42	7.27	Peak	Vertical
2	5197.500	-50.34	-60.79	-13.00	-37.34	10.45	Peak	Vertical

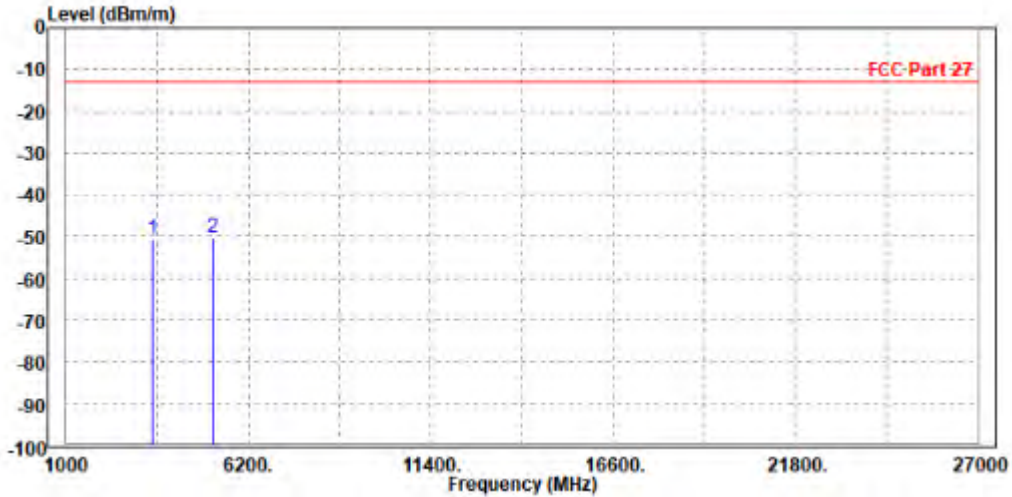



**BUREAU
VERITAS**


Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 10MHz / QPSK

CH20175

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3465.000	-51.11	-58.38	-13.00	-38.11	7.27	Peak	Horizontal
2	5186.000	-51.25	-61.23	-13.00	-38.25	9.98	Peak	Horizontal

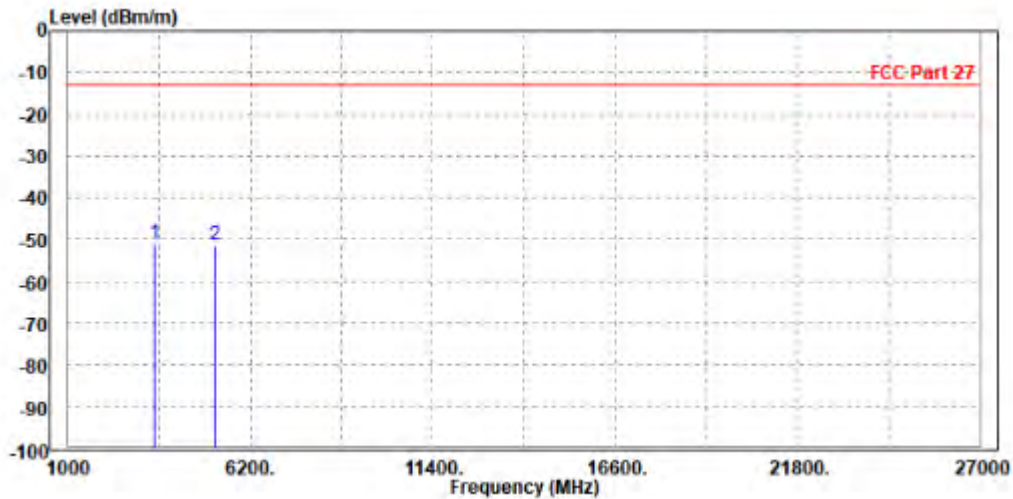




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-51.50	-58.77	-13.00	-38.50	7.27	Peak	Vertical
2 PP	5197.500	-49.86	-60.31	-13.00	-36.86	10.45	Peak	Vertical

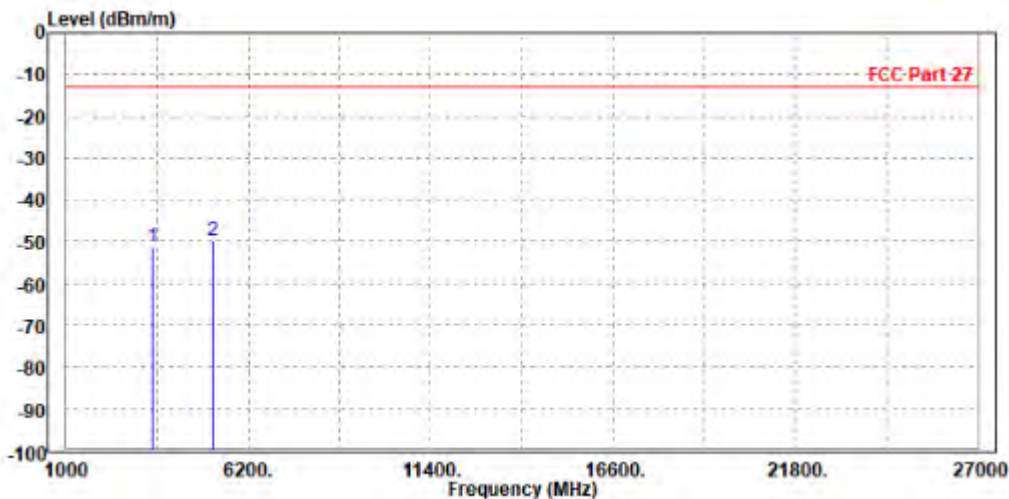




Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-51.81	-59.09	-13.00	-38.81	7.28	Peak	Horizontal
2 PP	5197.500	-50.70	-60.70	-13.00	-37.70	10.00	Peak	Horizontal

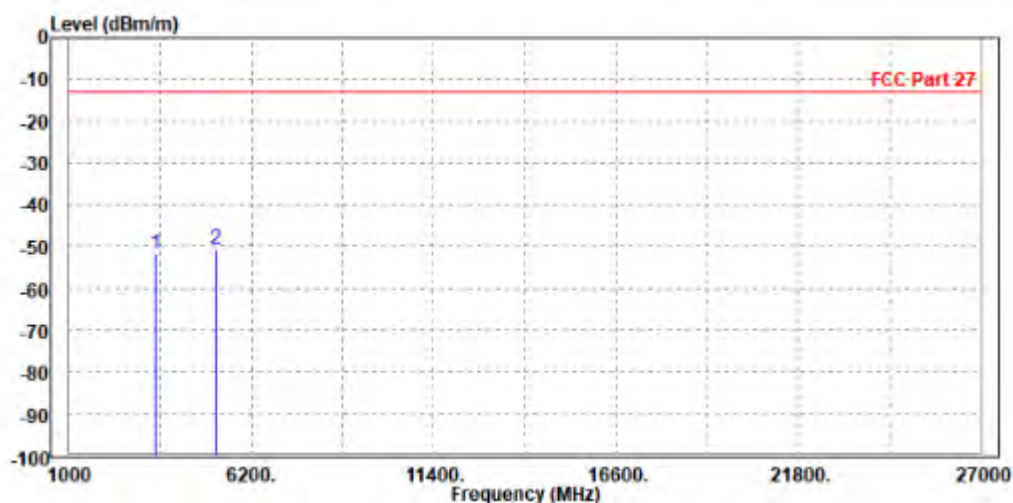




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-51.12	-58.38	-13.00	-38.12	7.26	Peak	Vertical
2 PP	5186.000	-50.59	-61.03	-13.00	-37.59	10.44	Peak	Vertical

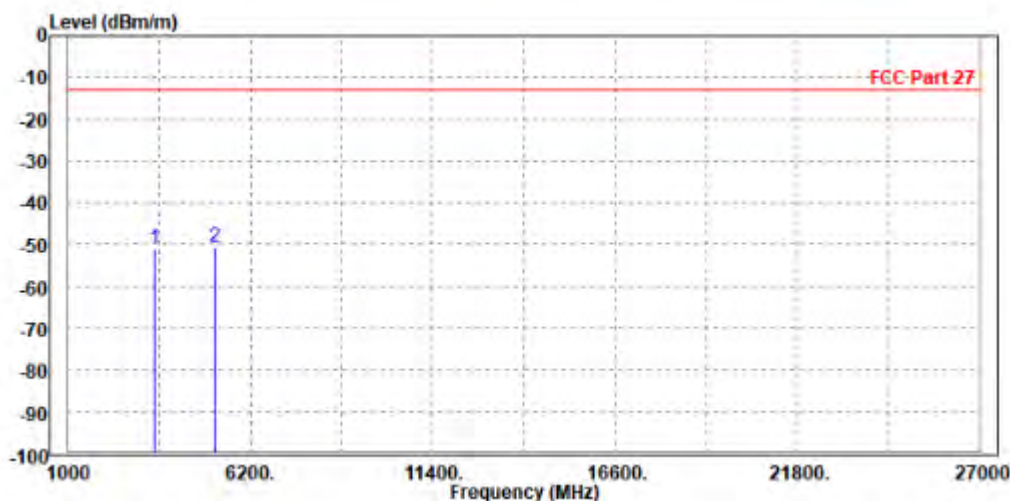




BUREAU VERITAS

Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 20MHz / QPSK
CH20050

MODE	TX channel 20050	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3444.000	-51.41	-58.66	-13.00	-38.41	7.25	Peak	Horizontal
2 PP	5160.000	-50.11	-60.05	-13.00	-37.11	9.94	Peak	Horizontal

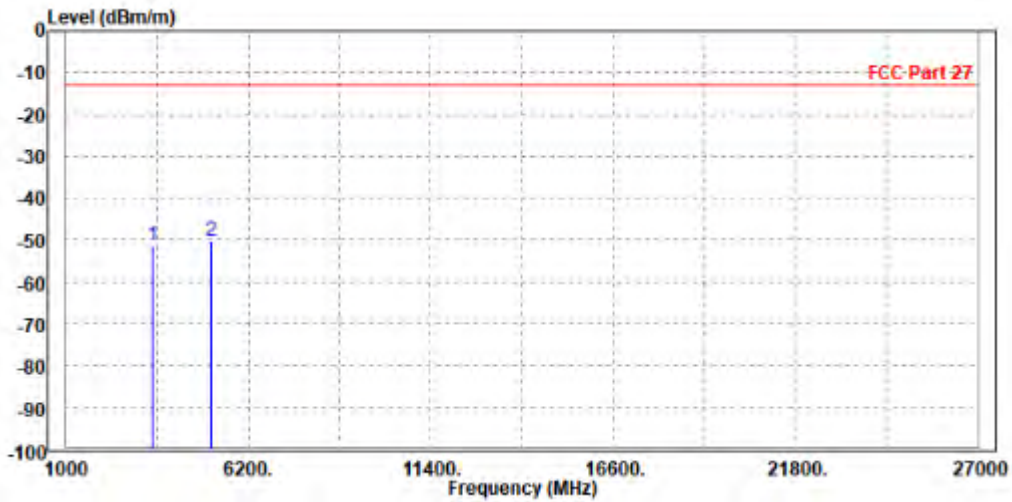




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20050	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3440.000	-51.23	-58.45	-13.00	-38.23	7.22	Peak	Vertical
2 PP	5160.000	-49.45	-59.87	-13.00	-36.45	10.42	Peak	Vertical

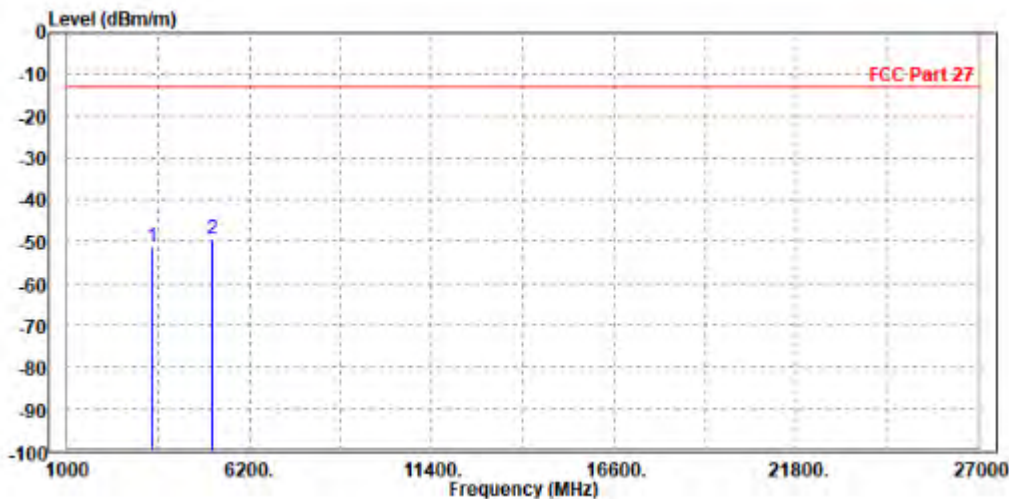




BUREAU VERITAS

Test Report No.: W7L-P22110028RF03

CH20175

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3465.000	-51.36	-58.63	-13.00	-38.36	7.27	Peak	Horizontal
2	5186.000	-51.67	-61.65	-13.00	-38.67	9.98	Peak	Horizontal

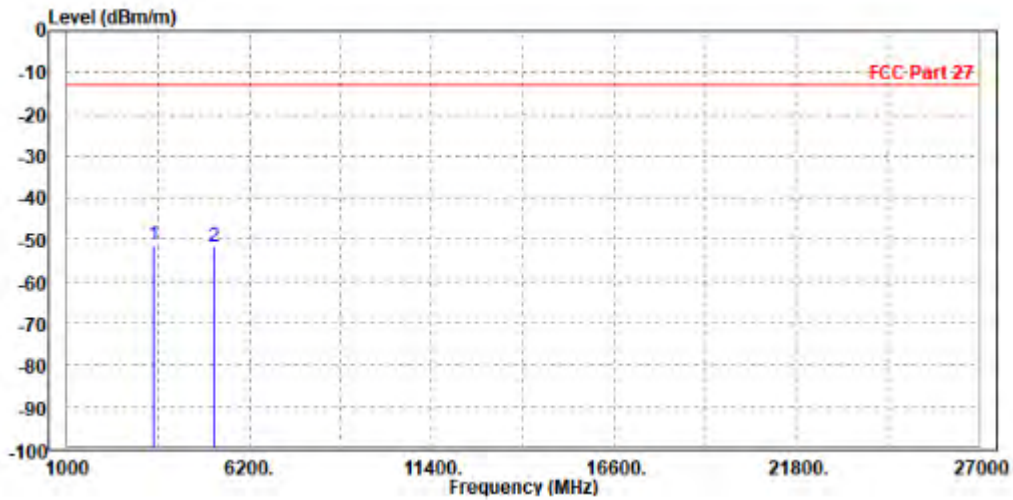




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-51.10	-58.37	-13.00	-38.10	7.27	Peak	Vertical
2	PP 5197.500	-48.95	-59.40	-13.00	-35.95	10.45	Peak	Vertical

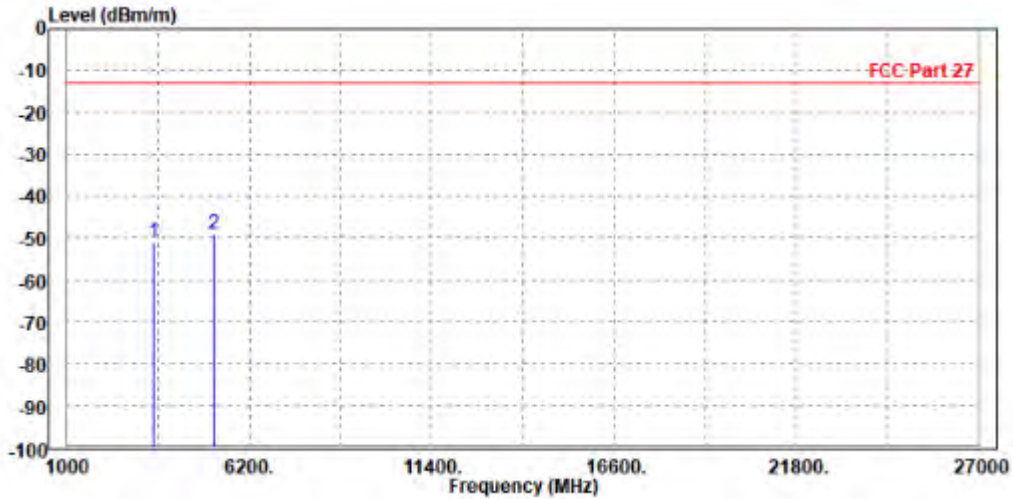




BUREAU VERITAS

Test Report No.: W7L-P22110028RF03

CH20300

MODE	TX channel 20300	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3490.000	-51.54	-58.85	-13.00	-38.54	7.31	Peak	Horizontal
2 PP	5238.000	-51.45	-61.51	-13.00	-38.45	10.06	Peak	Horizontal

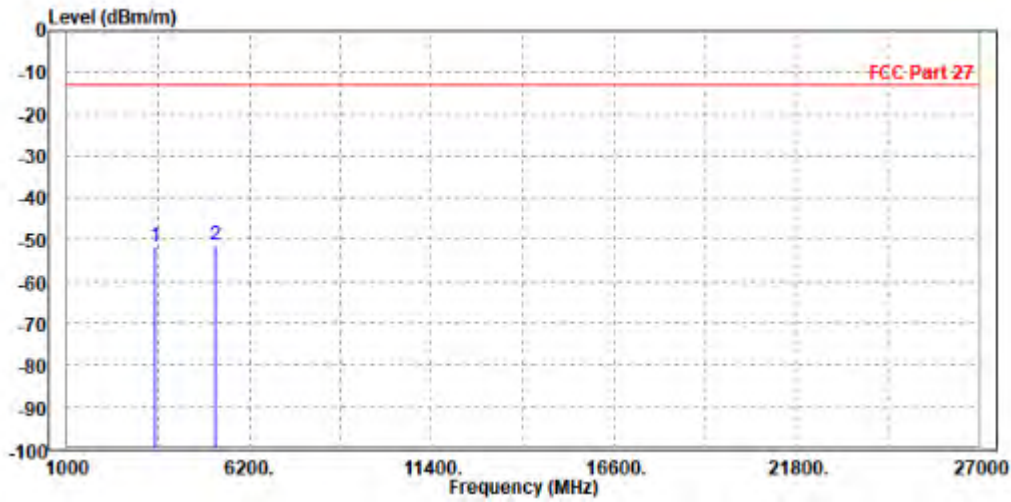




Test Report No.: W7L-P22110028RF03

MODE	TX channel 20300	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3496.000	-51.17	-58.48	-13.00	-38.17	7.31	Peak	Vertical
2 PP	5235.000	-50.76	-61.24	-13.00	-37.76	10.48	Peak	Vertical

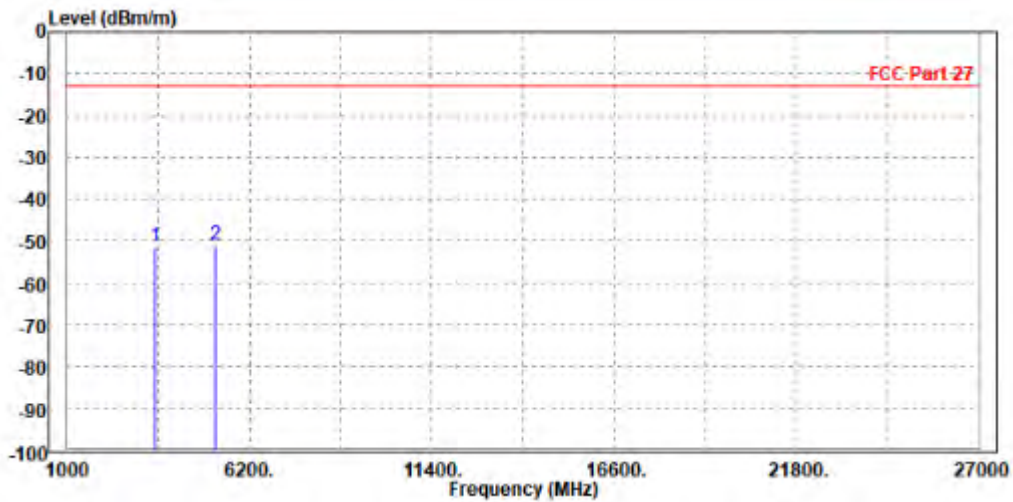



Test Report No.: W7L-P22110028RF03


LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK

CH23095

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1415.000	-51.07	-50.42	-13.00	-38.07	-0.65	Peak	Horizontal
2 PP	2118.000	-38.44	-42.49	-13.00	-25.44	4.05	Peak	Horizontal

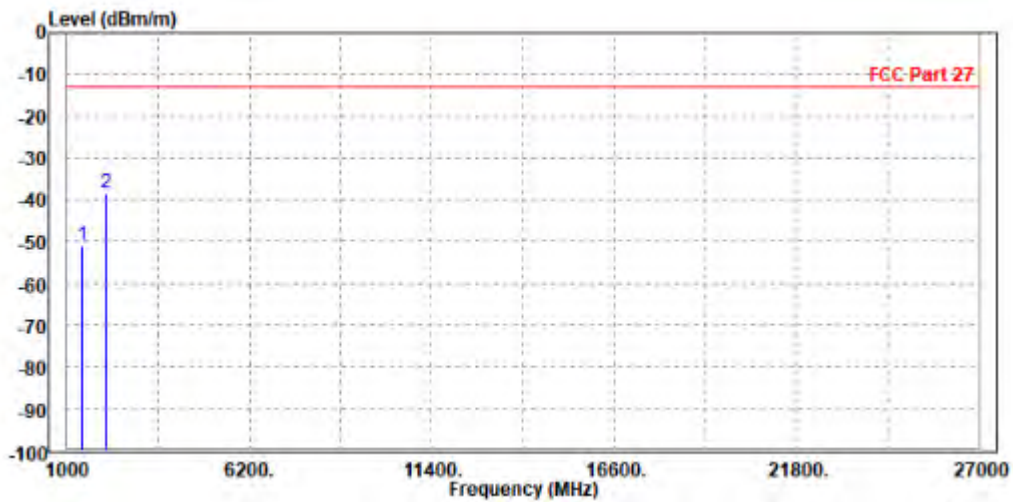




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1416.000	-46.39	-45.99	-13.00	-33.39	-0.40	Peak	Vertical
2	2122.500	-48.69	-52.61	-13.00	-35.69	3.92	Peak	Vertical

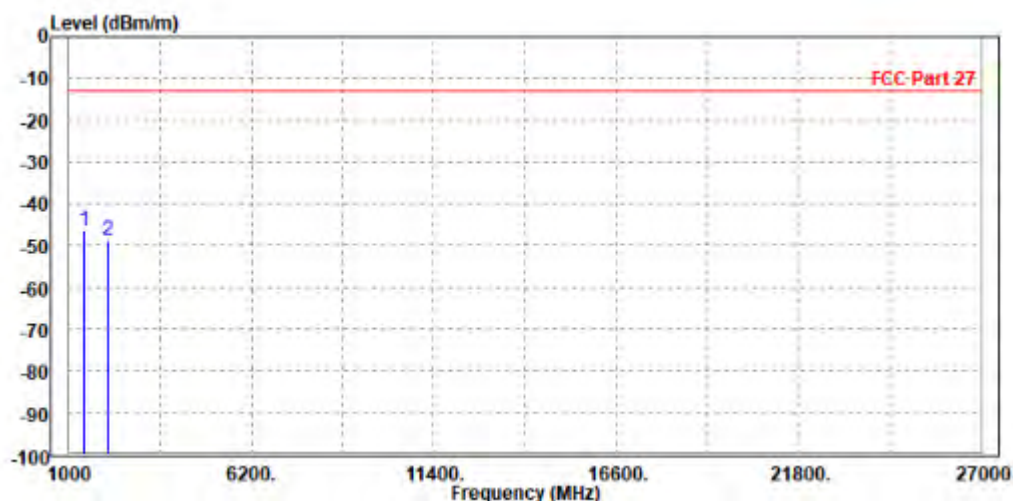




Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 3MHz / QPSK

CH23095

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-50.37	-49.73	-13.00	-37.37	-0.64	Peak	Horizontal
2 PP	2122.500	-35.99	-40.05	-13.00	-22.99	4.06	Peak	Horizontal

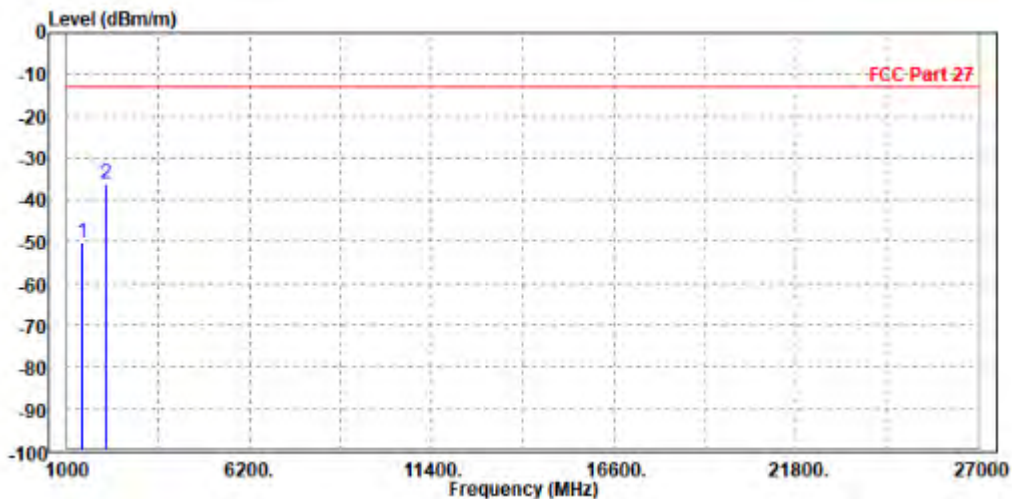




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1415.000	-46.78	-46.37	-13.00	-33.78	-0.41	Peak	Vertical
2	2118.000	-51.82	-55.72	-13.00	-38.82	3.90	Peak	Vertical

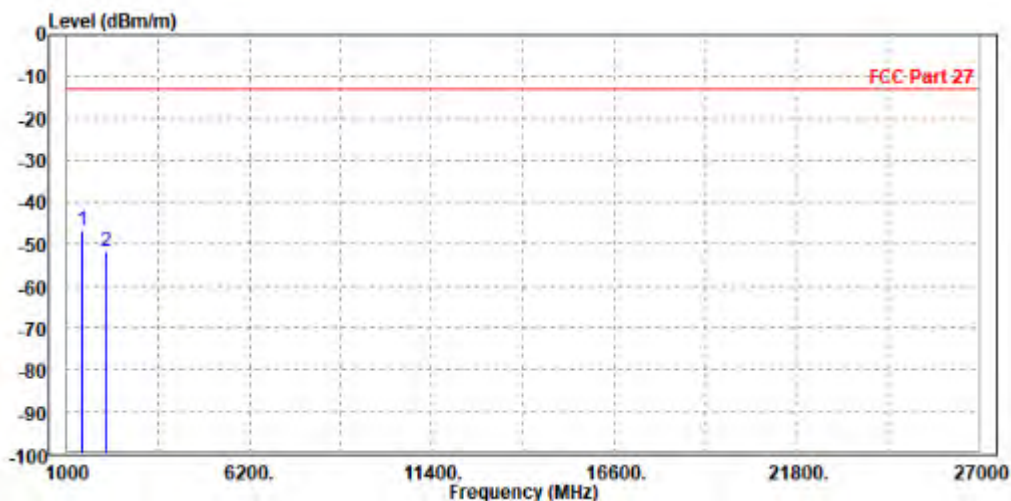




Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1415.000	-49.60	-48.95	-13.00	-36.60	-0.65	Peak	Horizontal
2 PP	2118.000	-38.47	-42.52	-13.00	-25.47	4.05	Peak	Horizontal

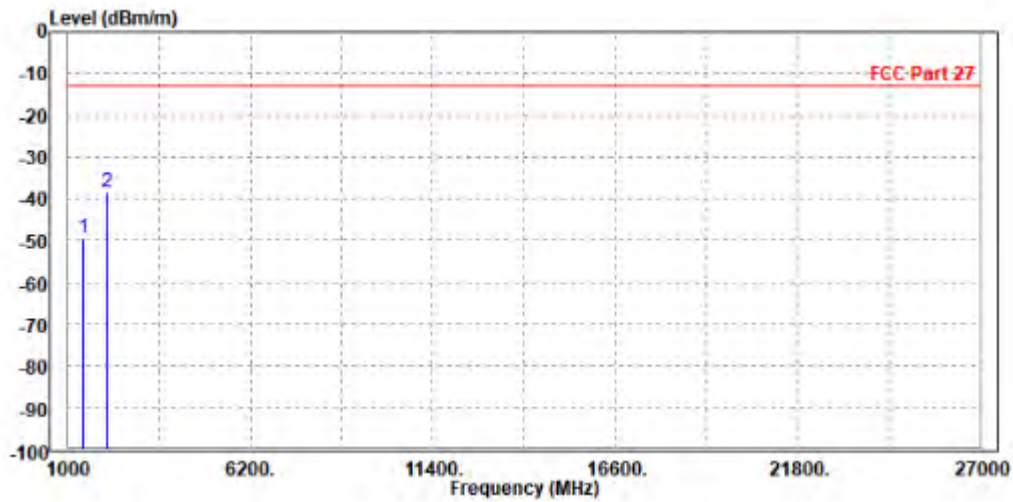




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1416.000	-47.45	-47.05	-13.00	-34.45	-0.40	Peak	Vertical
2	2122.500	-51.72	-55.64	-13.00	-38.72	3.92	Peak	Vertical

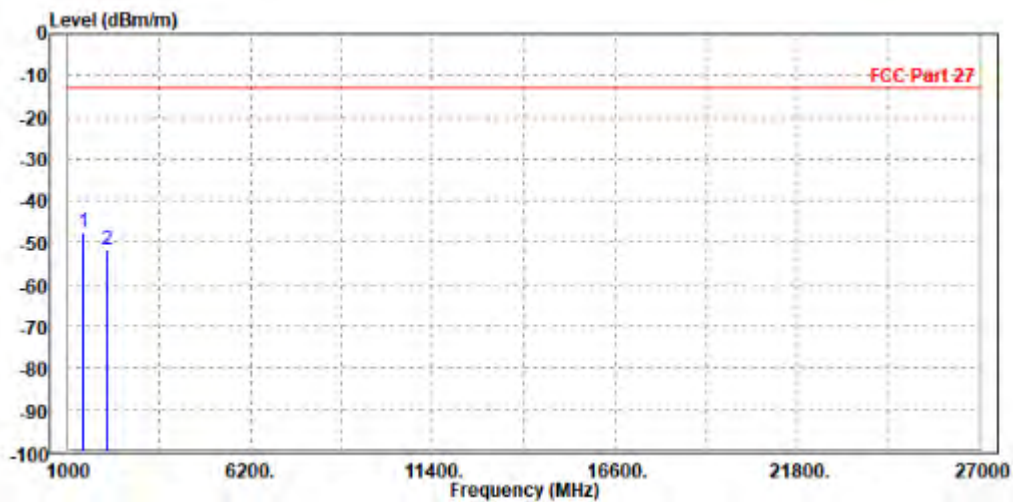




Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 10MHz / QPSK

CH23060

MODE	TX channel 23060	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1390.000	-45.13	-44.42	-13.00	-32.13	-0.71	Peak	Horizontal
2 PP	2092.000	-41.21	-45.16	-13.00	-28.21	3.95	Peak	Horizontal

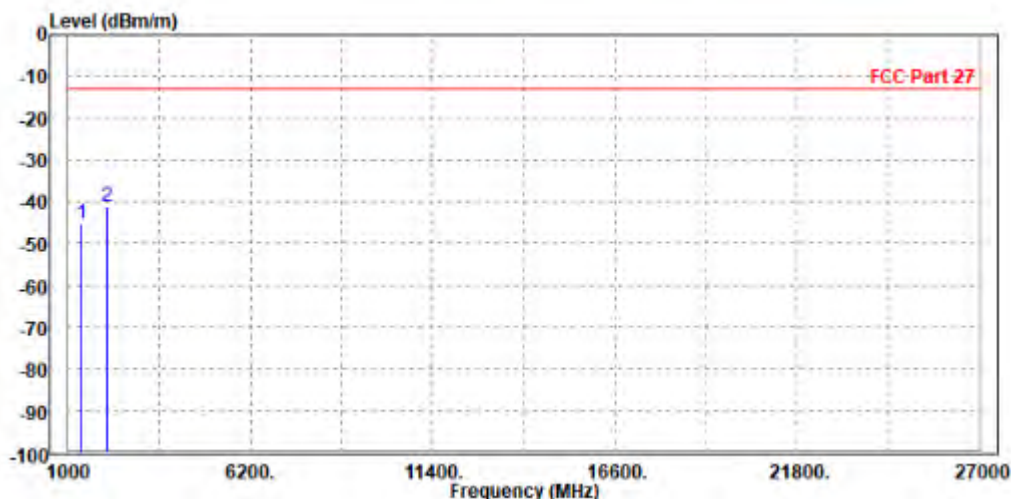




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23060	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1390.000	-47.96	-47.44	-13.00	-34.96	-0.52	Peak	Vertical
2	2092.000	-50.40	-54.23	-13.00	-37.40	3.83	Peak	Vertical

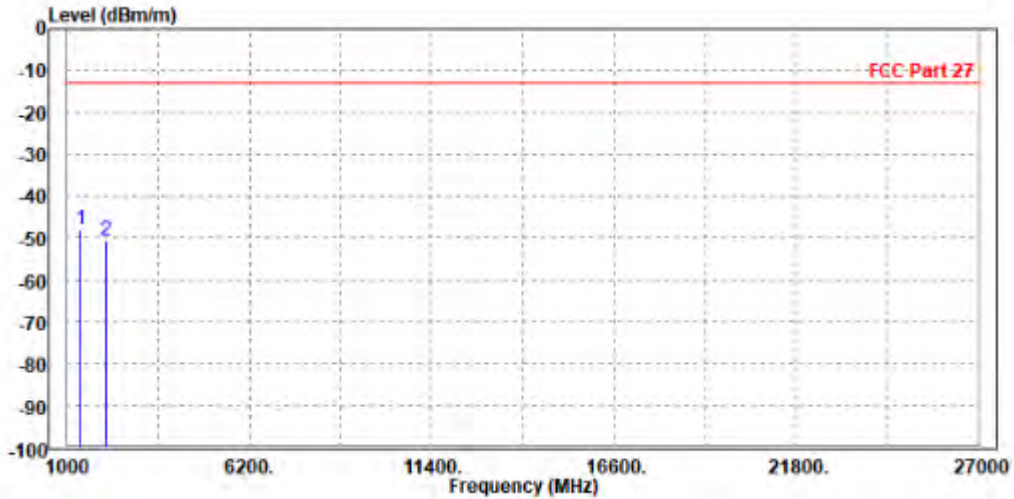




Test Report No.: W7L-P22110028RF03

CH23095

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-45.53	-44.89	-13.00	-32.53	-0.64	Peak	Horizontal
2	PP 2122.500	-36.53	-40.59	-13.00	-23.53	4.06	Peak	Horizontal

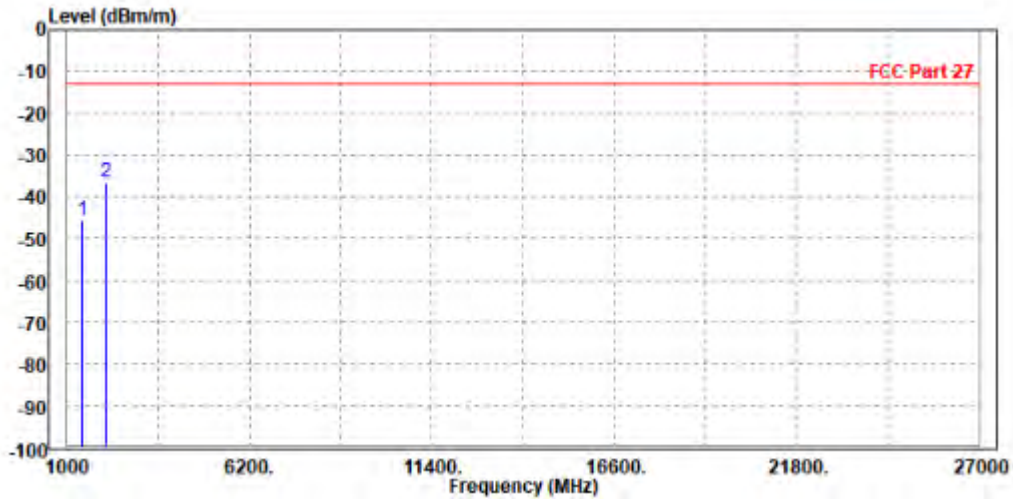




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1415.000	-44.27	-43.86	-13.00	-31.27	-0.41	Peak	Vertical
2	2118.000	-51.21	-55.11	-13.00	-38.21	3.90	Peak	Vertical

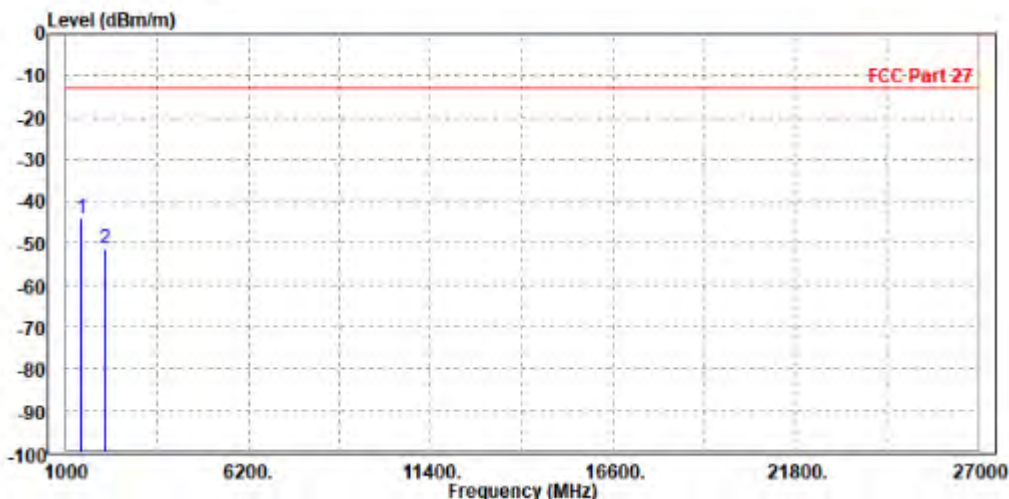




Test Report No.: W7L-P22110028RF03

CH23130

MODE	TX channel 23130	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-50.17	-49.53	-13.00	-37.17	-0.64	Peak	Horizontal
2	PP 2118.000	-36.61	-40.66	-13.00	-23.61	4.05	Peak	Horizontal

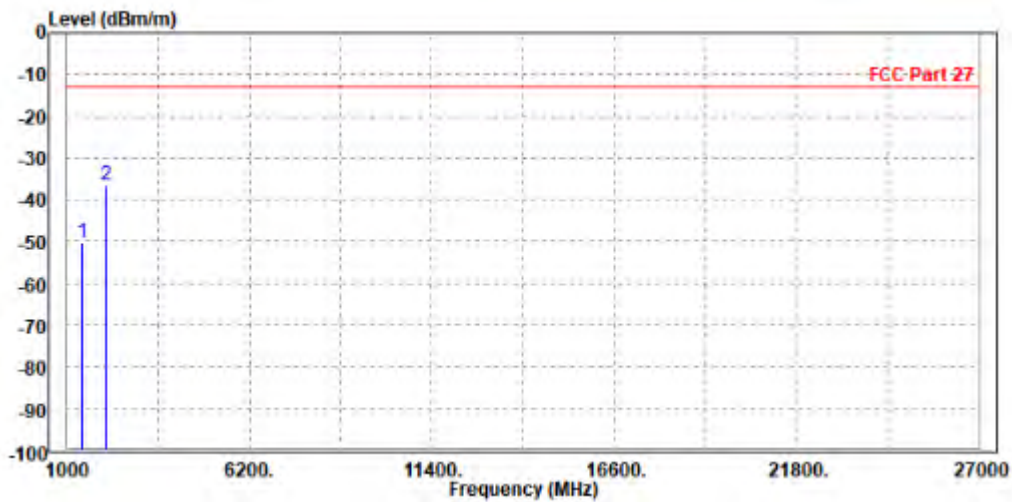




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23130	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1416.000	-46.80	-46.40	-13.00	-33.80	-0.40	Peak	Vertical
2	2118.000	-50.71	-54.61	-13.00	-37.71	3.90	Peak	Vertical

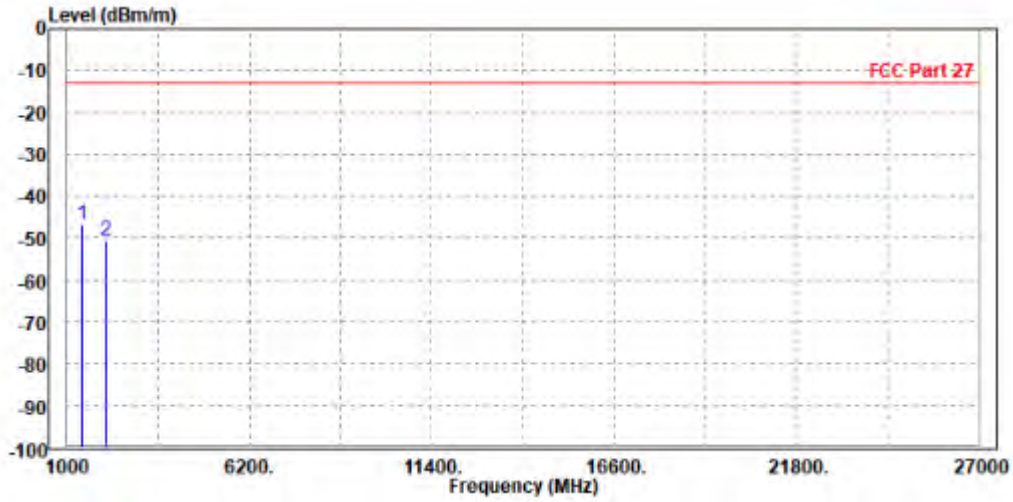



Test Report No.: W7L-P22110028RF03


LTE B13

CHANNEL BANDWIDTH: 5MHz / QPSK

CH23205

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-52.94	-53.10	-40.00	-12.94	0.16	Peak	Horizontal
2	2338.500	-51.52	-56.37	-13.00	-38.52	4.85	Peak	Horizontal

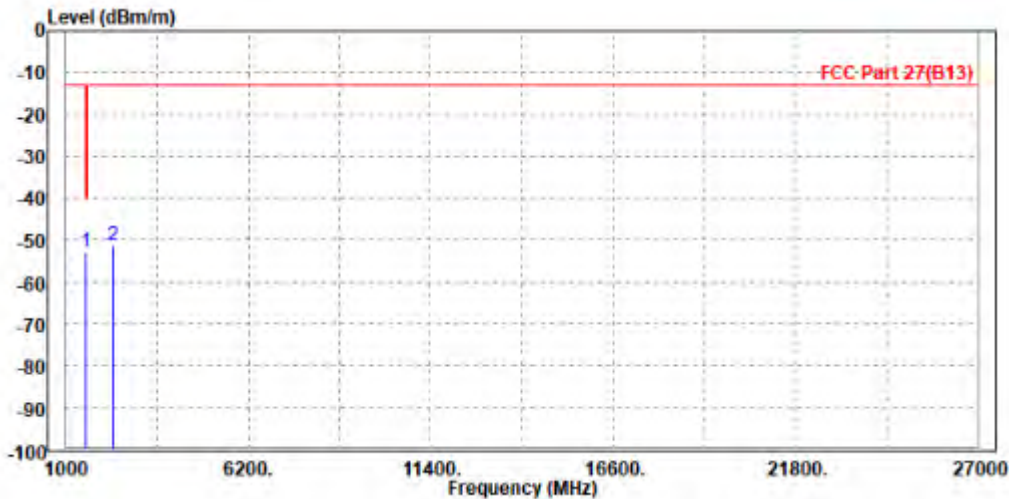




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1559.000	-58.10	-58.49	-40.00	-18.10	0.39	Peak	Vertical
2	2326.000	-53.51	-57.98	-13.00	-40.51	4.47	Peak	Vertical

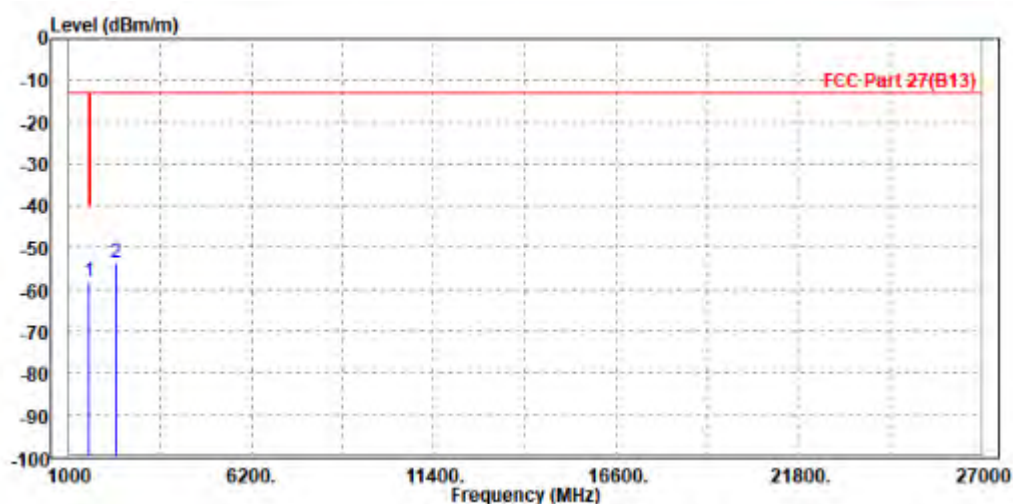




Test Report No.: W7L-P22110028RF03

CH23230

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1564.000	-57.02	-57.12	-40.00	-17.02	0.10	Peak	Horizontal
2	2352.000	-53.37	-58.27	-13.00	-40.37	4.90	Peak	Horizontal

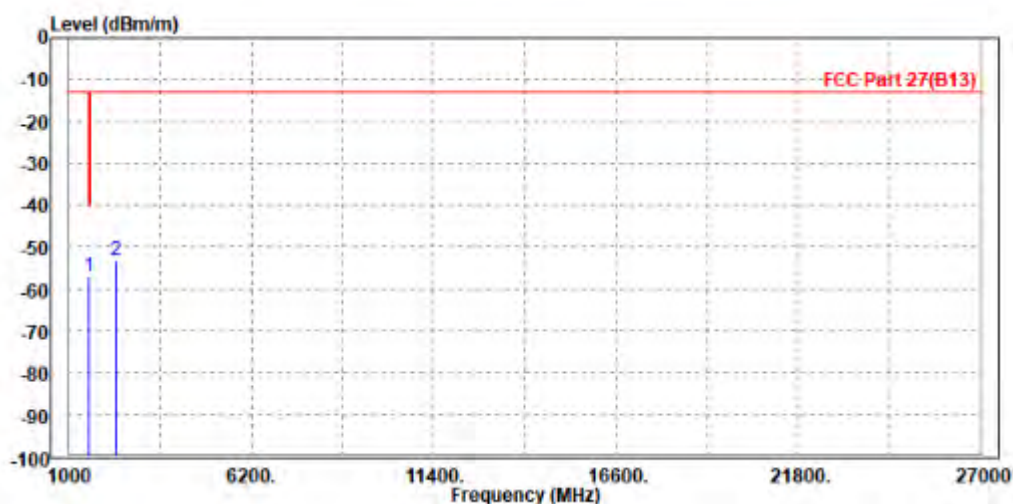




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-58.46	-58.95	-40.00	-18.46	0.49	Peak	Vertical
2	2346.000	-53.92	-58.44	-13.00	-40.92	4.52	Peak	Vertical

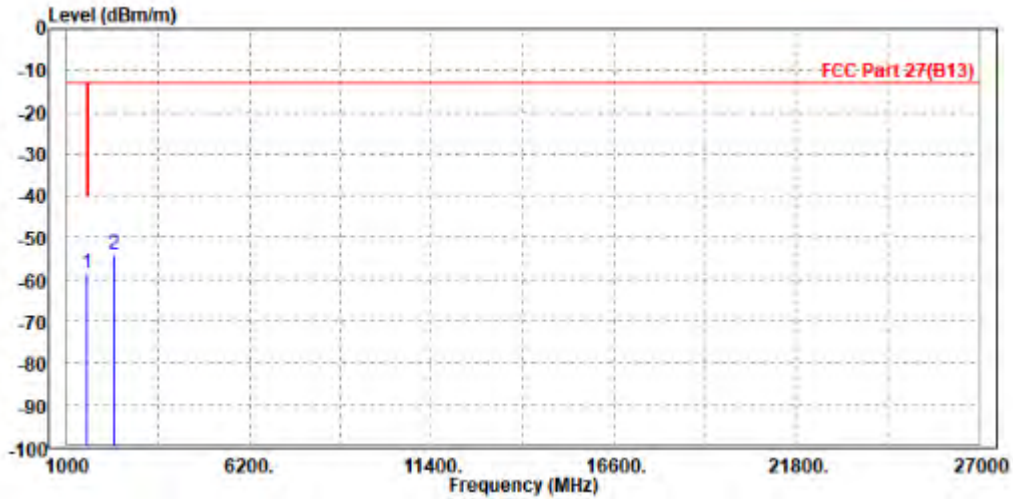




Test Report No.: W7L-P22110028RF03

CH23255

MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1569.000	-50.78	-50.92	-40.00	-10.78	0.14	Peak	Horizontal
2	2352.000	-50.30	-55.20	-13.00	-37.30	4.90	Peak	Horizontal

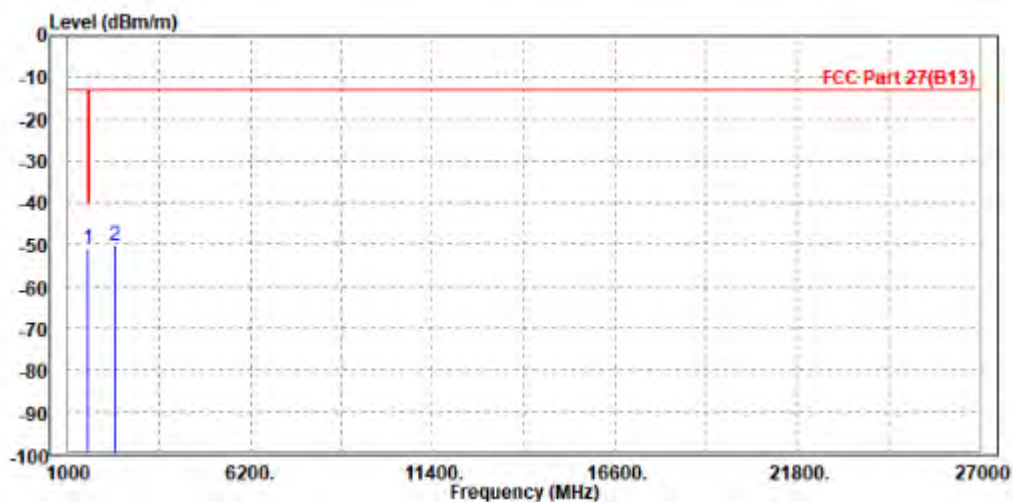




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-50.18	-50.67	-40.00	-10.18	0.49	Peak	Vertical
2	2353.500	-53.73	-58.27	-13.00	-40.73	4.54	Peak	Vertical

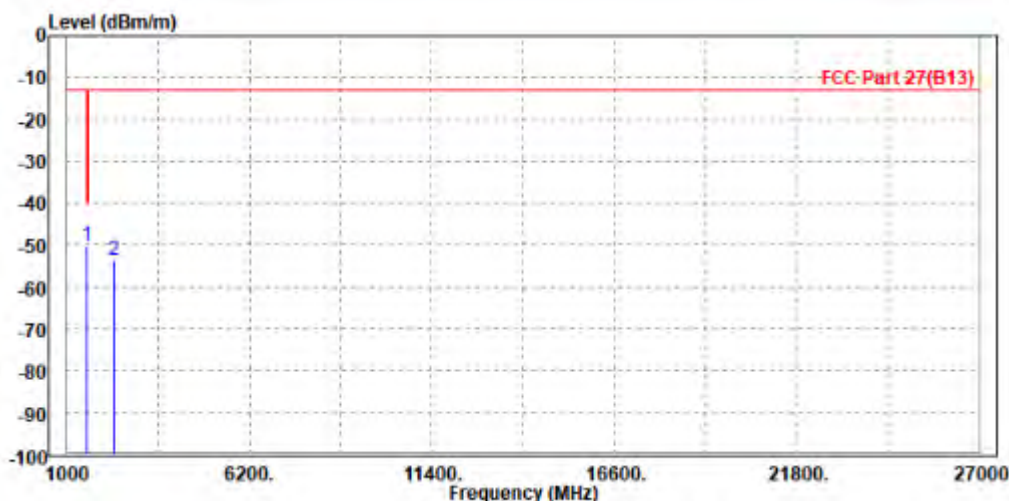




Test Report No.: W7L-P22110028RF03

CHANNEL BANDWIDTH: 10MHz /QPSK

CH23230

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1572.000	-58.16	-58.32	-40.00	-18.16	0.16	Peak	Horizontal
2	2346.000	-53.18	-58.06	-13.00	-40.18	4.88	Peak	Horizontal

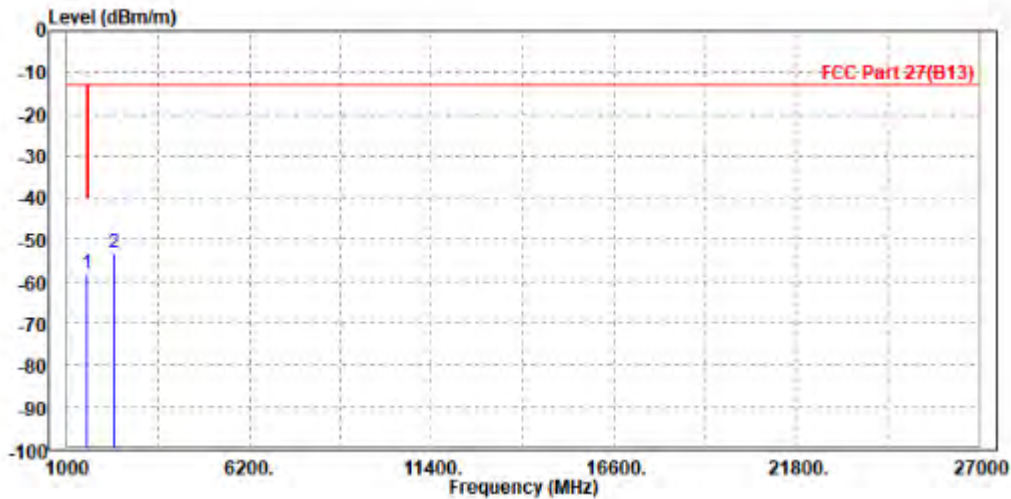




Test Report No.: W7L-P22110028RF03

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1564.000	-56.06	-56.49	-40.00	-16.06	0.43	Peak	Vertical
2	2352.000	-53.20	-57.74	-13.00	-40.20	4.54	Peak	Vertical

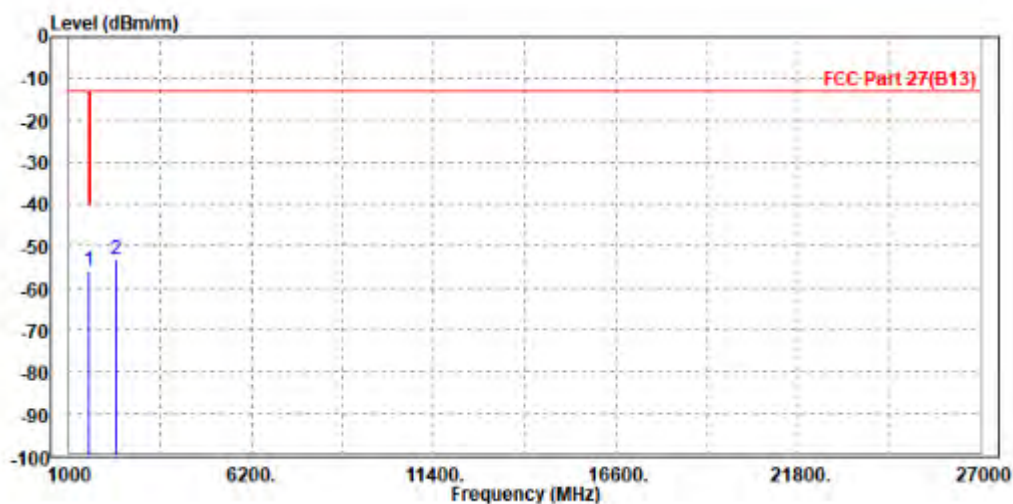


3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

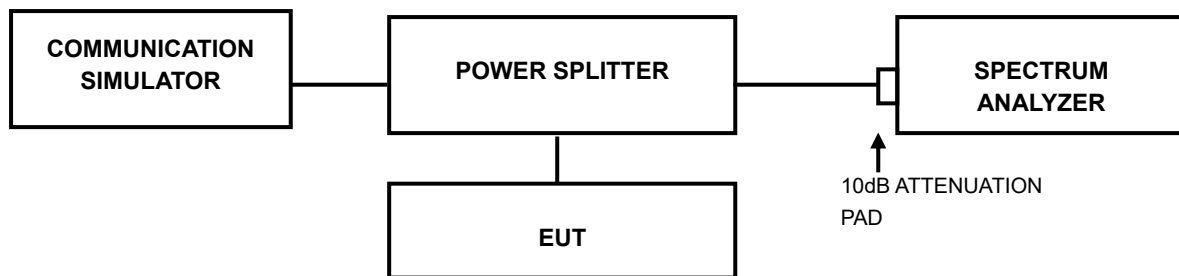

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.



Test Report No.: W7L-P22110028RF03

3.7.4 TEST RESULTS

Please Refer to Module report MDE_UBLOX_2105/MDE_UBLOX_1905_FCC_01.



Test Report No.: W7L-P22110028RF03

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.sw@bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: W7L-P22110028RF03

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---