



Test Report No.: W7L-P23120015RF03



FCC TEST REPORT (PART 27)

Applicant:	Particle Industries, Inc
Address:	325 9th Street, San Francisco, CA 94103, United States Of America

Manufacturer or Supplier:	Particle Industries, Inc
Address:	325 9th Street, San Francisco, CA 94103, United States Of America
Product:	M SoM
Brand Name:	Particle
Model Name:	M404
FCC ID:	2AEMI-M404
Date of tests:	Dec. 27, 2023 ~ Jan. 02, 2024

The tests have been carried out according to the requirements of the following standard:

- FCC Part 27 ANSI/TIA/EIA-603-D
- FCC Part 2 ANSI/TIA/EIA-603-E ANSI C63.26-2015

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
Date: Jan. 02, 2024	Date: Jan. 02, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	5
1.2 TEST SITE AND INSTRUMENTS	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT.....	7
2.2 CONFIGURATION OF SYSTEM UNDER TEST	12
2.3 DESCRIPTION OF SUPPORT UNITS	13
2.4 TEST ITEM AND TEST CONFIGURATION	13
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	17
3 TEST TYPES AND RESULTS	18
3.1 OUTPUT POWER MEASUREMENT	18
3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	18
3.1.2 TEST PROCEDURES	18
3.1.3 TEST SETUP	19
3.1.4 TEST RESULTS	20
3.2 RADIATED EMISSION MEASUREMENT	38
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	38
3.2.2 TEST PROCEDURES	38
3.2.3 DEVIATION FROM TEST STANDARD	39
3.2.4 TEST SETUP	39
3.2.5 TEST RESULTS	41
4 INFORMATION ON THE TESTING LABORATORIES	79
5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB... ..	80



Test Report No.: W7L-P23120015RF03

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-P23120015RF03	Original release	Jan. 02, 2024

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 27 & PART 2		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
§2.1046	Conducted Output Power	Compliance
§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (Band 12) (Band 13)	Compliance
§27.50(d)(4)	Equivalent Isotropically Radiated Power (Band 4) (Band 66)	Compliance
§2.1055 §27.54	Frequency Stability	See Note
§2.1049	Occupied Bandwidth	See Note
§2.1051 §27.53(c)(2)(4) §27.53(g) §27.53(h)	Conducted Band Edge Measurements (Band 4) (Band 12) (Band 13) (Band 66)	See Note
§2.1051 §27.53(c)(2)(4) §27.53(g) §27.53(f) §27.53(h)	Conducted Spurious Emissions (Band 4) (Band 12) (Band 13) (Band 66)	See Note
§2.1053 §27.53(c)(2)(4) §27.53(f) §27.53(g) §27.53(h)	Radiated Spurious Emissions (Band 4) (Band 12) (Band 13) (Band 66)	Compliance
NA	Peak to average ratio	See Note

Note: please refer to the module report R2108A0767- R4V1 (FCC ID: XMR202005BG95M5)

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
Maximum Peak Output Power	±2.06dB
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



1.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,23	Mar. 27,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.10,23	May.09,24
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.03,23	Sep.02,24
Bilog Antenna	ETS-LINDGRE N	3143B	00161965	Feb. 18,23	Feb. 17,24
Horn Antenna	ETS-LINDGRE N	3117	00168692	Feb. 18,23	Feb. 17,24
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K- SG/QMS-00361	15433	Sep.04, 23	Sep.03, 24
Radio Communication Analyzer	ANRITSU	MT8820C	6201465426	Feb. 14,23	Feb. 13,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,23	May. 05,24
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,23	May.09,24
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,23	Feb.16,24
3m Semi-anechoic Chamber	ETS-LINDGRE N	9m*6m*6m	Euroshieldpn- CT0001143-121 6	Nov. 14,23	Nov. 13,26
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120	3.1.36	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	50HF-010-SMA	May. 06,23	May. 05,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,23	Feb. 13,24
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,23	Feb. 13,24
Temperature Chamber	ESPEC	SH-242	93000855	May. 06,23	May. 05,24
MXG Analog Microwave Signal Generator	KEYSIGHT	N5183A	MY50143024	Feb. 14,23	Feb. 13,24
Base station R&S CMW500	Rohde&Schwa rz	CMW500	153085	May.10,23	May.09,24
DC Source	Kikusui/JP	PMX18-5A	N/A	Aug. 11,23	Aug. 10,24

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Semi-anechoic Chamber and RF Oven Room.
 3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	M SoM	
BRAND NAME	Particle	
MODEL NAME	M404	
NOMINAL VOLTAGE	VCC: 3.8V. 3V3:3.3V	
MODULATION TYPE	LTE	QPSK, 16QAM
FREQUENCY RANGE	LTE Band 4 Channel Bandwidth: 1.4MHz	1710.7MHz ~ 1754.3MHz
	LTE Band 4 Channel Bandwidth: 3MHz	1711.5MHz ~ 1753.5MHz
	LTE Band 4 Channel Bandwidth: 5MHz	1712.5MHz ~ 1752.5MHz
	LTE Band 4 Channel Bandwidth: 10MHz	1715MHz ~ 1750MHz
	LTE Band 4 Channel Bandwidth: 15MHz	1717.5MHz ~ 1747.5 MHz
	LTE Band 4 Channel Bandwidth: 20MHz	1720MHz ~ 1745MHz
	LTE Band 12 Channel Bandwidth: 1.4MHz	699.7MHz ~ 715.3MHz
	LTE Band 12 Channel Bandwidth: 3MHz	700.5MHz ~ 714.5MHz
	LTE Band 12 Channel Bandwidth: 5MHz	701.5MHz ~ 713.5MHz
	LTE Band 12 Channel Bandwidth: 10MHz	704MHz ~ 711MHz
	LTE Band 13 Channel Bandwidth: 5MHz	779.5MHz ~ 784.5MHz
	LTE Band 13 Channel Bandwidth: 10MHz	782MHz
	LTE Band 66 Channel Bandwidth: 1.4MHz	1710.7MHz ~ 1779.3MHz
	LTE Band 66 Channel Bandwidth: 3MHz	1711.5MHz ~ 1778.5MHz
	LTE Band 66 Channel Bandwidth: 5MHz	1712.5MHz ~ 1777.5MHz
	LTE Band 66 Channel Bandwidth: 10MHz	1715MHz ~ 1775MHz
LTE Band 66 Channel Bandwidth: 15MHz	1717.5MHz ~ 1772.5MHz	



**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

	LTE Band 66 Channel Bandwidth: 20MHz	1720MHz ~ 1770MHz	
MAX. EIRP/ERP POWER	LTE Band 4 Channel Bandwidth: 1.4MHz	767.36mW	
	LTE Band 4 Channel Bandwidth: 3MHz	763.84mW	
	LTE Band 4 Channel Bandwidth: 5MHz	762.08mW	
	LTE Band 4 Channel Bandwidth: 10MHz	765.6mW	
	LTE Band 4 Channel Bandwidth: 15MHz	765.6mW	
	LTE Band 4 Channel Bandwidth: 20MHz	772.68mW	
	LTE Band 12 Channel Bandwidth: 1.4MHz	244.91mW	
	LTE Band 12 Channel Bandwidth: 3MHz	244.34mW	
	LTE Band 12 Channel Bandwidth: 5MHz	247.17mW	
	LTE Band 12 Channel Bandwidth: 10MHz	248.89mW	
	LTE Band 13 Channel Bandwidth: 5MHz	240.44mW	
	LTE Band 13 Channel Bandwidth: 10MHz	244.34mW	
	LTE Band 66 Channel Bandwidth: 1.4MHz	734.51mW	
	LTE Band 66 Channel Bandwidth: 3MHz	736.21mW	
	LTE Band 66 Channel Bandwidth: 5MHz	732.82mW	
	LTE Band 66 Channel Bandwidth: 10MHz	741.31mW	
	LTE Band 66 Channel Bandwidth: 15MHz	731.14mW	
	LTE Band 66 Channel Bandwidth: 20MHz	743.02mW	
	EMISSION DESIGNATOR	LTE Band 4 Channel Bandwidth: 1.4MHz	QPSK: 1M10G7D
			16QAM: 938KW7D
64QAM: /			
LTE Band 4 Channel Bandwidth: 3MHz		QPSK: 1M11G7D	
		16QAM: 953KW7D	
		64QAM: /	



**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

EMISSION DESIGNATOR	LTE Band 4 Channel Bandwidth: 5MHz	QPSK: 1M11G7D
		16QAM: 952KW7D
		64QAM: /
	LTE Band 4 Channel Bandwidth: 10MHz	QPSK: 1M12G7D
		16QAM: 956KW7D
		64QAM: /
	LTE Band 4 Channel Bandwidth: 15MHz	QPSK: 1M13G7D
		16QAM: 972KW7D
		64QAM: /
	CLTE Band 4 Channel Bandwidth: 20MHz	QPSK: 1M13G7D
		16QAM: 974KW7D
		64QAM: /
	LTE Band 12 Channel Bandwidth: 1.4MHz	QPSK: 1M10G7D
		16QAM: 938KW7D
		64QAM: /
	LTE Band 12 Channel Bandwidth: 3MHz	QPSK: 1M11G7D
		16QAM: 946KW7D
		64QAM: /
	LTE Band 12 Channel Bandwidth: 5MHz	QPSK: 1M11G7D
		16QAM: 949KW7D
		64QAM: /
	LTE Band 12 Channel Bandwidth: 10MHz	QPSK: 1M12G7D
		16QAM: 952KW7D
		64QAM: /
LTE Band 13 Channel Bandwidth: 5MHz	QPSK: 1M12G7D	
	16QAM: 947KW7D	
	64QAM: /	
LTE Band 13 Channel Bandwidth: 10MHz	QPSK: 1M12G7D	
	16QAM: 956KW7D	
	64QAM: /	



**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

EMISSION DESIGNATOR	LTE Band 66 Channel Bandwidth: 1.4MHz	QPSK: 1M10G7D
		16QAM: 941KW7D
		64QAM: /
	LTE Band 66 Channel Bandwidth: 3MHz	QPSK: 1M11G7D
		16QAM: 947KW7D
		64QAM: /
	LTE Band 66 Channel Bandwidth: 5MHz	QPSK: 1M11G7D
		16QAM: 953KW7D
		64QAM: /
	LTE Band 66 Channel Bandwidth: 10MHz	QPSK: 1M12G7D
		16QAM: 957KW7D
		64QAM: /
LTE Band 66 Channel Bandwidth: 15MHz	QPSK: 1M11G7D	
	16QAM: 957KW7D	
	64QAM: /	
CLTE Band 66 Channel Bandwidth: 20MHz	QPSK: 1M12G7D	
	16QAM: 966KW7D	
	64QAM: /	
ANTENNA TYPE	Fixed External Antenna with 5.3dBi gain for LTE B4 Fixed External Antenna with 2.8dBi gain for LTE B12 Fixed External Antenna with 2.8dBi gain for LTE B13 Fixed External Antenna with 5.3dBi gain for LTE B66	
HW VERSION	v0.2	
SW VERSION	v5.5.2	
I/O PORTS	Refer to user's manual	
CABLE SUPPLIED	N/A	
EXTREME TEMPERATURE	-35-75 °C	
EXTREME VOLTAGE	VCC: 3.3V. 3V3:3.0V- VCC: 4.3V. 3V3:3.6V	

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
LTE	1TX/1RX




**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.

2.2 CONFIGURATION OF SYSTEM UNDER TEST FOR RADIATION EMISSION TEST

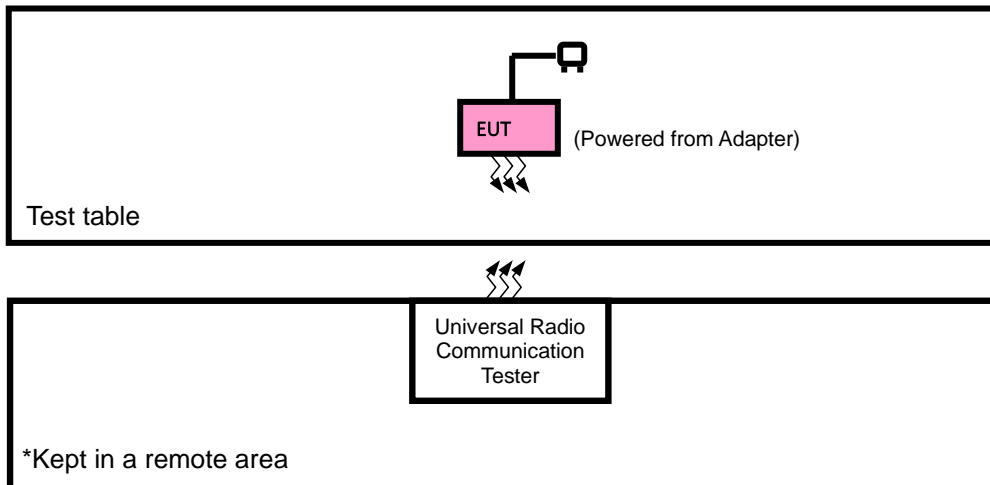



2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	AC Adapter	TRI-MAG	L6R30-240	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A

2.4 TEST ITEM AND TEST CONFIGURATION

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane for EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with LTE link

LTE BAND 4 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset

Note: 1.This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

2. LTE Band 4 are covered by LTE Band 66, Because it is a subset of LTE Band 66 with the same output power and supported bandwidths, So the RSE test data please refer to LTE Band 66

LTE BAND 12 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23017 to 23173	23017, 23095, 23173	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23025 to 23165	23025, 23095, 23165	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 0 RB Offset
		23025 to 23165	23095	3MHz	QPSK	1 RB / 0 RB Offset
		23035 to 23155	23035, 23095, 23155	5MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23095	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

LTE BAND 13 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	ERP	23205 to 23255	23205, 23230, 23255	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	23205 to 23255	23205, 23230, 23255	5MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



BUREAU
VERITAS

Test Report No.: W7L-P23120015RF03

LTE BAND 66 MODE

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
A	EIRP	131979 to 132665	131979,132322,132665	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		131987 to 132657	131987,132322,132657	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		131997 to 132647	131997,132322,132647	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132022 to 132622	132022,132322,132622	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132047 to 132597	132047,132322,132597	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		132072 to 132572	132072,132322,132572	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
A	RADIATED EMISSION	131979 to 132665	131979,132322,132665	1.4MHz	QPSK	1 RB / 0 RB Offset
		131987 to 132657	132322	3MHz	QPSK	1 RB / 0 RB Offset
		131997 to 132647	132322	5MHz	QPSK	1 RB / 0 RB Offset
		132022 to 132622	132322	10MHz	QPSK	1 RB / 0 RB Offset
		132047 to 132597	132322	15MHz	QPSK	1 RB / 0 RB Offset
		132072 to 132572	132322	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: W7L-P23120015RF03

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
ERP&EIRP	23deg. C, 70%RH	3.8V	Jace Hu
RADIATED EMISSION	23deg. C, 70%RH	AC 120V/60Hz	Jace Hu



Test Report No.: W7L-P23120015RF03

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-D

ANSI/TIA/EIA-603-E

ANSI C63.26-2015

NOTE: All test items have been performed and recorded as per the above standards.

3 TEST TYPES AND RESULTS

3.1 OUTPUT POWER MEASUREMENT

3.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

According to the specific rule Part 27.50(b)(10) and 27.50(c)(10) Fixed, mobile, and Portable stations (hand-held devices) transmitting in the 698-746 MHz, 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1-watt EIRP

3.1.2 TEST PROCEDURES

EIRP MEASUREMENT:

Per KDB 971168 D01 Power Meas License Digital Systems v03r01 or subclause 5.2.5.5 of ANSI C63.26-2015, the relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_{\text{T}} - L_{\text{C}}$$

Where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_{T} = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

L_{C} = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

CONDUCTED POWER MEASUREMENT:


- The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.



Test Report No.: W7L-P23120015RF03

3.1.3 TEST SETUP

CONDUCTED POWER MEASUREMENT:



For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.4 TEST RESULTS

CONDUCTED OUTPUT POWER (dBm)

LTE Band 4

Band/BW	Modulation	RB Size	RB Offset	Low CH 19957	Mid CH 20175	High CH 20393
				Frequency 1710.7 MHz	Frequency 1732.5 MHz	Frequency 1754.3 MHz
4/ 1.4	QPSK	1	0	23.44	23.52	23.25
		1	5	23.40	23.52	23.24
		3	0	23.50	23.42	23.28
		3	3	23.48	23.46	23.28
		6	0	22.45	22.53	22.34
	16QAM	1	0	23.46	23.50	23.25
		1	5	23.39	23.26	23.20
		3	0	23.37	23.55	23.24
		3	3	23.38	23.33	23.19
		5	0	22.40	22.44	22.21

Band/BW	Modulation	RB Size	RB Offset	Low CH 19965	Mid CH 20175	High CH 20385
				Frequency 1711.5 MHz	Frequency 1732.5 MHz	Frequency 1753.5 MHz
4/ 3	QPSK	1	0	23.45	23.53	23.29
		1	5	23.39	23.41	23.24
		3	0	23.48	23.43	23.36
		3	3	23.47	23.43	23.28
		6	0	22.40	22.58	22.37
	16QAM	1	0	23.43	23.54	23.34
		1	5	23.38	23.25	23.21
		3	0	23.46	23.45	23.30
		3	3	23.37	23.37	23.26
		5	0	22.41	22.40	22.31

Band/BW	Modulation	RB Size	RB Offset	Low CH 19975	Mid CH 20175	High CH 20375
				Frequency 1712.5 MHz	Frequency 1732.5 MHz	Frequency 1752.5 MHz
4/ 5	QPSK	1	0	23.48	23.52	23.38
		1	5	23.48	23.51	23.30
		3	0	23.42	23.52	23.23
		3	3	23.48	23.48	23.20
		6	0	22.43	22.45	22.27
	16QAM	1	0	23.48	23.50	23.22
		1	5	23.31	23.36	23.25
		3	0	23.48	23.45	23.19
		3	3	23.37	23.34	23.18
		5	0	22.34	22.44	22.29

Band/BW	Modulation	RB Size	RB Offset	Low CH 20000	Mid CH 20175	High CH 20350
				Frequency 1715 MHz	Frequency 1732.5 MHz	Frequency 1750 MHz
4/ 10	QPSK	1	0	23.50	23.54	23.32
		1	5	23.42	23.45	23.24
		3	0	23.39	23.45	23.31
		3	3	23.47	23.40	23.26
		6	0	22.42	22.50	22.24
	16QAM	1	0	23.52	23.45	23.28
		1	5	23.32	23.38	23.23
		3	0	23.36	23.49	23.28
		3	3	23.41	23.41	23.17
		5	0	22.32	22.37	22.25



**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

Band/BW	Modulation	RB Size	RB Offset	Low CH 20025	Mid CH 20175	High CH 20325
				Frequency 1717.5 MHz	Frequency 1732.5 MHz	Frequency 1747.5 MHz
4/ 15	QPSK	1	0	23.44	23.47	23.28
		1	5	23.50	23.42	23.33
		3	0	23.50	23.46	23.34
		3	3	23.46	23.48	23.21
		6	0	22.43	22.50	22.24
	16QAM	1	0	23.43	23.53	23.29
		1	5	23.34	23.34	23.28
		3	0	23.49	23.54	23.19
		3	3	23.35	23.45	23.21
		5	0	22.31	22.39	22.27

Band/BW	Modulation	RB Size	RB Offset	Low CH 20050	Mid CH 20175	High CH 20300
				Frequency 1720 MHz	Frequency 1732.5 MHz	Frequency 1745 MHz
4/ 20	QPSK	1	0	23.55	23.58	23.40
		1	5	23.53	23.55	23.36
		3	0	23.53	23.57	23.37
		3	3	23.51	23.55	23.33
		6	0	22.54	22.60	22.38
	16QAM	1	0	23.53	23.56	23.37
		1	5	23.45	23.40	23.29
		3	0	23.50	23.56	23.32
		3	3	23.42	23.46	23.31
		5	0	22.43	22.52	22.34



**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

LTE Band 12

Band/BW	Modulation	RB Size	RB Offset	Low CH 23017	Mid CH 23095	High CH 23173
				Frequency 699.7 MHz	Frequency 707.5 MHz	Frequency 715.3 MHz
12/ 1.4	QPSK	1	0	23.24	23.12	23.23
		1	5	23.20	23.23	23.14
		3	0	23.22	23.15	23.16
		3	3	23.14	23.17	23.11
		6	0	22.25	22.18	22.11
	16QAM	1	0	23.18	23.07	23.01
		1	5	23.24	23.09	23.00
		3	0	23.16	23.16	23.04
		3	3	23.03	23.18	23.11
		5	0	22.21	22.18	22.01

Band/BW	Modulation	RB Size	RB Offset	Low CH 23025	Mid CH 23095	High CH 23165
				Frequency 700.5 MHz	Frequency 707.5 MHz	Frequency 714.5 MHz
12/ 3	QPSK	1	0	23.18	23.21	23.19
		1	5	23.19	23.23	23.20
		3	0	23.17	23.12	23.17
		3	3	23.20	23.21	23.17
		6	0	22.19	22.26	22.17
	16QAM	1	0	23.16	23.17	23.08
		1	5	23.17	22.99	23.05
		3	0	23.23	23.14	23.15
		3	3	23.11	23.07	23.20
		5	0	22.24	22.11	21.97

Band/BW	Modulation	RB Size	RB Offset	Low CH 23035	Mid CH 23095	High CH 23155
				Frequency 701.5 MHz	Frequency 707.5 MHz	Frequency 713.5 MHz
12/ 5	QPSK	1	0	23.20	23.18	23.10
		1	5	23.21	23.21	23.14
		3	0	23.17	23.16	23.10
		3	3	23.21	23.17	23.10
		6	0	22.17	22.12	22.17
	16QAM	1	0	23.16	23.07	23.14
		1	5	23.28	23.13	22.98
		3	0	23.16	23.06	23.14
		3	3	23.01	23.18	23.10
		5	0	22.22	22.04	21.98

Band/BW	Modulation	RB Size	RB Offset	Low CH 23060	Mid CH 23095	High CH 23130
				Frequency 704 MHz	Frequency 707.5 MHz	Frequency 711 MHz
12/ 10	QPSK	1	0	23.29	23.26	23.24
		1	5	23.31	23.29	23.26
		3	0	23.27	23.24	23.22
		3	3	23.28	23.26	23.24
		6	0	22.31	22.27	22.25
	16QAM	1	0	23.25	23.19	23.15
		1	5	23.29	23.14	23.12
		3	0	23.25	23.18	23.17
		3	3	23.13	23.21	23.21
		5	0	22.25	22.19	22.11



BUREAU
VERITAS

Test Report No.: W7L-P23120015RF03

LTE Band 13

Band/BW	Modulation	RB Size	RB Offset	Low CH 23205	Mid CH 23230	High CH 23255
				Frequency 779.5 MHz	Frequency 782.0 MHz	Frequency 784.5 MHz
13/ 5	QPSK	1	0	23.09	23.15	23.08
		1	5	23.14	23.16	23.12
		3	0	23.07	23.08	23.14
		3	3	23.08	23.06	23.15
		6	0	22.19	22.22	22.21
	16QAM	1	0	23.08	23.07	23.03
		1	5	23.07	23.00	23.01
		3	0	23.13	23.07	23.10
		3	3	23.01	23.04	23.12
		5	0	22.22	22.09	22.14

Band/BW	Modulation	RB Size	RB Offset	/	Mid CH 23230	/
				/	Frequency 782.0 MHz	/
13/ 10	QPSK	1	0	/	23.21	/
		1	5	/	23.23	/
		3	0	/	23.19	/
		3	3	/	23.20	/
		6	0	/	22.25	/
	16QAM	1	0	/	23.18	/
		1	5	/	23.08	/
		3	0	/	23.16	/
		3	3	/	23.13	/
		5	0	/	22.24	/



**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

LTE Band 66

Band/BW	Modulation	RB Size	RB Offset	Low CH 131979	Mid CH 132322	High CH 132665
				Frequency 1710.7MHz	Frequency 1745MHz	Frequency 1779.3MHz
66/ 1.4	QPSK	1	0	23.26	23.04	22.97
		1	5	23.35	23.14	23.06
		3	0	23.36	23.16	23.07
		3	3	23.24	23.12	23.01
		6	0	22.19	22.10	21.95
	16QAM	1	0	23.22	23.07	22.90
		1	5	23.10	23.12	22.95
		3	0	23.32	23.04	22.95
		3	3	23.24	22.98	22.91
		5	0	22.14	21.96	21.83

Band/BW	Modulation	RB Size	RB Offset	Low CH 131987	Mid CH 132322	High CH 132657
				Frequency 1711.5MHz	Frequency 1745MHz	Frequency 1778.5MHz
66/ 3	QPSK	1	0	23.37	23.05	23.00
		1	5	23.30	23.07	23.07
		3	0	23.31	23.03	23.06
		3	3	23.20	23.09	23.00
		6	0	22.22	22.16	21.97
	16QAM	1	0	23.27	23.07	22.97
		1	5	23.12	23.11	22.83
		3	0	23.25	23.06	22.90
		3	3	23.10	22.96	22.95
		5	0	22.18	21.94	21.95

Band/BW	Modulation	RB Size	RB Offset	Low CH 131997	Mid CH 132322	High CH 132647
				Frequency 1712.5MHz	Frequency 1745MHz	Frequency 1777.5MHz
66/ 5	QPSK	1	0	23.34	23.08	23.08
		1	5	23.31	23.08	22.99
		3	0	23.35	23.03	23.05
		3	3	23.29	23.05	22.96
		6	0	22.15	22.09	21.92
	16QAM	1	0	23.23	23.01	22.91
		1	5	23.16	23.01	22.90
		3	0	23.28	23.05	23.01
		3	3	23.11	22.91	23.02
		5	0	22.16	21.94	21.82

Band/BW	Modulation	RB Size	RB Offset	Low CH 132022	Mid CH 132322	High CH 132622
				Frequency 1715MHz	Frequency 1745MHz	Frequency 1775MHz
66/ 10	QPSK	1	0	23.40	23.16	22.98
		1	5	23.27	23.04	22.98
		3	0	23.32	23.13	23.07
		3	3	23.32	23.12	23.01
		6	0	22.19	22.04	21.99
	16QAM	1	0	23.35	23.00	22.89
		1	5	23.16	23.07	22.87
		3	0	23.35	23.01	22.94
		3	3	23.14	22.96	22.94
		5	0	22.12	22.04	21.91

Band/BW	Modulation	RB Size	RB Offset	Low CH 132047	Mid CH 132322	High CH 132597
				Frequency 1717.5 MHz	Frequency 1745MHz	Frequency 1772.5 MHz
66/ 15	QPSK	1	0	23.27	23.15	23.02
		1	5	23.30	23.04	22.97
		3	0	23.34	23.07	23.05
		3	3	23.27	23.03	23.06
		6	0	22.23	22.06	22.03
	16QAM	1	0	23.25	22.99	22.92
		1	5	23.22	23.00	22.90
		3	0	23.26	22.97	22.95
		3	3	23.13	22.89	22.94
		5	0	22.22	21.99	21.94

Band/BW	Modulation	RB Size	RB Offset	Low CH 132072	Mid CH 132322	High CH 132572
				Frequency 1720MHz	Frequency 1745MHz	Frequency 1770MHz
66/ 20	QPSK	1	0	23.41	23.18	23.11
		1	5	23.38	23.19	23.10
		3	0	23.39	23.17	23.10
		3	3	23.35	23.15	23.08
		6	0	22.30	22.17	22.05
	16QAM	1	0	23.36	23.09	23.02
		1	5	23.23	23.13	22.97
		3	0	23.36	23.10	23.04
		3	3	23.25	23.04	23.03
		5	0	22.25	22.09	21.96



BUREAU
VERITAS

Test Report No.: W7L-P23120015RF03

EIRP

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	23.5	5.3	28.8	758.58	1
20175	1732.5	23.52	5.3	28.82	762.08	1
20393	1754.3	23.28	5.3	28.58	721.11	1

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19957	1710.7	23.46	5.3	28.76	751.62	1
20175	1732.5	23.55	5.3	28.85	767.36	1
20393	1754.3	23.25	5.3	28.55	716.14	1

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	23.48	5.3	28.78	755.09	1
20175	1732.5	23.53	5.3	28.83	763.84	1
20385	1753.5	23.36	5.3	28.66	734.51	1

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19965	1711.5	23.46	5.3	28.76	751.62	1
20175	1732.5	23.46	5.3	28.76	751.62	1
20385	1753.5	23.46	5.3	28.76	751.62	1

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	23.48	5.3	28.78	755.09	1
20175	1732.5	23.52	5.3	28.82	762.08	1
20375	1752.5	23.38	5.3	28.68	737.9	1

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
19975	1712.5	23.48	5.3	28.78	755.09	1
20175	1732.5	23.5	5.3	28.8	758.58	1
20375	1752.5	23.25	5.3	28.55	716.14	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	23.5	5.3	28.8	758.58	1
20175	1732.5	23.54	5.3	28.84	765.6	1
20350	1750	23.32	5.3	28.62	727.78	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20000	1715	23.52	5.3	28.82	762.08	1
20175	1732.5	23.49	5.3	28.79	756.83	1
20350	1750	23.28	5.3	28.58	721.11	1

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	23.5	5.3	28.8	758.58	1
20175	1732.5	23.48	5.3	28.78	755.09	1
20325	1747.5	23.34	5.3	28.64	731.14	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20025	1717.5	23.49	5.3	28.79	756.83	1
20175	1732.5	23.54	5.3	28.84	765.6	1
20325	1747.5	23.29	5.3	28.59	722.77	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	23.55	5.3	28.85	767.36	1
20175	1732.5	23.58	5.3	28.88	772.68	1
20300	1745	23.4	5.3	28.7	741.31	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
20050	1720	23.53	5.3	28.83	763.84	1
20175	1732.5	23.56	5.3	28.86	769.13	1
20300	1745	23.37	5.3	28.67	736.21	1



**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	23.24	2.8	23.89	244.91	3
23095	707.5	23.23	2.8	23.88	244.34	3
23173	715.3	23.23	2.8	23.88	244.34	3

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23017	699.7	23.24	2.8	23.89	244.91	3
23095	707.5	23.18	2.8	23.83	241.55	3
23173	715.3	23.11	2.8	23.76	237.68	3

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	23.2	2.8	23.85	242.66	3
23095	707.5	23.23	2.8	23.88	244.34	3
23165	714.5	23.2	2.8	23.85	242.66	3

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23025	700.5	23.23	2.8	23.88	244.34	3
23095	707.5	23.17	2.8	23.82	240.99	3
23165	714.5	23.2	2.8	23.85	242.66	3

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	23.21	2.8	23.86	243.22	3
23095	707.5	23.21	2.8	23.86	243.22	3
23155	713.5	23.14	2.8	23.79	239.33	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23035	701.5	23.28	2.8	23.93	247.17	3
23095	707.5	23.18	2.8	23.83	241.55	3
23155	713.5	23.14	2.8	23.79	239.33	3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	23.31	2.8	23.96	248.89	3
23095	707.5	23.29	2.8	23.94	247.74	3
23130	711	23.26	2.8	23.91	246.04	3

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23060	704	23.29	2.8	23.94	247.74	3
23095	707.5	23.21	2.8	23.86	243.22	3
23130	711	23.21	2.8	23.86	243.22	3

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).



BUREAU
VERITAS

Test Report No.: W7L-P23120015RF03

LTE BAND 13

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	23.14	2.8	23.79	239.33	3
23230	782	23.16	2.8	23.81	240.44	3
23255	784.5	23.15	2.8	23.8	239.88	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
23205	779.5	23.13	2.8	23.78	238.78	3
23230	782	23.07	2.8	23.72	235.5	3
23255	784.5	23.12	2.8	23.77	238.23	3

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
-	-	-	-	-	-	-
23230	782	23.23	2.8	23.88	244.34	3
-	-	-	-	-	-	-

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	ERP (dBm)	ERP (mW)	Limit (W)
-	-	-	-	-	-	-
23230	782	23.18	2.8	23.83	241.55	3
-	-	-	-	-	-	-

REMARKS: ERP Output Power (dBm) = EIRP (dBm) -2.15(dB).

LTE BAND 66

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131979	1710.7	23.36	5.3	28.66	734.51	1
132322	1745	23.16	5.3	28.46	701.46	1
132665	1779.3	23.07	5.3	28.37	687.07	1

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131979	1710.7	23.32	5.3	28.62	727.78	1
132322	1745	23.12	5.3	28.42	695.02	1
132665	1779.3	22.95	5.3	28.25	668.34	1

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131987	1711.5	23.37	5.3	28.67	736.21	1
132322	1745	23.09	5.3	28.39	690.24	1
132657	1778.5	23.07	5.3	28.37	687.07	1

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131987	1711.5	23.27	5.3	28.57	719.45	1
132322	1745	23.11	5.3	28.41	693.43	1
132657	1778.5	22.97	5.3	28.27	671.43	1

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131997	1712.5	23.35	5.3	28.65	732.82	1
132322	1745	23.08	5.3	28.38	688.65	1
132647	1777.5	23.08	5.3	28.38	688.65	1

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
131997	1712.5	23.28	5.3	28.58	721.11	1
132322	1745	23.05	5.3	28.35	683.91	1
132647	1777.5	23.02	5.3	28.32	679.2	1

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132022	1715	23.4	5.3	28.7	741.31	1
132322	1745	23.16	5.3	28.46	701.46	1
132622	1775	23.07	5.3	28.37	687.07	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132022	1715	23.35	5.3	28.65	732.82	1
132322	1745	23.07	5.3	28.37	687.07	1
132622	1775	22.94	5.3	28.24	666.81	1

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132047	1717.5	23.34	5.3	28.64	731.14	1
132322	1745	23.15	5.3	28.45	699.84	1
132597	1772.5	23.06	5.3	28.36	685.49	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132047	1717.5	23.26	5.3	28.56	717.79	1
132322	1745	23	5.3	28.3	676.08	1
132597	1772.5	22.95	5.3	28.25	668.34	1

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132072	1720	23.41	5.3	28.71	743.02	1
132322	1745	23.19	5.3	28.49	706.32	1
132572	1770	23.11	5.3	28.41	693.43	1

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	Conducted Power (dBm)	G _T -L _c (dB)	EIRP (dBm)	EIRP (mW)	Limit (W)
132072	1720	23.36	5.3	28.66	734.51	1
132322	1745	23.13	5.3	28.43	696.63	1
132572	1770	23.04	5.3	28.34	682.34	1



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

47 CFR 27.53(c)(2)

On any frequency outside the 776–788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

47 CFR 27.53(f)

For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

3.2.2 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G.
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi}$.


NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP

< Frequency Range below 30MHz >

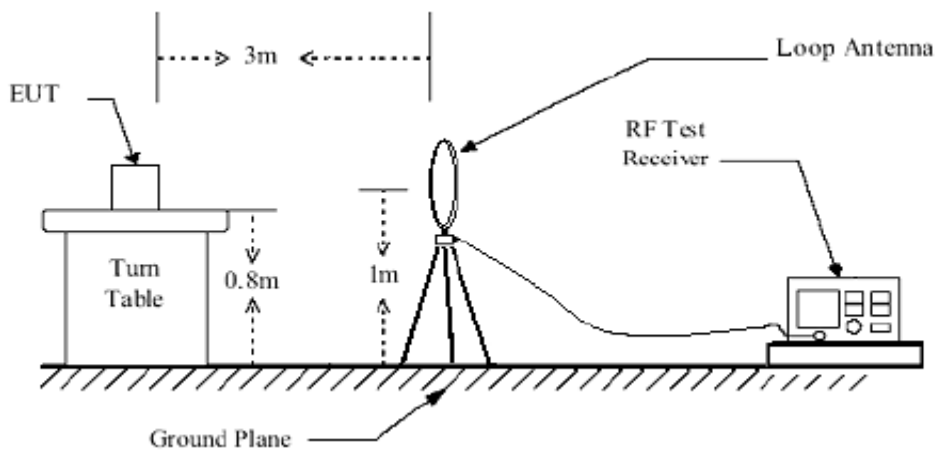

< Frequency Range 30MHz~1GHz >

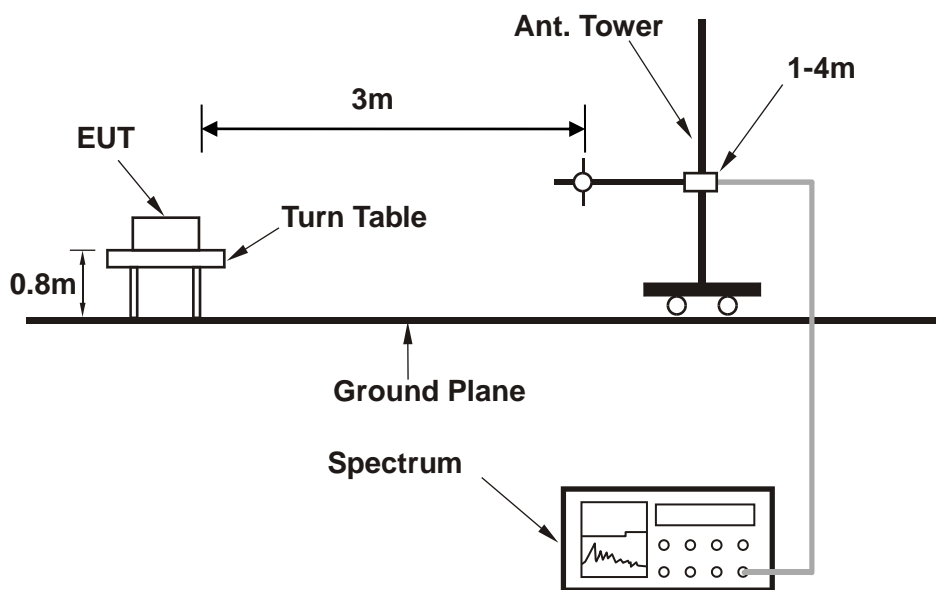




BUREAU
VERITAS

Test Report No.: W7L-P23120015RF03

<Frequency Range above 1GHz>

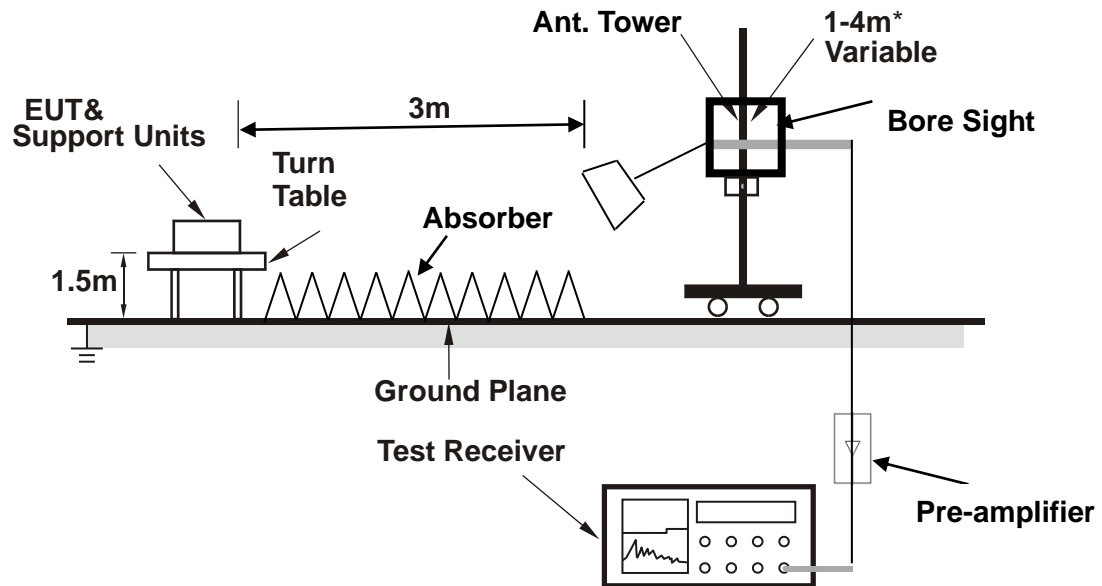

Note: Above 1G is a directional antenna depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).



3.2.5 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA


30 MHz – 1GHz data:

LTE Band 12

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 23095	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	30.000	-61.61	-59.63	-13.00	-48.61	-1.98	Peak	Horizontal
2	108.570	-59.22	-45.07	-13.00	-46.22	-14.15	Peak	Horizontal
3	142.520	-63.94	-49.12	-13.00	-50.94	-14.82	Peak	Horizontal
4	190.050	-67.50	-51.64	-13.00	-54.50	-15.86	Peak	Horizontal
5 PP	317.120	-56.28	-47.80	-13.00	-43.28	-8.48	Peak	Horizontal
6	441.280	-66.61	-60.48	-13.00	-53.61	-6.13	Peak	Horizontal

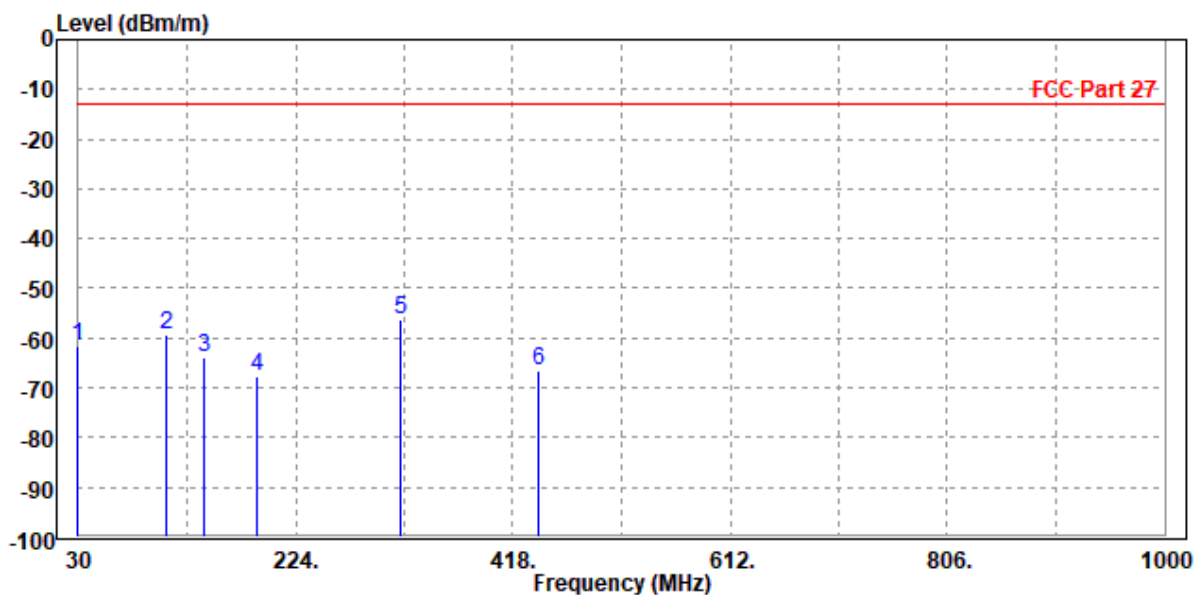




Test Report No.: W7L-P23120015RF03

MODE	TX channel 23095	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	62.980	-56.46	-37.52	-13.00	-43.46	-18.94	Peak	Vertical
2	120.210	-60.09	-43.87	-13.00	-47.09	-16.22	Peak	Vertical
3	168.710	-61.97	-51.02	-13.00	-48.97	-10.95	Peak	Vertical
4	249.220	-61.52	-57.70	-13.00	-48.52	-3.82	Peak	Vertical
5	346.220	-62.04	-58.29	-13.00	-49.04	-3.75	Peak	Vertical
6	450.010	-61.36	-56.66	-13.00	-48.36	-4.70	Peak	Vertical

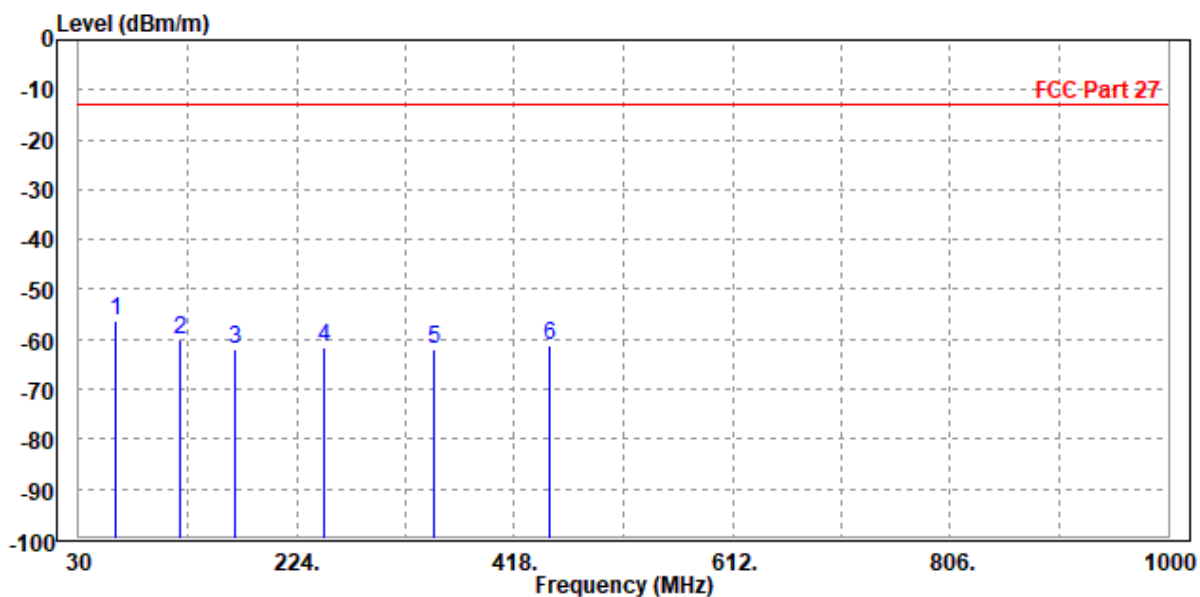



**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

ABOVE 1GHz


Note: For higher frequency, the emission is too low to be detected.

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1406.000	-33.87	-36.78	-13.00	-20.87	2.91	Peak	Horizontal
2	2113.000	-44.22	-49.28	-13.00	-31.22	5.06	Peak	Horizontal

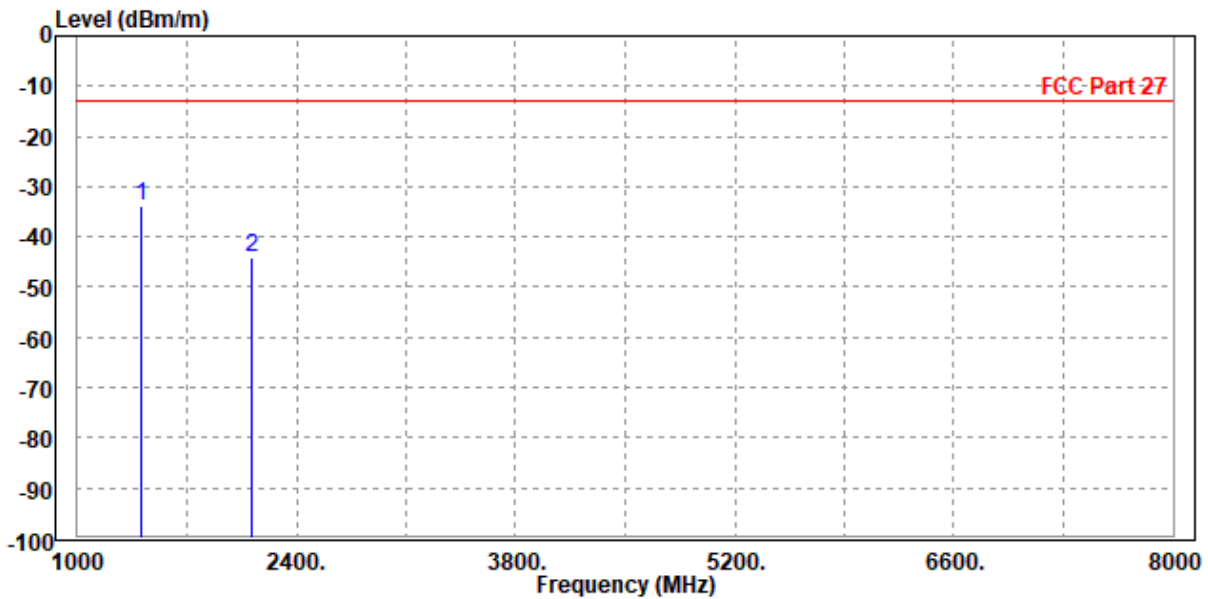




Test Report No.: W7L-P23120015RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1406.000	-31.80	-34.70	-13.00	-18.80	2.90	Peak	Vertical
2	2134.000	-50.69	-55.17	-13.00	-37.69	4.48	Peak	Vertical

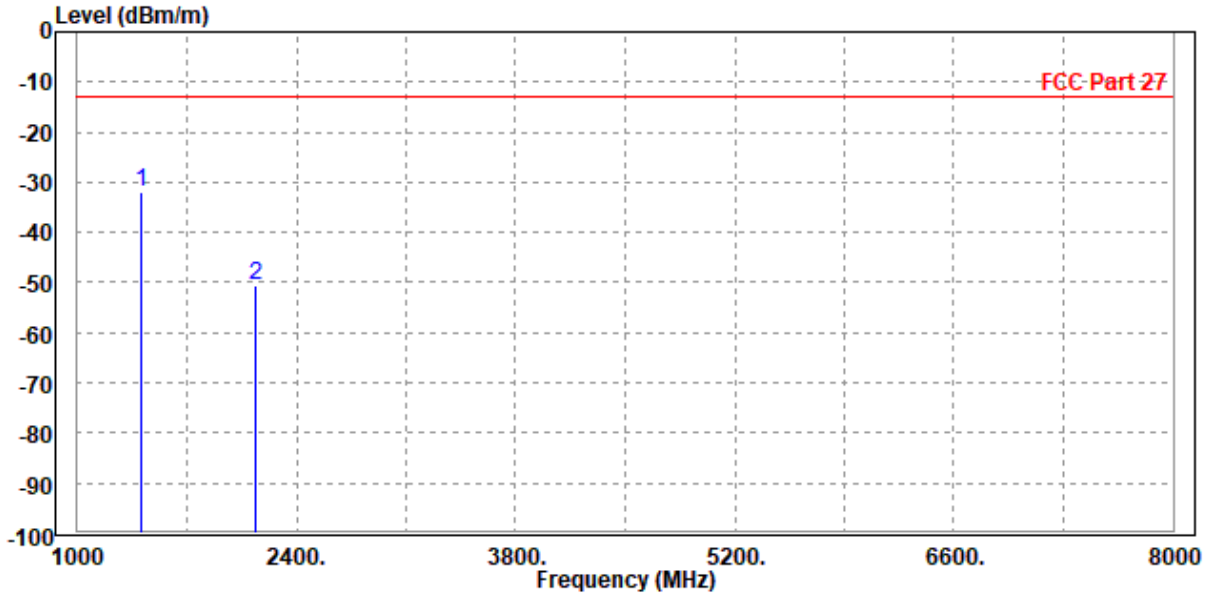




**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1420.000	-32.07	-35.02	-13.00	-19.07	2.95	Peak	Horizontal
2	2127.000	-44.03	-49.12	-13.00	-31.03	5.09	Peak	Horizontal

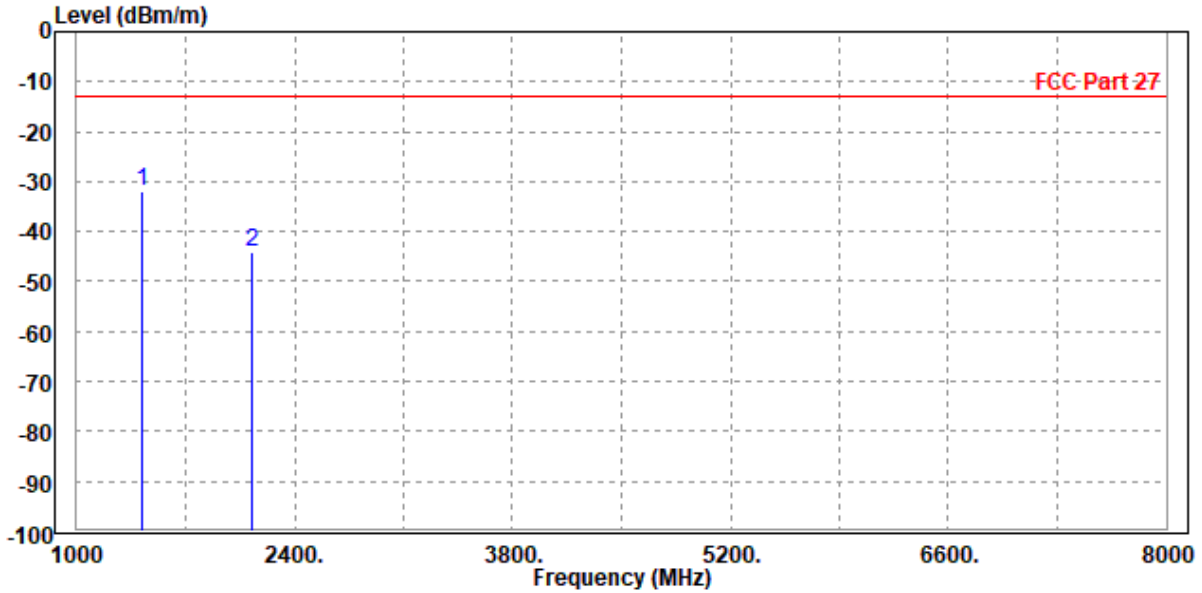




Test Report No.: W7L-P23120015RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1420.000	-31.80	-34.74	-13.00	-18.80	2.94	Peak	Vertical
2	2127.000	-51.83	-56.28	-13.00	-38.83	4.45	Peak	Vertical

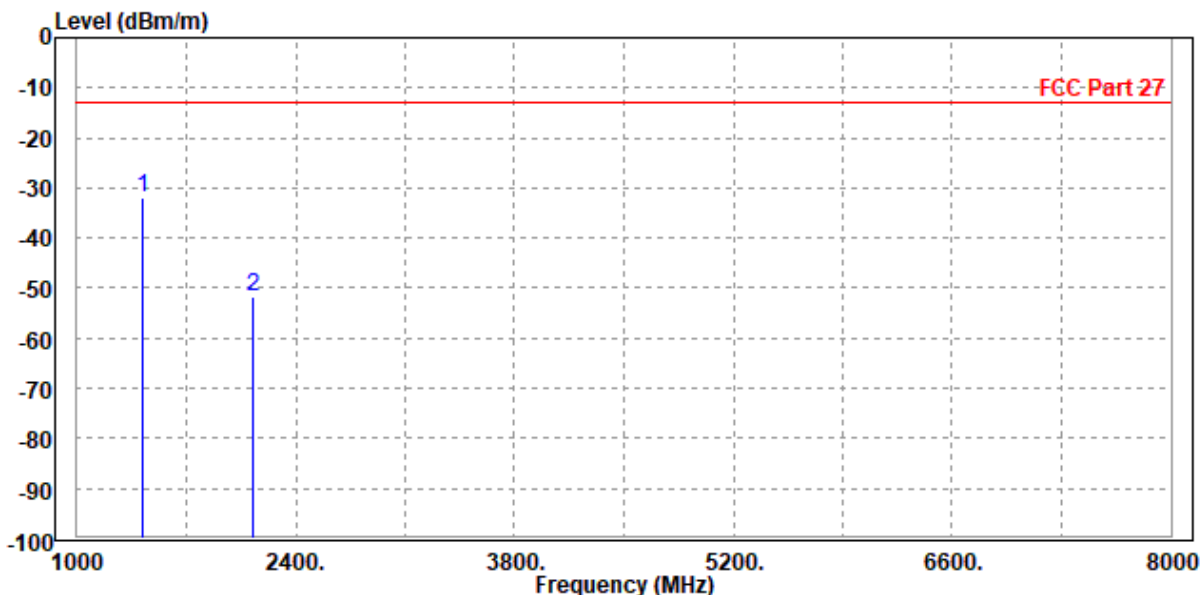




Test Report No.: W7L-P23120015RF03

CHANNEL BANDWIDTH: 5MHz / QPSK

CH 23035

MODE	TX channel 23035	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1399.000	-35.84	-38.73	-13.00	-22.84	2.89	Peak	Horizontal
2	2099.000	-51.53	-56.55	-13.00	-38.53	5.02	Peak	Horizontal

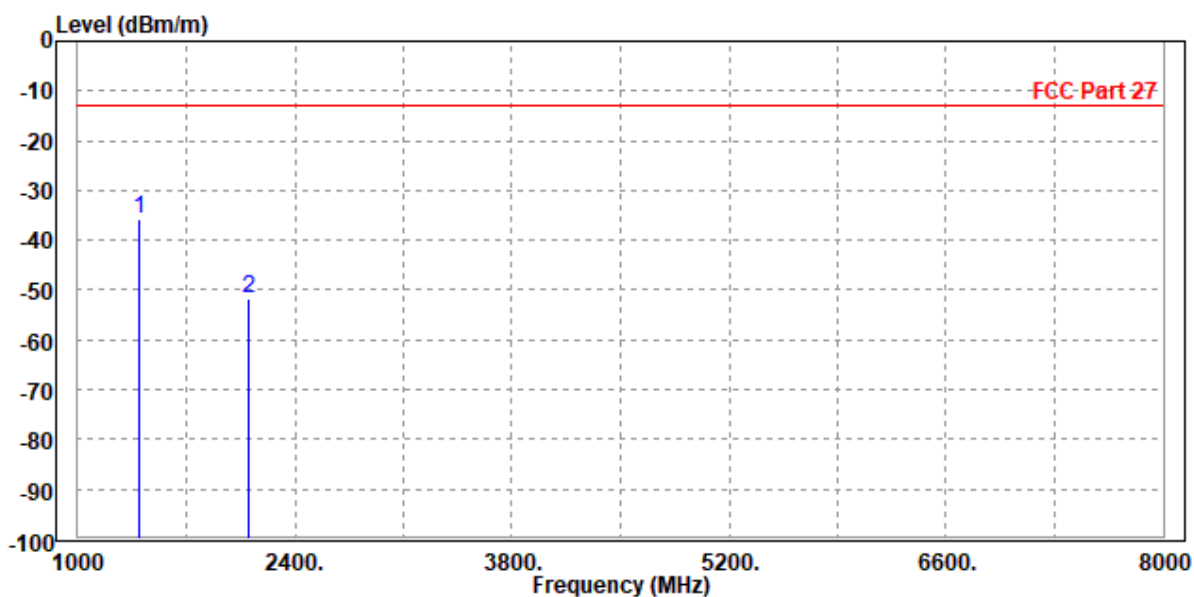




Test Report No.: W7L-P23120015RF03

MODE	TX channel 23035	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1406.000	-36.73	-39.63	-13.00	-23.73	2.90	Peak	Vertical
2	2113.000	-48.25	-52.65	-13.00	-35.25	4.40	Peak	Vertical

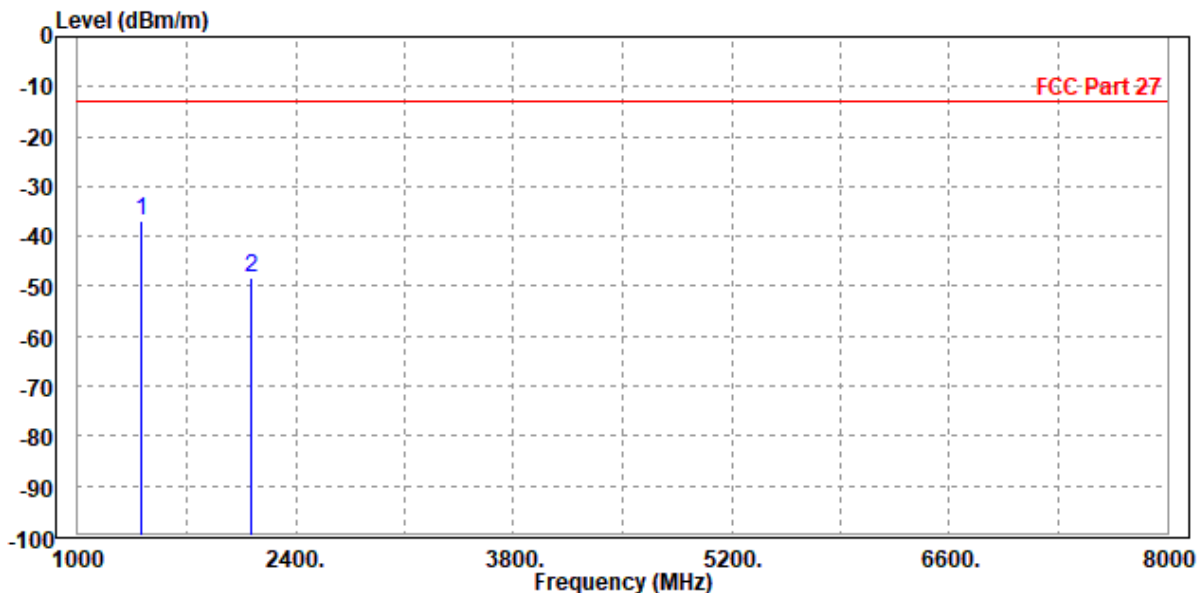




Test Report No.: W7L-P23120015RF03

CH 23095

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1420.000	-28.72	-31.67	-13.00	-15.72	2.95	Peak	Horizontal
2	2127.000	-40.72	-45.81	-13.00	-27.72	5.09	Peak	Horizontal

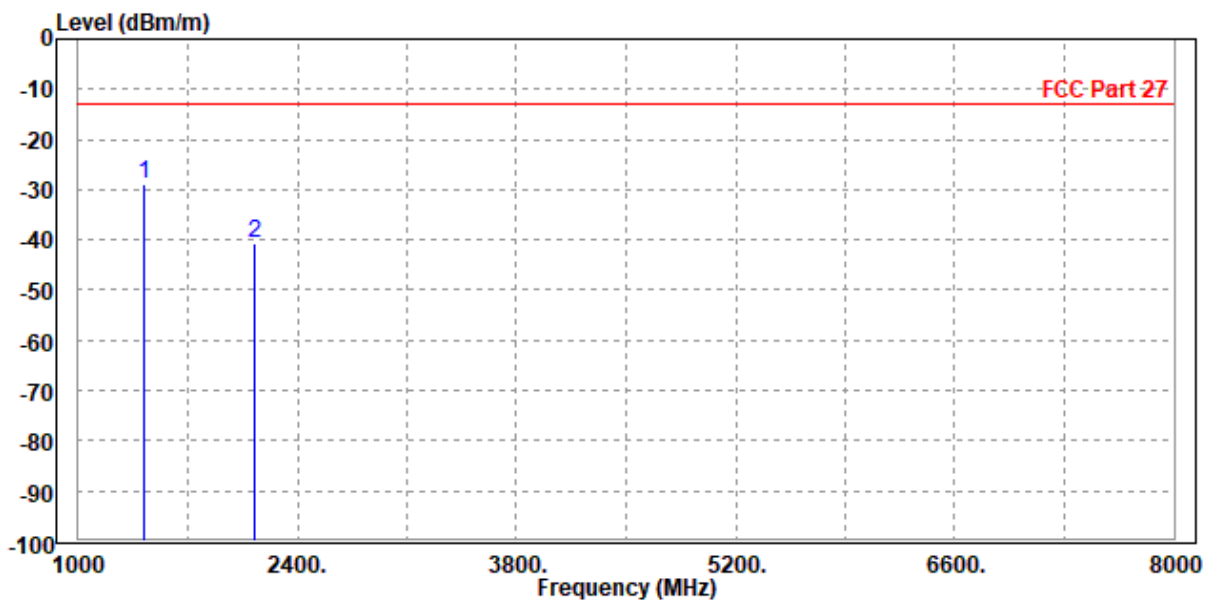




**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1420.000	-32.91	-35.85	-13.00	-19.91	2.94	Peak	Vertical
2	2127.000	-49.86	-54.31	-13.00	-36.86	4.45	Peak	Vertical

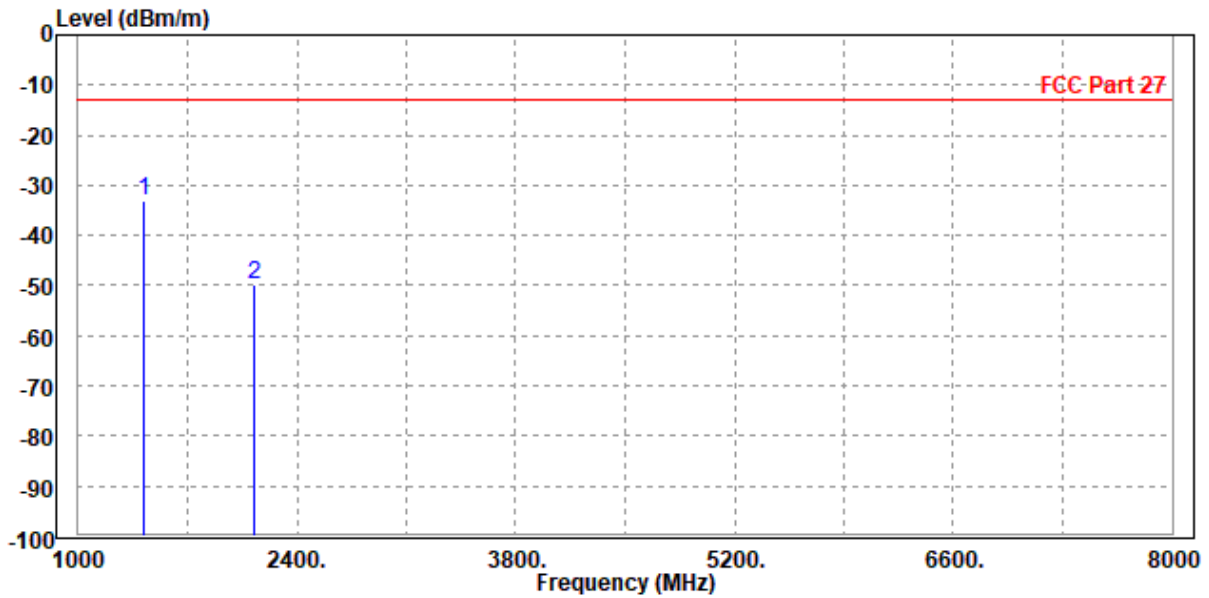




**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

CH 23155

MODE	TX channel 23155	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1434.000	-32.42	-35.42	-13.00	-19.42	3.00	Peak	Horizontal
2	2148.000	-44.05	-49.20	-13.00	-31.05	5.15	Peak	Horizontal

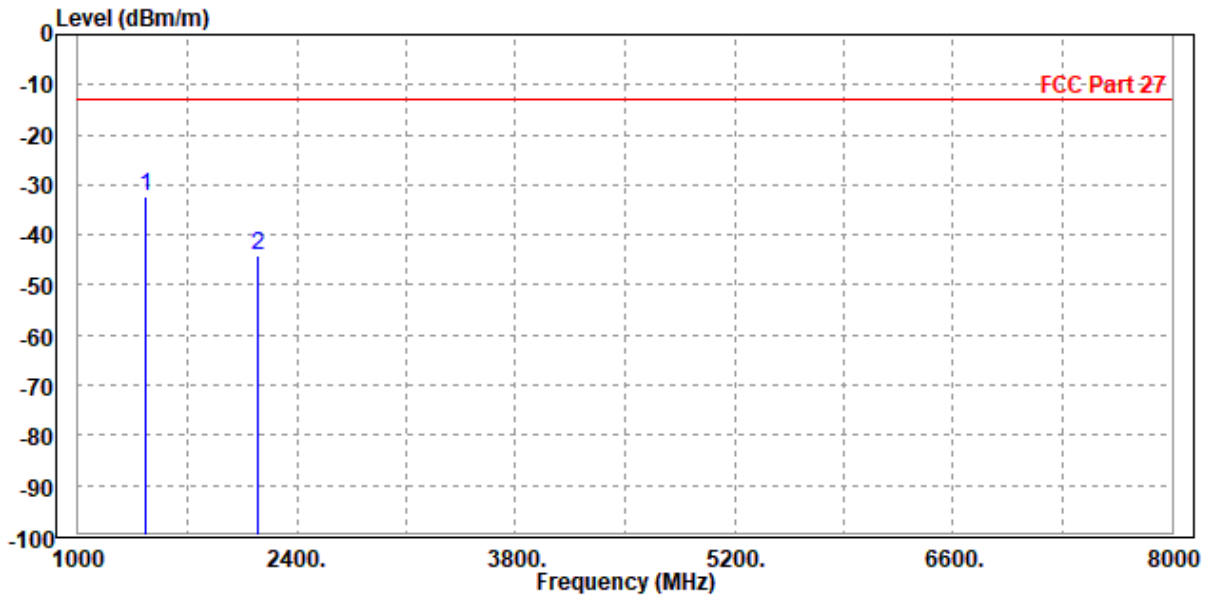




**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

MODE	TX channel 23155	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1434.000	-33.53	-36.50	-13.00	-20.53	2.97	Peak	Vertical
2	2148.000	-49.97	-54.50	-13.00	-36.97	4.53	Peak	Vertical

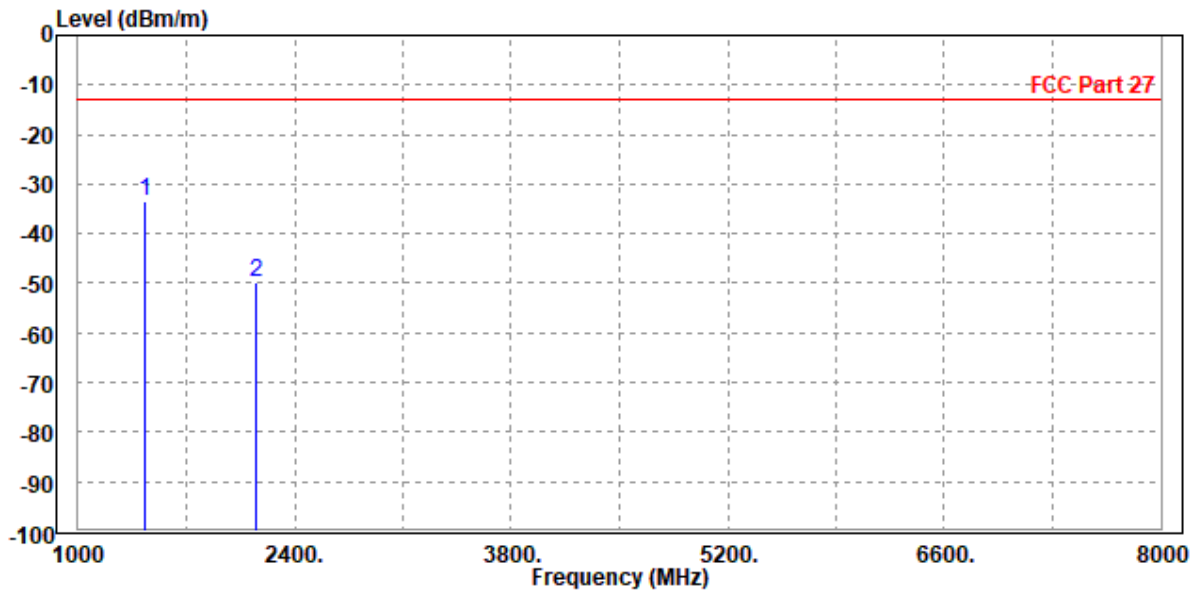




Test Report No.: W7L-P23120015RF03

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1406.000	-32.35	-35.26	-13.00	-19.35	2.91	Peak	Horizontal
2	2113.000	-42.96	-48.02	-13.00	-29.96	5.06	Peak	Horizontal

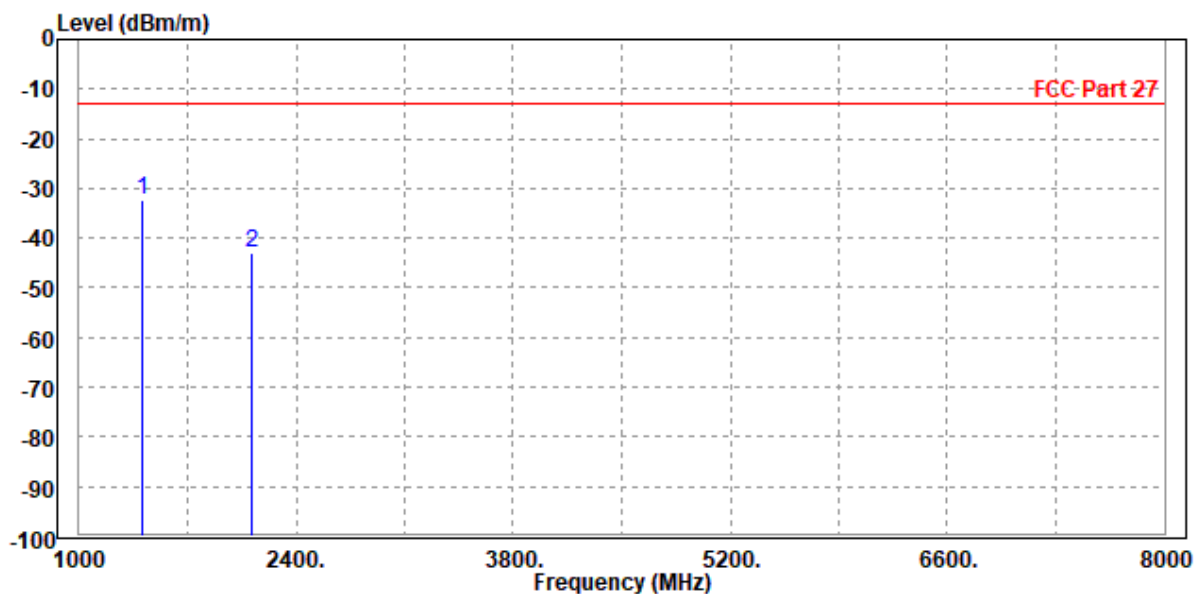




Test Report No.: W7L-P23120015RF03

MODE	TX channel 23095	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1406.000	-37.10	-40.00	-13.00	-24.10	2.90	Peak	Vertical
2	2113.000	-52.28	-56.68	-13.00	-39.28	4.40	Peak	Vertical

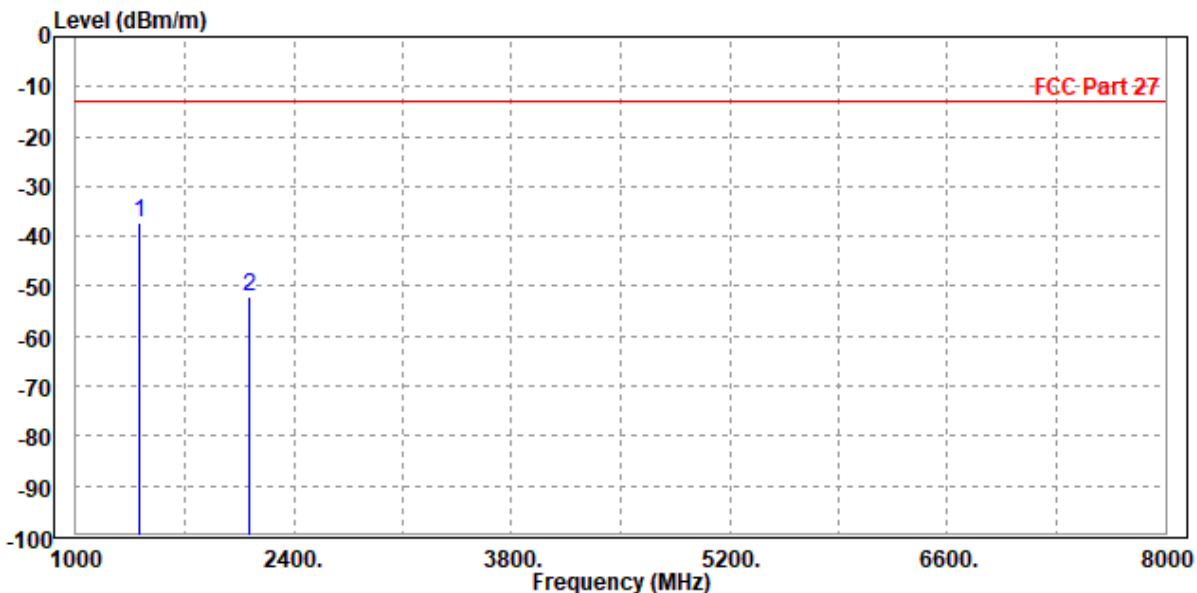



Test Report No.: W7L-P23120015RF03


LTE B13

CHANNEL BANDWIDTH: 5MHz / QPSK

CH 23205

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1559.000	-54.24	-57.62	-40.00	-14.24	3.38	Peak	Horizontal
2	2337.000	-53.65	-59.31	-13.00	-40.65	5.66	Peak	Horizontal

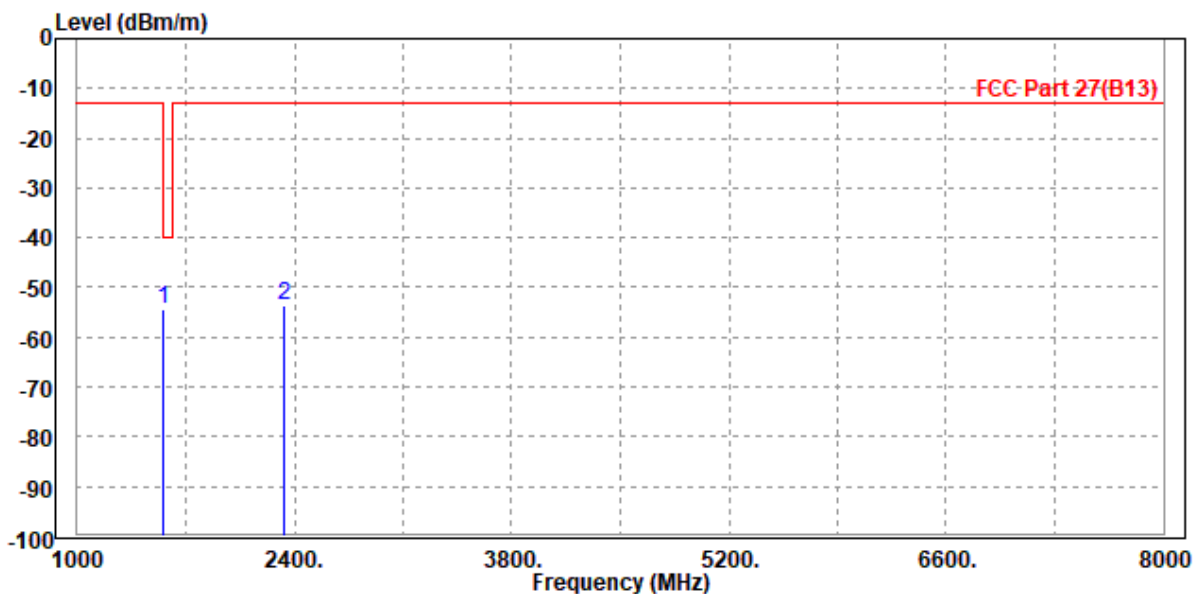




Test Report No.: W7L-P23120015RF03

MODE	TX channel 23205	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1560.000	-56.61	-59.84	-40.00	-16.61	3.23	Peak	Vertical
2	2338.500	-54.88	-60.09	-13.00	-41.88	5.21	Peak	Vertical

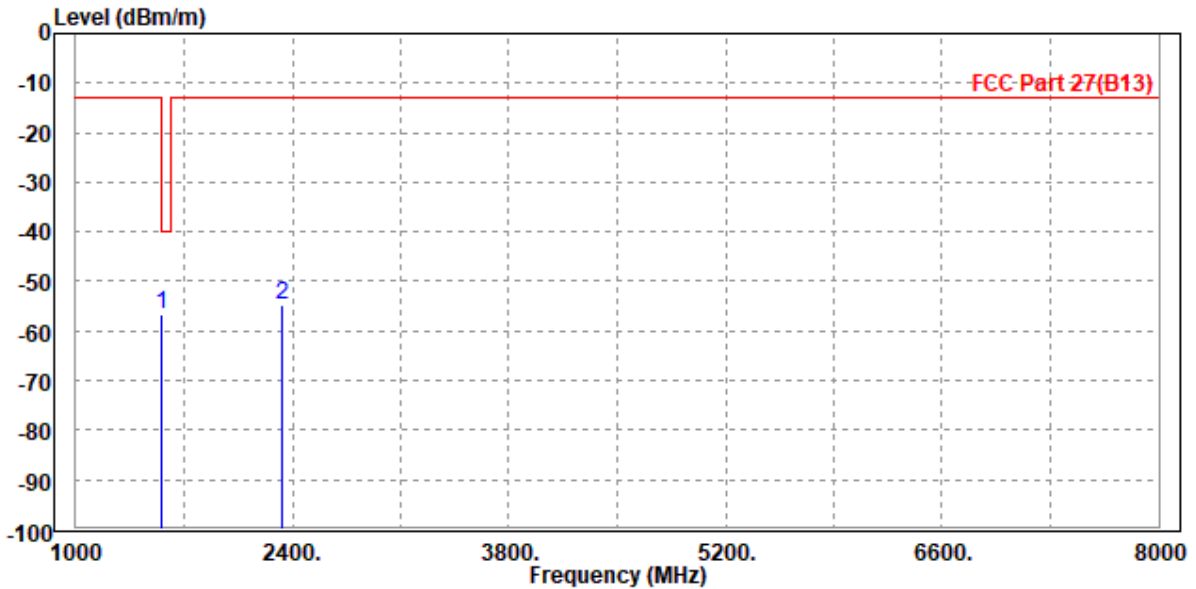




Test Report No.: W7L-P23120015RF03

CH 23230

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1567.000	-52.70	-56.11	-40.00	-12.70	3.41	Peak	Horizontal
2	2346.000	-51.73	-57.41	-13.00	-38.73	5.68	Peak	Horizontal

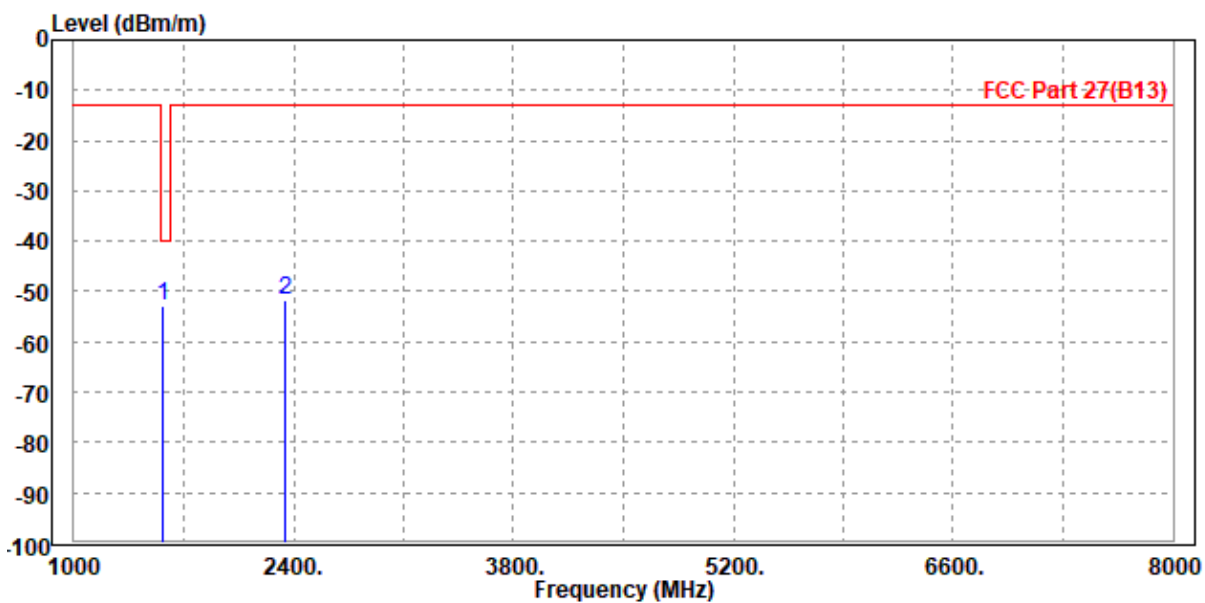




Test Report No.: W7L-P23120015RF03

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1564.000	-56.97	-60.21	-40.00	-16.97	3.24	Peak	Vertical
2	2344.000	-55.77	-60.99	-13.00	-42.77	5.22	Peak	Vertical

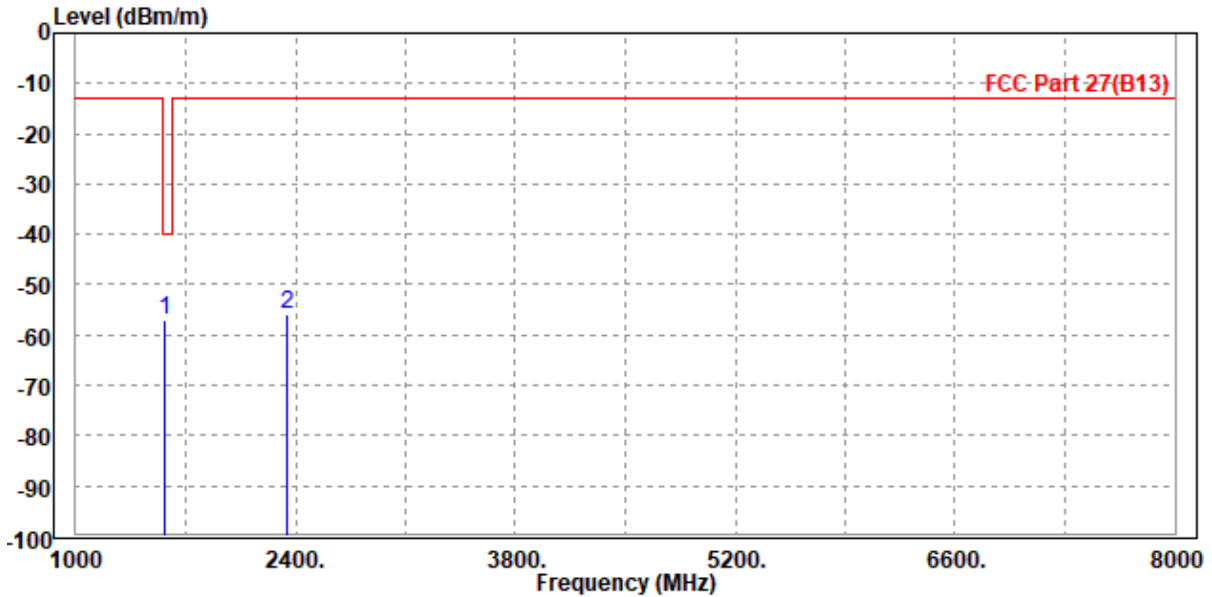




**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

CH 23255

MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1567.000	-55.46	-58.87	-40.00	-15.46	3.41	Peak	Horizontal
2	2353.500	-48.50	-54.20	-13.00	-35.50	5.70	Peak	Horizontal

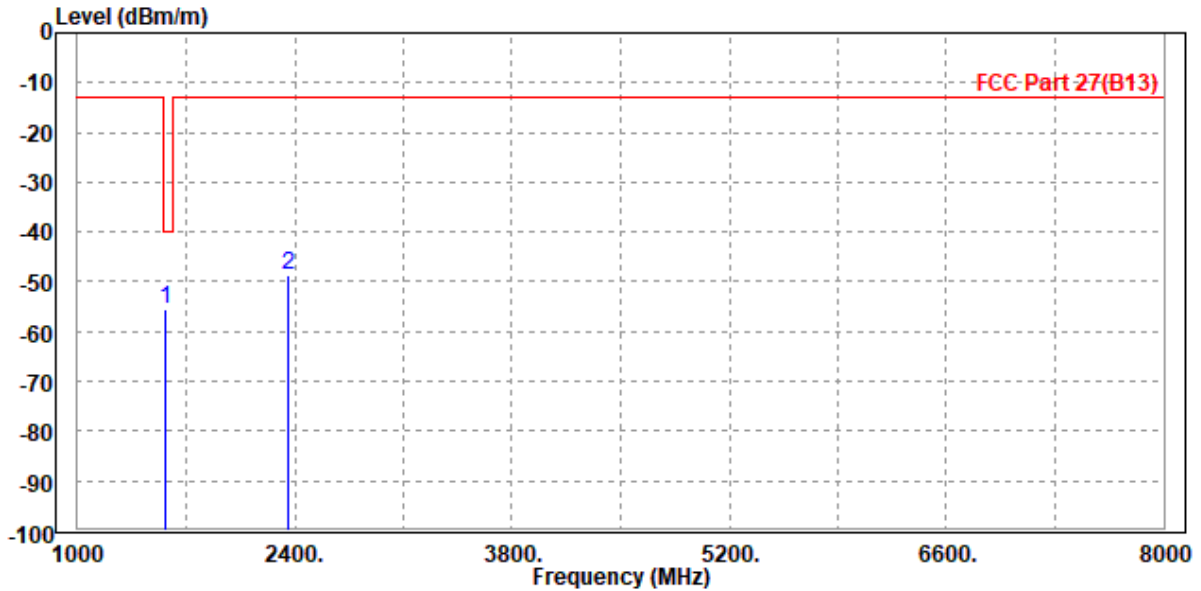




Test Report No.: W7L-P23120015RF03

MODE	TX channel 23255	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1 PP	1569.000	-56.11	-59.36	-40.00	-16.11	3.25	Peak	Vertical
2	2351.000	-54.59	-59.84	-13.00	-41.59	5.25	Peak	Vertical

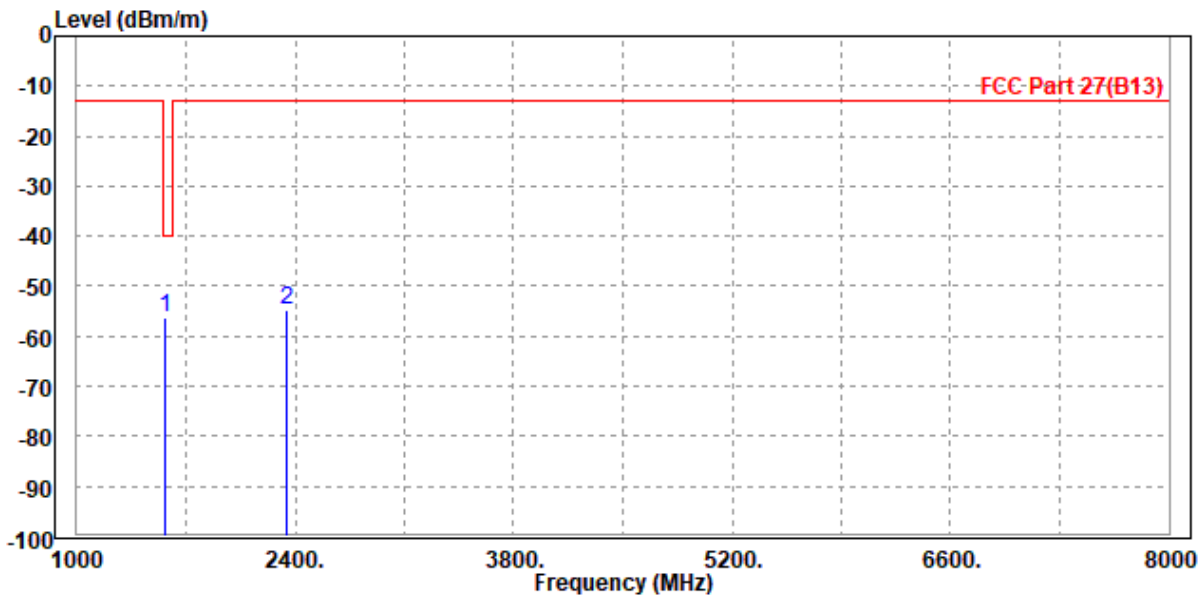




Test Report No.: W7L-P23120015RF03

CHANNEL BANDWIDTH: 10MHz /QPSK

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1567.000	-56.25	-59.66	-40.00	-16.25	3.41	Peak	Horizontal
2	2346.000	-54.51	-60.19	-13.00	-41.51	5.68	Peak	Horizontal

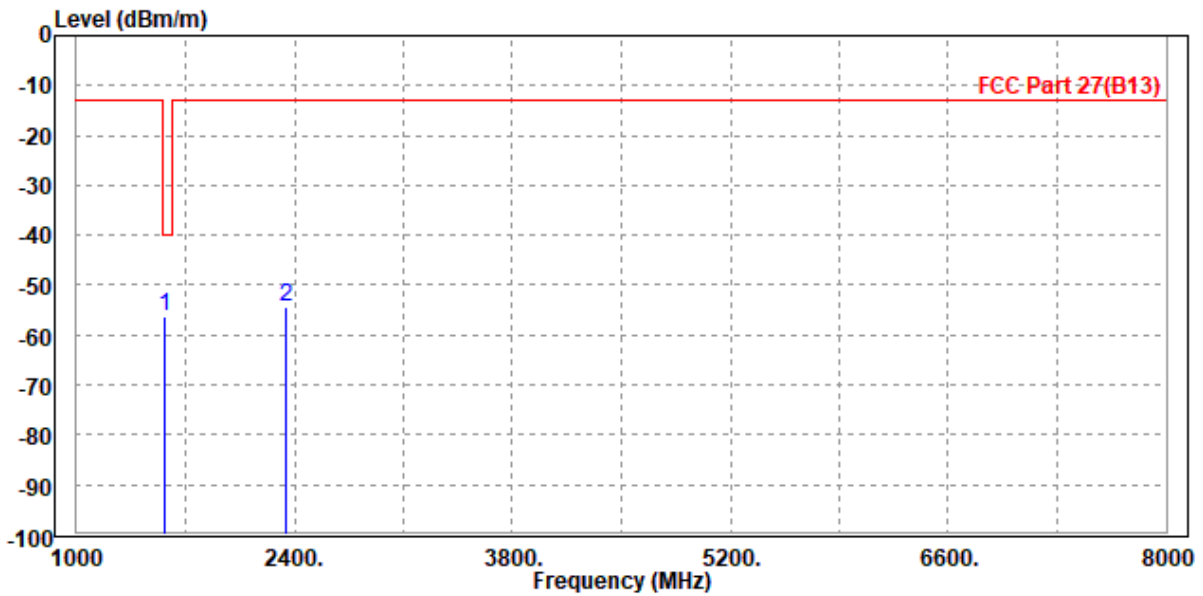




Test Report No.: W7L-P23120015RF03

MODE	TX channel 23230	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1564.000	-56.20	-59.44	-40.00	-16.20	3.24	Peak	Vertical
2	2344.000	-55.38	-60.60	-13.00	-42.38	5.22	Peak	Vertical

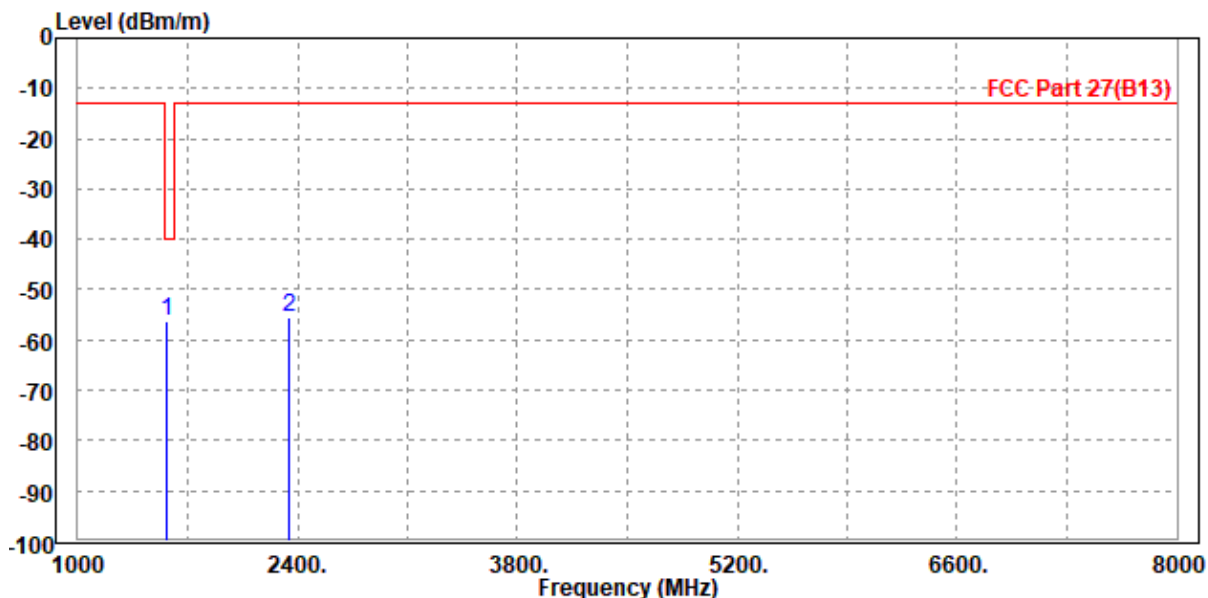



**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03


LTE BAND 66

CHANNEL BANDWIDTH: 1.4MHz / QPSK

CH 131979

MODE	TX channel 131979	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3421.400	-51.24	-59.75	-13.00	-38.24	8.51	Peak	Horizontal
2	PP 5131.000	-48.25	-59.50	-13.00	-35.25	11.25	Peak	Horizontal

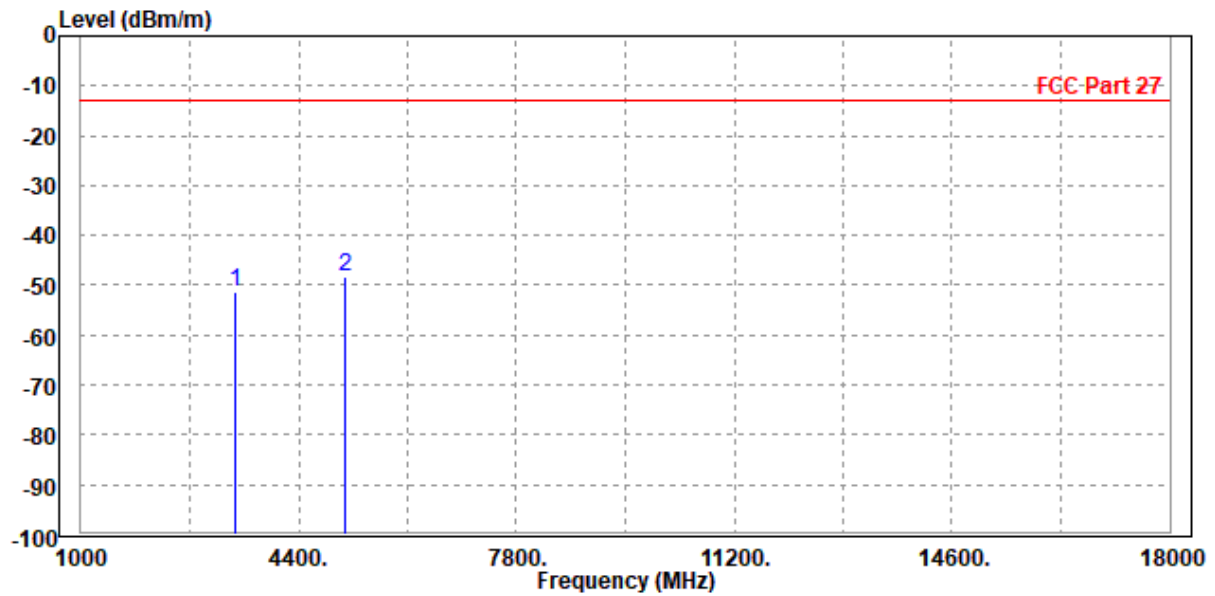




Test Report No.: W7L-P23120015RF03

MODE	TX channel 131979	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3414.000	-51.45	-60.12	-13.00	-38.45	8.67	Peak	Vertical
2	PP 5132.100	-49.01	-60.64	-13.00	-36.01	11.63	Peak	Vertical

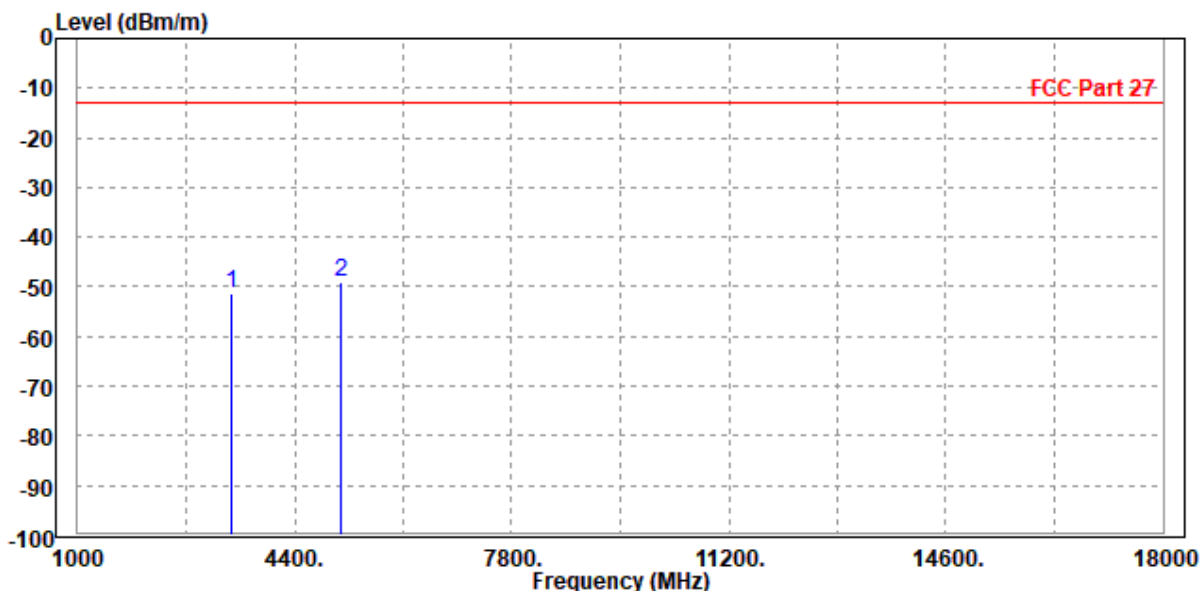




Test Report No.: W7L-P23120015RF03

CH 132322

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3482.000	-49.29	-57.84	-13.00	-36.29	8.55	Peak	Horizontal
2	PP 5235.000	-48.61	-60.02	-13.00	-35.61	11.41	Peak	Horizontal

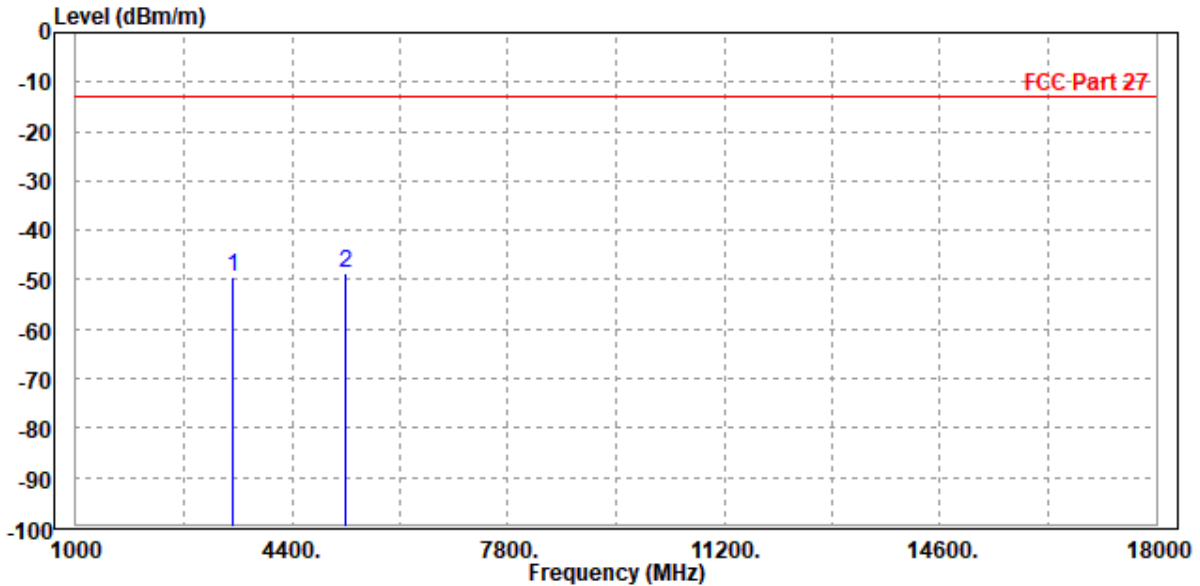




Test Report No.: W7L-P23120015RF03

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3490.000	-44.55	-53.19	-13.00	-31.55	8.64	Peak	Vertical
2	5233.000	-47.15	-58.97	-13.00	-34.15	11.82	Peak	Vertical

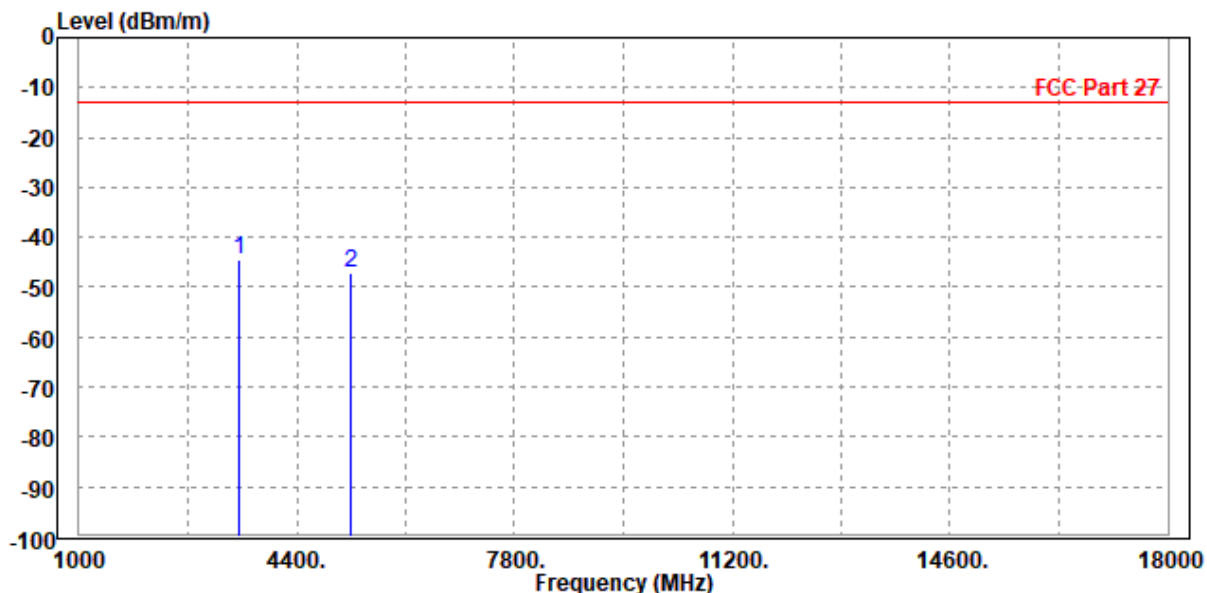




**BUREAU
VERITAS**

Test Report No.: W7L-P23120015RF03

CH 132665

MODE	TX channel 132665	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3567.000	-52.20	-60.71	-13.00	-39.20	8.51	Peak	Horizontal
2	PP 5337.900	-47.48	-59.04	-13.00	-34.48	11.56	Peak	Horizontal

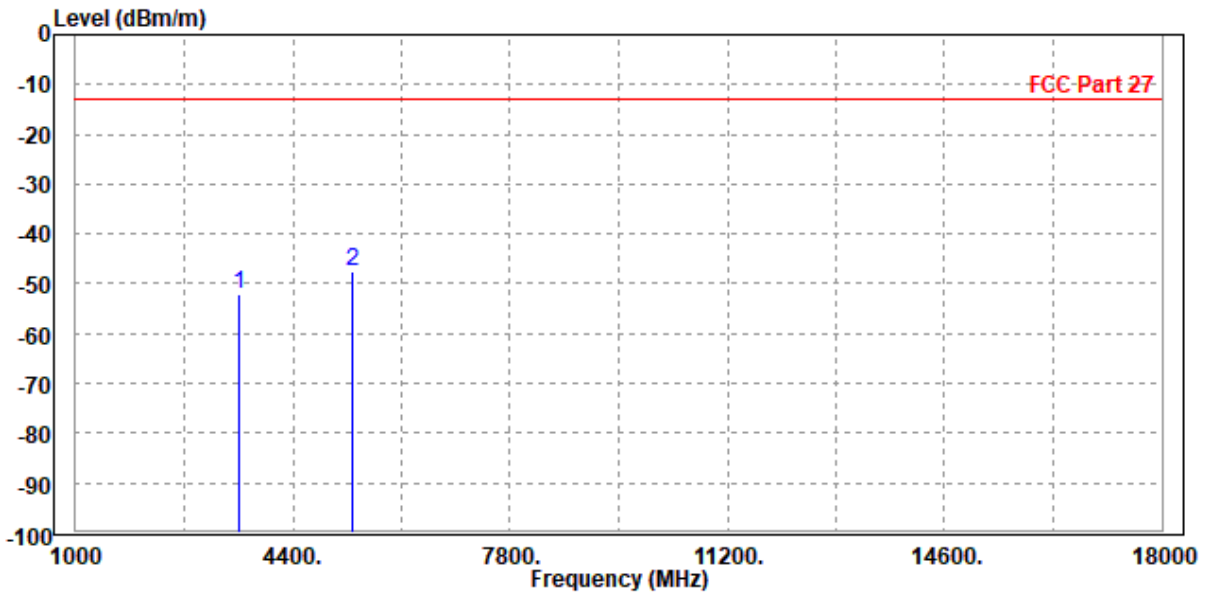




Test Report No.: W7L-P23120015RF03

MODE	TX channel 132665	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3558.600	-52.71	-61.35	-13.00	-39.71	8.64	Peak	Vertical
2	PP 5335.000	-46.99	-59.01	-13.00	-33.99	12.02	Peak	Vertical

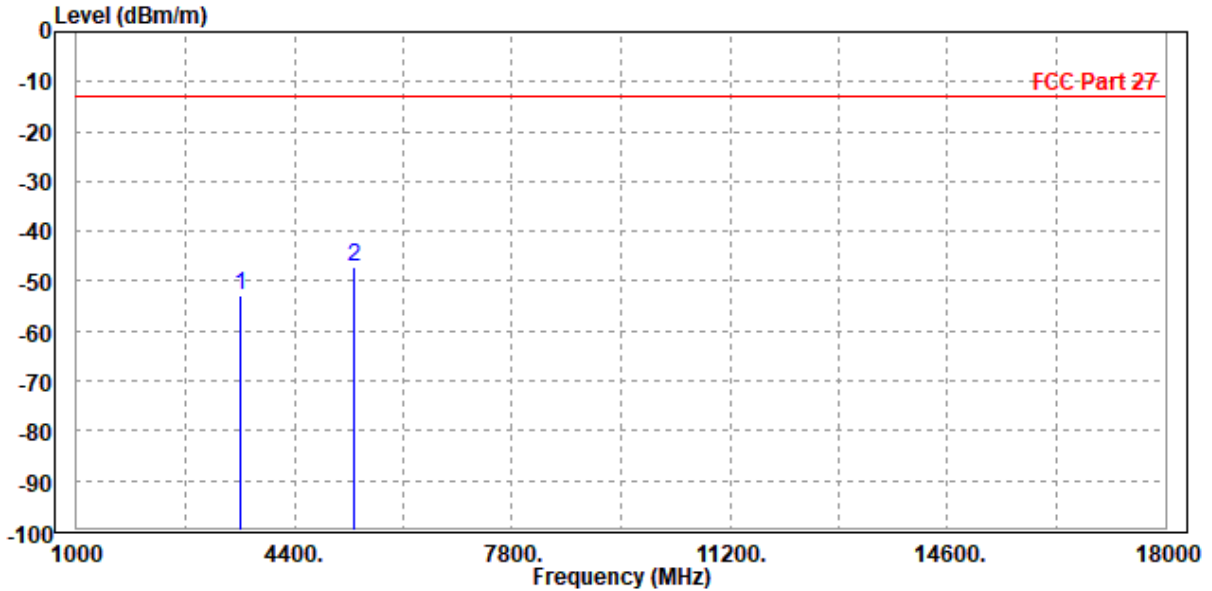




Test Report No.: W7L-P23120015RF03

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3490.000	-48.24	-56.79	-13.00	-35.24	8.55	Peak	Horizontal
2	PP 5233.000	-47.38	-58.78	-13.00	-34.38	11.40	Peak	Horizontal

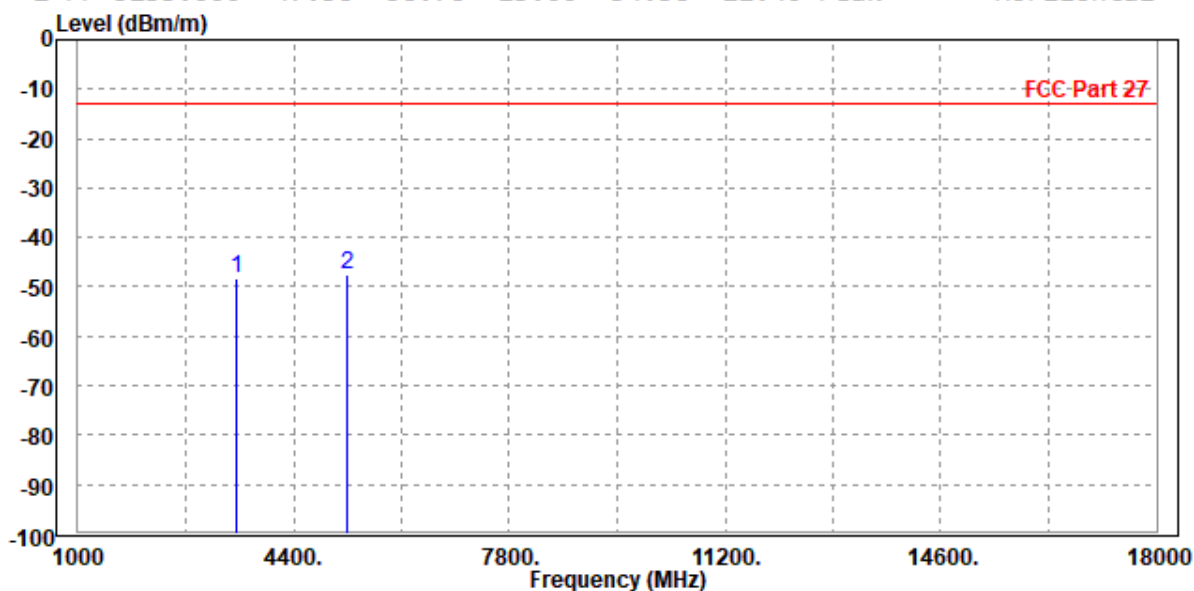




Test Report No.: W7L-P23120015RF03

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3482.000	-46.09	-54.74	-13.00	-33.09	8.65	Peak	Vertical
2	5235.000	-47.39	-59.22	-13.00	-34.39	11.83	Peak	Vertical

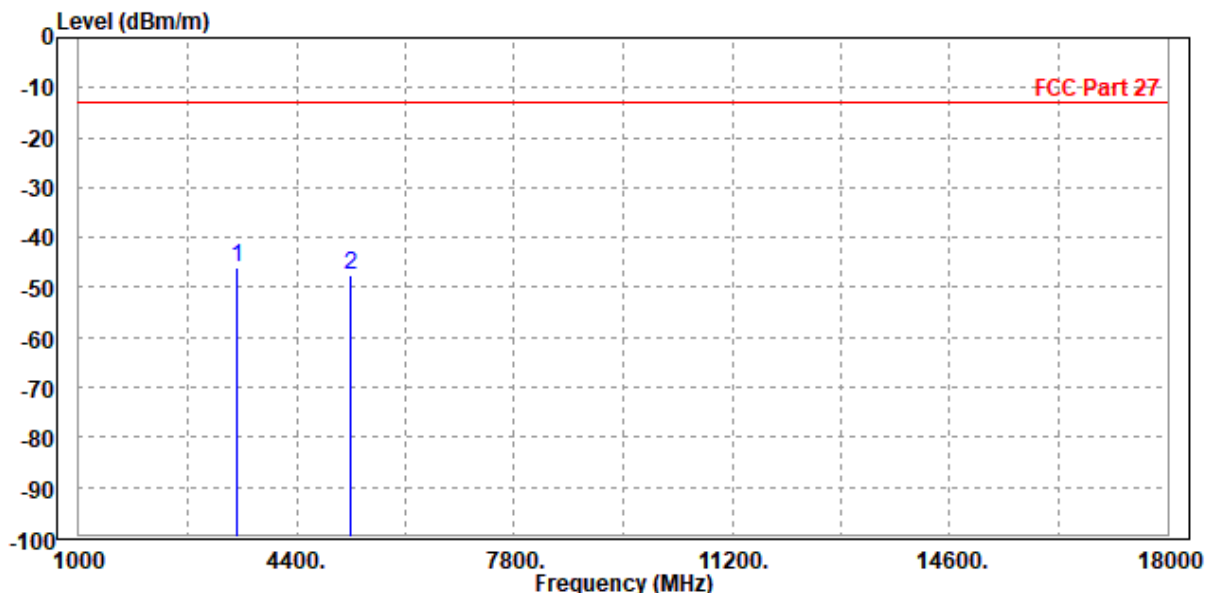




Test Report No.: W7L-P23120015RF03

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3482.000	-49.99	-58.54	-13.00	-36.99	8.55	Peak	Horizontal
2	PP 5235.000	-48.79	-60.20	-13.00	-35.79	11.41	Peak	Horizontal

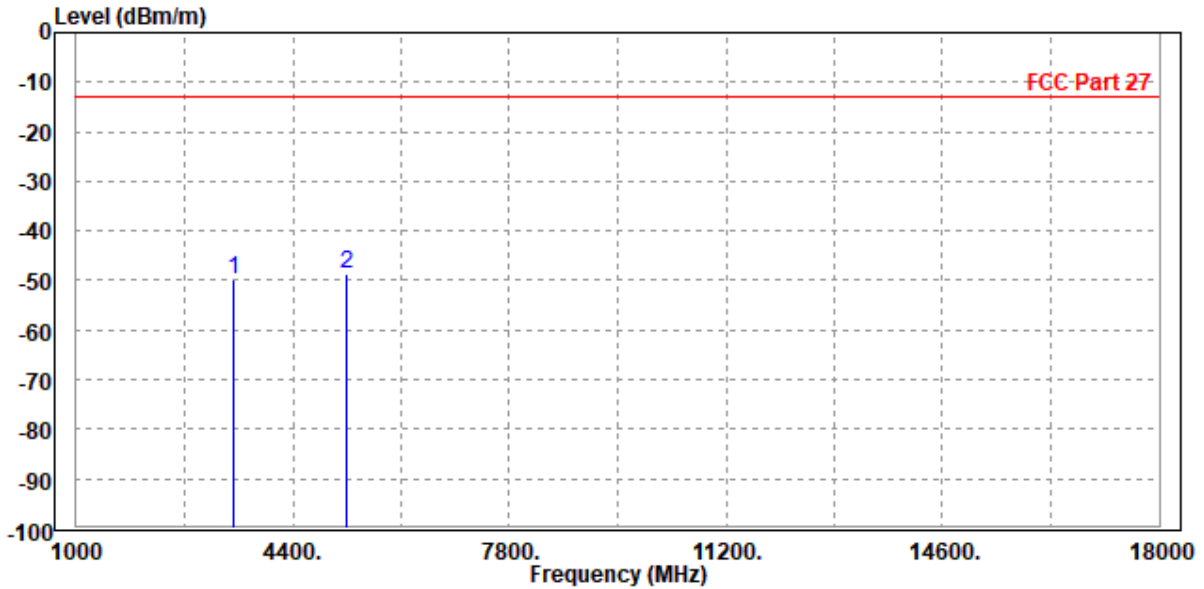




Test Report No.: W7L-P23120015RF03

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3490.000	-47.72	-56.36	-13.00	-34.72	8.64	Peak	Vertical
2 PP	5233.000	-46.60	-58.42	-13.00	-33.60	11.82	Peak	Vertical

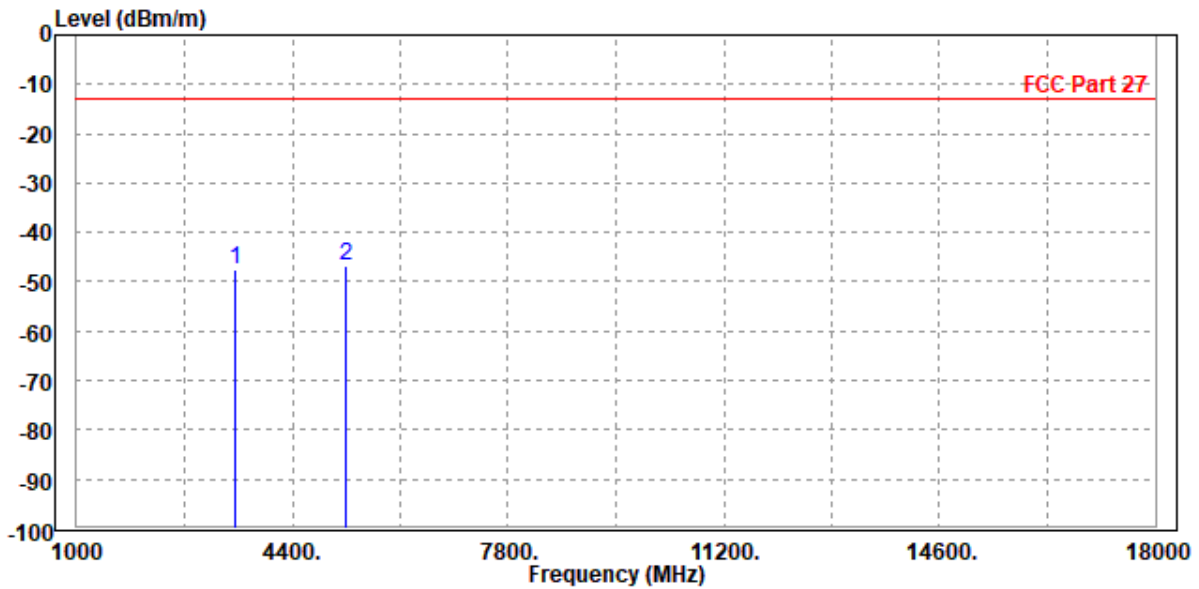




Test Report No.: W7L-P23120015RF03

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Read	Limit	Over				
	Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 3482.000	-45.96	-54.51	-13.00	-32.96	8.55	Peak	Horizontal
2	5235.000	-48.87	-60.28	-13.00	-35.87	11.41	Peak	Horizontal

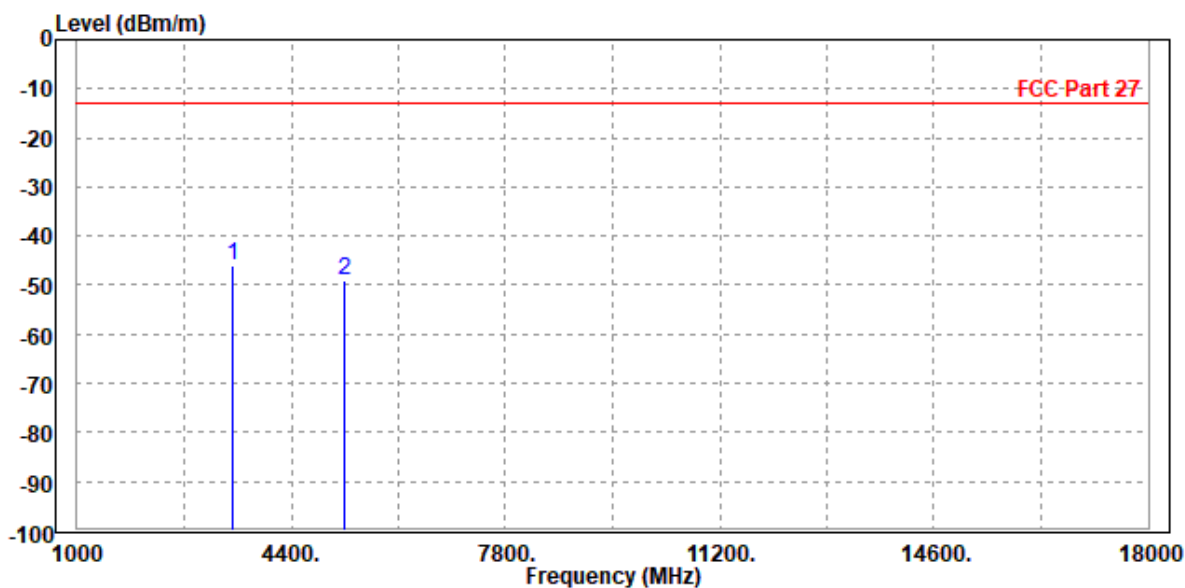




Test Report No.: W7L-P23120015RF03

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3490.000	-48.99	-57.63	-13.00	-35.99	8.64	Peak	Vertical
2	PP 5233.000	-47.87	-59.69	-13.00	-34.87	11.82	Peak	Vertical

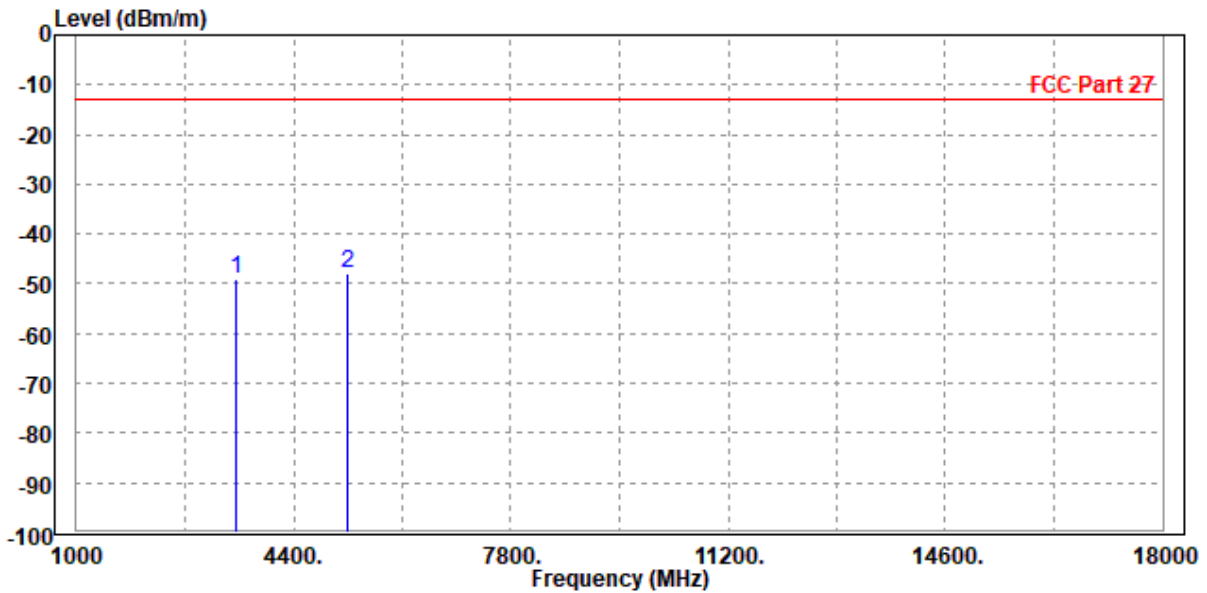




Test Report No.: W7L-P23120015RF03

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3490.000	-48.19	-56.74	-13.00	-35.19	8.55	Peak	Horizontal
2	PP 5233.000	-47.68	-59.08	-13.00	-34.68	11.40	Peak	Horizontal

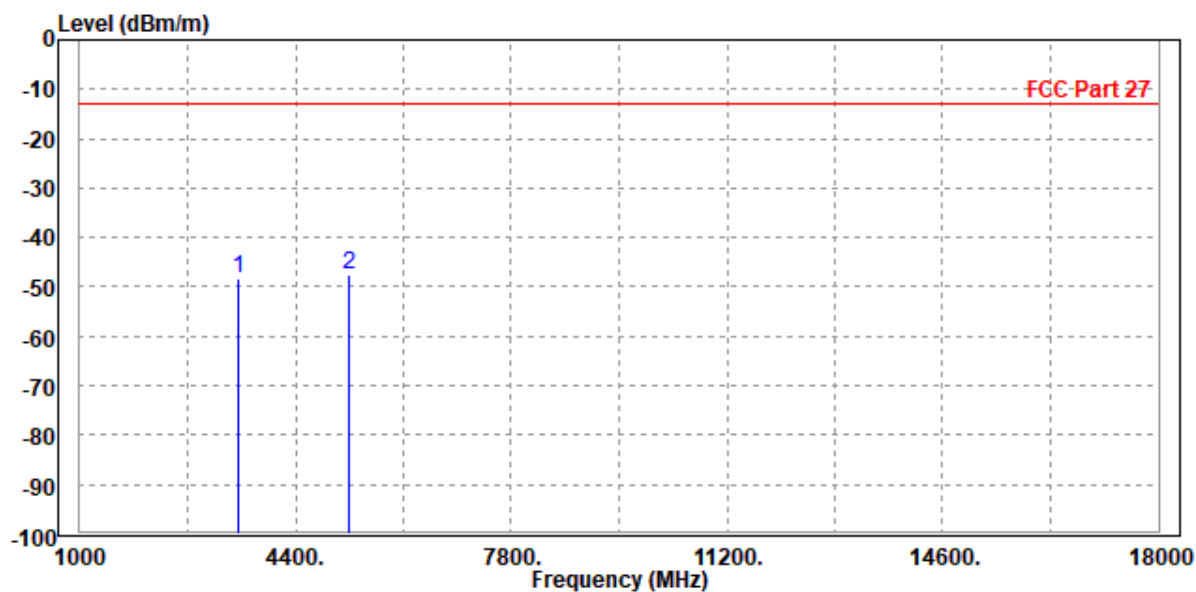




Test Report No.: W7L-P23120015RF03

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3482.000	-48.90	-57.55	-13.00	-35.90	8.65	Peak	Vertical
2 PP	5235.000	-47.92	-59.75	-13.00	-34.92	11.83	Peak	Vertical

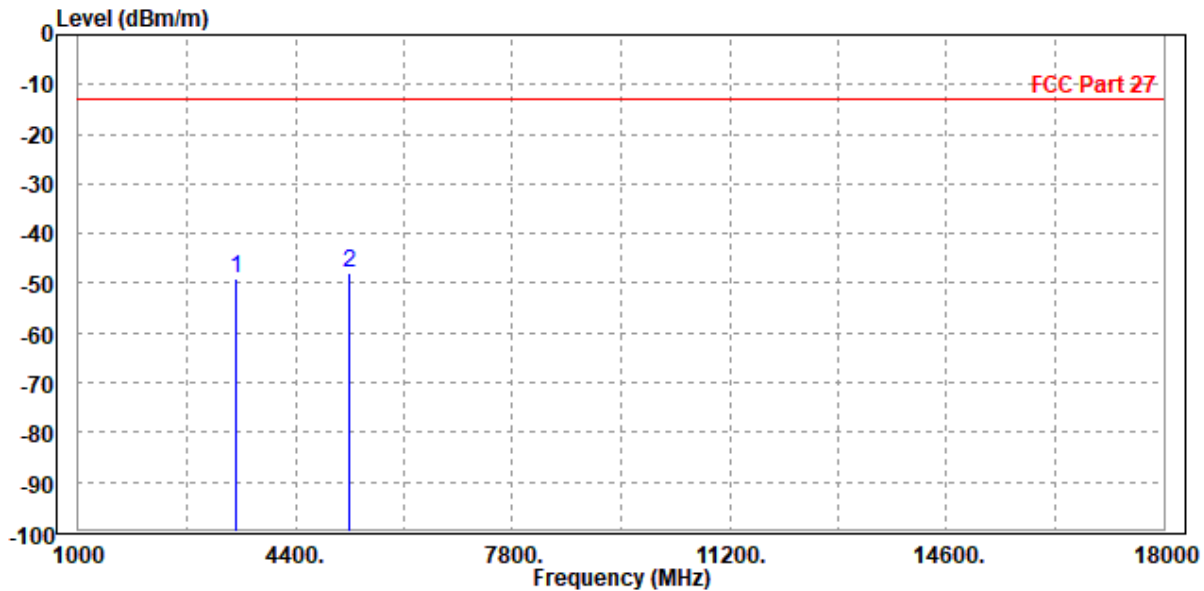




Test Report No.: W7L-P23120015RF03

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3482.000	-49.85	-58.40	-13.00	-36.85	8.55	Peak	Horizontal
2 PP	5235.000	-47.20	-58.61	-13.00	-34.20	11.41	Peak	Horizontal

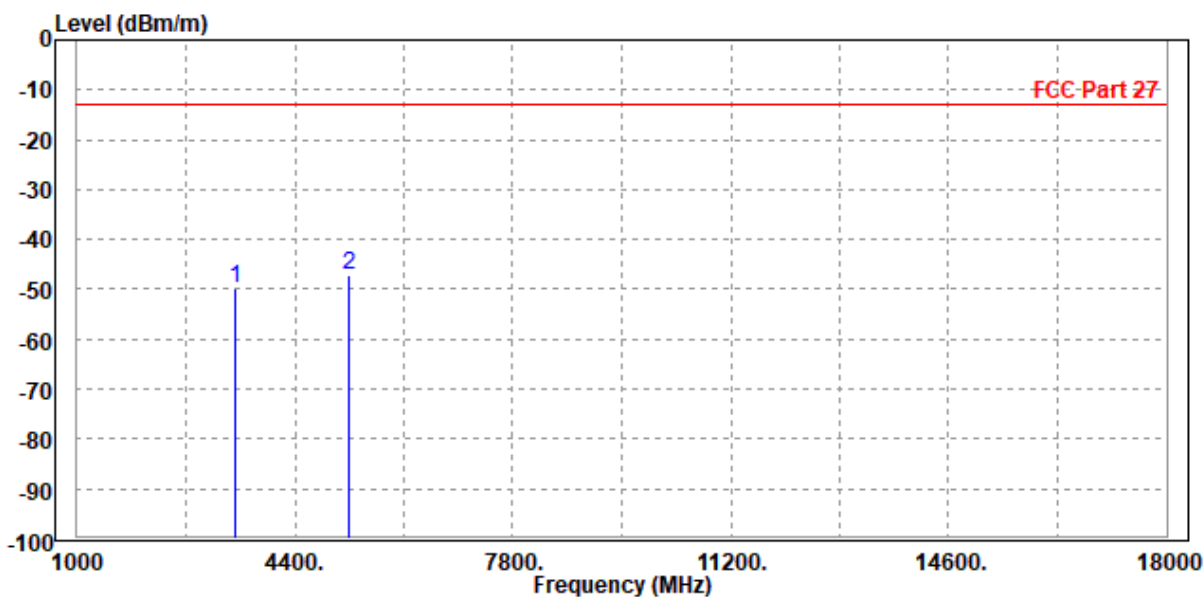




Test Report No.: W7L-P23120015RF03

MODE	TX channel 132322	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH	INPUT POWER	AC 120V/60HZ
TESTED BY	Jace Hu		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3490.000	-49.69	-58.33	-13.00	-36.69	8.64	Peak	Vertical
2	PP 5233.000	-47.80	-59.62	-13.00	-34.80	11.82	Peak	Vertical

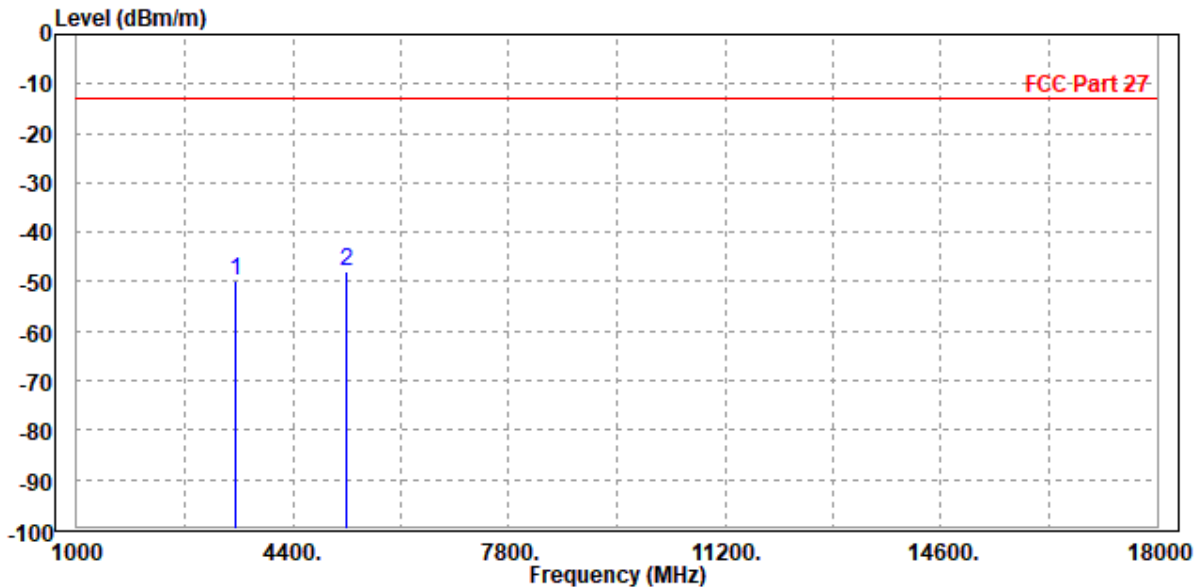



Test Report No.: W7L-P23120015RF03

4 INFORMATION ON THE TESTING LABORATORIES

We, BV 7LAYERS COMMUNICATIONS TECHNOLOGY (SHENZHEN) CO. LTD., were founded in 2015 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Shenzhen EMC/RF Lab:

Tel: +86-755-88696566

Fax: +86-755-88696577

Email: customerservice.sw@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: W7L-P23120015RF03

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--END--