



# FCC TEST REPORT

**Test report  
On Behalf of  
DESAY INFOR TECHNOLOGY CO ., LTD  
For  
smart band  
Model No.: D20**

**FCC ID: 2AEMN-D20**

**Prepared for :** DESAY INFOR TECHNOLOGY CO .,LTD  
DESAY 3rd Industry Zone, chenjiang Town Huizhou, Guangdong, P.R.China

**Prepared By :** Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China

**Date of Test:** Dec. 11, 2018 ~ Dec. 21, 2018

**Date of Report:** Dec. 23, 2018

**Report Number:** HK1811291744E



### TEST RESULT CERTIFICATION

**Applicant's name** ..... : DESAY INFOR TECHNOLOGY CO ., LTD  
 Address ..... : DESAY 3rd Industry Zone, chenjiang Town Huizhou, Guangdong, P.R.China  
**Manufacture's Name**..... : DESAY INFOR TECHNOLOGY CO ., LTD  
 Address ..... : DESAY 3rd Industry Zone, chenjiang Town Huizhou, Guangdong, P.R.China

**Product description**

Trade Mark: ..... desay  
 Product Name..... : smart band  
 Model and/or type reference .. : D20  
 Series Model..... : D20F, D20W D2XX(x=0-9or x=A-Z)  
 Difference Description..... : All the same except for the appearance color.

**Standards** ..... : FCC Rules and Regulations Part 15 Subpart C Section 15.247  
 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :  
 Date (s) of performance of tests ..... : Dec. 11, 2018 ~ Dec. 21, 2018  
 Date of Issue..... : Dec. 23, 2018  
 Test Result..... : **Pass**

Testing Engineer : Gary Qian  
 (Gary Qian)

Technical Manager : Eden Hu  
 (Eden Hu)

Authorized Signatory : Jason Zhou  
 (Jason Zhou)



<b>Table of Contents</b>	<b>Page</b>
1 . TEST SUMMARY	5
2 . GENERAL INFORMATION	6
2.1 . GENERAL DESCRIPTION OF EUT	6
2.2 . CARRIER FREQUENCY OF CHANNELS	7
2.3 . OPERATION OF EUT DURING TESTING	7
2.4 . DESCRIPTION OF TEST SETUP	7
2.5. EQUIPMENT USED IN EUT SYSTEM	7
2.6. MEASUREMENT INSTRUMENTS LIST	8
3. ANTENNA REQUIREMENT	9
4. RADIATED EMISSION	10
4.1 LIMITS	10
4.2 MEASUREMENT PROCEDURE	10
4.3 TEST SETUP	11
4.4 TEST RESULT (Worst Modulation: GFSK)	13
5. BAND EDGE EMISSION	25
5.1. MEASUREMENT PROCEDURE	25
5.2. TEST SET-UP	25
5.3. TEST RESULT	26
6. 6DB BANDWIDTH	30
6.1. TEST PROCEDURE	30
6.2. SUMMARY OF TEST RESULTS/PLOTS	30
7. CONDUCTED OUTPUT POWER	32
7.1. MEASUREMENT PROCEDURE	32
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	32
7.3. LIMITS AND MEASUREMENT RESULT	33
8. CONDUCTED SPURIOUS EMISSION	35
8.1. MEASUREMENT PROCEDURE	35
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	35
8.3. LIMITS AND MEASUREMENT RESULT	35
9. CONDUCTED OUTPUT POWER SPECTRAL DENSITY	39
9.1 MEASUREMENT PROCEDURE	39
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	39
9.3 LIMITS AND MEASUREMENT RESULT	39
10. LINE CONDUCTED EMISSION TEST	42



<b>Table of Contents</b>	<b>Page</b>
10.1 LIMITS	42
10.2 TEST SETUP	42
10.3 PRELIMINARY PROCEDURE	43
10.4 FINAL TEST PROCEDURE	43
10.5 TEST RESULT OF POWER LINE	44
11. ANTENNA REQUIREMENT	46
12. PHOTOGRAPH OF TEST	47
13. PHOTOGRAPHS OF EUT	50



## 1. TEST SUMMARY

### 1.1. TEST PROCEDURES AND RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247	Output Power	Compliant
§15.247	6 dB Bandwidth	Compliant
§15.247	Conducted Spurious Emission	Compliant
§15.247	Maximum Conducted Output Power SPECTRAL Density	Compliant
§15.209	Radiated Emission	Compliant
§15.247&15.209	Band Edges	Compliant
§15.207	Line Conduction Emission	Compliant
§15.203	Antenna requirement	Compliant

### 1.2. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,  
Fuhai Street, Bao'an District, Shenzhen City, China

Designation Number: : CN1229

Test Firm Registration Number : 616276

### 1.3. MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2



## 2. GENERAL INFORMATION

### 2.1. GENERAL DESCRIPTION OF EUT

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>RF Output Power</b>	-13.36dBm(Max)
<b>Bluetooth Version</b>	V4.2
<b>Modulation</b>	BR <input type="checkbox"/> GFSK, EDR <input type="checkbox"/> $\pi$ /4-DQPSK, <input type="checkbox"/> 8DPSK BLE <input checked="" type="checkbox"/> GFSK
<b>Number of channels</b>	40 for BLE
<b>Hardware Version</b>	D20_V1.2
<b>Software Version</b>	V101
<b>Antenna Designation</b>	Ceramic Antenna
<b>Antenna Gain</b>	2dBi
<b>Power Supply</b>	DC 3.7V by battery
Note: The USB port only beused for charging and be used to transfer data with PC.	



## 2.2. CARRIER FREQUENCY OF CHANNELS

BLE Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2404MHz
	:	:
	38	2478 MHz
	39	2480 MHz


## 2.3. OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK

Note: 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.  
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.  
3. The EUT used fully-charged battery when tested.

## 2.4. DESCRIPTION OF TEST SETUP

Configure 1: (Control continuous TX)

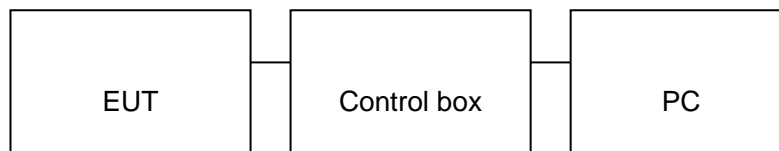

## 2.5. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	smart band	desay	D20	EUT
2	Battery	VDL	351325	Accessory
3	PC	APPLE	A1465	A.E
4	IPOD	APPLE	A1367	A.E
5	Control box	DOFLY	N/A	A.E
6	Adapter	IPRO	NTR-S01	A.E

**2.6. MEASUREMENT INSTRUMENTS LIST****TEST EQUIPMENT OF CONDUCTED EMISSION TEST**

Item	Equipment	Manufacturer	Model No.	Lab Equipment No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year

**TEST EQUIPMENT OF RADIATED EMISSION TEST**

Item	Equipment	Manufacturer	Model No.	Lab Equipment No.	Last Cal.	Cal. Interval
1.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
2.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
4.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
5.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
6.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
7.	Broad-band Horn Antenna	A-INFOMW	LB-180400-K F	HKE-031	Dec. 28, 2017	1 Year
8.	Pre-amplifier	EMCI	EMC051845S E	HKE-015	Dec. 28, 2017	1 Year
9.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
10.	Radiation Cable 1	MXT	HK1	R05	N/A	N/A
11.	Radiation Cable 2	MXT	HK1	R06	N/A	N/A





### **3. ANTENNA REQUIREMENT**

#### **3.1. STANDARD APPLICABLE**

According to FCC 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### **3.2. TEST RESULT**

This product has a permanent antenna, fulfill the requirement of this section.



## 4. RADIATED EMISSION

### 4.1 LIMITS

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB( $\mu\text{V}$ )/m (Peak) 54.0 dB( $\mu\text{V}$ )/m (Average)	


Remark : (1) Emission level  $\text{dB } \mu\text{V} = 20 \log \text{ Emission level } \mu\text{V/m}$   
(2) The smaller limit shall apply at the cross point between two frequency bands.  
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

### 4.2 MEASUREMENT PROCEDURE


1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

### 4.3 TEST SETUP

#### RADIATED EMISSION TEST SETUP BELOW 30MHz

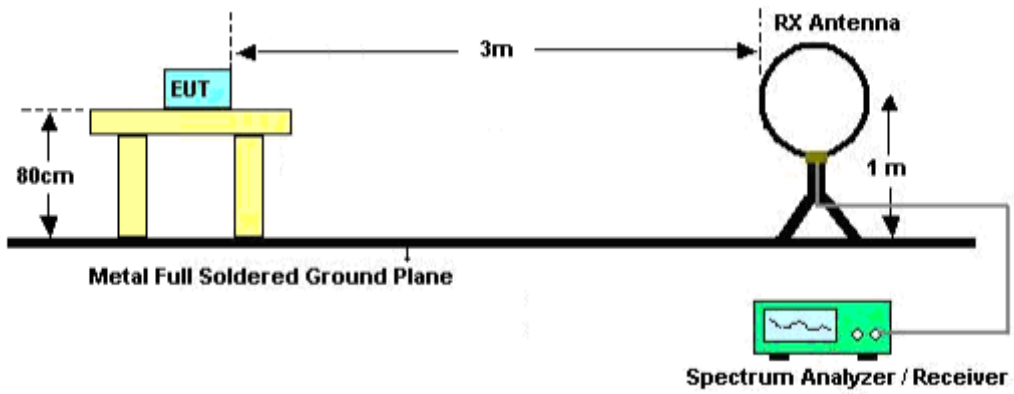


#### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

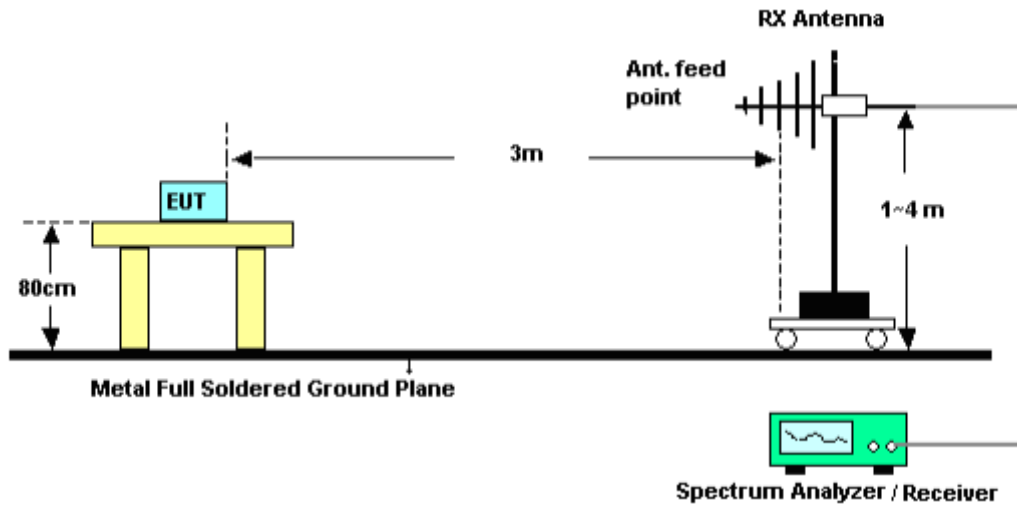



### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

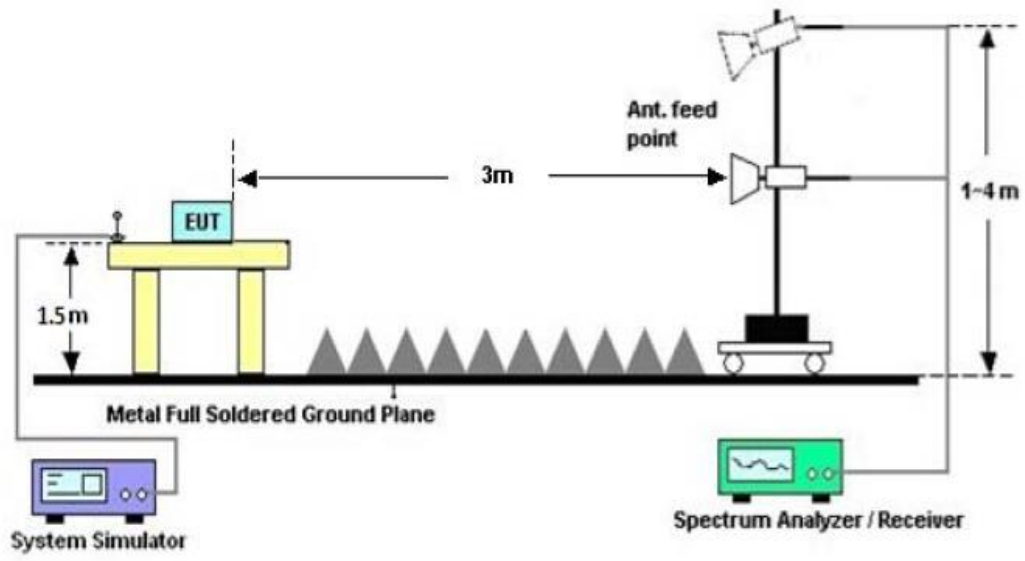




**4.4 TEST RESULT**

**RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHz**

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

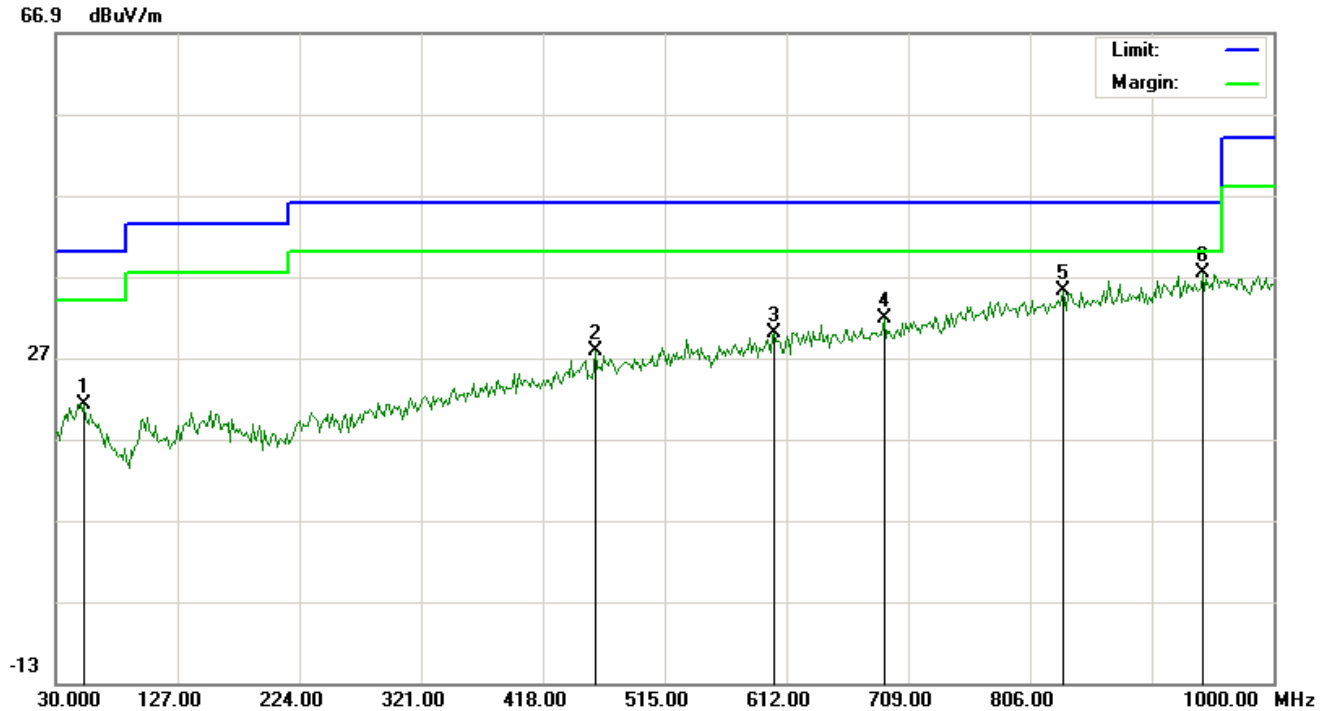


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		52.6333	0.13	21.14	21.27	40.00	-18.73	peak			
2		460.0333	1.64	26.22	27.86	46.00	-18.14	peak			
3		602.3000	0.79	29.25	30.04	46.00	-15.96	peak			
4		689.6000	1.13	30.59	31.72	46.00	-14.28	peak			
5		831.8667	1.48	33.65	35.13	46.00	-10.87	peak			
6	*	943.4167	2.22	35.10	37.32	46.00	-8.68	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

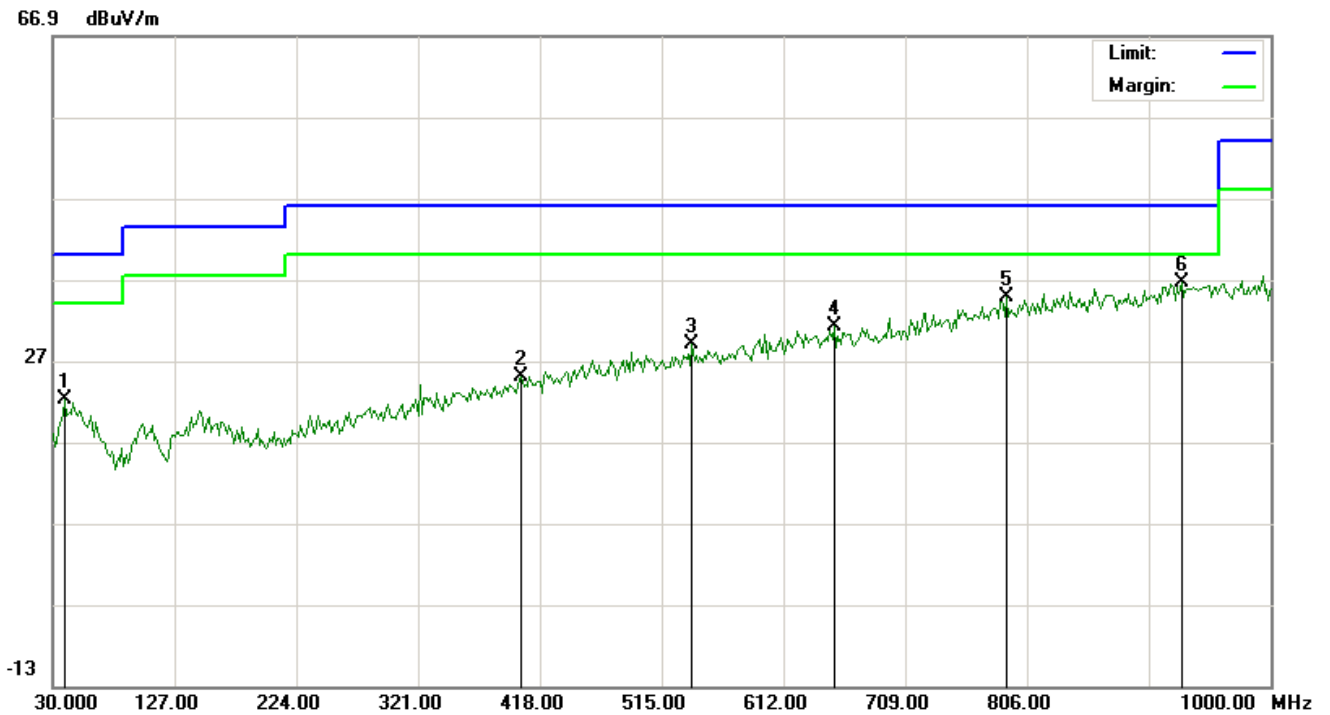

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		39.7000	0.73	21.51	22.24	40.00	-17.76	peak			
2		403.4500	0.14	24.92	25.06	46.00	-20.94	peak			
3		539.2500	1.04	27.95	28.99	46.00	-17.01	peak			
4		652.4167	1.19	30.02	31.21	46.00	-14.79	peak			
5		789.8333	1.84	32.92	34.76	46.00	-11.24	peak			
6	*	928.8667	1.71	34.96	36.67	46.00	-9.33	peak			


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

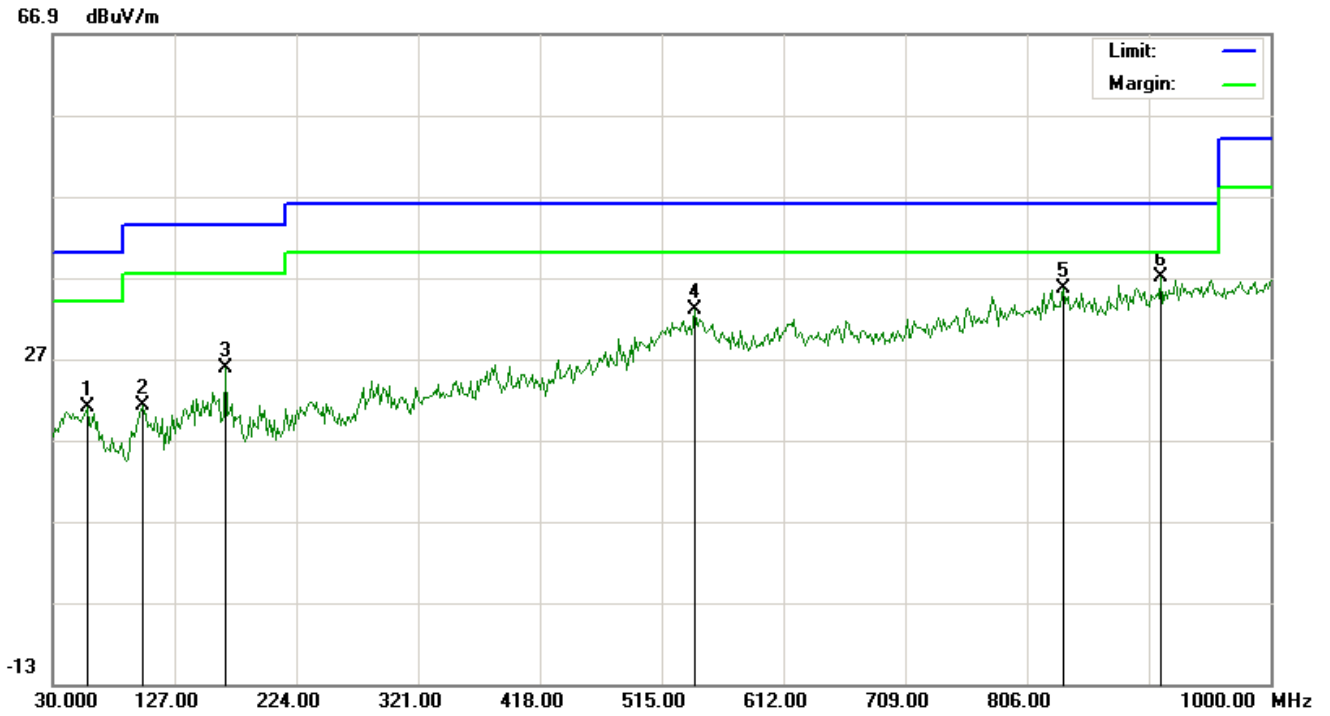


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		57.4833	0.25	20.76	21.01	40.00	-18.99	peak			
2		101.1333	1.37	19.74	21.11	43.50	-22.39	peak			
3		167.4167	6.24	19.57	25.81	43.50	-17.69	peak			
4		540.8667	4.95	27.99	32.94	46.00	-13.06	peak			
5		835.1000	1.88	33.70	35.58	46.00	-10.42	peak			
6	*	912.7000	2.26	34.80	37.06	46.00	-8.94	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

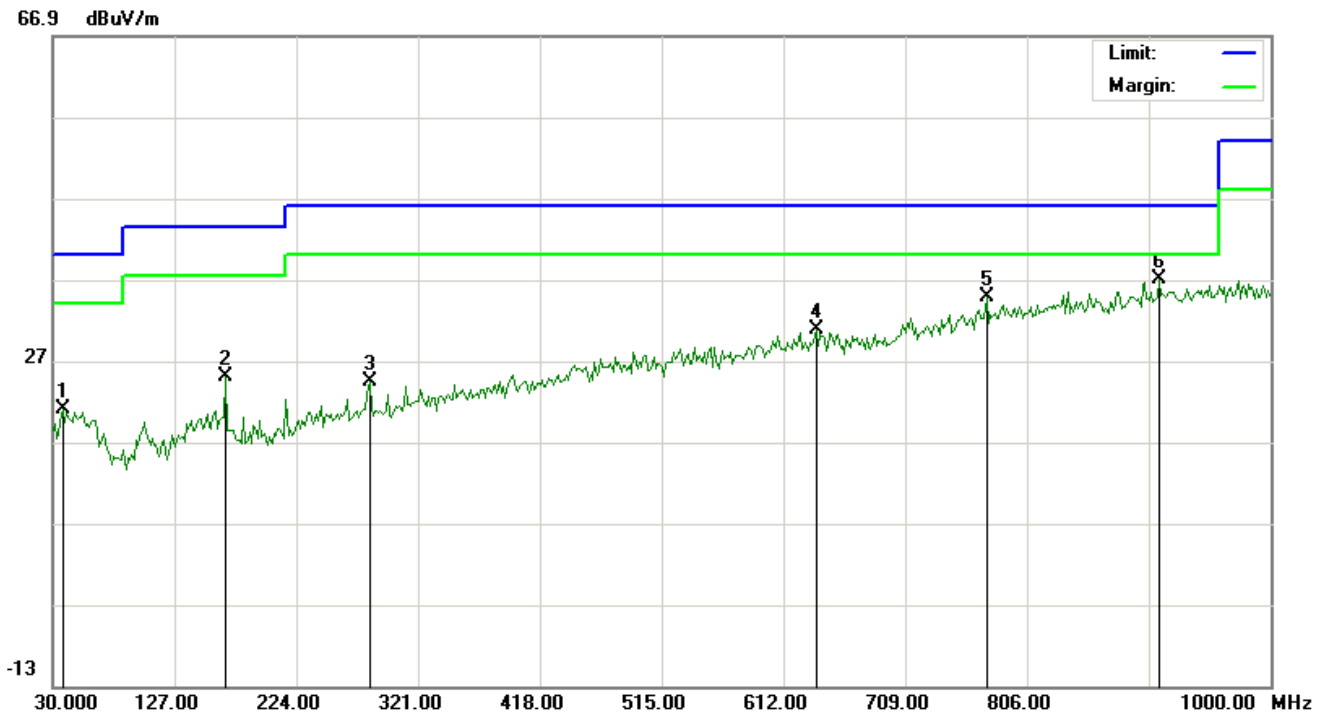

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		38.0833	0.12	20.79	20.91	40.00	-19.09	peak			
2		167.4167	5.45	19.57	25.02	43.50	-18.48	peak			
3		282.2000	3.10	21.39	24.49	46.00	-21.51	peak			
4		637.8667	1.03	29.79	30.82	46.00	-15.18	peak			
5		773.6667	2.31	32.53	34.84	46.00	-11.16	peak			
6	*	911.0833	2.26	34.78	37.04	46.00	-8.96	peak			

**RESULT: PASS**


**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.





RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

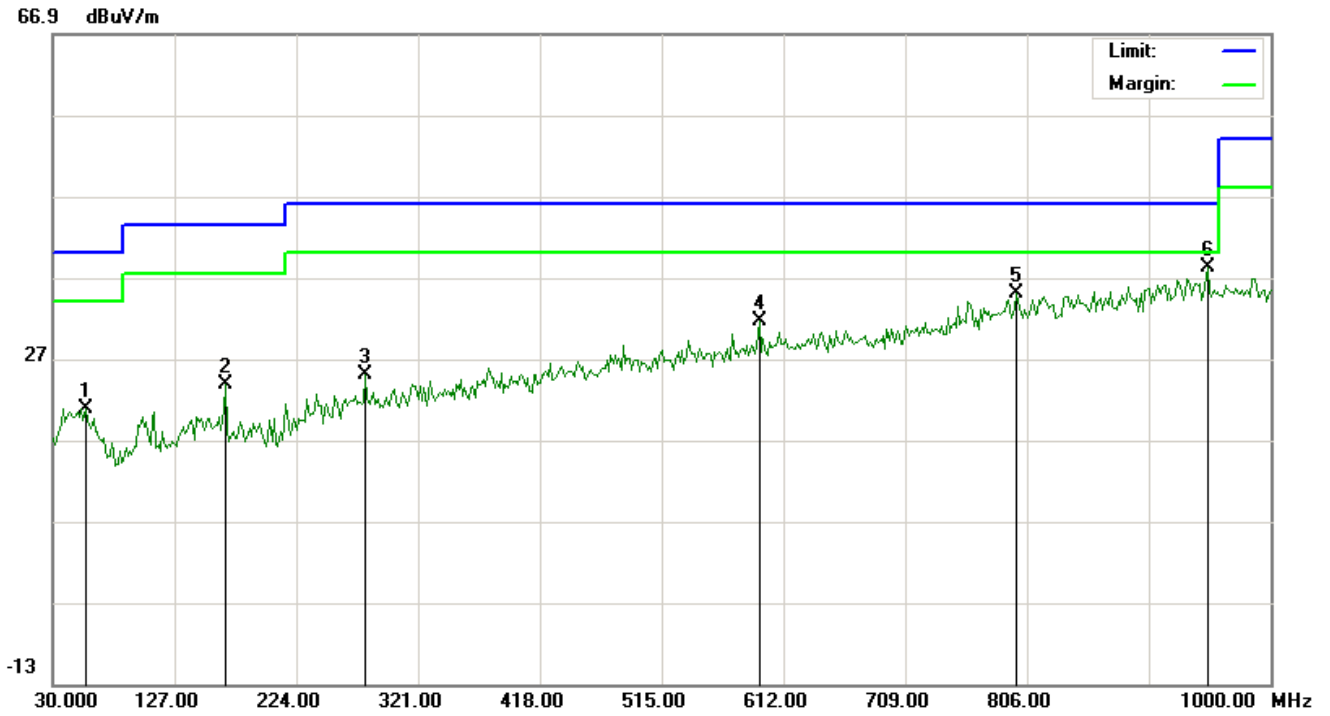


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		55.8667	-0.01	20.89	20.88	40.00	-19.12	peak			
2		167.4167	4.29	19.57	23.86	43.50	-19.64	peak			
3		278.9667	3.59	21.33	24.92	46.00	-21.08	peak			
4		592.6000	2.45	29.06	31.51	46.00	-14.49	peak			
5		797.9167	1.96	33.12	35.08	46.00	-10.92	peak			
6	*	949.8833	2.95	35.17	38.12	46.00	-7.88	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

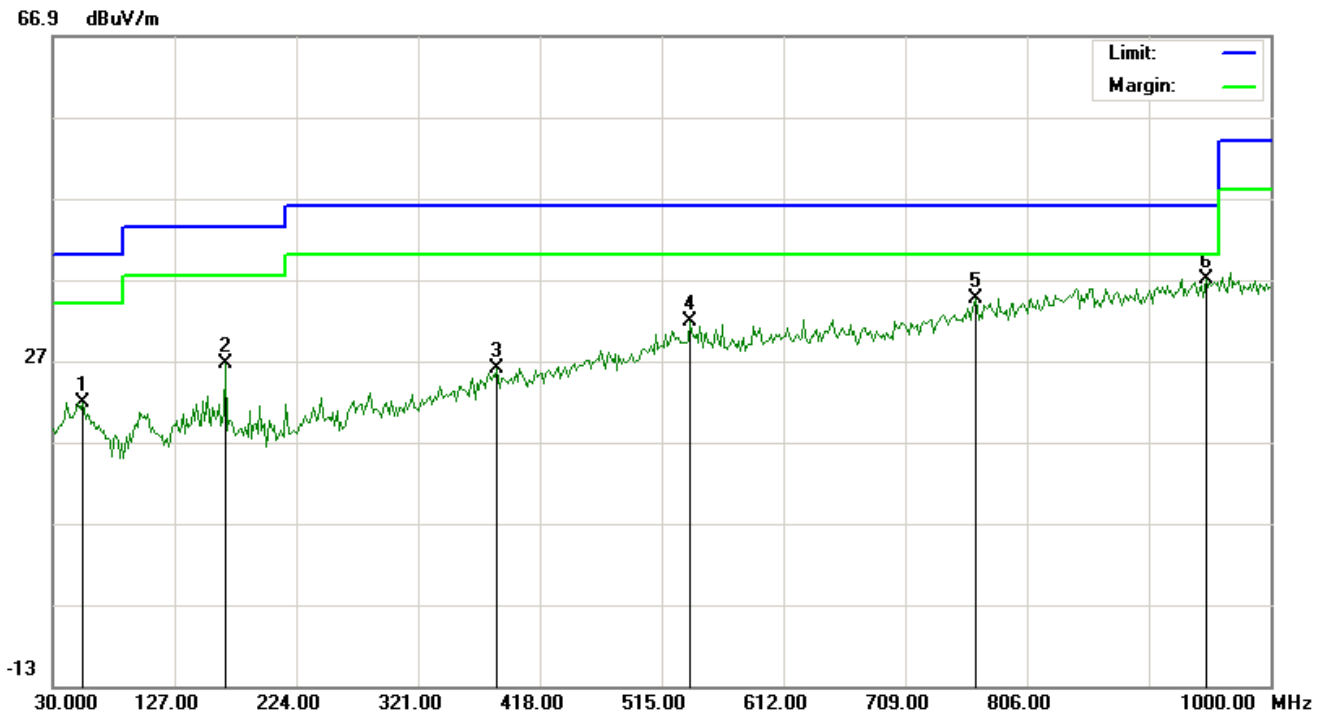

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		54.2500	0.83	21.01	21.84	40.00	-18.16	peak			
2		167.4167	7.07	19.57	26.64	43.50	-16.86	peak			
3		384.0500	1.75	24.25	26.00	46.00	-20.00	peak			
4		537.6332	3.82	27.92	31.74	46.00	-14.26	peak			
5		765.5833	2.34	32.34	34.68	46.00	-11.32	peak			
6	*	948.2667	1.84	35.15	36.99	46.00	-9.01	peak			

**RESULT: PASS**


**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



**RADIATED EMISSION ABOVE 1GHz**

**RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL**

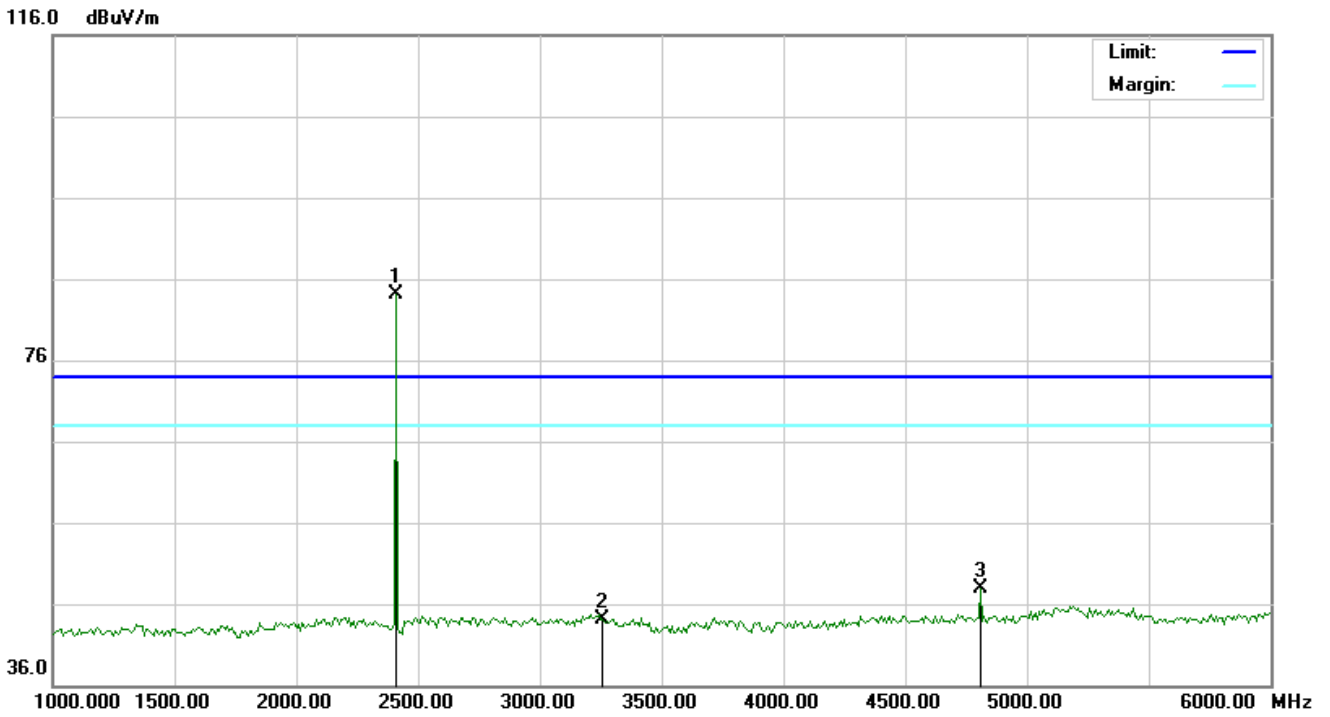


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	73.83	10.32	84.15	74.00	10.15	peak			
2		3254.000	32.20	11.88	44.08	74.00	-29.92	peak			
3		4804.000	40.21	7.69	47.90	74.00	-26.10	peak			

**RESULT: PASS**



RADIATED EMISSION TEST-(ABOVE 1GHz)-LOW CHANNEL-VERTICAL

116.0 dBuV/m

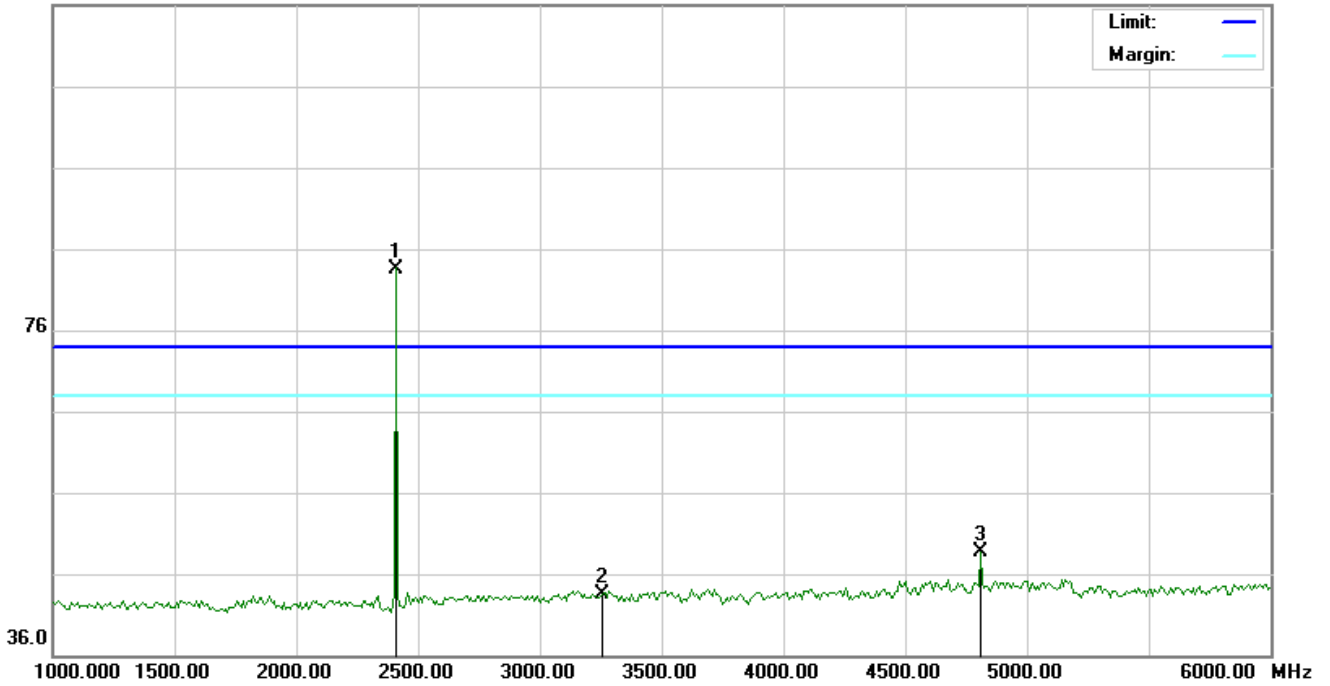

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2402.000	73.20	10.32	83.52	74.00	9.52	peak			
2		3256.000	31.56	11.88	43.44	74.00	-30.56	peak			
3		4804.000	41.05	7.69	48.74	74.00	-25.26	peak			


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The “Factor” value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST-(ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

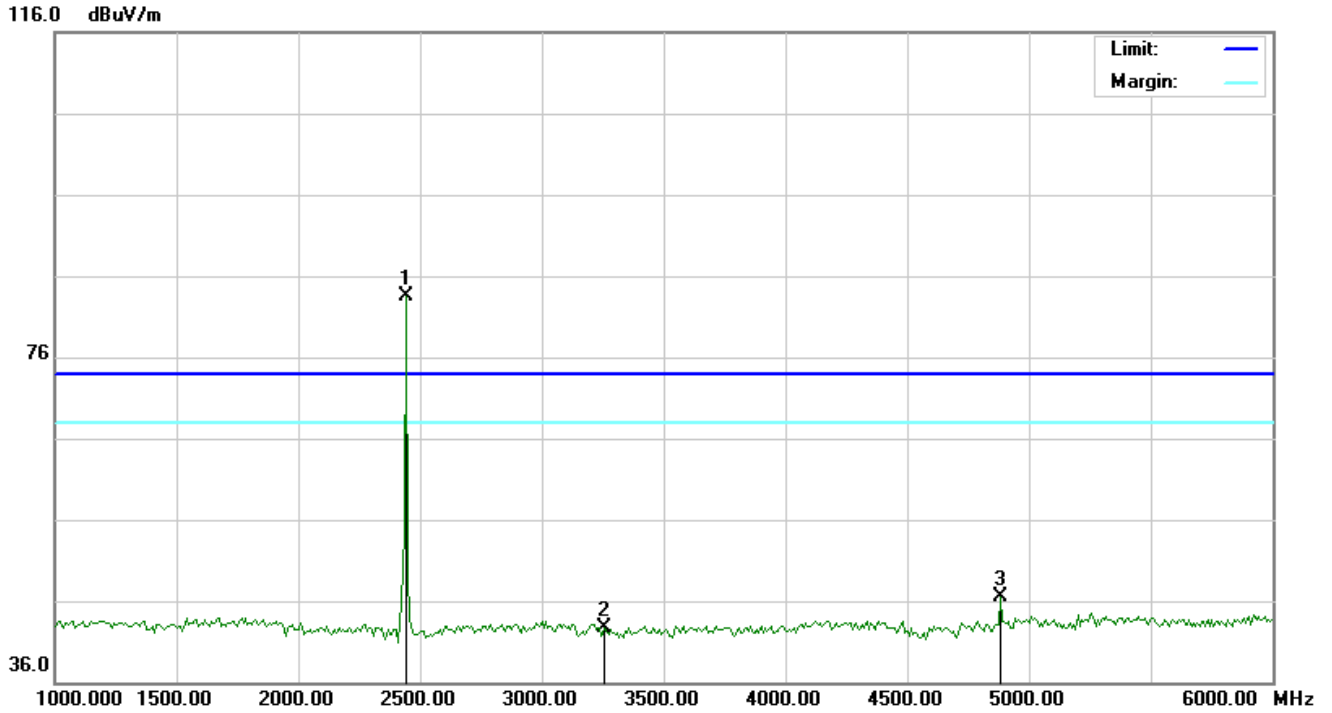


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2440.000	73.23	10.36	83.59	74.00	9.59	peak			
2		3256.000	30.73	11.88	42.61	74.00	-31.39	peak			
3		4880.000	38.66	7.89	46.55	74.00	-27.45	peak			

**RESULT: PASS**



RADIATED EMISSION TEST-(ABOVE 1GHz)-MIDDLE CHANNEL-VERTICAL

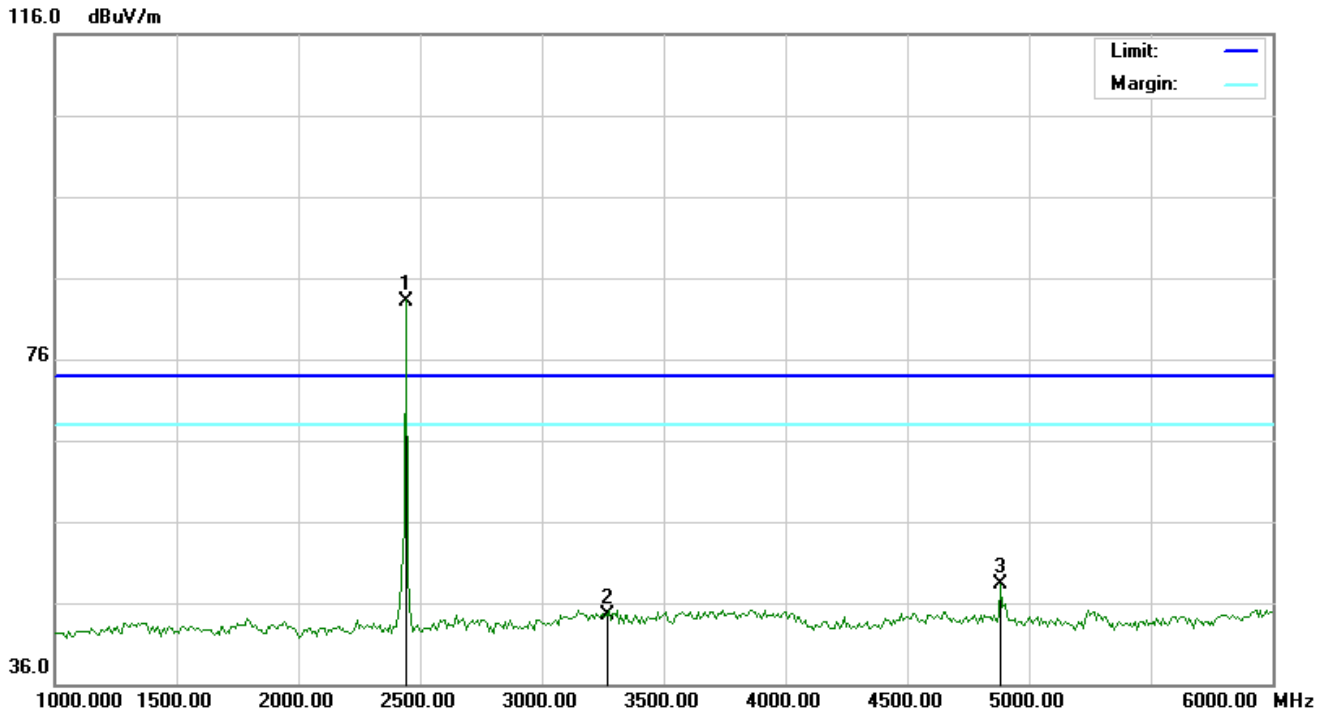

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2440.000	72.79	10.36	83.15	74.00	9.15	peak			
2		3259.000	32.64	11.88	44.52	74.00	-29.48	peak			
3		4880.000	40.39	7.89	48.28	74.00	-25.72	peak			


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST-(ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

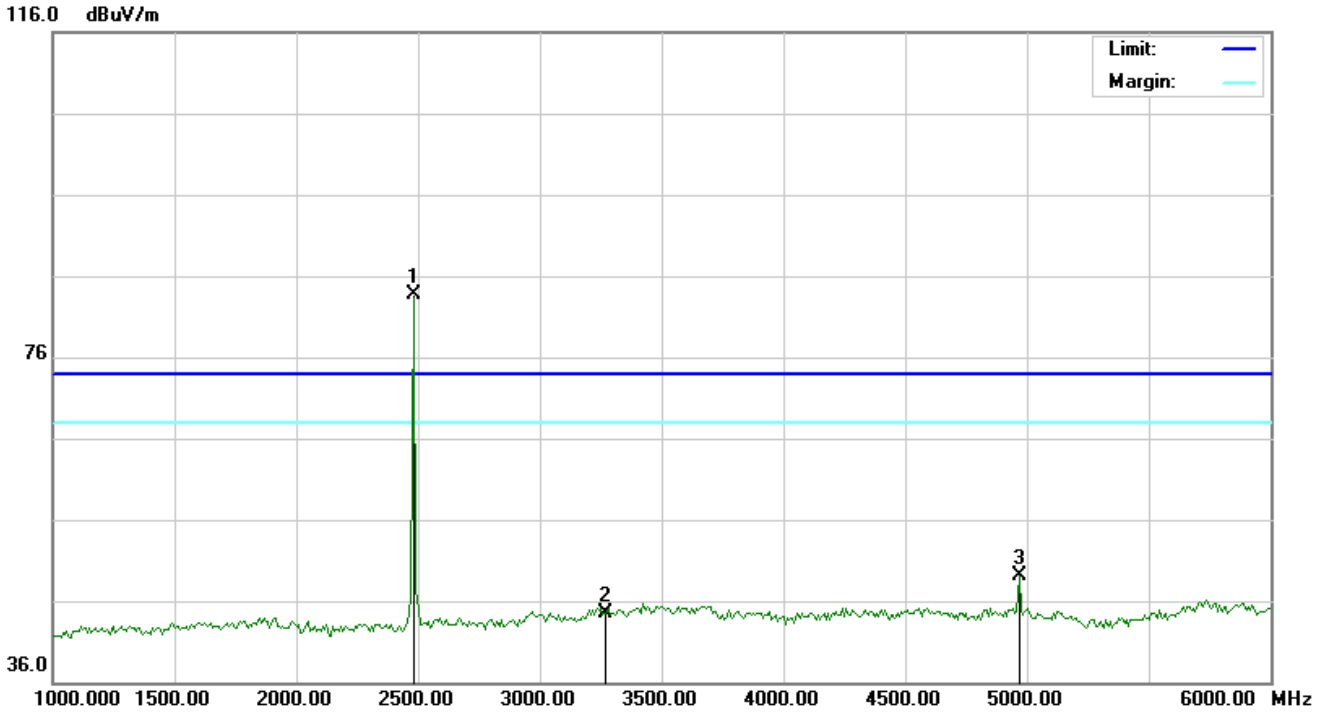


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	73.20	10.41	83.61	74.00	9.61	peak			
2		3264.000	32.60	11.89	44.49	74.00	-29.51	peak			
3		4960.000	41.10	8.09	49.19	74.00	-24.81	peak			

**RESULT: PASS**



RADIATED EMISSION TEST-(ABOVE 1GHz)-HIGH CHANNEL-VERTICAL

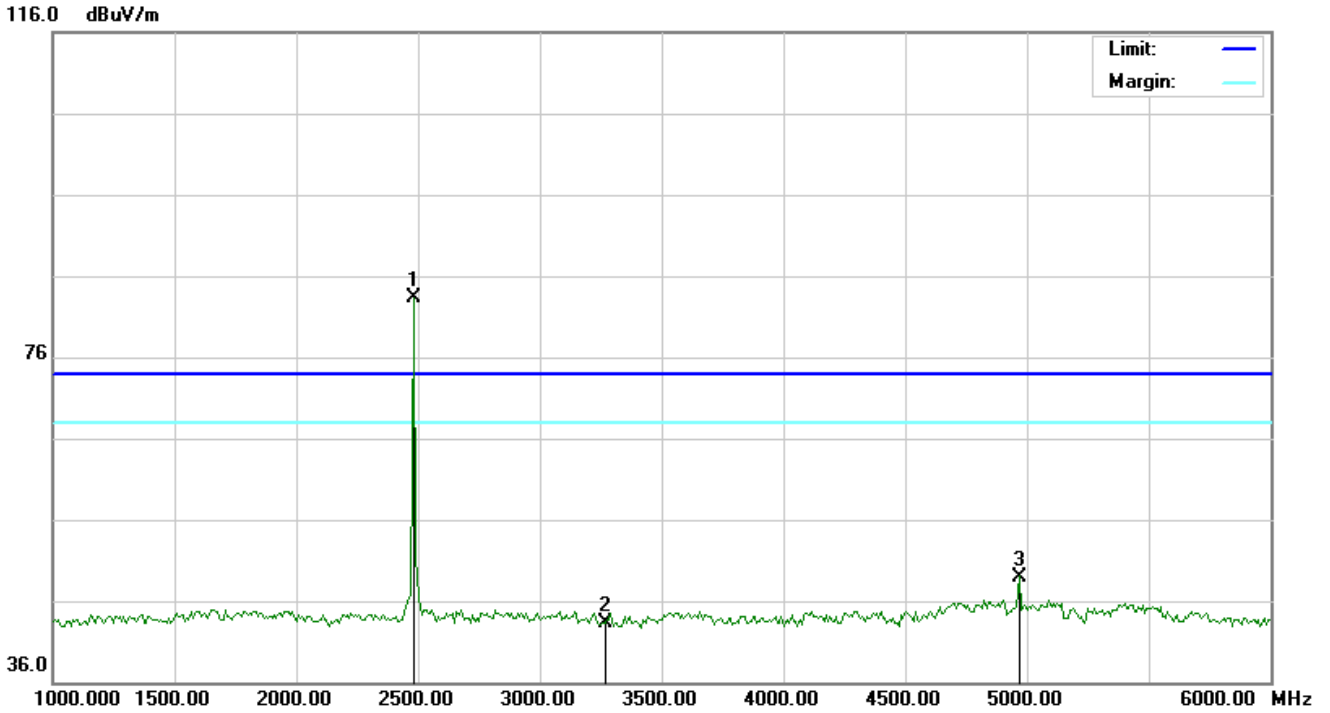

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	72.97	10.41	83.38	74.00	9.38	peak			
2		3265.000	31.46	11.89	43.35	74.00	-30.65	peak			
3		4960.000	40.91	8.09	49.00	74.00	-25.00	peak			

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain,

Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.




## 5. BAND EDGE EMISSION

### 5.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the bottom operation frequency individually.
2. Set SPA Start or Stop Frequency=Operation Frequency,  
For unrestricted band: RBW=100kHz, VBW=300kHz  
For restricted band: RBW=1MHz, VBW=3\*RBW  
Center frequency =Operation frequency
3. The band edges was measured and recorded.


### 5.2. TEST SET-UP

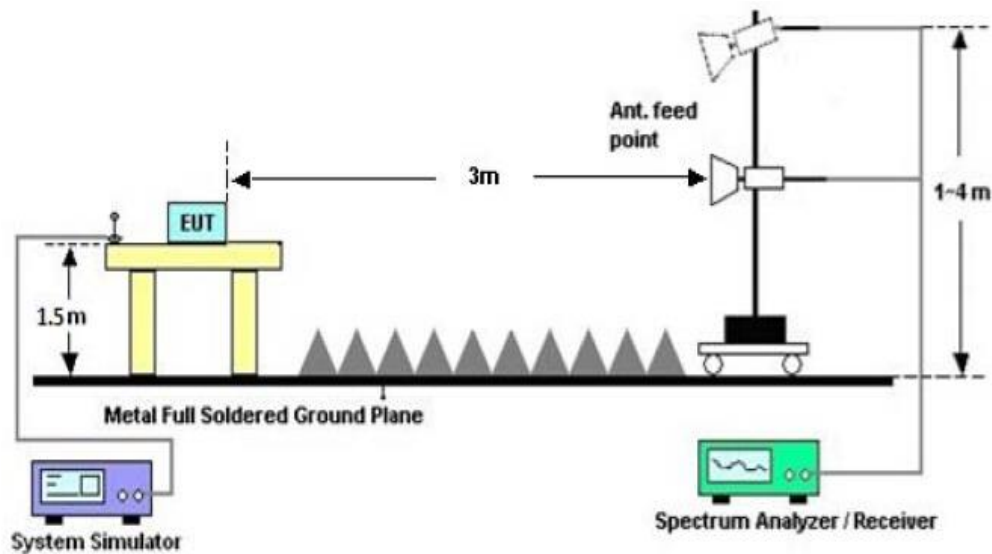



5.3. TEST RESULT


TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Horizontal

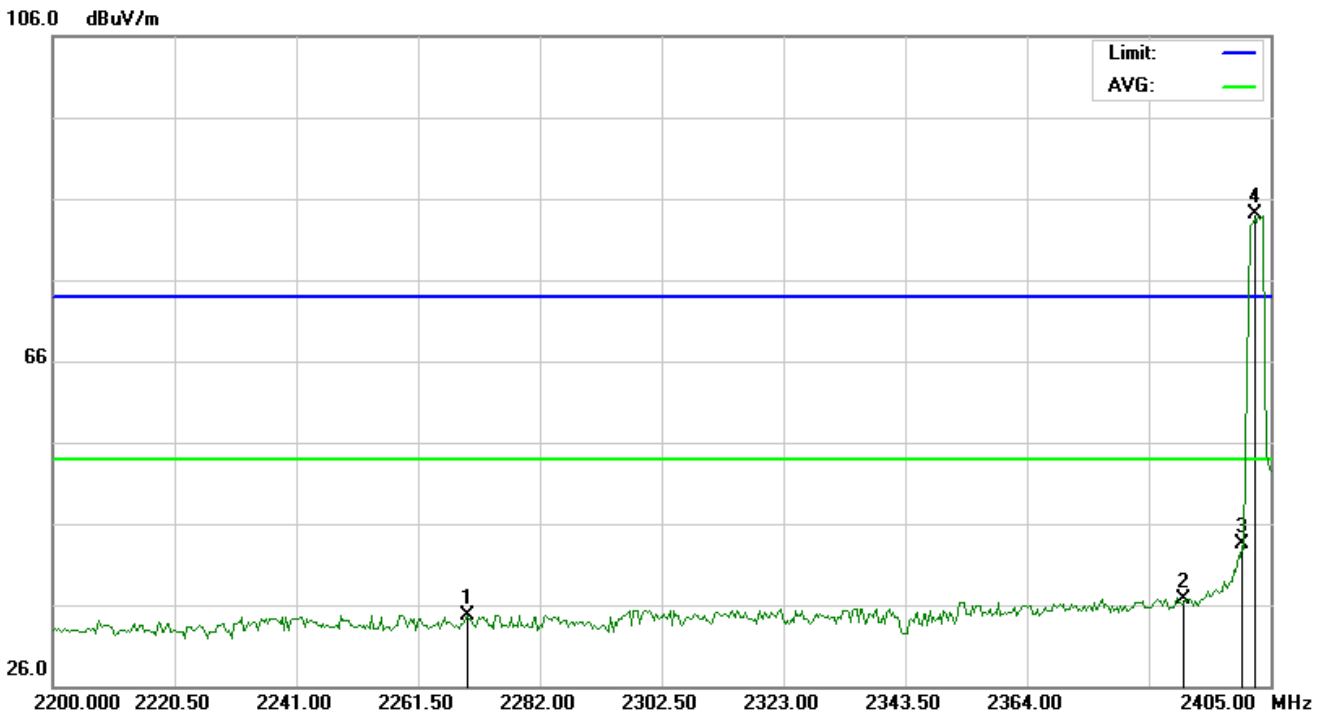

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2269.700	21.31	13.45	34.76	74.00	-39.24	peak			
2		2390.000	23.17	13.46	36.63	74.00	-37.37	peak			
3		2400.000	29.94	13.46	43.40	74.00	-30.60	peak			
4	*	2402.000	70.59	13.46	84.05	74.00	10.05	peak			



TEST PLOT OF BAND EDGE FOR LOW CHANNEL - Vertical

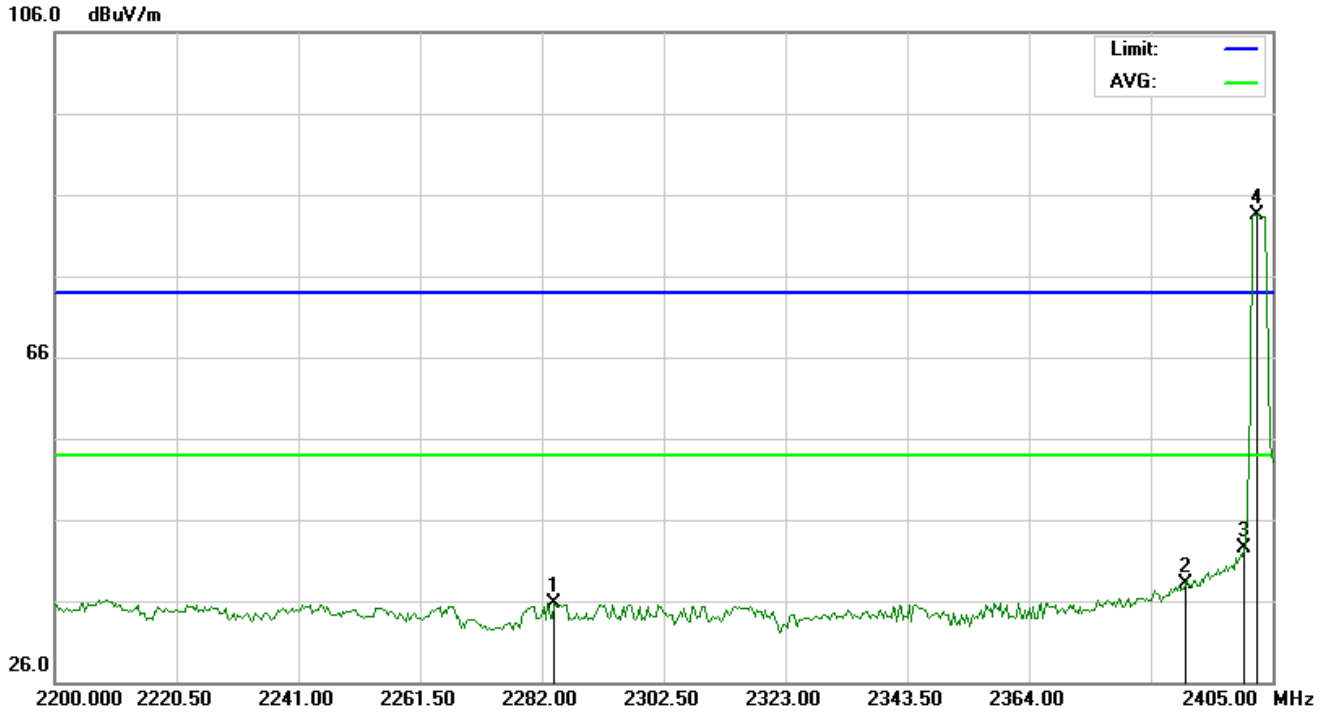


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2284.050	22.22	13.45	35.67	74.00	-38.33	peak			
2		2390.000	24.67	13.46	38.13	74.00	-35.87	peak			
3		2400.000	28.94	13.46	42.40	74.00	-31.60	peak			
4	*	2402.000	69.99	13.46	83.45	74.00	9.45	peak			

**RESULT: PASS**




TEST PLOT OF BAND EDGE FOR HIGH CHANNEL –Horizontal

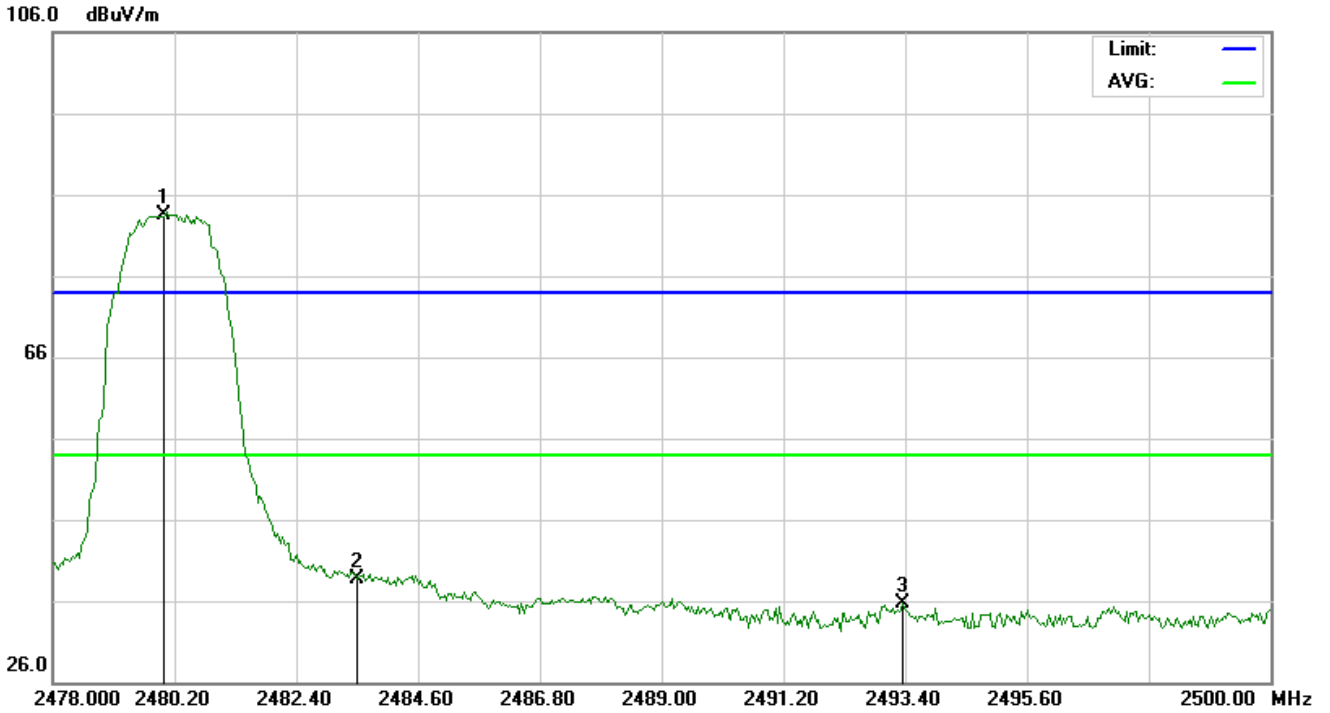

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	69.44	14.11	83.55	74.00	9.55	peak			
2		2483.500	24.66	14.13	38.79	74.00	-35.21	peak			
3		2493.363	21.47	14.19	35.66	74.00	-38.34	peak			



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Vertical

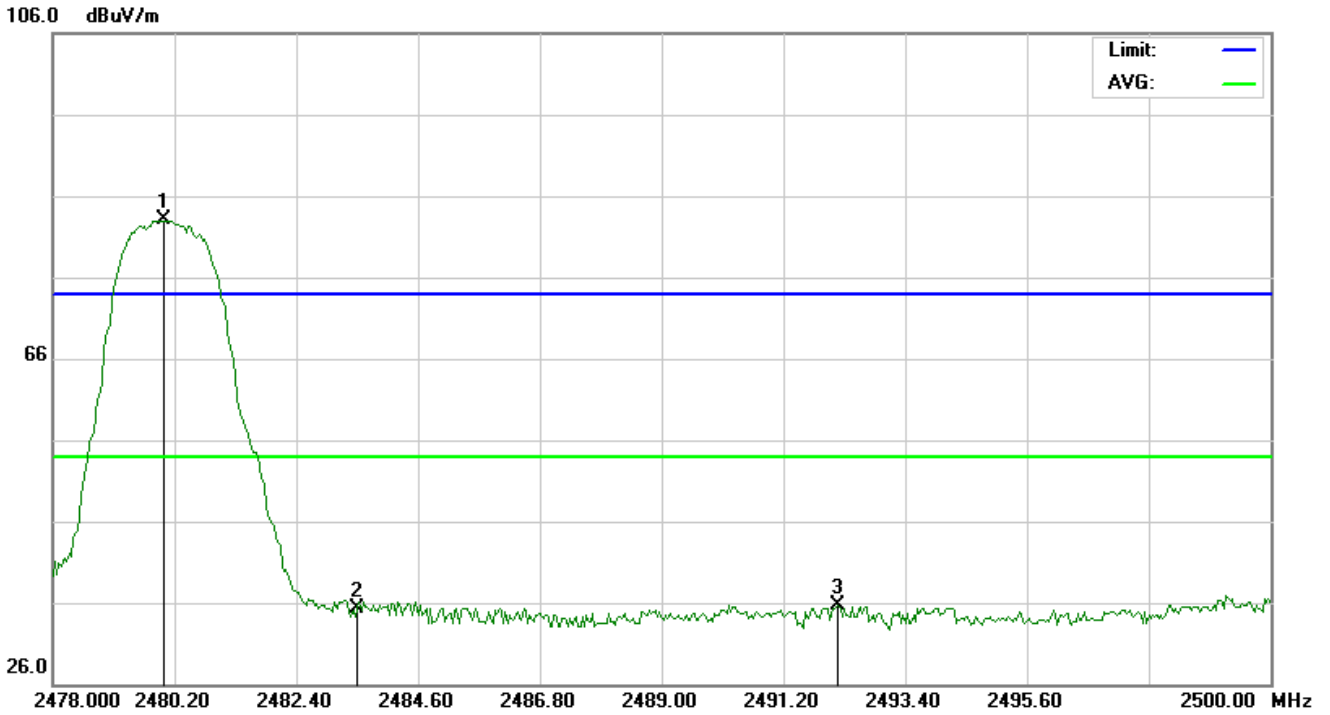

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	2480.000	68.90	14.11	83.01	74.00	9.01	peak			
2		2483.500	21.22	14.13	35.35	74.00	-38.65	peak			
3		2492.190	21.50	14.18	35.68	74.00	-38.32	peak			

RESULT: PASS



## 6. 6DB BANDWIDTH


### 6.1. TEST PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW $\geq$ 3\*RBW.
4. Set SPA Trace 1 Max hold, then View.

### 6.2. SUMMARY OF TEST RESULTS/PLOTS


Channel	6dB Bandwidth (KHz)	Minimum Limit (KHz)	Pass/Fail
Low	693	500KHz	Pass
Middle	681		Pass
High	693		Pass

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

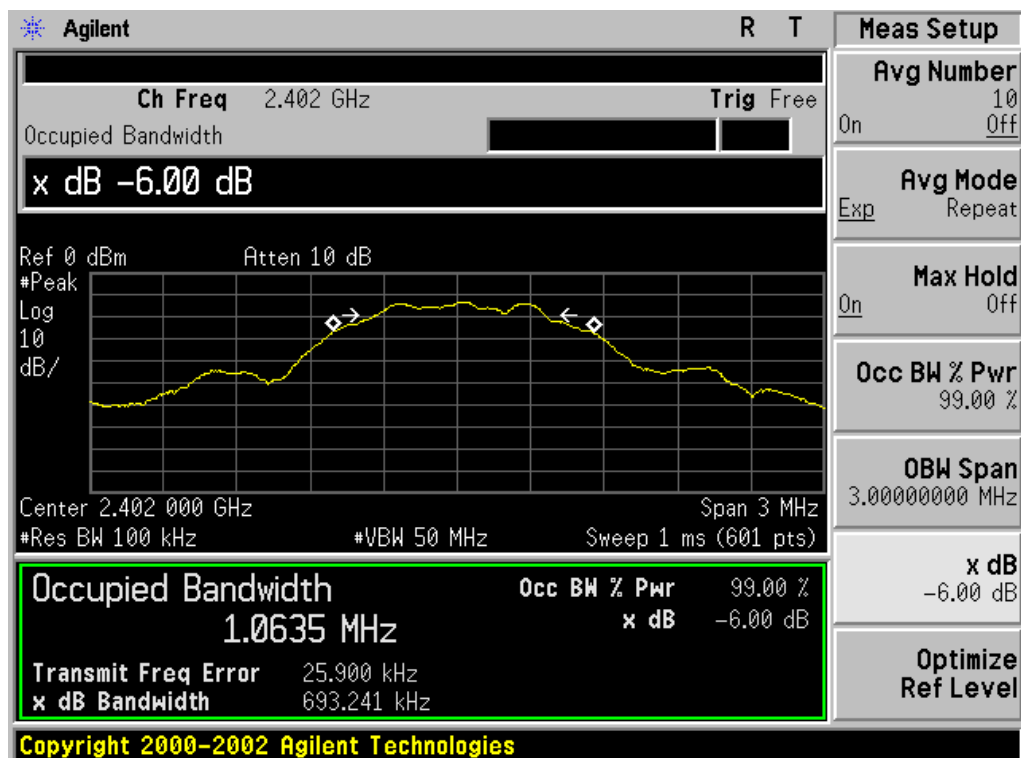




### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

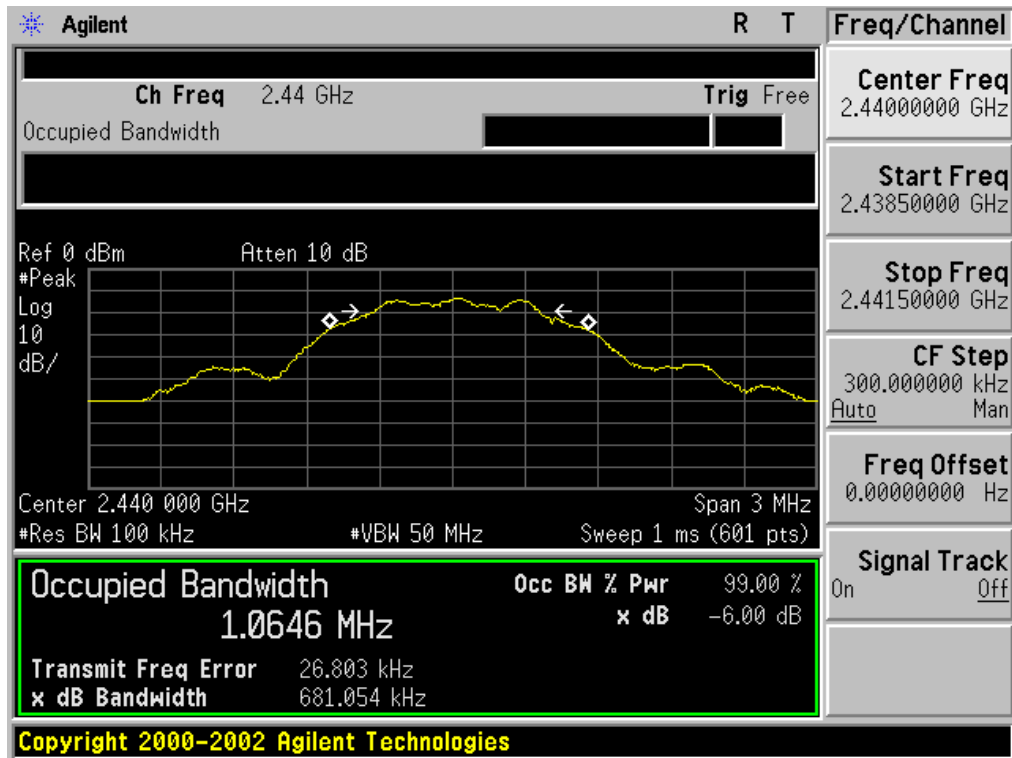

### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

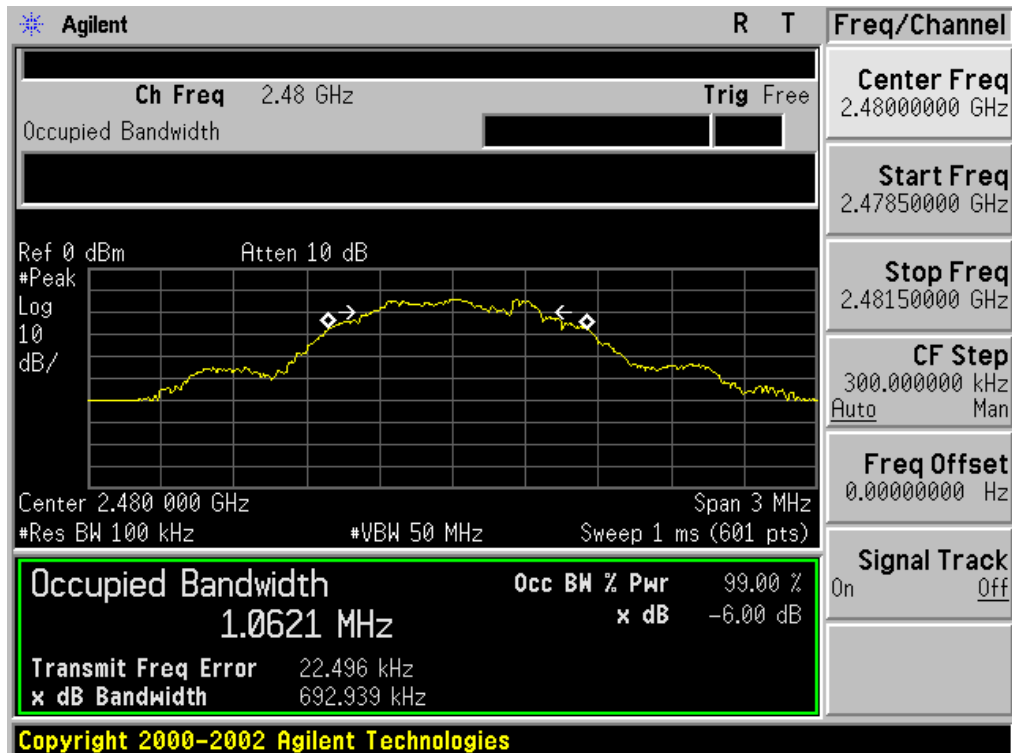




## 7. CONDUCTED OUTPUT POWER

### 7.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
3. Use the following spectrum analyzer settings:
  - a) Set the RBW  $\geq$  DTS bandwidth.
  - b) Set VBW  $\geq$  3 RBW.
  - c) Set span  $\geq$  3 x RBW
  - d) Sweep time = auto couple.
  - e) Detector = peak.
  - f) Trace mode = max hold.
  - g) Allow trace to fully stabilize.
  - h) Use peak marker function to determine the peak amplitude level.
4. Allow the trace to stabilize.
5. Record the result form the Spectrum Analyzer.

### 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

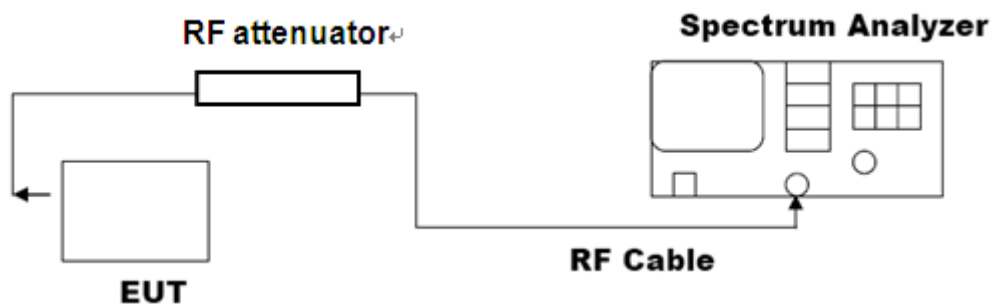






### 7.3. LIMITS AND MEASUREMENT RESULT


Channel	Peak Power (dBm)	Applicable Limits (dBm)	Pass/Fail
Low Channel	-13.36	30	Pass
Middle Channel	-13.53	30	Pass
High Channel	-13.66	30	Pass

The Low Channel Result

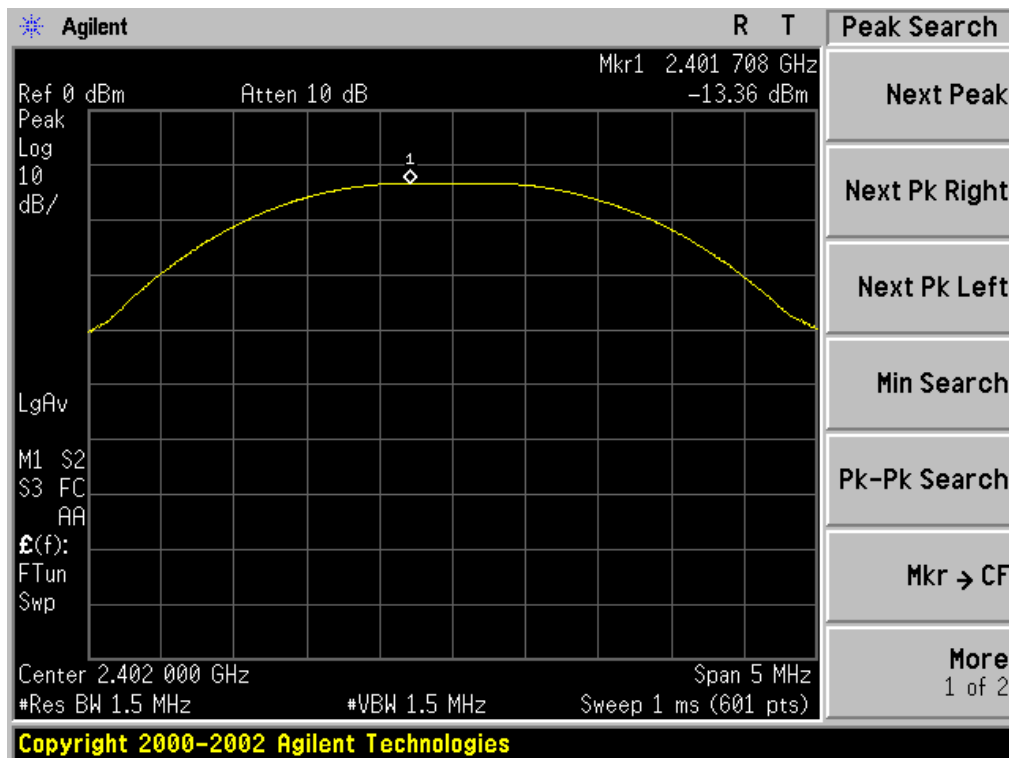




### The Middle Channel Result

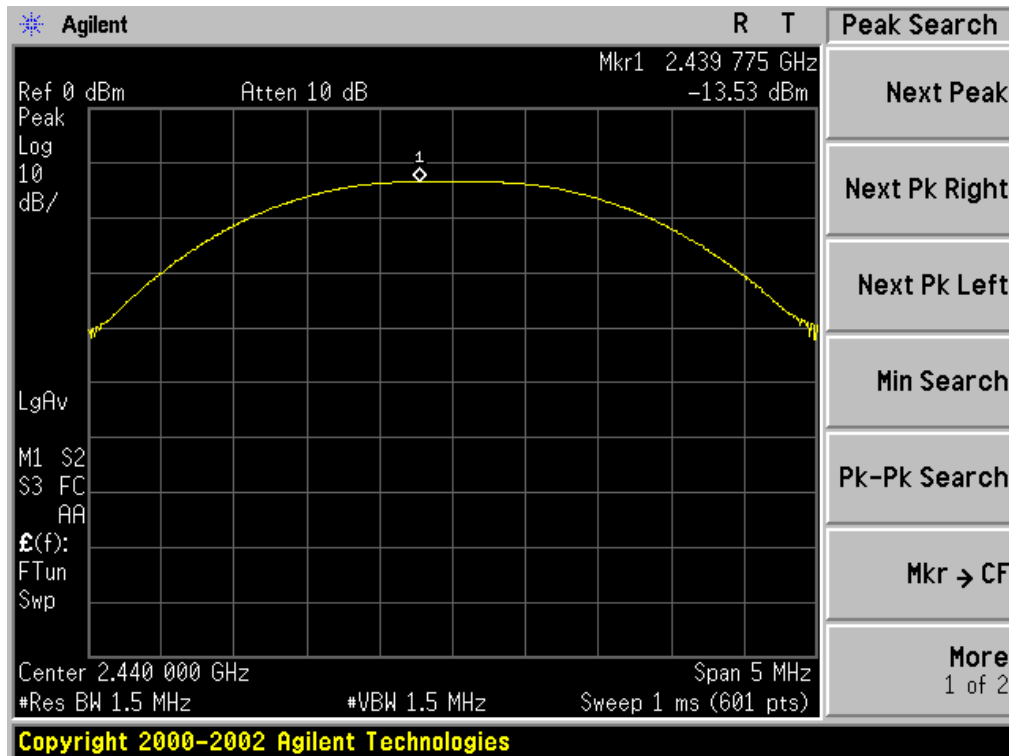

### The High Channel Result

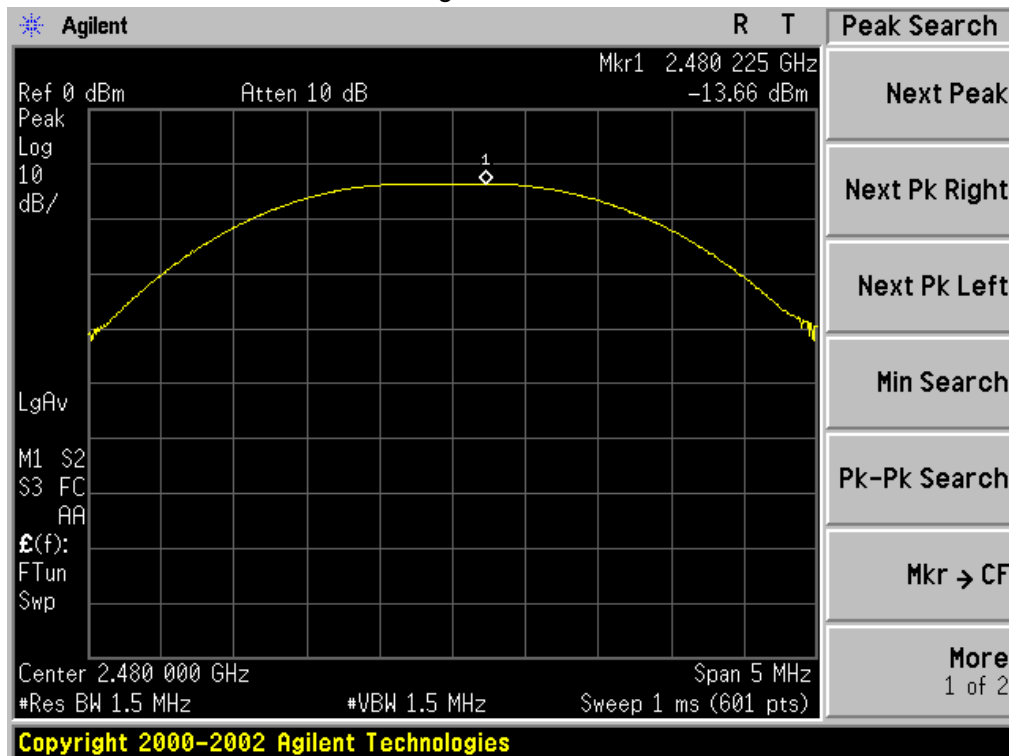


## 8. CONDUCTED SPURIOUS EMISSION

### 8.1. MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.  
RBW = 100kHz; VBW  $\geq$ 3 RBW; Sweep = auto; Detector function = peak.
4. Set SPA Trace 1 Max hold, then View.

### 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


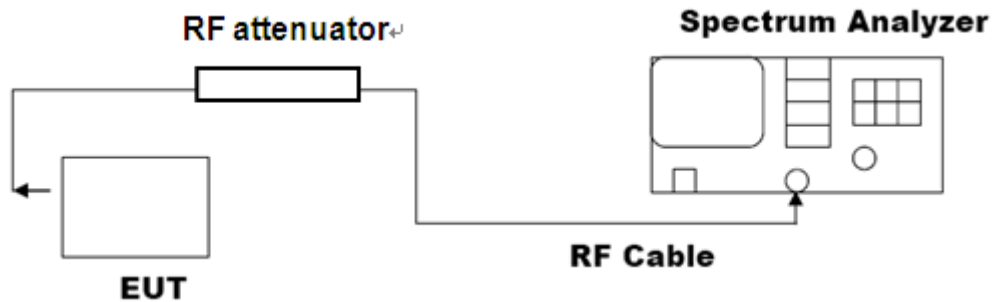


### 8.3. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT		
Applicable Limits	Measurement Result	
	Test Data	Result
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a)	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS
	At least -20dBc than the limit Specified on the TOP Channel	PASS





### TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

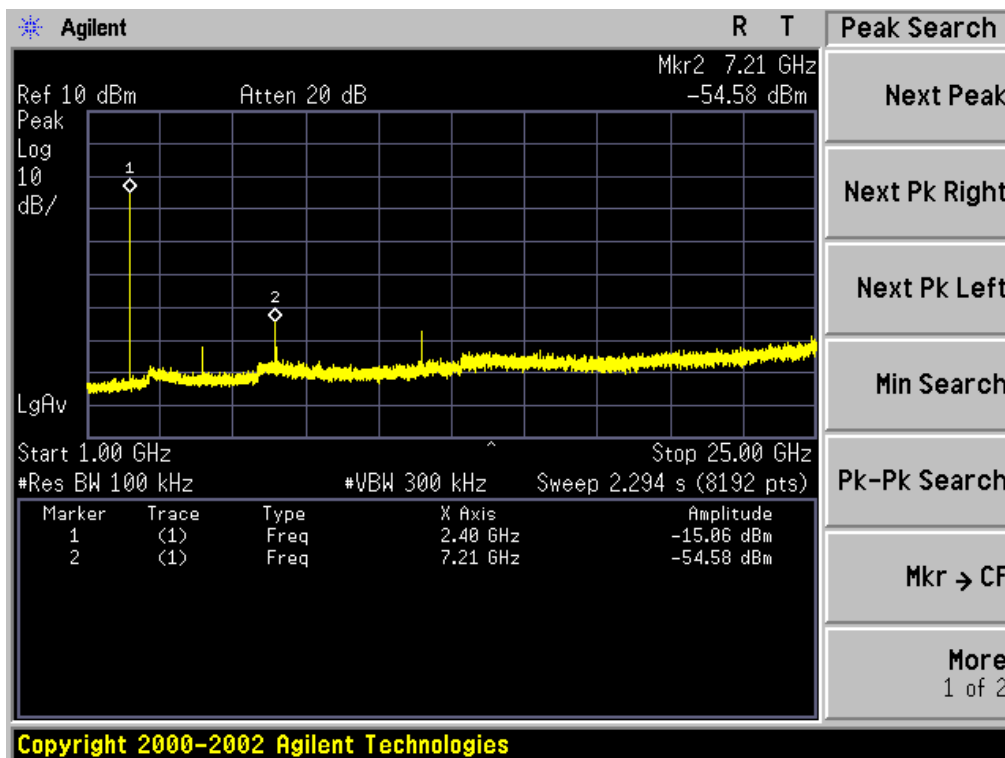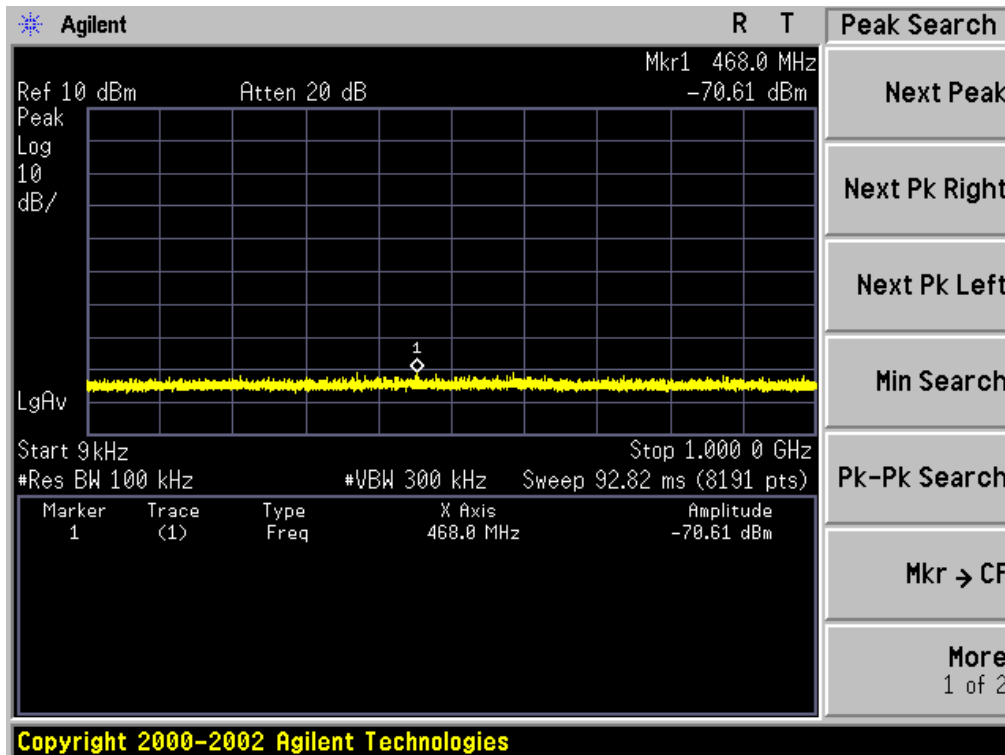





### TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

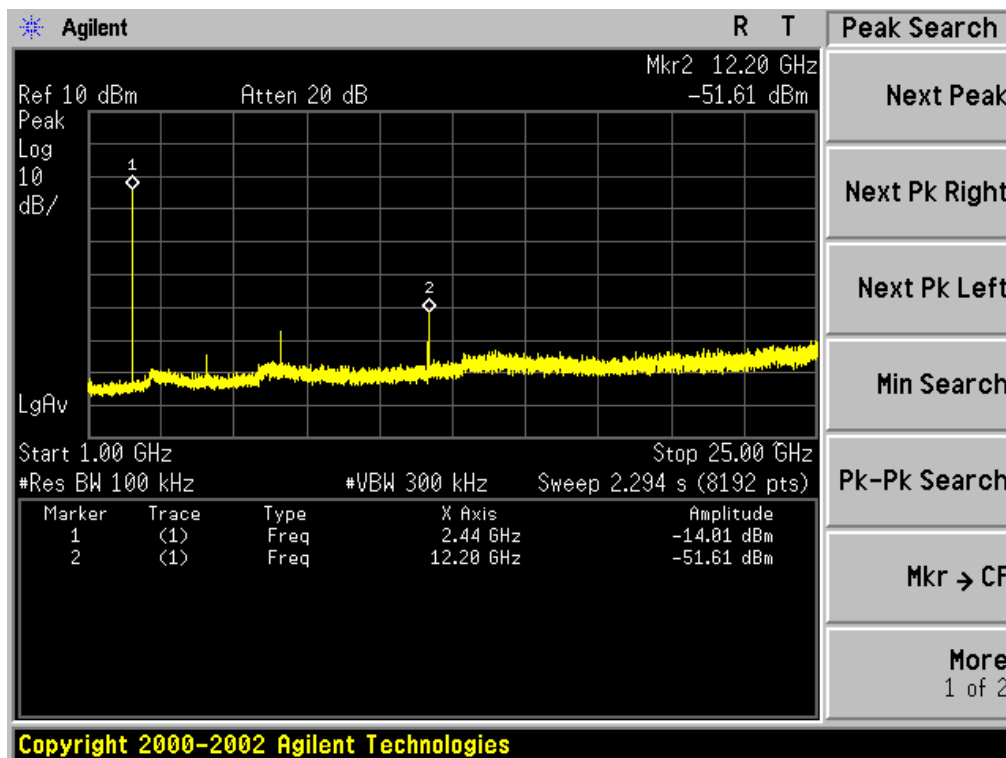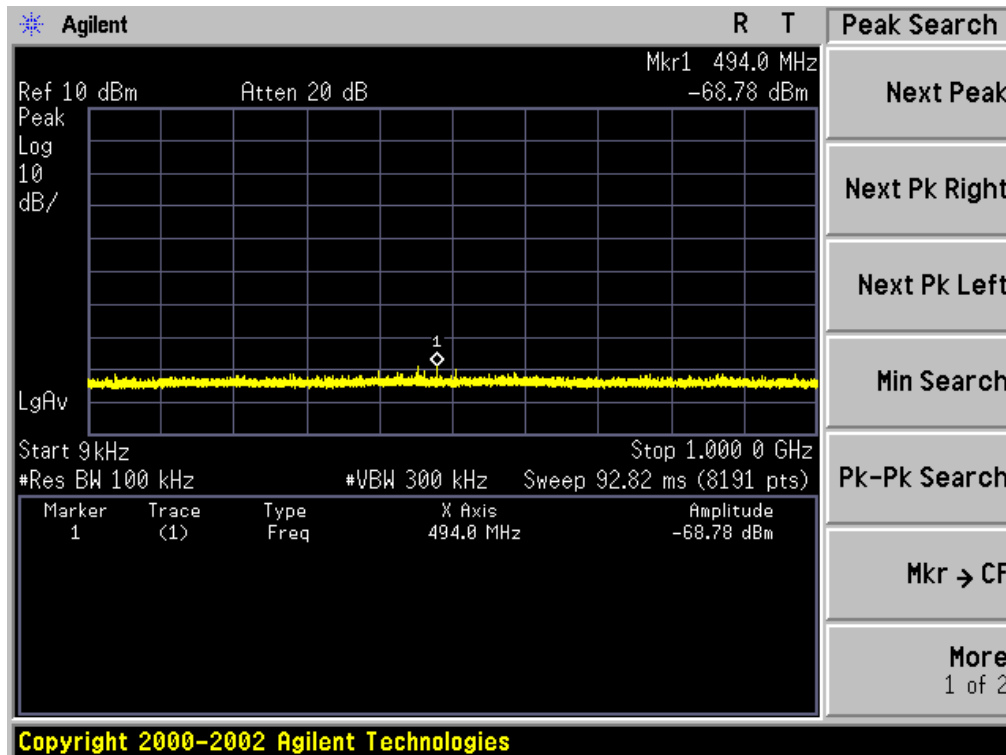



### TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

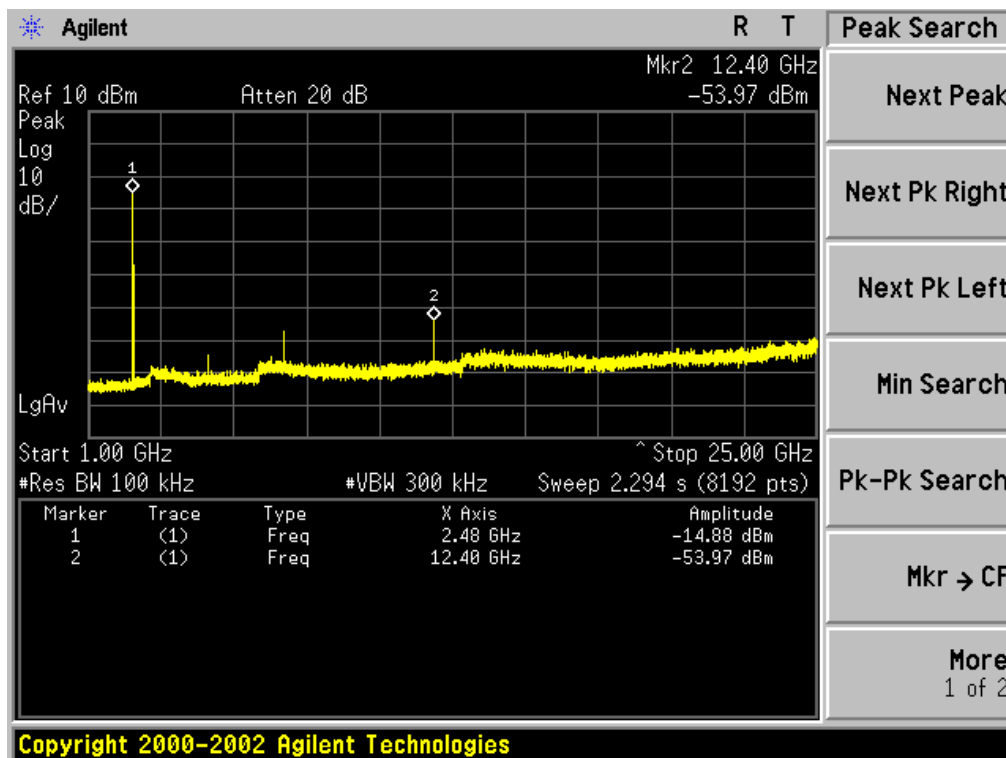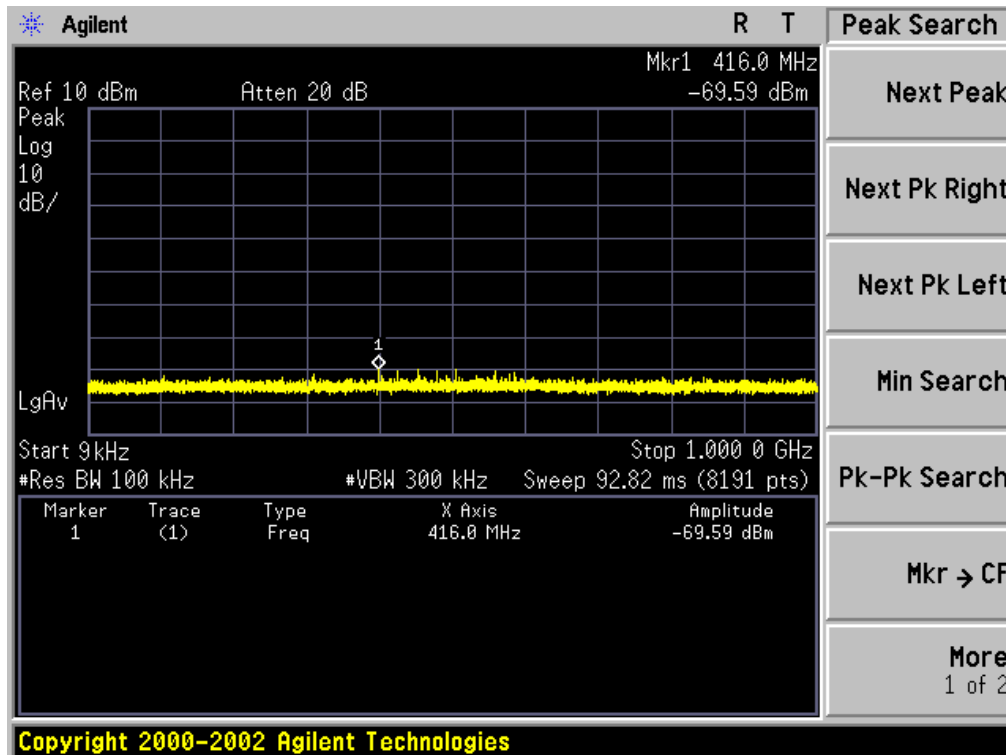




## 9. CONDUCTED OUTPUT POWER SPECTRAL DENSITY

### 9.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the span to 1.5times the DTS bandwidth, RBW:  $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$ , VBW  $\geq 3 * \text{RBW}$
- (4). Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

### 9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

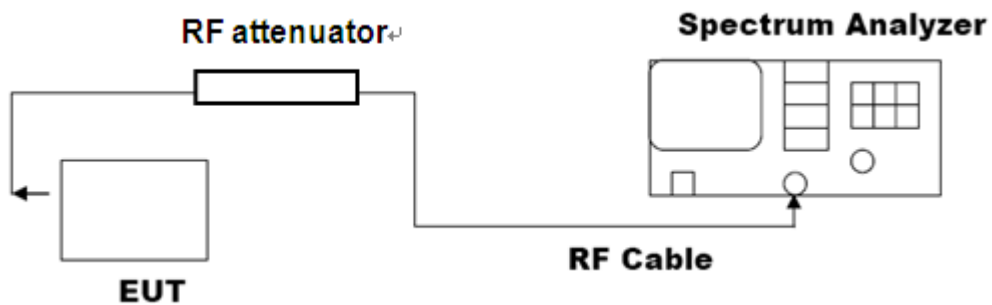


### 9.3 LIMITS AND MEASUREMENT RESULT


Channel No.	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
Low Channel	-30.85	8	Pass
Middle Channel	-31.14	8	Pass
High Channel	-31.28	8	Pass



TEST PLOT OF SPECTRAL DENSITY FOR LOW CHANNEL

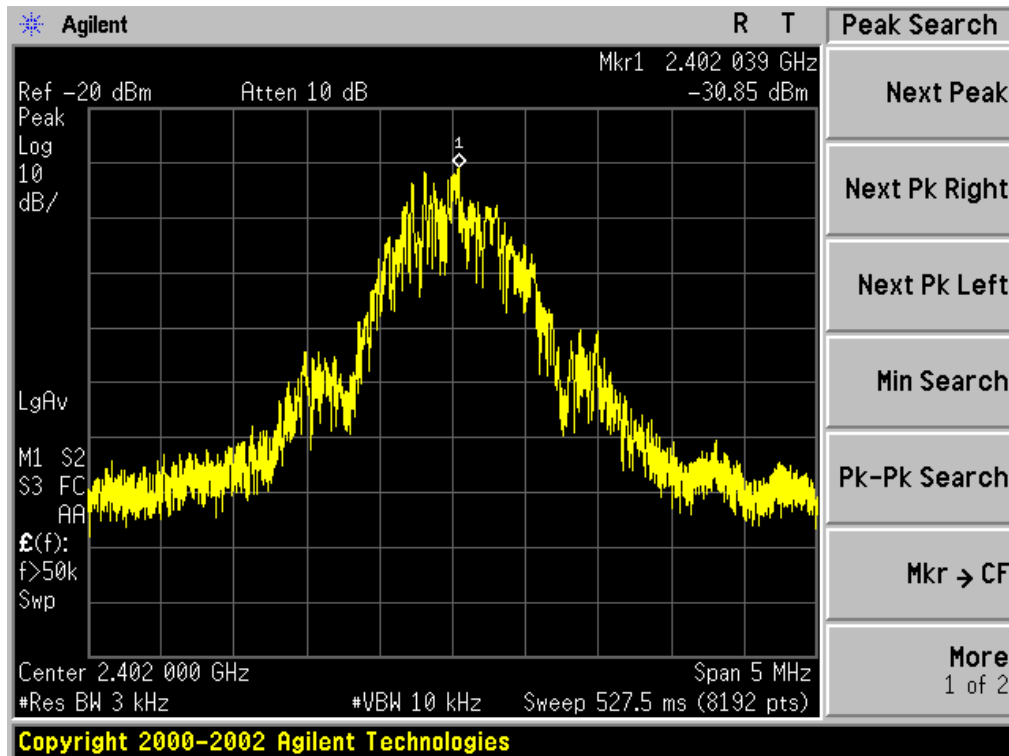


TEST PLOT OF SPECTRAL DENSITY FOR MIDDLE CHANNEL

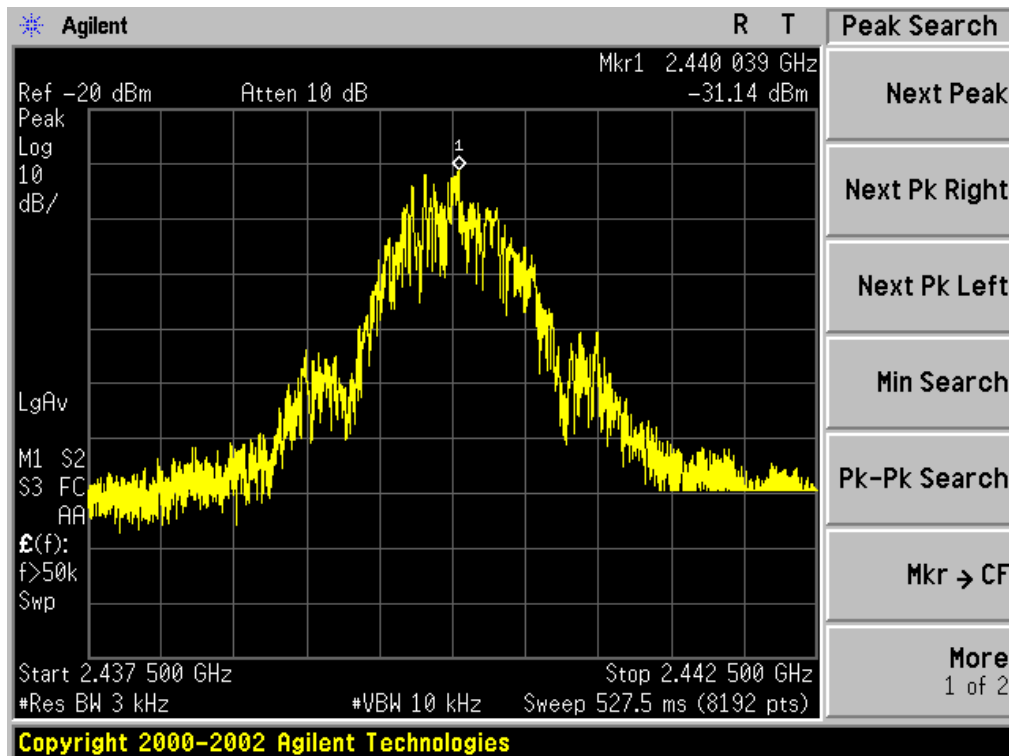





### TEST PLOT OF SPECTRAL DENSITY FOR HIGH CHANNEL

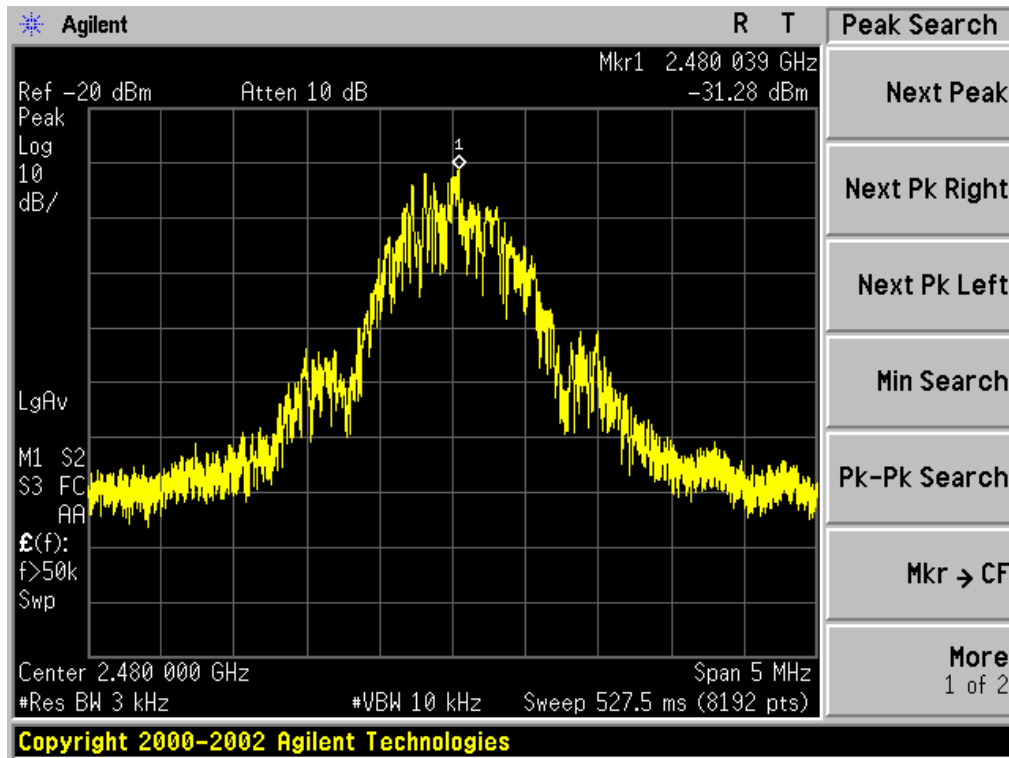

## 10. LINE CONDUCTED EMISSION TEST


### 10.1 LIMITS

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

### 10.2 TEST SETUP

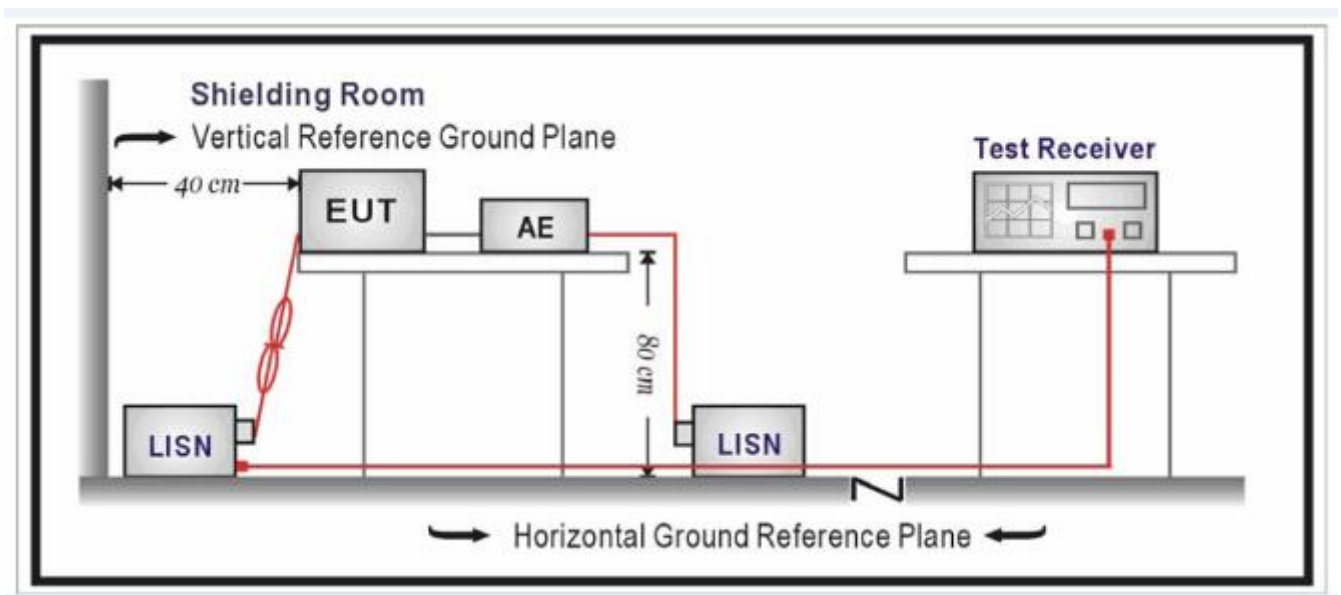



### 10.3 PRELIMINARY PROCEDURE

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.10.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4) All support equipments received AC120V/60Hz power from a LISN, if any.
- 5) The EUT received DC charging voltage by adapter which received 120V/60Hz power by a LISN.
- 6) The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test.  
Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 10.4 FINAL TEST PROCEDURE

- 1) EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.




### 10.5 TEST RESULT OF POWER LINE

By adapter (worst case)

FOR BLE


Line Conducted Emission Test Line 1-L

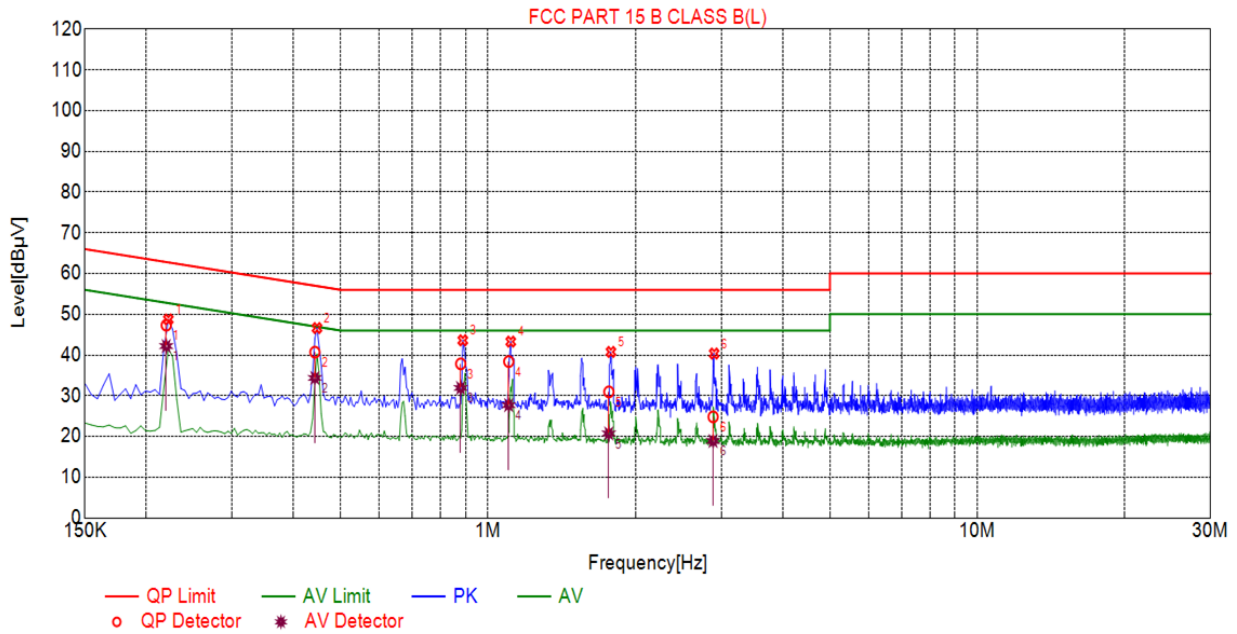

Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]
1	0.2198	10.05	47.33	62.83	15.50	42.19	52.83	10.64
2	0.4425	10.05	40.70	57.01	16.31	34.36	47.01	12.65
3	0.8791	10.06	37.85	56.00	18.15	31.91	46.00	14.09
4	1.1019	10.07	38.40	56.00	17.60	27.69	46.00	18.31
5	1.7657	10.14	30.96	56.00	25.04	20.74	46.00	25.26
6	2.8843	10.21	24.83	56.00	31.17	18.89	46.00	27.11



Line Conducted Emission Test Line 2-N

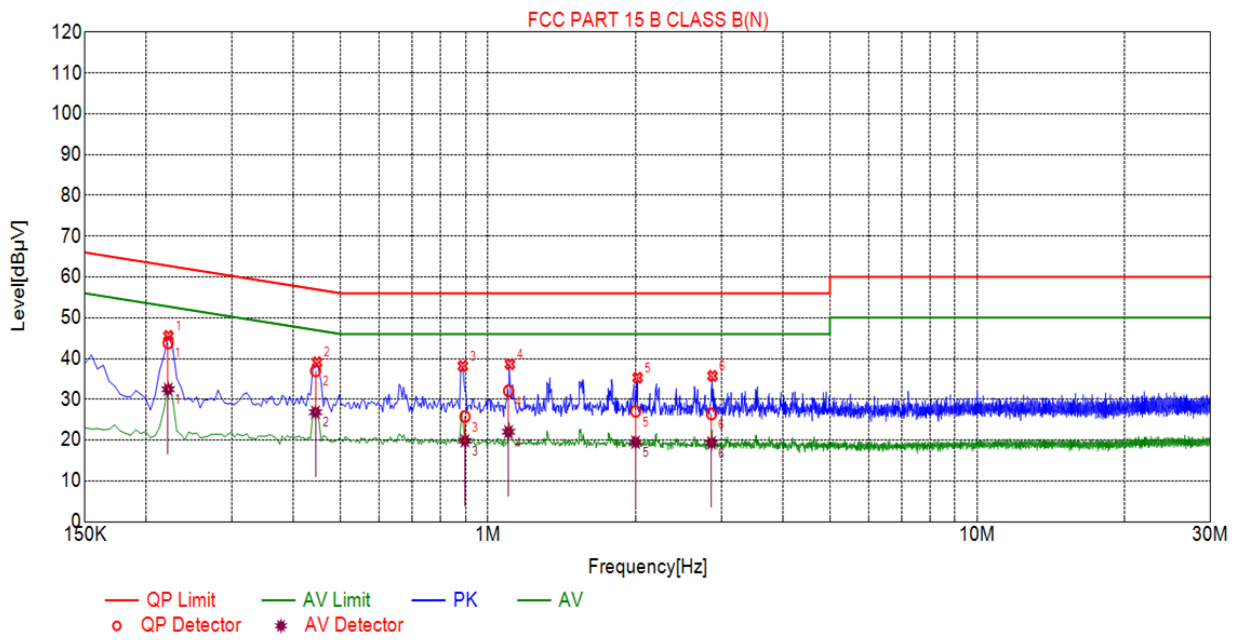

Final Data List								
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]
1	0.2218	10.04	43.82	62.75	18.93	32.46	52.75	20.29
2	0.4439	10.04	36.98	56.99	20.01	26.85	46.99	20.14
3	0.8969	10.06	25.76	56.00	30.24	19.85	46.00	26.15
4	1.1011	10.07	32.11	56.00	23.89	22.06	46.00	23.94
5	2.0027	10.14	27.07	56.00	28.93	19.50	46.00	26.50
6	2.8629	10.21	26.41	56.00	29.59	19.35	46.00	26.65

## 11. ANTENNA REQUIREMENT


### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.


### ANTENNA

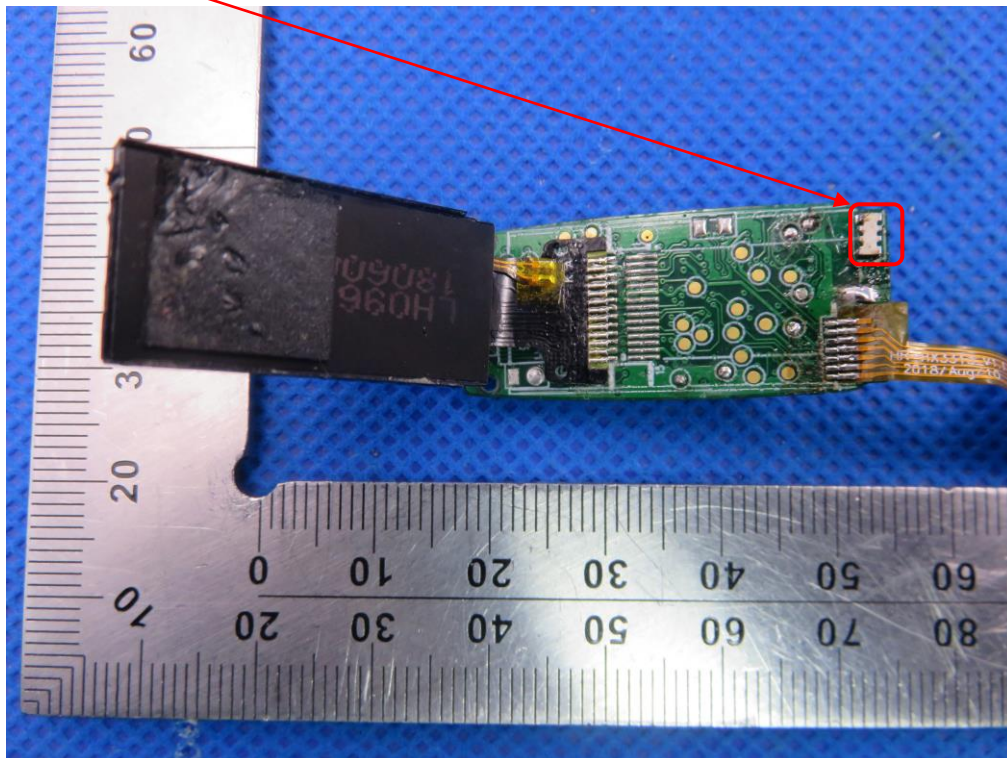





## 12. PHOTOGRAPH OF TEST

FCC LINE CONDUCTED EMISSION TEST SETUP

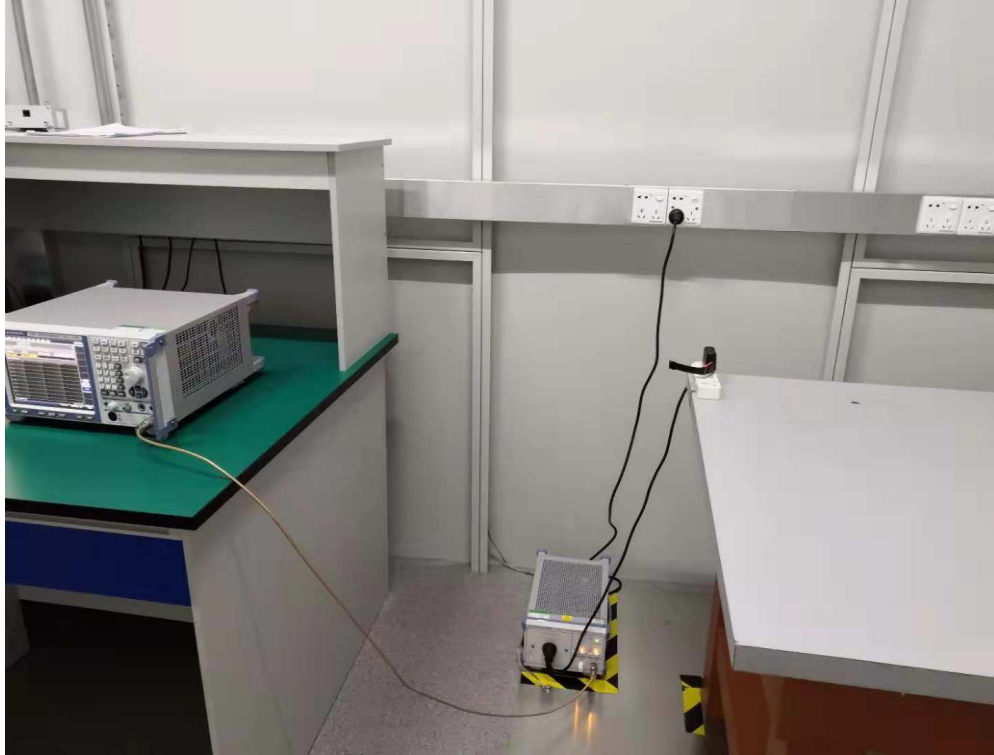

FCC RADIATED EMISSION TEST SETUP

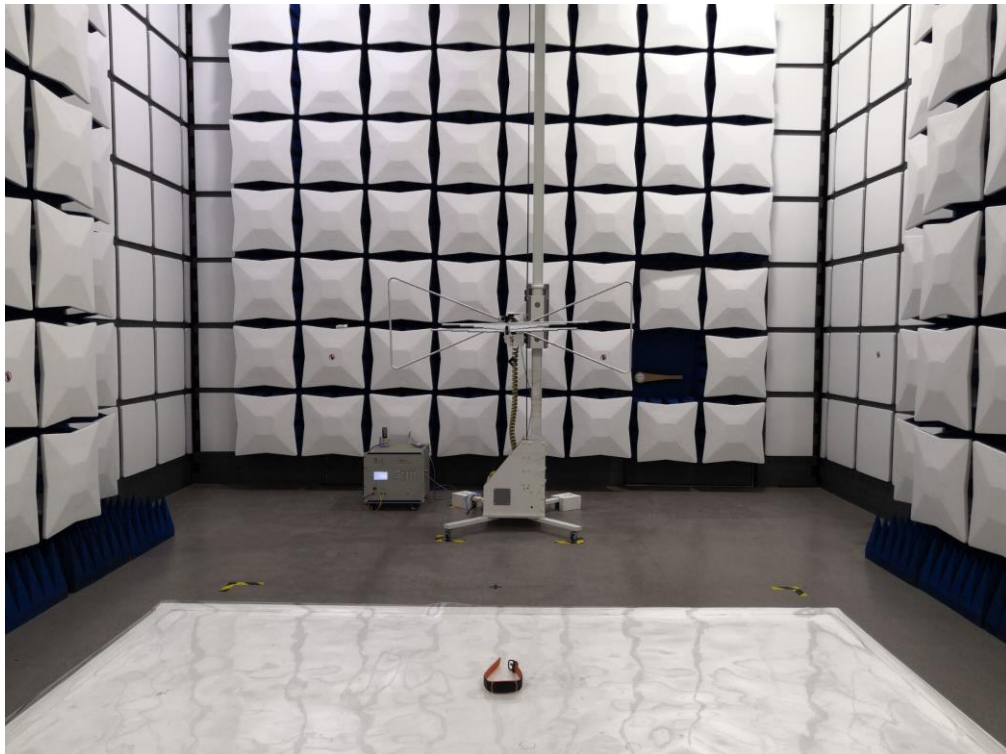

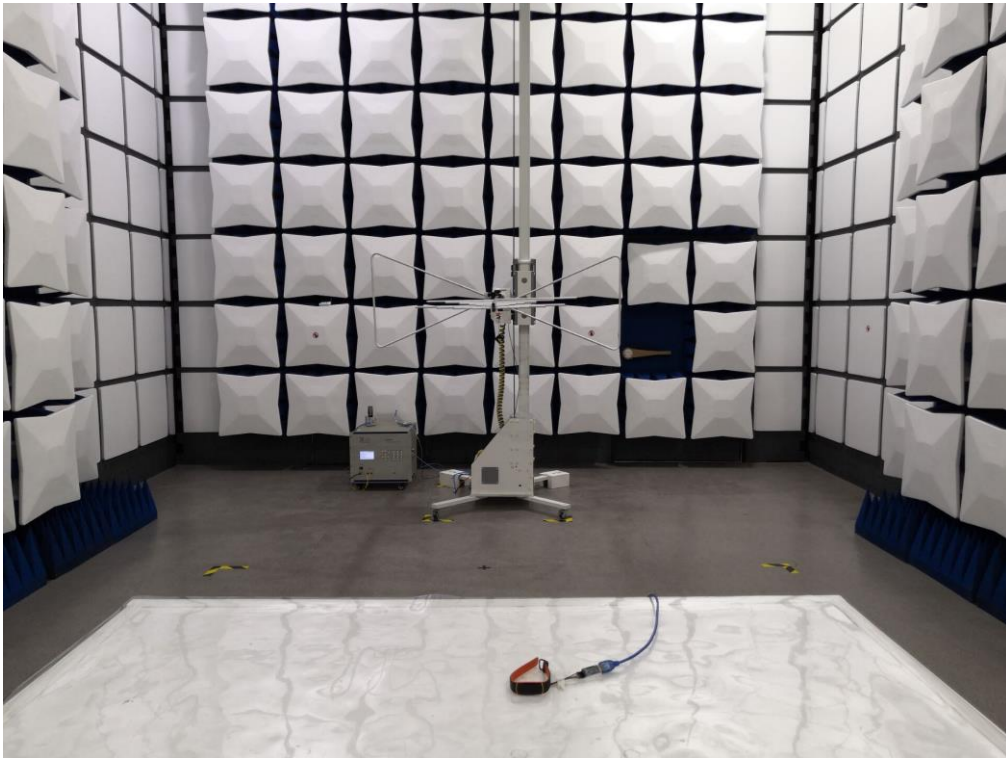









### 13. PHOTOGRAPHS OF EUT

TOP VIEW OF EUT

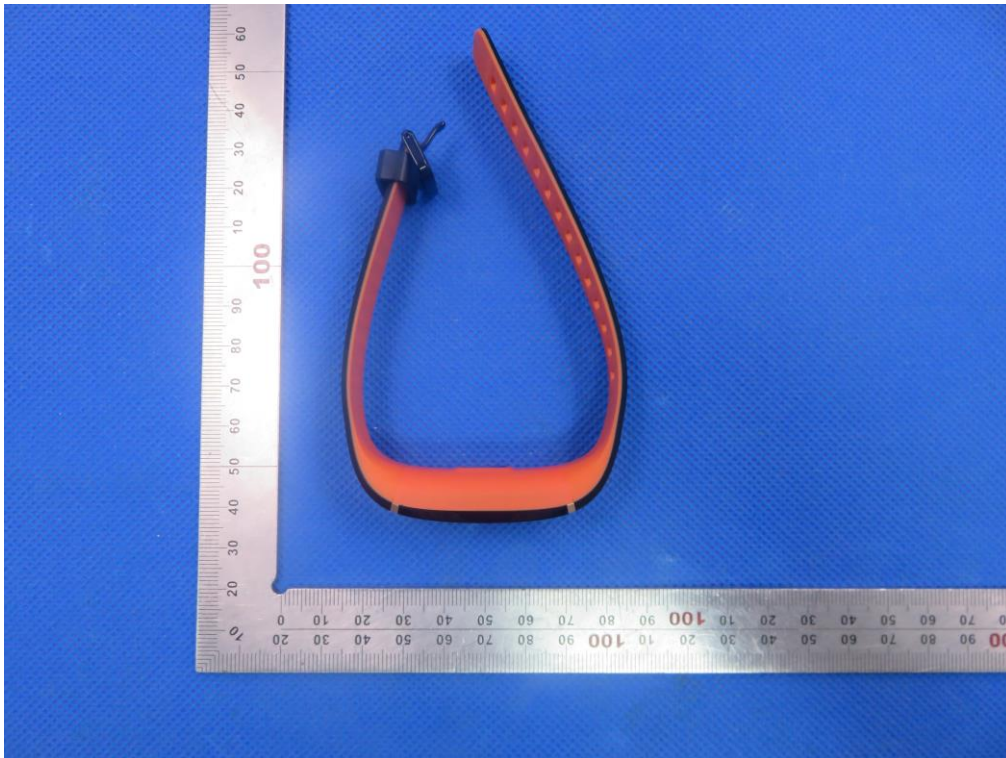

BOTTOM VIEW OF EUT

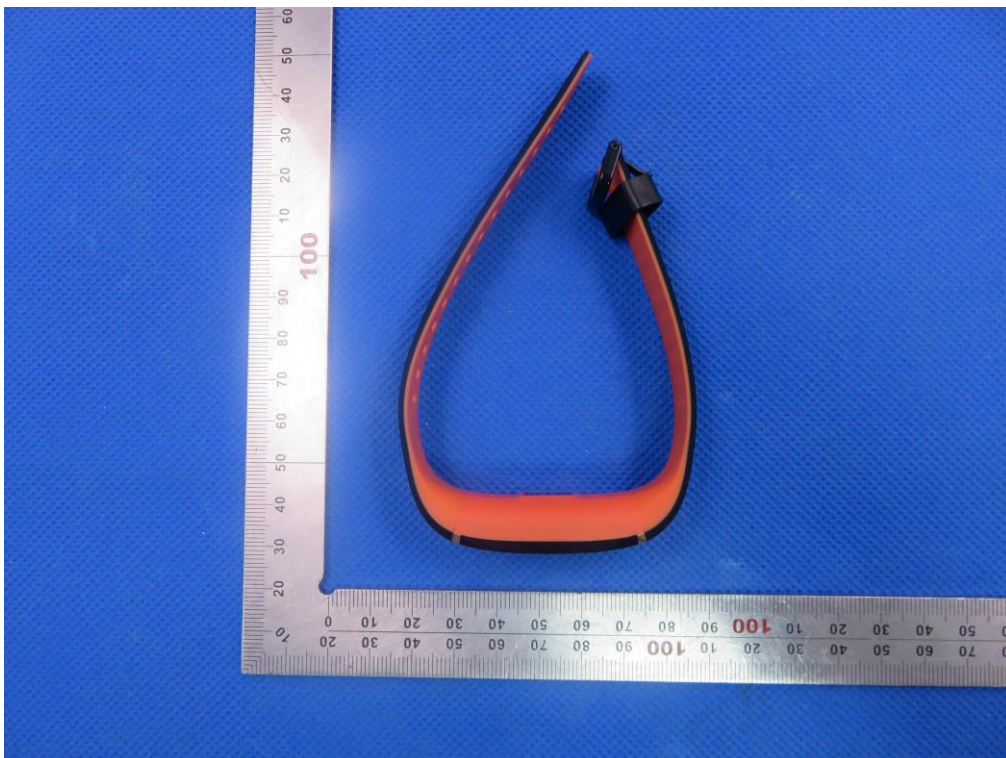



FRONT VIEW OF EUT



BACK VIEW OF EUT





LEFT VIEW OF EUT




RIGHT VIEW OF EUT








VIEW OF EUT (PORT)

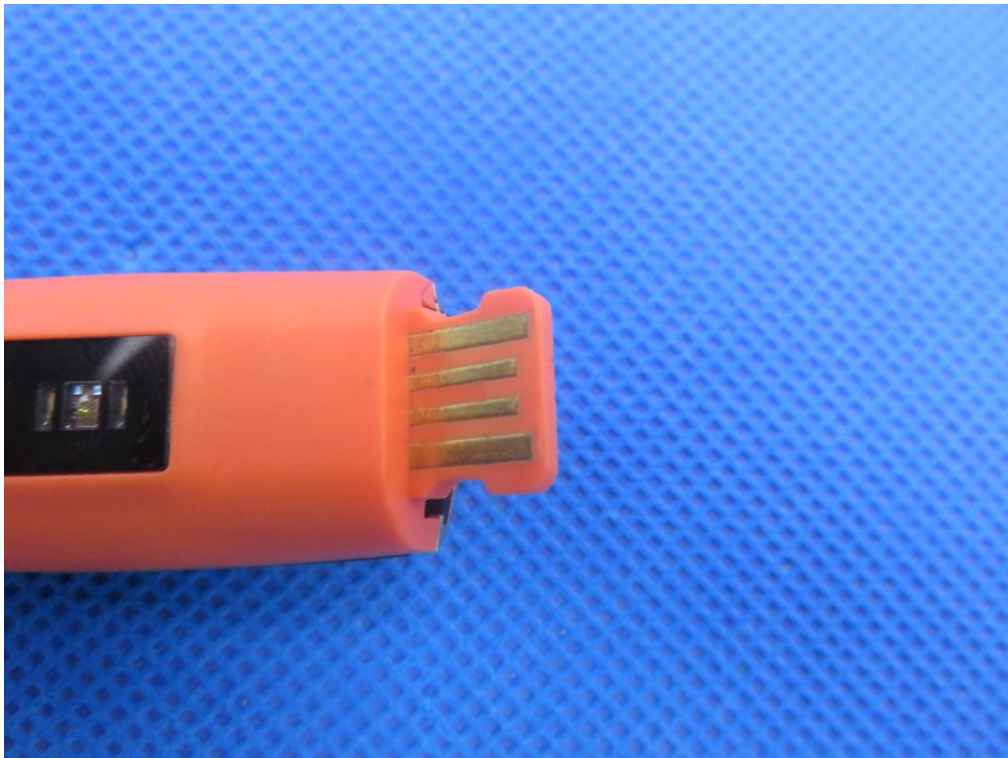

OPEN VIEW OF EUT

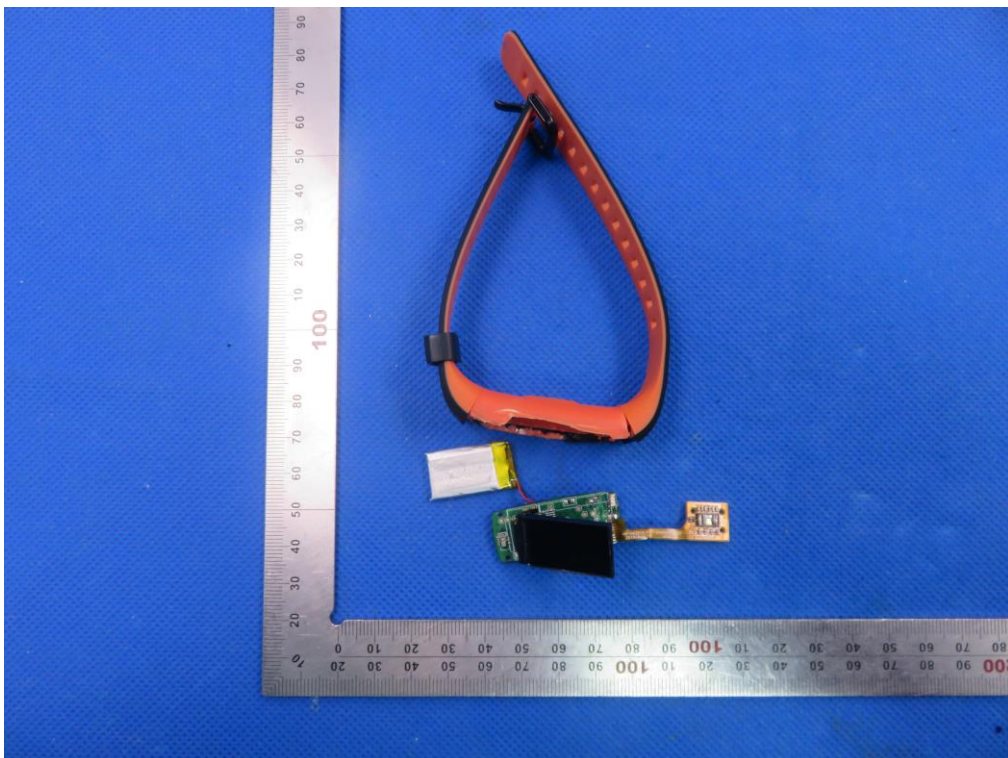




VIEW OF BATTERY




INTERNAL VIEW OF EUT-1

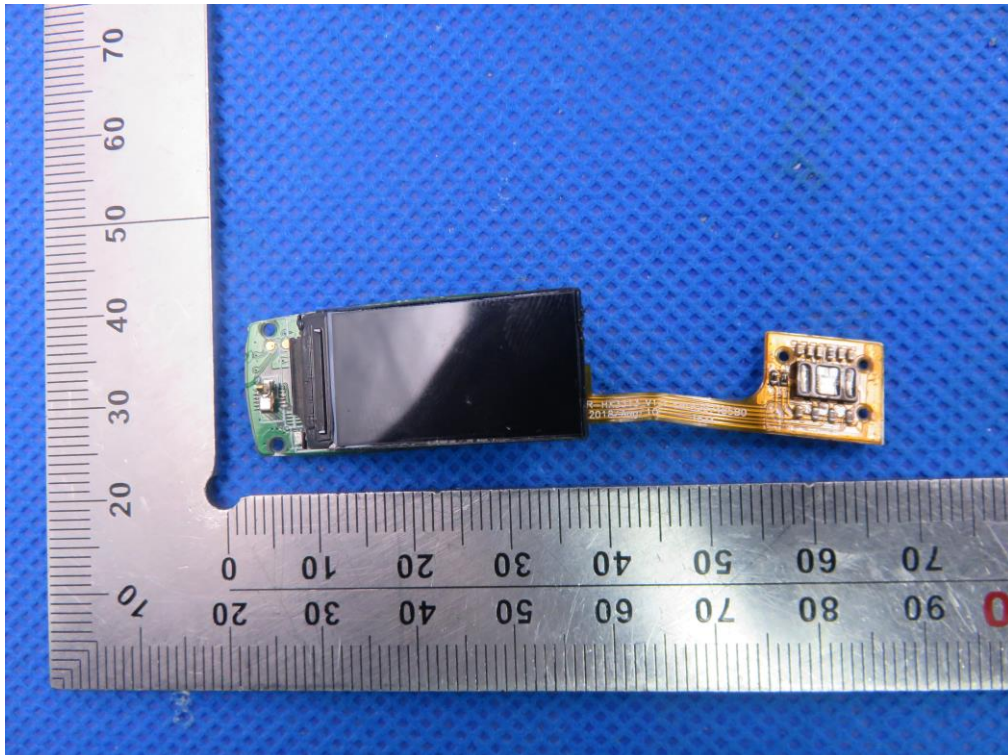




INTERNAL VIEW OF EUT-2

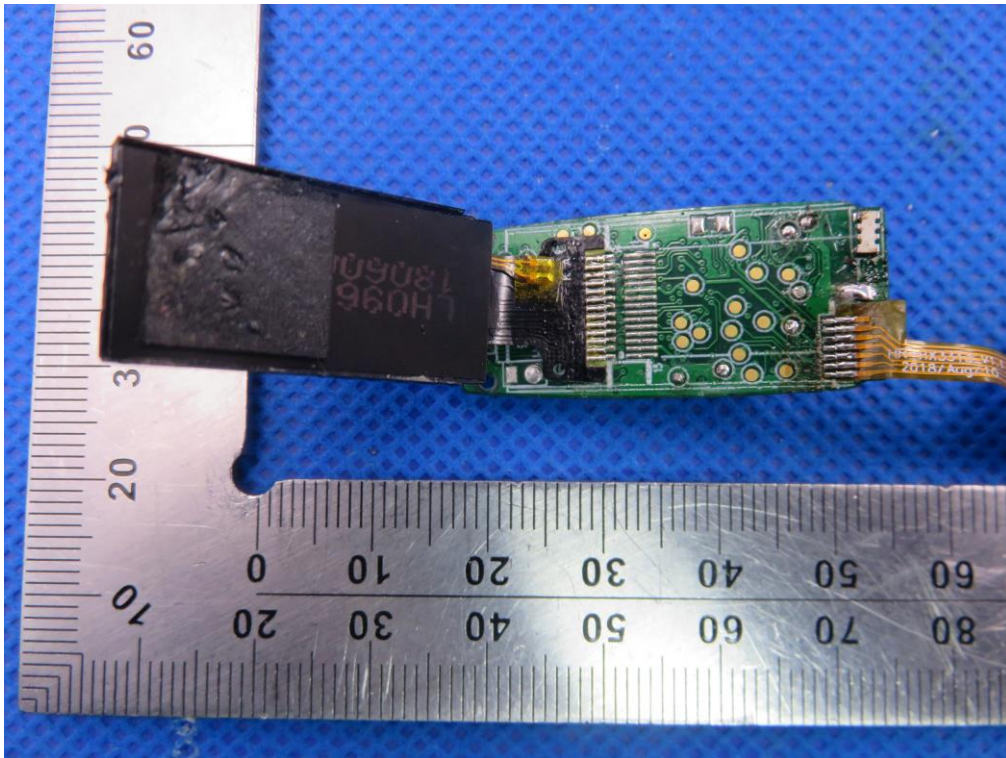


INTERNAL VIEW OF EUT-3

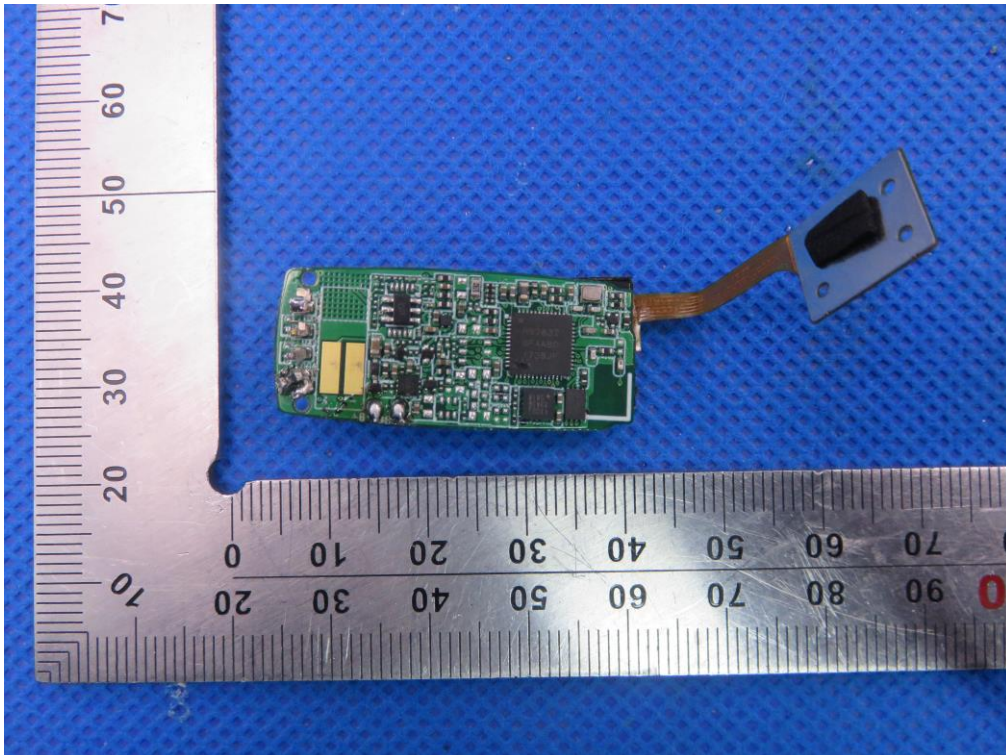



INTERNAL VIEW OF EUT-4

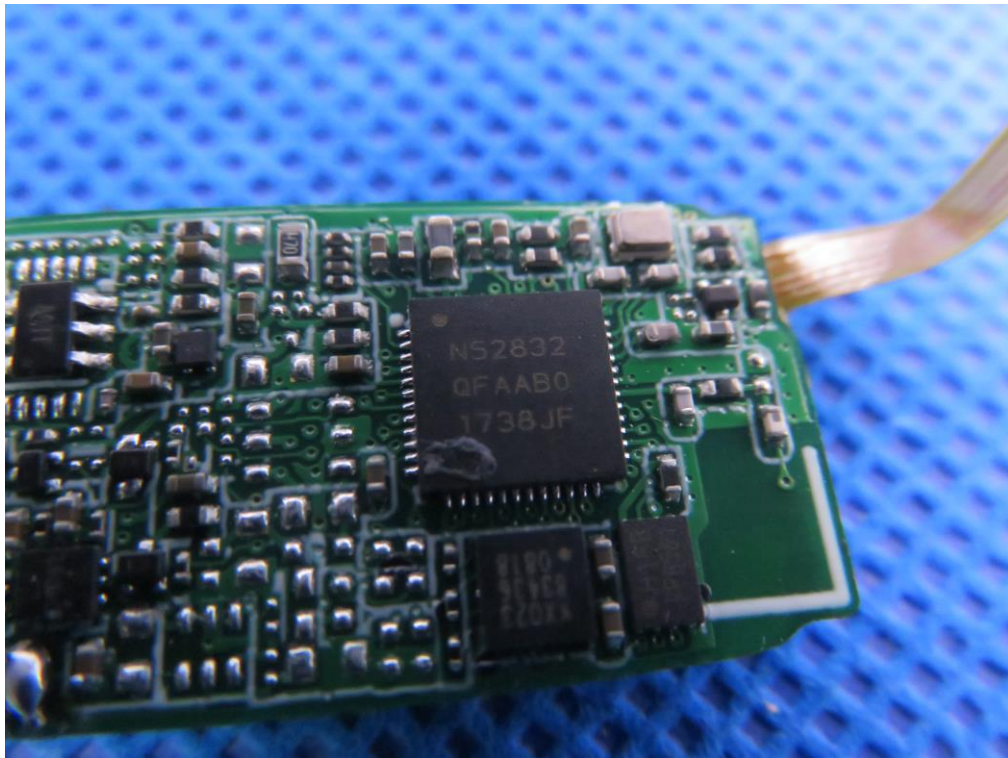

VIEW OF ADAPTER (AE)



The adapter was supplied by HUAKE

----END OF REPORT----