

TRaC Wireless Test Report : 9F2925WUS1

Applicant : Bluegiga

Apparatus : WT11i Bluetooth Module

Specification(s) : CFR47 Part 15.247 July 2008

FCCID : QOQWT11IA

Purpose of Test : Certification

Authorised by :



: Radio Product Manager

Issue Date : 11th March 2011

Authorised Copy Number : PDF

Contents

Section 1: Introduction	3
1.1 General	3
1.2 Tests Requested By	4
1.3 Manufacturer	4
1.4 Apparatus Assessed	4
1.5 Test Result Summary	5
1.6 Notes Relating To The Assessment	6
1.7 Deviations from Test Standards	6
Section 2: Measurement Uncertainty	7
2.1 Application of Measurement Uncertainty	7
2.2 Measurement Uncertainty Values	8
Section 3: Modifications	9
3.1 Modifications Performed During Assessment	9
Appendix A: Formal Emission Test Results	10
A1 Transmitter Peak Output Power	11
A2 RF Antenna Conducted Spurious Emissions	12
A3 Radiated Electric Field Emissions Within The Restricted Bands of 15.205	14
A4 20 dB Bandwidth	23
A5 Carrier Frequency Separation	24
A6 Hopping frequencies	25
A7 Channel Occupancy	26
A8 Antenna Gain	27
A9 Unintentional Radiated Electric Field Emissions - 15.109	28
A10 Power Line Conducted Emissions	29
Appendix B: Supporting Graphical Data	34
Appendix C: Additional Test and Sample Details	96
Appendix D: Additional Information	103
Appendix E: Calculation of the duty cycle correction factor	104
Appendix F: Photographs and Figures	105

Section 1:**Introduction****1.1 General**

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by: TRaC Telecoms & Radio [X]
Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806

TRaC Telecoms & Radio []
Moss View
Nipe Lane
Up Holland
West Lancashire, WN8 9PY
United Kingdom

Telephone: +44 (0) 1695 556666
Fax: +44 (0) 1695 577077

Email: test@tracglobal.com
Web site: <http://www.tracglobal.com>

Tests performed by: Geoff Cruickshank

Report author: Geoff Cruickshank

This report must not be reproduced except in full without prior written permission from TRaC Telecoms & Radio.

1.2 Tests Requested By

This testing in this report was requested by :

Bluegiga
Sinikalliontie 5A
Espoo
FIN-02630
Finland

1.3 Manufacturer

as above

1.4 Apparatus Assessed

The following apparatus was assessed between

WT11i Bluetooth Module

The above equipment was a FHSS transmitter operating in the 2400 MHz to 2483.5 MHz band and is a Bluetooth module, designed for use internal to a laptop and used to enable Bluetooth wireless communication within personal computers and laptops.

1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	Regulation	Measurement standard	Result
Radiated spurious emissions (Restricted bands)	Title 47 of the CFR: Part 15 Subpart (c) 15.247	ANSI C63.10	PASS
Conducted spurious emissions (Non-restricted bands)	Title 47 of the CFR: Part 15 Subpart (c) 15.247	ANSI C63.10	PASS
AC Power conducted emissions	Title 47 of the CFR: Part 15 Subpart (c) 15.207	ANSI C63.10	PASS
20dB Bandwidth and Channel Spacing	Title 47 of the CFR : Part 15 Subpart (c) 15.247(a)(1)(i)	ANSI C63.10	PASS
Conducted Carrier Power	Title 47 of the CFR : Part 15 Subpart (c) 15.247(b)(2)	ANSI C63.10	PASS
Hopping Frequencies	Title 47 of the CFR : Part 15 Subpart (c) 15.247(a)(1)	ANSI C63.10	PASS
Channel Occupancy	Title 47 of the CFR : Part 15 Subpart (c) 15.247(a)(1)(i)	ANSI C63.10	PASS
Unintentional Radiated Spurious Emissions	Title 47 of the CFR: Part 15 Subpart (b) 15.109	ANSI C63.10	PASS

Abbreviations used in the above table:

Mod	: Modification	ANSI	: American National Standards Institution
CFR	: Code of Federal Regulations	PLCE	: Power Line Conducted Emissions
REFE	: Radiated Electric Field Emissions		

1.6 Notes Relating To The Assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 17 to 23 °C
Humidity	: 45 to 75 %
Barometric Pressure	: 86 to 106 kPa

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

1.7 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:

Measurement Uncertainty

2.1 Application of Measurement Uncertainty

The following table contains the measurement uncertainties for measurements

- The measured value related to the corresponding limit is used to decide whether equipment meets the requirements of the standard.
- The measurement uncertainty value for the measurement of each parameter is recorded in section 2.3 of this report.
- All values of measurement uncertainty are equal to or lower than the values in the table (section 2.2) below as required by the standard

2.2 Measurement Uncertainty Values

For the test data recorded, the following measurement uncertainty was calculated:

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result = **0.9 dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.1 dB**

[4] Spurious Emissions

Uncertainty in test result = **4.1dB**

[5] Maximum frequency error

Uncertainty in test result = **3.6kHz**

[6] Frequency deviation

Uncertainty in test result = **3.6 kHz**

[7] Magnetic Field Emissions

Uncertainty in test result = **2.1 dB**

[8] Conducted Spurious

Uncertainty in test result = **0.9 dB**

[9] Channel Bandwidth

Uncertainty in test result = **3.6 kHz**

[10] Power Line Conduction

Uncertainty in test result = **3.5 dB**

[11] Spectrum Mask Measurements

Uncertainty in test result = **3.6 kHz (frequency)**

Uncertainty in test result = **0.9 dB (amplitude)**

[12] Transmission Time Measurement

Uncertainty in test result = **5.8% ± 10ns**

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
		ATS	: Alternative Test Site
EUT	: Equipment Under Test	Ref	: Reference
SE	: Support Equipment	Freq	: Frequency
L	: Live Power Line	MD	: Measurement Distance
N	: Neutral Power Line	SD	: Spec Distance
E	: Earth Power Line		
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network	Mbps	: Mega Bits Per Second

A1 Transmitter Peak Output Power

Carrier power was verified with the EUT transmitting on its lowest, centre and highest carrier frequency in turn.

Test Details:	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.247(b)(1)
Measurement standard	ANSI C63.10:2003
EUT sample number	S19
Modification state	0
SE in test environment	None
SE isolated from EUT	TRaC PC
EUT set up	Refer to Appendix C
Temperature	20°C

Data Rate = 1Mbps			
Channel Frequency (MHz)	Peak Carrier Power (W)	Limit (W)	Result
2402.0	0.016	1	PASS
2441.0	0.019		PASS
2480.0	0.020		PASS
Data Rate = 2Mbps			
Channel Frequency (MHz)	Peak Carrier Power (W)	Limit (W)	Result
2402.0	0.002	1	PASS
2441.0	0.002		PASS
2480.0	0.002		PASS
Data Rate = 3Mbps			
Channel Frequency (MHz)	Peak Carrier Power (W)	Limit (W)	Result
2402.0	0.002	1	PASS
2441.0	0.002		PASS
2480.0	0.002		PASS

Notes:

Number of hopping channels employed is 79

Conducted Measurement

Measured Peak Carrier power includes highest gain of any antenna to be used.
Highest Gain of any antenna to be used = 0.5 dBi

Conducted measurements were performed with a temporary antenna connector provided by the client.

A2 RF Antenna Conducted Spurious Emissions

Measurement of conducted spurious emissions at the antenna port was performed using a peak detector with the RBW set to 100kHz and the VBW>RBW. Frequencies were scanned up through to the 10th harmonic with the EUT transmitting on its lowest, centre and highest carrier frequency in turn and operating at data rates of 1Mbps, 2Mbps & 3Mbps at each frequency. Plots were taken of all data rates and frequencies. Only plots of top middle and bottom frequencies for the data rate producing highest output power are contained in appendix B.

Test Details	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.247(d)
Measurement standard	ANSI C63.10:2003
Frequency range	9 kHz to 25 GHz
EUT sample number	S19
Modification state	0
SE in test environment	None
SE isolated from EUT	TRaC PC
EUT set up	Refer to Appendix C
Temperature	20°C

The worst case conducted emission measurements at the antenna port are listed below:

Test Details : 1Mbps, 2402MHz, 2441MHz & 2480MHz						
Ref No.	Measured Freq (MHz)	Det.	Is measured Frequency within the Restricted bands (Y/N)	Measured Peak Conducted power (RBW =100kHz) (dBuV)	15.247(d) Limit (dBuV)	Summary
No significant emissions within 20 dB of the limit						

Test Details : 2Mbps, 2402MHz, 2441MHz & 2480MHz						
Ref No.	Measured Freq (MHz)	Det.	Is measured Frequency within the Restricted bands (Y/N)	Measured Peak Conducted power (RBW =100kHz) (dBuV)	15.247(d) Limit (dBuV)	Summary
No significant emissions within 20 dB of the limit						

Test Details : 3Mbps, 2402MHz, 2441MHz & 2480MHz						
Ref No.	Measured Freq (MHz)	Det.	Is measured Frequency within the Restricted bands (Y/N)	Measured Peak Conducted power (RBW =100kHz) (dBuV)	15.247(d) Limit (dBuV)	Summary
No significant emissions within 20 dB of the limit						

Notes:

1. The conducted emission limit for all emissions are based on a transmitted carrier level in a 100kHz RBW. With the EUT transmitting on its lowest, centre and highest carrier frequencies in turn, emissions from the EUT are required to be 20 dB below the level of the highest fundamental as measured within a 100 kHz RBW in accordance with 15.247(d) using a peak detector.
2. The RBW = 100 kHz, Video bandwidth (VBW) > RBW and the radio spectrum was investigated up to the 10th harmonic in accordance 15.33 (a)(1).
3. The measurements at 2400 MHz and 2483.5 MHz were made to ensure band edge compliance.
4. The carrier level was measured whilst varying the supply voltage between 85% and 105% of the nominal supply voltage as required by 15.31(e). No variation in carrier level was observed. All other emissions were at least 20dB below the test limit

The limit outside the restricted band in 100 kHz RBW is defined using the following formula in accordance with 15.247(d):

The limit in 100 kHz RBW = (Maximum Peak Conducted Carrier/100kHz) - 20dB

A3 Radiated Electric Field Emissions Within The Restricted Bands of 15.205

Preliminary scans were performed using a peak detector with the RBW = 100kHz. The radiated electric field emission test applies to spurious emissions and harmonics that fall within the restricted bands listed in Section 15.205. The maximum permitted field strength is listed in Section 15.209. The EUT was set to transmit on its lowest, centre and highest carrier frequency and operating at data rates of 1Mbps, 2Mbps & 3Mbps at each frequency. Plots were taken of all data rates and frequencies. Only plots of top middle and bottom frequencies for the data rate producing highest output power are contained in appendix B.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site : 3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details: 1Mbps	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz to 25 GHz
EUT sample number	S22
Modification state	0
SE in test environment	RFG464
SE isolated from EUT	REF829
EUT set up	Refer to Appendix C
Temperature	20°C
Photographs (Appendix F)	Photograph 1 and 2

The worst case radiated emission measurements for spurious emissions and harmonics that fall within the restricted bands are listed below:

2402 MHz – 1Mbps											
Ref No.	FREQ. (MHz)	Det.	MEAS Rx (dBμV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBμV/m)	EXTRAP FACT (dB)	FIELD ST'GH (μV/m)	LIMIT (μV/m)	Margin (dB)
1	1600.200	Pk	55.2	5.0	26.2	33.73	52.7	0.0	52.7	74.0	-21.3
2	1600.200	AV	47.1	5.0	26.2	33.73	44.6	0.0	44.6	54.0	-9.4
3	2370.032	Pk	57.5	4.6	29.4	33.75	57.8	0.0	57.8	74.0	-16.2
4	2370.032	AV	42.5	4.6	29.4	33.75	42.8	0.0	42.8	54.0	-11.2
5	2376.018	Pk	60.4	4.5	29.4	33.75	60.6	0.0	60.6	74.0	-13.4
6	2376.018	AV	48.2	4.5	29.4	33.75	48.4	0.0	48.4	54.0	-5.6
7	2386.218	Pk	60.8	4.9	29.5	33.75	61.5	0.0	61.5	74.0	-12.5
8	2386.218	AV	45.3	4.9	29.5	33.75	46.0	0.0	46.0	54.0	-8.0
9	2390.000	Pk	59.0	4.5	29.5	33.75	59.3	0.0	59.3	74.0	-14.7
10	2390.000	AV	41.9	4.5	29.5	33.75	42.2	0.0	42.2	54.0	-11.8
11	2402.003	Pk	84.5	4.0	29.5	N/A	118.0	0.0	118.0	137.0	-19.0
12	2974.069	Pk	50.7	5.7	31.6	33.96	54.0	0.0	54.0	98.0	-44.0
13	2974.069	AV	40.1	5.7	31.6	33.96	43.4	0.0	43.4	78.0	-34.6
14	4803.878	Pk	51.2	8.0	35.9	34.04	61.1	0.0	61.1	74.0	-12.9
15	4803.878	AV	40.3	8.0	35.9	34.04	50.2	0.0	50.2	54.0	-3.8
16	7206.482	Pk	52.4	10.3	38.9	34.37	67.2	-9.5	57.7	98.0	-40.3
17	7206.482	AV	38.8	10.3	38.9	34.37	53.6	-9.5	44.1	78.0	-33.9

2441 MHz – 1Mbps											
Ref No.	FREQ. (MHz)	Det.	MEAS Rx (dBμV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBμV/m)	EXTRAP FACT (dB)	FIELD ST'GH (μV/m)	LIMIT (μV/m)	Margin (dB)
1	1627.709	Pk	57.0	5.2	26.3	33.72	54.8	0.0	54.8	98.6	-43.8
2	1627.709	AV	49.1	5.2	26.3	33.72	46.9	0.0	46.9	78.6	-31.7
3	2441.026	Pk	84.9	4.0	29.7	N/A	118.6	0.0	118.6	137.0	-18.4
4	3051.976	Pk	49.5	6.6	31.9	33.99	54.0	0.0	54.0	98.6	-44.6
5	3051.976	AV	38.5	6.6	31.9	33.99	43.0	0.0	43.0	78.6	-35.6
6	4881.840	Pk	51.2	8.6	36.1	34.06	61.8	0.0	61.8	74.0	-12.2
7	4881.840	AV	40.5	8.6	36.1	34.06	51.1	0.0	51.1	54.0	-2.9
8	7323.470	Pk	52.0	10.5	39.1	34.42	67.2	-9.5	57.7	74.0	-16.3
9	7323.470	AV	38.6	10.5	39.1	34.42	53.8	-9.5	44.3	54.0	-9.7

2480 MHz – 1Mbps											
Ref No.	FREQ. (MHz)	Det.	MEAS Rx (dBμV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBμV/m)	EXTRAP FACT (dB)	FIELD ST'GH (μV/m)	LIMIT (μV/m)	Margin (dB)
1	1653.776	Pk	56.4	5.2	26.4	33.72	54.3	0.0	54.3	97.4	-43.1
2	1653.776	AV	48.8	5.2	26.4	33.72	46.7	0.0	46.7	77.4	-30.7
3	2480.016	Pk	83.1	4.5	29.8	N/A	117.4	0.0	117.4	137.0	-19.6
4	2483.500	Pk	66.1	4.4	29.8	33.78	66.5	0.0	66.5	74.0	-7.5
5	2483.500	AV	47.6	4.4	29.8	33.78	48.0	0.0	48.0	54.0	-6.0
6	2485.721	Pk	61.8	4.5	29.8	33.78	62.3	0.0	62.3	74.0	-11.7
7	2485.721	AV	43.8	4.5	29.8	33.78	44.3	0.0	44.3	54.0	-9.7
8	2495.901	Pk	57.6	4.7	29.9	33.78	58.4	0.0	58.4	74.0	-15.6
9	2495.901	AV	42.7	4.7	29.9	33.78	43.5	0.0	43.5	54.0	-10.5
10	4960.008	Pk	52.1	8.9	36.2	34.09	63.1	0.0	63.1	74.0	-10.9
11	4960.008	AV	42.1	8.9	36.2	34.09	53.1	0.0	53.1	54.0	-0.9
12	7440.486	Pk	51.0	10.8	39.3	34.46	66.6	-9.5	57.1	74.0	-16.9
13	7440.486	AV	37.2	10.8	39.3	34.46	52.8	-9.5	43.3	54.0	-10.7

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details: 2Mbps	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz to 25 GHz
EUT sample number	S22
Modification state	0
SE in test environment	RFG464
SE isolated from EUT	REF829
EUT set up	Refer to Appendix C
Temperature	20°C
Photographs (Appendix F)	Photograph 1 and 2

The worst case radiated emission measurements for spurious emissions and harmonics that fall within the restricted bands are listed below:

2402 MHz – 2Mbps											
Ref No.	FREQ. (MHz)	Det.	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)	Margin (dB)
1	1600.329	Pk	52.9	5.0	26.2	33.73	50.4	0.0	50.4	74.0	-23.6
2	1600.329	AV	45.3	5.0	26.2	33.73	42.8	0.0	42.8	54.0	-11.2
3	2369.859	Pk	56.0	4.6	29.4	33.75	56.3	0.0	56.3	74.0	-17.7
4	2369.859	AV	38.5	4.6	29.4	33.75	38.8	0.0	38.8	54.0	-15.2
5	2375.946	Pk	59.9	4.5	29.4	33.75	60.1	0.0	60.1	74.0	-13.9
6	2375.946	AV	40.1	4.5	29.4	33.75	40.3	0.0	40.3	54.0	-13.7
7	2385.990	Pk	61.5	4.9	29.5	33.75	62.2	0.0	62.2	74.0	-11.8
8	2385.990	AV	42.2	4.9	29.5	33.75	42.9	0.0	42.9	54.0	-11.1
9	2390.000	Pk	54.4	4.5	29.5	33.75	54.7	0.0	54.7	74.0	-19.3
10	2390.000	AV	35.7	4.5	29.5	33.75	36.0	0.0	36.0	54.0	-18.0
11	2401.840	Pk	76.6	4.0	29.5	N/A	110.1	0.0	110.1	137.0	-26.9
12	2973.986	Pk	48.1	5.7	31.6	33.96	51.4	0.0	51.4	90.1	-38.7
13	2973.986	AV	36.4	5.7	31.6	33.96	39.7	0.0	39.7	70.1	-30.4

2441 MHz – 2Mbps											
Ref No.	FREQ. (MHz)	Det.	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)	Margin (dB)
1	1626.345	Pk	55.6	5.1	26.3	33.72	53.3	0.0	53.3	74.0	-20.7
2	1626.345	AV	48.8	5.1	26.3	33.72	46.5	0.0	46.5	54.0	-7.5
3	2440.832	Pk	77.0	4.0	29.7	N/A	110.7	0.0	110.7	137.0	-26.3

2480 MHz – 2Mbps											
Ref No.	FREQ. (MHz)	Det.	MEAS Rx (dBμV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBμV/m)	EXTRAP FACT (dB)	FIELD ST'GH (μV/m)	LIMIT (μV/m)	Margin (dB)
1	1653.659	Pk	54.7	5.2	26.4	33.72	52.6	0.0	52.6	90.8	-38.2
2	1653.659	AV	46.6	5.2	26.4	33.72	44.5	0.0	44.5	70.8	-26.3
3	2479.864	Pk	76.6	4.4	29.8	N/A	110.8	0.0	110.8	137.0	-26.2
4	2483.500	Pk	65.4	4.4	29.8	33.78	65.8	0.0	65.8	74.0	-8.2
5	2483.500	AV	46.1	4.4	29.8	33.78	46.5	0.0	46.5	54.0	-7.5
6	2496.034	Pk	59.9	4.7	29.9	33.78	60.7	0.0	60.7	74.0	-13.3
7	2496.034	AV	35.7	4.7	29.9	33.78	36.5	0.0	36.5	54.0	-17.5

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details: 3Mbps	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz to 25 GHz
EUT sample number	S22
Modification state	0
SE in test environment	RFG464
SE isolated from EUT	REF829
EUT set up	Refer to Appendix C
Temperature	20°C
Photographs (Appendix F)	Photograph 1 and 2

The worst case radiated emission measurements for spurious emissions and harmonics that fall within the restricted bands are listed below:

2402 MHz – 3Mbps											
Ref No.	FREQ. (MHz)	Det.	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)	Margin (dB)
1	1600.337	Pk	52.7	5.0	26.2	33.73	50.2	0.0	50.2	74.0	-23.8
2	1600.337	AV	45.0	5.0	26.2	33.73	42.5	0.0	42.5	54.0	-11.5
3	2322.032	Pk	50.9	4.3	29.2	33.73	50.7	0.0	50.7	74.0	-23.3
4	2322.032	AV	32.5	4.3	29.2	33.73	32.3	0.0	32.3	54.0	-21.7
5	2369.853	Pk	54.9	4.6	29.4	33.75	55.2	0.0	55.2	74.0	-18.8
6	2369.853	AV	39.0	4.6	29.4	33.75	39.3	0.0	39.3	54.0	-14.7
7	2375.984	Pk	59.8	4.5	29.4	33.75	60.0	0.0	60.0	74.0	-14.0
8	2375.984	AV	40.3	4.5	29.4	33.75	40.5	0.0	40.5	54.0	-13.5
9	2386.173	Pk	61.9	4.9	29.5	33.75	62.6	0.0	62.6	74.0	-11.4
10	2386.173	AV	42.7	4.9	29.5	33.75	43.4	0.0	43.4	54.0	-10.6
11	2390.000	Pk	55.0	4.5	29.5	33.75	55.3	0.0	55.3	74.0	-18.7
12	2390.000	AV	36.3	4.5	29.5	33.75	36.6	0.0	36.6	54.0	-17.4
13	2401.867	Pk	76.3	4.0	29.5	N/A	109.8	0.0	109.8	137.0	-27.2
14	2974.026	Pk	49.8	5.7	31.6	33.96	53.1	0.0	53.1	89.8	-36.7
15	2974.026	AV	38.5	5.7	31.6	33.96	41.8	0.0	41.8	69.8	-28.0

2441 MHz – 3Mbps											
Ref No.	FREQ. (MHz)	Det.	MEAS Rx (dB μ V)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dB μ V/m)	EXTRAP FACT (dB)	FIELD ST'GH (μ V/m)	LIMIT (μ V/m)	Margin (dB)
1	1626.337	Pk	55.1	5.1	26.3	33.72	52.8	0.0	52.8	74.0	-21.2
2	1626.337	AV	48.0	5.1	26.3	33.72	45.7	0.0	45.7	54.0	-8.3
3	2441.200	Pk	77.3	4.0	29.7	N/A	111.0	0.0	111.0	137.0	-26.0

2480 MHz – 3Mbps											
Ref No.	FREQ. (MHz)	Det.	MEAS Rx (dB μ V)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dB μ V/m)	EXTRAP FACT (dB)	FIELD ST'GH (μ V/m)	LIMIT (μ V/m)	Margin (dB)
1	1653.673	Pk	54.5	5.2	26.4	33.72	52.4	0.0	52.4	91.7	-39.3
2	1653.673	AV	46.2	5.2	26.4	33.72	44.1	0.0	44.1	71.7	-27.6
3	2480.035	Pk	77.4	4.5	29.8	N/A	111.7	0.0	111.7	137.0	-25.3
4	2483.500	Pk	64.9	4.4	29.8	33.78	65.3	0.0	65.3	74.0	-8.7
5	2483.500	AV	46.6	4.4	29.8	33.78	47.0	0.0	47.0	54.0	-7.0
6	2490.667	Pk	54.1	4.9	29.8	33.78	55.0	0.0	55.0	74.0	-19.0
7	2490.667	AV	35.1	4.9	29.8	33.78	36.0	0.0	36.0	54.0	-18.0
8	2496.051	Pk	57.4	4.7	29.9	33.78	58.2	0.0	58.2	74.0	-15.8
9	2496.051	AV	35.3	4.7	29.9	33.78	36.1	0.0	36.1	54.0	-17.9

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector do not exceed a level 20 dB above the average limit.
- 3 Measurements at 2400 & 2483.5 MHz were made to ensure band edge compliance.
- 4 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 5 For Frequencies below 1 GHz, RBW= 100 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak	RBW= 1MHz, VBW > RBW
Average	RBW= 1MHz, VBW > RBW

These settings as per ANSI C63.10 and DA 00-705.

- 6 In accordance with DA 00-705, the average level of the spurious radiated emission may be reduced by the duty cycle correction factor. If the dwell time per channel (refer to the measured channel occupancy time, section A7 of this test report) of the hopping signal is less than 100ms then the average measurement may be further adjusted by the duty cycle correction factor which is derived from

$$20\log_{10}\left(\frac{\text{dwell time}}{100ms}\right)$$

The upper and lower frequency of the measurement range was decided according to 47 CFR 15.2008 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits (47 CFR 15: Clause 15.209) for emissions falling within the restricted bands defined in 15.205(a):

Frequency of emission (MHz)	Field strength $\mu\text{V/m}$	Measurement Distance m	Field strength dB $\mu\text{V/m}$
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

Notes:

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

The results displayed take into account applicable antenna factors and cable losses.

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels:

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels		✓		
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

A4 20 dB Bandwidth

Title 47 of the CFR: Part 15 Subpart (c) 15.247(a)(1)(i) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing.

Test Details:	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) 15.247(a)(1)
EUT sample number	S19
Modification state	0
SE in test environment	None
SE isolated from EUT	TRaC PC
Temperature	20°C
EUT set up	Refer to Appendix C

1Mbps	
Channel Frequency (MHz)	Measured 20 dB Bandwidth (kHz)
2402	1135
2441	1135
2480	1135
2Mbps	
Channel Frequency (MHz)	Measured 20 dB Bandwidth (kHz)
2402	1391
2441	1391
2480	1391
3Mbps	
Channel Frequency (MHz)	Measured 20 dB Bandwidth (kHz)
2402	1394
2441	1394
2480	1394

Plots of the 20 dB bandwidth are contained in Appendix B of this test report.

A5 Carrier Frequency Separation

For systems with an output power greater than 125mW the channel separation shall be a minimum of 25 kHz or the 20 dB bandwidth, whichever is the greater. For systems with output power less than 125mW the channel separation shall be a minimum of 25 kHz or $\frac{2}{3}$ of the 20 dB bandwidth whichever is the greater. The formal measurements are detailed below:

Test Details:	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) 15.247(a)(1)
EUT sample number	S19
Modification state	0
SE in test environment	None
SE isolated from EUT	TRaC PC
Temperature	20°C
EUT set up	Refer to Appendix C

Operational Data Rate	Measured Channel Spacing (kHz)	Measured 20 dB Bandwidth (kHz)	Limit (kHz)	Result
1Mbps	1006	1135	749	Pass
2Mbps	1003	1391	927	Pass
3Mbps	1009	1394	929	Pass
Limit	25 kHz or $\frac{2}{3}$ of the 20 dB bandwidth of the hopping channel Whichever is greater			

Plots of the channel spacing are contained in Appendix B of this test report.

A6 Hopping frequencies

Hopping frequencies were verified using a spectrum analyser, while the EUT was operating in its normal frequency hopping mode.

Test Details:	
Regulation	Title 47 of the CFR : Part 15 Subpart (c) 15.247(a)(1)(i)
EUT sample number	S19
Modification state	0
SE in test environment	None
SE isolated from EUT	TRaC PC
Temperature	20°C
EUT set up	Refer to Appendix C

No. of Hopping Channels	Requirement	Result
79	>15	Pass

Plots showing the hopping channels are contained in Appendix B

A7 Channel Occupancy

Channel occupancy time was verified using a spectrum analyser in zero span mode, centred on the middle hopping channel frequency (2441.0 MHz), while the EUT was operating in its normal frequency hopping mode. The other channels were then verified to ensure that the channel occupancy was identical for all channels.

Test Details:	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.247(a)(1)
EUT sample number	S19
Modification state	0
SE in test environment	None
SE isolated from EUT	TRaC PC
Temperature	20°C
EUT set up	Refer to Appendix C

T_{occ} (ms)	MP (s)	MPTX	AOT (s)	Limit (s)	Result
2.94	31.6	106	0.312	0.400	Pass

Plots showing the channel occupancy time and time between successive transmissions are contained in Appendix B of this test report. These are identical for all modulation modes.

Average Channel Occupancy Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

No. Of utilised hopping channels (N) = 79

One channel occupancy time (T_{occ}) = 2.94ms

Measurement Period (MP) = 31.6 Seconds

Measurement Period = 0.4 x N
 Measurement Period = 0.4 x 79
 Measurement Period = 31.6 seconds

No. of transmission cycles in measurement period (MPTX) = $31.6/PRF$
 = $31.6/0.297$
 = 106

Average Occupancy Time (AOT) = $T_{occ} \times MPTX$
 Average Occupancy Time (AOT) = $2.94ms \times 106$
 Average Occupancy Time (AOT) = 311.64ms

A8 Antenna Gain

The maximum antenna gain for the antenna types to be used with the EUT, as declared by the client, is 0.5dBi.

A9 Unintentional Radiated Electric Field Emissions - 15.109

Preliminary scans were performed using a peak detector with the RBW = 100kHz. The maximum permitted field strength is listed in Section 15.109. The EUT was set to receive mode only.

The following test site was used for final measurements as specified by the standard tested to :

3m open area test site :

3m alternative test site :

Test Details:	
Regulation	Title 47 of the CFR: Part 15 Subpart (b) Clause 15.109
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz to 25 GHz
EUT sample number	S22
Modification state	0
SE in test environment	RFG464
SE isolated from EUT	REF829
EUT set up	Refer to Appendix C
Temperature	19°C
Photographs (Appendix F)	Photograph 1 and 2

The worst case radiated emission measurements for spurious emissions:

Ref No.	FREQ. (MHz)	Det.	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)	Margin (dB)
No Emissions within 20dB of the limit											

A10 Power Line Conducted Emissions

Preview power line conducted emission measurements were performed with a peak detector in a screened room. The effect of the EUT set-up on the measurements is summarised in note (b).

Where applicable formal measurements of the emissions were performed with a peak, average and/or quasi peak detector. The EUT was set to transmit on its lowest, centre and highest carrier frequency in turn. The formal measurements are detailed below:

Test Details: Transmit Mode	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.207
Measurement standard	ANSI C63.10
Frequency range	150kHz to 30MHz
EUT sample number	S22
Modification state	0
SE in test environment	RFG464
SE isolated from EUT	REF829
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photograph 3

The worst-case power line conducted emission measurements are listed below:

Results measured using the average detector compared to the average limit

Ref No.	Freq (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	0.150	L1	2.4	56.0	-53.6	Pass
2	2.000	L1	2.0	46.0	-44.0	Pass
3	5.000	L1	2.4	50.0	-47.6	Pass
4	10.000	L1	3.8	50.0	-46.2	Pass
5	20.000	L1	6.7	50.0	-43.3	Pass
6	30.000	L1	6.2	50.0	-43.8	Pass
7	0.150	N	2.7	56.0	-53.3	Pass
8	2.000	N	2.2	46.0	-43.8	Pass
9	5.000	N	2.6	50.0	-47.4	Pass
10	10.000	N	4.1	50.0	-45.9	Pass
11	20.000	N	7.0	50.0	-43.0	Pass
12	30.000	N	5.5	50.0	-44.5	Pass

Results measured using the quasi-peak detector compared to the quasi-peak limit

Ref No.	Freq (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	0.150	L1	7.9	66.0	-58.1	Pass
2	2.000	L1	7.6	56.0	-48.4	Pass
3	5.000	L1	7.4	60.0	-52.6	Pass
4	10.000	L1	8.2	60.0	-51.8	Pass
5	20.000	L1	11.2	60.0	-48.8	Pass
6	30.000	L1	11.3	60.0	-48.7	Pass
7	0.150	N	7.9	56.0	-48.1	Pass
8	2.000	N	7.5	50.0	-42.5	Pass
9	5.000	N	7.7	60.0	-52.3	Pass
10	10.000	N	8.6	60.0	-51.4	Pass
11	20.000	N	11.5	60.0	-48.5	Pass
12	30.000	N	10.8	60.0	-49.2	Pass

Preview power line conducted emission measurements were performed with a peak detector in a screened room. The effect of the EUT set-up on the measurements is summarised in note (b).

Where applicable formal measurements of the emissions were performed with a peak, average and/or quasi peak detector. The EUT was set to not transmit. The formal measurements are detailed below:

Test Details: Receive Mode	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.107
Measurement standard	ANSI C63.10
Frequency range	150kHz to 30MHz
EUT sample number	S22
Modification state	0
SE in test environment	RFG464
SE isolated from EUT	REF829
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photograph 3

The worst-case power line conducted emission measurements are listed below:

Results measured using the average detector compared to the average limit

Ref No.	Freq (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	0.150	L1	2.0	56.0	-54.0	Pass
2	2.000	L1	2.2	46.0	-43.8	Pass
3	5.000	L1	2.6	50.0	-47.4	Pass
4	10.000	L1	3.5	50.0	-46.5	Pass
5	20.000	L1	6.3	50.0	-43.7	Pass
6	30.000	L1	6.4	50.0	-43.6	Pass
7	0.150	N	2.0	56.0	-54.0	Pass
8	2.000	N	2.2	46.0	-43.8	Pass
9	5.000	N	2.6	50.0	-47.4	Pass
10	10.000	N	3.5	50.0	-46.5	Pass
11	20.000	N	6.3	50.0	-43.7	Pass
12	30.000	N	6.4	50.0	-43.6	Pass

Results measured using the quasi-peak detector compared to the quasi-peak limit

Ref No.	Freq (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	0.150	L1	7.7	66.0	-58.3	Pass
2	2.000	L1	7.6	56.0	-48.4	Pass
3	5.000	L1	7.2	60.0	-52.8	Pass
4	10.000	L1	7.7	60.0	-52.3	Pass
5	20.000	L1	10.6	60.0	-49.4	Pass
6	30.000	L1	11.5	60.0	-48.5	Pass
7	0.150	N	8.1	56.0	-47.9	Pass
8	2.000	N	7.3	50.0	-42.7	Pass
9	5.000	N	7.4	60.0	-52.6	Pass
10	10.000	N	8.3	60.0	-51.7	Pass
11	20.000	N	11.1	60.0	-48.9	Pass
12	30.000	N	10.5	60.0	-49.5	Pass

Specification limits :

Conducted emission limits (47 CFR 15: Clause 15.207):

Conducted disturbance at the mains ports.

Frequency range MHz	Limits dB μ V	
	Quasi-peak	Average
0.15 to 0.5	66 to 56 ²	56 to 46 ²
0.5 to 5	56	46
5 to 30	60	50

Notes:

- The lower limit shall apply at the transition frequency.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

Notes:

- (a) The levels may have been rounded for display purposes.
- (b) The following table summarises the effect of the EUT operating mode and internal configuration on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓	✓	✓	✓
Effect of EUT internal configuration on emission levels	✓	✓	✓	✓

(i) Parameter defined by standard and / or single possible, refer to Appendix C
(ii) Parameter defined by client and / or single possible, refer to Appendix C
(iii) Parameter had a negligible effect on emission levels, refer to Appendix C
(iv) Worst case determined by initial measurement, refer to Appendix C

Appendix B:

Supporting Graphical Data


This appendix contains graphical data obtained during testing.

Notes:


- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.




20dB Bandwidth – 1Mbps

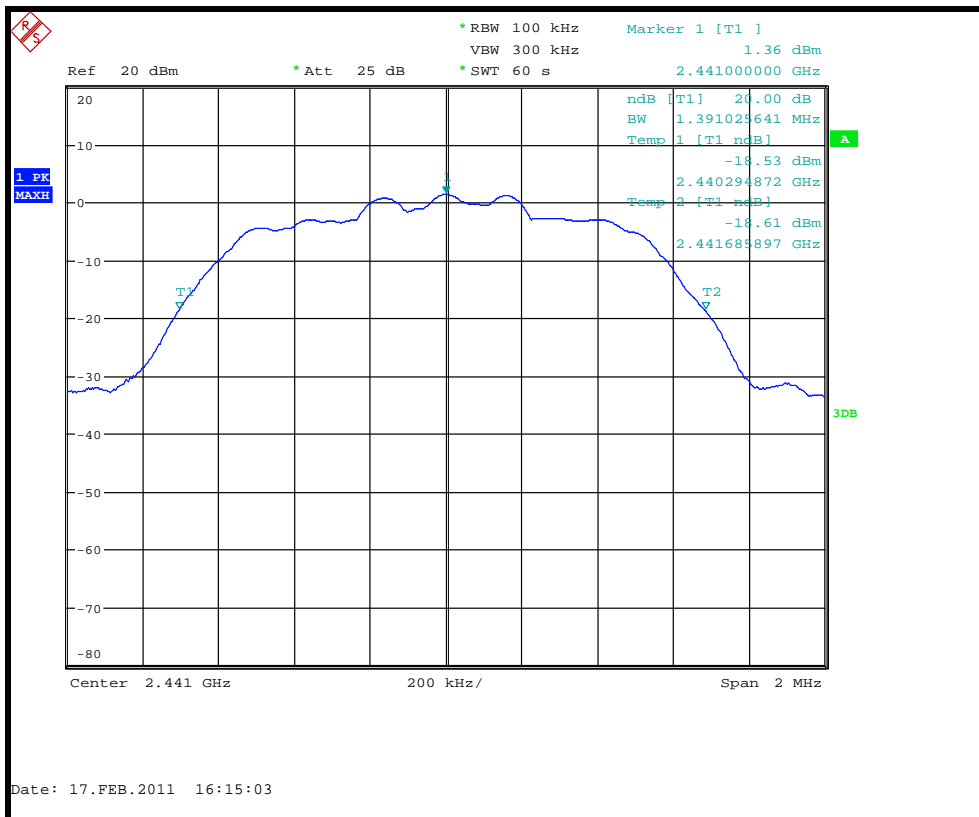


20dB Bandwidth – 2Mbps

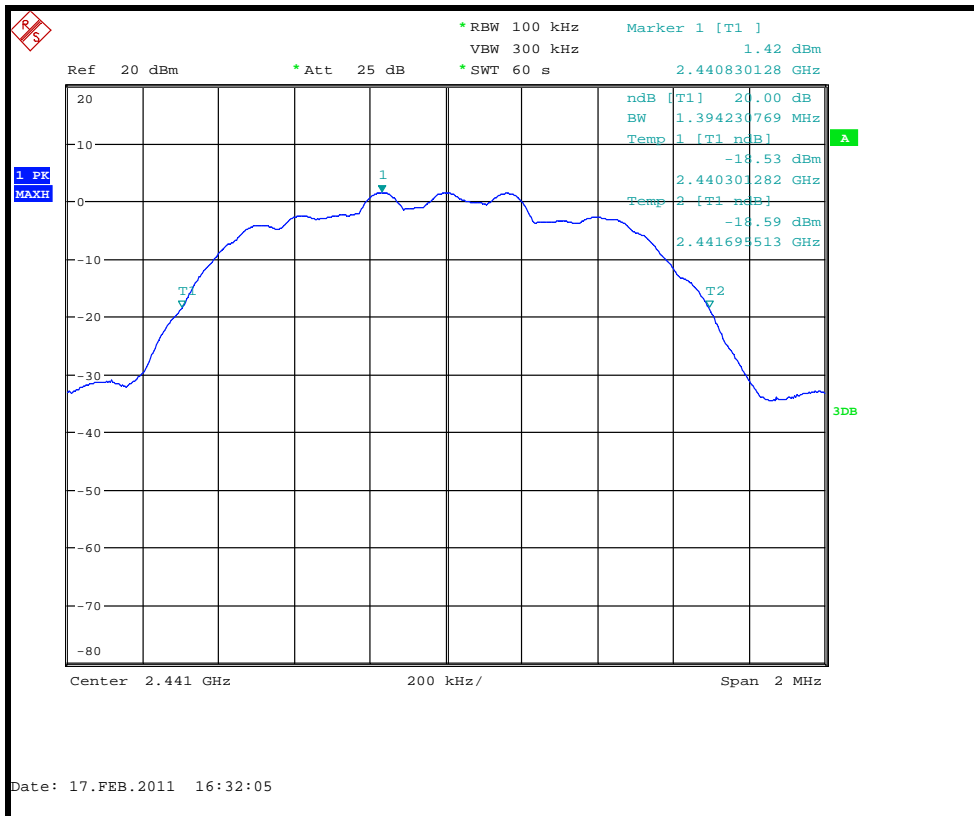


20dB Bandwidth – 3Mbps

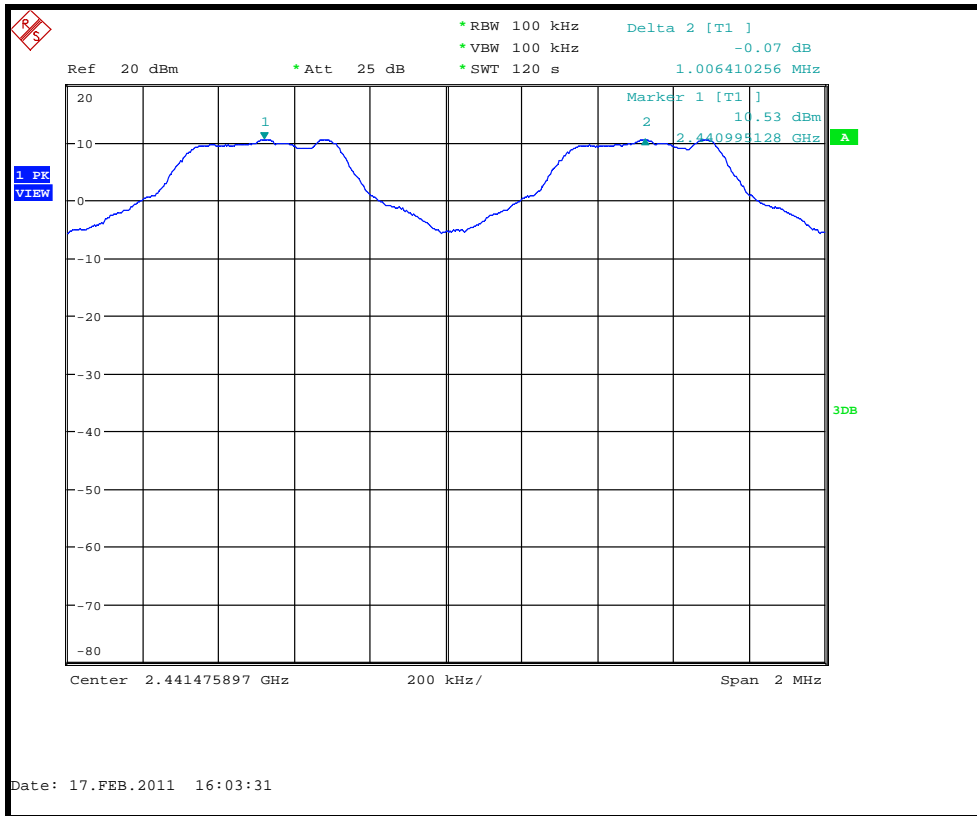



Channel Spacing – 1Mbps

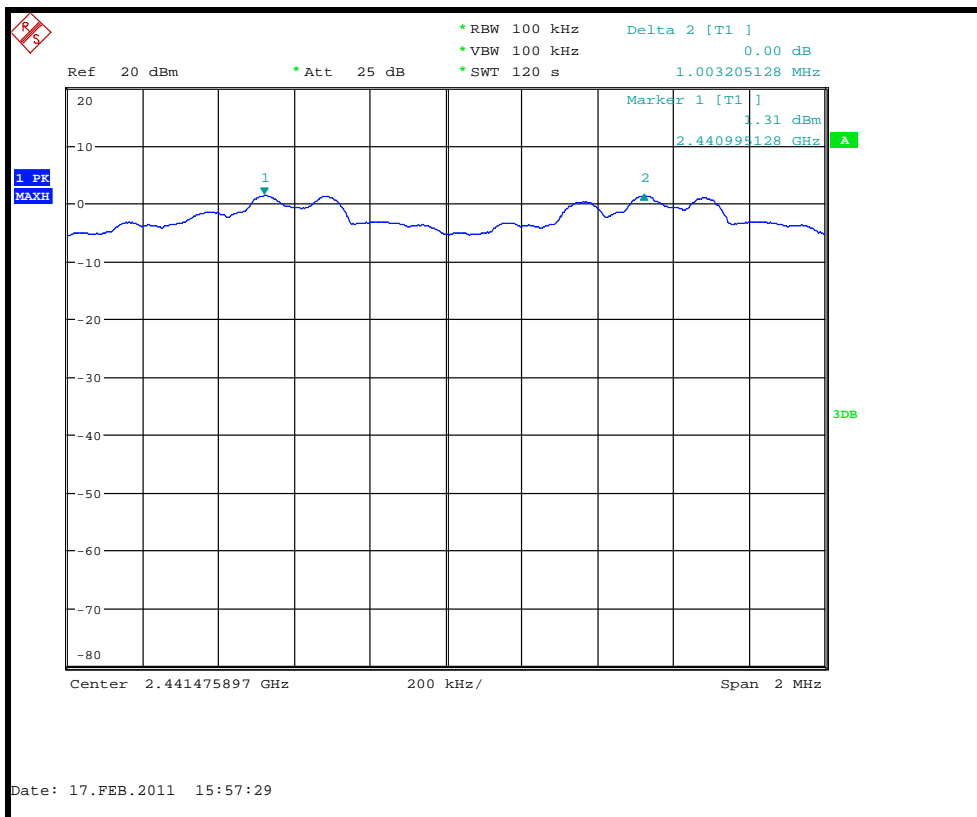



Channel Spacing – 2Mbps

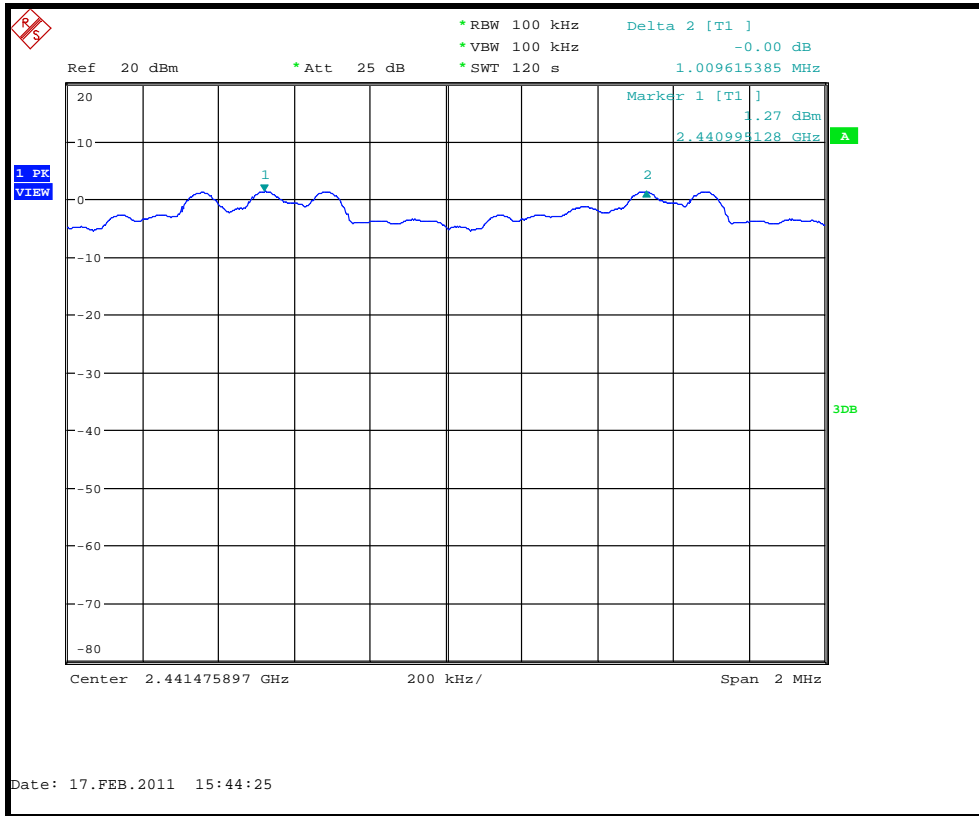



Channel Spacing – 3Mbps

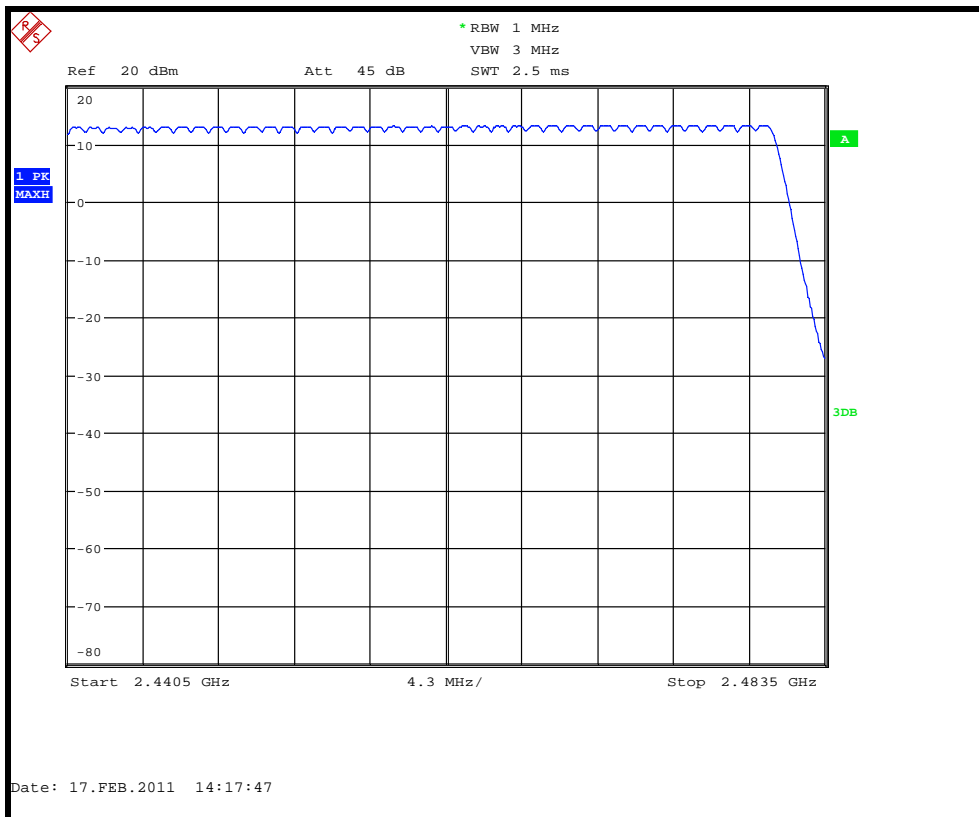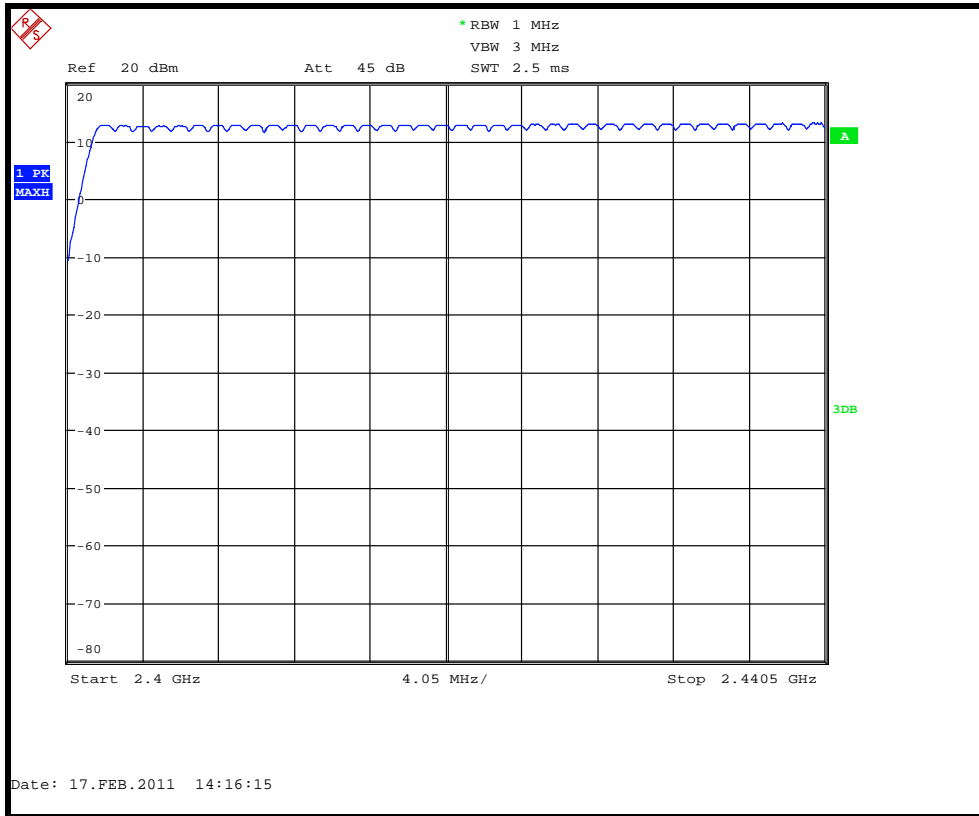


Number of Hopping Channels – 1Mbps

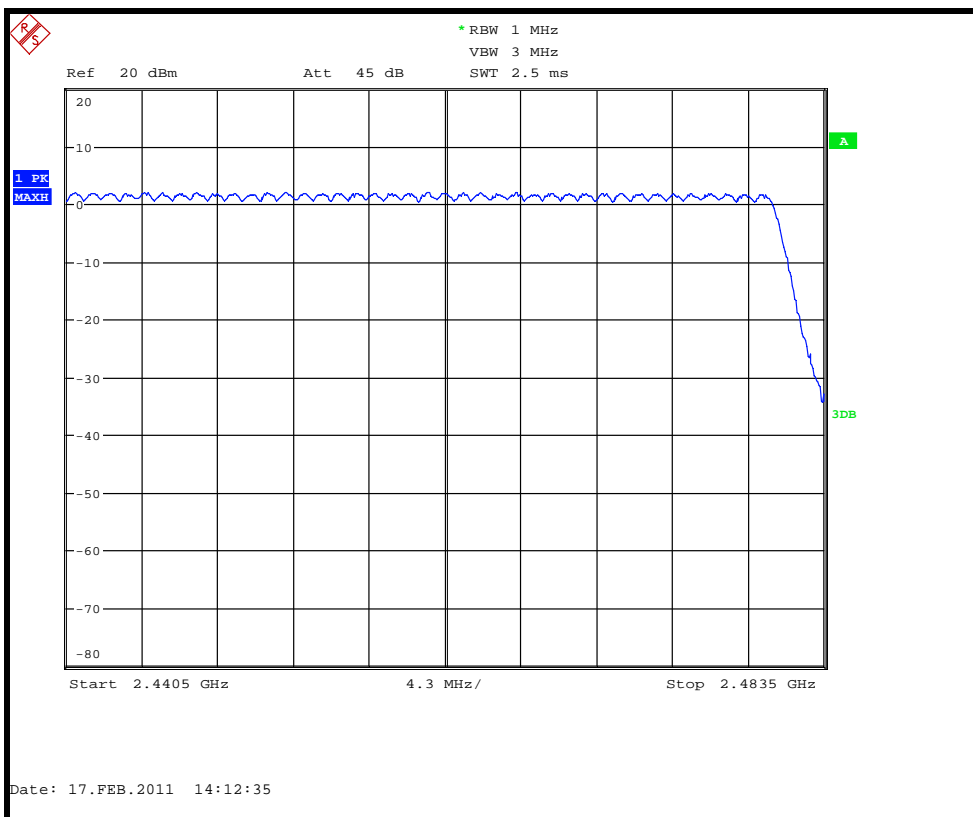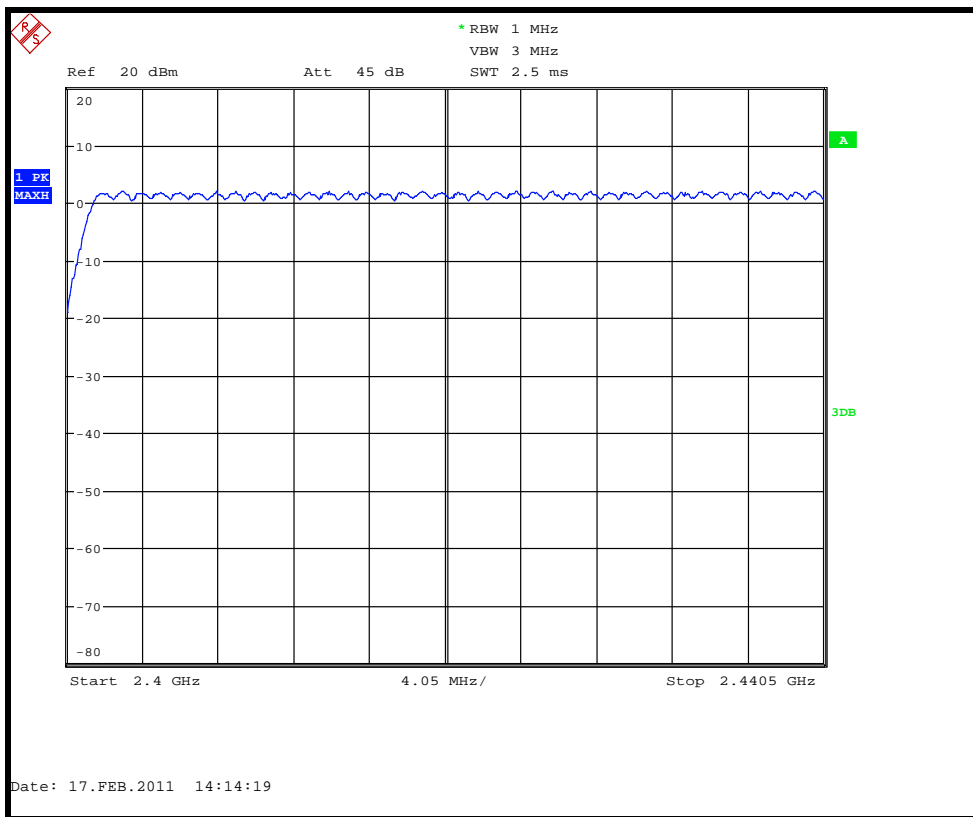


Number of Hopping Channels – 2Mbps

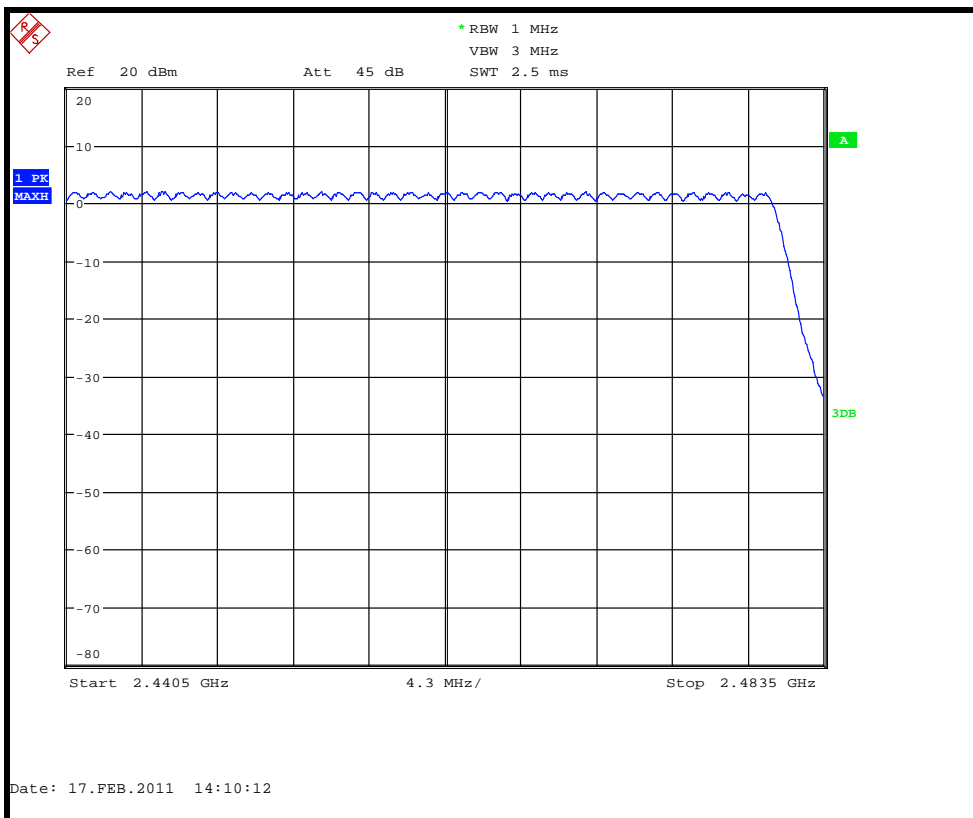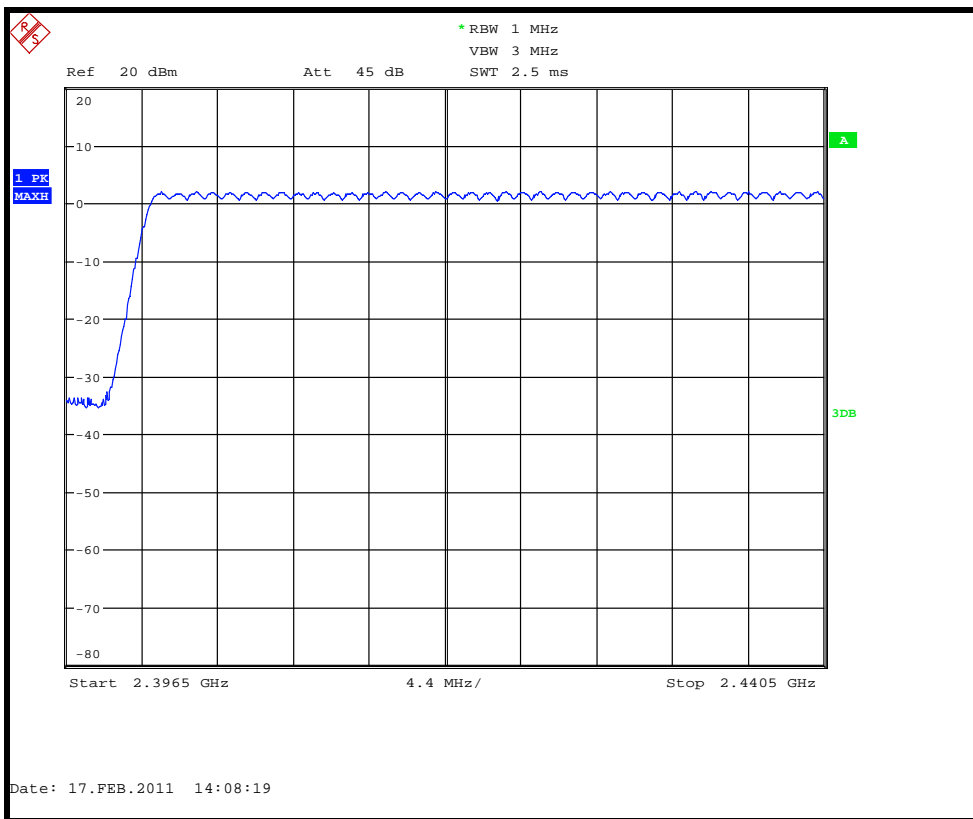


Number of Hopping Channels – 3Mbps

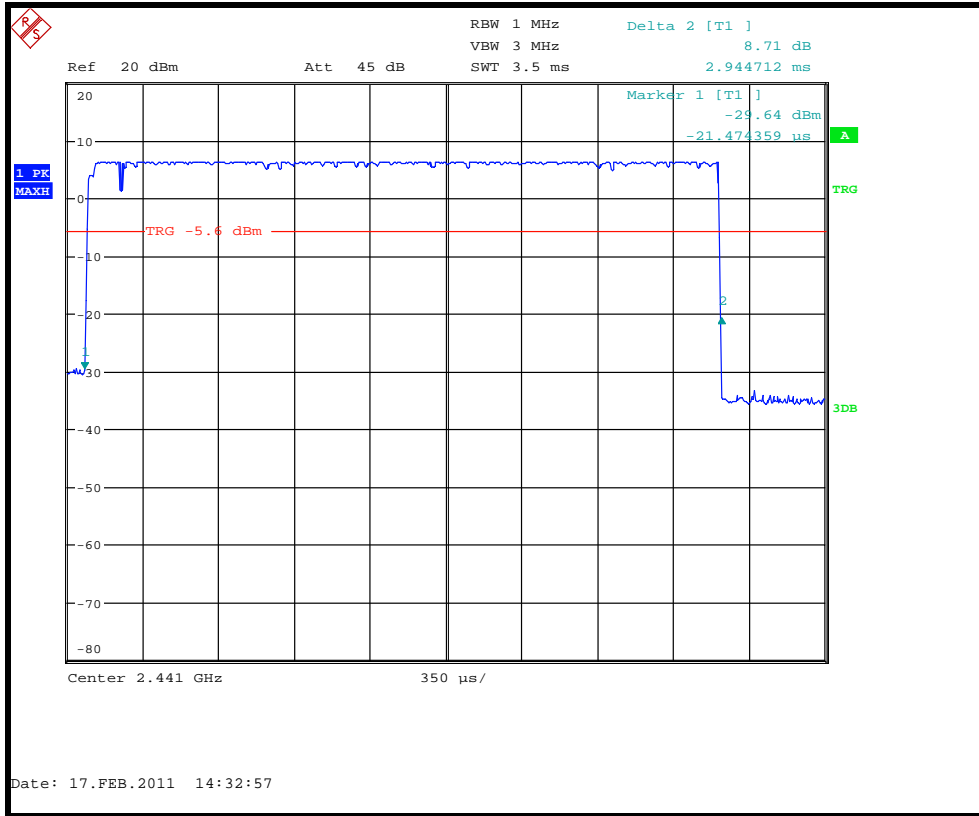


Channel Occupancy Time – 1Mbps

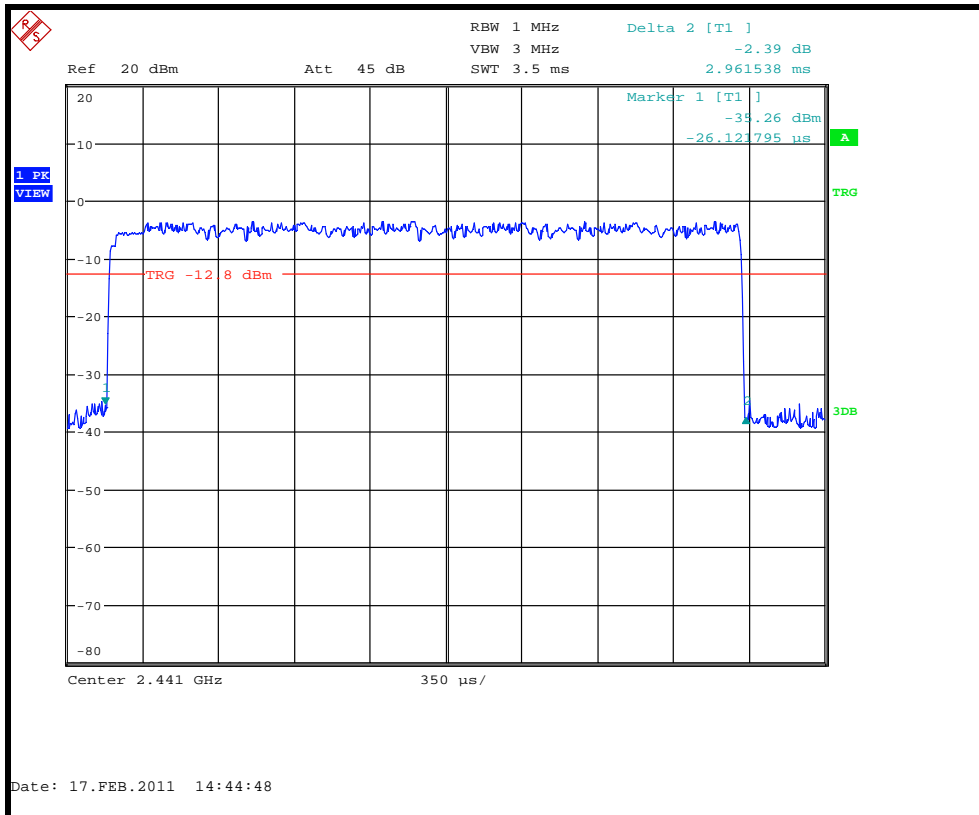


Channel Occupancy Time – 2Mbps

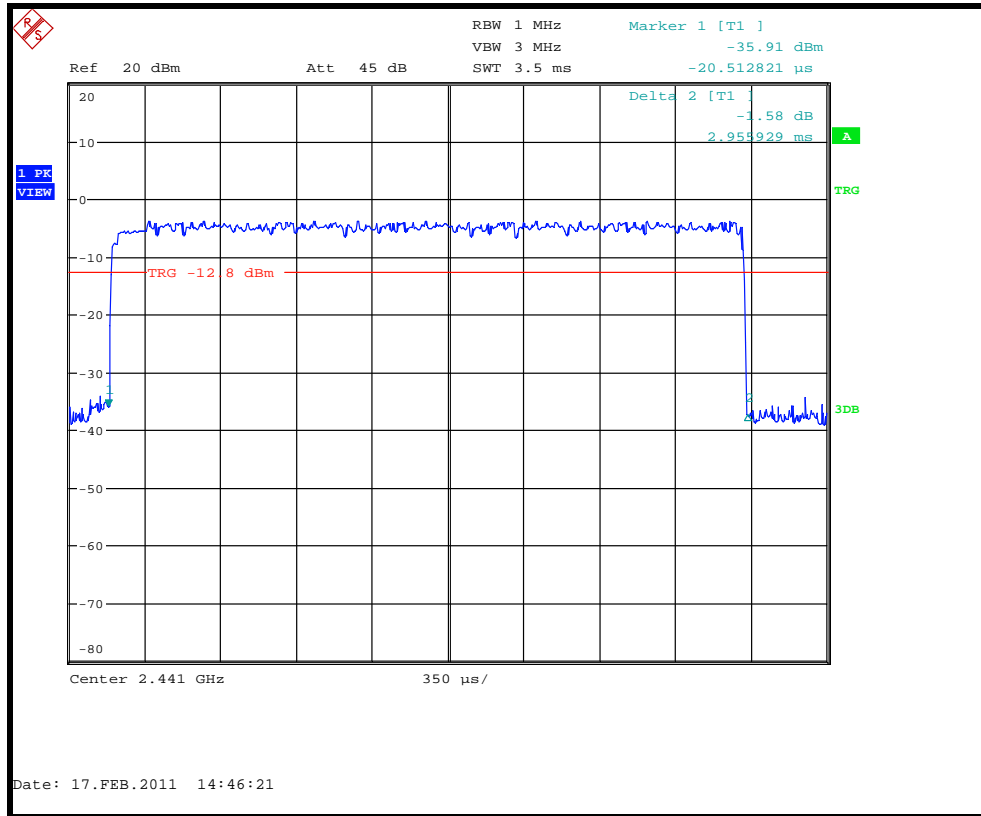


Channel Occupancy Time – 3Mbps

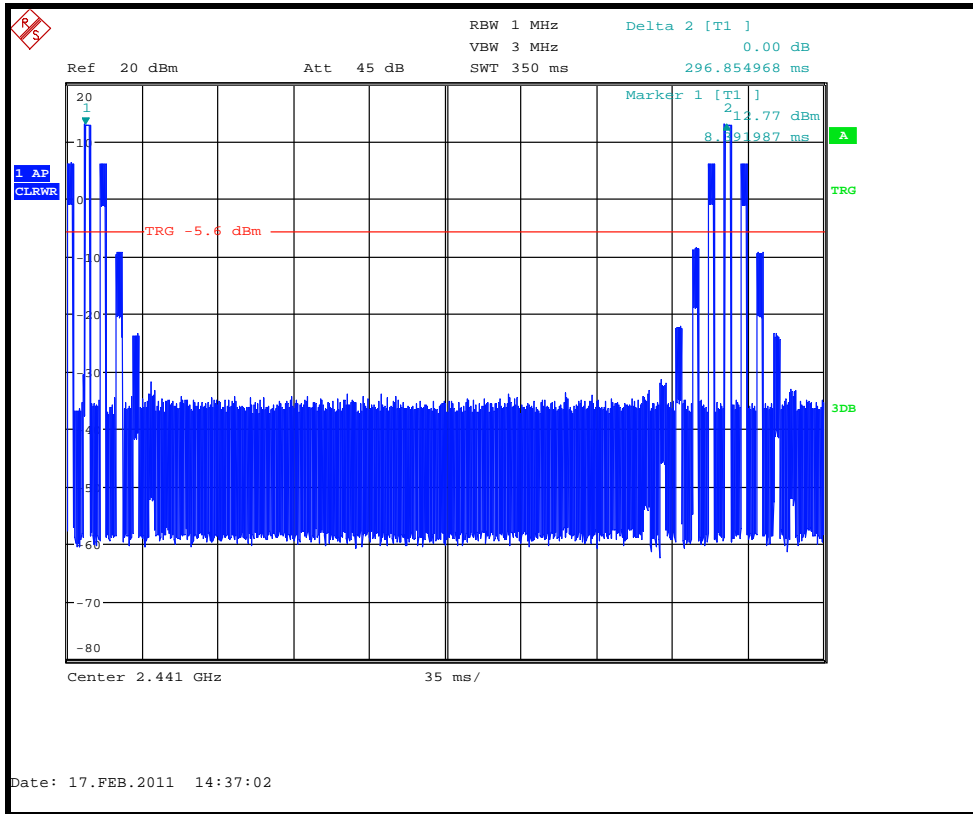


Channel repetition time – 1Mbps

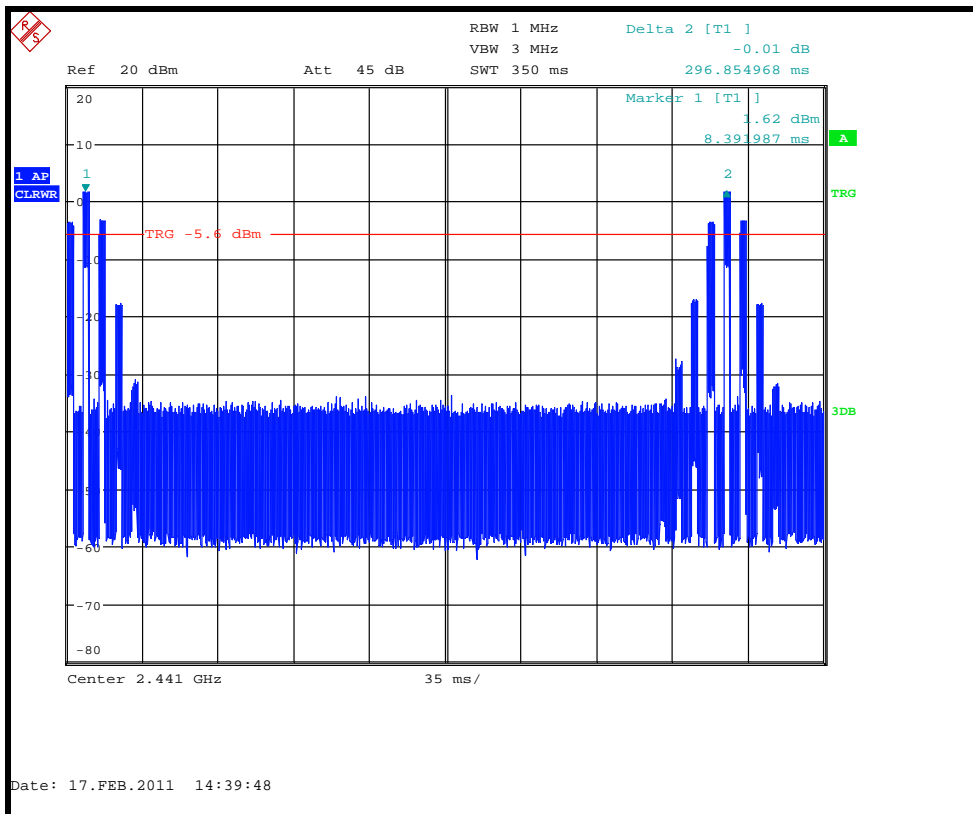


Channel repetition time – 2Mbps

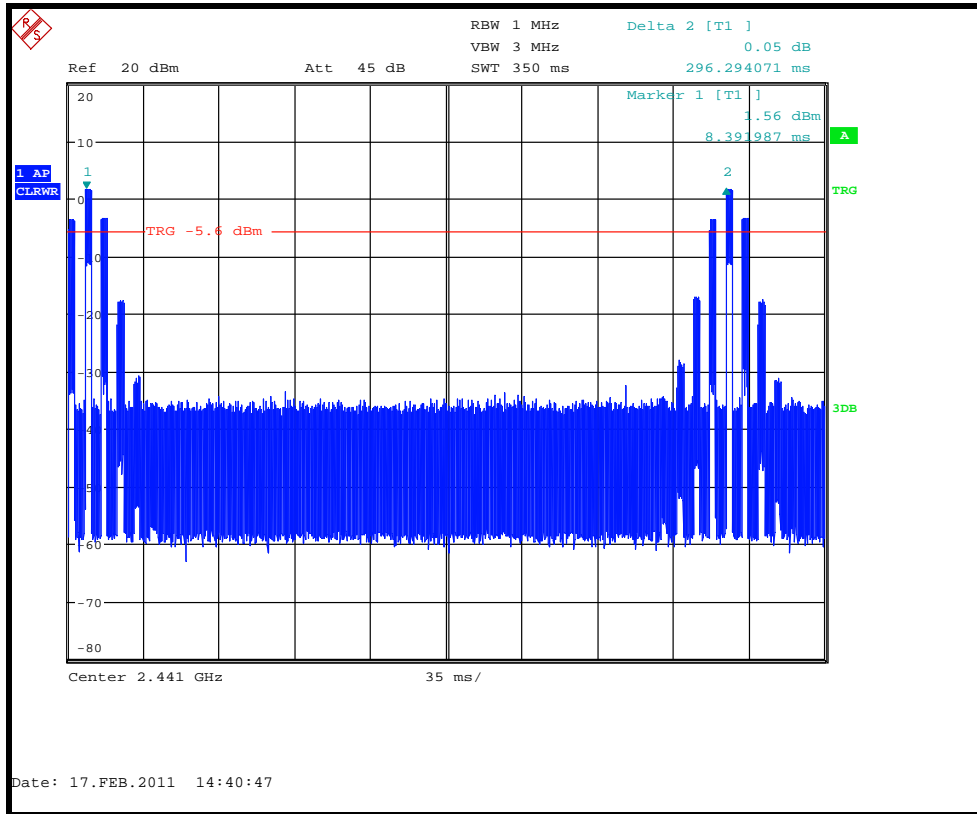


Channel repetition time – 3Mbps

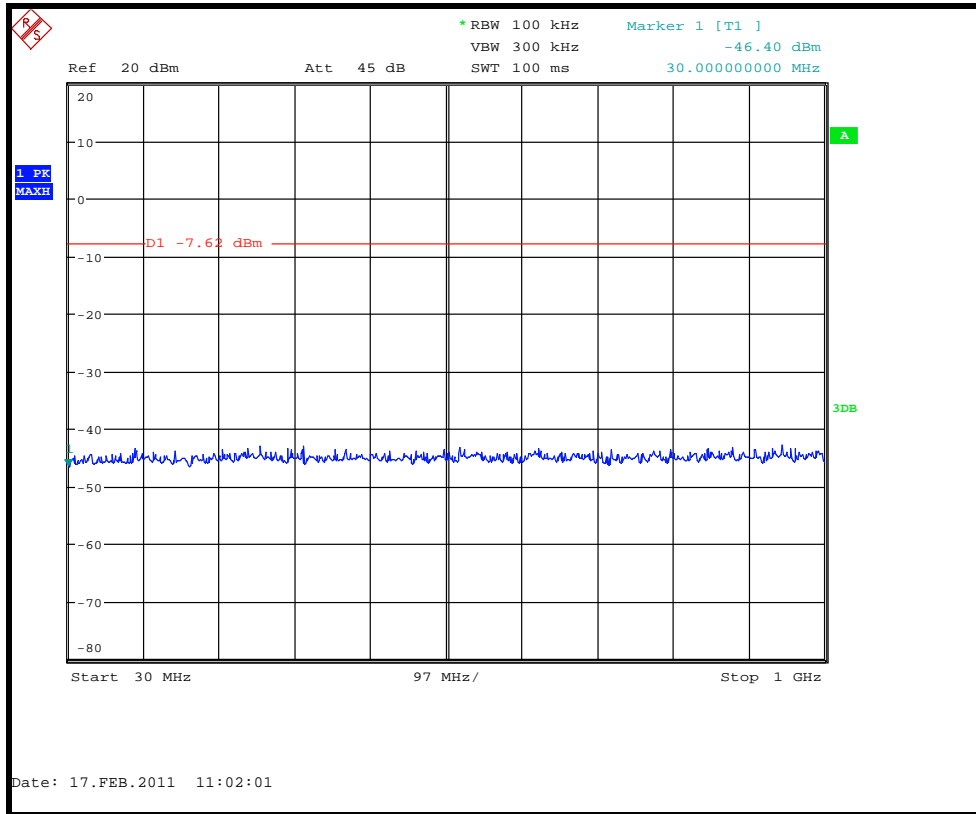


Conducted spurious emissions 30 MHz to 1 GHz – 2402.0MHz – 1Mbps

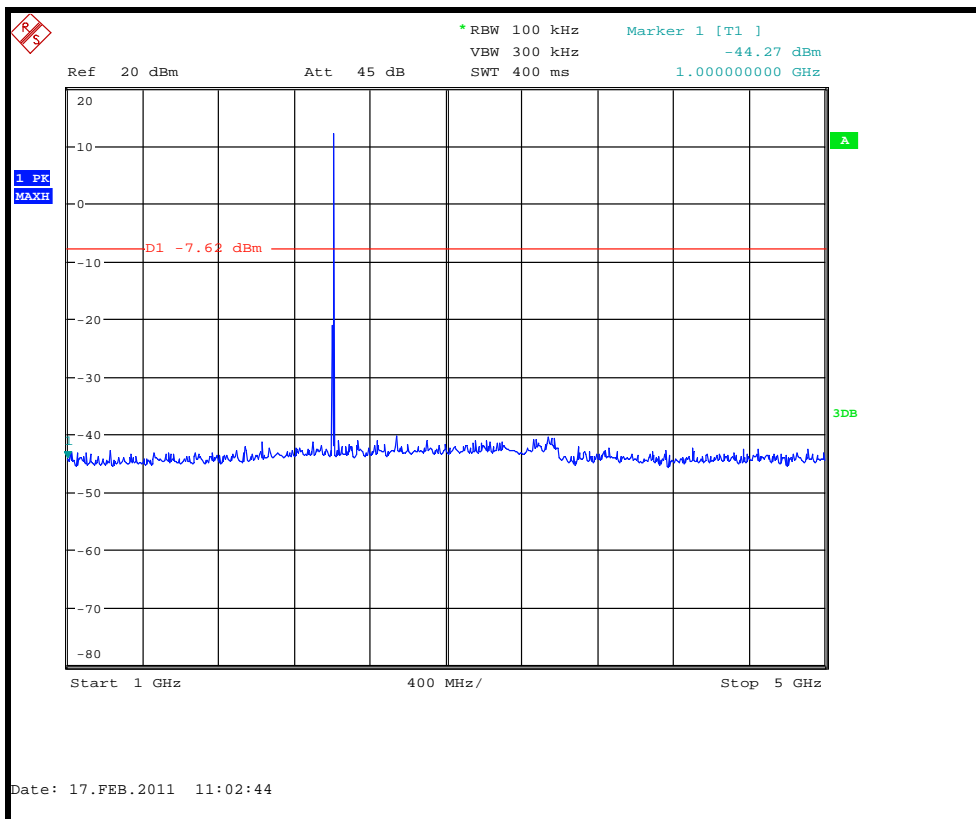


Conducted spurious emissions 1 GHz to 5 GHz – 2402.0MHz – 1Mbps

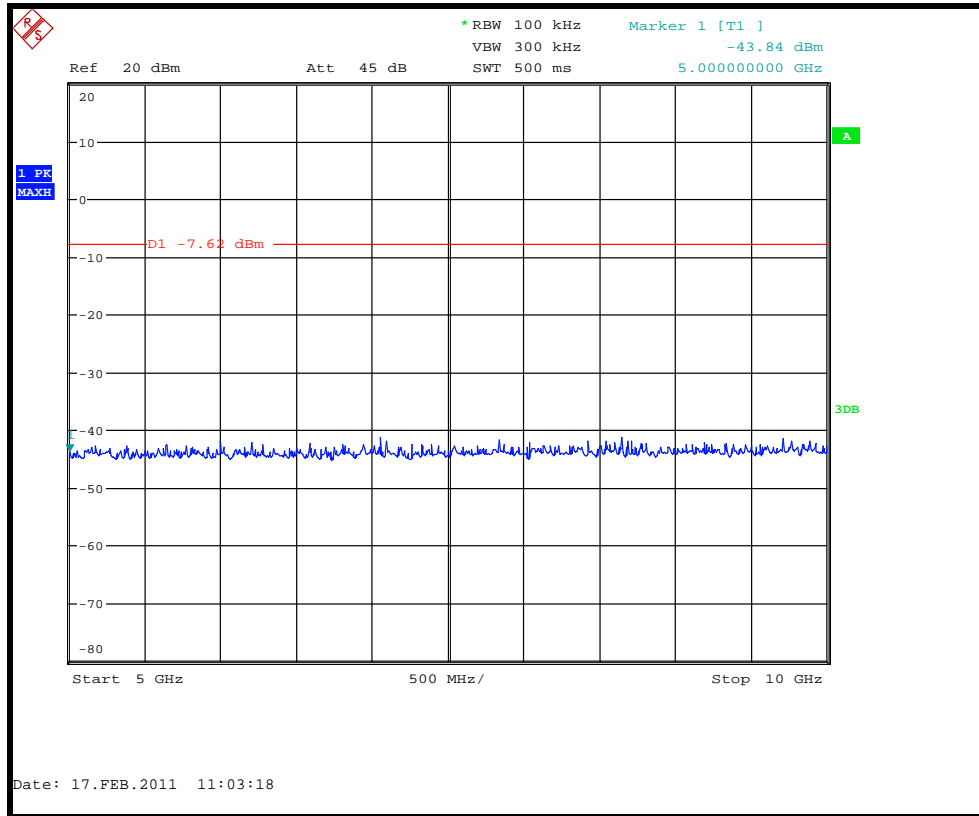


Conducted spurious emissions 5 GHz to 10 GHz – 2402.0MHz – 1Mbps

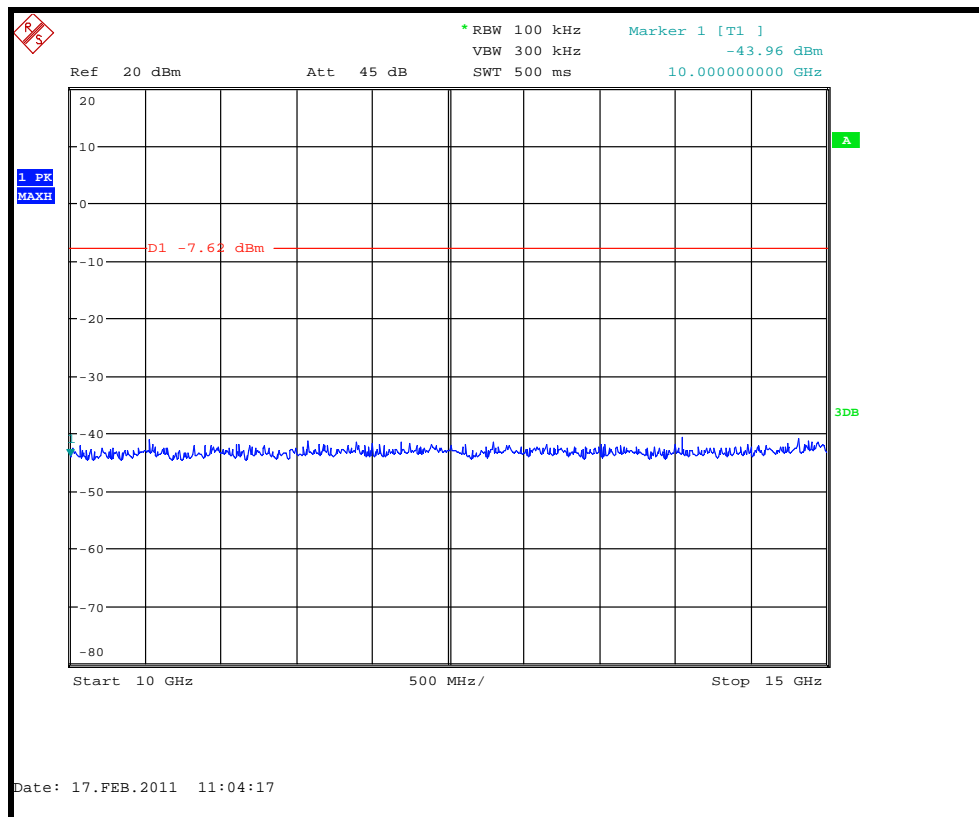


Conducted spurious emissions 10 GHz to 15 GHz – 2402.0MHz – 1Mbps

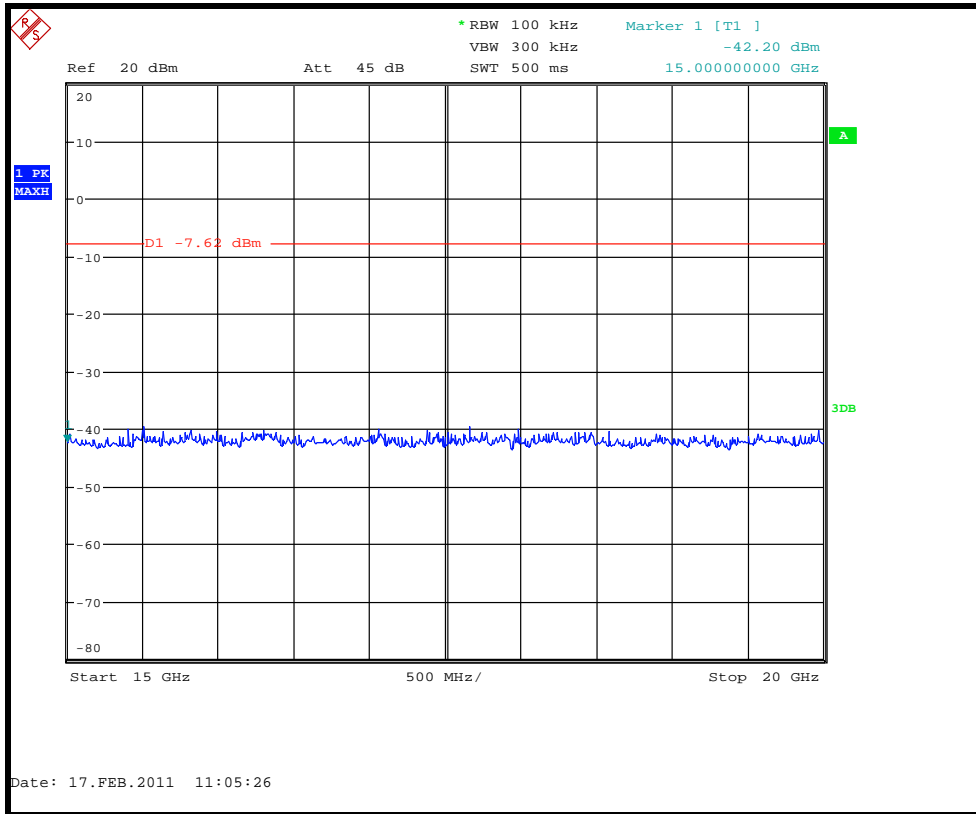


Conducted spurious emissions 15 GHz to 20 GHz – 2402.0MHz – 1Mbps

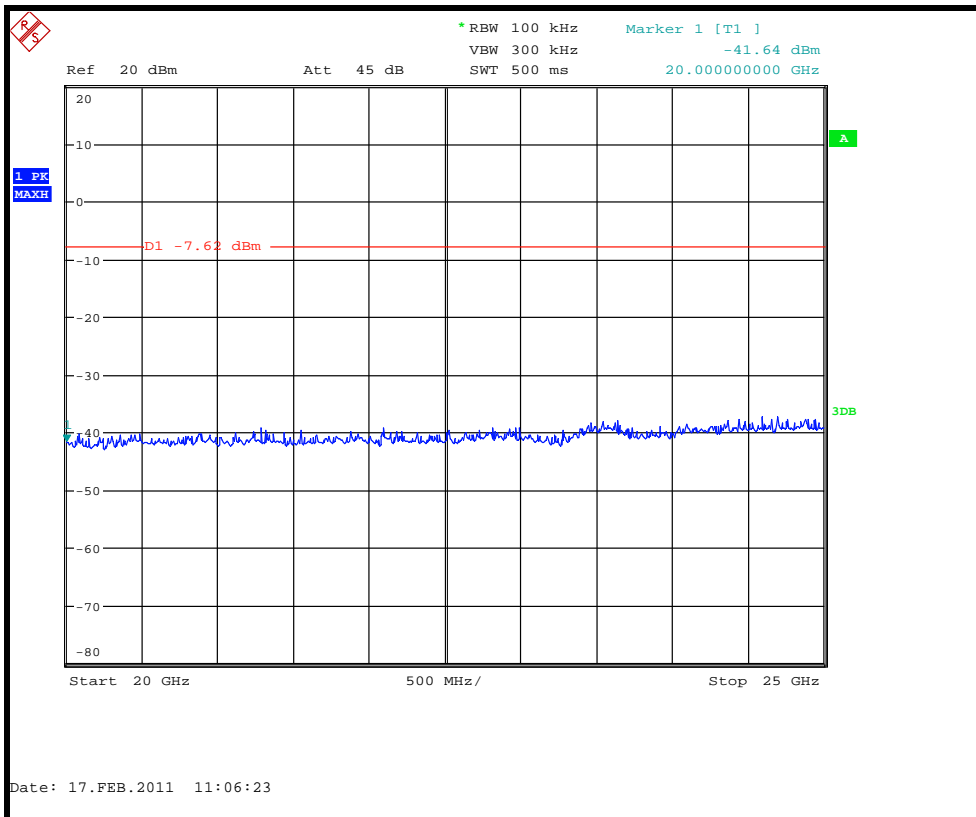


Conducted spurious emissions 20 GHz to 25 GHz – 2402.0MHz 1Mbps

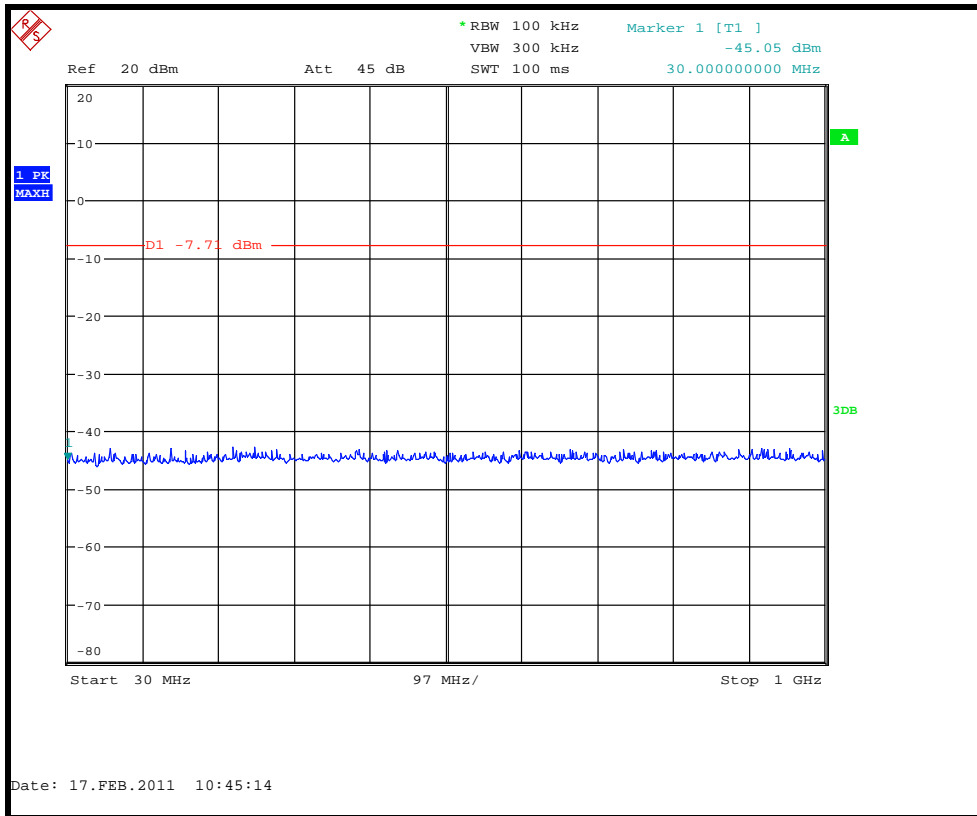


Conducted Spurious emissions 30 MHz to 1 GHz – 2441.0 MHz – 1Mbps

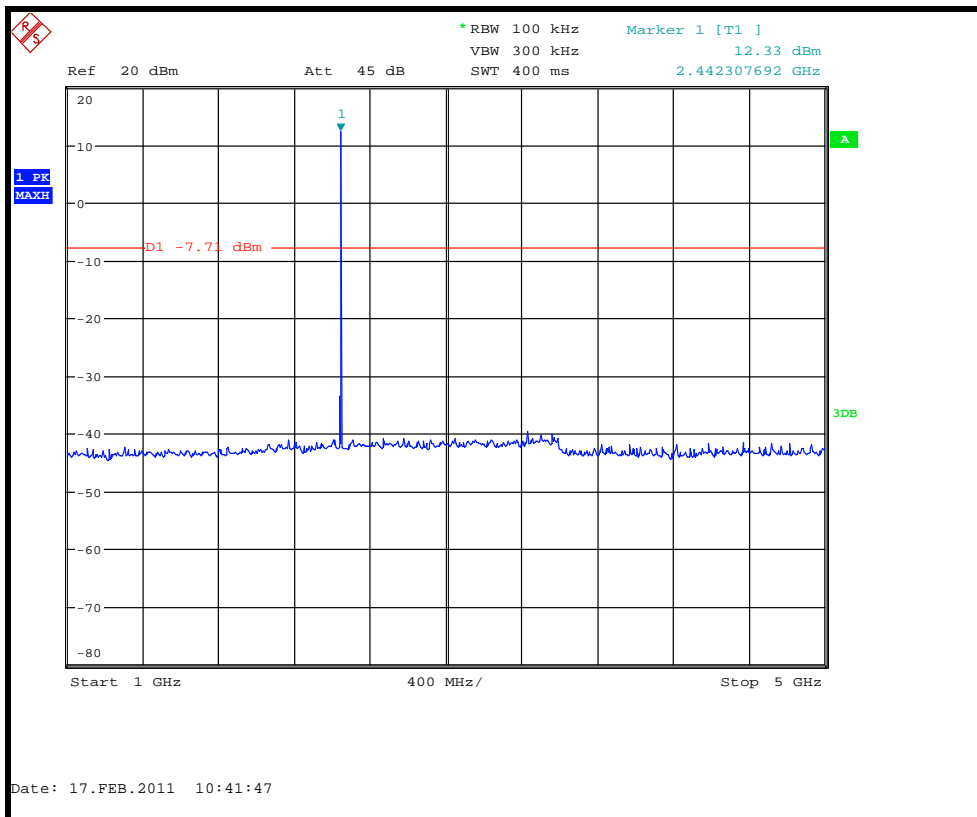


Conducted Spurious emissions 1 GHz to 5 GHz – 2441.0 MHz – 1Mbps

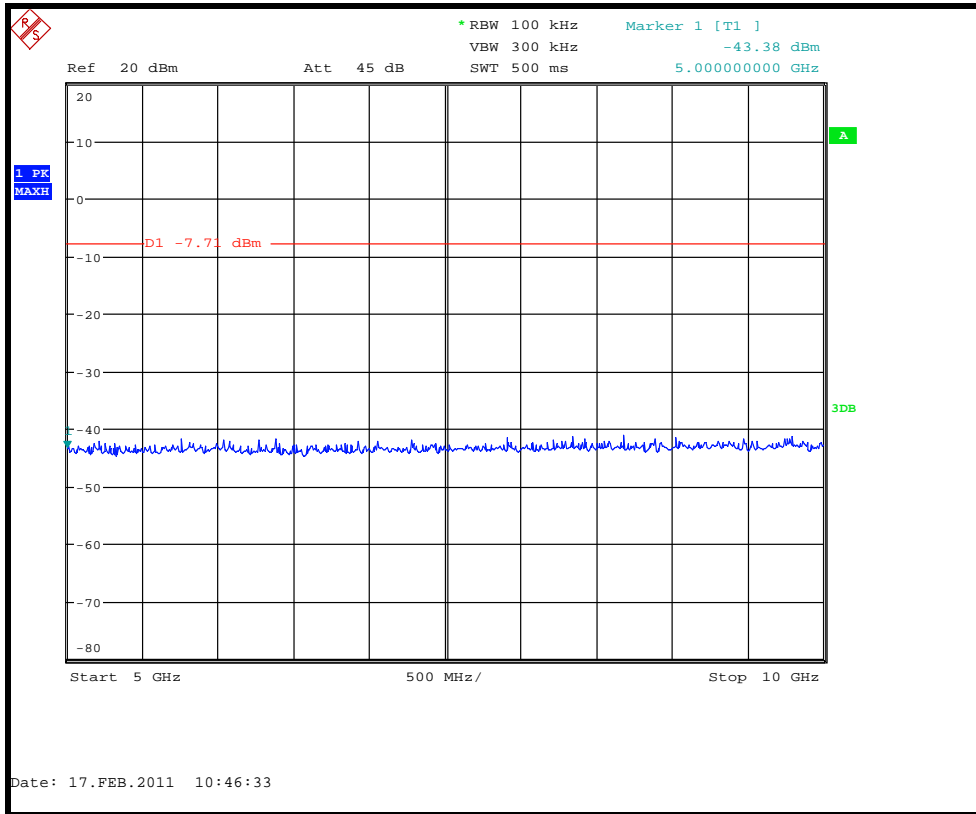


Conducted Spurious emissions 5 GHz to 10 GHz – 2441.0 MHz – 1Mbps

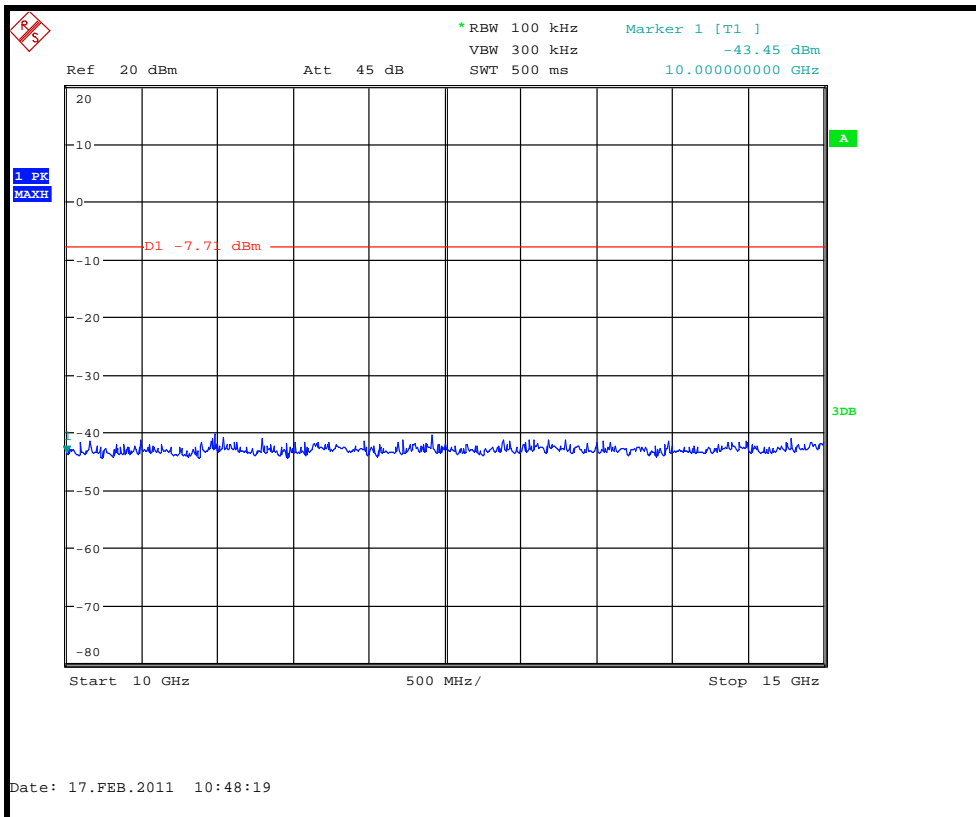


Conducted Spurious emissions 10 GHz to 15GHz – 2441.0 MHz – 1Mbps

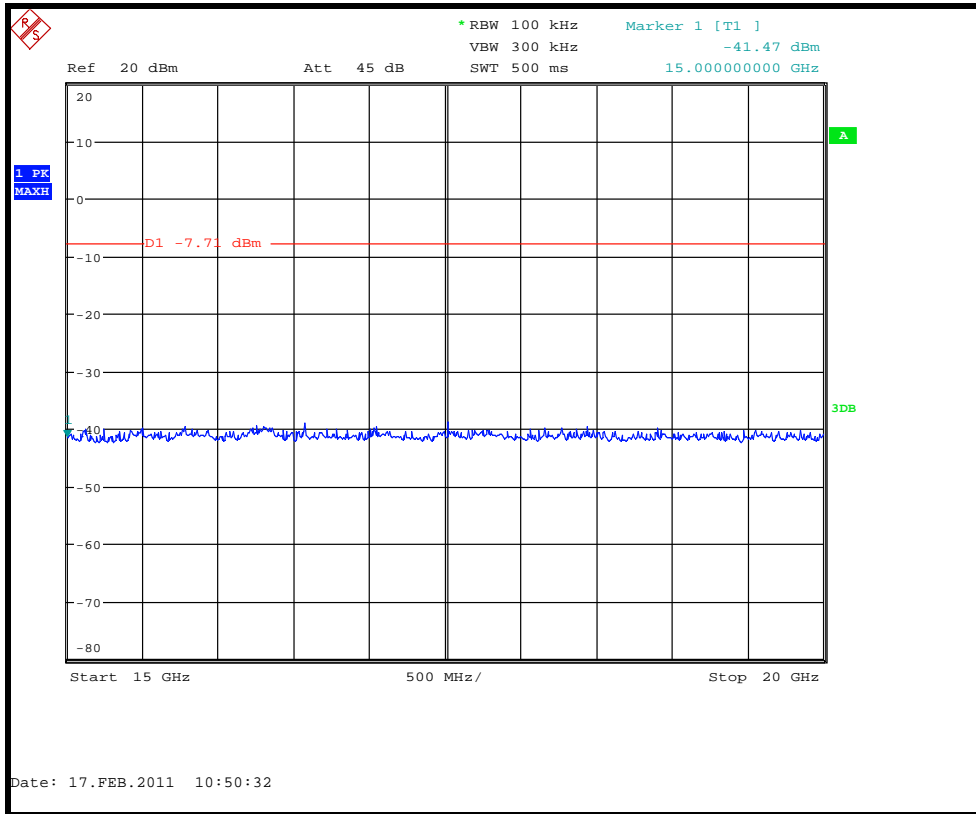


Conducted Spurious emissions 15 GHz to 20GHz – 2441.0 MHz – 1Mbps

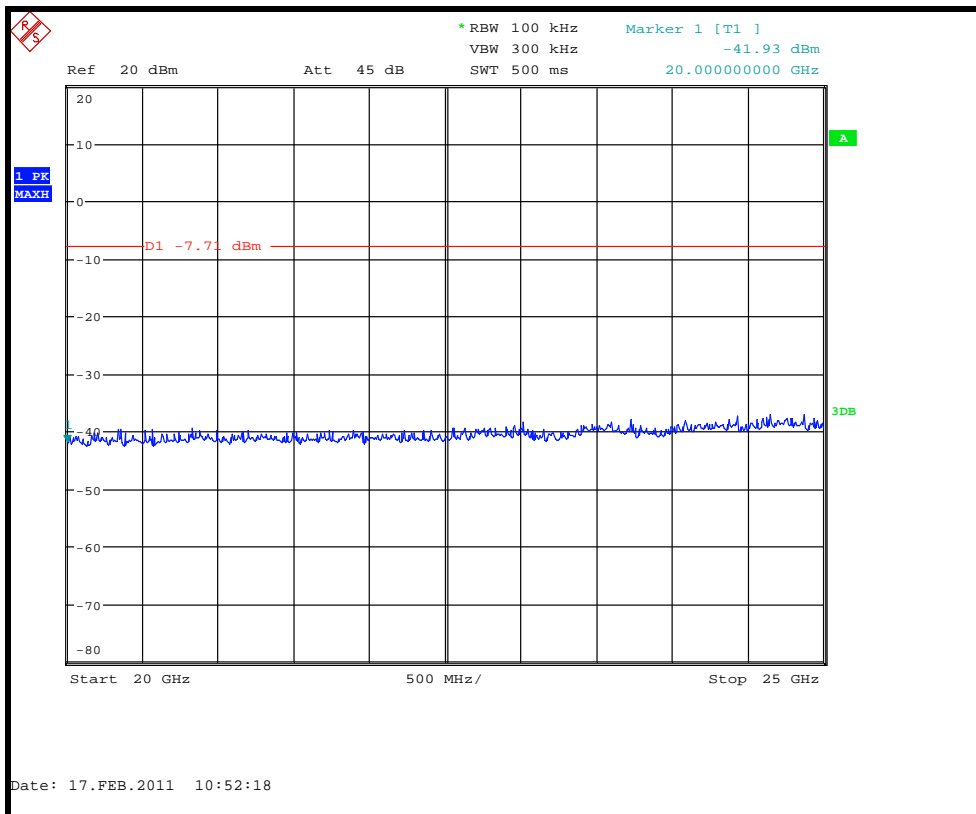


Conducted Spurious emissions 20 GHz to 25GHz – 2441.0 MHz – 1Mbps

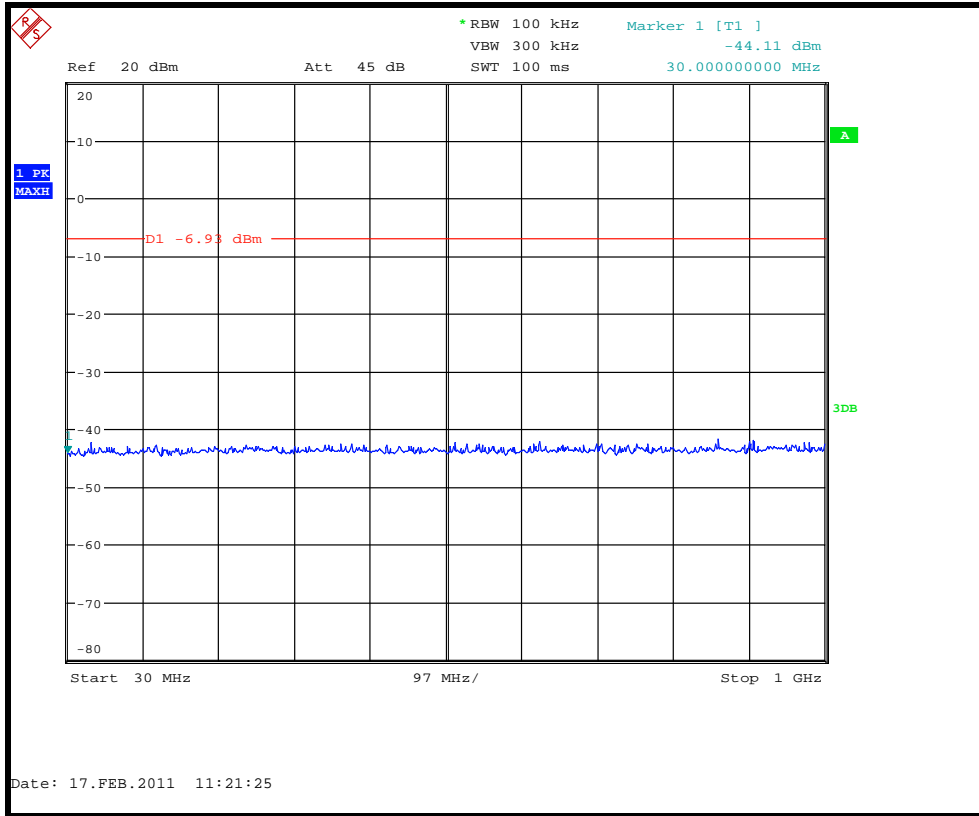


Conducted Spurious emissions 30 MHz to 1 GHz – 2480.0MHz – 1Mbps

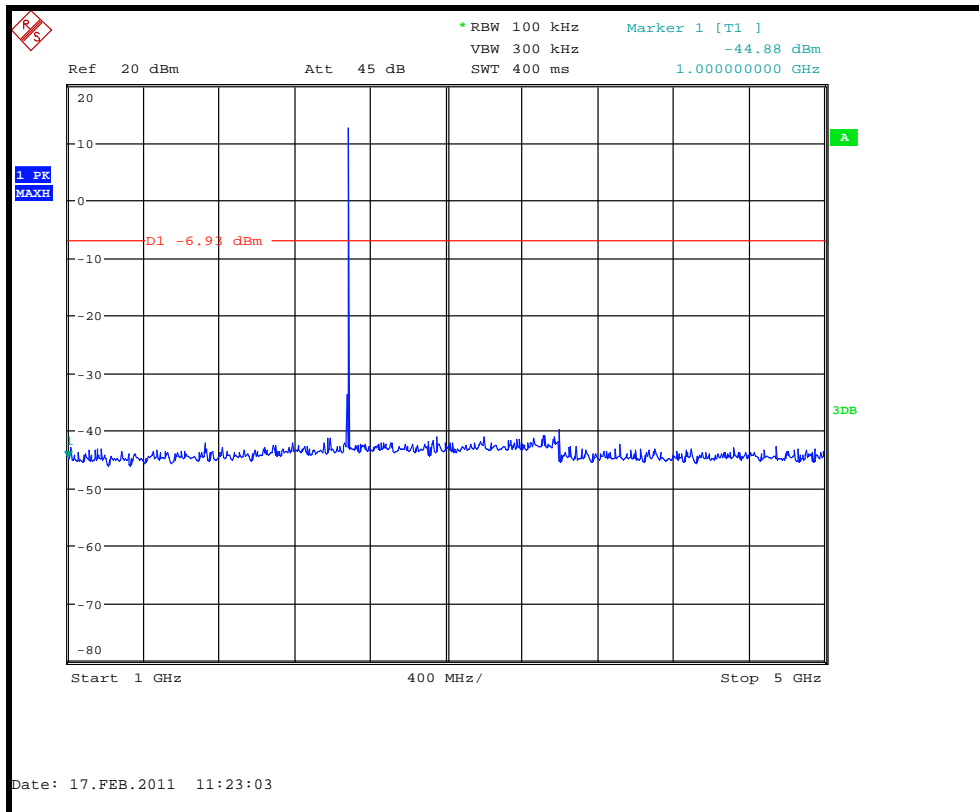


Conducted Spurious emissions 1 GHz to 5 GHz – 2480.0MHz – 1Mbps

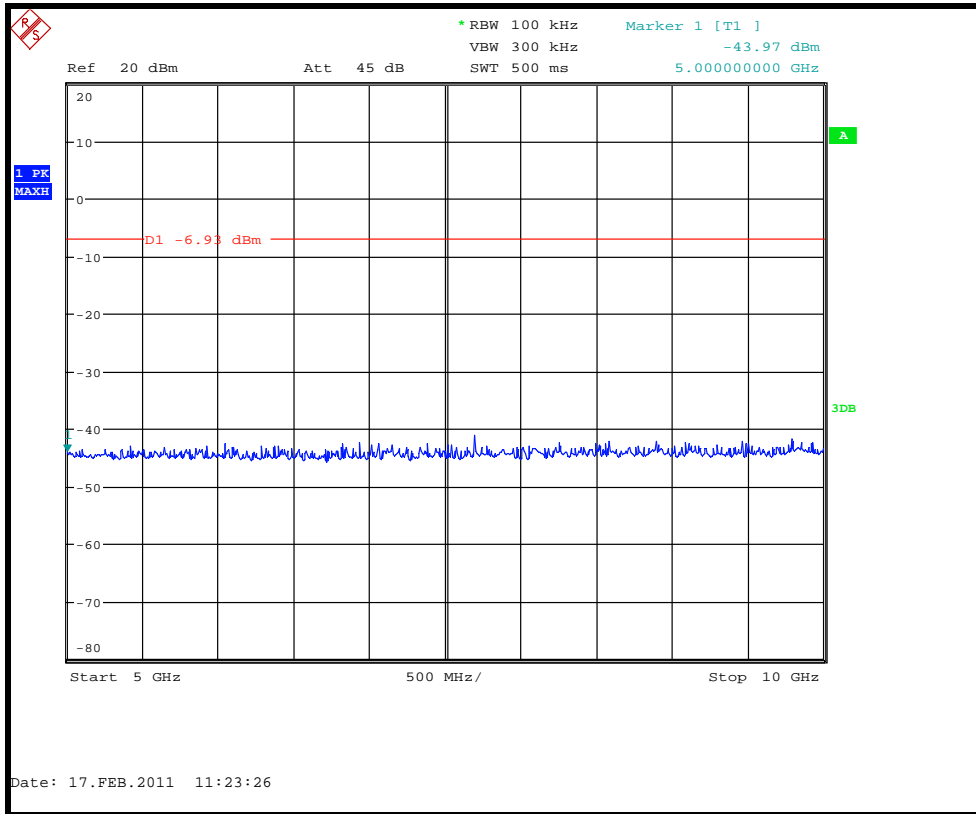


Conducted Spurious emissions 5 GHz to 10 GHz– 2480.0MHz – 1Mbps

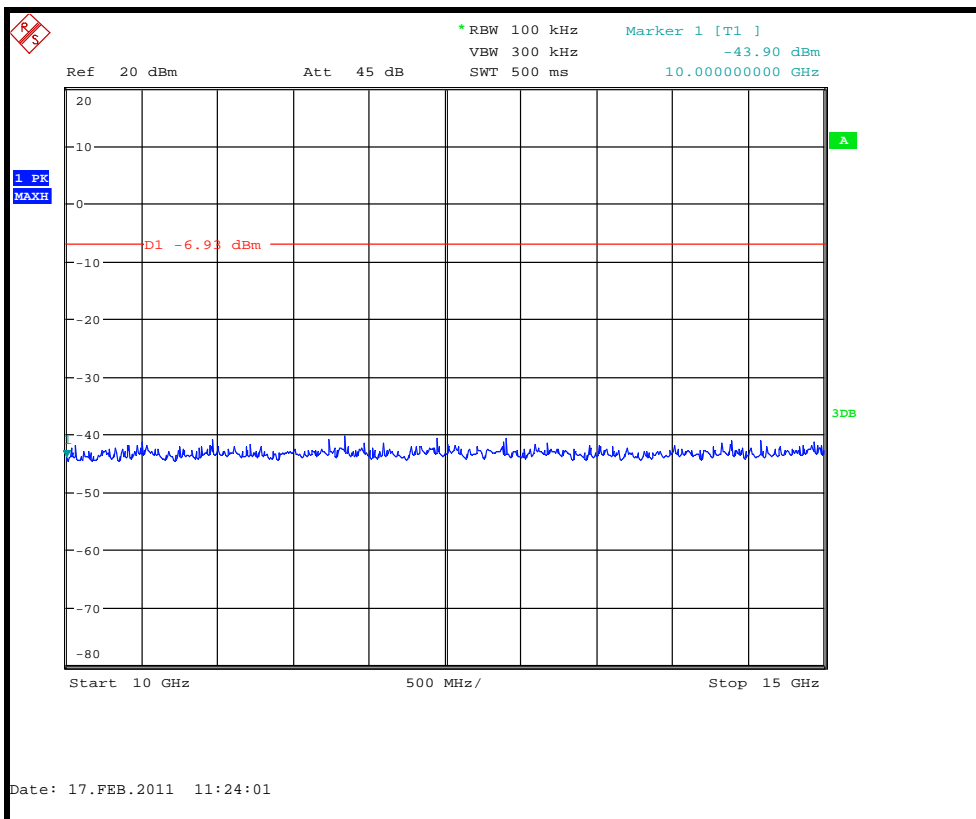

Conducted Spurious emissions 10 GHz to 15 GHz– 2480.0MHz – 1Mbps

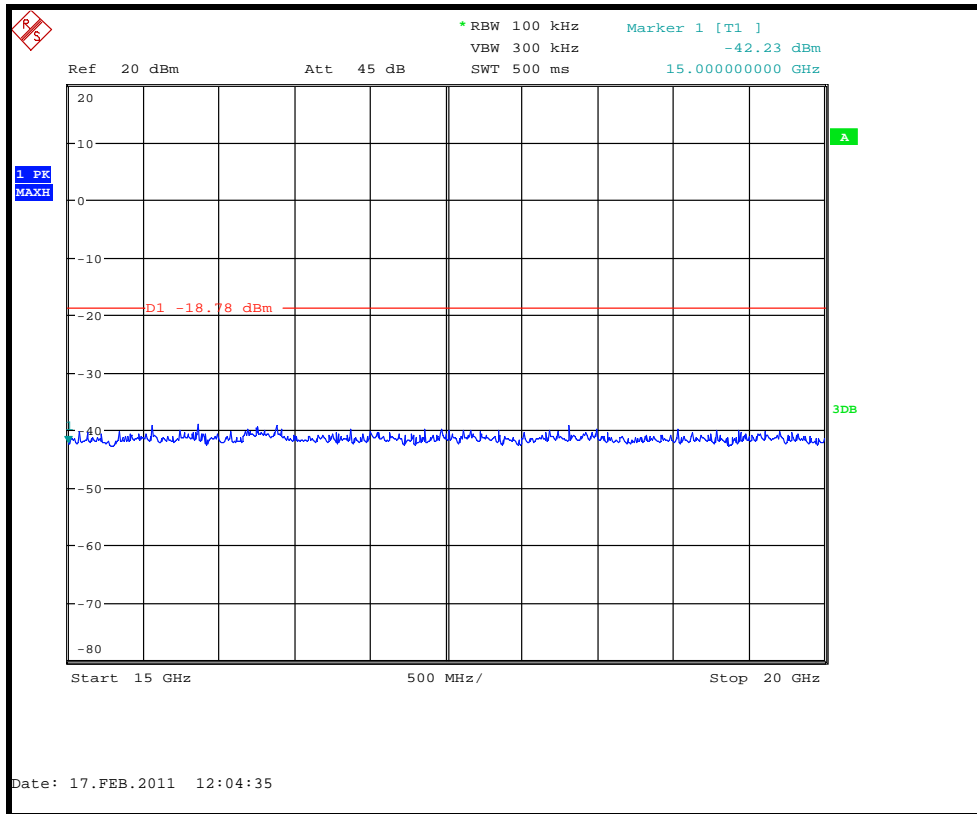


Conducted Spurious emissions 15 GHz to 20 GHz– 2480.0MHz – 1Mbps

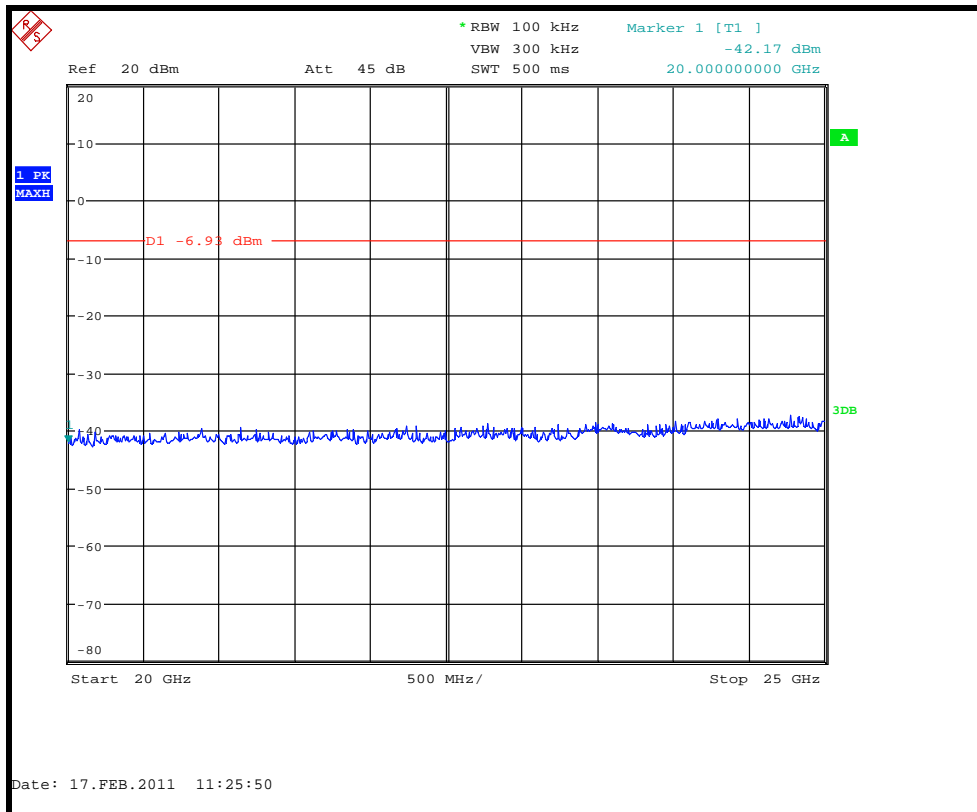


Conducted Spurious emissions 20 GHz to 25 GHz– 2480.0MHz – 1Mbps


Conducted Bandedge Compliance

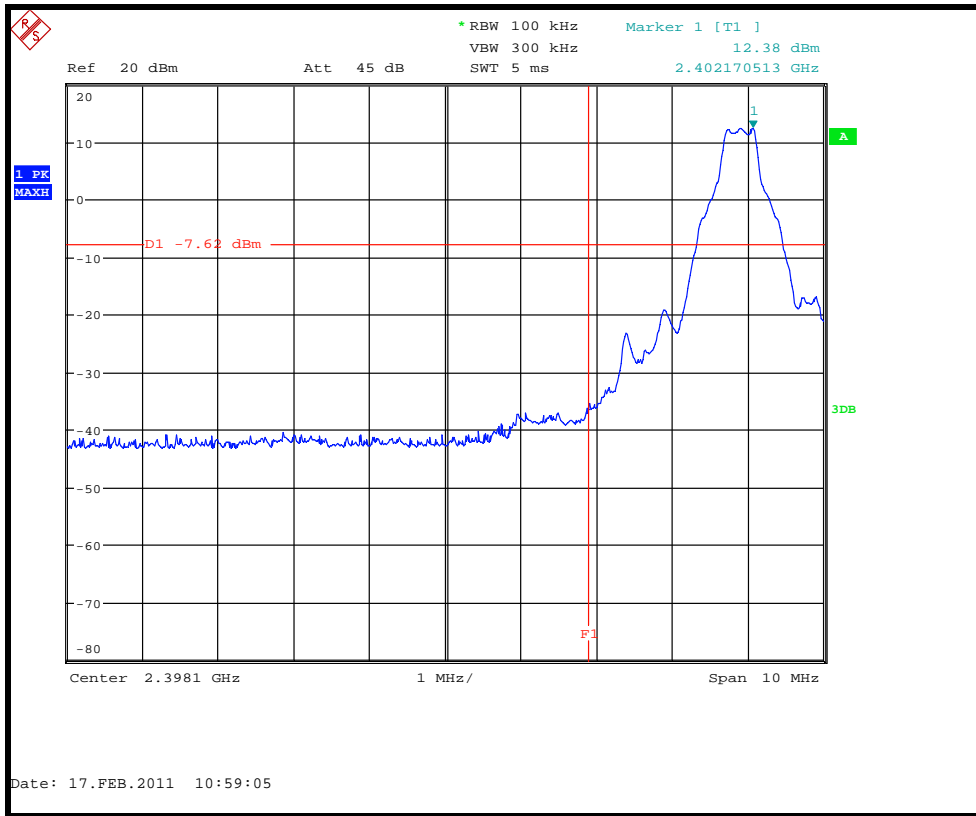


Lower Bandedge – 1Mbps

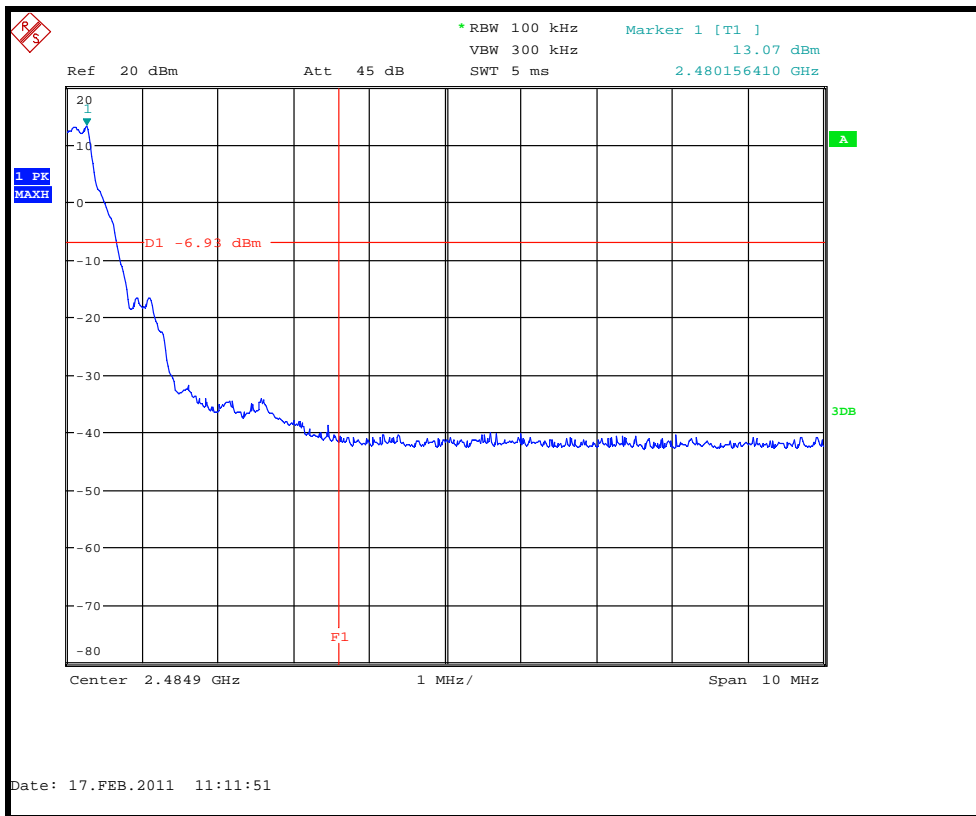


Upper Bandedge – 1Mbps

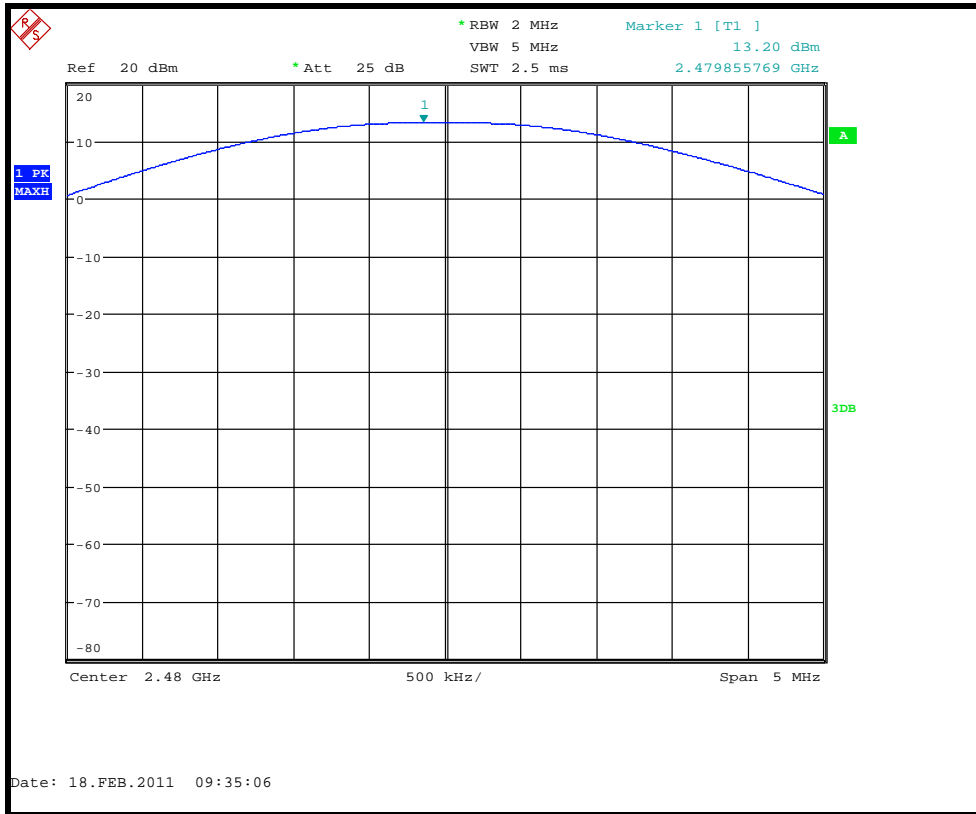


Conducted carrier power 2480.0 MHz – 1Mbps

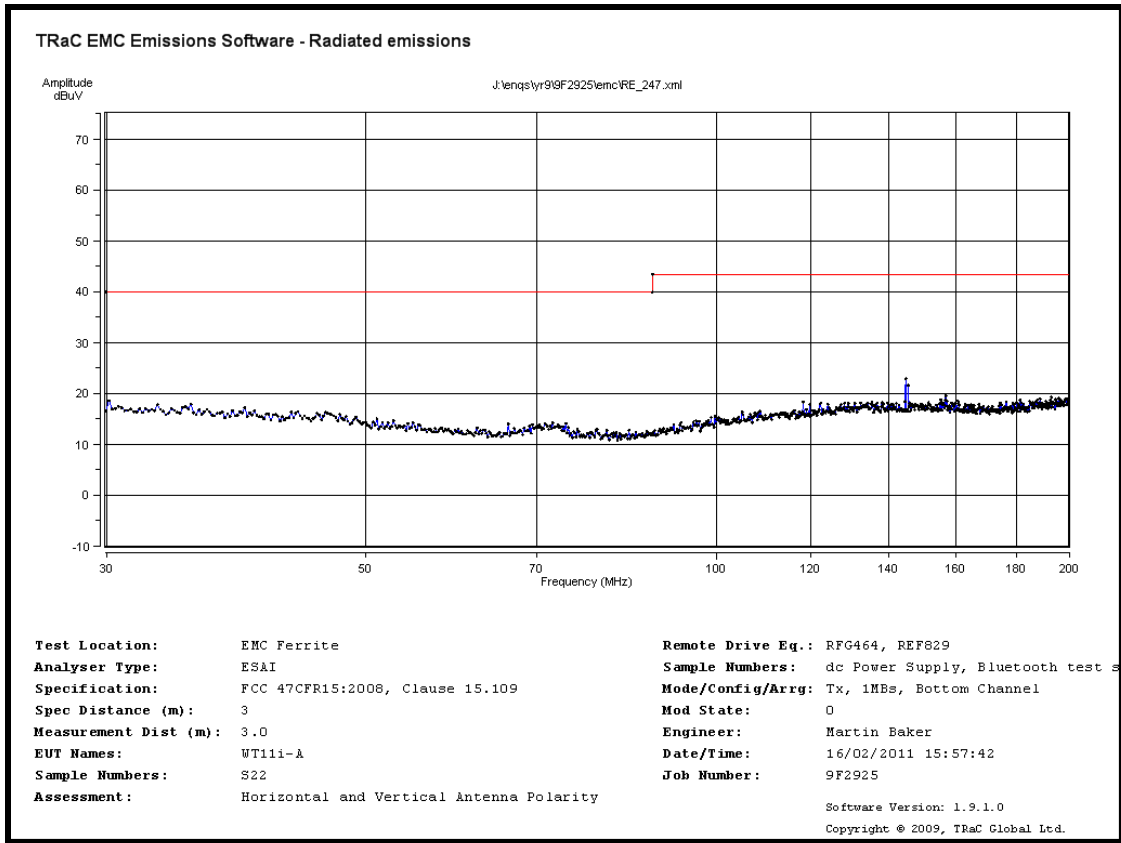


Radiated Spurious emissions 30 MHz to 200 MHz – 2402MHz – 1Mbps

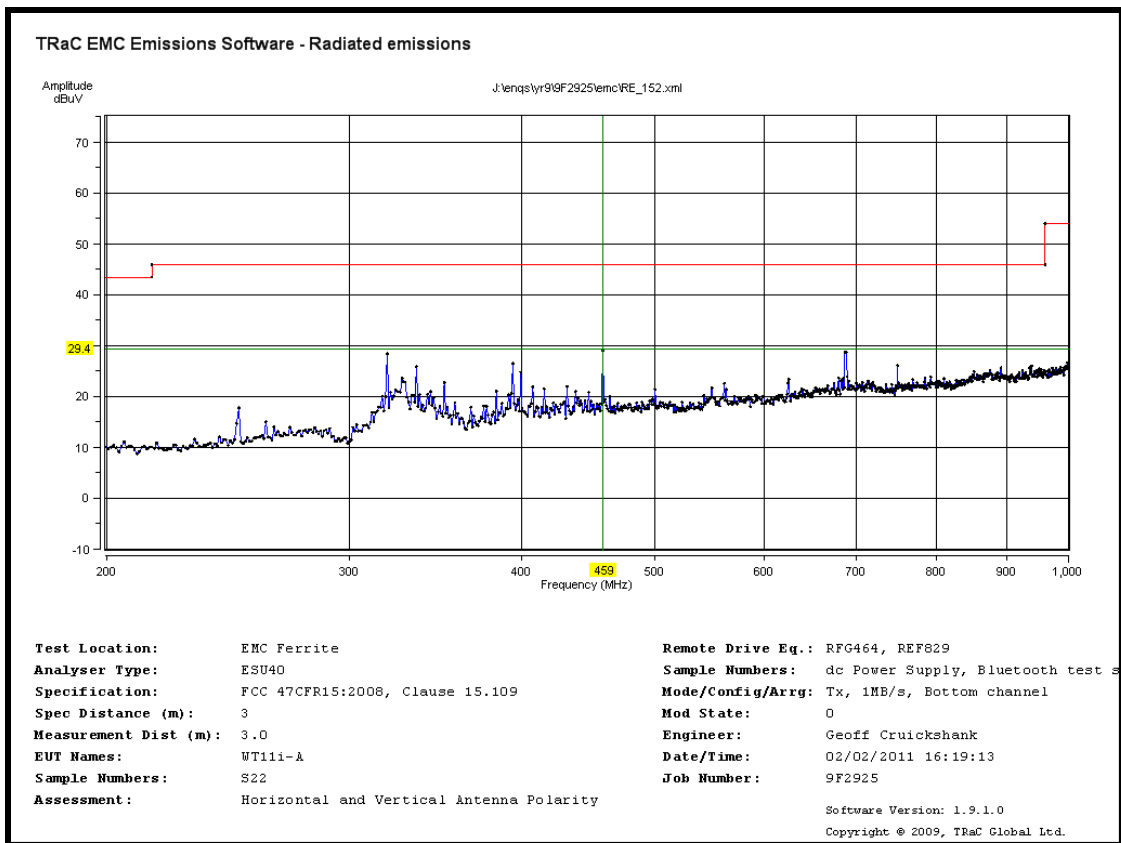


Radiated Spurious emissions 200 MHz to 1 GHz – 2402MHz – 1Mbps

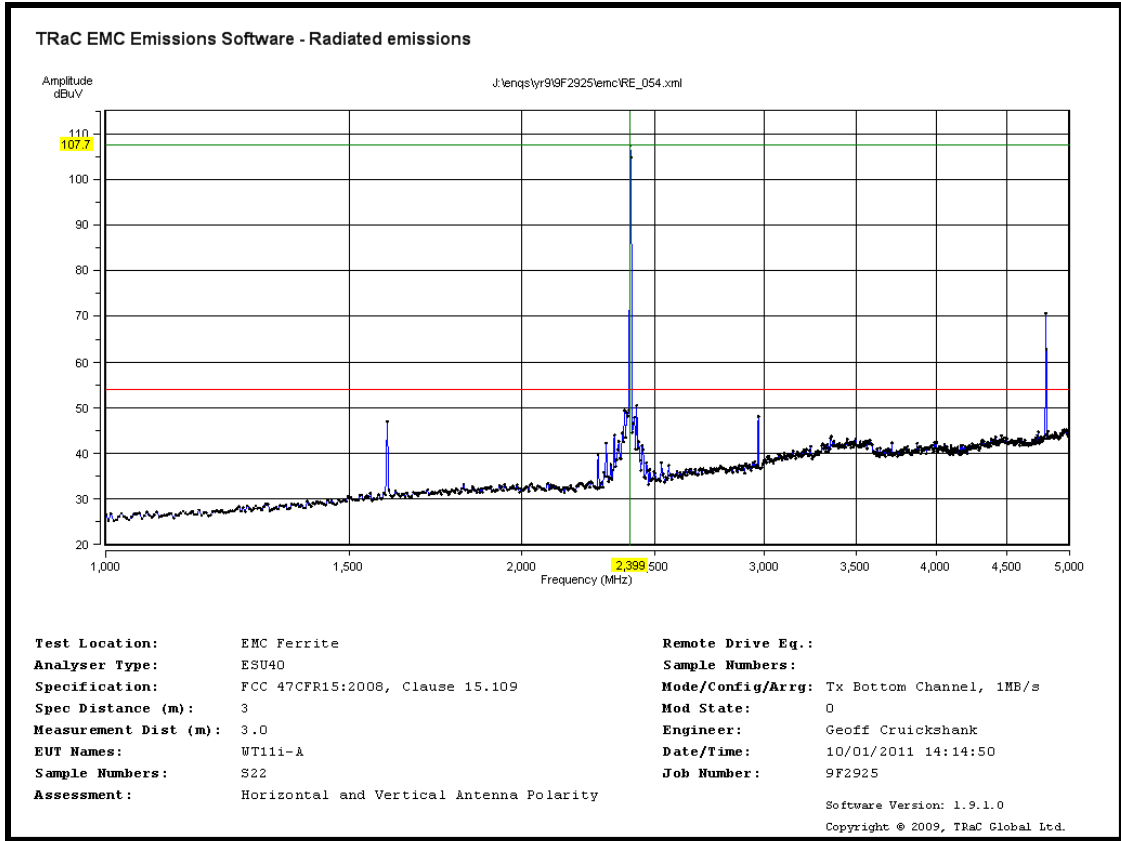


Radiated Spurious emissions 1 GHz to 5 GHz – 2402MHz – 1Mbps

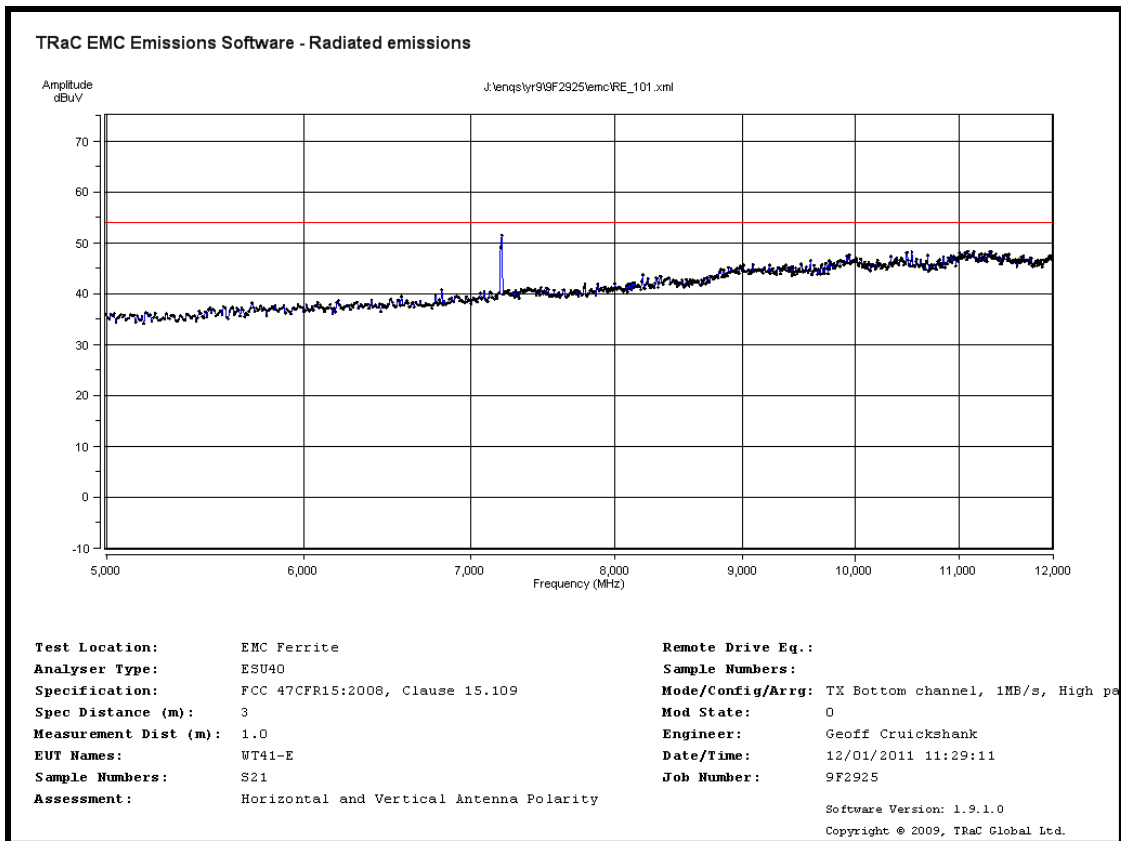


Radiated Spurious emissions 5 GHz to 12 GHz – 2402MHz – 1Mbps

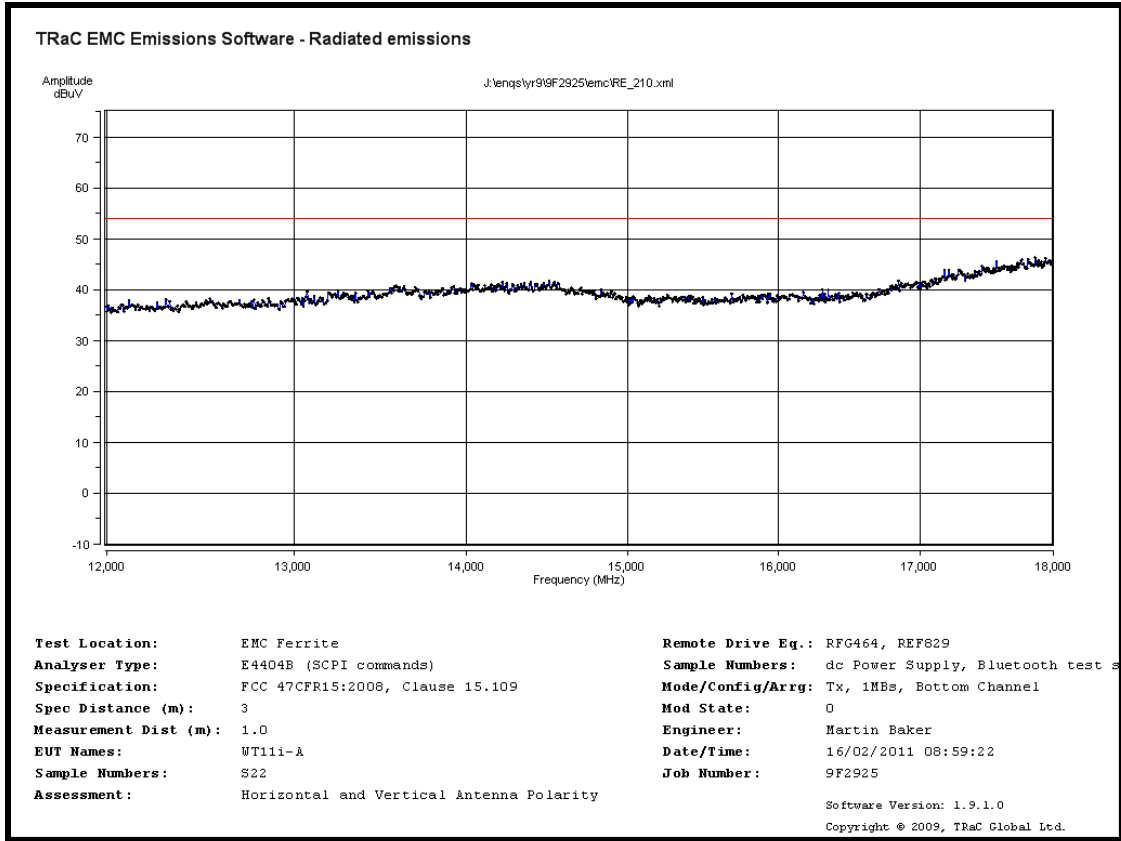


Radiated Spurious emissions 12 GHz to 18 GHz – 2402MHz – 1Mbps

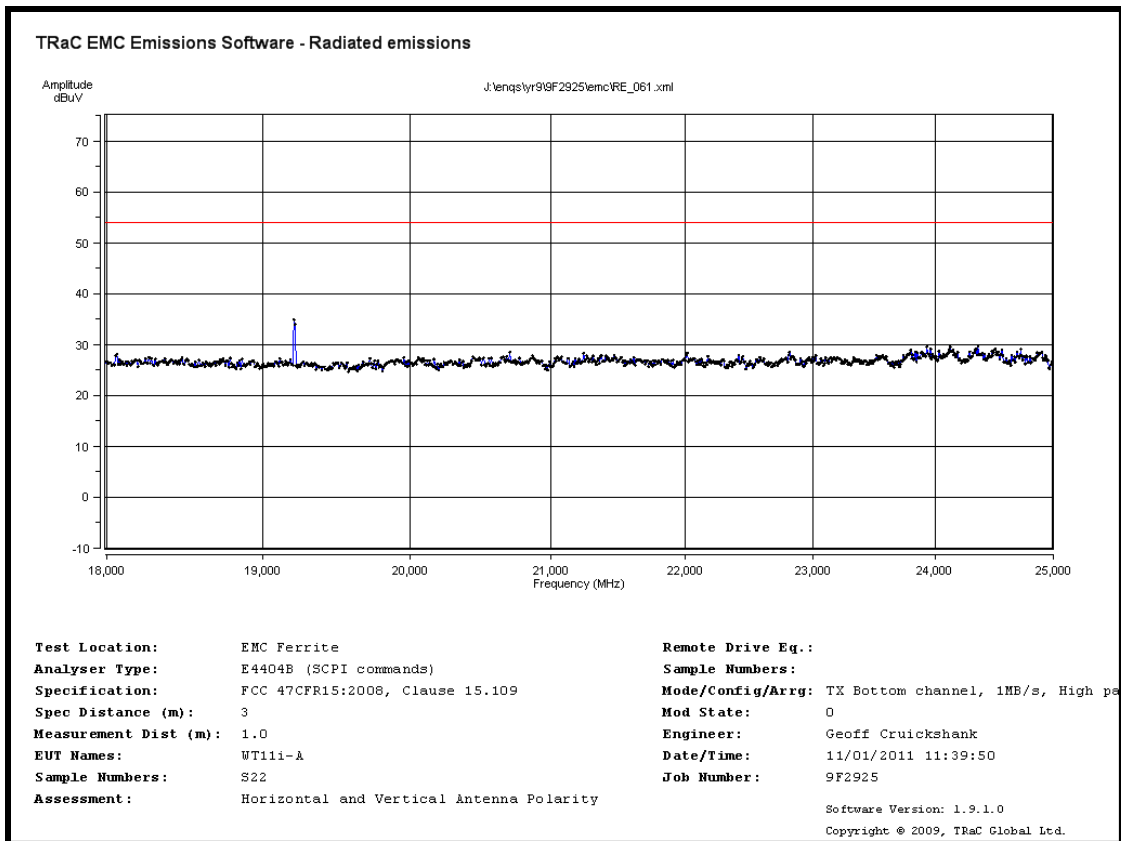


Radiated Spurious emissions 18 GHz to 25 GHz – 2402MHz – 1Mbps

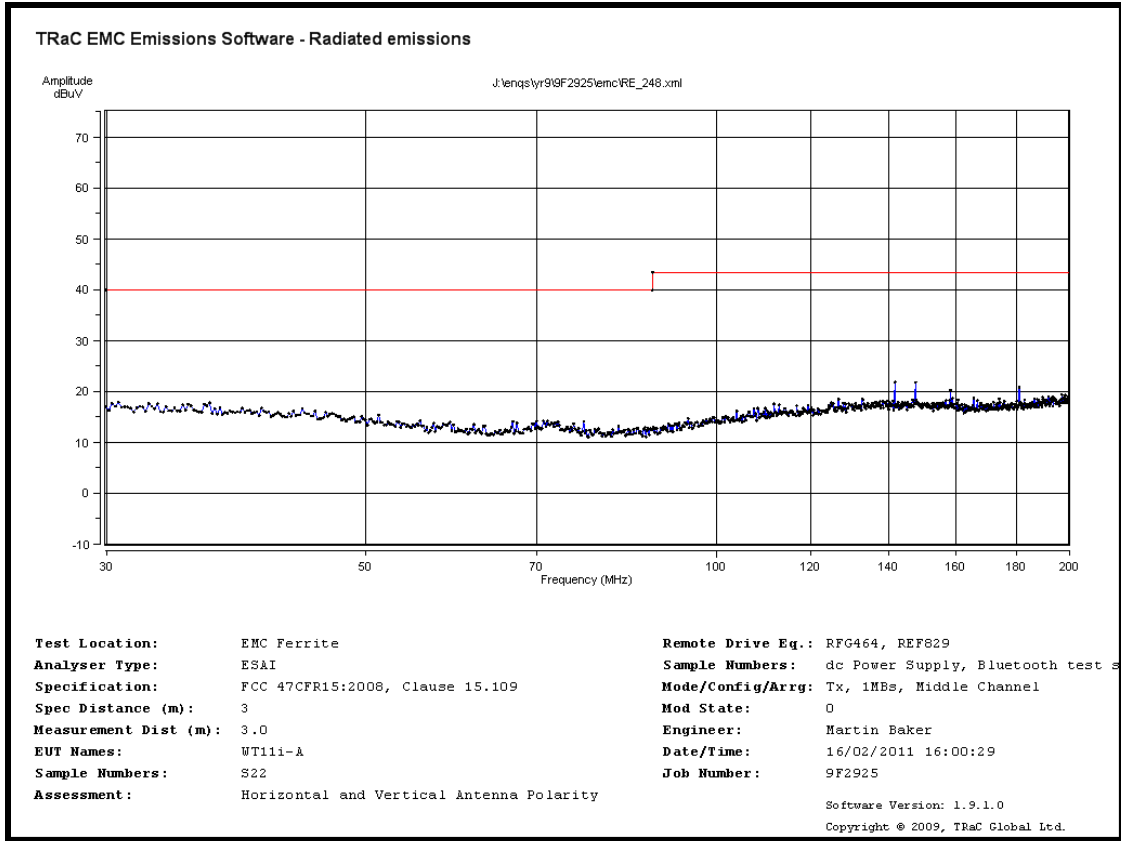


Radiated Spurious emissions 30 MHz to 200 MHz – 2441MHz – 1Mbps

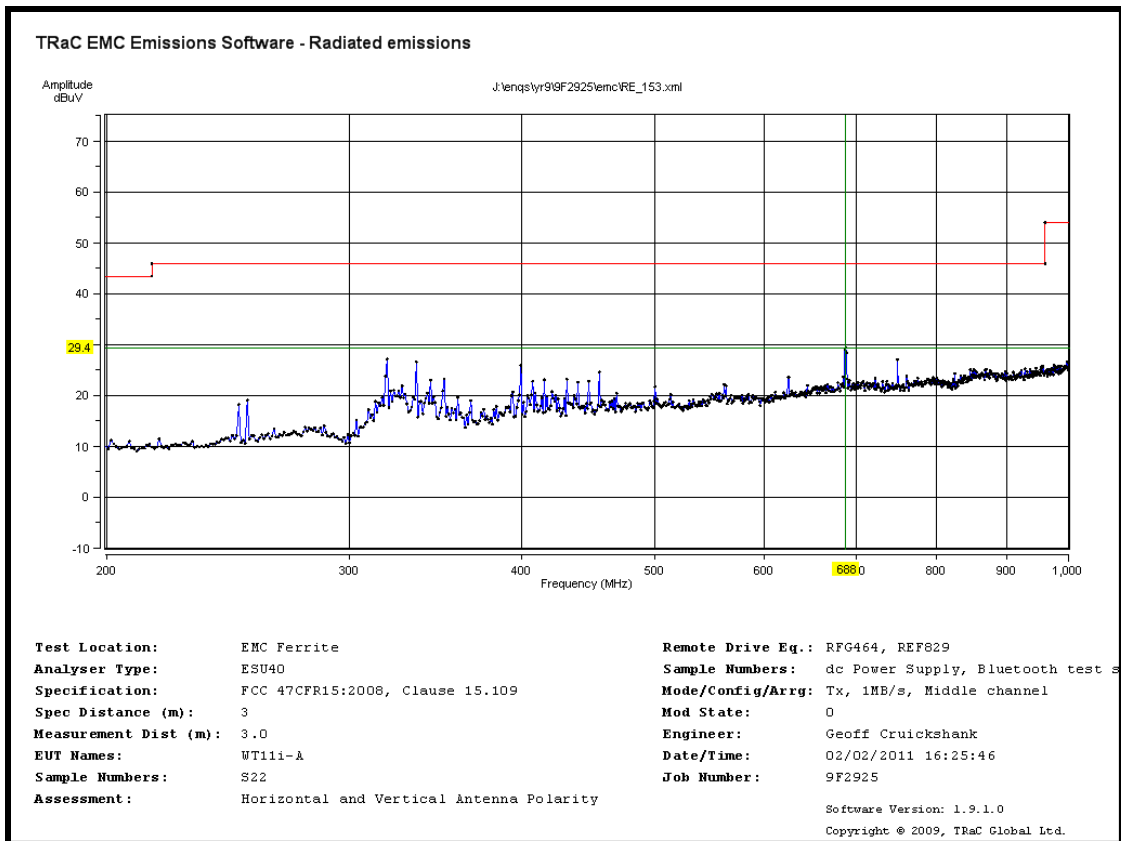


Radiated Spurious emissions 200 MHz to 1 GHz – 2441MHz – 1Mbps

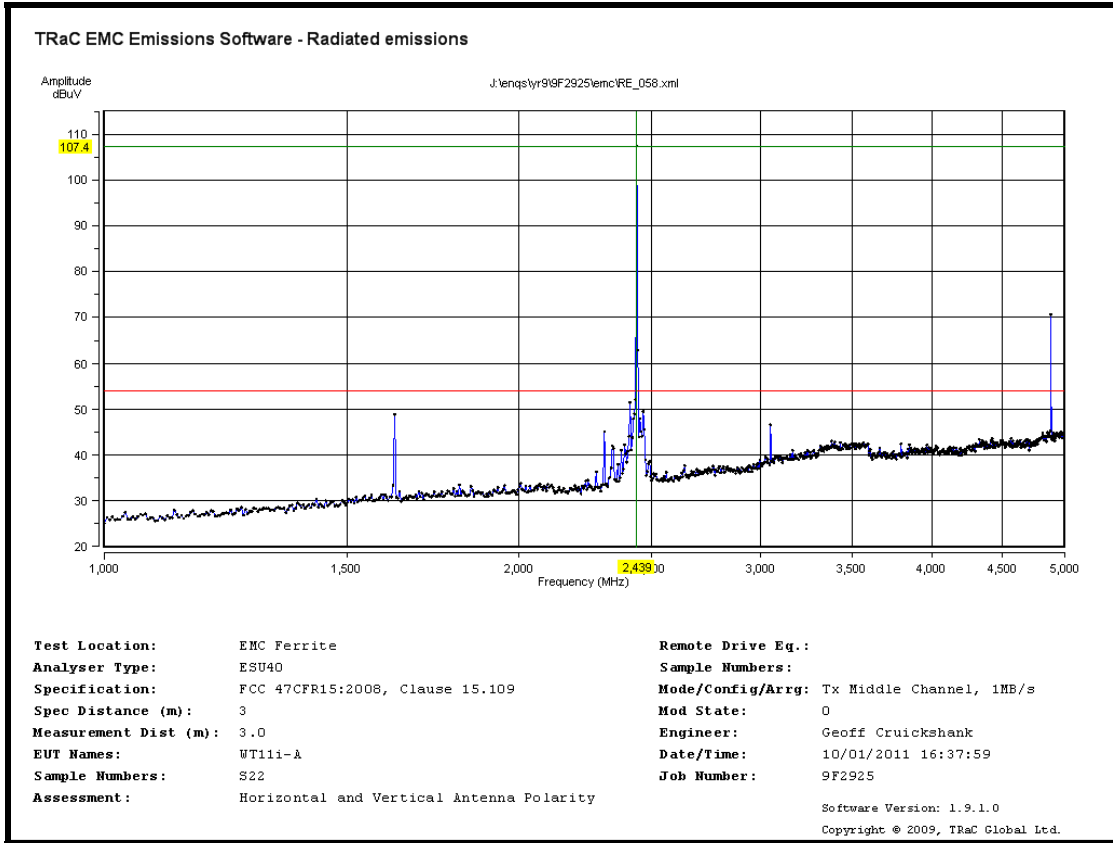


Radiated Spurious emissions 1 GHz to 5 GHz – 2441MHz – 1Mbps

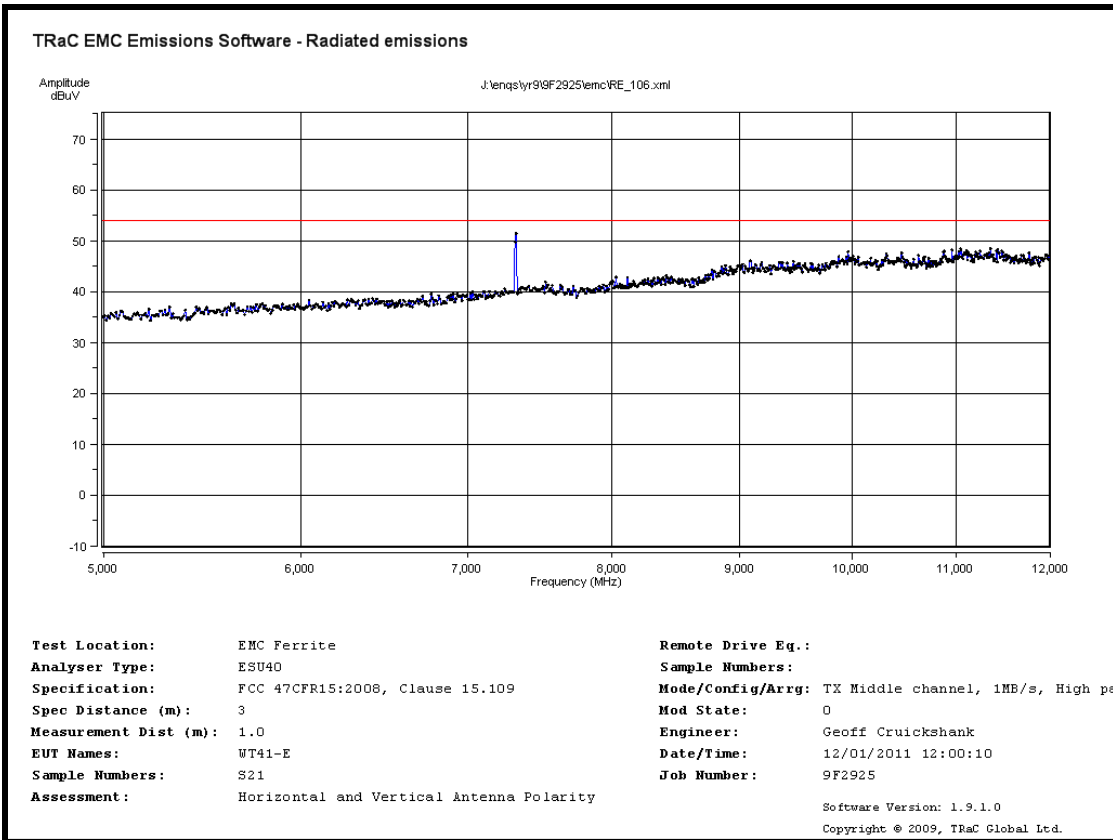


Radiated Spurious emissions 5 GHz to 12 GHz – 2441MHz – 1Mbps

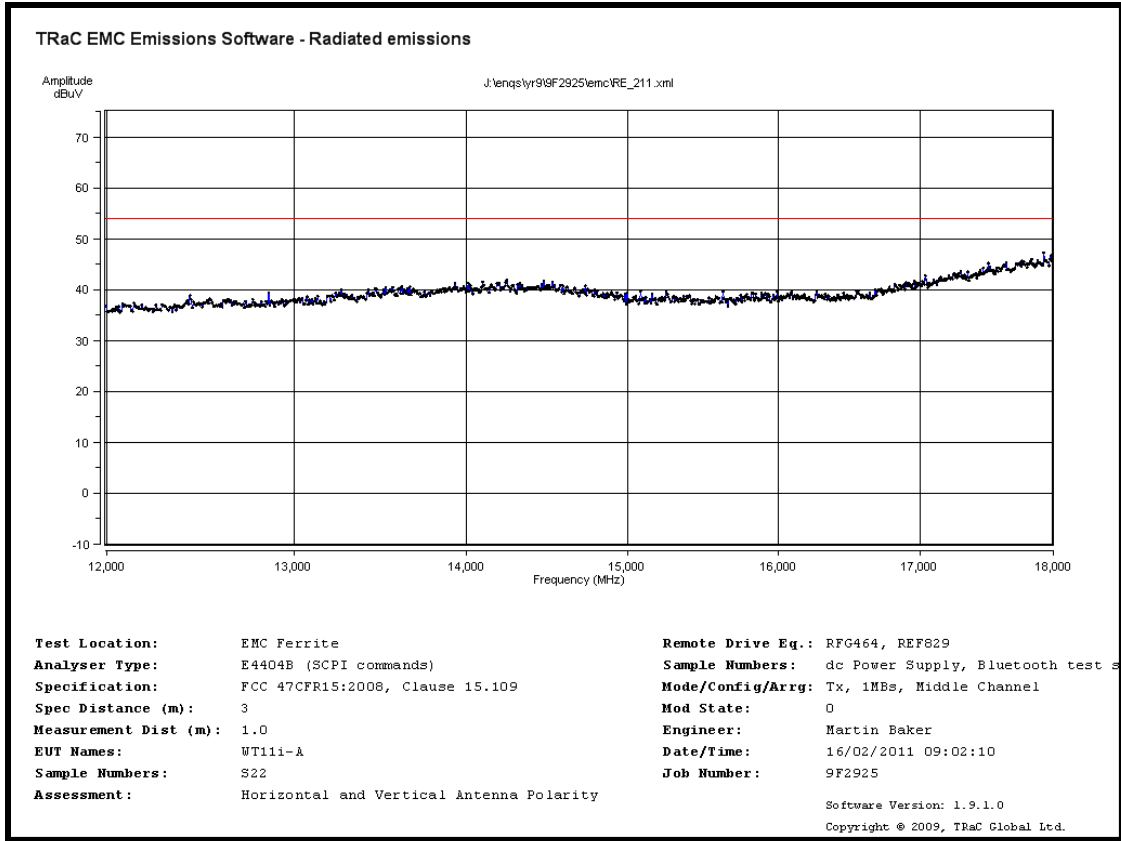


Radiated Spurious emissions 12 GHz to 18 GHz – 2441MHz – 1Mbps

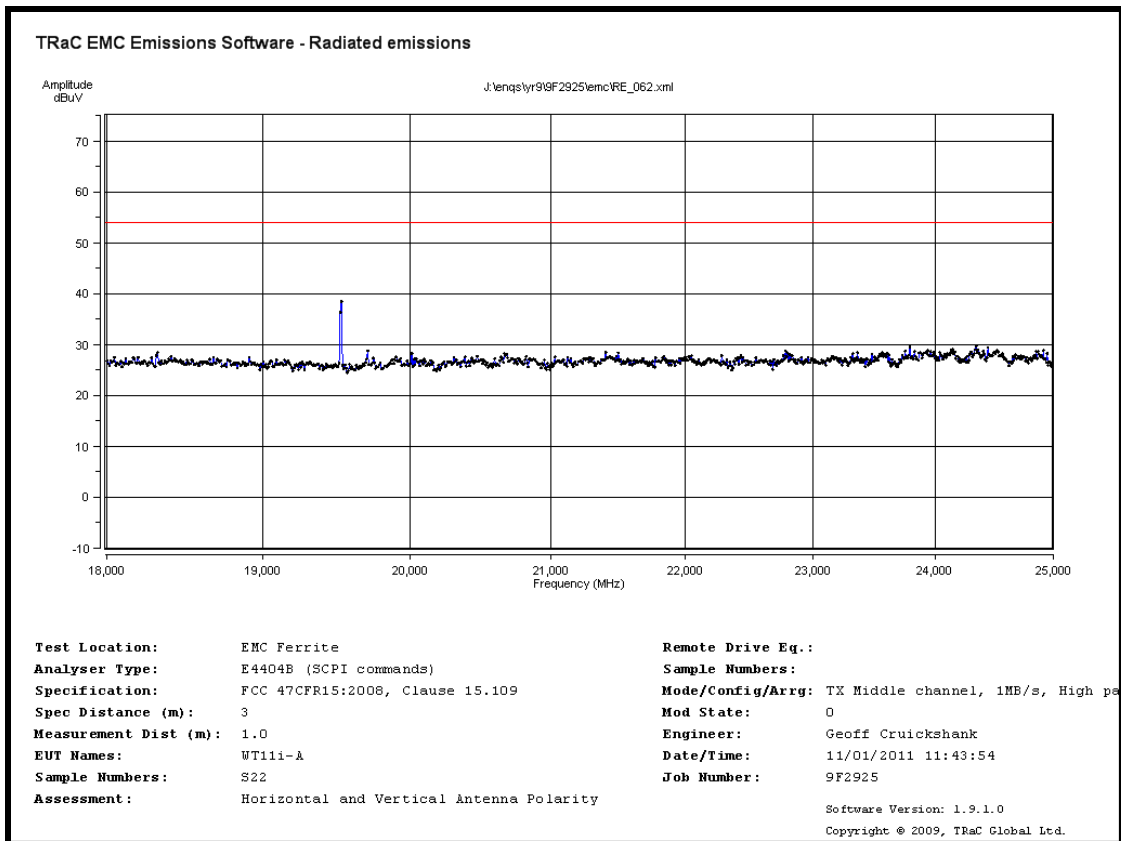


Radiated Spurious emissions 18 GHz to 25 GHz – 2441MHz – 1Mbps

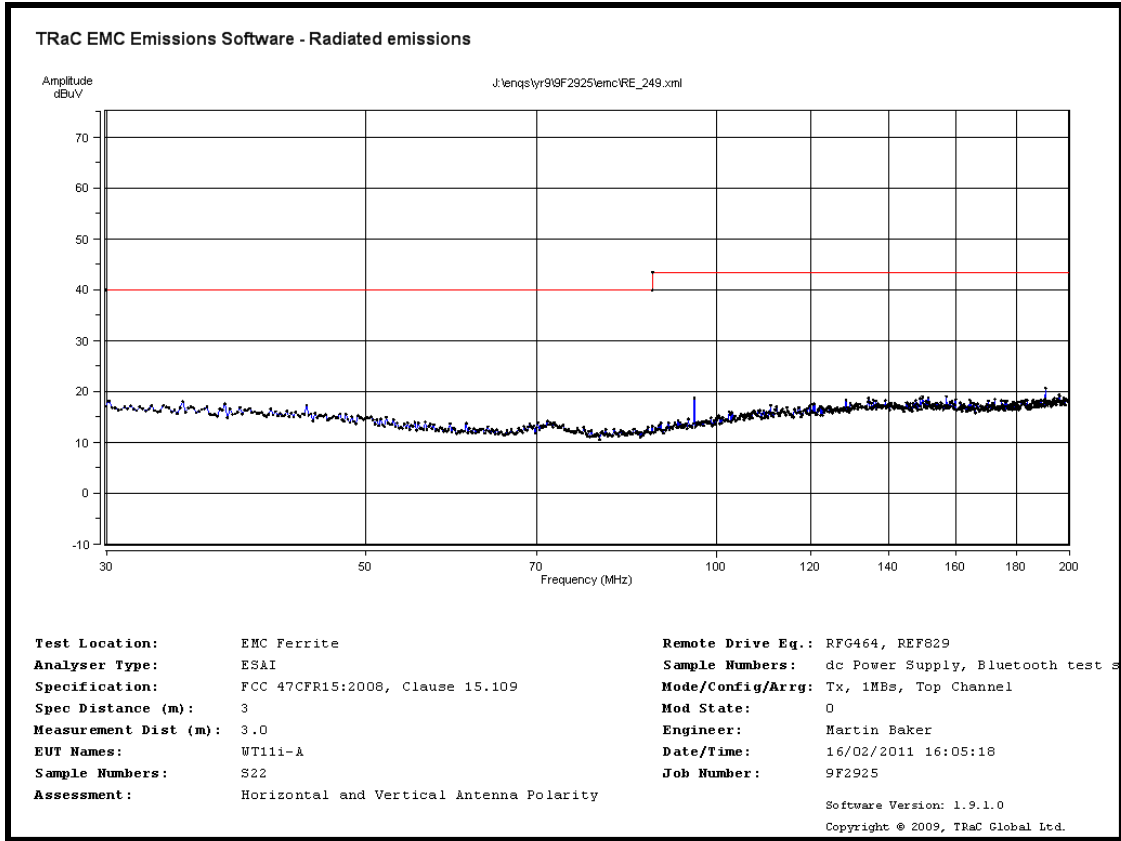


Radiated Spurious emissions 30 MHz to 200 MHz – 2480MHz – 1Mbps

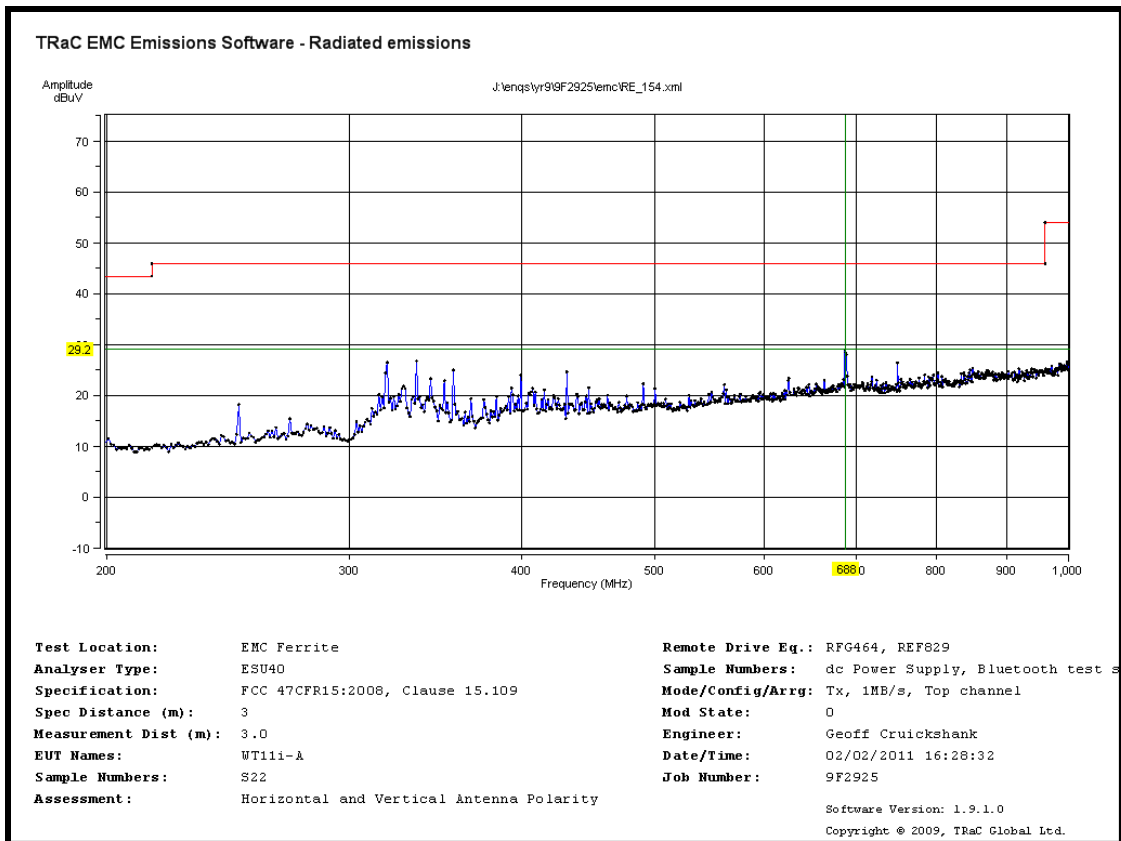


Radiated Spurious emissions 200 MHz to 1 GHz – 2480MHz – 1Mbps

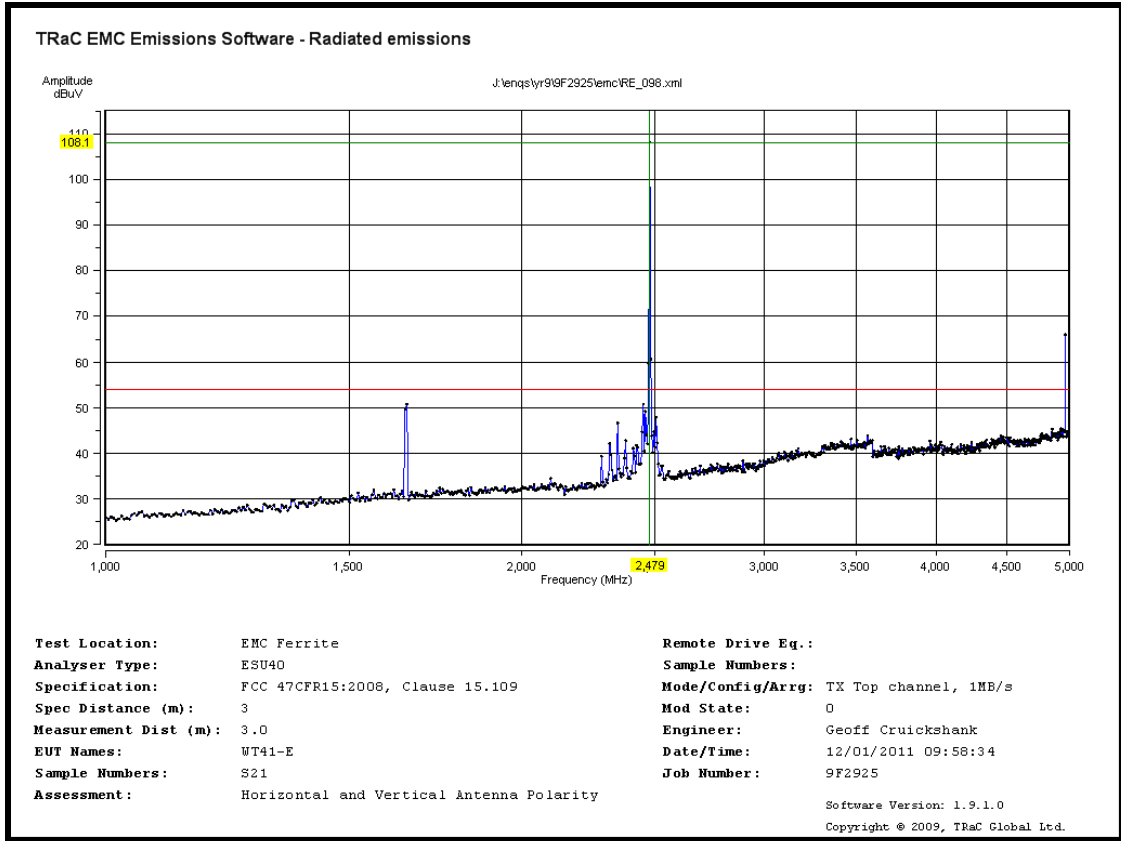


Radiated Spurious emissions 1 GHz to 5 GHz – 2480MHz – 1Mbps

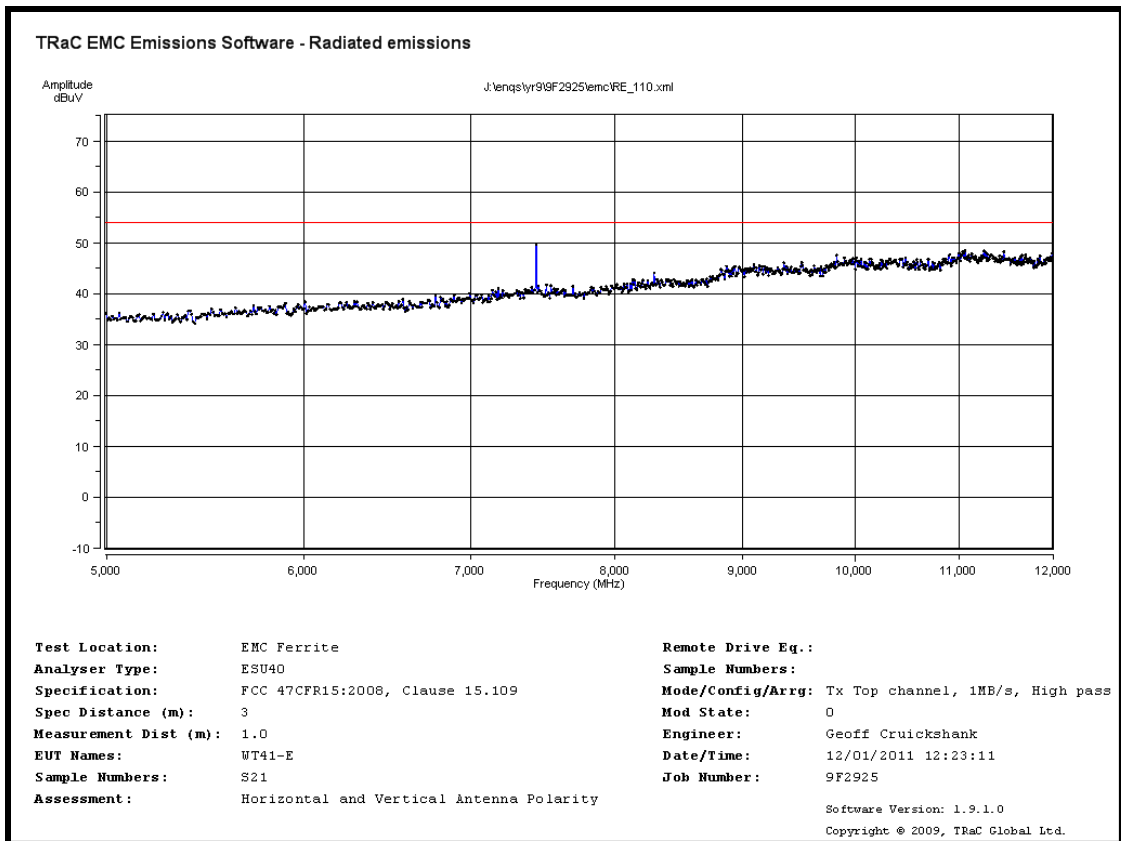

Radiated Spurious emissions 5 GHz to 12 GHz – 2480MHz – 1Mbps

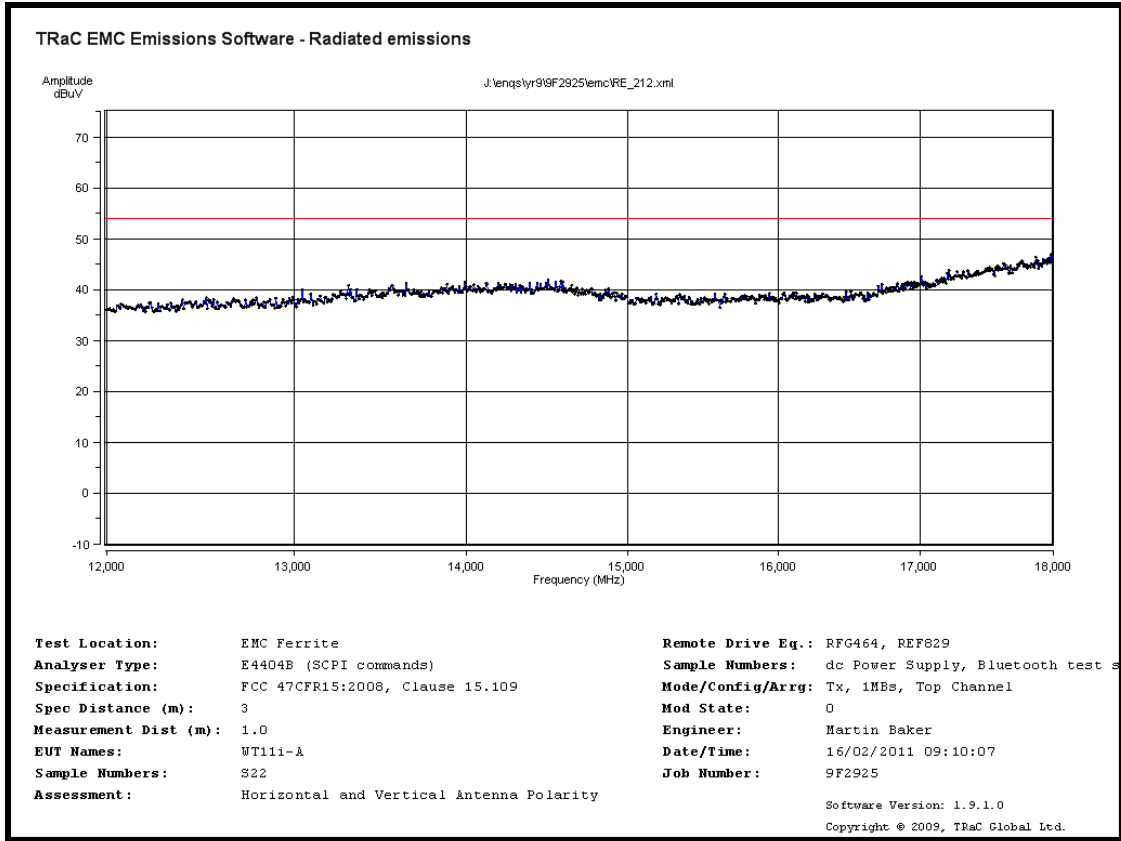


Radiated Spurious emissions 12 GHz to 18 GHz – 2480MHz – 1Mbps

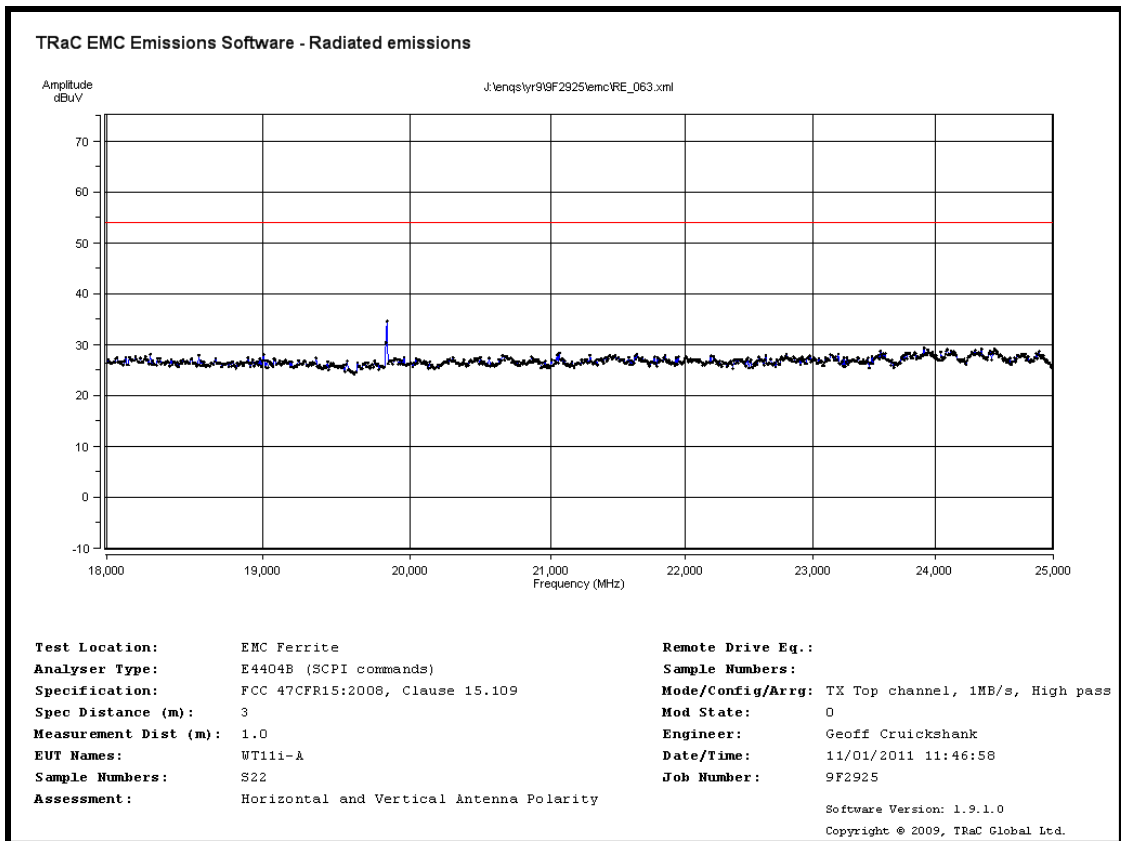


Radiated Spurious emissions 18 GHz to 25 GHz – 2480MHz – 1Mbps

Radiated Bandedge Compliance – Peak plot to average limit

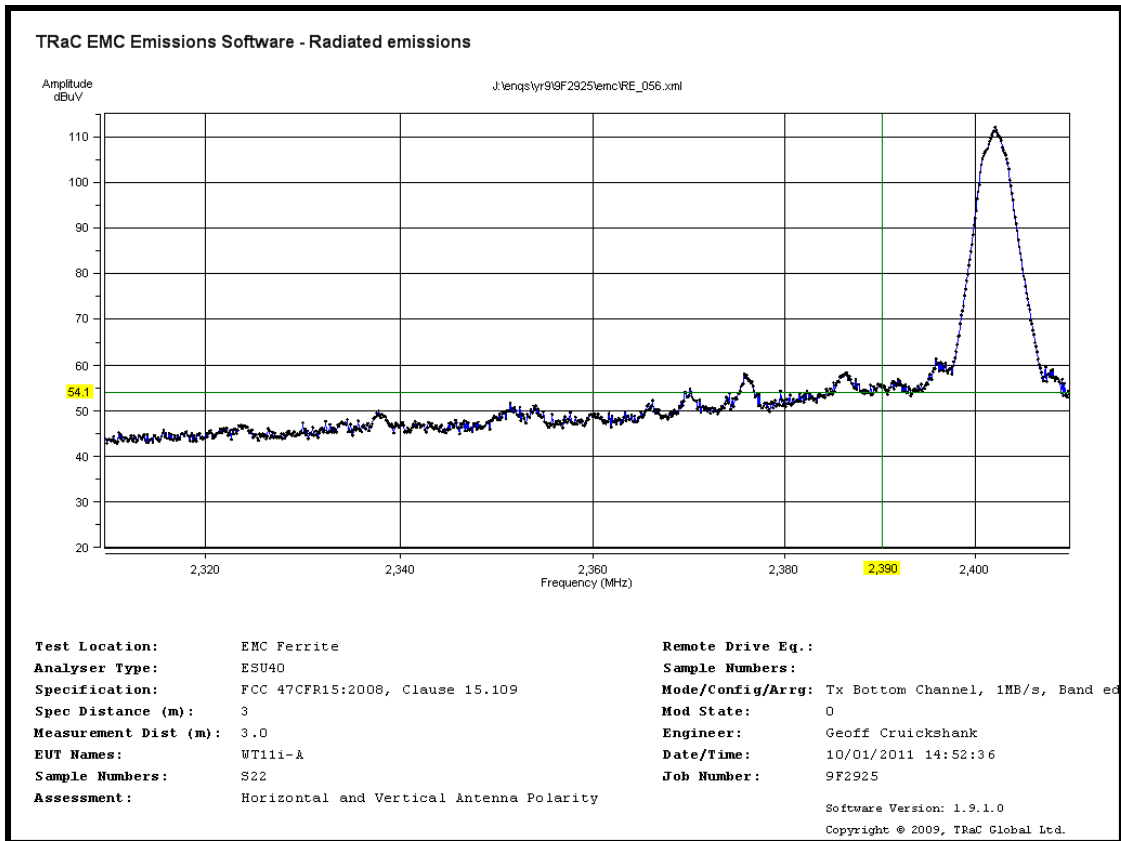


Lower Bandedge

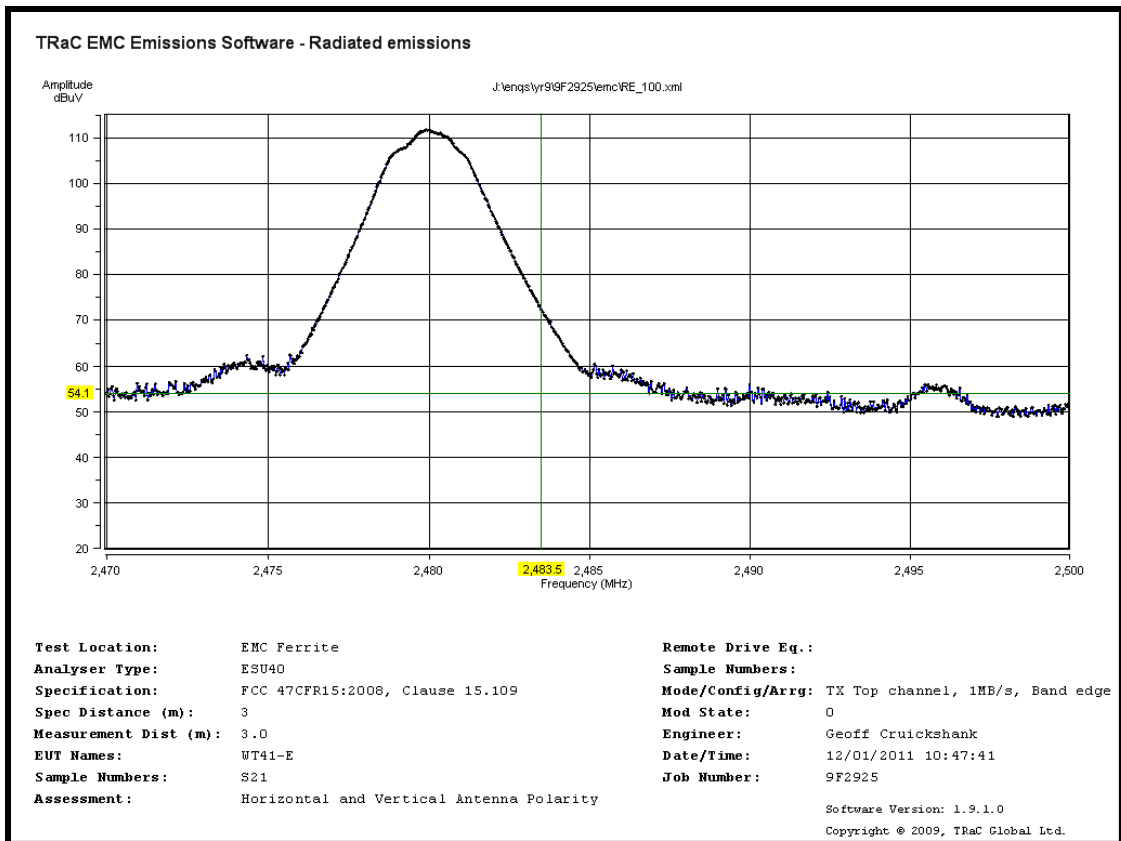


Upper Bandedge


Radiated Bandedge Compliance – Average plot to average limit

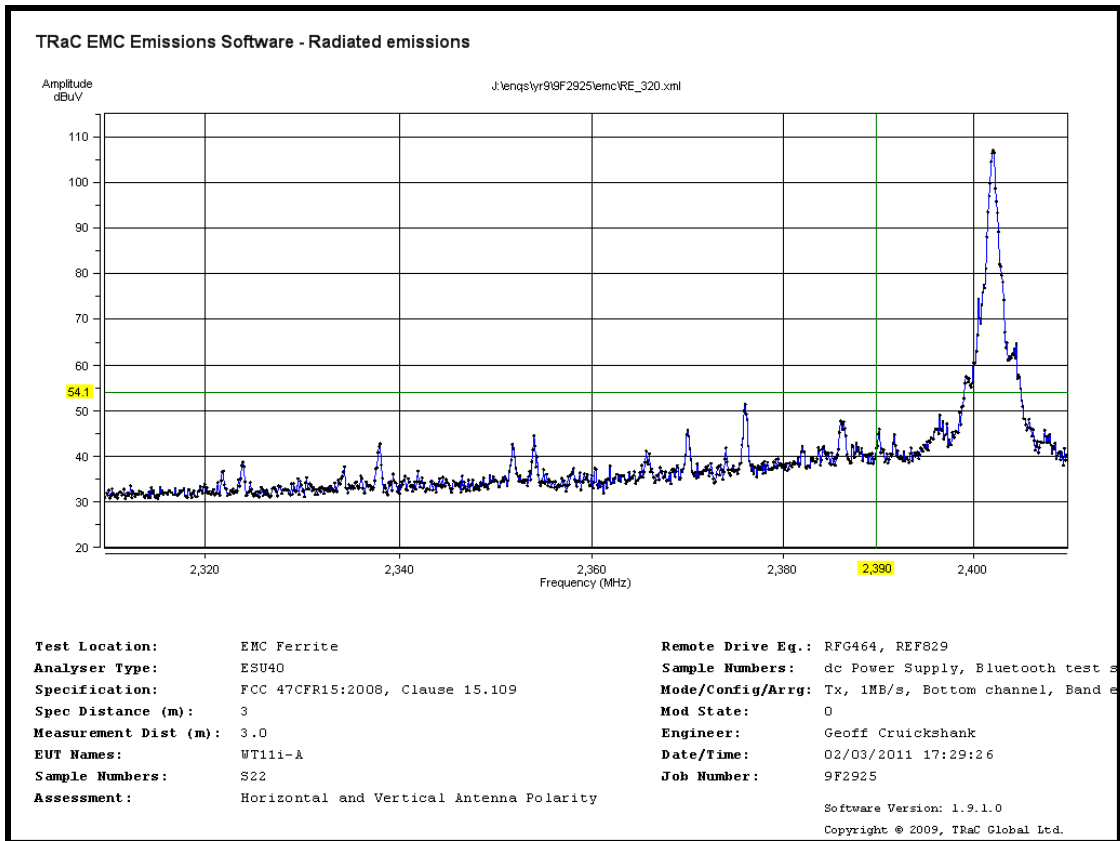


Lower Bandedge

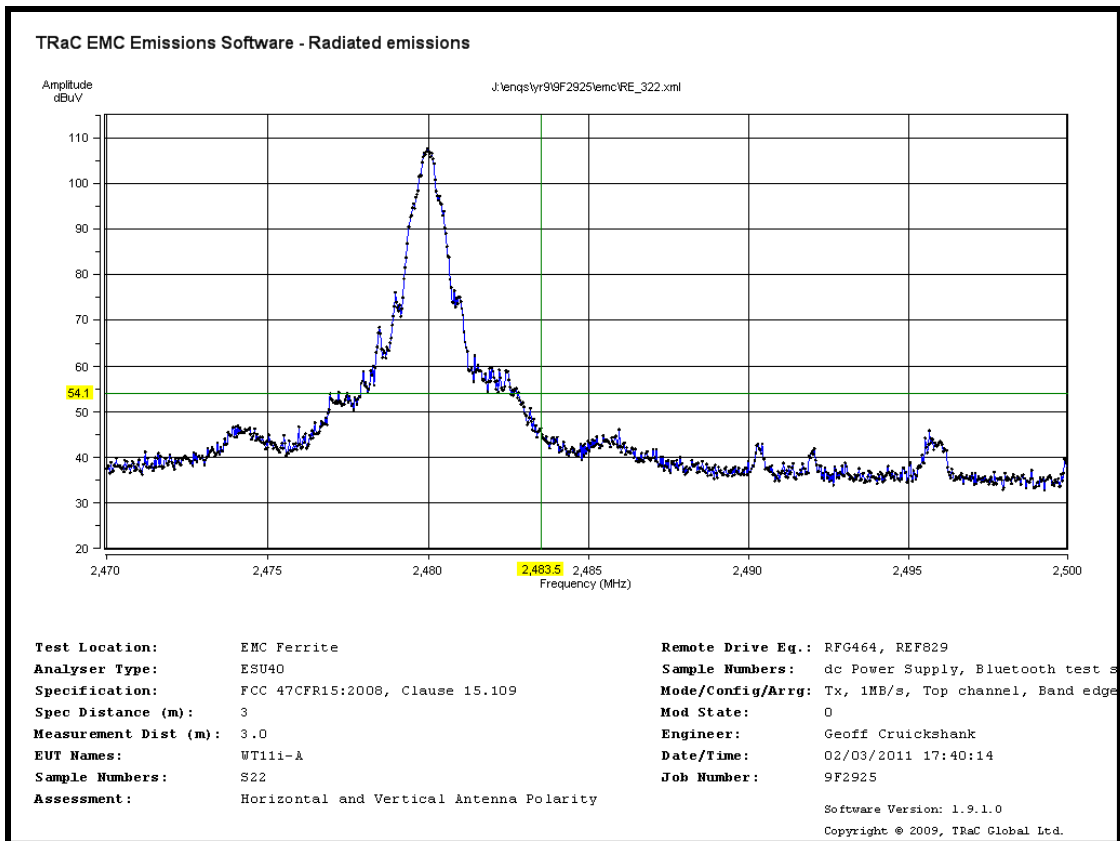


Upper Bandedge

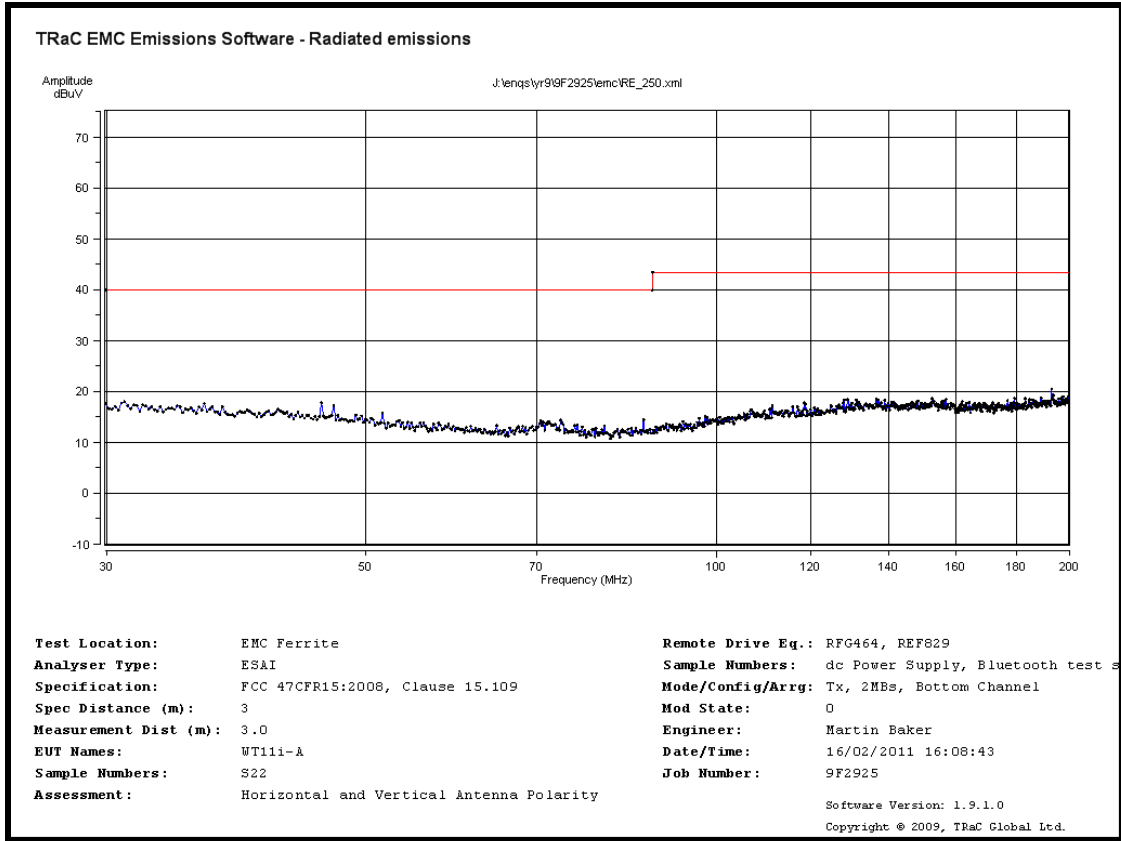


Radiated Spurious emissions 30 MHz to 200 MHz – 2402MHz – 2Mbps

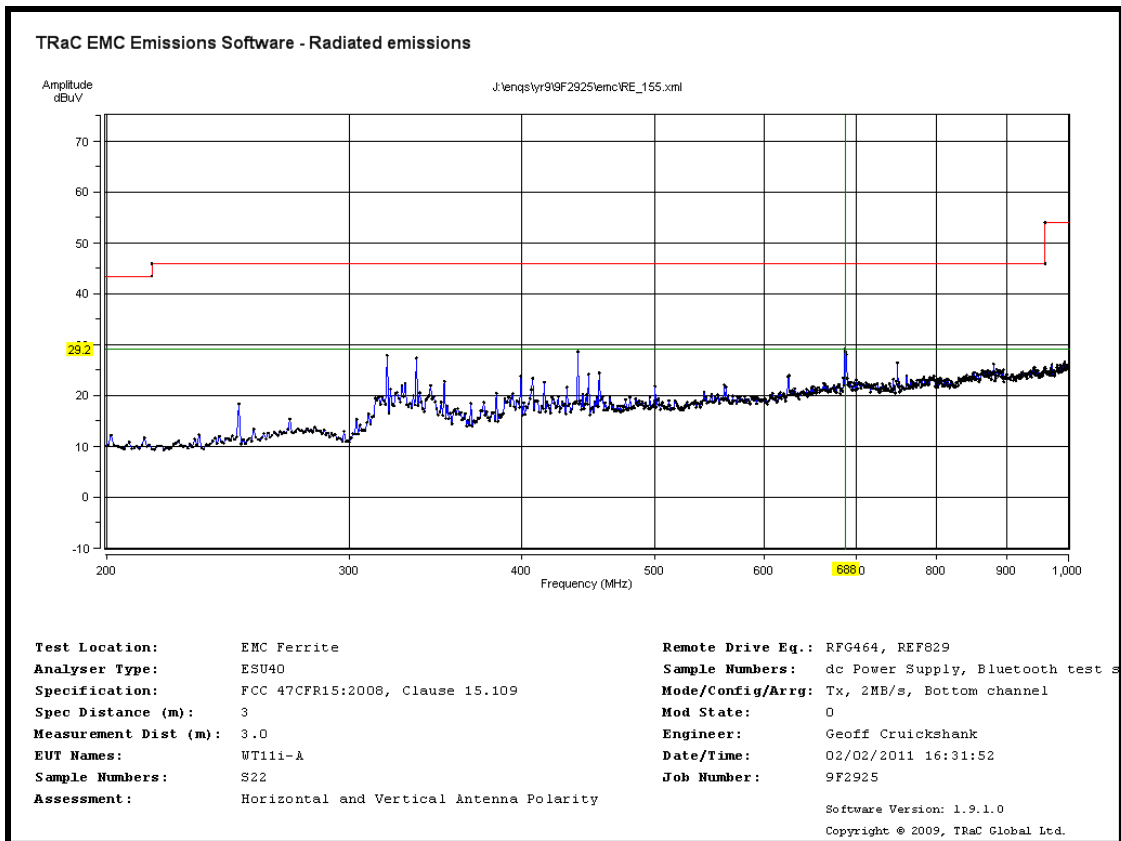


Radiated Spurious emissions 200 MHz to 1 GHz – 2402MHz – 2Mbps

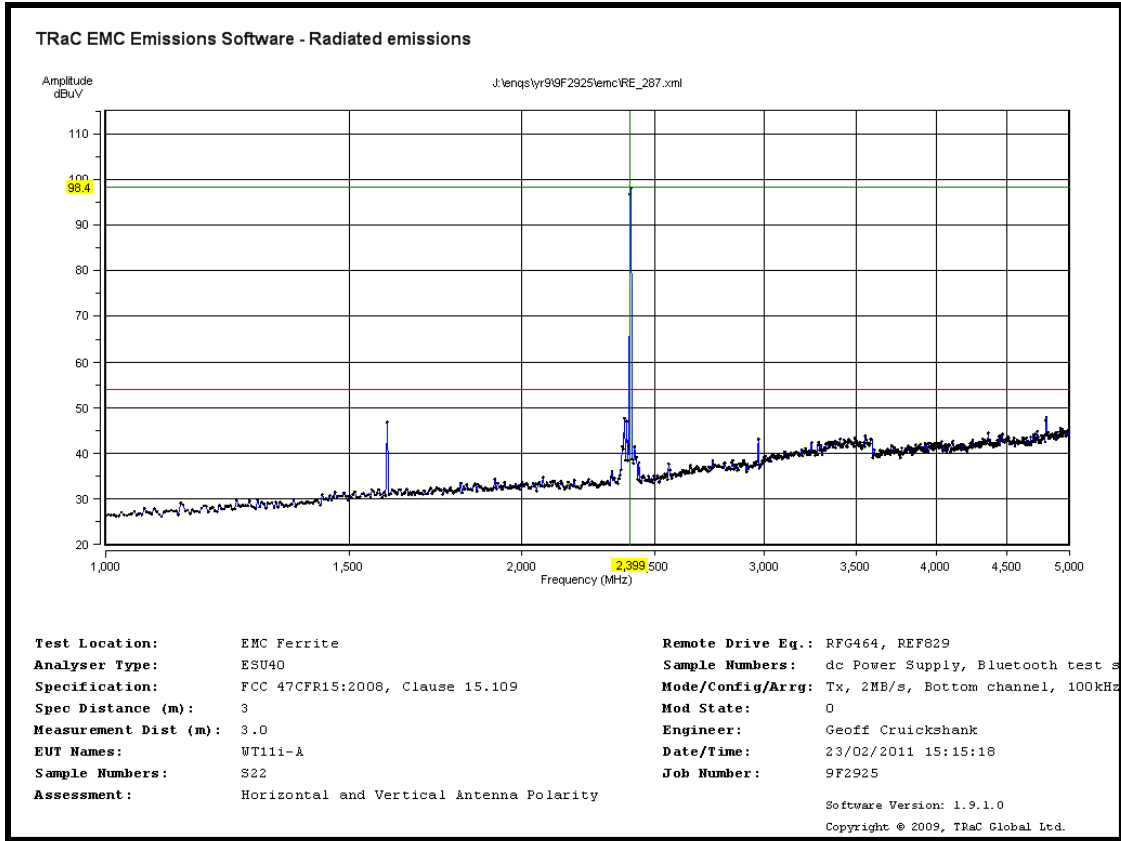


Radiated Spurious emissions 1 GHz to 5 GHz – 2402MHz – 2Mbps

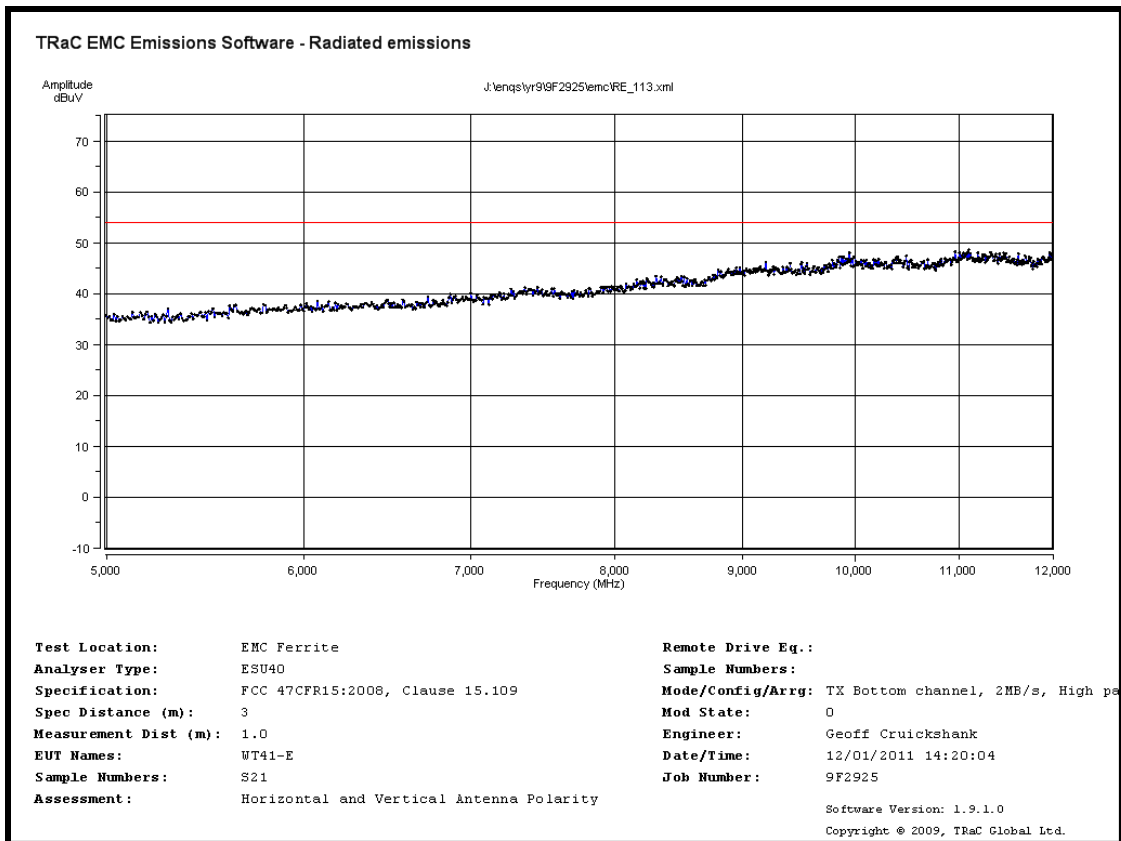


Radiated Spurious emissions 5 GHz to 12 GHz – 2402MHz – 2Mbps

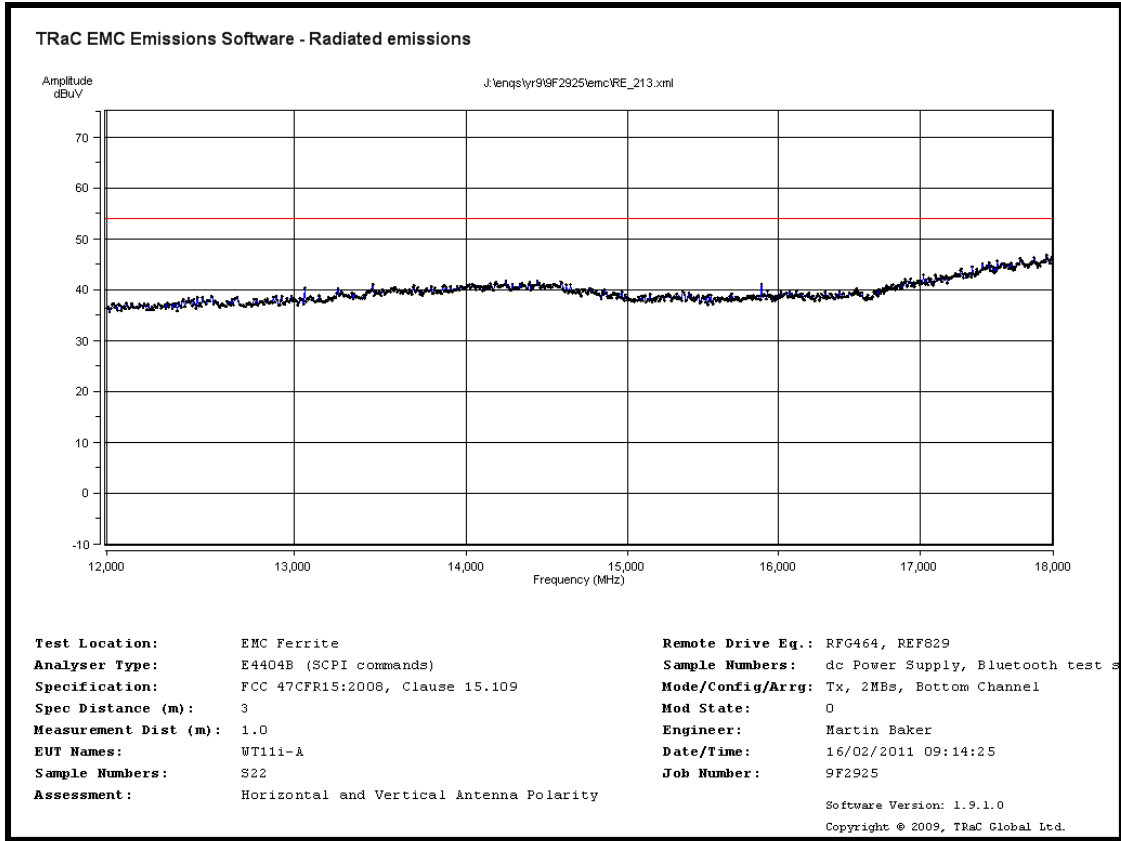


Radiated Spurious emissions 12 GHz to 18 GHz – 2402MHz – 2Mbps

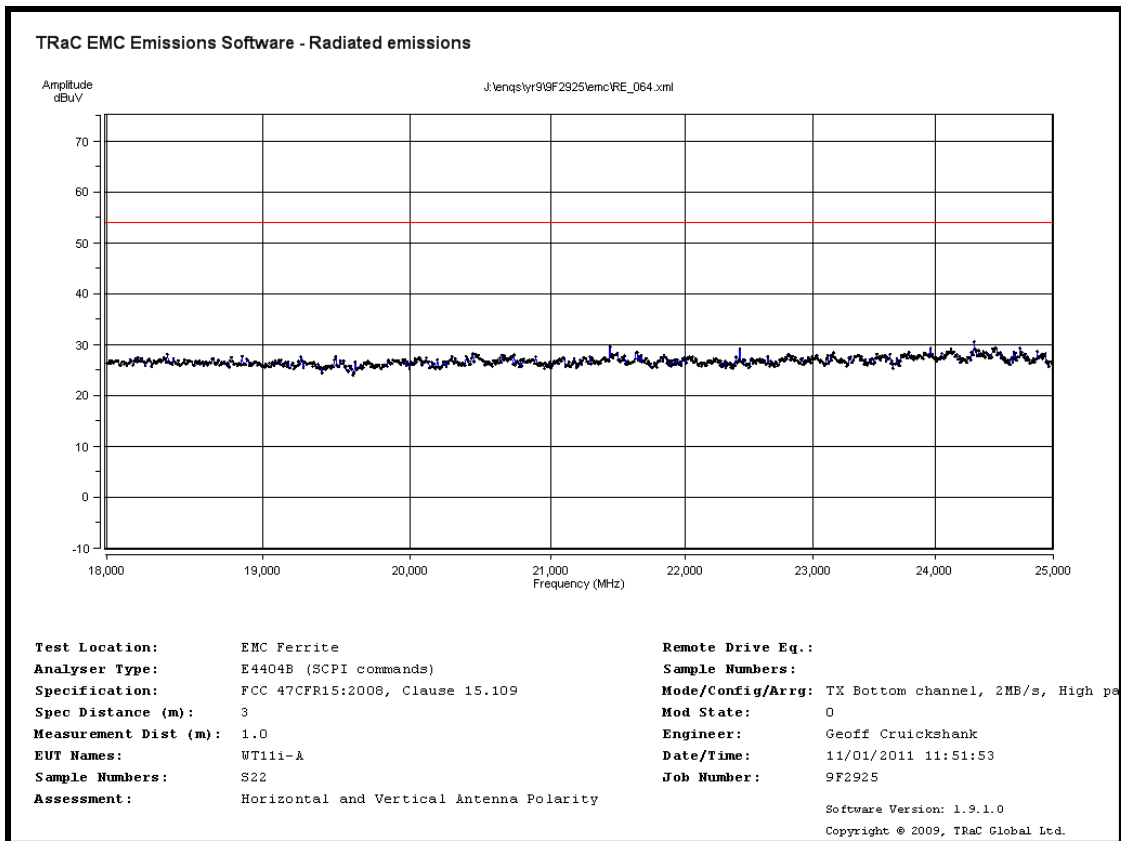


Radiated Spurious emissions 18 GHz to 25 GHz – 2402MHz – 2Mbps

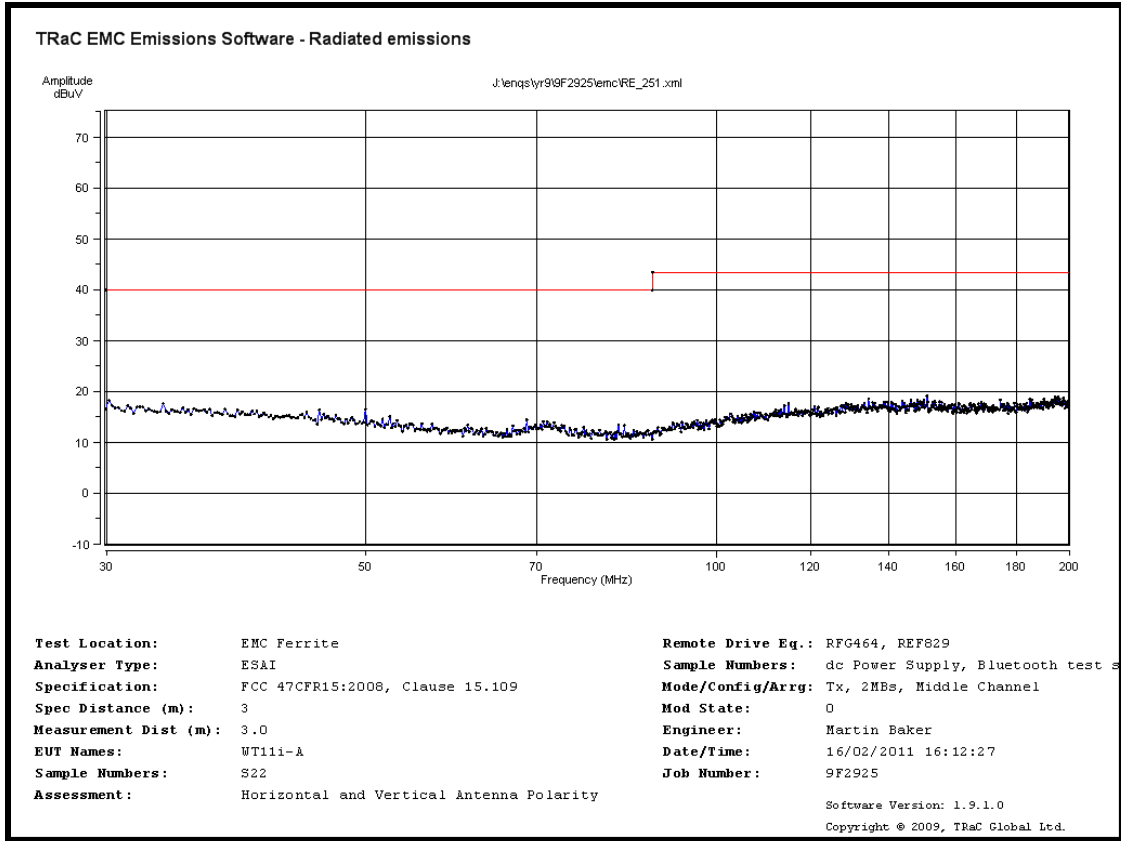


Radiated Spurious emissions 30 MHz to 200 MHz – 2441MHz – 2Mbps

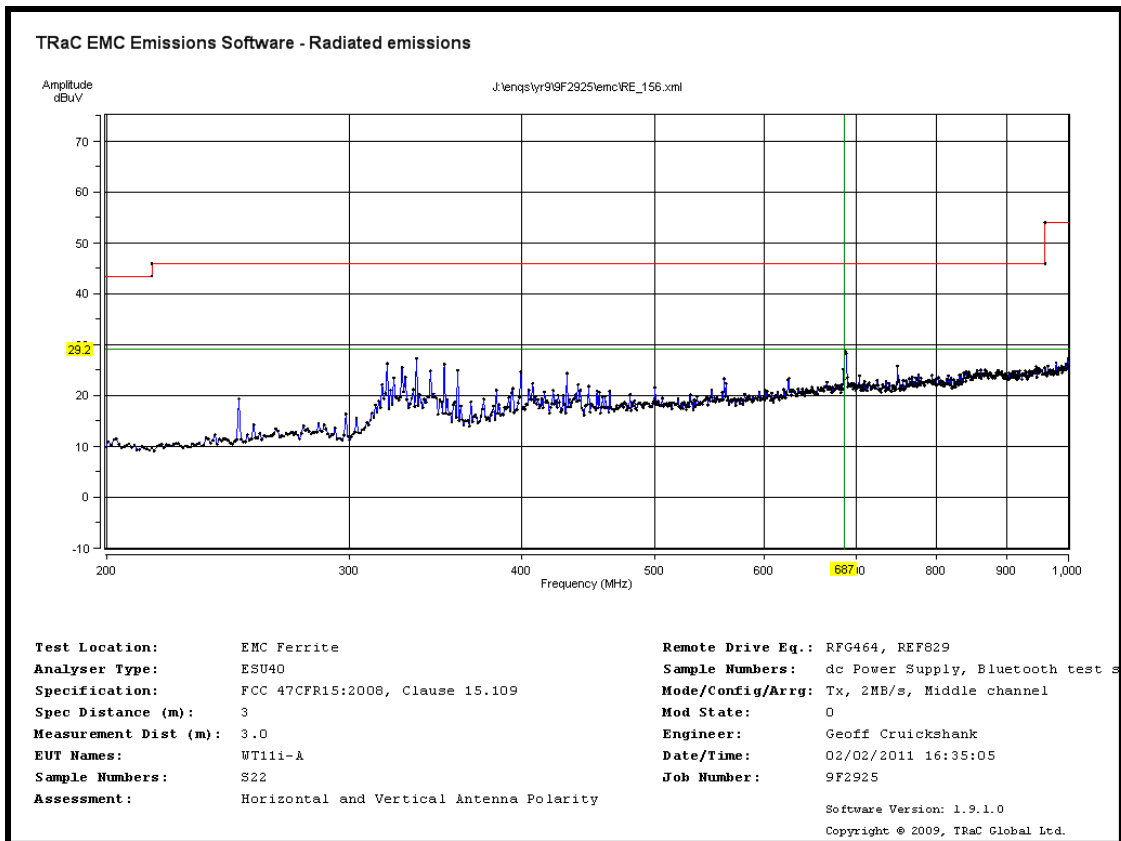


Radiated Spurious emissions 200 MHz to 1 GHz – 2441MHz – 2Mbps

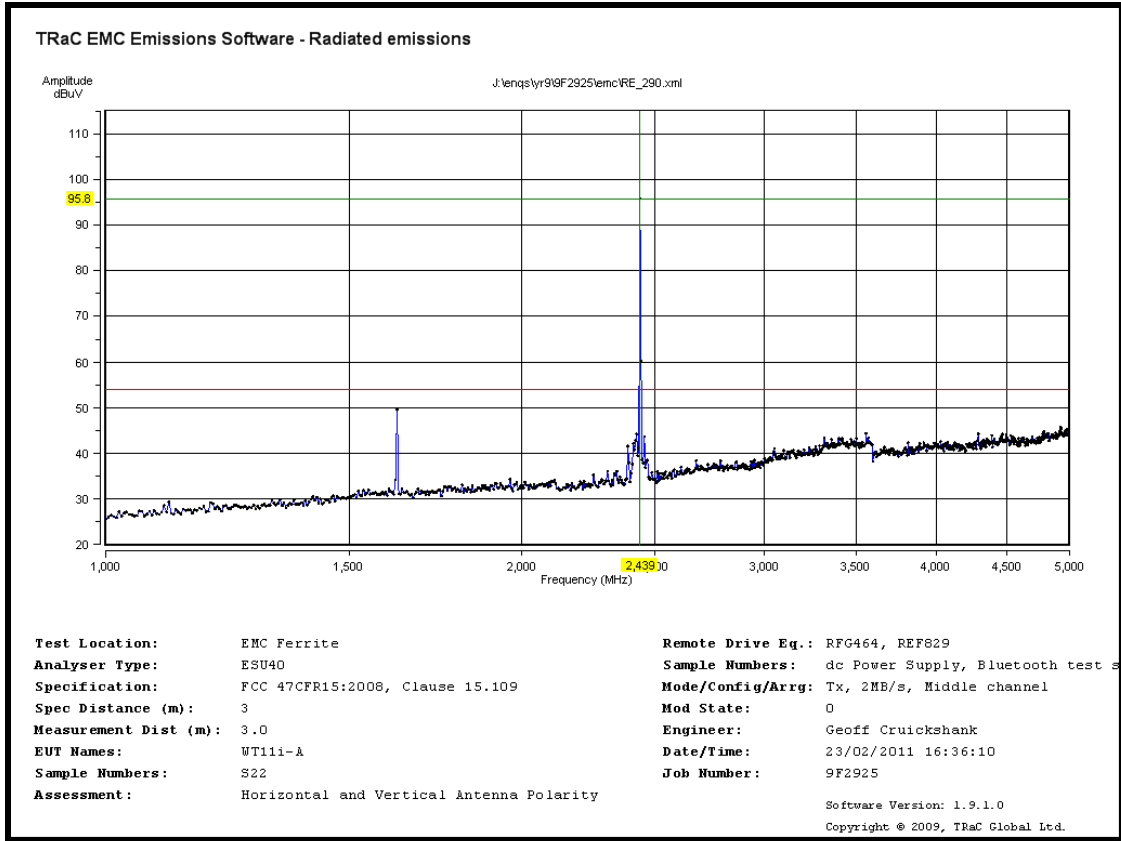


Radiated Spurious emissions 1 GHz to 5 GHz – 2441MHz – 2Mbps

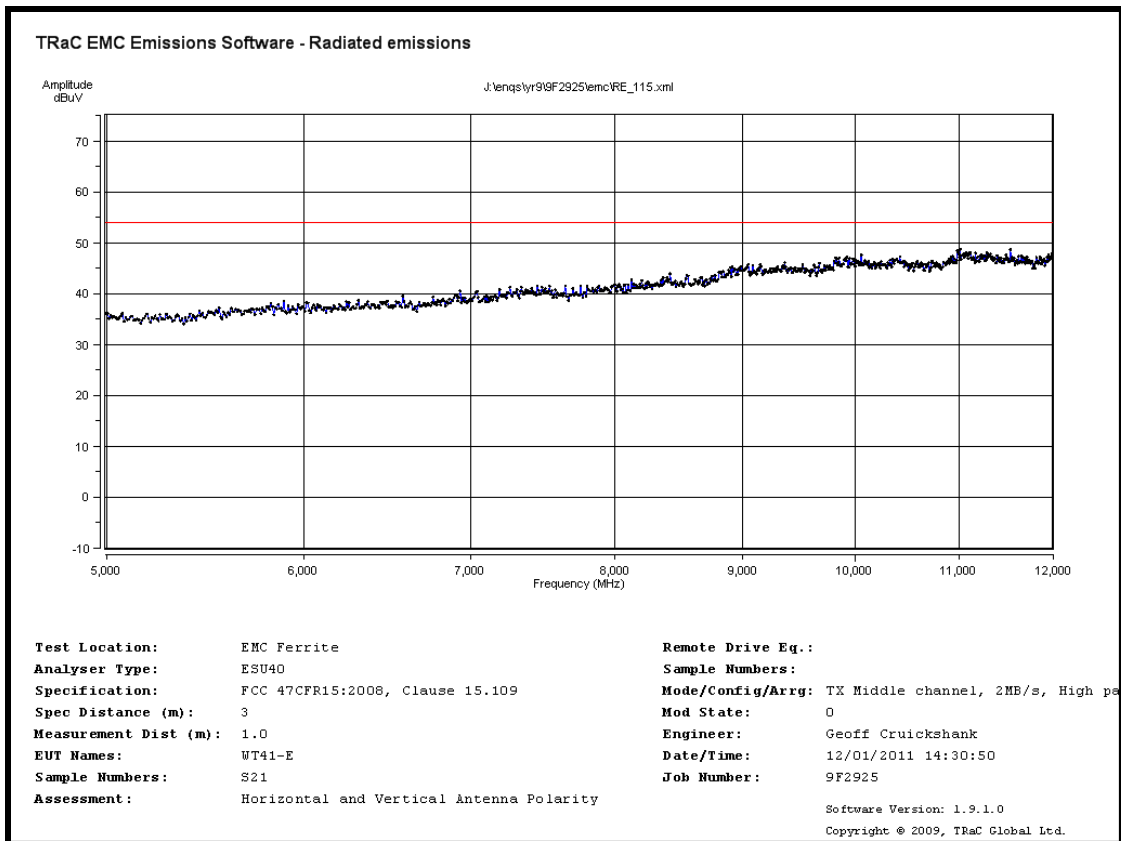


Radiated Spurious emissions 5 GHz to 12 GHz – 2441MHz – 2Mbps

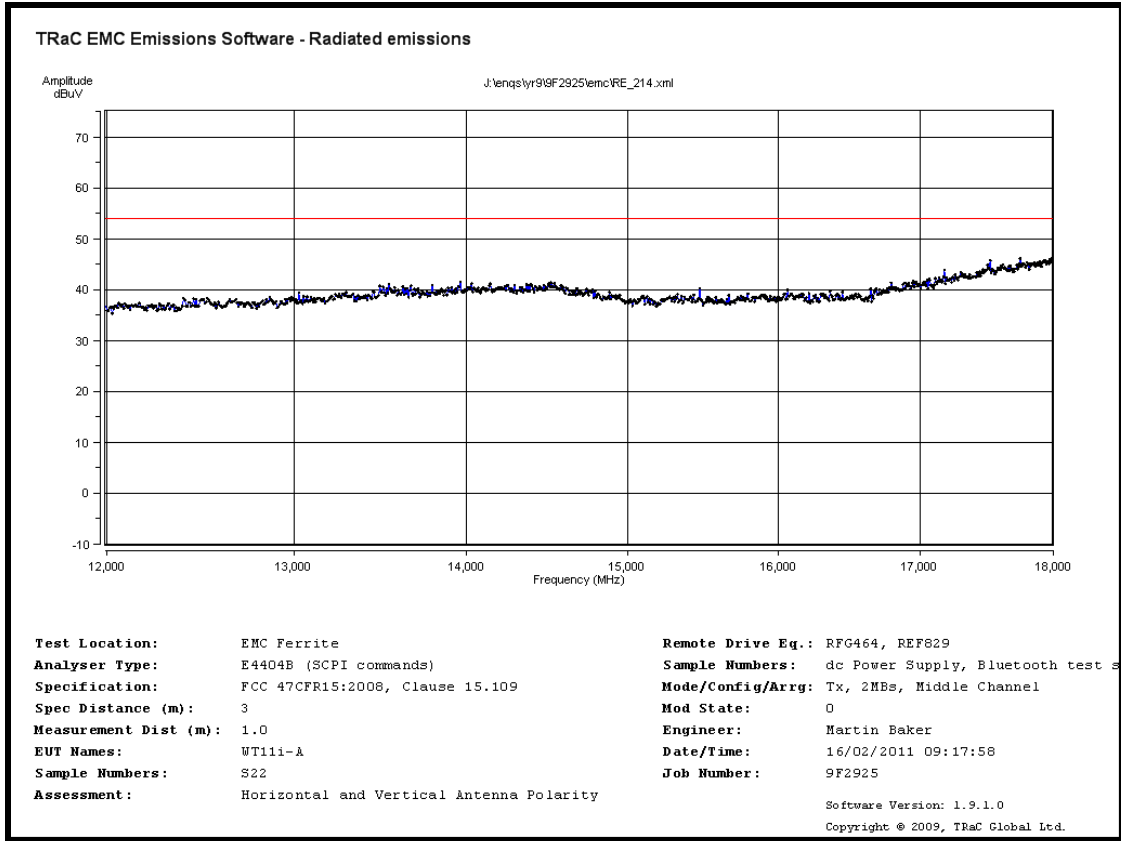


Radiated Spurious emissions 12 GHz to 18 GHz – 2441MHz – 2Mbps

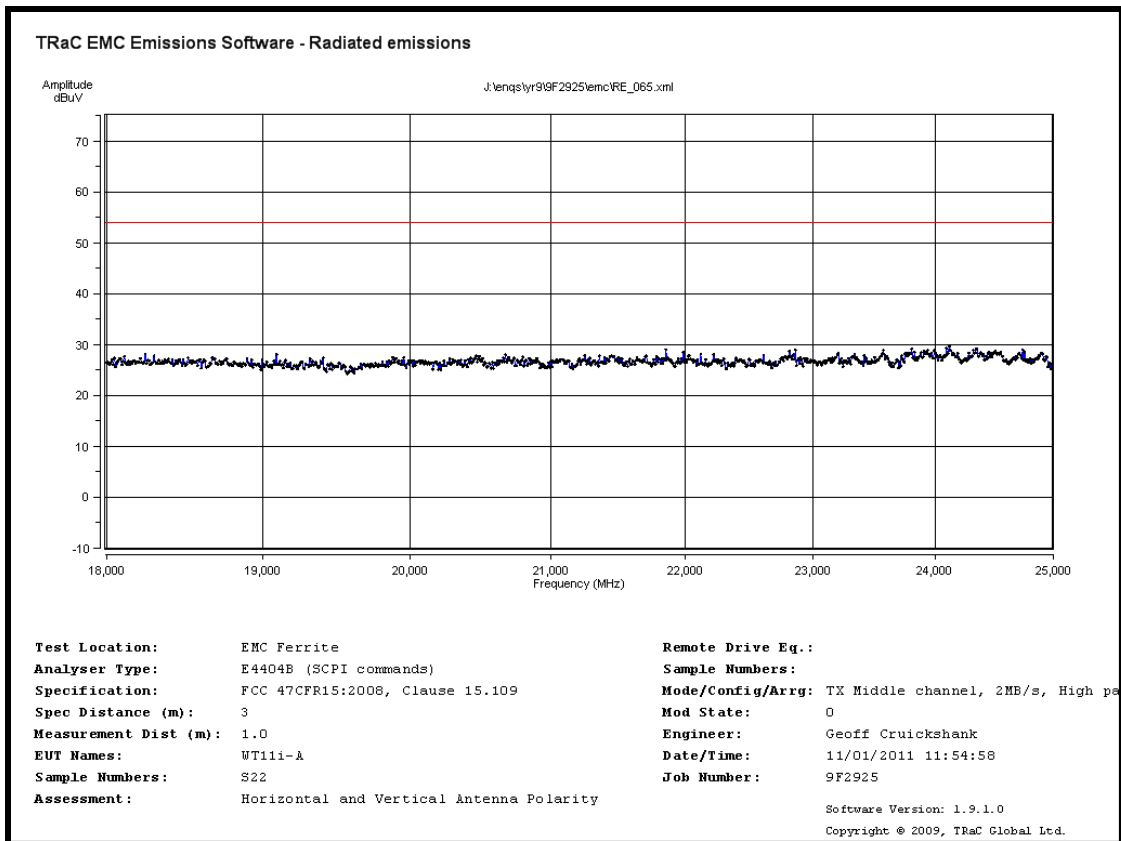


Radiated Spurious emissions 18 GHz to 25 GHz – 2441MHz – 2Mbps

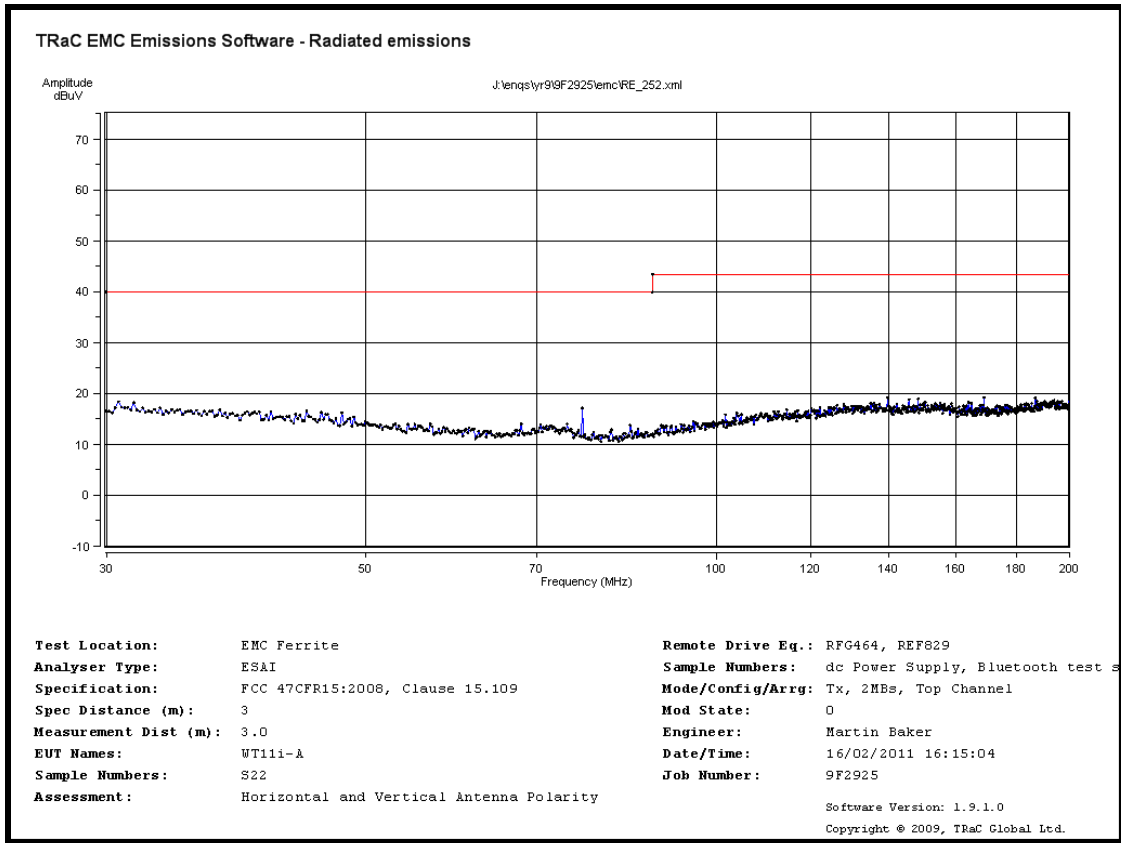


Radiated Spurious emissions 30 MHz to 200 MHz – 2480MHz – 2Mbps

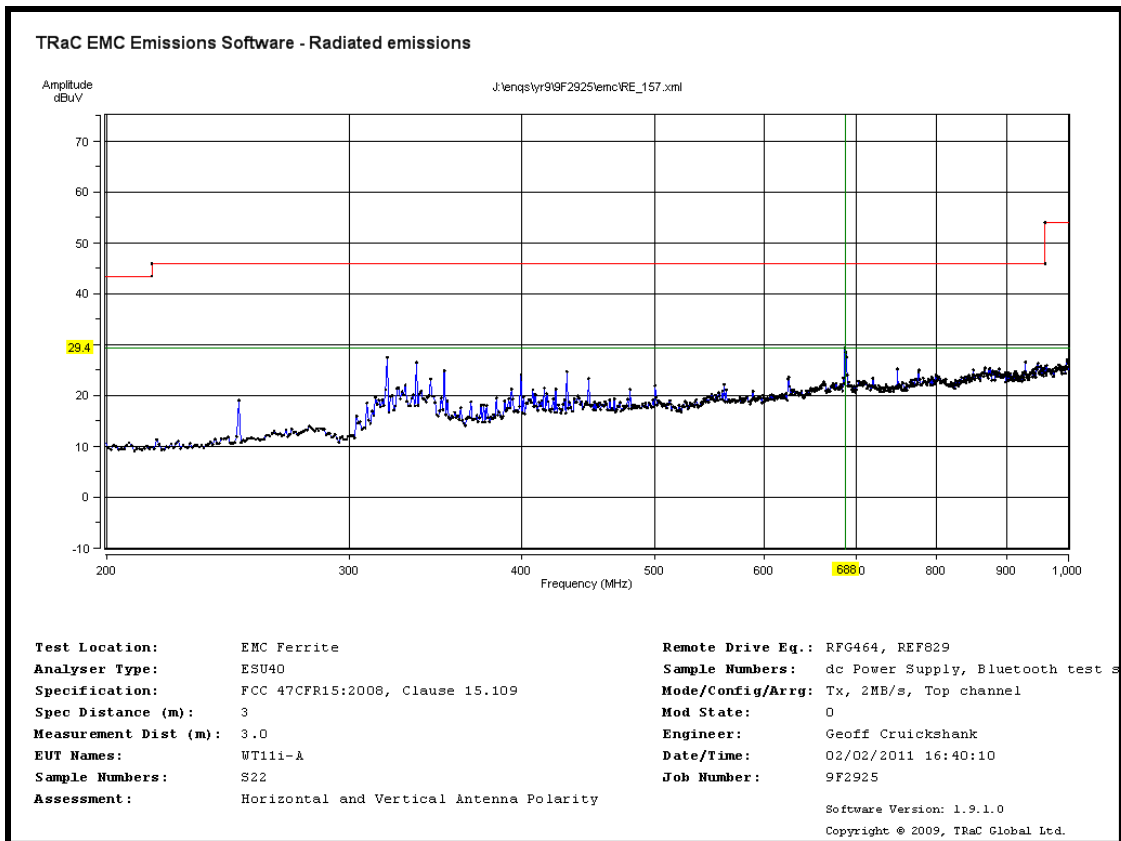


Radiated Spurious emissions 200 MHz to 1 GHz – 2480MHz – 2Mbps

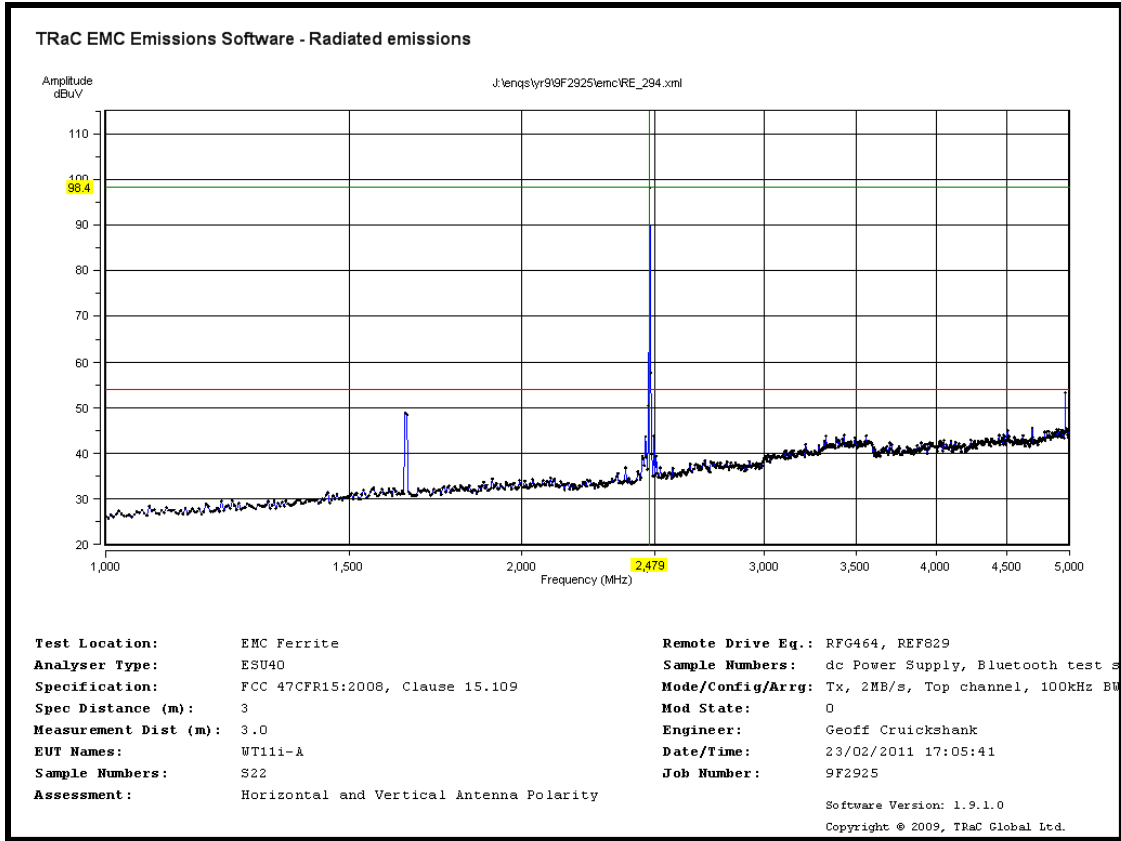


Radiated Spurious emissions 1 GHz to 5 GHz – 2480MHz – 2Mbps

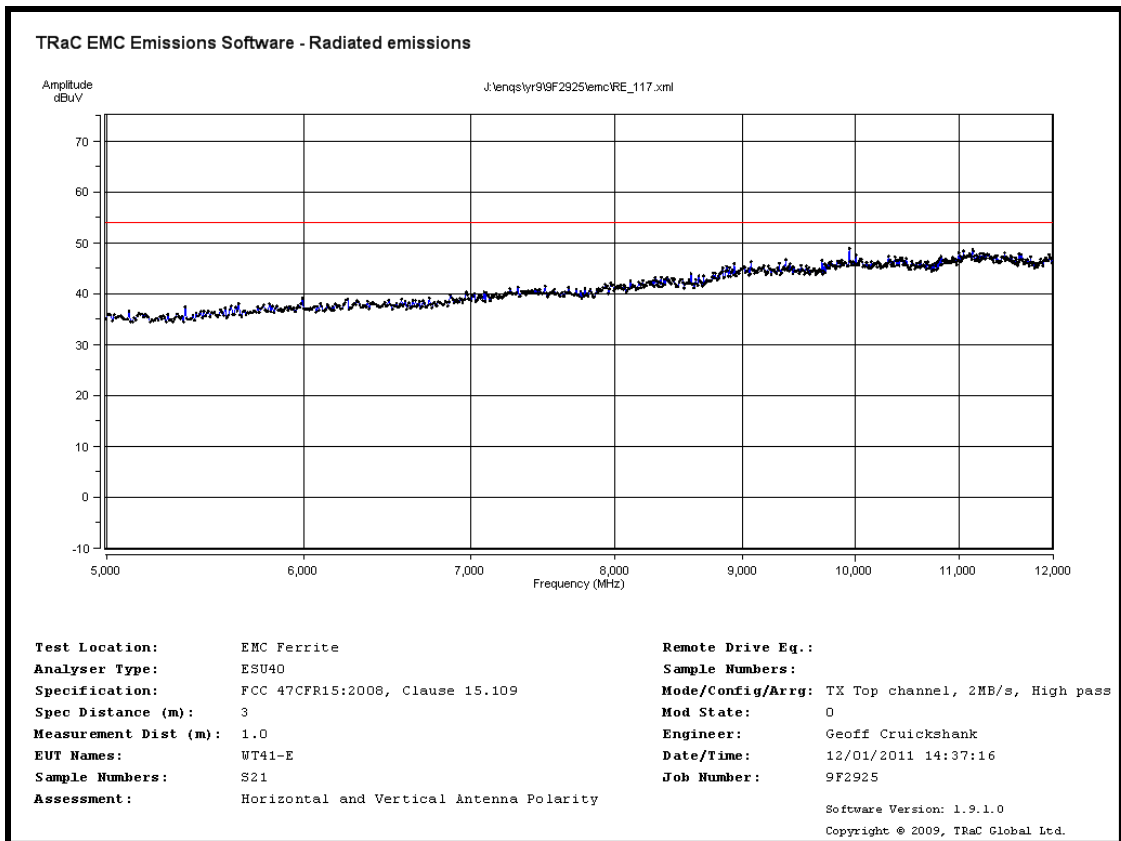

Radiated Spurious emissions 5 GHz to 12 GHz – 2480MHz – 2Mbps

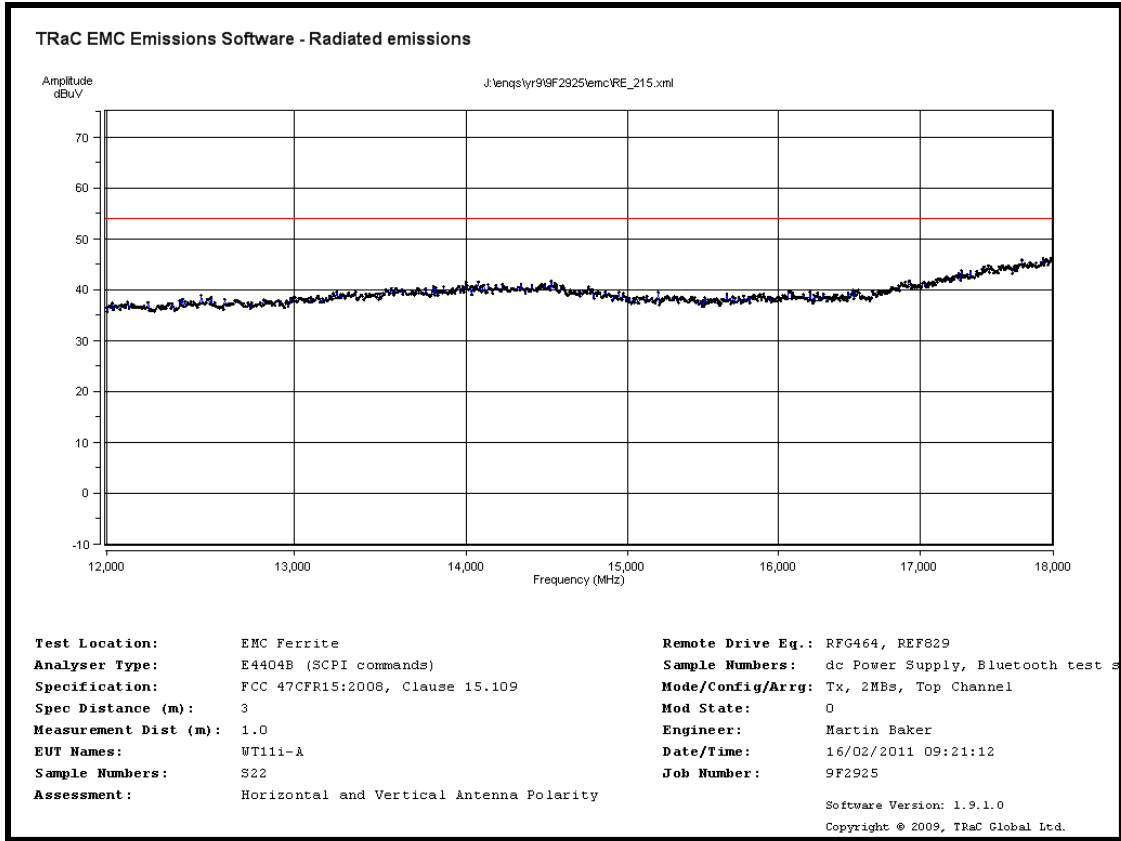


Radiated Spurious emissions 12 GHz to 18 GHz – 2480MHz – 2Mbps

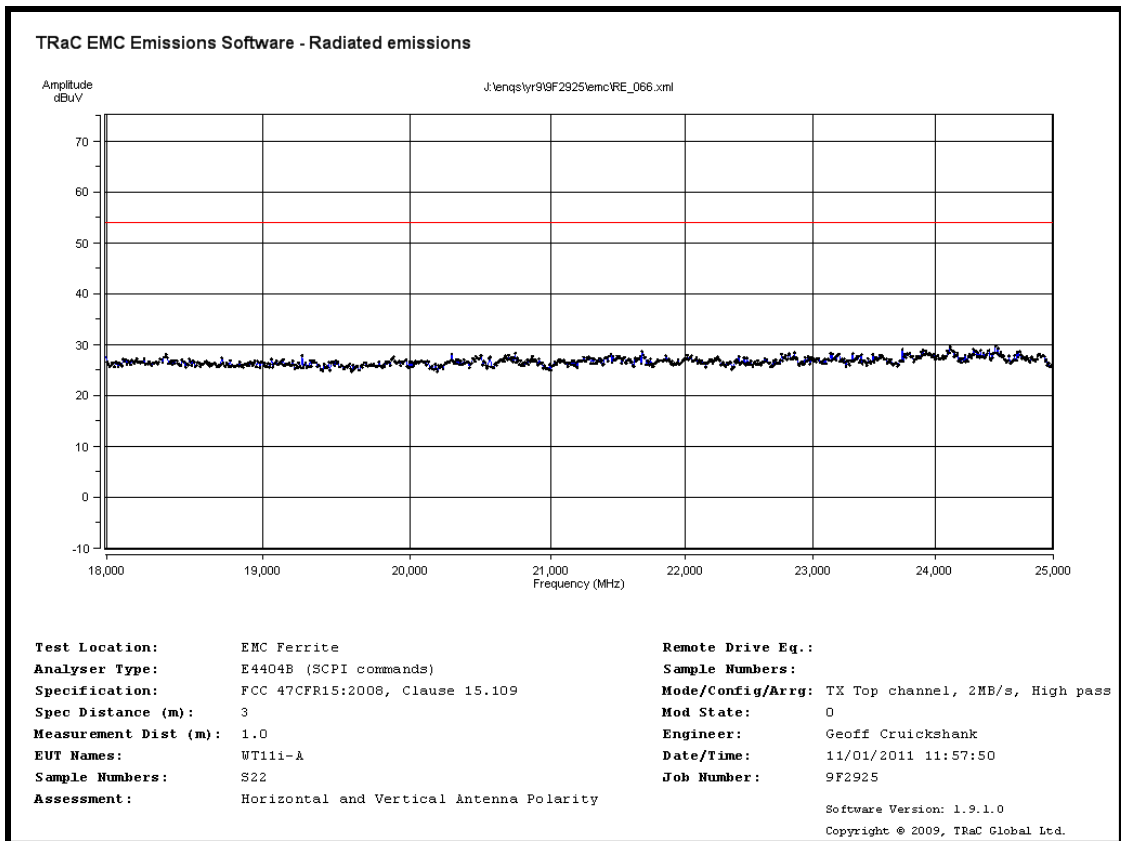


Radiated Spurious emissions 18 GHz to 25 GHz – 2480MHz – 2Mbps

Radiated Bandedge Compliance – Peak plot to average limit

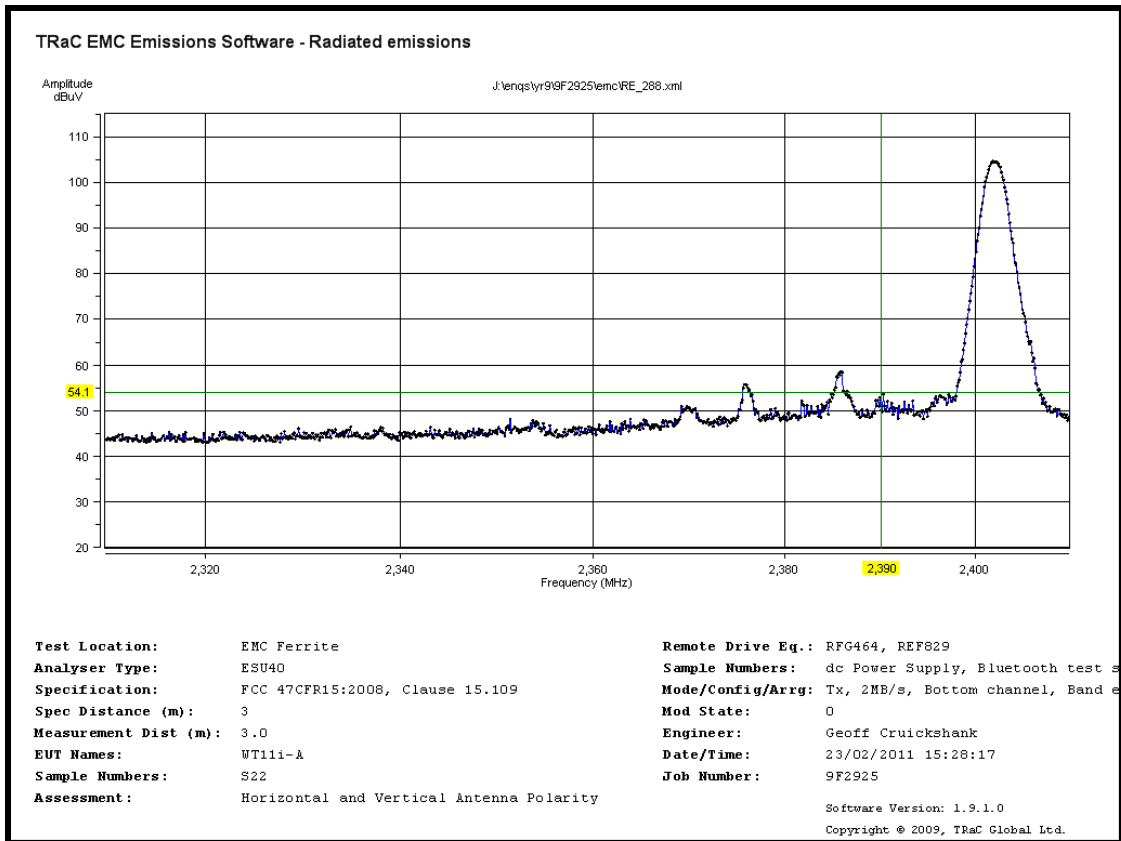


Lower Bandedge

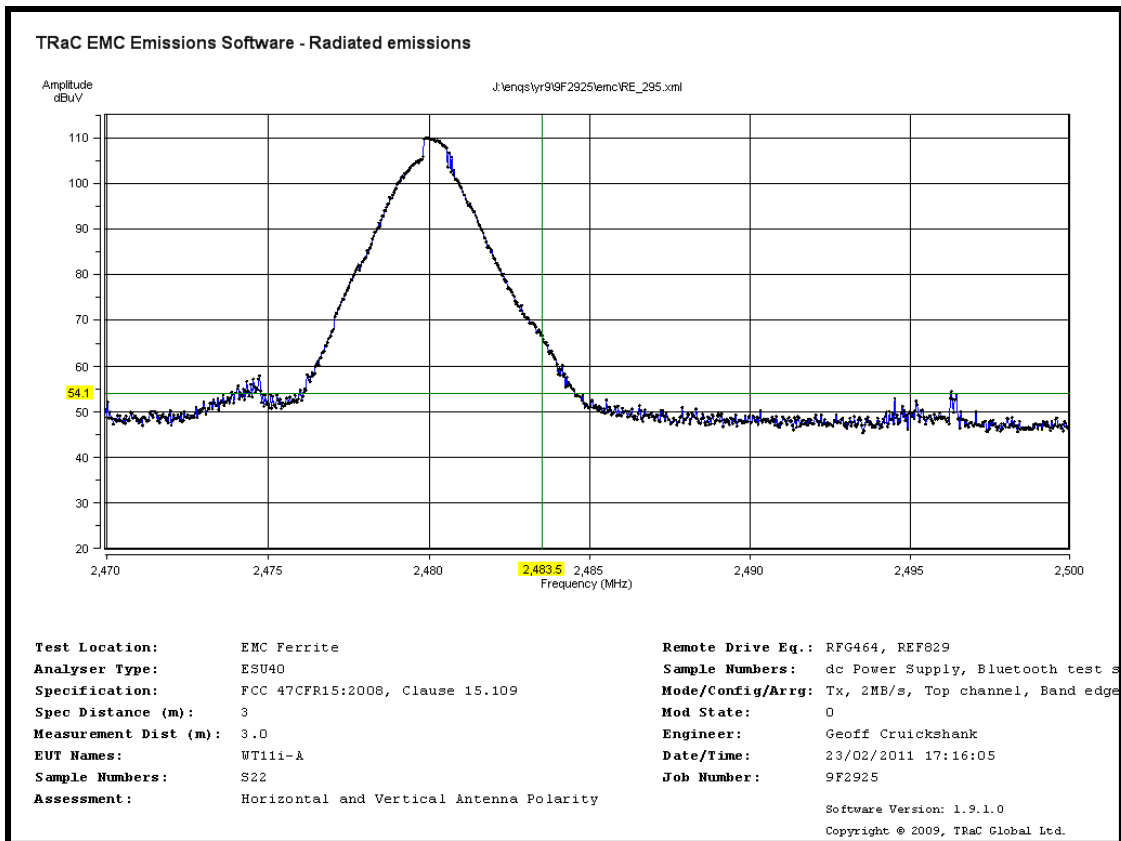


Upper Bandedge


Radiated Bandedge Compliance – Average plot to average limit

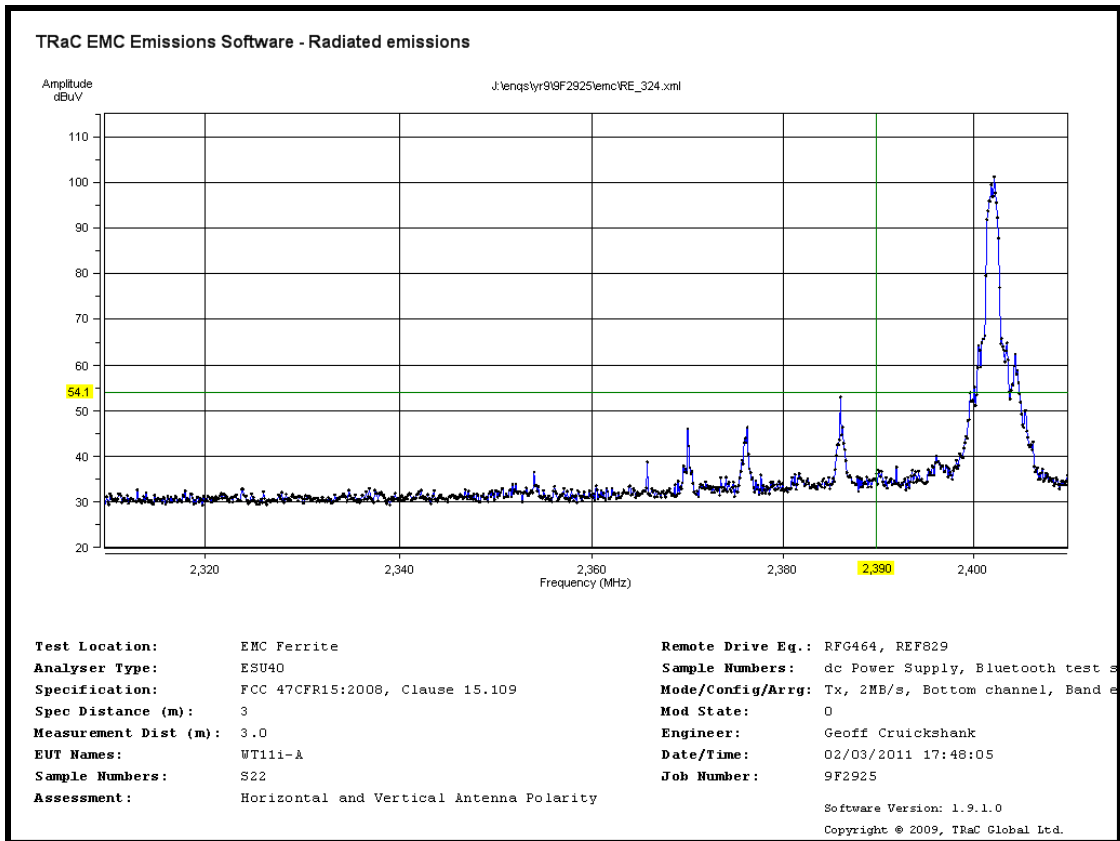


Lower Bandedge

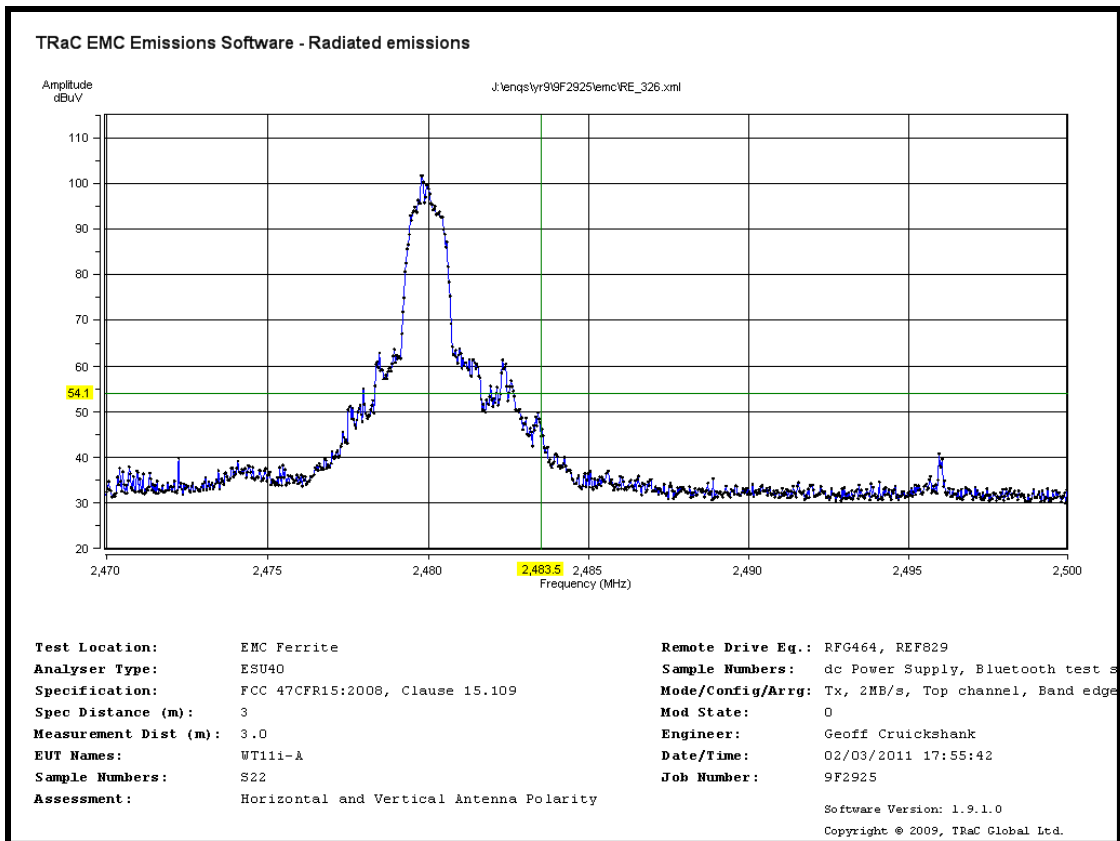


Upper Bandedge

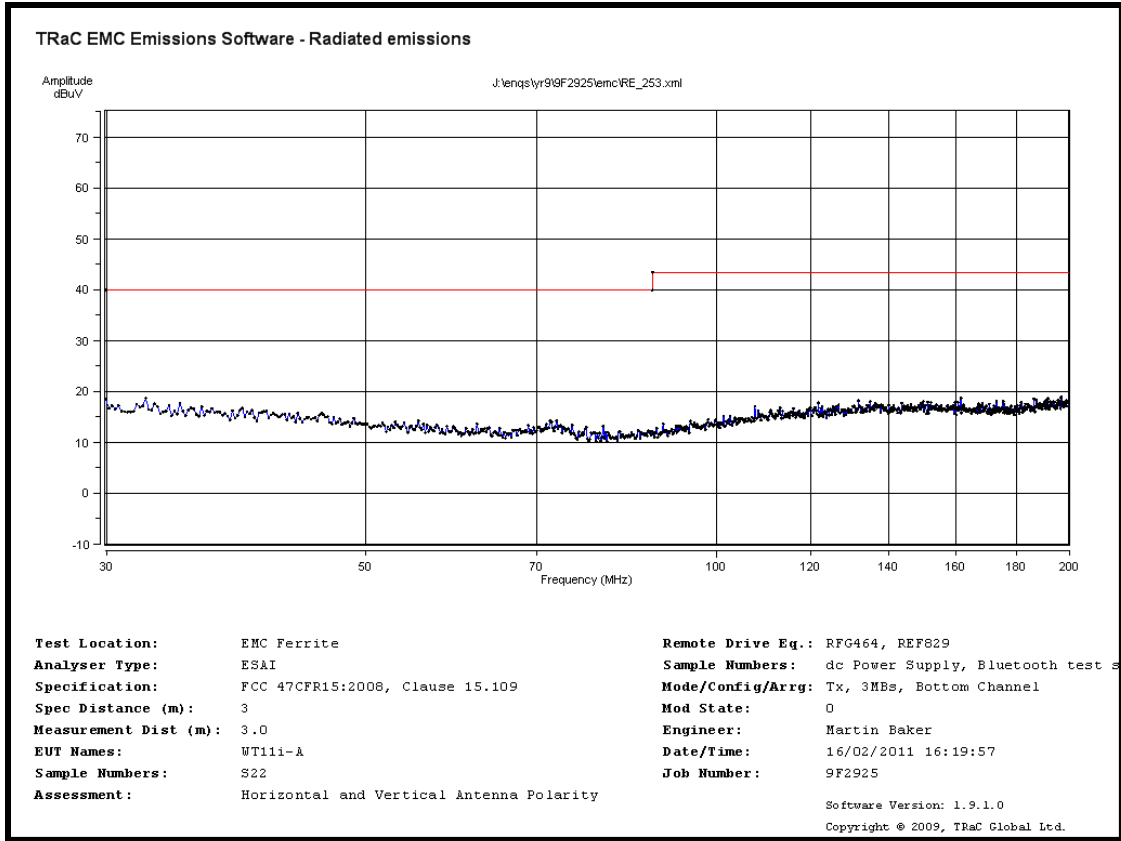


Radiated Spurious emissions 30 MHz to 200 MHz – 2402MHz – 3Mbps

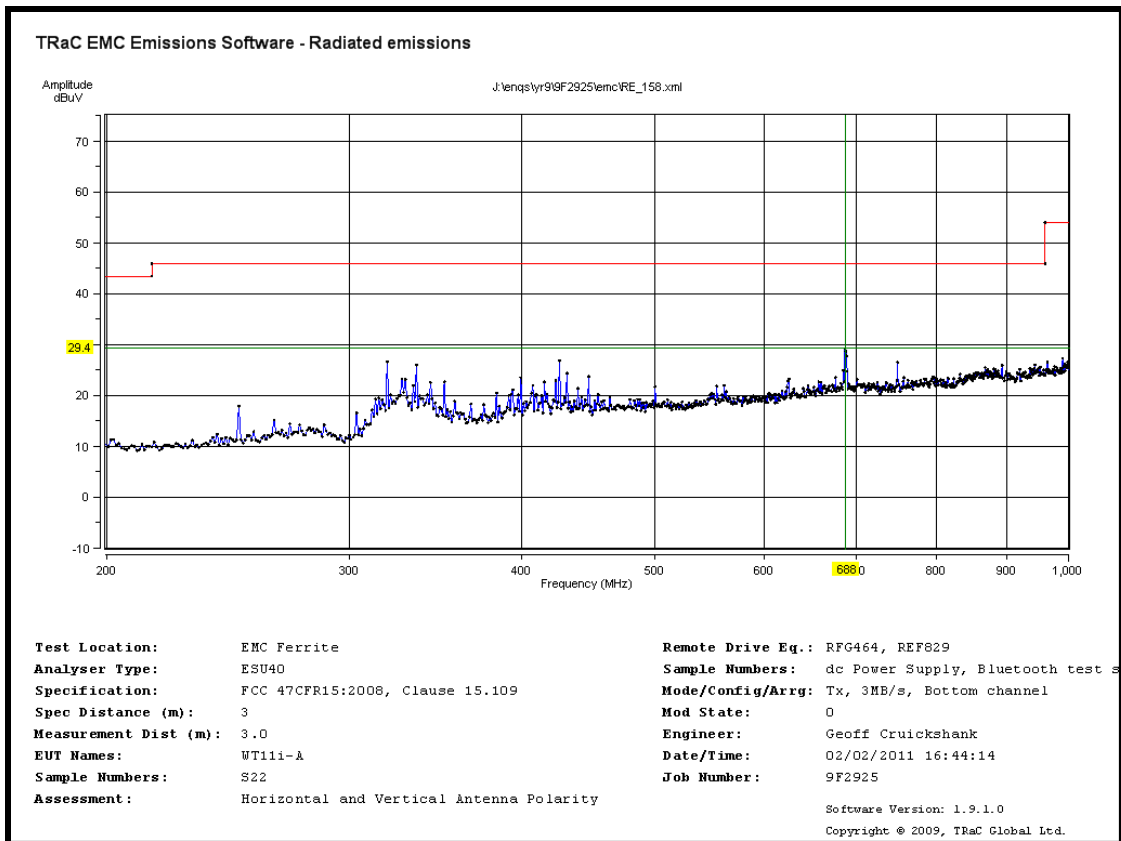


Radiated Spurious emissions 200 MHz to 1 GHz – 2402MHz – 3Mbps

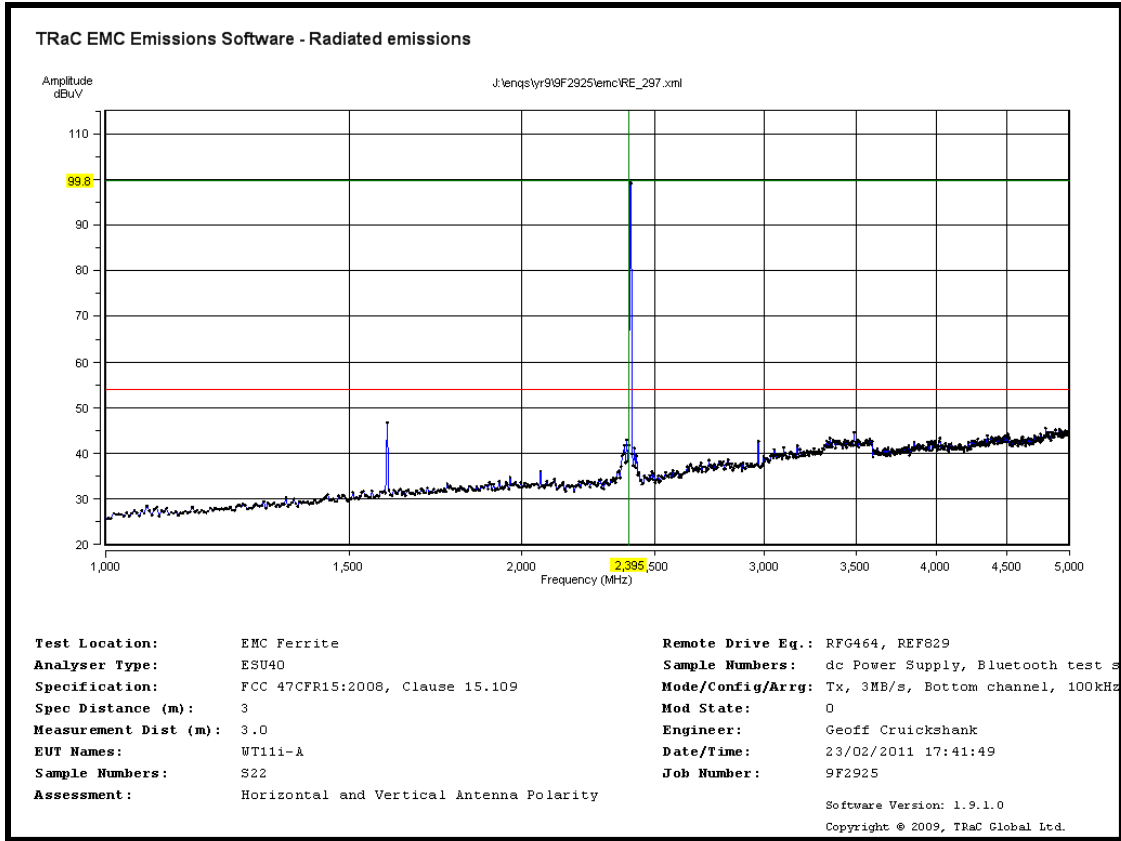


Radiated Spurious emissions 1 GHz to 5 GHz – 2402MHz – 3Mbps

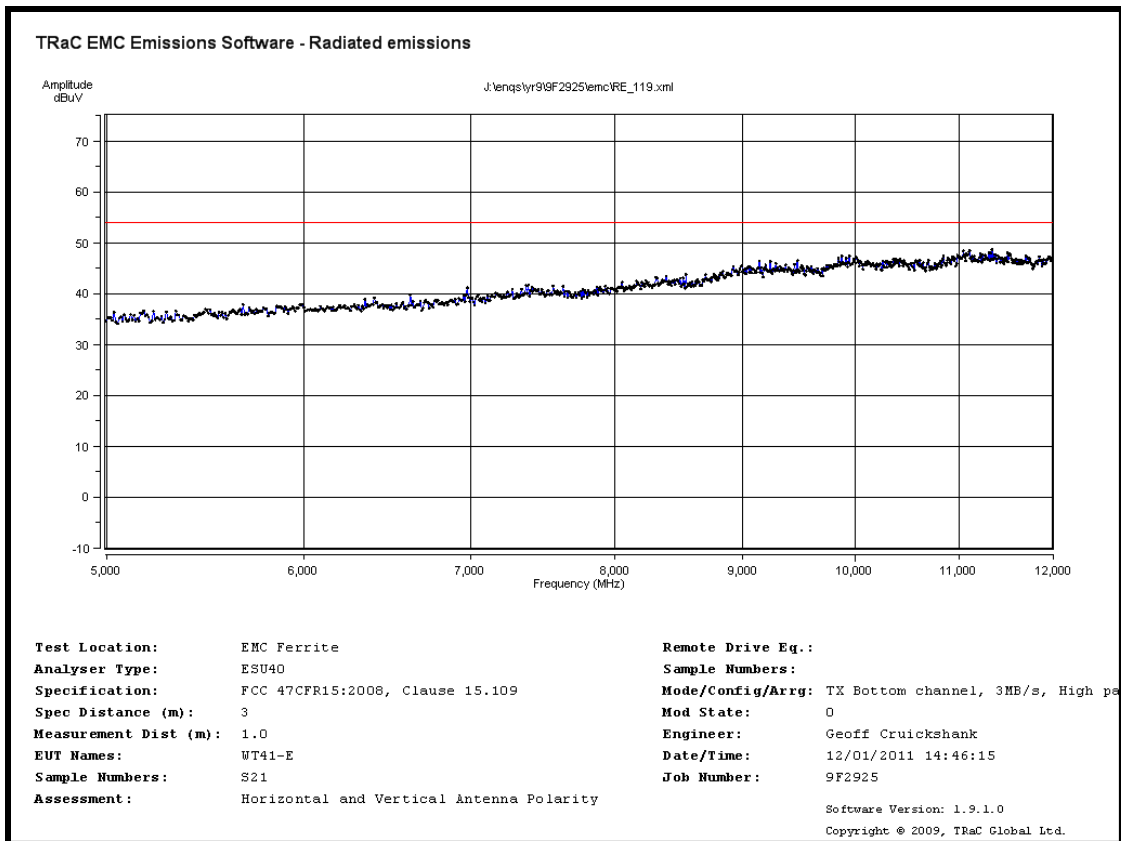


Radiated Spurious emissions 5 GHz to 12 GHz – 2402MHz – 3Mbps

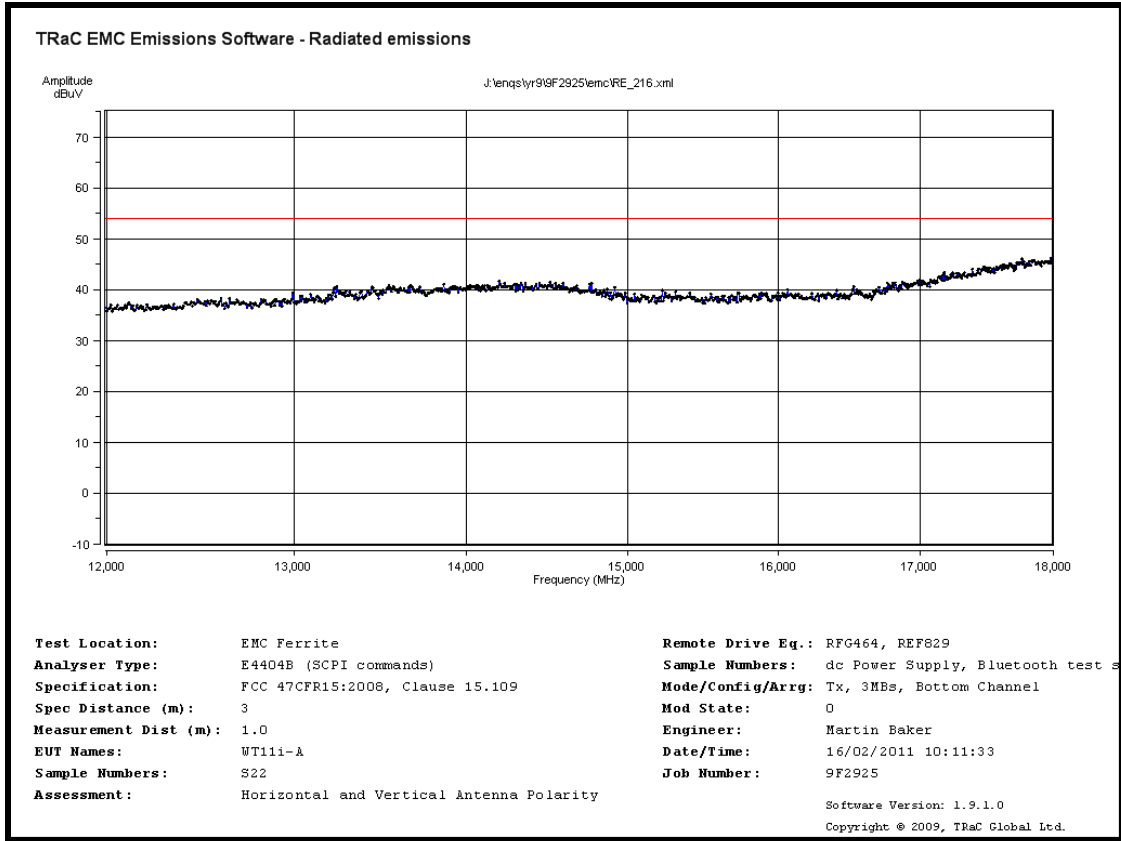


Radiated Spurious emissions 12 GHz to 18 GHz – 2402MHz – 3Mbps

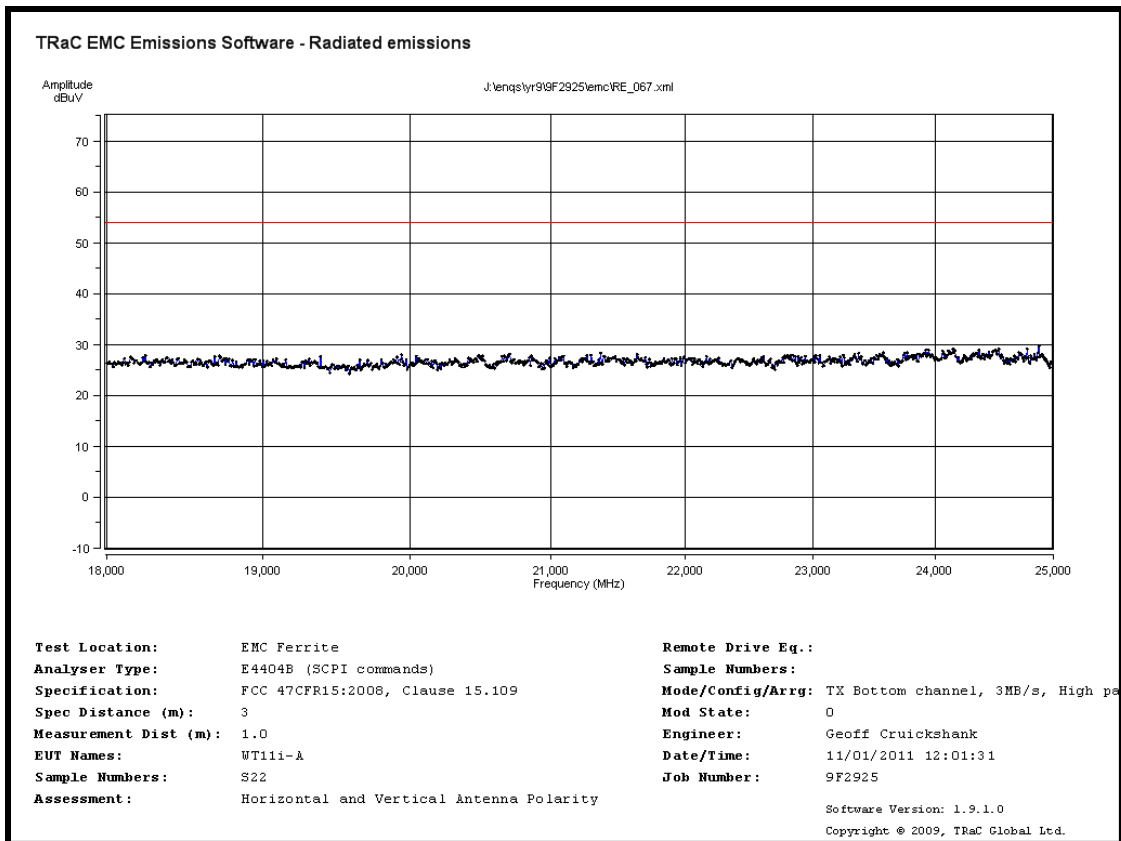


Radiated Spurious emissions 18 GHz to 25 GHz – 2402MHz – 3Mbps

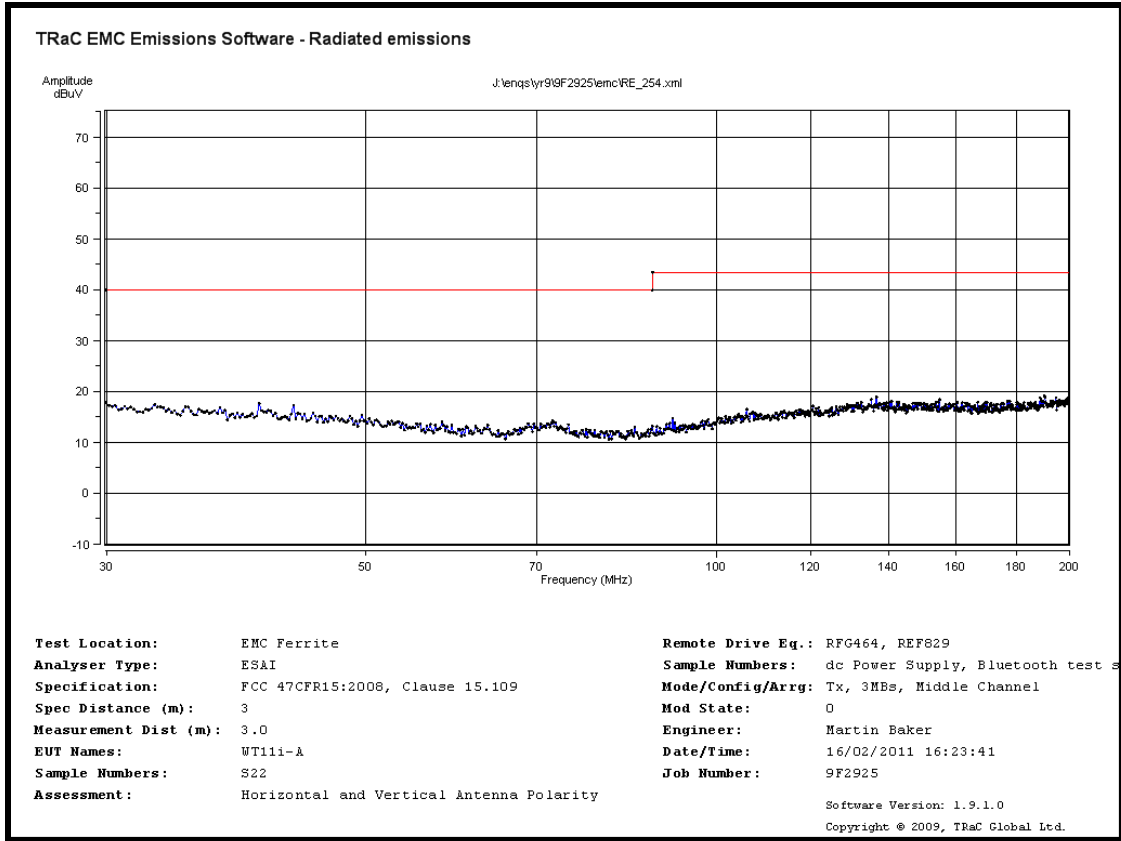


Radiated Spurious emissions 30 MHz to 200 MHz – 2441MHz – 3Mbps

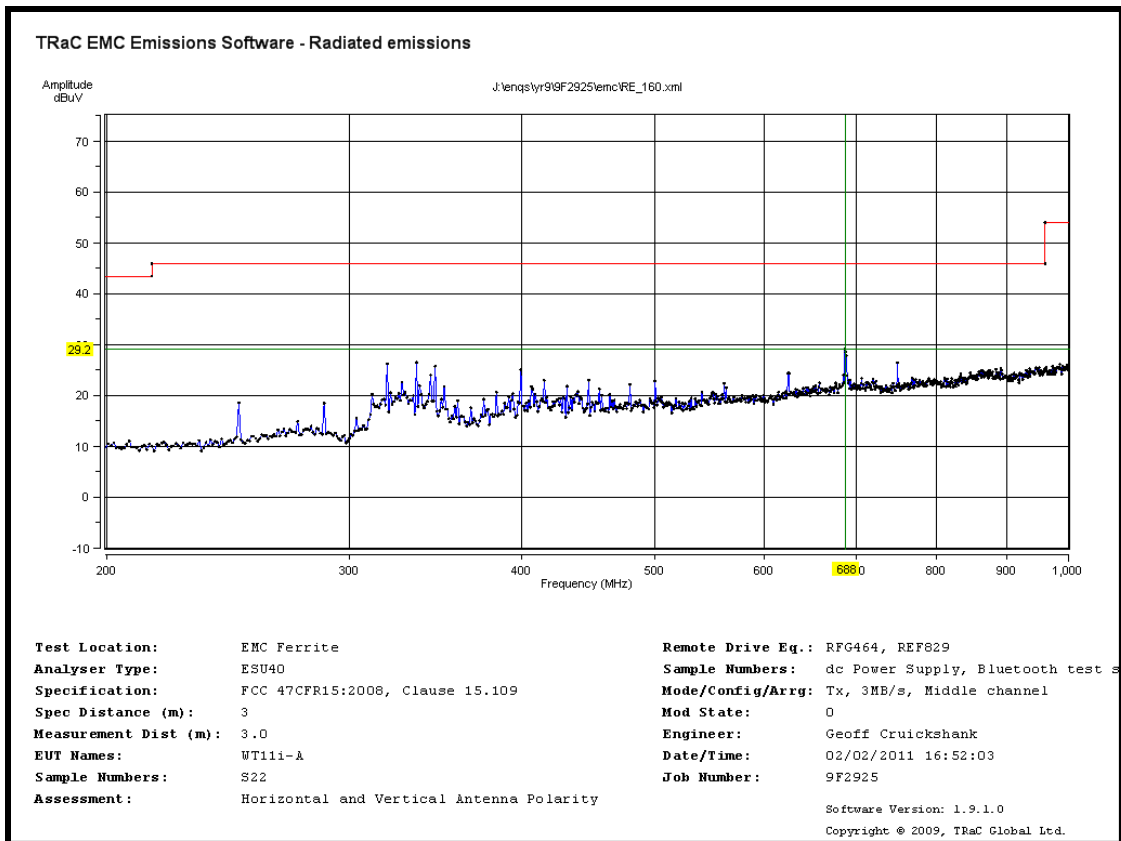


Radiated Spurious emissions 200 MHz to 1 GHz – 2441MHz – 3Mbps

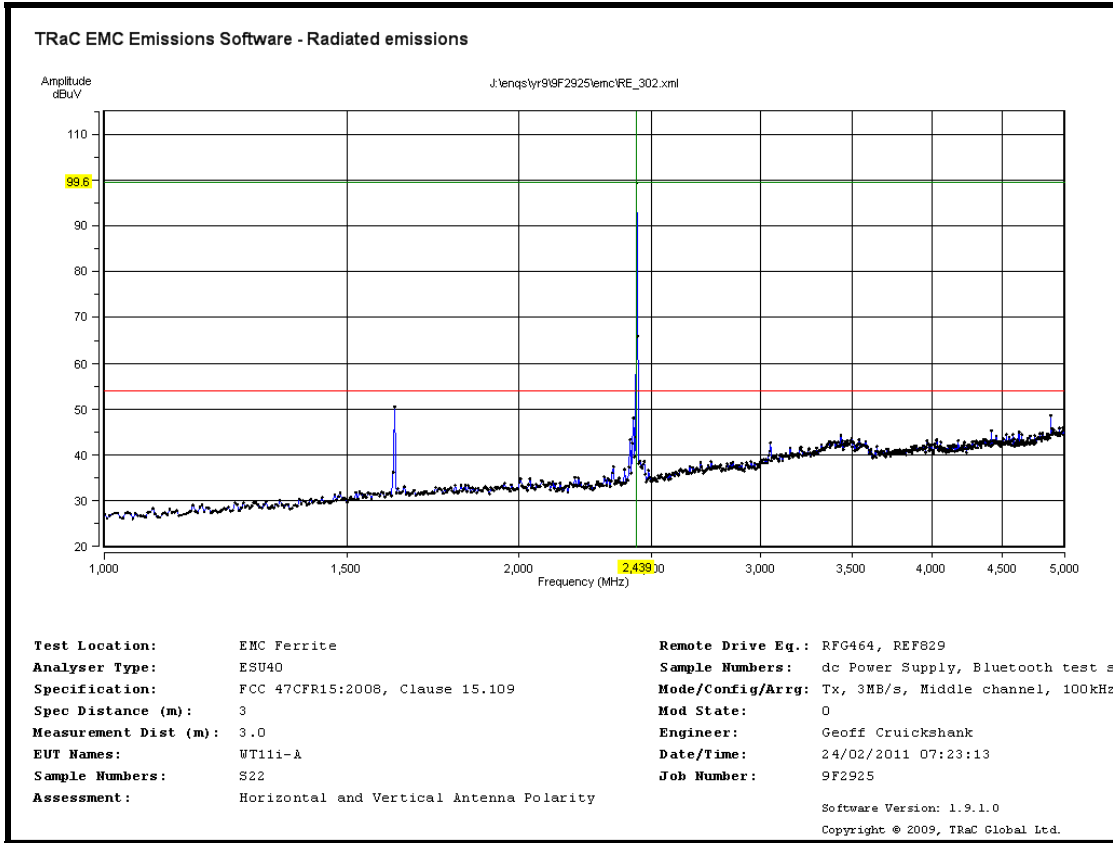


Radiated Spurious emissions 1 GHz to 5 GHz – 2441MHz – 3Mbps

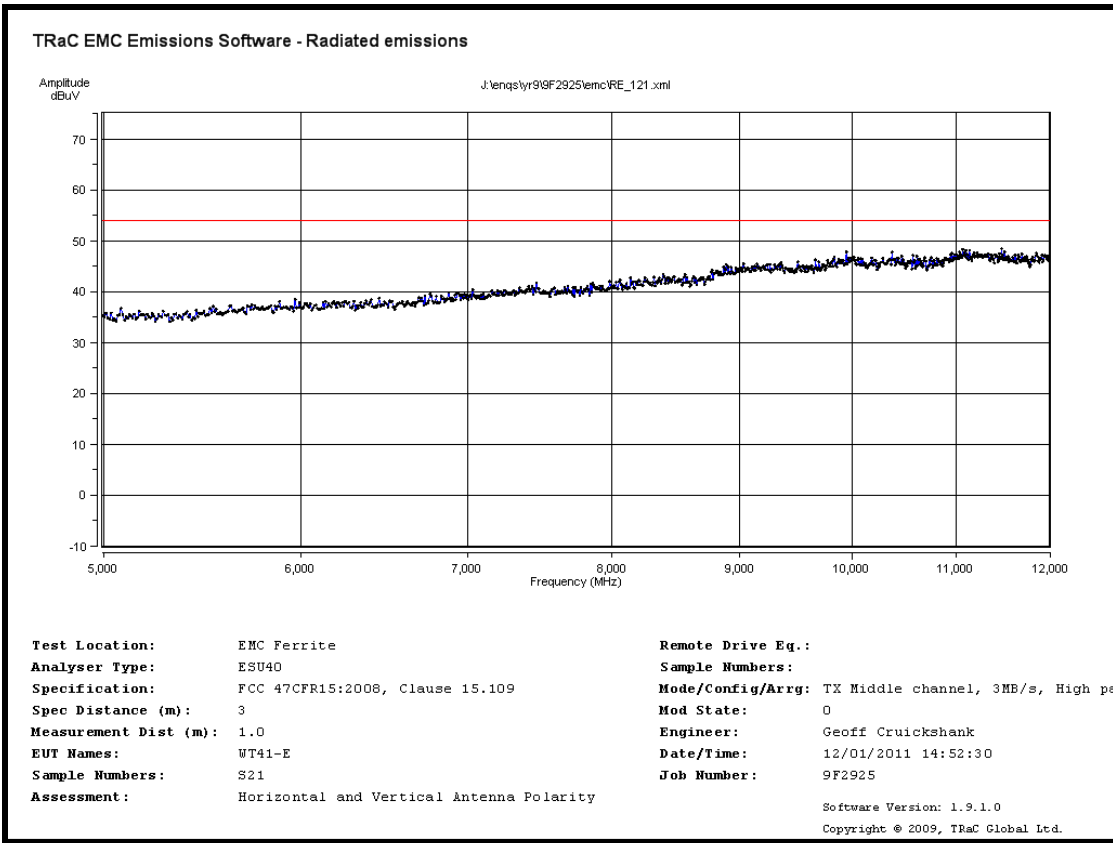


Radiated Spurious emissions 5 GHz to 12 GHz – 2441MHz – 3Mbps

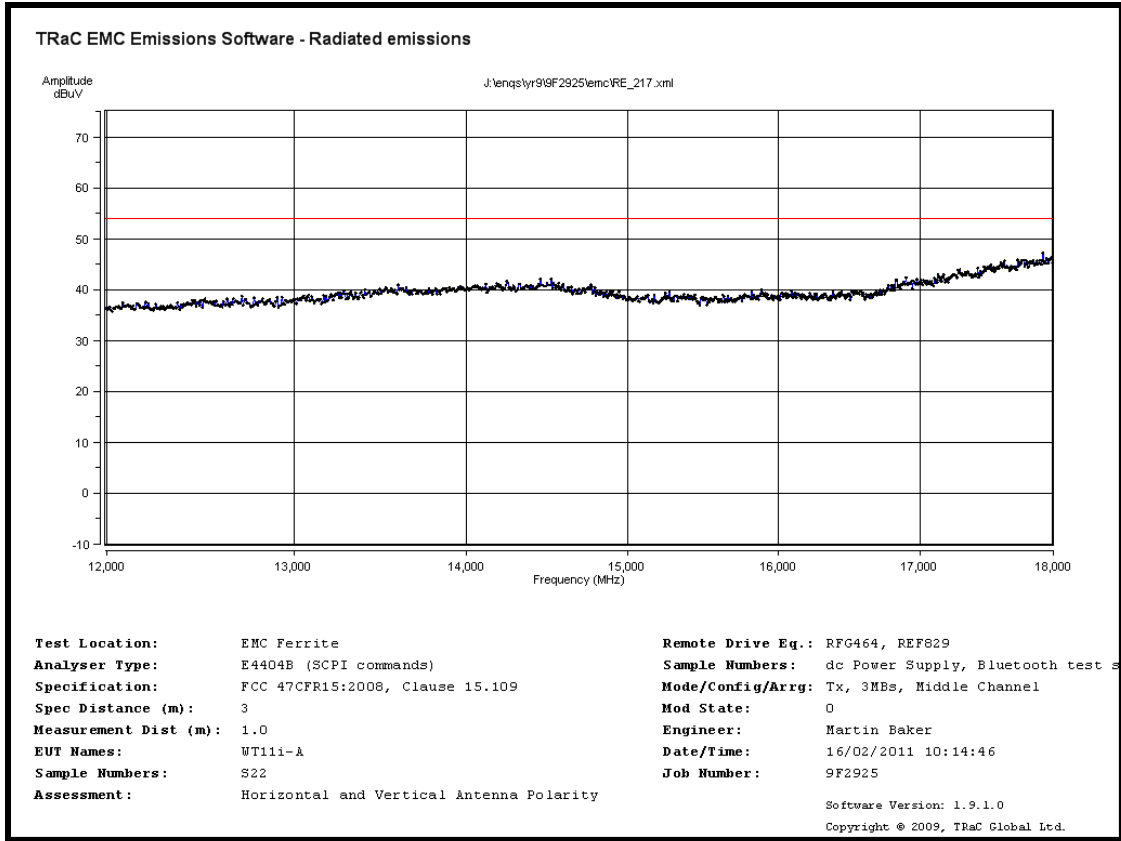


Radiated Spurious emissions 12 GHz to 18 GHz – 2441MHz – 3Mbps

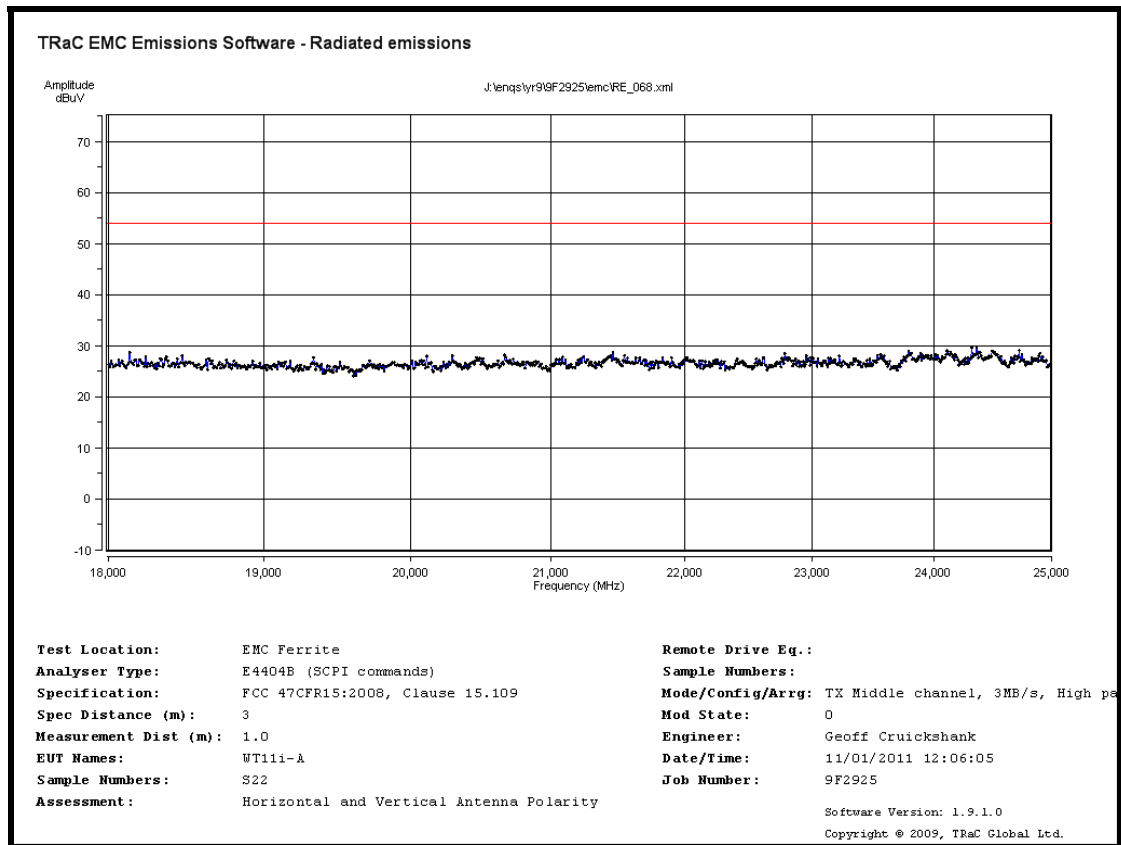


Radiated Spurious emissions 18 GHz to 25 GHz – 2441MHz – 3Mbps

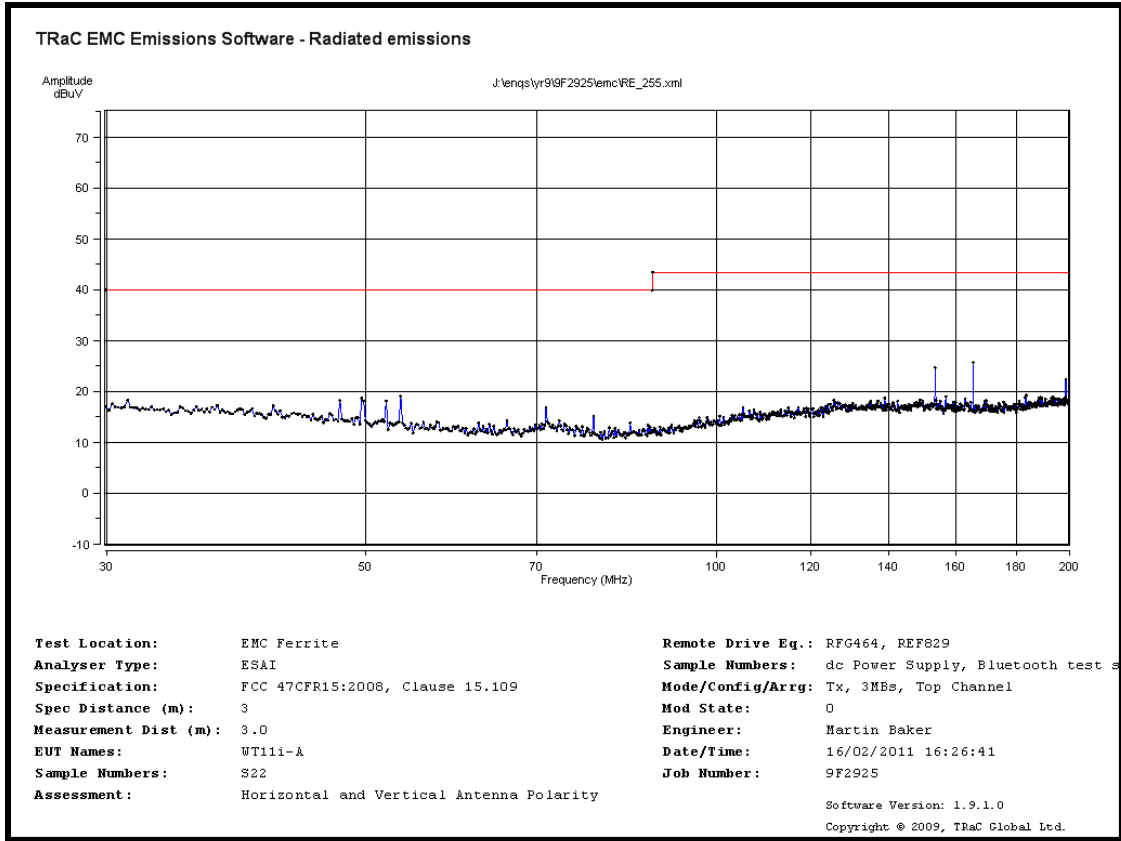


Radiated Spurious emissions 30 MHz to 200 MHz – 2480MHz – 3Mbps

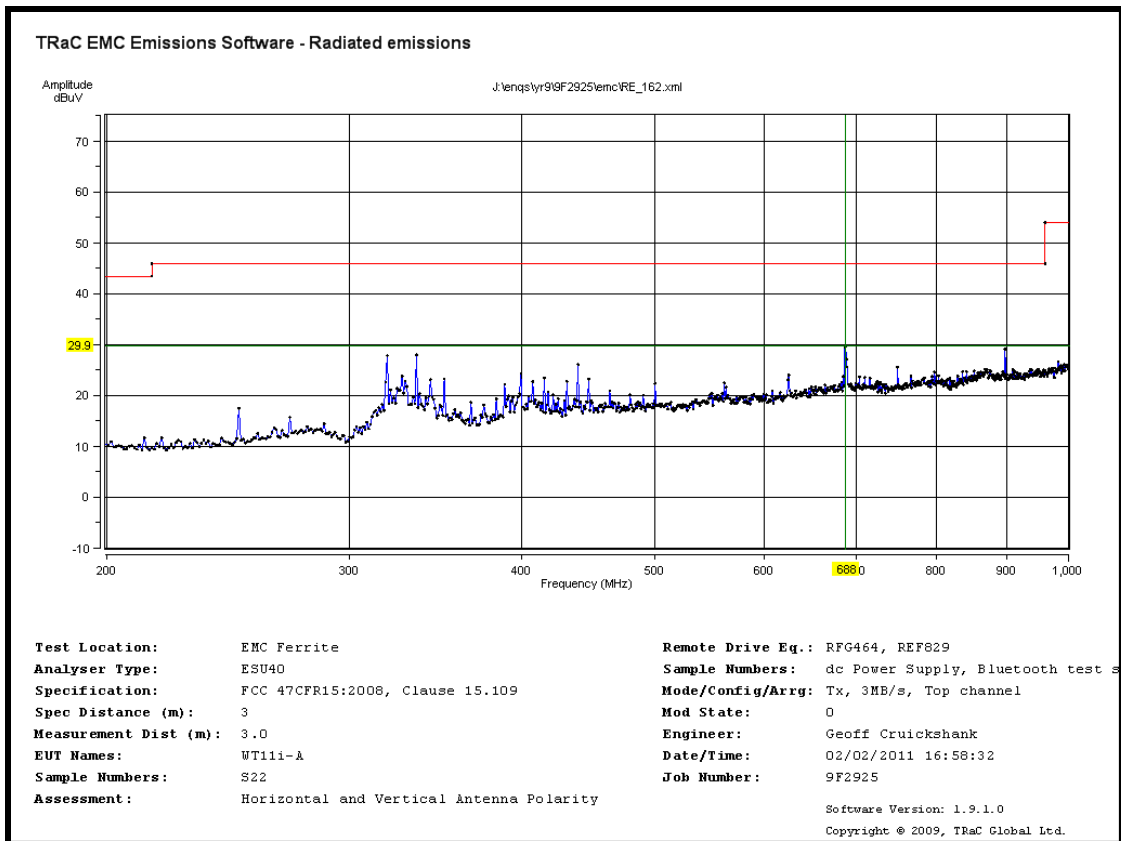


Radiated Spurious emissions 200 MHz to 1 GHz – 2480MHz – 3Mbps

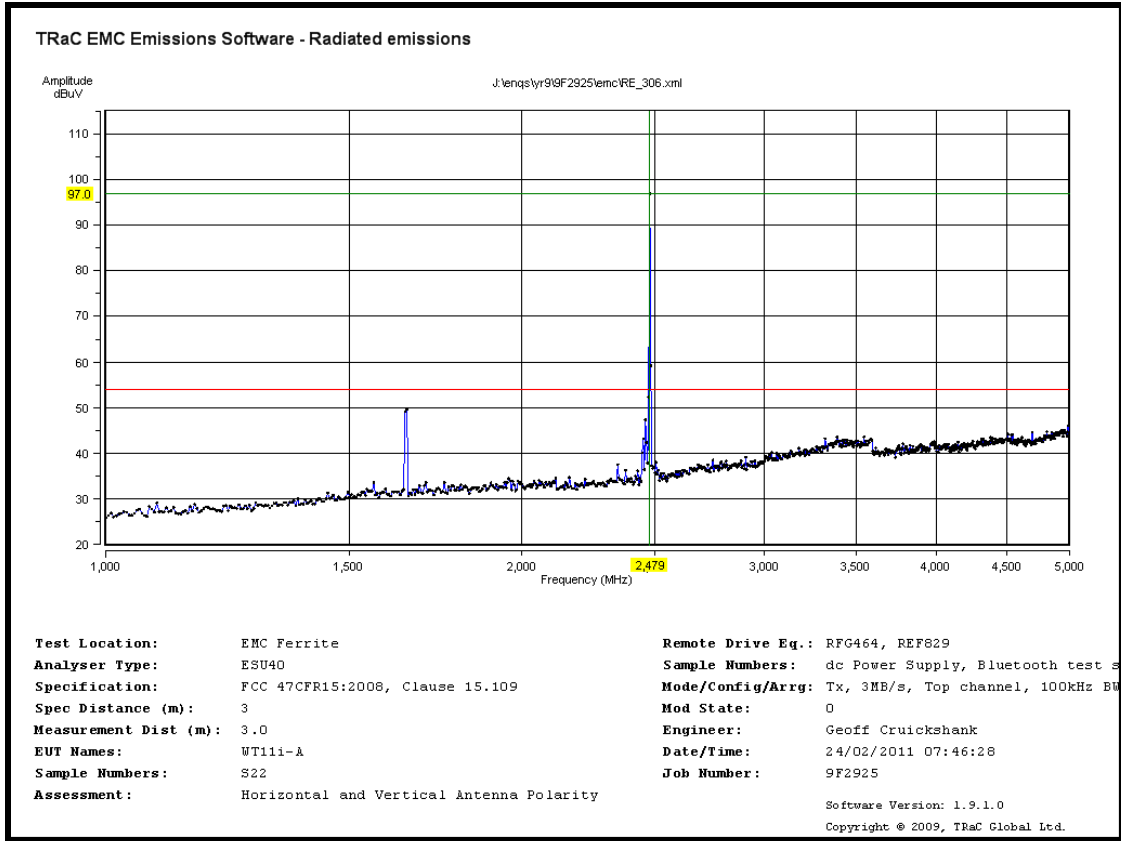


Radiated Spurious emissions 1 GHz to 5 GHz – 2480MHz – 3Mbps

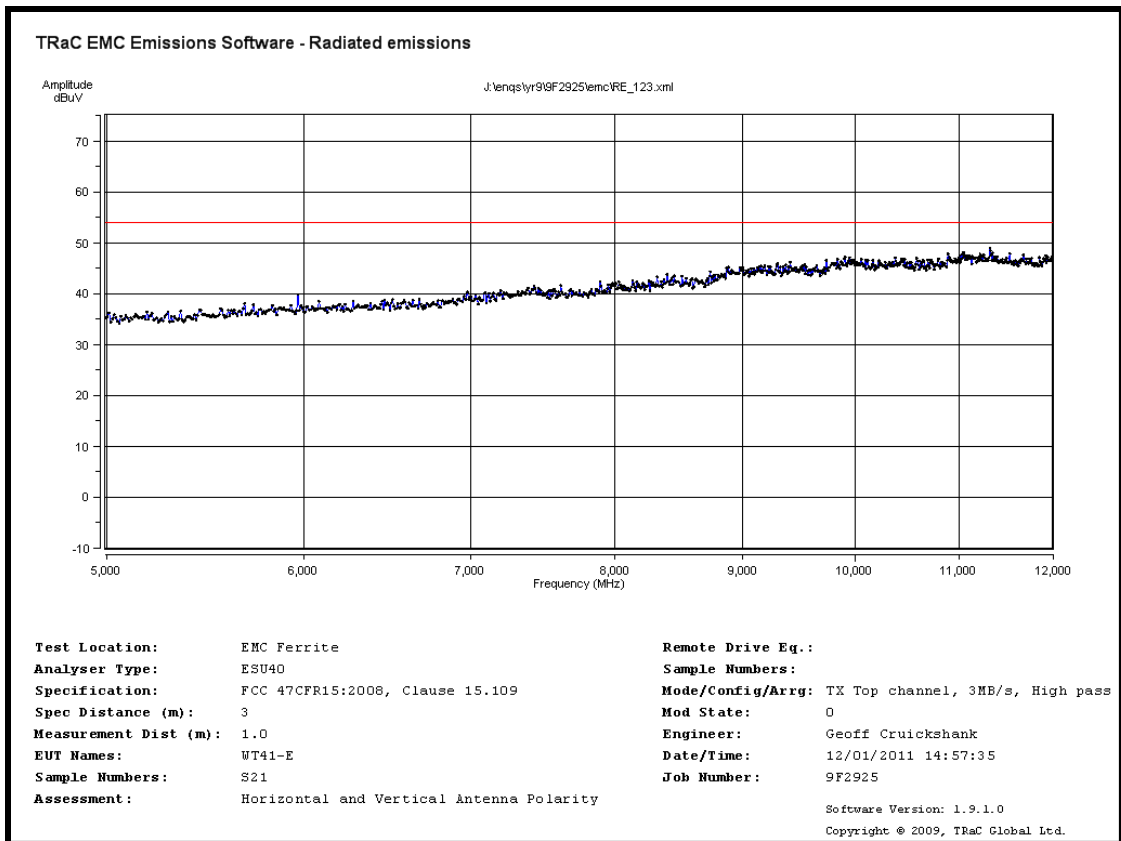

Radiated Spurious emissions 5 GHz to 12 GHz – 2480MHz – 3Mbps

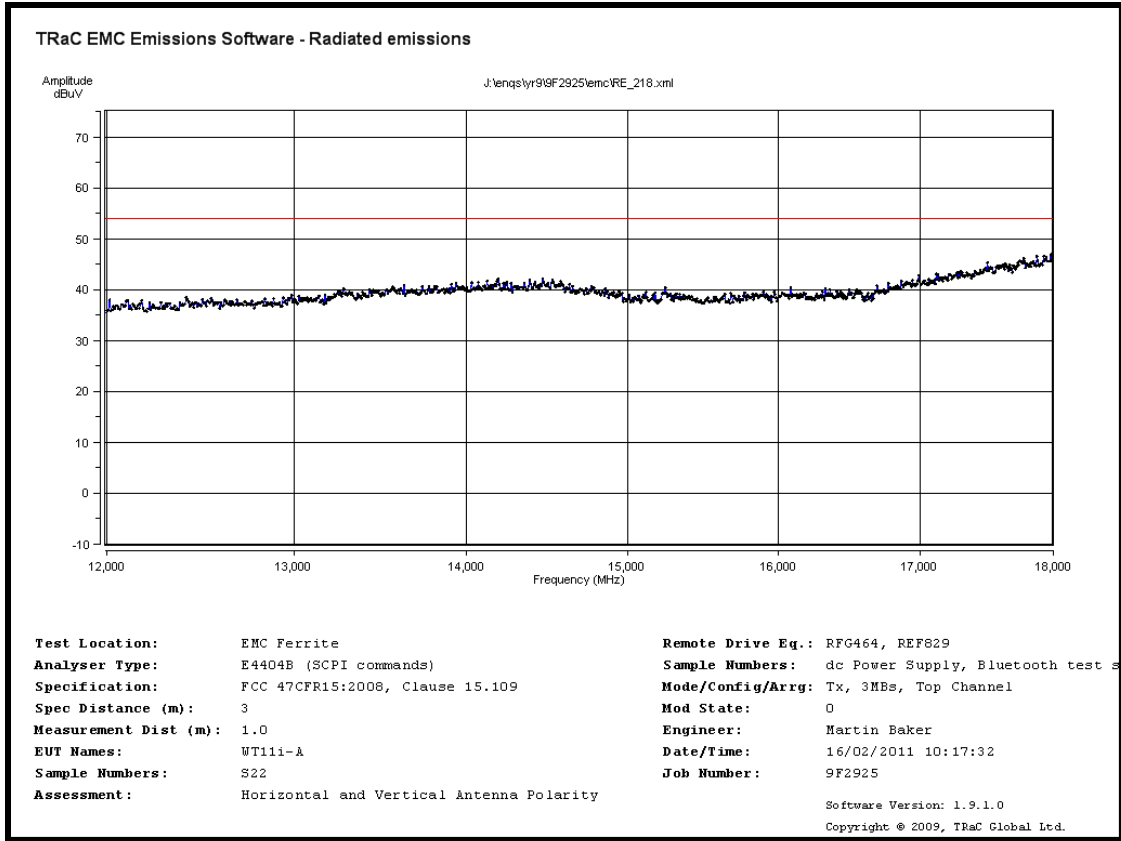


Radiated Spurious emissions 12 GHz to 18 GHz – 2480MHz – 3Mbps

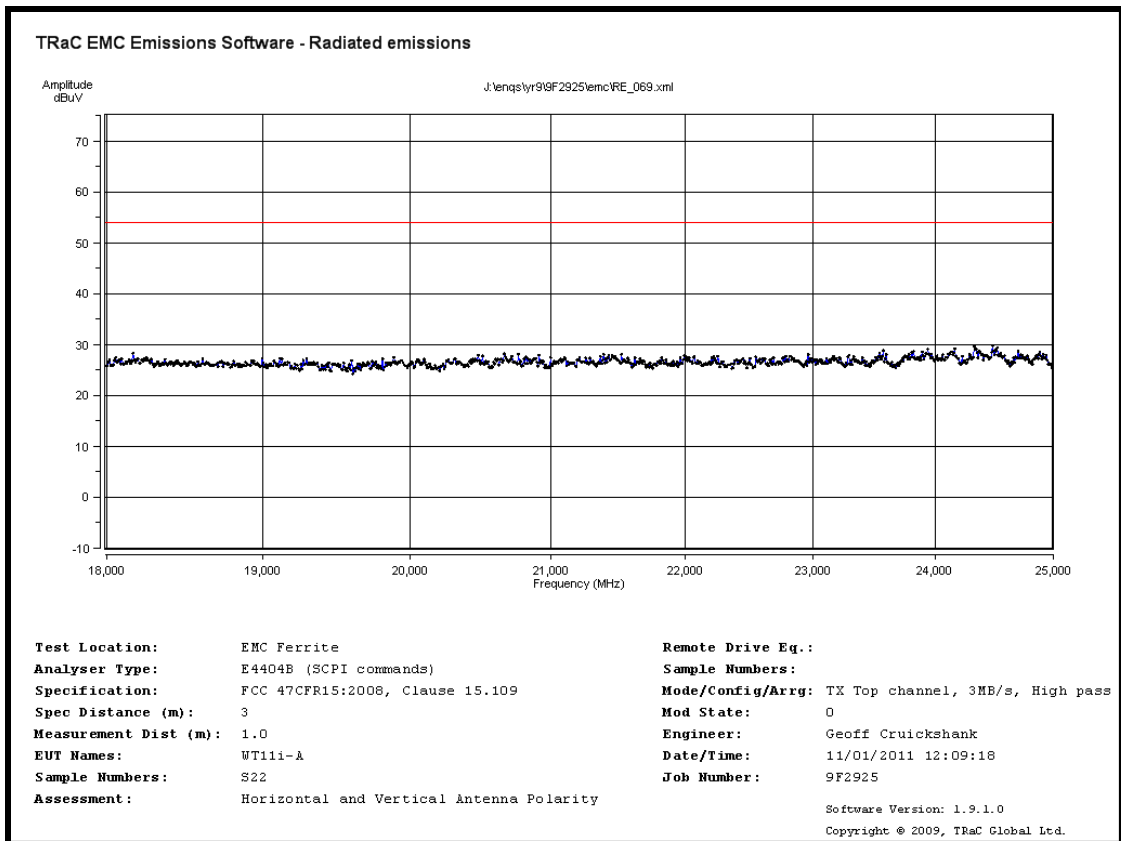


Radiated Spurious emissions 18 GHz to 25 GHz – 2480MHz – 3Mbps

Radiated Bandedge Compliance – Peak plot to average limit

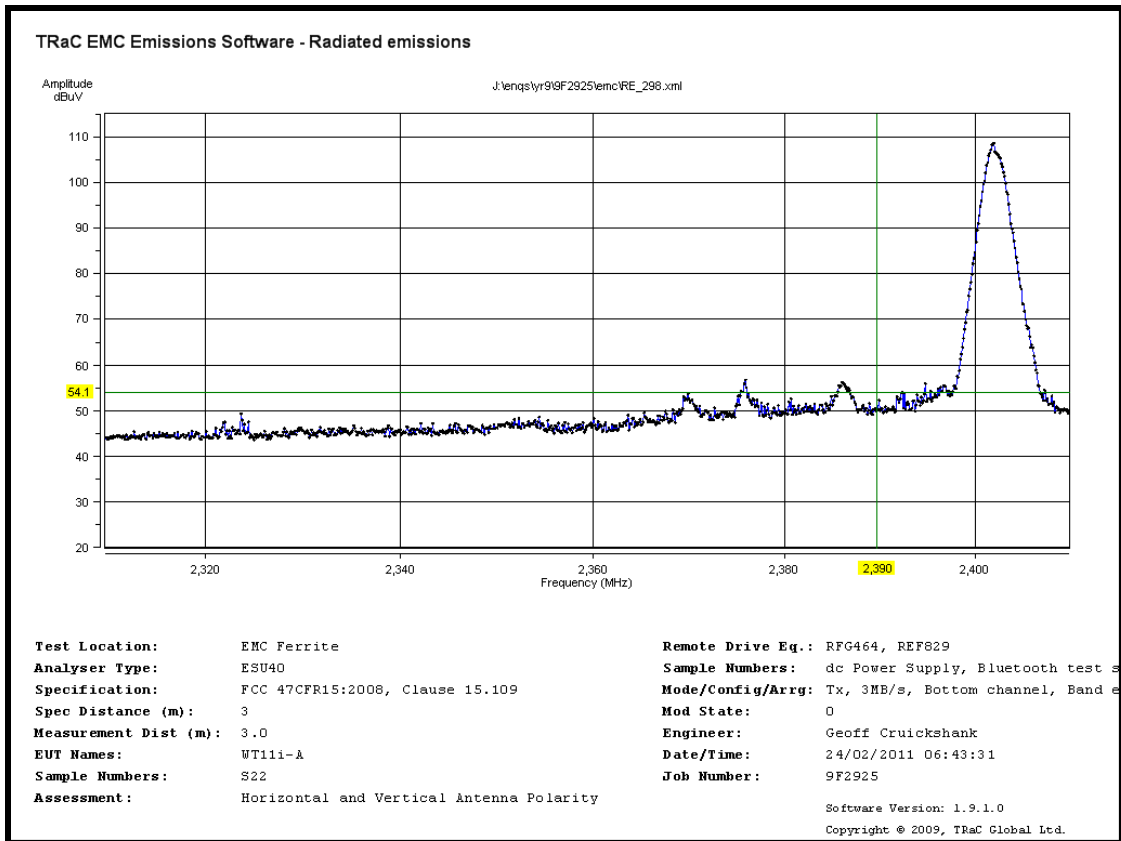


Lower Bandedge

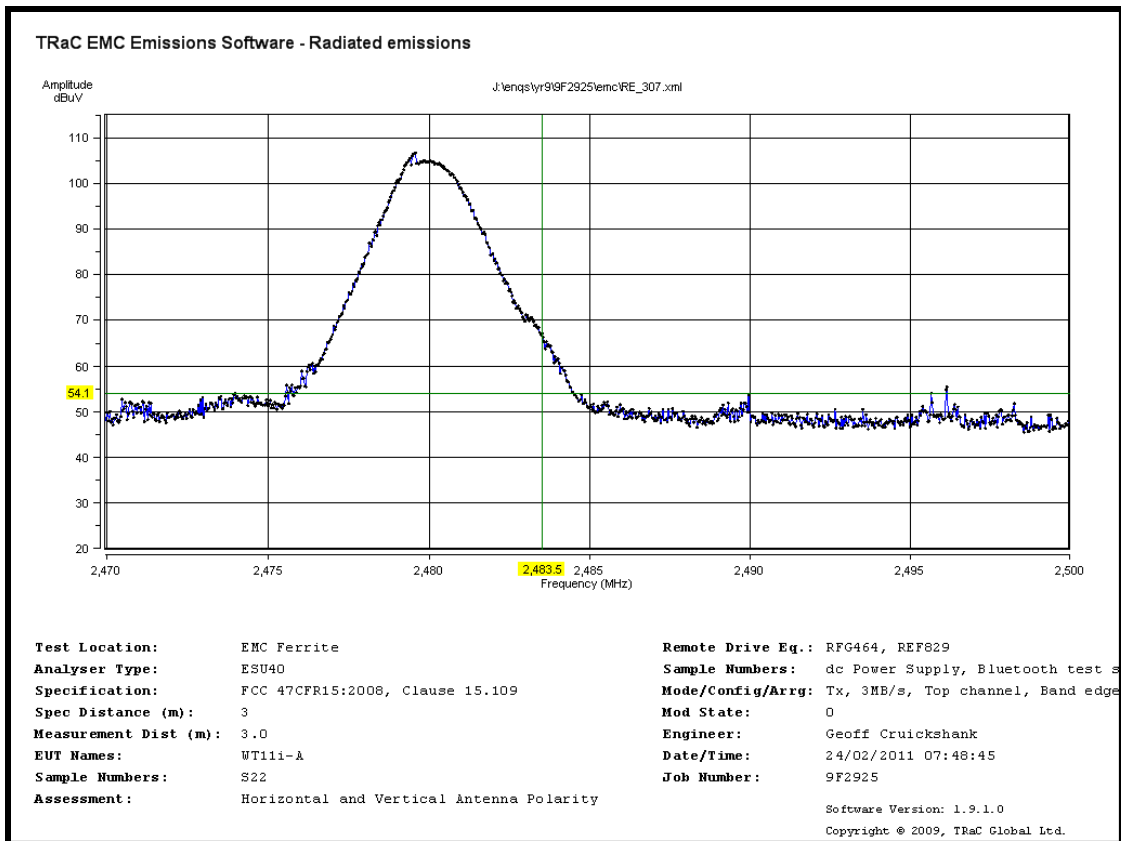


Upper Bandedge


Radiated Bandedge Compliance – Average plot to average limit

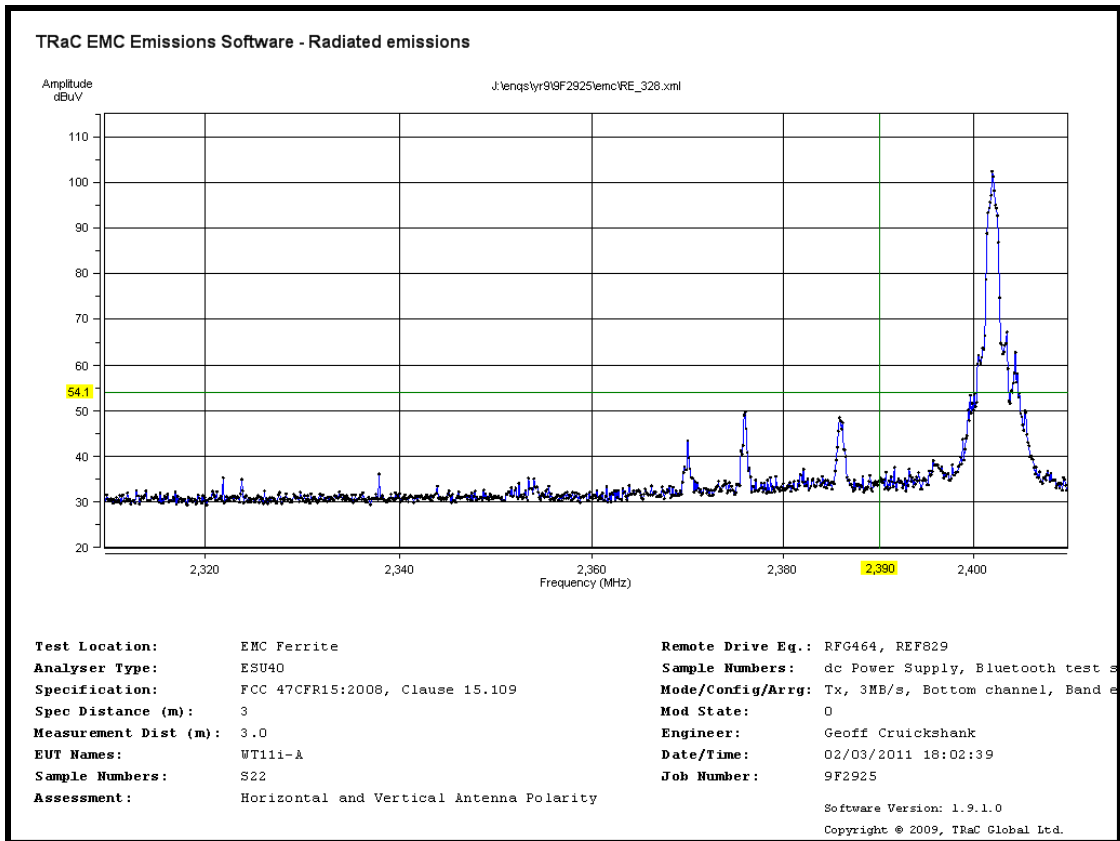


Lower Bandedge

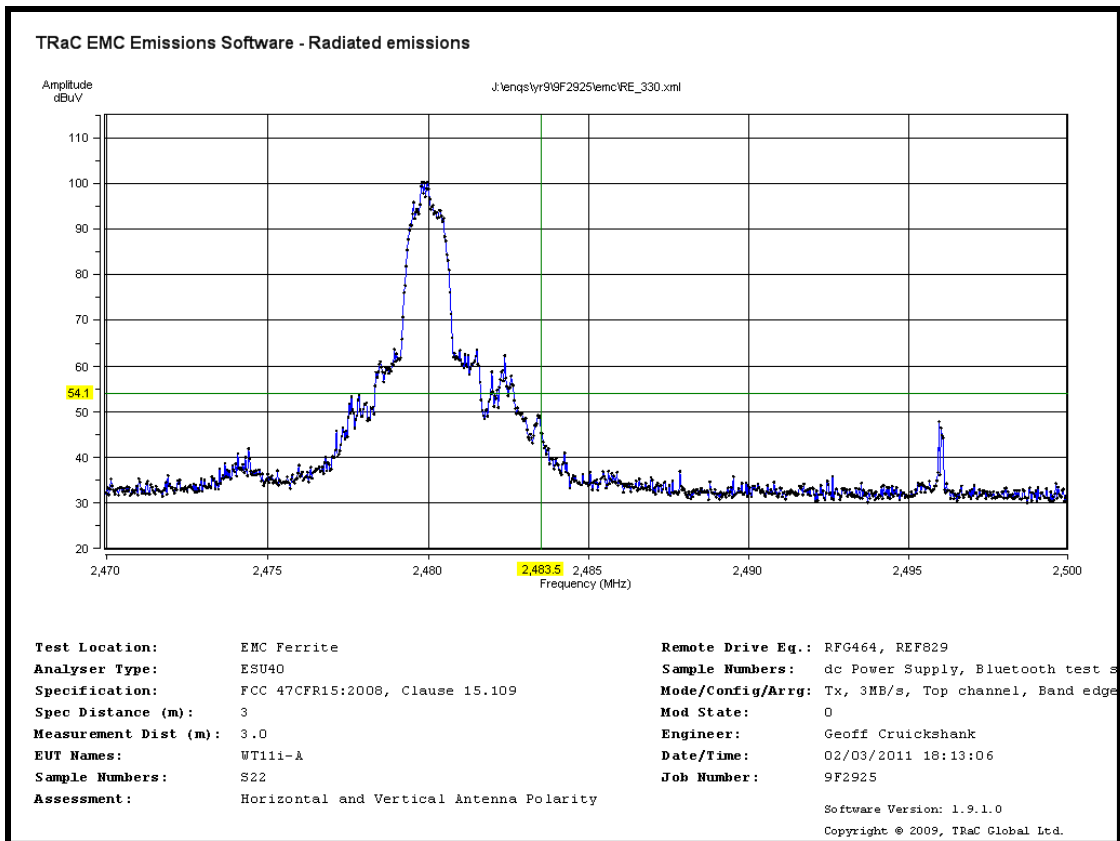


Upper Bandedge

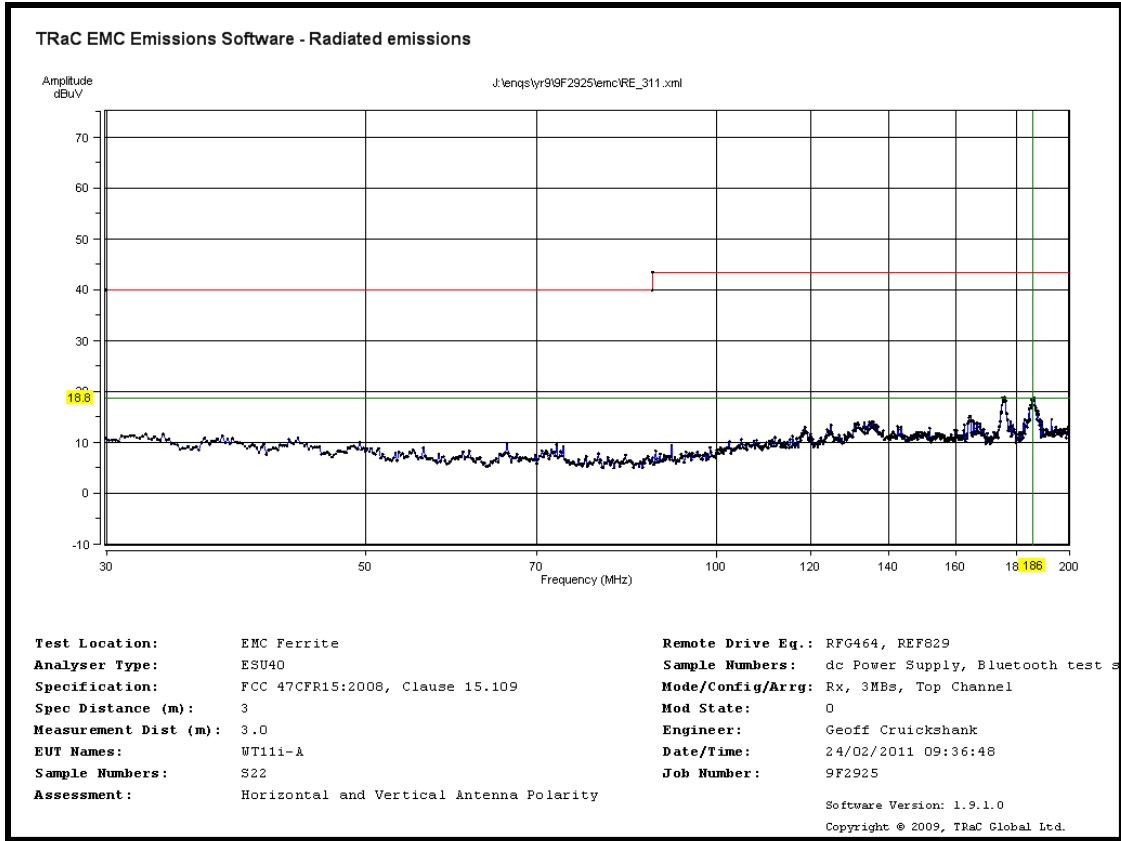


Unintentional Radiated Spurious emissions 30 MHz to 200 MHz

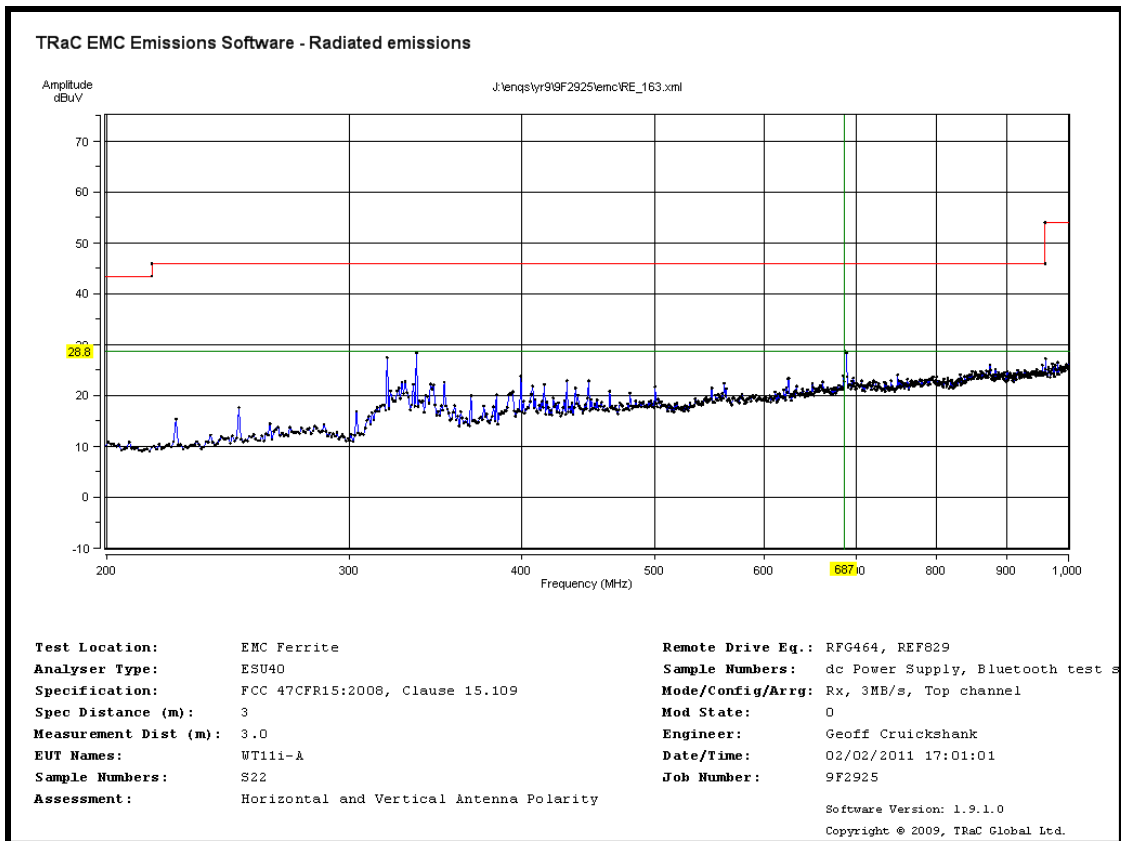


Unintentional Radiated Spurious emissions 200 MHz to 200 MHz

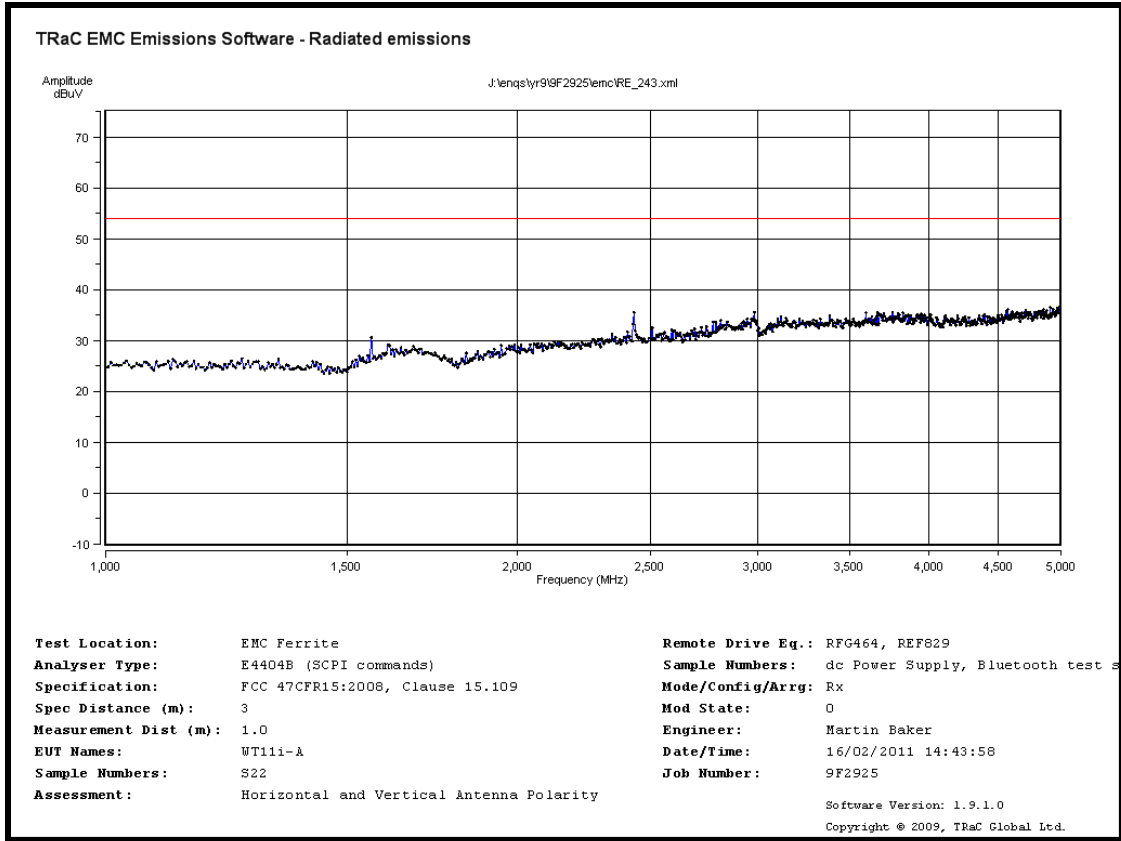


Unintentional Radiated Spurious emissions 1 GHz to 5 GHz

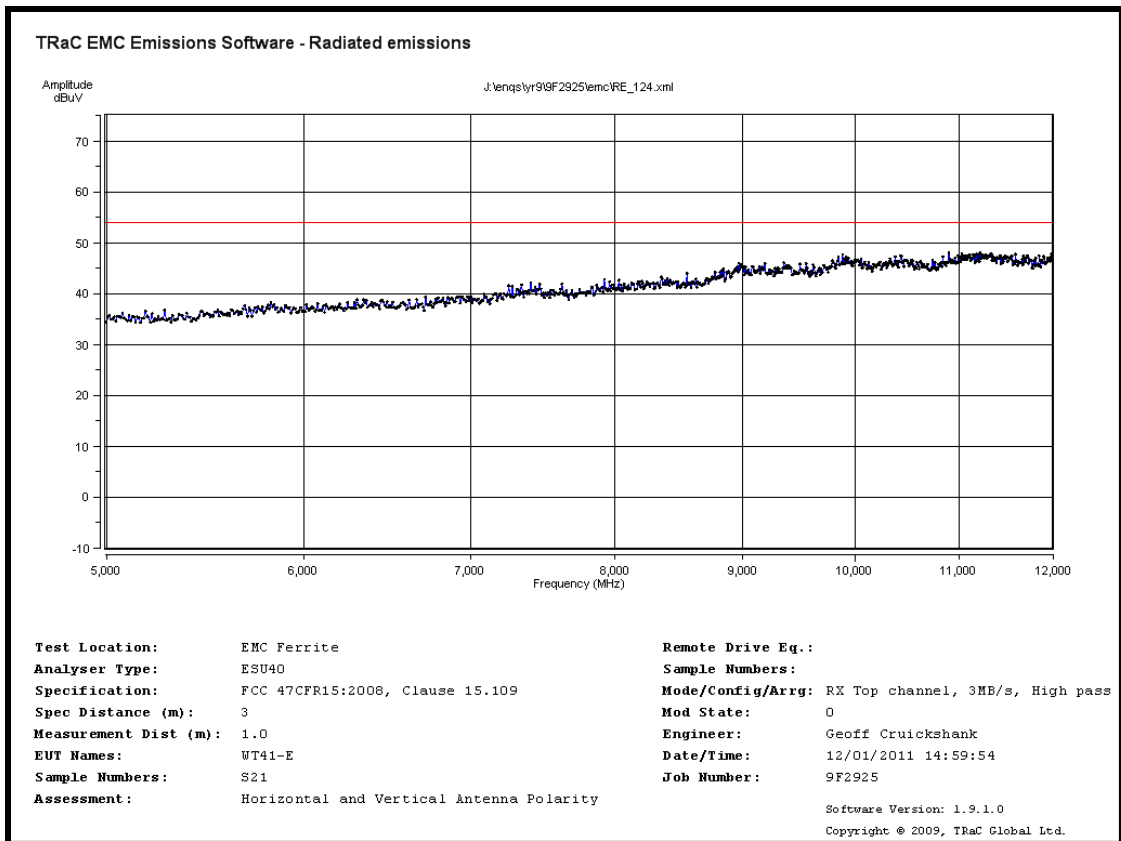


Unintentional Radiated Spurious emissions 5 GHz to 12 GHz

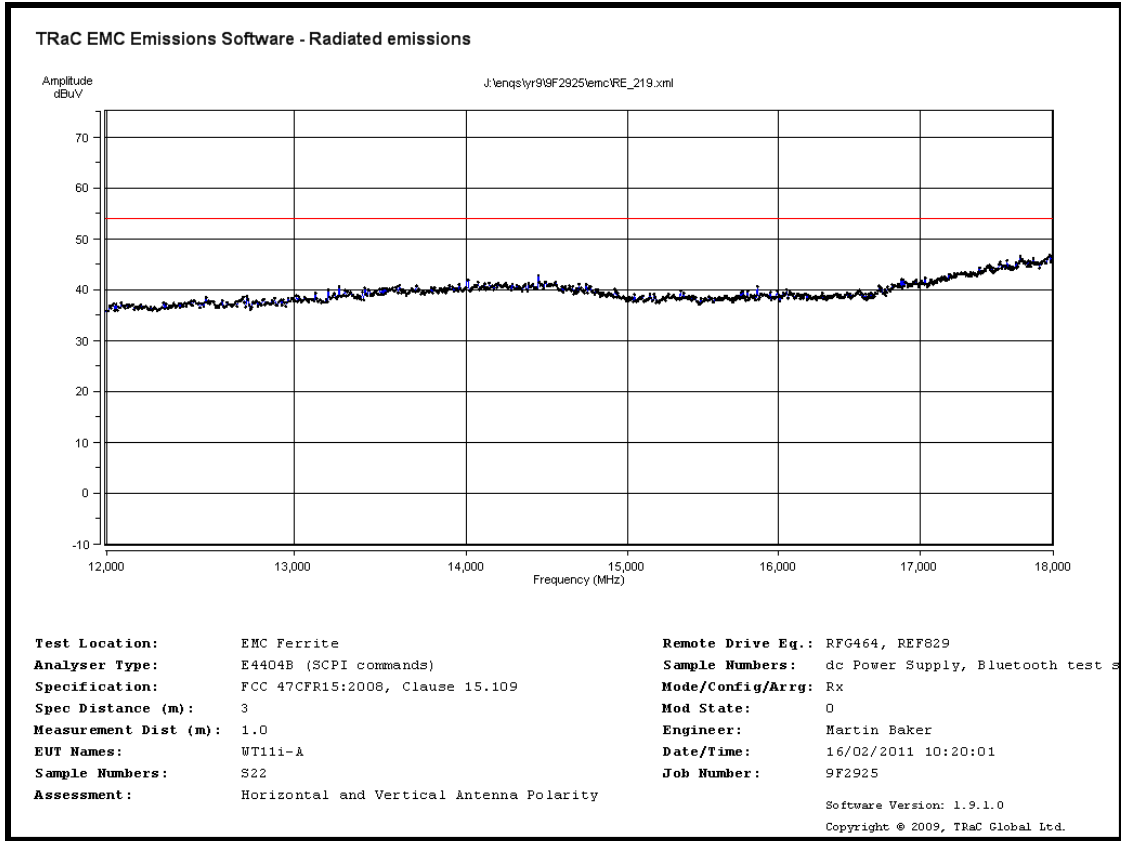


Unintentional Radiated Spurious emissions 12 GHz to 18 GHz

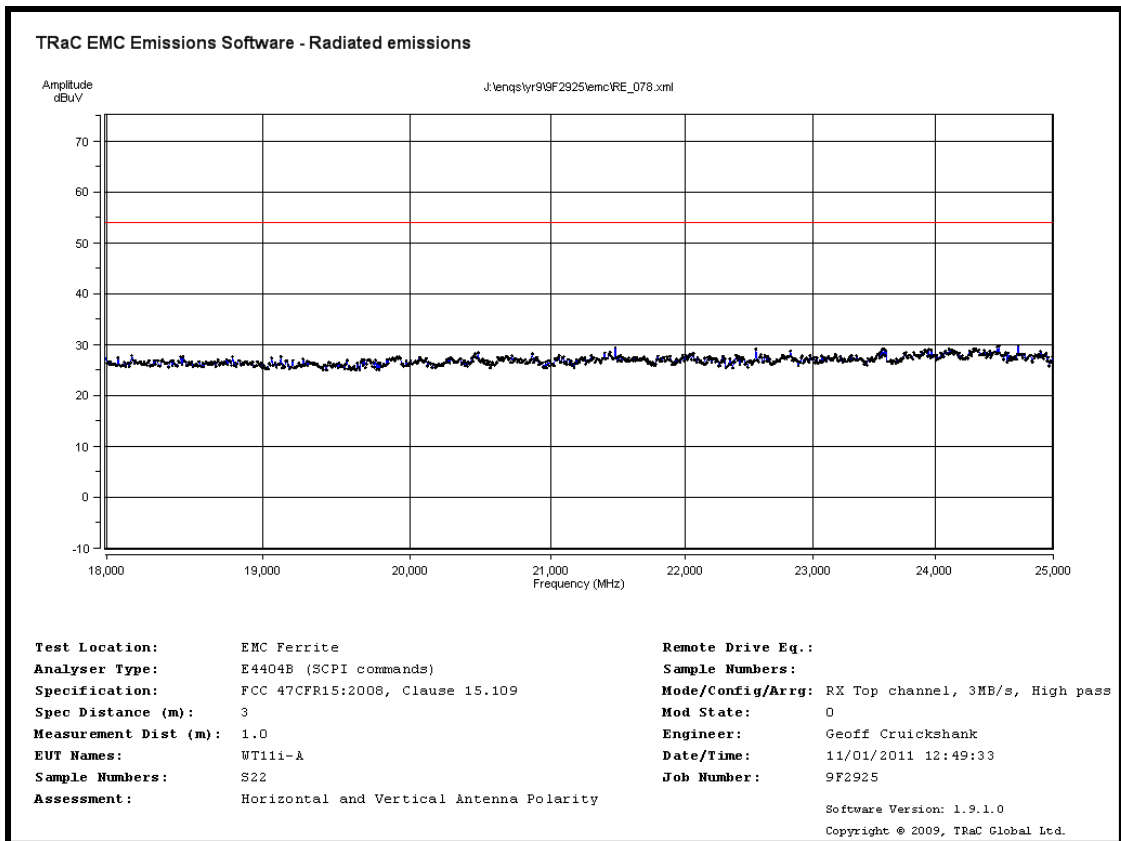


Unintentional Radiated Spurious emissions 18 GHz to 25 GHz

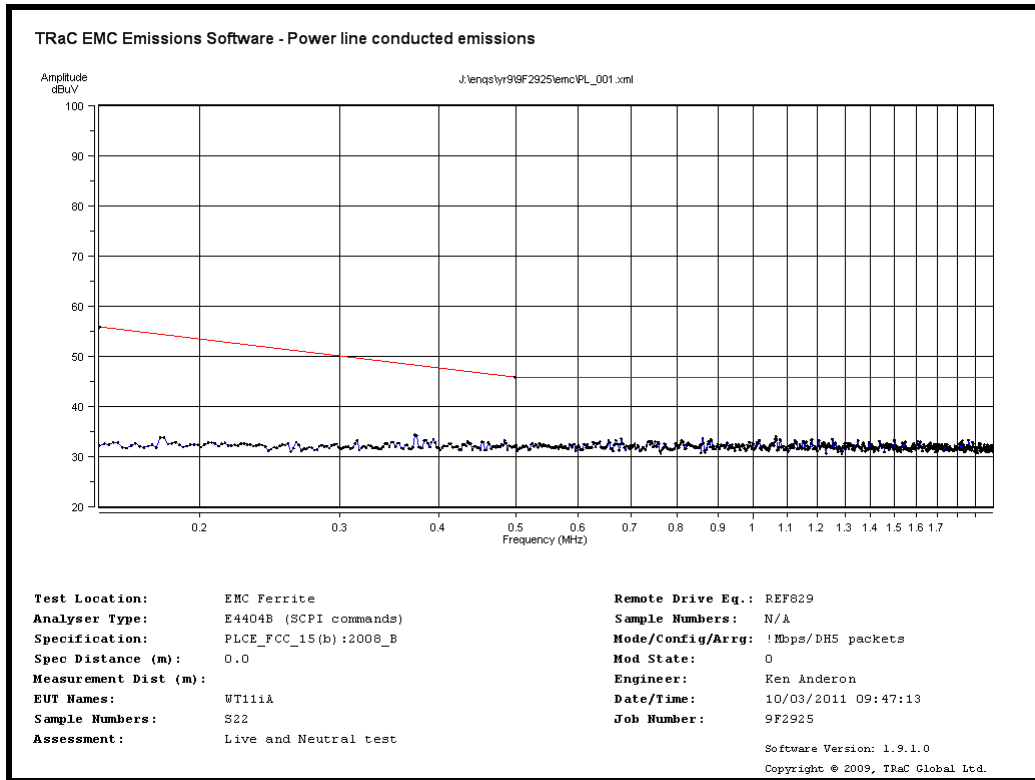


Power line conducted emissions Transmit Mode 0.15 MHz to 2 MHz

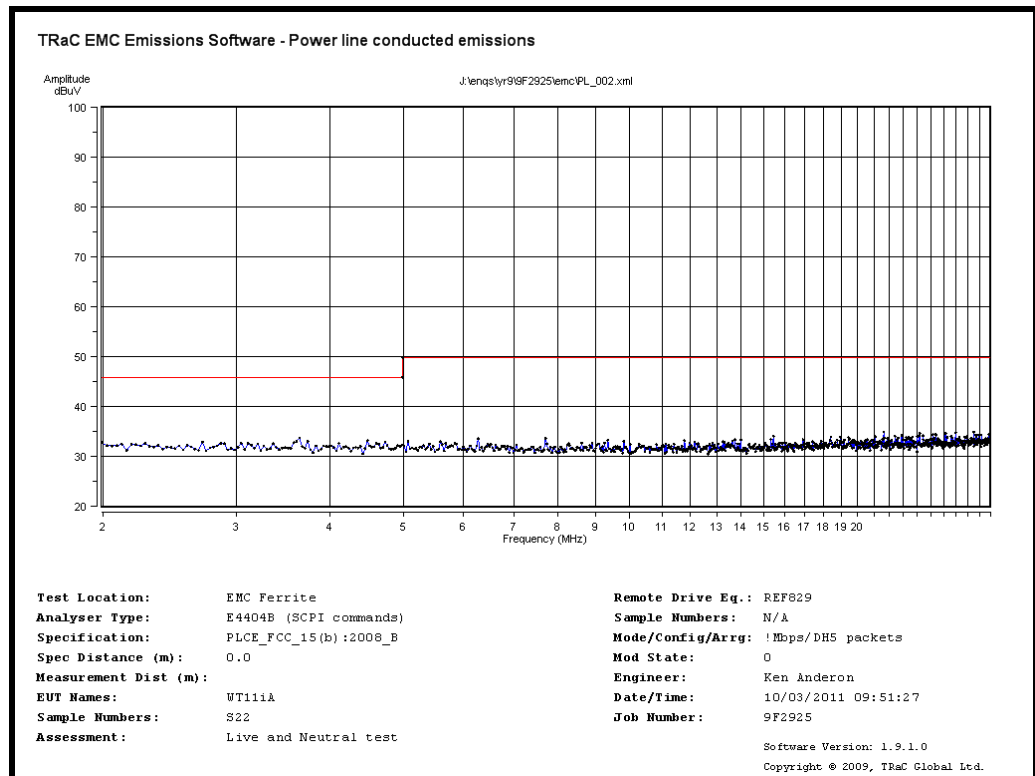

Power line conducted emissions Transmit Mode 2 MHz to 30 MHz

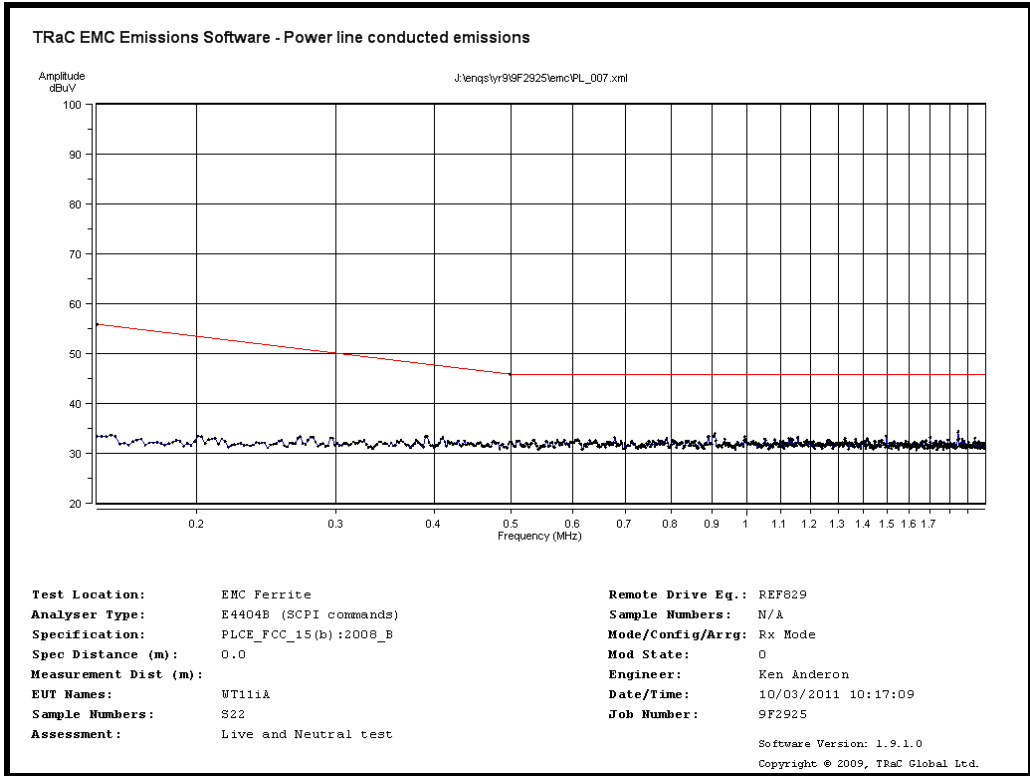

Power line conducted emissions Receive Mode 0.15 MHz to 2 MHz

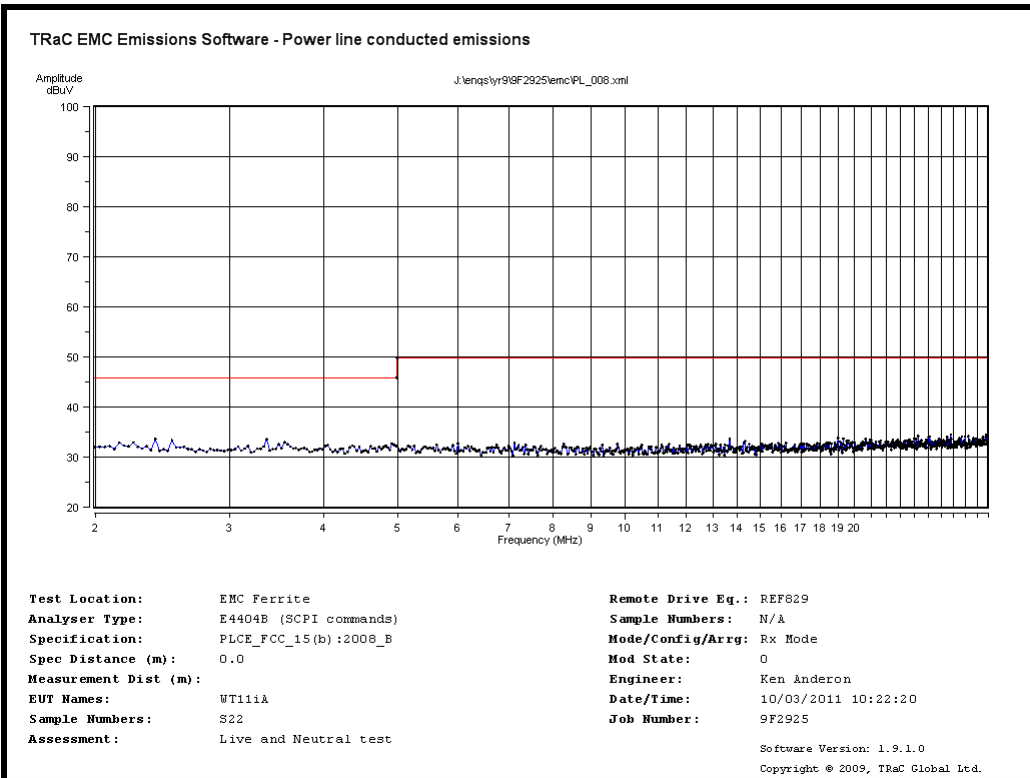

Power line conducted emissions Receive Mode 2 MHz to 30 MHz

Appendix C: Additional Test and Sample Details

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and it's modification state:

Sample No: Sxx Mod w

where:

xx	= sample number	eg. S01
w	= modification number	eg. Mod 2

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by TRaC Telecoms & Radio upon request.

C1) Test samples

The following samples of the apparatus were submitted by the client for testing :

Sample No.	Description	Identification
S19	WT11i-A	None
S22	WT11i-A	S/N: 1025017

The following samples of apparatus were supplied by TRaC Telecoms & Radio as support or drive equipment (auxiliary equipment):

Identification	Description
RFG464	dc Power Supply
REF829	N4010A Wireless connectivity Test Set

C2) EUT Operating Mode During Testing.

During testing, the EUT was exercised as described in the following tables :

Test	Description of Operating Mode
All Transmitter tests detailed in this report	EUT active transmitting, operating at 1Mbps, 2Mbps and 3Mbps data rates and on highest middle and lowest operating frequencies at each data rate.

Test	Description of Operating Mode:
Receiver conducted and radiated spurious emissions	EUT active but non-transmitting.

C3) EUT Configuration Information.

The EUT was submitted for testing in one single possible configuration.

C4) List of EUT Ports

The tables below describe the termination of EUT ports:

Sample : S19
Tests : Conducted

Port	Description of Cable Attached	Cable length	Equipment Connected
Antenna	UFL to SMA Cable	120mm	REF909
dc Power Port	2 core unshielded	2m	REF053

Sample : S22
Tests : Radiated Emissions

Port	Description of Cable Attached	Cable length	Equipment Connected
dc Power Port	2 core unshielded	2m	RFG464

C5 Details of Equipment Used

For Radiated Measurements:

For Radiated TX and Standby/RX spurious emissions 30MHz to 1GHz

RFG No	Type	Description	Manufacturer	Date Calibrated.
REF886	Lab 16	Large Anechoic Chamber	TRaC	10/06/10
095	96002	Bicon Antena (30-200MHz)	Eaton	12/05/10
191	3146	Log Periodic Antenna (200-1000MHz)	EMCO	12/05/10
673	310	Pre-Amp (9kHz-1GHz)	Sonoma	14/09/10
REF847	ESU	Spectrum Analyser	R&S	14/06/10
454		HF RF coaxial cable	Teledyne Reynolds	04/05/10
REF881		HF RF coaxial cable	Teledyne Reynolds	10/06/10
REF882		HF RF coaxial cable	Teledyne Reynolds	10/06/10
REF884		HF RF coaxial cable	Teledyne Reynolds	10/06/10
464	6220B	dc Power Supply	HP	N/A
REF883		HF RF coaxial cable		10/06/10
REF829	N4010A	Wireless connectivity Test Set	Agilent	02/03/11

Radiated TX and Standby/RX spurious emissions 1GHz to 12.75GHz

RFG No	Type	Description	Manufacturer	Date Calibrated
REF886	Lab 16	Large Anechoic Chamber	TRaC	10/06/10
REF880	HL050	Log Perodic Antenna (1-26.5GHz)	R&S	14/05/10
307	HP8449B	Microwave Pre-Amp (1-26.5GHz)	HP	01/03/10
REF847	ESU	Spectrum Analyser	R&S	14/06/10
454		HF RF coaxial cable	Teledyne Reynolds	04/05/10
REF881		HF RF coaxial cable	Teledyne Reynolds	10/06/10
REF882		HF RF coaxial cable	Teledyne Reynolds	10/06/10
REF884		HF RF coaxial cable	Teledyne Reynolds	10/06/10
464	6220B	dc Power Supply	HP	N/A
REF883		HF RF coaxial cable		10/06/10
REF829	N4010A	Wireless connectivity Test Set	Agilent	02/03/11

For Conducted Measurements

RFG No	Type	Description	Manufacturer	Date Calibrated
REF909	FSU	Spectrum Analyser	R&S	14/06/10
REF053	6634A	dc Power Supply	HP	Cal before Use
REF887	34405A	DMM	Agilent	25/08/10

For Power Line Conducted Measurements

RFG No	Type	Description	Manufacturer	Date Calibrated
404	E4407B	Spectrum Analyser	Agilent	10/05/10
125	ESHS10	Test receiver	R&S	23/11/10
232	ESH2-Z5	LISN	R&S	22/05/10
674	0357.8810.54	Pulse Limiter	R&S	08/07/11
296	BNC	Cable	TRaC	17/09/10
298	BNC	Cable	TRaC	17/09/10

Appendix D:

Additional Information

No additional information is included within this test report.

Appendix E:**Calculation of the duty cycle correction factor**

Using a spectrum analyser in zero span mode, centred on the fundamental carrier frequency with a RBW of 1MHz and a video Bandwidth of 1MHz the sweep time was set accordingly to capture the pulse train. The transmit pulsewidths and period was measured. A plots of the pulse train is contained in Appendix B of this test report.

If the pulse train was less than 100 ms, including blanking intervals, the duty cycle was calculated by averaging the sum of the pulsewidths over one complete pulse train. However if the pulse train exceeds 100ms then the duty cycle was calculated by averaging the sum of the pulsewidths over the 100ms width with the highest average value. (The duty cycle is the value of the sum of the pulse widths in one period (or 100ms), divided by the length of the period (or 100ms). The duty cycle correction factor was then expressed in dB and the peak emissions adjusted accordingly to give an average value of the emission.

Correction factor dB = $20 \times (\text{Log}_{10} \text{ Calculated Duty Cycle})$

Therefore the calculated duty cycle was determined:

The pulse train period was greater than >100ms and in as shown from the plots in contained in appendix B of this test report.

Duty cycle = $\frac{\text{the sum of the highest average value pulsewidths over 100ms}}{100\text{ms}}$

e.g

$$= \frac{7.459\text{ms}}{100\text{ms}} = 0.07459$$

0.07459 or 7.459%

Correction factor (dB) = $20 \times (\text{Log}_{10} 0.07459) = -22.54\text{dB}$

Appendix F:

Photographs and Figures

The following photographs were taken of the test samples:


1. Radiated emissions Overview: Front view
2. Radiated emissions Overview: Back view
3. Photo of the WT11i-A top overview
4. Photo of the WT11i-A bottom overview



Photograph 1



Photograph 2

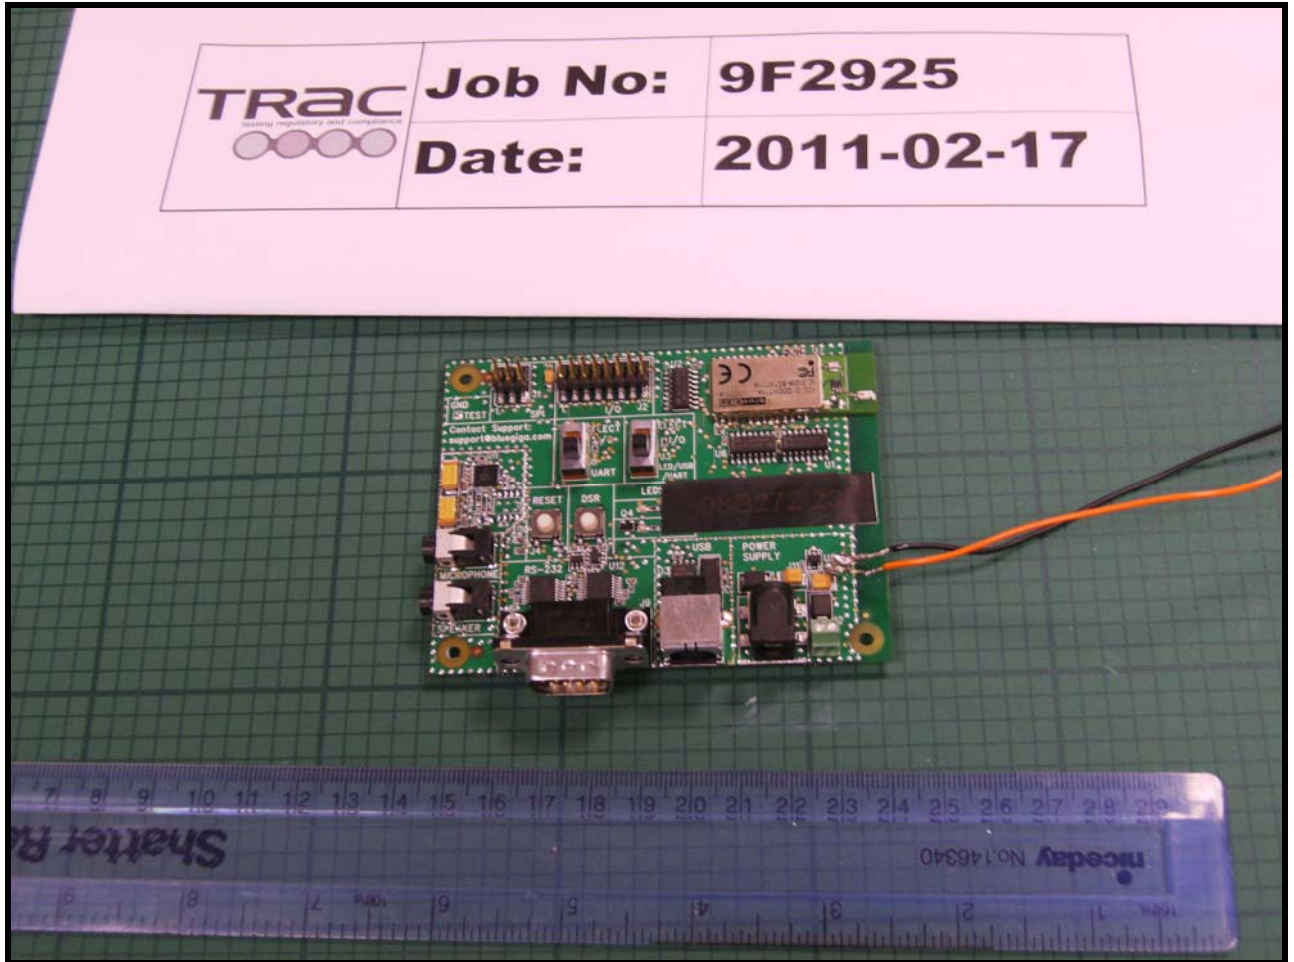

Photograph 3



Photograph 4

