

RF TEST REPORT



Report No.: 15070303-FCC-R2

Supersede Report No.: N/A

Applicant	SynCrown Inc.	
Product Name	Mobile Thermal Printer	
Model No.	SMP-M240	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2014, ANSI C63.10: 2013	
Test Date	April 29 to May 06, 2015	
Issue Date	May 08, 2015	
Test Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Wilky Jam	Chris You	
Wilky Jam Test Engineer	Chris You Checked By	
This test report may be reproduced in full only		
Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	15070303-FCC-R2
Page	3 of 54

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	8
6.1 ANTENNA REQUIREMENT.....	8
6.2 CHANNEL SEPARATION	9
6.3 20DB BANDWIDTH.....	13
6.4 PEAK OUTPUT POWER.....	17
6.5 NUMBER OF HOPPING CHANNEL.....	21
6.6 TIME OF OCCUPANCY (DWELL TIME)	23
6.7 BAND EDGE.....	27
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	35
6.9 RADIATED SPURIOUS EMISSIONS	39
ANNEX A. TEST INSTRUMENT.....	44
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	45
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	50
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	53
ANNEX E. DECLARATION OF SIMILARITY	54

1. Report Revision History

Report No.	Report Version	Description	Issue Date
15070303-FCC-R2	NONE	Original	May 08, 2015

2. Customer information

Applicant Name	SynCrown Inc.
Applicant Add	704, EnC dream-tower, 45 Gasan Digital 1st road, GeumCheon, Seoul, Korea
Manufacturer	Xiamen Hanin Electronic Technology Co., Ltd.
Manufacturer Add	Room 305A, Angye Building, Pioneering Park, Torch High-tech Zone, Xiamen China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT: Mobile Thermal Printer

Main Model: SMP-M240

Serial Model: N/A

Date EUT received: April 28, 2015

Test Date(s): April 29 to May 06, 2015

Equipment Category : DSS

Antenna Gain: Bluetooth/BLE: 2 dBi

Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
 BLE: GFSK

RF Operating Frequency (ies): Bluetooth& BLE: 2402-2480 MHz

Max. Output Power: -1.220 dBm

Number of Channels: Bluetooth: 79CH
 BLE: 40CH

Port: Power Port, USB Port

Battery:
 Model: L002
 Spec: 7.4V 1500mAh

Input Power: Adapter:
 Model: P6120050 US
 Input: AC 100-240V; 50/60Hz 0.2A
 Output: DC 12.0V; 0.5A

Trade Name : SYNCROWN

FCC ID: 2AEPCSMP-M240

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one antenna:

A permanent PCB antenna for Bluetooth/BLE, the gain is 2 dBi for Bluetooth/BLE.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	25°C
Relative Humidity	58%
Atmospheric Pressure	1013mbar
Test date :	May 05, 2015
Tested By :	Wiky Jam

Requirement(s):

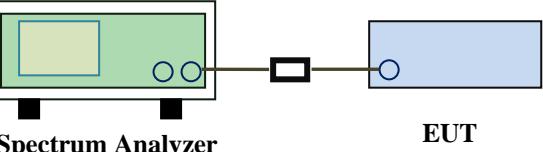Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) \geq 1% of the span - Video (or Average) Bandwidth (VBW) \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 	

Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.947	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.937	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.942	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.005	0.827	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.826	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.818	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.005	0.842	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.841	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.836	Pass
	Adjacency Channel	2479			

Test Plots

Channel Separation measurement result

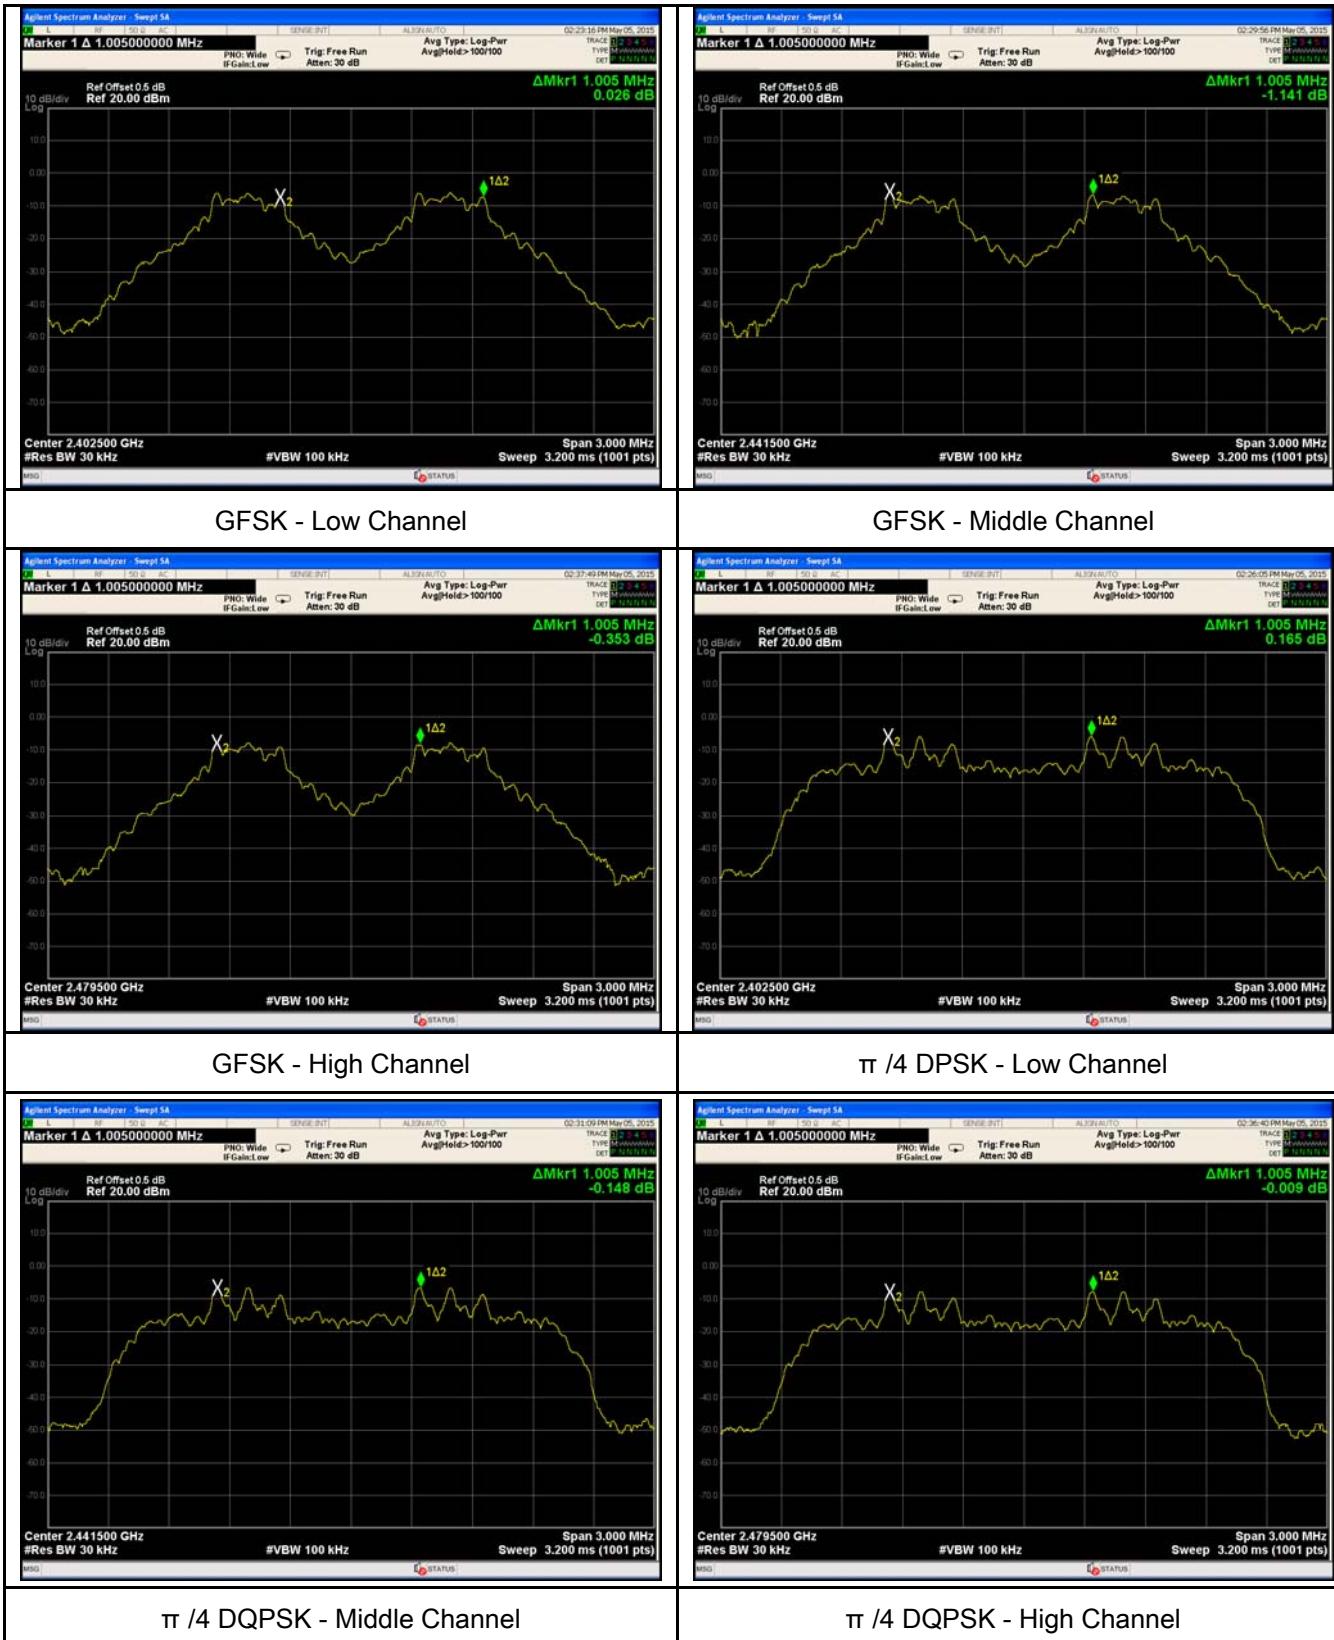



8DPSK - Low Channel

8DPSK - Middle Channel




8DPSK - High Channel

6.3 20dB Bandwidth

Temperature	25°C
Relative Humidity	58%
Atmospheric Pressure	1013mbar
Test date :	May 05, 2015
Tested By :	Wiky Jam

Requirement(s):

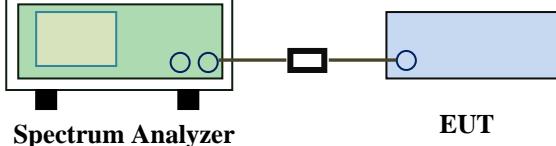Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference 		

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A



Test Plot Yes (See below) N/A

Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	0.947	0.873
	Mid	2441	0.937	0.864
	High	2480	0.942	0.867
$\pi/4$ DQPSK	Low	2402	1.241	1.1560
	Mid	2441	1.239	1.1546
	High	2480	1.227	1.1503
8-DPSK	Low	2402	1.263	1.1576
	Mid	2441	1.261	1.160
	High	2480	1.254	1.1624

Test Plots


20dB Bandwidth measurement result

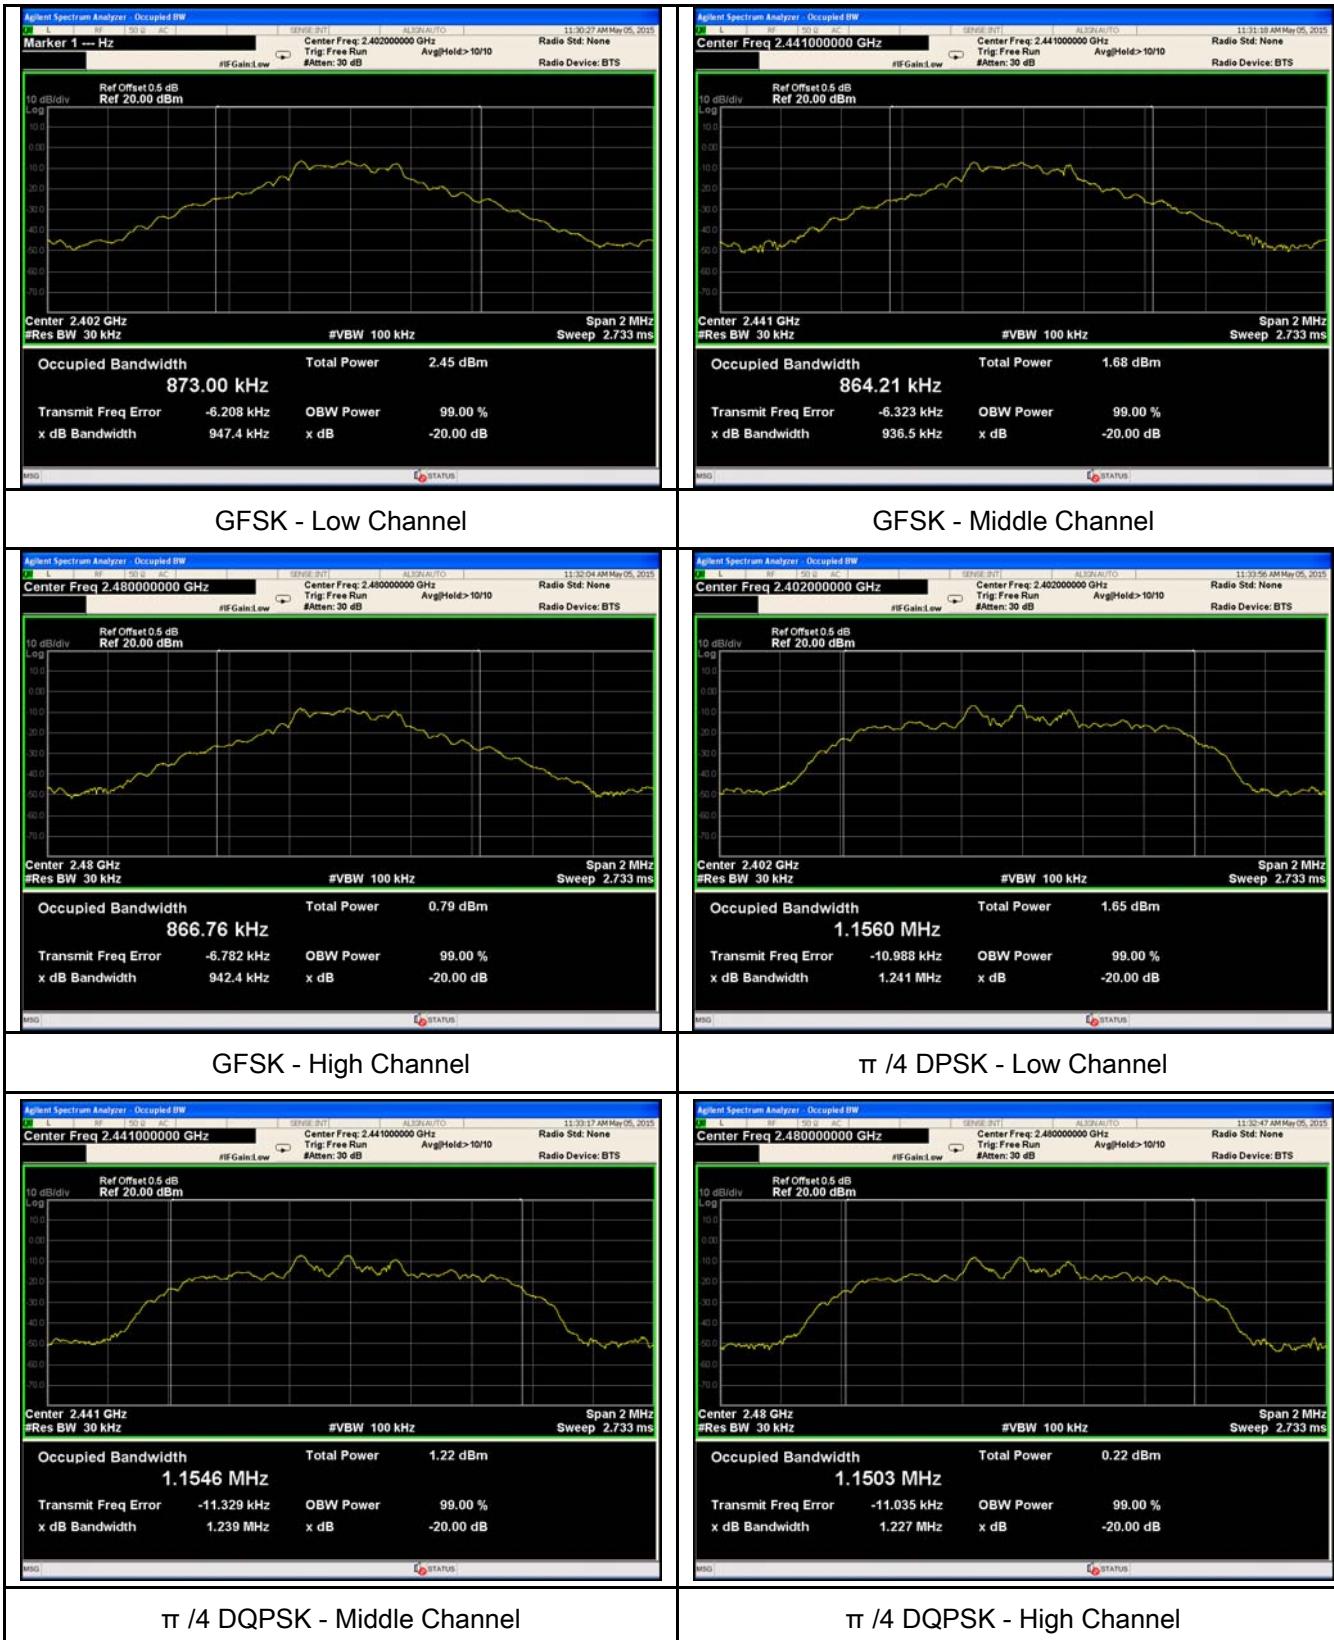

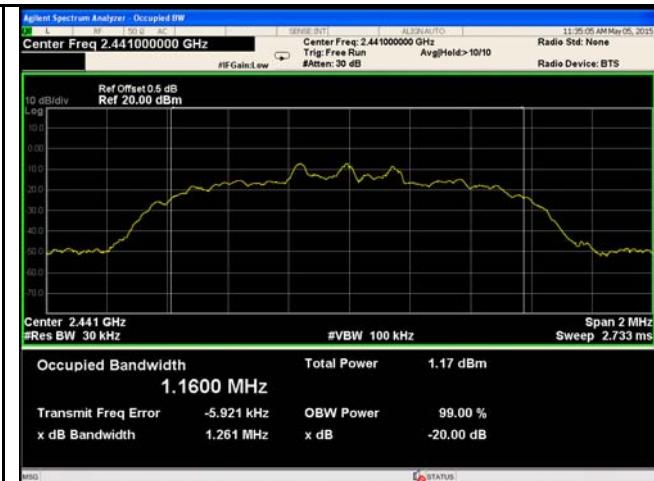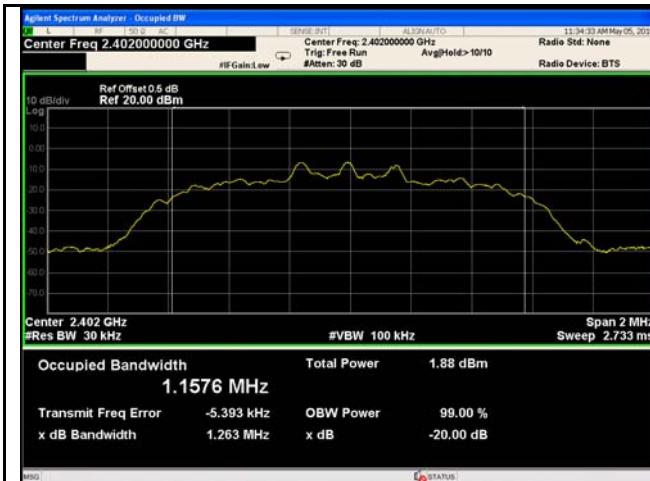

8DPSK - Low Channel

8DPSK - Middle Channel

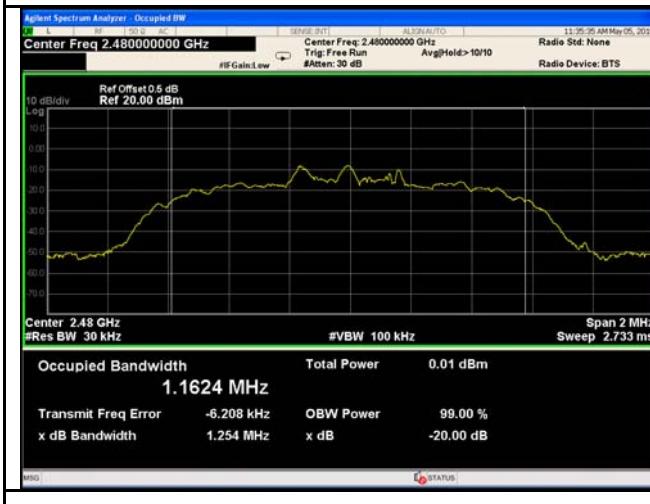


8DPSK - High Channel

6.4 Peak Output Power

Temperature	25°C
Relative Humidity	58%
Atmospheric Pressure	1013mbar
Test date :	May 05, 2015
Tested By :	Wiky Jam

Requirement(s):

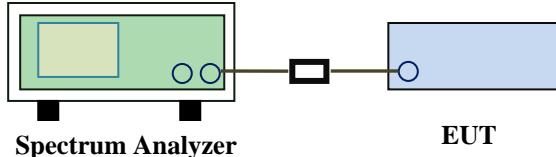Spec	Item	Requirement	Applicable
§15.247(b) (2)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & $<$ 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DSSS in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
Test Setup		 Spectrum Analyzer EUT	
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold 	

	<ul style="list-style-type: none"> - Allow the trace to stabilize. - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Peak Output Power measurement result

Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	-1.632	1000	Pass
		Mid	2441	-2.044	1000	Pass
		High	2480	-2.864	1000	Pass
	$\pi/4$ DQPSK	Low	2402	-1.529	125	Pass
		Mid	2441	-1.848	125	Pass
		High	2480	-2.693	125	Pass
	8-DPSK	Low	2402	-1.220	125	Pass
		Mid	2441	-1.653	125	Pass
		High	2480	-2.406	125	Pass

Test Plots

Output Power measurement result



GFSK Output power - Low CH 2402

GFSK Output power - Mid CH 2441



GFSK Output power - High CH 2480

$\pi/4$ DQPSK Output power - Low CH 2402



$\pi/4$ DQPSK Output power - Mid CH 2441

$\pi/4$ DQPSK Output power - High CH 2480



8DPSK Output power - Low CH 2402

8DPSK Output power - Mid CH 2441



8DPSK Output power - High CH 2480

6.5 Number of Hopping Channel

Temperature	25°C
Relative Humidity	58%
Atmospheric Pressure	1013mbar
Test date :	May 05, 2015
Tested By :	Wiky Jam

Requirement(s):

Test Data Yes

Yes (See below) N/A


Test Plot **Yes (See below)** **N/A**

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

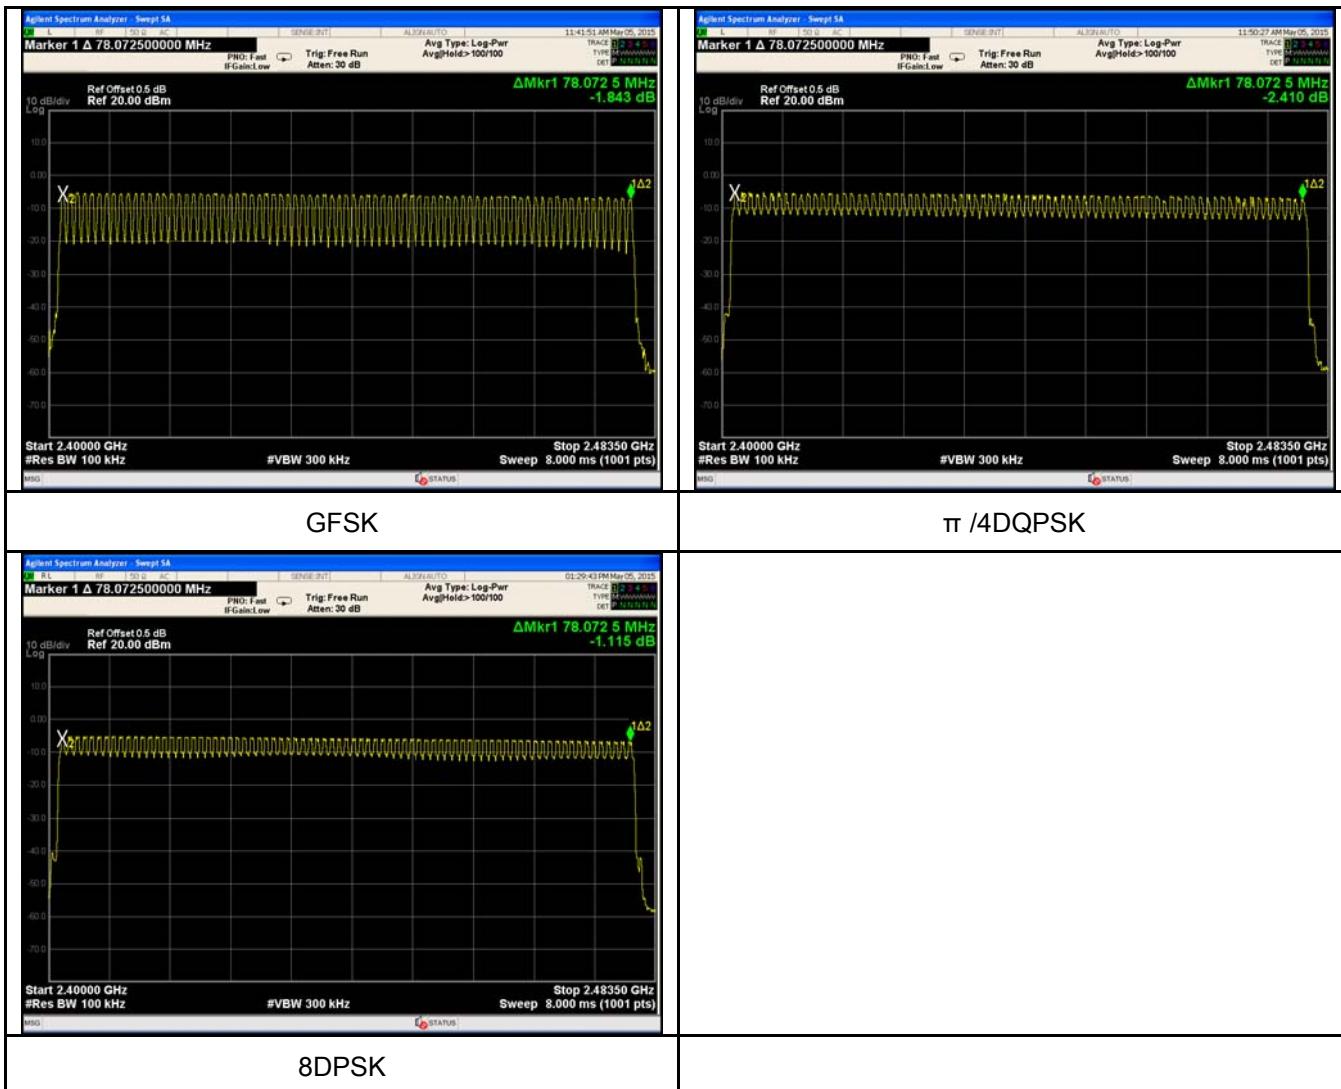

6.6 Time of Occupancy (Dwell Time)

Temperature	25°C
Relative Humidity	58%
Atmospheric Pressure	1013mbar
Test date :	May 05, 2015
Tested By :	Wiky Jam

Requirement(s):

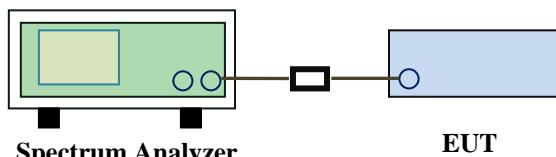Spec	Item	Requirement	Applicable	
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>	
Test Setup				
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW \geq RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 			
Remark				
Result	<input checked="" type="checkbox"/>	Pass	<input type="checkbox"/>	Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Dwell Time measurement result


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Dwell Time	GFSK	Low	2.968	0.317	0.4	Pass
		Mid	2.968	0.317	0.4	Pass
		High	2.938	0.313	0.4	Pass
	$\pi/4$ DQPSK	Low	2.938	0.313	0.4	Pass
		Mid	2.953	0.315	0.4	Pass
		High	2.938	0.313	0.4	Pass
	8-DPSK	Low	2.923	0.312	0.4	Pass
		Mid	2.953	0.315	0.4	Pass
		High	2.968	0.317	0.4	Pass

 Note: Dwell time=Pulse Time (ms) \times (1600 \div 6 \div 79) \times 31.6

Test Plots

Dwell Time measurement result

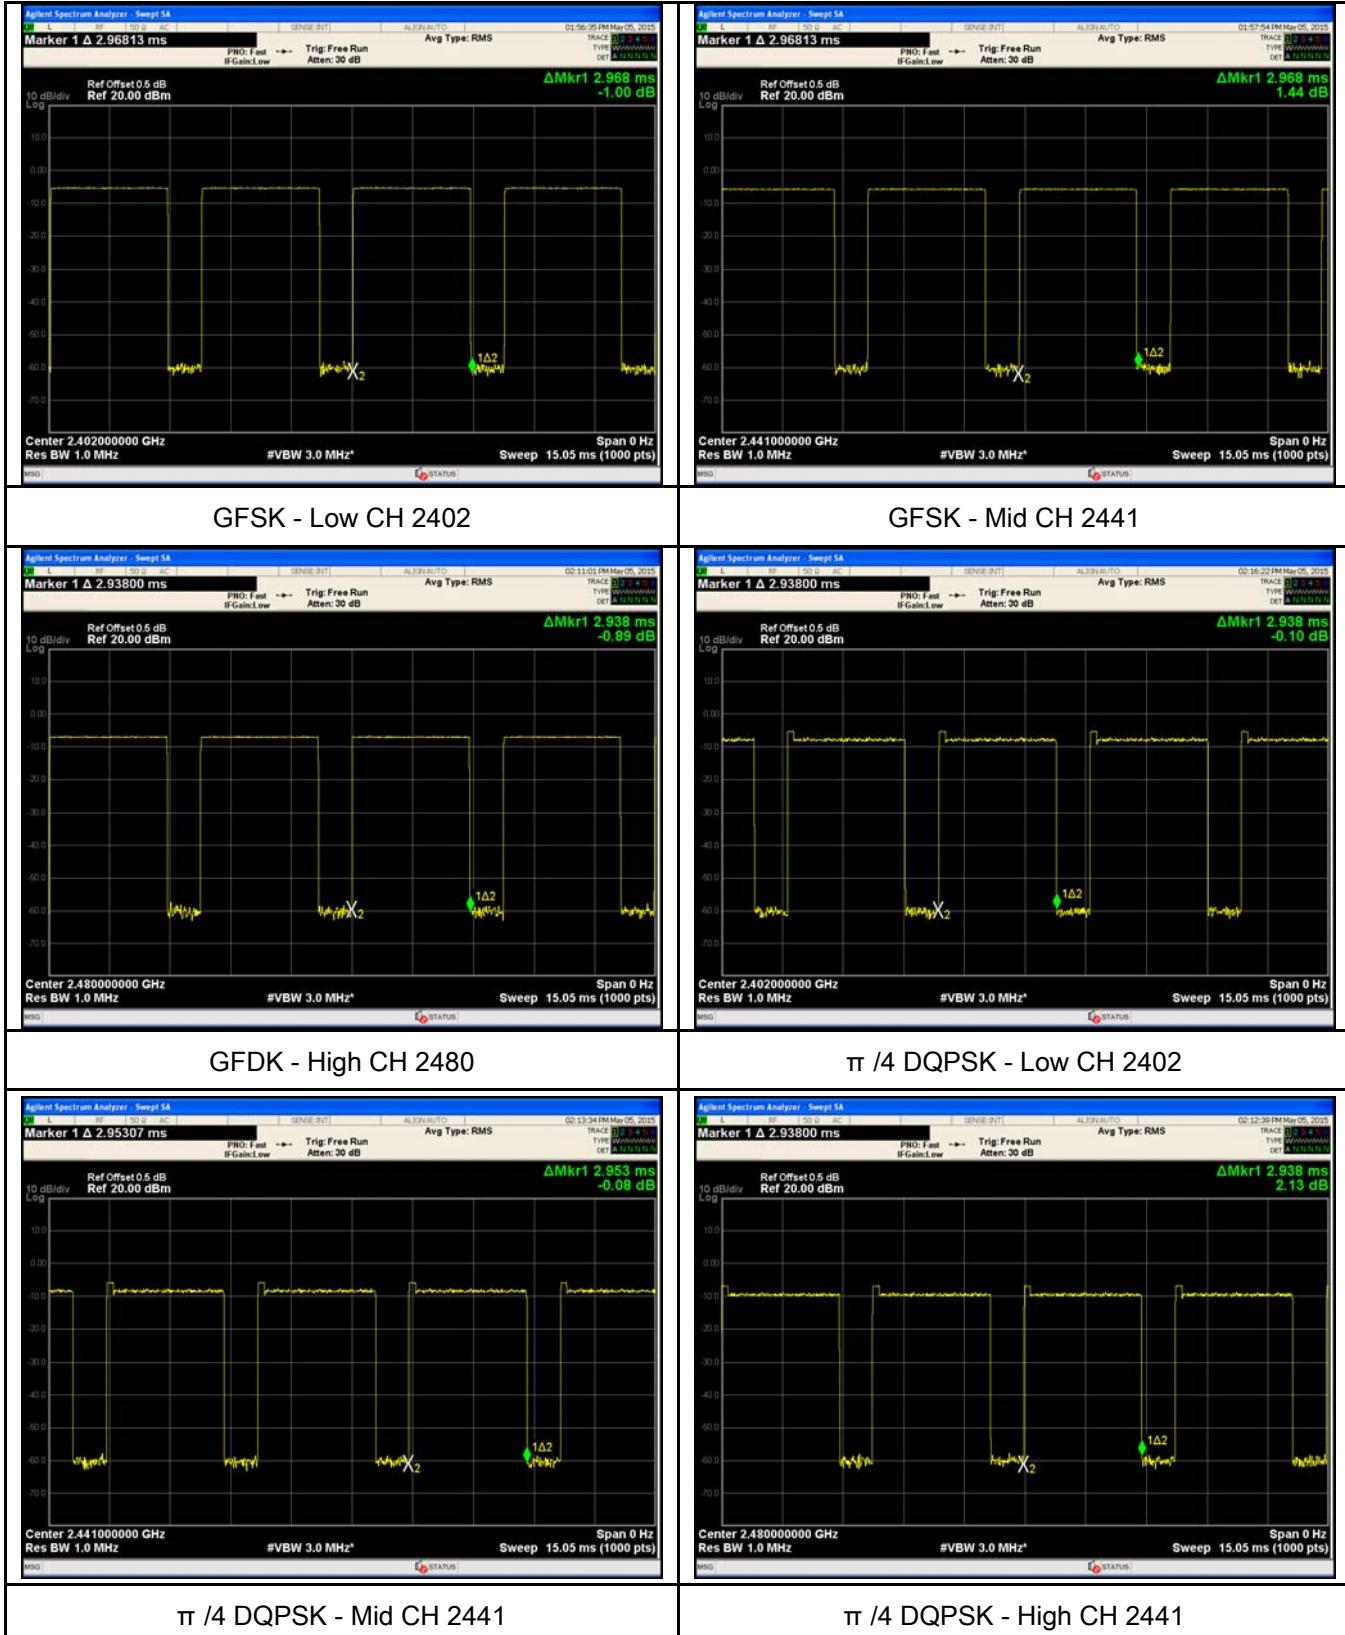


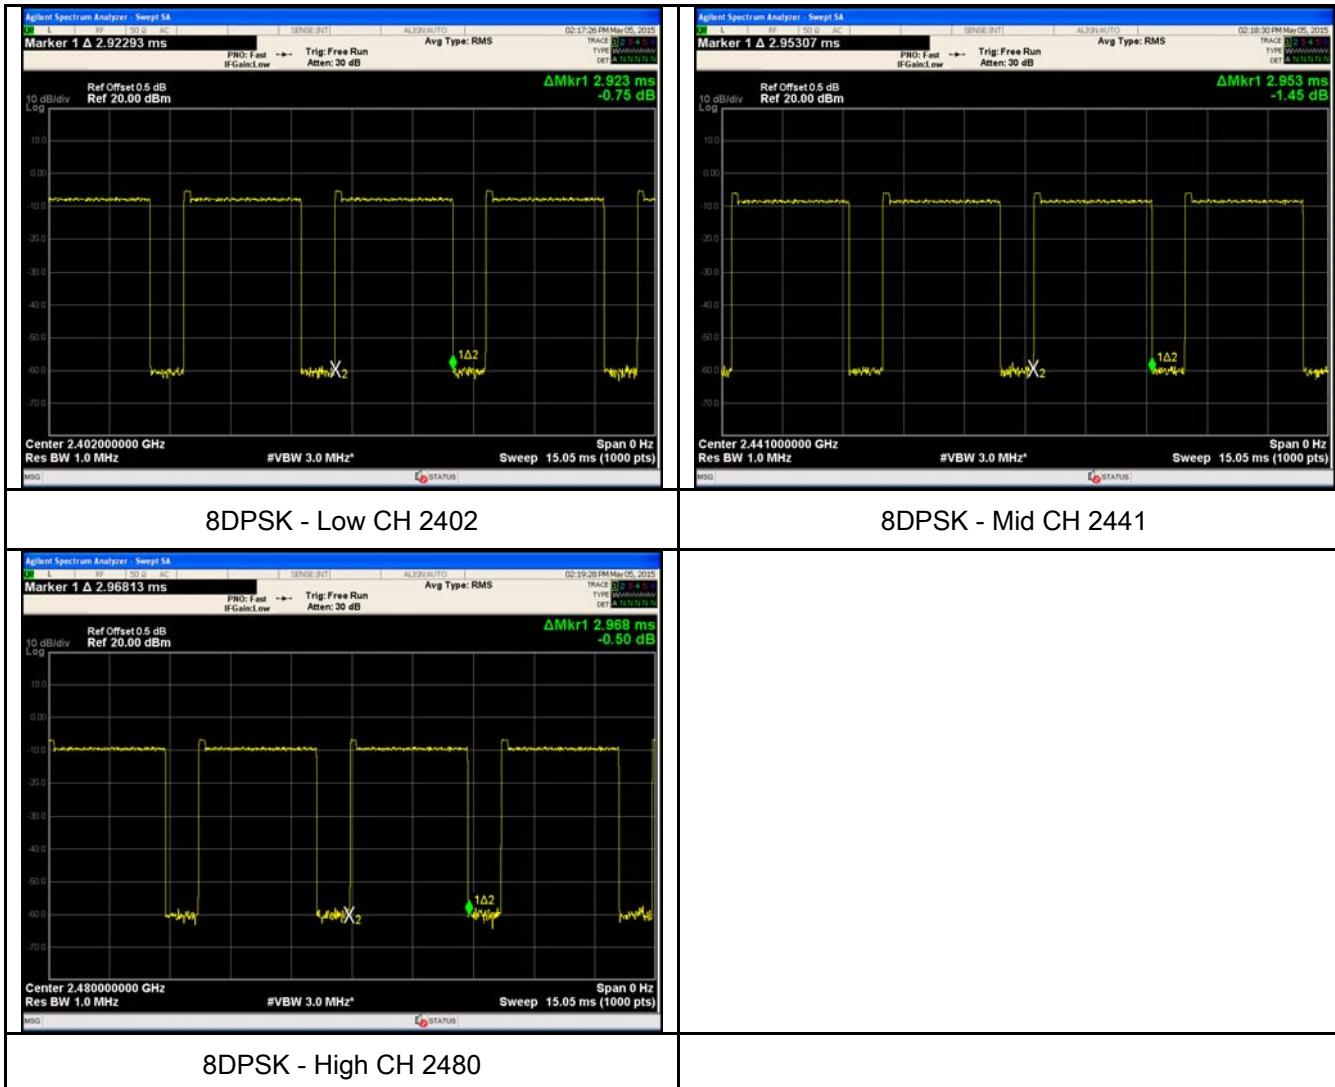

6.7 Band Edge

Temperature	25°C
Relative Humidity	61%
Atmospheric Pressure	1013mbar
Test date :	May 06, 2015
Tested By :	Wiky Jam

Requirement(s):

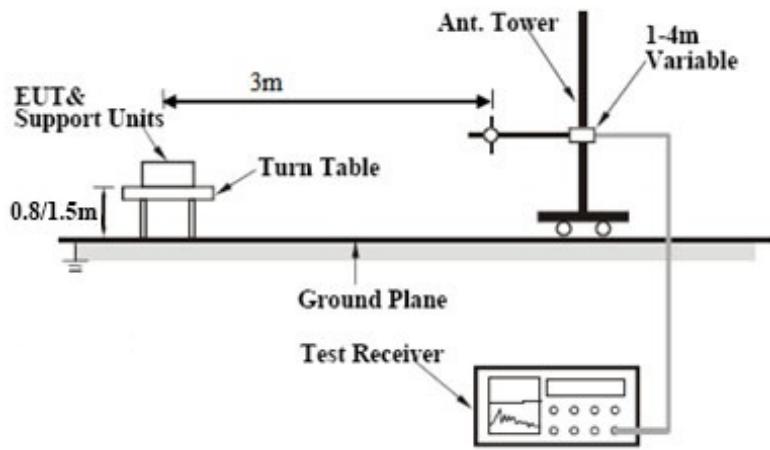Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. A Turn Table is positioned on a Ground Plane. An EUT & Support Units is placed on the turn table. A vertical Ant. Tower is mounted on the turn table, with a 3m horizontal distance to the EUT. The Ant. Tower is connected to a Test Receiver, which is shown as a waveform monitor. The height of the EUT is 0.8/1.5m. The Ant. Tower has a 1-4m Variable height adjustment.</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, 		


	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Plots

GFSK Mode:

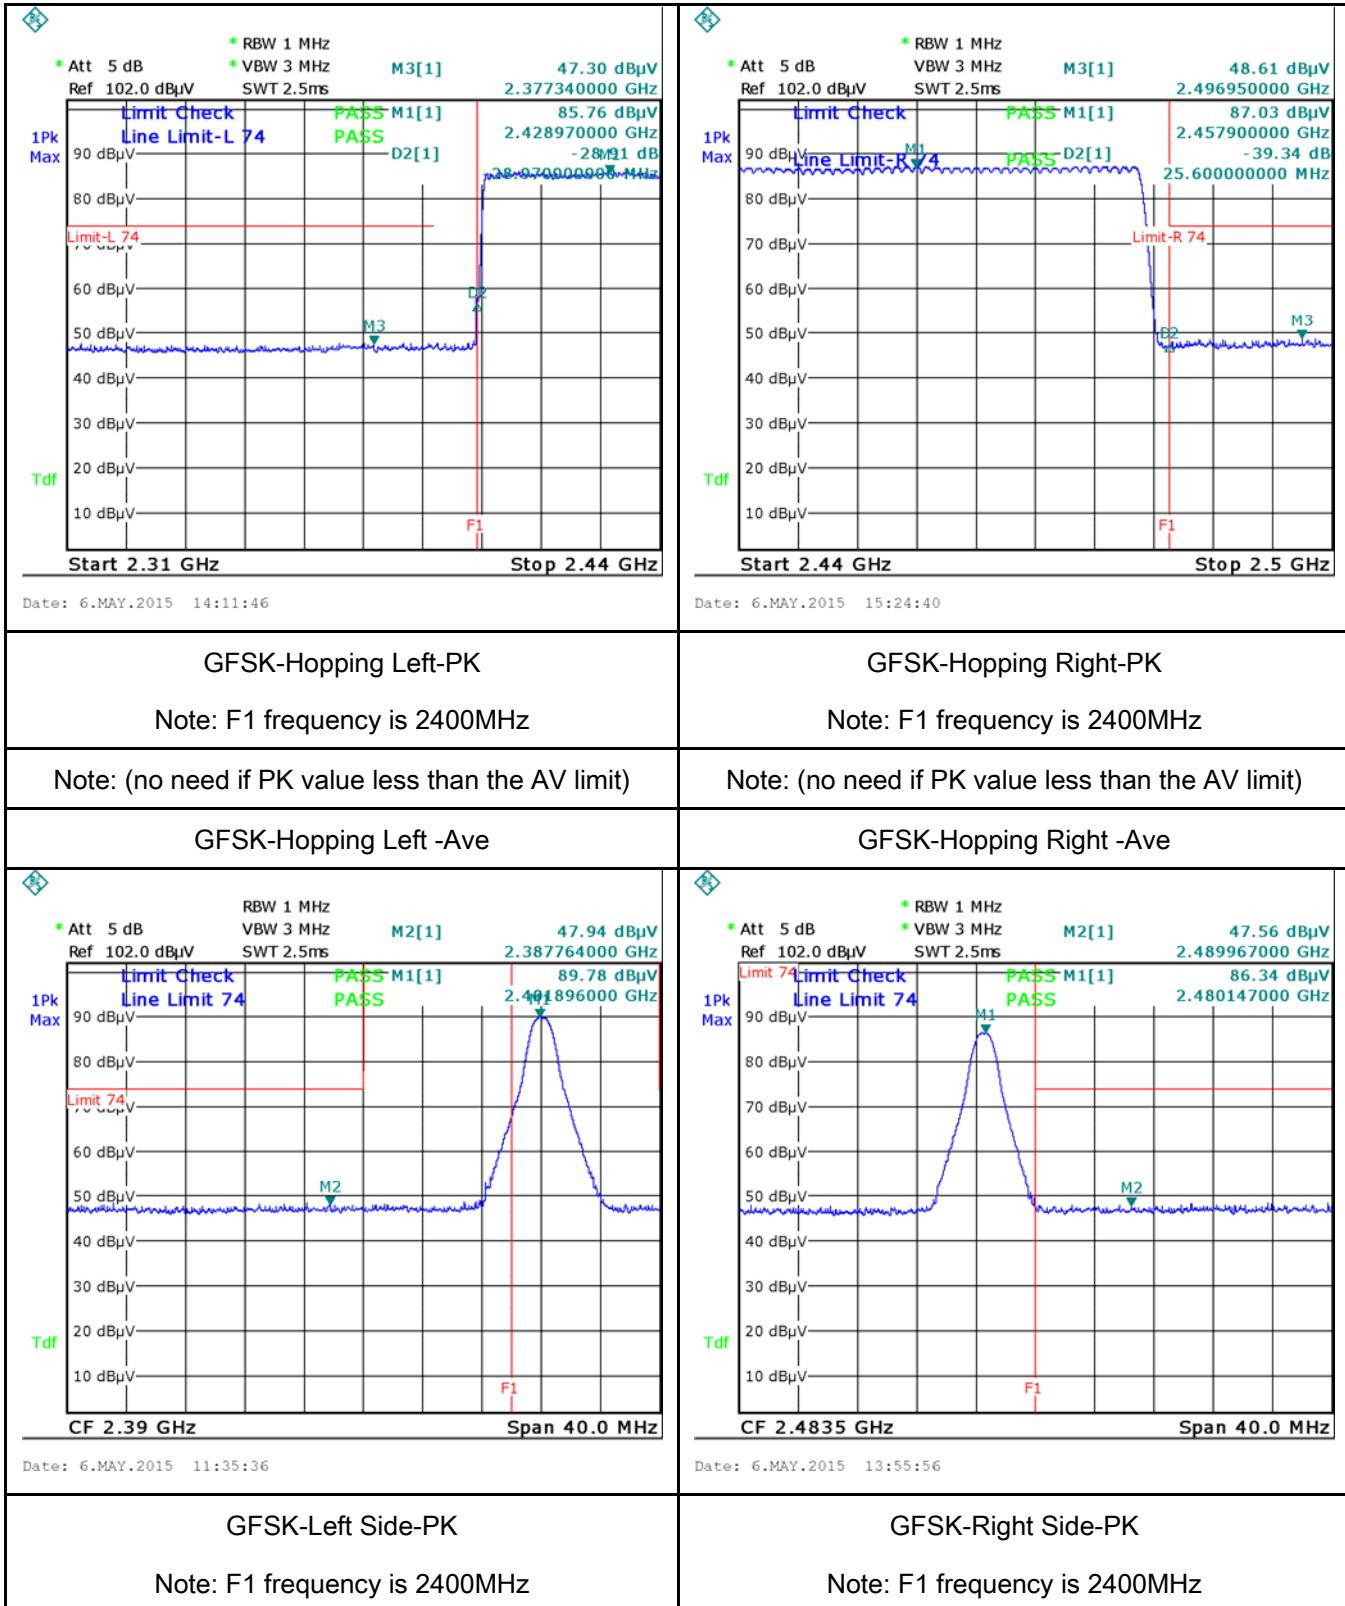

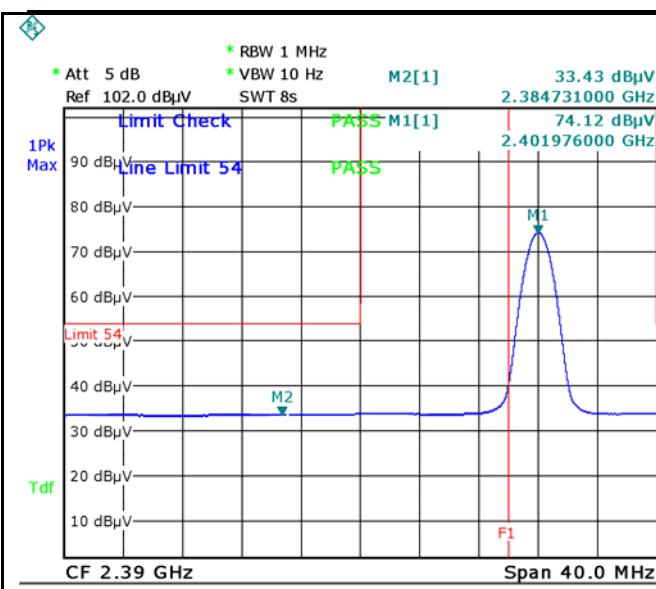





Note: (no need if PK value less than the AV limit)


GFSK-Left Side-AV

Note: F1 frequency is 2400MHz

GFSK-Right Side-AV

$\pi/4$ DQPSK Mode:

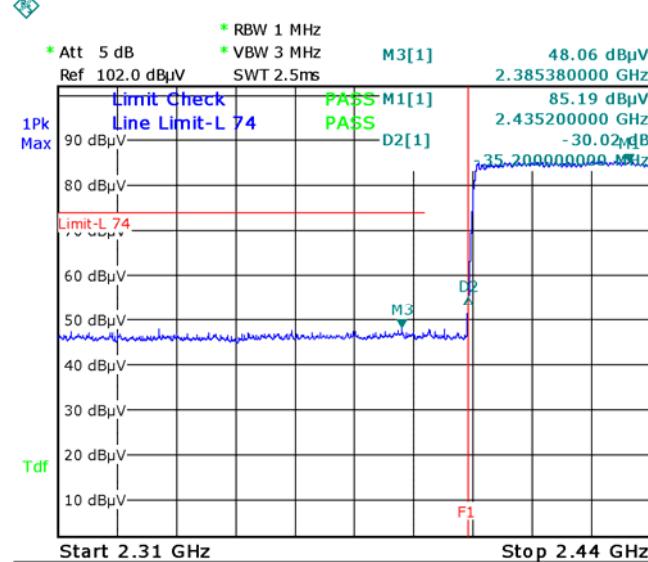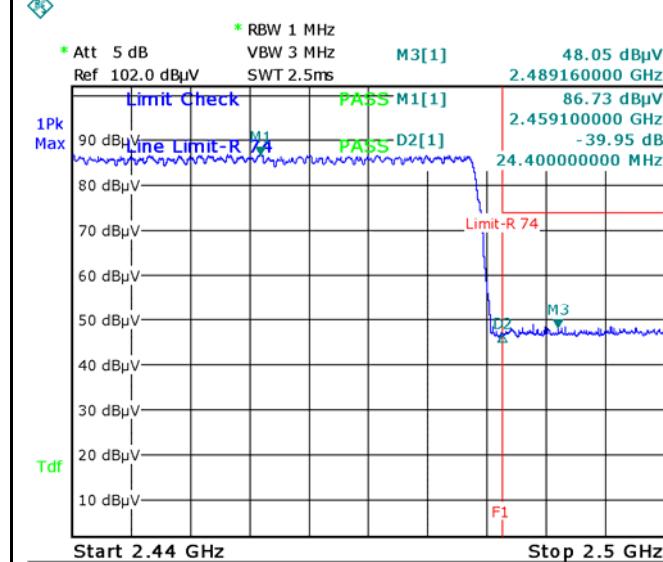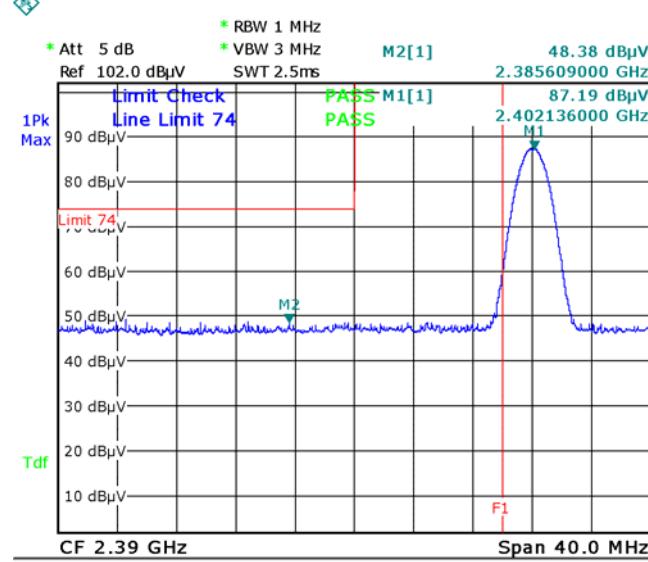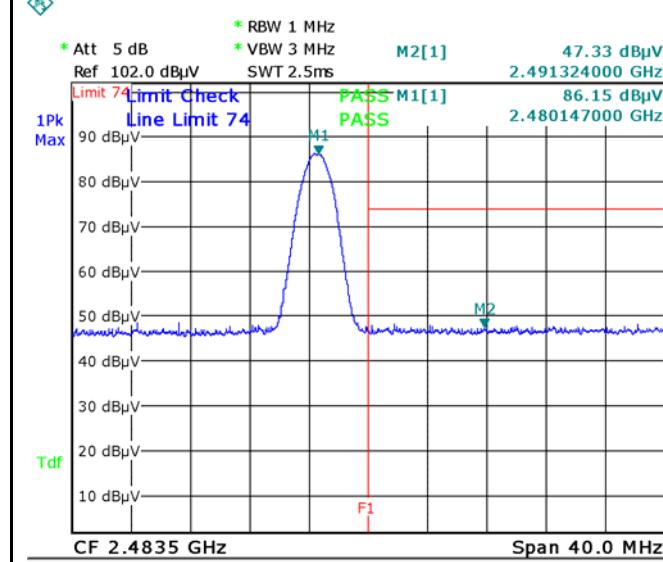 <p>1Pk Max</p> <p>* Att 5 dB * RBW 1 MHz Ref 102.0 dBμV * VBW 3 MHz SWT 2.5ms</p> <p>M3[1] 48.06 dBμV 2.385380000 GHz</p> <p>Limit Check: PASS M1[1] PASS D2[1]</p> <p>90 dBμV 85.19 dBμV 80 dBμV 2.435200000 GHz 70 dBμV -30.02 dB 60 dBμV 35.200000000 MHz 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>Start 2.31 GHz Stop 2.44 GHz</p>	 <p>1Pk Max</p> <p>* Att 5 dB * RBW 1 MHz Ref 102.0 dBμV * VBW 3 MHz SWT 2.5ms</p> <p>M3[1] 48.05 dBμV 2.489160000 GHz</p> <p>Limit Check: PASS M1[1] PASS D2[1]</p> <p>90 dBμV 86.73 dBμV 80 dBμV 2.459100000 GHz 70 dBμV -39.95 dB 60 dBμV 24.400000000 MHz 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>Start 2.44 GHz Stop 2.5 GHz</p>
<p>Date: 6.MAY.2015 14:15:33</p> <p>$\pi/4$ DQPSK-Hopping Left-PK</p> <p>Note: F1 frequency is 2400MHz</p>	<p>Date: 6.MAY.2015 15:28:06</p> <p>$\pi/4$ DQPSK-Hopping Right-PK</p> <p>Note: F1 frequency is 2400MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>$\pi/4$ DQPSK-Hopping Left-Ave</p>	<p>$\pi/4$ DQPSK-Hopping Right-Ave</p>
 <p>1Pk Max</p> <p>* Att 5 dB * RBW 1 MHz Ref 102.0 dBμV * VBW 3 MHz SWT 2.5ms</p> <p>M2[1] 48.38 dBμV 2.385609000 GHz</p> <p>Limit Check: PASS M1[1] PASS</p> <p>90 dBμV 87.19 dBμV 80 dBμV 2.402136000 GHz 70 dBμV M1 60 dBμV 50 dBμV M2 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>CF 2.39 GHz Span 40.0 MHz</p>	 <p>1Pk Max</p> <p>* Att 5 dB * RBW 1 MHz Ref 102.0 dBμV * VBW 3 MHz SWT 2.5ms</p> <p>M2[1] 47.33 dBμV 2.491324000 GHz</p> <p>Limit Check: PASS M1[1] PASS</p> <p>90 dBμV 86.15 dBμV 80 dBμV 2.480147000 GHz 70 dBμV 60 dBμV 50 dBμV 40 dBμV 30 dBμV 20 dBμV 10 dBμV</p> <p>CF 2.4835 GHz Span 40.0 MHz</p>
<p>Date: 6.MAY.2015 13:31:13</p> <p>$\pi/4$ DQPSK-Left Side-PK</p> <p>Note: F1 frequency is 2400MHz</p>	<p>Date: 6.MAY.2015 13:59:39</p> <p>$\pi/4$ DQPSK-Right Side-PK</p> <p>Note: F1 frequency is 2400MHz</p>

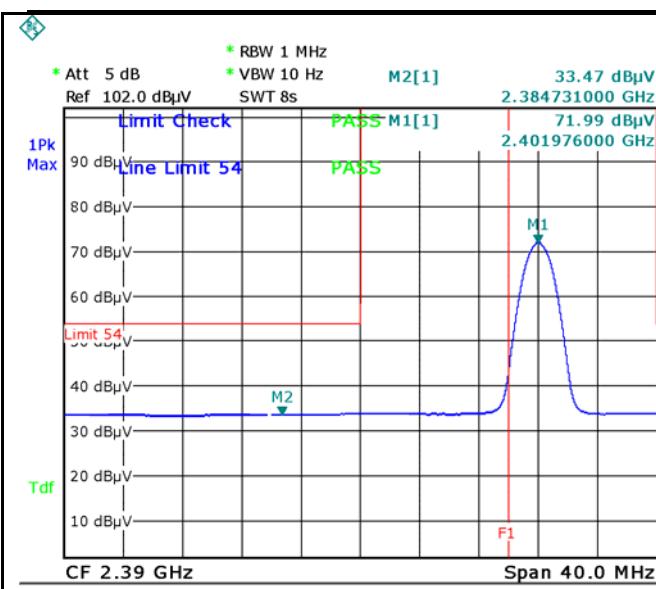





Note: (no need if PK value less than the AV limit)


$\pi/4$ DQPSK-Left Side-AV

Note: F1 frequency is 2400MHz

$\pi/4$ DQPSK-Right Side-AV

8-DPSK Mode:

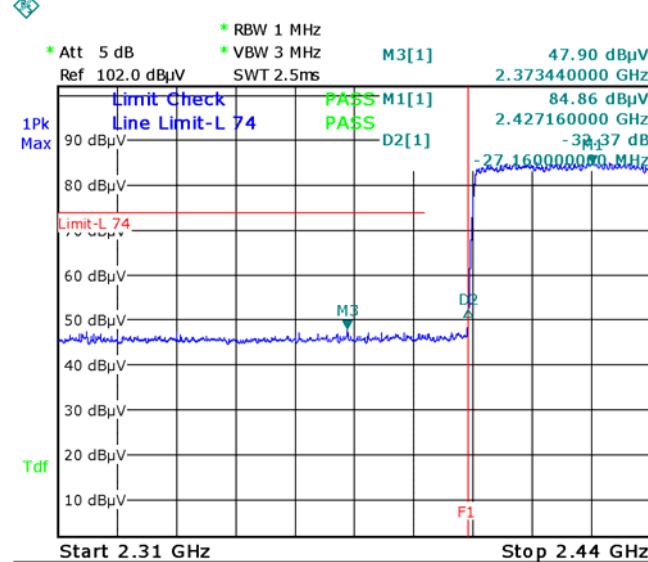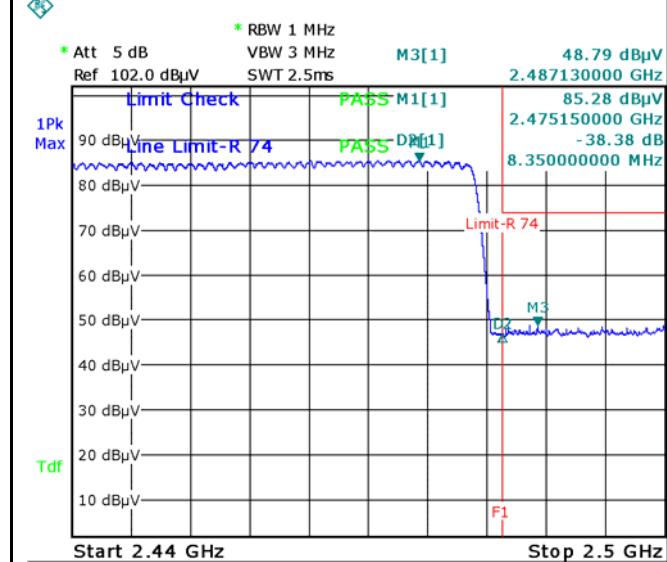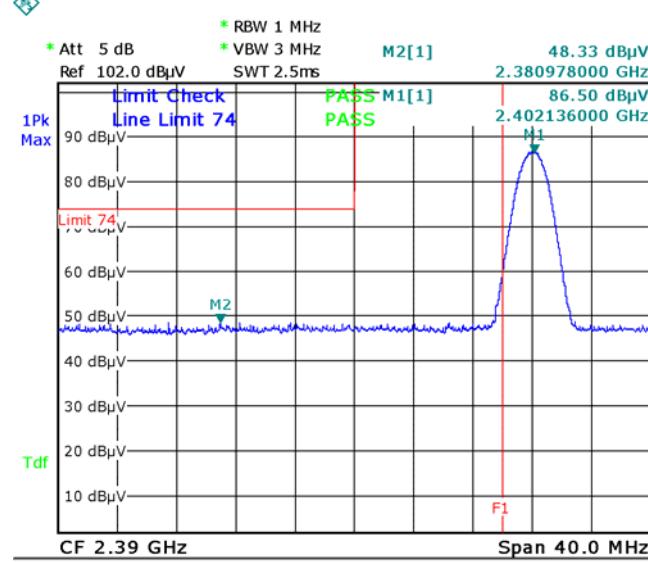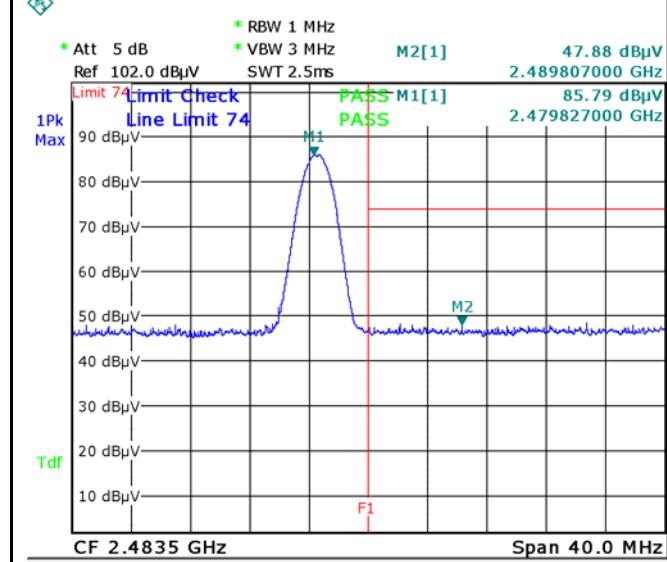 <p>RBW 1 MHz VBW 3 MHz SWT 2.5ms Att 5 dB Ref 102.0 dBμV 1Pk Max Tdf</p> <p>Limit Check: Line Limit-L 74 M3[1] PASS D2[1] PASS F1</p> <p>Start 2.31 GHz Stop 2.44 GHz</p>	 <p>RBW 1 MHz VBW 3 MHz SWT 2.5ms Att 5 dB Ref 102.0 dBμV 1Pk Max Tdf</p> <p>Limit Check: Line Limit-R 74 M3[1] PASS D2[1] PASS F1</p> <p>Start 2.44 GHz Stop 2.5 GHz</p>
<p>8DPSK-Hopping Left-PK Note: F1 frequency is 2400MHz</p>	<p>8DPSK-Hopping Right-PK Note: F1 frequency is 2400MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>8DPSK-Hopping Left-Ave</p>	<p>8DPSK-Hopping Right-Ave</p>
 <p>RBW 1 MHz VBW 3 MHz SWT 2.5ms Att 5 dB Ref 102.0 dBμV 1Pk Max Tdf</p> <p>Limit Check: Line Limit 74 M2[1] PASS F1</p> <p>CF 2.39 GHz Span 40.0 MHz</p>	 <p>RBW 1 MHz VBW 3 MHz SWT 2.5ms Att 5 dB Ref 102.0 dBμV 1Pk Max Tdf</p> <p>Limit Check: Line Limit 74 M2[1] PASS F1</p> <p>CF 2.4835 GHz Span 40.0 MHz</p>
<p>8DPSK-Left Side-PK Note: F1 frequency is 2400MHz</p>	<p>8DPSK-Right Side-PK Note: F1 frequency is 2400MHz</p>

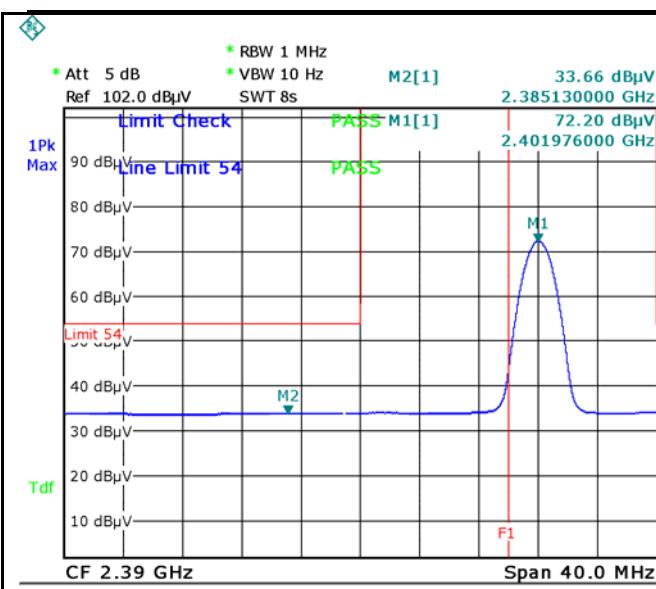


Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV	8DPSK-Right Side-AV
Note: F1 frequency is 2400MHz	

6.8 AC Power Line Conducted Emissions

Temperature	25°C
Relative Humidity	62%
Atmospheric Pressure	1015mbar
Test date :	April 29, 2015
Tested By :	Wiky Jam

Requirement(s):

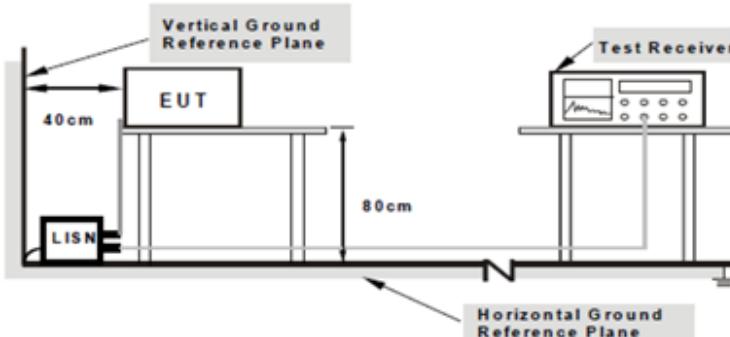
Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																
Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss 																

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A


Test Mode: Transmitting BT Mode

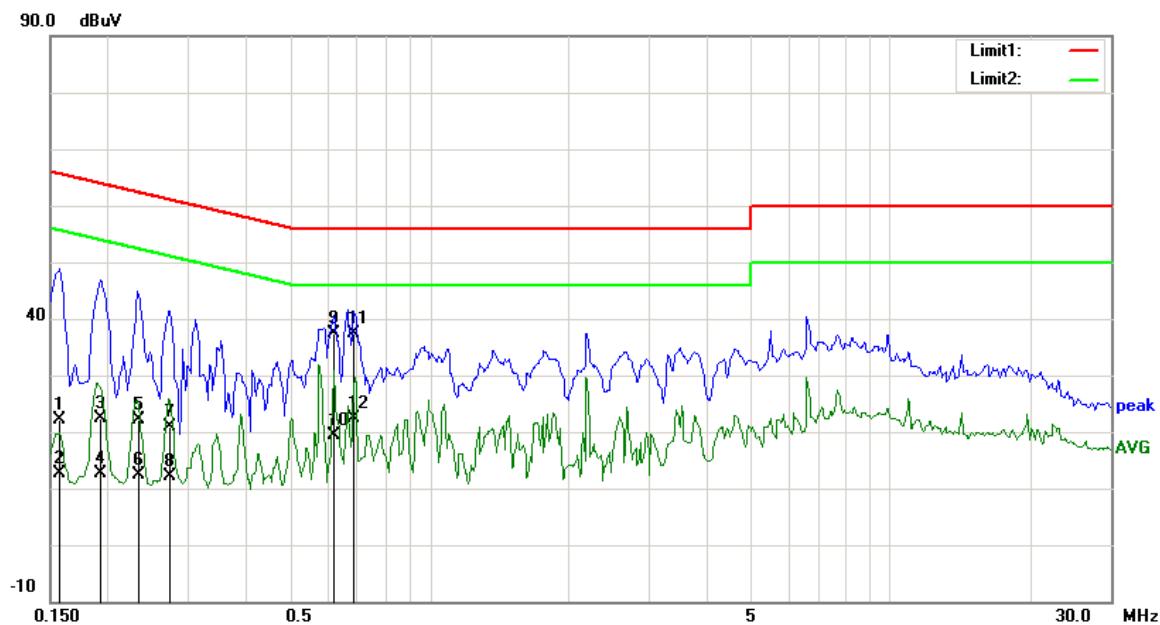

Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V/m)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1	L1	0.1578	9.01	QP	13.17	22.18	65.58	-43.40
2	L1	0.1578	-0.45	AVG	13.17	12.72	55.58	-42.86
3	L1	0.1930	9.25	QP	13.04	22.29	63.91	-41.62
4	L1	0.1930	-0.45	AVG	13.04	12.59	53.91	-41.32
5	L1	0.2329	9.16	QP	12.89	22.05	62.35	-40.30
6	L1	0.2329	-0.48	AVG	12.89	12.41	52.35	-39.94
7	L1	0.2730	8.17	QP	12.74	20.91	61.03	-40.12
8	L1	0.2730	-0.51	AVG	12.74	12.23	51.03	-38.80
9	L1	0.6188	25.51	QP	11.78	37.29	56.00	-18.71
10	L1	0.6188	7.59	AVG	11.78	19.37	46.00	-26.63
11	L1	0.6852	25.62	QP	11.71	37.33	56.00	-18.67
12	L1	0.6852	10.78	AVG	11.71	22.49	46.00	-23.51

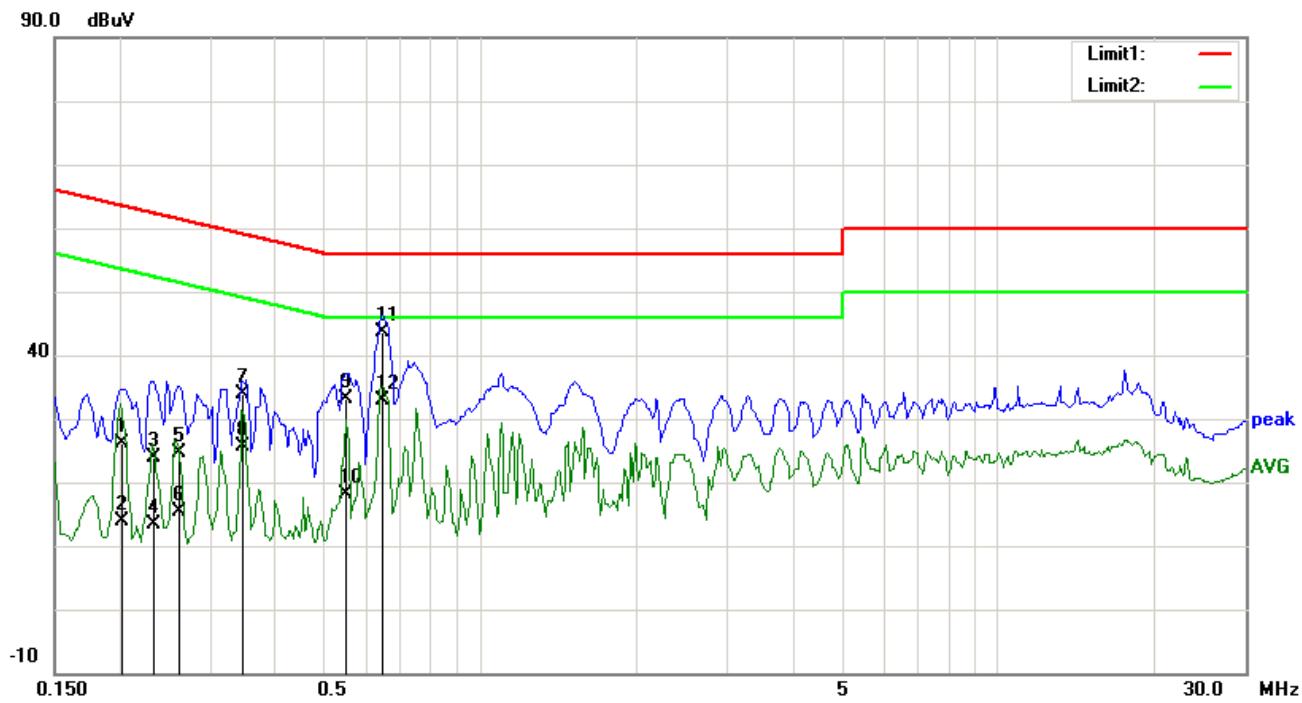

Test Data


Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V/m)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1	N	0.2008	13.15	QP	13.01	26.16	63.58	-37.42
2	N	0.2008	0.95	AVG	13.01	13.96	53.58	-39.62
3	N	0.2329	10.90	QP	12.89	23.79	62.35	-38.56
4	N	0.2329	0.61	AVG	12.89	13.50	52.35	-38.85
5	N	0.2616	11.89	QP	12.79	24.68	61.38	-36.70
6	N	0.2616	2.61	AVG	12.79	15.40	51.38	-35.98
7	N	0.3492	21.52	QP	12.46	33.98	58.98	-25.00
8	N	0.3492	13.24	AVG	12.46	25.70	48.98	-23.28
9	N	0.5493	21.40	QP	11.85	33.25	56.00	-22.75
10	N	0.5493	6.31	AVG	11.85	18.16	46.00	-27.84
11	N	0.6461	32.00	QP	11.75	43.75	56.00	-12.25
12	N	0.6461	21.14	AVG	11.75	32.89	46.00	-13.11

6.9 Radiated Spurious Emissions

Temperature	25°C
Relative Humidity	61%
Atmospheric Pressure	1013mbar
Test date :	May 06, 2015
Tested By :	Wiky Jam

Requirement(s):

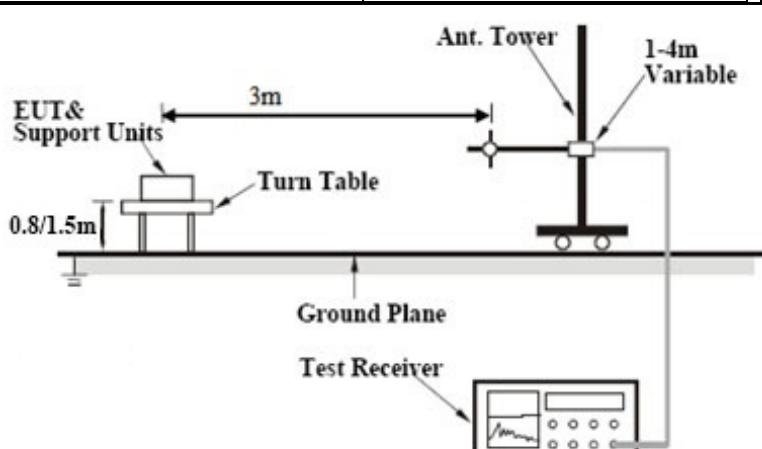Spec	Item	Requirement	Applicable										
47CFR§15. 205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (μ V/m)												
30 – 88	100												
88 – 216	150												
216 – 960	200												
Above 960	500												
Test Setup	 <p>The diagram illustrates the test setup for radiated spurious emissions. It shows a 'Turn Table' on a 'Ground Plane' with a 'EUT & Support Units' mounted on it. A '3m' horizontal distance is marked between the EUT and a 'Ant. Tower'. The 'Ant. Tower' is a vertical mast with a '1-4m Variable' height adjustment. A 'Test Receiver' is connected to the tower, and its signal is processed through a 'Test Receiver' unit.</p>												
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: 												


	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Transmitting BT Mode

(Below 1GHz)

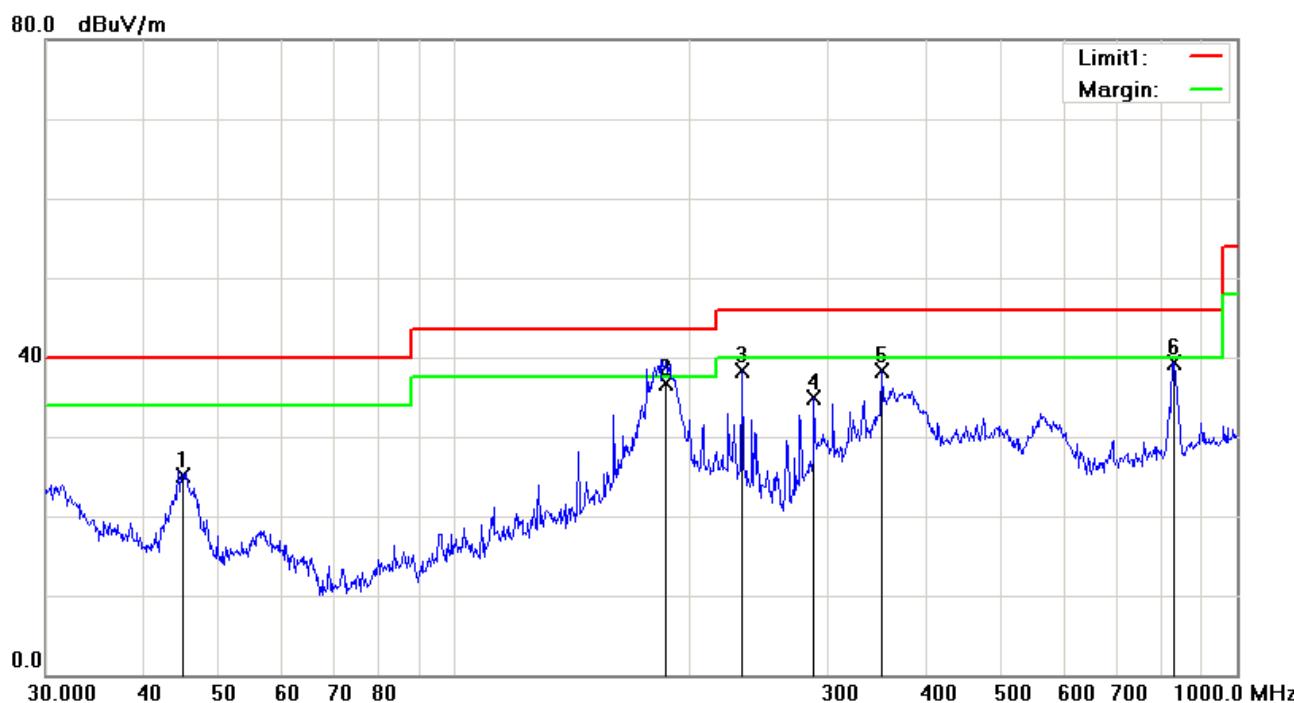

Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dB μ V/m)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)
1	H	44.9006	25.69	peak	-0.49	25.20	40.00	-14.80	100	143
2	H	185.9836	46.24	QP	-9.49	36.75	43.50	-6.75	100	124
3	H	233.3487	47.31	peak	-9.04	38.27	46.00	-7.73	100	87
4	H	287.9904	42.40	peak	-7.45	34.95	46.00	-11.05	100	293
5	H	351.7079	43.67	peak	-5.42	38.25	46.00	-7.75	100	207
6	H	830.4002	35.77	peak	3.57	39.34	46.00	-6.66	100	75



Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dB μ V/m)	Detector	Corrected (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Degree (°)
1	V	47.8260	44.80	peak	-12.97	31.83	40.00	-8.17	100	63
2	V	85.8984	40.73	peak	-13.77	26.96	40.00	-13.04	100	104
3	V	135.9822	34.38	peak	-7.24	27.14	43.50	-16.36	100	164
4	V	191.7450	39.94	peak	-8.38	31.56	43.50	-11.94	100	186
5	V	351.7079	41.77	peak	-5.07	36.70	46.00	-9.30	100	141
6	V	830.4002	35.33	peak	3.82	39.15	46.00	-6.85	100	55

Test Mode: Transmitting Mode

Note: Other modes were verified, only the result of worst case basic rate mode was presented.

Above 1GHz

Mode: GFSK (Worst Case)

Low Channel (2402 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4804	36.59	AV	V	33.83	6.86	31.72	45.56	54	-8.44
4804	36.78	AV	H	33.83	6.86	31.72	45.75	54	-8.25
4804	46.58	PK	V	33.83	6.86	31.72	55.55	74	-18.45
4804	46.33	PK	H	33.83	6.86	31.72	55.3	74	-18.7

Middle Channel (2441 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4882	34.19	AV	V	33.86	6.82	31.82	43.05	54	-10.95
4882	35.75	AV	H	33.86	6.82	31.82	44.61	54	-9.39
4882	48.05	PK	V	33.86	6.82	31.82	56.91	74	-17.09
4882	46.18	PK	H	33.86	6.82	31.82	55.04	74	-18.96

High Channel (2480 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960	34.57	AV	V	33.9	6.76	31.92	43.31	54	-10.69
4960	35.24	AV	H	33.9	6.76	31.92	43.98	54	-10.02
4960	45.98	PK	V	33.9	6.76	31.92	54.72	74	-19.28
4960	46.37	PK	H	33.9	6.76	31.92	55.11	74	-18.89


Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/18/2014	09/17/2015	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/20/2014	11/19/2015	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2014	09/01/2015	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/25/2015	03/24/2016	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/22/2014	09/21/2015	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/25/2014	09/24/2015	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/26/2014	09/25/2015	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs


Annex B.i. Photograph: EUT External Photo



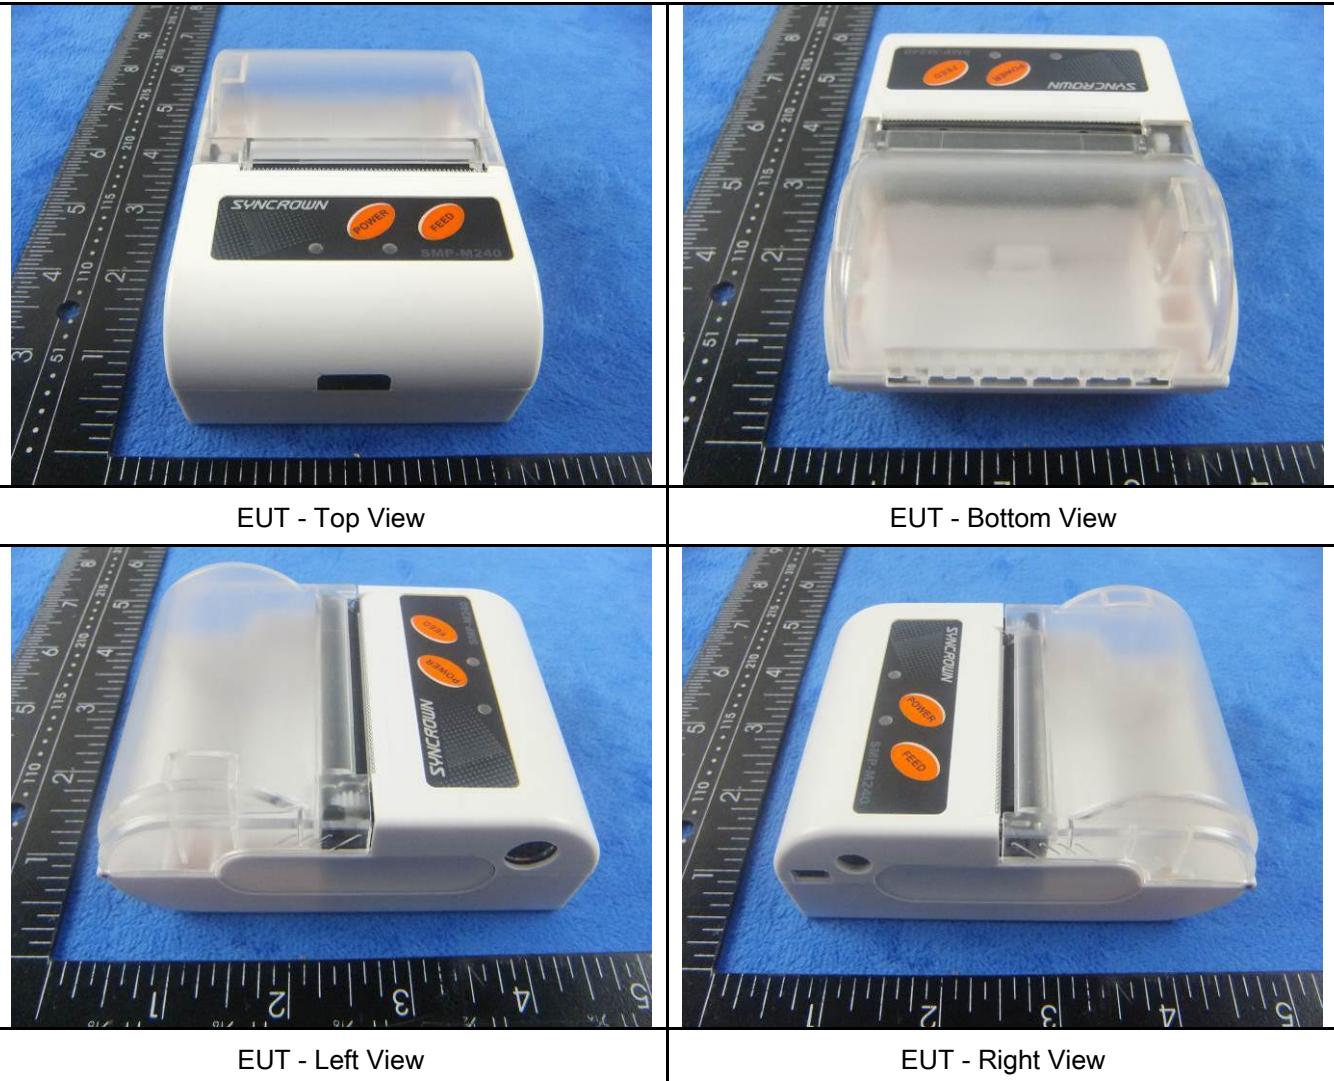


Annex B.ii. Photograph: EUT Internal Photo



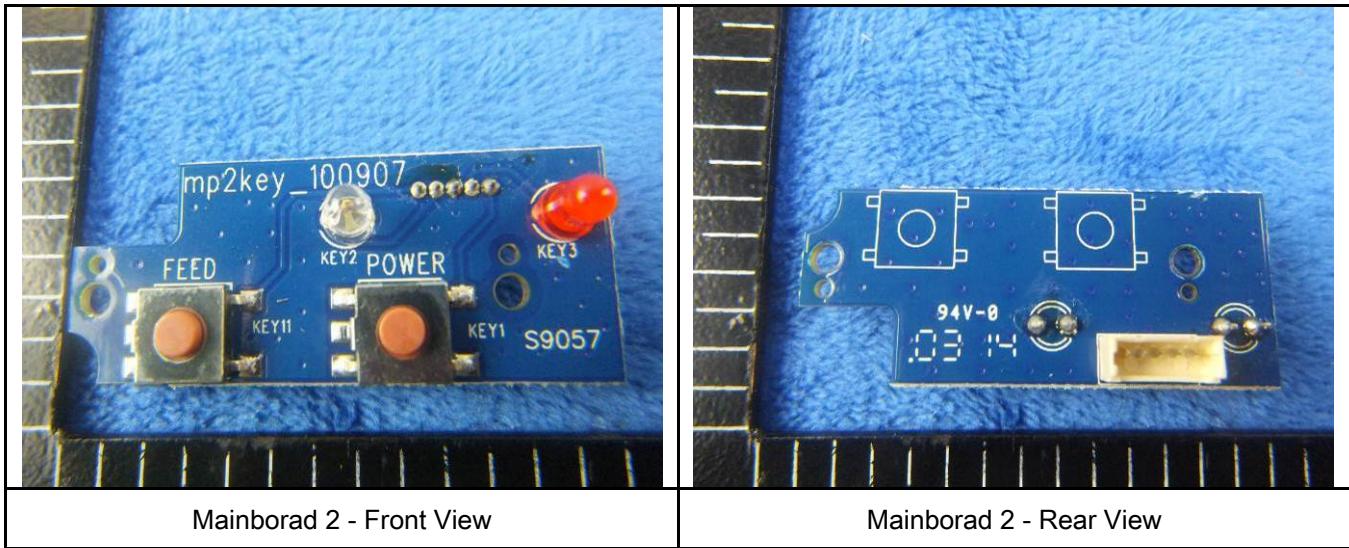


Annex B.iii. Photograph: Test Setup Photo

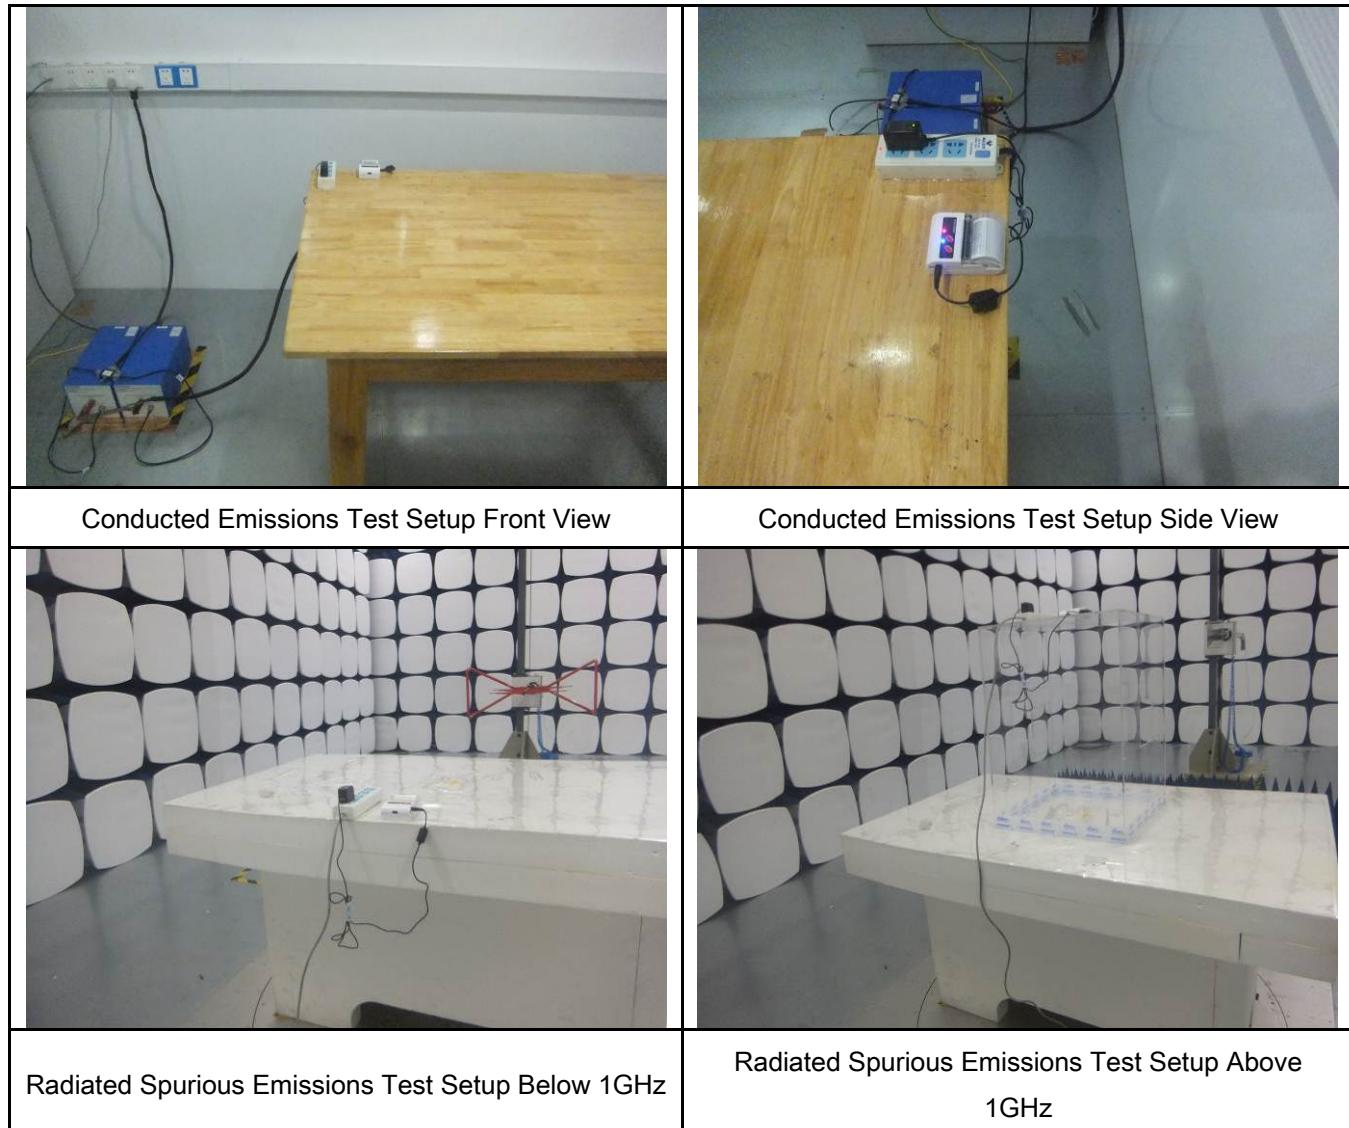


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK

Block Configuration Diagram for AC Line Conducted Emissions

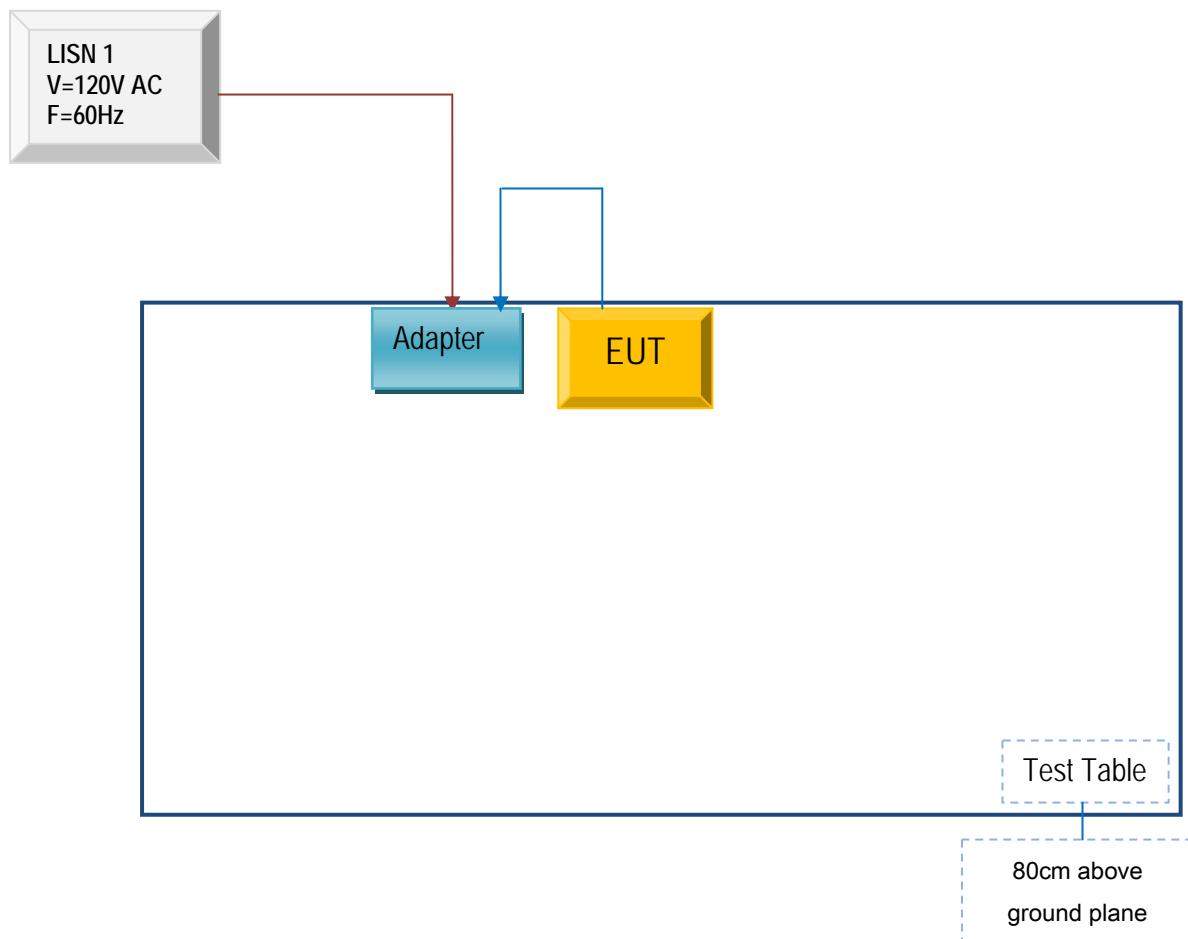

Block Configuration Diagram for Radiated Emissions

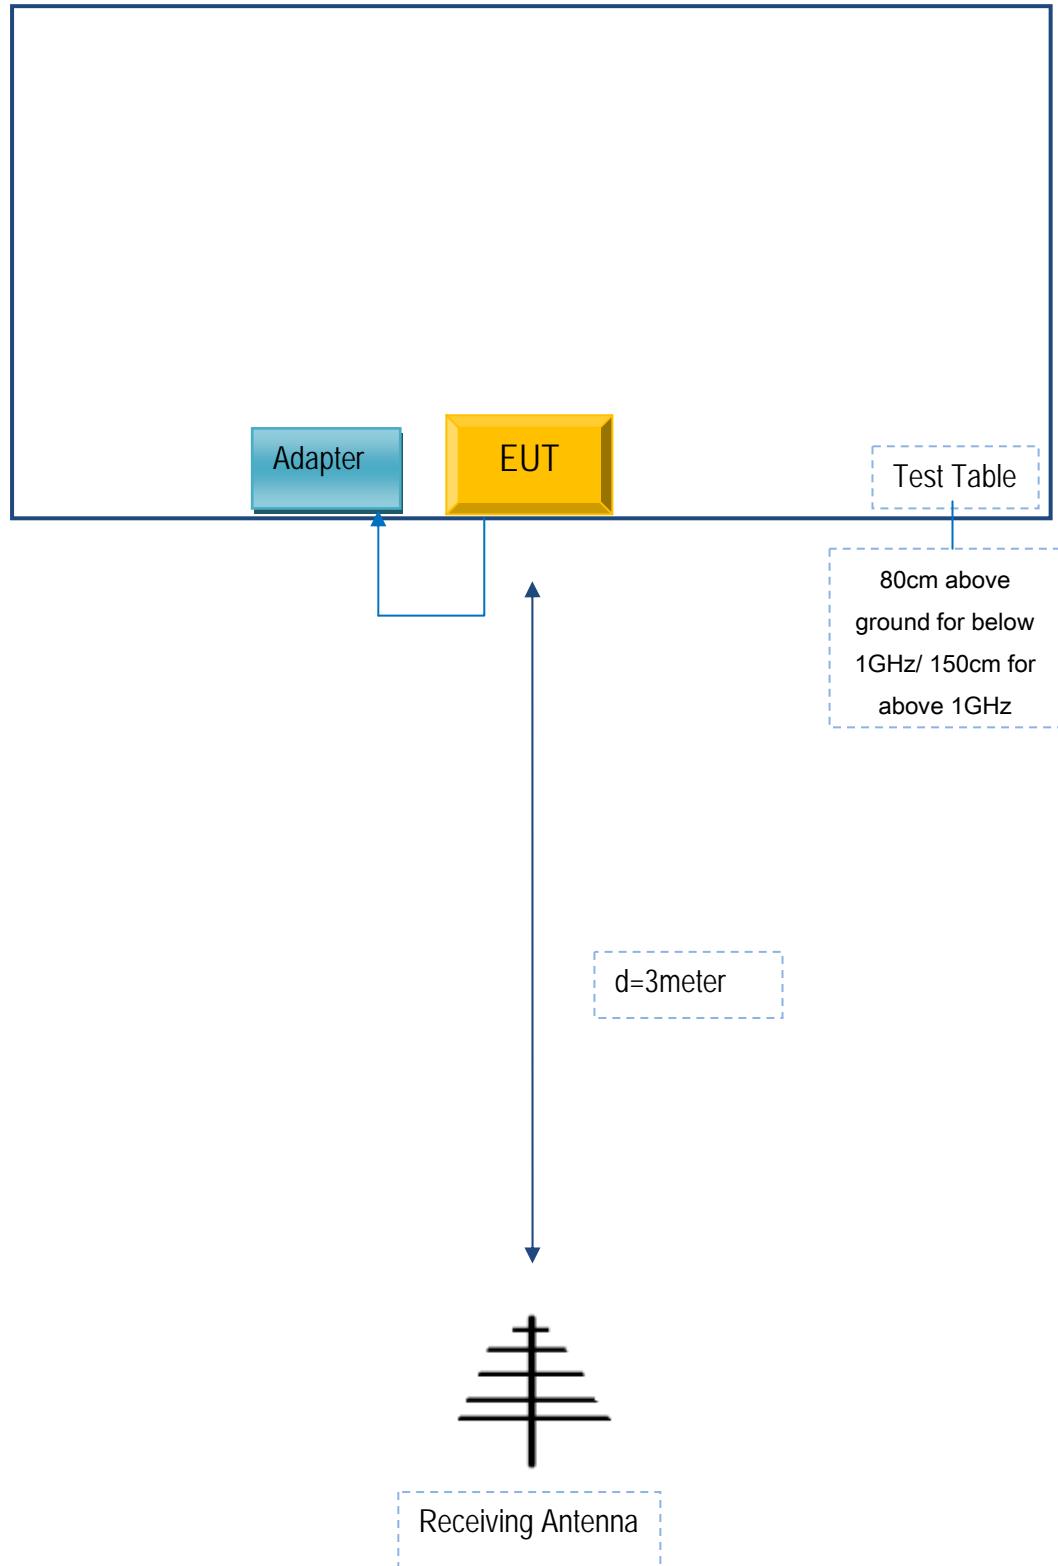

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see attachment

Annex E. DECLARATION OF SIMILARITY

N/A